



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: LM Technologies Ltd.

Address: Sierra Quebec Bravo, 2nd Floor, 77 Marsh Wall, E14 9SH, London, United Kingdom

FCC ID: VVXLM3001

Product Name: LM3001 Bluetooth 5.0 Dual Mode Access Point

Standard(s): 47 CFR Part 15, Subpart C (15.247)
ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR231059192-00B

Date Of Issue: 2023/11/13

Reviewed By: Calvin Chen
Title: RF Engineer

Approved By: Sun Zhong
Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)
No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.1 EUT Operation Condition:	7
1.2.2 Support Equipment List and Details	7
1.2.3 Support Cable List and Details	7
1.2.4 Block Diagram of Test Setup.....	8
1.3 MEASUREMENT UNCERTAINTY	9
2. SUMMARY OF TEST RESULTS	10
3. REQUIREMENTS AND TEST PROCEDURES	11
3.1 AC LINE CONDUCTED EMISSIONS.....	11
3.1.1 Applicable Standard.....	11
3.1.2 EUT Setup.....	12
3.1.3 EMI Test Receiver Setup	12
3.1.4 Test Procedure	13
3.1.5 Corrected Amplitude & Margin Calculation.....	13
3.2 RADIATED SPURIOUS EMISSIONS.....	14
3.2.1 Applicable Standard.....	14
3.2.2 EUT Setup.....	14
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	15
3.2.4 Test Procedure	15
3.2.5 Corrected Amplitude & Margin Calculation.....	16
3.3 20 DB EMISSION BANDWIDTH	17
3.3.1 Applicable Standard.....	17
3.3.2 EUT Setup.....	17
3.3.3 Test Procedure	17
3.4 CHANNEL SEPARATION	19
3.4.1 Applicable Standard.....	19
3.4.2 EUT Setup.....	19
3.4.3 Test Procedure	19
3.5 NUMBER OF HOPPING FREQUENCY.....	20
3.5.1 Applicable Standard.....	20
3.5.2 EUT Setup.....	20
3.5.3 Test Procedure	20
3.6 TIME OF OCCUPANCY (DWELL TIME).....	21
3.6.1 Applicable Standard.....	21
3.6.2 EUT Setup.....	21
3.6.3 Test Procedure	21
3.7 MAXIMUM CONDUCTED OUTPUT POWER.....	22
3.7.1 Applicable Standard.....	22
3.7.2 EUT Setup.....	22

3.7.3 Test Procedure22

3.8 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE23

3.8.1 Applicable Standard.....23

3.8.2 EUT Setup.....23

3.8.3 Test Procedure23

3.9 ANTENNA REQUIREMENT.....24

3.9.1 Applicable Standard.....24

3.9.2 Judgment.....24

4. TEST DATA AND RESULTS 25

4.1 AC LINE CONDUCTED EMISSIONS.....25

4.2 RADIATED SPURIOUS EMISSIONS.....28

4.3 20 dB EMISSION BANDWIDTH53

4.4 CHANNEL SEPARATION67

4.5 NUMBER OF HOPPING FREQUENCY81

4.6 TIME OF OCCUPANCY(DWELL TIME).....86

4.7 MAXIMUM CONDUCTED OUTPUT POWER.....101

4.8 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....115

5. EUT PHOTOGRAPHS 140

6. TEST SETUP PHOTOGRAPHS 141

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR231059192-00B	Original Report	2023/11/13

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	LM3001 Bluetooth 5.0 Dual Mode Access Point
EUT Model:	LM3001
Operation Frequency:	2402-2480 MHz
Maximum Peak Output Power (Conducted):	6.58dBm (Module 1) 7.72dBm (Module 2) 7.22dBm (Module 3) 6.85dBm (Module 4)
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Rated Input Voltage:	DC 12V from adapter
Serial Number:	2C4W-1(For AC line Conductive Emission and Radiated Spurious Emission Test) 2C4W-2(For RF Conducted Test)
EUT Received Date:	2023/10/19
EUT Received Status:	Good

Operation Frequency Detail:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	41	2443
...
...
...	...	78	2480
39	2441	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2402
Middle	2441
Highest	2480

Antenna Information Detail▲:

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Dipole	50	2.4~2.5GHz	5.18dBi

The Method of §15.203 Compliance:

- Antenna was permanently attached to the unit.
 Antenna use a unique type of connector to attach to the EUT.
 Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Accessory Information:

Accessory Description	Manufacturer	Model
/	/	/

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.			
Equipment Modifications:	No			
EUT Exercise Software:	BlueTest3			
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:				
Module 1	Test Modes	Power Level Setting		
		Lowest	Middle	Highest
	GFSK	-20	-20	-20
	$\pi/4$ -DQPSK	-20	-20	-20
8DPSK	-20	-20	-20	
Module 2	Test Modes	Power Level Setting		
		Lowest	Middle	Highest
	GFSK	-20	-20	-20
	$\pi/4$ -DQPSK	-20	-20	-20
8DPSK	-20	-20	-20	
Module 3	Test Modes	Power Level Setting		
		Lowest	Middle	Highest
	GFSK	-20	-20	-20
	$\pi/4$ -DQPSK	-20	-20	-20
8DPSK	-20	-20	-20	
Module 4	Test Modes	Power Level Setting		
		Lowest	Middle	Highest
	GFSK	-20	-20	-20
	$\pi/4$ -DQPSK	-20	-20	-20
8DPSK	-20	-20	-20	


1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Kingston	USB Disk	DTI/2GB	CH 031308
ZIONCOM	adapter	DCP014E121000U	Unknown
TOTO LINK	Router	X5000R	X5000RK9T0560


1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Power Cable	No	No	1.2	Adapter	EUT
RJ45 Cable	No	No	10	Router	EUT

1.2.4 Block Diagram of Test Setup
AC Line Conducted Emissions:

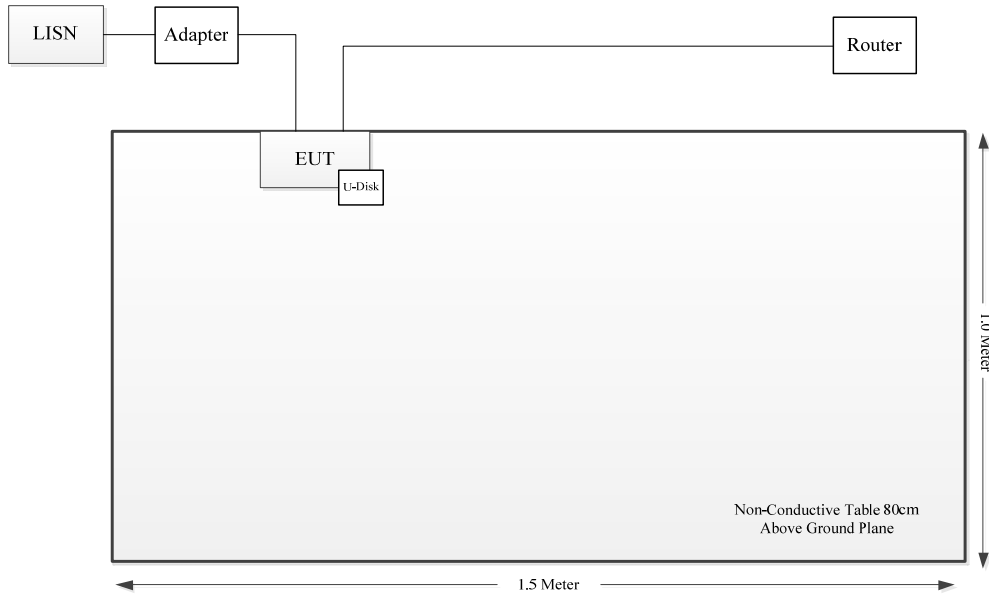

Radiated Spurious Emissions:

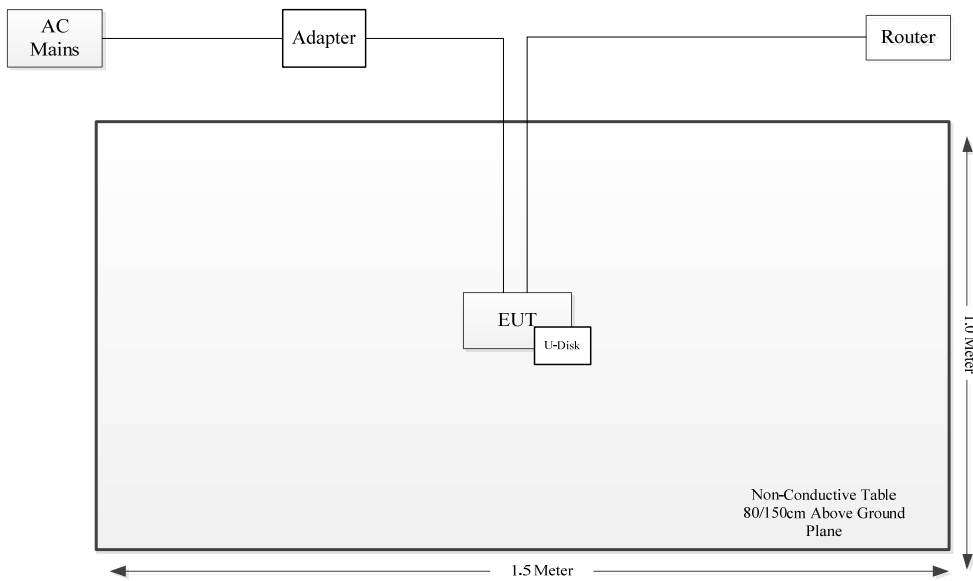

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 4.12 dB, 30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(1)	20 dB Emission Bandwidth	Compliant
FCC §15.247(a)(1)	Channel Separation	Compliant
FCC §15.247(a)(1)(iii)	Number of Hopping Frequency	Compliant
FCC §15.247(a)(1)(iii)	Time of Occupancy (dwell time)	Compliant
FCC §15.247(b)(1)	Maximum Conducted Output Power	Compliant
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.203	Antenna Requirement	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup

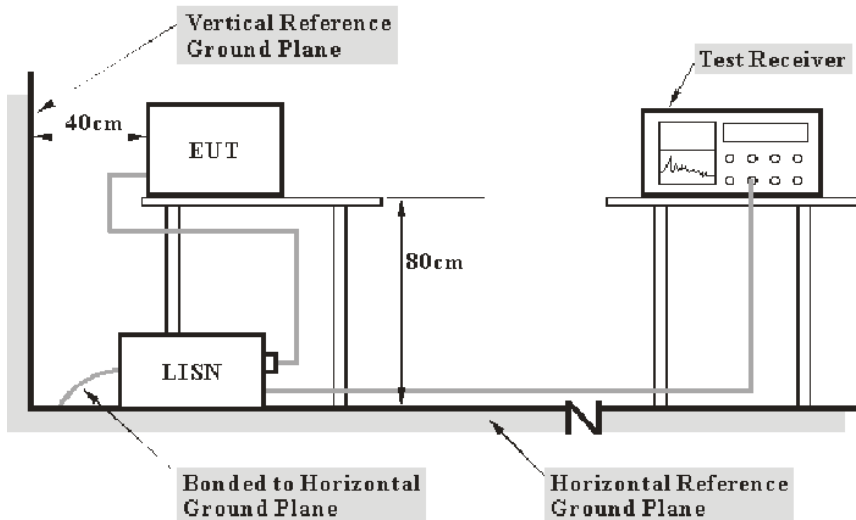

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiated Spurious Emissions


3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


3.2.2 EUT Setup

9kHz-30MHz:

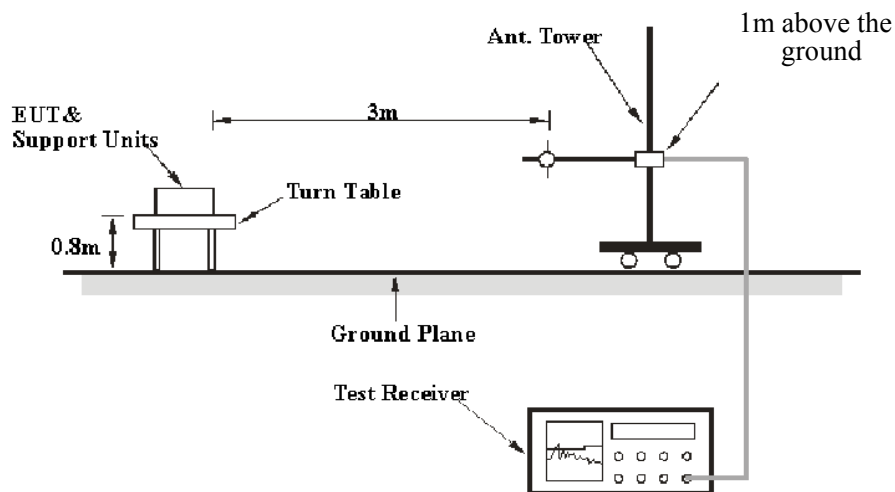

30MHz-1GHz:

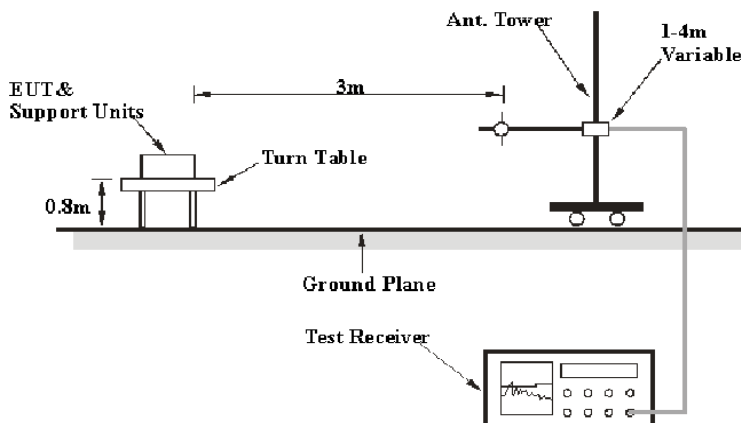

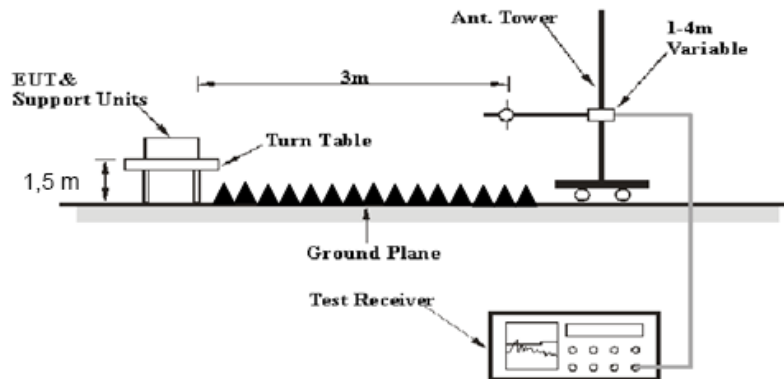Above 1GHz:

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	300 Hz	1 kHz	200 Hz	QP/AV
150 kHz – 30 MHz	10 kHz	30 kHz	9 kHz	QP/AV
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz except 9 – 90 kHz, 110 – 490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

The spurious emissions which below the limit more than 20dB was not be recorded.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$\text{Result} = \text{Reading} + \text{Factor}$$

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Result}$$


3.3 20 dB Emission Bandwidth

3.3.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

3.3.2 EUT Setup

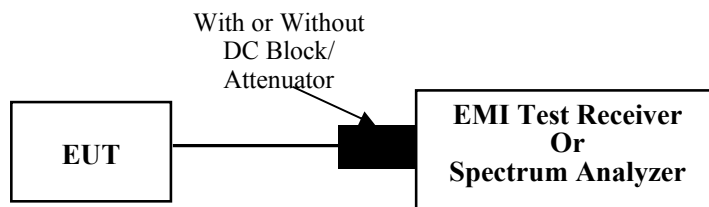

3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 6.9.2

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).

- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


3.4 Channel Separation

3.4.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

3.4.2 EUT Setup

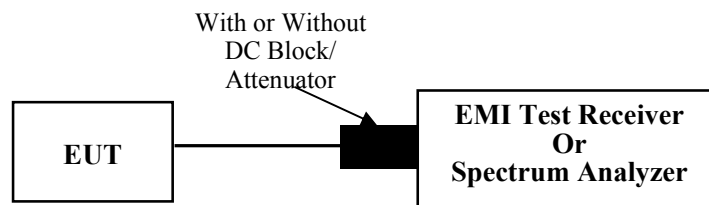

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.2

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.


3.5 Number of Hopping Frequency

3.5.1 Applicable Standard

FCC §15.247 (a)(1)(iii)

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.5.2 EUT Setup

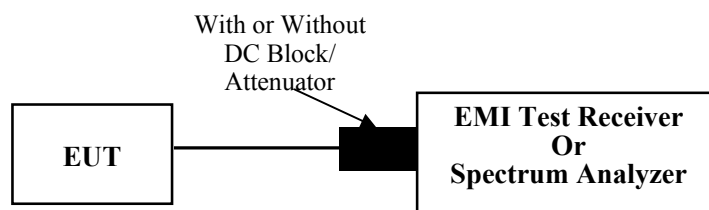

3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.3

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize


It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

3.6 Time of Occupancy (Dwell Time)

3.6.1 Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.6.2 EUT Setup

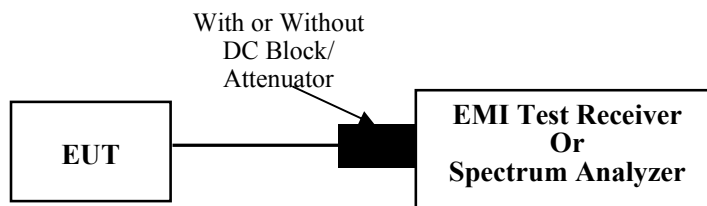

3.6.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.4

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$\text{(Number of hops in the period specified in the requirements)} = \text{(number of hops on spectrum analyzer)} \times \text{(period specified in the requirements / analyzer sweep time)}$$

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.


3.7 Maximum Conducted Output Power

3.7.1 Applicable Standard

FCC §15.247 (b)(1)

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

3.7.2 EUT Setup

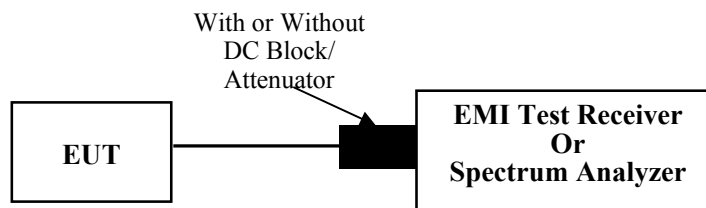

3.7.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.5

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. Offset the Insertion loss of the RF cable, DC Block/ Attenuator into the spectrum analyzer. The hopping shall be disabled for this test:

- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW \geq RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

NOTE—A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.


3.8 100 kHz Bandwidth Of Frequency Band Edge

3.8.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.8.2 EUT Setup

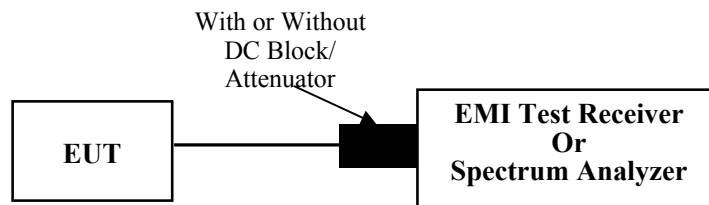

3.8.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.6

For band-edge measurements, use the band-edge procedure in 6.10. Band-edge measurements shall be tested both on single channels, and with the EUT hopping.

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

3.9 Antenna Requirement

3.9.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.9.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	2C4W-1	Test Date:	2023/10/31
Test Site:	CE	Test Mode:	Transmitting(maximum output power mode, 8DPSK Middle channel(four modules transmission simultaneously))
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.8	Relative Humidity: (%)	55	ATM Pressure: (kPa)	101.2
----------------------	------	---------------------------	----	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/03/31	2024/03/30
R&S	EMI Test Receiver	ESR3	102726	2023/03/31	2024/03/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/08/06	2024/08/05
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Project No.: CR231059192-RF
 Tester: David Huang
 Port: Line
 Note: Transmitting(BT)


Date: 2023-10-31

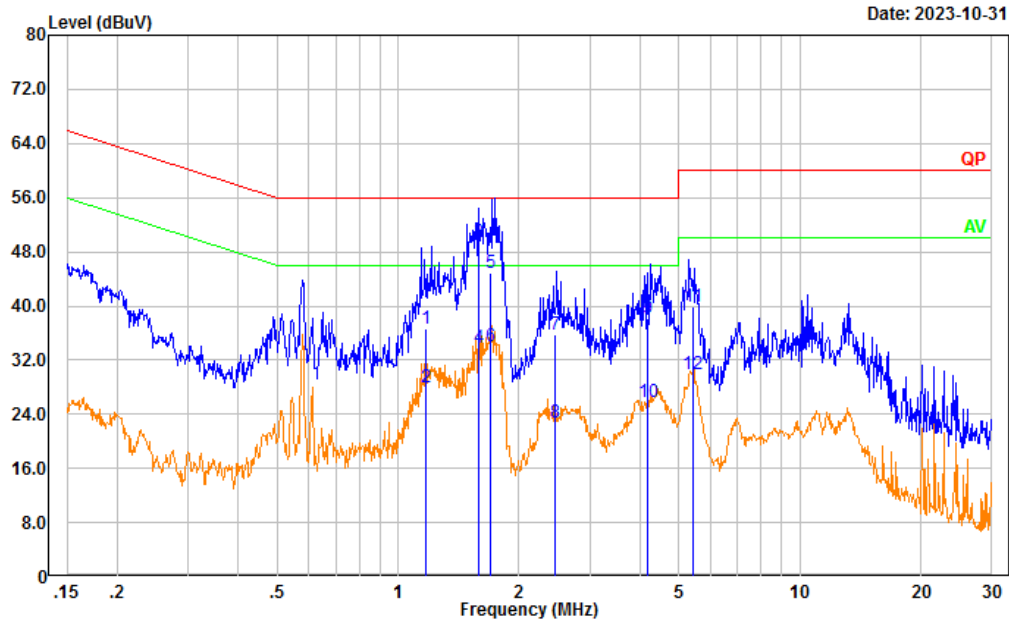

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	1.175	27.02	9.62	36.64	56.00	19.36	QP
2	1.175	18.29	9.62	27.91	46.00	18.09	Average
3	1.586	39.80	9.63	49.43	56.00	6.57	QP
4	1.586	24.28	9.63	33.91	46.00	12.09	Average
5	1.700	35.22	9.63	44.85	56.00	11.15	QP
6	1.700	24.38	9.63	34.01	46.00	11.99	Average
7	2.463	26.07	9.64	35.71	56.00	20.29	QP
8	2.463	13.14	9.64	22.78	46.00	23.22	Average
9	4.177	28.49	9.65	38.14	56.00	17.86	QP
10	4.177	16.22	9.65	25.87	46.00	20.13	Average
11	5.400	30.27	9.66	39.93	60.00	20.07	QP
12	5.400	20.24	9.66	29.90	50.00	20.10	Average

Project No.: CR231059192-RF
 Tester: David Huang
 Port: neutral
 Note: Transmitting(BT)

Date: 2023-10-31

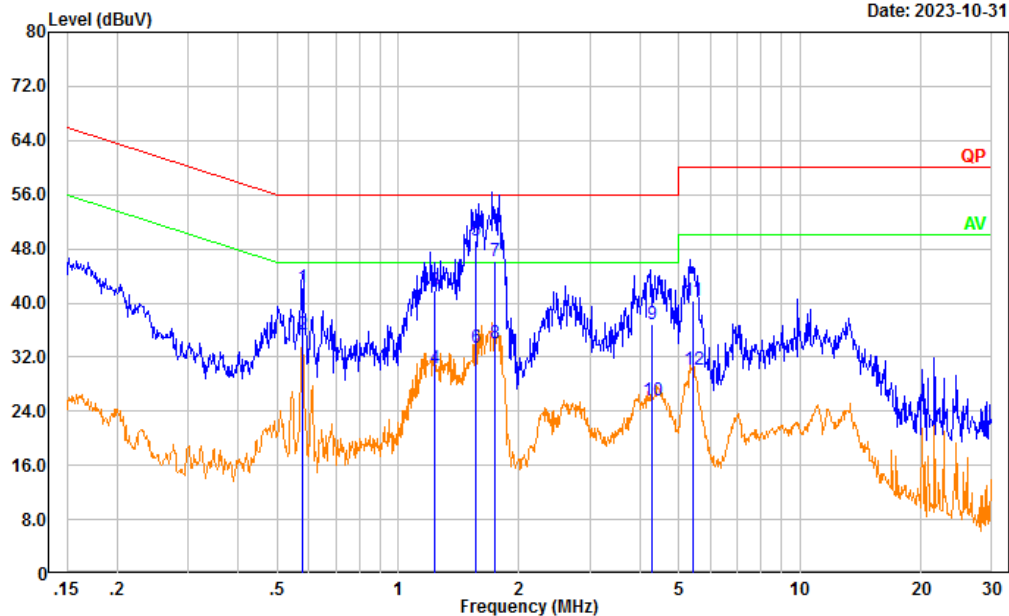

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.580	32.56	9.62	42.18	56.00	13.82	QP
2	0.580	25.72	9.62	35.34	46.00	10.66	Average
3	1.237	32.28	9.62	41.90	56.00	14.10	QP
4	1.237	20.72	9.62	30.34	46.00	15.66	Average
5	1.562	39.58	9.63	49.21	56.00	6.79	QP
6	1.562	23.84	9.63	33.47	46.00	12.53	Average
7	1.740	36.59	9.63	46.22	56.00	9.78	QP
8	1.740	24.46	9.63	34.09	46.00	11.91	Average
9	4.296	27.21	9.65	36.86	56.00	19.14	QP
10	4.296	15.95	9.65	25.60	46.00	20.40	Average
11	5.412	30.77	9.66	40.43	60.00	19.57	QP
12	5.412	20.37	9.66	30.03	50.00	19.97	Average

4.2 Radiated Spurious Emissions

Serial Number:	2C4W-1	Test Date:	2023/11/4~2023/11/6
Test Site:	966-1, 966-2	Test Mode:	Transmitting
Tester:	Carl Xue coco Tian	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.7~26.5	Relative Humidity: (%)	58~64	ATM Pressure: (kPa)	100.9~101.1
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-6	2023/9/18	2026/9/17
BACL	Loop Antenna	1313-1P	3092721	2023/10/20	2026/10/19
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
AH	Double Ridge Guide Horn Antenna	SAS-571	1394	2023/2/22	2026/2/21
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/9	2023/11/8
Audix	Test Software	E3	201021 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2023/9/15	2024/9/14
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/8/6	2024/8/5
E-Microwave	Band Rejection Filter	2400-2483.5MHz	OE01902424	2023/8/6	2024/8/5
Mini Circuits	High Pass Filter	VHF-6010+	31119	2023/8/6	2024/8/5

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

For 9kHz-30MHz, The amplitude of spurious emissions attenuated more than 20 dB below the limit was not be recorded.

1) 30MHz-1GHz (maximum output power mode, 8DPSK(four modules transmission simultaneously))
 Low Channel:

Project No.: CR231059192-RF
 Tester: Carl Xue
 Polarization: horizontal
 Note:


Date: 2023-11-04

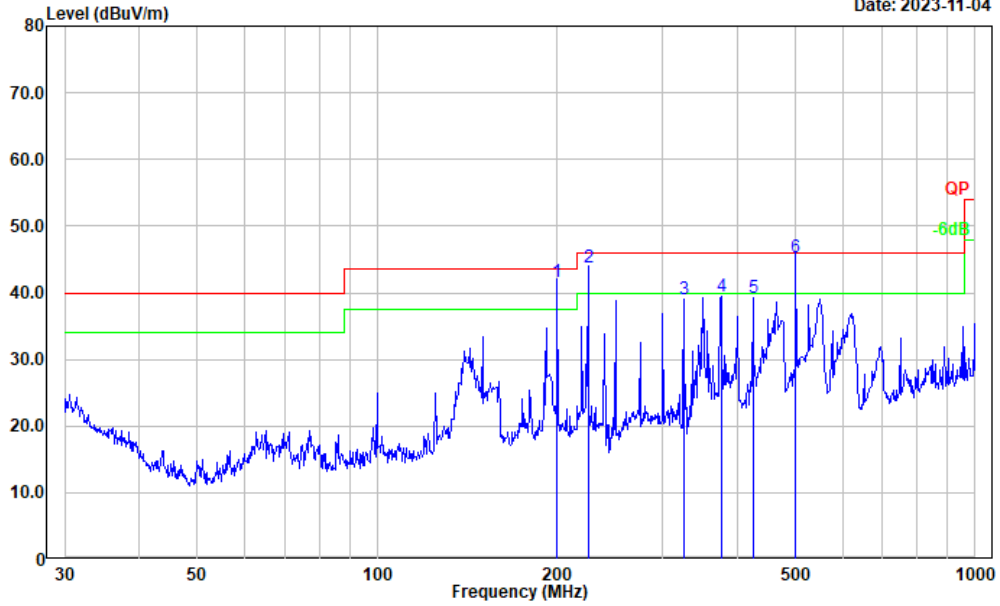

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	199.986	53.77	-12.21	41.56	43.50	1.94	QP
2	225.308	56.67	-12.92	43.75	46.00	2.25	QP
3	325.596	49.48	-10.36	39.12	46.00	6.88	Peak
4	375.939	48.72	-9.29	39.43	46.00	6.57	Peak
5	425.028	46.96	-7.71	39.25	46.00	6.75	Peak
6	501.179	51.24	-5.99	45.25	46.00	0.75	QP

Project No.: CR231059192-RF
 Tester: Carl Xue
 Polarization: vertical
 Note:

Date: 2023-11-04

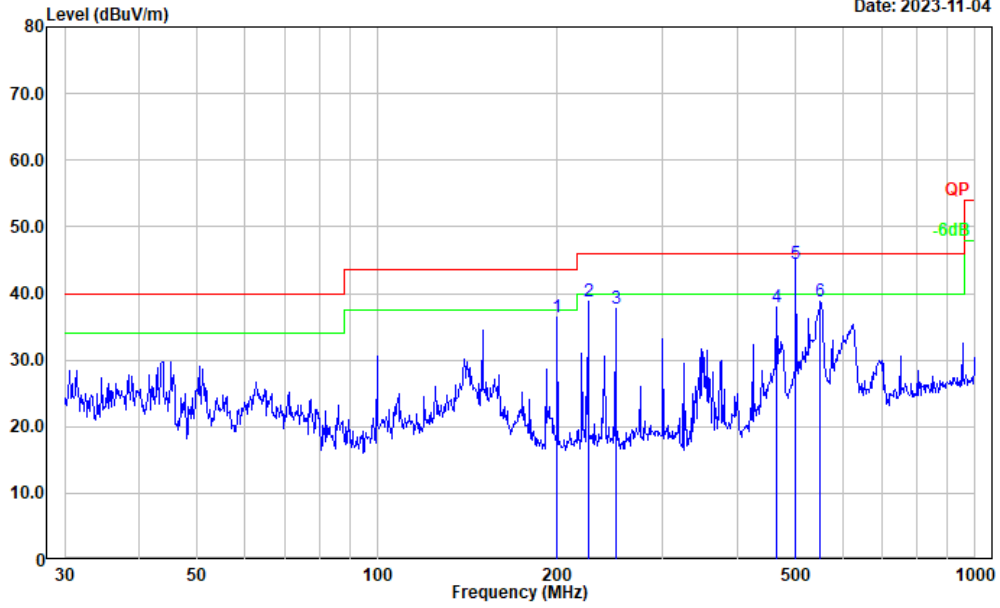


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	199.986	48.55	-12.21	36.34	43.50	7.16	Peak
2	225.308	51.74	-12.92	38.82	46.00	7.18	Peak
3	250.301	50.99	-13.18	37.81	46.00	8.19	Peak
4	465.599	44.43	-6.46	37.97	46.00	8.03	Peak
5	501.179	50.52	-5.99	44.53	46.00	1.47	QP
6	550.948	44.60	-5.74	38.86	46.00	7.14	Peak

Middle Channel:

Project No.: CR231059192-RF
 Tester: Carl Xue
 Polarization: horizontal
 Note:


Date: 2023-11-04

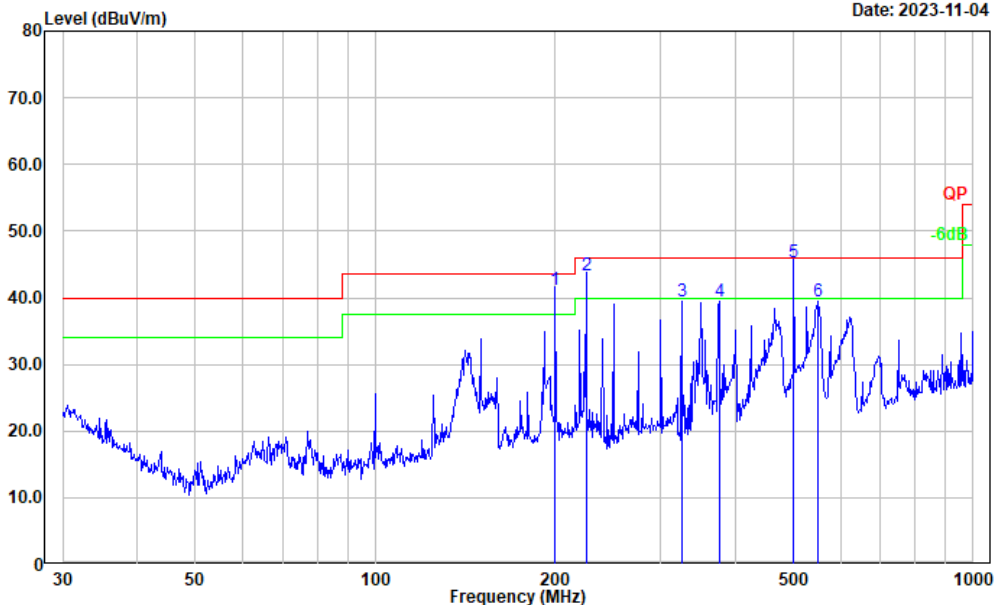

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	199.986	53.44	-12.21	41.23	43.50	2.27	QP
2	225.308	56.38	-12.92	43.46	46.00	2.54	QP
3	325.596	49.72	-10.36	39.36	46.00	6.64	Peak
4	375.939	48.75	-9.29	39.46	46.00	6.54	Peak
5	501.179	51.40	-5.99	45.41	46.00	0.59	QP
6	550.948	45.24	-5.74	39.50	46.00	6.50	Peak

Project No.: CR231059192-RF
 Tester: Carl Xue
 Polarization: vertical
 Note:

Date: 2023-11-04

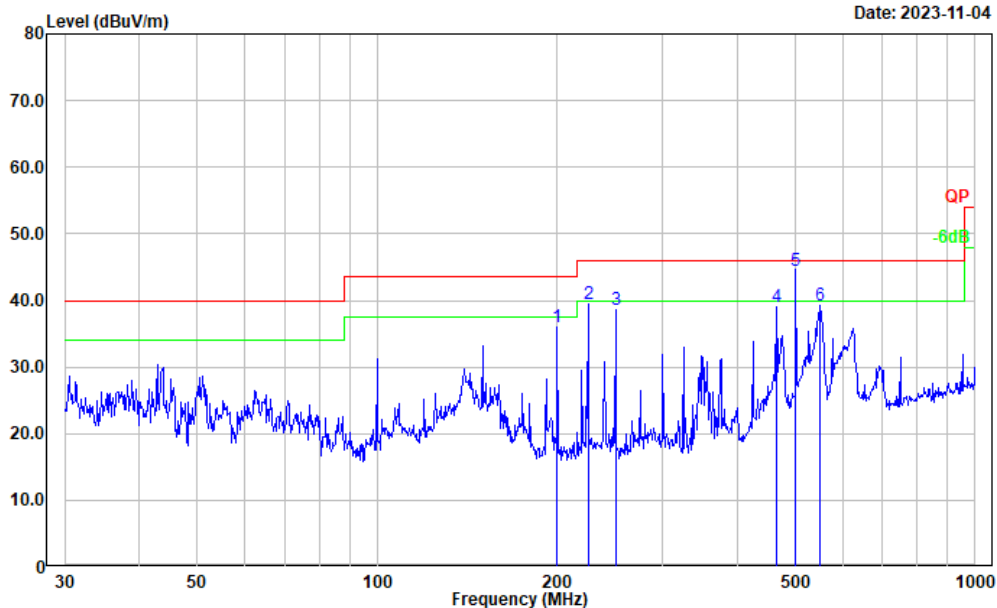


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	199.986	48.16	-12.21	35.95	43.50	7.55	Peak
2	225.308	52.36	-12.92	39.44	46.00	6.56	Peak
3	250.301	51.71	-13.18	38.53	46.00	7.47	Peak
4	465.599	45.58	-6.46	39.12	46.00	6.88	Peak
5	501.179	50.44	-5.99	44.45	46.00	1.55	QP
6	550.948	44.88	-5.74	39.14	46.00	6.86	Peak

High Channel:

Project No.: CR231059192-RF
 Tester: Carl Xue
 Polarization: horizontal
 Note:


Date: 2023-11-04

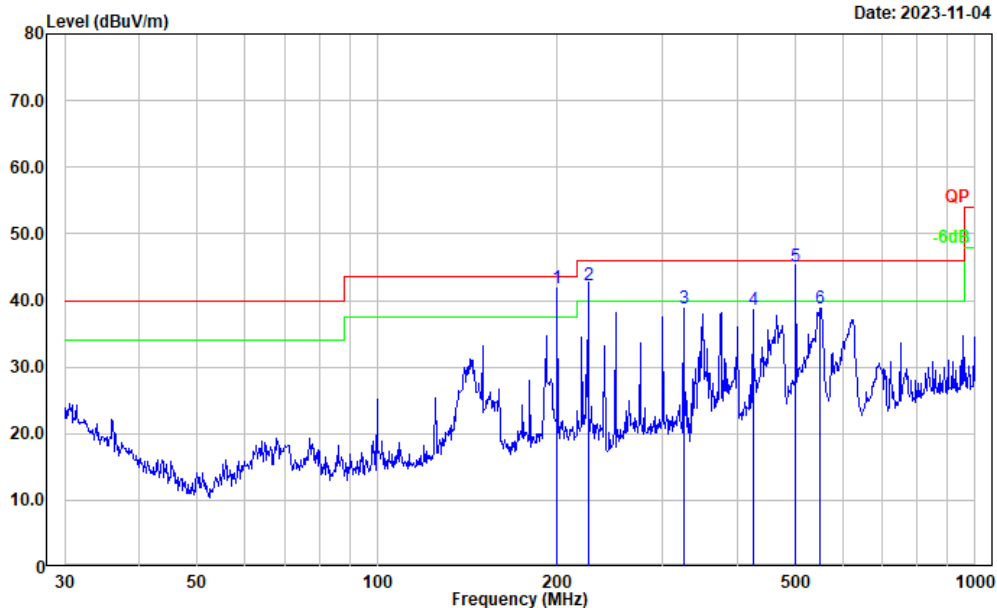

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	199.986	53.95	-12.21	41.74	43.50	1.76	QP
2	225.308	55.22	-12.92	42.30	46.00	3.70	QP
3	325.596	49.16	-10.36	38.80	46.00	7.20	Peak
4	425.028	46.22	-7.71	38.51	46.00	7.49	Peak
5	501.179	51.10	-5.99	45.11	46.00	0.89	QP
6	549.020	44.66	-5.77	38.89	46.00	7.11	Peak

Project No.: CR231059192-RF
 Tester: Carl Xue
 Polarization: vertical
 Note:

Date: 2023-11-04

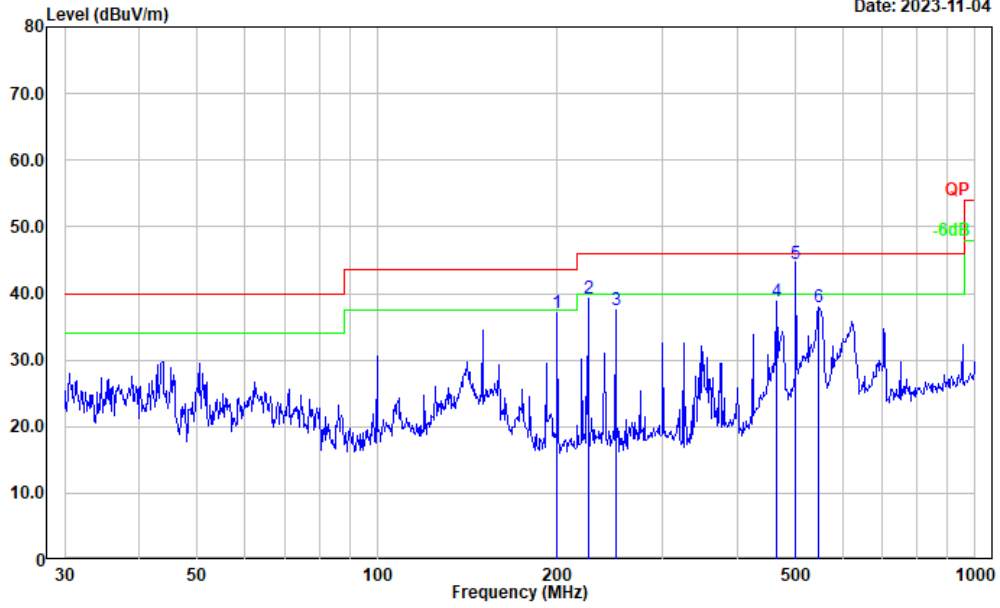

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	199.986	49.21	-12.21	37.00	43.50	6.50	Peak
2	225.308	52.13	-12.92	39.21	46.00	6.79	Peak
3	250.301	50.75	-13.18	37.57	46.00	8.43	Peak
4	465.599	45.30	-6.46	38.84	46.00	7.16	Peak
5	501.179	50.47	-5.99	44.48	46.00	1.52	QP
6	547.098	43.74	-5.83	37.91	46.00	8.09	Peak

2) 1-25GHz:**Module 1:****BDR Mode(GFSK):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel:				2402	MHz		
2390.000	28.18	PK	H	31.71	59.89	74.00	14.11
2390.000	13.44	AV	H	31.71	45.15	54.00	8.85
2390.000	31.51	PK	V	31.71	63.22	74.00	10.78
2390.000	13.66	AV	V	31.71	45.37	54.00	8.63
4804.000	33.23	PK	H	11.19	44.42	74.00	29.58
4804.000	20.79	AV	H	11.19	31.98	54.00	22.02
4804.000	34.78	PK	V	11.19	45.97	74.00	28.03
4804.000	21.33	AV	V	11.19	32.52	54.00	21.48
7206.000	32.84	PK	H	15.03	47.87	74.00	26.13
7206.000	21.22	AV	H	15.03	36.25	54.00	17.75
7206.000	32.56	PK	V	15.03	47.59	74.00	26.41
7206.000	20.90	AV	V	15.03	35.93	54.00	18.07
Middle Channel:				2441	MHz		
4882.000	33.44	PK	H	11.48	44.92	74.00	29.08
4882.000	22.03	AV	H	11.48	33.51	54.00	20.49
4882.000	34.03	PK	V	11.48	45.51	74.00	28.49
4882.000	20.17	AV	V	11.48	31.65	54.00	22.35
7323.000	32.61	PK	H	15.57	48.18	74.00	25.82
7323.000	19.52	AV	H	15.57	35.09	54.00	18.91
7323.000	34.11	PK	V	15.57	49.68	74.00	24.32
7323.000	19.44	AV	V	15.57	35.01	54.00	18.99
High Channel:				2480	MHz		
2483.500	27.72	PK	H	32.19	59.91	74.00	14.09
2483.500	14.81	AV	H	32.19	47.00	54.00	7.00
2483.500	18.09	PK	V	32.19	50.28	74.00	23.72
2483.500	14.62	AV	V	32.19	46.81	54.00	7.19
4960.000	34.27	PK	H	11.77	46.04	74.00	27.96
4960.000	22.38	AV	H	11.77	34.15	54.00	19.85
4960.000	34.83	PK	V	11.77	46.60	74.00	27.40
4960.000	20.88	AV	V	11.77	32.65	54.00	21.35
7440.000	34.36	PK	H	15.98	50.34	74.00	23.66
7440.000	20.30	AV	H	15.98	36.28	54.00	17.72
7440.000	32.72	PK	V	15.98	48.70	74.00	25.30
7440.000	20.21	AV	V	15.98	36.19	54.00	17.81

EDR Mode ($\pi/4$ -DQPSK):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
2390.000	28.24	PK	H	31.71	59.95	74.00	14.05
2390.000	14.53	AV	H	31.71	46.24	54.00	7.76
2390.000	27.56	PK	V	31.71	59.27	74.00	14.73
2390.000	13.65	AV	V	31.71	45.36	54.00	8.64
4804.000	34.71	PK	H	11.19	45.90	74.00	28.10
4804.000	20.34	AV	H	11.19	31.53	54.00	22.47
4804.000	33.56	PK	V	11.19	44.75	74.00	29.25
4804.000	22.13	AV	V	11.19	33.32	54.00	20.68
7206.000	32.94	PK	H	15.03	47.97	74.00	26.03
7206.000	20.80	AV	H	15.03	35.83	54.00	18.17
7206.000	32.73	PK	V	15.03	47.76	74.00	26.24
7206.000	19.84	AV	V	15.03	34.87	54.00	19.13
Middle Channel: 2441 MHz							
4882.000	35.37	PK	H	11.48	46.85	74.00	27.15
4882.000	22.19	AV	H	11.48	33.67	54.00	20.33
4882.000	34.43	PK	V	11.48	45.91	74.00	28.09
4882.000	20.36	AV	V	11.48	31.84	54.00	22.16
7323.000	32.17	PK	H	15.57	47.74	74.00	26.26
7323.000	19.91	AV	H	15.57	35.48	54.00	18.52
7323.000	34.20	PK	V	15.57	49.77	74.00	24.23
7323.000	19.43	AV	V	15.57	35.00	54.00	19.00
High Channel: 2480 MHz							
2483.500	26.10	PK	H	32.19	58.29	74.00	15.71
2483.500	13.27	AV	H	32.19	45.46	54.00	8.54
2483.500	27.07	PK	V	32.19	59.26	74.00	14.74
2483.500	14.07	AV	V	32.19	46.26	54.00	7.74
4960.000	33.96	PK	H	11.77	45.73	74.00	28.27
4960.000	21.48	AV	H	11.77	33.25	54.00	20.75
4960.000	34.28	PK	V	11.77	46.05	74.00	27.95
4960.000	20.90	AV	V	11.77	32.67	54.00	21.33
7440.000	32.93	PK	H	15.98	48.91	74.00	25.09
7440.000	20.13	AV	H	15.98	36.11	54.00	17.89
7440.000	33.59	PK	V	15.98	49.57	74.00	24.43
7440.000	19.78	AV	V	15.98	35.76	54.00	18.24

EDR Mode (8DPSK):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
2390.000	27.66	PK	H	31.71	59.37	74.00	14.63
2390.000	15.31	AV	H	31.71	47.02	54.00	6.98
2390.000	27.67	PK	V	31.71	59.38	74.00	14.62
2390.000	14.68	AV	V	31.71	46.39	54.00	7.61
4804.000	34.17	PK	H	11.19	45.36	74.00	28.64
4804.000	20.41	AV	H	11.19	31.60	54.00	22.40
4804.000	33.93	PK	V	11.19	45.12	74.00	28.88
4804.000	21.41	AV	V	11.19	32.60	54.00	21.40
7206.000	33.04	PK	H	15.03	48.07	74.00	25.93
7206.000	21.15	AV	H	15.03	36.18	54.00	17.82
7206.000	32.92	PK	V	15.03	47.95	74.00	26.05
7206.000	20.31	AV	V	15.03	35.34	54.00	18.66
Middle Channel: 2441 MHz							
4882.000	34.64	PK	H	11.48	46.12	74.00	27.88
4882.000	21.71	AV	H	11.48	33.19	54.00	20.81
4882.000	34.06	PK	V	11.48	45.54	74.00	28.46
4882.000	20.90	AV	V	11.48	32.38	54.00	21.62
7323.000	33.54	PK	H	15.57	49.11	74.00	24.89
7323.000	20.64	AV	H	15.57	36.21	54.00	17.79
7323.000	33.84	PK	V	15.57	49.41	74.00	24.59
7323.000	19.64	AV	V	15.57	35.21	54.00	18.79
High Channel: 2480 MHz							
2483.500	28.05	PK	H	32.19	60.24	74.00	13.76
2483.500	13.73	AV	H	32.19	45.92	54.00	8.08
2483.500	28.08	PK	V	32.19	60.27	74.00	13.73
2483.500	13.87	AV	V	32.19	46.06	54.00	7.94
4960.000	34.44	PK	H	11.77	46.21	74.00	27.79
4960.000	21.82	AV	H	11.77	33.59	54.00	20.41
4960.000	35.28	PK	V	11.77	47.05	74.00	26.95
4960.000	20.71	AV	V	11.77	32.48	54.00	21.52
7440.000	32.72	PK	H	15.98	48.70	74.00	25.30
7440.000	20.21	AV	H	15.98	36.19	54.00	17.81
7440.000	34.21	PK	V	15.98	50.19	74.00	23.81
7440.000	20.13	AV	V	15.98	36.11	54.00	17.89

Module 2**BDR Mode (GFSK):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
2390.000	27.33	PK	H	31.71	59.04	74.00	14.96
2390.000	14.12	AV	H	31.71	45.83	54.00	8.17
2390.000	30.76	PK	V	31.71	62.47	74.00	11.53
2390.000	14.59	AV	V	31.71	46.30	54.00	7.70
4804.000	34.21	PK	H	11.19	45.40	74.00	28.60
4804.000	21.25	AV	H	11.19	32.44	54.00	21.56
4804.000	34.36	PK	V	11.19	45.55	74.00	28.45
4804.000	21.47	AV	V	11.19	32.66	54.00	21.34
7206.000	33.36	PK	H	15.03	48.39	74.00	25.61
7206.000	20.28	AV	H	15.03	35.31	54.00	18.69
7206.000	33.47	PK	V	15.03	48.50	74.00	25.50
7206.000	20.64	AV	V	15.03	35.67	54.00	18.33
Middle Channel: 2441 MHz							
4882.000	34.25	PK	H	11.48	45.73	74.00	28.27
4882.000	21.16	AV	H	11.48	32.64	54.00	21.36
4882.000	34.30	PK	V	11.48	45.78	74.00	28.22
4882.000	21.09	AV	V	11.48	32.57	54.00	21.43
7323.000	33.47	PK	H	15.57	49.04	74.00	24.96
7323.000	20.34	AV	H	15.57	35.91	54.00	18.09
7323.000	33.29	PK	V	15.57	48.86	74.00	25.14
7323.000	20.19	AV	V	15.57	35.76	54.00	18.24
High Channel: 2480 MHz							
2483.500	27.34	PK	H	32.19	59.53	74.00	14.47
2483.500	14.38	AV	H	32.19	46.57	54.00	7.43
2483.500	17.29	PK	V	32.19	49.48	74.00	24.52
2483.500	14.63	AV	V	32.19	46.82	54.00	7.18
4960.000	34.33	PK	H	11.77	46.10	74.00	27.90
4960.000	21.55	AV	H	11.77	33.32	54.00	20.68
4960.000	34.18	PK	V	11.77	45.95	74.00	28.05
4960.000	21.35	AV	V	11.77	33.12	54.00	20.88
7440.000	33.69	PK	H	15.98	49.67	74.00	24.33
7440.000	20.90	AV	H	15.98	36.88	54.00	17.12
7440.000	33.54	PK	V	15.98	49.52	74.00	24.48
7440.000	20.81	AV	V	15.98	36.79	54.00	17.21

EDR Mode ($\pi/4$ -DQPSK):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
2390.000	27.35	PK	H	31.71	59.06	74.00	14.94
2390.000	14.16	AV	H	31.71	45.87	54.00	8.13
2390.000	27.29	PK	V	31.71	59.00	74.00	15.00
2390.000	14.11	AV	V	31.71	45.82	54.00	8.18
4804.000	34.26	PK	H	11.19	45.45	74.00	28.55
4804.000	21.25	AV	H	11.19	32.44	54.00	21.56
4804.000	34.37	PK	V	11.19	45.56	74.00	28.44
4804.000	21.22	AV	V	11.19	32.41	54.00	21.59
7206.000	33.07	PK	H	15.03	48.10	74.00	25.90
7206.000	21.71	AV	H	15.03	36.74	54.00	17.26
7206.000	33.61	PK	V	15.03	48.64	74.00	25.36
7206.000	20.14	AV	V	15.03	35.17	54.00	18.83
Middle Channel: 2441 MHz							
4882.000	34.60	PK	H	11.48	46.08	74.00	27.92
4882.000	21.37	AV	H	11.48	32.85	54.00	21.15
4882.000	34.19	PK	V	11.48	45.67	74.00	28.33
4882.000	20.52	AV	V	11.48	32.00	54.00	22.00
7323.000	33.02	PK	H	15.57	48.59	74.00	25.41
7323.000	20.36	AV	H	15.57	35.93	54.00	18.07
7323.000	33.24	PK	V	15.57	48.81	74.00	25.19
7323.000	20.17	AV	V	15.57	35.74	54.00	18.26
High Channel: 2480 MHz							
2483.500	27.09	PK	H	32.19	59.28	74.00	14.72
2483.500	14.23	AV	H	32.19	46.42	54.00	7.58
2483.500	27.30	PK	V	32.19	59.49	74.00	14.51
2483.500	14.12	AV	V	32.19	46.31	54.00	7.69
4960.000	34.71	PK	H	11.77	46.48	74.00	27.52
4960.000	21.82	AV	H	11.77	33.59	54.00	20.41
4960.000	34.53	PK	V	11.77	46.30	74.00	27.70
4960.000	21.69	AV	V	11.77	33.46	54.00	20.54
7440.000	33.45	PK	H	15.98	49.43	74.00	24.57
7440.000	20.51	AV	H	15.98	36.49	54.00	17.51
7440.000	33.62	PK	V	15.98	49.60	74.00	24.40
7440.000	20.19	AV	V	15.98	36.17	54.00	17.83

EDR Mode (8DPSK):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
2390.000	27.63	PK	H	31.71	59.34	74.00	14.66
2390.000	14.34	AV	H	31.71	46.05	54.00	7.95
2390.000	27.09	PK	V	31.71	58.80	74.00	15.20
2390.000	14.16	AV	V	31.71	45.87	54.00	8.13
4804.000	34.62	PK	H	11.19	45.81	74.00	28.19
4804.000	21.35	AV	H	11.19	32.54	54.00	21.46
4804.000	34.53	PK	V	11.19	45.72	74.00	28.28
4804.000	21.60	AV	V	11.19	32.79	54.00	21.21
7206.000	33.47	PK	H	15.03	48.50	74.00	25.50
7206.000	20.19	AV	H	15.03	35.22	54.00	18.78
7206.000	33.36	PK	V	15.03	48.39	74.00	25.61
7206.000	20.18	AV	V	15.03	35.21	54.00	18.79
Middle Channel: 2441 MHz							
4882.000	34.62	PK	H	11.48	46.10	74.00	27.90
4882.000	21.25	AV	H	11.48	32.73	54.00	21.27
4882.000	34.39	PK	V	11.48	45.87	74.00	28.13
4882.000	21.75	AV	V	11.48	33.23	54.00	20.77
7323.000	33.45	PK	H	15.57	49.02	74.00	24.98
7323.000	20.52	AV	H	15.57	36.09	54.00	17.91
7323.000	33.61	PK	V	15.57	49.18	74.00	24.82
7323.000	20.47	AV	V	15.57	36.04	54.00	17.96
High Channel: 2480 MHz							
2483.500	27.26	PK	H	32.19	59.45	74.00	14.55
2483.500	14.32	AV	H	32.19	46.51	54.00	7.49
2483.500	27.18	PK	V	32.19	59.37	74.00	14.63
2483.500	14.25	AV	V	32.19	46.44	54.00	7.56
4960.000	34.65	PK	H	11.77	46.42	74.00	27.58
4960.000	21.49	AV	H	11.77	33.26	54.00	20.74
4960.000	34.38	PK	V	11.77	46.15	74.00	27.85
4960.000	21.46	AV	V	11.77	33.23	54.00	20.77
7440.000	33.53	PK	H	15.98	49.51	74.00	24.49
7440.000	20.33	AV	H	15.98	36.31	54.00	17.69
7440.000	33.40	PK	V	15.98	49.38	74.00	24.62
7440.000	20.16	AV	V	15.98	36.14	54.00	17.86

Module 3:**BDR Mode(GFSK):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
2390.000	28.31	PK	H	31.71	60.02	74.00	13.98
2390.000	13.31	AV	H	31.71	45.02	54.00	8.98
2390.000	30.57	PK	V	31.71	62.28	74.00	11.72
2390.000	13.97	AV	V	31.71	45.68	54.00	8.32
4804.000	33.77	PK	H	11.19	44.96	74.00	29.04
4804.000	20.54	AV	H	11.19	31.73	54.00	22.27
4804.000	34.16	PK	V	11.19	45.35	74.00	28.65
4804.000	20.99	AV	V	11.19	32.18	54.00	21.82
7206.000	33.79	PK	H	15.03	48.82	74.00	25.18
7206.000	20.21	AV	H	15.03	35.24	54.00	18.76
7206.000	32.80	PK	V	15.03	47.83	74.00	26.17
7206.000	19.99	AV	V	15.03	35.02	54.00	18.98
Middle Channel: 2441 MHz							
4882.000	33.26	PK	H	11.48	44.74	74.00	29.26
4882.000	21.44	AV	H	11.48	32.92	54.00	21.08
4882.000	33.47	PK	V	11.48	44.95	74.00	29.05
4882.000	20.78	AV	V	11.48	32.26	54.00	21.74
7323.000	33.69	PK	H	15.57	49.26	74.00	24.74
7323.000	20.85	AV	H	15.57	36.42	54.00	17.58
7323.000	33.67	PK	V	15.57	49.24	74.00	24.76
7323.000	20.79	AV	V	15.57	36.36	54.00	17.64
High Channel: 2480 MHz							
2483.500	28.12	PK	H	32.19	60.31	74.00	13.69
2483.500	14.63	AV	H	32.19	46.82	54.00	7.18
2483.500	17.05	PK	V	32.19	49.24	74.00	24.76
2483.500	14.03	AV	V	32.19	46.22	54.00	7.78
4960.000	34.81	PK	H	11.77	46.58	74.00	27.42
4960.000	20.86	AV	H	11.77	32.63	54.00	21.37
4960.000	33.95	PK	V	11.77	45.72	74.00	28.28
4960.000	21.69	AV	V	11.77	33.46	54.00	20.54
7440.000	34.01	PK	H	15.98	49.99	74.00	24.01
7440.000	20.41	AV	H	15.98	36.39	54.00	17.61
7440.000	34.14	PK	V	15.98	50.12	74.00	23.88
7440.000	20.33	AV	V	15.98	36.31	54.00	17.69

EDR Mode ($\pi/4$ -DQPSK):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
2390.000	28.09	PK	H	31.71	59.80	74.00	14.20
2390.000	13.26	AV	H	31.71	44.97	54.00	9.03
2390.000	26.78	PK	V	31.71	58.49	74.00	15.51
2390.000	14.13	AV	V	31.71	45.84	54.00	8.16
4804.000	34.70	PK	H	11.19	45.89	74.00	28.11
4804.000	21.08	AV	H	11.19	32.27	54.00	21.73
4804.000	34.13	PK	V	11.19	45.32	74.00	28.68
4804.000	20.55	AV	V	11.19	31.74	54.00	22.26
7206.000	32.13	PK	H	15.03	47.16	74.00	26.84
7206.000	20.35	AV	H	15.03	35.38	54.00	18.62
7206.000	34.25	PK	V	15.03	49.28	74.00	24.72
7206.000	19.46	AV	V	15.03	34.49	54.00	19.51
Middle Channel: 2441 MHz							
4882.000	33.74	PK	H	11.48	45.22	74.00	28.78
4882.000	21.15	AV	H	11.48	32.63	54.00	21.37
4882.000	34.27	PK	V	11.48	45.75	74.00	28.25
4882.000	20.70	AV	V	11.48	32.18	54.00	21.82
7323.000	33.54	PK	H	15.57	49.11	74.00	24.89
7323.000	21.21	AV	H	15.57	36.78	54.00	17.22
7323.000	32.96	PK	V	15.57	48.53	74.00	25.47
7323.000	20.28	AV	V	15.57	35.85	54.00	18.15
High Channel: 2480 MHz							
2483.500	27.98	PK	H	32.19	60.17	74.00	13.83
2483.500	15.20	AV	H	32.19	47.39	54.00	6.61
2483.500	28.24	PK	V	32.19	60.43	74.00	13.57
2483.500	14.02	AV	V	32.19	46.21	54.00	7.79
4960.000	35.05	PK	H	11.77	46.82	74.00	27.18
4960.000	22.17	AV	H	11.77	33.94	54.00	20.06
4960.000	35.05	PK	V	11.77	46.82	74.00	27.18
4960.000	22.45	AV	V	11.77	34.22	54.00	19.78
7440.000	34.28	PK	H	15.98	50.26	74.00	23.74
7440.000	20.56	AV	H	15.98	36.54	54.00	17.46
7440.000	33.76	PK	V	15.98	49.74	74.00	24.26
7440.000	20.11	AV	V	15.98	36.09	54.00	17.91

EDR Mode (8DPSK):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
2390.000	27.73	PK	H	31.71	59.44	74.00	14.56
2390.000	13.97	AV	H	31.71	45.68	54.00	8.32
2390.000	26.96	PK	V	31.71	58.67	74.00	15.33
2390.000	14.72	AV	V	31.71	46.43	54.00	7.57
4804.000	34.26	PK	H	11.19	45.45	74.00	28.55
4804.000	21.61	AV	H	11.19	32.80	54.00	21.20
4804.000	34.89	PK	V	11.19	46.08	74.00	27.92
4804.000	21.14	AV	V	11.19	32.33	54.00	21.67
7206.000	32.81	PK	H	15.03	47.84	74.00	26.16
7206.000	21.30	AV	H	15.03	36.33	54.00	17.67
7206.000	34.30	PK	V	15.03	49.33	74.00	24.67
7206.000	20.77	AV	V	15.03	35.80	54.00	18.20
Middle Channel: 2441 MHz							
4882.000	35.41	PK	H	11.48	46.89	74.00	27.11
4882.000	22.07	AV	H	11.48	33.55	54.00	20.45
4882.000	34.08	PK	V	11.48	45.56	74.00	28.44
4882.000	22.38	AV	V	11.48	33.86	54.00	20.14
7323.000	34.10	PK	H	15.57	49.67	74.00	24.33
7323.000	20.27	AV	H	15.57	35.84	54.00	18.16
7323.000	33.54	PK	V	15.57	49.11	74.00	24.89
7323.000	19.48	AV	V	15.57	35.05	54.00	18.95
High Channel: 2480 MHz							
2483.500	27.10	PK	H	32.19	59.29	74.00	14.71
2483.500	15.20	AV	H	32.19	47.39	54.00	6.61
2483.500	26.90	PK	V	32.19	59.09	74.00	14.91
2483.500	13.92	AV	V	32.19	46.11	54.00	7.89
4960.000	34.82	PK	H	11.77	46.59	74.00	27.41
4960.000	20.77	AV	H	11.77	32.54	54.00	21.46
4960.000	33.49	PK	V	11.77	45.26	74.00	28.74
4960.000	20.71	AV	V	11.77	32.48	54.00	21.52
7440.000	34.41	PK	H	15.98	50.39	74.00	23.61
7440.000	20.14	AV	H	15.98	36.12	54.00	17.88
7440.000	33.98	PK	V	15.98	49.96	74.00	24.04
7440.000	19.69	AV	V	15.98	35.67	54.00	18.33

Module 4:**BDR Mode(GFSK):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel:				2402	MHz		
2390.000	26.78	PK	H	31.71	58.49	74.00	15.51
2390.000	14.53	AV	H	31.71	46.24	54.00	7.76
2390.000	31.18	PK	V	31.71	62.89	74.00	11.11
2390.000	14.32	AV	V	31.71	46.03	54.00	7.97
4804.000	34.13	PK	H	11.19	45.32	74.00	28.68
4804.000	22.00	AV	H	11.19	33.19	54.00	20.81
4804.000	33.53	PK	V	11.19	44.72	74.00	29.28
4804.000	20.91	AV	V	11.19	32.10	54.00	21.90
7206.000	32.48	PK	H	15.03	47.51	74.00	26.49
7206.000	20.31	AV	H	15.03	35.34	54.00	18.66
7206.000	32.78	PK	V	15.03	47.81	74.00	26.19
7206.000	19.98	AV	V	15.03	35.01	54.00	18.99
Middle Channel:				2441	MHz		
4882.000	34.60	PK	H	11.48	46.08	74.00	27.92
4882.000	20.65	AV	H	11.48	32.13	54.00	21.87
4882.000	34.62	PK	V	11.48	46.10	74.00	27.90
4882.000	20.23	AV	V	11.48	31.71	54.00	22.29
7323.000	34.23	PK	H	15.57	49.80	74.00	24.20
7323.000	19.61	AV	H	15.57	35.18	54.00	18.82
7323.000	32.38	PK	V	15.57	47.95	74.00	26.05
7323.000	19.57	AV	V	15.57	35.14	54.00	18.86
High Channel:				2480	MHz		
2483.500	26.88	PK	H	32.19	59.07	74.00	14.93
2483.500	13.57	AV	H	32.19	45.76	54.00	8.24
2483.500	17.12	PK	V	32.19	49.31	74.00	24.69
2483.500	14.34	AV	V	32.19	46.53	54.00	7.47
4960.000	34.23	PK	H	11.77	46.00	74.00	28.00
4960.000	21.58	AV	H	11.77	33.35	54.00	20.65
4960.000	35.09	PK	V	11.77	46.86	74.00	27.14
4960.000	21.38	AV	V	11.77	33.15	54.00	20.85
7440.000	33.21	PK	H	15.98	49.19	74.00	24.81
7440.000	20.34	AV	H	15.98	36.32	54.00	17.68
7440.000	32.75	PK	V	15.98	48.73	74.00	25.27
7440.000	19.84	AV	V	15.98	35.82	54.00	18.18

EDR Mode ($\pi/4$ -DQPSK):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
2390.000	26.54	PK	H	31.71	58.25	74.00	15.75
2390.000	14.63	AV	H	31.71	46.34	54.00	7.66
2390.000	27.38	PK	V	31.71	59.09	74.00	14.91
2390.000	14.63	AV	V	31.71	46.34	54.00	7.66
4804.000	33.83	PK	H	11.19	45.02	74.00	28.98
4804.000	21.14	AV	H	11.19	32.33	54.00	21.67
4804.000	34.25	PK	V	11.19	45.44	74.00	28.56
4804.000	21.86	AV	V	11.19	33.05	54.00	20.95
7206.000	32.08	PK	H	15.03	47.11	74.00	26.89
7206.000	20.81	AV	H	15.03	35.84	54.00	18.16
7206.000	33.46	PK	V	15.03	48.49	74.00	25.51
7206.000	20.01	AV	V	15.03	35.04	54.00	18.96
Middle Channel: 2441 MHz							
4882.000	34.65	PK	H	11.48	46.13	74.00	27.87
4882.000	21.05	AV	H	11.48	32.53	54.00	21.47
4882.000	34.17	PK	V	11.48	45.65	74.00	28.35
4882.000	19.77	AV	V	11.48	31.25	54.00	22.75
7323.000	33.08	PK	H	15.57	48.65	74.00	25.35
7323.000	20.43	AV	H	15.57	36.00	54.00	18.00
7323.000	33.24	PK	V	15.57	48.81	74.00	25.19
7323.000	20.17	AV	V	15.57	35.74	54.00	18.26
High Channel: 2480 MHz							
2483.500	27.59	PK	H	32.19	59.78	74.00	14.22
2483.500	15.12	AV	H	32.19	47.31	54.00	6.69
2483.500	27.36	PK	V	32.19	59.55	74.00	14.45
2483.500	14.15	AV	V	32.19	46.34	54.00	7.66
4960.000	34.50	PK	H	11.77	46.27	74.00	27.73
4960.000	21.80	AV	H	11.77	33.57	54.00	20.43
4960.000	35.13	PK	V	11.77	46.90	74.00	27.10
4960.000	20.92	AV	V	11.77	32.69	54.00	21.31
7440.000	33.89	PK	H	15.98	49.87	74.00	24.13
7440.000	19.79	AV	H	15.98	35.77	54.00	18.23
7440.000	33.55	PK	V	15.98	49.53	74.00	24.47
7440.000	19.65	AV	V	15.98	35.63	54.00	18.37


EDR Mode (8DPSK):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
2390.000	27.26	PK	H	31.71	58.97	74.00	15.03
2390.000	13.47	AV	H	31.71	45.18	54.00	8.82
2390.000	26.74	PK	V	31.71	58.45	74.00	15.55
2390.000	13.34	AV	V	31.71	45.05	54.00	8.95
4804.000	35.45	PK	H	11.19	46.64	74.00	27.36
4804.000	21.99	AV	H	11.19	33.18	54.00	20.82
4804.000	33.83	PK	V	11.19	45.02	74.00	28.98
4804.000	21.57	AV	V	11.19	32.76	54.00	21.24
7206.000	33.24	PK	H	15.03	48.27	74.00	25.73
7206.000	20.56	AV	H	15.03	35.59	54.00	18.41
7206.000	32.64	PK	V	15.03	47.67	74.00	26.33
7206.000	20.13	AV	V	15.03	35.16	54.00	18.84
Middle Channel: 2441 MHz							
4882.000	34.62	PK	H	11.48	46.10	74.00	27.90
4882.000	20.47	AV	H	11.48	31.95	54.00	22.05
4882.000	33.55	PK	V	11.48	45.03	74.00	28.97
4882.000	22.74	AV	V	11.48	34.22	54.00	19.78
7323.000	32.69	PK	H	15.57	48.26	74.00	25.74
7323.000	20.76	AV	H	15.57	36.33	54.00	17.67
7323.000	33.52	PK	V	15.57	49.09	74.00	24.91
7323.000	20.26	AV	V	15.57	35.83	54.00	18.17
High Channel: 2480 MHz							
2483.500	26.60	PK	H	32.19	58.79	74.00	15.21
2483.500	14.57	AV	H	32.19	46.76	54.00	7.24
2483.500	27.57	PK	V	32.19	59.76	74.00	14.24
2483.500	13.74	AV	V	32.19	45.93	54.00	8.07
4960.000	33.95	PK	H	11.77	45.72	74.00	28.28
4960.000	22.37	AV	H	11.77	34.14	54.00	19.86
4960.000	33.93	PK	V	11.77	45.70	74.00	28.30
4960.000	20.62	AV	V	11.77	32.39	54.00	21.61
7440.000	33.48	PK	H	15.98	49.46	74.00	24.54
7440.000	20.86	AV	H	15.98	36.84	54.00	17.16
7440.000	32.82	PK	V	15.98	48.80	74.00	25.20
7440.000	20.55	AV	V	15.98	36.53	54.00	17.47

Worst Radiation Spurious Emissions Margin Test plots (Module 2 BDR High channel)

Project No.: CR231059192-RF
 Tester: coco Tian
 Polarization: horizontal
 Note:


Date: 2023-11-06

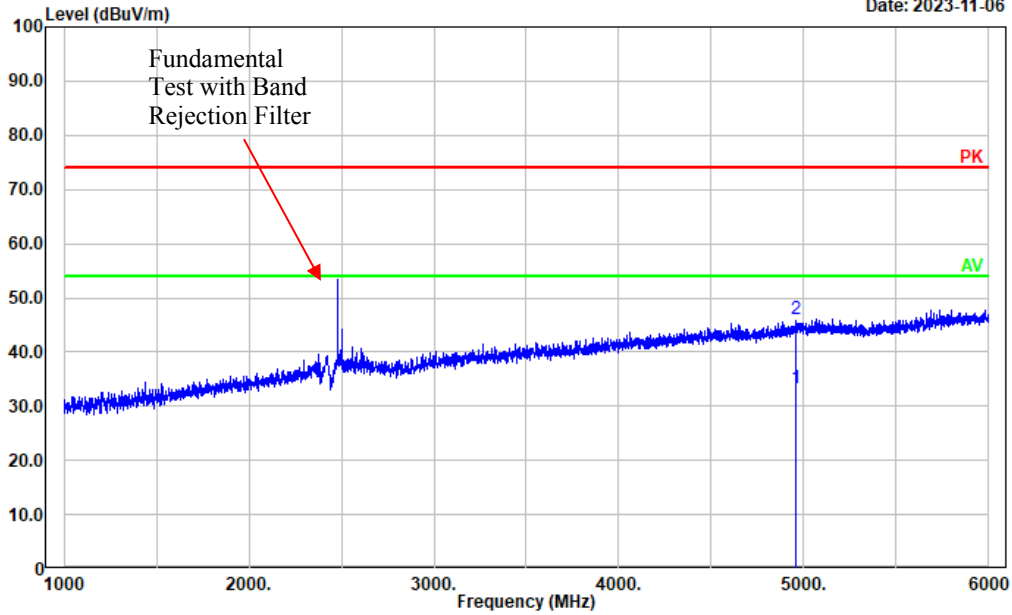

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4960.000	21.55	11.77	33.32	54.00	20.68	Average
2	4960.000	34.33	11.77	46.10	74.00	27.90	Peak

Project No.: CR231059192-RF
 Tester: coco Tian
 Polarization: vertical
 Note:


Date: 2023-11-06

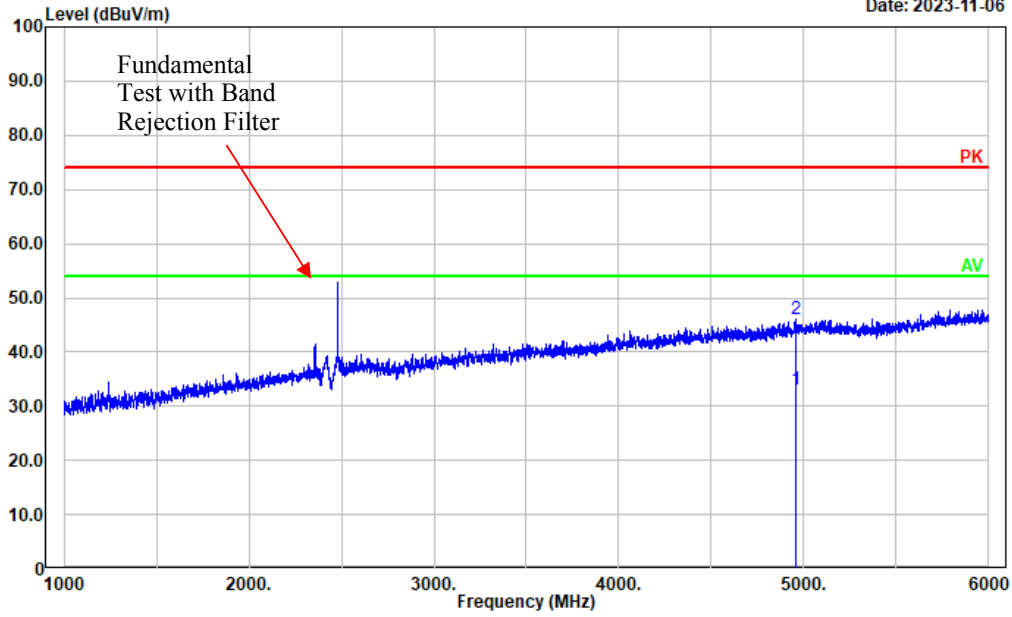

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4960.000	21.35	11.77	33.12	54.00	20.88	Average
2	4960.000	34.18	11.77	45.95	74.00	28.05	Peak

Project No.: CR231059192-RF
 Tester: coco Tian
 Polarization: horizontal
 Note:


Date: 2023-11-06

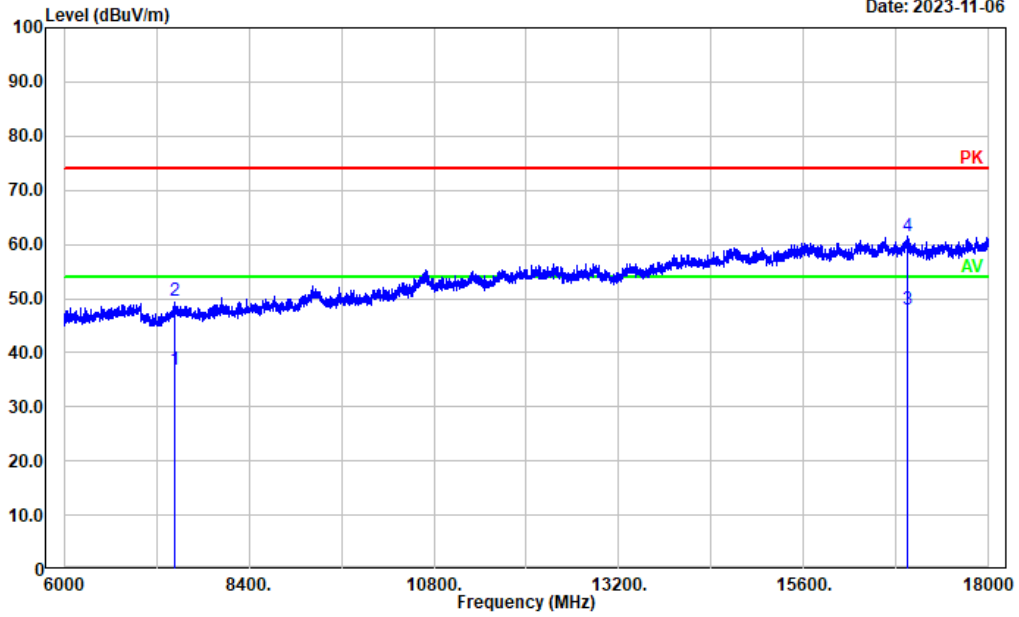

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	7440.000	20.90	15.98	36.88	54.00	17.12	Average
2	7440.000	33.69	15.98	49.67	74.00	24.33	Peak
3	16941.390	20.14	27.84	47.98	54.00	6.02	Average
4	16941.390	33.60	27.84	61.44	74.00	12.56	Peak

Project No.: CR231059192-RF
 Tester: coco Tian
 Polarization: vertical
 Note:


Date: 2023-11-06

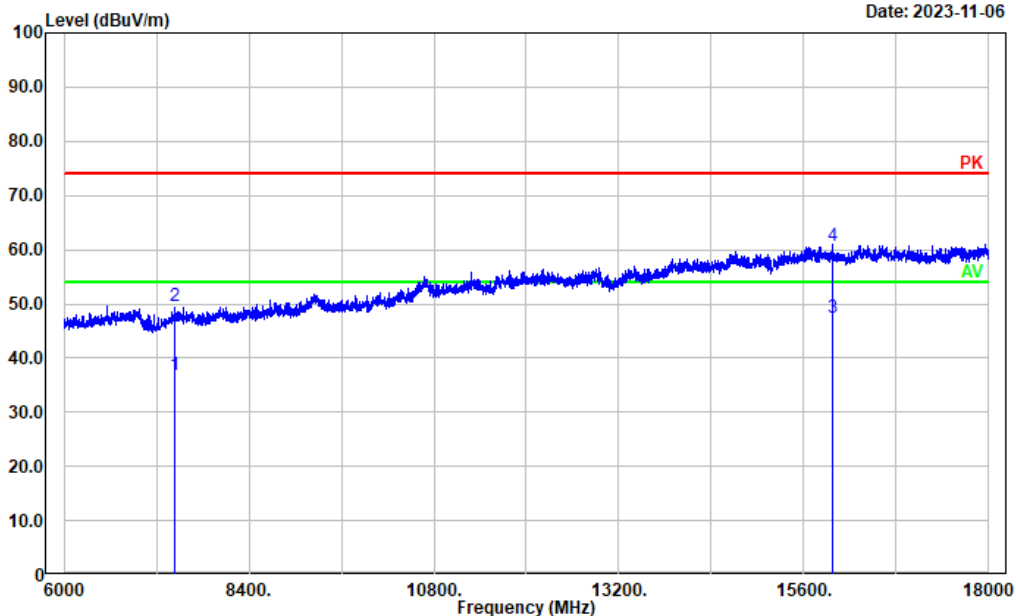

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7440.000	20.81	15.98	36.79	54.00	17.21	Average
2	7440.000	33.54	15.98	49.52	74.00	24.48	Peak
3	15966.790	22.16	25.22	47.38	54.00	6.62	Average
4	15966.790	35.62	25.22	60.84	74.00	13.16	Peak

Project No.: CR231059192-RF
 Tester: coco Tian
 Polarization: Horizontal
 Note:


Date: 2023-11-06

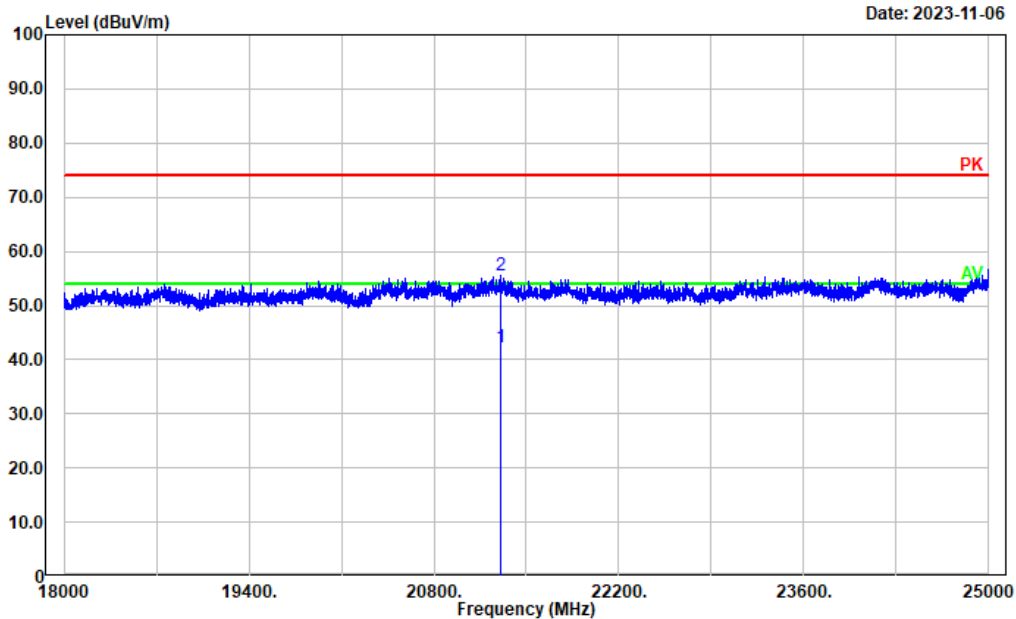

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	21304.660	37.58	4.77	42.35	54.00	11.65	Average
2	21304.660	50.79	4.77	55.56	74.00	18.44	Peak

Project No.: CR231059192-RF
 Tester: coco Tian
 Polarization: vertical
 Note:

Date: 2023-11-06

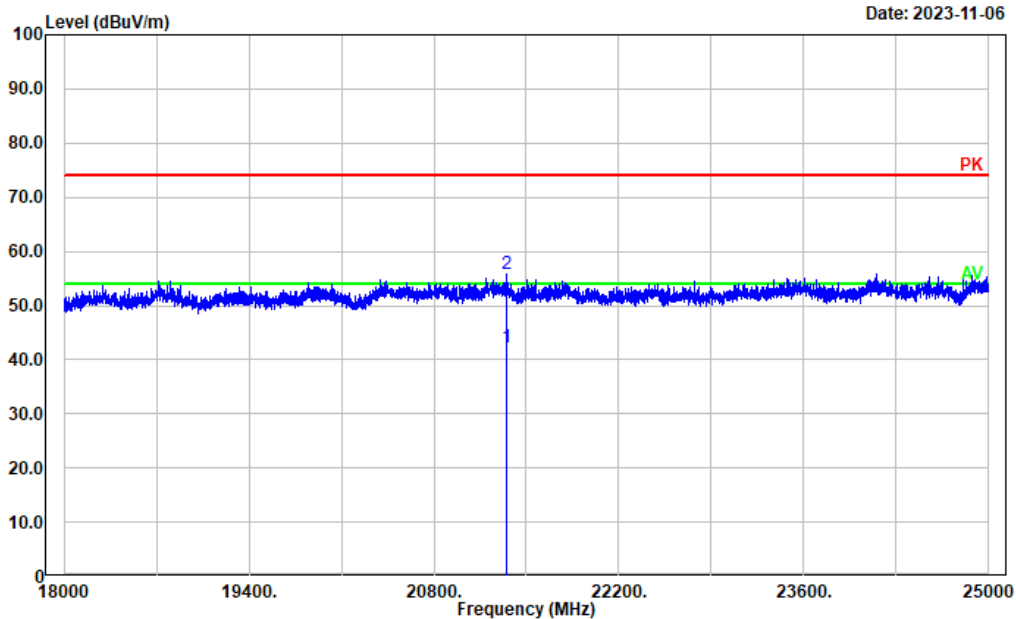

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	21352.270	37.67	4.68	42.35	54.00	11.65	Average
2	21352.270	51.19	4.68	55.87	74.00	18.13	Peak

4.3 20 dB Emission Bandwidth

Serial Number:	2C4W-2	Test Date:	2023/10/18~2023/10/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li ,Claire Liu	Test Result:	pass

Environmental Conditions:

Temperature: (°C)	24.9~26.9	Relative Humidity: (%)	46~64	ATM Pressure: (kPa)	100.2~101.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Module	Test Modes	Test Channel	Test Frequency (MHz)	20 dB Bandwidth (MHz)
Module 1	BDR Mode (GFSK)	Lowest	2402	0.933
		Middle	2441	0.933
		Highest	2480	0.933
	EDR Mode ($\pi/4$ -DQPSK)	Lowest	2402	1.212
		Middle	2441	1.212
		Highest	2480	1.207
	EDR Mode (8DPSK)	Lowest	2402	1.207
		Middle	2441	1.202
		Highest	2480	1.202
Module 2	BDR Mode (GFSK)	Lowest	2402	0.937
		Middle	2441	0.933
		Highest	2480	0.933
	EDR Mode ($\pi/4$ -DQPSK)	Lowest	2402	1.216
		Middle	2441	1.212
		Highest	2480	1.216
	EDR Mode (8DPSK)	Lowest	2402	1.202
		Middle	2441	1.202
		Highest	2480	1.202
Module 3	BDR Mode (GFSK)	Lowest	2402	0.938
		Middle	2441	0.937
		Highest	2480	0.933
	EDR Mode ($\pi/4$ -DQPSK)	Lowest	2402	1.212
		Middle	2441	1.216
		Highest	2480	1.212
	EDR Mode (8DPSK)	Lowest	2402	1.202
		Middle	2441	1.202
		Highest	2480	1.202
Module 4	BDR Mode (GFSK)	Lowest	2402	0.908
		Middle	2441	0.932
		Highest	2480	0.932
	EDR Mode ($\pi/4$ -DQPSK)	Lowest	2402	1.218
		Middle	2441	1.223
		Highest	2480	1.224
	EDR Mode (8DPSK)	Lowest	2402	1.208
		Middle	2441	1.208
		Highest	2480	1.208

Module 1:




BDR Mode (GFSK)	
Lowest Channel	<p>Ref 20 dBm Att 35 dB RBW 20 kHz VBW 50 kHz SWF 30 ms Delta 1 [T1] -0.37 dB</p> <p>Offset 0.4 dB Marker 1 [T1] -14.12 dBm 2.40154269 GHz</p> <p>D1 0.76 dBm D2 -9.24 dBm</p> <p>Center 2.402 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 14:40:28</p>
Middle Channel	<p>Ref 20 dBm Att 35 dB RBW 20 kHz VBW 50 kHz SWF 30 ms Delta 1 [T1] -0.58 dB</p> <p>Offset 0.4 dB Marker 1 [T1] -17.36 dBm 2.440533462 GHz</p> <p>D1 2.38 dBm D2 -17.62 dBm</p> <p>Center 2.441 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 14:42:28</p>
Highest Channel	<p>Ref 20 dBm Att 35 dB RBW 20 kHz VBW 50 kHz SWF 30 ms Delta 1 [T1] -0.09 dB</p> <p>Offset 0.4 dB Marker 1 [T1] -18.37 dBm 2.479833462 GHz</p> <p>D1 2 dBm D2 -8 dBm</p> <p>Center 2.48 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 14:43:33</p>

EDR Mode ($\pi/4$ -DQPSK)




<p>Lowest Channel</p>	<p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 14:46:47</p>
<p>Middle Channel</p>	<p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 14:48:14</p>
<p>Highest Channel</p>	<p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 14:45:13</p>

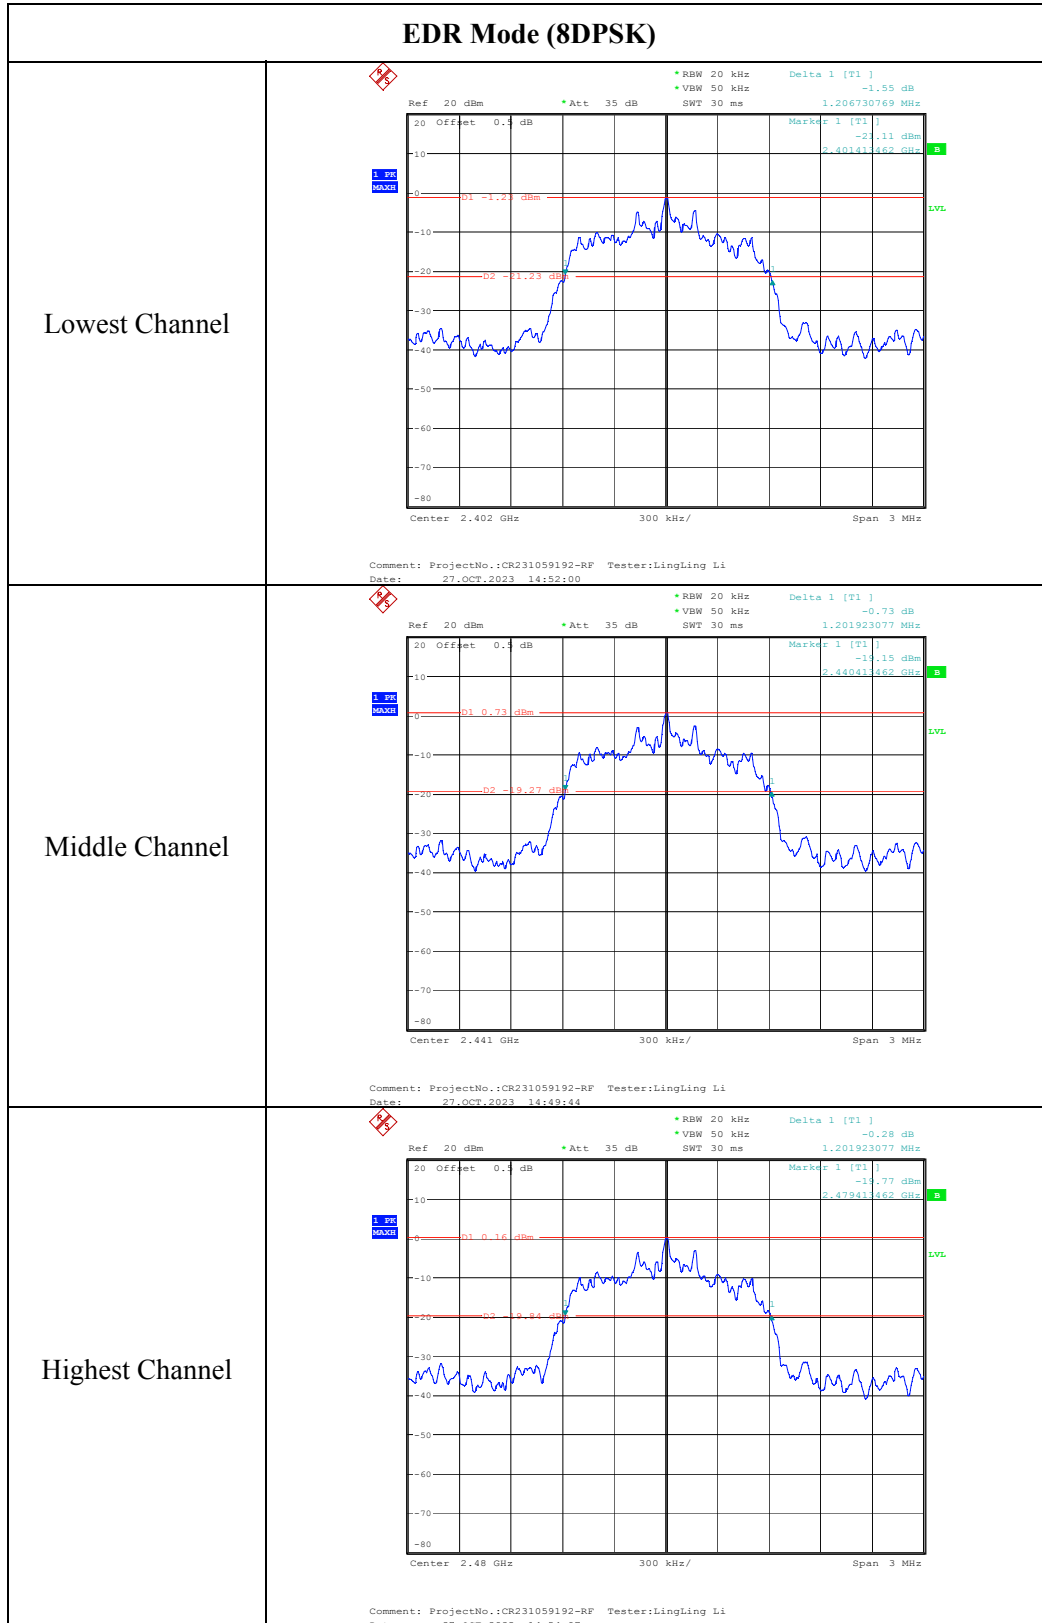




Module 2:

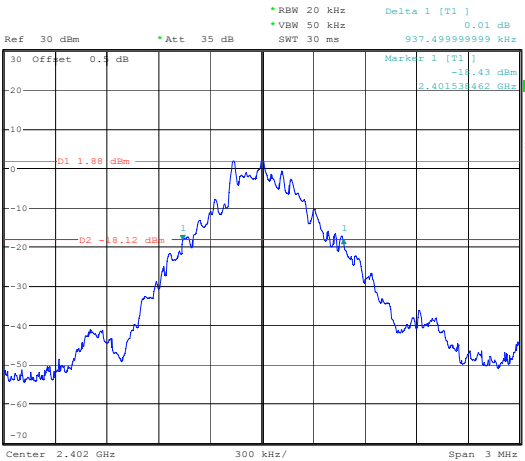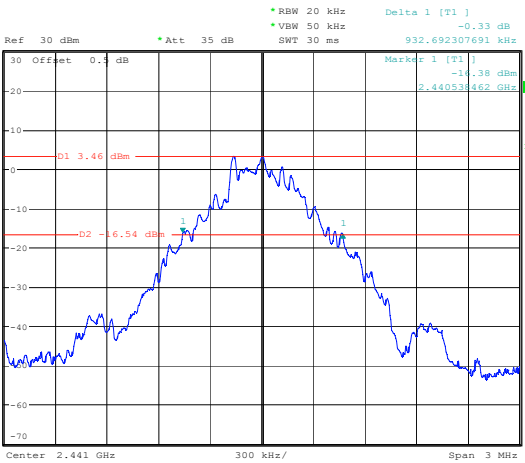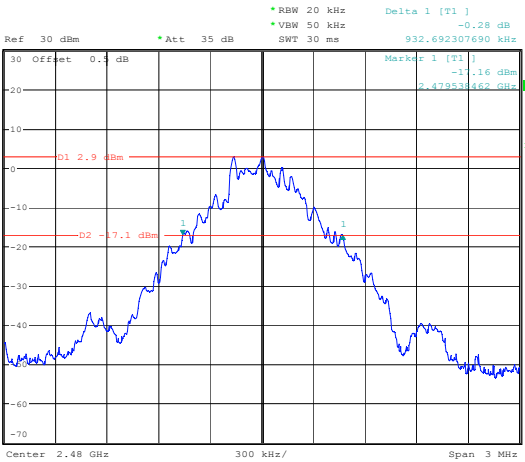BDR Mode (GFSK)	
Lowest Channel	 <p>Ref 30 dBm Att 35 dB RBW 20 kHz Delta 1 [T1] 0.01 dB VBW 50 kHz 937.499999999 kHz SWT 30 ms</p> <p>Offset 0.4 dB Mark 1 [T1] -14.43 dBm 2.40153462 GHz</p> <p>D1 1.88 dBm D2 -18.12 dBm</p> <p>Center 2.402 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 17:35:31</p>
Middle Channel	 <p>Ref 30 dBm Att 35 dB RBW 20 kHz Delta 1 [T1] -0.33 dB VBW 50 kHz 932.692307691 kHz SWT 30 ms</p> <p>Offset 0.4 dB Mark 1 [T1] -14.38 dBm 2.44053462 GHz</p> <p>D1 3.46 dBm D2 -16.54 dBm</p> <p>Center 2.441 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 17:35:31</p>
Highest Channel	 <p>Ref 30 dBm Att 35 dB RBW 20 kHz Delta 1 [T1] -0.28 dB VBW 50 kHz 932.692307690 kHz SWT 30 ms</p> <p>Offset 0.4 dB Mark 1 [T1] -11.16 dBm 2.47953462 GHz</p> <p>D1 2.9 dBm D2 -17.1 dBm</p> <p>Center 2.48 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 17:39:54</p>




EDR Mode ($\pi/4$ -DQPSK)

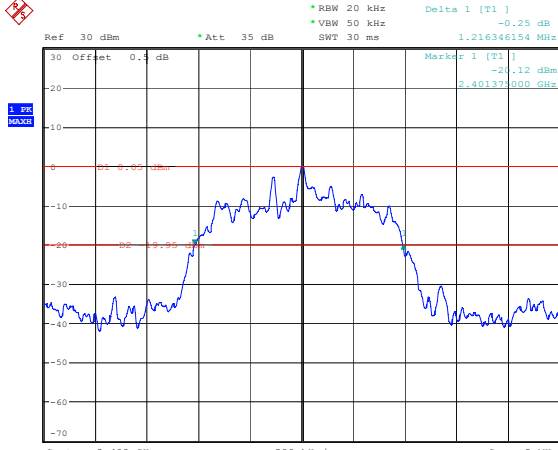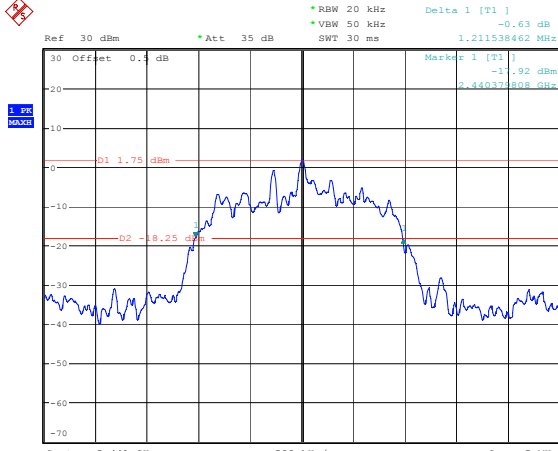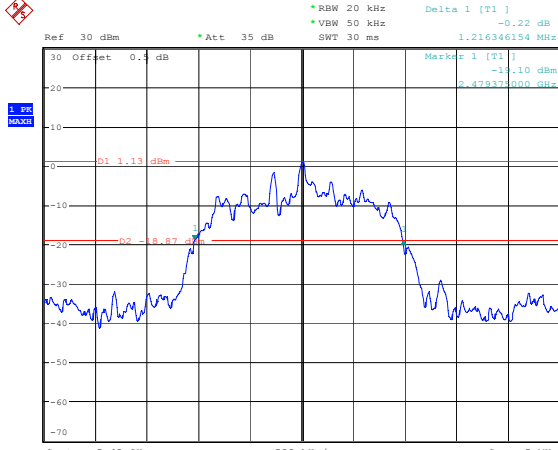Lowest Channel	 <p>Ref 30 dBm Att 35 dB RBW 20 kHz VBW 50 kHz SWT 30 ms Delta 1 [T1] -0.25 dB Marker 1 [T1] 1.216346154 MHz -20.12 dBm 2.401370000 GHz</p> <p>D1 0.00 dBm D2 -9.99 dBm</p> <p>Center 2.402 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 17:45:16</p>
Middle Channel	 <p>Ref 30 dBm Att 35 dB RBW 20 kHz VBW 50 kHz SWT 30 ms Delta 1 [T1] -0.63 dB Marker 1 [T1] 1.211539462 MHz -11.92 dBm 2.440378808 GHz</p> <p>D1 1.75 dBm D2 -8.25 dBm</p> <p>Center 2.441 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 17:47:11</p>
Highest Channel	 <p>Ref 30 dBm Att 35 dB RBW 20 kHz VBW 50 kHz SWT 30 ms Delta 1 [T1] -0.22 dB Marker 1 [T1] 1.216346154 MHz -15.10 dBm 2.479370000 GHz</p> <p>D1 1.13 dBm D2 -8.87 dBm</p> <p>Center 2.48 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 17:41:03</p>

EDR Mode (8DPSK)

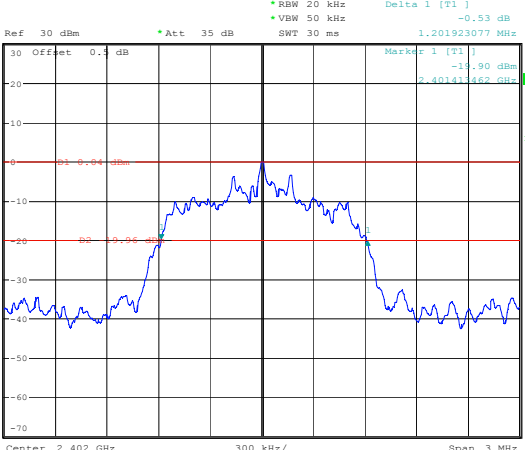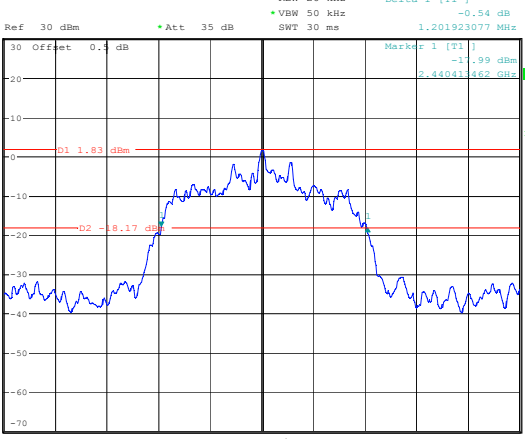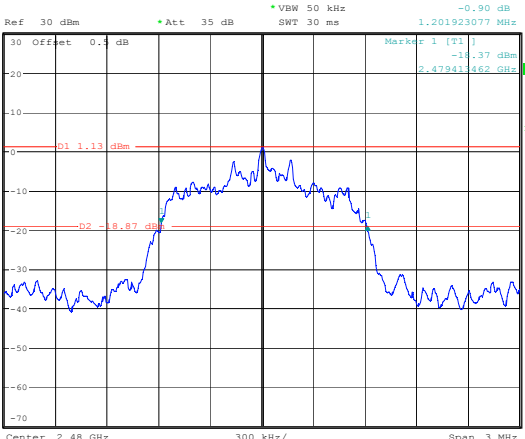
<p>Lowest Channel</p>	 <p>Ref 30 dBm Att 35 dB RBW 20 kHz Delta 1 [T1] -0.53 dB VBW 50 kHz 1.201923077 MHz SWT 30 ms</p> <p>Offset 0.4 dB Markers 1 [T1] -19.90 dBm 2.40191462 GHz</p> <p>Center 2.402 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 17:49:07</p>
<p>Middle Channel</p>	 <p>Ref 30 dBm Att 35 dB RBW 20 kHz Delta 1 [T1] -0.54 dB VBW 50 kHz 1.201923077 MHz SWT 30 ms</p> <p>Offset 0.4 dB Markers 1 [T1] -19.99 dBm 2.44041462 GHz</p> <p>Center 2.441 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 17:50:13</p>
<p>Highest Channel</p>	 <p>Ref 30 dBm Att 35 dB RBW 20 kHz Delta 1 [T1] -0.90 dB VBW 50 kHz 1.201923077 MHz SWT 30 ms</p> <p>Offset 0.4 dB Markers 1 [T1] -14.37 dBm 2.47941462 GHz</p> <p>Center 2.48 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 17:51:20</p>

Module 3:

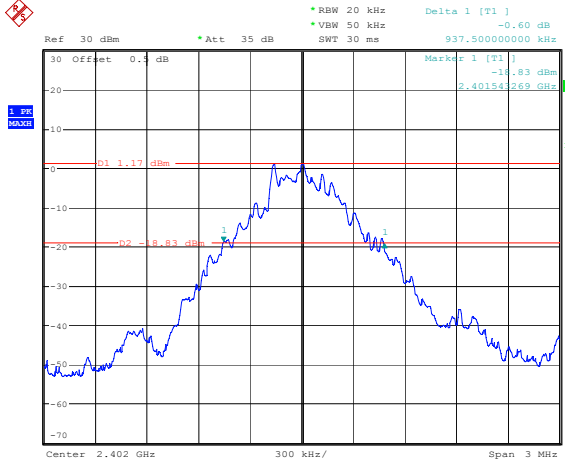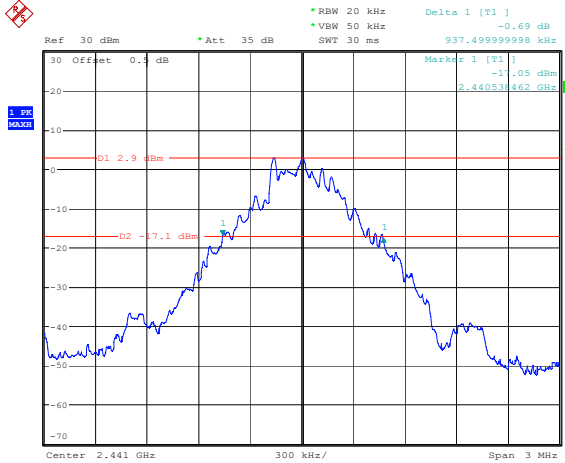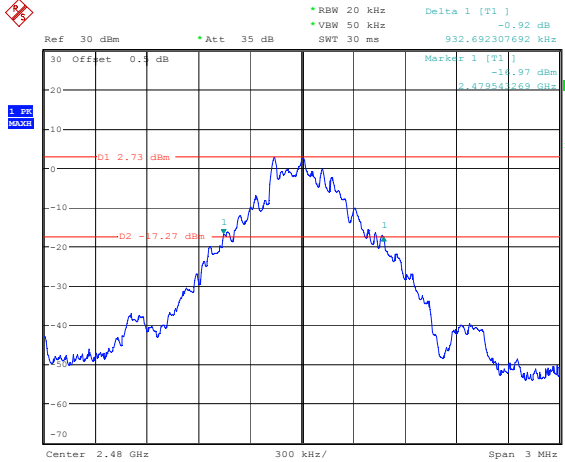BDR Mode (GFSK)	
Lowest Channel	 <p>Ref 30 dBm Att 35 dB RBW 20 kHz VBW 50 kHz SWT 30 ms Delta 1 [T1] -0.60 dB Offset 0.4 dB Marked 1 [T1] -14.83 dBm D1 1.17 dBm D2 -18.83 dBm Center 2.402 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 10:54:38</p>
Middle Channel	 <p>Ref 30 dBm Att 35 dB RBW 20 kHz VBW 50 kHz SWT 30 ms Delta 1 [T1] -0.69 dB Offset 0.4 dB Marked 1 [T1] -17.05 dBm D1 2.9 dBm D2 -17.1 dBm Center 2.441 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 10:50:03</p>
Highest Channel	 <p>Ref 30 dBm Att 35 dB RBW 20 kHz VBW 50 kHz SWT 30 ms Delta 1 [T1] -0.92 dB Offset 0.4 dB Marked 1 [T1] -14.97 dBm D1 2.73 dBm D2 -17.27 dBm Center 2.478 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 10:55:34</p>


EDR Mode ($\pi/4$ -DQPSK)

Lowest Channel

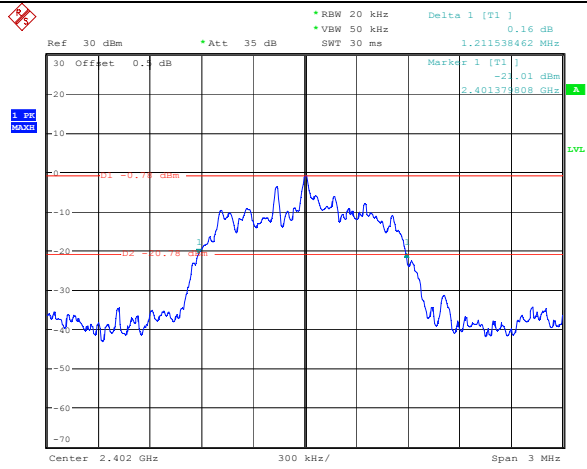


Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
Date: 28.OCT.2023 10:59:20

Middle Channel

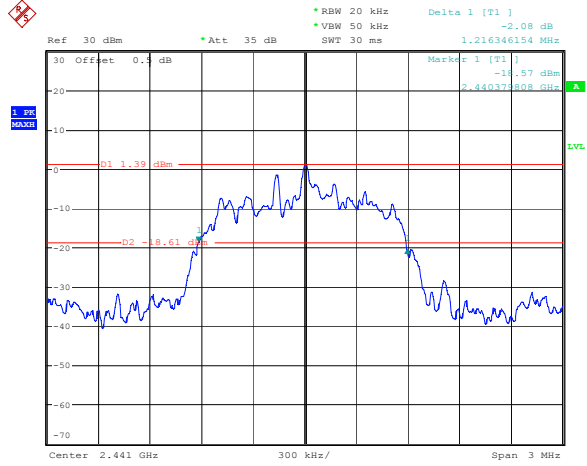

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
Date: 28.OCT.2023 10:57:17

Highest Channel

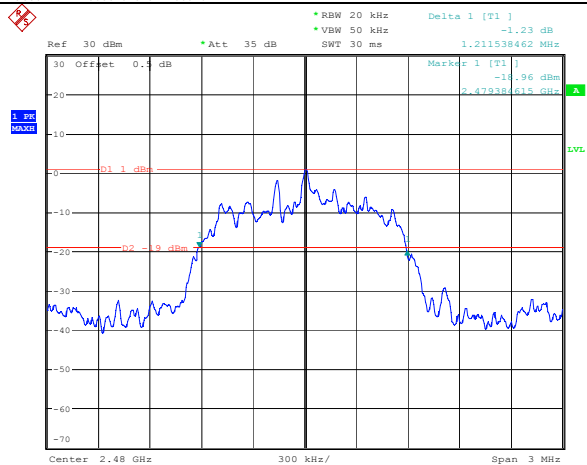

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
Date: 28.OCT.2023 10:56:41

EDR Mode (8DPSK)




<p>Lowest Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 20 kHz VBW 50 kHz SWT 30 ms Delta 1 [T1] 0.37 dB</p> <p>Offset 0.4 dB Markers 1 [T1] 1.201923077 MHz</p> <p>D1 -0.79 dBm -21.06 dBm</p> <p>D2 -0.79 dBm 2.4011462 GHz</p> <p>Center 2.402 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:00:42</p>
<p>Middle Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 20 kHz VBW 50 kHz SWT 30 ms Delta 1 [T1] 0.51 dB</p> <p>Offset 0.4 dB Markers 1 [T1] 1.201923077 MHz</p> <p>D1 1.4 dBm -15.21 dBm</p> <p>D2 -8.6 dBm 2.44041462 GHz</p> <p>Center 2.441 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:01:22</p>
<p>Highest Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 20 kHz VBW 50 kHz SWT 30 ms Delta 1 [T1] -1.31 dB</p> <p>Offset 0.4 dB Markers 1 [T1] 1.201923077 MHz</p> <p>D1 0.98 dBm -14.22 dBm</p> <p>D2 -9.02 dBm 2.47941269 GHz</p> <p>Center 2.48 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:02:23</p>

Module 4:

BDR Mode (GFSK)	
Lowest Channel	<p style="font-size: small;">ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 10:17:47</p>
Middle Channel	<p style="font-size: small;">ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 18.OCT.2023 16:35:09</p>
Highest Channel	<p style="font-size: small;">ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 18.OCT.2023 16:36:47</p>

EDR Mode ($\pi/4$-DQPSK)	
Lowest Channel	<p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 09:53:47</p>
Middle Channel	<p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 09:51:40</p>
Highest Channel	<p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 09:39:40</p>

EDR Mode (8DPSK)
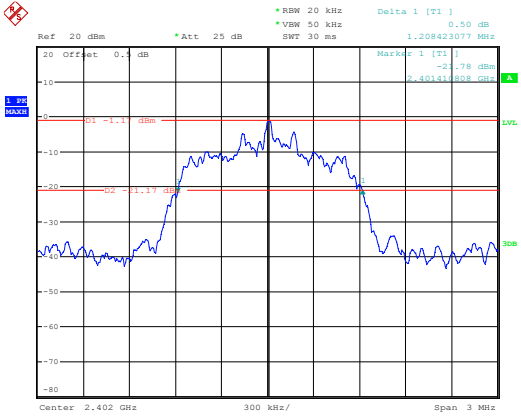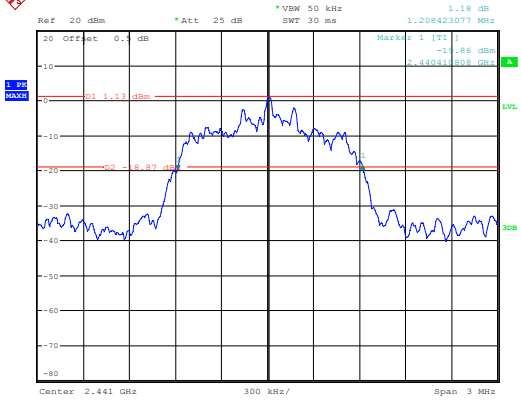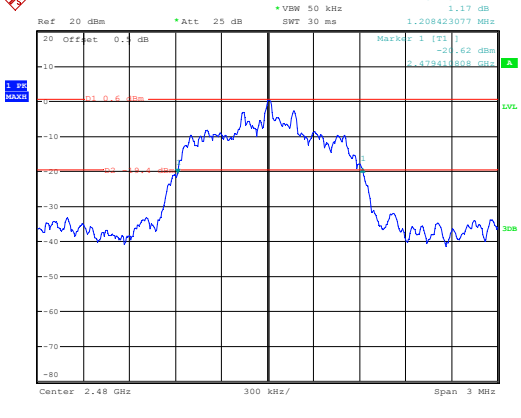
<p>Lowest Channel</p>	 <p>ProjectNo.:CR231059192-RF Tester:Clair Liu Date: 19.OCT.2023 09:56:45</p>
<p>Middle Channel</p>	 <p>ProjectNo.:CR231059192-RF Tester:Clair Liu Date: 19.OCT.2023 10:07:36</p>
<p>Highest Channel</p>	 <p>ProjectNo.:CR231059192-RF Tester:Clair Liu Date: 19.OCT.2023 10:09:17</p>

4.4 Channel Separation

Serial Number:	2C4W-2	Test Date:	2023/10/18~2023/10/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li ,Claire Liu	Test Result:	pass

Environmental Conditions:

Temperature: (°C)	24.9~26.9	Relative Humidity: (%)	46~64	ATM Pressure: (kPa)	100.2~101.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


Test Data:

Module	Test Modes	Test Frequency (MHz)	Channel Separation (MHz)	Limits (MHz)
Module 1	BDR Mode (GFSK)	2402	1	0.622
		2441	1.005	0.622
		2480	1	0.622
	EDR Mode ($\pi/4$ -DQPSK)	2402	1.005	0.808
		2441	1	0.808
		2480	1	0.805
	EDR Mode (8DPSK)	2402	1.01	0.805
		2441	1.005	0.801
		2480	1	0.801
Module 2	BDR Mode (GFSK)	2402	1	0.625
		2441	1	0.622
		2480	1	0.622
	EDR Mode ($\pi/4$ -DQPSK)	2402	1	0.811
		2441	1	0.808
		2480	1	0.811
	EDR Mode (8DPSK)	2402	1.005	0.801
		2441	1	0.801
		2480	1	0.801
Module 3	BDR Mode (GFSK)	2402	1.005	0.625
		2441	1	0.625
		2480	1	0.622
	EDR Mode ($\pi/4$ -DQPSK)	2402	1.005	0.808
		2441	1.005	0.811
		2480	1	0.808
	EDR Mode (8DPSK)	2402	1	0.801
		2441	1.005	0.801
		2480	1	0.801
Module 4	BDR Mode (GFSK)	2402	1.002	0.605
		2441	0.996	0.621
		2480	1.002	0.621
	EDR Mode ($\pi/4$ -DQPSK)	2402	1.008	0.812
		2441	0.996	0.815
		2480	1.008	0.816
	EDR Mode (8DPSK)	2402	1.002	0.805
		2441	1.002	0.805
		2480	1.002	0.805

Module 1:

BDR Mode (GFSK)	
Lowest Channel	<p>Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 15 ms Delta 1 [T1] 1.01 dB Offset 0.4 dB Marker 1 [T1] 4.78 dBm 2.40204808 GHz</p> <p>Center 2.4025 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:08:16</p>
Middle Channel	<p>Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 15 ms Delta 1 [T1] -0.01 dB Offset 0.4 dB Marker 1 [T1] 4.26 dBm 2.44100000 GHz</p> <p>Center 2.4415 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:09:25</p>
Highest Channel	<p>Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 15 ms Delta 1 [T1] 0.01 dB Offset 0.4 dB Marker 1 [T1] 4.81 dBm 2.47904898 GHz</p> <p>Center 2.4795 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:10:57</p>


EDR Mode ($\pi/4$ -DQPSK)

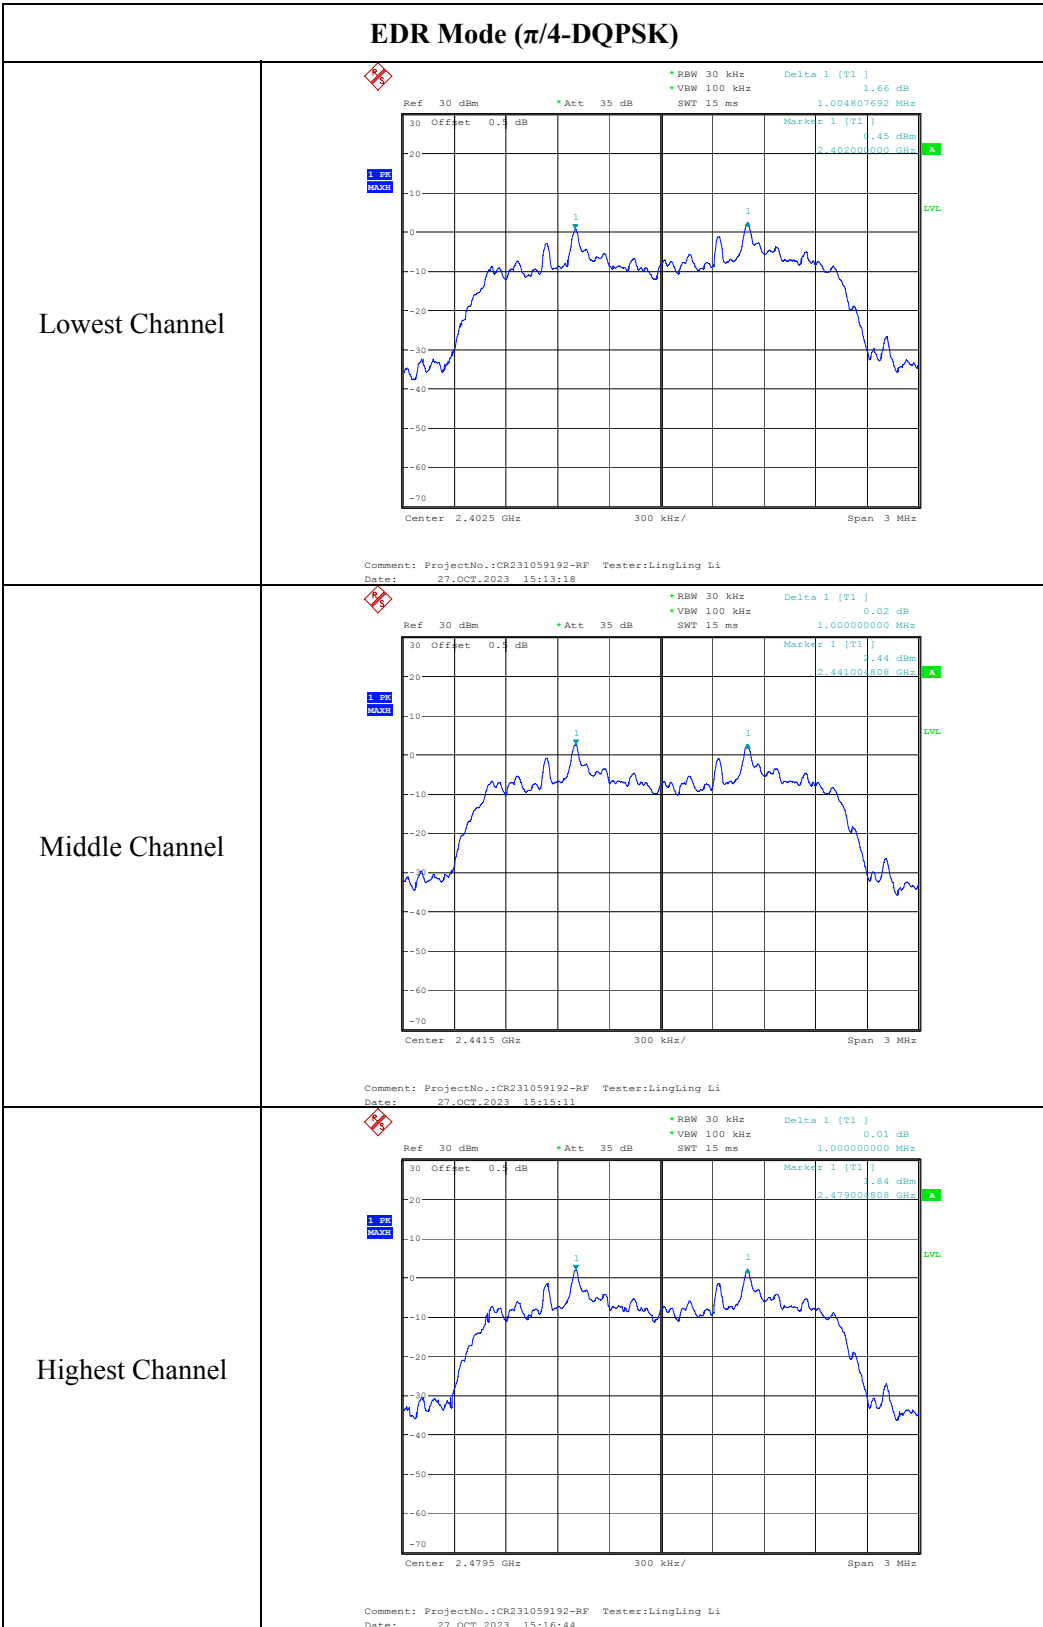


EDR Mode (8DPSK)

<p>Lowest Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 30 kHz Delta 1 [T1] 1.62 dB VBW 100 kHz SWT 15 ms 1.009615385 MHz</p> <p>30 Offset 0.4 dB Marked 1 [T1] 1.009615385 MHz 0.47 dBm 2.402500000 GHz</p> <p>Center 2.4025 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:04:31</p>
<p>Middle Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 30 kHz Delta 1 [T1] 0.03 dB VBW 100 kHz SWT 15 ms 1.004807692 MHz</p> <p>30 Offset 0.4 dB Marked 1 [T1] 1.004807692 MHz 1.46 dBm 2.441500000 GHz</p> <p>Center 2.4415 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:05:57</p>
<p>Highest Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 30 kHz Delta 1 [T1] -0.00 dB VBW 100 kHz SWT 15 ms 1.000000000 MHz</p> <p>30 Offset 0.4 dB Marked 1 [T1] 1.000000000 MHz 1.85 dBm 2.479500000 GHz</p> <p>Center 2.4795 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:02:36</p>

Module 2:

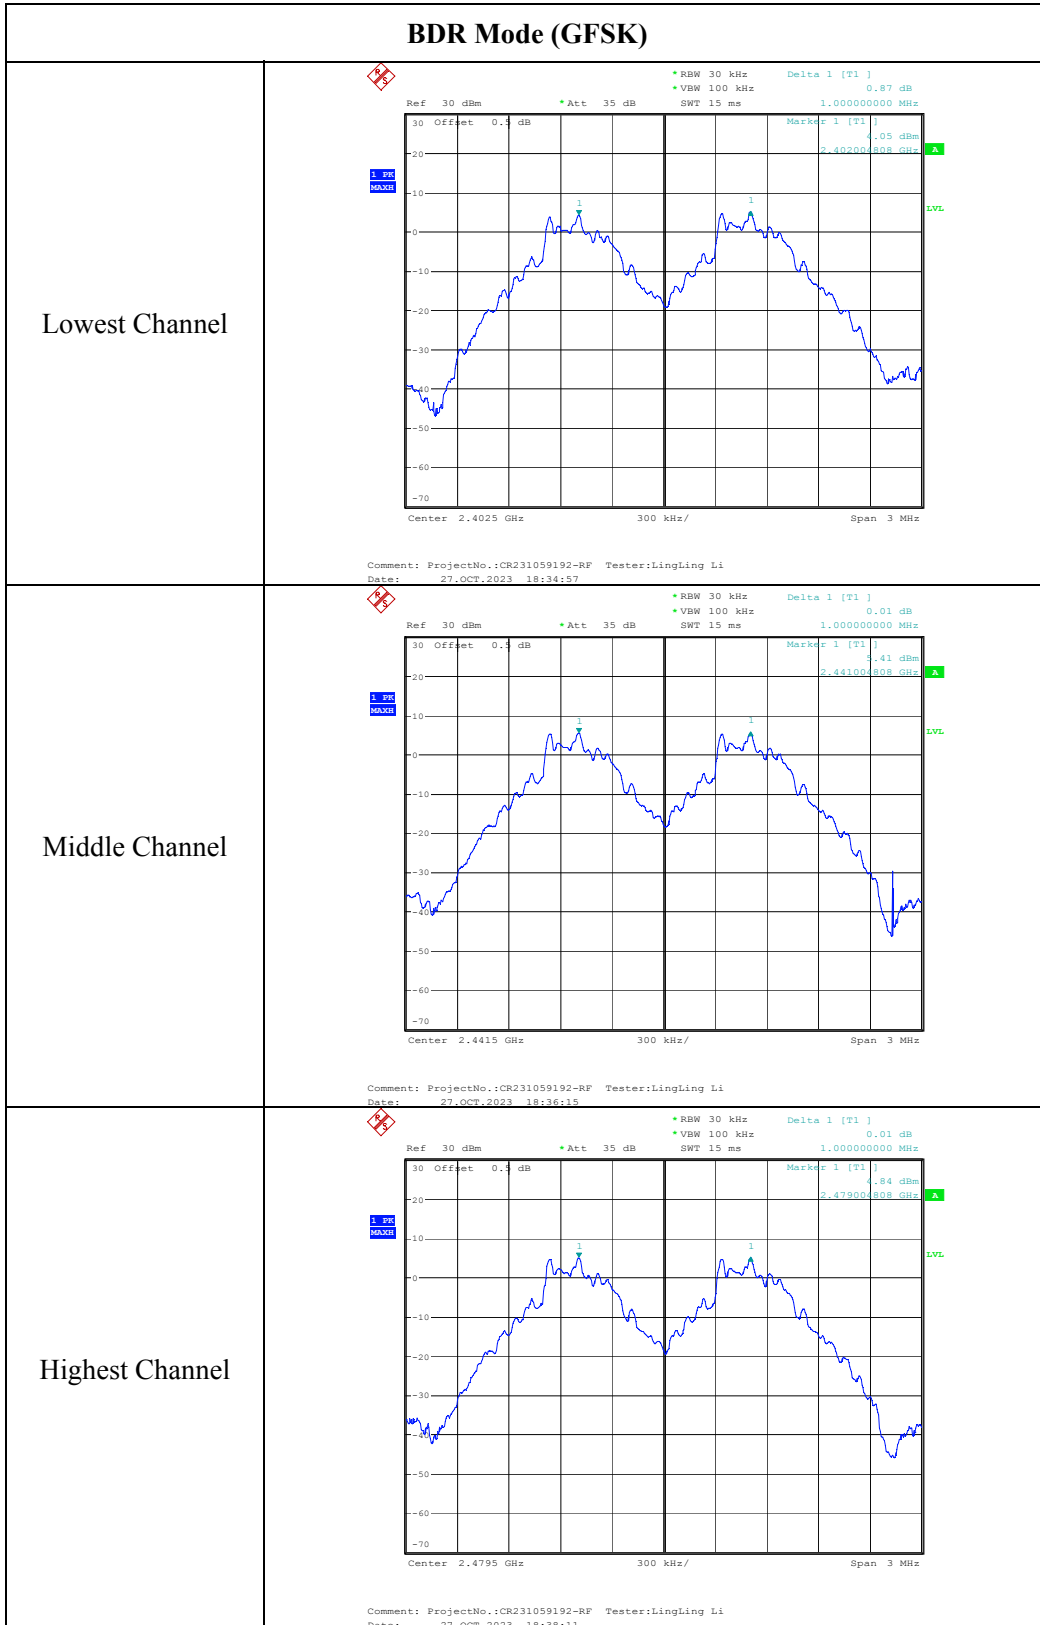


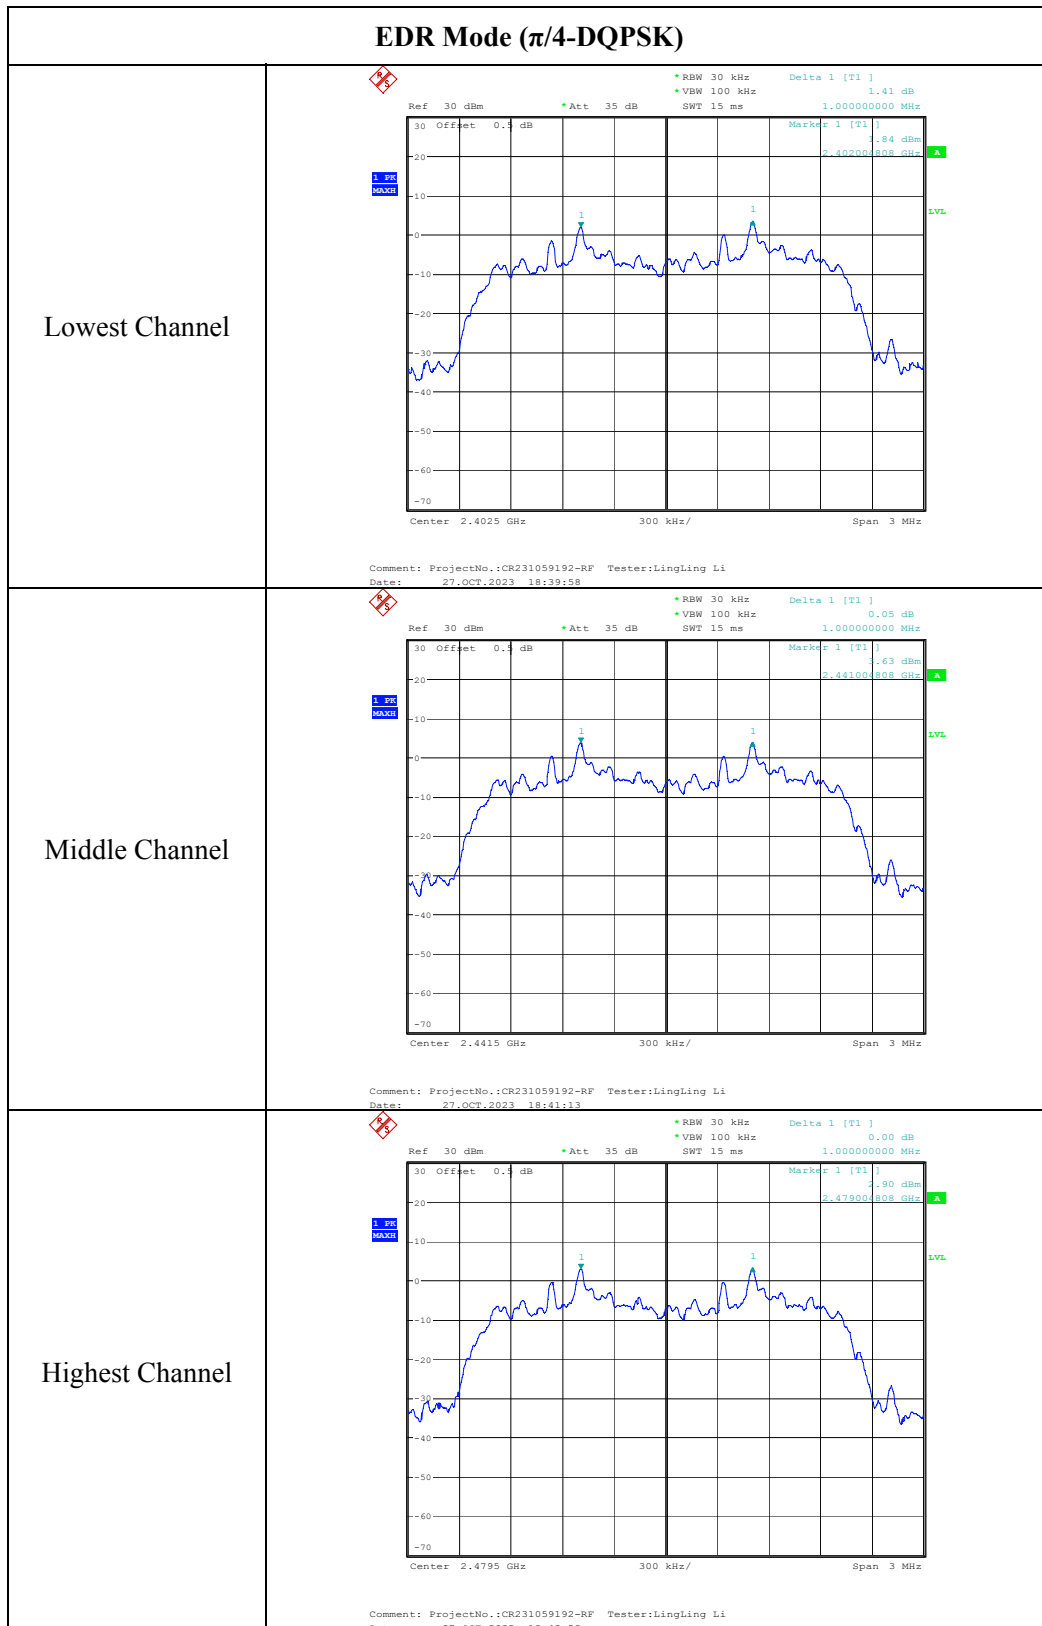


EDR Mode (8DPSK)

<p>Lowest Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 15 ms Delta 1 [T1] 1.42 dB</p> <p>Marker 1 [T1] 2.40250000 GHz -1.86 dBm</p> <p>Center 2.4025 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 18:30:08</p>
<p>Middle Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 15 ms Delta 1 [T1] 0.02 dB</p> <p>Marker 1 [T1] 2.441004808 GHz -1.67 dBm</p> <p>Center 2.4415 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 18:31:33</p>
<p>Highest Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 15 ms Delta 1 [T1] 0.07 dB</p> <p>Marker 1 [T1] 2.479004808 GHz -1.88 dBm</p> <p>Center 2.4795 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 18:33:03</p>

Module 3:



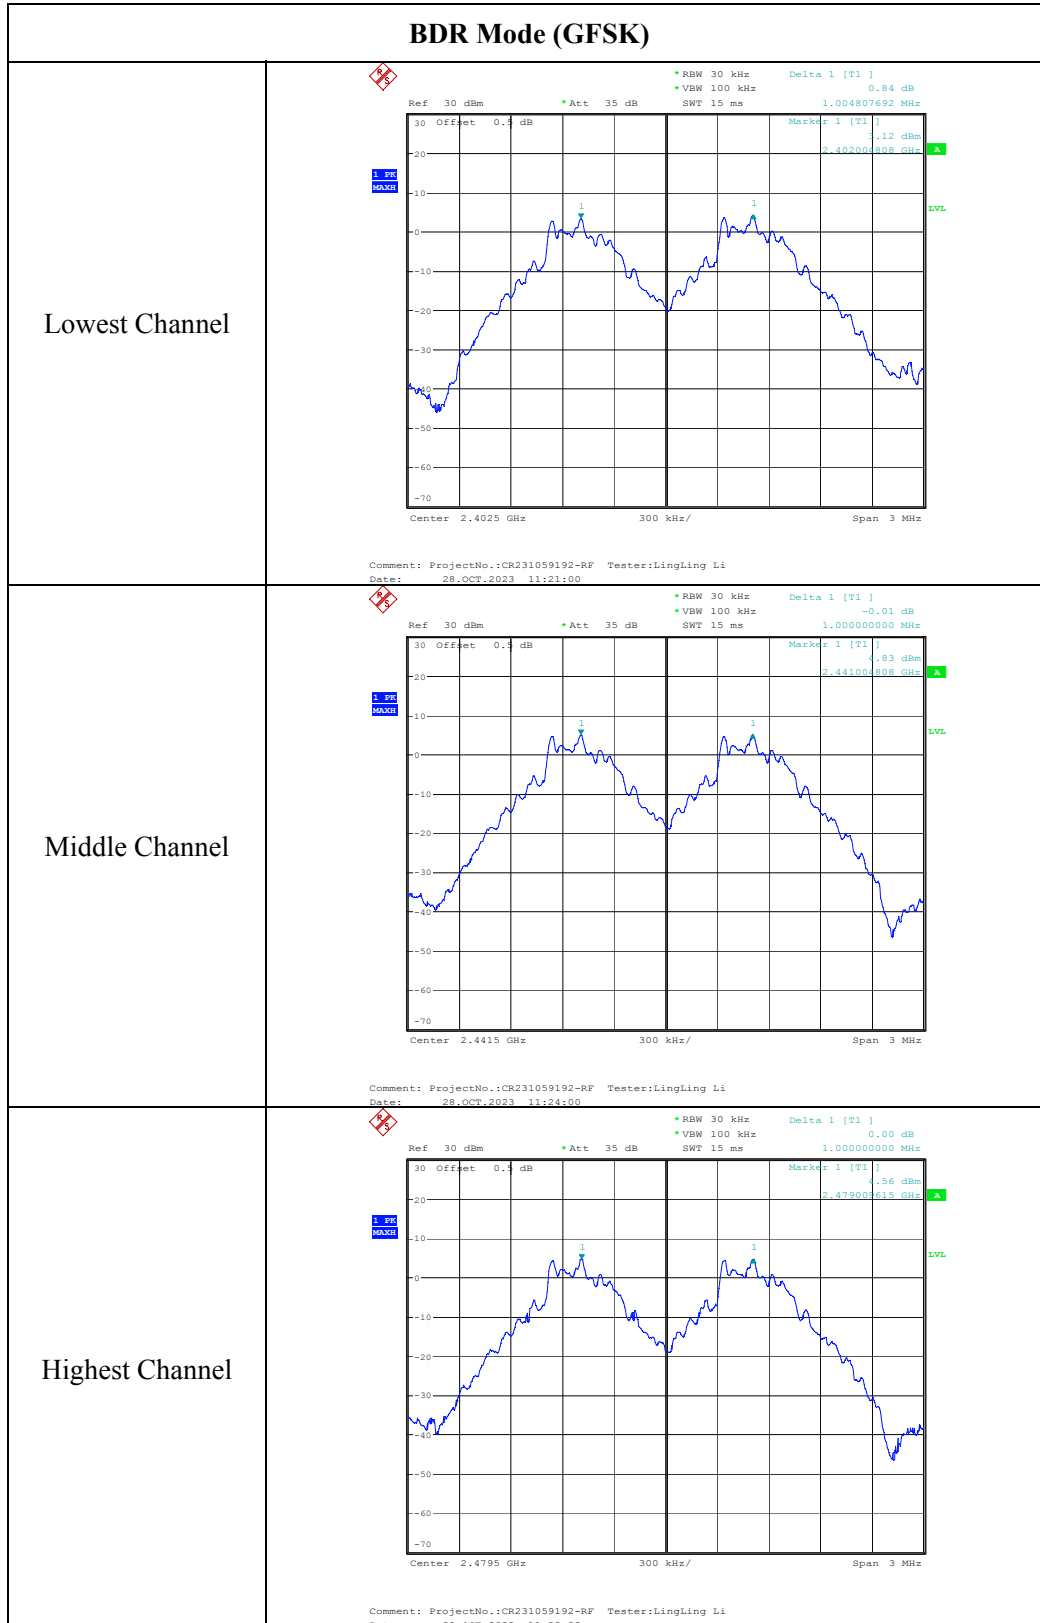


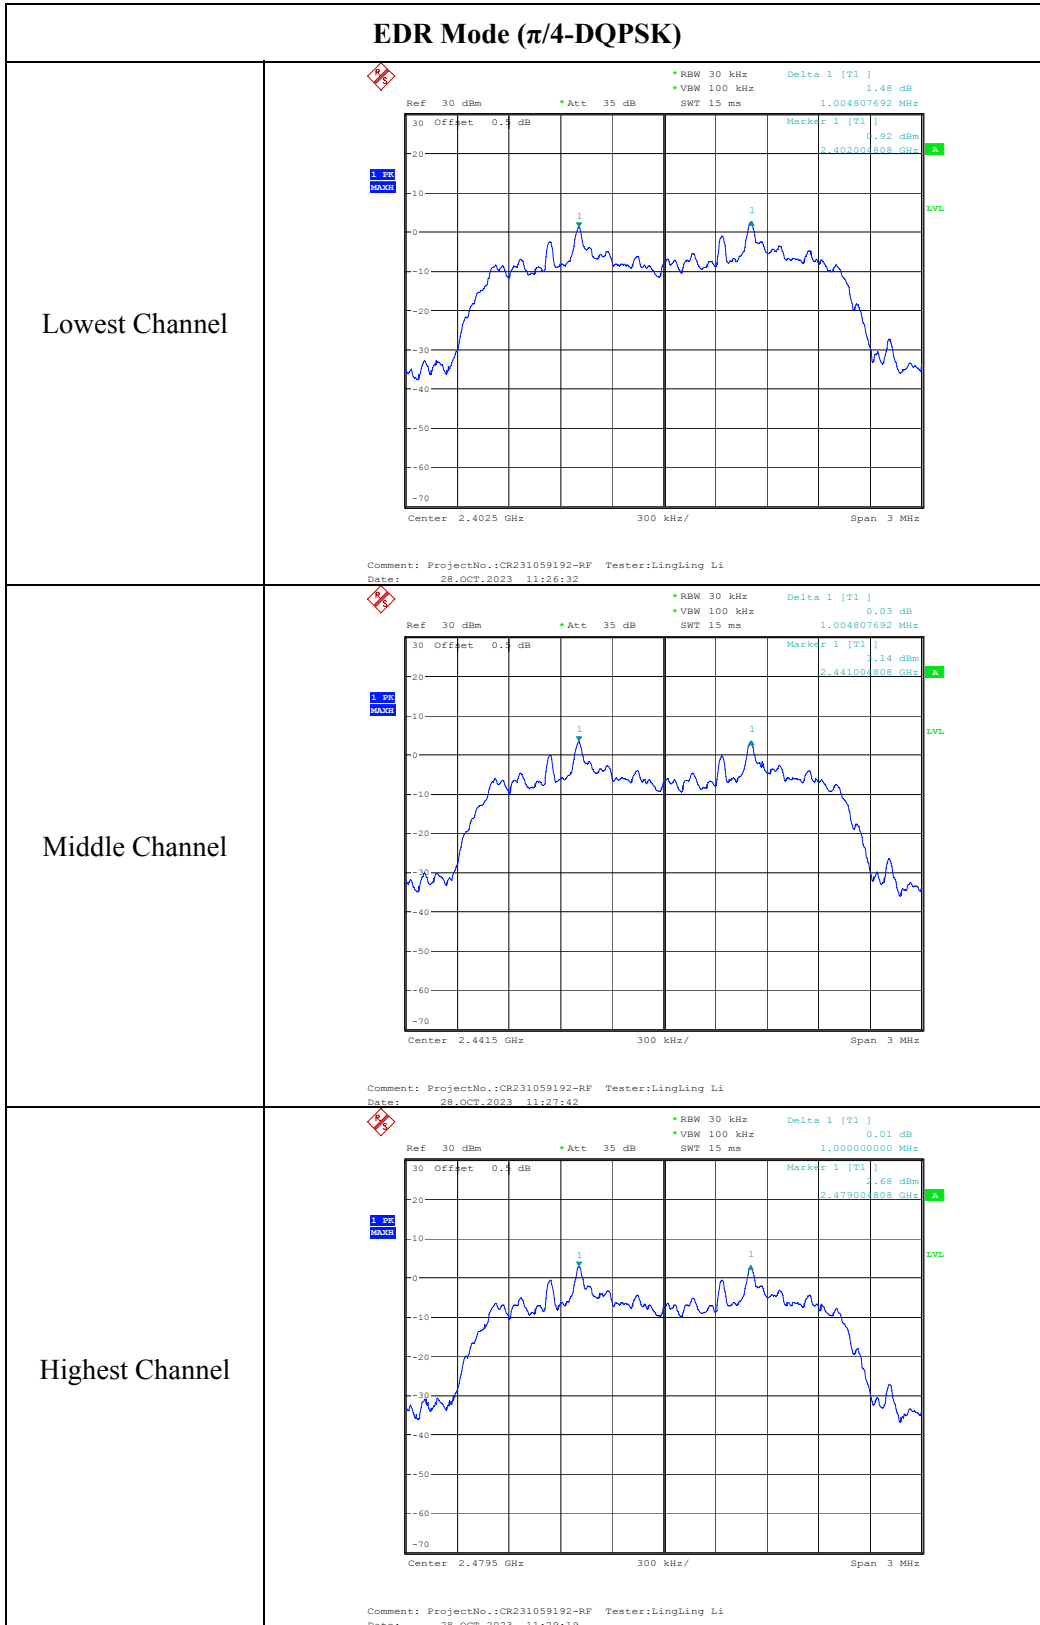

EDR Mode (8DPSK)


<p>Lowest Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 15 ms Delta 1 [T1] 1.41 dB Marker 1 [T1] 0.93 dBm 2.4025498 GHz</p> <p>Center 2.4025 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:30:58</p>
<p>Middle Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 15 ms Delta 1 [T1] 0.04 dB Marker 1 [T1] 1.13 dBm 2.441004808 GHz</p> <p>Center 2.4415 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:32:08</p>
<p>Highest Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 15 ms Delta 1 [T1] 0.00 dB Marker 1 [T1] 1.71 dBm 2.47909615 GHz</p> <p>Center 2.4795 GHz 300 kHz/ Span 3 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:33:40</p>

Module 4:

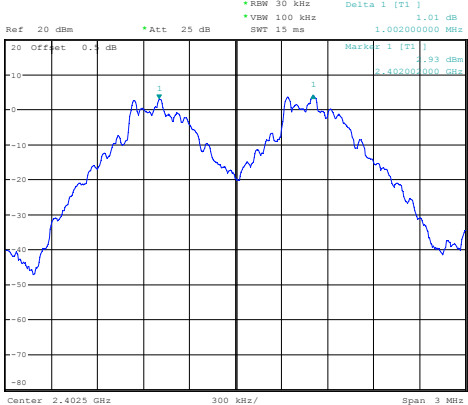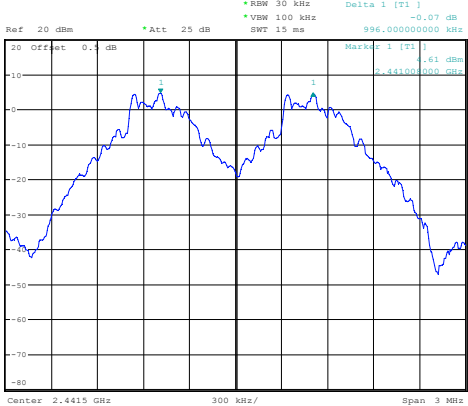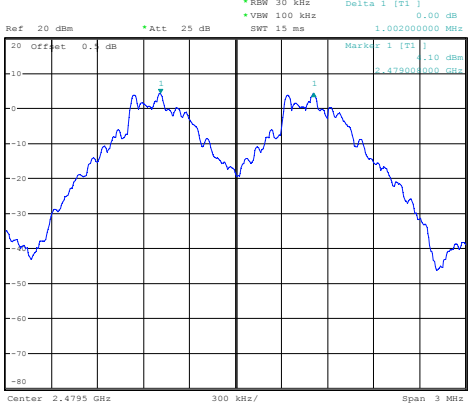BDR Mode (GFSK)	
Lowest Channel	 <p>Ref 20 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] 1.01 dB *VSW 100 kHz 1.002000000 MHz SWT 15 ms</p> <p>20 Offset 0.1 dB Markers 1 [T1] 1.93 dBm 2.402000000 GHz</p> <p>Center 2.4020 GHz 300 kHz/ Span 3 MHz</p> <p>ProjectNo.:CR231059192-RF Tester:Clair Liu Date: 18.OCT.2023 16:00:34</p>
Middle Channel	 <p>Ref 20 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.07 dB *VSW 100 kHz 996.000000000 MHz SWT 15 ms</p> <p>20 Offset 0.1 dB Markers 1 [T1] 1.61 dBm 2.441000000 GHz</p> <p>Center 2.4410 GHz 300 kHz/ Span 3 MHz</p> <p>ProjectNo.:CR231059192-RF Tester:Clair Liu Date: 18.OCT.2023 16:33:21</p>
Highest Channel	 <p>Ref 20 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] 0.00 dB *VSW 100 kHz 1.002000000 MHz SWT 15 ms</p> <p>20 Offset 0.1 dB Markers 1 [T1] 1.10 dBm 2.479000000 GHz</p> <p>Center 2.4790 GHz 300 kHz/ Span 3 MHz</p> <p>ProjectNo.:CR231059192-RF Tester:Clair Liu Date: 18.OCT.2023 16:41:01</p>


EDR Mode ($\pi/4$ -DQPSK)

Lowest Channel

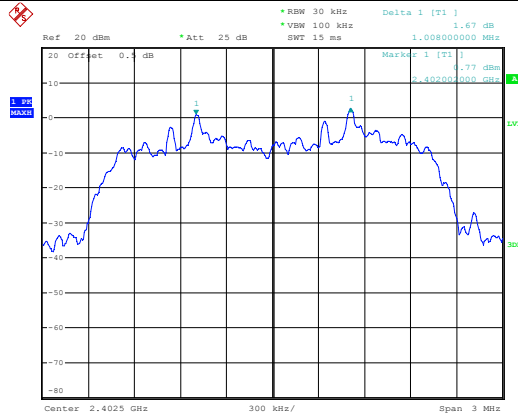


ProjectNo.:CR231059192-RF Tester: Claire Liu
Date: 19.OCT.2023 10:25:44

Middle Channel

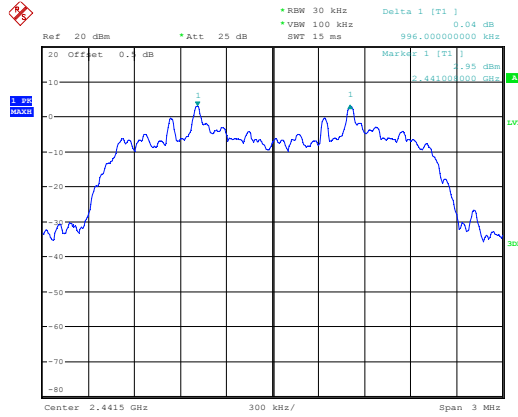




ProjectNo.:CR231059192-RF Tester: Claire Liu
Date: 19.OCT.2023 10:27:53

Highest Channel

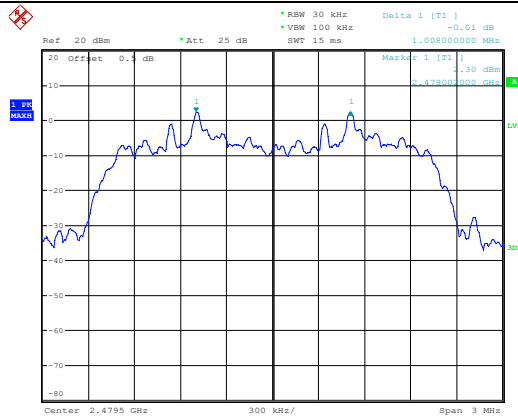

ProjectNo.:CR231059192-RF Tester: Claire Liu
Date: 19.OCT.2023 10:29:51

EDR Mode (8DPSK)
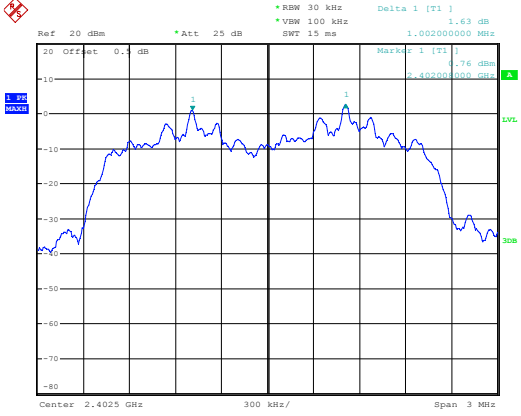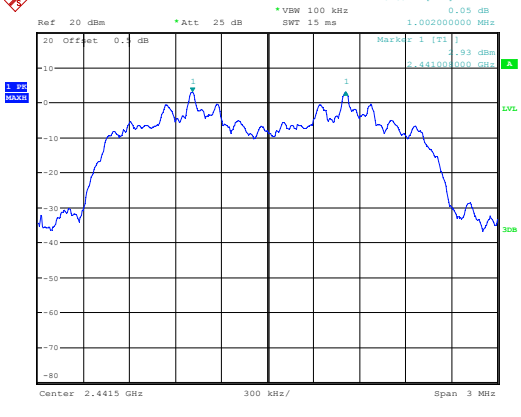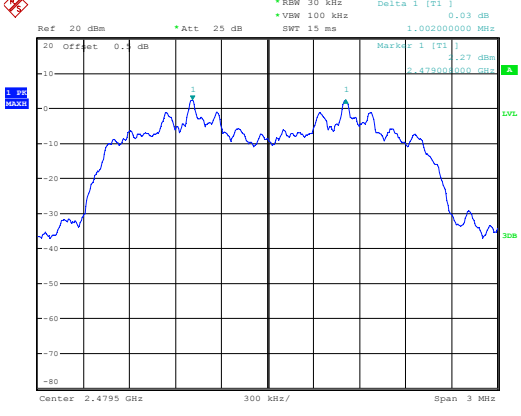
<p>Lowest Channel</p>	 <p>Ref: 20 dBm *Att: 25 dB *RBW: 30 kHz Delta 1 [T1]: 1.63 dB *VSW: 100 kHz *SWT: 15 ms 1.002000000 MHz</p> <p>Center: 2.4029 GHz 300 kHz/ Span: 3 MHz</p> <p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 10:37:20</p>
<p>Middle Channel</p>	 <p>Ref: 20 dBm *Att: 25 dB *RBW: 30 kHz Delta 1 [T1]: 0.05 dB *VSW: 100 kHz *SWT: 15 ms 1.002000000 MHz</p> <p>Center: 2.4415 GHz 300 kHz/ Span: 3 MHz</p> <p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 10:35:08</p>
<p>Highest Channel</p>	 <p>Ref: 20 dBm *Att: 25 dB *RBW: 30 kHz Delta 1 [T1]: 0.03 dB *VSW: 100 kHz *SWT: 15 ms 1.002000000 MHz</p> <p>Center: 2.4795 GHz 300 kHz/ Span: 3 MHz</p> <p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 10:33:36</p>

4.5 Number Of Hopping Frequency

Serial Number:	2C4W-2	Test Date:	2023/10/18~2023/10/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li ,Claire Liu	Test Result:	pass

Environmental Conditions:

Temperature: (°C)	24.9~26.9	Relative Humidity: (%)	46~64	ATM Pressure: (kPa)	100.2~101.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Module	Test Modes	Frequency Range (MHz)	Number of Hopping Channel	Limits
Module 1	GFSK	2400-2483.5	79	≥15
	$\pi/4$ -DQPSK	2400-2483.5	79	≥15
	8DPSK	2400-2483.5	79	≥15
Module 2	GFSK	2400-2483.5	79	≥15
	$\pi/4$ -DQPSK	2400-2483.5	79	≥15
	8DPSK	2400-2483.5	79	≥15
Module 3	GFSK	2400-2483.5	79	≥15
	$\pi/4$ -DQPSK	2400-2483.5	79	≥15
	8DPSK	2400-2483.5	79	≥15
Module 4	GFSK	2400-2483.5	79	≥15
	$\pi/4$ -DQPSK	2400-2483.5	79	≥15
	8DPSK	2400-2483.5	79	≥15

Module 1:

Number of Hopping Channel	
BDR Mode (GFSK)	<p>Ref 30 dBm Att 35 dB RBW 100 kHz Delta 1 [T1] 1.74 dB VSW 300 kHz SWT 10 ms 78.415064103 MHz</p> <p>Offset 0.4 dB Marker 1 [T1] 1.14 dBm 2.401733583 GHz</p> <p>Start 2.4 GHz 8.35 MHz/ Stop 2.4835 GHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:38:55</p>
EDR Mode ($\pi/4$-DQPSK)	<p>Ref 30 dBm Att 35 dB RBW 100 kHz Delta 1 [T1] 2.14 dB VSW 300 kHz SWT 10 ms 78.147435897 MHz</p> <p>Offset 0.4 dB Marker 1 [T1] 0.69 dBm 2.40200212 GHz</p> <p>Start 2.4 GHz 8.35 MHz/ Stop 2.4835 GHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:41:40</p>
EDR Mode (8DPSK)	<p>Ref 30 dBm Att 35 dB RBW 100 kHz Delta 1 [T1] 1.42 dB VSW 300 kHz SWT 10 ms 78.147435897 MHz</p> <p>Offset 0.4 dB Marker 1 [T1] 1.19 dBm 2.40200212 GHz</p> <p>Start 2.4 GHz 8.35 MHz/ Stop 2.4835 GHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 16:06:45</p>




Module 2:

Number of Hopping Channel	
BDR Mode (GFSK)	<p>Ref: 30 dBm Att: 35 dB RBW: 100 kHz Delta 1 [T1]: 1.04 dB VBW: 300 kHz SWT: 10 ms 78.147435897 MHz Offset: 0.4 dB Marker 1 [T1]: -4.66 dBm 2.40200212 GHz</p> <p>Start: 2.4 GHz 8.35 MHz/ Stop: 2.4835 GHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 18:55:33</p>
EDR Mode ($\pi/4$-DQPSK)	<p>Ref: 30 dBm Att: 35 dB RBW: 100 kHz Delta 1 [T1]: 0.70 dB VBW: 300 kHz SWT: 10 ms 78.147435897 MHz Offset: 0.4 dB Marker 1 [T1]: -4.59 dBm 2.40200212 GHz</p> <p>Start: 2.4 GHz 8.35 MHz/ Stop: 2.4835 GHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 18:49:16</p>
EDR Mode (8DPSK)	<p>Ref: 30 dBm Att: 35 dB RBW: 100 kHz Delta 1 [T1]: 1.77 dB VBW: 300 kHz SWT: 10 ms 78.415064103 MHz Offset: 0.4 dB Marker 1 [T1]: -2.01 dBm 2.401735883 GHz</p> <p>Start: 2.4 GHz 8.35 MHz/ Stop: 2.4835 GHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 18:23:13</p>

Module 3:

Number of Hopping Channel	
BDR Mode (GFSK)	<p>Ref 30 dBm Att 35 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Delta 1 [T1] 1.82 dB Marker 1 [T1] 2.401734593 GHz 4.00 dBm</p> <p>Start 2.4 GHz 8.35 MHz/ Stop 2.4835 GHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 13:32:23</p>
EDR Mode ($\pi/4$-DQPSK)	<p>Ref 30 dBm Att 35 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Delta 1 [T1] 1.78 dB Marker 1 [T1] 2.40200212 GHz 4.78 dBm</p> <p>Start 2.4 GHz 8.35 MHz/ Stop 2.4835 GHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:58:18</p>
EDR Mode (8DPSK)	<p>Ref 30 dBm Att 35 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Delta 1 [T1] 1.97 dB Marker 1 [T1] 2.40200212 GHz 4.64 dBm</p> <p>Start 2.4 GHz 8.35 MHz/ Stop 2.4835 GHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:38:39</p>

Module 4:

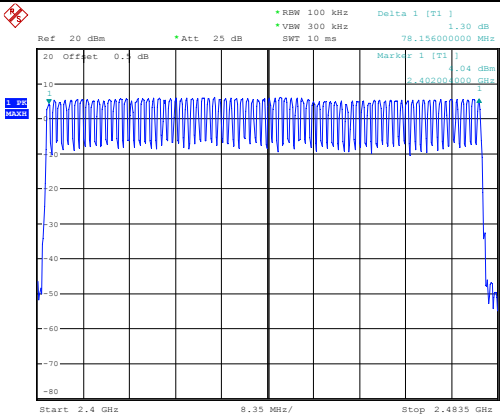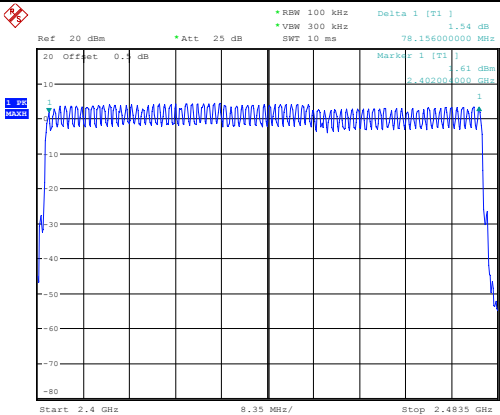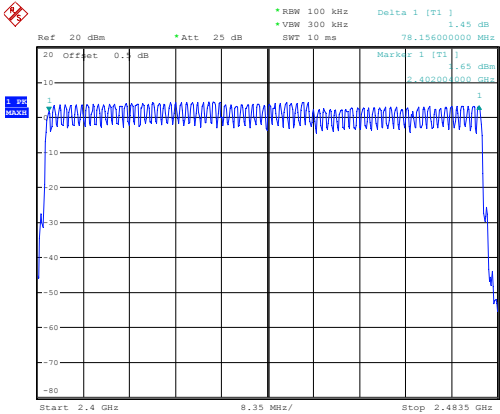Number of Hopping Channel	
BDR Mode (GFSK)	 <p>Ref 20 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 1.30 dB *VSW 300 kHz 78.156000000 MHz SWT 10 ms</p> <p>20 Offset 0.1 dB Mark 1 [T1] -1.04 dBm 2.482000000 GHz</p> <p>Start 2.4 GHz 8.35 MHz/ Stop 2.4835 GHz</p> <p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 11:06:47</p>
EDR Mode ($\pi/4$-DQPSK)	 <p>Ref 20 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 1.54 dB *VSW 300 kHz 78.156000000 MHz SWT 10 ms</p> <p>20 Offset 0.1 dB Mark 1 [T1] -1.54 dBm 2.482000000 GHz</p> <p>Start 2.4 GHz 8.35 MHz/ Stop 2.4835 GHz</p> <p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 11:19:20</p>
EDR Mode (8DPSK)	 <p>Ref 20 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 1.45 dB *VSW 300 kHz 78.156000000 MHz SWT 10 ms</p> <p>20 Offset 0.1 dB Mark 1 [T1] -1.45 dBm 2.482000000 GHz</p> <p>Start 2.4 GHz 8.35 MHz/ Stop 2.4835 GHz</p> <p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 11:30:28</p>

4.6 Time Of Occupancy(Dwell Time)

Serial Number:	2C4W-2	Test Date:	2023/10/18~2023/10/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li ,Claire Liu	Test Result:	pass

Environmental Conditions:

Temperature: (°C)	24.9~26.9	Relative Humidity: (%)	46~64	ATM Pressure: (kPa)	100.2~101.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Module 1:**Test Data:**

Test Modes	Packet Type	Test Frequency (MHz)	Pulse width (ms)	Result (s)	Limit (s)
BDR Mode (GFSK)	DH1	2441	0.425	0.136	0.400
	DH3	2441	1.692	0.271	0.400
	DH5	2441	2.962	0.316	0.400
EDR Mode ($\pi/4$ -DQPSK)	2DH1	2441	0.433	0.139	0.400
	2DH3	2441	1.697	0.272	0.400
	2DH5	2441	2.962	0.316	0.400
EDR Mode (8DPSK)	3DH1	2441	0.425	0.136	0.400
	3DH3	2441	1.697	0.272	0.400
	3DH5	2441	2.962	0.316	0.400

Note:
DH1:Dwell time=Pulse time (ms) \times (1600/2/79) \times 31.6 s
DH3:Dwell time=Pulse time (ms) \times (1600/4/79) \times 31.6 s
DH5:Dwell time=Pulse time (ms) \times (1600/6/79) \times 31.6 s

Module 2:**Test Data:**

Test Modes	Packet Type	Test Frequency (MHz)	Pulse width (ms)	Result (s)	Limit (s)
BDR Mode (GFSK)	DH1	2441	0.431	0.138	0.400
	DH3	2441	1.702	0.272	0.400
	DH5	2441	2.955	0.315	0.400
EDR Mode ($\pi/4$ -DQPSK)	2DH1	2441	0.433	0.139	0.400
	2DH3	2441	1.707	0.273	0.400
	2DH5	2441	2.955	0.315	0.400
EDR Mode (8DPSK)	3DH1	2441	0.433	0.139	0.400
	3DH3	2441	1.707	0.273	0.400
	3DH5	2441	2.974	0.317	0.400

Note:
DH1:Dwell time=Pulse time (ms) \times (1600/2/79) \times 31.6 s
DH3:Dwell time=Pulse time (ms) \times (1600/4/79) \times 31.6 s
DH5:Dwell time=Pulse time (ms) \times (1600/6/79) \times 31.6 s

Module 3:**Test Data:**

Test Modes	Packet Type	Test Frequency (MHz)	Pulse width (ms)	Result (s)	Limit (s)
BDR Mode (GFSK)	DH1	2441	0.429	0.137	0.400
	DH3	2441	1.697	0.272	0.400
	DH5	2441	2.962	0.316	0.400
EDR Mode ($\pi/4$ -DQPSK)	2DH1	2441	0.433	0.139	0.400
	2DH3	2441	1.697	0.272	0.400
	2DH5	2441	2.962	0.316	0.400
EDR Mode (8DPSK)	3DH1	2441	0.433	0.139	0.400
	3DH3	2441	1.697	0.272	0.400
	3DH5	2441	2.962	0.316	0.400

Note:
DH1:Dwell time=Pulse time (ms) \times (1600/2/79) \times 31.6 s
DH3:Dwell time=Pulse time (ms) \times (1600/4/79) \times 31.6 s
DH5:Dwell time=Pulse time (ms) \times (1600/6/79) \times 31.6 s

Module 4:**Test Data:**

Test Modes	Packet Type	Test Frequency (MHz)	Pulse width (ms)	Result (s)	Limit (s)
BDR Mode (GFSK)	DH1	2441	0.435	0.139	0.400
	DH3	2441	1.706	0.273	0.400
	DH5	2441	2.969	0.317	0.400
EDR Mode ($\pi/4$ -DQPSK)	2DH1	2441	0.440	0.141	0.400
	2DH3	2441	1.706	0.273	0.400
	2DH5	2441	2.969	0.317	0.400
EDR Mode (8DPSK)	3DH1	2441	0.438	0.140	0.400
	3DH3	2441	1.706	0.273	0.400
	3DH5	2441	2.962	0.316	0.400

Note:
DH1:Dwell time=Pulse time (ms) \times (1600/2/79) \times 31.6 s
DH3:Dwell time=Pulse time (ms) \times (1600/4/79) \times 31.6 s
DH5:Dwell time=Pulse time (ms) \times (1600/6/79) \times 31.6 s




Module 1:

BDR Mode (GFSK)	
DH1:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] -4.11 dB VBW 3 MHz SWT 1 ms 424.679487 μs</p> <p>Offset 0.4 dB Marker 1 [T1] -4.42 dBm -320.51821 ns</p> <p>TRG -3.1 dBm</p> <p>Center 2.441 GHz 100 μs/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:49:42</p>
DH3:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] 3.00 dB VBW 3 MHz SWT 3 ms 1.692308 ms</p> <p>Offset 0.4 dB Marker 1 [T1] -50.54 dBm -13.46538 μs</p> <p>TRG -3.1 dBm</p> <p>Center 2.441 GHz 300 μs/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:51:57</p>
DH5:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] 0.52 dB VBW 3 MHz SWT 4 ms 2.961538 ms</p> <p>Offset 0.4 dB Marker 1 [T1] -44.61 dBm -10.25410 μs</p> <p>TRG -3.1 dBm</p> <p>Center 2.441 GHz 400 μs/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:57:36</p>

EDR Mode ($\pi/4$-DQPSK)	
2DH1:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] -5.74 dB VBW 3 MHz SWT 1 ms 432.692308 ps</p> <p>Offset 0.4 dB Markers 1 [T1] -44.97 dBm -320.51821 ns</p> <p>TRG -3.0 dBm</p> <p>Center 2.441 GHz 100 μs/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:46:37</p>
2DH3:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] -3.19 dB VBW 3 MHz SWT 3 ms 1.697115 ms</p> <p>Offset 0.4 dB Markers 1 [T1] -45.16 dBm -3.844154 us</p> <p>TRG -3.0 dBm</p> <p>Center 2.441 GHz 300 μs/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:52:37</p>
2DH5:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] 2.28 dB VBW 3 MHz SWT 4 ms 2.961538 ms</p> <p>Offset 0.4 dB Markers 1 [T1] -48.47 dBm -10.254410 us</p> <p>TRG -3.0 dBm</p> <p>Center 2.441 GHz 400 μs/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:53:57</p>

EDR Mode (8DPSK)	
3DH1:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] 1.22 dB VBW 3 MHz SWT 1 ms 424.679487 ps</p> <p>Offset 0.0 dB Marked 1 [T1] -40.45 dBm -320.51821 ns</p> <p>TRG -3.0 dBm</p> <p>Center 2.441 GHz 100 ps/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:51:01</p>
3DH3:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] -4.05 dB VBW 3 MHz SWT 3 ms 1.697115 ms</p> <p>Offset 0.0 dB Marked 1 [T1] -40.64 dBm -3.844154 us</p> <p>TRG -3.0 dBm</p> <p>Center 2.441 GHz 300 ps/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:52:59</p>
3DH5:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] -2.25 dB VBW 3 MHz SWT 4 ms 2.961538 ms</p> <p>Offset 0.0 dB Marked 1 [T1] -45.00 dBm -10.254410 us</p> <p>TRG -3.0 dBm</p> <p>Center 2.441 GHz 400 ps/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:53:36</p>




Module 2:

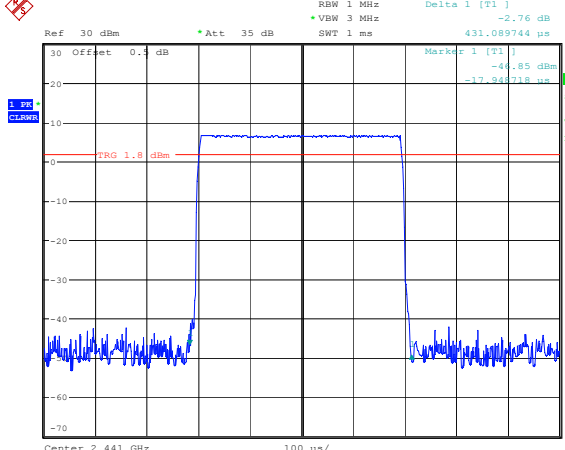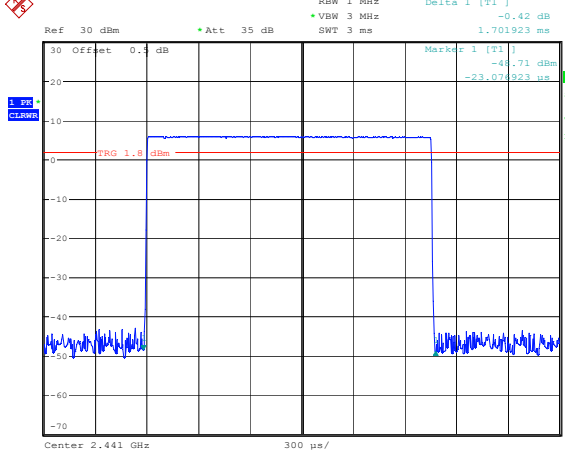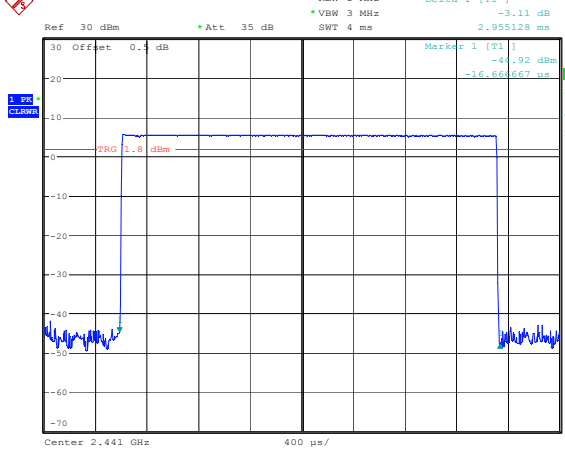BDR Mode (GFSK)	
DH1:	 <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 17:38:16</p>
DH3:	 <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 19:05:51</p>
DH5:	 <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 19:06:40</p>

EDR Mode ($\pi/4$-DQPSK)	
2DH1:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] -3.71 dB VBW 3 MHz SWT 1 ms 432.692308 µs</p> <p>Offset 0.4 dB Markers 1 [T1] -45.09 dBm -11.531462 µs</p> <p>TRG 1.8 dBm</p> <p>Center 2.441 GHz 100 µs/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 17:47:51</p>
2DH3:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] 1.22 dB VBW 3 MHz SWT 3 ms 1.706731 ms</p> <p>Offset 0.4 dB Markers 1 [T1] -45.53 dBm -23.074923 µs</p> <p>TRG 1.8 dBm</p> <p>Center 2.441 GHz 300 µs/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 18:58:17</p>
2DH5:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] 0.84 dB VBW 3 MHz SWT 4 ms 2.955128 ms</p> <p>Offset 0.4 dB Markers 1 [T1] -45.64 dBm -16.561667 µs</p> <p>TRG 1.8 dBm</p> <p>Center 2.441 GHz 400 µs/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 18:58:57</p>

EDR Mode (8DPSK)	
3DH1:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] 6.12 dB VBW 3 MHz SWT 1 ms 432.692308 us</p> <p>Offset 0.4 dB TRG 1.8 dBm Marker 1 [T1] -48.54 dBm -11.531462 us</p> <p>Center 2.441 GHz 100 us/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 17:50:40</p>
3DH3:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] 1.94 dB VBW 3 MHz SWT 3 ms 1.706731 ms</p> <p>Offset 0.4 dB TRG 1.8 dBm Marker 1 [T1] -48.72 dBm -23.074923 us</p> <p>Center 2.441 GHz 300 us/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 18:58:36</p>
3DH5:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] 0.62 dB VBW 3 MHz SWT 4 ms 2.974359 ms</p> <p>Offset 0.4 dB TRG 1.8 dBm Marker 1 [T1] -44.21 dBm -170.51821 us</p> <p>Center 2.441 GHz 400 us/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 18:58:22</p>


Module 3:

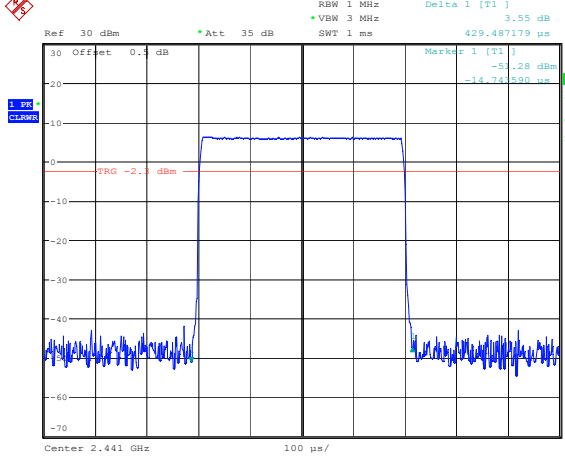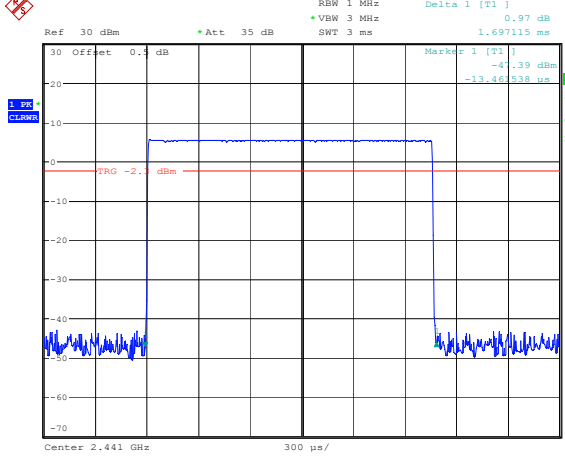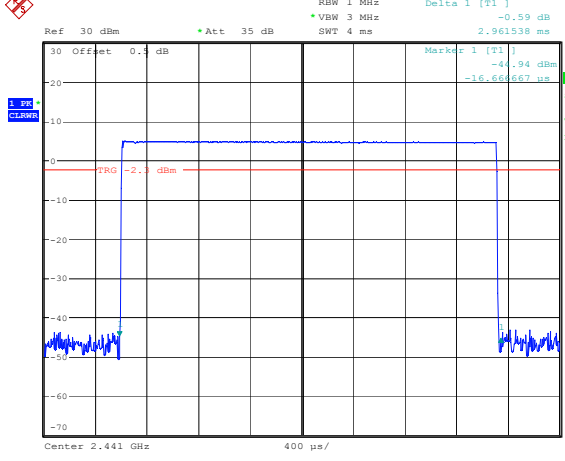BDR Mode (GFSK)	
DH1:	 <p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] 3.55 dB VBW 3 MHz SWT 1 ms 429.487179 ps</p> <p>Offset 0.4 dB Marker 1 [T1] -54.28 dBm -14.74590 ps</p> <p>TRG -2.3 dBm</p> <p>Center 2.441 GHz 100 μs/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:05:55</p>
DH3:	 <p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] 0.97 dB VBW 3 MHz SWT 3 ms 1.697115 ms</p> <p>Offset 0.4 dB Marker 1 [T1] -41.39 dBm -13.464538 ps</p> <p>TRG -2.3 dBm</p> <p>Center 2.441 GHz 300 μs/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 13:44:30</p>
DH5:	 <p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] -0.59 dB VBW 3 MHz SWT 4 ms 2.961536 ms</p> <p>Offset 0.4 dB Marker 1 [T1] -44.94 dBm -16.66667 ps</p> <p>TRG -2.3 dBm</p> <p>Center 2.441 GHz 400 μs/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 13:55:41</p>

EDR Mode ($\pi/4$-DQPSK)	
2DH1:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] -3.89 dB VBW 3 MHz SWT 1 ms 432.692308 us Marker 1 [T1] -44.63 dBm -6.73762 us TRG -2.3 dBm</p> <p>Center 2.441 GHz 100 us/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 10:58:28</p>
2DH3:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] 2.68 dB VBW 3 MHz SWT 3 ms 1.697115 ms Marker 1 [T1] -41.58 dBm -13.464538 us TRG -2.3 dBm</p> <p>Center 2.441 GHz 300 us/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 13:45:35</p>
2DH5:	<p>Ref 30 dBm Att 35 dB RBW 1 MHz Delta 1 [T1] 3.74 dB VBW 3 MHz SWT 4 ms 2.961538 ms Marker 1 [T1] -41.03 dBm -16.866667 us TRG -2.3 dBm</p> <p>Center 2.441 GHz 400 us/</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 13:46:59</p>


EDR Mode (8DPSK)

3DH1:

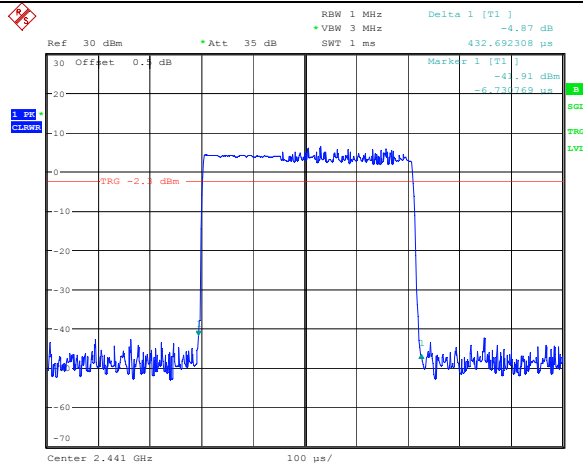


Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
Date: 28.OCT.2023 11:01:37

3DH3:

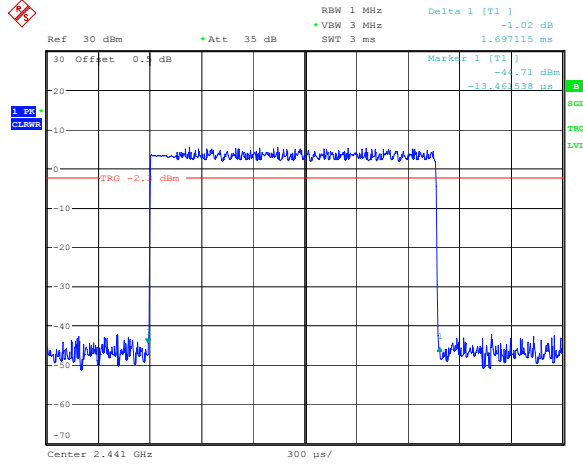

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
Date: 28.OCT.2023 13:45:59

3DH5:

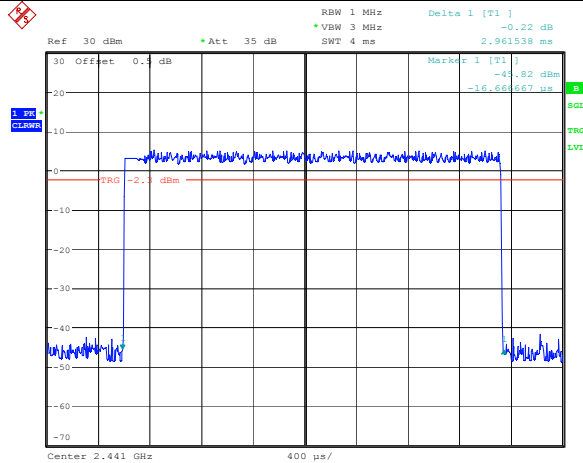


Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
Date: 28.OCT.2023 13:46:39

Module 4:

BDR Mode (GFSK)	
DH1:	<p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 11:33:44</p>
DH3:	<p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 11:38:29</p>
DH5:	<p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 11:39:27</p>


EDR Mode ($\pi/4$ -DQPSK)

2DH1:

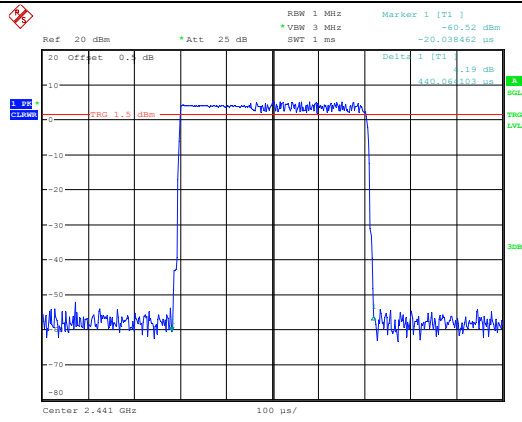


ProjectNo.:CR231059192-RF Tester:Clair Liu
Date: 19.OCT.2023 11:34:32

2DH3:

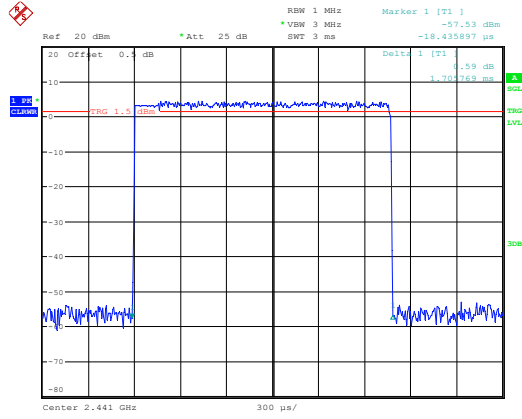

ProjectNo.:CR231059192-RF Tester:Clair Liu
Date: 19.OCT.2023 11:37:53


2DH5:

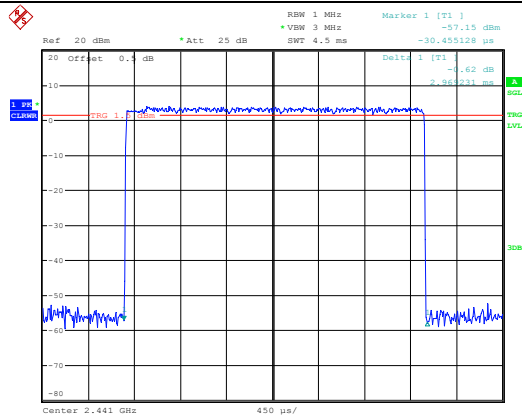

ProjectNo.:CR231059192-RF Tester:Clair Liu
Date: 19.OCT.2023 11:41:28


EDR Mode (8DPSK)

3DH1:

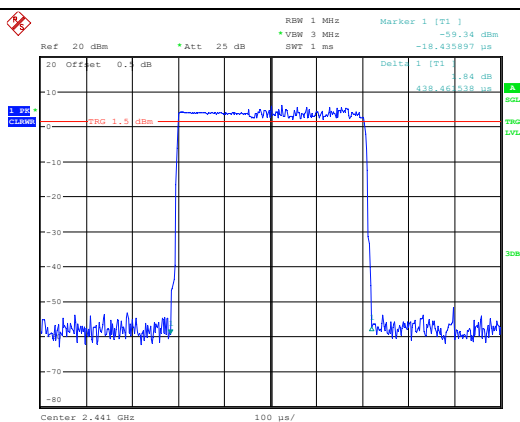


ProjectNo.:CR231059192-RF Tester:Clair Liu
 Date: 19.OCT.2023 11:35:26

3DH3:

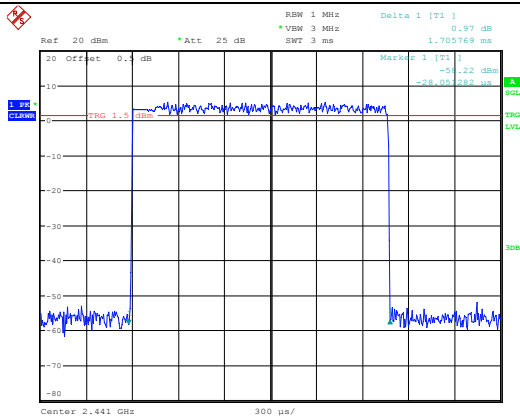

ProjectNo.:CR231059192-RF Tester:Clair Liu
 Date: 19.OCT.2023 11:36:43

3DH5:

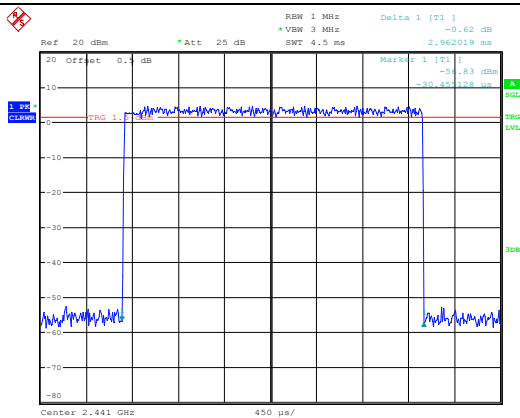

ProjectNo.:CR231059192-RF Tester:Clair Liu
 Date: 19.OCT.2023 11:42:17

4.7 Maximum Conducted Output Power

Serial Number:	2C4W-2	Test Date:	2023/10/18~2023/10/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li ,Claire Liu	Test Result:	pass

Environmental Conditions:

Temperature: (°C)	24.9~26.9	Relative Humidity: (%)	46~64	ATM Pressure: (kPa)	100.2~101.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A


** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:




Module	Test Modes	Test Frequency (MHz)	Peak Conducted Output Power (dBm)	Limits (dBm)
Module 1	BDR Mode (GFSK)	2402	4.37	21
		2441	5.83	21
		2480	5.39	21
	EDR Mode ($\pi/4$ -DQPSK)	2402	3.75	21
		2441	5.76	21
		2480	5.06	21
	EDR Mode (8DPSK)	2402	4.66	21
		2441	6.58	21
		2480	6.29	21
Module 2	BDR Mode (GFSK)	2402	5.58	21
		2441	6.96	21
		2480	6.39	21
	EDR Mode ($\pi/4$ -DQPSK)	2402	5.02	21
		2441	6.93	21
		2480	6.16	21
	EDR Mode (8DPSK)	2402	5.94	21
		2441	7.72	21
		2480	7.13	21
Module 3	BDR Mode (GFSK)	2402	4.66	21
		2441	6.35	21
		2480	6.11	21
	EDR Mode ($\pi/4$ -DQPSK)	2402	4.04	21
		2441	6.3	21
		2480	5.88	21
	EDR Mode (8DPSK)	2402	4.84	21
		2441	7.22	21
		2480	6.8	21
Module 4	BDR Mode (GFSK)	2402	4.33	21
		2441	5.98	21
		2480	5.62	21
	EDR Mode ($\pi/4$ -DQPSK)	2402	3.82	21
		2441	5.95	21
		2480	5.30	21
	EDR Mode (8DPSK)	2402	4.63	21
		2441	6.85	21
		2480	6.33	21

Module 1:

BDR Mode (GFSK)	
Lowest Channel	<div style="border: 1px solid black; padding: 5px;"><p style="text-align: right; margin: 0;">Marker 1 [T1] 4.37 dBm</p><p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms 2.402022428 GHz</p><p>Offset 0.4 dB</p><p>Center 2.402 GHz 466.5 kHz/ Span 4.665 MHz</p><p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:07:28</p></div>
Middle Channel	<div style="border: 1px solid black; padding: 5px;"><p style="text-align: right; margin: 0;">Marker 1 [T1] 5.83 dBm</p><p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms 2.440738341 GHz</p><p>Offset 0.4 dB</p><p>Center 2.441 GHz 466.5 kHz/ Span 4.665 MHz</p><p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:08:54</p></div>
Highest Channel	<div style="border: 1px solid black; padding: 5px;"><p style="text-align: right; margin: 0;">Marker 1 [T1] 5.39 dBm</p><p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms 2.479760769 GHz</p><p>Offset 0.4 dB</p><p>Center 2.48 GHz 466.5 kHz/ Span 4.665 MHz</p><p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:10:09</p></div>

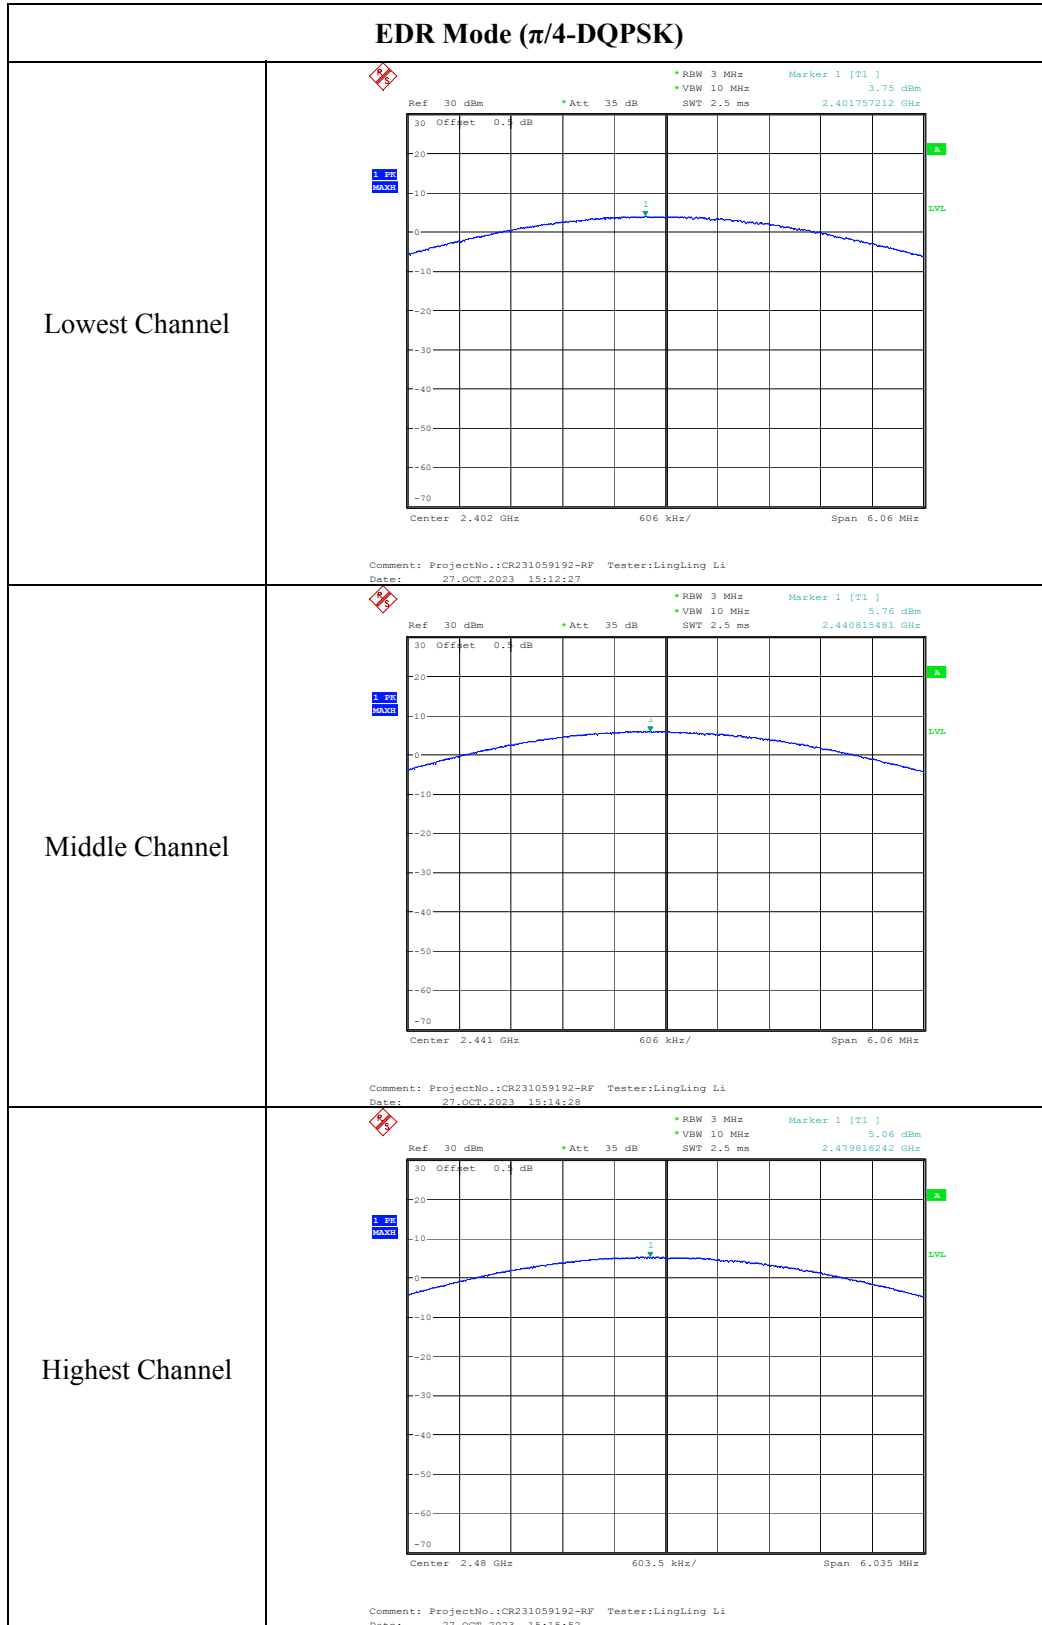


EDR Mode (8DPSK)
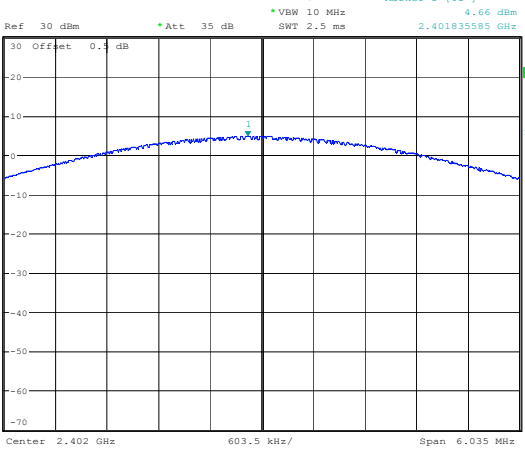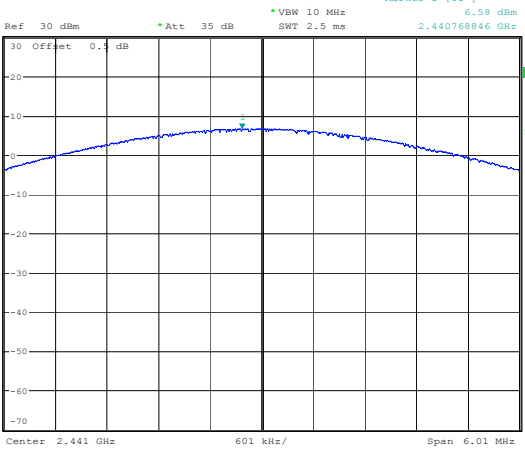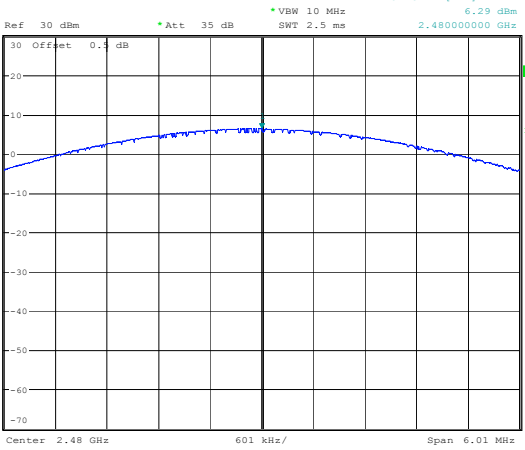
<p>Lowest Channel</p>	 <p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms Marker 1 [T1] 4.66 dBm Offset 0.4 dB Center 2.402 GHz 603.5 kHz/ Span 6.035 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:03:30</p>
<p>Middle Channel</p>	 <p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms Marker 1 [T1] 6.58 dBm Offset 0.4 dB Center 2.441 GHz 601 kHz/ Span 6.01 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:05:12</p>
<p>Highest Channel</p>	 <p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms Marker 1 [T1] 6.29 dBm Offset 0.4 dB Center 2.48 GHz 601 kHz/ Span 6.01 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 15:01:41</p>

Module 2:

BDR Mode (GFSK)	
Lowest Channel	<p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms Marker 1 [T1] 5.58 dBm Offset 0.4 dB Center 2.402 GHz 466.5 kHz/ Span 4.665 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 18:34:09</p>
Middle Channel	<p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms Marker 1 [T1] 6.96 dBm Offset 0.4 dB Center 2.441 GHz 466.5 kHz/ Span 4.665 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 18:35:38</p>
Highest Channel	<p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms Marker 1 [T1] 6.39 dBm Offset 0.4 dB Center 2.48 GHz 466.5 kHz/ Span 4.665 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 18:37:18</p>

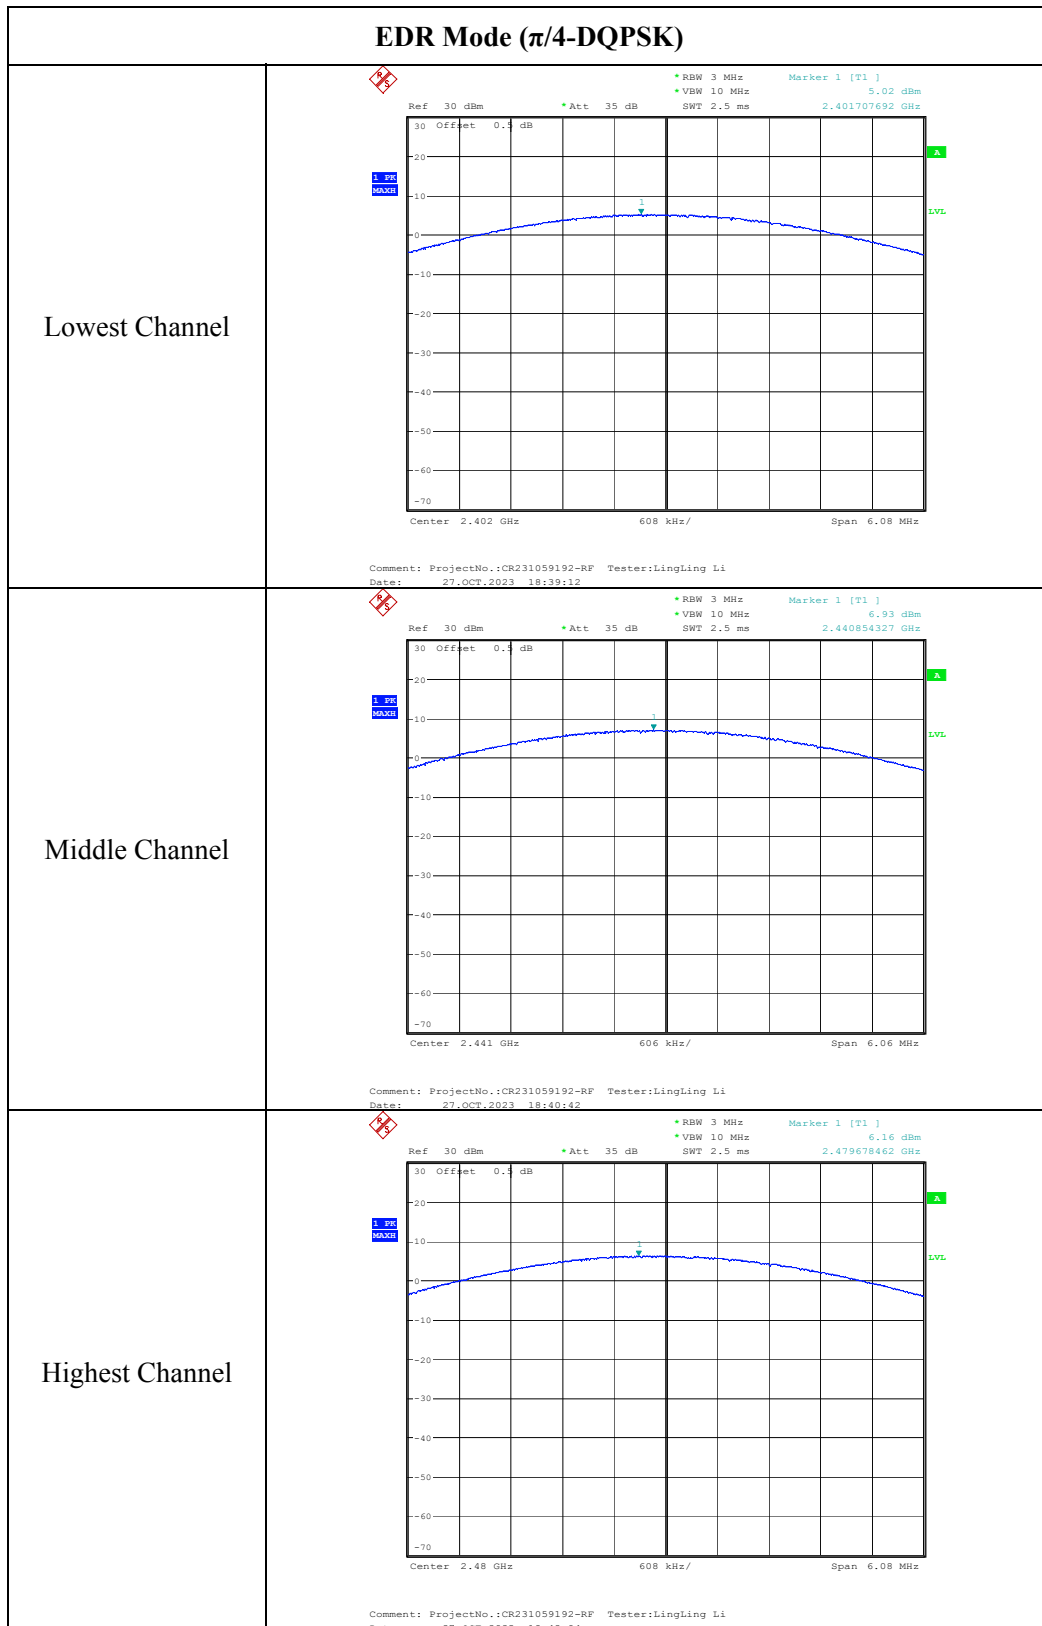

EDR Mode (8DPSK)

<p>Lowest Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms Marker 1 [T1] 5.94 dBm</p> <p>Offset 0.4 dB</p> <p>Center 2.402 GHz 601 kHz/ Span 6.01 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 18:29:16</p>
<p>Middle Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms Marker 1 [T1] 7.72 dBm</p> <p>Offset 0.4 dB</p> <p>Center 2.441 GHz 601 kHz/ Span 6.01 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 18:30:52</p>
<p>Highest Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms Marker 1 [T1] 7.13 dBm</p> <p>Offset 0.4 dB</p> <p>Center 2.48 GHz 601 kHz/ Span 6.01 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 27.OCT.2023 18:32:14</p>




Module 3:

BDR Mode (GFSK)	
Lowest Channel	<div style="border: 1px solid black; padding: 5px;"><p style="text-align: right;">Marker 1 [T1] 4.66 dBm</p><p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms 2.401932356 GHz</p><p style="text-align: center;">Center 2.402 GHz 469 kHz/ Span 4.69 MHz</p><p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:19:58</p></div>
Middle Channel	<div style="border: 1px solid black; padding: 5px;"><p style="text-align: right;">Marker 1 [T1] 6.35 dBm</p><p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms 2.440662139 GHz</p><p style="text-align: center;">Center 2.441 GHz 468.5 kHz/ Span 4.685 MHz</p><p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:23:21</p></div>
Highest Channel	<div style="border: 1px solid black; padding: 5px;"><p style="text-align: right;">Marker 1 [T1] 6.11 dBm</p><p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms 2.479813101 GHz</p><p style="text-align: center;">Center 2.48 GHz 466.5 kHz/ Span 4.665 MHz</p><p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:21:38</p></div>

EDR Mode ($\pi/4$ -DQPSK)

<p>Lowest Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms Marker 1 [T1] 4.04 dBm 2.401815481 GHz</p> <p>Center: 2.402 GHz 606 kHz/ Span: 6.06 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:25:41</p>
<p>Middle Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms Marker 1 [T1] 6.30 dBm 2.440795385 GHz</p> <p>Center: 2.441 GHz 608 kHz/ Span: 6.08 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:27:09</p>
<p>Highest Channel</p>	<p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms Marker 1 [T1] 5.88 dBm 2.479718365 GHz</p> <p>Center: 2.48 GHz 606 kHz/ Span: 6.06 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:28:25</p>

EDR Mode (8DPSK)

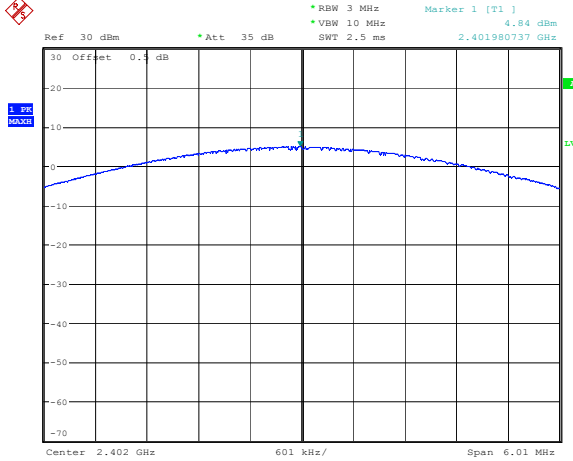
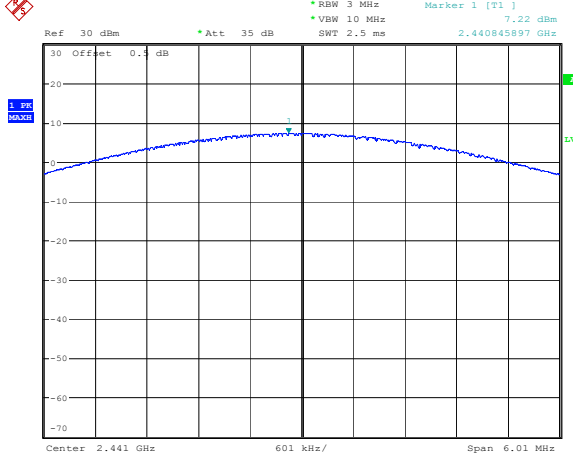
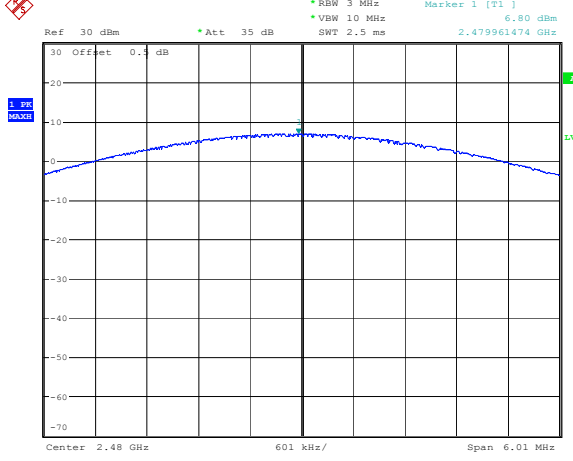
<p>Lowest Channel</p>	 <p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms Marker 1 [T1] 4.84 dBm Offset 0.4 dB Center 2.402 GHz 601 kHz/ Span 6.01 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:30:10</p>
<p>Middle Channel</p>	 <p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms Marker 1 [T1] 7.22 dBm Offset 0.4 dB Center 2.441 GHz 601 kHz/ Span 6.01 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:31:38</p>
<p>Highest Channel</p>	 <p>Ref 30 dBm Att 35 dB RBW 3 MHz VBW 10 MHz SWT 2.5 ms Marker 1 [T1] 6.80 dBm Offset 0.4 dB Center 2.48 GHz 601 kHz/ Span 6.01 MHz</p> <p>Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li Date: 28.OCT.2023 11:32:46</p>

Module 4:

BDR Mode (GFSK)	
Lowest Channel	<p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 18.OCT.2023 16:04:31</p>
Middle Channel	<p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 18.OCT.2023 16:35:45</p>
Highest Channel	<p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 18.OCT.2023 16:37:16</p>

EDR Mode ($\pi/4$-DQPSK)	
Lowest Channel	<p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 10:24:39</p>
Middle Channel	<p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 10:26:27</p>
Highest Channel	<p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 10:28:42</p>

EDR Mode (8DPSK)
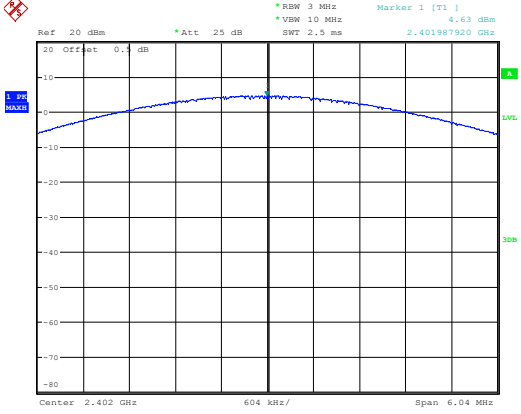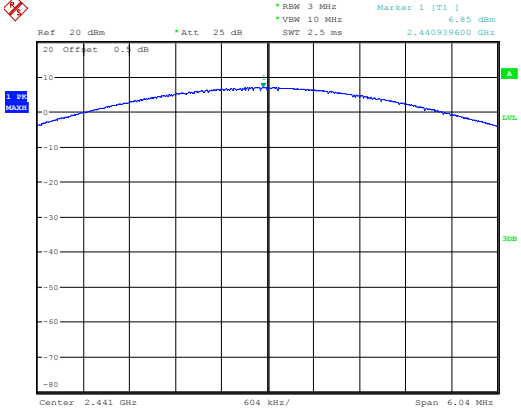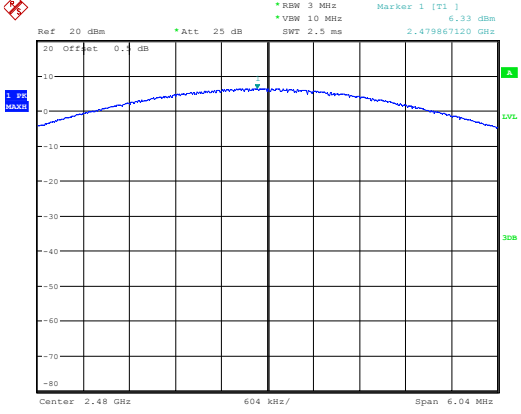
<p>Lowest Channel</p>	 <p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 10:35:52</p>
<p>Middle Channel</p>	 <p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 10:34:22</p>
<p>Highest Channel</p>	 <p>ProjectNo.:CR231059192-RF Tester: Claire Liu Date: 19.OCT.2023 10:32:15</p>

4.8 100 kHz Bandwidth of Frequency Band Edge

Serial Number:	2C4W-2	Test Date:	2023/10/18~2023/10/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li ,Claire Liu	Test Result:	pass

Environmental Conditions:

Temperature: (°C)	24.9~26.9	Relative Humidity: (%)	46~64	ATM Pressure: (kPa)	100.2~101.5
----------------------	-----------	---------------------------	-------	------------------------	-------------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A

* *Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


Test Data:

Module 1:

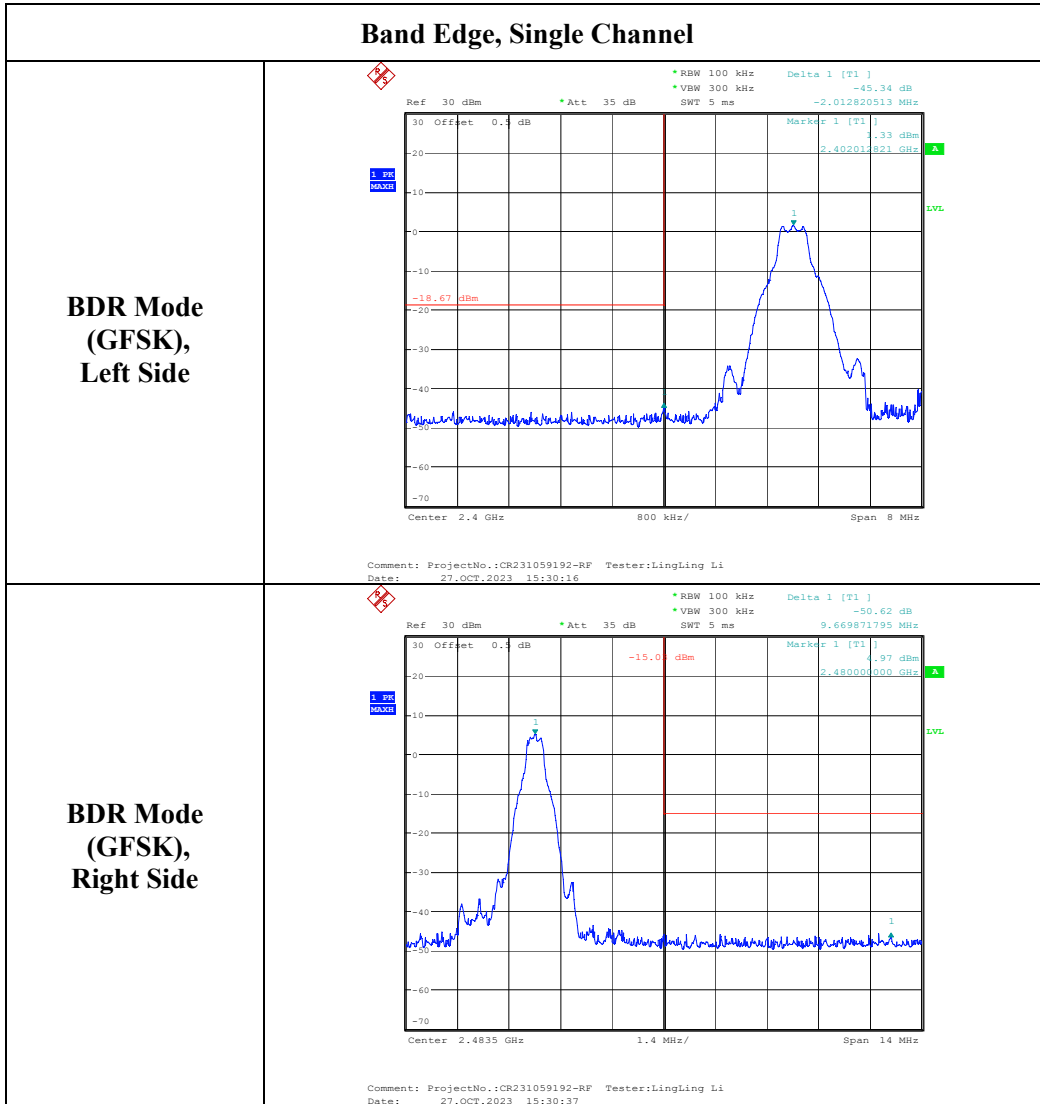


Band Edge, Single Channel

**EDR Mode
($\pi/4$ -DQPSK),
Left Side**

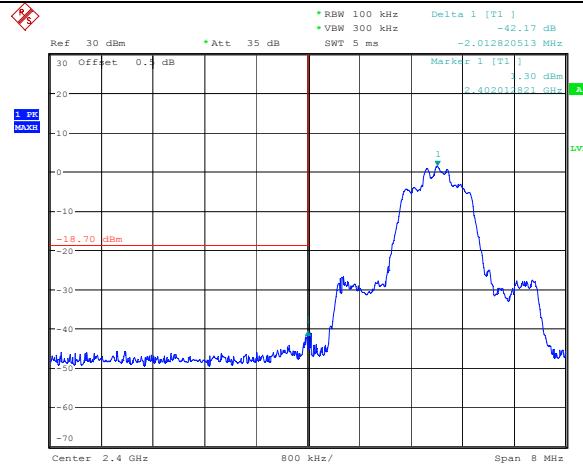

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 27.OCT.2023 15:29:56


**EDR Mode
($\pi/4$ -DQPSK),
Right Side**

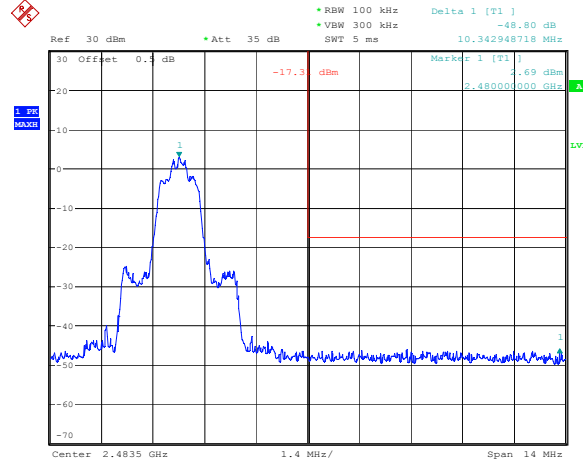

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 27.OCT.2023 15:29:34


Band Edge, Single Channel

**EDR Mode
(8DPSK),
Left Side**

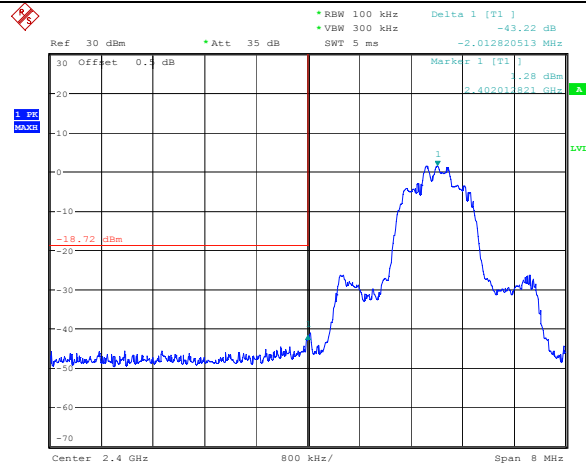

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 27.OCT.2023 15:28:39


**EDR Mode
(8DPSK),
Right Side**

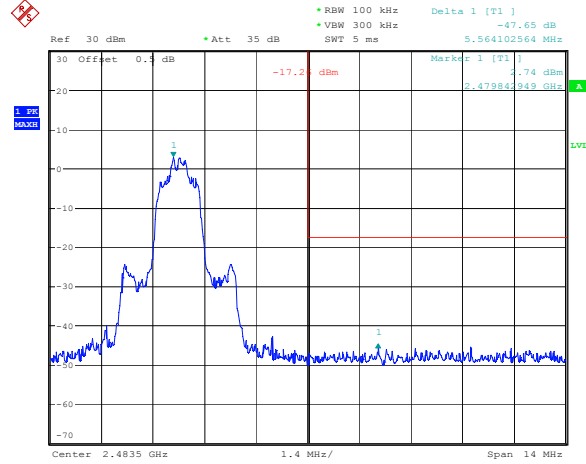

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 27.OCT.2023 15:29:01


Band Edge, Hopping Channel

**BDR Mode
(GFSK),
Left Side**

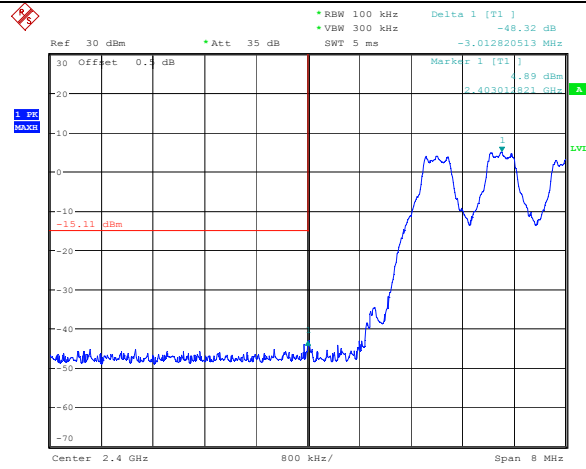

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
Date: 27.OCT.2023 15:23:05


**BDR Mode
(GFSK),
Right Side**

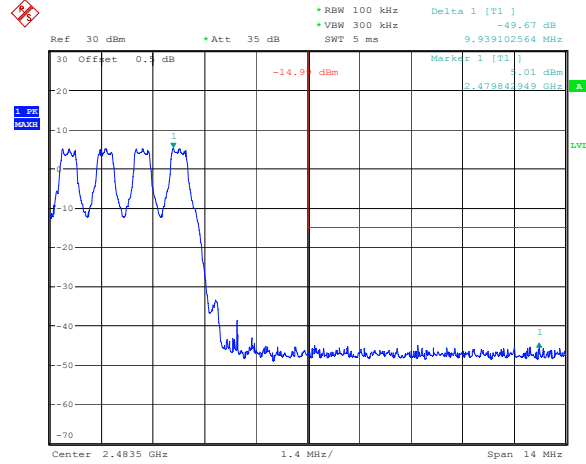


Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
Date: 27.OCT.2023 15:23:49

Band Edge, Hopping Channel

**EDR Mode
($\pi/4$ -DQPSK),
Left Side**

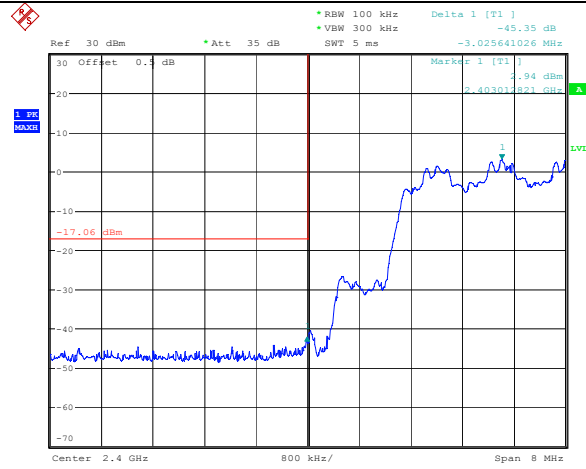


**EDR Mode
($\pi/4$ -DQPSK),
Right Side**

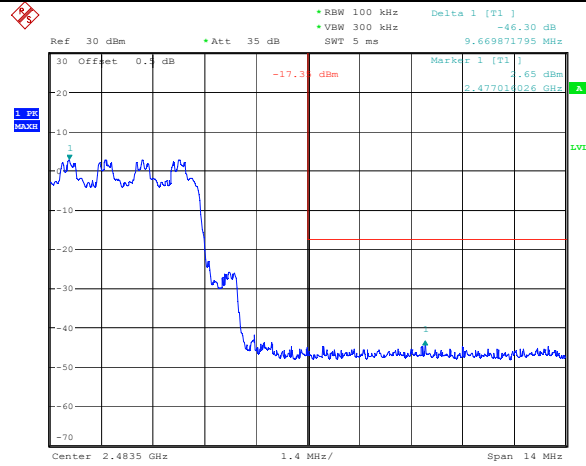


Band Edge, Hopping Channel

**EDR Mode
(8DPSK),
Left Side**

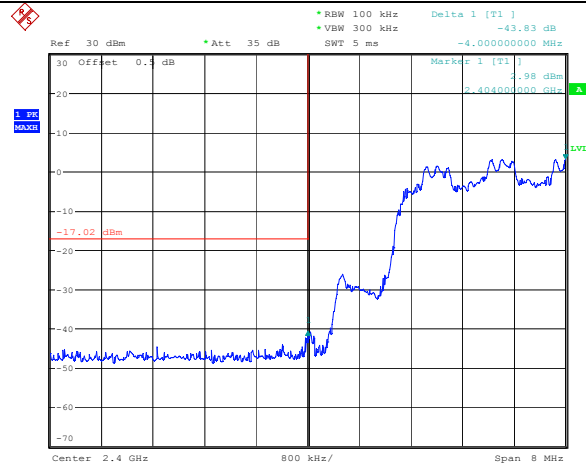

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 27.OCT.2023 15:27:02

**EDR Mode
(8DPSK),
Right Side**

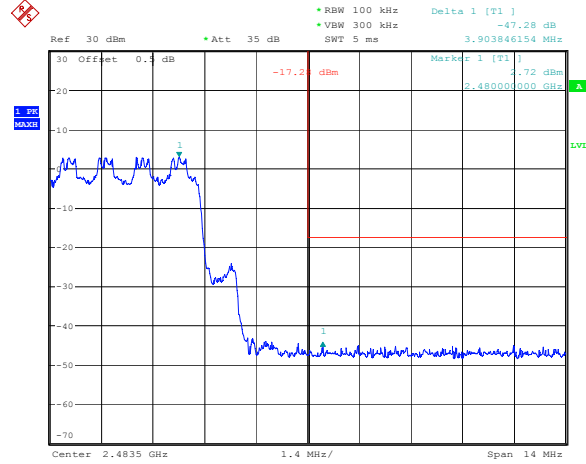


Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 27.OCT.2023 15:28:25

Module 2:


Band Edge, Single Channel

**BDR Mode
(GFSK),
Left Side**

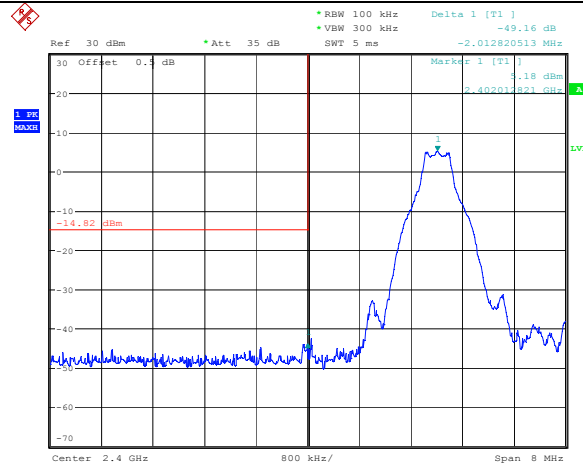

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 27.OCT.2023 18:34:26


**BDR Mode
(GFSK),
Right Side**

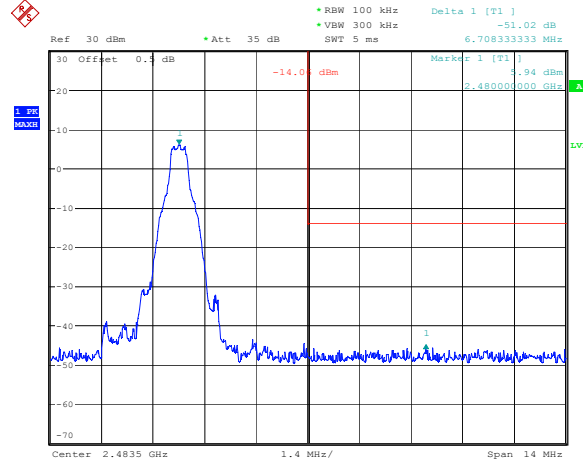

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 27.OCT.2023 18:37:36


Band Edge, Single Channel

**EDR Mode
($\pi/4$ -DQPSK),
Left Side**

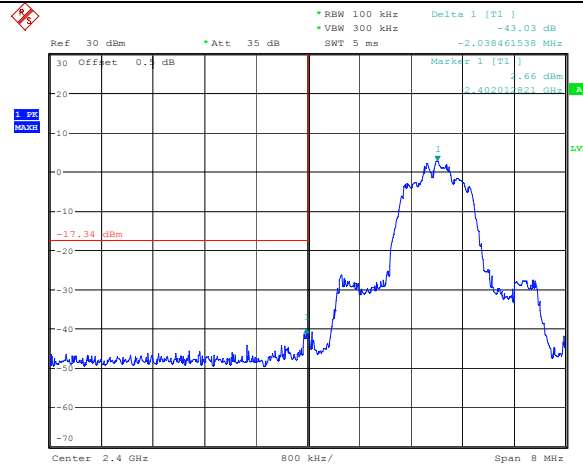

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 27.OCT.2023 18:39:27


**EDR Mode
($\pi/4$ -DQPSK),
Right Side**

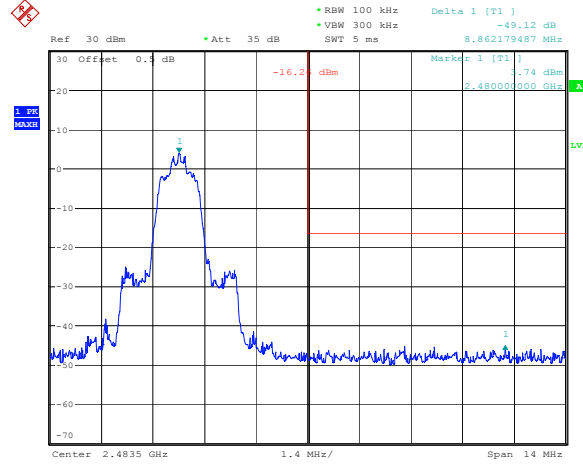

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 27.OCT.2023 18:42:22


Band Edge, Single Channel

**EDR Mode
(8DPSK),
Left Side**

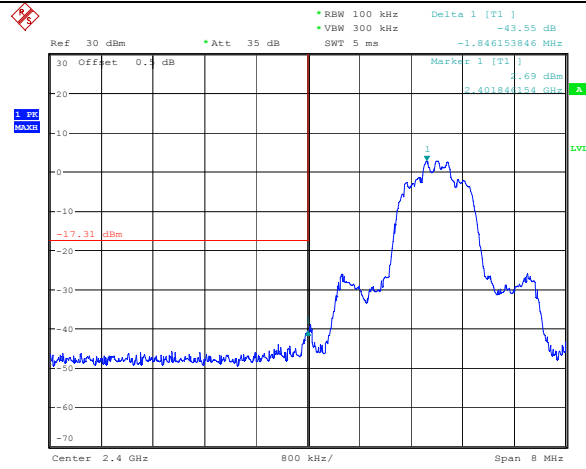

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 27.OCT.2023 18:29:34


**EDR Mode
(8DPSK),
Right Side**

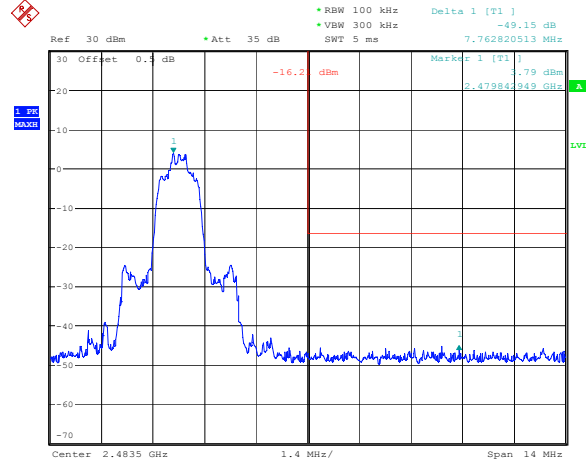

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 27.OCT.2023 18:32:32


Band Edge, Hopping Channel

**BDR Mode
(GFSK),
Left Side**

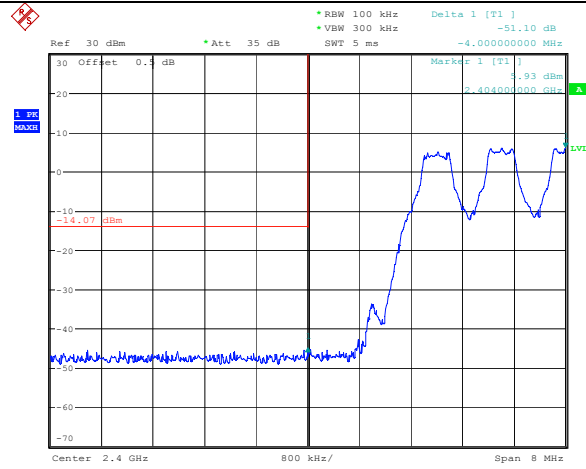

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
Date: 27.OCT.2023 19:16:57


**BDR Mode
(GFSK),
Right Side**

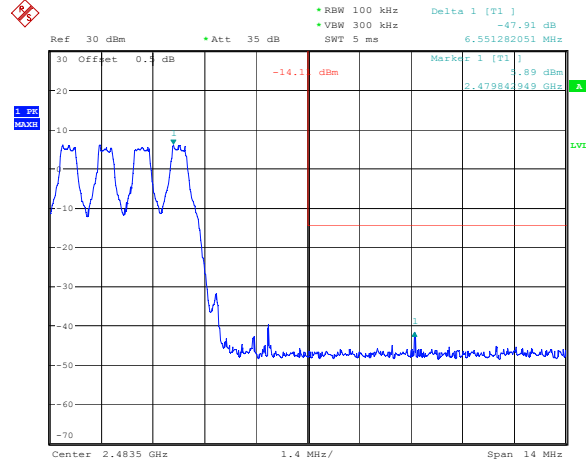

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
Date: 27.OCT.2023 19:17:52


Band Edge, Hopping Channel

**EDR Mode
($\pi/4$ -DQPSK),
Left Side**

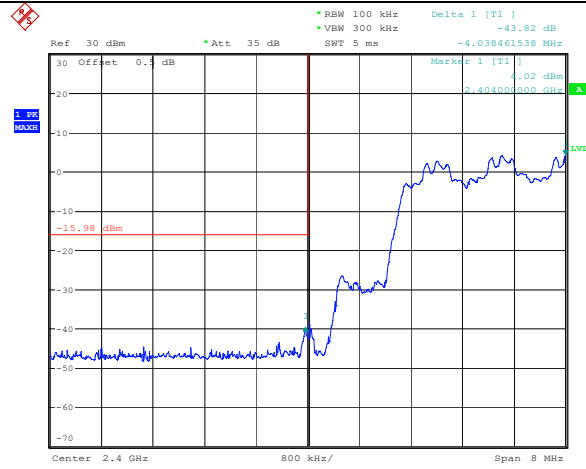

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 27.OCT.2023 19:20:22


**EDR Mode
($\pi/4$ -DQPSK),
Right Side**

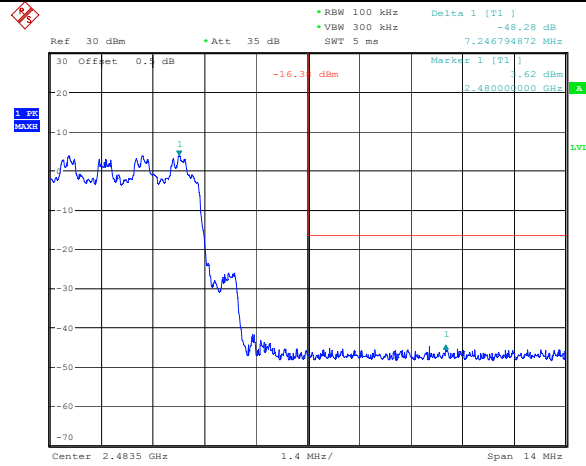

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 27.OCT.2023 19:19:16


Band Edge, Hopping Channel

**EDR Mode
(8DPSK),
Left Side**

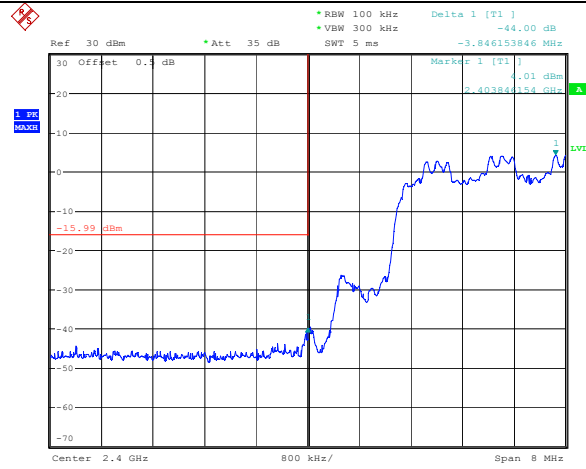

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
Date: 27.OCT.2023 19:23:02

**EDR Mode
(8DPSK),
Right Side**

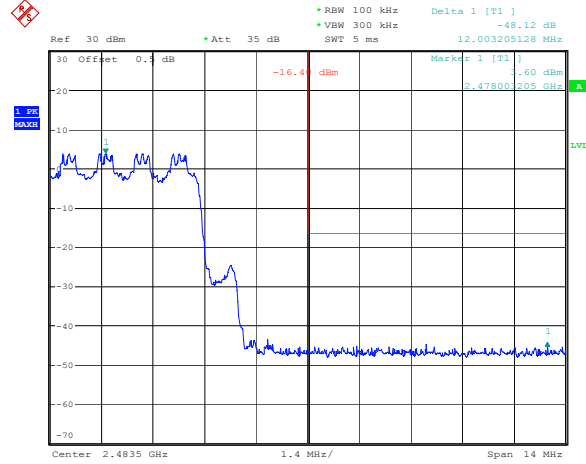


Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
Date: 27.OCT.2023 19:24:46

Module 3:


Band Edge, Single Channel

BDR Mode
(GFSK),
Left Side

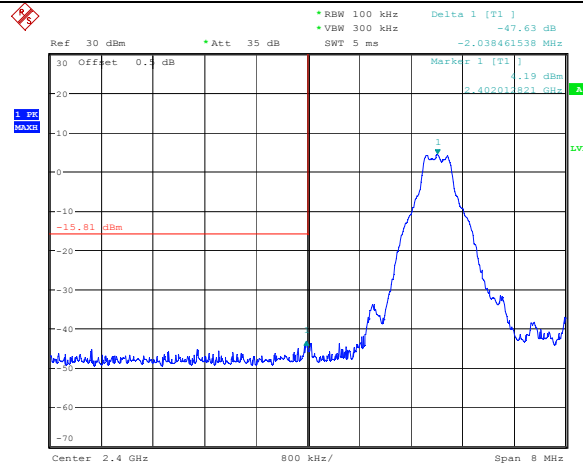

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
Date: 28.OCT.2023 11:20:16


BDR Mode
(GFSK),
Right Side

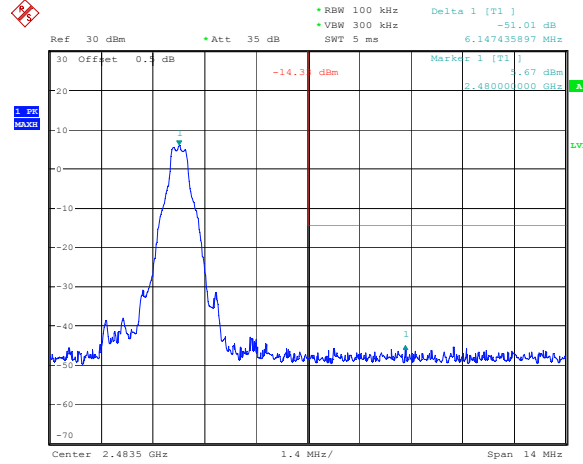

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
Date: 28.OCT.2023 11:21:57


Band Edge, Single Channel

**EDR Mode
($\pi/4$ -DQPSK),
Left Side**

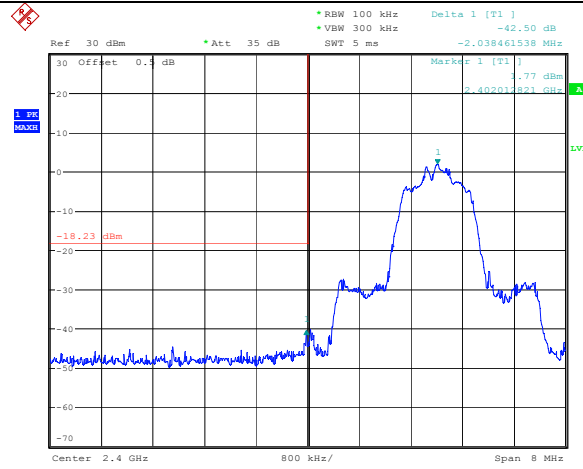

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 28.OCT.2023 11:25:56


**EDR Mode
($\pi/4$ -DQPSK),
Right Side**

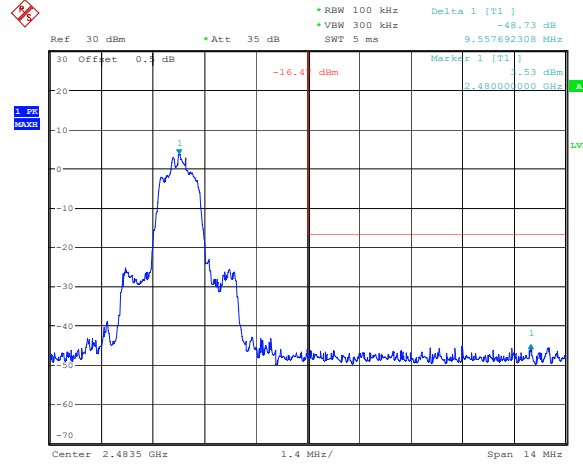

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 28.OCT.2023 11:28:43


Band Edge, Single Channel

**EDR Mode
(8DPSK),
Left Side**

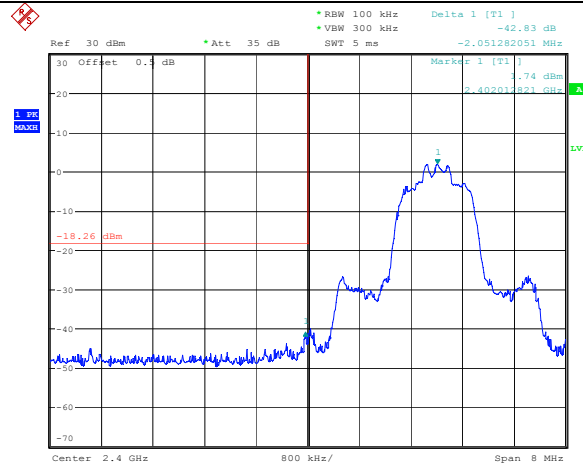

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 28.OCT.2023 11:30:29


**EDR Mode
(8DPSK),
Right Side**

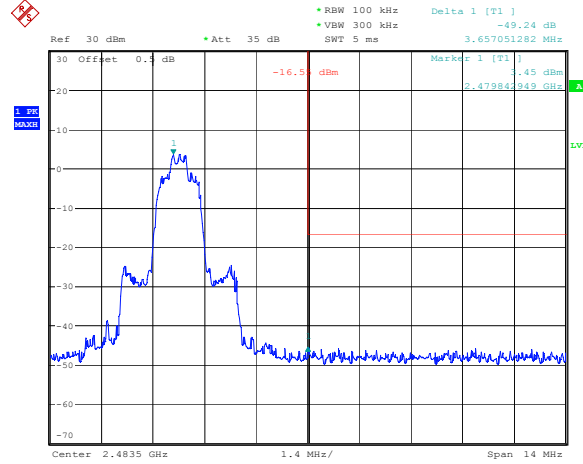

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 28.OCT.2023 11:33:04


Band Edge, Hopping Channel

**BDR Mode
(GFSK),
Left Side**

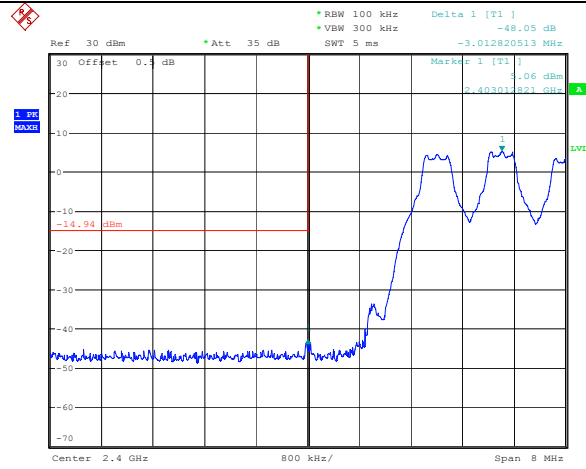

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 28.OCT.2023 11:45:26


**BDR Mode
(GFSK),
Right Side**

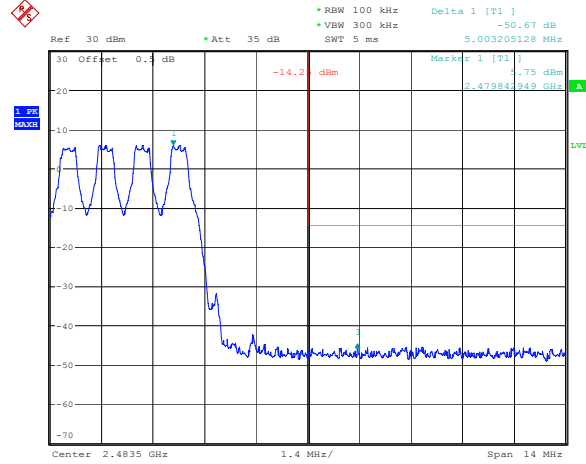

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 28.OCT.2023 11:46:24


Band Edge, Hopping Channel

**EDR Mode
(8DPSK),
Left Side**

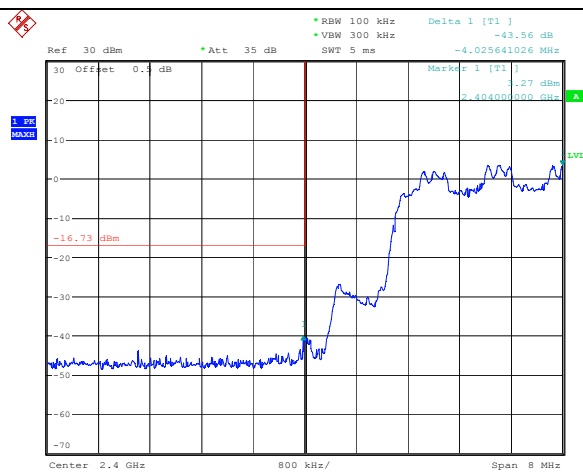

Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 28.OCT.2023 11:44:15

**EDR Mode
(8DPSK),
Right Side**

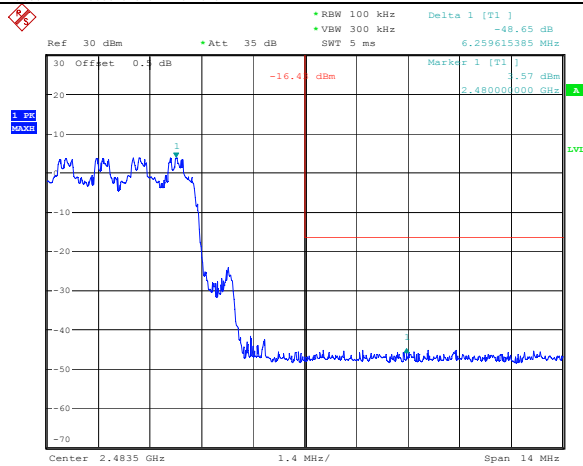


Comment: ProjectNo.:CR231059192-RF Tester:LingLing Li
 Date: 28.OCT.2023 11:42:57

Module 4:


Band Edge, Single Channel

**BDR Mode
(GFSK),
Left Side**

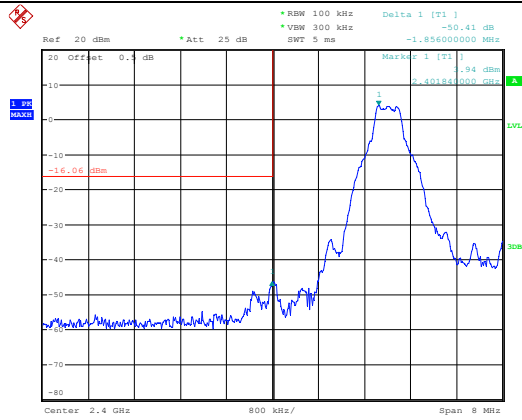

ProjectNo.:CR231059192-RF Tester: Claire Liu
 Date: 18.OCT.2023 15:59:46


**BDR Mode
(GFSK),
Right Side**

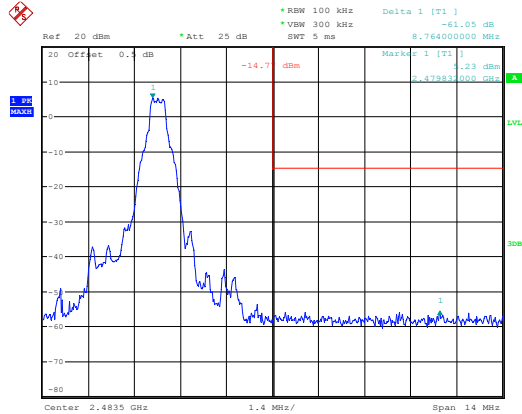

ProjectNo.:CR231059192-RF Tester: Claire Liu
 Date: 18.OCT.2023 16:37:33


Band Edge, Single Channel

**EDR Mode
($\pi/4$ -DQPSK),
Left Side**

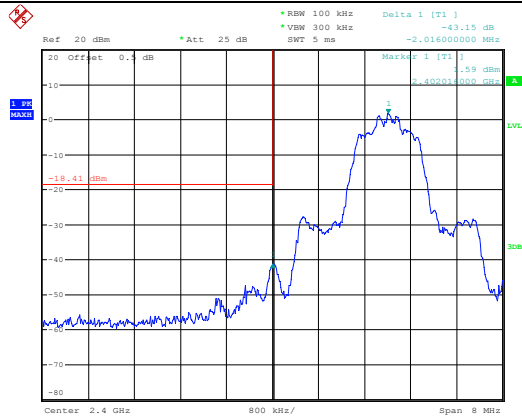

ProjectNo.:CR231059192-RF Tester: Claire Liu
Date: 19.OCT.2023 10:24:57


**EDR Mode
($\pi/4$ -DQPSK),
Right Side**

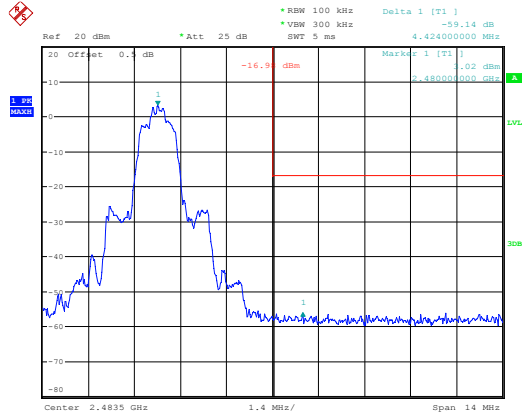

ProjectNo.:CR231059192-RF Tester: Claire Liu
Date: 19.OCT.2023 10:29:02


Band Edge, Single Channel

**EDR Mode
(8DPSK),
Left Side**

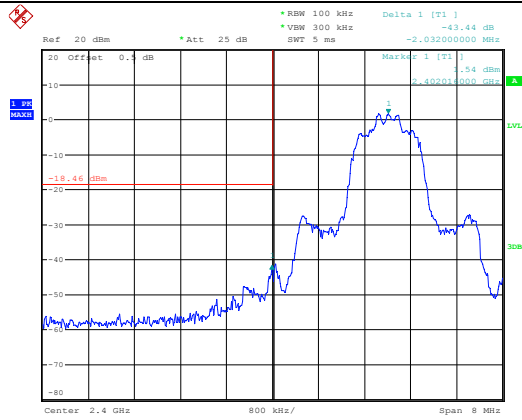

ProjectNo.:CR231059192-RF Tester: Claire Liu
Date: 19.OCT.2023 10:36:09


**EDR Mode
(8DPSK),
Right Side**

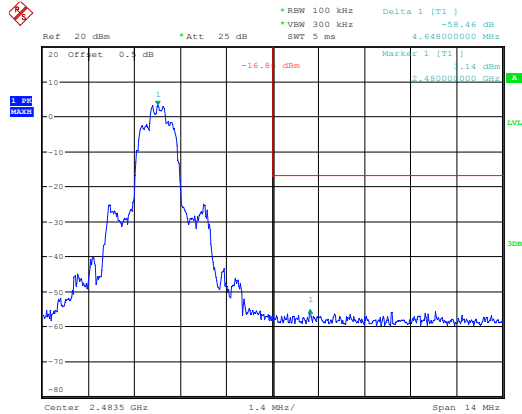


ProjectNo.:CR231059192-RF Tester: Claire Liu
Date: 19.OCT.2023 10:32:31

Band Edge, Hopping Channel

**BDR Mode
(GFSK),
Left Side**

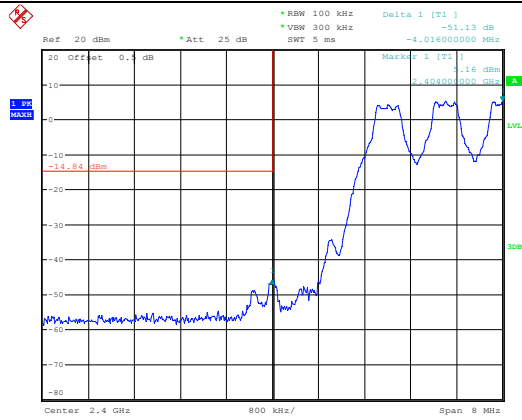


**BDR Mode
(GFSK),
Right Side**

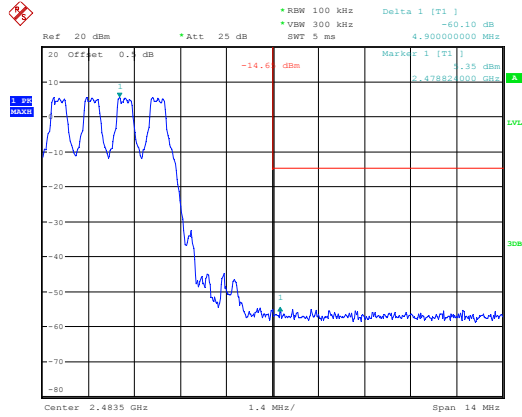


Band Edge, Hopping Channel

**EDR Mode
($\pi/4$ -DQPSK),
Left Side**

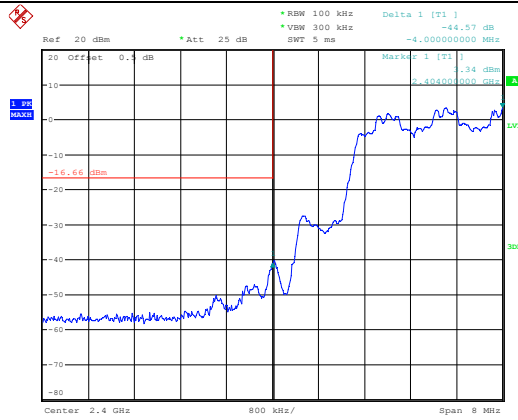

ProjectNo.:CR231059192-RF Tester: Claire Liu
 Date: 19.OCT.2023 10:51:12


**EDR Mode
($\pi/4$ -DQPSK),
Right Side**

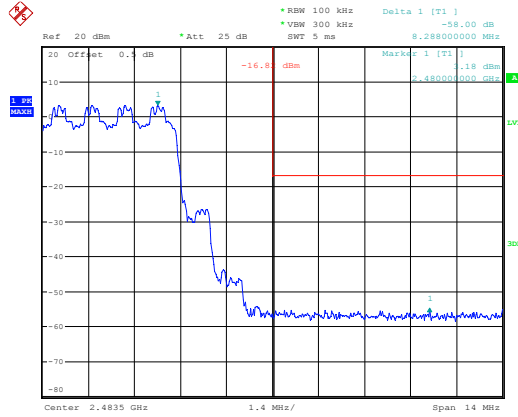

ProjectNo.:CR231059192-RF Tester: Claire Liu
 Date: 19.OCT.2023 10:49:38


Band Edge, Hopping Channel

**EDR Mode
(8DPSK),
Left Side**

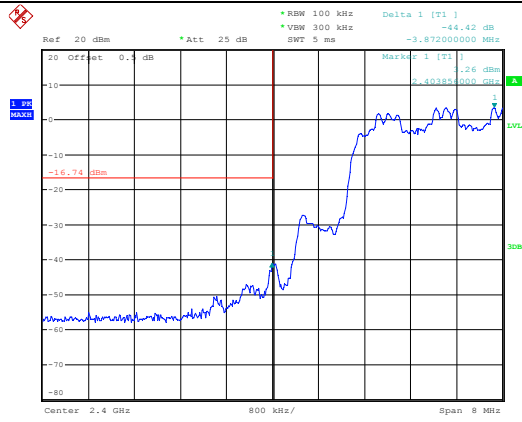

ProjectNo.:CR231059192-RF Tester: Claire Liu
 Date: 19.OCT.2023 10:40:52

**EDR Mode
(8DPSK),
Right Side**

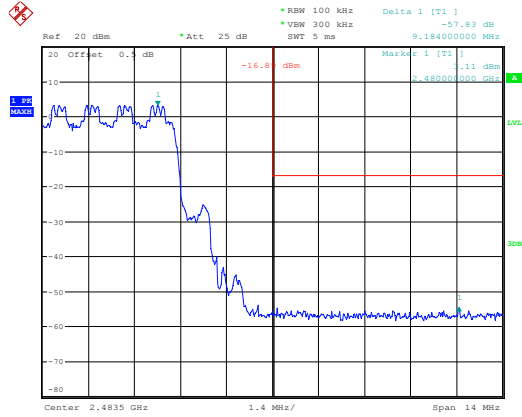

ProjectNo.:CR231059192-RF Tester: Claire Liu
 Date: 19.OCT.2023 10:43:19

5. EUT PHOTOGRAPHS

Please refer to the attachment CR231059192-EXP EUT EXTERNAL PHOTOGRAPHS and CR231059192-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR231059192-00B-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====