

# FCC Part 15E Measurement and Test Report




For

**LM Technologies Ltd.**

**Unit 19, Spectrum House, 32-34, Gordon House Road, London, NW5 1LP,**

**United Kingdom**

**FCC ID: VVXLM813**

<b>FCC Rule(s):</b>	<u>FCC Part 15.407</u>
<b>Product Description:</b>	<u>LM813 WiFi and BT Dual Mode Combi Module</u>
<b>Tested Model:</b>	<u>LM813</u>
<b>Report No.:</b>	<u>STR18118326I-1</u>
<b>Sample Receipt Date:</b>	<u>2018-11-26</u>
<b>Tested Date:</b>	<u>2018-11-27 to 2019-01-08</u>
<b>Issued Date:</b>	<u>2019-01-08</u>
<b>Tested By:</b>	<u>Long Tang / Engineer</u> 
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u> 
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u> 
<b>Prepared By:</b>	

**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	4
1.5 EUT OPERATING DURING TEST	5
1.6 TEST FACILITY	5
1.7 EUT SETUP AND TEST MODE	5
1.8 MEASUREMENT UNCERTAINTY	6
1.9 TEST EQUIPMENT LIST AND DETAILS	7
<b>2. SUMMARY OF TEST RESULTS</b>	<b>8</b>
<b>3. RF EXPOSURE</b>	<b>9</b>
3.1 STANDARD APPLICABLE	9
3.2 TEST RESULT	9
<b>4. ANTENNA REQUIREMENT</b>	<b>10</b>
4.1 STANDARD APPLICABLE	10
4.2 EVALUATION INFORMATION	10
<b>5. CONDUCTED EMISSIONS</b>	<b>11</b>
5.1 TEST PROCEDURE	11
5.2 BASIC TEST SETUP BLOCK DIAGRAM	11
5.3 TEST RECEIVER SETUP	11
5.4 SUMMARY OF TEST RESULTS/PLOTS	11
<b>6. POWER SPECTRAL DENSITY</b>	<b>14</b>
6.1 STANDARD APPLICABLE	14
6.2 TEST PROCEDURE	14
6.3 SUMMARY OF TEST RESULTS/PLOTS	15
<b>7. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH</b>	<b>24</b>
7.1 STANDARD APPLICABLE	24
7.2 TEST PROCEDURE	24
7.3 SUMMARY OF TEST RESULTS/PLOTS	26
<b>8. MAXIMUM CONDUCTED OUTPUT POWER</b>	<b>35</b>
8.1 STANDARD APPLICABLE	35
8.2 TEST PROCEDURE	35
8.3 SUMMARY OF TEST RESULTS/PLOTS	36
<b>9. RADIATED SPURIOUS EMISSIONS</b>	<b>45</b>
9.1 STANDARD APPLICABLE	45
9.2 TEST PROCEDURE	45
9.3 TEST RECEIVER SETUP	47
9.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	47
9.5 SUMMARY OF TEST RESULTS/PLOTS	47
<b>10. FREQUENCY STABILITY</b>	<b>77</b>
10.1 STANDARD APPLICABLE	77
10.2 TEST PROCEDURE	77
10.3 SUMMARY OF TEST RESULTS/PLOTS	77

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: LM Technologies Ltd.  
Address of applicant: Unit 19, Spectrum House, 32-34, Gordon House Road,  
London, NW5 1LP, United Kingdom

Manufacturer: LM Technologies Ltd.  
Address of manufacturer: Unit 19, Spectrum House, 32-34, Gordon House Road,  
London, NW5 1LP, United Kingdom

General Description of EUT	
Product Name:	LM813 WiFi and BT Dual Mode Combi Module
Brand Name:	LM Technologies
Model No.:	LM813
Adding Model(s):	/
Rated Voltage:	DC 3.3/5V
Battery Capacity:	/
Power Adapter:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VH80
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	12.86dBm (Conducted)
Type of Modulation:	QPSK, 16QAM, 64QAM
Data Rate:	6-54Mbps, up to 433.3Mbps
Quantity of Channels:	15
Type of Antenna:	SMA-reverse Antenna
Antenna Gain:	0.5dBi

### 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.407:** General technical requirements.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**KDB789033 D02 v02r01:** GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

### 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

### 1.4 Table for parameters of Test Software setting

After install software "00009933-Win7\_MP\_Kit\_RTL11ac\_8821CU\_USB\_v3.02\_20171213(BETA)" in your computer, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)													
	NCB: 20MHz													
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825	
802.11a 6Mbps	10	10	10								10	10	10	
802.11n-HT20 MCS0	10	10	10								10	10	10	
Mode	NCB: 40MHz													
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795				
802.11n-HT40 MCS0	12	12								12	12			
Mode	NCB: 80MHz													
	5210		5290		5530		5610		5690		5775			
802.11ac-VH80 MCS0/Nss2	10										10			

## 1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Windows system were executed.

## 1.6 Test Facility

### FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz, 5240MHz, 5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz, 5240MHz, 5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz, 5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz, 5775 MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Accessories Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E23	EB12648265

## 1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

## 1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-05-22	2019-05-21
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203; § 15.405	Antenna Requirement	Compliant
§ 15.207; § 15.407(b)(6)	Conducted Emission	Compliant
§ 15.407(a)(1),(2)	Power Spectral Density	Compliant
§ 15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§ 15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§ 15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§ 15.205; § 15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§ 15.407(g)	Frequency Stability	Compliant
§ 15.407(h)	Dynamic Frequency Selection (DFS)	N/A

N/A: not applicable



### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the MPE Report.

## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has a SMA-reverse antenna, fulfill the requirement of this section.


## 5. Conducted Emissions

### 5.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 5.2 Basic Test Setup Block Diagram

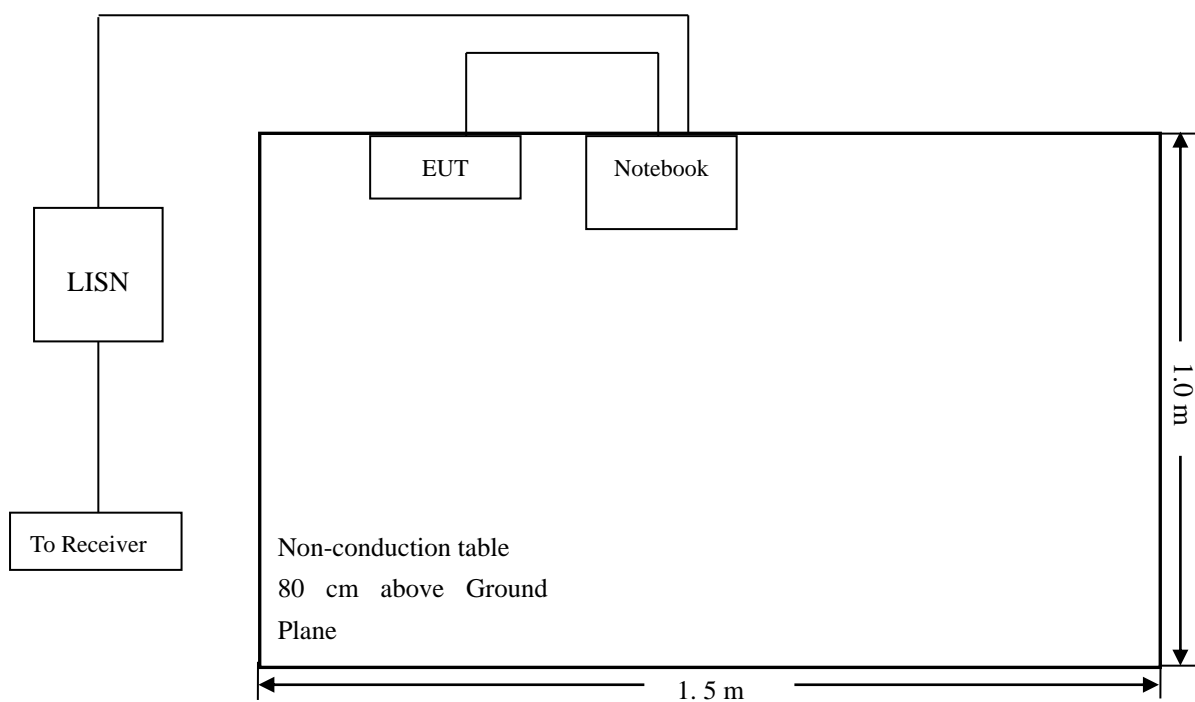


### 5.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150 kHz
Stop Frequency .....	30 MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth .....	9 kHz
Quasi-Peak Adapter Mode .....	Normal


### 5.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

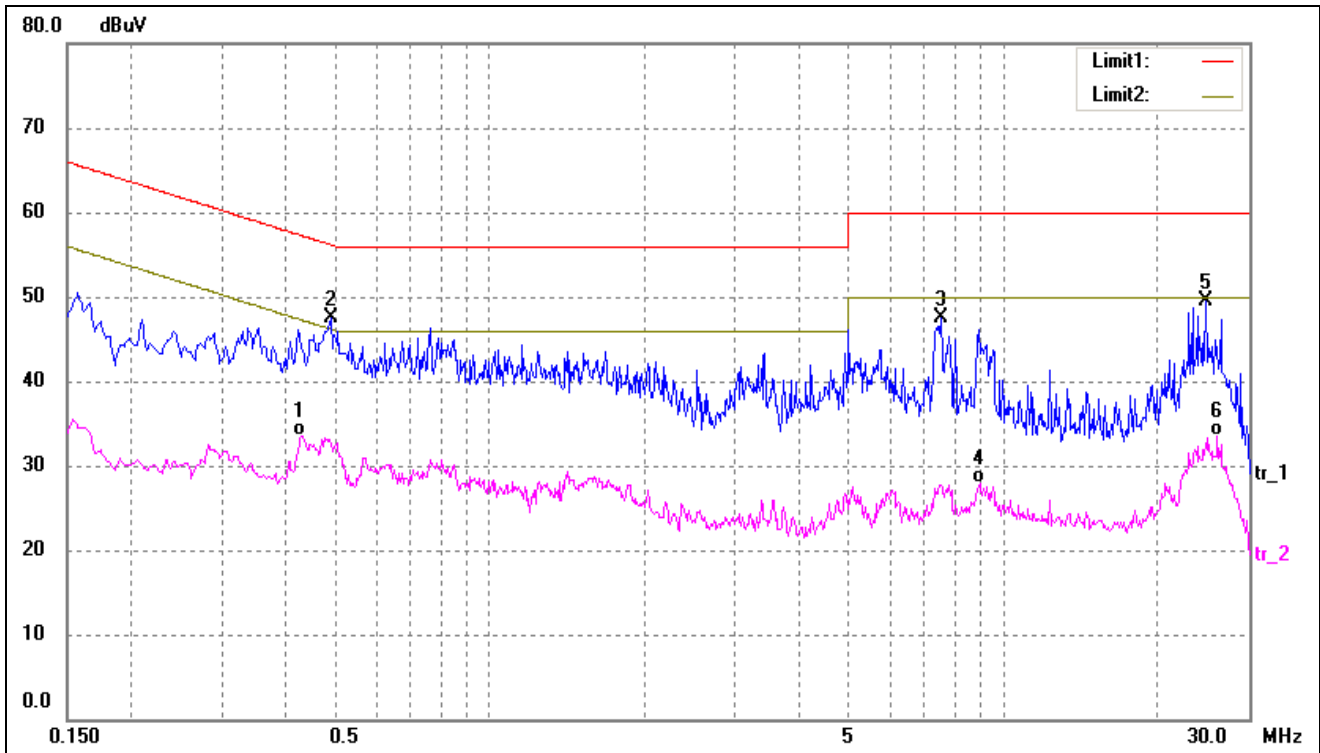

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4300	23.32	10.26	33.58	47.25	-13.67	AVG
2*	0.4900	37.19	10.29	47.48	56.17	-8.69	peak
3	7.5460	36.59	10.86	47.45	60.00	-12.55	peak
4	8.9900	17.01	10.92	27.93	50.00	-22.07	AVG
5	24.7860	38.36	11.22	49.58	60.00	-10.42	peak
6	26.0820	22.30	11.23	33.53	50.00	-16.47	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

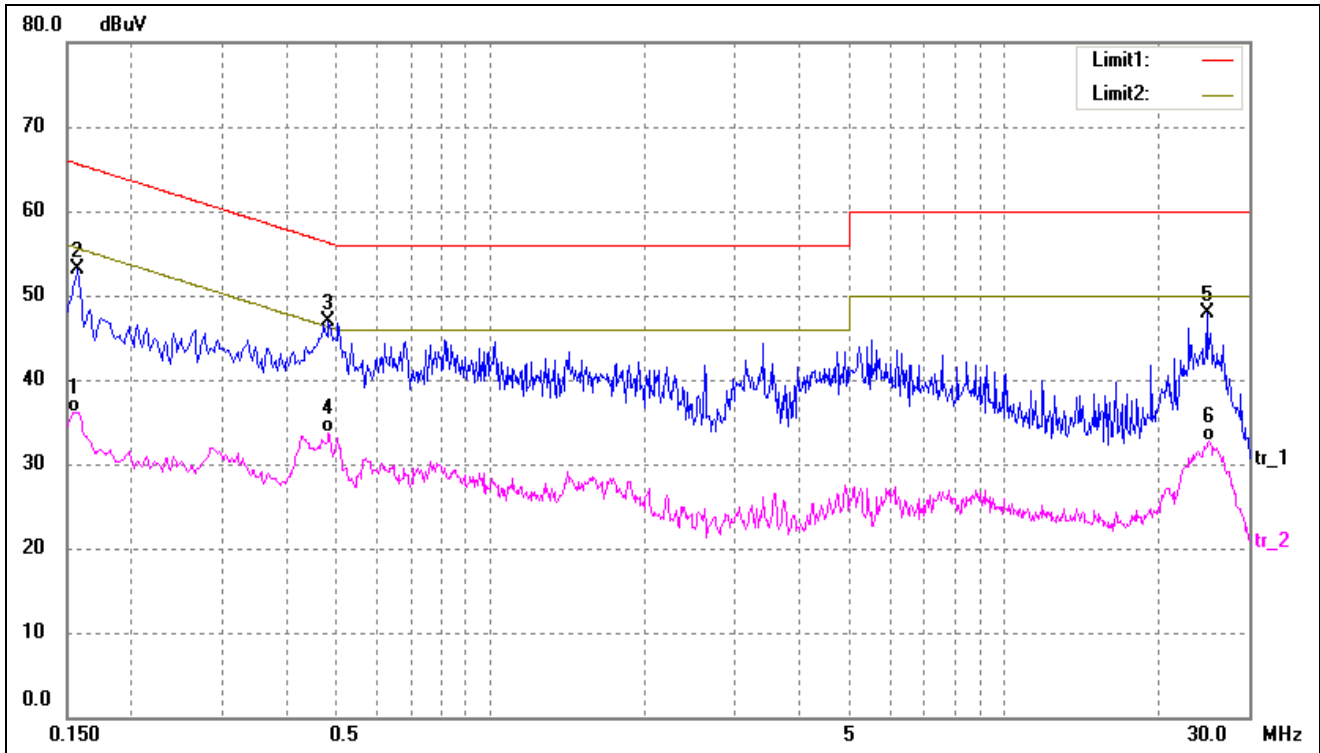

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	26.10	10.10	36.20	55.78	-19.58	AVG
2	0.1580	43.02	10.10	53.12	65.56	-12.44	peak
3*	0.4860	36.56	10.28	46.84	56.24	-9.40	peak
4	0.4860	23.35	10.28	33.63	46.24	-12.61	AVG
5	24.8940	36.69	11.22	47.91	60.00	-12.09	peak
6	25.0620	21.42	11.23	32.65	50.00	-17.35	AVG

## 6. Power Spectral Density

---

### 6.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 6.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.1.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas  $RBW (< 500 \text{ kHz})$  is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas  $RBW (< 1 \text{ MHz})$  is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since  $RBW=100 \text{ kHz}$  is available on nearly all spectrum analyzers.




### 6.3 Summary of Test Results/Plots

U-NII-1:5150-5250MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	7.281	11
	5200	6.655	11
	5240	6.074	11
802.11n-HT20	5180	5.879	11
	5200	6.768	11
	5240	5.700	11
802.11n-HT40	5190	0.247	11
	5230	0.948	11
802.11ac-HT80	5210	-2.563	11

U-NII-3: 5725-5850MHz					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	2.320	2.22	4.540	30
	5785	4.009	2.22	6.229	30
	5825	3.939	2.22	6.159	30
802.11n-HT20	5745	3.079	2.22	5.299	30
	5785	3.500	2.22	5.720	30
	5825	3.716	2.22	5.936	30
802.11n HT40	5755	-2.488	2.22	-0.268	30
	5795	-2.140	2.22	0.080	30
802.11ac VH80	5775	-4.385	2.22	-2.165	30

\*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22


➤ 5150-5250MHz

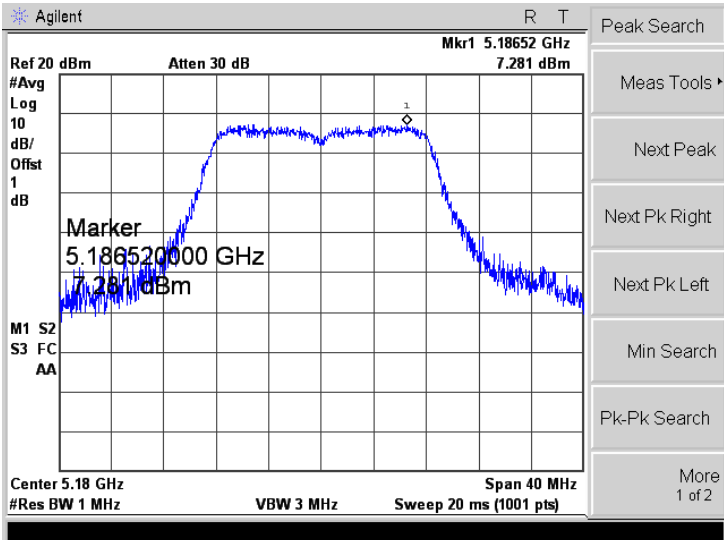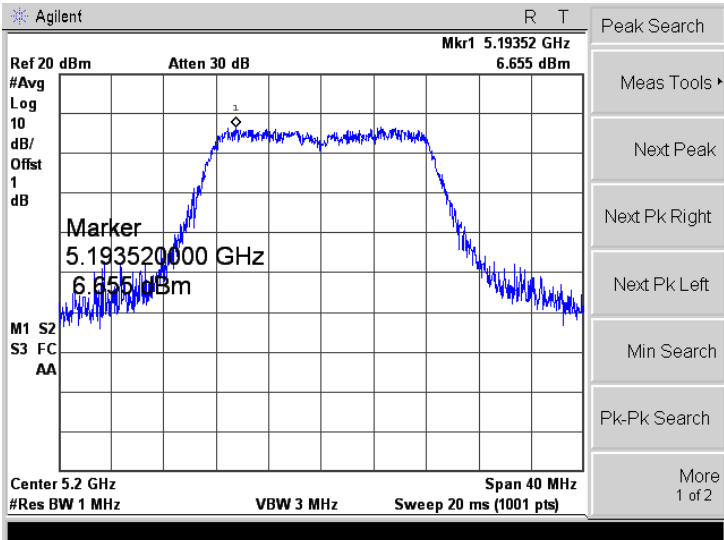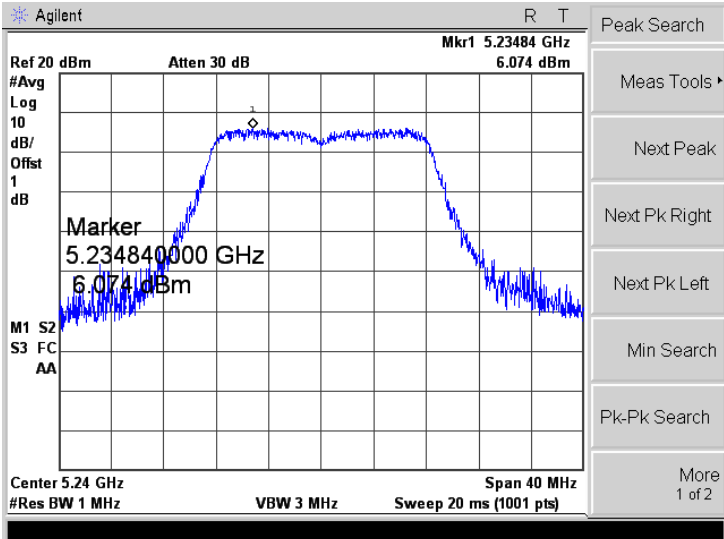Mode:		802.11a
5180MHz		
5200MHz		
5240MHz		




**Mode:** 802.11n-HT20


5180MHz


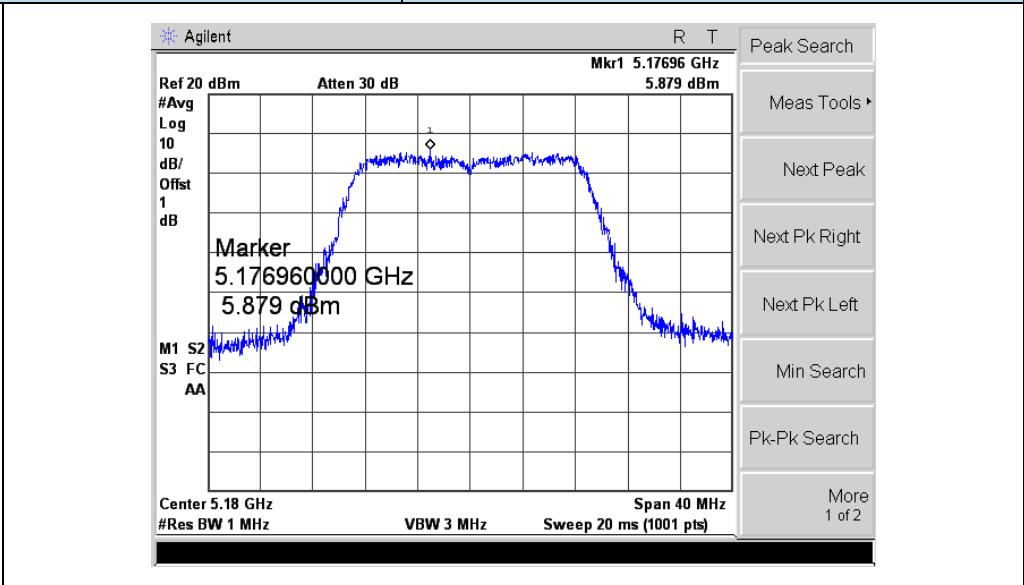



5200MHz

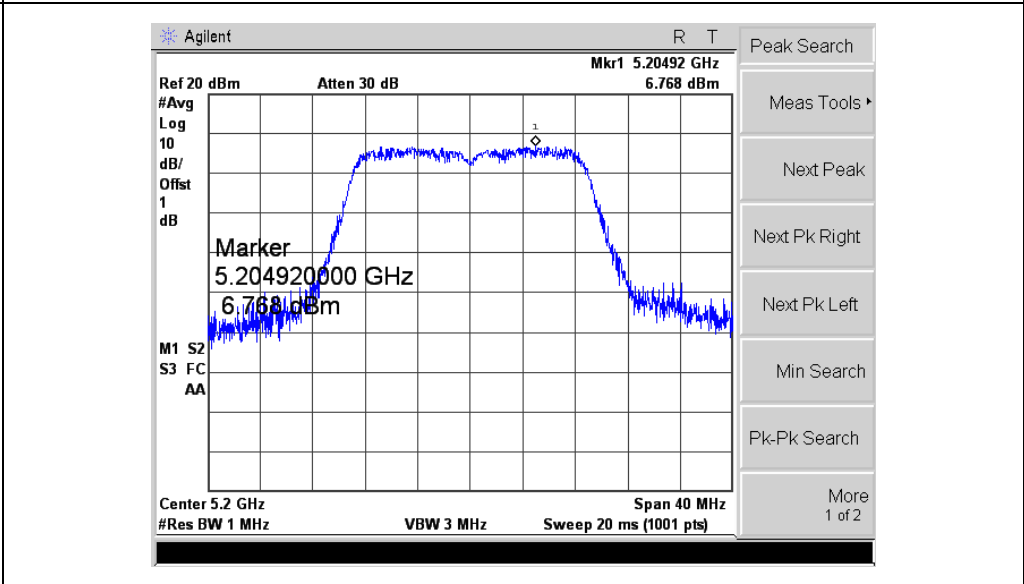




5240MHz

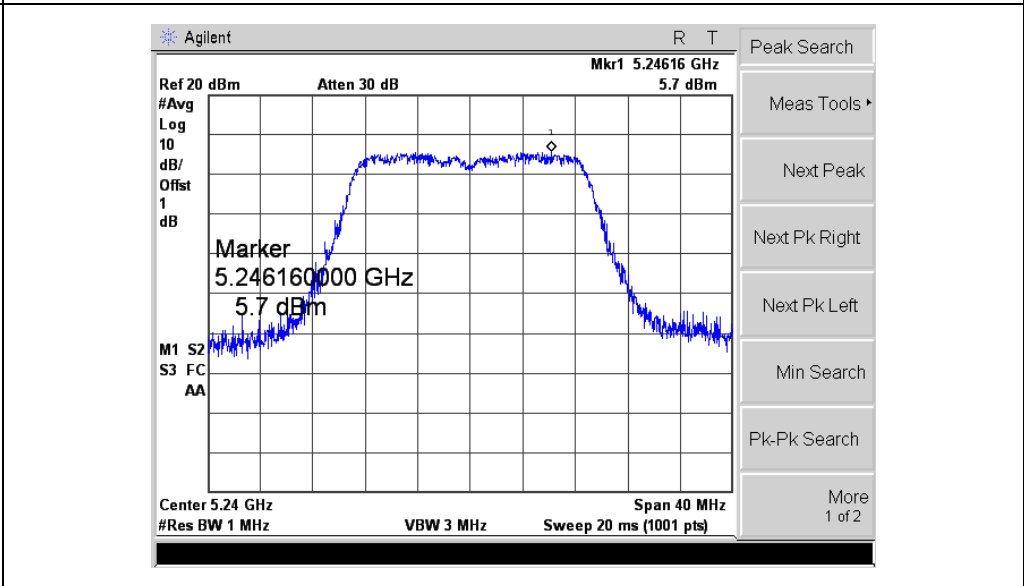
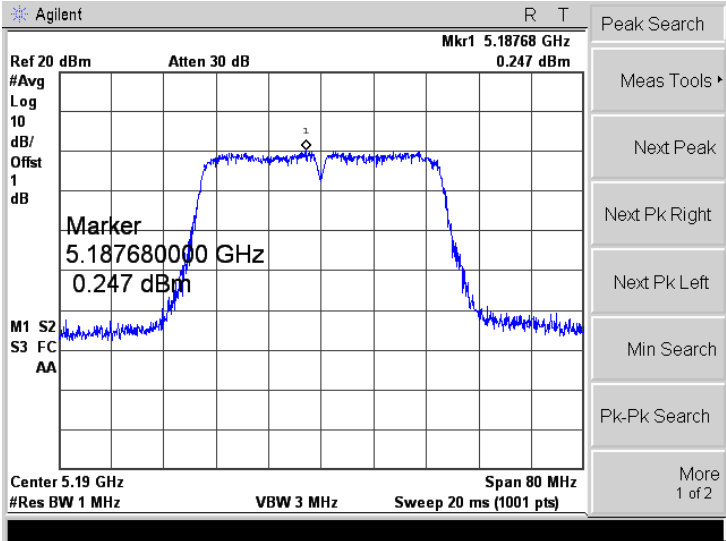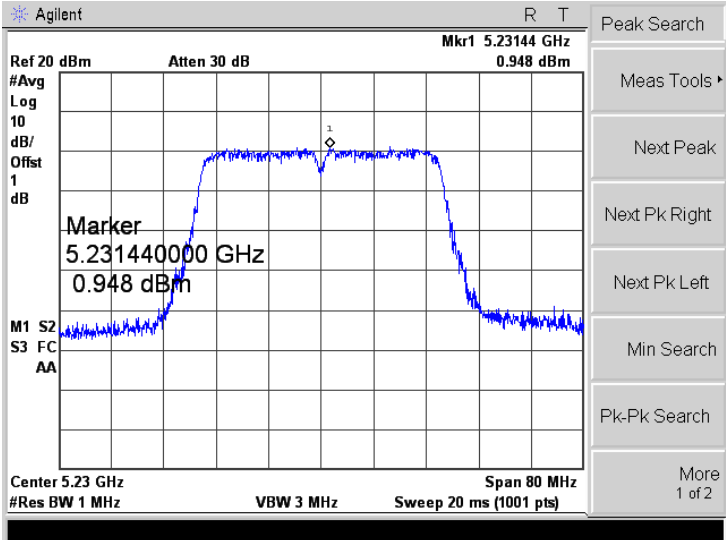
<p>Mode:</p>	<p>802.11n-HT40</p>
<p>5190 MHz</p>	
<p>5230 MHz</p>	

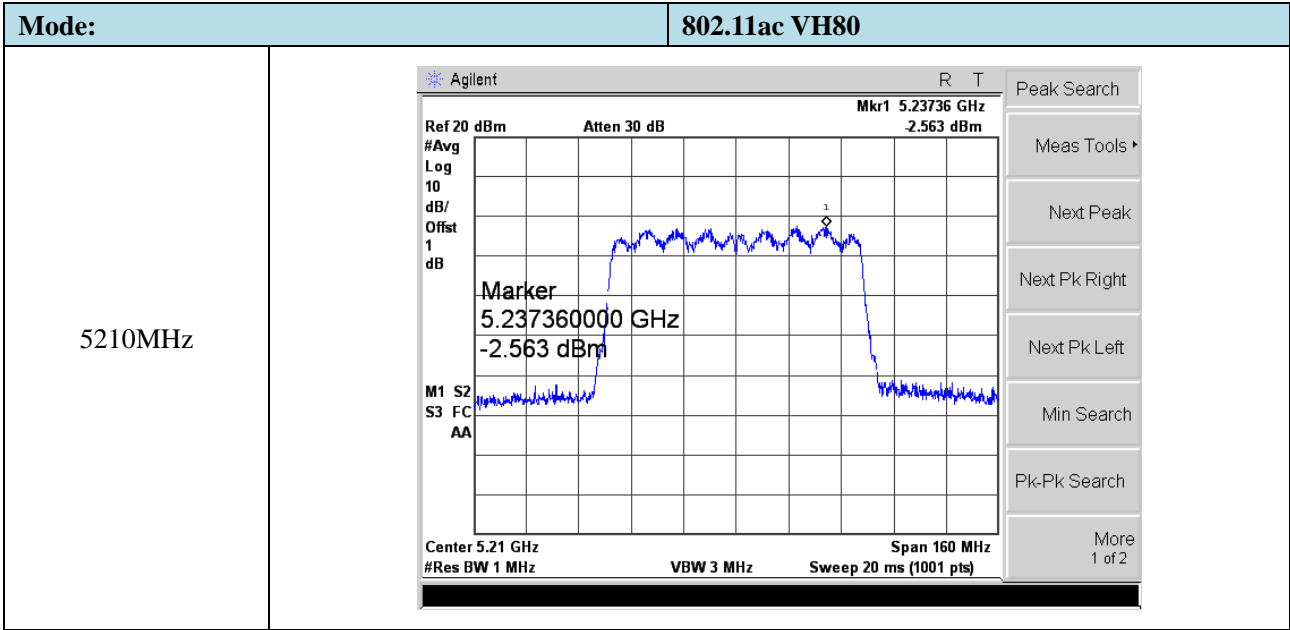


➤ 5725-5850MHz

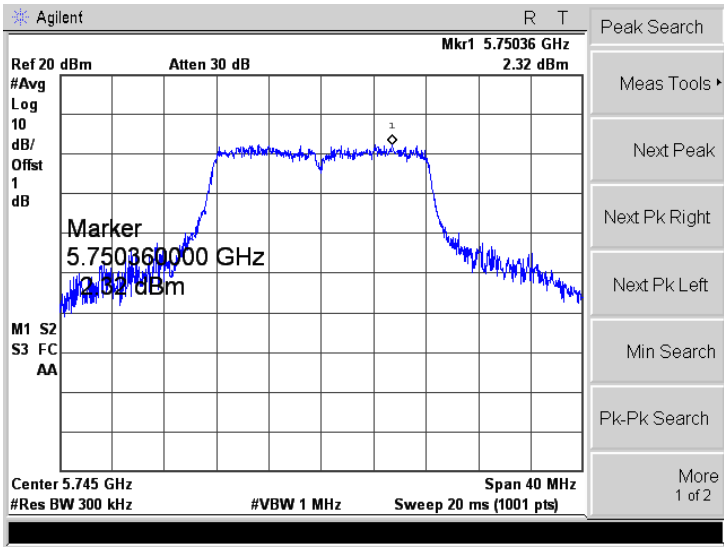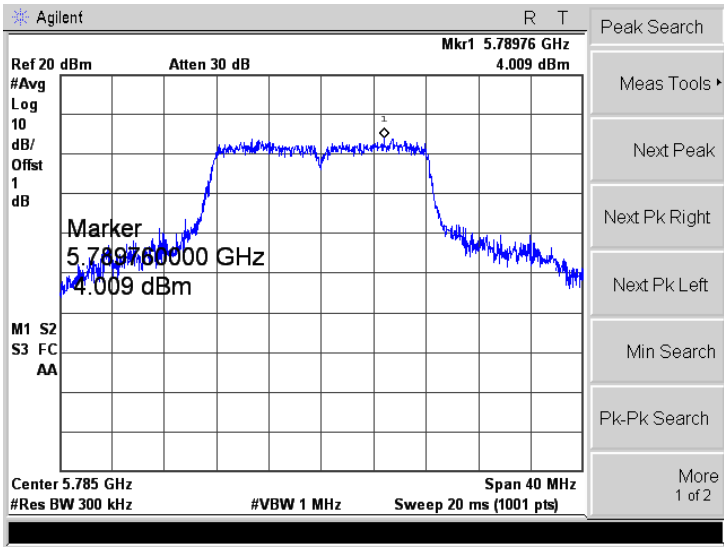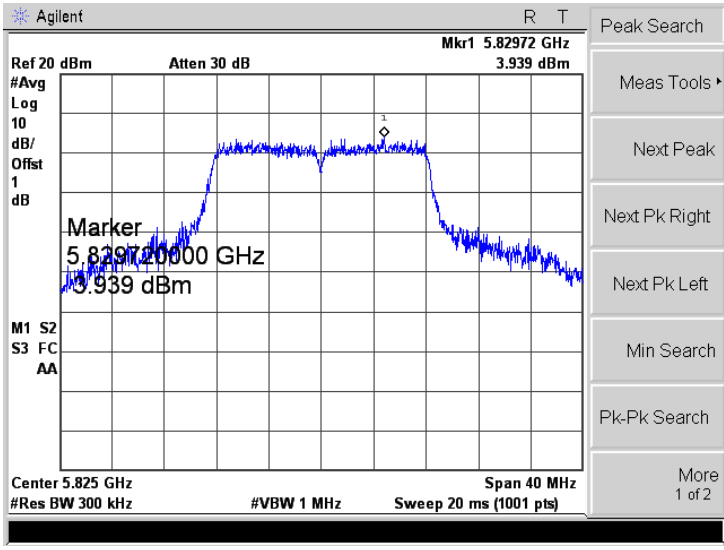
Mode:		802.11a
5745MHz		
5785MHz		
5825MHz		

**Mode:** 802.11n-HT20


5745MHz

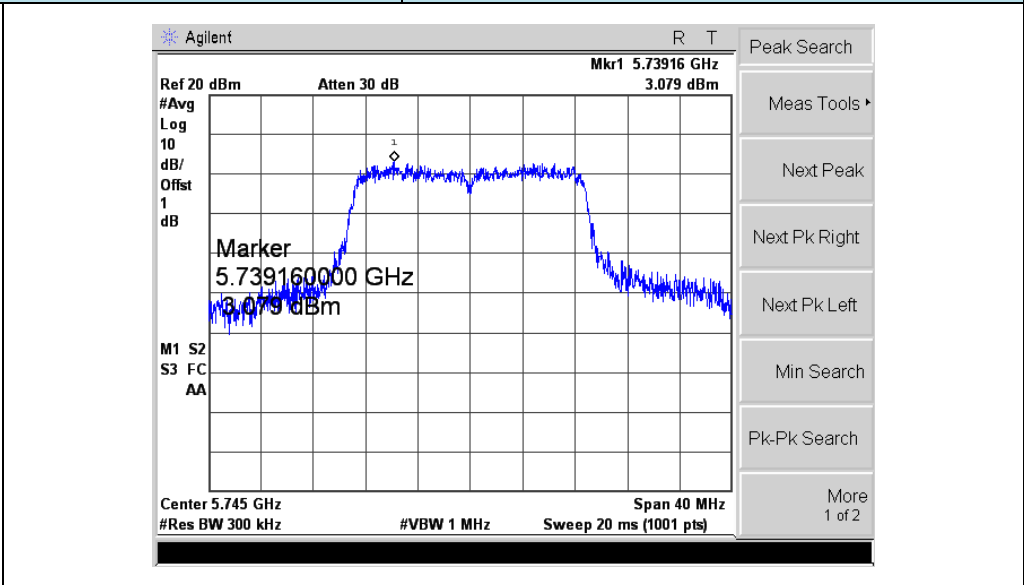

5785MHz

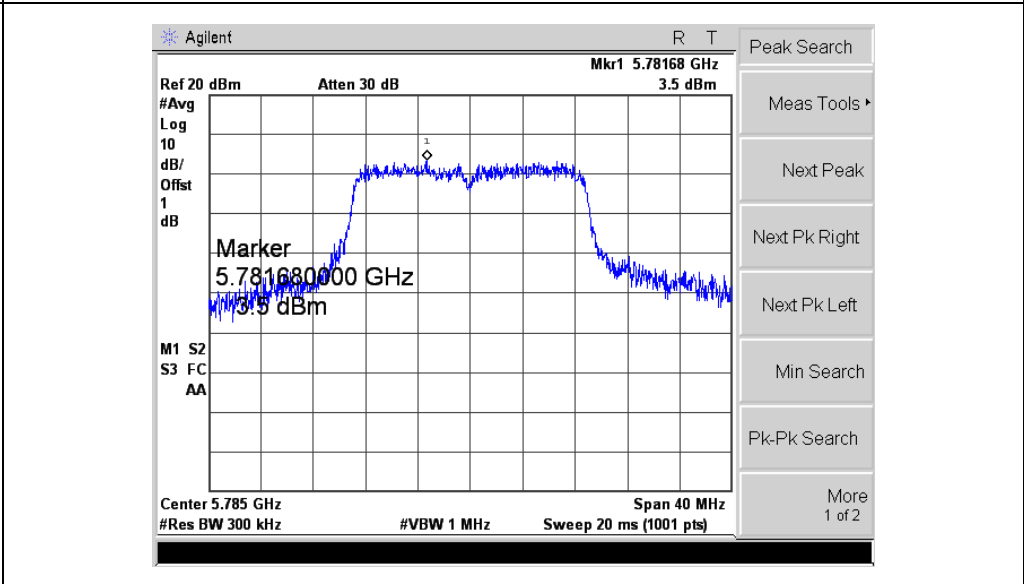


5825MHz

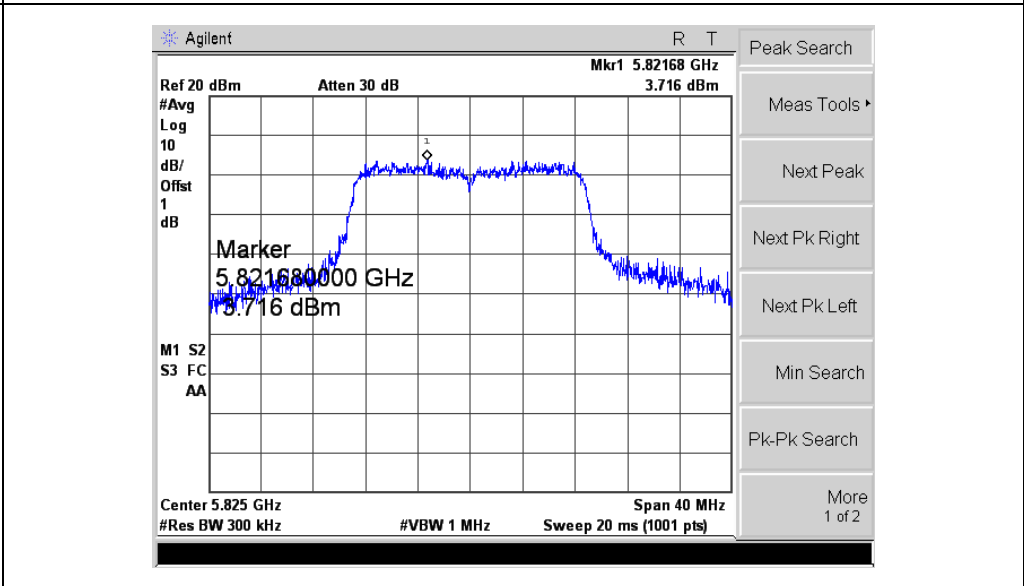



**Mode:** 802.11n-HT40

5755 MHz

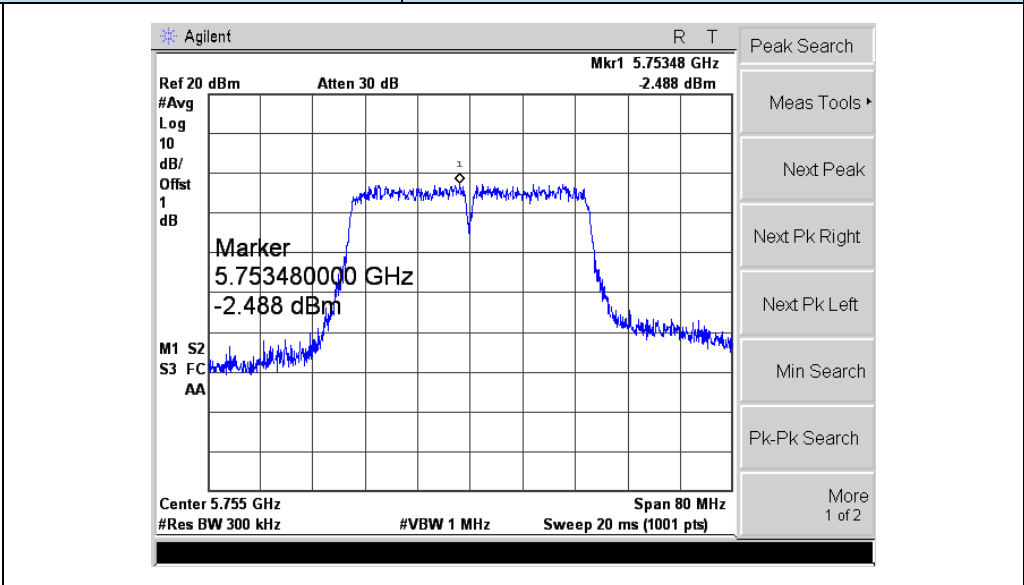

5795 MHz

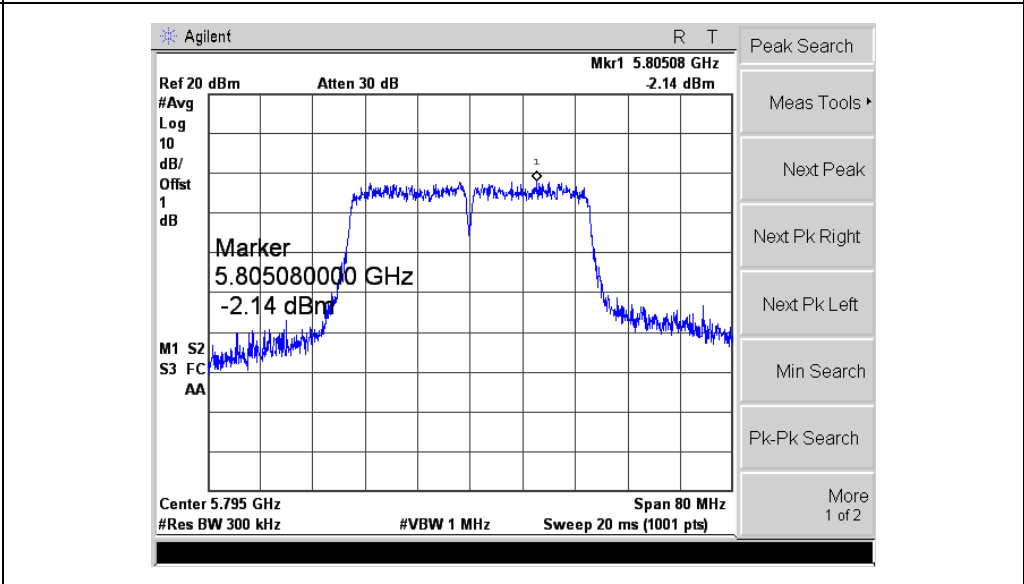

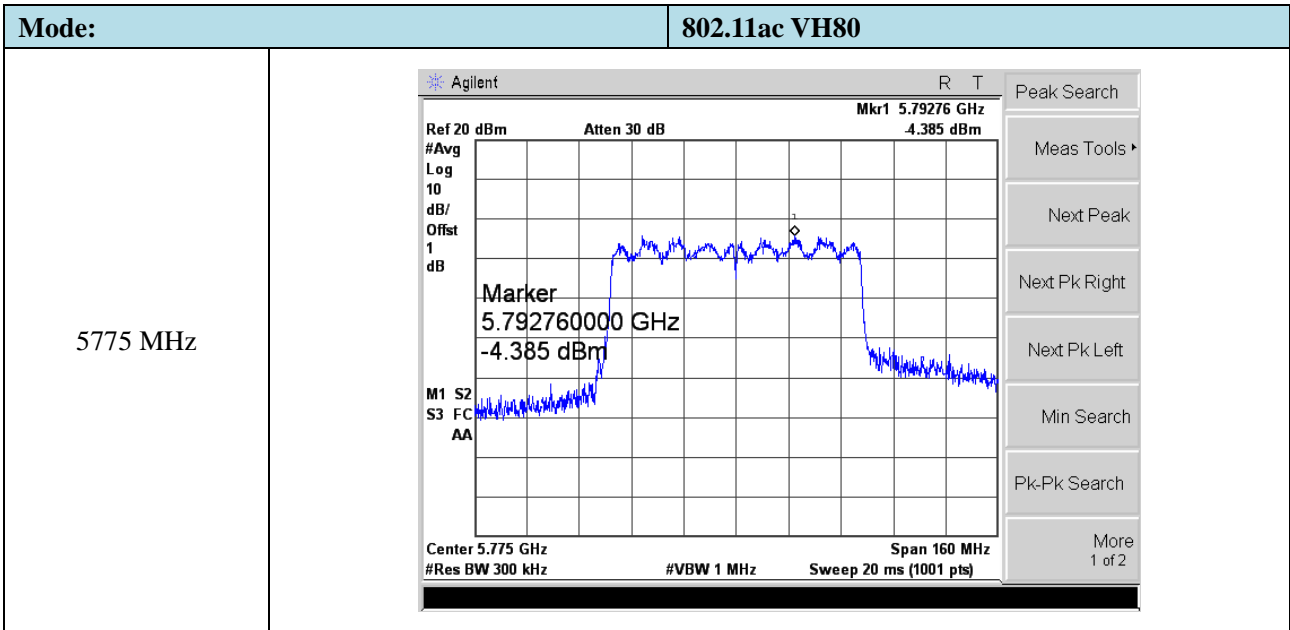

## 7. Emission Bandwidth and Occupied Bandwidth

---

### 7.1 Standard Applicable

According to 15.407 (a) and (e)

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### 7.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

a) Set RBW = approximately 1% of the emission bandwidth.

b) Set the VBW > RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare



this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

## 2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

## D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:




1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 * RBW$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.




### 7.3 Summary of Test Results/Plots



U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	21.417	16.7598	Pass
	5200	20.498	16.7212	Pass
	5240	20.718	16.7183	Pass
802.11n-HT20	5180	21.264	17.7158	Pass
	5200	21.490	17.7107	Pass
	5240	21.260	17.6801	Pass
802.11n-HT40	5190	42.371	36.3922	Pass
	5230	42.469	36.4239	Pass
802.11ac-HT80	5210	81.095	75.2250	Pass


U-NII-3: 5725-5850MHz				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	16.452	16.8162	$\geq 500$
	5785	16.465	16.9909	$\geq 500$
	5825	16.441	16.9522	$\geq 500$
802.11n-HT20	5745	17.583	17.9114	$\geq 500$
	5785	17.666	18.0759	$\geq 500$
	5825	17.625	17.8616	$\geq 500$
802.11n-HT40	5755	36.214	36.5137	$\geq 500$
	5795	36.267	36.5035	$\geq 500$
802.11ac VH80	5775	75.534	75.2361	$\geq 500$

➤ 5150-5250MHz

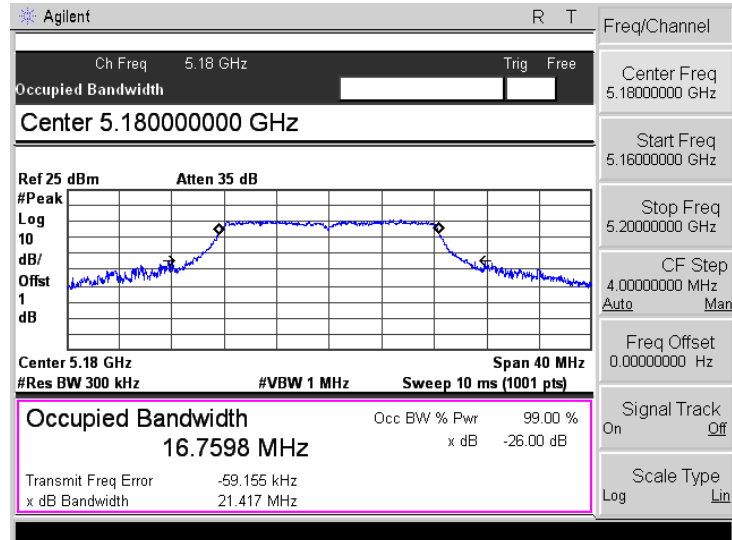
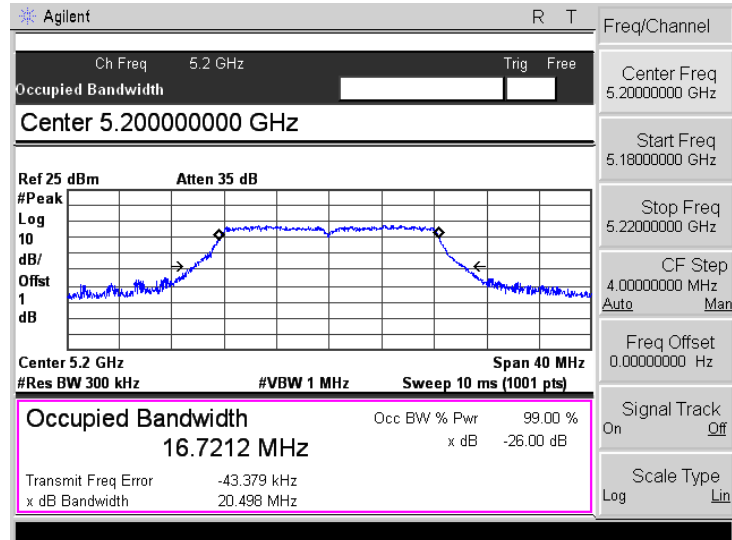
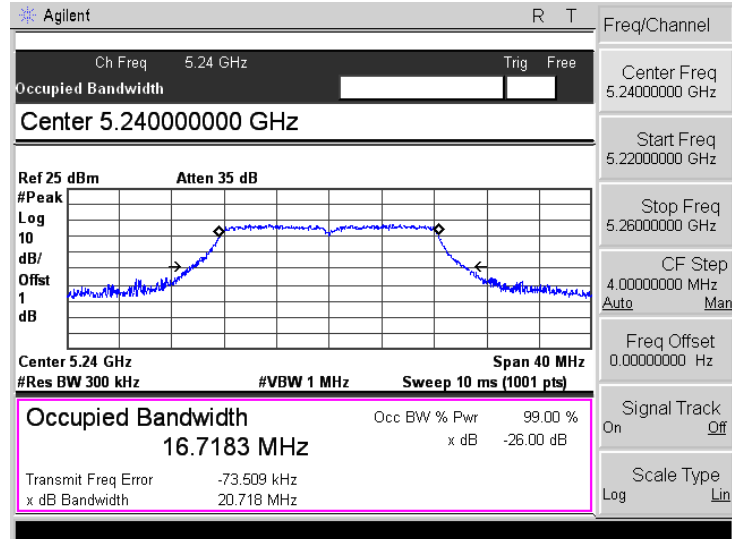
Mode:	802.11a
5180MHz	 <p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.18000000 GHz</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.7598 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -59.155 kHz x dB Bandwidth 21.417 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5200MHz	 <p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.20000000 GHz</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.7212 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -43.379 kHz x dB Bandwidth 20.498 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5240MHz	 <p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.24000000 GHz</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.7183 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -73.509 kHz x dB Bandwidth 20.718 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

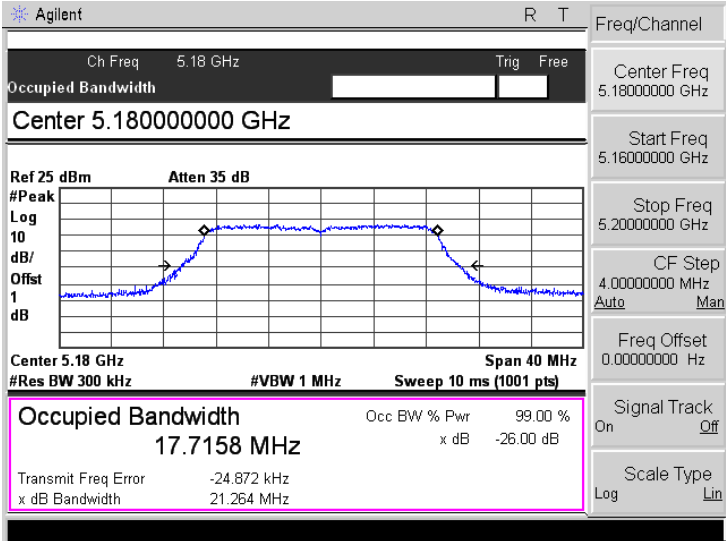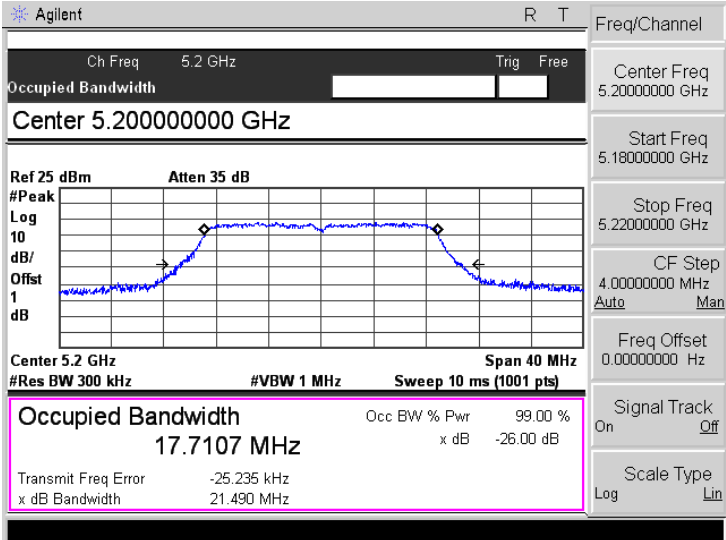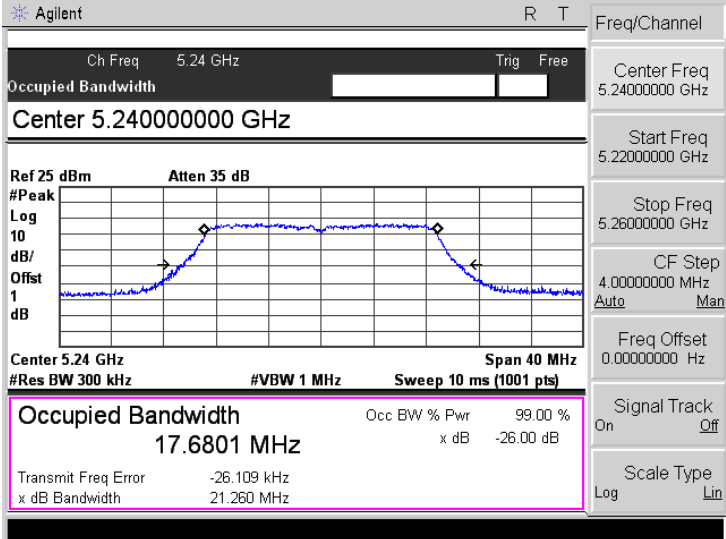Mode:	802.11n-HT20
5180MHz	 <p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.18000000 GHz</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Peak 10 dB/Offst 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.7158 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -24.872 kHz x dB Bandwidth 21.264 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5200MHz	 <p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.20000000 GHz</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Peak 10 dB/Offst 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.7107 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -25.235 kHz x dB Bandwidth 21.490 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5240MHz	 <p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.24000000 GHz</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Peak 10 dB/Offst 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.6801 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -26.109 kHz x dB Bandwidth 21.260 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
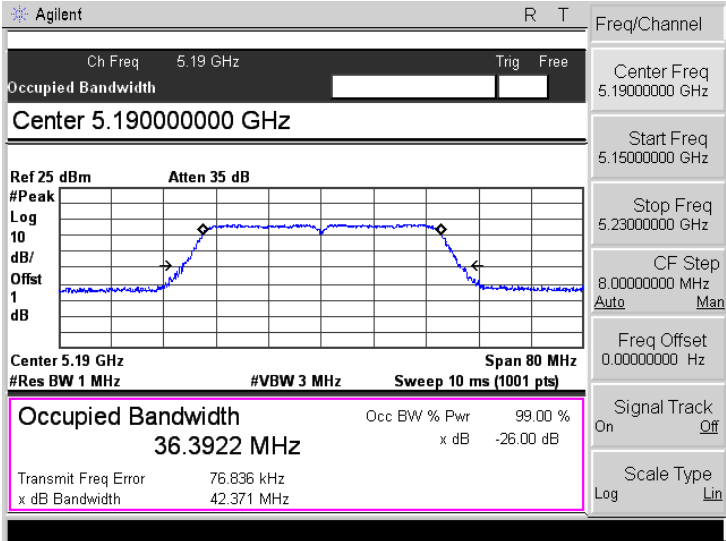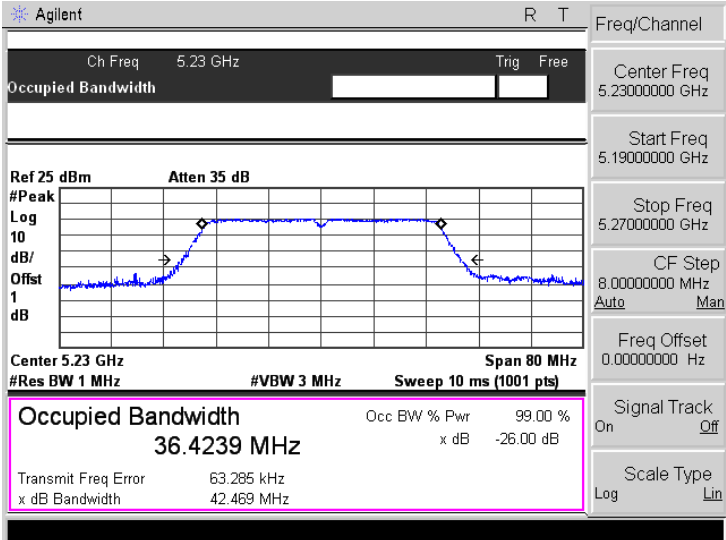
<p>Mode:</p>	<p>802.11n-HT40</p>
<p>5190 MHz</p>	
<p>5230 MHz</p>	

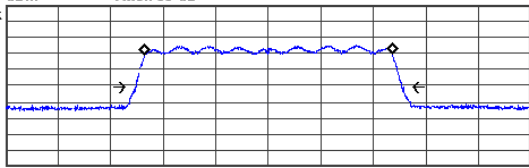
<b>Mode:</b>	<b>802.11ac VH80</b>
5210MHz	<div style="border: 1px solid gray; padding: 5px;"> <div style="display: flex; justify-content: space-between; border-bottom: 1px solid gray;"> <span>Agilent</span> <span>R T</span> </div> <div style="border-bottom: 1px solid gray; padding: 2px;"> <p style="font-size: small;">Ch Freq 5.21 GHz Trig Free</p> <p style="font-size: small;">Occupied Bandwidth</p> <p style="font-size: small;">Center 5.21000000 GHz</p> </div> <div style="display: flex; justify-content: space-between; padding: 2px;"> <div style="font-size: x-small;"> <p>Ref 25 dBm</p> <p>#Peak</p> <p>Log</p> <p>dB/</p> <p>Offst</p> <p>1</p> <p>dB</p> </div> <div style="text-align: center;"> <p>Atten 35 dB</p>  </div> <div style="font-size: x-small;"> <p>Center 5.21 GHz</p> <p>#Res BW 1 MHz</p> <p>#VBW 3 MHz</p> <p>Sweep 10 ms (1001 pts)</p> </div> <div style="font-size: x-small;"> <p>Span 160 MHz</p> </div> </div> <div style="border: 2px solid magenta; padding: 2px; margin: 2px;"> <p style="font-size: small; margin: 0;"><b>Occupied Bandwidth</b></p> <p style="font-size: small; margin: 0; text-align: center;"><b>75.2250 MHz</b></p> </div> <div style="font-size: x-small; margin-top: 2px;"> <p>Transmit Freq Error 90.716 kHz</p> <p>x dB Bandwidth 81.095 MHz</p> </div> <div style="font-size: x-small; margin-top: 2px;"> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> </div> </div> <div style="border-left: 1px solid gray; border-right: 1px solid gray; padding: 2px; font-size: x-small;"> <p>Freq/Channel</p> <p>Center Freq 5.21000000 GHz</p> <p>Start Freq 5.13000000 GHz</p> <p>Stop Freq 5.29000000 GHz</p> <p>CF Step 16.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p> </div>

➤ 5725-5850MHz

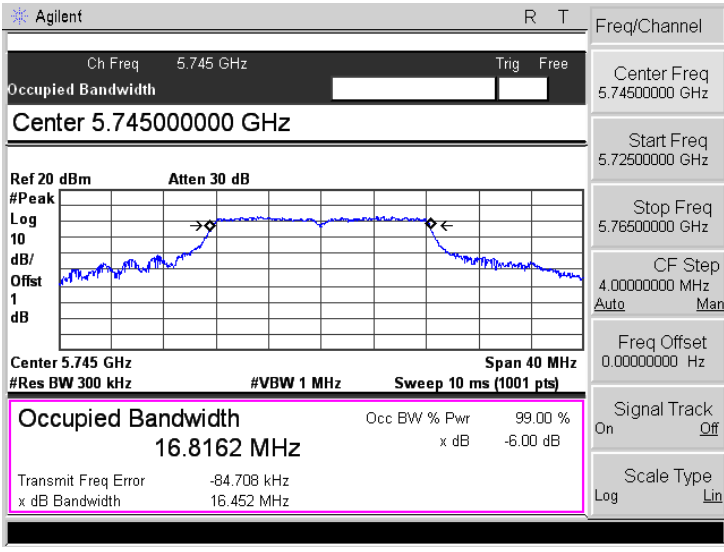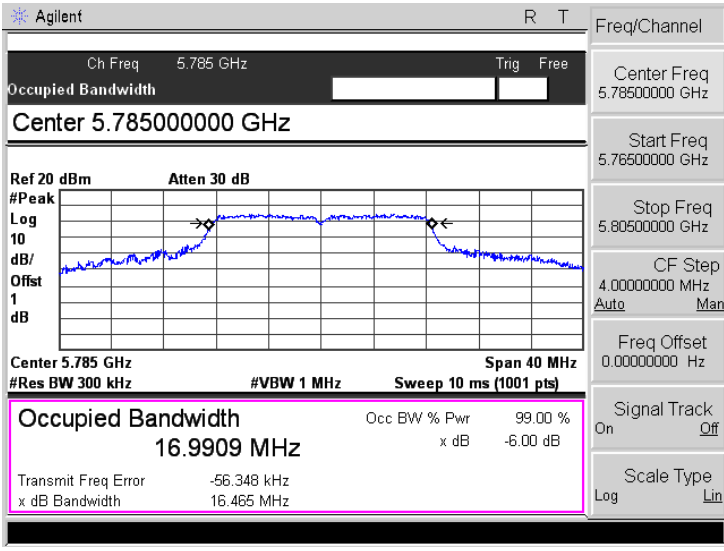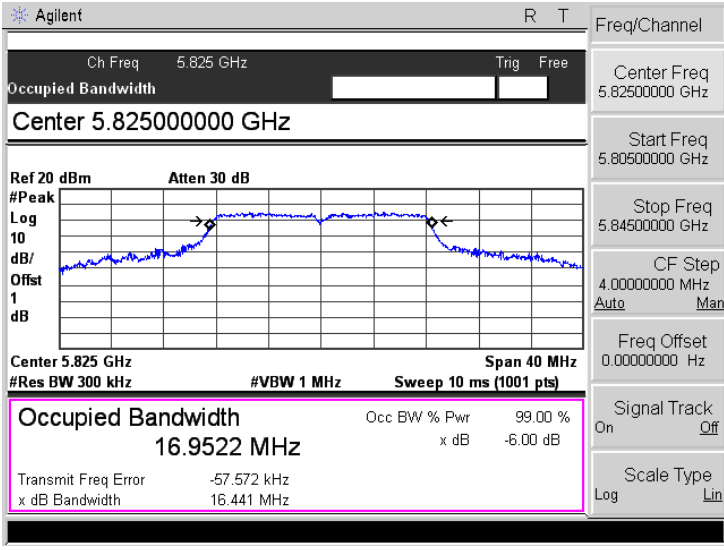
Mode:		802.11a
5745MHz		
5785MHz		
5825MHz		

**Mode:** 802.11n-HT20


5745MHz

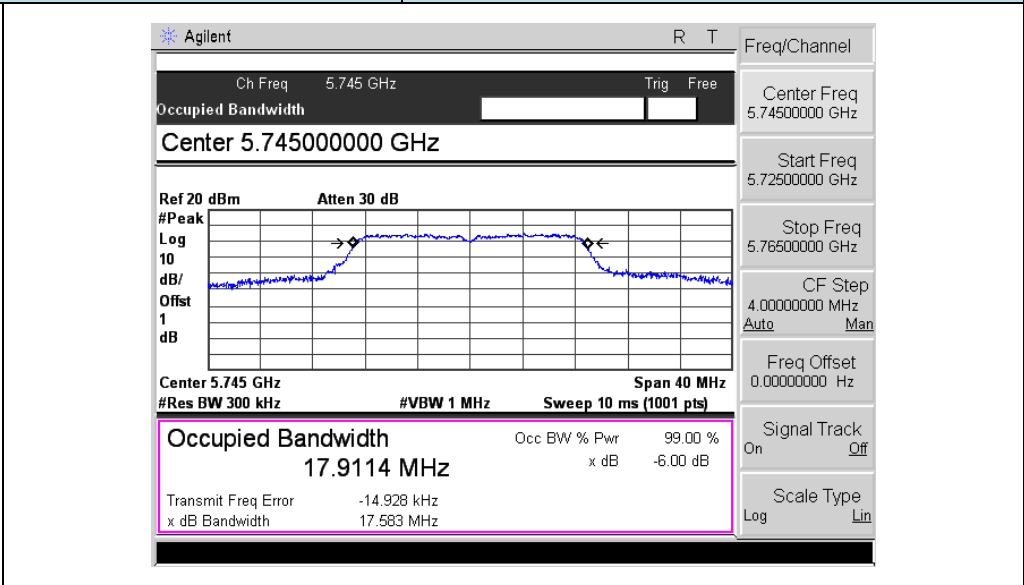

5785MHz

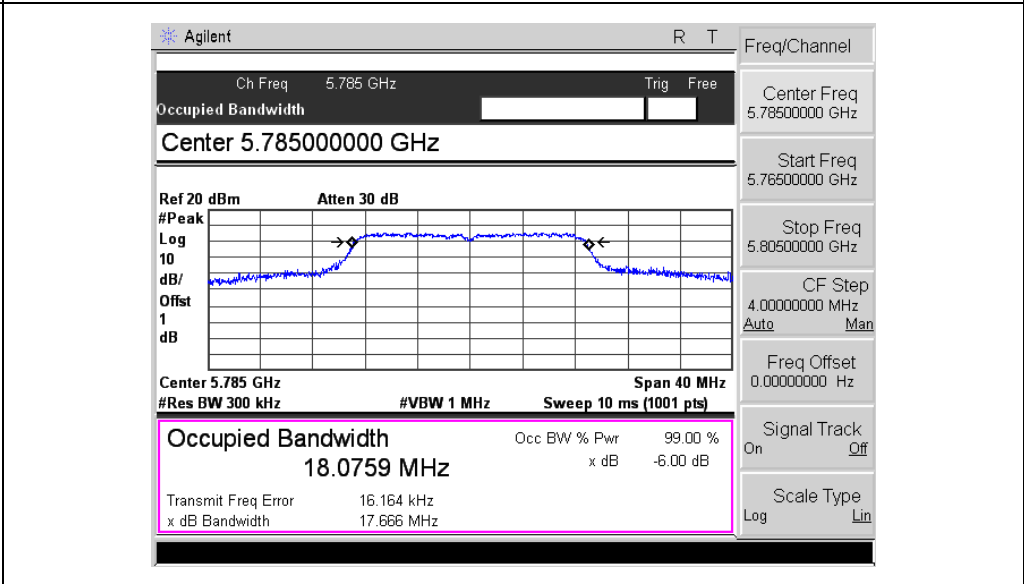


5825MHz

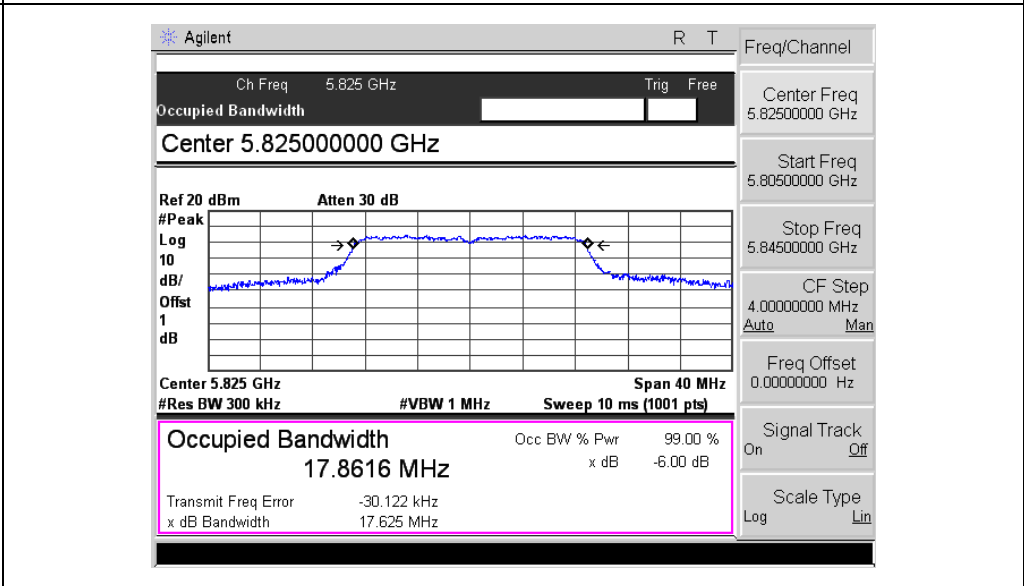





**Mode:** 802.11n-HT40

5755 MHz

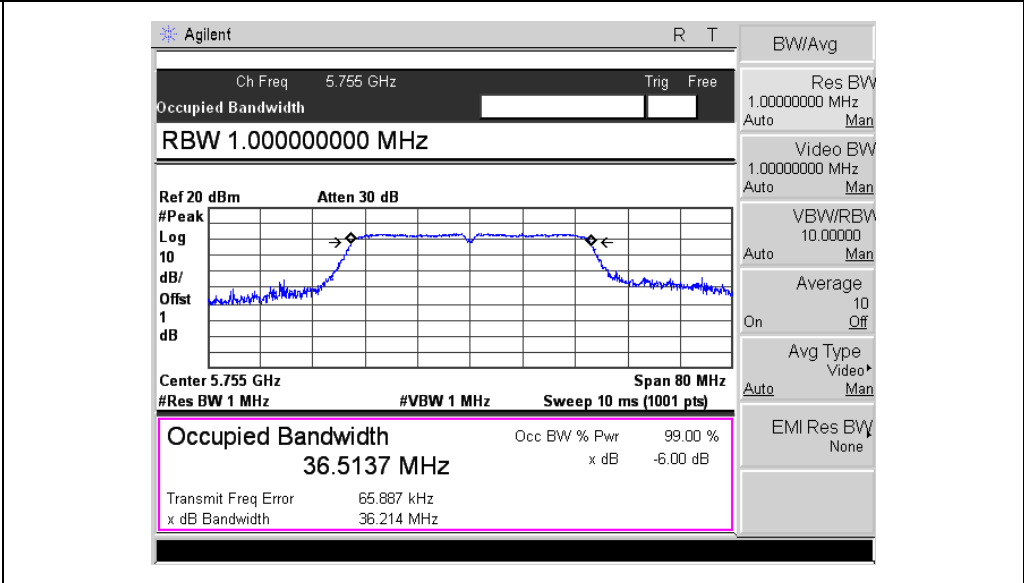

5795 MHz

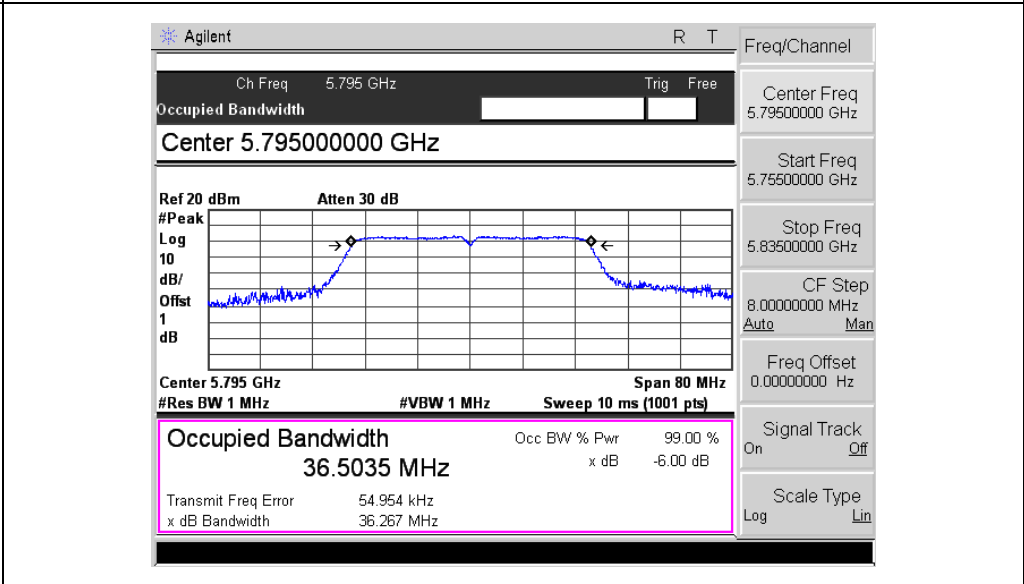
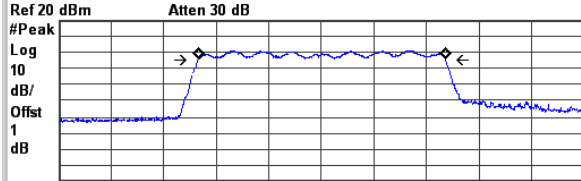
<b>Mode:</b>	<b>802.11ac VH80</b>																				
5775 MHz	<div style="border: 1px solid gray; padding: 5px;"> <div style="display: flex; justify-content: space-between; border-bottom: 1px solid gray;"> <span>Agilent</span> <span>R T</span> </div> <div style="border-bottom: 1px solid gray; padding: 5px;"> <p style="text-align: center;">Ch Freq 5.775 GHz    Trig Free</p> <p style="text-align: center;">Occupied Bandwidth</p> <p style="text-align: center; font-weight: bold;">Center 5.77500000 GHz</p> </div> <div style="border-bottom: 1px solid gray; padding: 5px;"> <p>Ref 20 dBm    Atten 30 dB</p>  </div> <div style="border-bottom: 1px solid gray; padding: 5px;"> <p style="text-align: center;">Center 5.775 GHz    Span 160 MHz</p> <p style="text-align: center;">#Res BW 1 MHz    #VBW 3 MHz    Sweep 10 ms (1001 pts)</p> </div> <div style="border: 2px solid magenta; padding: 5px;"> <p style="text-align: center; font-weight: bold; margin: 0;">Occupied Bandwidth</p> <p style="text-align: center; font-weight: bold; margin: 0;">75.2361 MHz</p> <table style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <tr> <td style="width: 50%;">Transmit Freq Error</td> <td style="width: 50%;">109.642 kHz</td> </tr> <tr> <td>x dB Bandwidth</td> <td>75.534 MHz</td> </tr> </table> </div> <div style="padding: 5px;"> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Freq/Channel</td> <td style="width: 50%;">Center Freq 5.77500000 GHz</td> </tr> <tr> <td>Start Freq</td> <td>5.69500000 GHz</td> </tr> <tr> <td>Stop Freq</td> <td>5.85500000 GHz</td> </tr> <tr> <td>CF Step</td> <td>16.00000000 MHz</td> </tr> <tr> <td>Auto</td> <td>Man</td> </tr> <tr> <td>Freq Offset</td> <td>0.00000000 Hz</td> </tr> <tr> <td>Signal Track</td> <td>On Off</td> </tr> <tr> <td>Scale Type</td> <td>Log Lin</td> </tr> </table> </div> </div>	Transmit Freq Error	109.642 kHz	x dB Bandwidth	75.534 MHz	Freq/Channel	Center Freq 5.77500000 GHz	Start Freq	5.69500000 GHz	Stop Freq	5.85500000 GHz	CF Step	16.00000000 MHz	Auto	Man	Freq Offset	0.00000000 Hz	Signal Track	On Off	Scale Type	Log Lin
Transmit Freq Error	109.642 kHz																				
x dB Bandwidth	75.534 MHz																				
Freq/Channel	Center Freq 5.77500000 GHz																				
Start Freq	5.69500000 GHz																				
Stop Freq	5.85500000 GHz																				
CF Step	16.00000000 MHz																				
Auto	Man																				
Freq Offset	0.00000000 Hz																				
Signal Track	On Off																				
Scale Type	Log Lin																				

---

## 8. Maximum Conducted Output Power

---

### 8.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 8.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW  $\geq$  3 MHz.
- (iv) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.




- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq$  98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

### 8.3 Summary of Test Results/Plots




<b>U-NII-1:5150-5250MHz</b>				
Test mode	Frequency MHz	Output Power dBm	Output Power mW	Limit mW
802.11a	5180	10.46	11.12	250
	5200	11.10	12.88	250
	5240	10.37	10.89	250
802.11n-HT20	5180	9.63	9.18	250
	5200	10.75	11.89	250
	5240	8.83	7.64	250
802.11n-HT40	5190	8.68	7.38	250
	5230	10.02	10.05	250
802.11ac VH80	5210	5.64	3.66	250



<b>U-NII-3: 5725-5850MHz</b>				
Test mode	Frequency MHz	Output Power dBm	Output Power mW	Limit mW
802.11a	5745	10.51	11.25	1000
	5785	12.35	17.18	1000
	5825	12.43	17.50	1000
802.11n-HT20	5745	12.22	16.67	1000
	5785	12.36	17.22	1000
	5825	12.86	19.32	1000
802.11n-HT40	5755	8.67	7.36	1000
	5795	8.39	6.90	1000
802.11ac VH80	5775	8.94	7.83	1000


➤ 5150-5250MHz

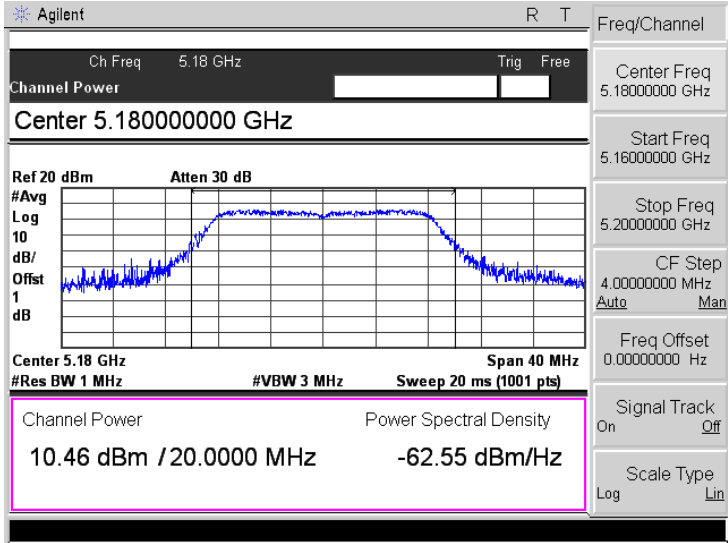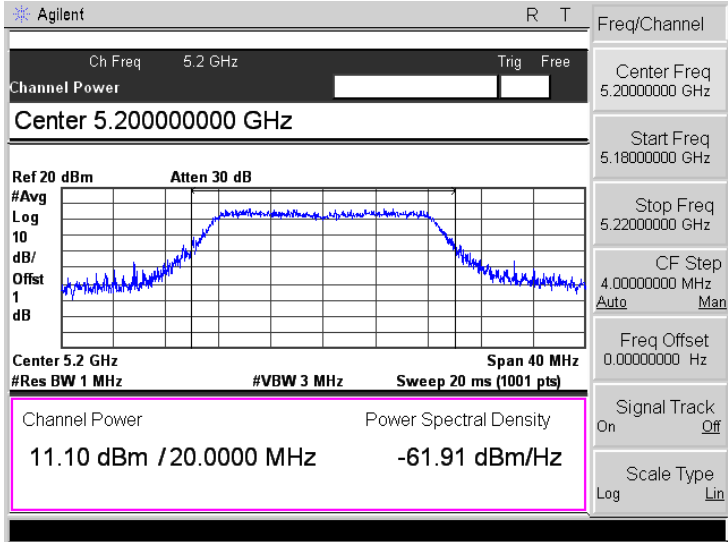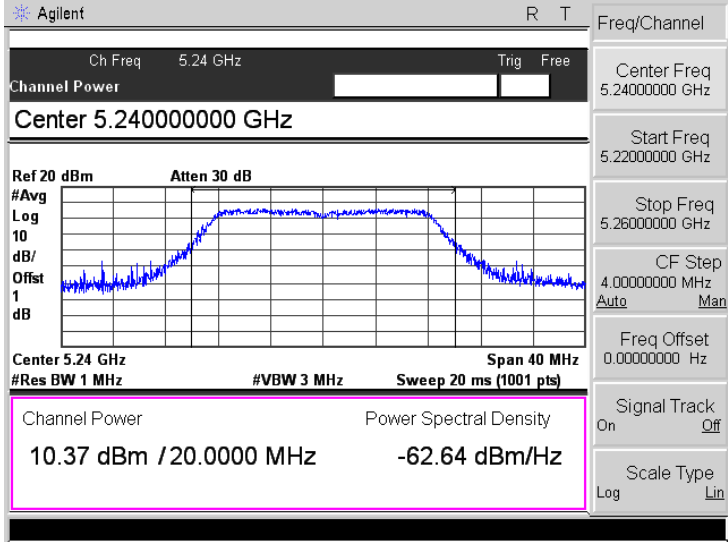Mode:		802.11a
5180MHz	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.18000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>10.46 dBm / 20.0000 MHz -62.55 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	
5200MHz	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>11.10 dBm / 20.0000 MHz -61.91 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	
5240MHz	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>10.37 dBm / 20.0000 MHz -62.64 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	

<b>Mode:</b>	<b>802.11n-HT20</b>
--------------	---------------------

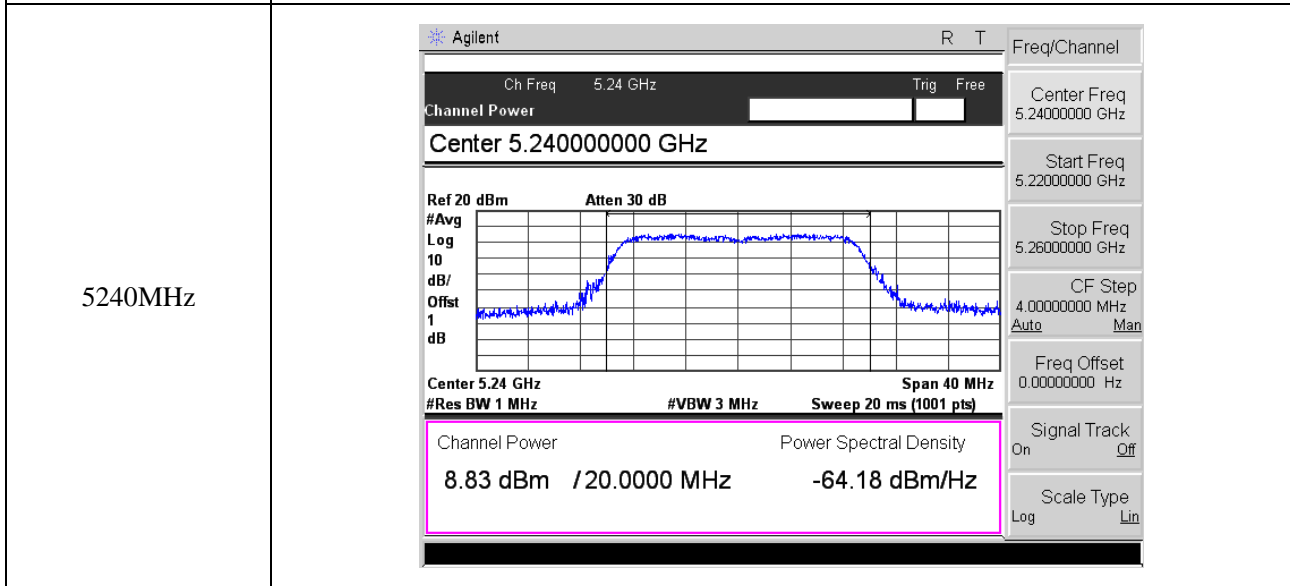
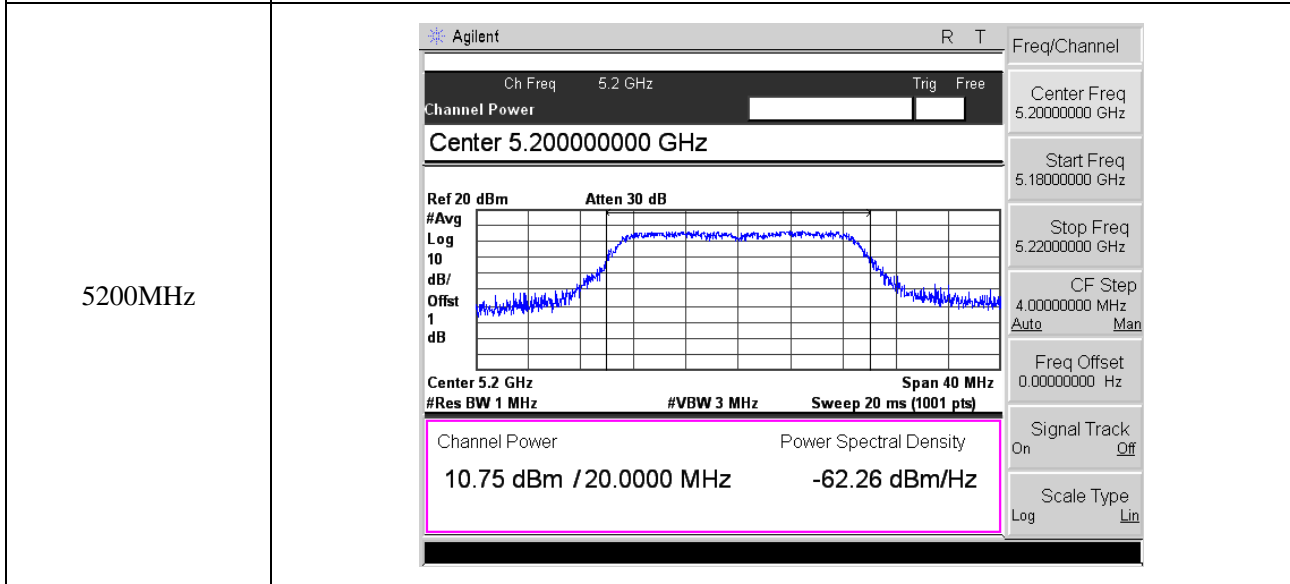
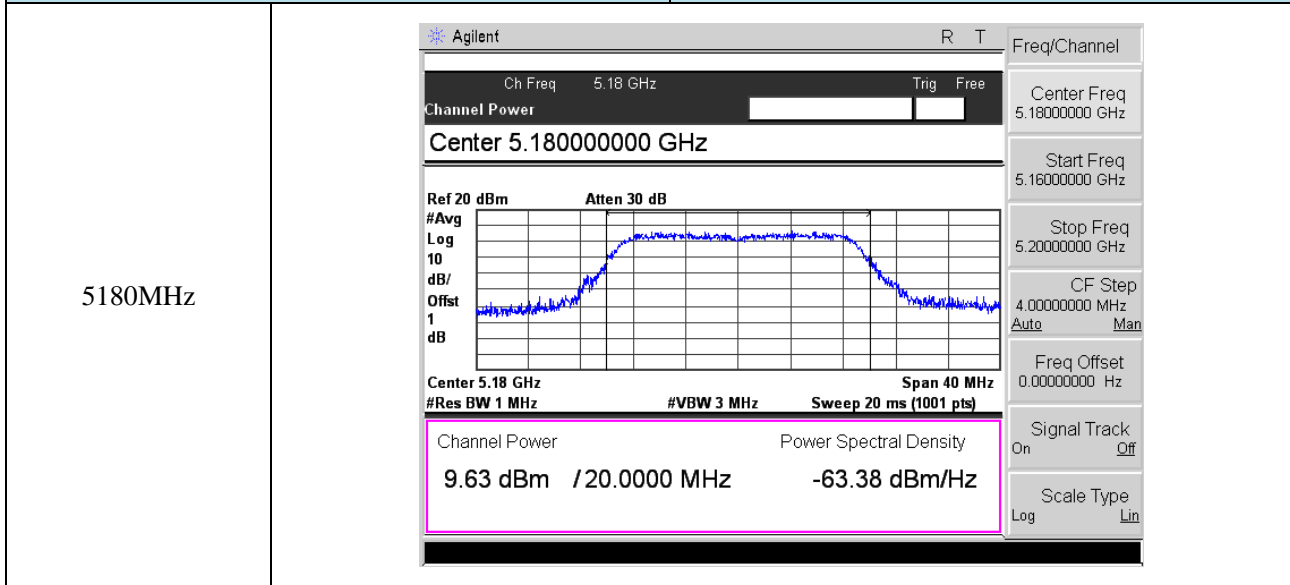



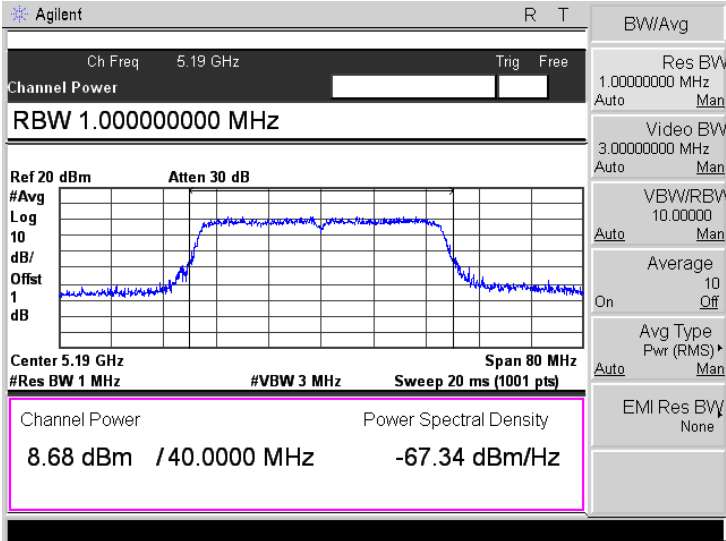
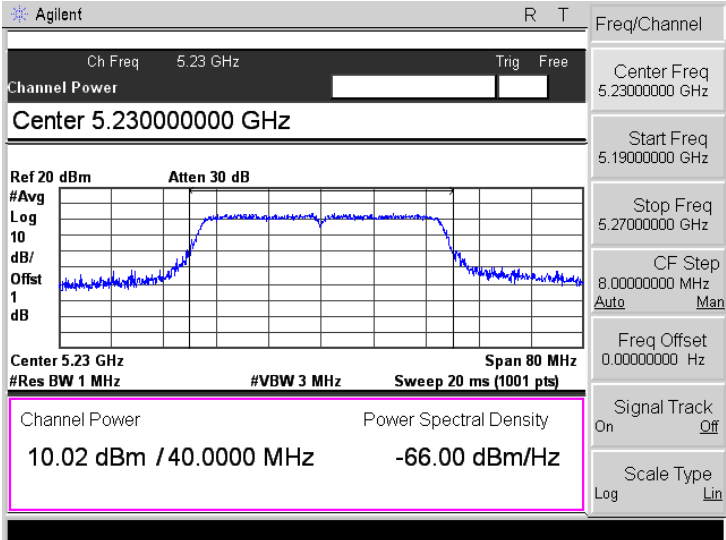
<p>Mode:</p>	<p>802.11n-HT40</p>
<p>5190 MHz</p>	 <p>Agilent R T</p> <p>Ch Freq 5.19 GHz Trig Free</p> <p>Channel Power <input type="text"/> <input type="text"/></p> <p>RBW 1.000000000 MHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log dB/ Offst dB</p> <p>Center 5.19 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>8.68 dBm / 40.0000 MHz -67.34 dBm/Hz</p> <p>BW/Avg</p> <p>Res BW 1.00000000 MHz Auto Man</p> <p>Video BW 3.00000000 MHz Auto Man</p> <p>VBW/RBW 10.00000 Auto Man</p> <p>Average 10 On Off</p> <p>Avg Type Pwr (RMS) Auto Man</p> <p>EMI Res BW None</p>
<p>5230 MHz</p>	 <p>Agilent R T</p> <p>Ch Freq 5.23 GHz Trig Free</p> <p>Channel Power <input type="text"/> <input type="text"/></p> <p>Center 5.230000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log dB/ Offst dB</p> <p>Center 5.23 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>10.02 dBm / 40.0000 MHz -66.00 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.23000000 GHz</p> <p>Start Freq 5.19000000 GHz</p> <p>Stop Freq 5.27000000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>


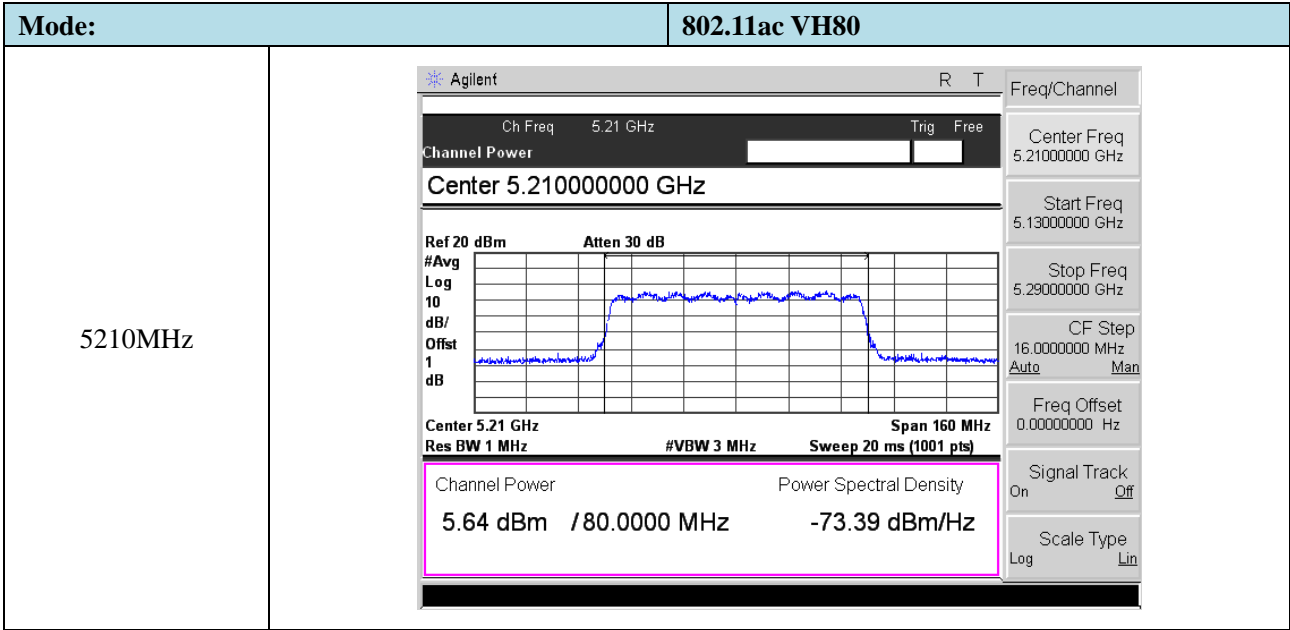




➤ 5725-5850MHz

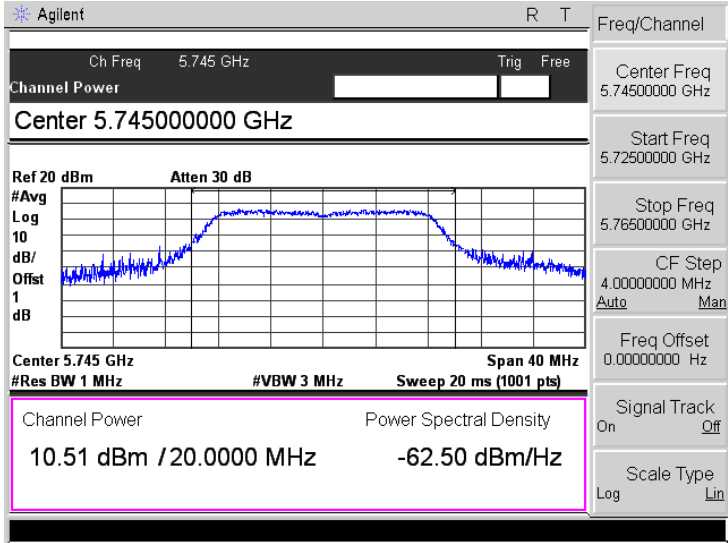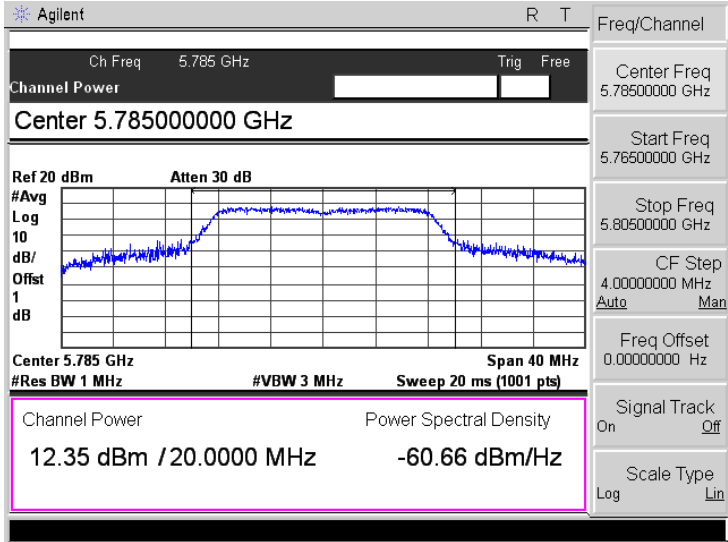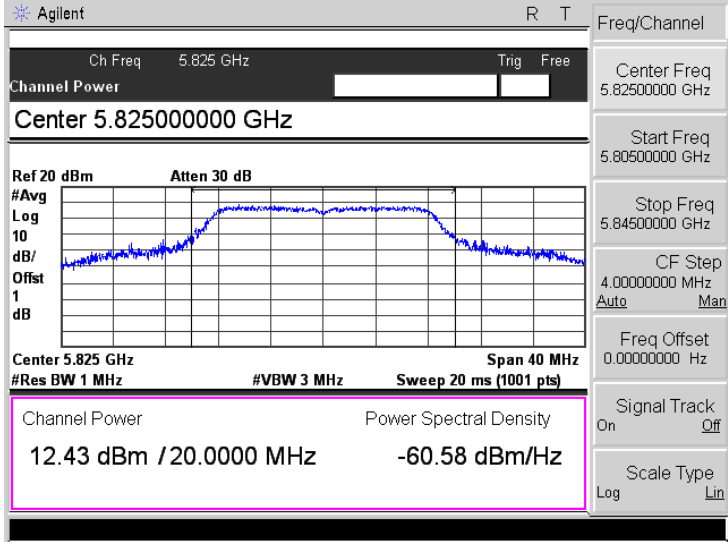Mode:		802.11a
5745MHz		
5785MHz		
5825MHz		

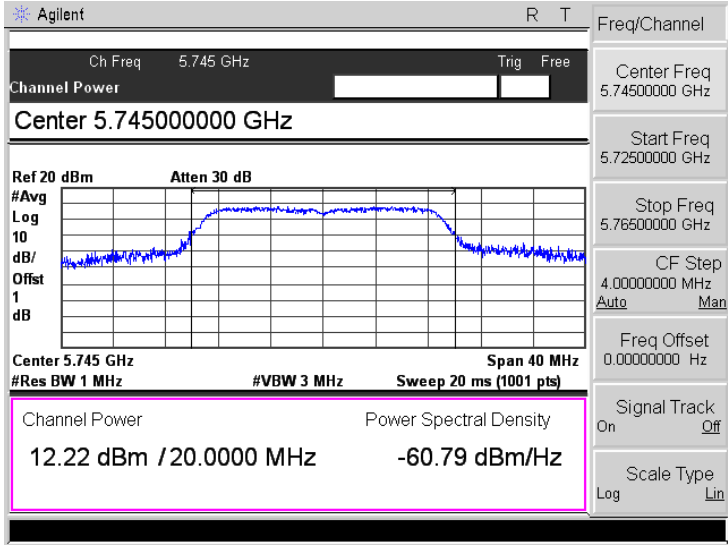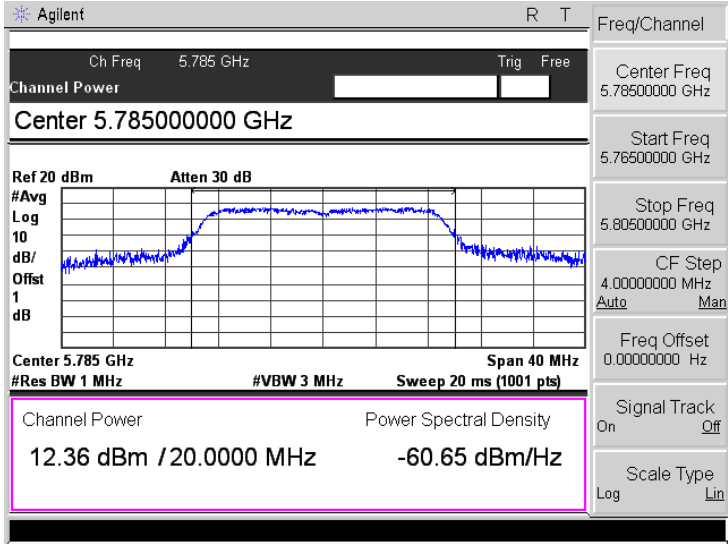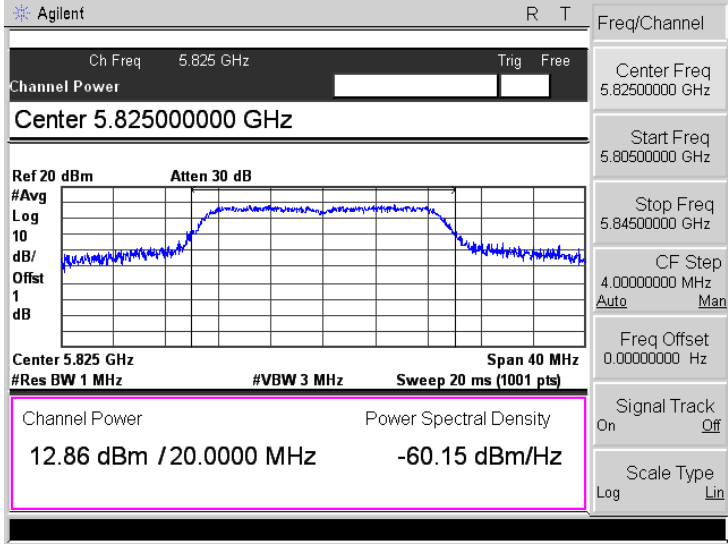Mode:		802.11n-HT20
5745MHz		
5785MHz		
5825MHz		

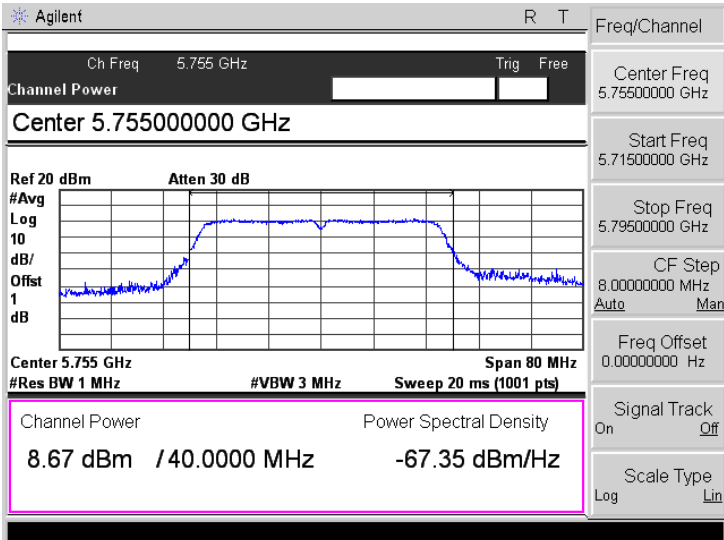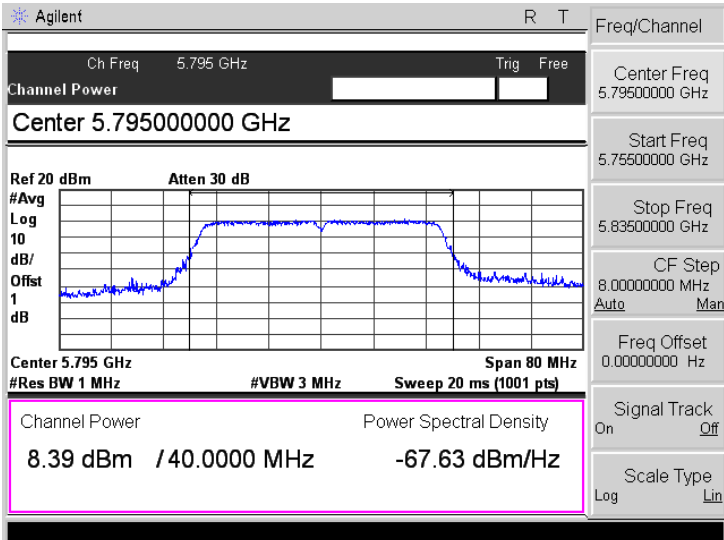Mode:		802.11n-HT40
5755 MHz		
5795 MHz		

<b>Mode:</b>	<b>802.11ac VH80</b>																						
5775 MHz	<div style="border: 1px solid #ccc; padding: 5px;"> <div style="display: flex; justify-content: space-between; border-bottom: 1px solid #ccc; margin-bottom: 5px;"> <span>Agilent</span> <span>R T</span> </div> <div style="display: flex; justify-content: space-between; border-bottom: 1px solid #ccc; margin-bottom: 5px;"> <span>Ch Freq 5.775 GHz</span> <span>Trig Free</span> </div> <div style="display: flex; justify-content: space-between; border-bottom: 1px solid #ccc; margin-bottom: 5px;"> <span>Channel Power</span> <span></span> </div> <div style="border-bottom: 1px solid #ccc; margin-bottom: 5px;"> <p style="margin: 0;">Integration BW 80.0000 MHz</p> </div> <div style="display: flex; justify-content: space-between; border-bottom: 1px solid #ccc; margin-bottom: 5px;"> <span>Ref 20 dBm</span> <span>Atten 30 dB</span> </div> <div style="border-bottom: 1px solid #ccc; margin-bottom: 5px;"> <p style="margin: 0;">#Avg 10</p> <p style="margin: 0;">Log dB/</p> <p style="margin: 0;">Ofst 1</p> <p style="margin: 0;">dB</p> </div> <div style="display: flex; justify-content: space-between; border-bottom: 1px solid #ccc; margin-bottom: 5px;"> <span>Center 5.775 GHz</span> <span>Span 160 MHz</span> </div> <div style="display: flex; justify-content: space-between; border-bottom: 1px solid #ccc; margin-bottom: 5px;"> <span>#Res BW 1 MHz</span> <span>#VBW 3 MHz</span> <span>Sweep 20 ms (1001 pts)</span> </div> <div style="border: 2px solid #ff00ff; padding: 5px; margin-bottom: 5px;"> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Channel Power</td> <td style="width: 50%;">Power Spectral Density</td> </tr> <tr> <td style="text-align: center;">8.94 dBm / 80.0000 MHz</td> <td style="text-align: center;">-70.10 dBm/Hz</td> </tr> </table> </div> </div> <div style="border: 1px solid #ccc; padding: 5px; margin-top: 5px;"> <table style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="padding: 2px;">Meas Setup</td> </tr> <tr> <td style="padding: 2px;">Avg Number</td> <td style="text-align: right; padding: 2px;">10</td> </tr> <tr> <td style="padding: 2px;">On</td> <td style="text-align: right; padding: 2px;">Off</td> </tr> <tr> <td style="padding: 2px;">Avg Mode</td> <td style="text-align: right; padding: 2px;">Repeat</td> </tr> <tr> <td style="padding: 2px;">Exp</td> <td style="padding: 2px;"></td> </tr> <tr> <td style="padding: 2px;">Integ BW</td> <td style="text-align: right; padding: 2px;">80.0000 MHz</td> </tr> <tr> <td style="padding: 2px;">Chan Pwr Span</td> <td style="text-align: right; padding: 2px;">160.000000 MHz</td> </tr> <tr> <td colspan="2" style="padding: 2px;">Optimize Ref Level</td> </tr> <tr> <td colspan="2" style="padding: 2px;">More 1 of 2</td> </tr> </table> </div>	Channel Power	Power Spectral Density	8.94 dBm / 80.0000 MHz	-70.10 dBm/Hz	Meas Setup		Avg Number	10	On	Off	Avg Mode	Repeat	Exp		Integ BW	80.0000 MHz	Chan Pwr Span	160.000000 MHz	Optimize Ref Level		More 1 of 2	
Channel Power	Power Spectral Density																						
8.94 dBm / 80.0000 MHz	-70.10 dBm/Hz																						
Meas Setup																							
Avg Number	10																						
On	Off																						
Avg Mode	Repeat																						
Exp																							
Integ BW	80.0000 MHz																						
Chan Pwr Span	160.000000 MHz																						
Optimize Ref Level																							
More 1 of 2																							

## 9. Radiated Spurious Emissions

---

### 9.1 Standard Applicable

According to §15.407(b), Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.  
789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E*d)^2) / 30$$

where:



- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

### 9.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

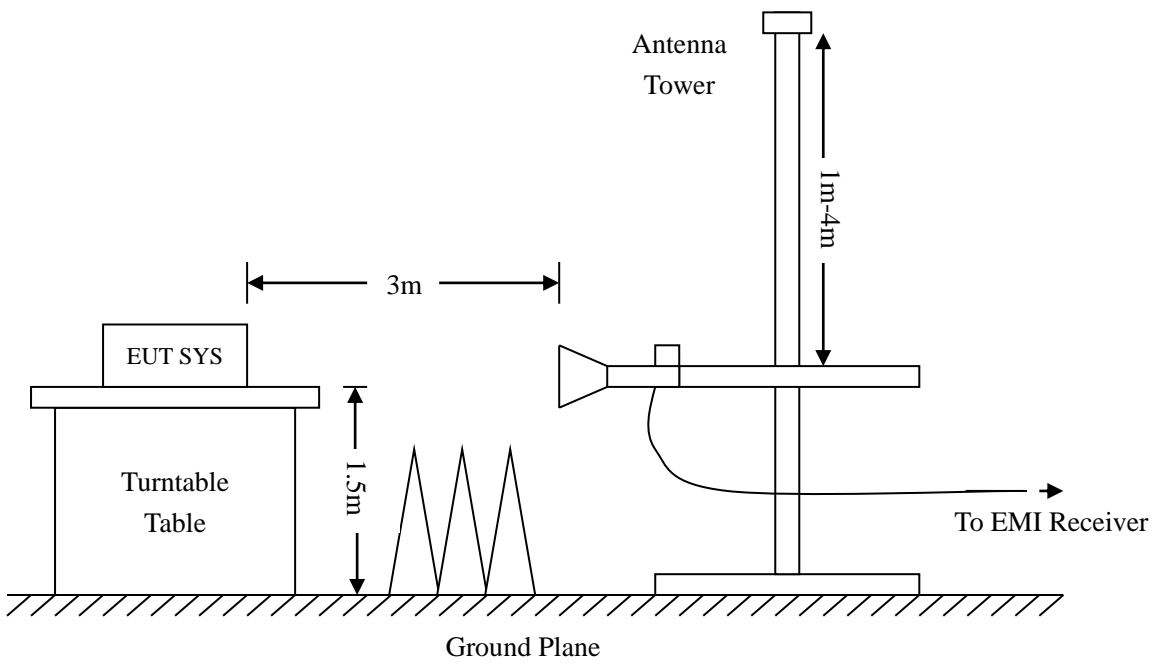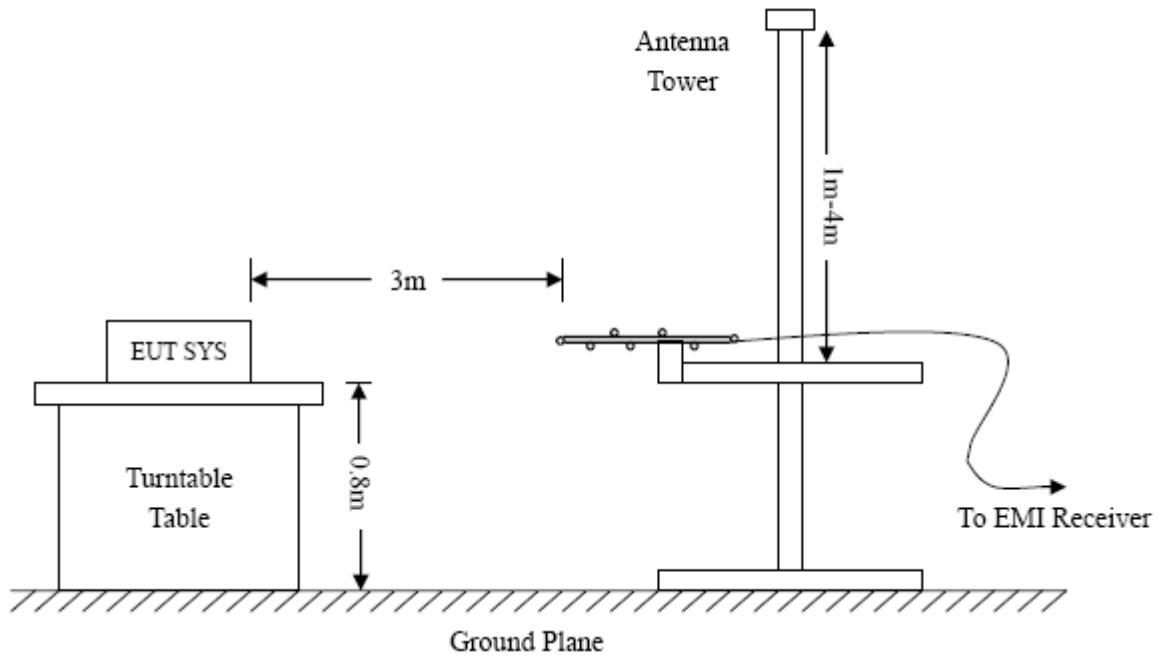

### 9.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

### 9.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 9.5 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

- Spurious Emission From 30 MHz to 1 GHz
- 5150-5250MHz


802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Horizontal

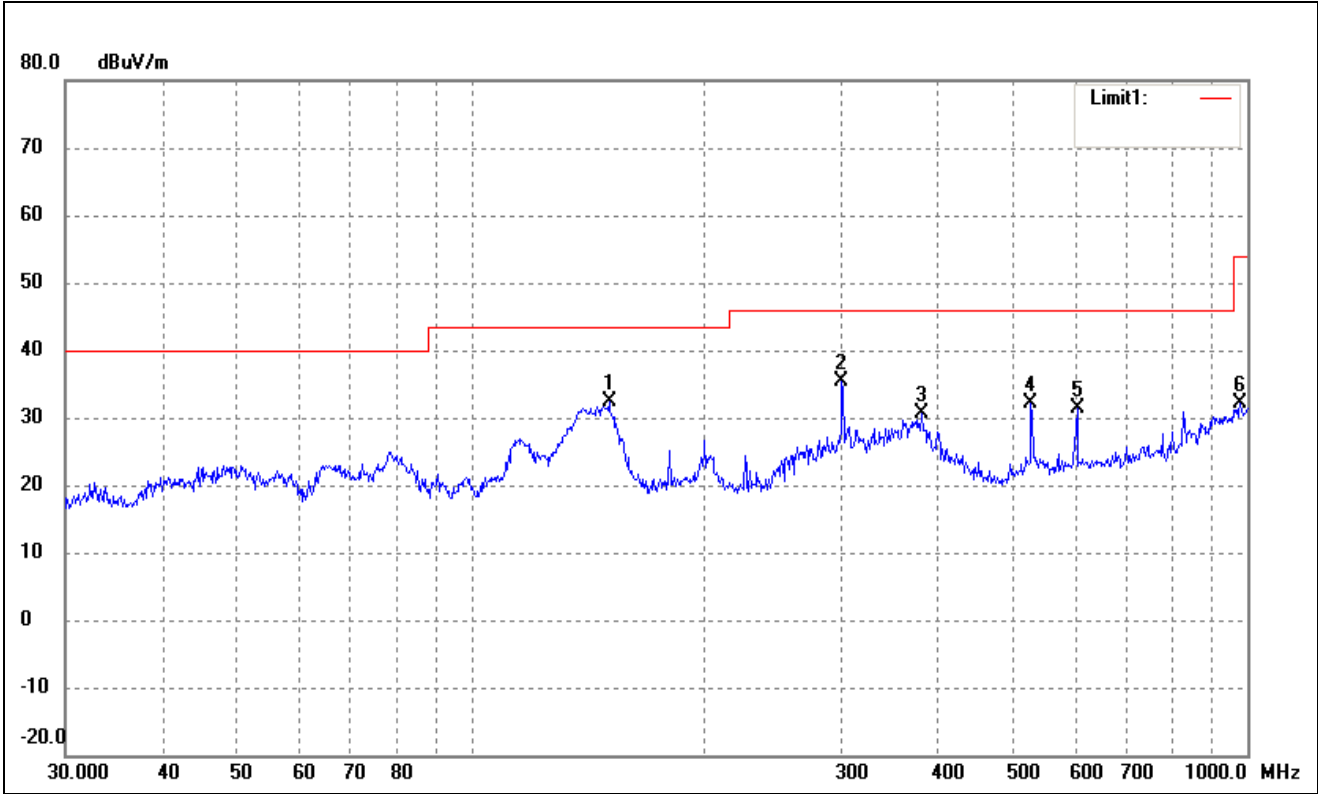

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Detector
1	150.5378	49.22	-16.73	32.49	43.50	-11.01	55	100	peak
2*	300.3672	42.81	-7.44	35.37	46.00	-10.63	161	100	peak
3	381.2485	37.15	-6.60	30.55	46.00	-15.45	83	100	peak
4	526.3967	37.80	-5.62	32.18	46.00	-13.82	118	100	peak
5	603.5392	35.21	-3.95	31.26	46.00	-14.74	304	100	peak
6	979.1803	28.53	3.69	32.22	54.00	-21.78	302	100	peak




802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Vertical

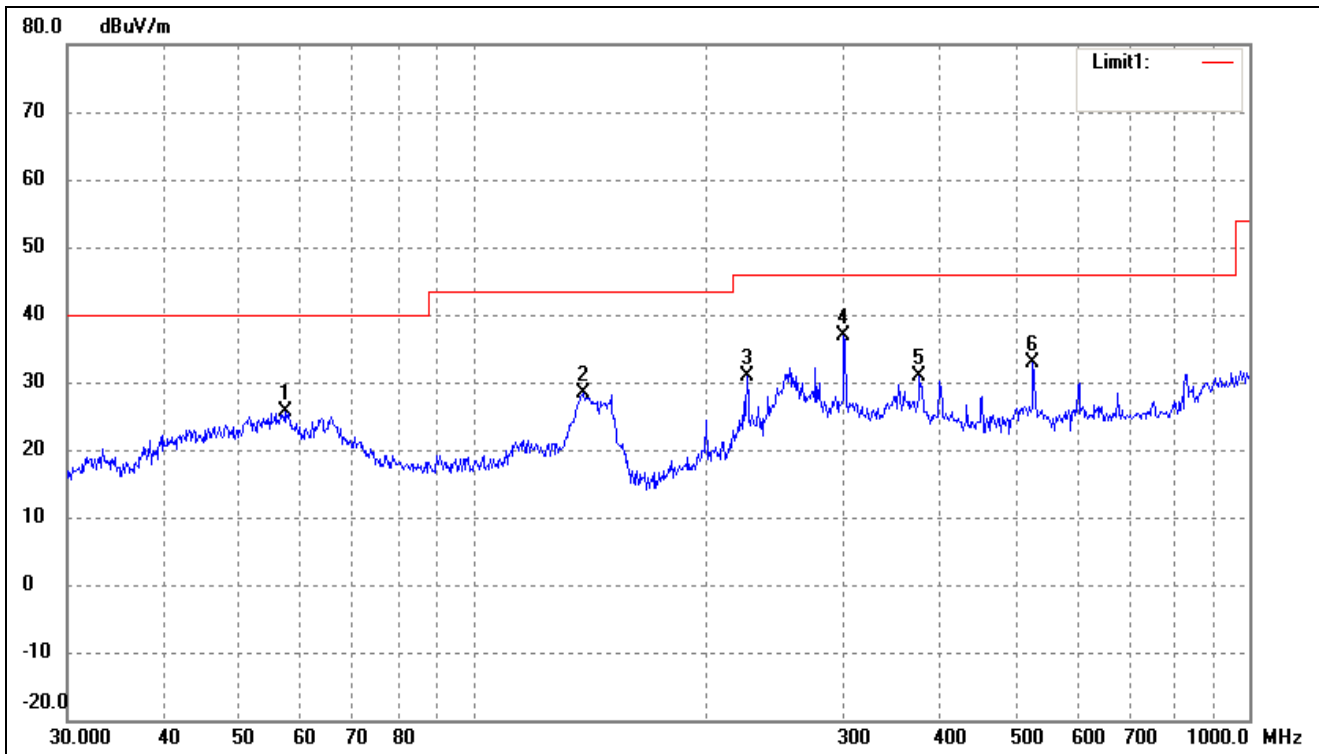


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Detector
1	57.1914	39.51	-13.92	25.59	40.00	-14.41	59	100	peak
2	138.8735	45.31	-16.99	28.32	43.50	-15.18	256	100	peak
3	225.3079	41.97	-11.16	30.81	46.00	-15.19	80	100	peak
4*	300.3672	44.35	-7.44	36.91	46.00	-9.09	248	100	peak
5	375.9384	37.75	-6.76	30.99	46.00	-15.01	175	100	peak
6	526.3967	38.40	-5.62	32.78	46.00	-13.22	292	100	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

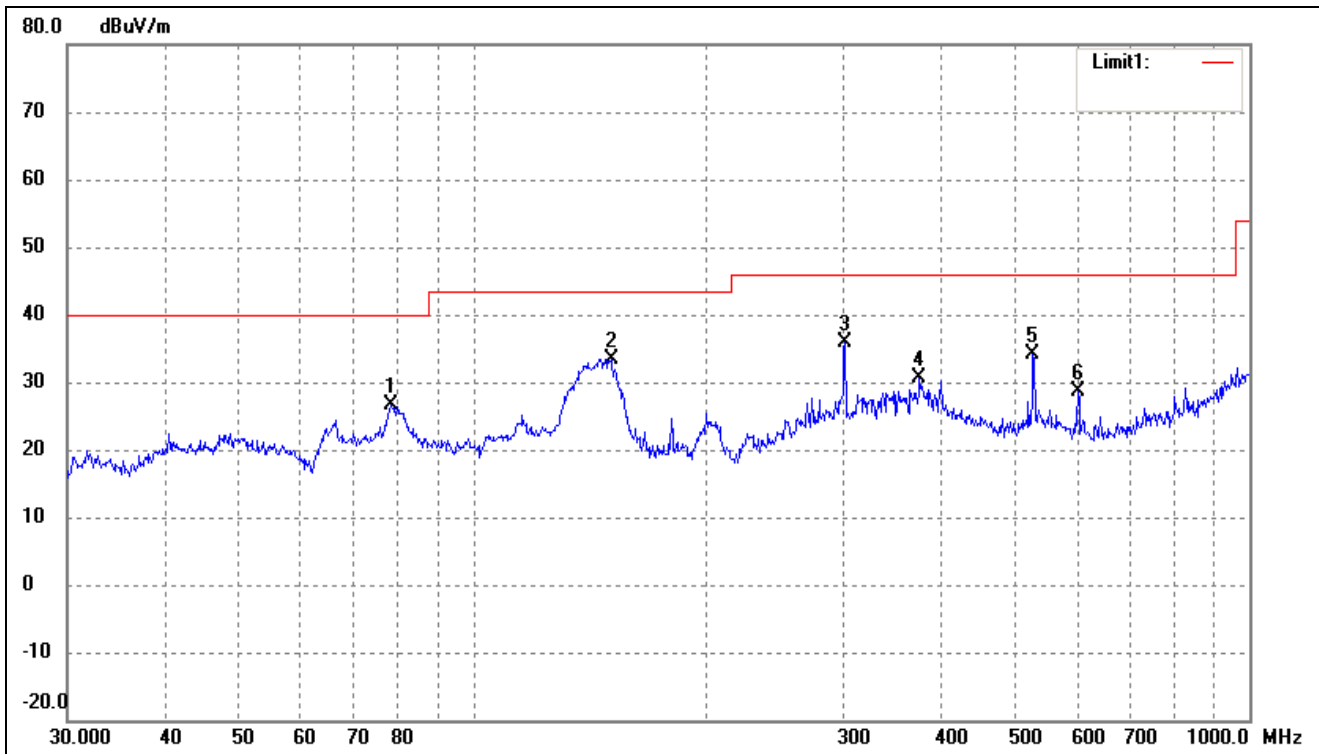


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Detector
1	78.4133	45.30	-18.75	26.55	40.00	-13.45	204	100	peak
2*	150.5378	50.22	-16.73	33.49	43.50	-10.01	94	100	peak
3	301.4223	43.39	-7.40	35.99	46.00	-10.01	60	100	peak
4	375.9384	37.48	-6.76	30.72	46.00	-15.28	121	100	peak
5	526.3967	39.68	-5.62	34.06	46.00	-11.94	297	100	peak
6	601.4265	32.51	-3.98	28.53	46.00	-17.47	176	100	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

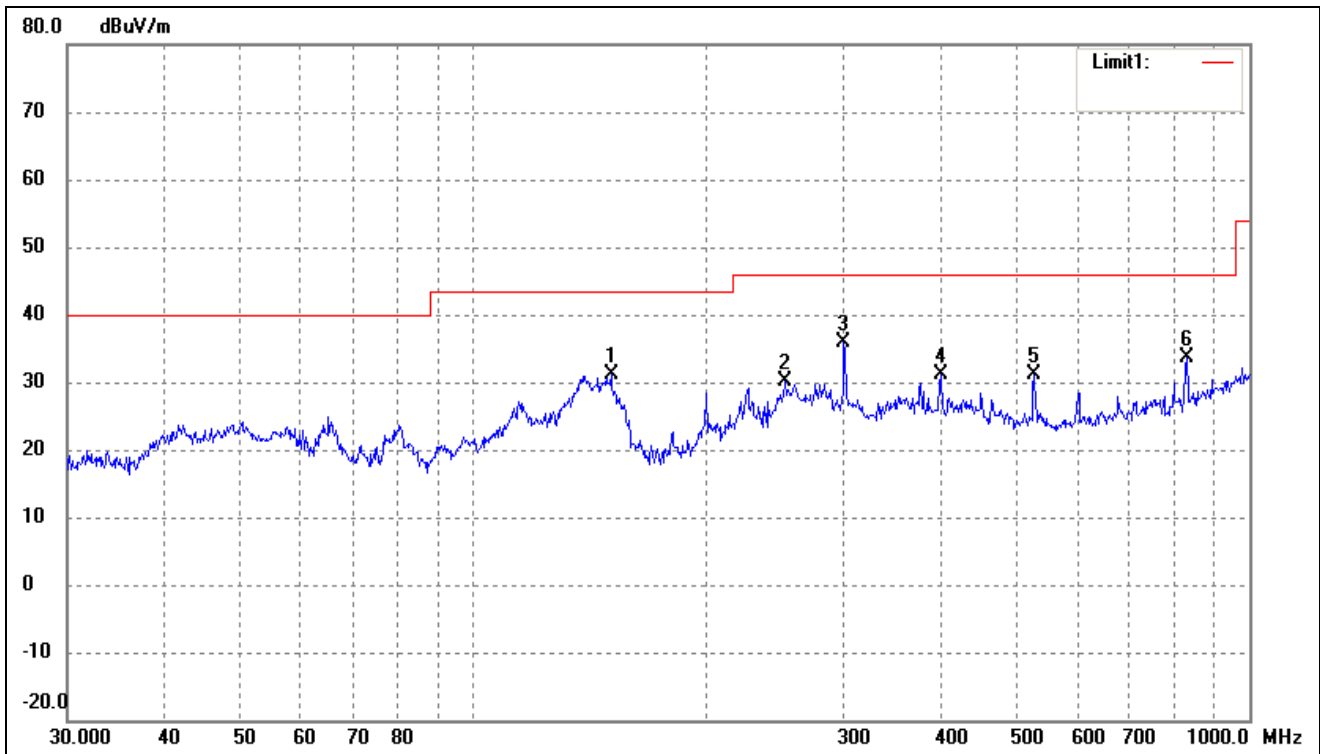


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Detector
1	150.5378	47.86	-16.73	31.13	43.50	-12.37	267	100	peak
2	252.0627	39.83	-9.73	30.10	46.00	-15.90	90	100	peak
3*	300.3672	43.35	-7.44	35.91	46.00	-10.09	248	100	peak
4	400.4318	37.58	-6.45	31.13	46.00	-14.87	98	100	peak
5	528.2458	36.78	-5.56	31.22	46.00	-14.78	181	100	peak
6	830.4002	34.23	-0.70	33.53	46.00	-12.47	284	100	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

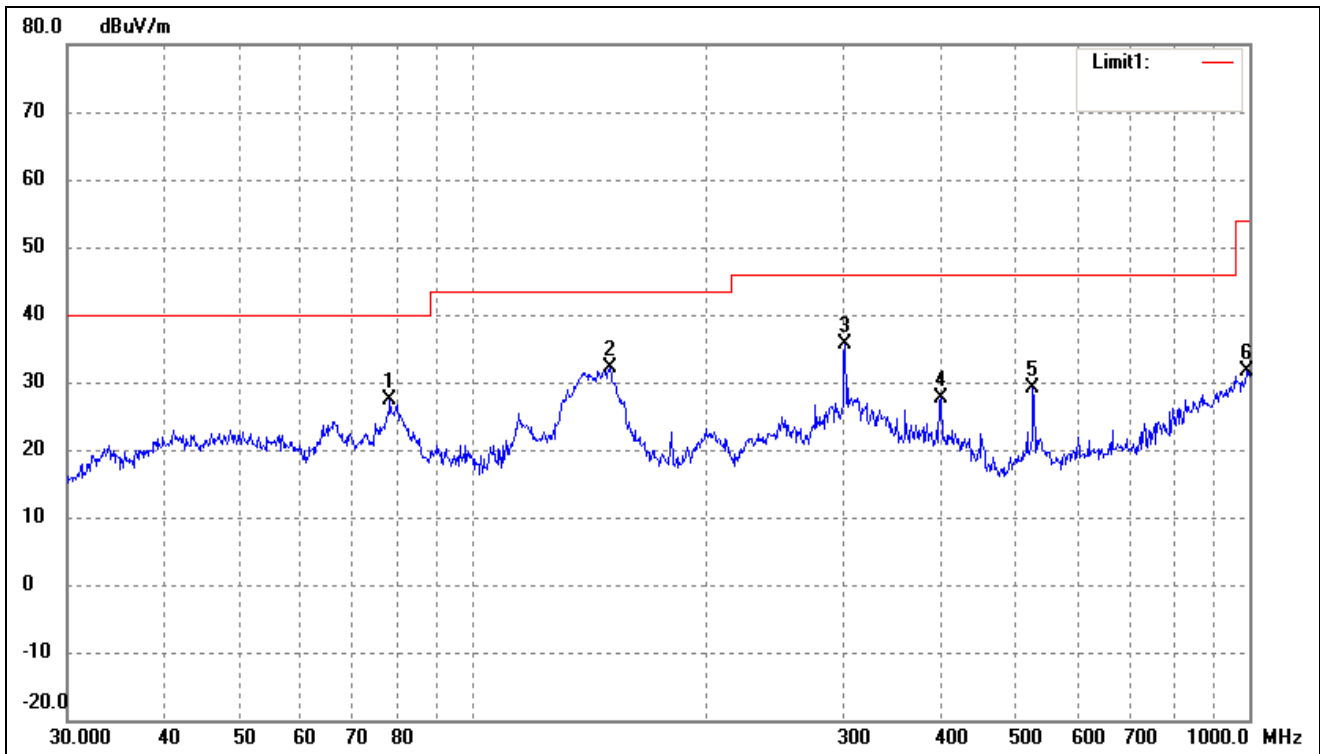


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Detector
1	78.1389	46.09	-18.75	27.34	40.00	-12.66	44	100	peak
2	150.0107	48.77	-16.76	32.01	43.50	-11.49	127	100	peak
3*	301.4223	42.94	-7.40	35.54	46.00	-10.46	147	100	peak
4	400.4318	34.18	-6.45	27.73	46.00	-18.27	90	100	peak
5	526.3967	34.83	-5.62	29.21	46.00	-16.79	130	100	peak
6	993.0113	27.72	3.93	31.65	54.00	-22.35	139	100	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

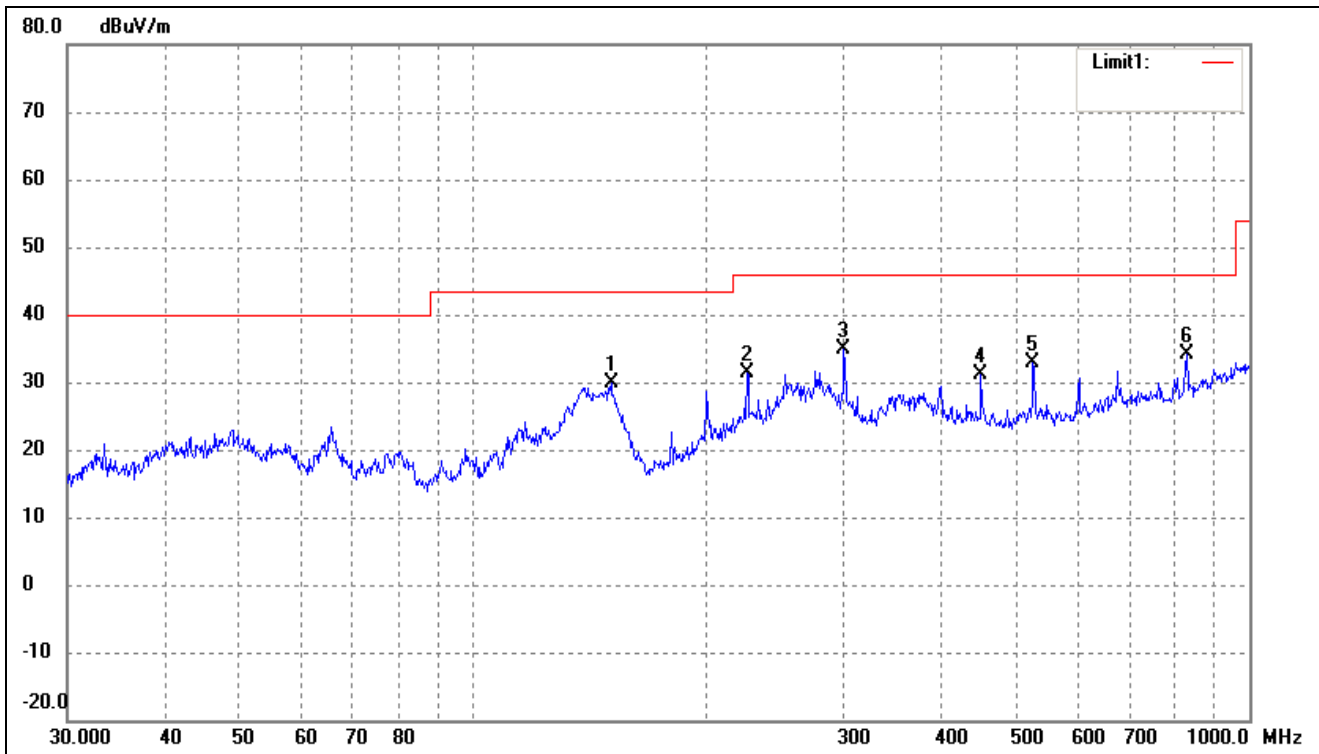


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Detector
1	150.5378	46.54	-16.73	29.81	43.50	-13.69	138	100	peak
2	225.3079	42.51	-11.16	31.35	46.00	-14.65	330	100	peak
3*	300.3672	42.22	-7.44	34.78	46.00	-11.22	100	100	peak
4	451.1349	37.63	-6.46	31.17	46.00	-14.83	286	100	peak
5	526.3967	38.38	-5.62	32.76	46.00	-13.24	255	100	peak
6	830.4002	34.81	-0.70	34.11	46.00	-11.89	261	100	peak

802.11ac-HT80			
Test Channel	5210MHz(worst case)	Polarity:	Horizontal

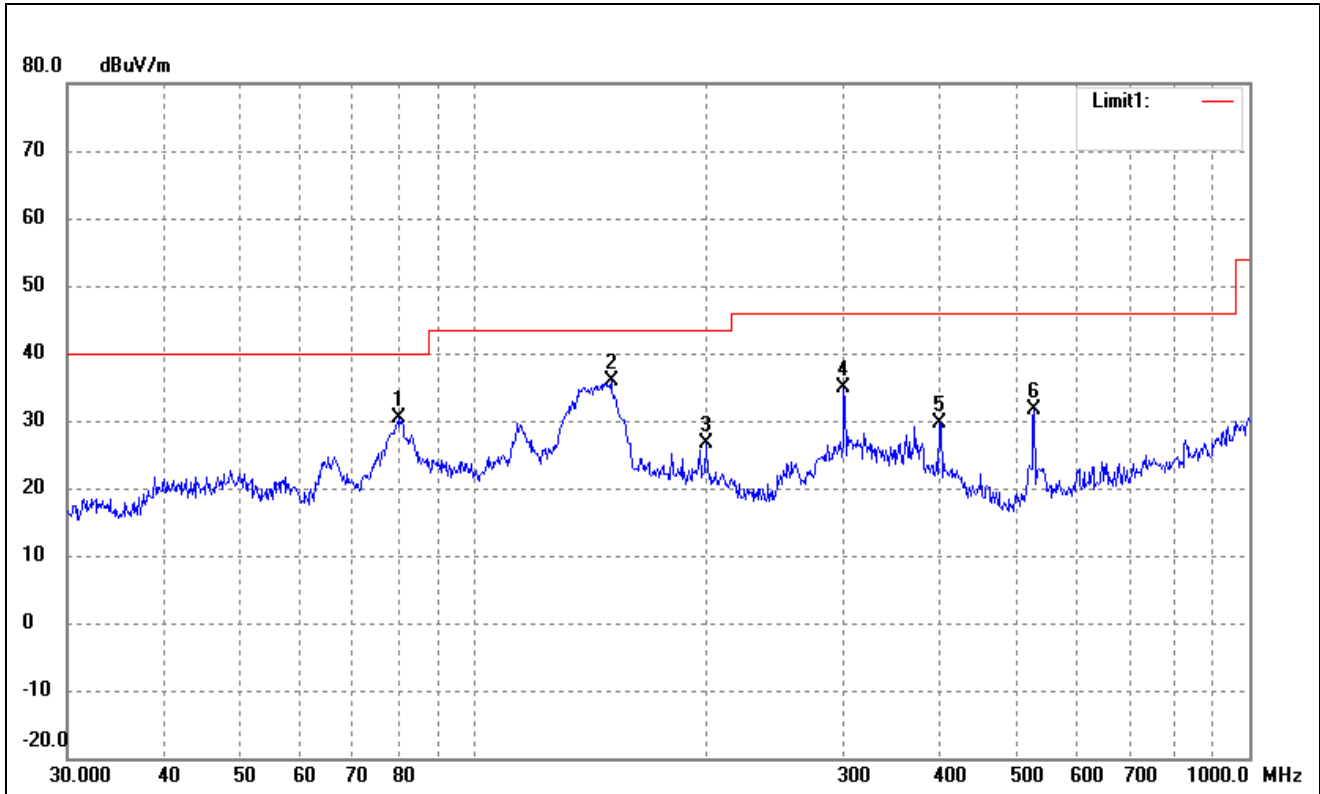

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Detector
1	80.0806	49.06	-18.79	30.27	40.00	-9.73	255	100	peak
2*	150.5378	52.61	-16.73	35.88	43.50	-7.62	100	100	peak
3	199.2855	38.84	-12.19	26.65	43.50	-16.85	134	100	peak
4	300.3672	42.28	-7.44	34.84	46.00	-11.16	99	100	peak
5	399.0300	36.16	-6.48	29.68	46.00	-16.32	190	100	peak
6	528.2458	37.17	-5.56	31.61	46.00	-14.39	338	100	peak

802.11ac-HT80			
Test Channel	5210MHz(worst case)	Polarity:	Vertical

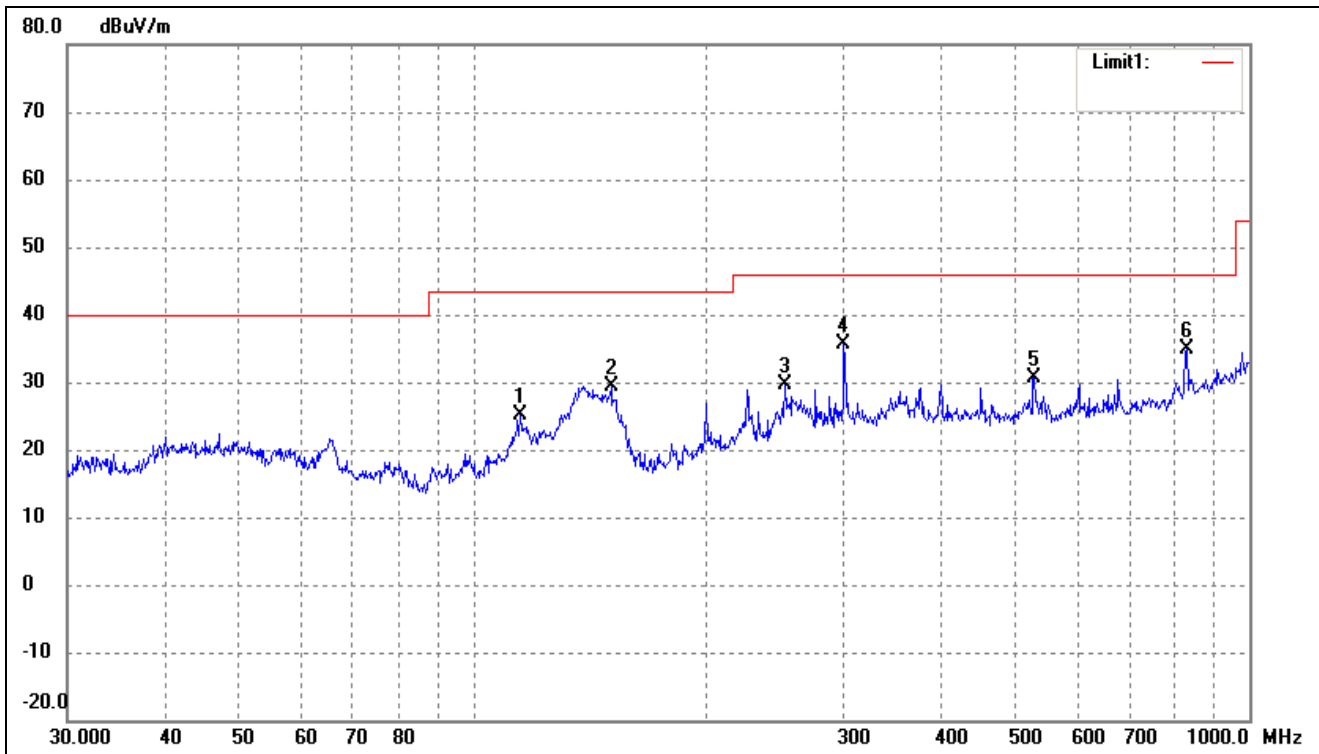


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Detector
1	114.9168	39.86	-14.77	25.09	43.50	-18.41	93	100	peak
2	150.5378	46.20	-16.73	29.47	43.50	-14.03	117	100	peak
3	252.0627	39.27	-9.73	29.54	46.00	-16.46	116	100	peak
4*	300.3672	43.06	-7.44	35.62	46.00	-10.38	108	100	peak
5	528.2458	36.24	-5.56	30.68	46.00	-15.32	159	100	peak
6	830.4002	35.67	-0.70	34.97	46.00	-11.03	165	100	peak

&gt; 5725-5850MHz

802.11a


Test Channel	5745MHz(worst case)	Polarity:	Horizontal
--------------	---------------------	-----------	------------

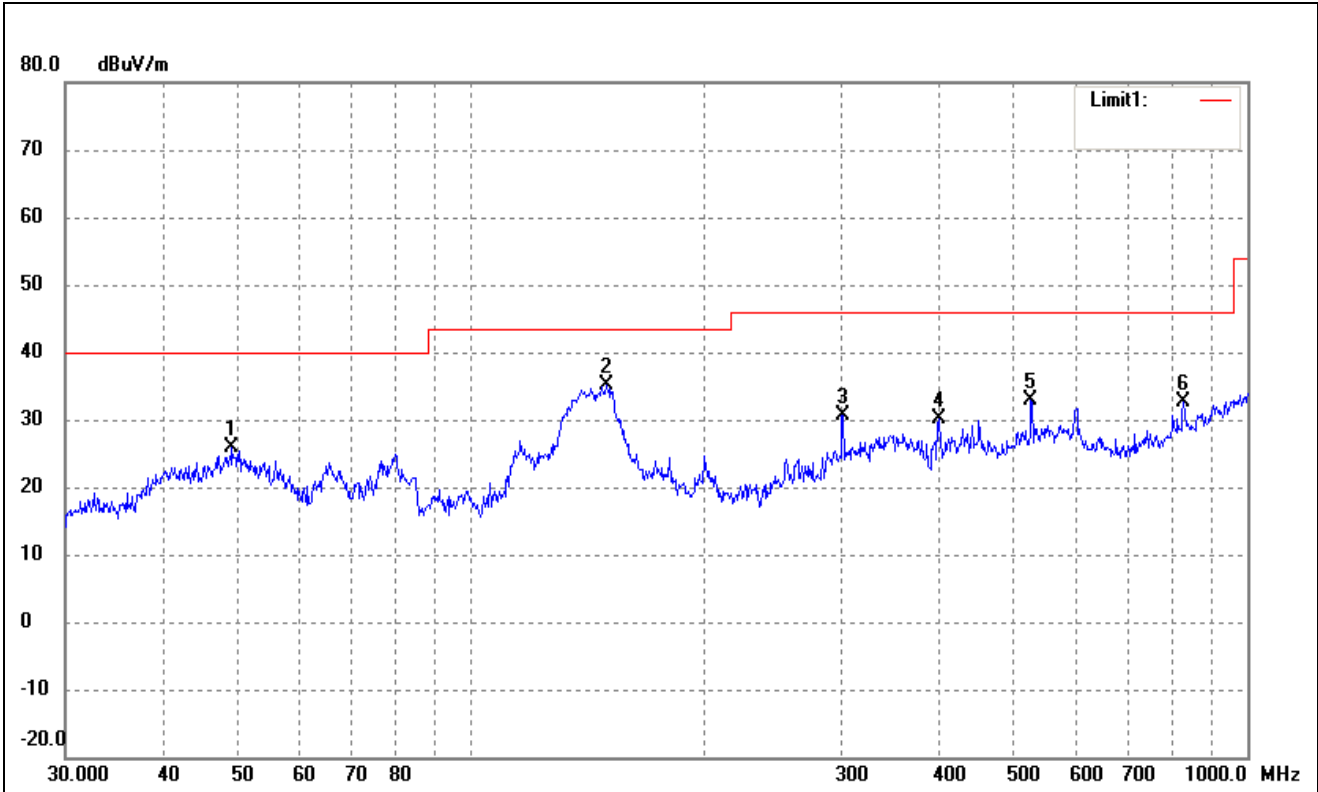

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Detector
1	49.1865	38.71	-12.86	25.85	40.00	-14.15	318	100	peak
2*	149.4857	51.91	-16.80	35.11	43.50	-8.39	114	100	peak
3	301.4223	38.12	-7.40	30.72	46.00	-15.28	91	100	peak
4	400.4318	36.50	-6.45	30.05	46.00	-15.95	176	100	peak
5	526.3967	38.55	-5.62	32.93	46.00	-13.07	62	100	peak
6	827.4933	33.36	-0.76	32.60	46.00	-13.40	104	100	peak




802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

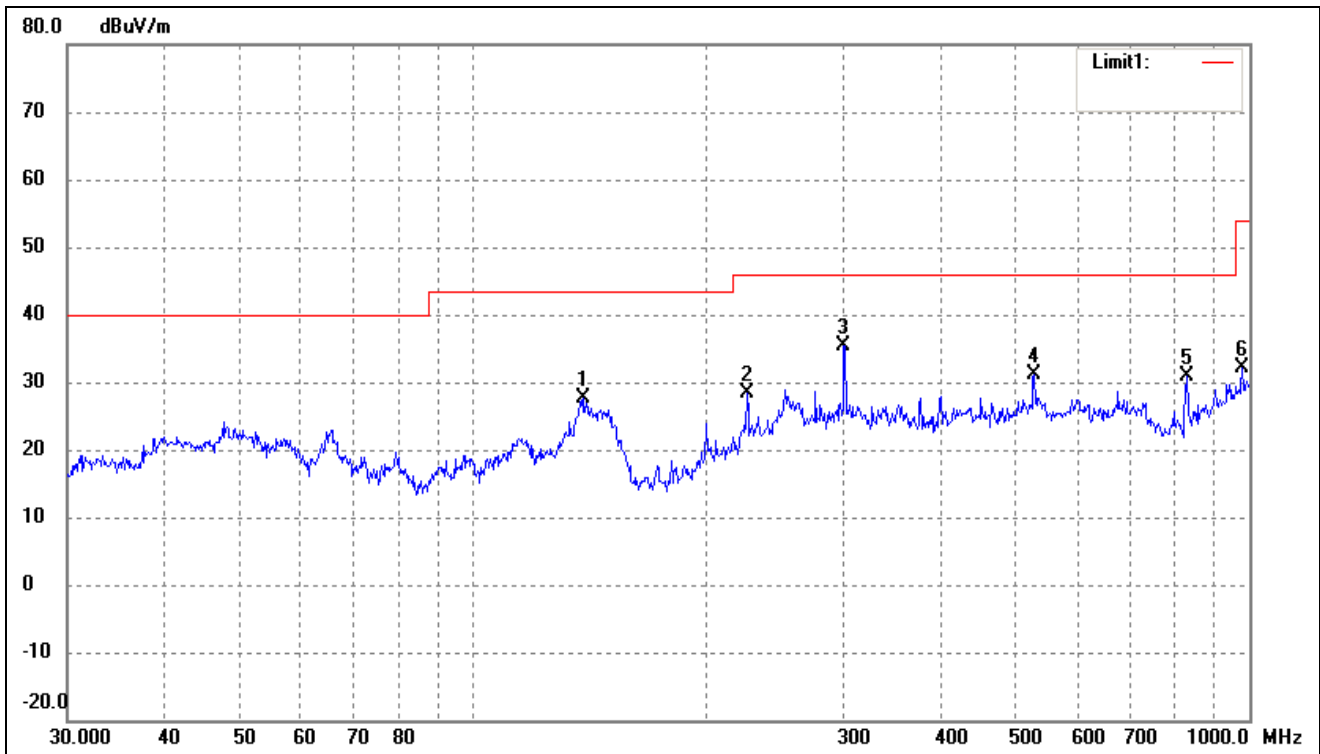


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Detector
1	138.8735	44.51	-16.99	27.52	43.50	-15.98	335	100	peak
2	225.3079	39.55	-11.16	28.39	46.00	-17.61	98	100	peak
3*	300.3672	42.92	-7.44	35.48	46.00	-10.52	251	100	peak
4	528.2458	36.76	-5.56	31.20	46.00	-14.80	101	100	peak
5	830.4002	31.65	-0.70	30.95	46.00	-15.05	66	100	peak
6	979.1803	28.37	3.69	32.06	54.00	-21.94	152	100	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

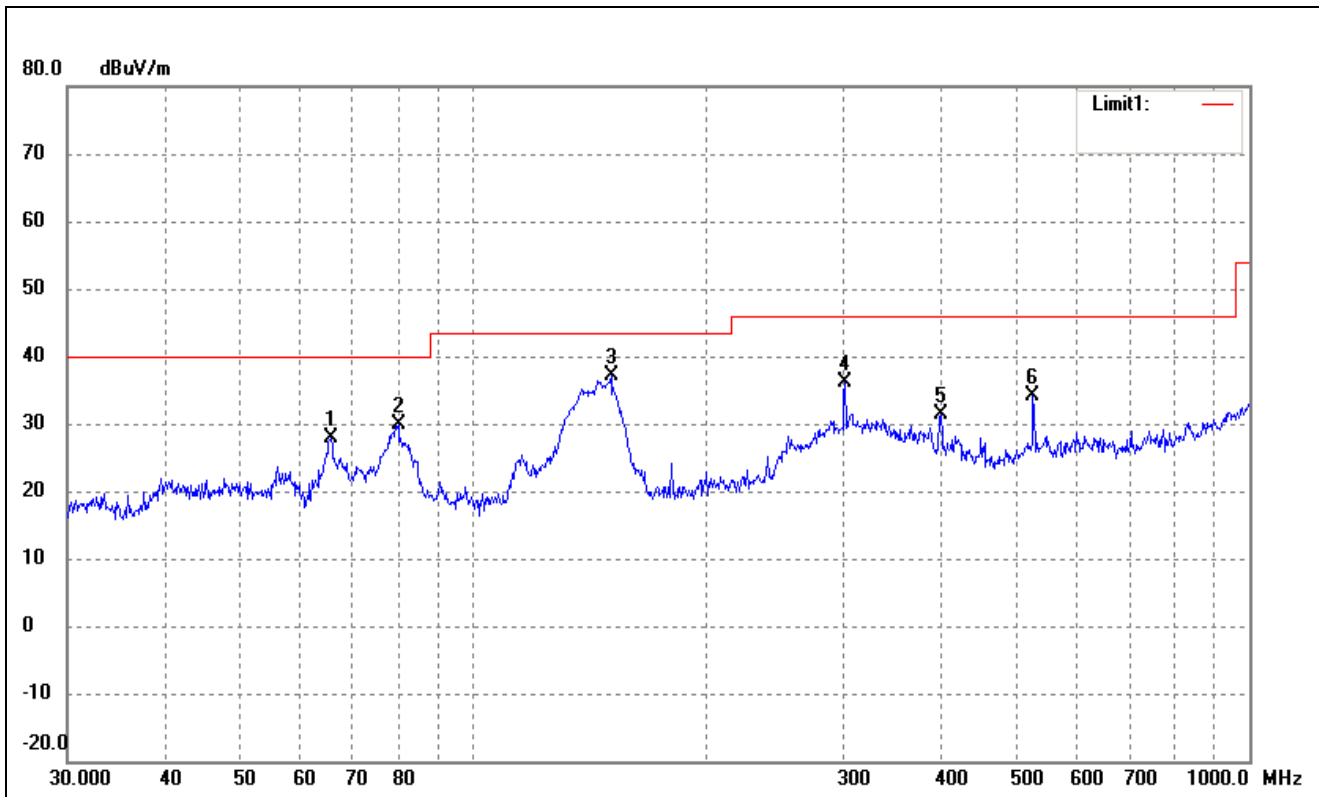


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Detector
1	65.5726	43.21	-15.45	27.76	40.00	-12.24	85	100	peak
2	80.0806	48.71	-18.79	29.92	40.00	-10.08	122	100	peak
3*	150.5378	53.96	-16.73	37.23	43.50	-6.27	84	100	peak
4	301.4223	43.52	-7.40	36.12	46.00	-9.88	129	100	peak
5	400.4318	37.79	-6.45	31.34	46.00	-14.66	333	100	peak
6	526.3967	39.70	-5.62	34.08	46.00	-11.92	194	100	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

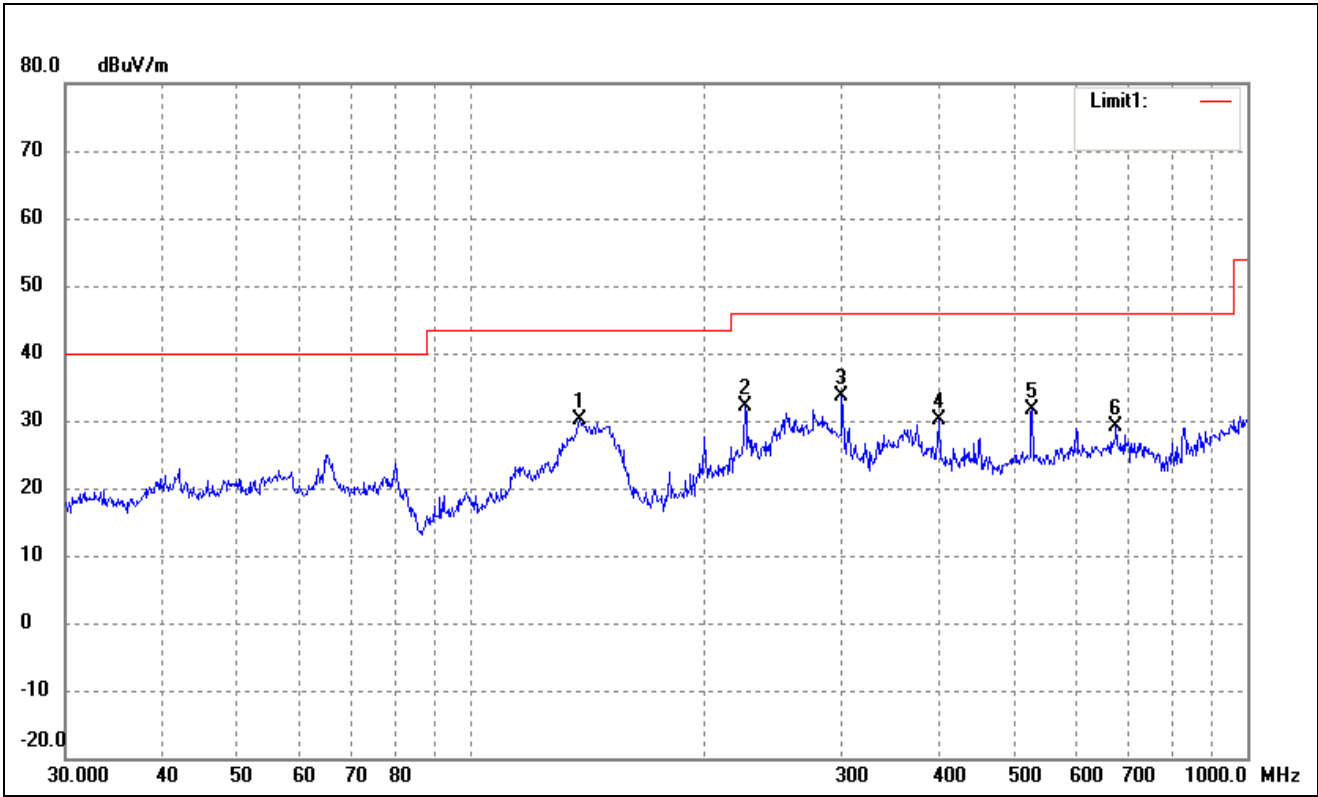


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Detector
1	137.9028	47.05	-17.03	30.02	43.50	-13.48	316	100	peak
2	225.3079	43.23	-11.16	32.07	46.00	-13.93	270	100	peak
3*	300.3672	41.12	-7.44	33.68	46.00	-12.32	99	100	peak
4	400.4318	36.57	-6.45	30.12	46.00	-15.88	213	100	peak
5	528.2458	37.30	-5.56	31.74	46.00	-14.26	162	100	peak
6	677.5797	32.01	-2.97	29.04	46.00	-16.96	232	100	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

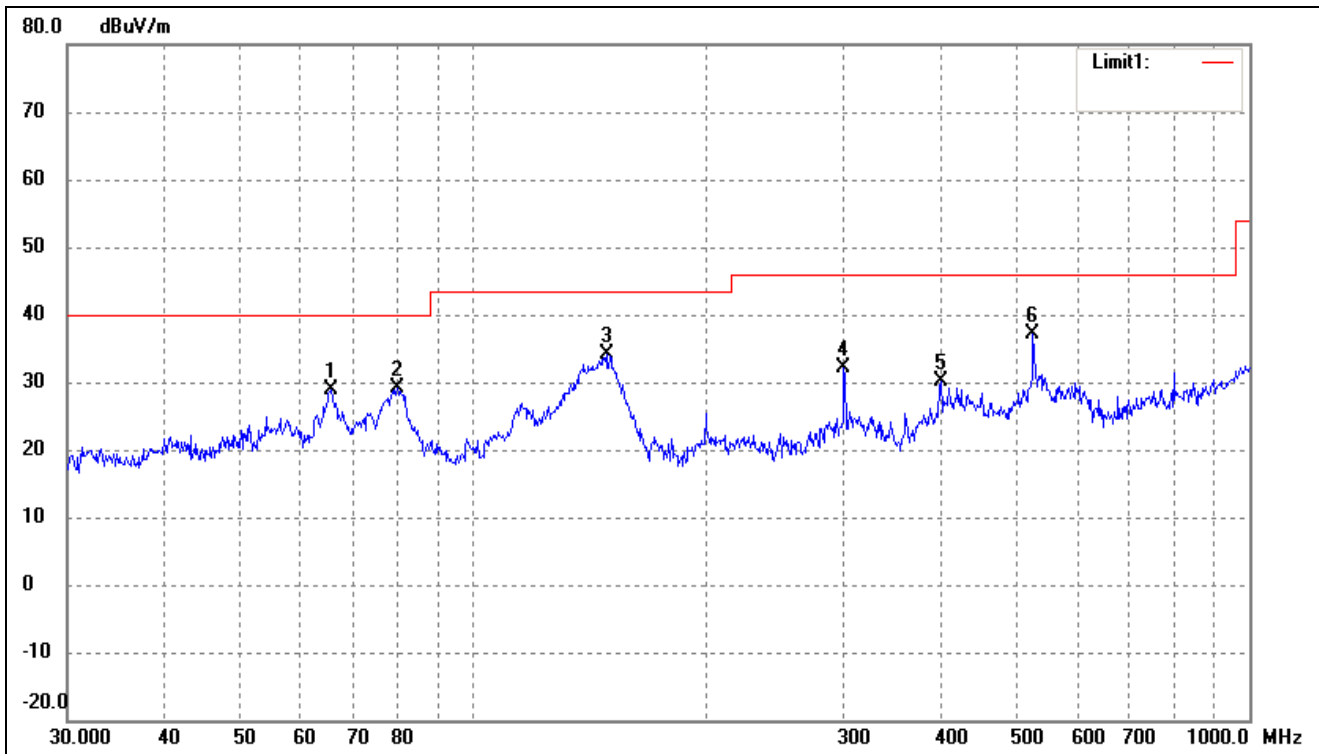


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Detector
1	65.5726	44.30	-15.45	28.85	40.00	-11.15	297	100	peak
2	79.8002	48.00	-18.79	29.21	40.00	-10.79	90	100	peak
3	148.4410	51.10	-16.87	34.23	43.50	-9.27	351	100	peak
4	300.3672	39.58	-7.44	32.14	46.00	-13.86	90	100	peak
5	400.4318	36.52	-6.45	30.07	46.00	-15.93	315	100	peak
6*	526.3967	42.82	-5.62	37.20	46.00	-8.80	237	100	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

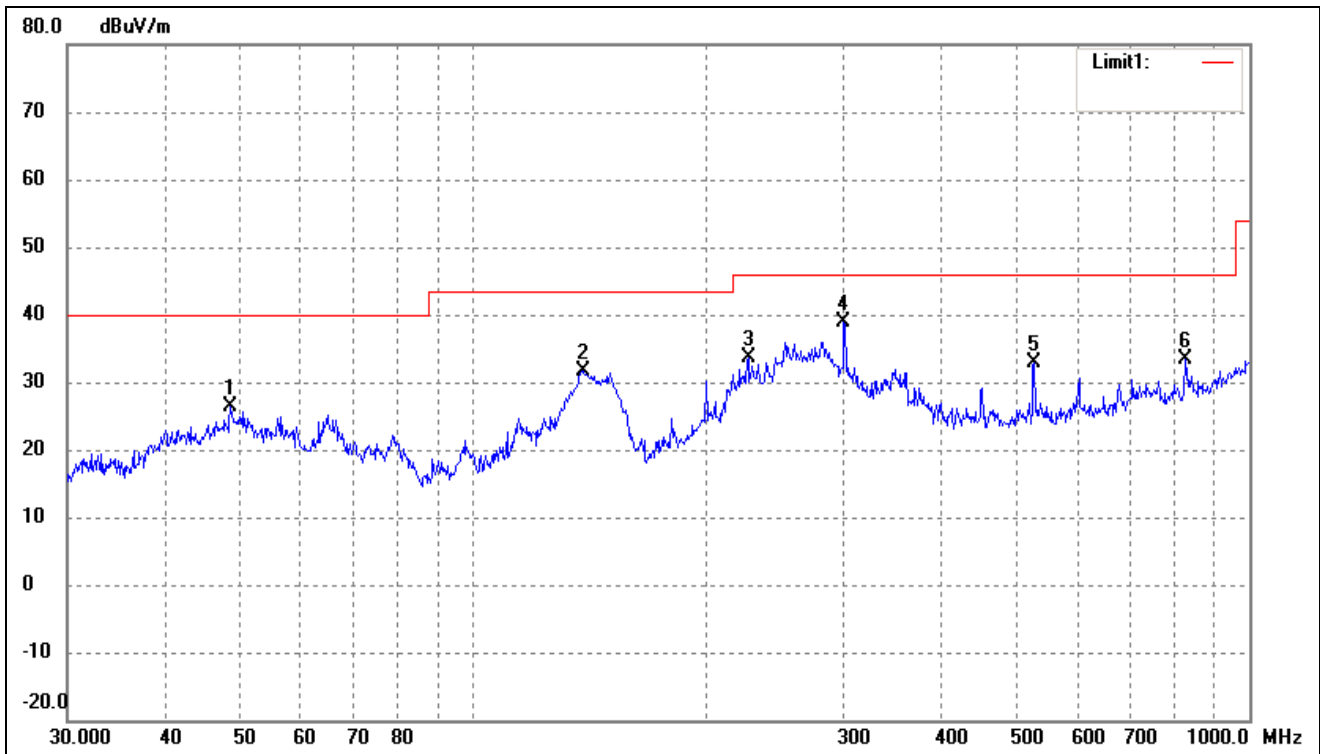


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Detector
1	48.6719	39.16	-12.82	26.34	40.00	-13.66	171	100	peak
2	138.8735	48.72	-16.99	31.73	43.50	-11.77	100	100	peak
3	226.0994	44.70	-11.09	33.61	46.00	-12.39	94	100	peak
4*	300.3672	46.38	-7.44	38.94	46.00	-7.06	100	100	peak
5	528.2458	38.53	-5.56	32.97	46.00	-13.03	210	100	peak
6	827.4933	34.11	-0.76	33.35	46.00	-12.65	231	100	peak

802.11ac-HT80			
Test Channel	5775MHz(worst case)	Polarity:	Horizontal

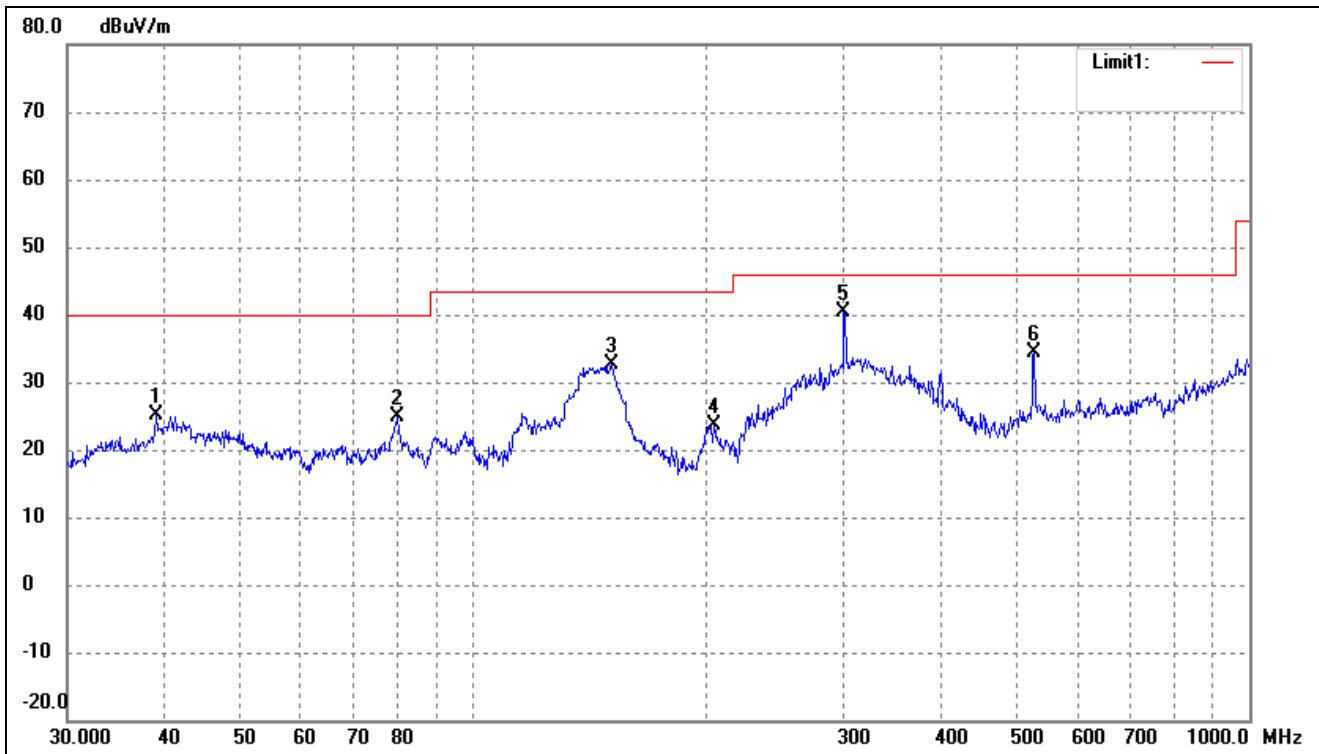

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Detector
1	39.0245	39.30	-14.24	25.06	40.00	-14.94	275	100	peak
2	79.8002	43.62	-18.79	24.83	40.00	-15.17	298	100	peak
3	150.5378	49.26	-16.73	32.53	43.50	-10.97	64	100	peak
4	204.2376	35.89	-12.25	23.64	43.50	-19.86	137	100	peak
5*	300.3672	47.83	-7.44	40.39	46.00	-5.61	339	100	peak
6	528.2458	39.86	-5.56	34.30	46.00	-11.70	95	100	peak


802.11ac-HT80			
Test Channel	5775MHz(worst case)	Polarity:	Vertical

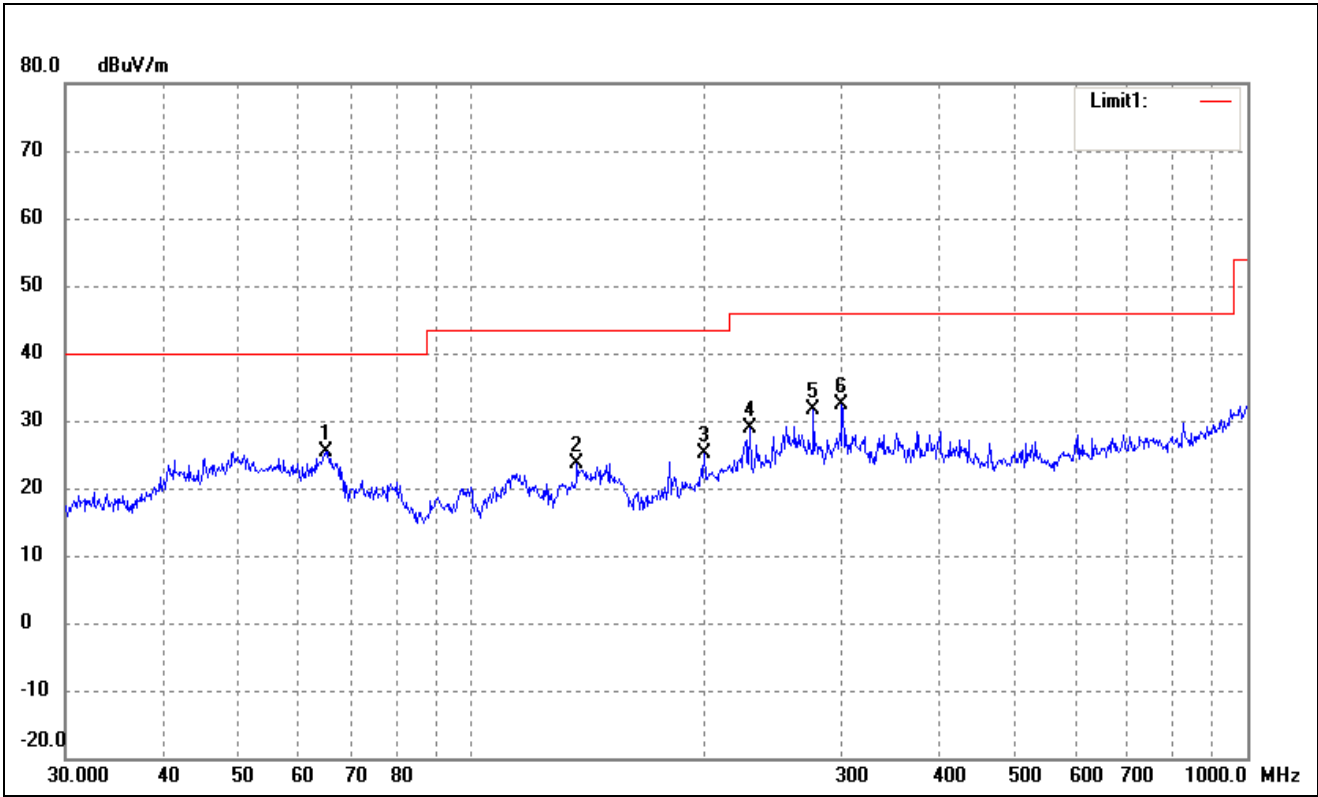

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Detector
1	64.8864	40.69	-15.21	25.48	40.00	-14.52	354	100	peak
2	136.9391	40.77	-17.07	23.70	43.50	-19.80	99	100	peak
3	199.2855	37.24	-12.19	25.05	43.50	-18.45	67	100	peak
4	228.4903	39.71	-10.90	28.81	46.00	-17.19	97	100	peak
5	276.1235	40.12	-8.46	31.66	46.00	-14.34	354	100	peak
6*	300.3672	39.81	-7.44	32.37	46.00	-13.63	142	100	peak

➤ Spurious Emission above 1GHz


802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

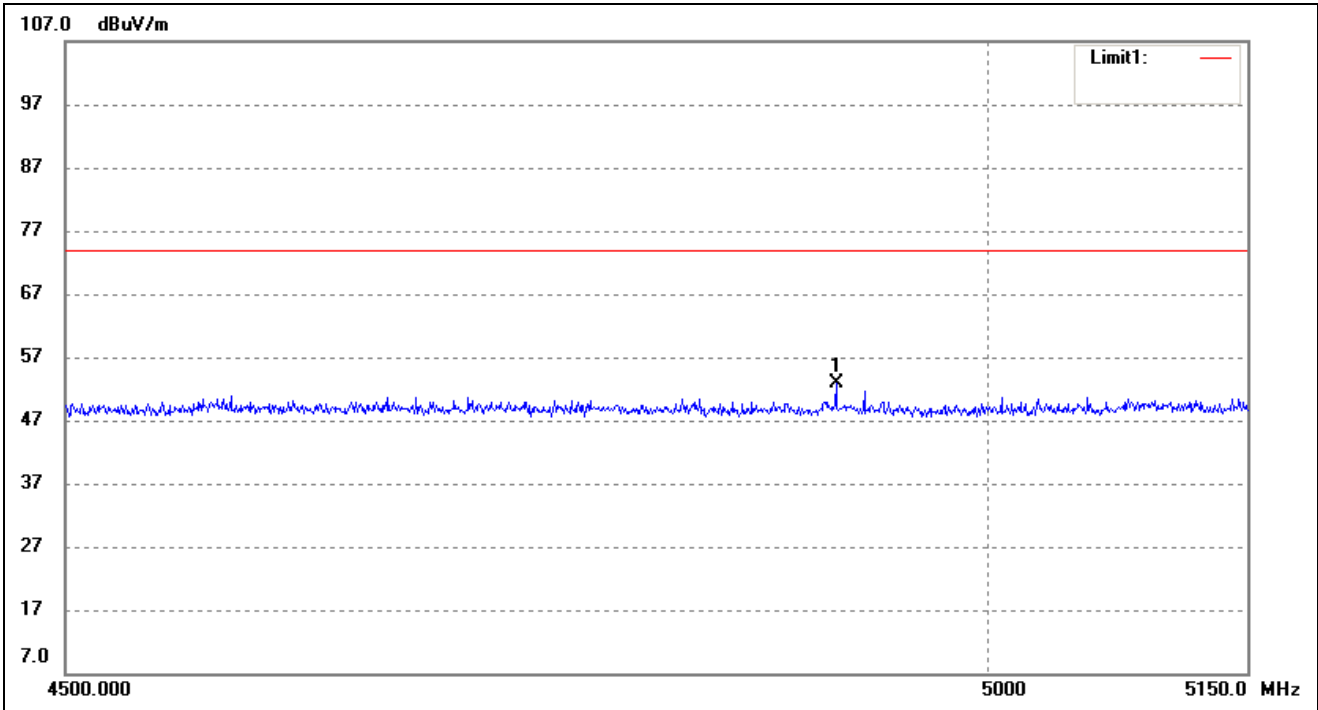

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	4913.786	56.25	-3.44	52.81	74.00	-21.19	134	100	peak




802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

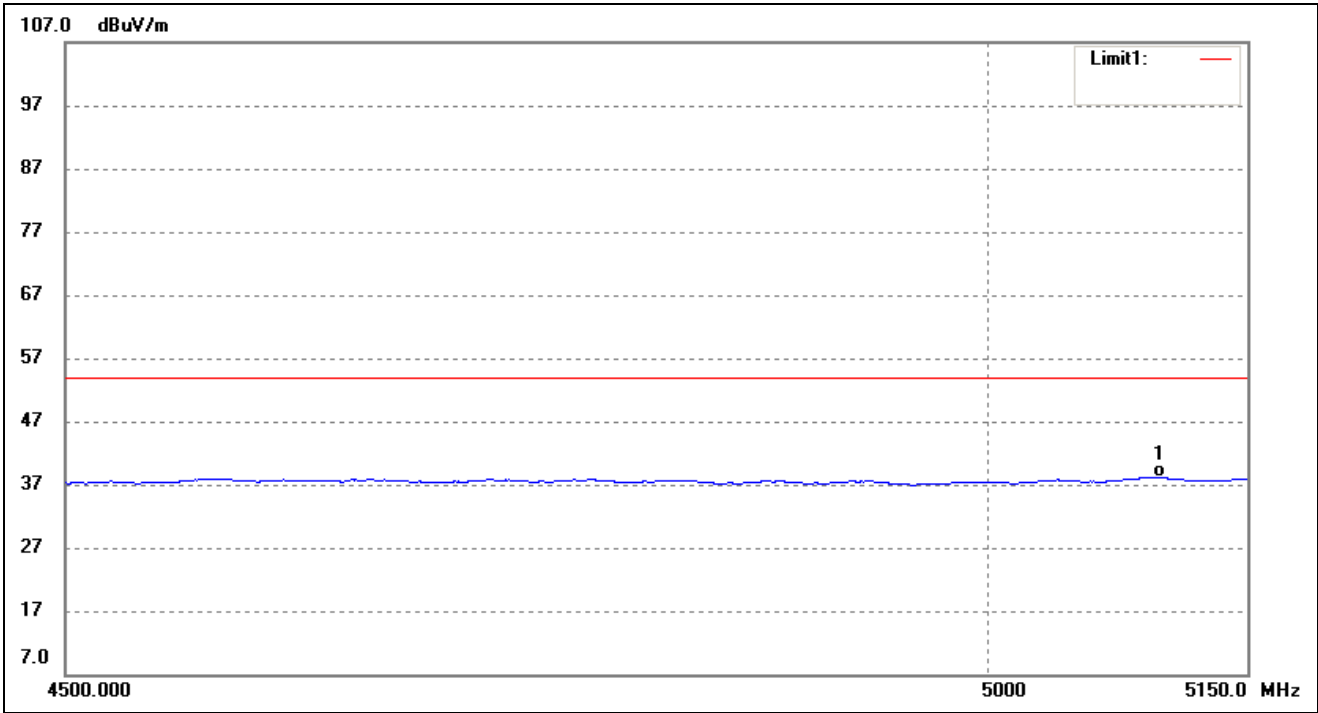


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5098.838	41.27	-3.12	38.15	54.00	-15.85	13	100	AVG

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

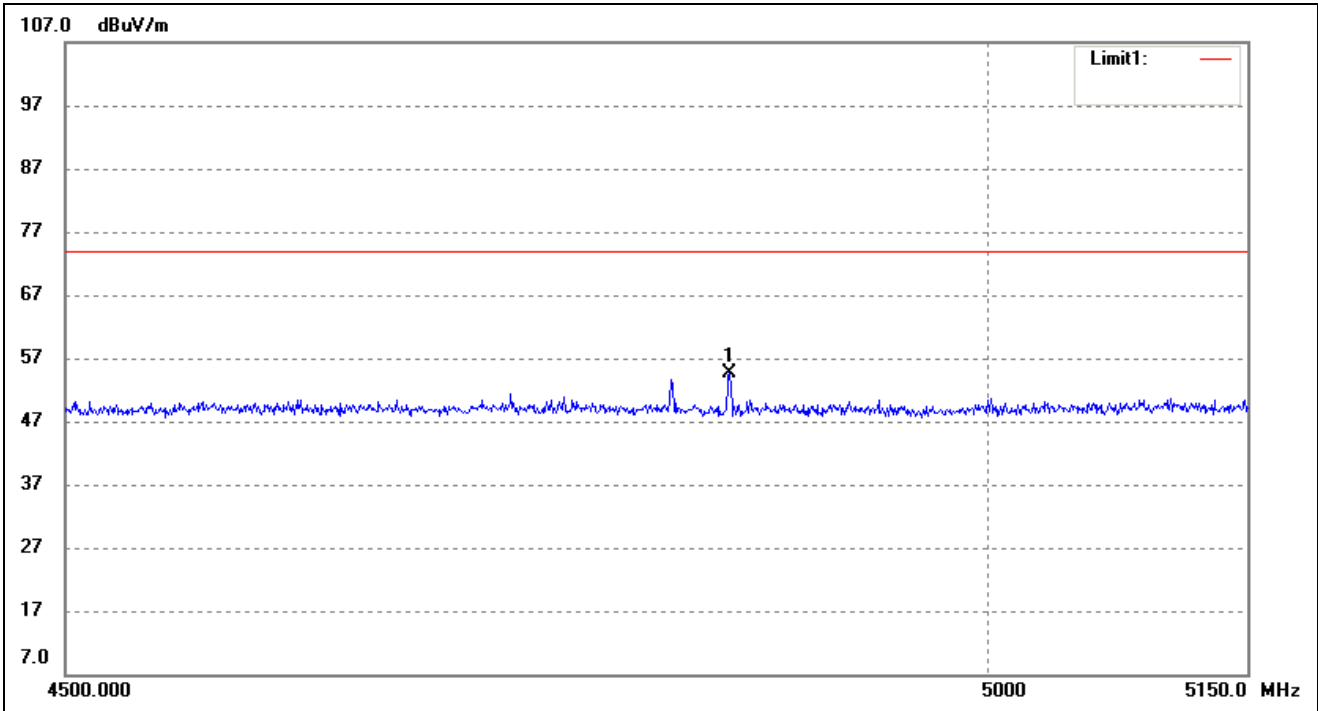


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	4854.480	58.01	-3.49	54.52	74.00	-19.48	12	100	peak

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

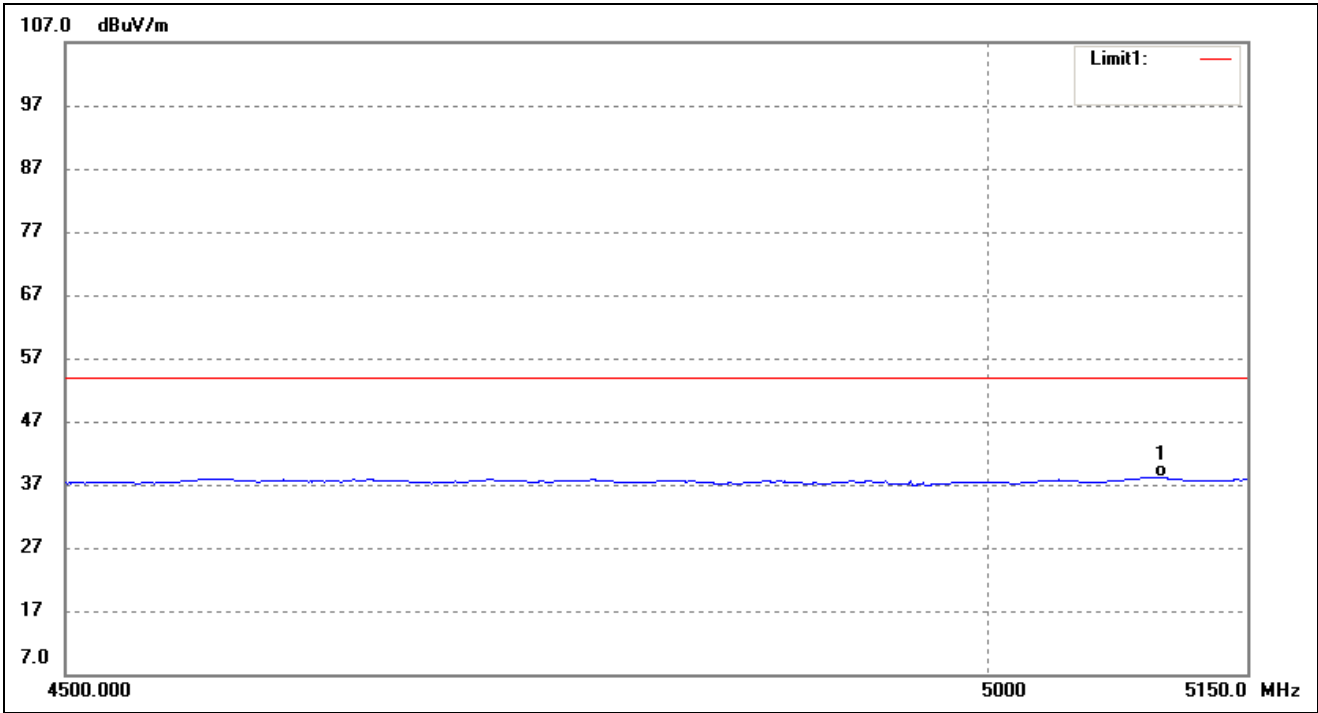


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5099.526	41.25	-3.12	38.13	54.00	-15.87	79	100	AVG

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

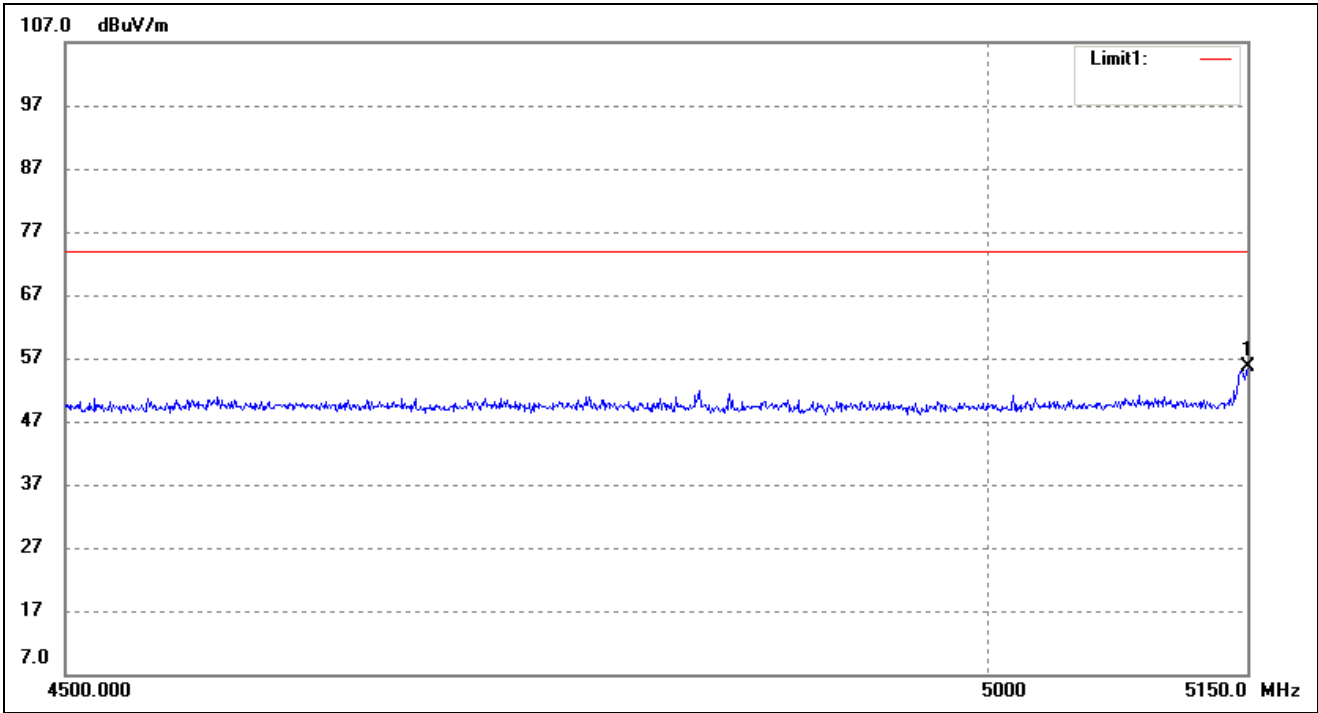


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5150.000	58.71	-2.99	55.72	74.00	-18.28	156	100	peak

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

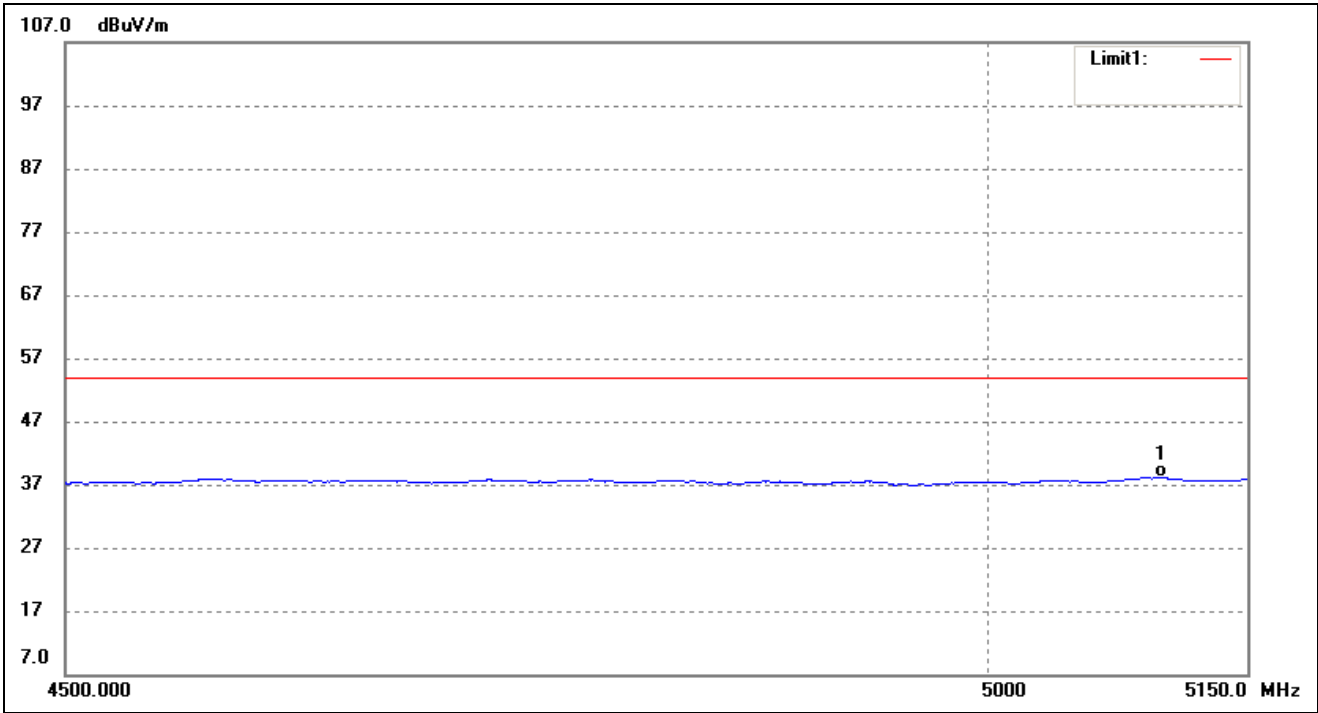


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5099.526	41.25	-3.12	38.13	54.00	-15.87	79	100	AVG

802.11ac-HT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

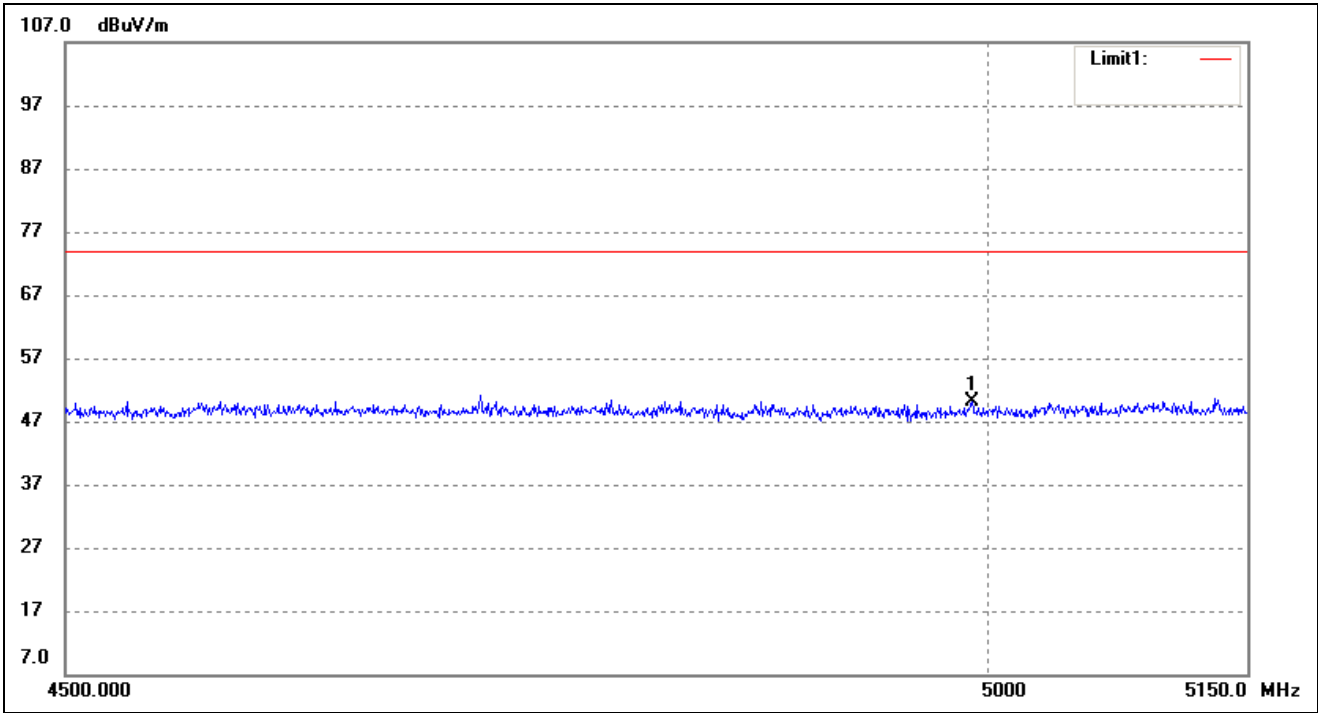

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	4990.622	53.59	-3.38	50.21	74.00	-23.79	42	100	peak

802.11ac-HT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

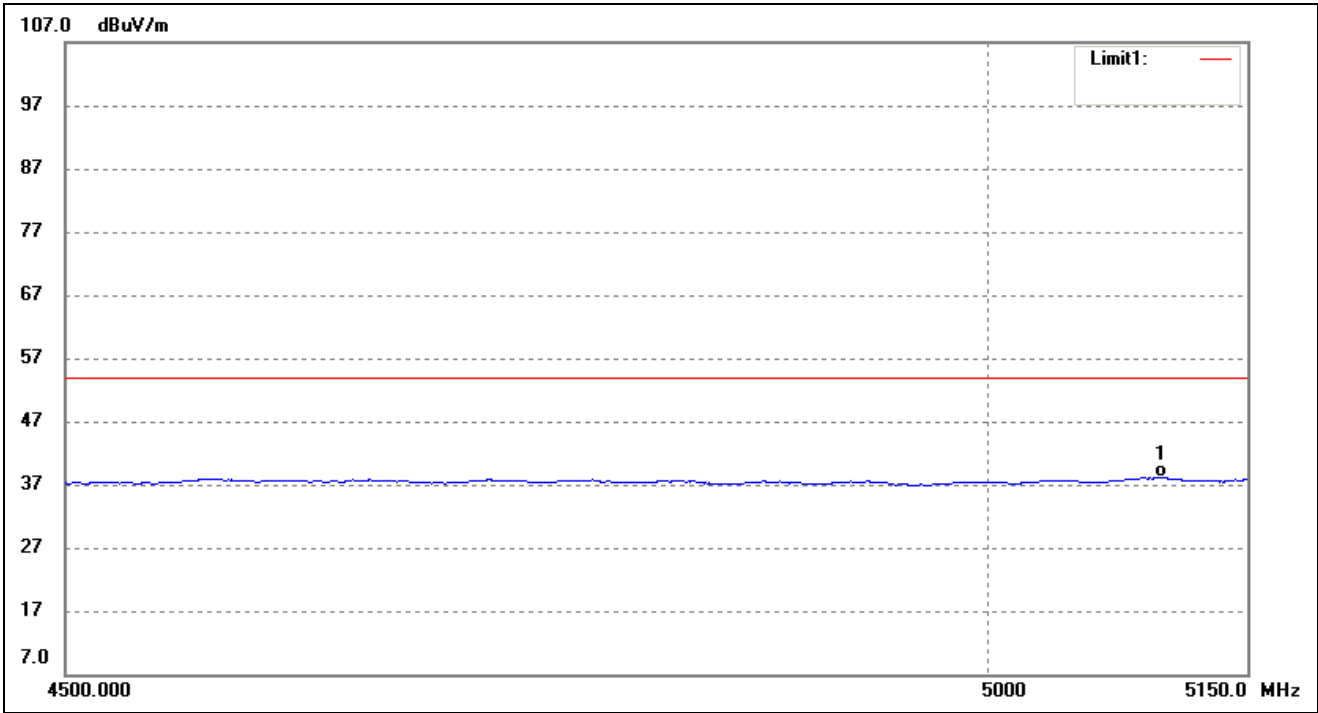

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5099.526	41.23	-3.12	38.11	54.00	-15.89	68	100	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	49.9	9.2	59.1	74	-14.9	H	PK
10360	49.7	7.1	56.8	74	-17.2	H	AV
10360	37.9	9.3	47.2	54	-6.8	H	PK
10360	39.6	8.6	48.2	54	-5.8	H	AV
High Channel (5240MHz)							
10480	48.7	9.8	58.5	74	-15.5	H	PK
10480	51.1	8.1	59.2	74	-14.8	H	AV
10480	36.7	8.1	44.8	54	-9.2	H	PK
10480	39.5	9.3	48.8	54	-5.2	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5725MHz)							
11490	48.9	7.8	56.7	74	-17.3	H	PK
11490	51.0	8.5	59.5	74	-14.5	H	AV
11490	36.7	10	46.7	54	-7.3	H	PK
11490	38.8	8.4	47.2	54	-6.8	H	AV
High Channel (5825MHz)							
11650	49.2	8.4	57.6	74	-16.4	H	PK
11650	50.8	9.4	60.2	74	-13.8	H	AV
11650	37.6	9.5	47.1	54	-6.9	H	PK
11650	39.1	7.8	46.9	54	-7.1	H	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-28.75	-27
Highest	Above 5350	-34.44	-27

Note: the data just list the worst cases



## ➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-39.63	-27
	5715 to 5725	-29.98	-17
Highest	5850 to 5860	-27.45	-17
	Above 5860	-34.60	-27

Note: the data just list the worst cases

- For the frequency band 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5725MHz)							
11490	48.7	9.3	58.0	74	-16.0	H	PK
11490	49.9	9.2	59.1	74	-14.9	H	AV
11490	38.0	8.8	46.8	54	-7.2	H	PK
11490	38.3	9.9	48.2	54	-5.8	H	AV
High Channel (5825MHz)							
11650	50.2	9.4	59.6	74	-14.4	H	PK
11650	49.7	8.5	58.2	74	-15.8	H	AV
11650	37.4	7.5	44.9	54	-9.1	H	PK
11650	39.3	8	47.3	54	-6.7	H	AV

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-39.35	-27
	5715 to 5725	-28.49	-17
Highest	5850 to 5860	-26.60	-17
	Above 5860	-34.28	-27

Note: the data just list the worst cases

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- For the frequency band 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5755MHz)							
11510	49.0	9.6	58.6	74	-15.4	H	PK
11510	49.2	9.7	58.9	74	-15.1	H	AV
11510	37.6	8.9	46.5	54	-7.5	H	PK
11510	38.6	7.2	45.8	54	-8.2	H	AV
High Channel (5795MHz)							
11590	50.3	9.8	60.1	74	-13.9	H	PK
11590	49.3	9.9	59.2	74	-14.8	H	AV
11590	38.2	8.1	46.3	54	-7.7	H	PK
11590	39.0	9.7	48.7	54	-5.3	H	AV

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-38.80	-27
	5715 to 5725	-28.50	-17
Highest	5850 to 5860	-27.75	-17
	Above 5860	-34.10	-27

Note: the data just list the worst cases

- For the frequency band 5.725-5.850GHz (802.11ac VH80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	50.3	9.9	60.2	74	-13.8	H	PK
11550	49.8	7.4	57.2	74	-16.8	H	AV
11550	37.8	7.2	45.0	54	-9.0	H	PK
11550	39.6	8.6	48.2	54	-5.8	H	AV

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-40.38	-27
	5715 to 5725	-28.85	-17
Highest	5850 to 5860	-27.89	-17
	Above 5860	-34.99	-27

Note: the data just list the worst cases

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

## 10. Frequency Stability

### 10.1 Standard Applicable

According to §15.407(g), Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

### 10.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

### 10.3 Summary of Test Results/Plots

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP( °C)	Freq.Dev(Hz)	Deviation
100%	5.0	-30	161	0.0279
100%		-20	181	0.0315
100%		-10	156	0.0271
100%		0	128	0.0223
100%		+10	171	0.0297
100%		+20	141	0.0245
100%		+30	131	0.0227
100%		+40	170	0.0295
100%		+50	150	0.0261
Low Battery power		5.50	+20	184
High Battery power	4.50	+20	160	0.0277

<b>U-NII-1:5725-5850MHz worst case at 802.11a middle channel</b>				
Voltage(%)	Power(VDC)	TEMP( °C)	Freq.Dev(Hz)	Deviation
100%	5.0	-30	154	0.0268
100%		-20	179	0.0311
100%		-10	165	0.0287
100%		0	127	0.0220
100%		+10	174	0.0302
100%		+20	132	0.0230
100%		+30	130	0.0227
100%		+40	157	0.0273
100%		+50	179	0.0311
Low Battery power		5.50	+20	160
High Battery power	4.50	+20	140	0.0243

\*\*\*\*\* END OF REPORT \*\*\*\*\*