



LCIE

Bluetooth Classic Template: Release August 08th, 2017

# TEST REPORT

N°: 155636-721608-B

Version : 01

## Subject

Radio spectrum matters  
tests according to standards:  
47 CFR Part 15.247 [P](#)

## Issued to

SAGEMCOM BROADBAND SAS  
250 Route de l'Empereur  
92500- RUEIL MALMAISON  
FRANCE

## Apparatus under test

- ↪ Product
- ↪ Trade mark
- ↪ Manufacturer
- ↪ Model under test
- ↪ Serial number
- ↪ FCC ID

Home router  
SAGEMCOM  
SAGEMCOM  
DCIWA384 UHD Alt US V2  
253764997  
VW3DCIWA384-V2

## Test date

: May 16, 2018 to June 12, 2018

## Test location

Fontenay Aux Roses & Ecuelles


## Composition of document

78 pages

## Document issued on

September 13, 2018

Written by :  
Armand MAHOUNGOU  
Tests operator



*Fayette*

This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the items tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measurement. This document doesn't anticipate any certification decision.

**LCIE**

Laboratoire Central des Industries Electriques  
Une société de Bureau Veritas

33, Av du Général Leclerc  
92266 Fontenay Aux Roses  
FRANCE

Tél : +33 1 40 95 60 60  
contact@lcie.fr  
www.lcie.fr



## PUBLICATION HISTORY

<b>Version</b>	<b>Date</b>	<b>Author</b>	<b>Modification</b>
01	June 22, 2018	Armand MAHOUNGOU	Creation of the document



## SUMMARY

1.	TEST PROGRAM .....	4
2.	EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER) .....	5
3.	OCCUPIED BANDWIDTH.....	10
4.	20DB EMISSION BANDWIDTH .....	15
5.	NUMBER OF HOPPING FREQUENCY .....	20
6.	CARRIER FREQUENCY SEPARATION.....	25
7.	TIME OF OCCUPANCY.....	30
8.	DUTY CYCLE .....	35
9.	MAXIMUM CONDUCTED OUTPUT POWER .....	40
10.	UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS AT THE BAND EDGE	45
11.	UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS.....	53
12.	AC POWER LINE CONDUCTED EMISSIONS.....	58
13.	UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS .....	63
14.	UNCERTAINTIES CHART .....	78



## 1. TEST PROGRAM

### References

- 47 CFR Part 15.247
- ANSI C63.10-2013

### Radio requirement:

Clause (47CFR Part 15.247) Test Description	Test result - Comments			
Occupied Bandwidth <a href="#">ℱ</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
20dB Bandwidth <a href="#">ℱ</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
Number of Hopping Frequency <a href="#">ℱ</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
Carrier Frequency Separation <a href="#">ℱ</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
Time of Occupancy <a href="#">ℱ</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
Duty Cycle <a href="#">ℱ</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
Maximum Conducted Output Power <a href="#">ℱ</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
Conducted Spurious Emission at the Band Edge <a href="#">ℱ</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
Unwanted Emissions into Non-Restricted Frequency Bands <a href="#">ℱ</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA()	<input type="checkbox"/> NP(1)
AC Power Line Conducted Emission <a href="#">ℱ</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA(2)	<input type="checkbox"/> NP(1)
Unwanted Emissions into Restricted Frequency Bands <a href="#">ℱ</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
Receiver Radiated emissions <a href="#">ℱ</a>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
This table is a summary of test report, see conclusion of each clause of this test report for detail.				

(1): Limited program

(2): EUT not directly or indirectly connected to the AC Power Public Network

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement

NA: Not Applicable


NP: Test Not Performed

**2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)**

**2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):**

**Equipment under test (EUT):**  
**SAGEMCOM DCIWA384 UHD AIt US V2**

**Serial Number: 253764997**

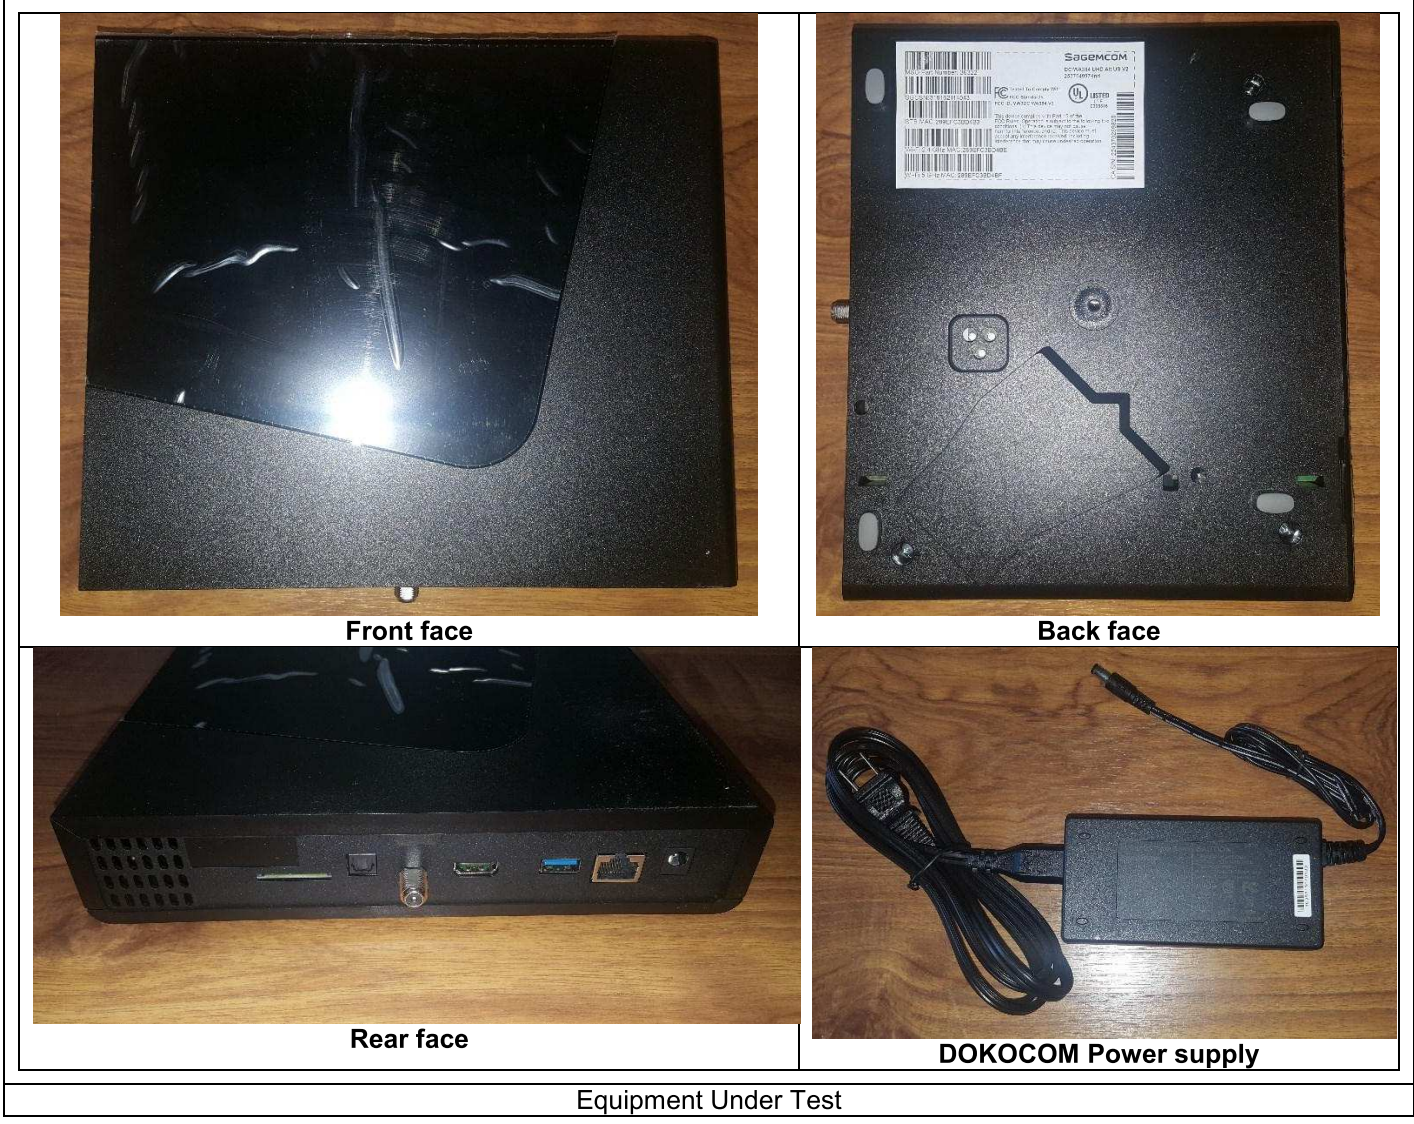

Equipment Under Test



MOSO Power supply



NetBit Power supply

Equipment Under Test

**Inputs/outputs - Cable:**

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
Ethernet cable	-	-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-
Power supply cable	-	-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-

**Auxiliary equipment used during test:**

Type	Reference	Sn	Comments
Laptop computer	-	-	-
Power supply	MSA-Z3800IC12.0-48W-P		MOSO



**Equipment information:**

Bluetooth Classic Type:	<input type="checkbox"/> v1.2	<input type="checkbox"/> v2.0	<input type="checkbox"/> v2.1+EDR	<input type="checkbox"/> v3.0+HS
	<input type="checkbox"/> v4.0	<input checked="" type="checkbox"/> v4.1		<input type="checkbox"/> v4.2
Frequency band:	[2400 – 2483.5] MHz			
Spectrum Modulation:	<input checked="" type="checkbox"/> FHSS			
Number of Channel:	Maximum:	79	Minimum:	20
Spacing channel:	1MHz			
Channel bandwidth:	1MHz			
Antenna Type:	<input checked="" type="checkbox"/> Integral	<input type="checkbox"/> External	<input type="checkbox"/> Dedicated	
Antenna connector:	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	<input type="checkbox"/> Temporary for test	
Transmit chains:	1			
	Single antenna			
Beam forming gain:	No			
Receiver chains:	1			
Type of equipment:	<input checked="" type="checkbox"/> Stand-alone	<input type="checkbox"/> Plug-in	<input type="checkbox"/> Combined	
Ad-Hoc mode:	<input type="checkbox"/> Yes		<input checked="" type="checkbox"/> No	
Dwell time:	400ms			
Duty cycle:	<input checked="" type="checkbox"/> Continuous duty	<input type="checkbox"/> Intermittent duty	<input type="checkbox"/> 100% duty	
Equipment type:	<input checked="" type="checkbox"/> Production model		<input type="checkbox"/> Pre-production model	
Operating temperature range:	Tmin:	<input type="checkbox"/> -20°C	<input checked="" type="checkbox"/> 0°C	<input type="checkbox"/> X°C
	Tnom:	20°C		
	Tmax:	<input type="checkbox"/> 35°C	<input type="checkbox"/> 55°C	<input checked="" type="checkbox"/> 45°C
Type of power source:	<input checked="" type="checkbox"/> AC power supply	<input type="checkbox"/> DC power supply	<input type="checkbox"/> Battery	
Operating voltage range:	Vnom:	<input checked="" type="checkbox"/> 120V/60Hz	<input type="checkbox"/> X Vdc	

Antenna Characteristic			
Antenna assembly	Gain (dBi)	Frequency Band (MHz)	Impedance(Ω)
1	2.5	2400-2483	50



L C I E

CHANNEL PLAN					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
<b>Cmin: 0</b>	<b>2402</b>	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	<b>2441</b>	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	<b>Cmax: 78</b>	<b>2480</b>
25	2427	52	2454		
26	2428	53	2455		

DATA RATE				
Available for EUT	Modulation type	Max. Data Rate (Mbps)	Packet type	Worst Case Modulation
<input checked="" type="checkbox"/>	GFSK	1	1-DM1	<input type="checkbox"/>
	GFSK	1	1-DH1	<input type="checkbox"/>
	GFSK	1	1-DM3	<input type="checkbox"/>
	GFSK	1	1-DH3	<input type="checkbox"/>
	GFSK	1	1-DM5	<input type="checkbox"/>
	GFSK	1	1-DH5	<input checked="" type="checkbox"/>
<input type="checkbox"/>	GFSK	1	AUX1	<input type="checkbox"/>
<input checked="" type="checkbox"/>	$\pi/4$ DQPSK	2	2-DH1	<input type="checkbox"/>
	$\pi/4$ DQPSK	2	2-DH3	<input type="checkbox"/>
	$\pi/4$ DQPSK	2	2-DH5	<input checked="" type="checkbox"/>
	8DPSK	3	3-DH1	<input type="checkbox"/>
	8DPSK	3	3-DH3	<input type="checkbox"/>
	8DPSK	3	3-DH5	<input checked="" type="checkbox"/>



## 2.2. RUNNING MODE

The EUT is set in the following modes during tests:

- Permanent emission with modulation on a fixed channel in the data rate that produced the highest power
- Permanent emission with modulation & hopping in the data rate that produced the highest power
- Permanent reception

Following commands with the specific test software "CR-20180405 - Bluetooth compliance test commands of M384R-US-4L.docx" is used to set the product:

## 2.1. EQUIPMENT LABELLING



## 2.2. EQUIPMENT MODIFICATION

- None       Modification:

### 3. OCCUPIED BANDWIDTH

#### 3.1. TEST CONDITIONS

Test performed by : Mathieu CERISIER  
Date of test : May 29, 2018  
Ambient temperature : 27 °C  
Relative humidity : 43 %

#### 3.2. TEST SETUP

- The Equipment Under Test is installed:
  - On a table
  - In an anechoic chamber
- Measurement is performed with a spectrum analyzer in:
  - Conducted Method
  - Radiated Method
- Test Procedure:
  - RSS-Gen Issue 4 § 6.6
  - ANSI C63.10 § 6.9.3



Photograph for Occupied bandwidth



### 3.1. LIMIT

No Limit

### 3.2. TEST EQUIPMENT LIST


DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2017/09	2018/09
Multi-meter	KEITHLEY	2000	A1242090	2016/06	2018/06
Programmable AC/DC power supply	KIKUSUI	PCR500M	A7040079	2016/06	2018/06
RF cable & 20 dB attenuator	Télédyne	920-0202-048	A5329676	2017/09	2018/09

Note: In our quality system, the test equipment calibration due is more & less 2 months




L C I E

### 3.3. RESULTS

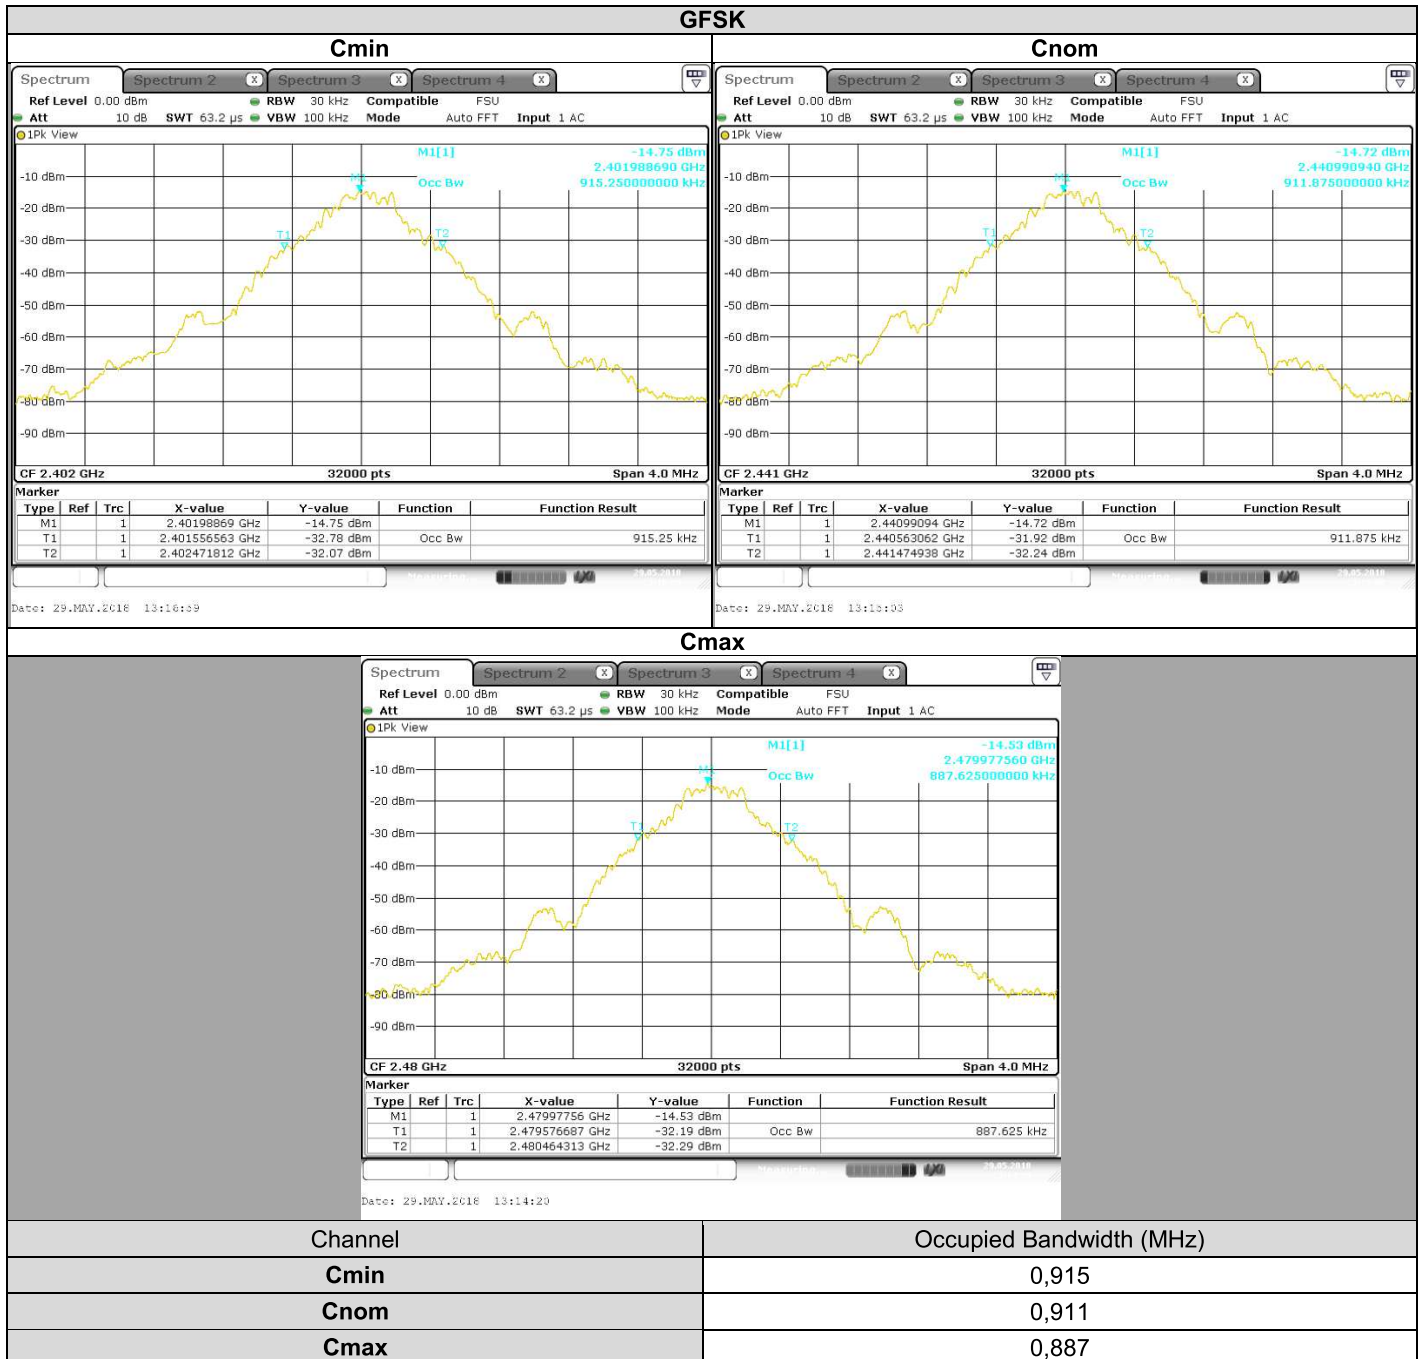




L C I E

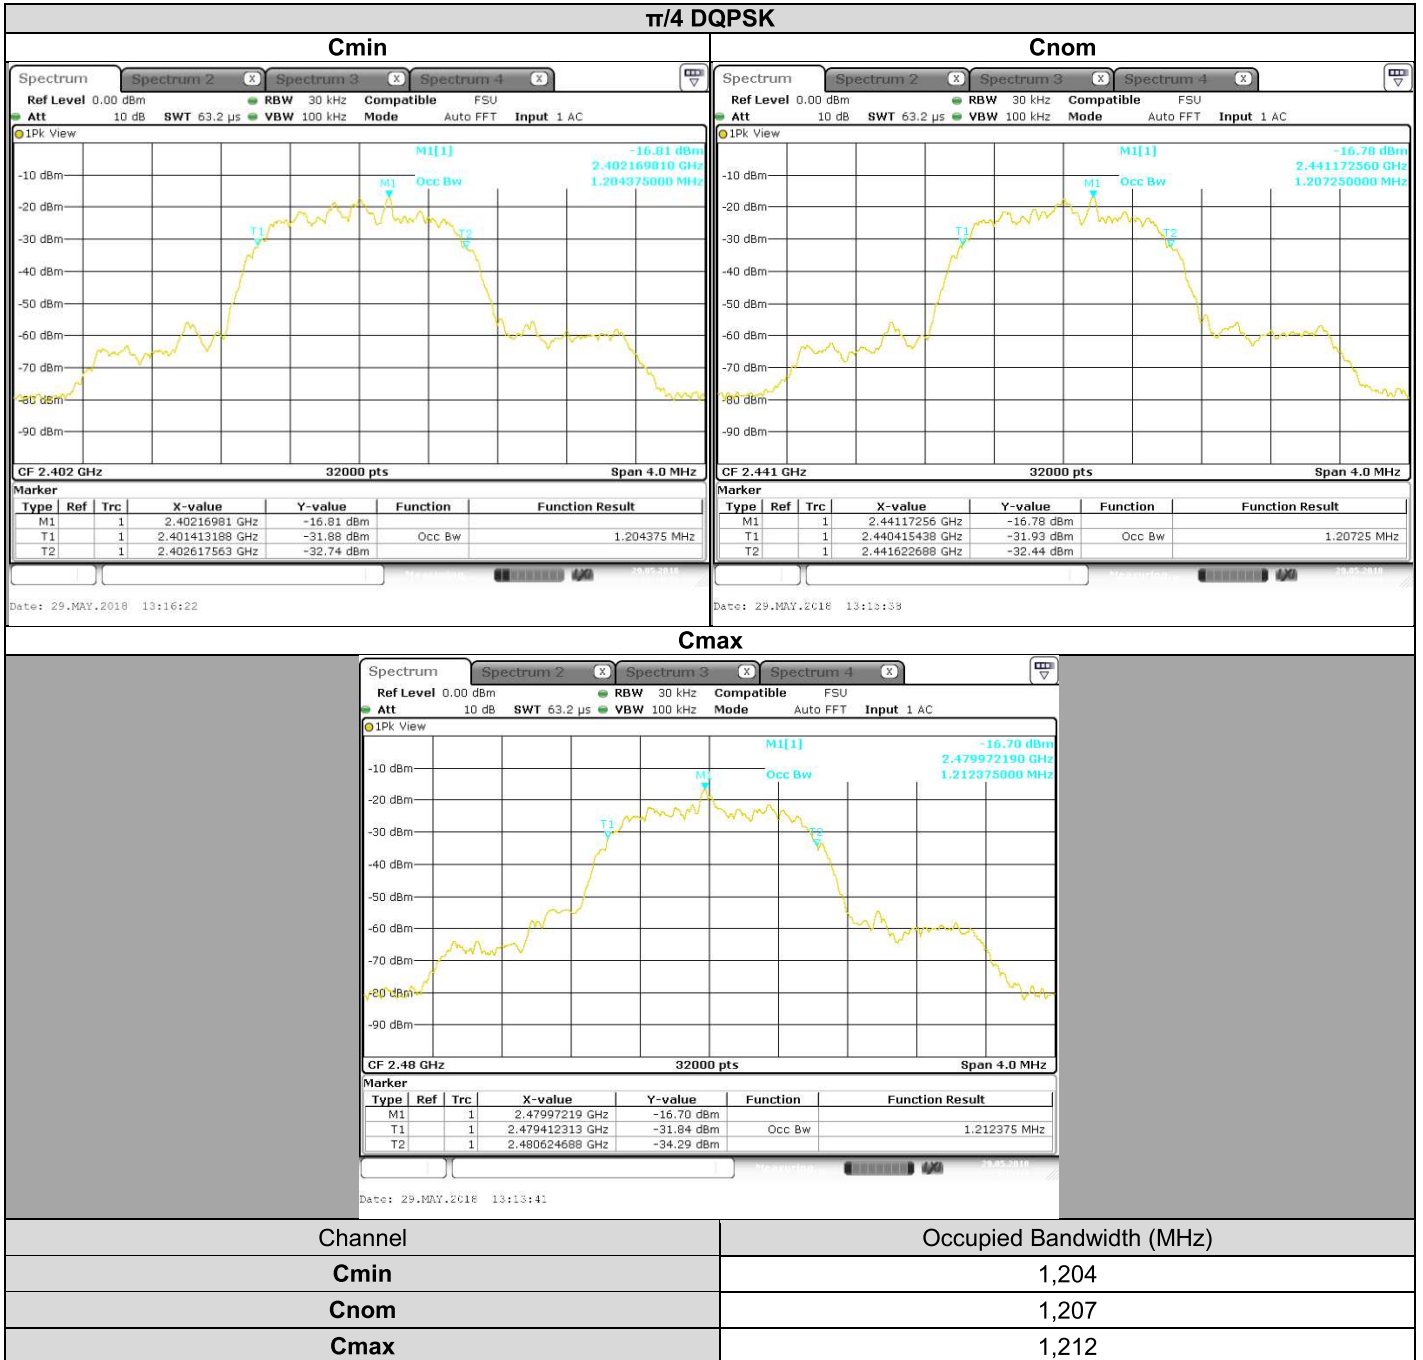



L C I E

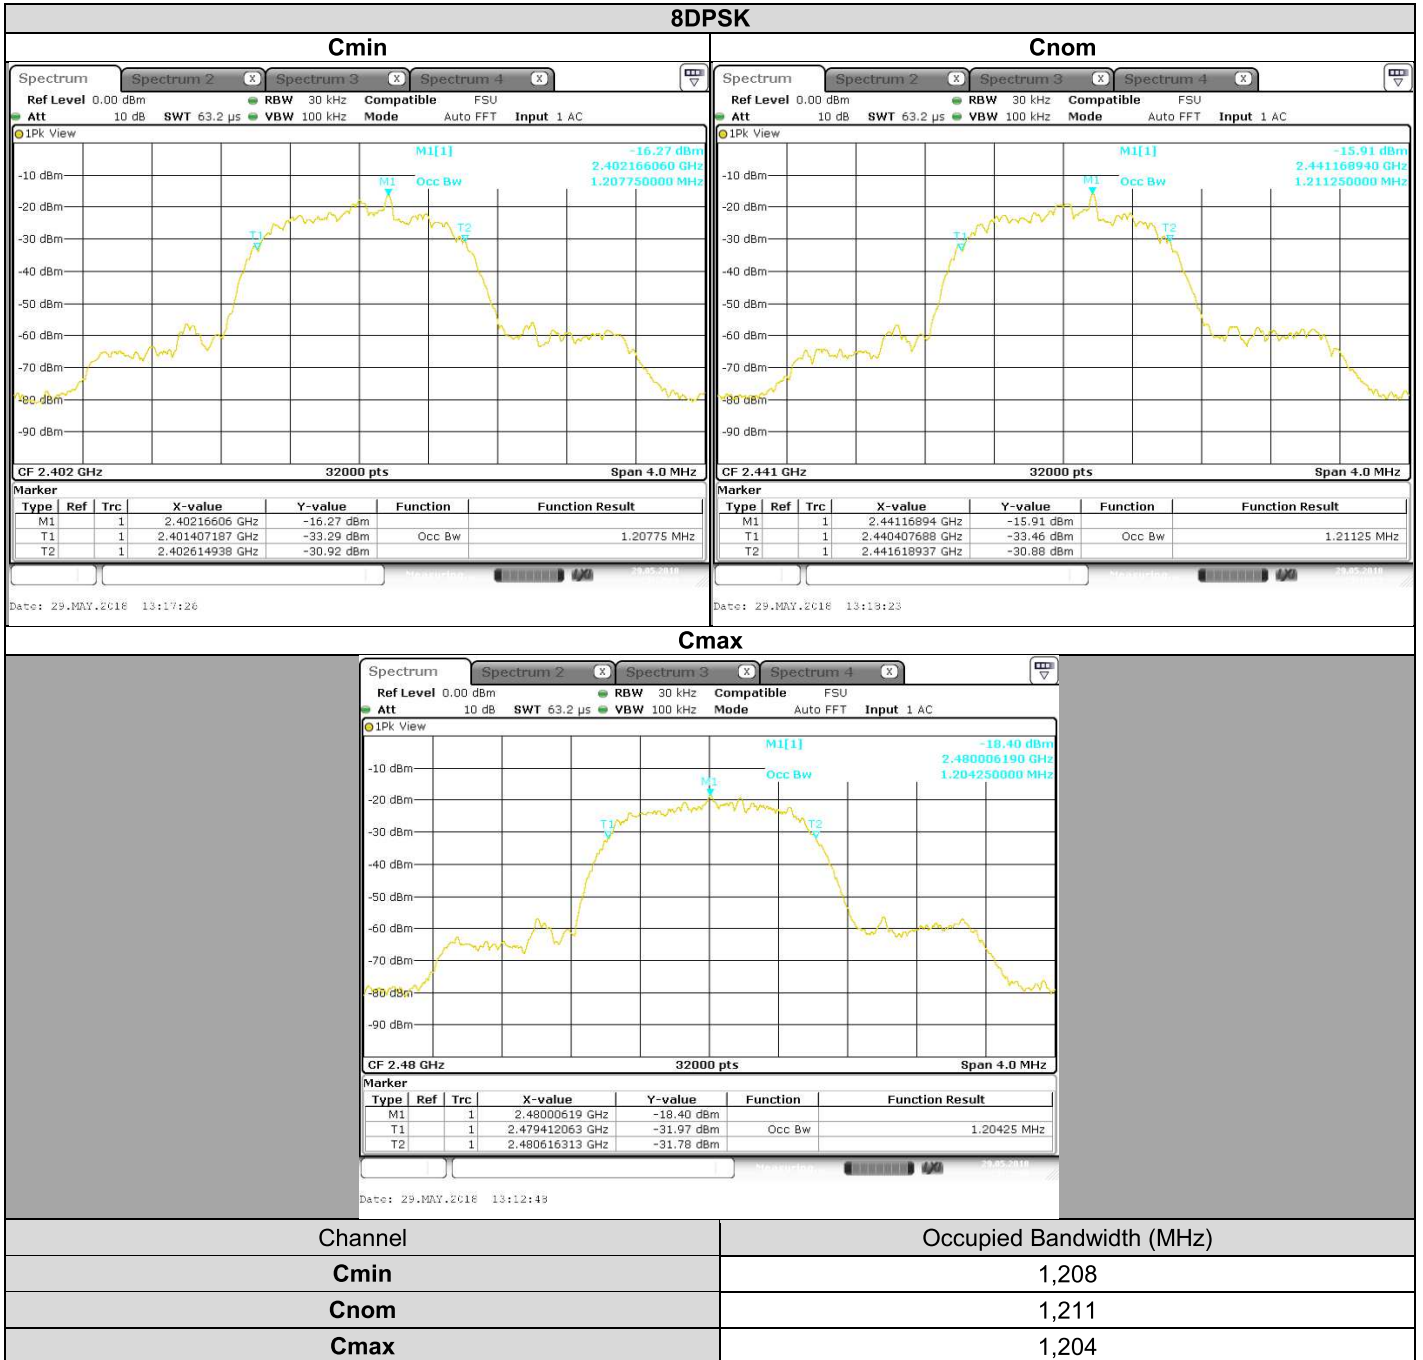

### 3.4. CONCLUSION

Occupied Bandwidth measurement performed on the sample of the product **SAGEMCOM DCIWA384 UHD Ait US V2**, SN: **253764997**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247** limits.

## 4. 20dB EMISSION BANDWIDTH

### 4.1. TEST CONDITIONS

Test performed by : Mathieu CERISIER  
Date of test : May 29, 2018  
Ambient temperature : 27 °C  
Relative humidity : 43 %

### 4.2. TEST SETUP

- The Equipment Under Test is installed:
  - On a table
  - In an anechoic chamber
- Measurement is performed with a spectrum analyzer in:
  - Conducted Method
  - Radiated Method
- Test Procedure:
  - ANSI C63.10 § 6.9.2



Photograph for 20dB emission bandwidth



#### 4.3. LIMIT

No Limit


#### 4.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2017/09	2018/09
Multi-meter	KEITHLEY	2000	A1242090	2016/06	2018/06
Programmable AC/DC power supply	KIKUSUI	PCR500M	A7040079	2016/06	2018/06
RF cable & 20 dB attenuator	Télédyne	920-0202-048	A5329676	2017/09	2018/09

Note: In our quality system, the test equipment calibration due is more & less 2 months




### 4.5. RESULTS

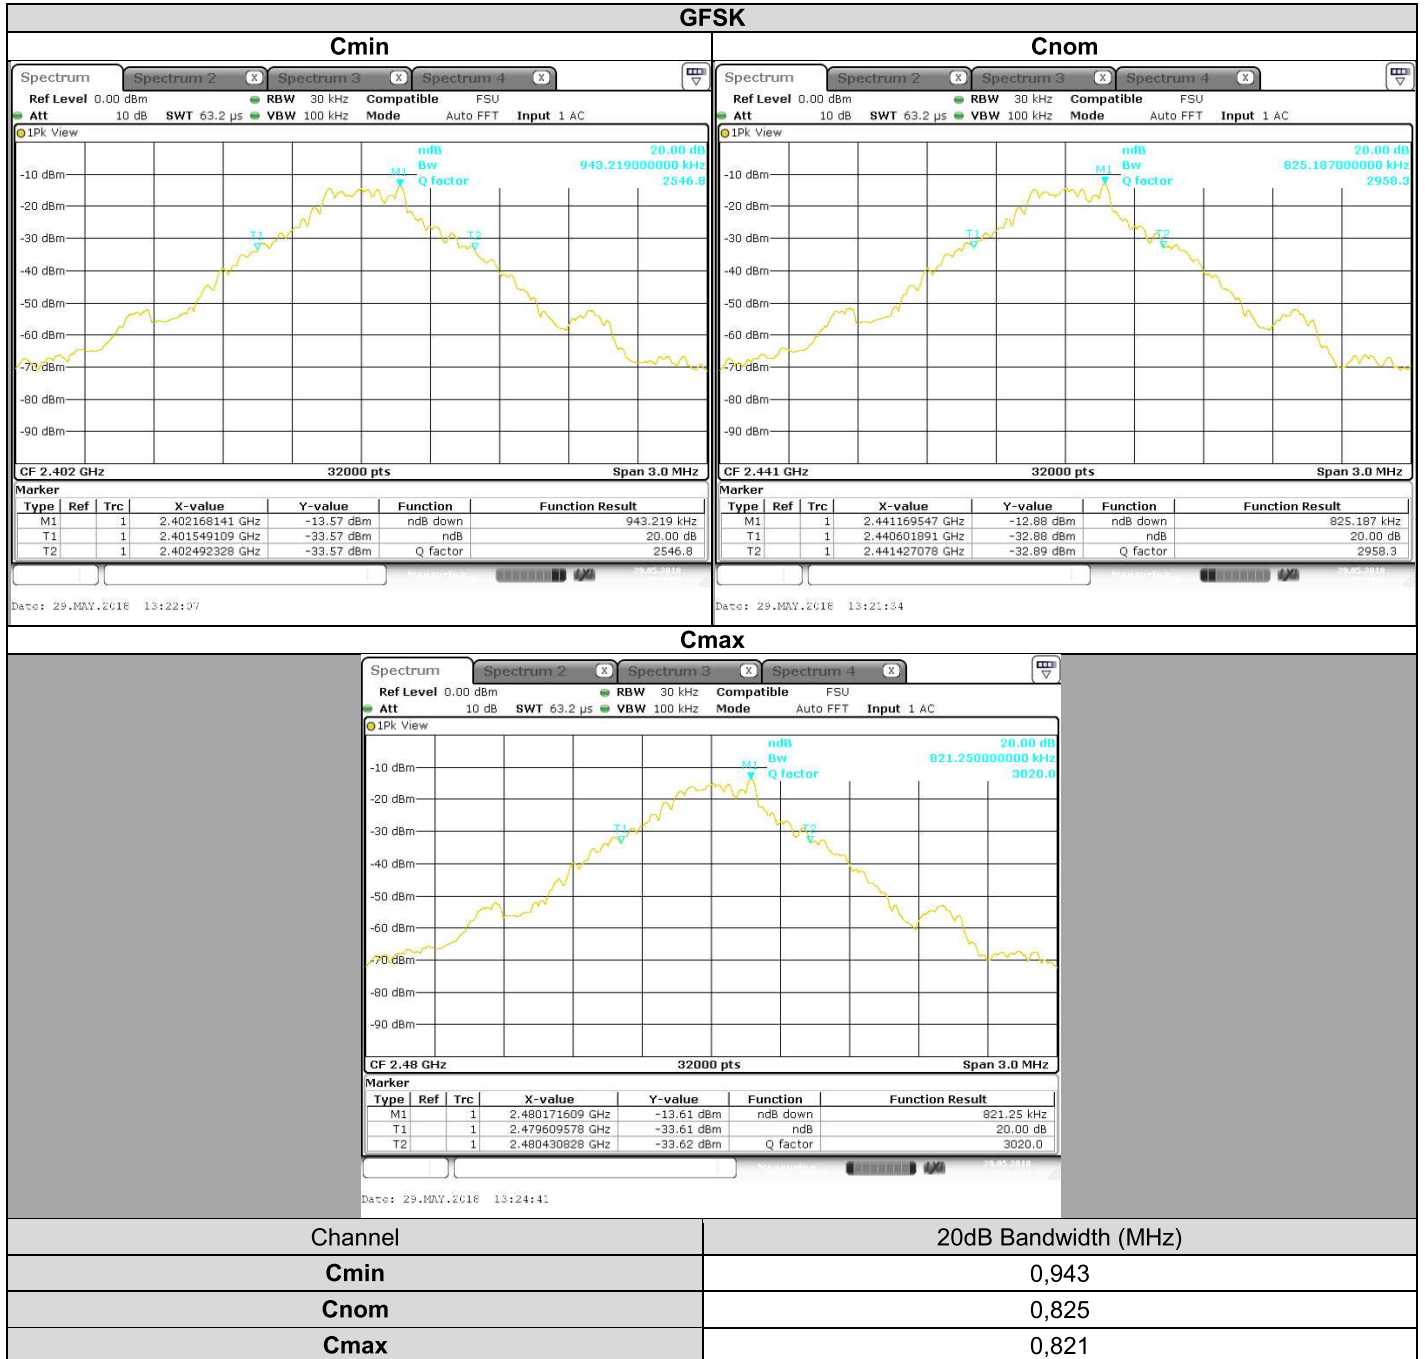




L C I E

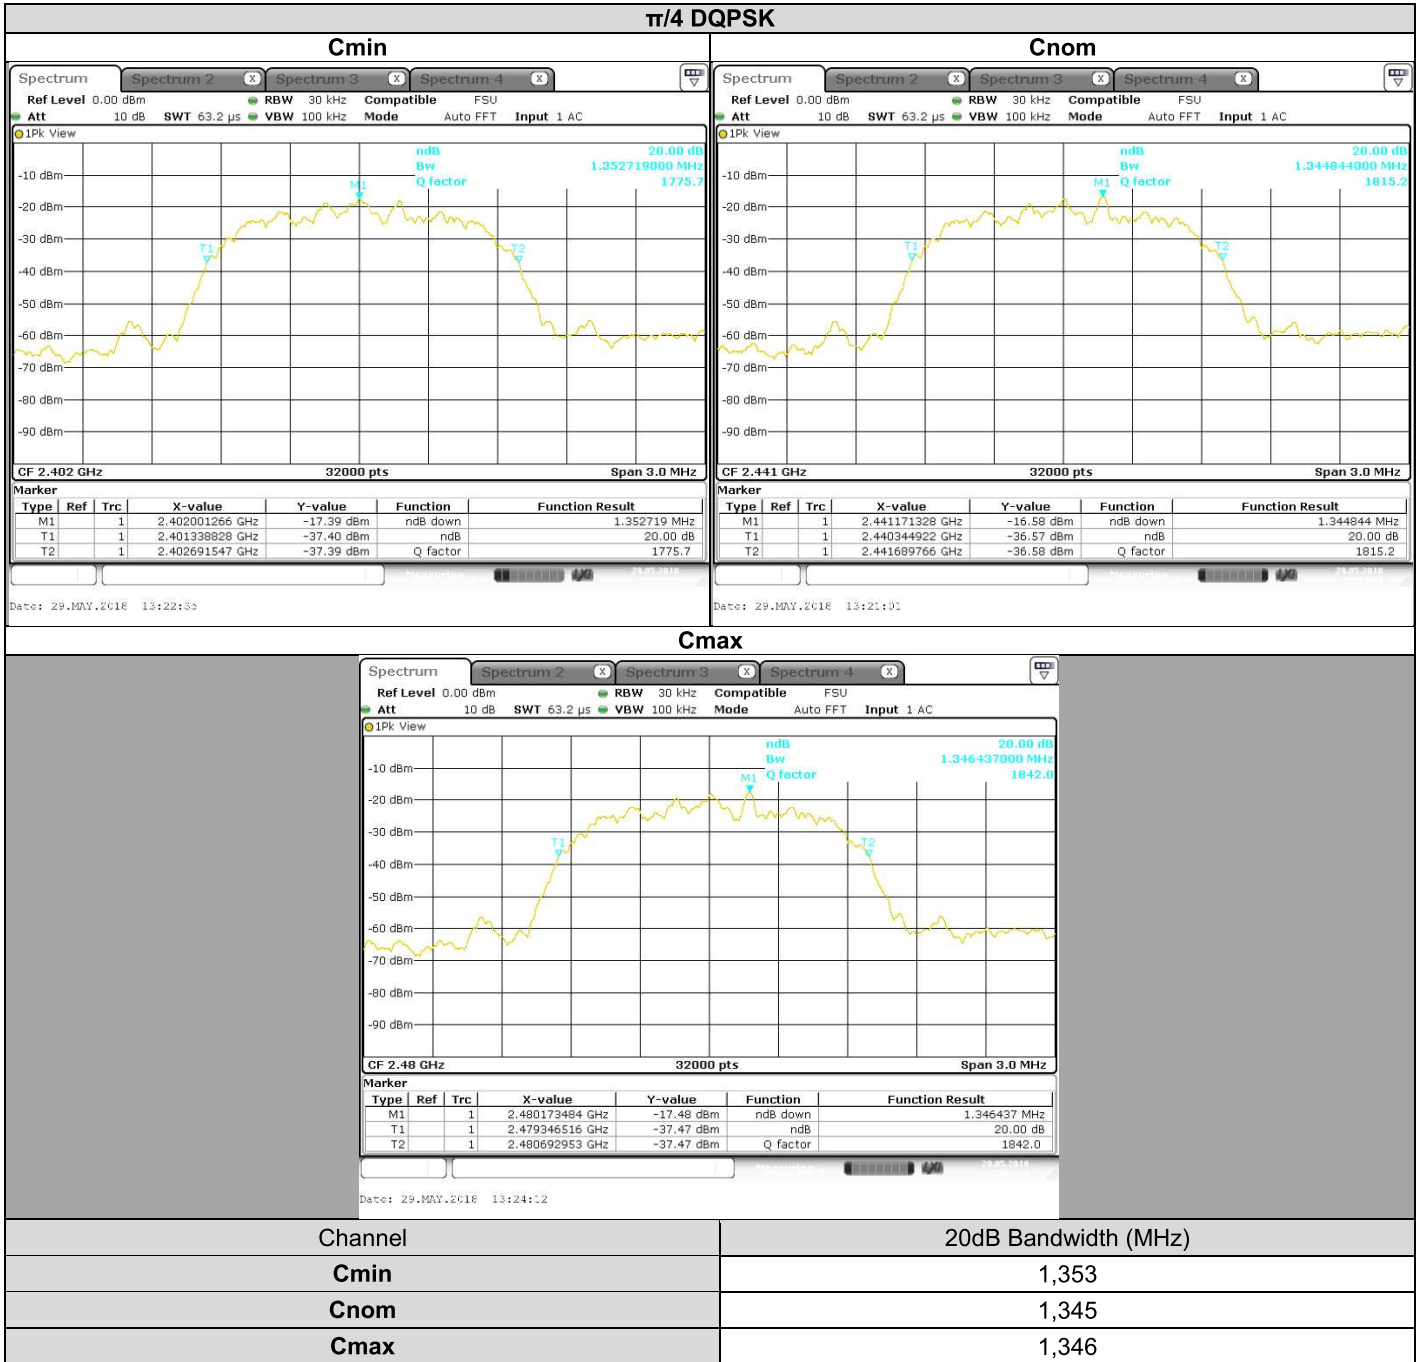



L C I E

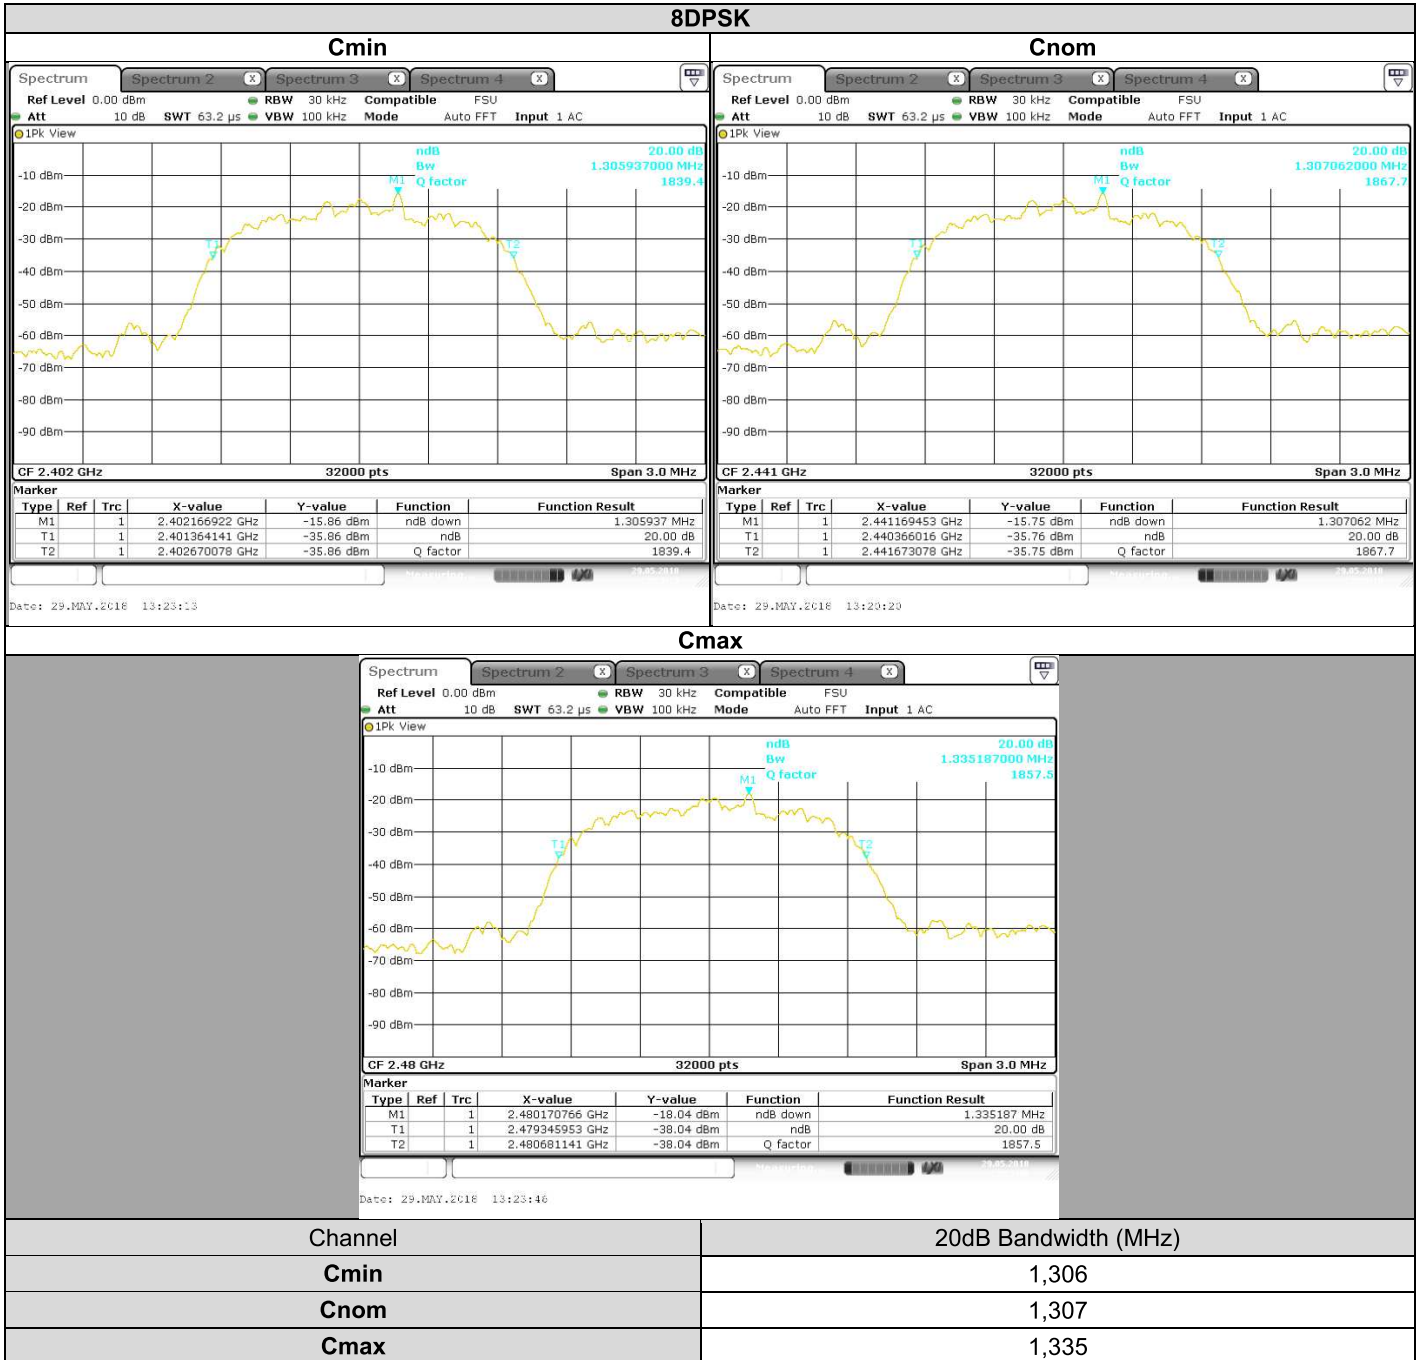

**4.6. CONCLUSION**

20dB Emission Bandwidth measurement performed on the sample of the product **SAGEMCOM DCIWA384 UHD Ait US V2**, SN: **253764997**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247** limits.


## 5. NUMBER OF HOPPING FREQUENCY

### 5.1. TEST CONDITIONS

Test performed by : Mathieu CERISIER  
Date of test : May 29, 2018  
Ambient temperature : 27 °C  
Relative humidity : 43 %

### 5.2. TEST SETUP

- The Equipment Under Test is installed:
  - On a table
  - In an anechoic chamber
- Measurement is performed with a spectrum analyzer in:
  - Conducted Method
  - Radiated Method
- Test Procedure:
  - ANSI C63.10 § 7.8.3

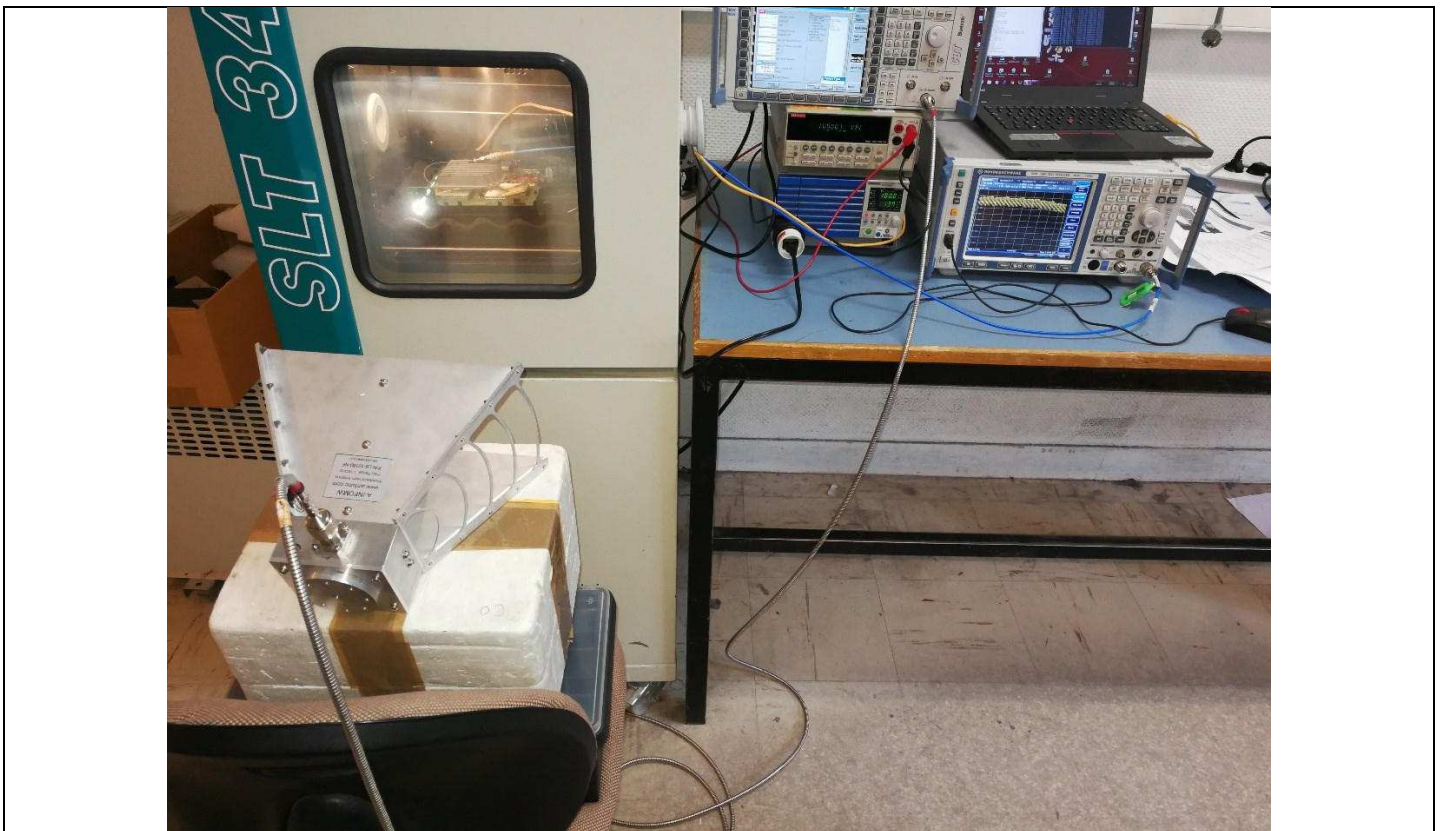

Photograph for Number of Frequency Hopping



### 5.3. LIMIT

Number of Hopping Frequencies shall be at least 15 channels

### 5.4. TEST EQUIPMENT LIST


DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2017/09	2018/09
Multi-meter	KEITHLEY	2000	A1242090	2016/06	2018/06
Programmable AC/DC power supply	KIKUSUI	PCR500M	A7040079	2016/06	2018/06
RF cable & 20 dB attenuator	Télédyne	920-0202-048	A5329676	2017/09	2018/09

Note: In our quality system, the test equipment calibration due is more & less 2 months




L C I E

## 5.5. RESULTS

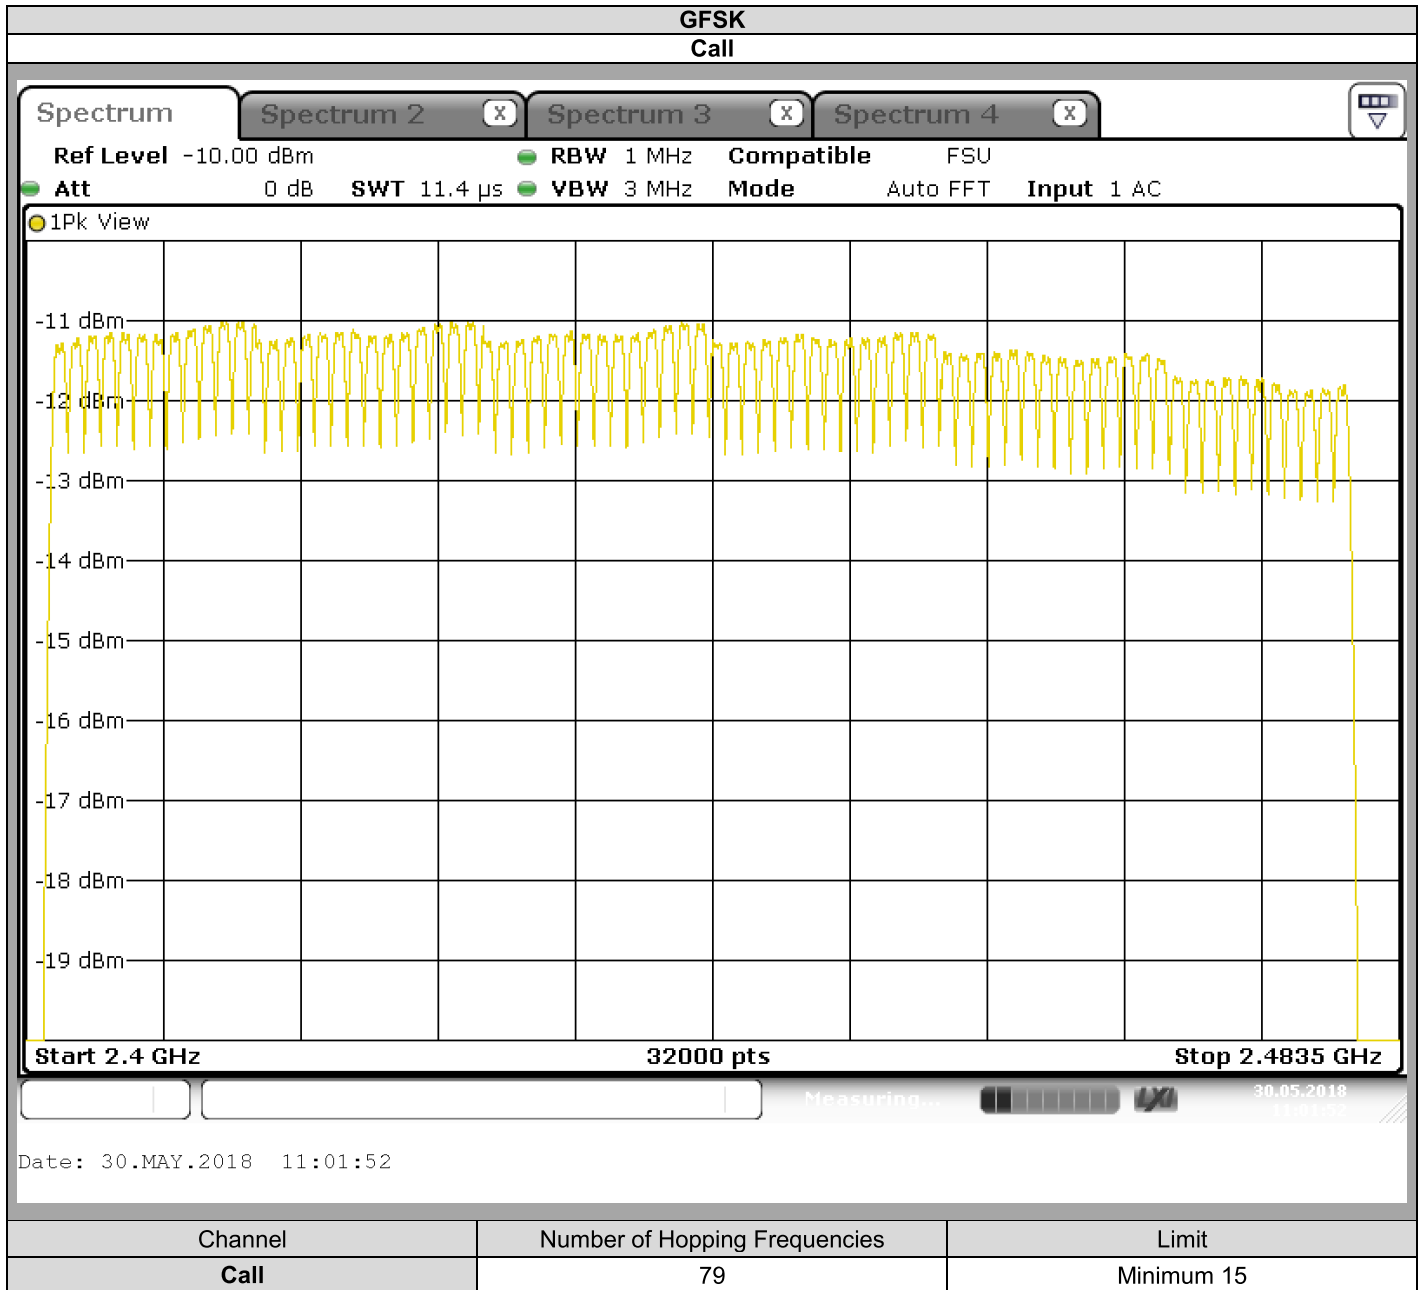




L C I E

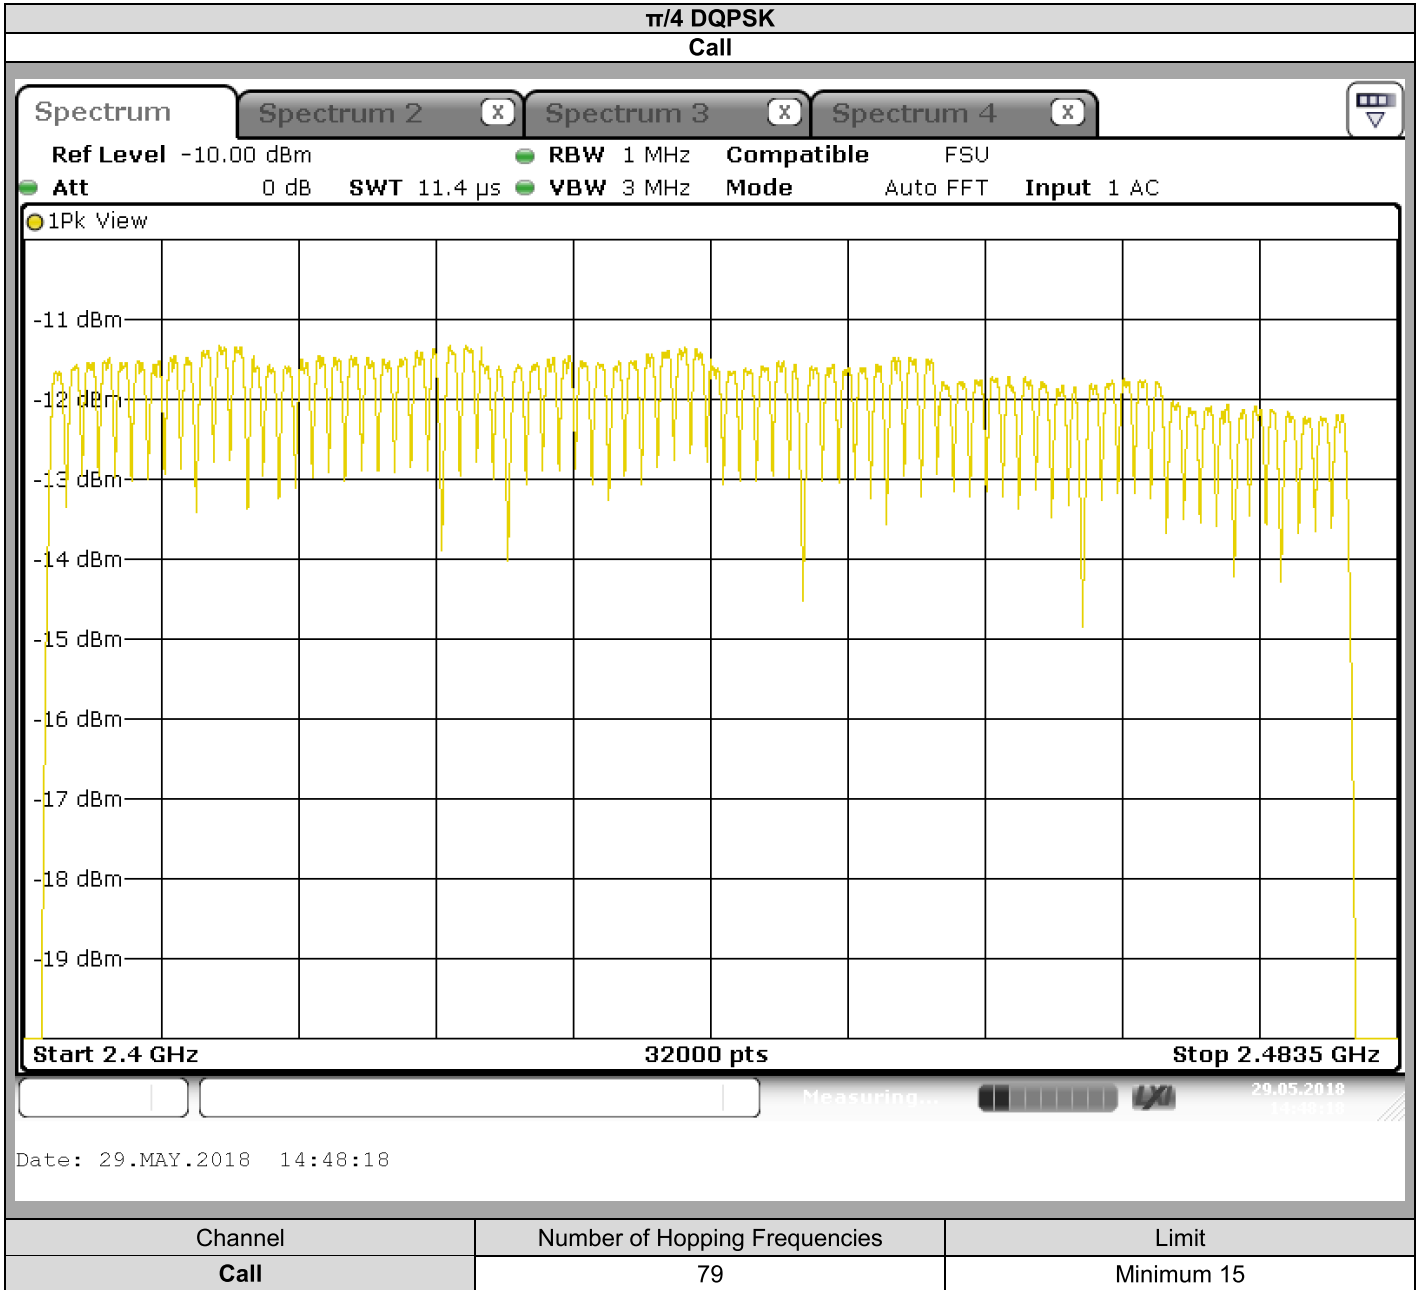



L C I E

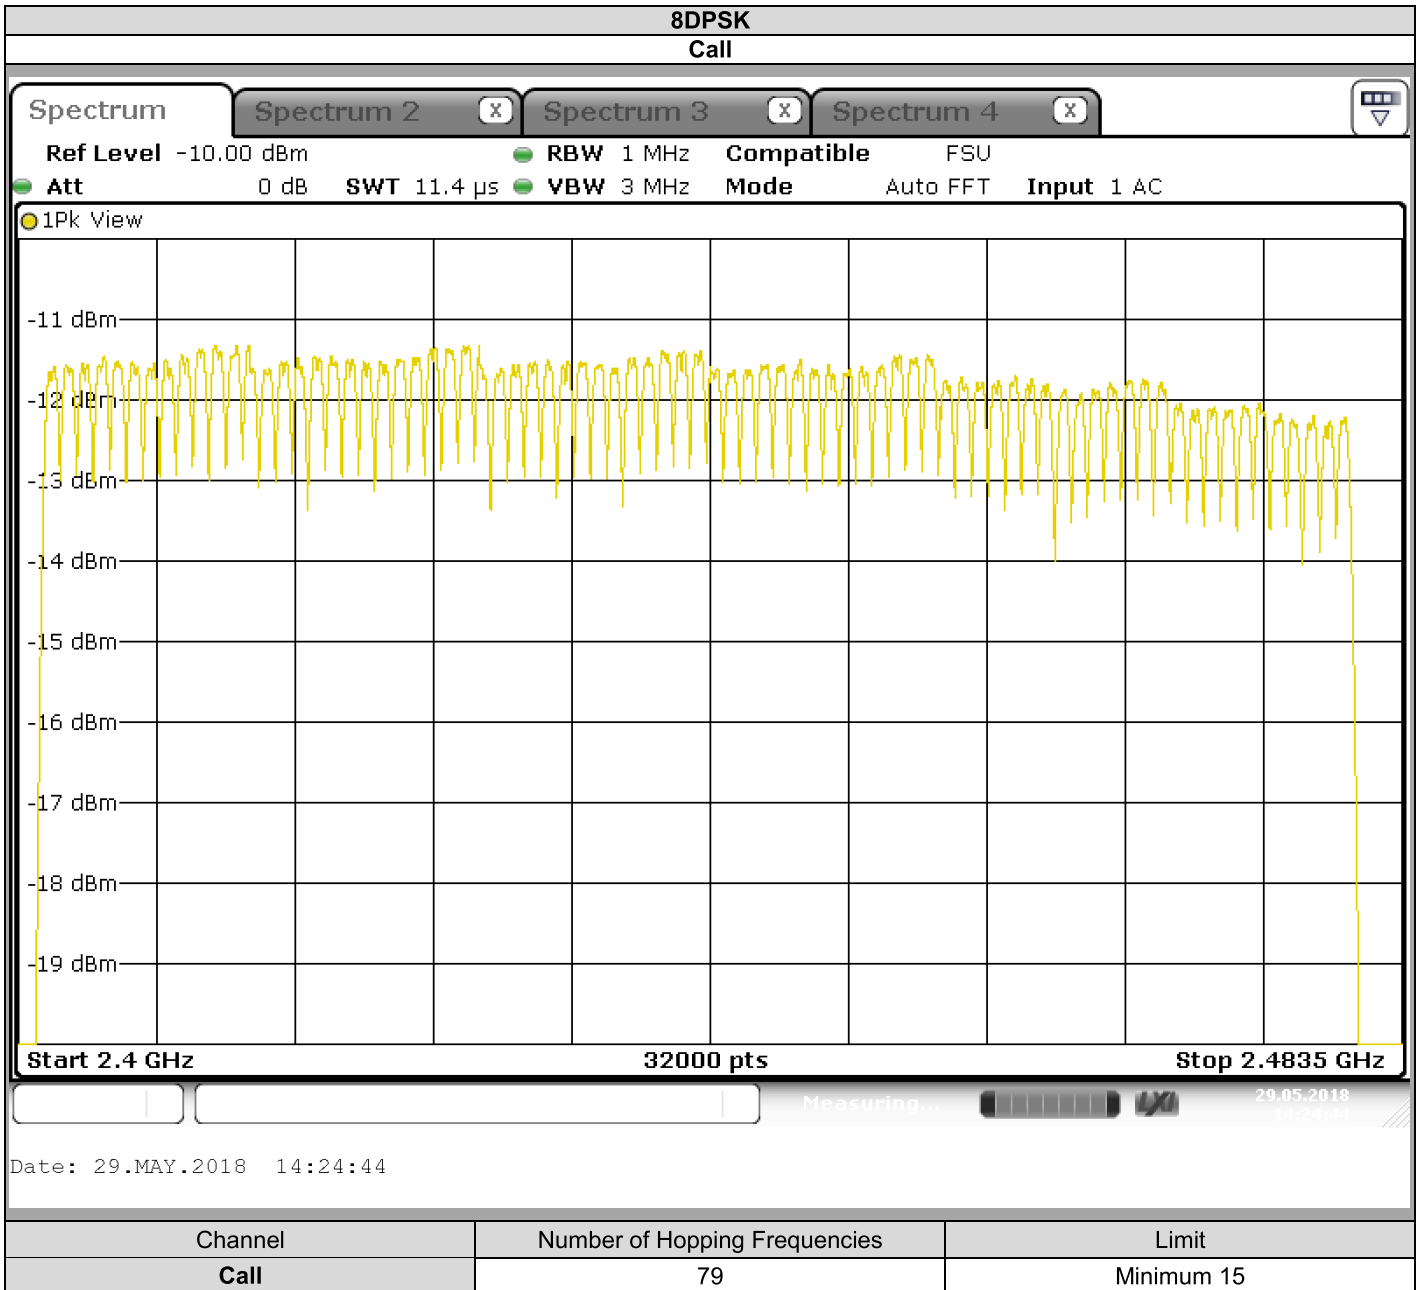

## 5.6. CONCLUSION

Number of Frequency Hopping measurement performed on the sample of the product **SAGEMCOM DCIWA384 UHD Ait US V2**, SN: **253764997**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247** limits.




## 6. CARRIER FREQUENCY SEPARATION

### 6.1. TEST CONDITIONS

Test performed by : Mathieu CERISIER  
Date of test : May 29, 2018  
Ambient temperature : 27 °C  
Relative humidity : 43 %

### 6.2. TEST SETUP

- The Equipment Under Test is installed:
  - On a table
  - In an anechoic chamber
- Measurement is performed with a spectrum analyzer in:
  - Conducted Method
  - Radiated Method
- Test Procedure:
  - ANSI C63.10 § 7.8.2

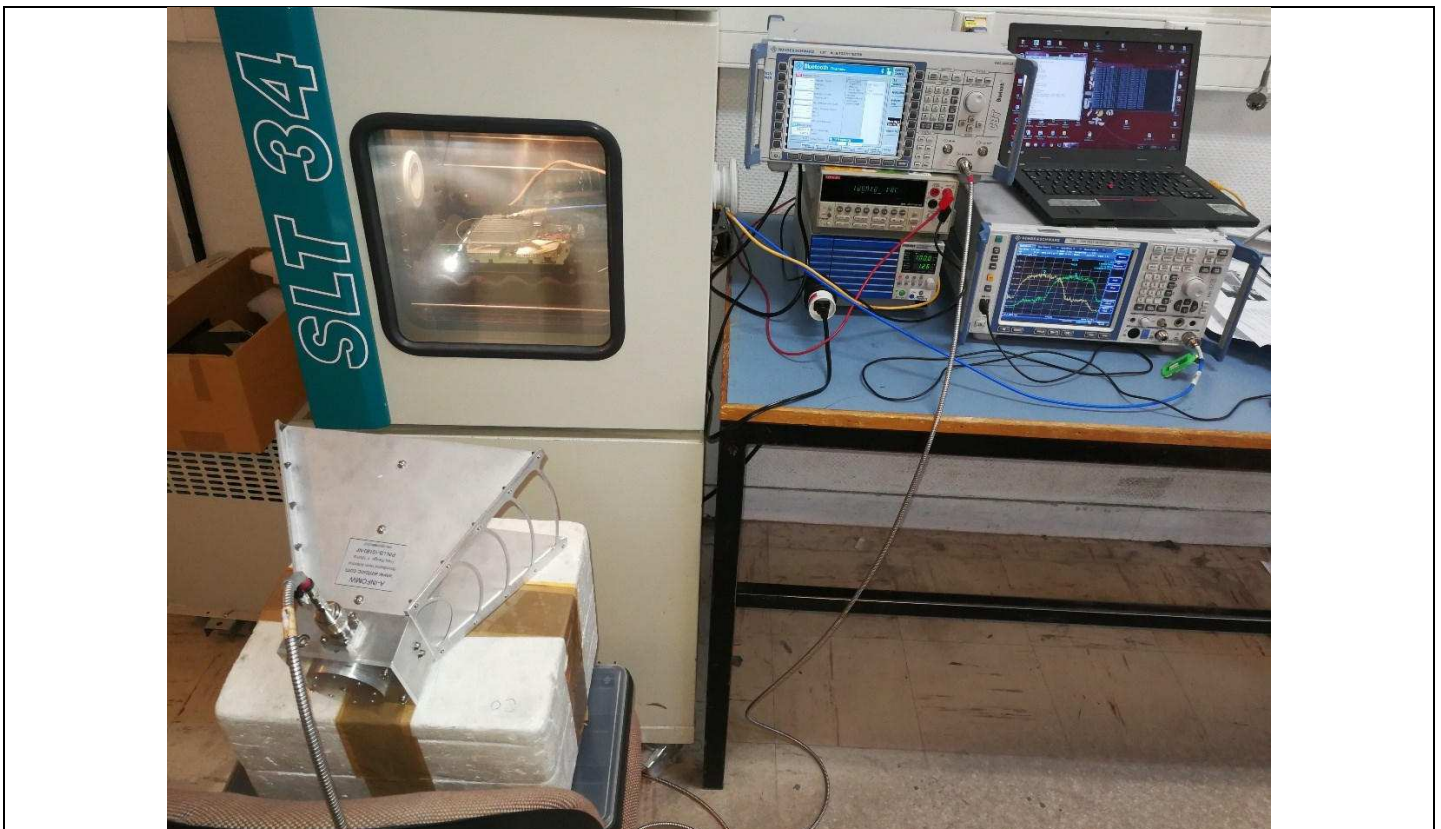

Photograph for Carrier Frequency Separation



### 6.3. LIMIT


Carrier Frequency Separation shall be at least two-thirds of the 20dB Bandwidth

### 6.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2017/09	2018/09
Multi-meter	KEITHLEY	2000	A1242090	2016/06	2018/06
Programmable AC/DC power supply	KIKUSUI	PCR500M	A7040079	2016/06	2018/06
RF cable & 20 dB attenuator	Télédyne	920-0202-048	A5329676	2017/09	2018/09



Note: In our quality system, the test equipment calibration due is more & less 2 months

## 6.5. RESULTS

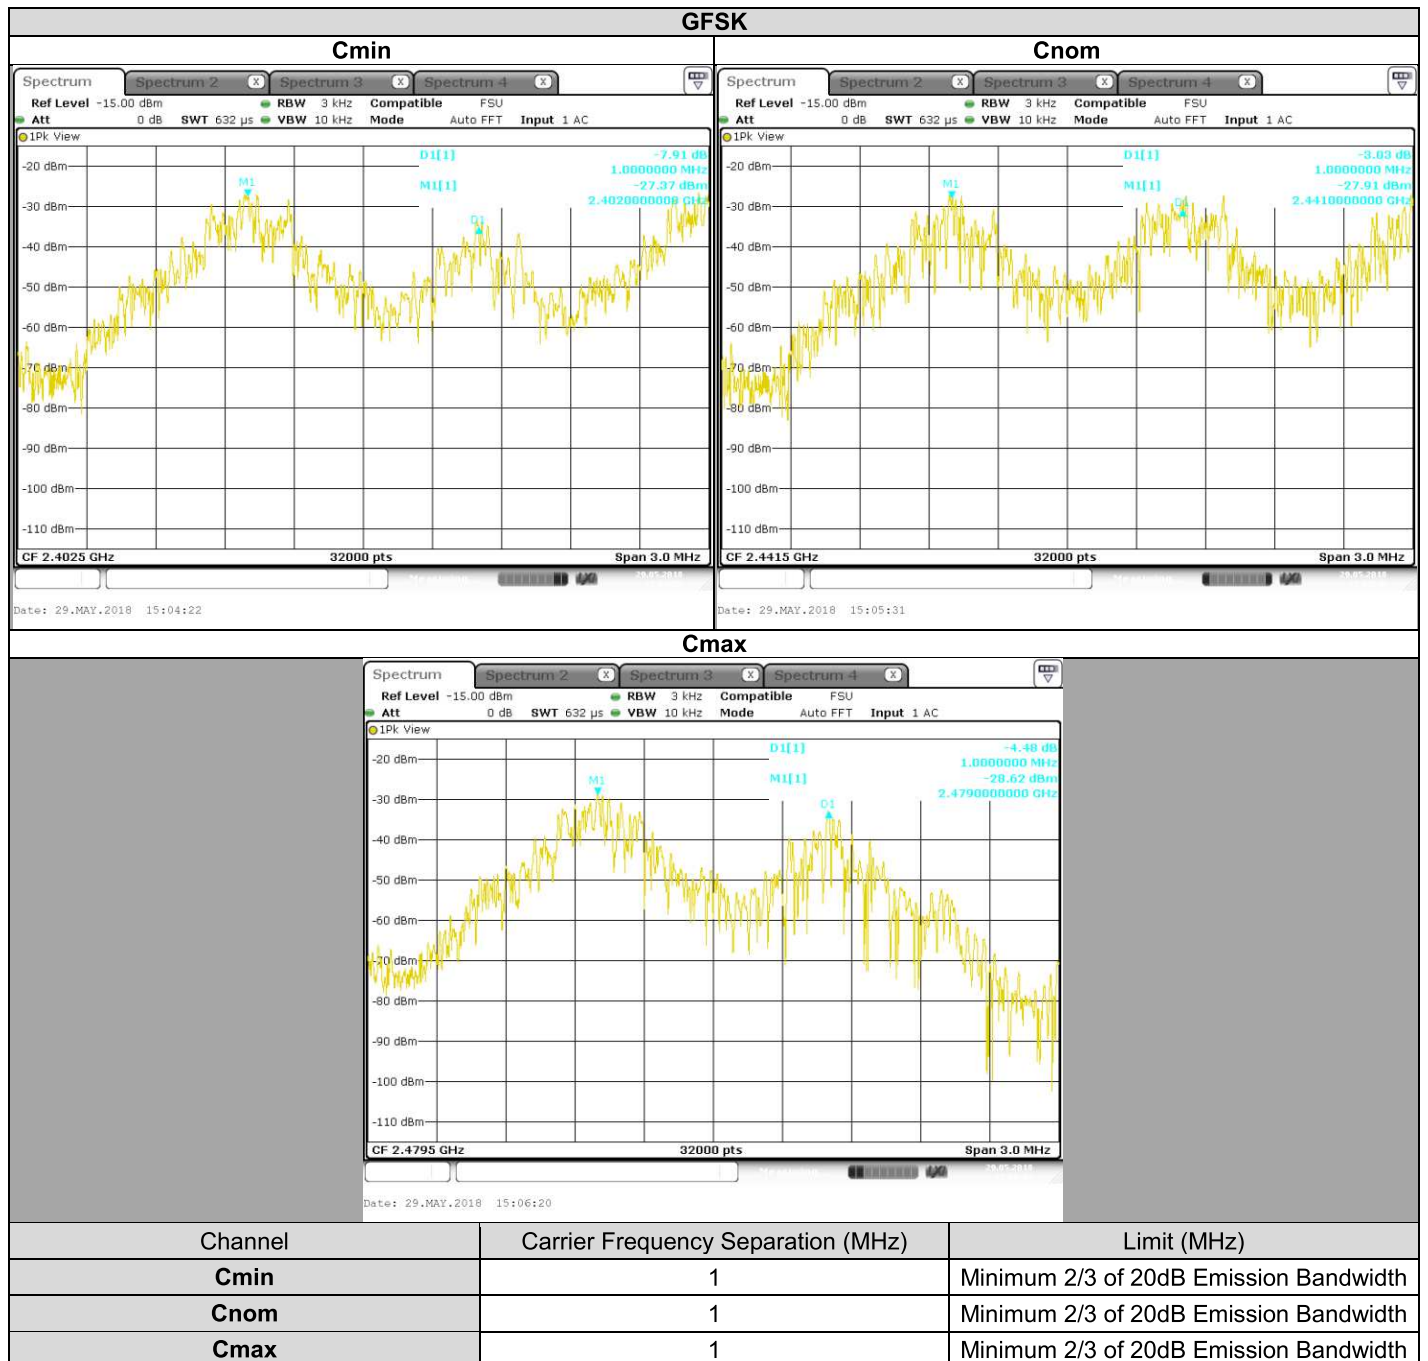





L C I E

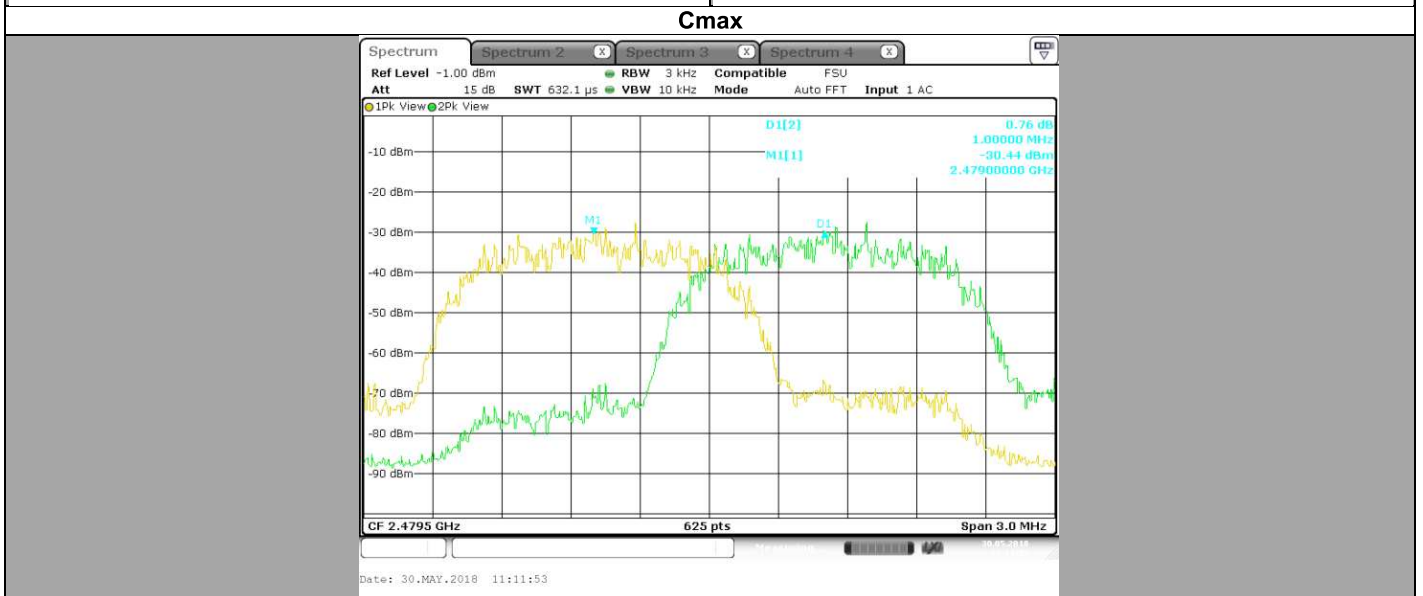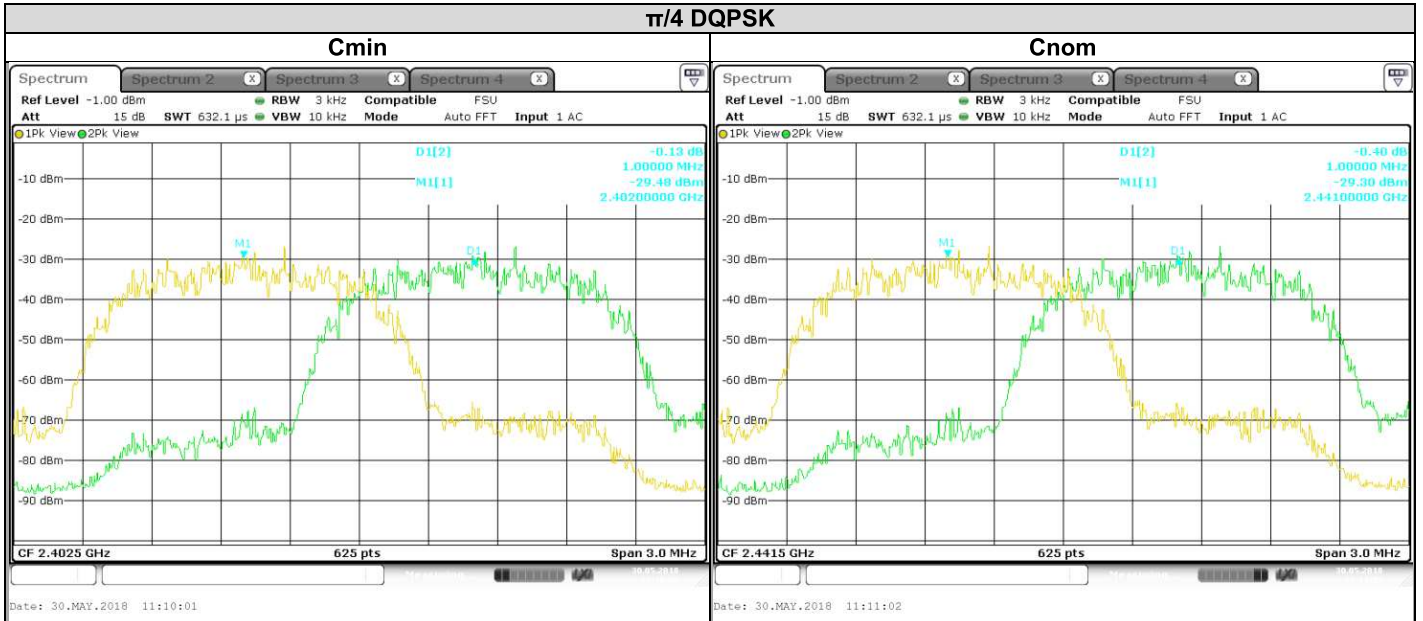

Channel	Carrier Frequency Separation (MHz)	Limit (MHz)
<b>Cmin</b>	1	Minimum 2/3 of 20dB Emission Bandwidth
<b>Cnom</b>	1	Minimum 2/3 of 20dB Emission Bandwidth
<b>Cmax</b>	1	Minimum 2/3 of 20dB Emission Bandwidth



L C I E

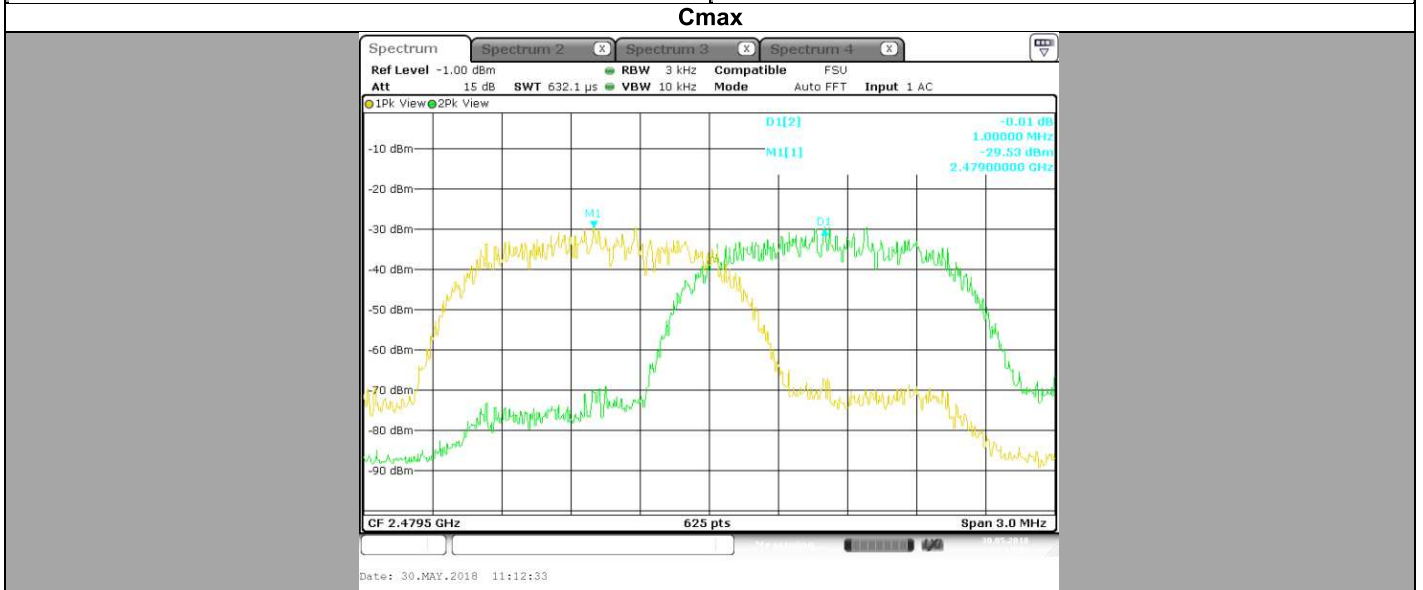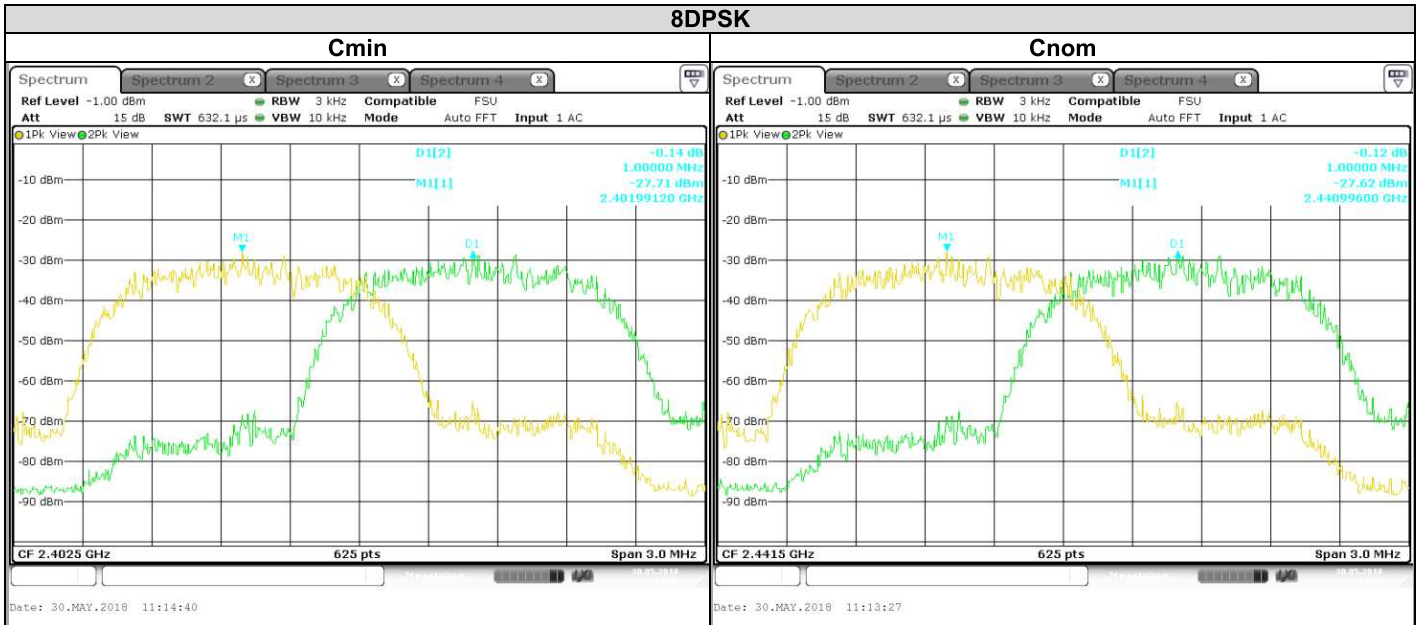

Channel	Carrier Frequency Separation (MHz)	Limit (MHz)
Cmin	1	Minimum 2/3 of 20dB Emission Bandwidth
Cnom	1	Minimum 2/3 of 20dB Emission Bandwidth
Cmax	1	Minimum 2/3 of 20dB Emission Bandwidth

## 6.6. CONCLUSION

Carrier Frequency Separation measurement performed on the sample of the product **SAGEMCOM DCIWA384 UHD Ait US V2**, SN: **253764997**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247** limits.

## 7. TIME OF OCCUPANCY

### 7.1. TEST CONDITIONS

Test performed by : Mathieu CERISIER  
Date of test : May 29, 2018  
Ambient temperature : 27 °C  
Relative humidity : 43 %

### 7.2. TEST SETUP

- The Equipment Under Test is installed:
  - On a table
  - In an anechoic chamber
- Measurement is performed with a spectrum analyzer in:
  - Conducted Method
  - Radiated Method
- Test Procedure:
  - ANSI C63.10 § 7.8.4



Photograph for Time of Occupancy



### 7.3. LIMIT

The Time of Occupancy shall not exceed 0.4s within any period of 0.4s multiplied by the number of hopping channels employed

### 7.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2017/09	2018/09
Multi-meter	KEITHLEY	2000	A1242090	2016/06	2018/06
Programmable AC/DC power supply	KIKUSUI	PCR500M	A7040079	2016/06	2018/06
RF cable & 20 dB attenuator	Télédyne	920-0202-048	A5329676	2017/09	2018/09

Note: In our quality system, the test equipment calibration due is more & less 2 months

## 7.5. RESULTS





<b>Burst Length</b>				
<b><math>\pi/4</math> DQPSK</b>				
<b>2DH1</b>	<b>2DH3</b>	<b>2DH5</b>		
				
<b>Time of Occupancy</b>				
<b>2DH1</b>	<b>2DH3</b>	<b>2DH5</b>		
				
Packet Type	Burst Length (ms)	Number of Hopping during Time of Occupancy	Time of Occupancy (ms)	Limit of Time of Occupancy (ms)
2DH1	0,372	244	91	400
2DH3	1,55	70	109	400
2DH5	2,6	46	120	400



L C I E



## 7.6. CONCLUSION

Time of Occupancy measurement performed on the sample of the product **SAGEMCOM DCIWA384 UHD AIt US V2**, SN: **253764997**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247** limits.

## 8. DUTY CYCLE

### 8.1. TEST CONDITIONS

Test performed by : Mathieu CERISIER  
Date of test : May 29, 2018  
Ambient temperature : 27 °C  
Relative humidity : 43 %

### 8.2. TEST SETUP

- The Equipment Under Test is installed:

- On a table
- In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:

- Conducted Method
- Radiated Method

- Test Procedure:

- ANSI C63.10 § 11.6



Photograph for Duty Cycle



### 8.3. LIMIT

None

### 8.4. TEST EQUIPMENT LIST


DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2017/09	2018/09
Multi-meter	KEITHLEY	2000	A1242090	2016/06	2018/06
Programmable AC/DC power supply	KIKUSUI	PCR500M	A7040079	2016/06	2018/06
RF cable & 20 dB attenuator	Télédyne	920-0202-048	A5329676	2017/09	2018/09

Note: In our quality system, the test equipment calibration due is more & less 2 months




L C I E

8.5. RESULTS

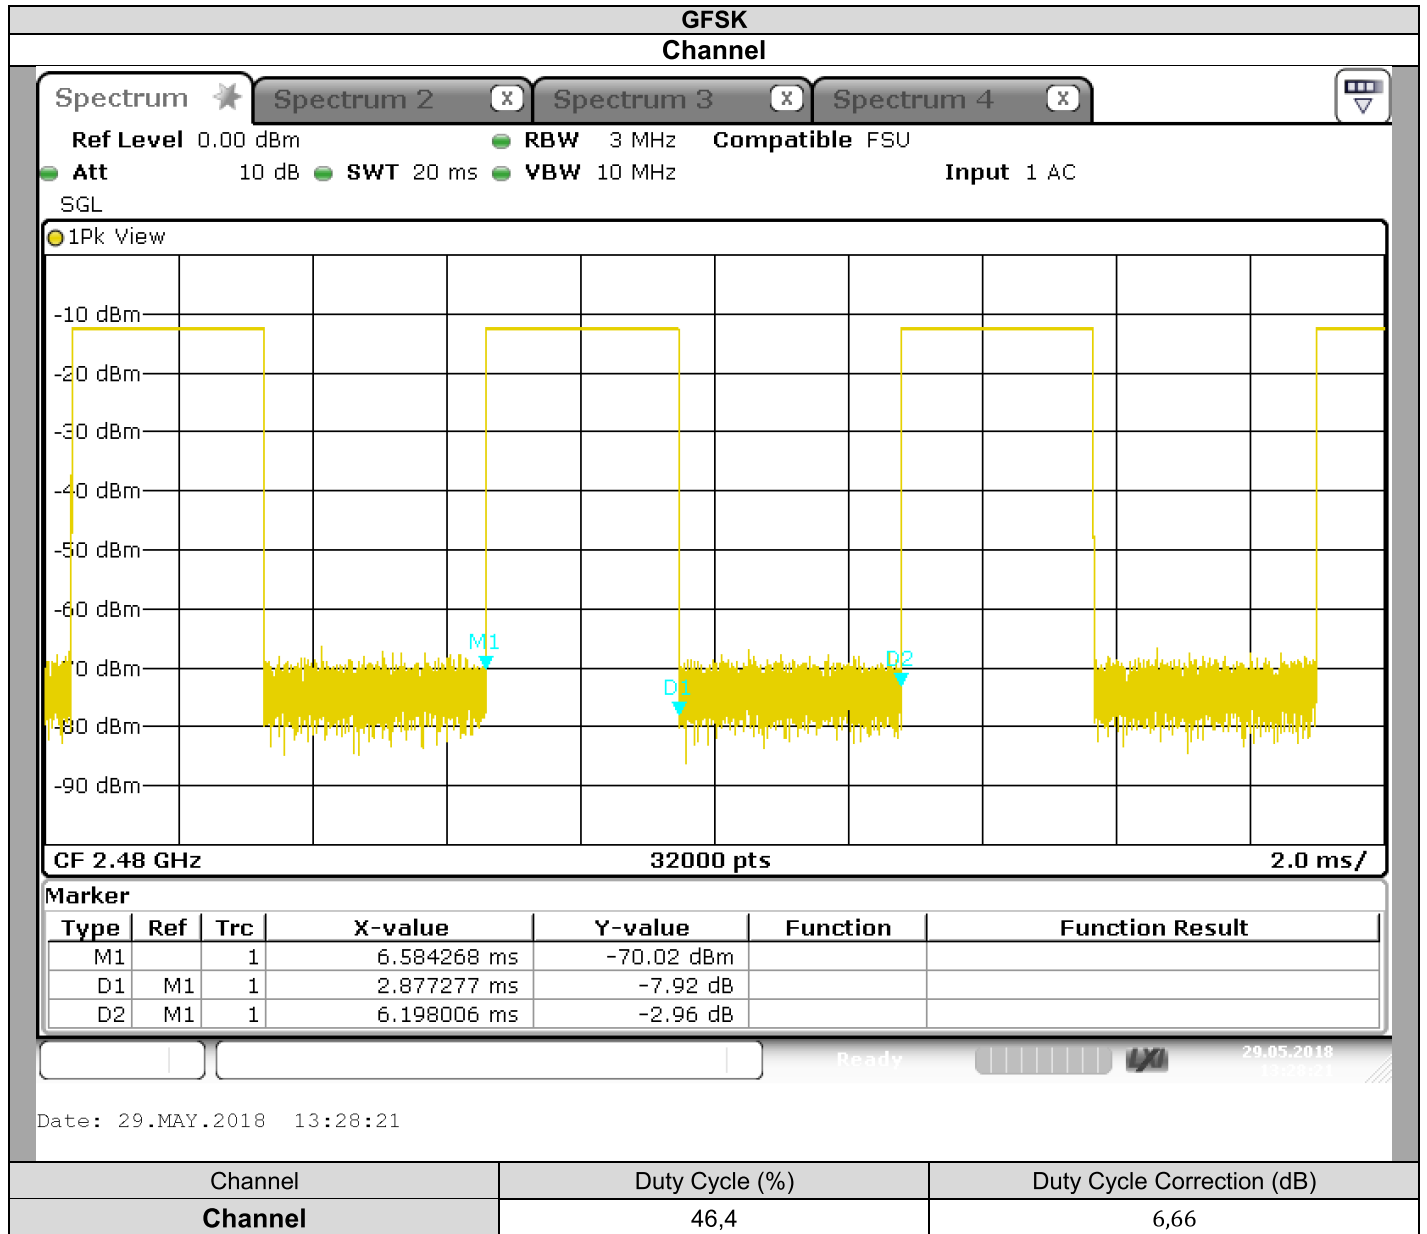




L C I E

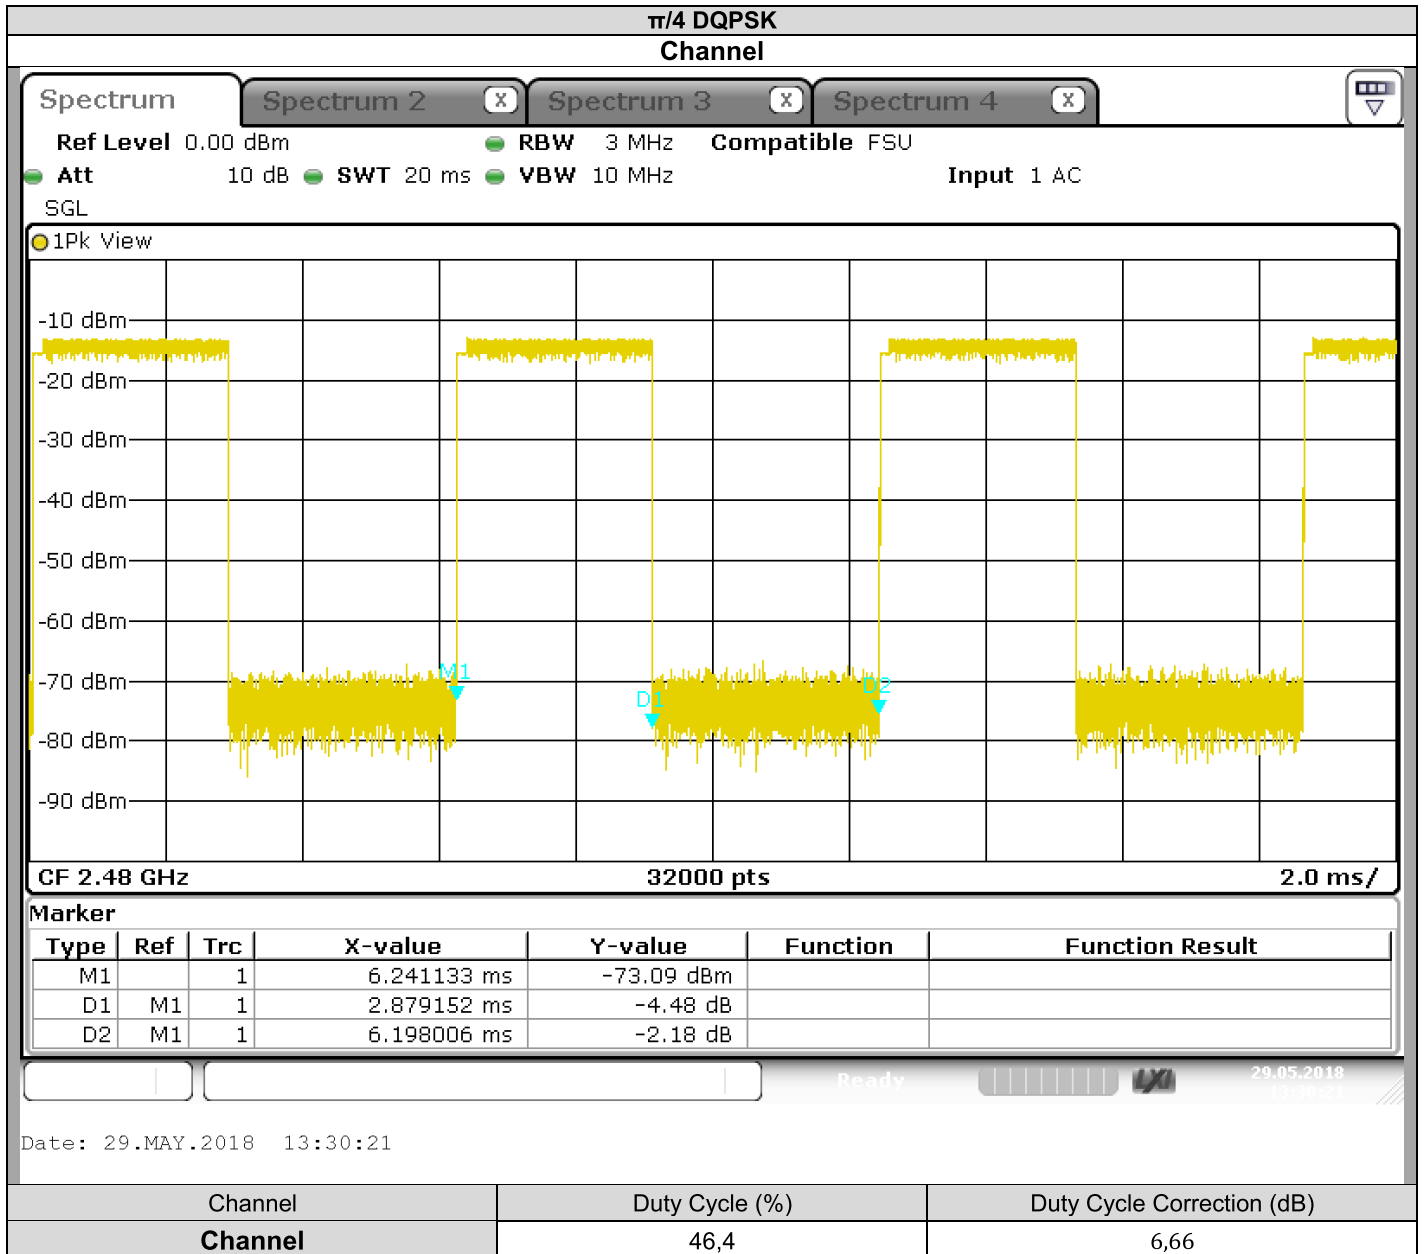



L C I E

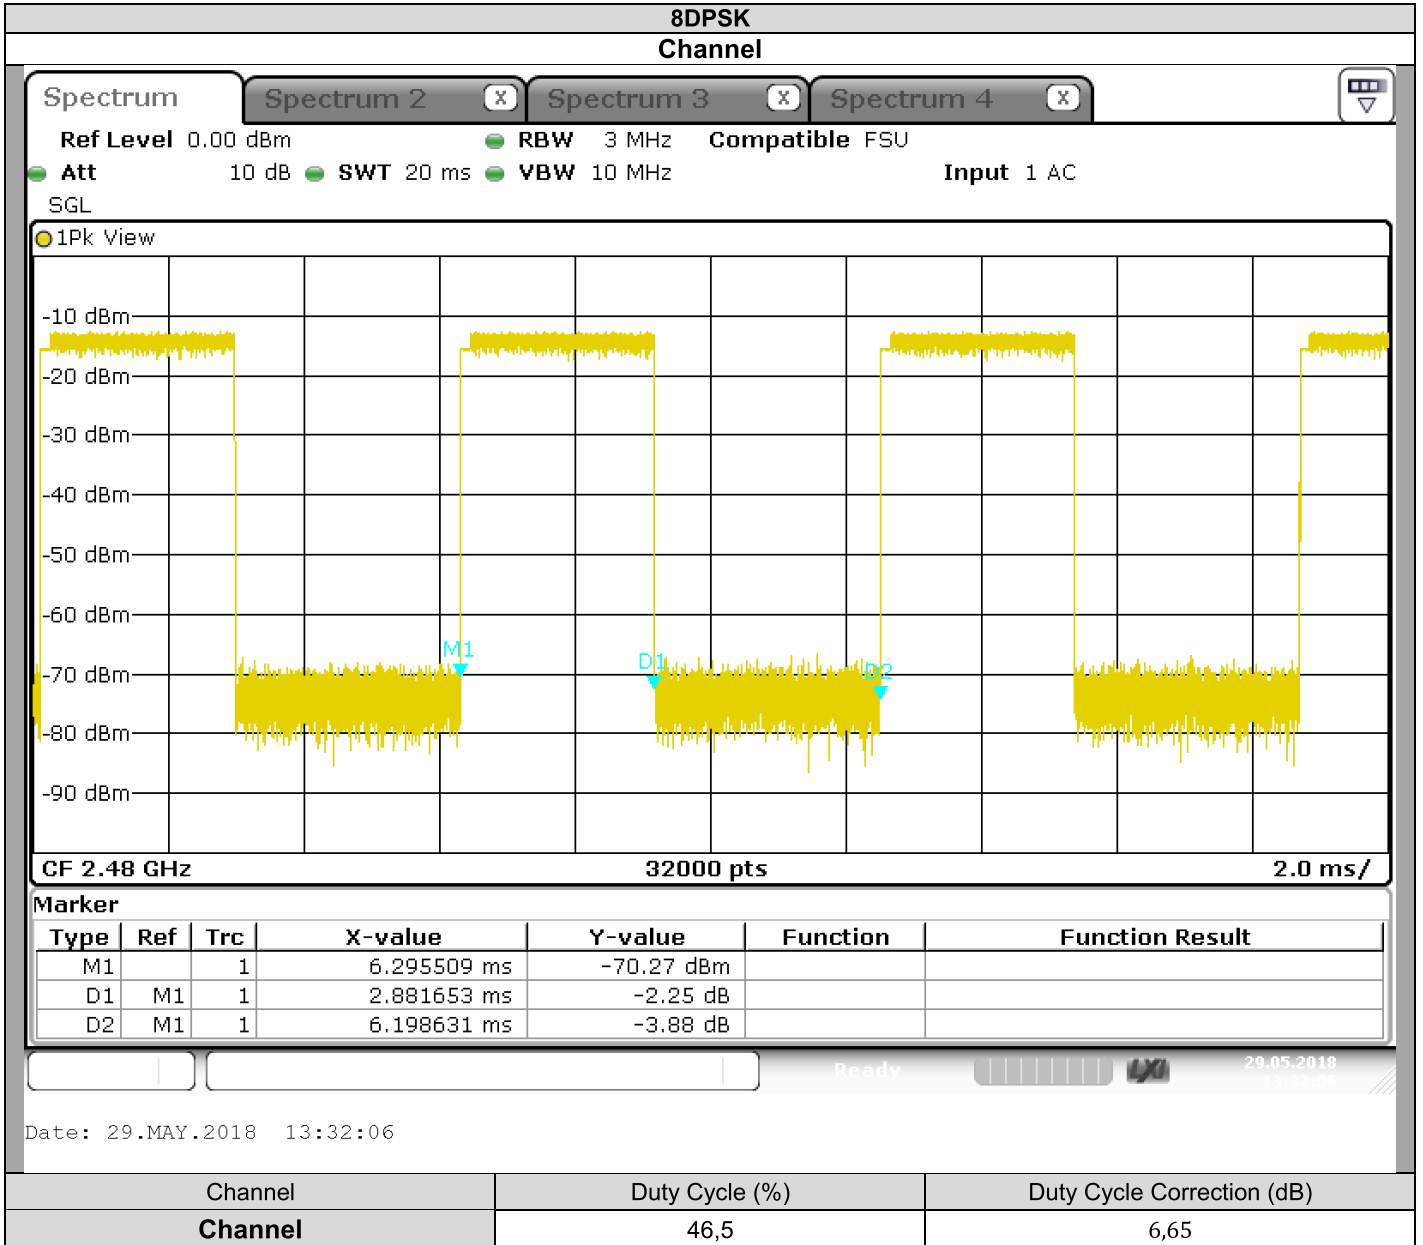

## 8.6. CONCLUSION

Duty Cycle measurement performed on the sample of the product **SAGEMCOM DCIWA384 UHD Alt US V2**, SN: **253764997**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247** limits.