

## TEST REPORT

Test report no.: 23-1-0068401T004a

BNetzA-CAB-02/21-102

### Testing laboratory

**cetecom advanced GmbH**  
Untertuerkheimer Strasse 6 – 10  
66117 Saarbruecken / Germany  
Phone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <https://cetecomadvanced.com>  
e-mail: [mail@cetecomadvanced.com](mailto:mail@cetecomadvanced.com)

#### Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)  
The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

### Applicant

**SAGEMCOM BROADBAND SAS**  
250, route de l' Empereur  
92848 Rueil-Malmaison Cedex / FRANCE  
Phone: -/-  
Contact: Benjamin Murindangabo  
e-mail: [benjamin.murindangabo-ext@sagemcom.com](mailto:benjamin.murindangabo-ext@sagemcom.com)

### Manufacturer

**SAGEMCOM BROADBAND SAS**  
250, route de l' Empereur  
92848 Rueil-Malmaison Cedex / FRANCE

### Test standard/s

FCC - Title 47 CFR Part 15    FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

For further applied test standards please refer to section 3 of this test report.

### Test Item

<b>Kind of test item:</b>	<b>Set-top Box</b>
<b>Model name:</b>	<b>DIW377 DISH</b>
<b>FCC ID:</b>	<b>VW3DIW377D</b>
<b>Frequency:</b>	UNII bands: 5150 MHz to 5250 MHz; 5250 MHz to 5350 MHz; 5470 MHz to 5725 MHz; 5725 MHz to 5850 MHz
<b>Technology tested:</b>	WLAN
<b>Antenna:</b>	Two integrated antennas
<b>Power supply:</b>	115 V AC by mains
<b>Temperature range:</b>	0°C to 40°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:



Michael Dorongovski  
Lab Manager  
Radio Labs

### Test performed:



p.o.  
Andreas Kurzkurt  
Testing Manager  
Radio Labs

## 1 Table of contents

1	Table of contents.....	2
2	General information.....	4
2.1	Notes and disclaimer .....	4
2.2	Application details .....	4
2.3	Test laboratories sub-contracted .....	4
3	Test standard/s, references and accreditations .....	5
4	Reporting statements of conformity – decision rule .....	6
5	Test environment.....	7
6	Test item .....	7
6.1	General description .....	7
6.2	Additional information .....	7
7	Description of the test setup.....	8
7.1	Shielded semi anechoic chamber .....	9
7.2	Shielded fully anechoic chamber.....	11
7.3	Radiated measurements > 18 GHz .....	12
7.4	AC conducted.....	13
7.5	Conducted measurements with peak power meter & spectrum analyzer .....	14
8	Sequence of testing.....	15
8.1	Sequence of testing radiated spurious 9 kHz to 30 MHz .....	15
8.2	Sequence of testing radiated spurious 30 MHz to 1 GHz.....	16
8.3	Sequence of testing radiated spurious 1 GHz to 18 GHz.....	17
8.4	Sequence of testing radiated spurious above 18 GHz.....	18
9	Measurement uncertainty .....	19
10	Summary of measurement results .....	20
11	Additional comments.....	21
12	Measurement results .....	28
12.1	Identify worst case data rate.....	28
12.2	Antenna gain .....	29
12.3	Duty cycle.....	30
12.4	Maximum output power .....	31
12.4.1	Maximum output power according to FCC requirements .....	31
12.5	Power spectral density .....	34
12.5.1	Power spectral density according to FCC requirements.....	34
12.6	Minimum emission bandwidth for the band 5.725-5.85 GHz.....	37
12.7	Spectrum bandwidth / 26 dB bandwidth .....	41
12.8	Occupied bandwidth / 99% emission bandwidth .....	44
12.9	Undesirable emissions for transmitters operating in the 5725 MHz to 5850 MHz band .....	46
12.10	Band edge compliance radiated .....	55
12.11	Spurious emissions radiated below 30 MHz .....	70
12.12	Spurious emissions radiated 30 MHz to 1 GHz .....	85
12.13	Spurious emissions radiated 1 GHz to 40 GHz .....	90

12.14	Spurious emissions conducted < 30 MHz .....	111
13	Observations .....	114
14	Glossary .....	114
15	Document history .....	115
16	Accreditation Certificate – D-PL-12076-01-05 .....	115

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.

The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".

cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.

All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

Date of receipt of test item:	2023-06-21
Start of test:*	2023-07-04
End of test:*	2023-07-26
Person(s) present during the test:	-/-

\*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

### 2.3 Test laboratories sub-contracted

None

### 3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 15		FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

Guidance	Version	Description
KDB 789033 D02	v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 662911 D01	v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band


Accreditation	Description
D-PL-12076-01-05	Telecommunication FCC requirements <a href="https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf">https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf</a>



ISED Testing Laboratory Recognized Listing Number: DE0001  
FCC designation number: DE0002

#### 4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3. The measurement uncertainty is mentioned in this test report, see chapter 9 but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

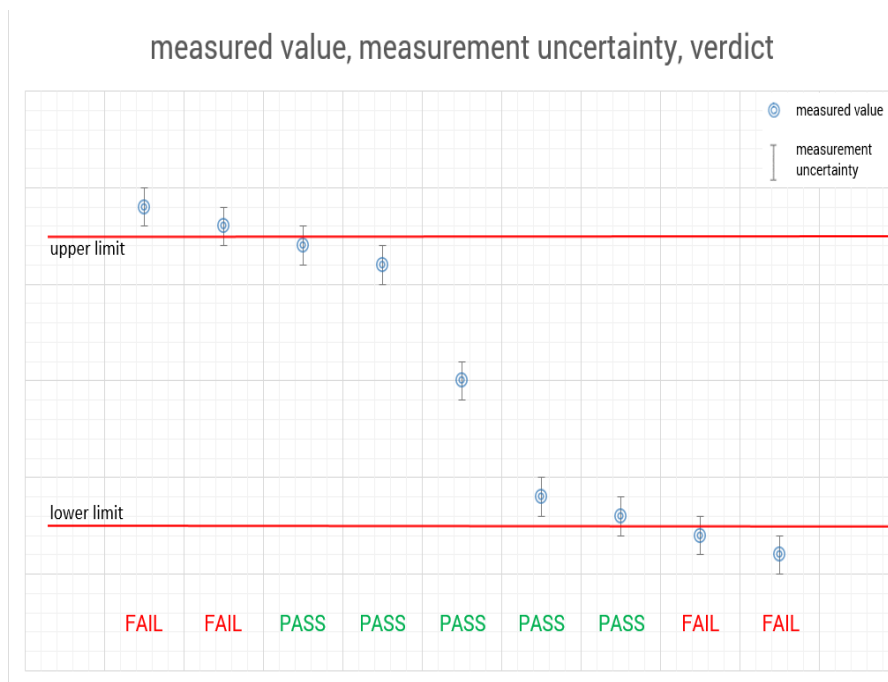

## 5 Test environment

Temperature	:	$T_{nom}$ 20 °C during room temperature tests $T_{max}$ No testing under extreme temperature conditions required $T_{min}$ No testing under extreme temperature conditions required
Relative humidity content	:	55 %
Barometric pressure	:	Not relevant for this kind of testing
Power supply	:	$V_{nom}$ 115 V AC by mains $V_{max}$ No testing under extreme voltage conditions required $V_{min}$ No testing under extreme temperature conditions required

## 6 Test item

### 6.1 General description

Kind of test item	:	Set-top Box
Model name	:	DIW377 DISH
S/N serial number	:	Rad. Config#3 Cond. Config#2
Hardware status	:	M393 AL VSB-3
Software status	:	TTHW compiled Wed 10 May 2023 09:31:07 AM CEST by Jenkins From 0f5de0b Broadcom SDK 22.0.1 Boxmode:2
Firmware status	:	STB_BCM4375B1_100.010_4375B1_UART_37_4MHz_fcbga_ipa_ref_stbda_cl ass2.hcd
Frequency band	:	UNII bands: 5150 MHz to 5250 MHz; 5250 MHz to 5350 MHz; 5470 MHz to 5725 MHz; 5725 MHz to 5850 MHz
Type of radio transmission	:	OFDM
Use of frequency spectrum	:	
Type of modulation	:	(D)BPSK, (D)QPSK, 16 – 1024 QAM
Number of channels	:	24 with 20 MHz channel bandwidth 11 with 40 MHz channel bandwidth 5 with 80 MHz channel bandwidth
Antenna	:	Two integrated antennas
Power supply	:	115 V AC by mains
Temperature range	:	0°C to 40°C

### 6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

- 23-1-0061401T004\_A2
- 23-1-0061401T004\_A3
- 23-1-0061401T004\_A4

## 7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.


### **Agenda:** Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress



## 7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

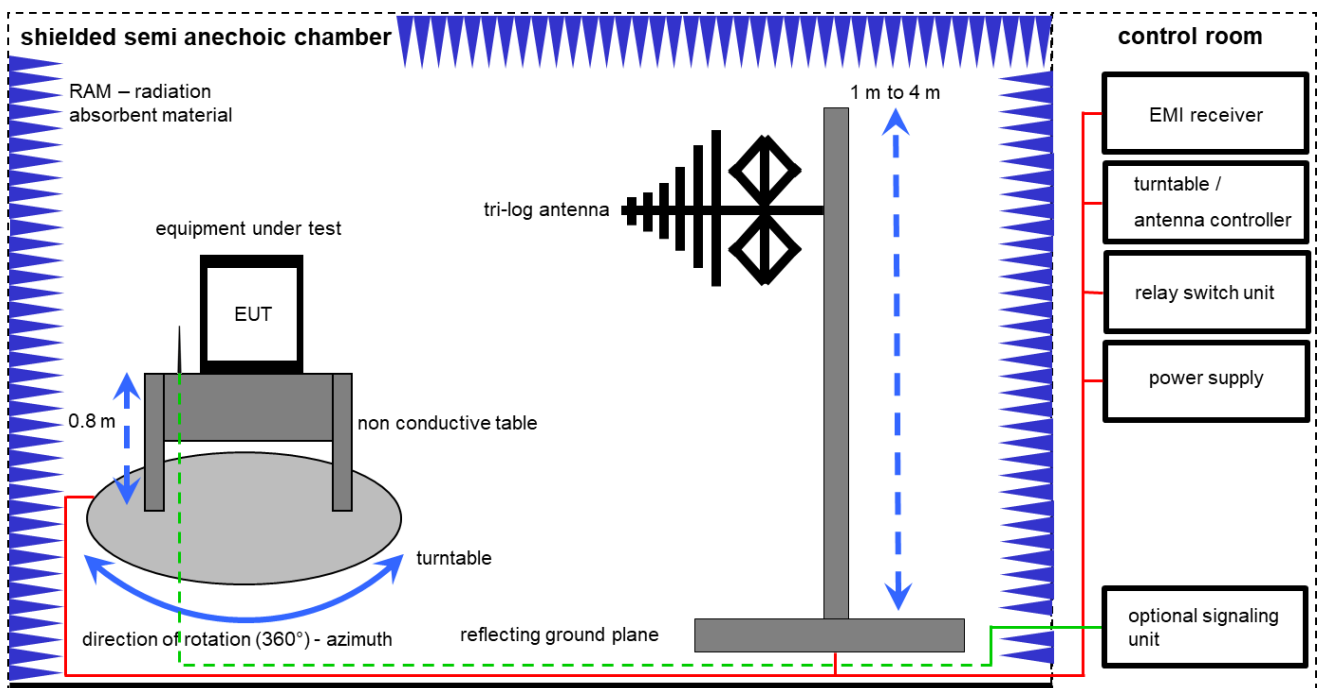

Measurement distance: tri-log antenna 10 meter  
EMC32 software version: 10.59.00

FS = UR + CL + AF  
(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

Example calculation:


FS [dB $\mu$ V/m] = 12.35 [dB $\mu$ V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB $\mu$ V/m] (35.69  $\mu$ V/m)

**Equipment table:**

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Semi anechoic chamber	3000023	MWB AG	-/-	300000551	ne	-/-	-/-
3	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	vIKI!	29.12.2021	31.12.2023

4	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
5	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
6	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
7	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess-Elektronik	318	300003696	vKI!	30.09.2021	29.09.2023
8	A	Turntable	2089-4.0	EMCO	-/-	300004394	ne	-/-	-/-
9	A	PC	Tecline	F+W	-/-	300004388	ne	-/-	-/-
10	A	EMI Test Receiver	ESR3	Rohde & Schwarz	102587	300005771	k	09.12.2022	31.12.2023

## 7.2 Shielded fully anechoic chamber

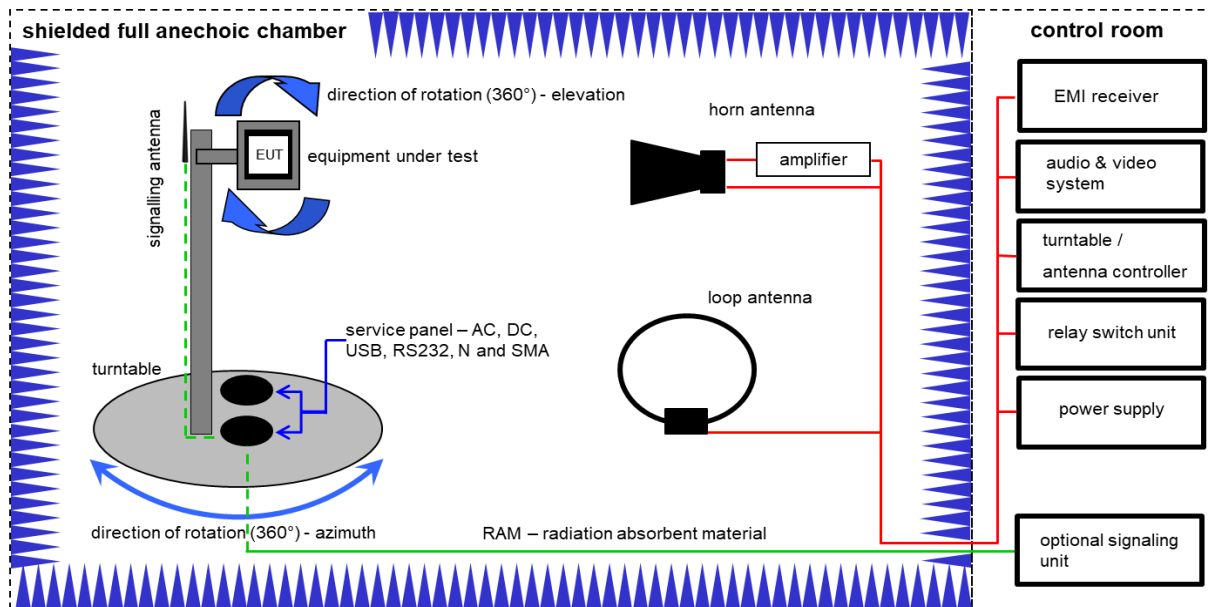

Measurement distance: horn antenna 3 meter; loop antenna 3 meter

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


Example calculation:

FS [dB $\mu$ V/m] = 40.0 [dB $\mu$ V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB $\mu$ V/m] (71.61  $\mu$ V/m)

**Equipment table:**

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	C	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vKI!	01.07.2021	31.07.2023
2	A, B	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032		02.08.2021	31.08.2023
3	A, B	Highpass Filter	WHK1.1/15G-10SS	Wainwright	37	400000148	ne	-/-	-/-
4	A, B	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne	-/-	-/-
5	A, B	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22051	300004483	ev	-/-	-/-
6	A, B, C	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000032	300004510	ne	-/-	-/-
7	A, B, C	NEXIO EMV- Software	BAT EMC V2022.0.22.0	Nexio	-/-	300004682	ne	-/-	-/-
8	A, B, C	Anechoic chamber	-/-	TDK	-/-	300003726	ne	-/-	-/-
9	A, B, C	EMI Test Receiver 9kHz-26.5GHz	ESR26	Rohde & Schwarz	101376	300005063	k	13.12.2022	31.12.2023
10	B	Band Reject Filter	WRCJV12-5120- 5150-5350-5380- 40SS	Wainwright	5	300005168	ev	-/-	-/-
11	B	Band Reject Filter	WRCJV12-5695- 5725-5850-5880- 40SS	Wainwright	5	300005169	ev	-/-	-/-
12	B	Band Reject Filter	WRCJV16-5440- 5470-5725-5755- 40SS	Wainwright	9	300005170	ev	-/-	-/-
13	A, B	RF-Amplifier	AMF-6F06001800- 30-10P-R	NARDA-MITEQ Inc	2011571	300005240	ev	-/-	-/-

### 7.3 Radiated measurements > 18 GHz

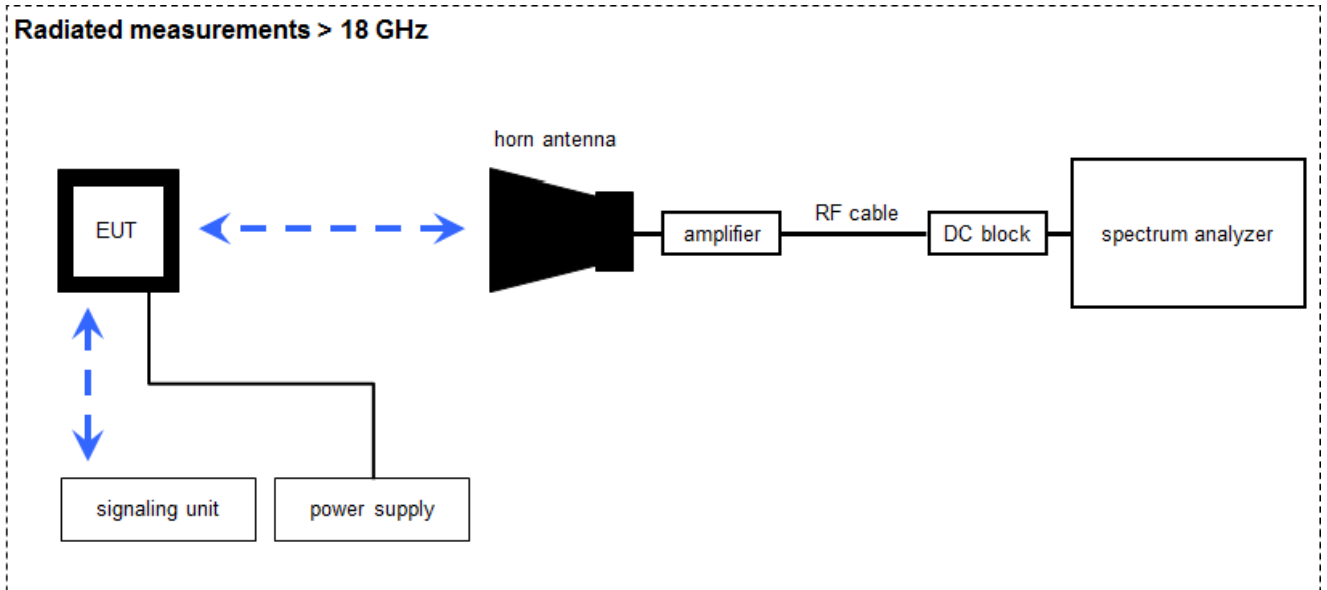

Measurement distance: horn antenna 50 cm

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dB\mu V/m] (6.79 \mu V/m)$$

#### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP	00419	300002268	ev	-/-	-/-
2	A	Std. Gain Horn Antenna 18.0-26.5 GHz	638	Narda	01096	300000486	vIKII	17.01.2022	31.01.2024
3	A	Std. Gain Horn Antenna 26.5-40.0 GHz	V637	Narda	82-16	300000510	vIKII	17.01.2022	31.01.2024
4	A	Broadband Low Noise Amplifier 18-50 GHz	CBL18503070-XX	CERNEX	19338	300004273	ev	-/-	-/-
5	A	Signal analyzer	FSV40	Rohde&Schwarz	101353	300004819	k	08.12.2022	31.12.2023
6	A	Signal- and Spectrum Analyzer 2 Hz - 50 GHz	FSW50	Rohde&Schwarz	101560	300006179	k	04.04.2023	30.04.2024
7	A	RF-Cable	ST18/SMAm/SMAm/48	Huber & Suhner	Batch no. 600918	400001182	ev	-/-	-/-
8	A	DC-Blocker 0.1-40 GHz	8141A	Inmet	-/-	400001185	ev	-/-	-/-

## 7.4 AC conducted

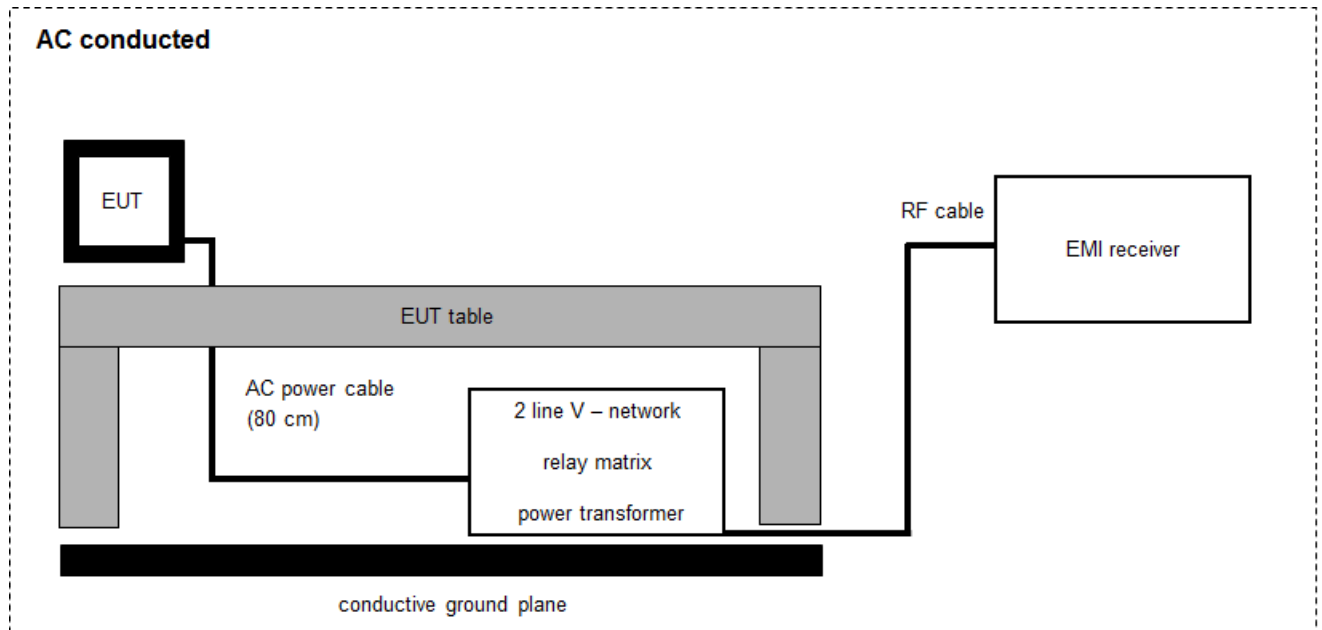

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:


$$FS [dB\mu V/m] = 37.62 [dB\mu V/m] + 9.90 [dB] + 0.23 [dB] = 47.75 [dB\mu V/m] (244.06 \mu V/m)$$

**Equipment table:**

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Two-line V-Network (LISN) 9 kHz to 30 MHz	ESH3-Z5	Rohde & Schwarz	892475/017	300002209	vIK!	14.12.2021	31.12.2023
2	A	RF-Filter-section	85420E	HP	3427A00162	300002214	NK!	-/-	-/-
3	A	Hochpass 150 kHz	EZ-25	R&S	100010	300003798	ev	-/-	-/-
4	A	PC	TecLine	F+W	-/-	300003532	ne	-/-	-/-
5	A	EMI Test Receiver 3.6 GHz	ESR3	Rohde & Schwarz	102981	300006318	k	09.12.2022	31.12.2023

## 7.5 Conducted measurements with peak power meter & spectrum analyzer

### Conducted measurements normal conditions

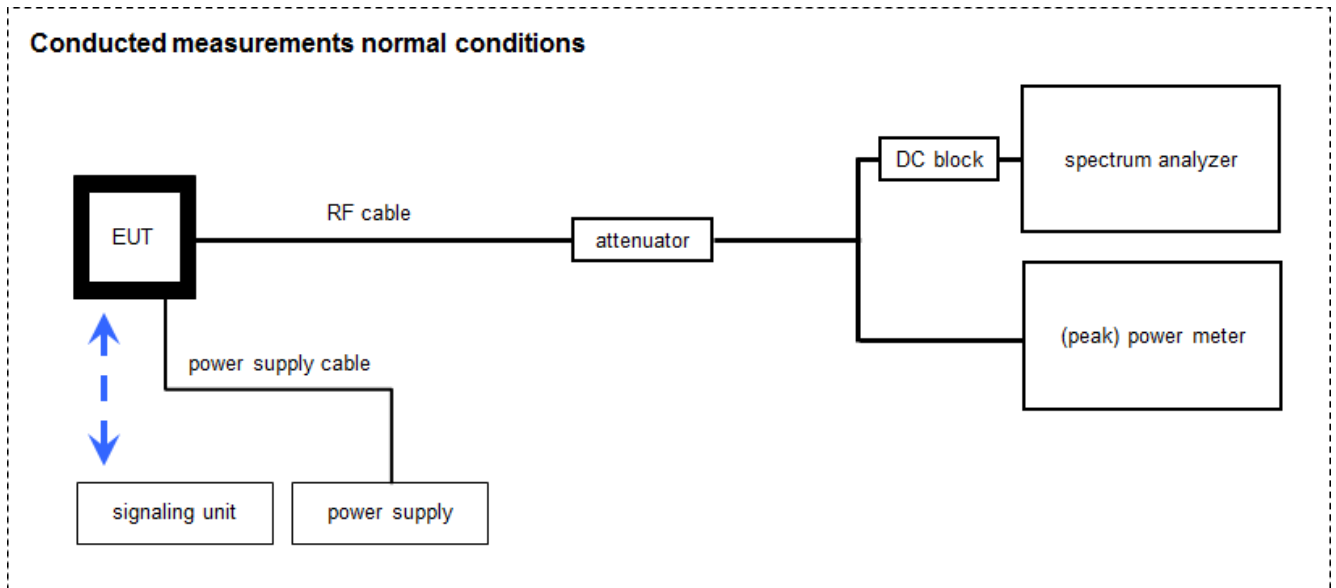

WLAN tester version: 1.1.13; LabView2015

OP = AV + CA  
 (OP-output power; AV-analyzer value; CA-loss signal path)

#### Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

#### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A, B	Isolating Transformer	RT5A	Grundig	12780	300001166	ev	-/-	-/-
2	A	Signal analyzer	FSV40	Rohde&Schwarz	101042	300004517	k	12.12.2022	31.12.2023
3	A, B	PC Tester R005	Intel Core i3 3220/3,3 GHz, Prozessor	-/-	2V2403033A45 23	300004589	ne	-/-	-/-
4	A, B	RF-Cable	ST18/SMAm/SMAm /60	Huber & Suhner	Batch no. 606844	400001181	ev	-/-	-/-
5	A, B	DC-Blocker 0.1-40 GHz	8141A	Inmet	-/-	400001185	ev	-/-	-/-
6	A, B	Coax Attenuator 10 dB 2W 0-40 GHz	MCL BW-K10-2W44+	Mini Circuits	-/-	400001186	ev	-/-	-/-
7	A, B	Tester Software RadioStar (C.BER2 for BT Conformance)	Version 1.0.0.X	CTC advanced GmbH	0001	400001380	ne	-/-	-/-

## 8 Sequence of testing

### 8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement\*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

\*Note: The sequence will be repeated three times with different EUT orientations.

## 8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.



### 8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

#### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 8.4 Sequence of testing radiated spurious above 18 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

### Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

### Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

## 9 Measurement uncertainty

Measurement uncertainty		
Test case	Uncertainty	
Antenna gain	± 3 dB	
Power spectral density	± 1.56 dB	
DTS bandwidth	± 100 kHz (depends on the used RBW)	
Occupied bandwidth	± 100 kHz (depends on the used RBW)	
Maximum output power conducted	± 1.56 dB	
Detailed spurious emissions @ the band edge - conducted	± 1.56 dB	
Band edge compliance radiated	± 3 dB	
Spurious emissions conducted	> 3.6 GHz	± 1.56 dB
	> 7 GHz	± 1.56 dB
	> 18 GHz	± 2.31 dB
	≥ 40 GHz	± 2.97 dB
Spurious emissions radiated below 30 MHz	± 3 dB	
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB	
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB	
Spurious emissions radiated above 12.75 GHz	± 4.5 dB	
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB	

## 10 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Title 47 Part 15 RSS 247, Issue 2	See table	2023-07-31	-/-

Test specification clause	Test case	C	NC	NA	NP	Remark
-/-	Output power verification (cond.)	-/-				Declared
-/-	Antenna gain	-/-				Declared
U-NII Part 15	Duty cycle	-/-				-/-
§15.407(a) RSS - 247 (6.2.x.1)	Maximum output power (conducted & radiated)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.407(a) RSS - 247 (6.2.x.1)	Power spectral density	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
RSS - 247 (6.2.4.1)	Spectrum bandwidth 6dB bandwidth	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.407(a) RSS - 247 (6.2.x.2)	Spectrum bandwidth 26dB bandwidth	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
RSS Gen clause 6.6	Spectrum bandwidth 99% bandwidth	-/-				-/-
§15.205 RSS - 247 (6.2.x.2)	Band edge compliance radiated	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.407(b) RSS - 247 (6.2.x.2)	TX spurious emissions radiated	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.109 RSS-Gen	RX spurious emissions radiated	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
§15.209(a) RSS-Gen	Spurious emissions radiated < 30 MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.107(a) §15.207	Spurious emissions conducted emissions < 30 MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.407 RSS - 247 (6.3)	DFS	-/-				See report 23-1-0068401T005

Notes:

C:	Compliant	NC:	Not compliant	NA:	Not applicable	NP:	Not performed
----	-----------	-----	---------------	-----	----------------	-----	---------------

## 11 Additional comments

Reference documents:	DFS report: 23-1-0068401T004 DIW377DISH - WiFi test commands_V2.docx 23-05-25_Antenna Drawing DIW377DISH.pptx
Co-applicable documents :	23-1-0068401T004a_A6a (a-mode results); 23-1-0068401T004a_A6b (n20-mode results); 23-1-0068401T004a_A6c (ac20-mode results); 23-1-0068401T004a_A6d (ax20-mode results); 23-1-0068401T004a_A6e (n40-mode results); 23-1-0068401T004a_A6f (ac40-mode results); 23-1-0068401T004a_A6g (ax40-mode results); 23-1-0068401T004a_A6h (ac80-mode results); 23-1-0068401T004a_A6i (ax80-mode results); 23-1-0068401T004a_A6j (20dB_BW results)
Special test descriptions:	None
Configuration descriptions:	All tests were performed with both chains active. SISO modes are not supported.

Provided channels and used power settings for all modes:

a-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency								
channel	<b>36</b>	<b>40</b>	44	<b>48</b>	<b>52</b>	<b>56</b>	60	<b>64</b>
f <sub>c</sub> / MHz	<b>5180</b>	<b>5200</b>	5220	<b>5240</b>	<b>5260</b>	<b>5280</b>	5300	<b>5320</b>
Power setting *)	<b>70</b>	<b>75</b>	-/-	<b>78</b>	<b>80</b>	<b>80</b>	-/-	<b>72</b>

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency											
channel	<b>100</b>	104	108	112	116	<b>120</b>	124	128	132	136	<b>140</b>
f <sub>c</sub> / MHz	<b>5500</b>	5520	5540	5560	5580	<b>5600</b>	5620	5640	5660	5680	<b>5700</b>
Power setting *)	<b>70</b>	-/-	-/-	-/-	-/-	<b>80</b>	-/-	-/-	-/-	-/-	<b>80</b>

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency					
channel	<b>149</b>	153	<b>157</b>	161	<b>165</b>
f <sub>c</sub> / MHz	<b>5745</b>	5765	<b>5785</b>	5805	<b>5825</b>
Power setting *)	<b>80</b>	-/-	<b>80</b>	-/-	<b>80</b>

nHT20-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency								
channel	<b>36</b>	<b>40</b>	44	<b>48</b>	<b>52</b>	<b>56</b>	60	<b>64</b>
f <sub>c</sub> / MHz	<b>5180</b>	<b>5200</b>	5220	<b>5240</b>	<b>5260</b>	<b>5280</b>	5300	<b>5320</b>
Power setting *)	<b>70</b>	<b>77</b>	-/-	<b>75</b>	<b>80</b>	<b>80</b>	-/-	<b>74</b>

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency											
channel	<b>100</b>	104	108	112	116	<b>120</b>	124	128	132	136	<b>140</b>
f <sub>c</sub> / MHz	<b>5500</b>	5520	5540	5560	5580	<b>5600</b>	5620	5640	5660	5680	<b>5700</b>
Power setting *)	<b>72</b>	-/-	-/-	-/-	-/-	<b>80</b>	-/-	-/-	-/-	-/-	<b>80</b>

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency					
channel	<b>149</b>	153	<b>157</b>	161	<b>165</b>
f <sub>c</sub> / MHz	<b>5745</b>	5765	<b>5785</b>	5805	<b>5825</b>
Power setting *)	<b>80</b>	-/-	<b>80</b>	-/-	<b>80</b>

acVHT20-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency								
channel	<b>36</b>	<b>40</b>	44	<b>48</b>	<b>52</b>	<b>56</b>	60	<b>64</b>
f <sub>c</sub> / MHz	<b>5180</b>	<b>5200</b>	5220	<b>5240</b>	<b>5260</b>	<b>5280</b>	5300	<b>5320</b>
Power setting *)	<b>68</b>	<b>76</b>	-/-	<b>74</b>	<b>80</b>	<b>80</b>	-/-	<b>74</b>

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency											
channel	<b>100</b>	104	108	112	116	<b>120</b>	124	128	132	136	<b>140</b>
f <sub>c</sub> / MHz	<b>5500</b>	5520	5540	5560	5580	<b>5600</b>	5620	5640	5660	5680	<b>5700</b>
Power setting *)	<b>72</b>	-/-	-/-	-/-	-/-	<b>80</b>	-/-	-/-	-/-	-/-	<b>80</b>

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency					
channel	<b>149</b>	153	<b>157</b>	161	<b>165</b>
f <sub>c</sub> / MHz	<b>5745</b>	5765	<b>5785</b>	5805	<b>5825</b>
Power setting *)	<b>80</b>	-/-	<b>80</b>	-/-	<b>80</b>

axHE20-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency								
channel	<b>36</b>	<b>40</b>	44	<b>48</b>	<b>52</b>	<b>56</b>	60	<b>64</b>
f <sub>c</sub> / MHz	<b>5180</b>	<b>5200</b>	5220	<b>5240</b>	<b>5260</b>	<b>5280</b>	5300	<b>5320</b>
Power setting *)	<b>62</b>	<b>76</b>	-/-	<b>80</b>	<b>80</b>	<b>80</b>	-/-	<b>70</b>

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency											
channel	<b>100</b>	104	108	112	116	<b>120</b>	124	128	132	136	<b>140</b>
f <sub>c</sub> / MHz	<b>5500</b>	5520	5540	5560	5580	<b>5600</b>	5620	5640	5660	5680	<b>5700</b>
Power setting *)	<b>74</b>	-/-	-/-	-/-	-/-	<b>80</b>	-/-	-/-	-/-	-/-	<b>80</b>

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency					
channel	<b>149</b>	153	<b>157</b>	161	<b>165</b>
f <sub>c</sub> / MHz	<b>5745</b>	5765	<b>5785</b>	5805	<b>5825</b>
Power setting *)	<b>80</b>	-/-	<b>80</b>	-/-	<b>80</b>

nHT40-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency				
channel	<b>38</b>	<b>46</b>	<b>54</b>	<b>62</b>
f <sub>c</sub> / MHz	<b>5190</b>	<b>5230</b>	<b>5270</b>	<b>5310</b>
Power setting *)	<b>54</b>	<b>76</b>	<b>76</b>	<b>58</b>

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency				
channel	<b>102</b>	110	<b>118</b>	126
f <sub>c</sub> / MHz	<b>5510</b>	5550	<b>5590</b>	5630
Power setting *)	<b>68</b>	-/-	<b>76</b>	-/-

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency		
channel	<b>151</b>	<b>159</b>
f <sub>c</sub> / MHz	<b>5755</b>	<b>5795</b>
Power setting *)	<b>76</b>	<b>76</b>

acVHT40-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency				
channel	<b>38</b>	<b>46</b>	<b>54</b>	<b>62</b>
f <sub>c</sub> / MHz	<b>5190</b>	<b>5230</b>	<b>5270</b>	<b>5310</b>
Power setting *)	<b>54</b>	<b>76</b>	<b>76</b>	<b>58</b>

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency				
channel	<b>102</b>	110	<b>118</b>	126
f <sub>c</sub> / MHz	<b>5510</b>	5550	<b>5590</b>	5630
Power setting *)	<b>68</b>	-/-	<b>76</b>	-/-

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency		
channel	<b>151</b>	<b>159</b>
f <sub>c</sub> / MHz	<b>5755</b>	<b>5795</b>
Power setting *)	<b>76</b>	<b>76</b>



axHE40-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency				
channel	<b>38</b>	<b>46</b>	<b>54</b>	<b>62</b>
f <sub>c</sub> / MHz	<b>5190</b>	<b>5230</b>	<b>5270</b>	<b>5310</b>
Power setting *)	<b>52</b>	<b>76</b>	<b>76</b>	<b>54</b>

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency				
channel	<b>102</b>	110	<b>118</b>	126
f <sub>c</sub> / MHz	<b>5510</b>	5550	<b>5590</b>	5630
Power setting *)	<b>62</b>	-/-	<b>76</b>	-/-

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency		
channel	<b>151</b>	<b>159</b>
f <sub>c</sub> / MHz	<b>5755</b>	<b>5795</b>
Power setting *)	<b>76</b>	<b>76</b>

acVHT80-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency		
channel	<b>42</b>	<b>58</b>
f <sub>c</sub> / MHz	<b>5210</b>	<b>5290</b>
Power setting *)	<b>52</b>	<b>54</b>

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency		
channel	<b>106</b>	<b>122</b>
f <sub>c</sub> / MHz	<b>5530</b>	<b>5610</b>
Power setting *)	<b>58</b>	<b>80</b>

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency	
channel	<b>155</b>
f <sub>c</sub> / MHz	<b>5775</b>
Power setting *)	<b>72</b>

axHE80-mode:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz) channel number & center frequency		
channel	<b>42</b>	<b>58</b>
f <sub>c</sub> / MHz	<b>5210</b>	<b>5290</b>
Power setting *)	<b>50</b>	<b>50</b>

U-NII-2C (5470 MHz to 5725 MHz) channel number & center frequency			
channel	<b>106</b>	<b>122</b>	<b>138</b>
f <sub>c</sub> / MHz	<b>5530</b>	<b>5610</b>	<b>5690</b>
Power setting *)	<b>52</b>	<b>80</b>	<b>80</b>

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency	
channel	<b>155</b>
f <sub>c</sub> / MHz	<b>5775</b>
Power setting *)	<b>72</b>

- EUT selection:
- Only one device available
  - Devices selected by the customer
  - Devices selected by the laboratory (Randomly)

- Test mode:
- No test mode available.  
Iperf is used to transmit data to a companion device
  - Special software is used.  
EUT is transmitting pseudo random data by itself

Antennas and transmit operating modes:

- Operating mode 1 (single antenna)
  - Equipment with 1 antenna,
  - Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,
  - Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)
- Operating mode 2 (multiple antennas, no beamforming)
  - Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.
- Operating mode 3 (multiple antennas, with beamforming)
  - Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.  
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.

## 12 Measurement results

### 12.1 Identify worst case data rate

Worst case data rates declared by the manufacturer (See section 11).

## 12.2 Antenna gain

### Description:

The antenna gain is declared by customer. Referenced information and antenna patterns can be found in "23-05-25\_Antenna Drawing DIW377DISH.pptx".

### Limits:

Antenna Gain
6 dBi / > 6 dBi output power and power density reduction required

### Results:

U-NII-1 (5150 MHz to 5250 MHz)	Peak Antenna Gain ANT 0	Peak Antenna Gain ANT 1	Combined Antenna gain
Gain / dBi (declared)	2.8	4.0	6.45

U-NII-2A (5250 MHz to 5350 MHz)	Peak Antenna Gain ANT 0	Peak Antenna Gain ANT 1	Combined Antenna gain
Gain / dBi (declared)	2.8	4.0	6.45

U-NII-2C (5470 MHz to 5725 MHz)	Peak Antenna Gain ANT 0	Peak Antenna Gain ANT 1	Combined Antenna gain
Gain / dBi (declared)	4.0	2.8	6.3

U-NII-3 (5725 MHz to 5850 MHz)	Peak Antenna Gain ANT 0	Peak Antenna Gain ANT 1	Combined Antenna gain
Gain / dBi (declared)	4.0	2.8	6.4

### 12.3 Duty cycle

Description:

The duty cycle is necessary to compute the maximum power during an actual transmission. The shown plots and values are to show an example of the measurement procedure. The real value is measured direct during the power measurement or power density measurement. The correction value is shown in each plot of these measurements.

Measurement:

Measurement parameter	
According to: KDB789033 D02, B.	
External result file(s)	23-1-0068401T004a_A6.pdf FCC Part 15.407 Max Output Power and PSD
Used test setup:	See chapter 7.5 – A
Measurement uncertainty:	See chapter 9

Results:

Duty cycle and correction factor:

OFDM – mode	Calculation method			
	$T_{on} (D2_{plot}) * 100 / T_{complete} (D3_{plot}) = \text{duty cycle}$ $10 * \log(\text{duty cycle}) = \text{correction factor}$			
	$T_{on} (D2_{plot})$	$T_{complete} (D3_{plot})$	Duty cycle	Correction factor
a – mode	-/-	-/-	100%	0dB
n/ac HT20 – mode	-/-	-/-	100%	0dB
ax HE20 – mode	-/-	-/-	100%	0dB
n/ac HT40 – mode	-/-	-/-	100%	0dB
ax HE40 – mode	-/-	-/-	100%	0dB
ac VHT80 – mode	-/-	-/-	100%	0dB
ax HE80 – mode	-/-	-/-	100%	0dB

## 12.4 Maximum output power

### 12.4.1 Maximum output power according to FCC requirements

Description:

Measurement of the maximum output power conducted

Measurement:

Measurement parameter	
According to: KDB789033 D02, E.2.e.	
External result file(s)	23-1-0068401T004a_A6a-i.pdf FCC Part 15.407 Max Output Power and PSD
Used test setup:	See chapter 7.5 – A
Measurement uncertainty:	See chapter 9
Standard parts:	FCC: § 15.407 (a)

Limits:

Limits:

Limits	
Radiated output power	Conducted output power
Band 5150 MHz – 5250 MHz	
Conducted power + 6 dBi antenna gain	<b>For client devices</b> output power $\leq$ 250 mW/24dBm
Band 5250MHz – 5350 MHz	
Conducted power + 6 dBi antenna gain	Output power $\leq$ lesser of 250mW or 11 dBm +10logB (B is the 26 dB emission bandwidth in megahertz)
Band 5470MHz – 5725 MHz	
Conducted power + 6 dBi antenna gain	Output power $\leq$ lesser of 250mW or 11 dBm +10logB (B is the 26 dB emission bandwidth in megahertz)
Band 5725MHz – 5850 MHz	
Conducted power + 6 dBi antenna gain	output power $\leq$ 1W/30dBm

\*If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. This leads to the following limits:

Bands	UNII-1	UNII-2A	UNII-2C	UNII-3
Limits [dBm]	23.55	23.55	23.7	29.55

Results:

802.11a												
Maximum output power [dBm]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	18.2	19.4	18.6	18.9	18.8	17.8	17.8	17.9	18.1	18.8	18.8	18.1
Port 2	17.6	18.9	18.3	19.6	19.4	18.5	17.8	18.0	19.6	20.3	19.9	19.6
SUM	20.9	22.2	21.5	22.3	22.2	21.2	20.8	21.0	21.9	22.6	22.4	21.9

802.11nHT20												
Maximum output power [dBm]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	18.0	19.9	17.9	19.0	19.0	17.4	17.8	18.8	18.2	18.8	18.9	18.3
Port 2	17.5	19.1	17.5	19.7	19.5	18.1	18.8	19.8	19.7	20.5	20.0	19.9
SUM	20.7	22.5	20.7	22.4	22.2	20.8	21.3	22.3	22.0	22.8	22.5	22.2

802.11ac VHT20												
Maximum output power [dBm]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	17.9	19.6	18.3	19.2	19.0	17.6	17.7	18.8	18.3	18.9	18.9	18.1
Port 2	17.4	18.9	17.7	20.0	19.6	18.3	18.8	20.0	19.8	20.5	20.1	19.8
SUM	20.7	22.3	21.0	22.6	22.3	20.9	21.3	22.4	11.1	22.8	22.6	22.1

802.11ax20												
Maximum output power [dBm]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	16.8	20.1	18.8	19.3	19.2	16.9	18.2	19.0	18.3	19.0	19.1	18.5
Port 2	16.2	20.1	18.4	20.0	19.7	17.7	19.2	20.1	20.0	20.6	20.2	19.9
SUM	19.5	23.1	21.6	22.6	22.4	20.3	21.7	22.6	22.2	22.9	22.7	22.3



802.11 n HT40									
Maximum output power [dBm]									
Channel	38	46	54	62	102	118	142	151	159
Port 1	14.2	18.9	18.4	13.7	16.5	18.2	17.8	18.2	17.8
Port 2	14.0	18.8	19.0	14.7	17.4	19.3	19.0	19.7	19.3
SUM	17.1	21.9	21.8	17.2	20.0	21.8	21.5	22.0	21.6

802.11 ac VHT40									
Maximum output power [dBm]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	14.5	19.1	18.5	13.6	16.2	18.2	17.7	18.0	17.8
Port 2	14.3	18.9	19.1	14.7	17.0	19.2	19.0	19.6	19.2
SUM	17.4	22.0	21.8	17.2	19.6	21.7	21.4	21.9	21.5

802.11 ax HE40									
Maximum output power [dBm]									
Channel	38	46	54	62	102	118	142	151	159
Port 1	13.1	18.1	17.7	12.2	14.4	17.4	16.9	17.4	17.0
Port 2	13.1	18.1	18.3	13.1	15.4	18.4	18.3	18.9	18.4
SUM	16.1	21.1	21.0	15.7	17.9	21.0	20.7	21.2	20.8

802.11 ac VHT80							
Maximum output power [dBm]							
Channel	42	58	106	122	138	155	
Port 1	13.8	13.1	14.4	18.7	18.4	17.2	
Port 2	13.7	13.9	15.3	20.1	20.1	18.2	
SUM	16.8	16.5	17.9	22.5	22.3	20.7	

802.11 ax HE80						
Maximum output power [dBm]						
Channel	42	58	106	122	138	155
Port 1	12.6	11.5	12.4	17.9	17.5	16.3
Port 2	12.6	12.5	13.5	19.4	19.2	17.4
SUM	15.6	15.0	16.0	21.7	21.5	19.9

## 12.5 Power spectral density

### 12.5.1 Power spectral density according to FCC requirements

Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
According to: KDB789033 D02, F.	
External result file(s)	23-1-0068401T004a_A6a-i.pdf FCC Part 15.407 Max Output Power and PSD
Used test setup:	See chapter 7.5 – A
Measurement uncertainty:	See chapter 9
Standard parts:	FCC: § 15.407 (a)

Limits:

Power Spectral Density
Band 5150 MHz – 5250 MHz
For client devices point power spectral density conducted $\leq 11$ dBm in any 1 MHz band*
Band 5250MHz – 5350 MHz
power spectral density conducted $\leq 11$ dBm in any 1 MHz band*
Band 5470MHz – 5725 MHz
power spectral density conducted $\leq 11$ dBm in any 1 MHz band*
Band 5725MHz – 5850 MHz
power spectral density conducted $\leq 30$ dBm in any 500 kHz band*

\*If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. This leads to the following limits:

Bands	UNII-1	UNII-2A	UNII-2C	UNII-3
Limits [dBm]	10.55	10.55	10.7	29.6

Results:

802.11 a												
Power spectral density [dBm/1MHz] or [dBm/500kHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	7.7	7.7	6.9	7.1	7.1	7.3	7.5	6.9	6.4	4.1	4.1	3.4
Port 2	7.1	7.1	6.6	7.9	7.7	7.4	7.5	8.1	7.9	5.6	5.3	5.0
SUM	10.4	10.5	9.8	10.5	10.4	10.4	10.5	10.6	10.2	7.9	7.7	7.3

802.11 n HT20												
Power spectral density [dBm/1MHz] or [dBm/500kHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	7.2	7.8	5.8	6.9	6.9	6.6	7.0	6.7	6.2	3.8	4.0	3.3
Port 2	6.7	7.0	5.4	7.7	7.5	7.4	8.1	7.7	7.6	5.5	5.0	4.8
SUM	10.0	10.5	8.6	10.3	10.2	10.0	10.6	10.2	10.0	7.7	7.5	7.1

802.11 ac VHT20												
Power spectral density [dBm/1MHz] or [dBm/500kHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	7.1	7.6	6.3	7.1	6.9	6.8	7.0	6.7	6.2	3.8	3.9	3.1
Port 2	6.6	6.9	5.6	7.9	7.6	7.5	8.1	7.9	7.8	5.4	5.1	4.7
SUM	9.9	10.2	9.0	10.5	10.3	10.2	10.6	10.4	10.1	7.7	7.5	7.0

802.11ax HE20												
Power spectral density [dBm/1MHz] or [dBm/500kHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	4.4	7.5	6.5	6.8	6.8	4.5	5.8	6.6	6.0	3.7	3.9	3.1
Port 2	3.9	6.8	6.1	7.6	7.3	5.4	6.8	7.7	7.6	5.4	4.9	4.6
SUM	7.2	10.2	9.3	10.2	10.1	8.0	9.4	10.2	9.9	7.6	7.4	6.9

802.11 n HT40									
Power spectral density [dBm/1MHz] or [dBm/500kHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	0.7	4.0	3.5	0.2	3.0	3.3	2.8	0.2	0.0
Port 2	0.6	3.8	4.1	1.3	3.8	4.4	4.1	1.8	1.5
SUM	3.6	6.9	6.8	3.8	6.5	6.9	6.5	4.0	3.8

802.11 ac VHT40									
Power spectral density [dBm/1MHz] or [dBm/500kHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	1.0	4.2	3.6	0.1	2.7	3.3	2.7	0.1	0.1
Port 2	0.9	4.0	4.2	1.2	3.4	4.3	4.1	1.8	1.5
SUM	3.9	7.1	6.9	3.7	6.1	6.8	6.5	4.0	3.8

802.11ax HE40									
Power spectral density [dBm/1MHz] or [dBm/500kHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	-1.6	3.5	3.0	-2.5	-0.3	2.7	2.2	0.1	-0.1
Port 2	-1.6	3.3	3.5	-1.5	0.7	3.7	3.6	1.7	1.3
SUM	1.4	6.4	6.3	1.1	3.2	6.2	6.0	4.0	3.7

802.11 ac VHT80						
Power spectral density [dBm/1MHz] or [dBm/500kHz]						
Channel	42	58	106	122	138	155
Port 1	-2.6	-3.3	-2.1	0.9	0.4	-3.8
Port 2	-2.6	-2.4	-1.1	2.3	2.3	-2.6
SUM	0.4	0.2	1.4	4.6	4.5	-0.2

802.11ax HE80						
Power spectral density [dBm/1MHz] or [dBm/500kHz]						
Channel	42	58	106	122	138	155
Port 1	-4.8	-6.1	-5.1	0.4	-0.1	-3.8
Port 2	-4.9	-4.9	-4.0	2.0	1.9	-2.7
SUM	-1.8	-2.5	-1.5	4.3	4.0	-0.2

## 12.6 Minimum emission bandwidth for the band 5.725-5.85 GHz

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
According to: KDB789033 D02, C.2.	
External result file(s)	23-1-0068401T004a_A6a-i.pdf FCC Part 15.407 & ISED Minimum Emission BW
Used test setup:	See chapter 7.5 – A
Measurement uncertainty:	See chapter 9

Limits:

FCC	ISED
The minimum 6 dB bandwidth shall be at least 500 kHz.	

Results: Antenna 0

a	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	16.35	16.35	16.35

n HT20	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	17.60	17.60	17.6

ac HT20	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	17.6	17.6	17.6

ax HE20	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	19.0	19.1	19.0

Results: Antenna 1

a	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	16.35	16.35	16.35

n HT20	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	17.60	17.60	17.6

ac VHT20	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	17.6	17.6	17.6

ax HE20	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	18.9	18.9	19.0

Results: Antenna 0

n HT40	6 dB emission bandwidth (MHz)	
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
	36.3	36.3

ac VHT40	6 dB emission bandwidth (MHz)	
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
	36.4	36.3

ax HE40	6 dB emission bandwidth (MHz)	
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
	37.7	36.7

Results: Antenna 1

n VHT40	6 dB emission bandwidth (MHz)	
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
	36.4	36.3

ac HT40	6 dB emission bandwidth (MHz)	
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
	36.4	36.3

ax HE40	6 dB emission bandwidth (MHz)	
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
	37.6	37.6

Results: Antenna 0

ac VHT80	6 dB emission bandwidth (MHz)
	U-NII-3 (5725 MHz to 5850 MHz)
	Middle channel
	75.8

ax VHT80	6 dB emission bandwidth (MHz)
	U-NII-3 (5725 MHz to 5850 MHz)
	Middle channel
	76.4

Results: Antenna 1

ac VHT80	6 dB emission bandwidth (MHz)
	U-NII-3 (5725 MHz to 5850 MHz)
	Middle channel
	76.2

ax VHT80	6 dB emission bandwidth (MHz)
	U-NII-3 (5725 MHz to 5850 MHz)
	Middle channel
	75.6



## 12.7 Spectrum bandwidth / 26 dB bandwidth

Description:

Measurement of the 26 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
According to: KDB789033 D02, C.1.	
External result file(s)	23-1-0068401T004a_A6a-i.pdf FCC Part 15.407 Bandwidths
Used test setup:	see chapter 7.5 – A
Measurement uncertainty:	See chapter 9

Limits:

Spectrum Bandwidth – 26 dB Bandwidth
<b>FCC:</b> Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

## Results:

802.11a 26 dB bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	22.8	33.3	35.6 <sup>1</sup>	36.9	37.1	28.1	29.2	34.9	34.9	35.6	33.4	33.3
Port 2	22.2	29.7	32.9 <sup>1</sup>	37.2	37.4	27.9	32.7	35.9	34.1	38.0	38.1	37.7

802.11n HT20 26 dB bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	27.8	43.2	39.4 <sup>1</sup>	43.5	42.5	29.6	33.9	40.4	39.7	40.6	39.4	39.9
Port 2	23.7	40.0	33.6 <sup>1</sup>	40.0	41.4	26.1	34.2	39.5	38.2	43.6	42.6	45.2

802.11ac VHT20 26 dB bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	26.5	42.2	38.1 <sup>1</sup>	44.2	43.2	30.4	35.2	40.7	40.1	41.8	39.5	38.6
Port 2	22.5	36.3	34.2 <sup>1</sup>	41.2	42.1	26.9	32.5	42.5	40.0	43.1	43.2	43.2

802.11ax HE20 26 dB bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	22.0	45.2	42.3 <sup>1</sup>	44.8	43.2	27.0	28.7	42.3	41.0	43.9	39.4	38.8
Port 2	21.8	42.2	35.8 <sup>1</sup>	42.3	43.9	27.0	30.7	41.8	42.0	45.9	47.10	45.2

<sup>1</sup> As per KDB 789033 D02 v02r01 the 99% bandwidth can be used in lieu of the 26dB bandwidth. The highest frequency measured with 99% measurement function is 5248.2 MHz and falls completely within the U-NII-1 band.

802.11n HT40 26 dB bandwidth [MHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	40.10	85.20 <sup>1</sup>	90.30	40.00	45.50	78.10	78.20	84.40	63.80
Port 2	39.40	67.60 <sup>1</sup>	70.80	39.30	39.50	65.60	65.80	81.50	77.60

802.11ac HT40 26 dB bandwidth [MHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	39.90	80.60 <sup>1</sup>	84.40	39.80	40.00	82.10	71.80	77.80	68.30
Port 2	39.30	62.50 <sup>1</sup>	69.30	39.40	39.80	73.30	64.70	79.20	72.40

802.11ax HE40 26 dB bandwidth [MHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	40.00	78.00 <sup>1</sup>	74.50	40.00	40.10	44.90	67.50	77.70	37.9
Port 2	39.80	66.90 <sup>1</sup>	76.80	39.90	40.00	66.30	78.20	72.70	38.2

802.11ac VHT80 26 dB bandwidth [MHz]						
Channel	42	58	106	122	138	155
Port 1	81.60	81.80 <sup>1</sup>	81.80	180.80	177.40	129.8 <sup>2</sup>
Port 2	81.20	81.20 <sup>1</sup>	81.40	172.80	163.80	140.6 <sup>2</sup>

802.11ax HE80 26 dB bandwidth [MHz]						
Channel	42	58	106	122	138	155
Port 1	81.60	81.40 <sup>1</sup>	81.40	151.60	147.40	97.6 <sup>2</sup>
Port 2	80.80	80.60 <sup>1</sup>	80.80	149.00	135.20	134.6 <sup>2</sup>

<sup>1</sup> As per KDB 789033 D02 v02r01 the 99% bandwidth can be used in lieu of the 26dB bandwidth. The highest frequency measured with 99% measurement function is 5248.2 MHz and falls completely within the U-NII-1 band.

<sup>2</sup> The 26dB emission bandwidth does extend the 5725 – 5850 MHz band. Therefore the 20dB bandwidth was measured to show compliance with §15.215 (c). The 20dB bandwidth is reported 23-1-0068401T004a-A6j and compliant with the §15.215 (c) requirement.

## 12.8 Occupied bandwidth / 99% emission bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

Measurement:

Measurement parameter	
External result file(s)	23-1-0068401T004a_A6a-i.pdf FCC Part 15.407 & ISED Bandwidths
Test setup:	See sub clause 7.5 – B
Measurement uncertainty:	See chapter 9

Usage:

-/-	ISED
OBW is necessary for Emission Designator	

Results:

802.11a 99% bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	17.2	18.7	19.8	21.1	20.9	17.7	18.0	20.0	19.3	20.4	19.3	18.9
Port 2	17.1	17.7	18.2	19.1	19.5	17.5	18.6	19.3	19.1	22.1	22.3	21.9

802.11n HT20 99% bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	18.3	23.1	19.4	23.2	22.1	18.5	19.0	20.6	20.0	21.2	20.2	19.7
Port 2	18.0	19.7	18.5	20.1	20.7	18.2	19.3	19.8	19.8	23.0	22.9	23.1

802.11ac VHT20 99% bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	18.2	22.6	19.1	22.4	21.5	18.6	19.0	20.4	19.9	20.8	20.0	19.6
Port 2	18.0	19.2	18.3	20.0	20.2	18.1	19.2	19.8	20.0	22.4	23.2	22.1

802.11ax HE20 99% bandwidth [MHz]												
Channel	36	40	48	52	56	64	100	120	140	149	157	165
Port 1	19.3	21.9	19.7	22.0	21.1	19.4	19.3	20.2	19.9	20.5	19.9	19.7
Port 2	19.2	19.9	19.5	20.0	20.3	19.3	19.4	19.9	20.0	23.1	23.2	22.5

802.11n HT40 99% bandwidth [MHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	36.5	39.5	40.1	36.2	36.4	37.5	37.8	37.5	37.0
Port 2	36.2	36.7	36.9	36.5	36.3	36.8	36.7	37.2	37.6

802.11ac VHT40 99% bandwidth [MHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	36.3	39.6	39.4	36.4	36.5	37.5	37.6	37.5	37.0
Port 2	36.2	36.8	36.9	36.1	36.3	36.8	36.7	37.3	37.5

802.11ax HE40 99% bandwidth [MHz]									
Channel	38	46	54	62	102	118	134	151	159
Port 1	37.7	38.2	38.3	37.6	37.7	38.1	38.1	38.1	37.9
Port 2	37.6	37.9	38.1	37.6	37.7	38.0	37.9	38.2	38.2

802.11ac VHT80 99% bandwidth [MHz]						
Channel	42	58	106	122	138	155
Port 1	75.5	75.5	75.5	82.9	79.1	76.3
Port 2	75.5	75.5	75.5	78.1	77.7	76.7

802.11ax HE80 99% bandwidth [MHz]						
Channel	42	58	106	122	138	155
Port 1	77.1	77.1	77.1	79.1	78.5	77.3
Port 2	77.1	77.1	77.1	78.5	77.9	77.5

## 12.9 Undesirable emissions for transmitters operating in the 5725 MHz to 5850 MHz band

Description:

Measurement of the spectrum mask as per FCC Part 15.407 (b)(4) and KDB 789033 II.G.2 (c) (ii).  
The measurement is repeated at the lowest, middle and highest channel and performed in a conducted way as defined in KDB 789033 II.G.3 (b).

The highest antenna gain is considered and was added to the Reference Level Offset.  
Emission levels are further adjusted to consider the number of antenna outputs (2).

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	≥ 3 x RBW
Span:	See plots!
Trace mode:	Max Hold
Test setup:	See sub clause 7.5 – A
Measurement uncertainty:	See chapter 9


Limits:

FCC Part 15.407 (b)(4)
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Result:

See plots below


Plots:

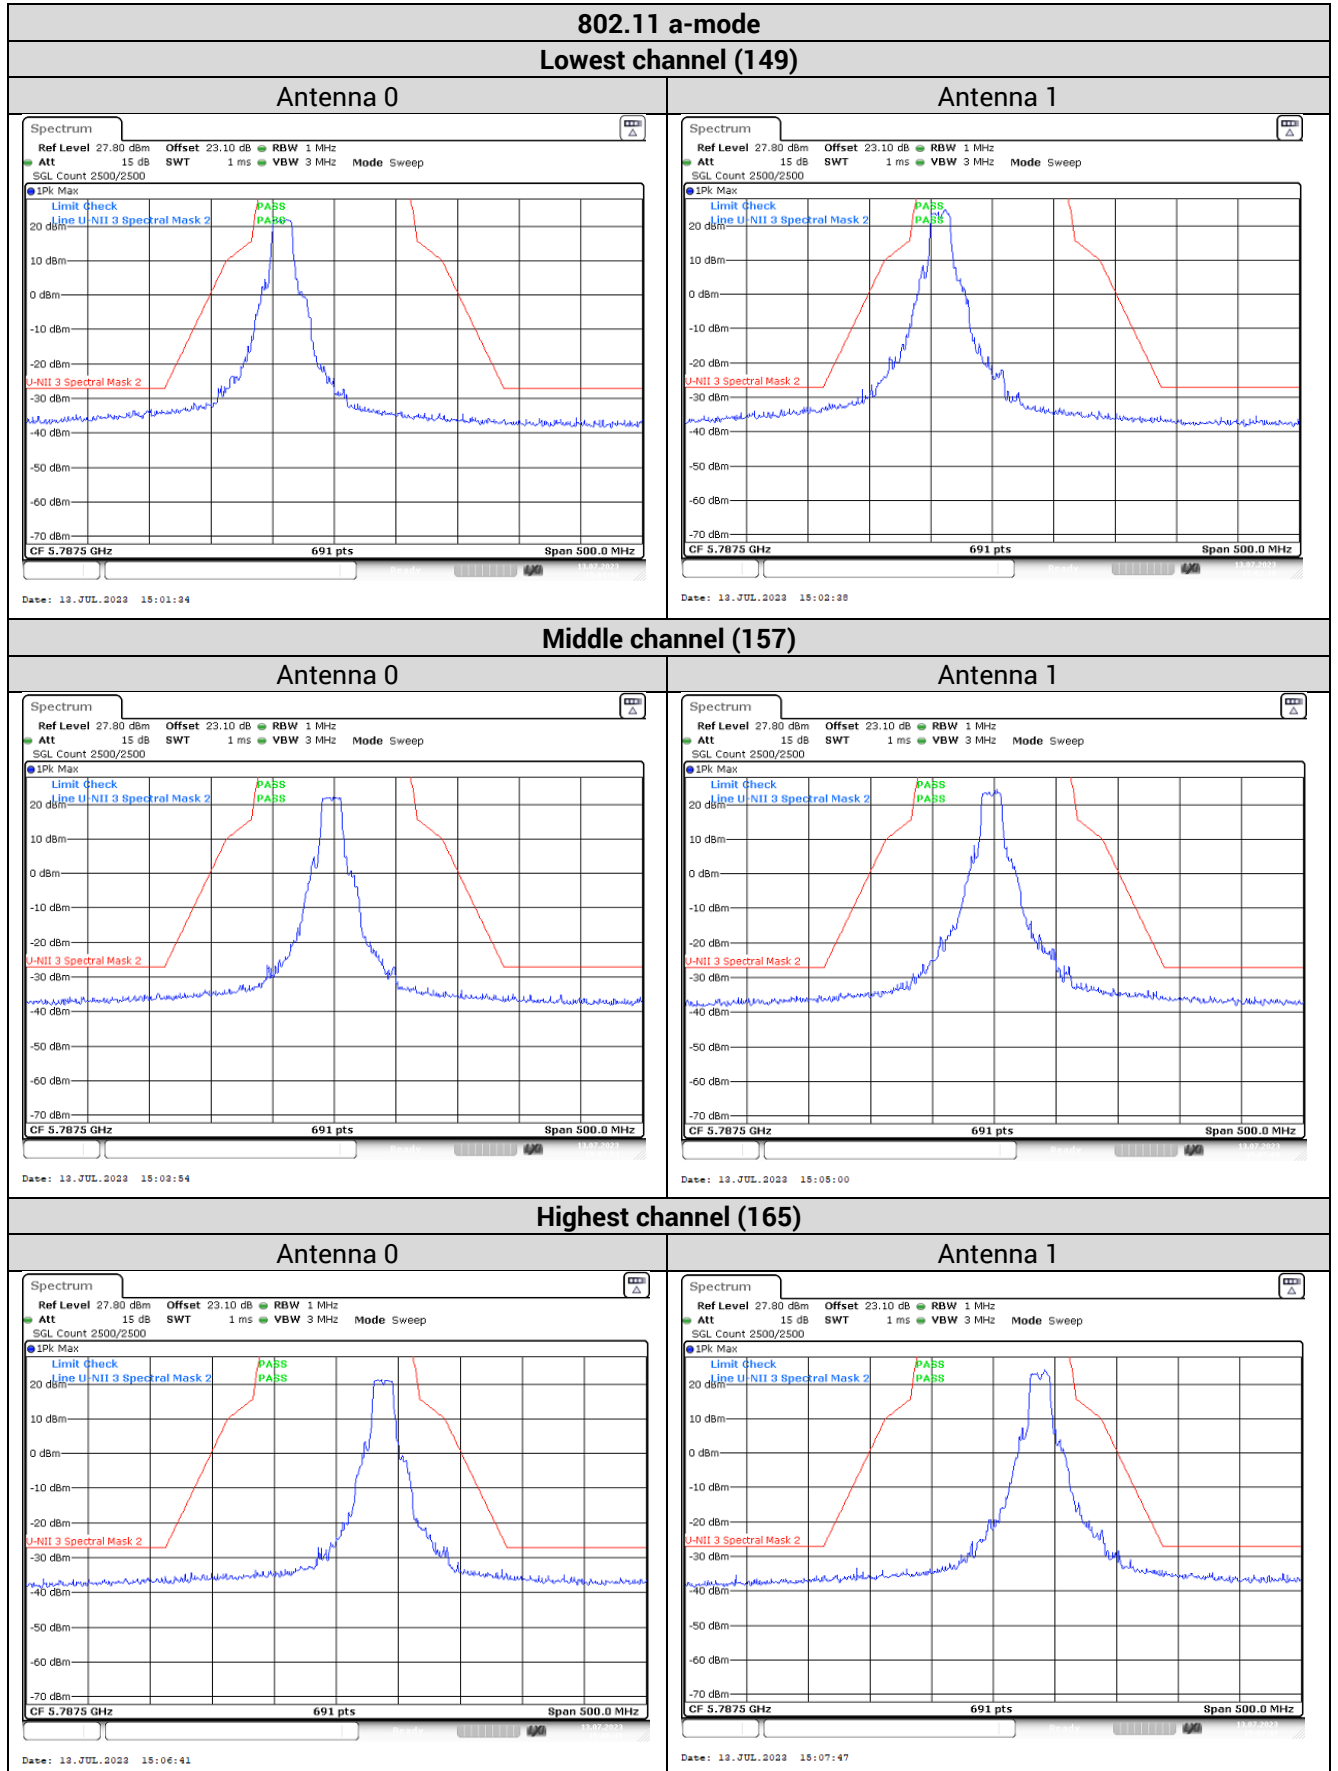


802.11 n HT20-mode

Lowest channel (149)

Antenna 0

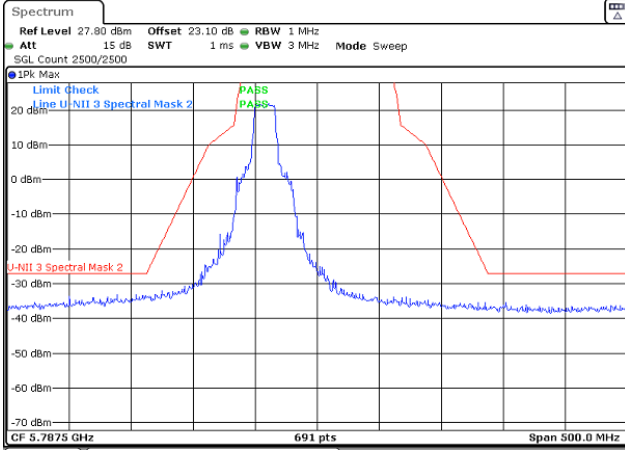


Antenna 1

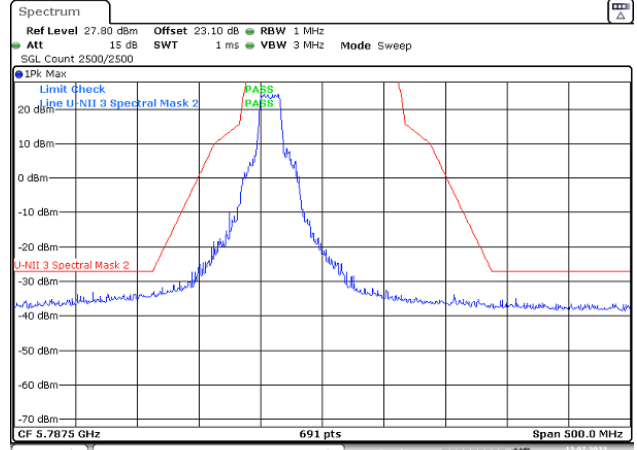


Middle channel (157)

Antenna 0

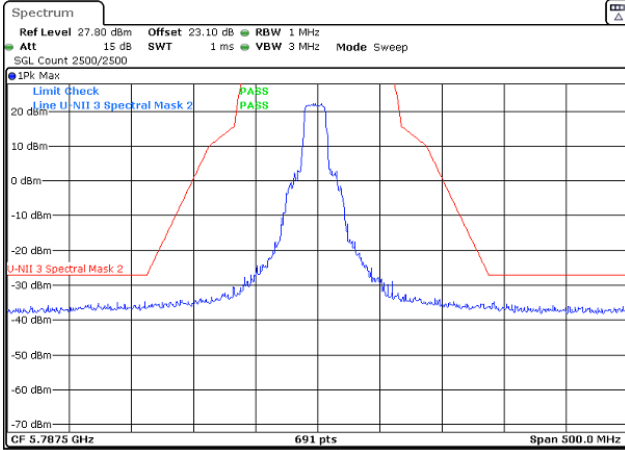


Antenna 1

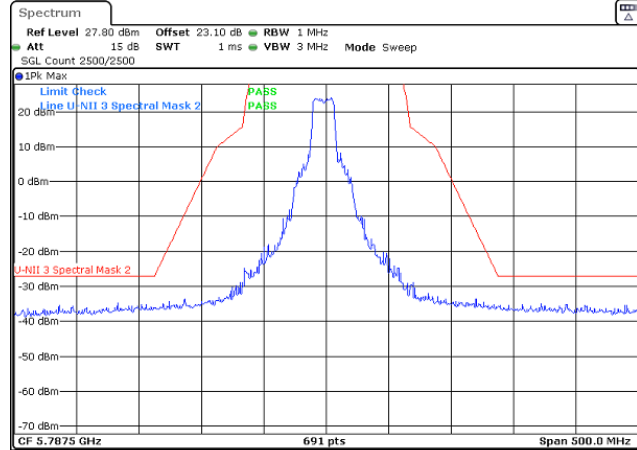


Highest channel (165)

Antenna 0

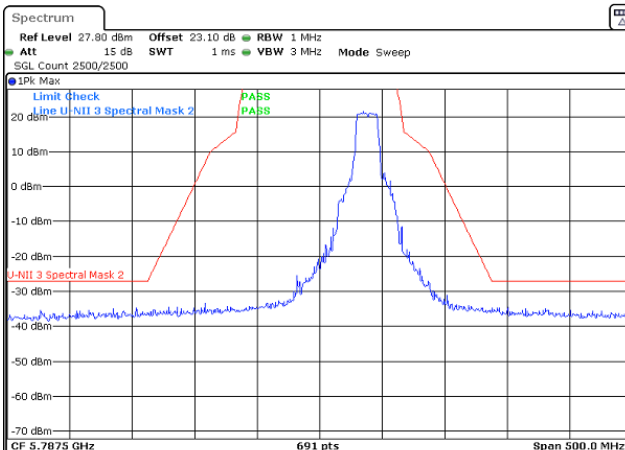

Antenna 1

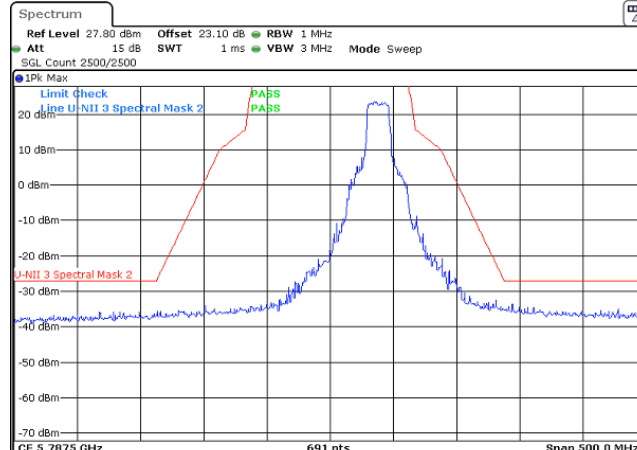





802.11 ac VHT20-mode

Lowest channel (149)

Antenna 0

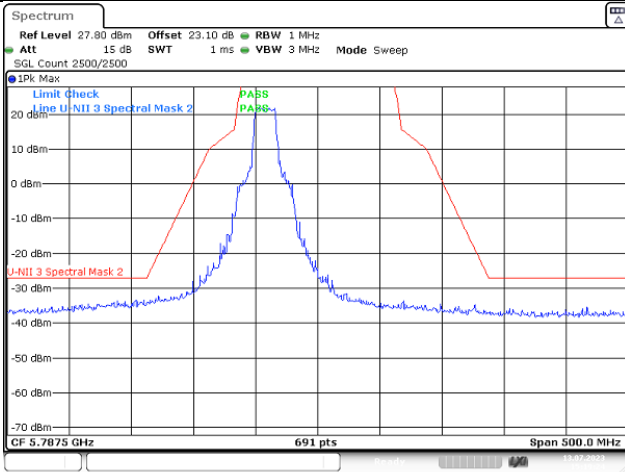


Antenna 1

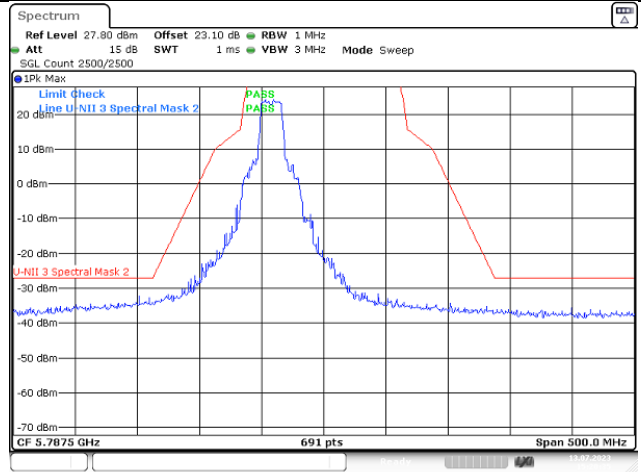


Middle channel (157)

Antenna 0

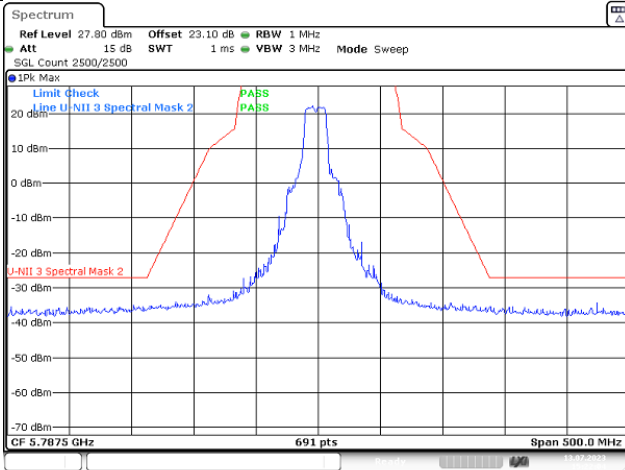


Antenna 1

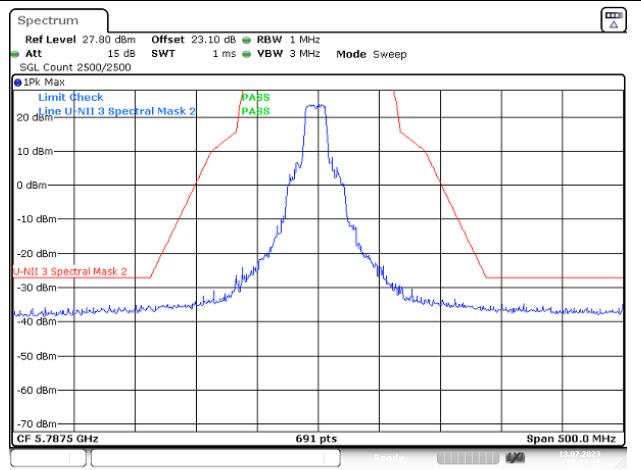


Highest channel (165)

Antenna 0

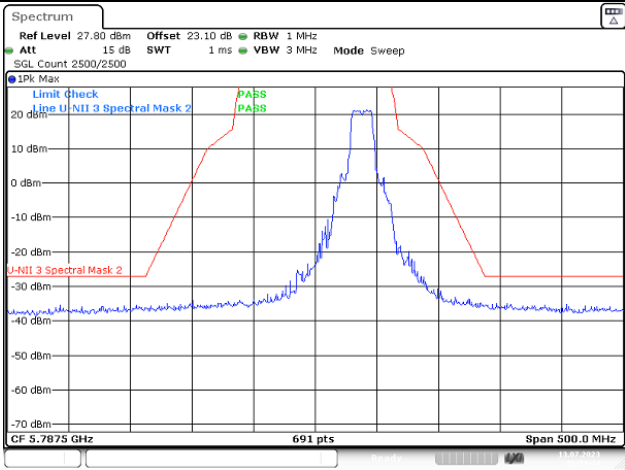


Antenna 1

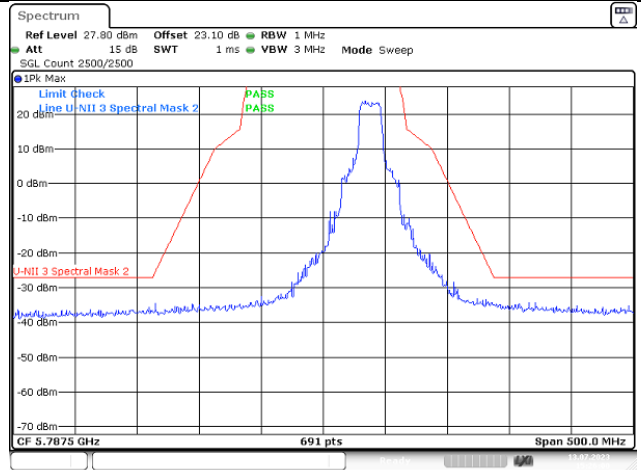


802.11 ax HE20-mode

Lowest channel (149)

Antenna 0

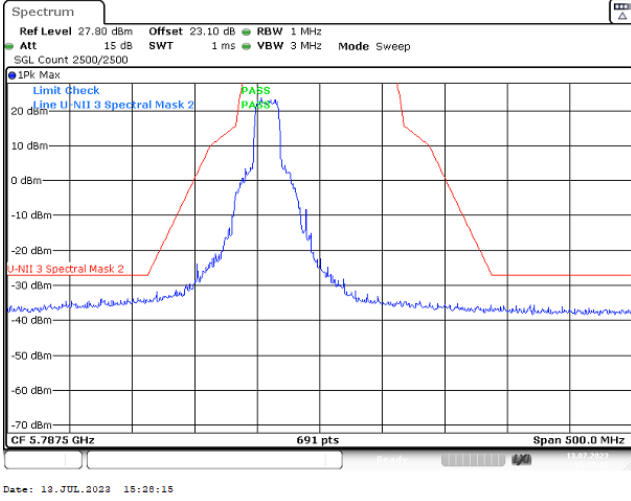


Antenna 1

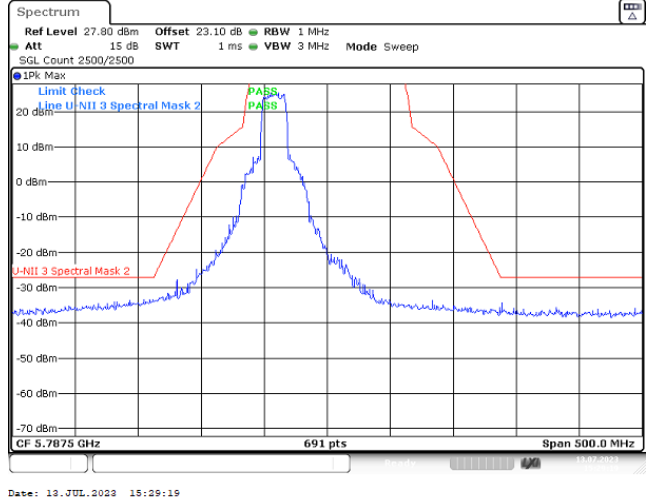


Middle channel (157)

Antenna 0

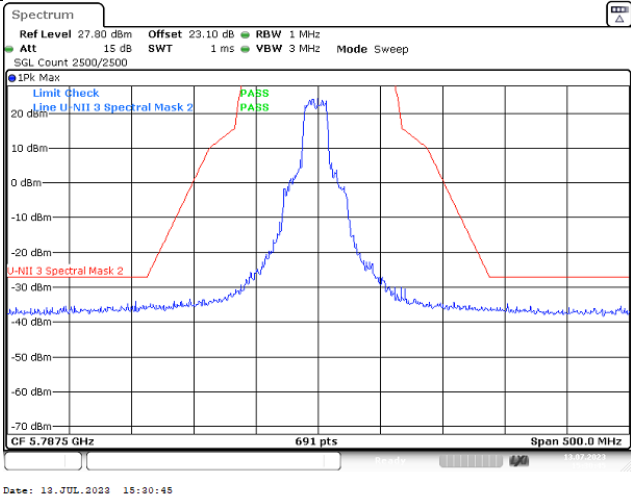


Antenna 1

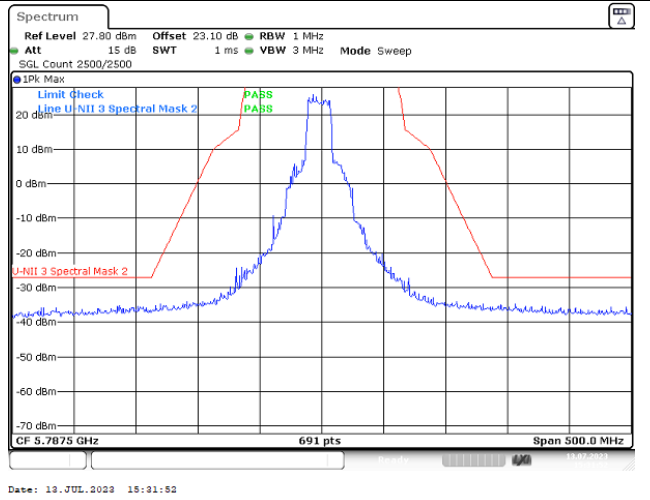


Highest channel (165)

Antenna 0

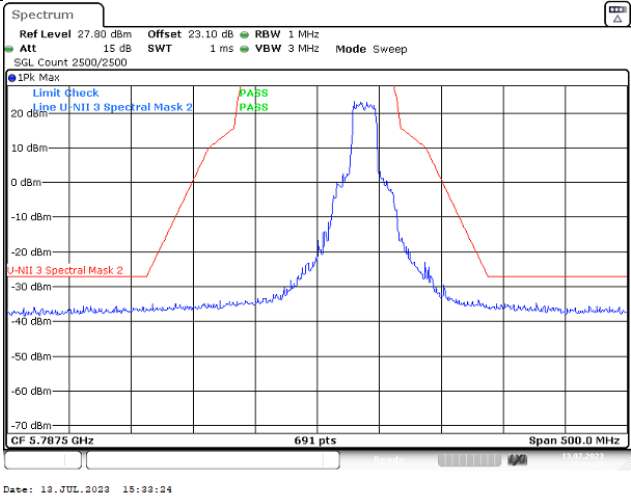


Antenna 1

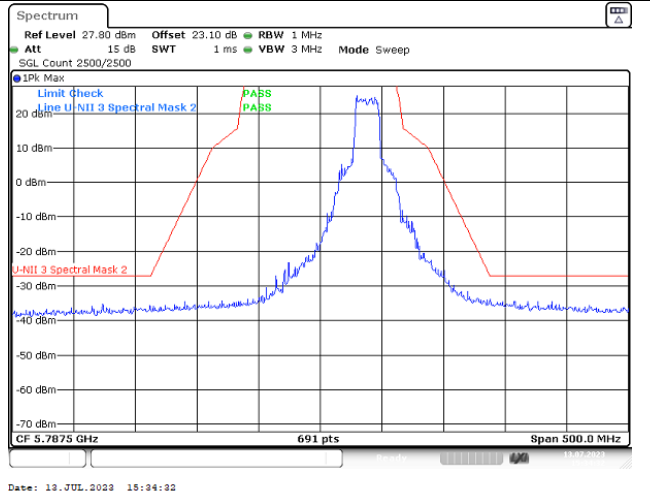


802.11 n HT40-mode  
Lowest channel (151)

Antenna 0

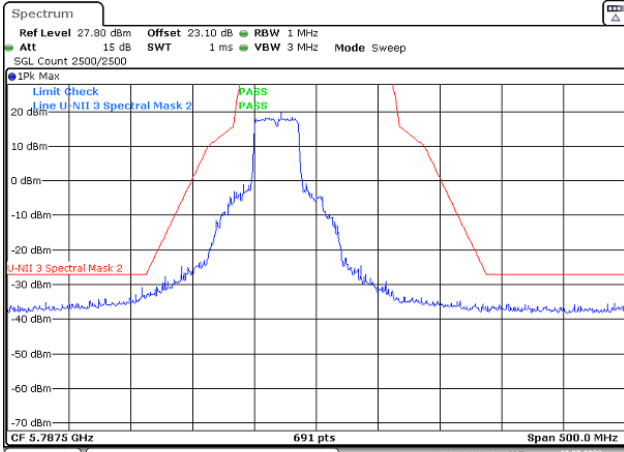


Antenna 1

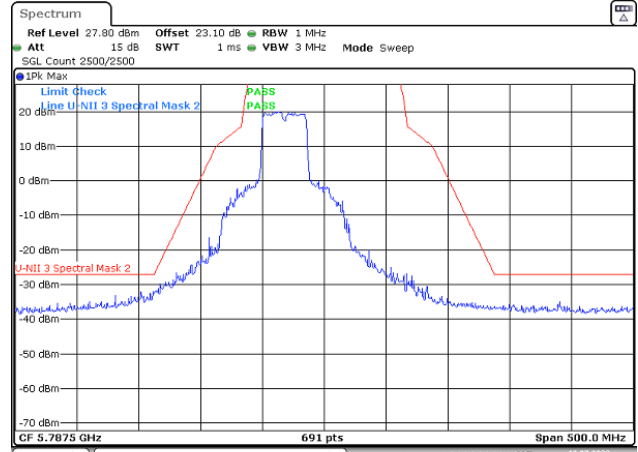


Highest channel (159)

Antenna 0

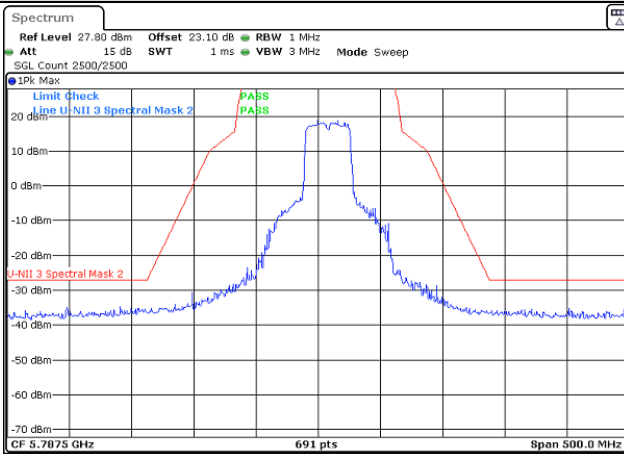


Antenna 1

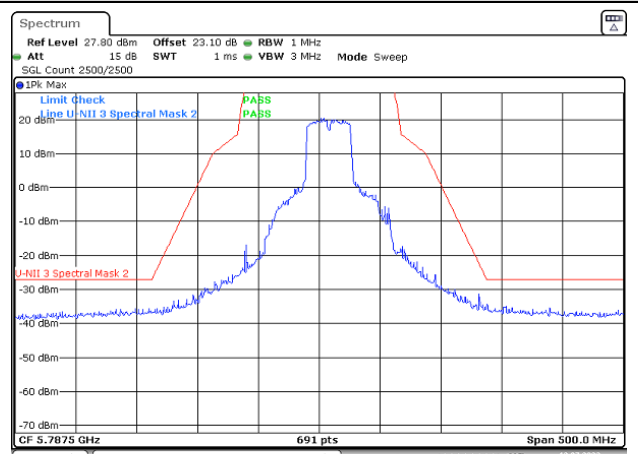


802.11 ac VHT40-mode

Lowest channel (151)

Antenna 0

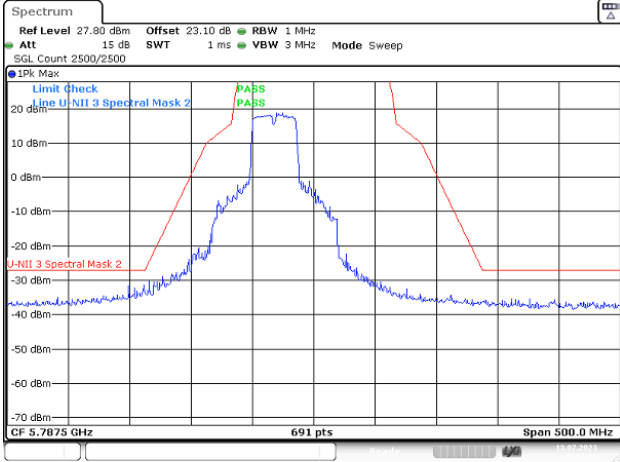


Antenna 1

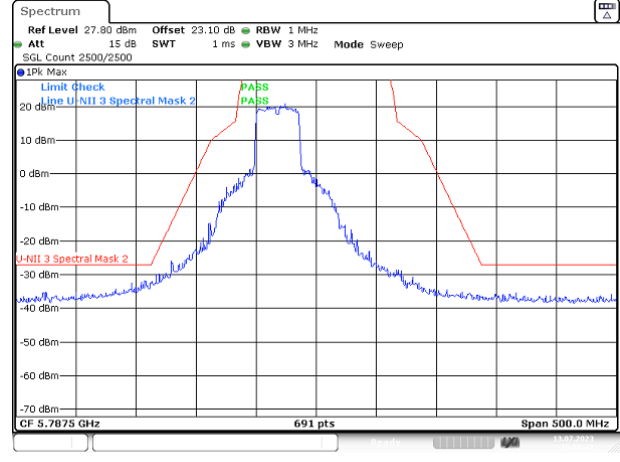


Highest channel (159)

Antenna 0

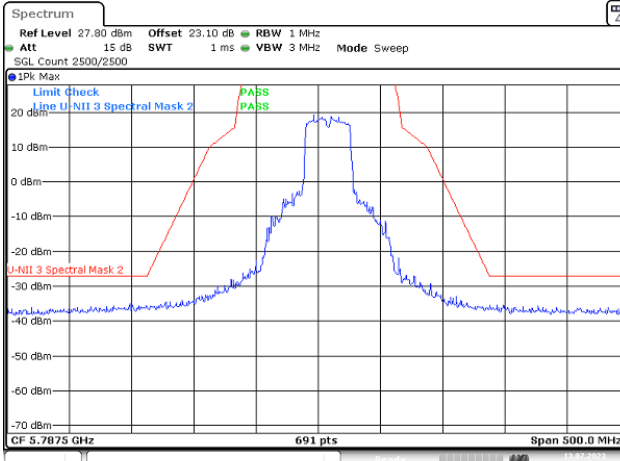


Antenna 1

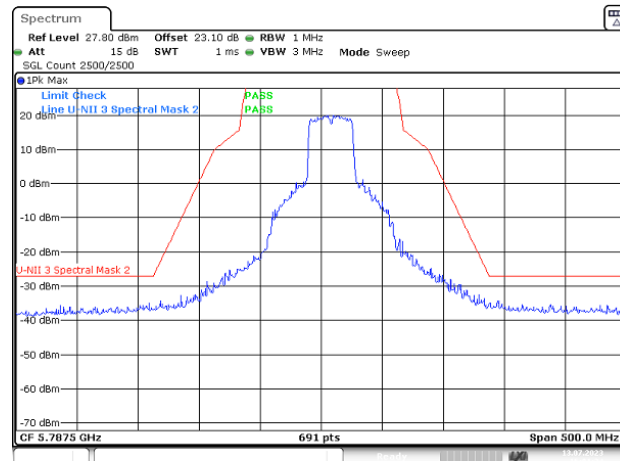


802.11 ax HE40-mode

Lowest channel (151)

Antenna 0

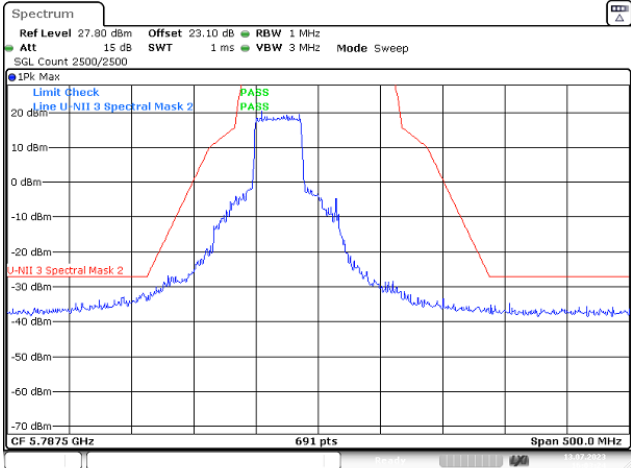


Antenna 1

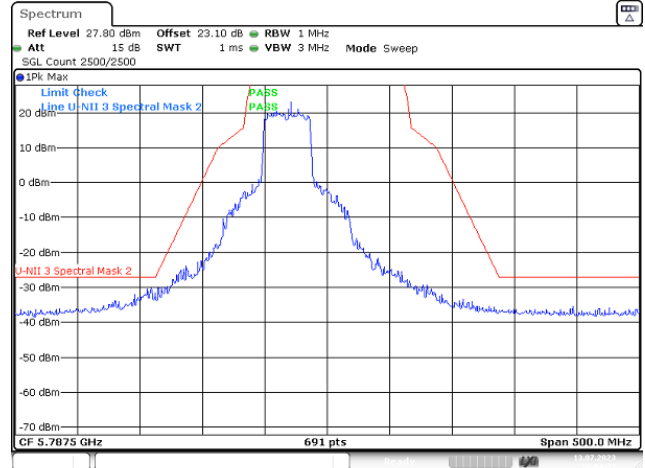


Highest channel (159)

Antenna 0

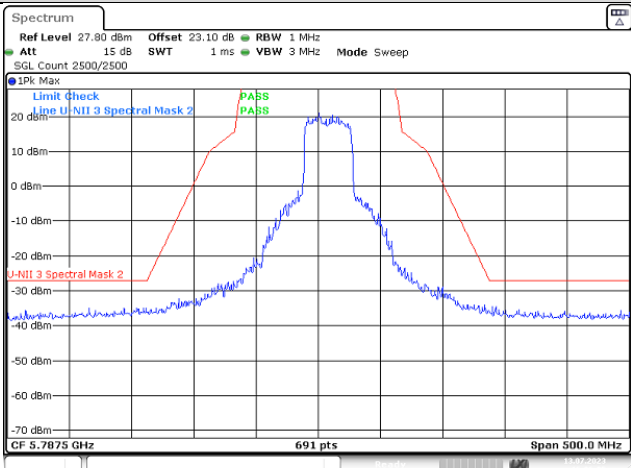


Antenna 1

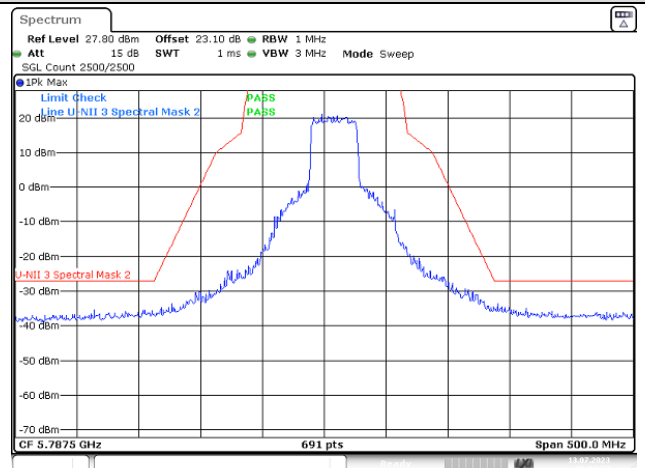


802.11 ac VHT80-mode

Channel (155)

Antenna 0

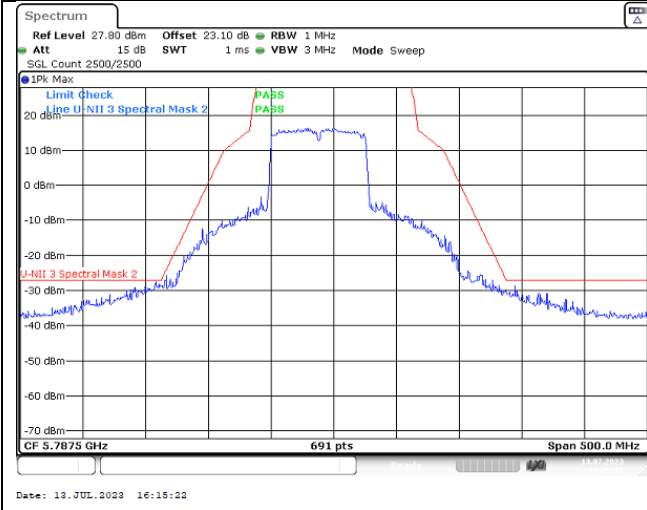


Antenna 1

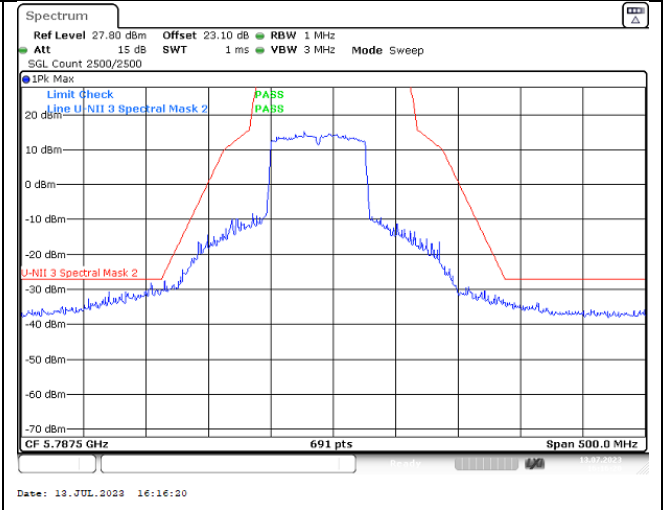


802.11 ax HE80-mode

Lowest channel (155)

Antenna 0

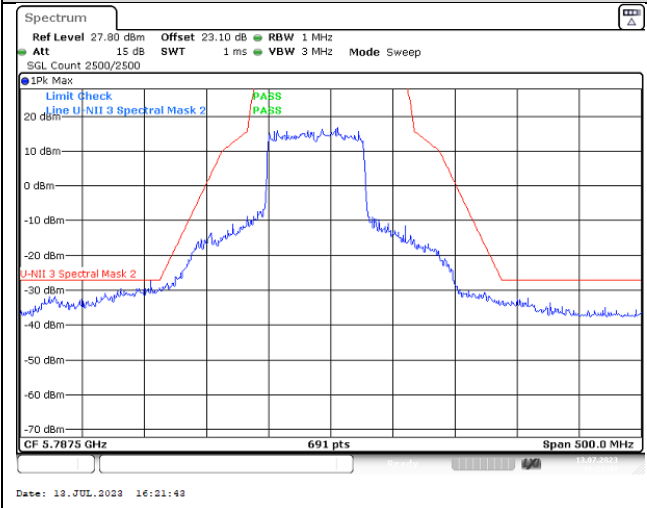

Antenna 1

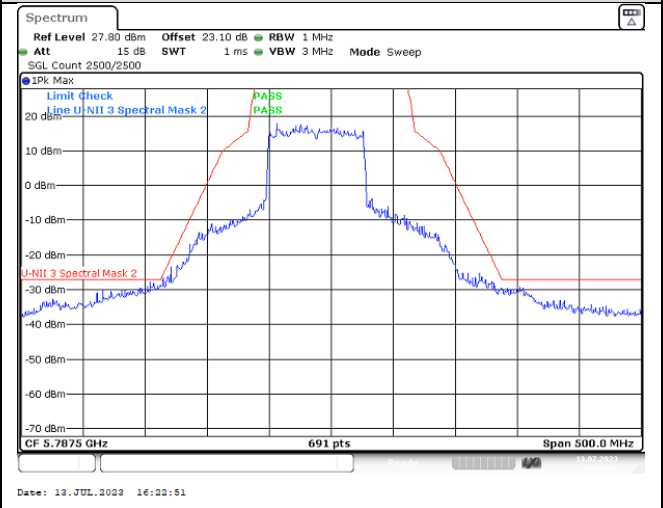

## 12.10 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to the lowest channel for the lower restricted band and to the highest channel for the upper restricted band. Measurement distance is 3m.

Measurement:

Measurement parameter	
Detector:	Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	≥ 3 x RBW
Span:	See plots!
Trace mode:	Max Hold
Test setup:	See sub clause 7.2 – A
Measurement uncertainty:	See chapter 9

Limits:


Band Edge Compliance Radiated
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
74 dBµV/m (peak) 54 dBµV/m (average)

Result:


Scenario	Band Edge Compliance Radiated [dBµV/m]
band edge	< 74 dBµV/m (peak) < 54 dBµV/m (average)

**Plots:**

**Plot 1:** lower band edge; U-NII-1; lowest channel; a-mode

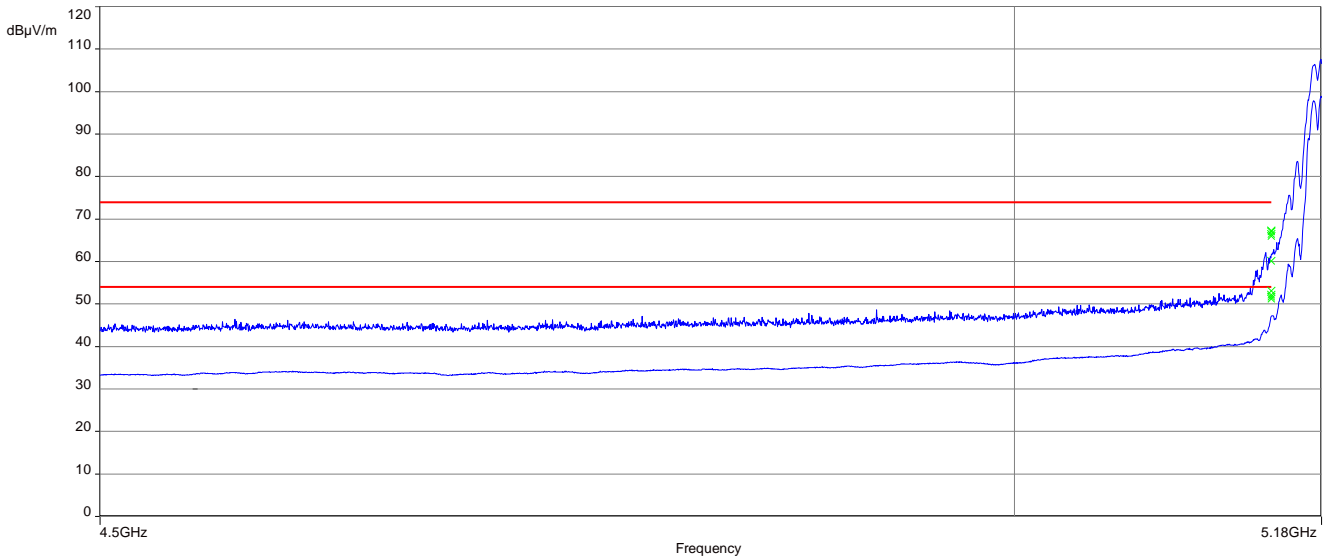


**Plot 2:** upper band edge; U-NII-2A; highest channel; a-mode

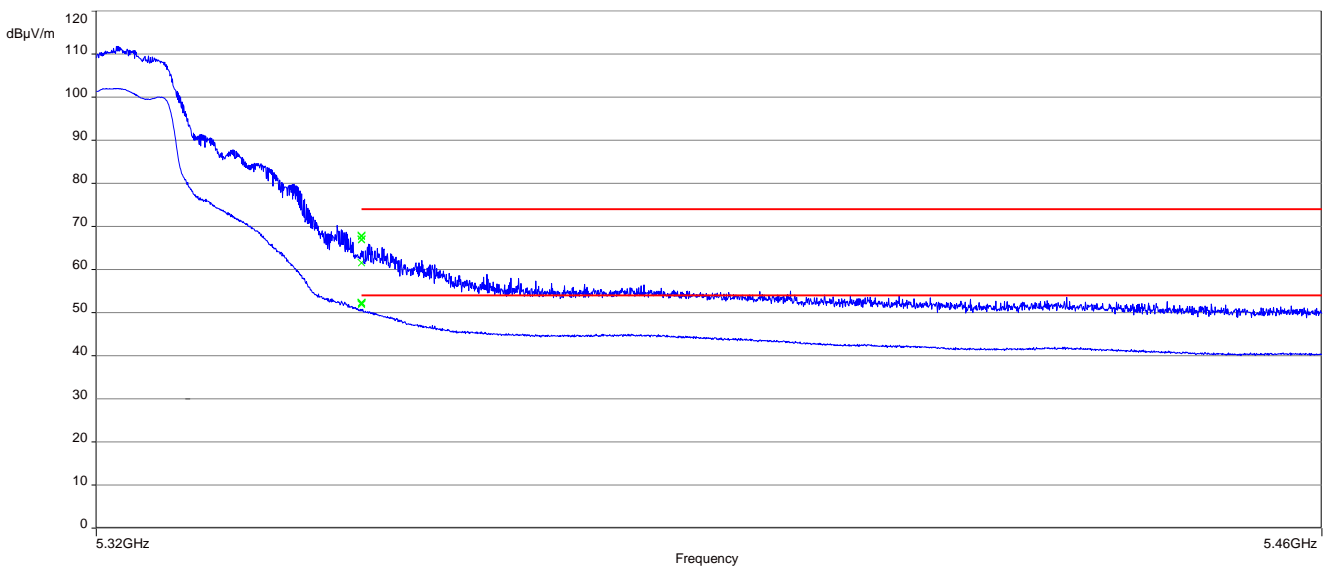





**Plot 3:** lower band edge; U-NII-2C; lowest channel; a-mode

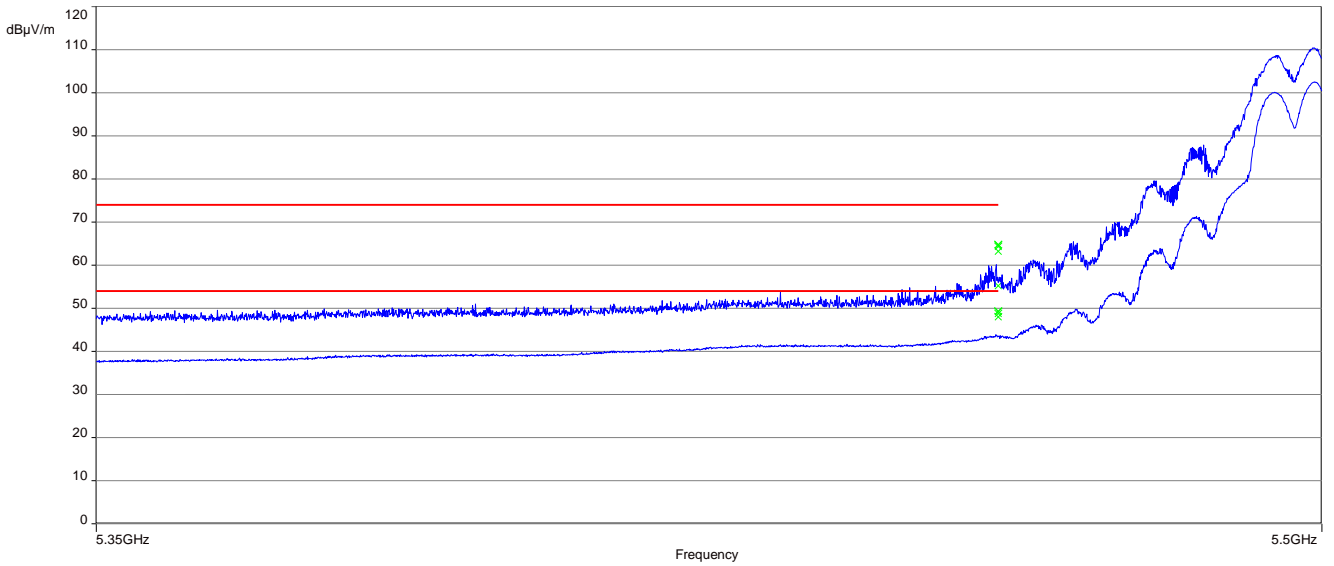


**Plot 4:** lower band edge; U-NII-1; lowest channel; n20-mode

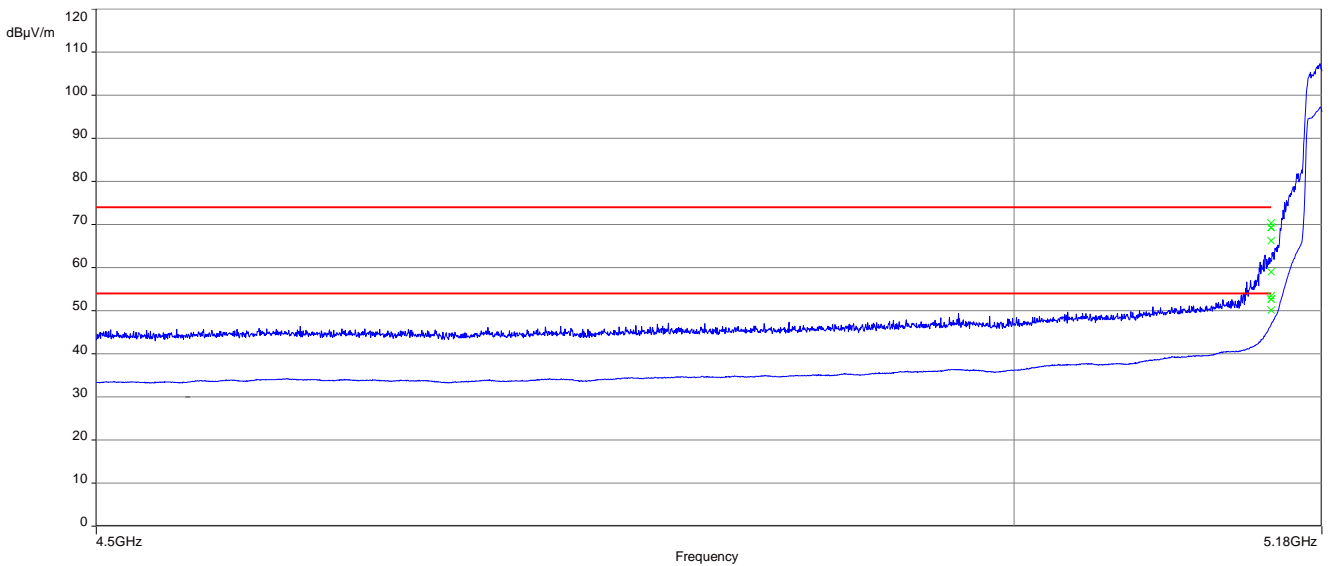


**Plot 5:** upper band edge; U-NII-2A; highest channel; n20-mode

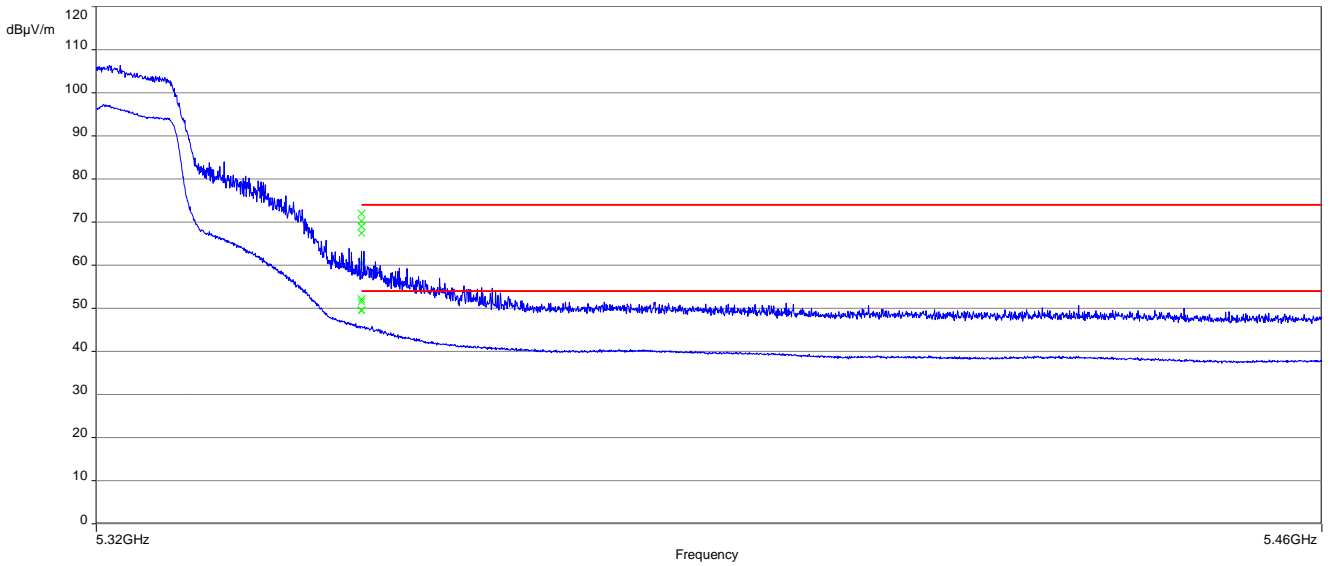


**Plot 6:** lower band edge; U-NII-2C; lowest channel; n20-mode

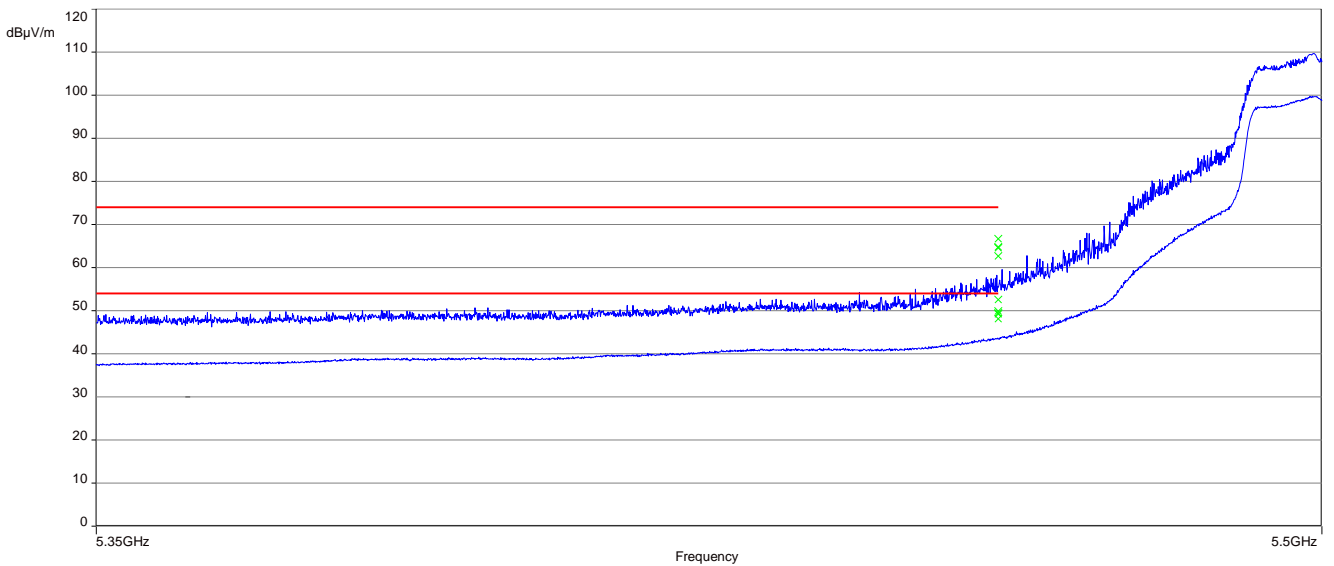


**Plot 7:** lower band edge; U-NII-1; lowest channel; ac20-mode

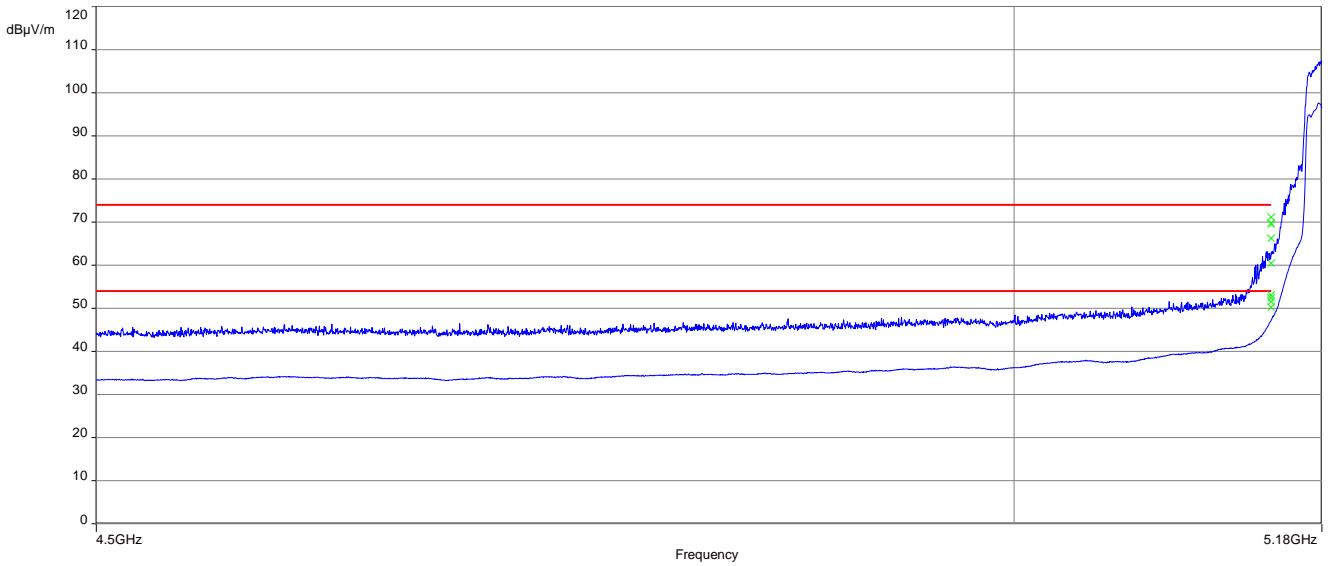


**Plot 8:** upper band edge; U-NII-2A; highest channel; ac20-mode

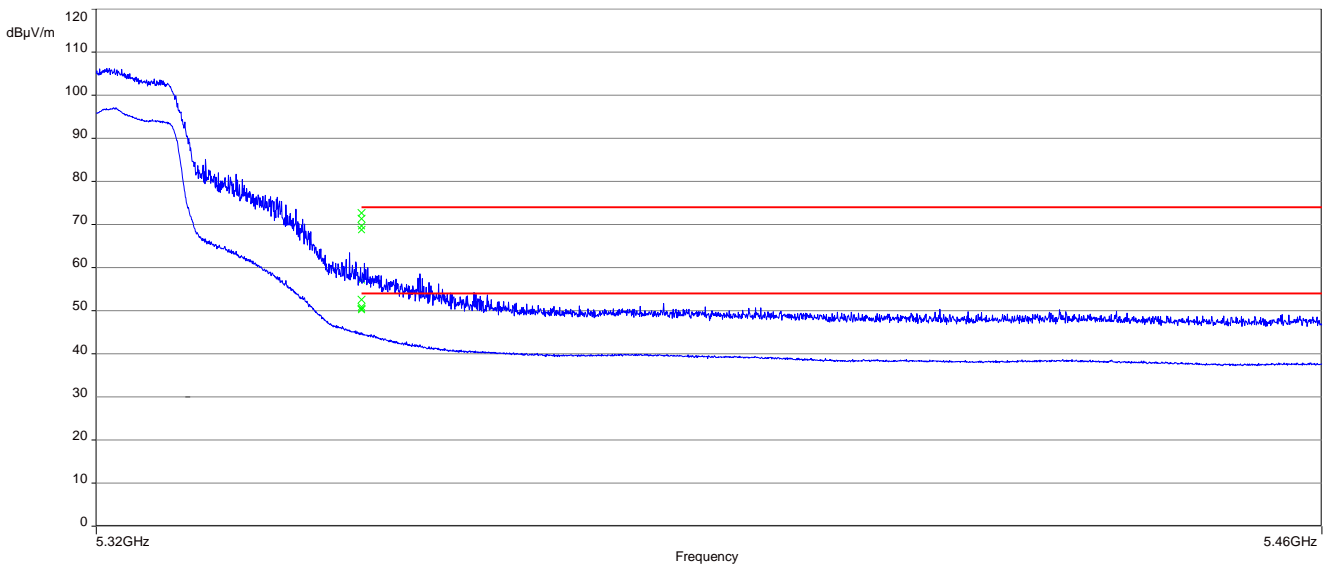


**Plot 9:** lower band edge; U-NII-2C; lowest channel; ac20-mode

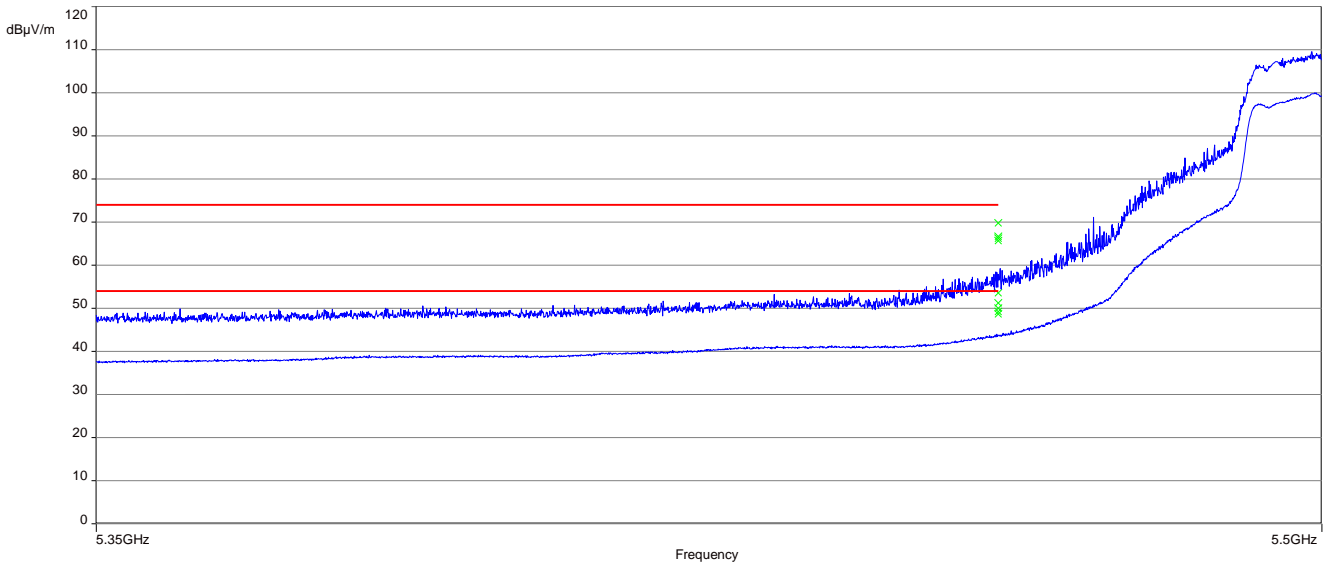


**Plot 10:** lower band edge; U-NII-1; lowest channel; ax20-mode

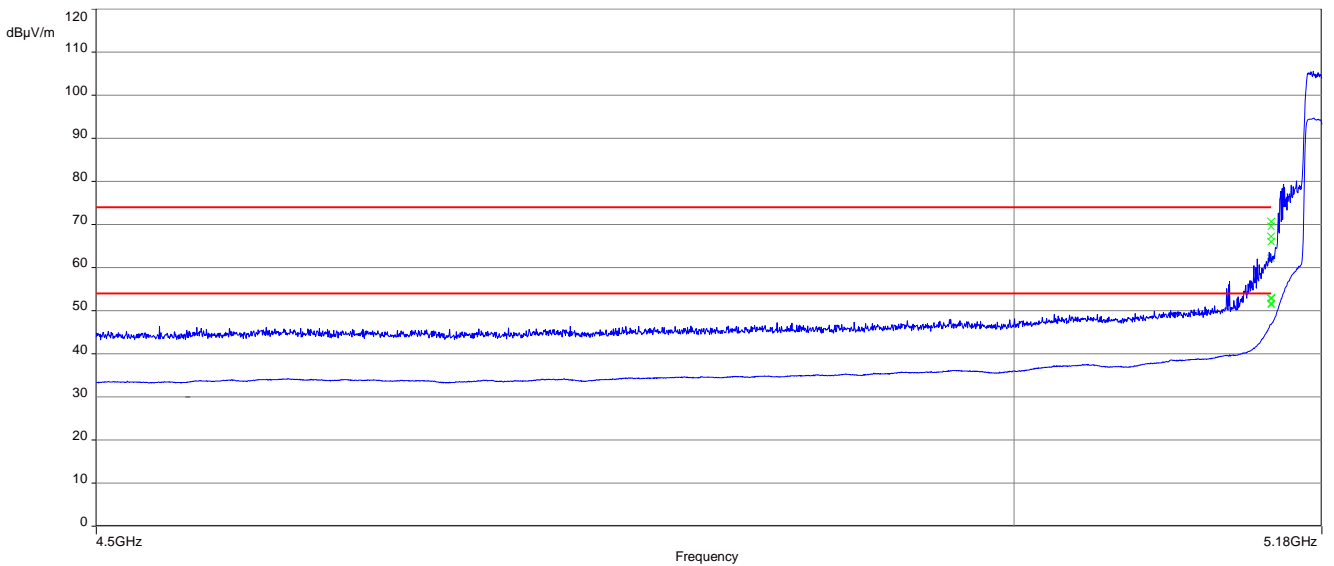


**Plot 11:** upper band edge; U-NII-2A; highest channel; ax20-mode

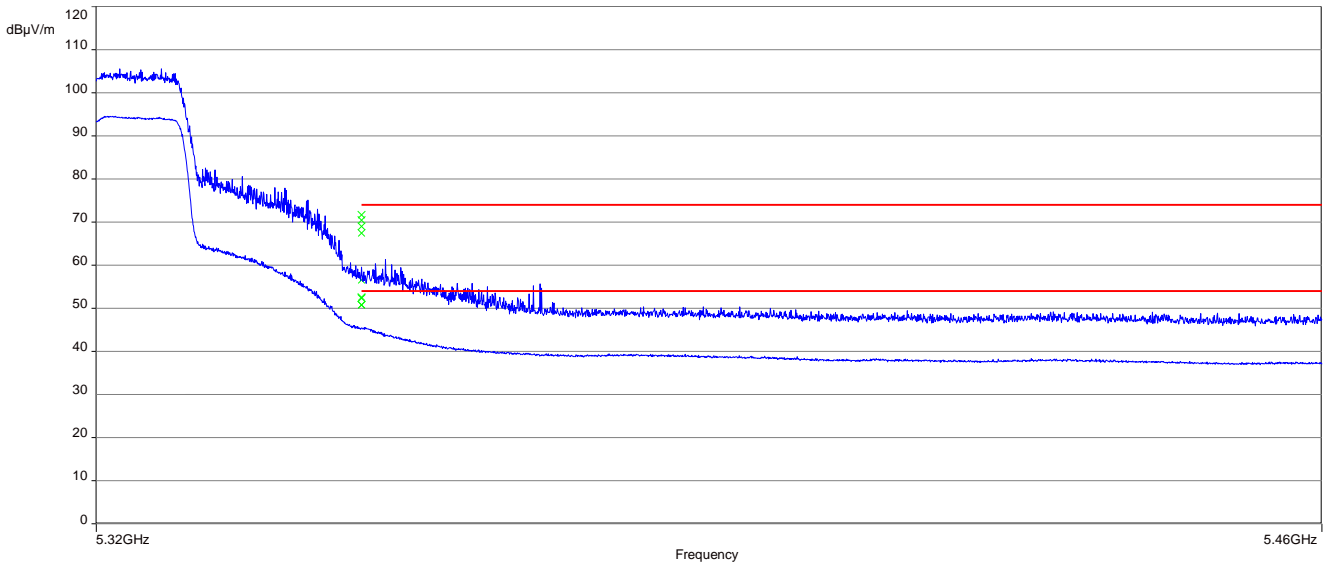


**Plot 12:** lower band edge; U-NII-2C; lowest channel; ax20-mode

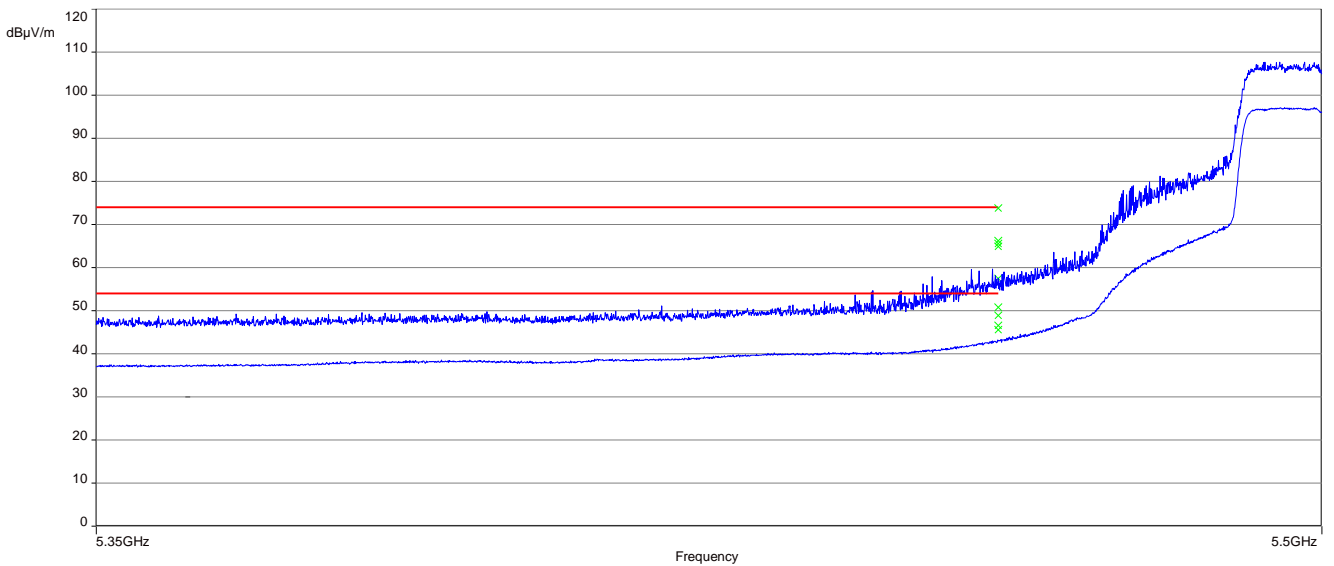


**Plot 13:** lower band edge; U-NII-1; lowest channel; n40-mode

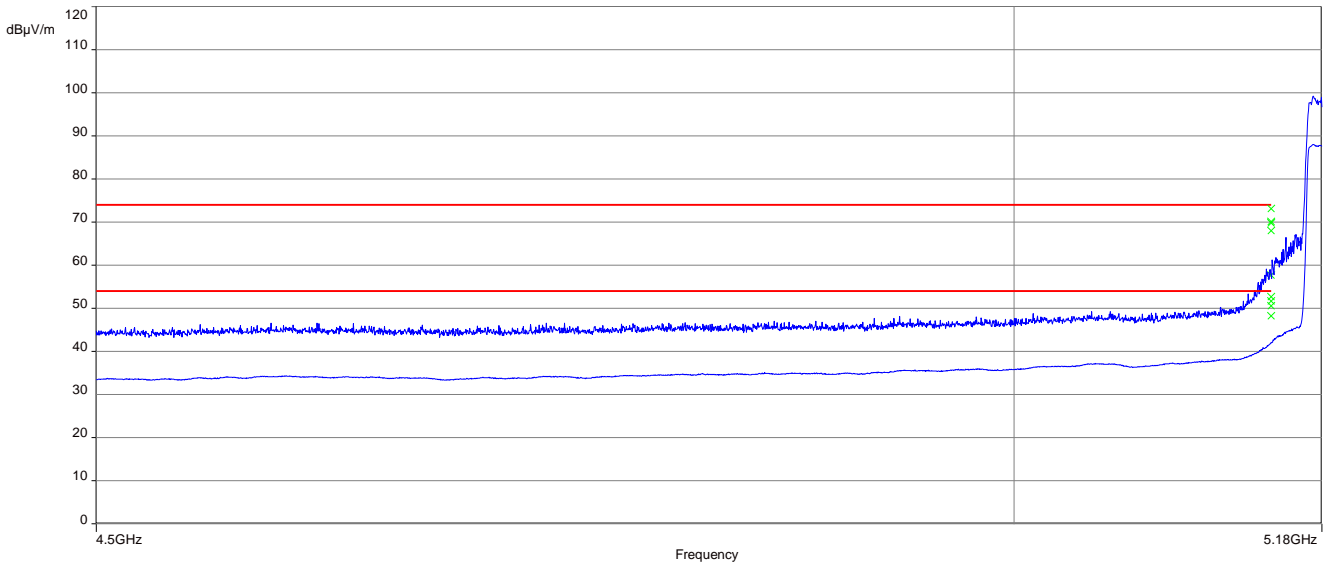


**Plot 14:** upper band edge; U-NII-2A; highest channel; n40-mode

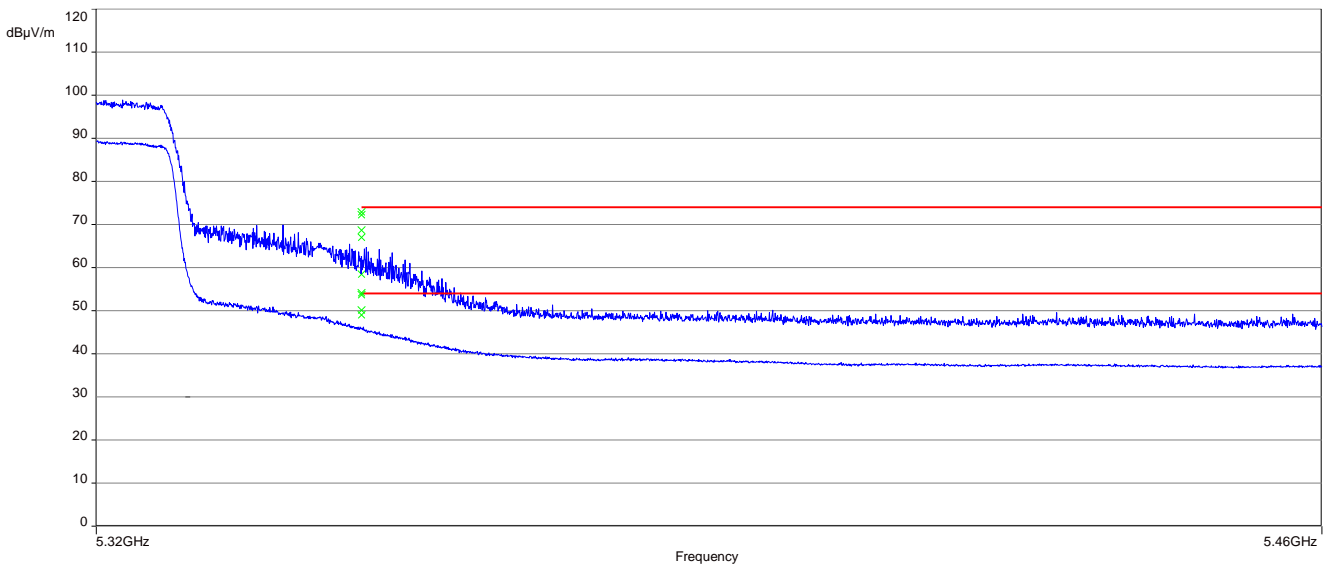


**Plot 15:** lower band edge; U-NII-2C; lowest channel; n40-mode

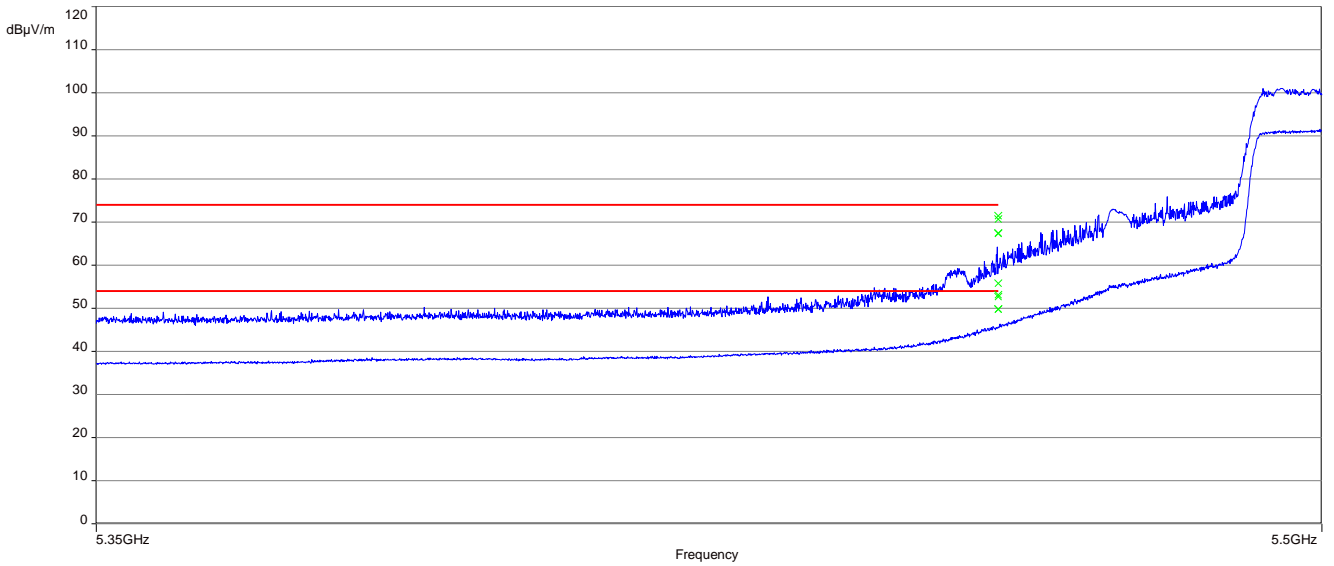


**Plot 16:** lower band edge; U-NII-1; lowest channel; ac40-mode

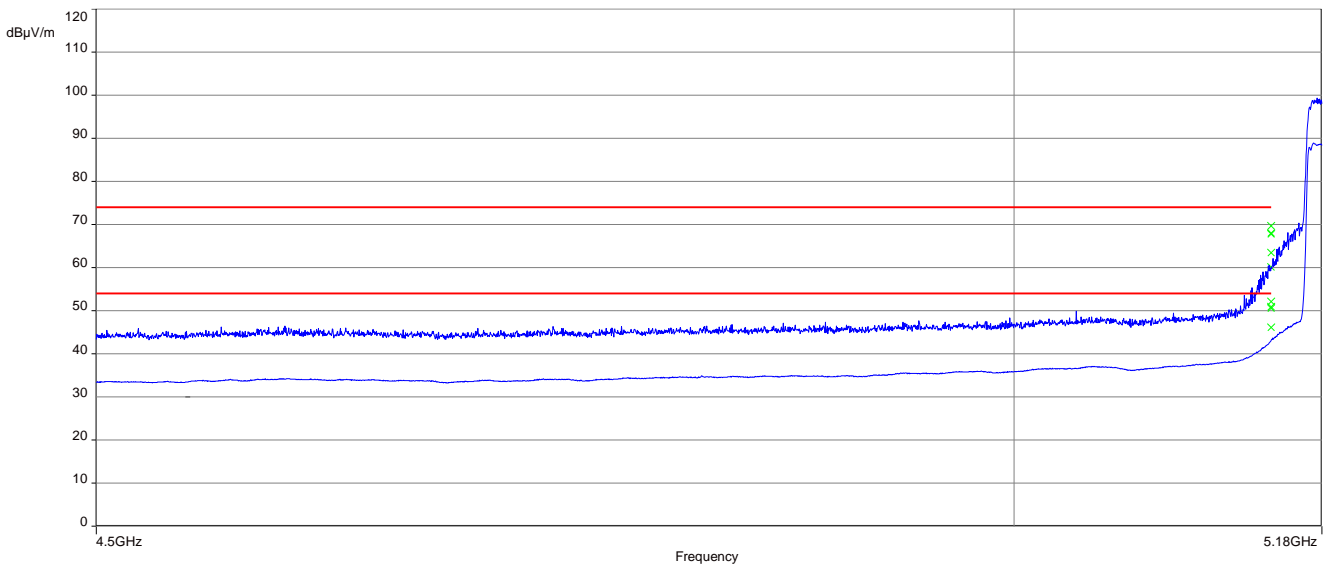

**Plot 17:** upper band edge; U-NII-2A; highest channel; ac40-mode

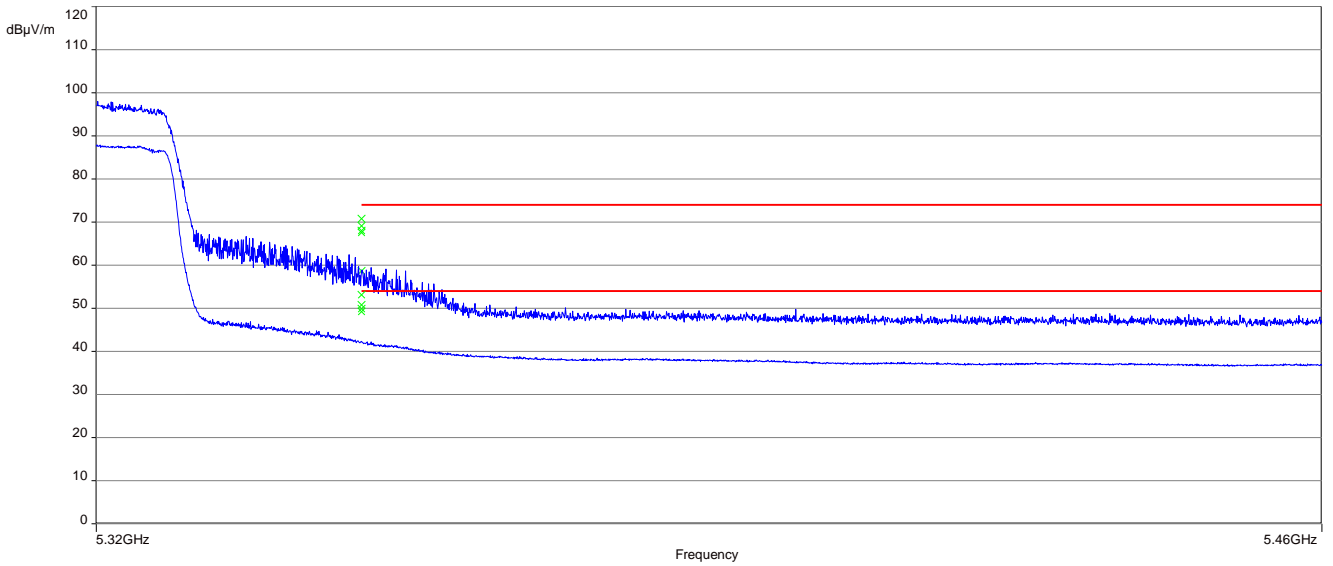


**Plot 18:** lower band edge; U-NII-2C; lowest channel; ac40-mode

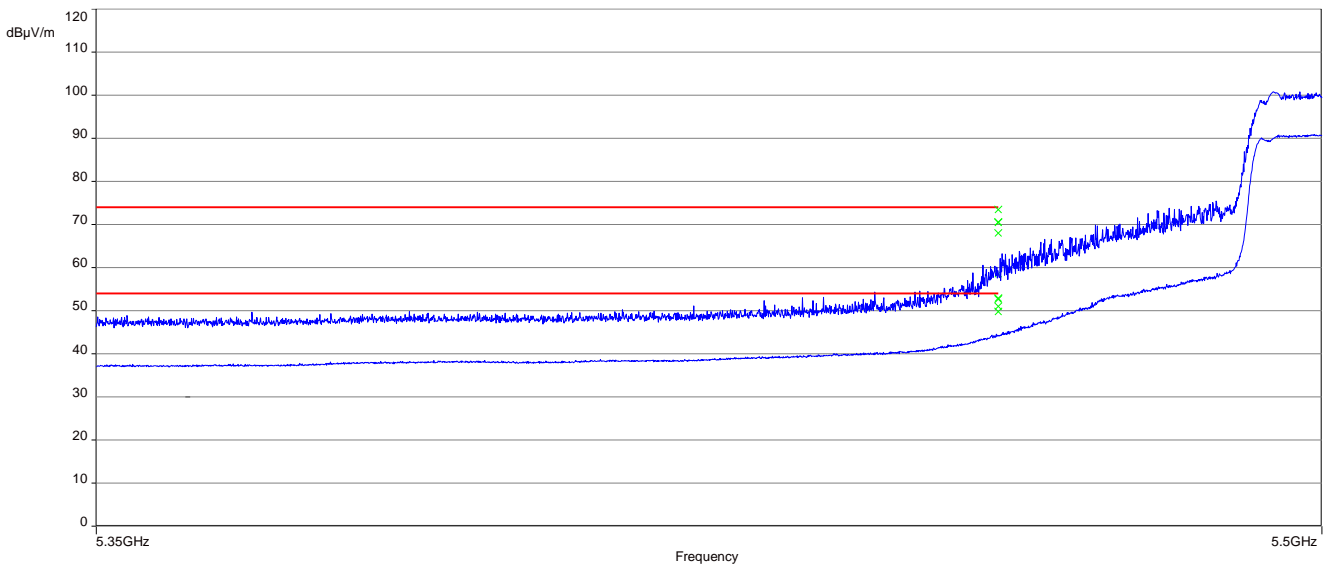





**Plot 19:** lower band edge; U-NII-1; lowest channel; ax40-mode

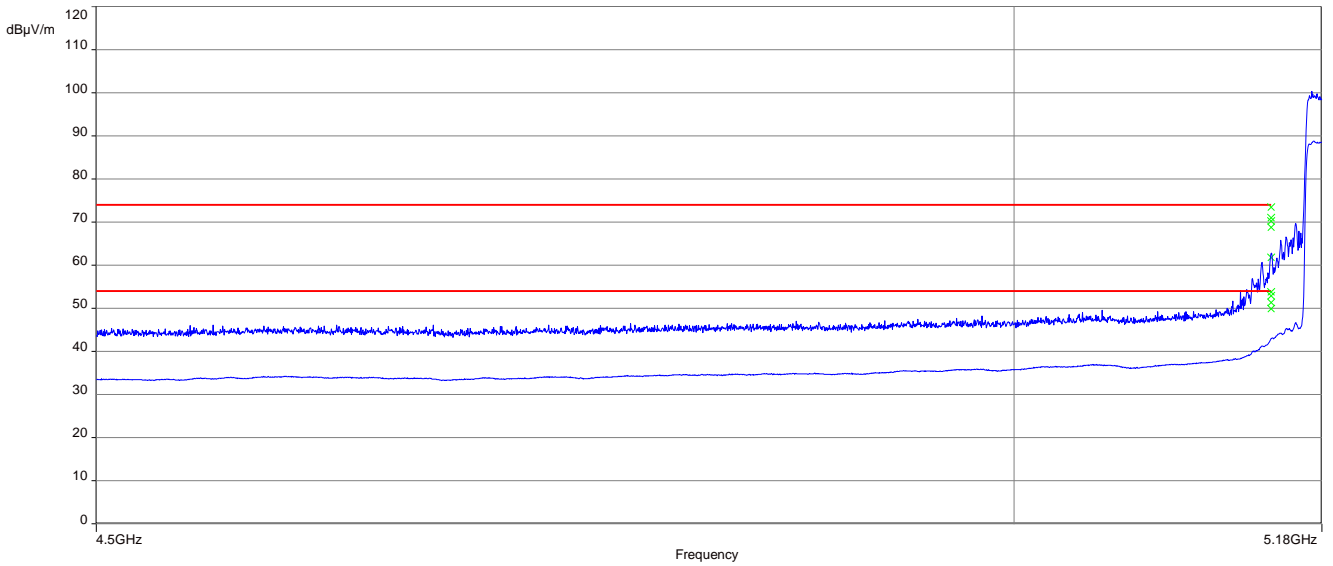


**Plot 20:** upper band edge; U-NII-2A; highest channel; ax40-mode

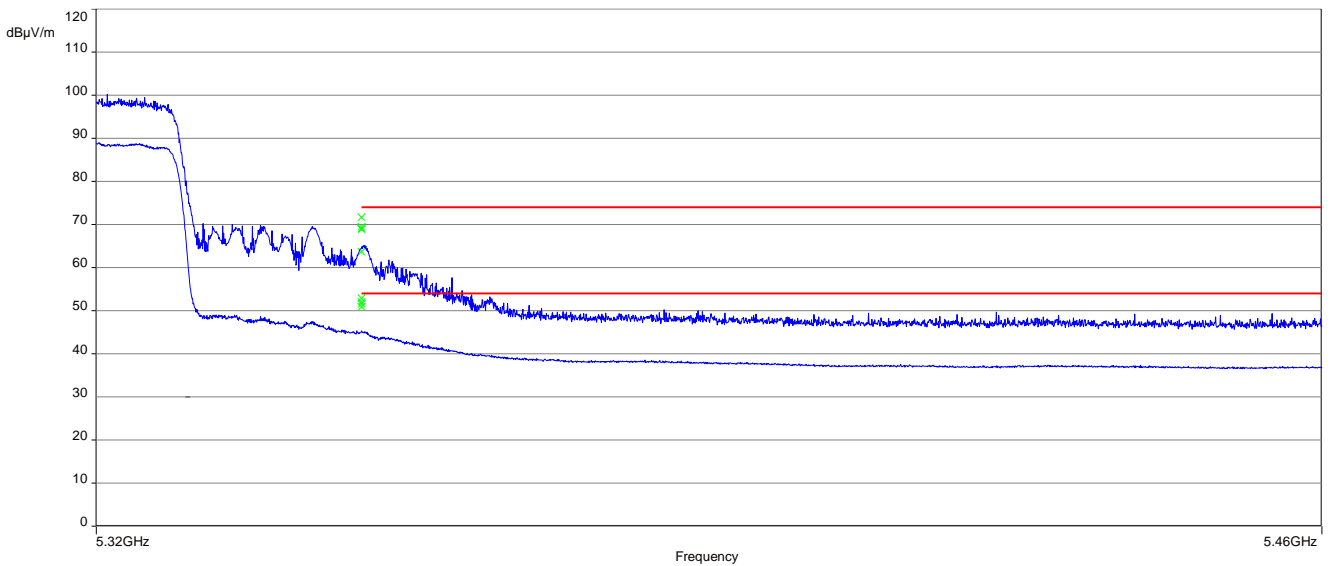


**Plot 21:** lower band edge; U-NII-2C; lowest channel; ax40-mode

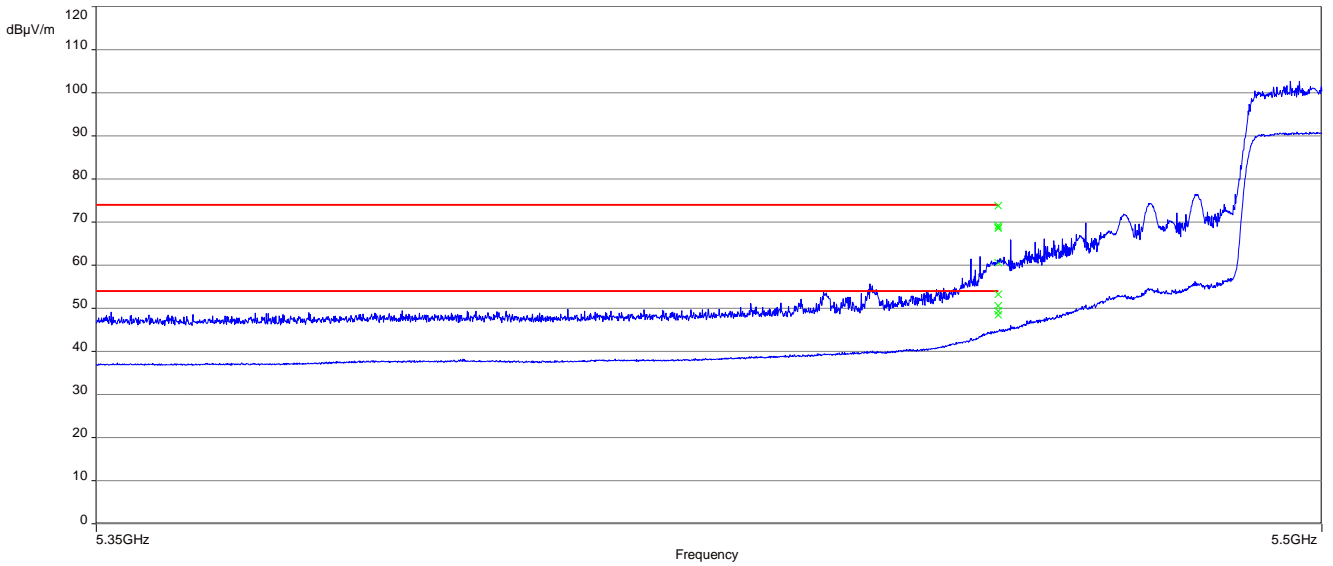


**Plot 22:** lower band edge; U-NII-1; lowest channel; ac80-mode

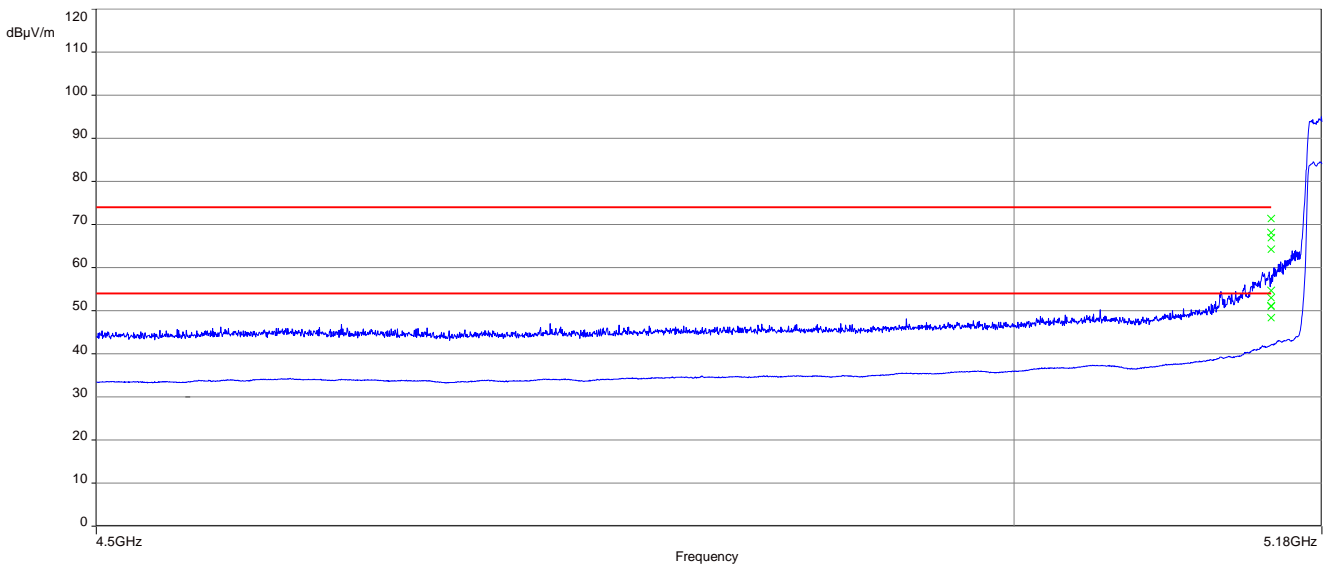


**Plot 23:** upper band edge; U-NII-2A; highest channel; ac80-mode

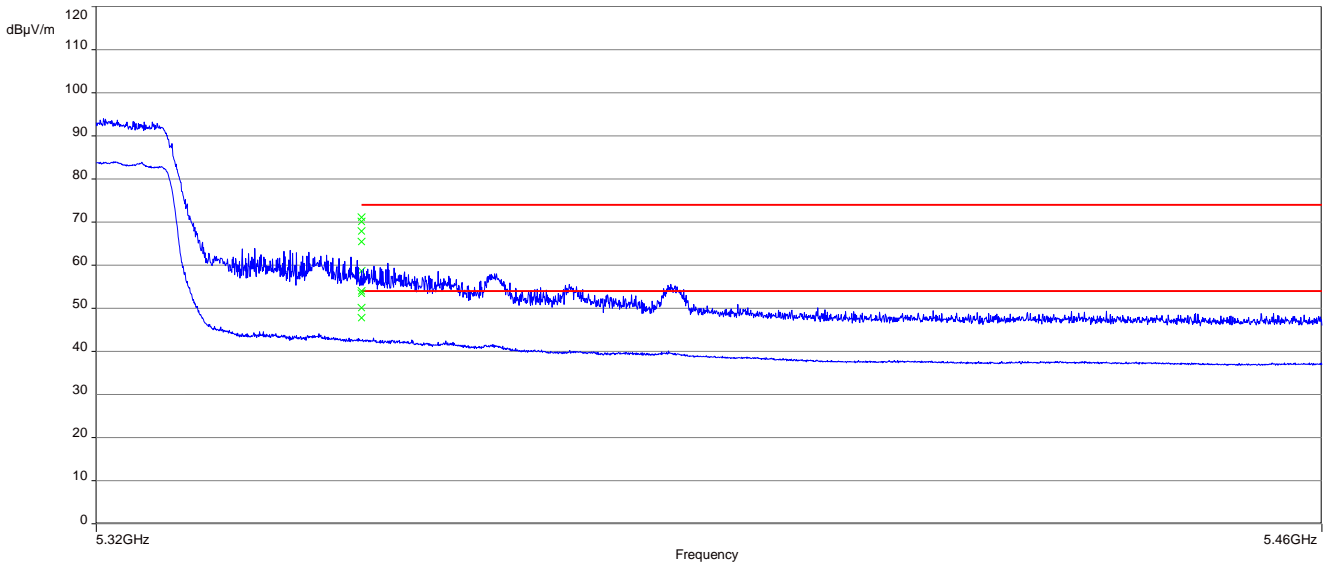


**Plot 24:** lower band edge; U-NII-2C; lowest channel; ac80-mode

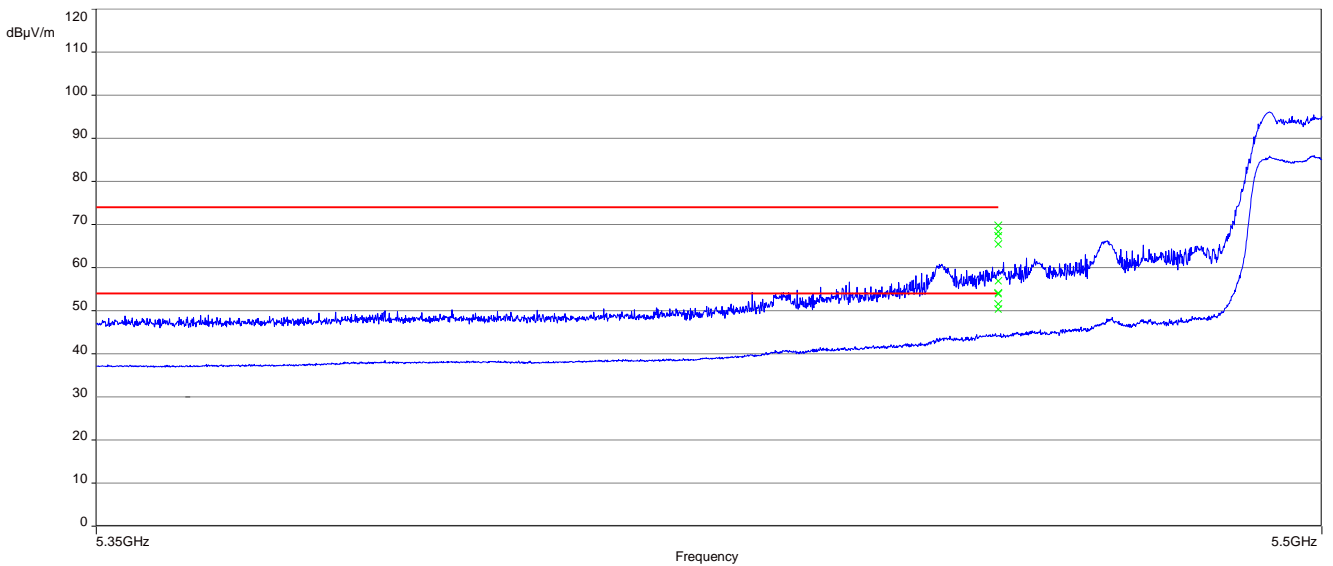


**Plot 25:** lower band edge; U-NII-1; lowest channel; ax80-mode

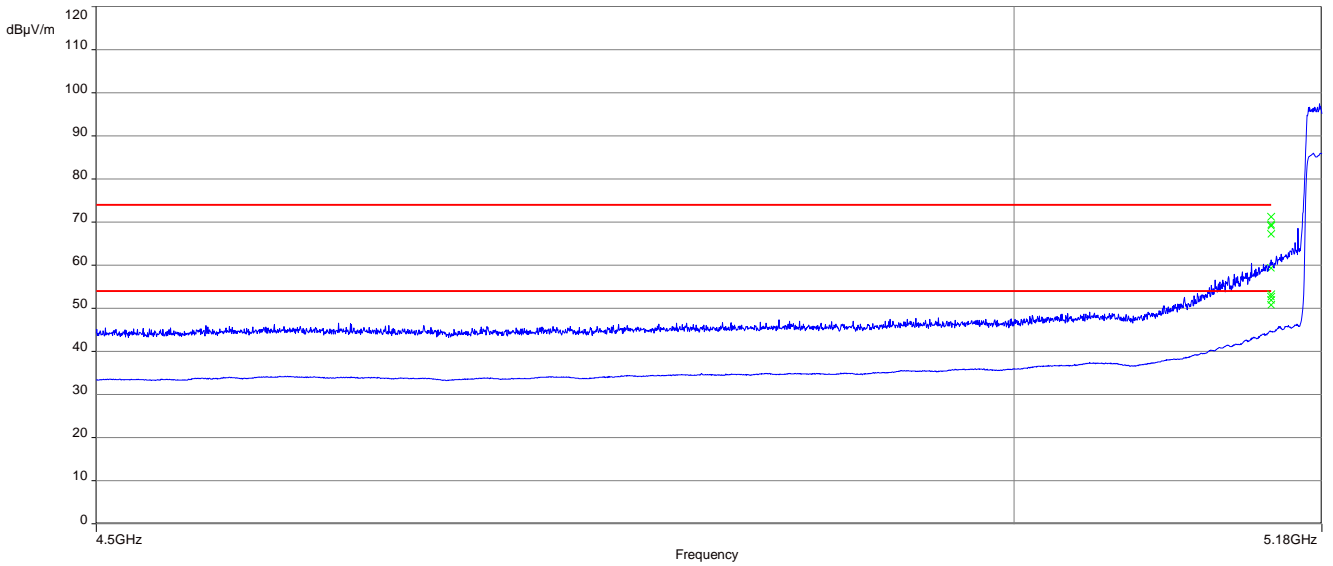

**Plot 26:** upper band edge; U-NII-2A; highest channel; ax80-mode

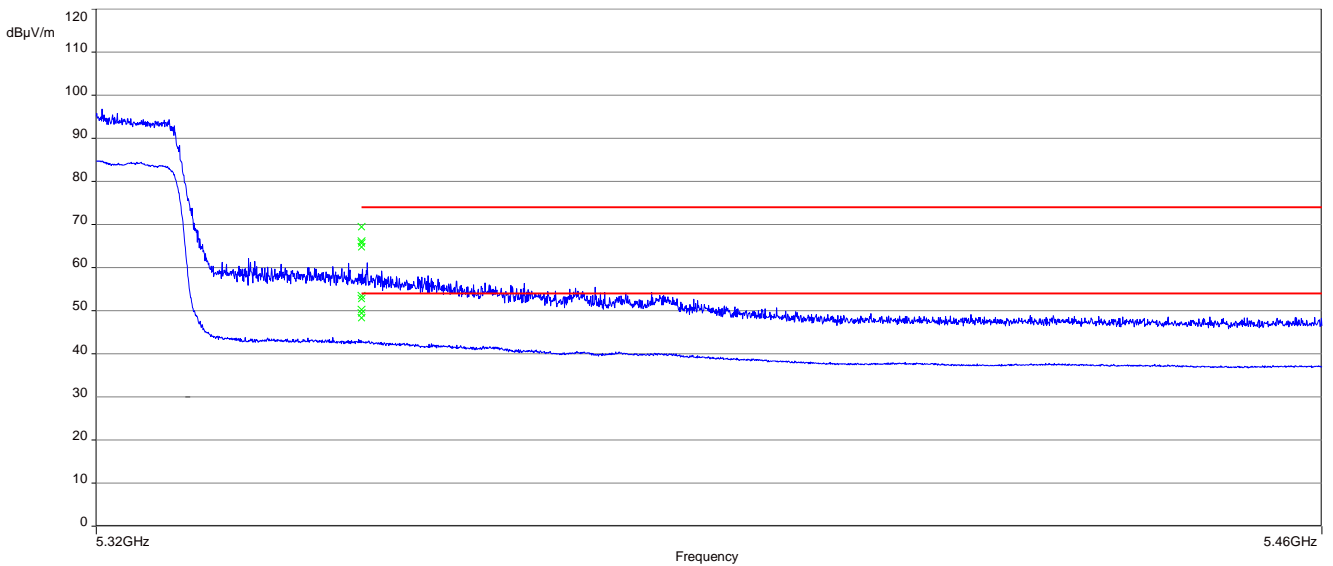

**Plot 27:** lower band edge; U-NII-2C; lowest channel; ax80-mode

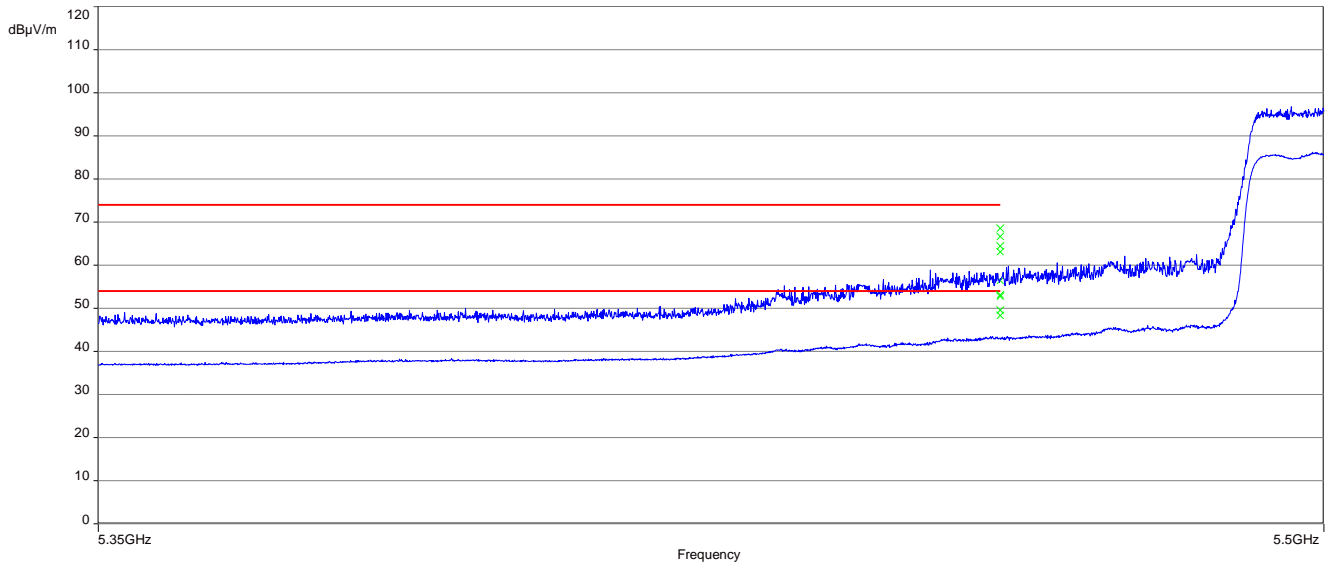

## 12.11 Spurious emissions radiated below 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The limits are re-calculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace mode:	Max Hold
Test setup:	See sub clause 7.2 – C
Measurement uncertainty:	See chapter 9

Limits:


Spurious Emissions Radiated < 30 MHz		
Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Results:


Spurious Emissions Radiated < 30 MHz [dB $\mu$ V/m]		
F [MHz]	Detector	Level [dB $\mu$ V/m]
All detected emissions are more than 20 dB below the limit.		

**Plots:** 20 MHz channel bandwidth


**Plot 1:** 9 kHz to 30 MHz, U-NII-1; lowest channel

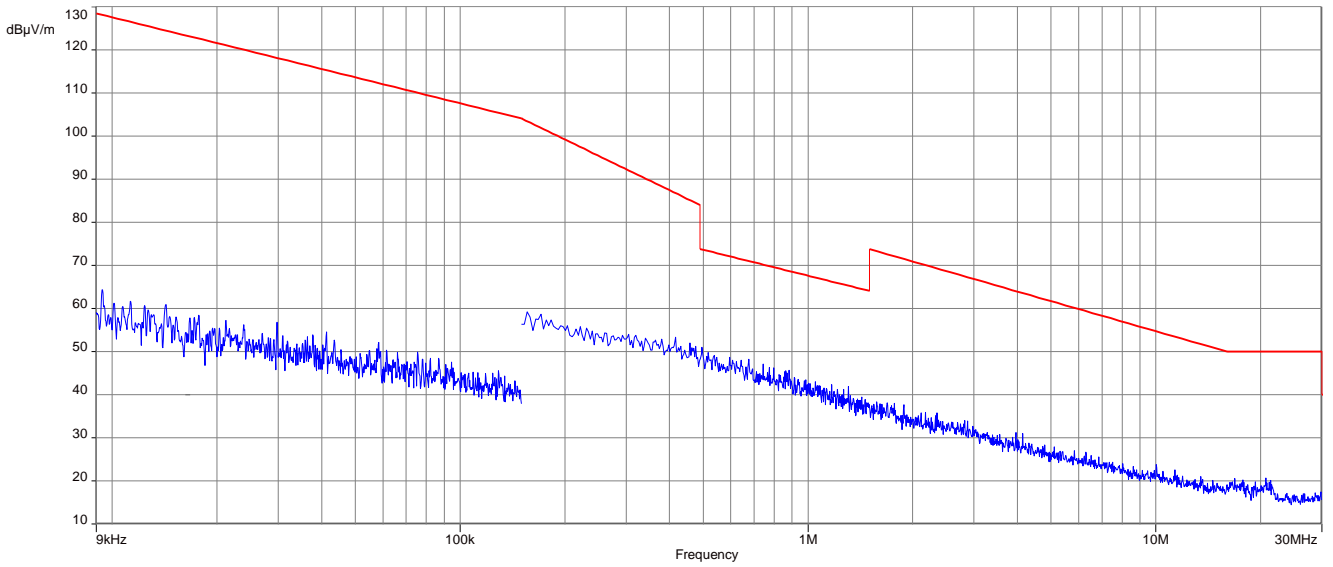


**Plot 2:** 9 kHz to 30 MHz, U-NII-1; middle channel

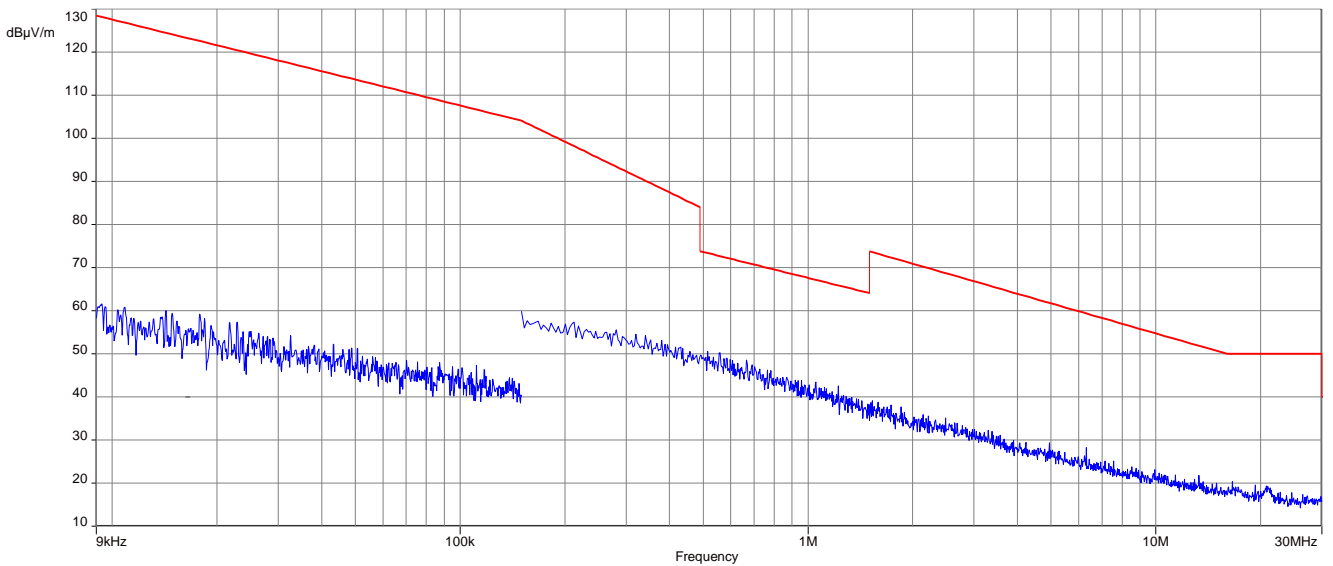

**Plot 3:** 9 kHz to 30 MHz, U-NII-1; highest channel

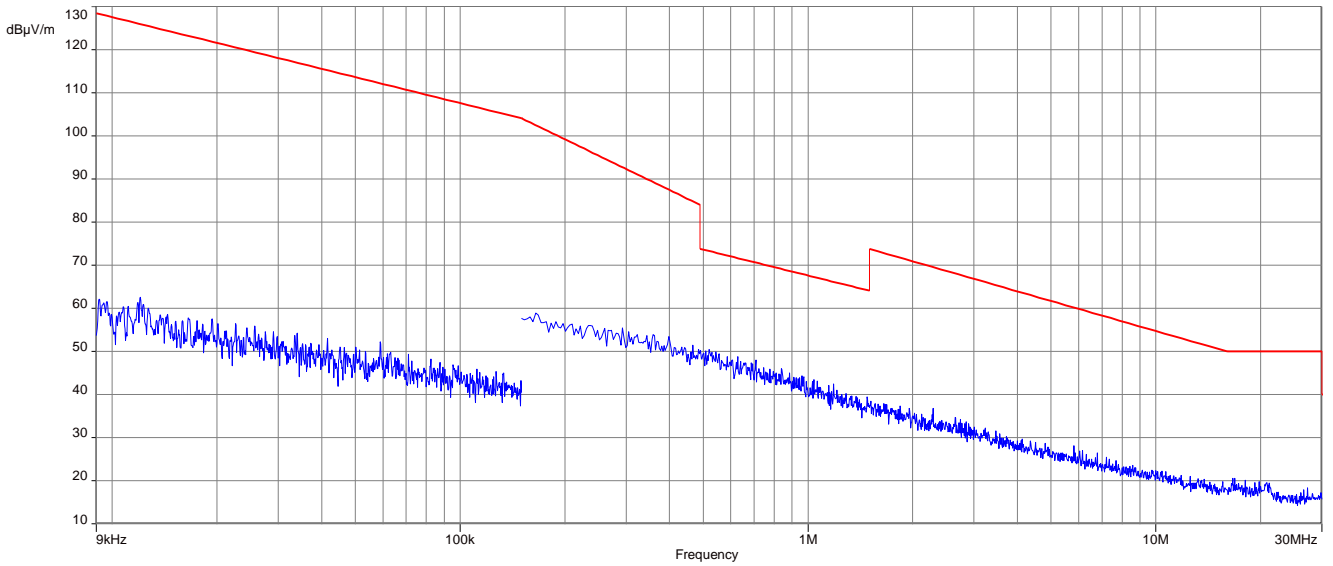


**Plot 4:** 9 kHz to 30 MHz, U-NII-2A; lowest channel

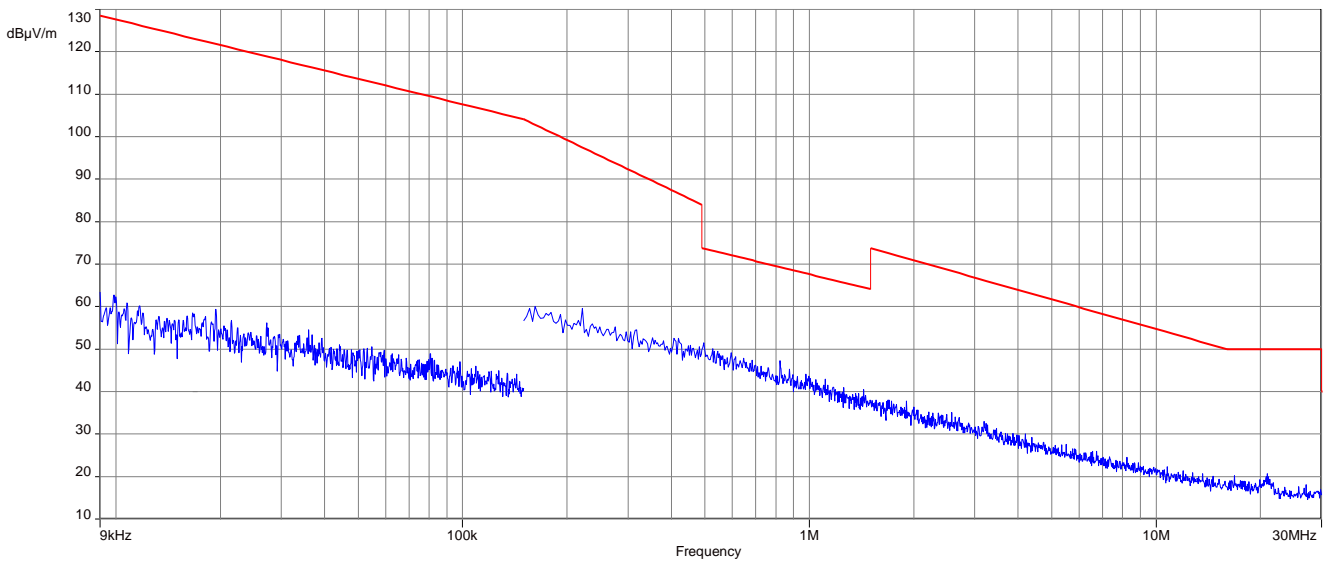





**Plot 5:** 9 kHz to 30 MHz, U-NII-2A; middle channel

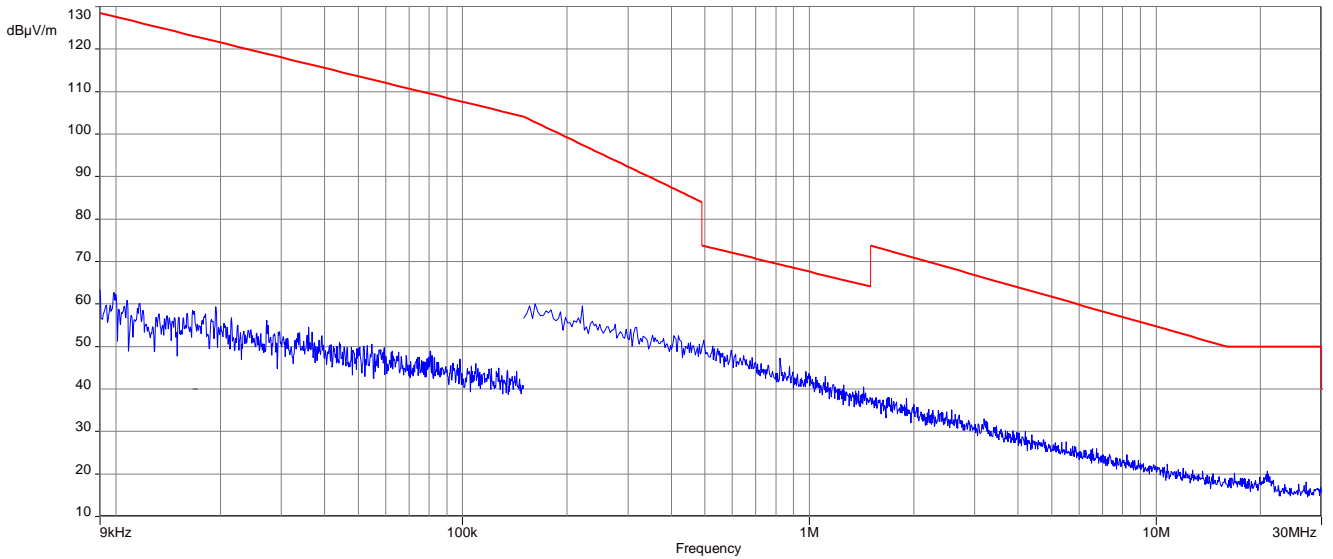


**Plot 6:** 9 kHz to 30 MHz, U-NII-2A; highest channel

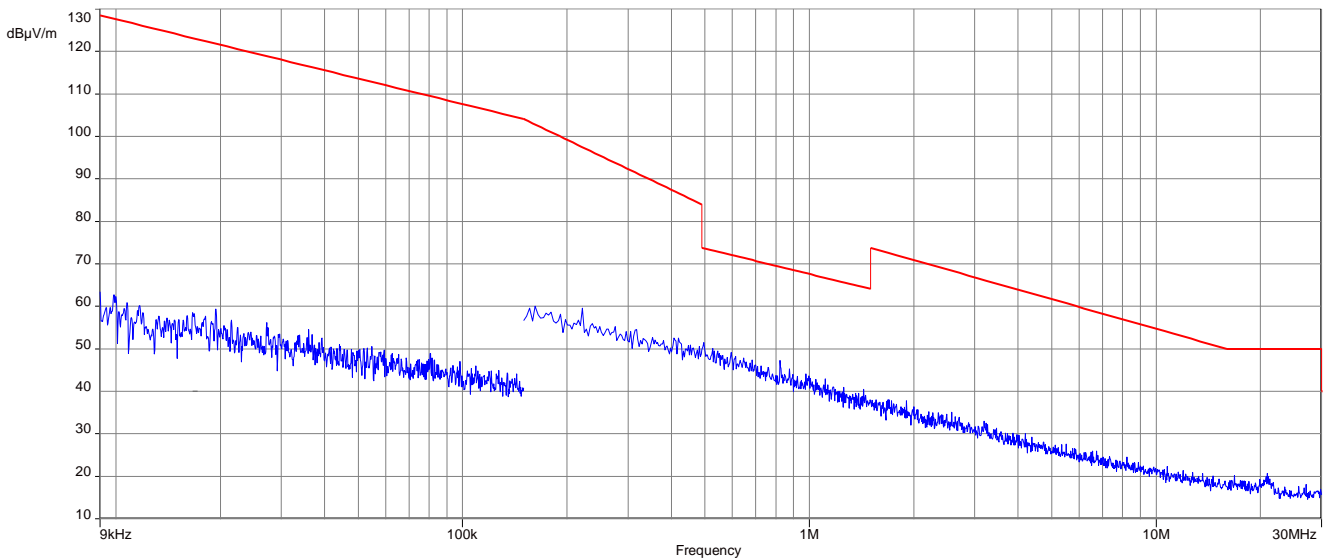


**Plot 7:** 9 kHz to 30 MHz, U-NII-2C; lowest channel

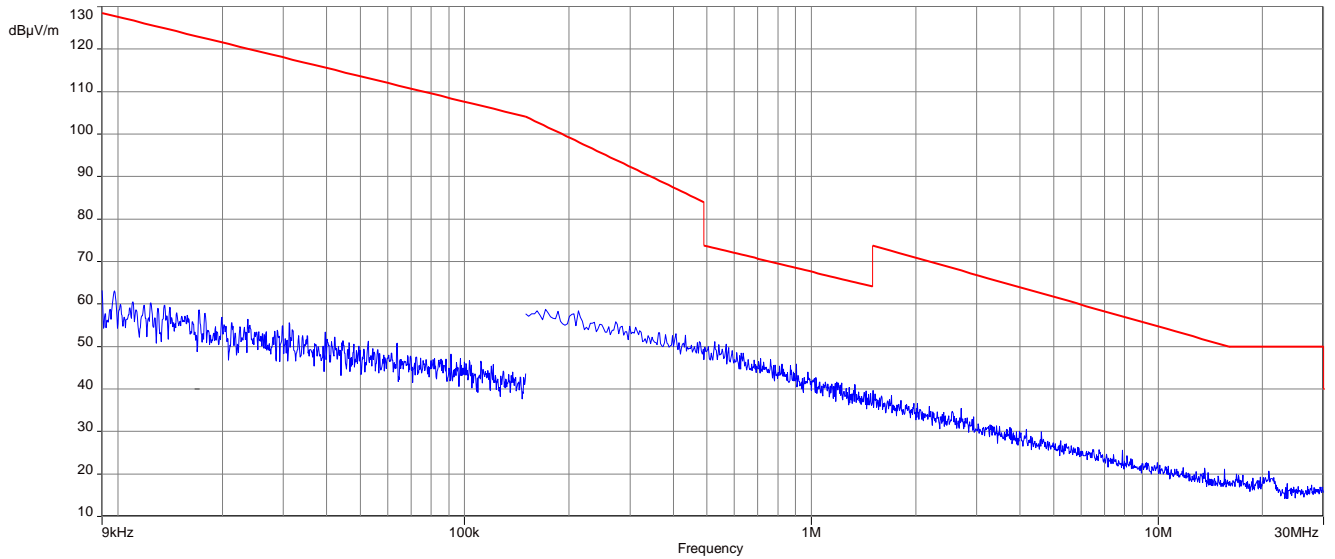


**Plot 8:** 9 kHz to 30 MHz, U-NII-2C; middle channel

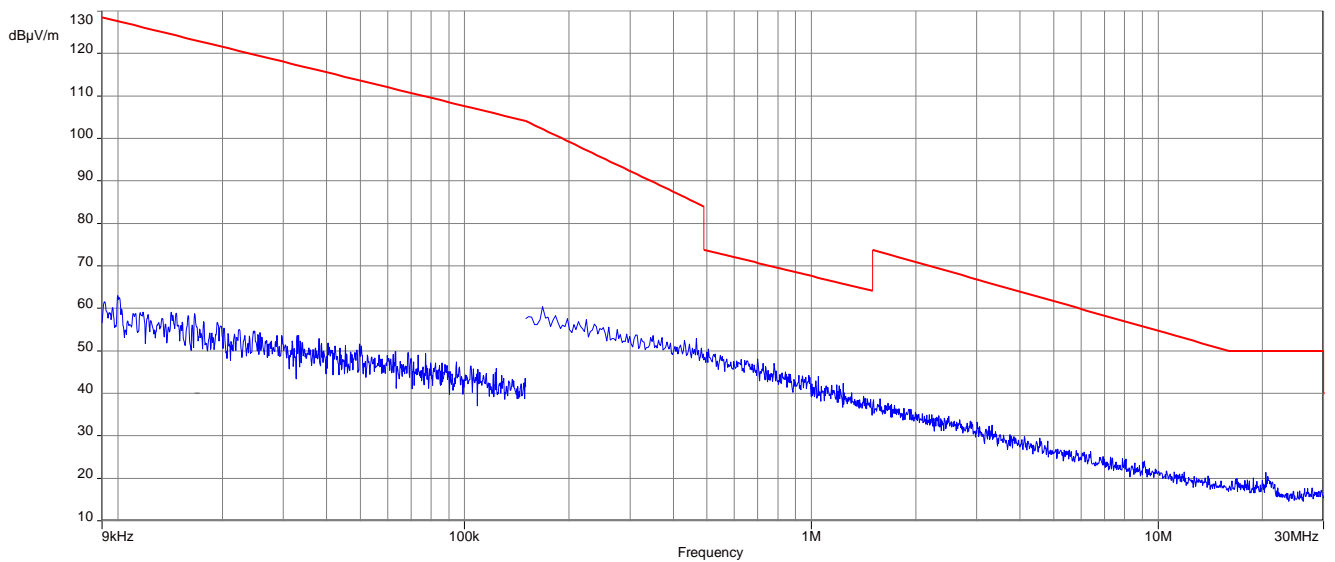


**Plot 9:** 9 kHz to 30 MHz, U-NII-2C; highest channel

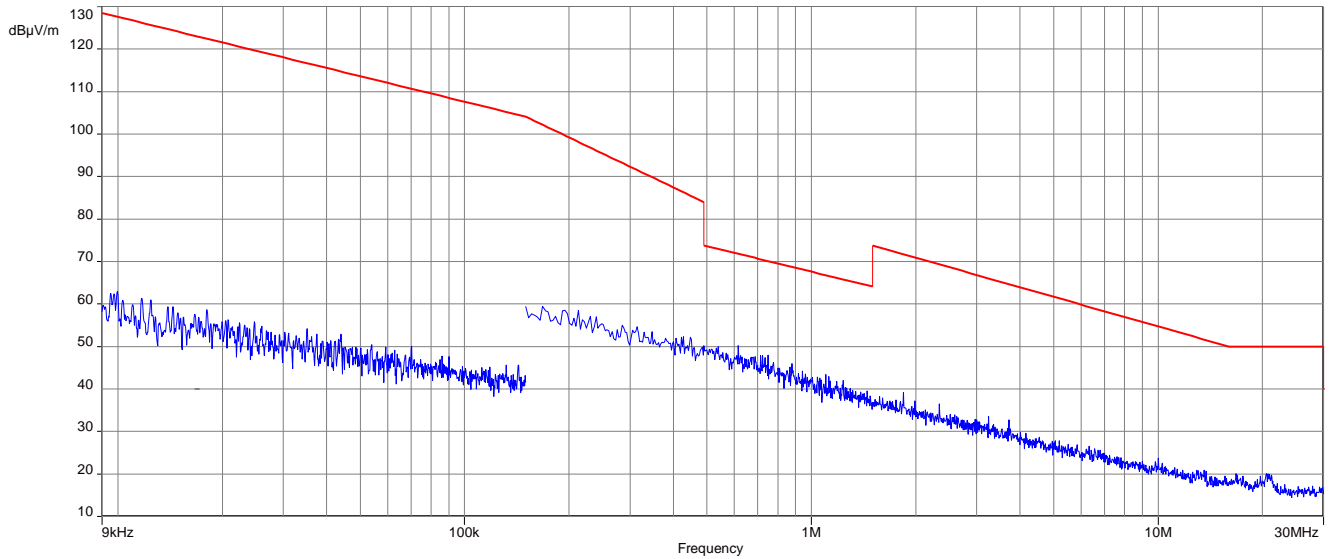


**Plot 10:** 9 kHz to 30 MHz, U-NII-3; lowest channel

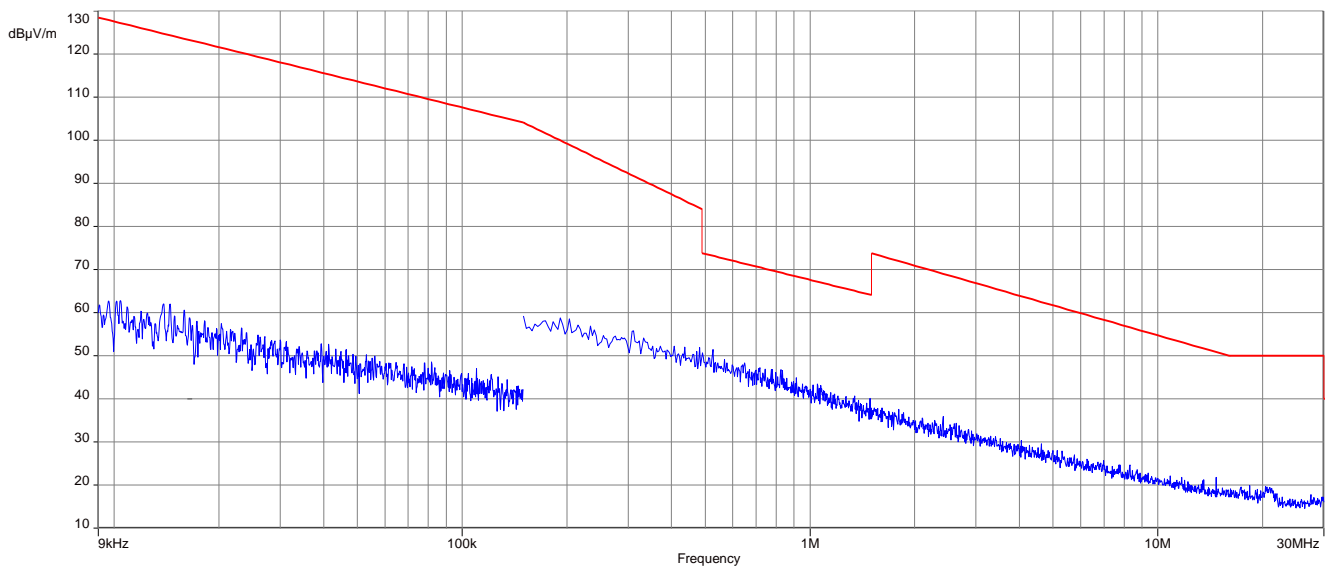

**Plot 11:** 9 kHz to 30 MHz, U-NII-3; middle channel

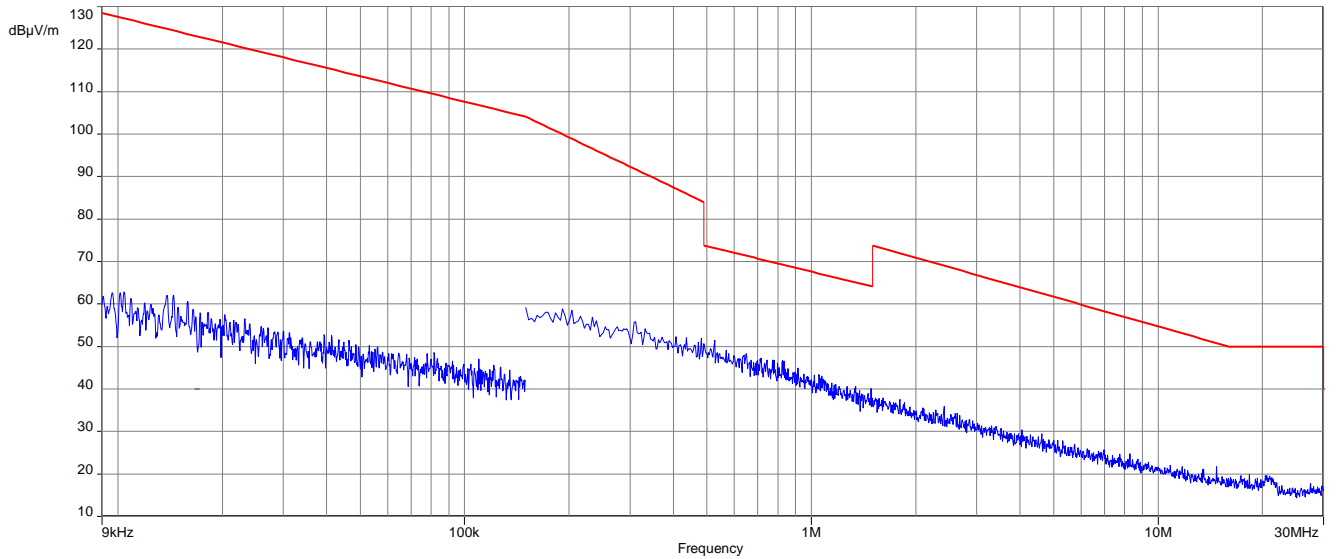


**Plot 12:** 9 kHz to 30 MHz, U-NII-3; highest channel

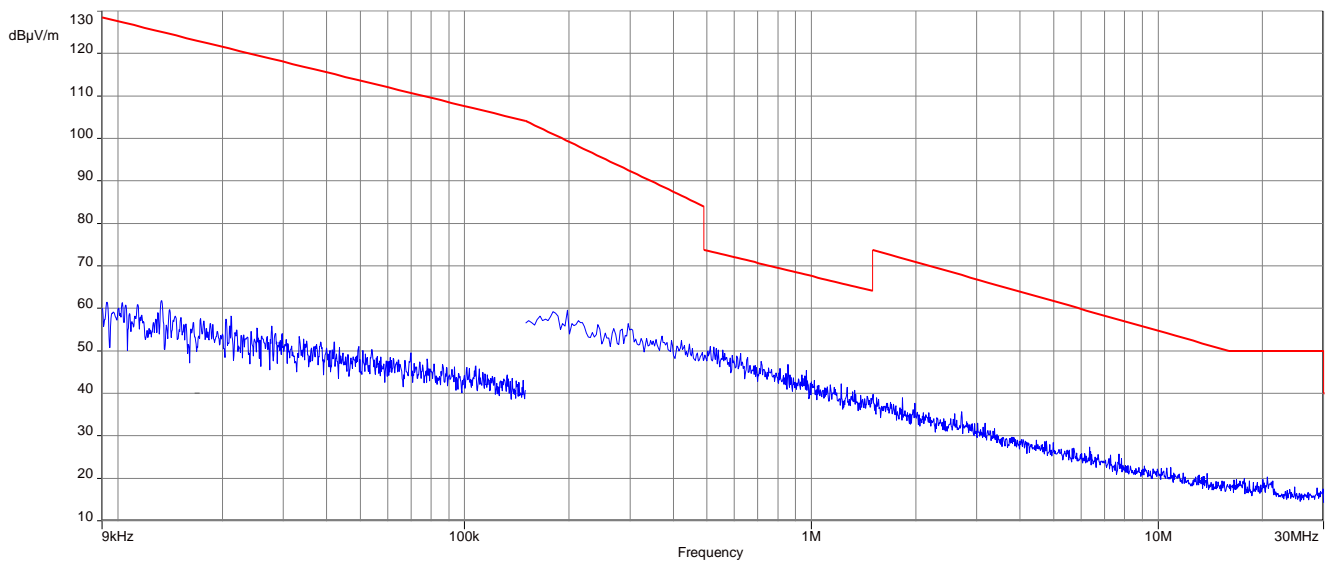


**Plots:** 40 MHz channel bandwidth


**Plot 1:** 9 kHz to 30 MHz, U-NII-1; lowest channel

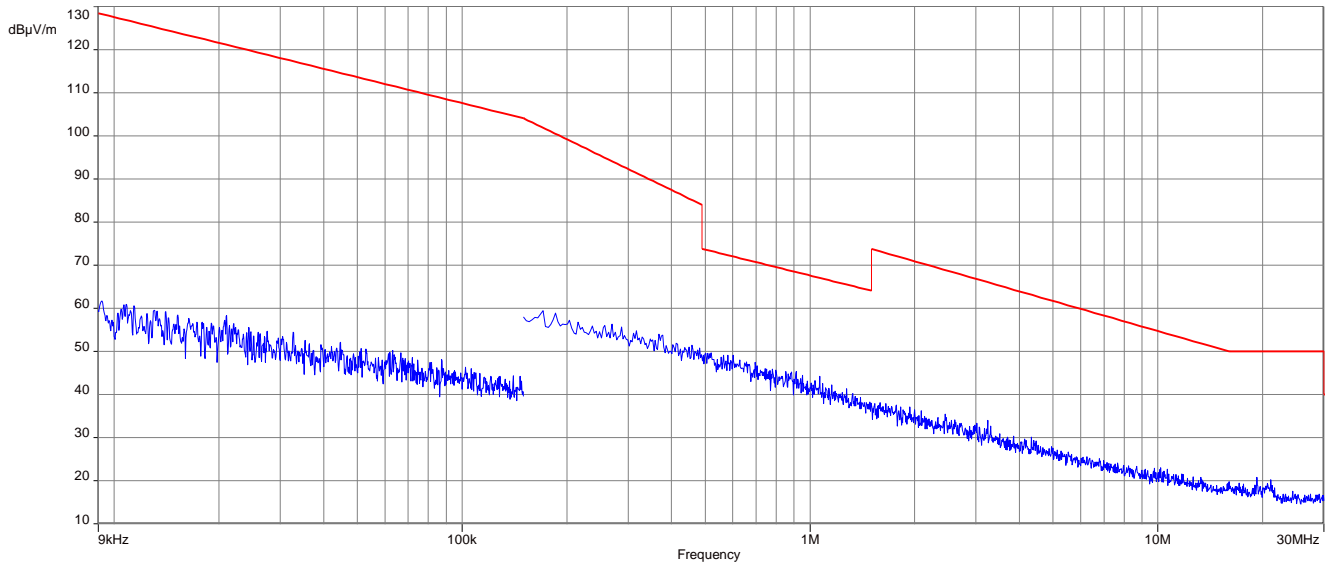


**Plot 2:** 9 kHz to 30 MHz, U-NII-1; highest channel

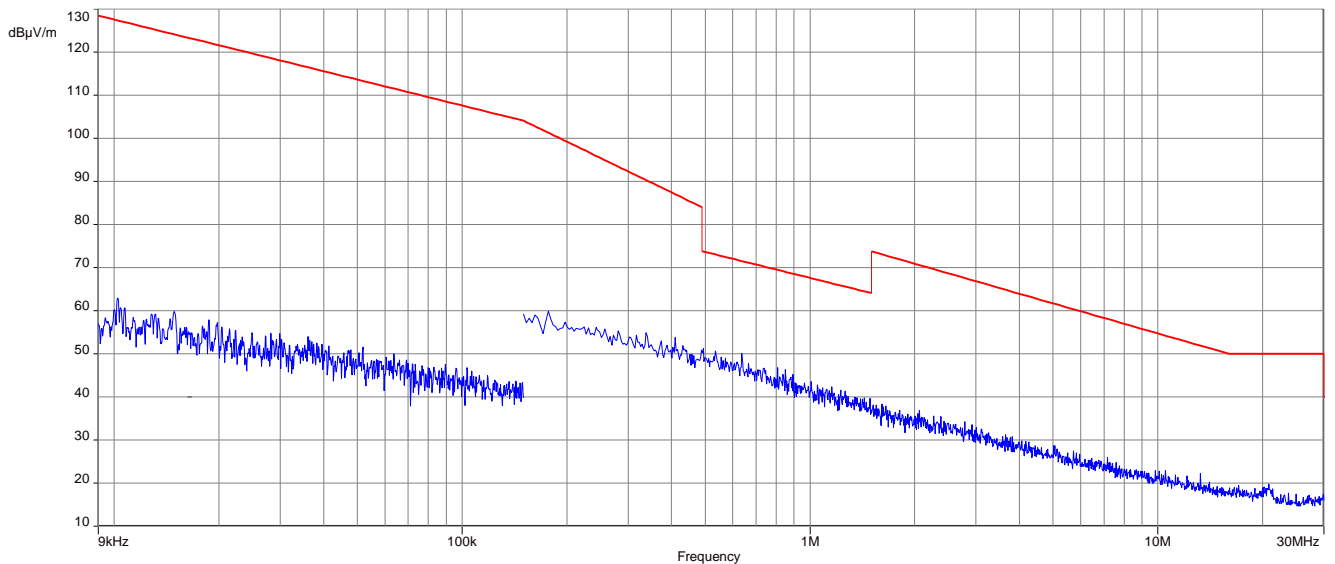


**Plot 3:** 9 kHz to 30 MHz, U-NII-2A; lowest channel

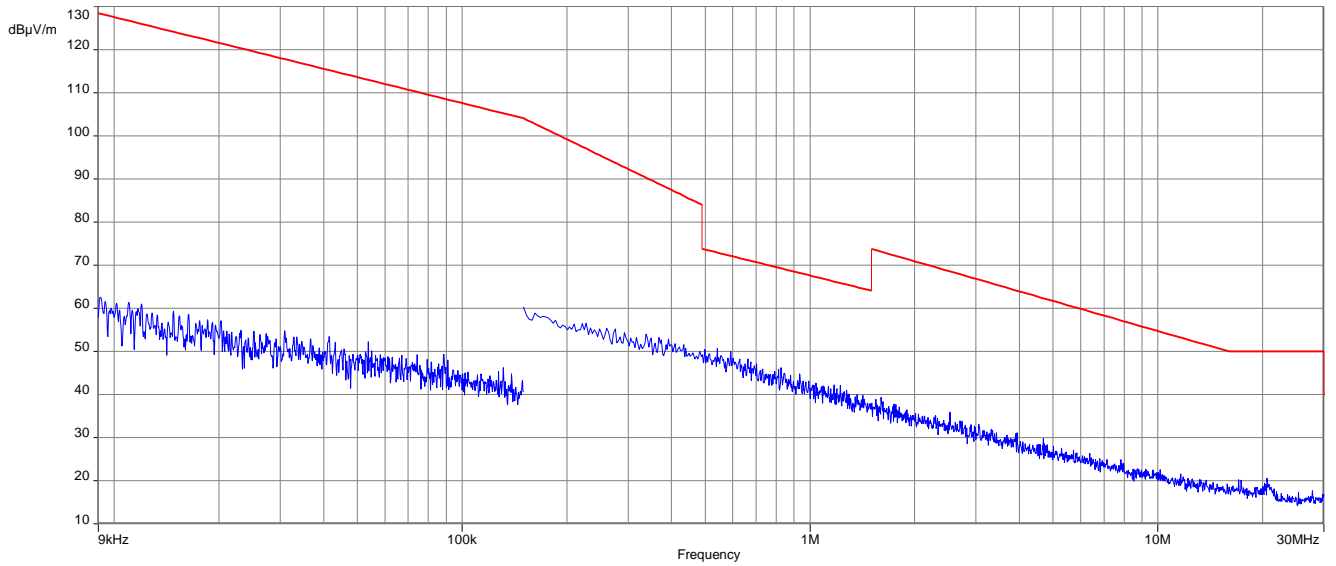


**Plot 4:** 9 kHz to 30 MHz, U-NII-2A; highest channel

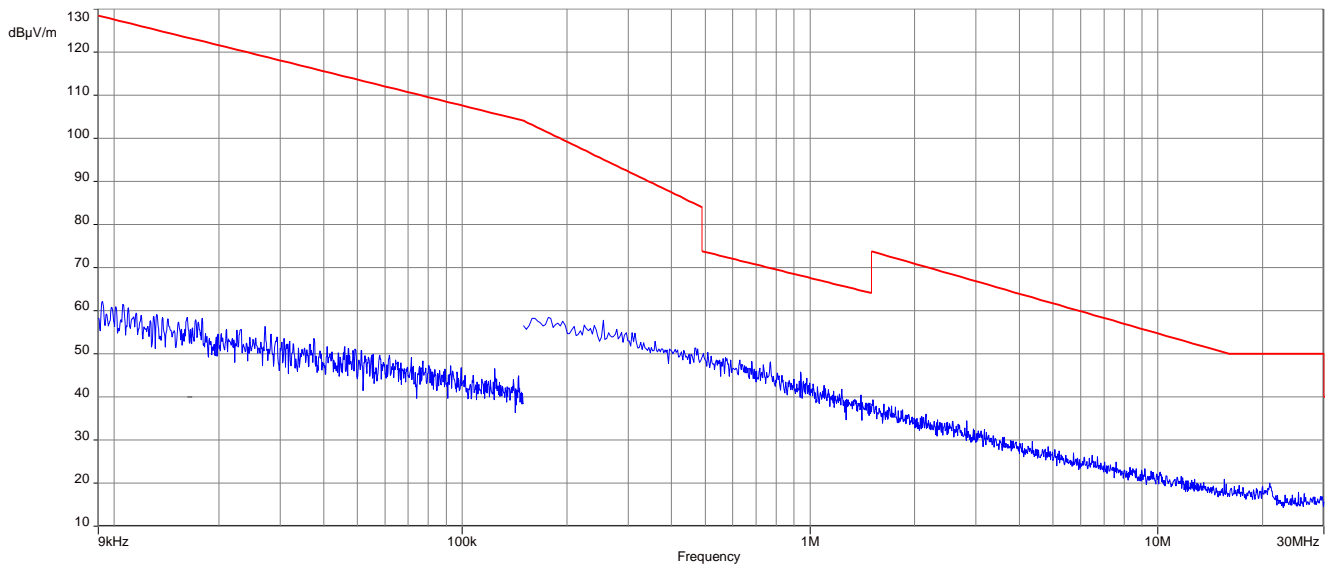


**Plot 5:** 9 kHz to 30 MHz, U-NII-2C; lowest channel

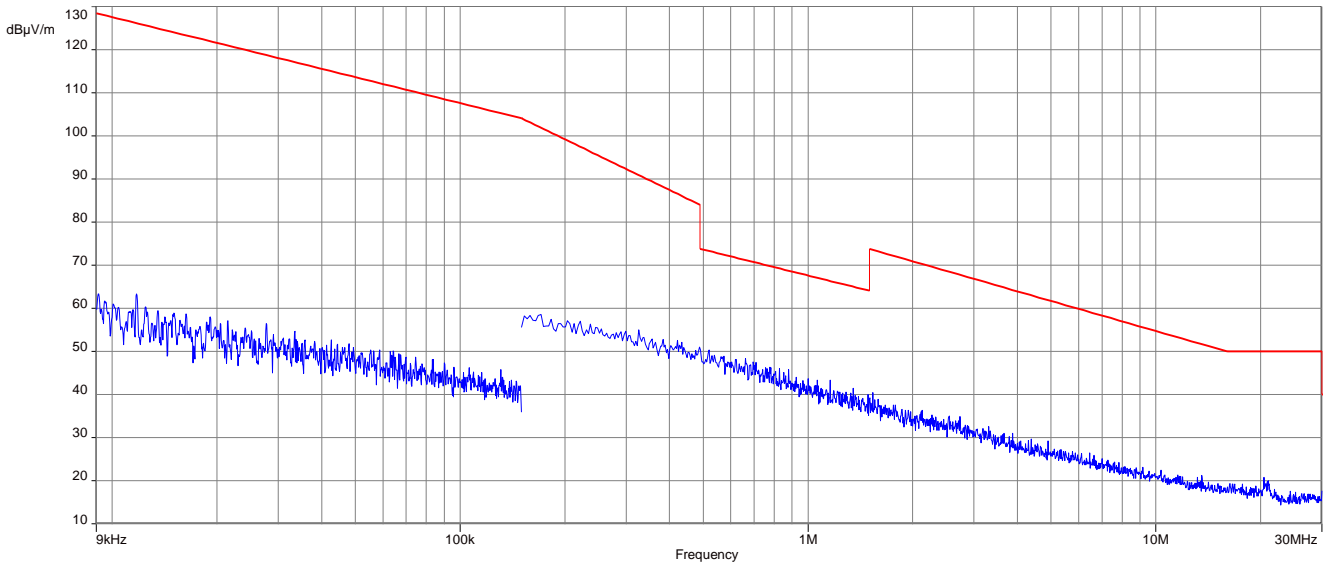


**Plot 6:** 9 kHz to 30 MHz, U-NII-2C; middle channel

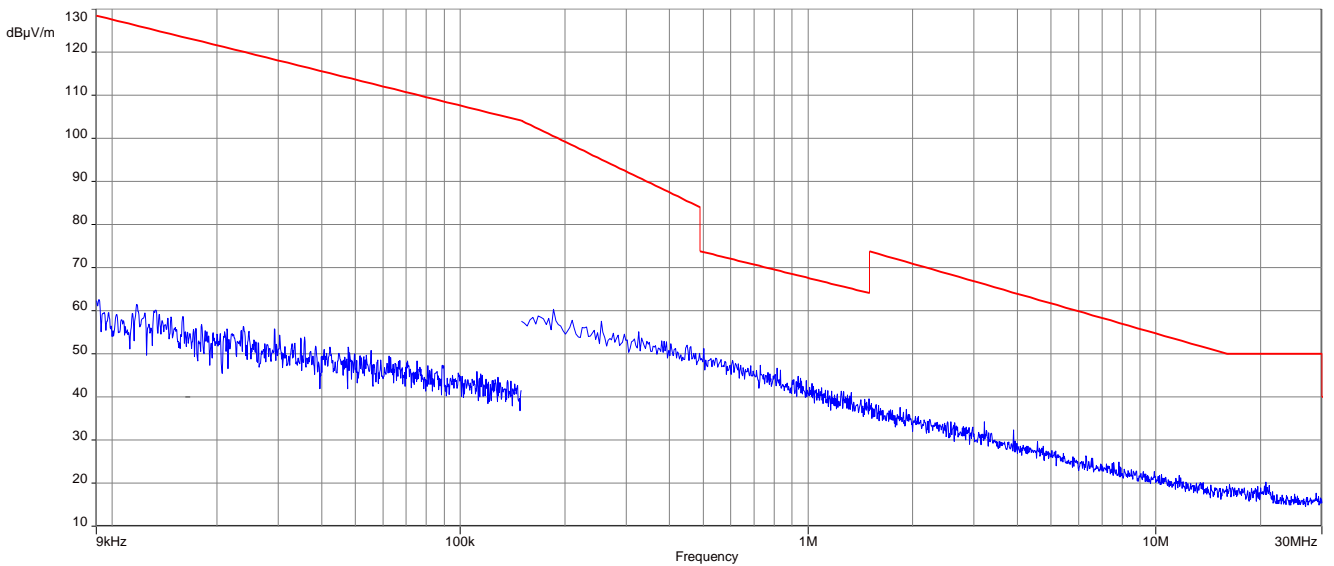

**Plot 7:** 9 kHz to 30 MHz, U-NII-2C; highest channel

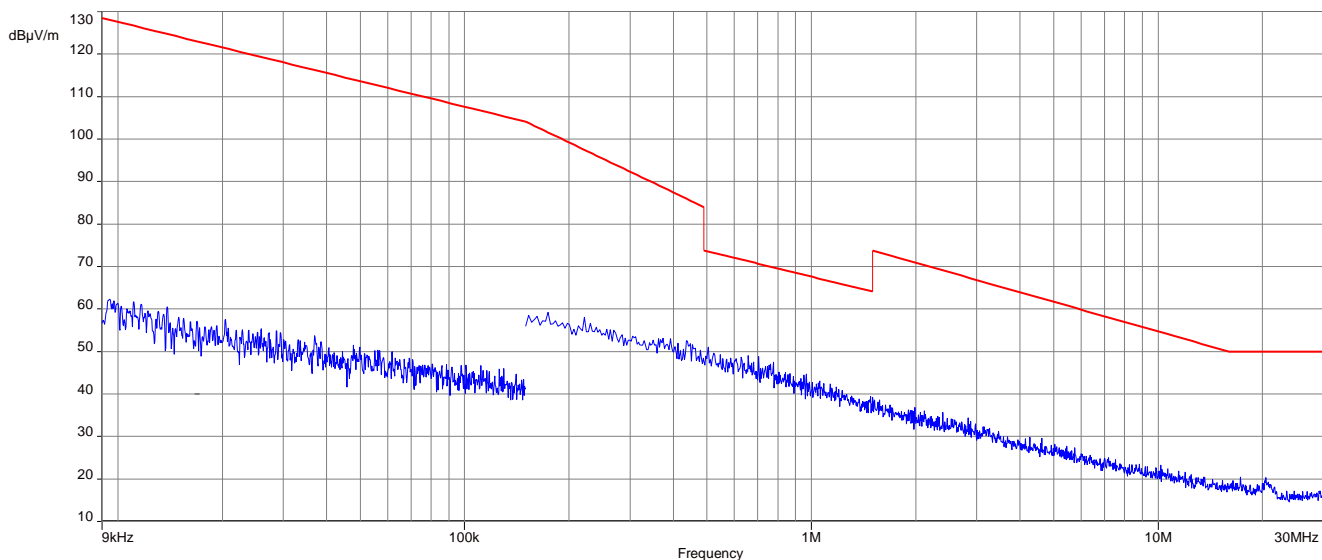


**Plot 8:** 9 kHz to 30 MHz, U-NII-3; lowest channel

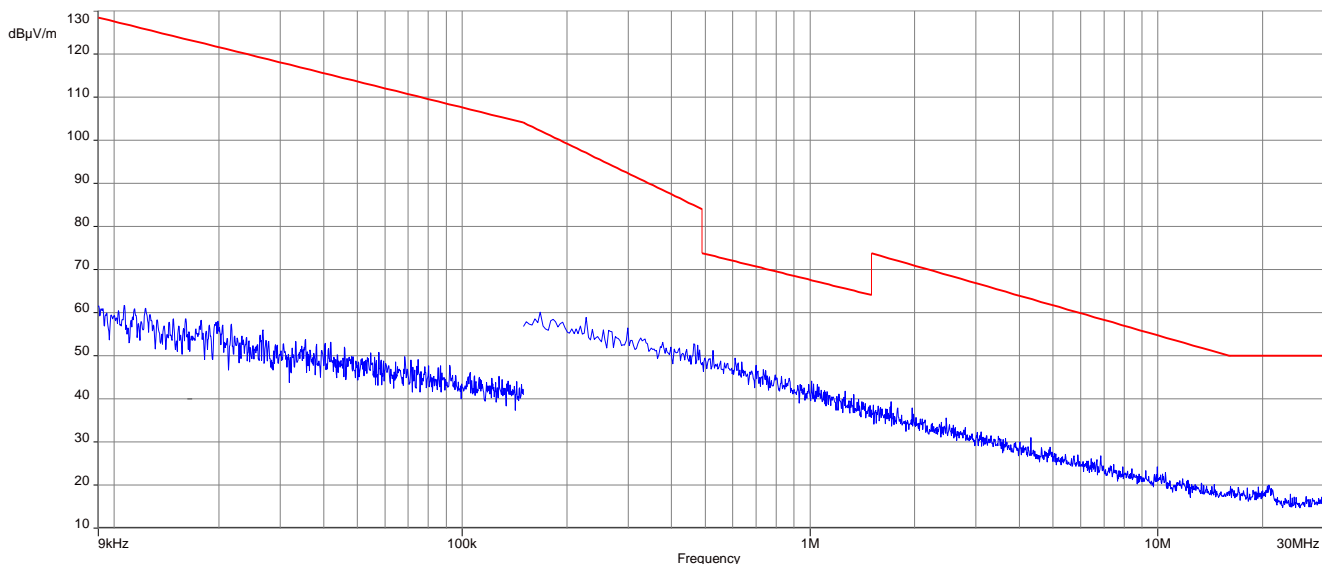




**Plot 9:** 9 kHz to 30 MHz, U-NII-3; highest channel

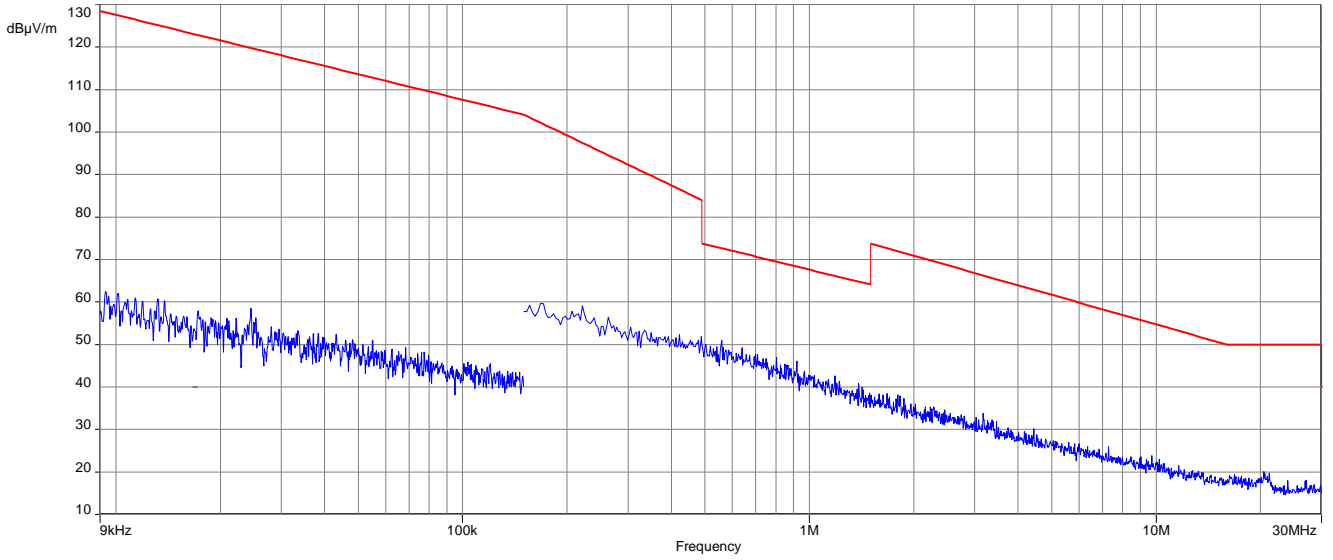


**Plots:** 80 MHz channel bandwidth


**Plot 1:** 9 kHz to 30 MHz, U-NII-1; middle channel

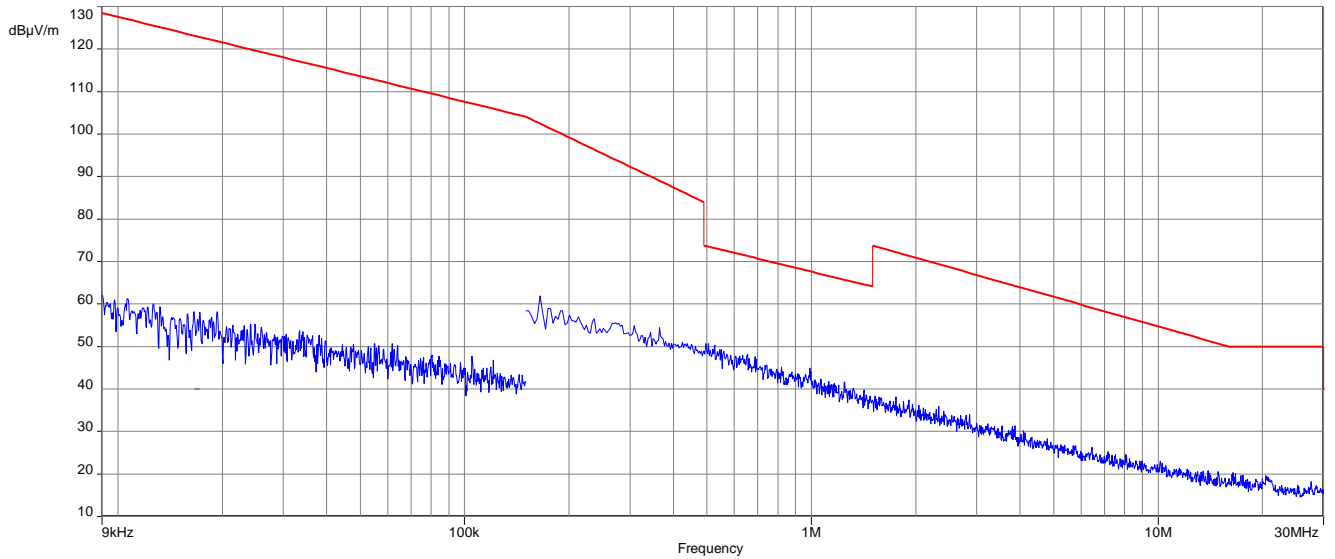


**Plot 2:** 9 kHz to 30 MHz, U-NII-2A; middle channel

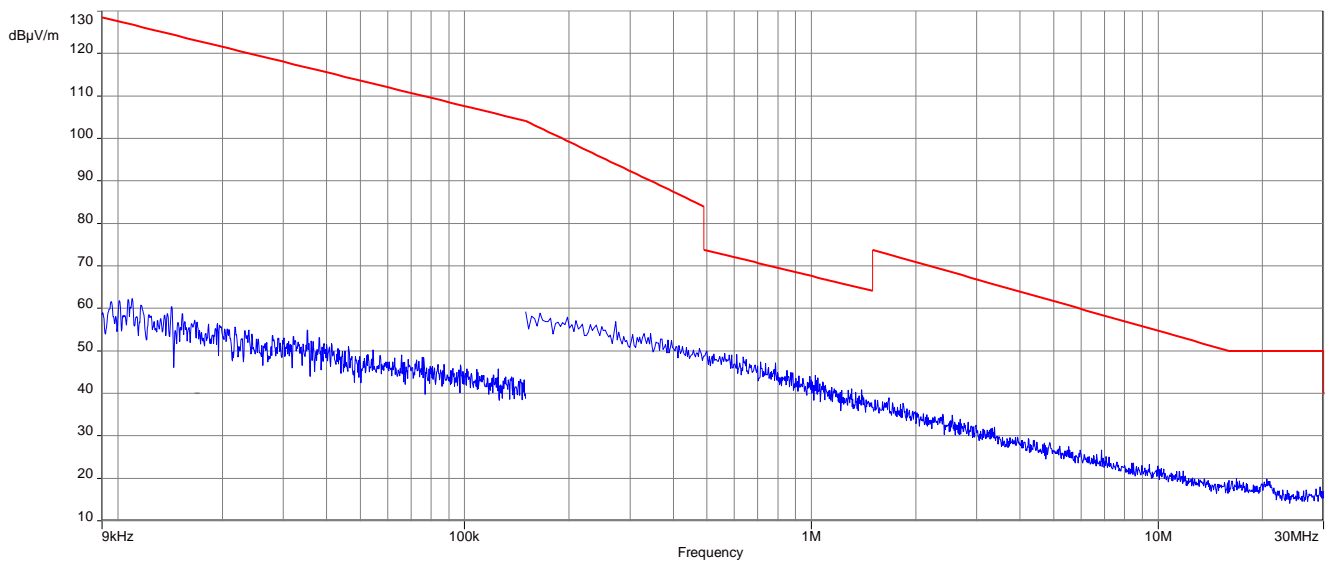


**Plot 3:** 9 kHz to 30 MHz, U-NII-2C; lowest channel

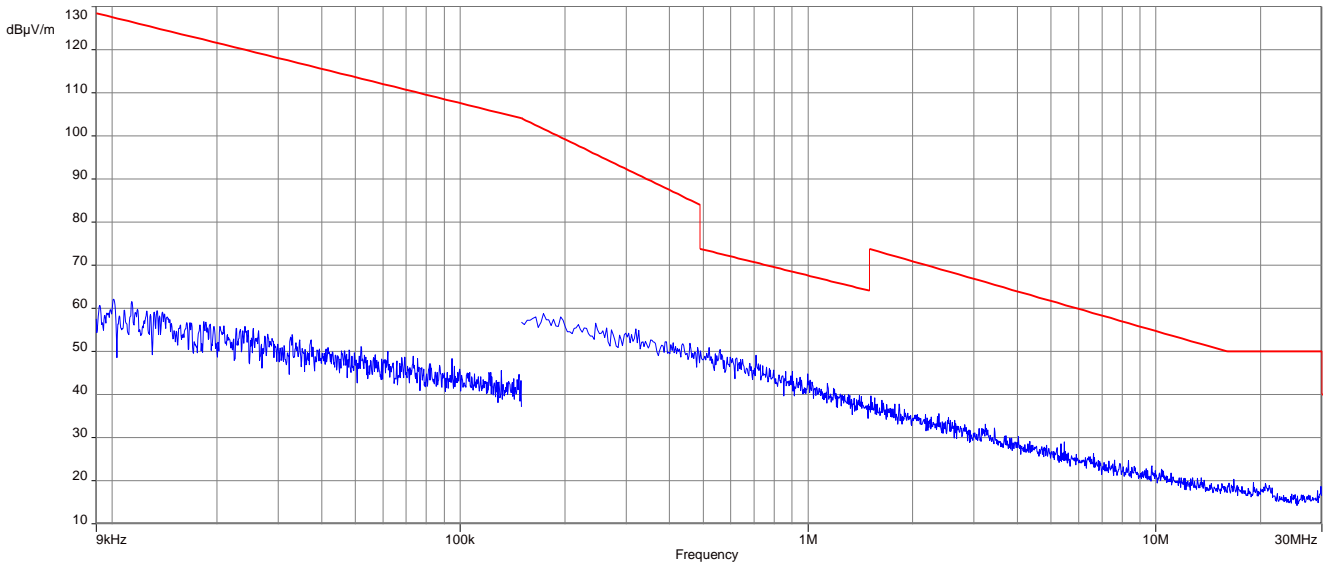

**Plot 4:** 9 kHz to 30 MHz, U-NII-2C; highest channel

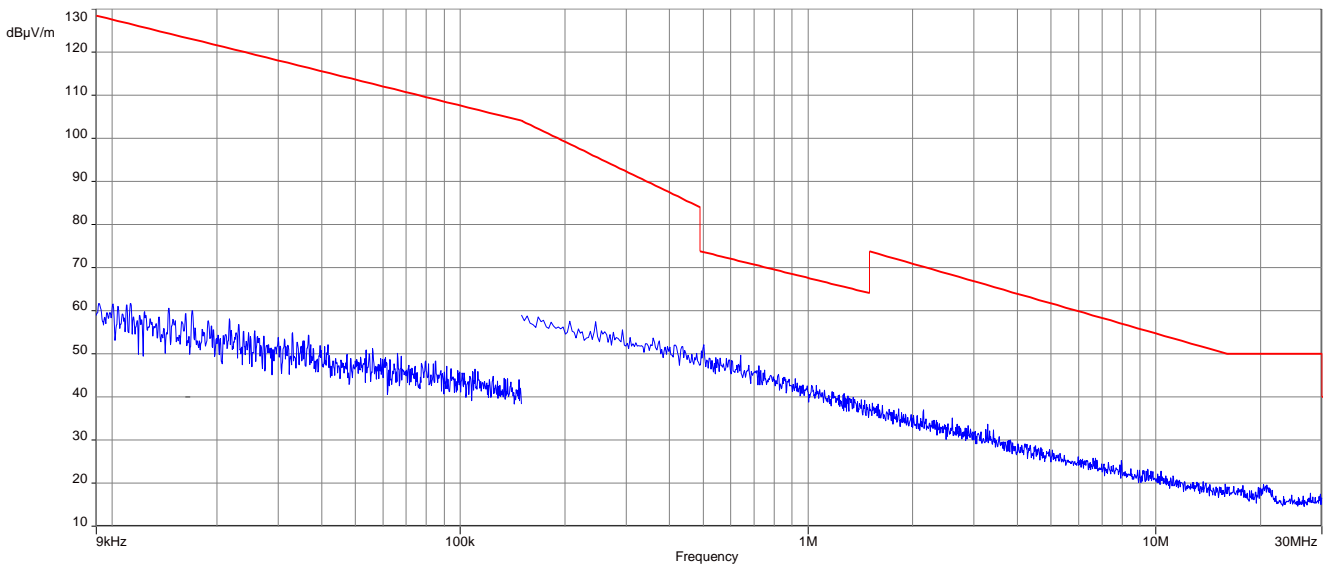

**Plot 5:** 9 kHz to 30 MHz, U-NII-3; middle channel

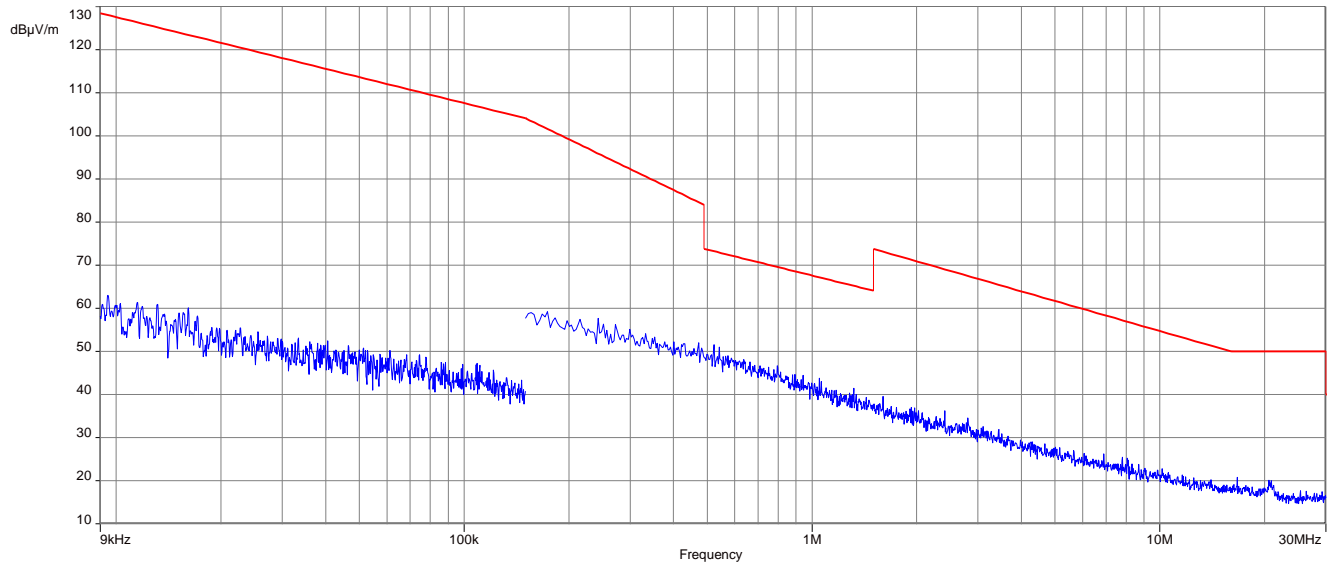

## 12.12 Spurious emissions radiated 30 MHz to 1 GHz

Description:

Measurement of the radiated spurious emissions and cabinet radiations below 1 GHz.

Measurement:


Measurement parameter	
Detector:	Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	120 kHz
Video bandwidth:	500 kHz
Span:	30 MHz to 1 GHz
Test setup:	See sub clause 7.1 – A
Measurement uncertainty:	See chapter 9

Limits:

TX Spurious Emissions Radiated		
§15.209 / RSS-247		
Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3
§15.407		
Outside the restricted bands!	-27 dBm / MHz	

**Plots:** 20 MHz channel bandwidth


**Plot 1:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-1; a-mode – 6 Mbit; all channels

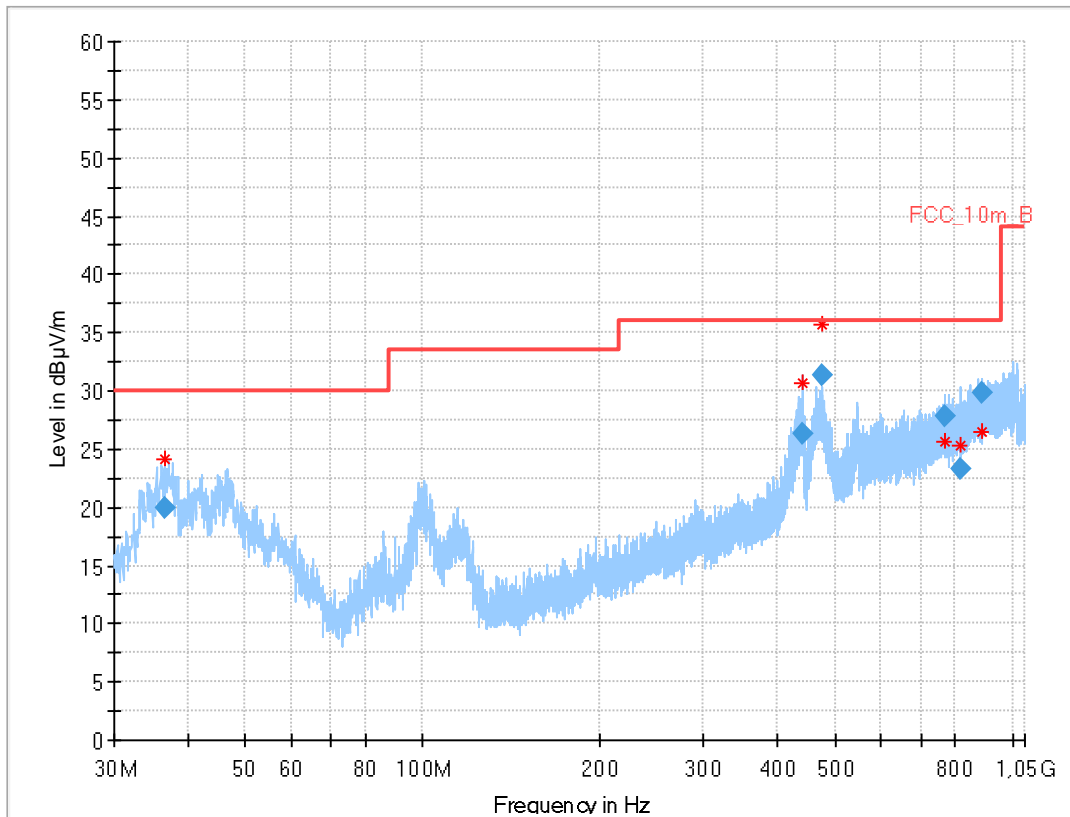

**Results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
36.600	20.01	30.0	10.0	1000	120.0	119.0	V	6	15
439.838	26.28	36.0	9.7	1000	120.0	114.0	V	52	19
474.226	31.32	36.0	4.7	1000	120.0	147.0	H	67	19
768.311	27.87	36.0	8.1	1000	120.0	195.0	V	142	24
814.569	23.33	36.0	12.7	1000	120.0	195.0	H	54	24
886.161	29.76	36.0	6.2	1000	120.0	195.0	V	142	25


**Plot 2:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-2A; ax40 - mode; all channels

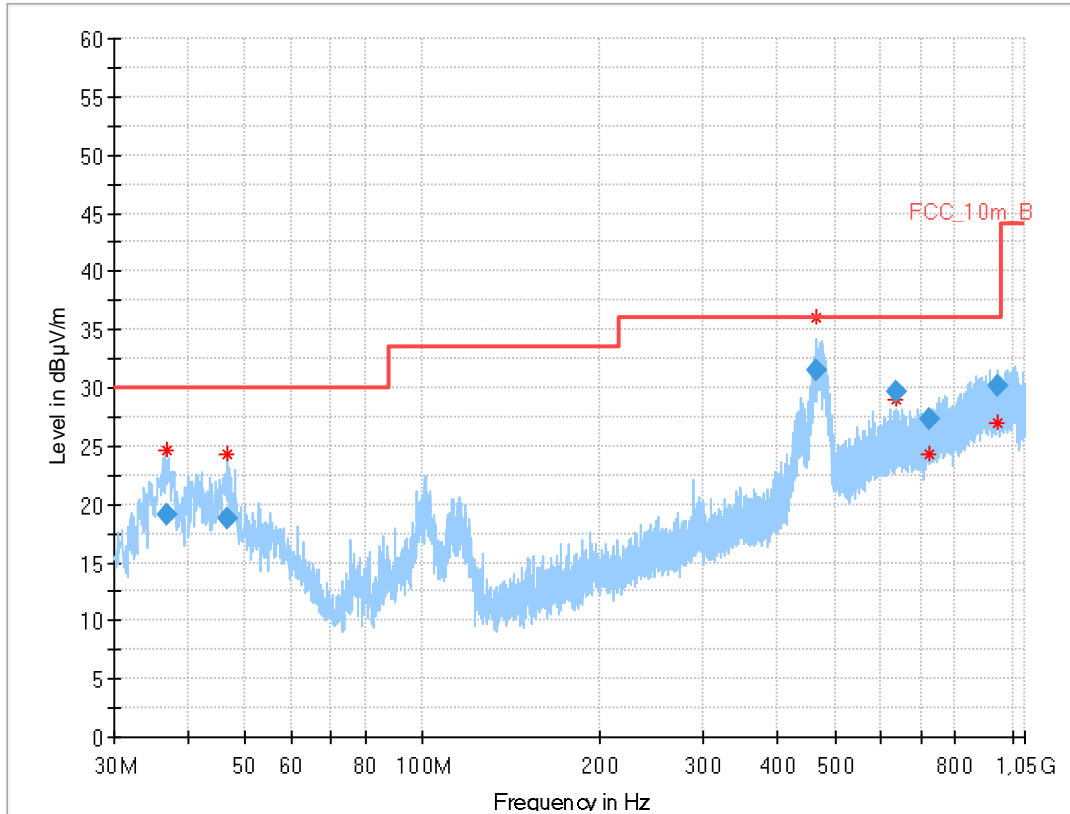

**Results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
36.868	19.05	30.0	11.0	1000	120.0	104.0	V	52	15
46.801	18.73	30.0	11.3	1000	120.0	149.0	V	28	16
464.906	31.48	36.0	4.5	1000	120.0	110.0	V	37	19
635.643	29.69	36.0	6.3	1000	120.0	195.0	H	52	22
724.527	27.37	36.0	8.6	1000	120.0	195.0	V	307	23
945.460	30.12	36.0	5.9	1000	120.0	195.0	V	52	25

**Plot 3:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-2C ax80 – mode; all channels

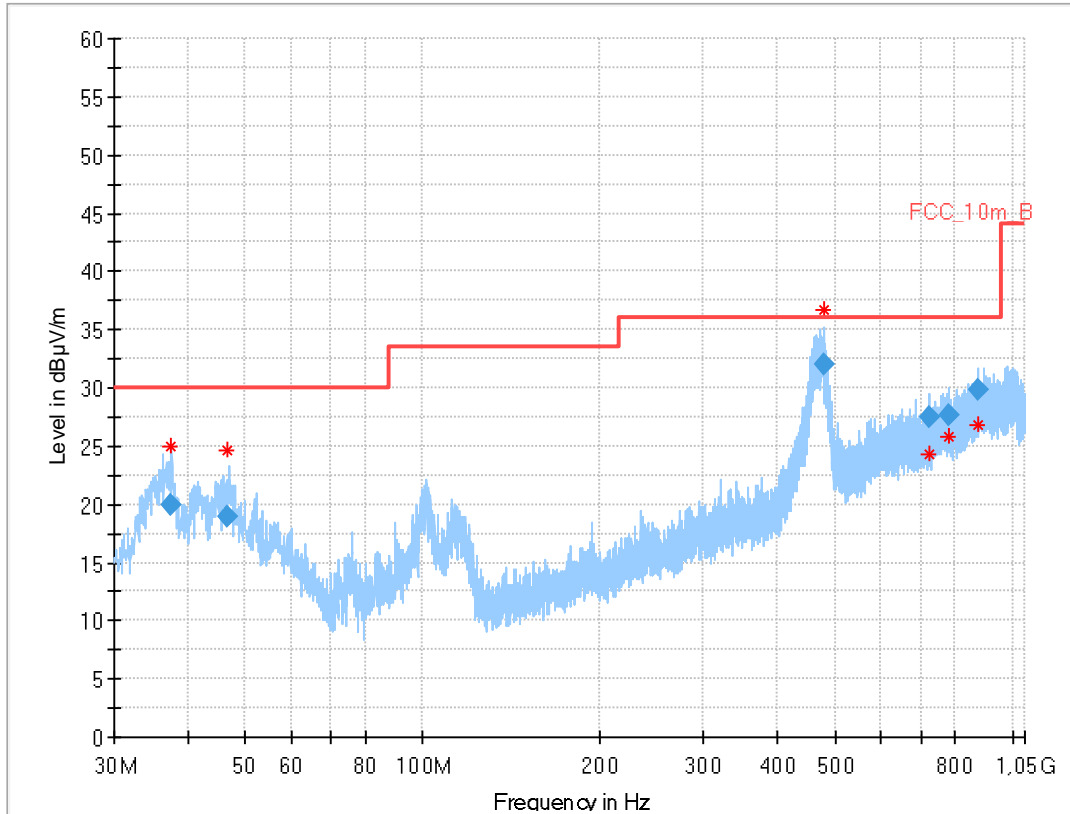


**Results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
37.314	19.98	30.0	10.0	1000	120.0	145.0	V	26	15
46.808	18.92	30.0	11.1	1000	120.0	144.0	V	5	16
477.913	31.99	36.0	4.0	1000	120.0	151.0	H	79	19
724.173	27.54	36.0	8.5	1000	120.0	195.0	V	284	23
778.232	27.61	36.0	8.4	1000	120.0	195.0	H	232	24
873.917	29.88	36.0	6.1	1000	120.0	120.0	V	84	25



**Plot 4:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-3; ax80 – mode; all channels

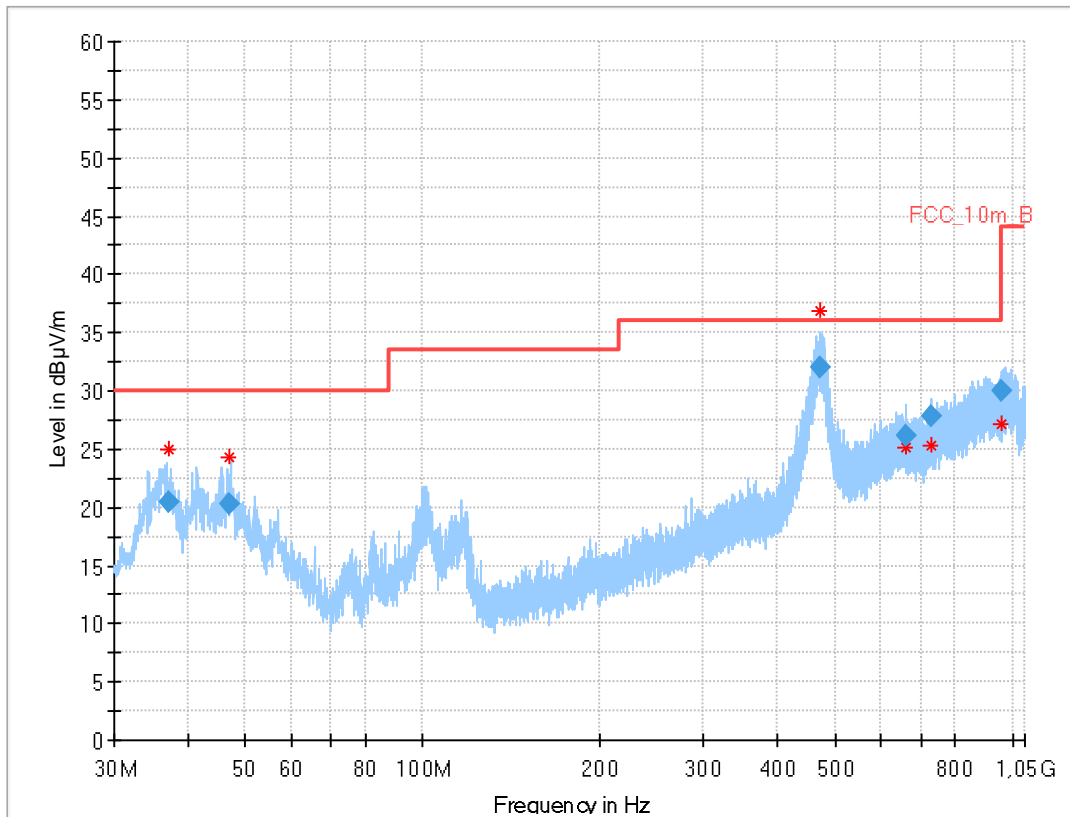

**Results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
37.219	20.40	30.0	9.6	1000	120.0	114.0	V	52	15
47.002	20.35	30.0	9.7	1000	120.0	167.0	V	24	16
471.122	32.06	36.0	3.9	1000	120.0	195.0	H	106	19
662.322	26.12	36.0	9.9	1000	120.0	170.0	H	232	22
729.989	27.83	36.0	8.2	1000	120.0	195.0	H	232	23
959.128	29.99	36.0	6.0	1000	120.0	195.0	V	-37	25

### 12.13 Spurious emissions radiated 1 GHz to 40 GHz

Description:

Measurement of the radiated spurious emissions and cabinet radiations from 1 GHz to 40 GHz.

Measurement:

Measurement parameter	
Detector:	Quasi Peak below 1 GHz (alternative Peak) Peak above 1 GHz / RMS
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Span:	1 GHz to 40 GHz
Trace mode:	Max Hold / Average with 100 counts + 20 log (1 / X) for duty cycle lower than 100 %
Test setup:	See sub clause 7.2 – B See sub clause 7.3 – A
Measurement uncertainty:	See chapter 9

Limits:

TX Spurious Emissions Radiated		
§15.209 / RSS-247		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
Above 960	54.0	3
§15.407		
Outside the restricted bands!	-27 dBm / MHz	

**Results:** 20 MHz channel bandwidth

TX Spurious Emissions Radiated [dBµV/m] / dBm								
U-NII-1 (5150 MHz to 5250 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dBµV/m] / dBm								
U-NII-2A (5250 MHz to 5350 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dBµV/m] / dBm								
U-NII-2C (5470 MHz to 5725 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dBµV/m] / dBm								
U-NII-3 (5725 MHz to 5850 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

**Results:** 40 MHz channel bandwidth

TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm					
U-NII-1 (5150 MHz to 5250 MHz)					
Lowest channel			Highest channel		
-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm					
U-NII-2A (5250 MHz to 5350 MHz)					
Lowest channel			Highest channel		
-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm								
U-NII-2C (5470 MHz to 5725 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm					
U-NII-3 (5725 MHz to 5850 MHz)					
Lowest channel			Highest channel		
-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

**Results:** 80 MHz channel bandwidth

TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm		
U-NII-1 (5150 MHz to 5250 MHz)		
Middle channel		
F [MHz]	Detector	Level [dB $\mu$ V/m]
-/-	Peak	-/-
	AVG	-/-
For emissions above 18 GHz please take look at the plots.		


TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm		
U-NII-2A (5250 MHz to 5350 MHz)		
Middle channel		
F [MHz]	Detector	Level [dB $\mu$ V/m]
-/-	Peak	-/-
	AVG	-/-
For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm					
U-NII-2C (5470 MHz to 5725 MHz)					
Lowest channel			Highest channel		
-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		


TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm		
U-NII-3 (5725 MHz to 5850 MHz)		
Middle channel		
F [MHz]	Detector	Level [dB $\mu$ V/m]
-/-	Peak	-/-
	AVG	-/-
For emissions above 18 GHz please take look at the plots.		

**Plots:** 20 MHz channel bandwidth


**Plot 1:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; lowest channel

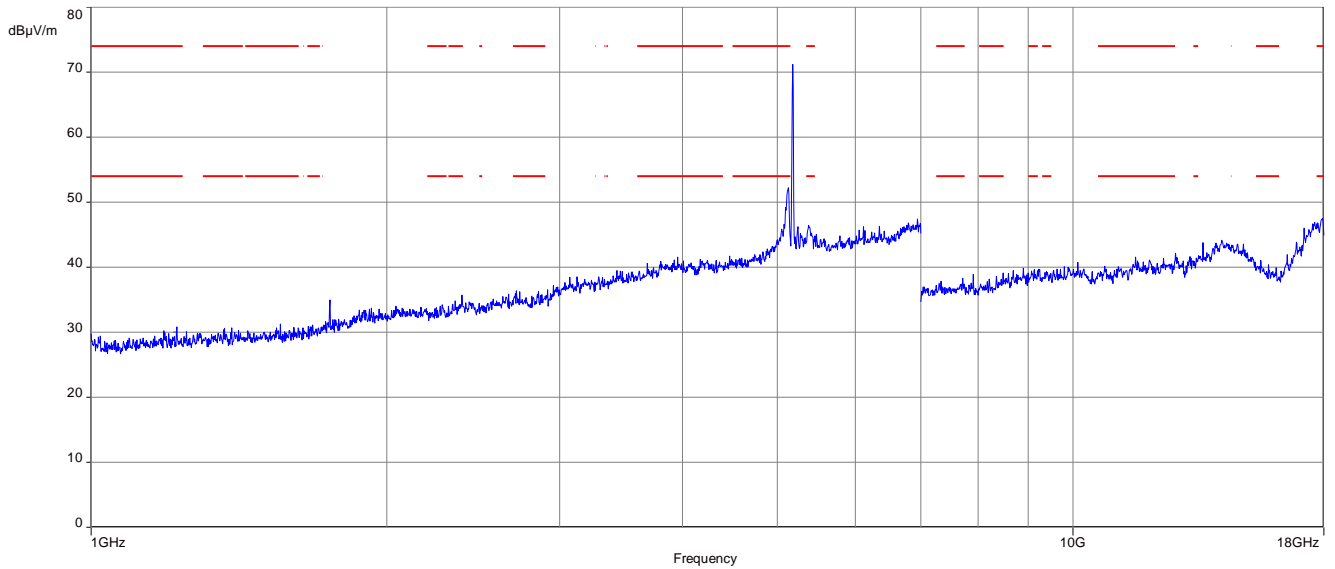


**Plot 2:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; middle channel

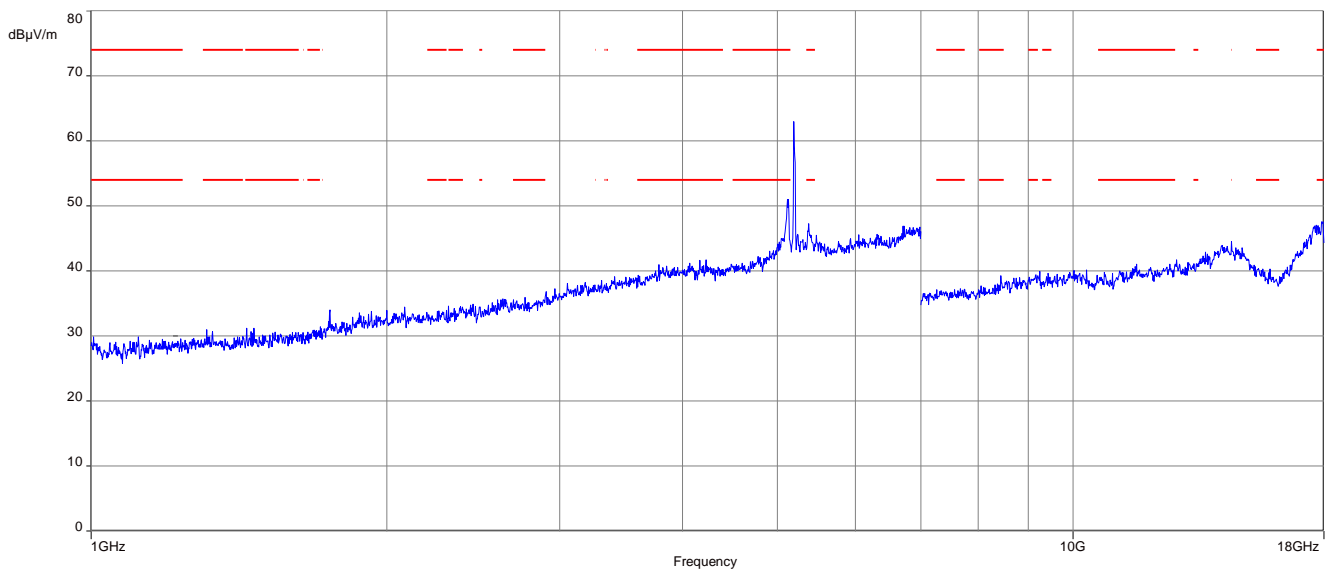


**Plot 3:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; highest channel

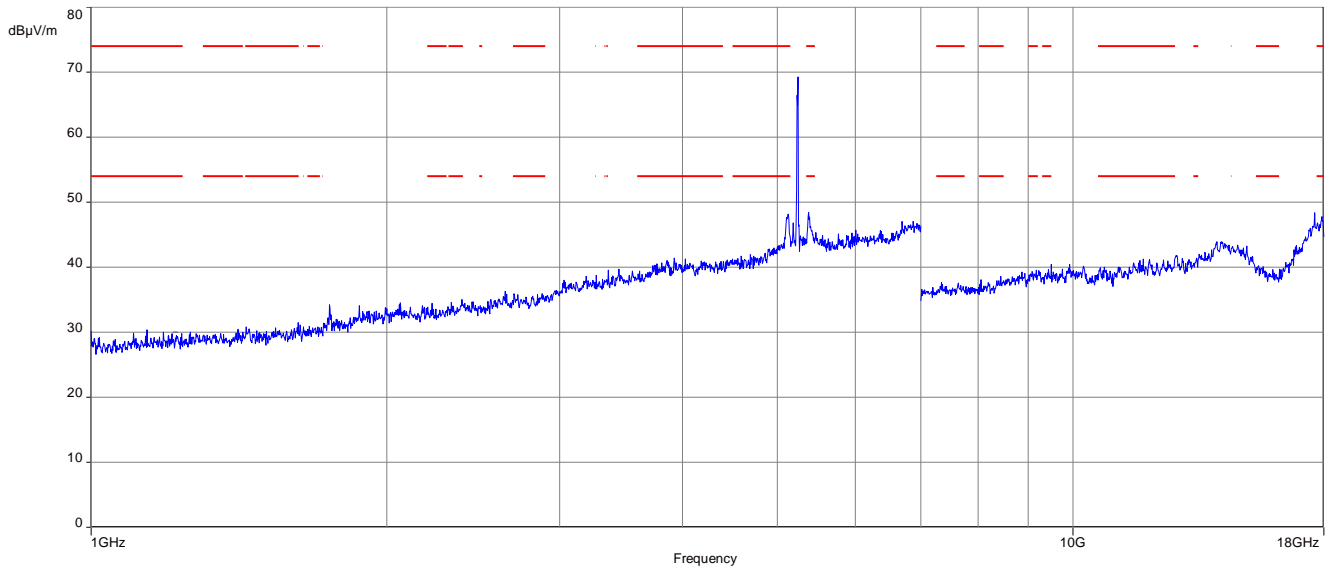


**Plot 4:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; lowest channel

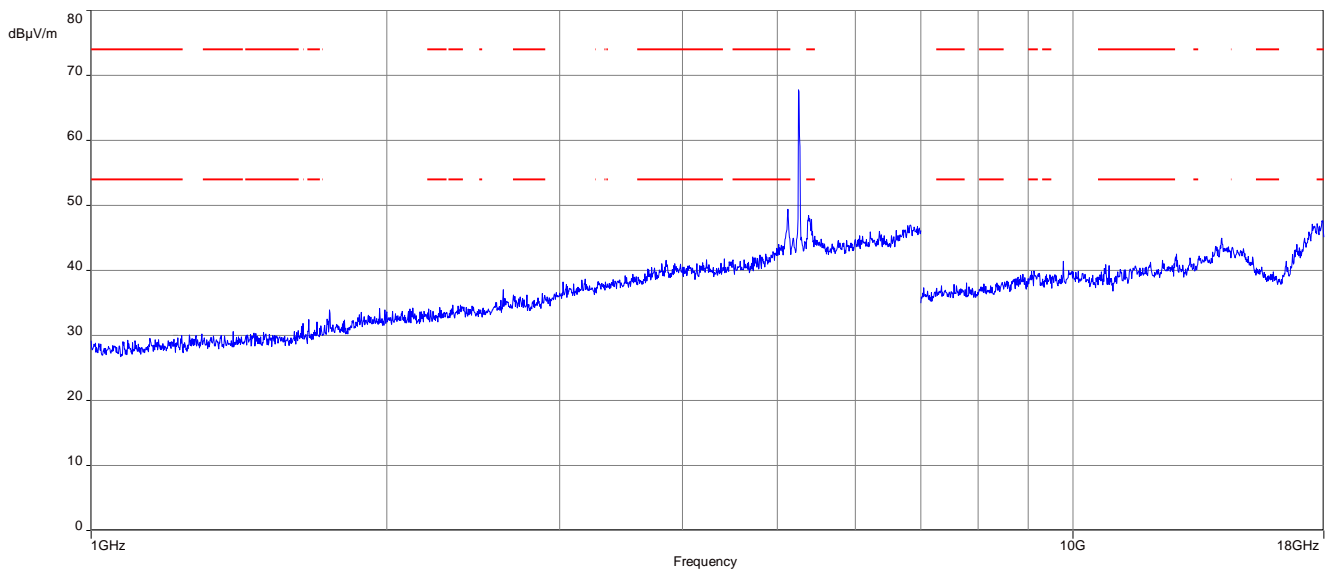

**Plot 5:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; middle channel

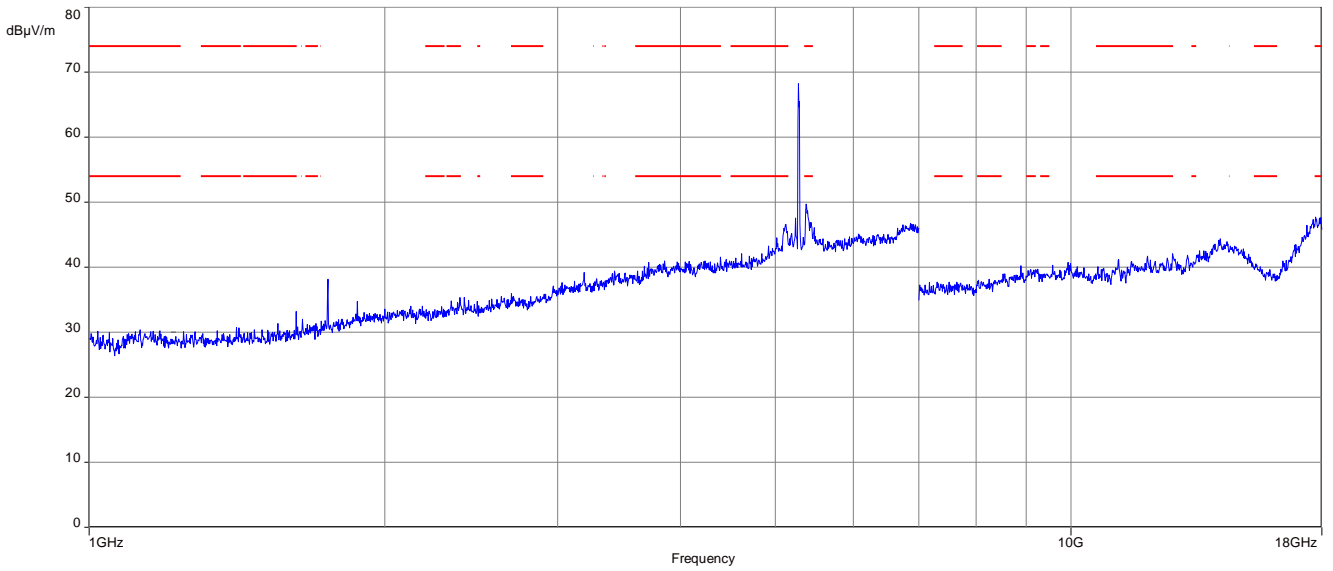


**Plot 6:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; highest channel

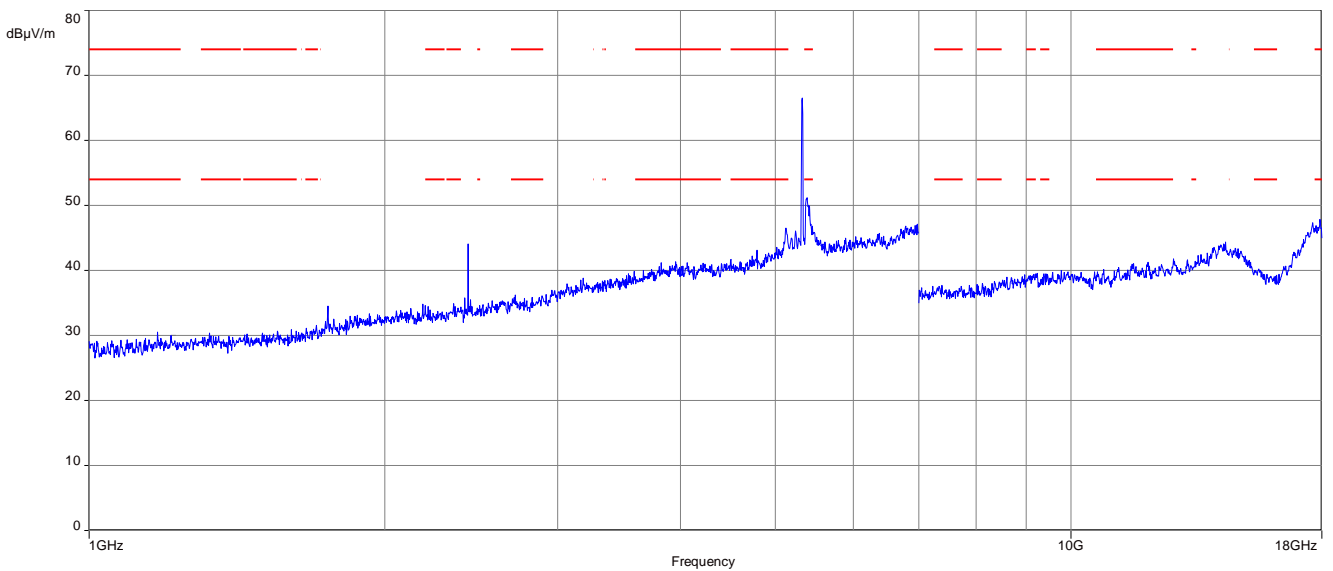





**Plot 7:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; lowest channel

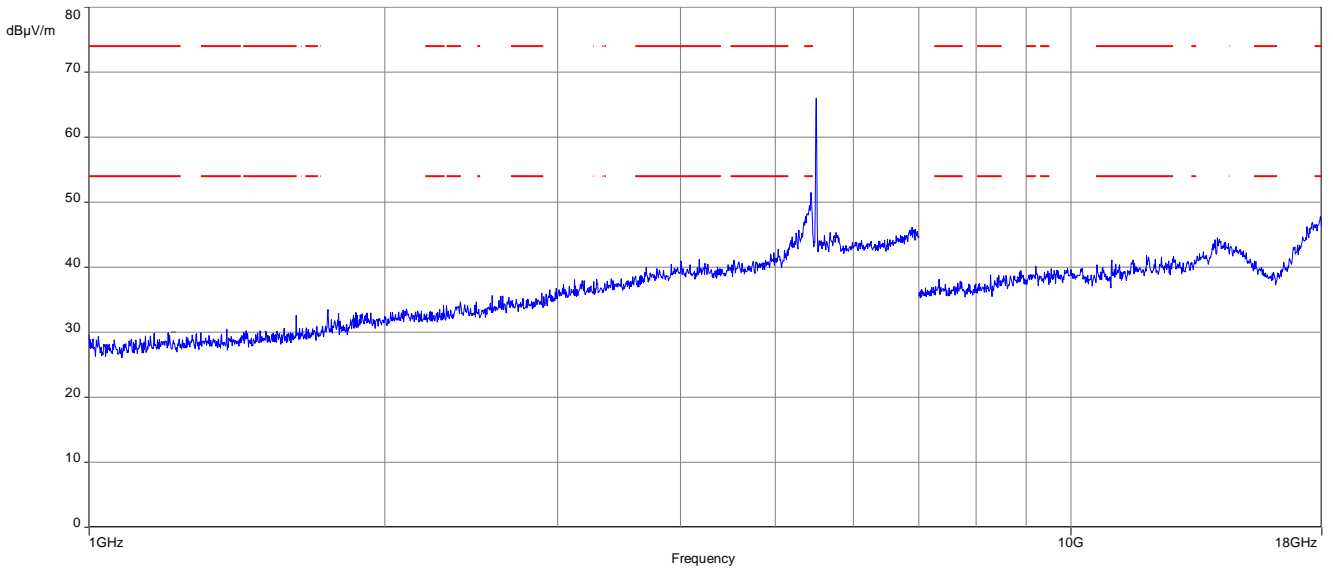


**Plot 8:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; middle channel

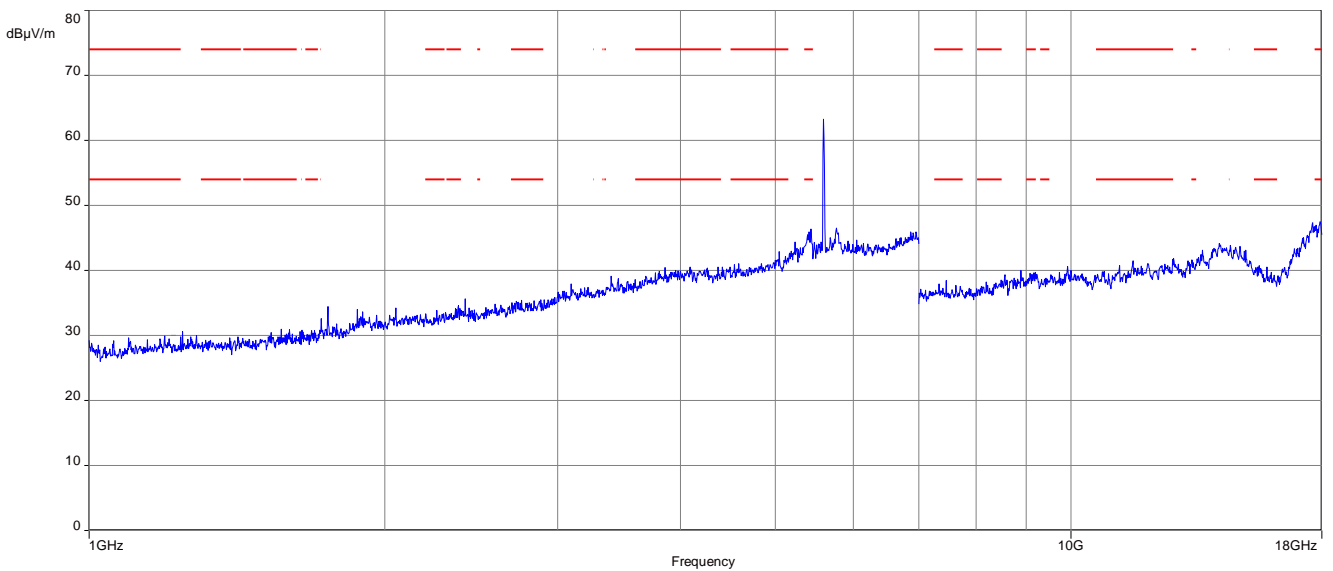


**Plot 9:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; highest channel

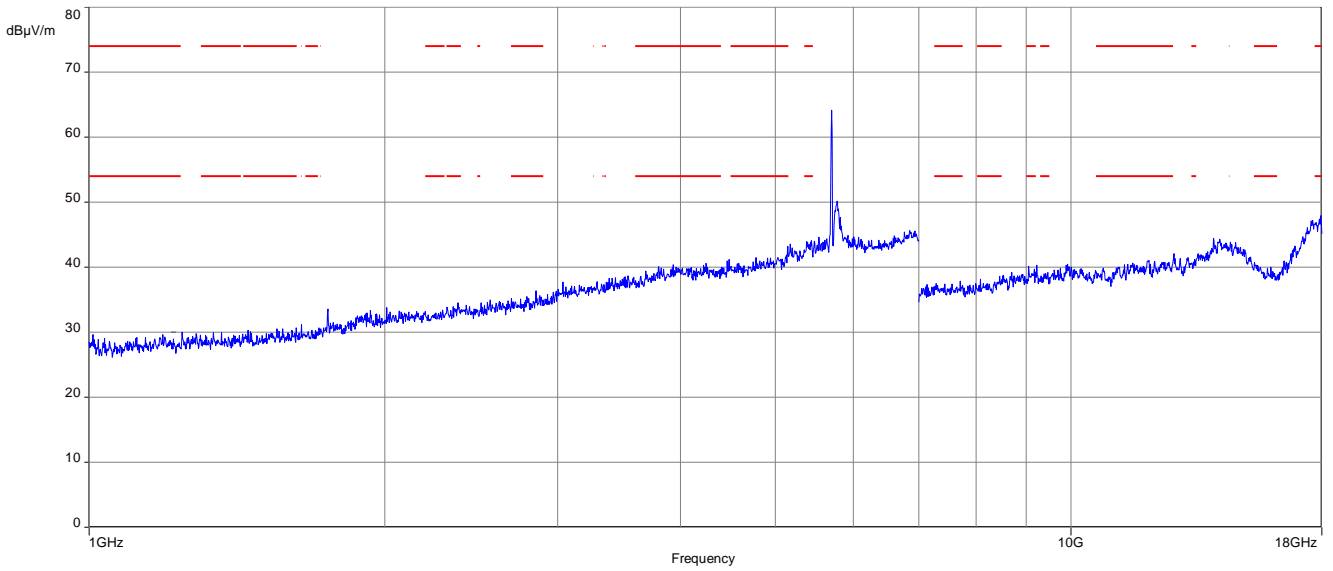


**Plot 10:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; lowest channel

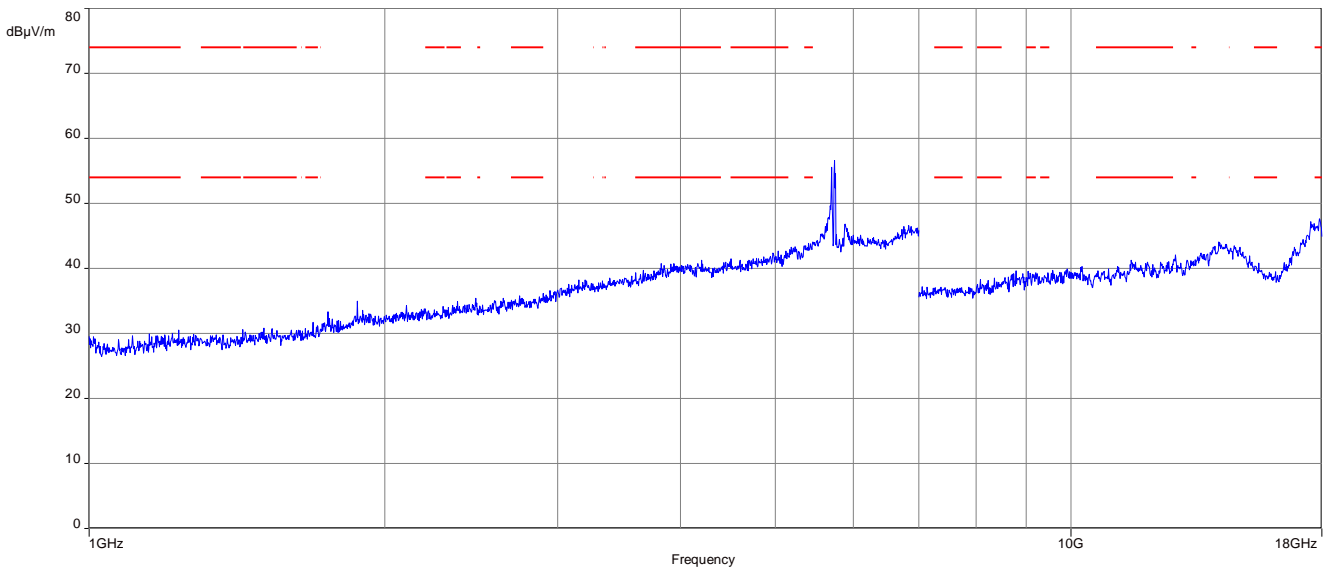


**Plot 11:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; middle channel

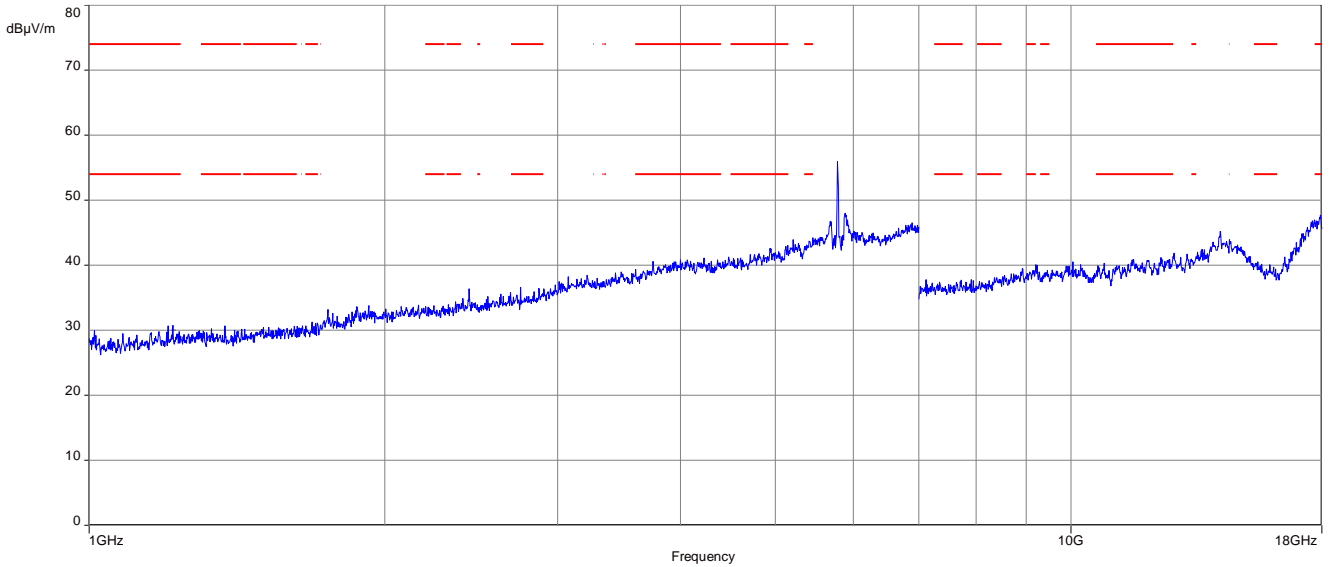

**Plot 12:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; highest channel

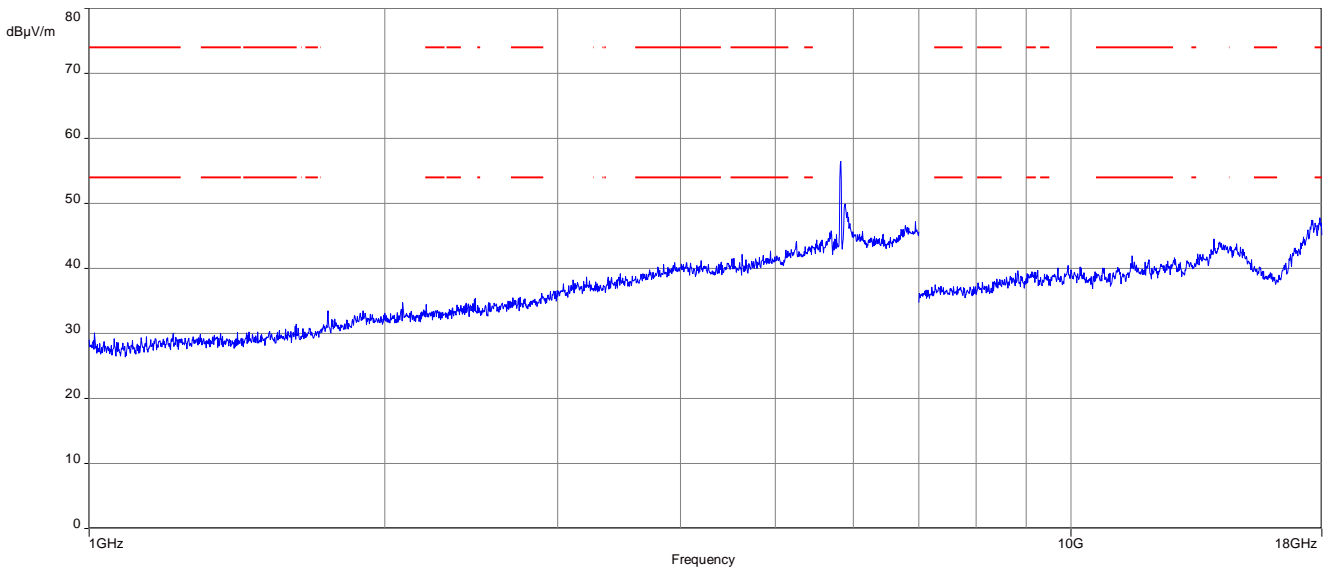


**Plot 13:** 18 GHz to 26 GHz; vertical & horizontal polarization; all channels

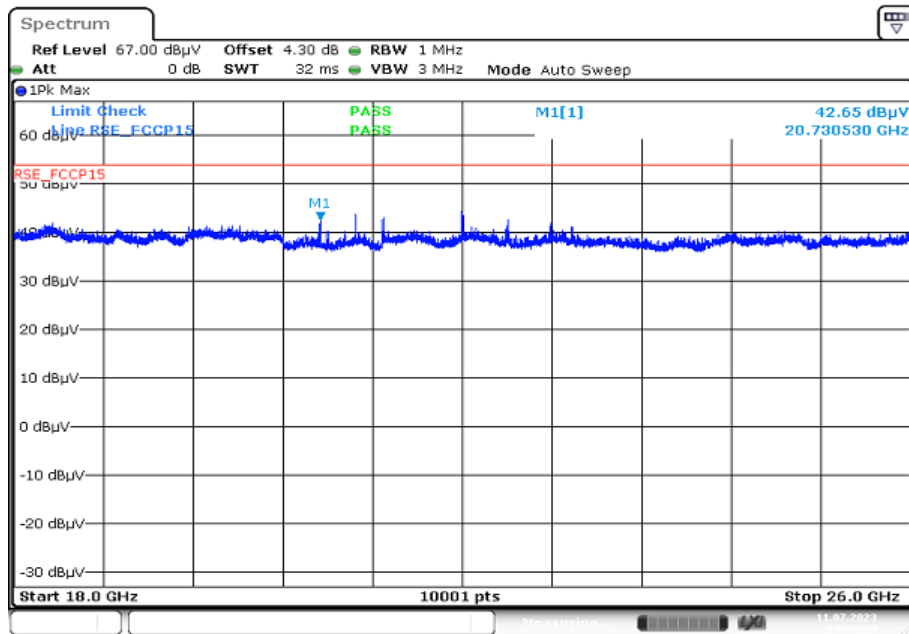

Date: 11 JUL 2023 10:53:24


**Plot 14:** 26 GHz to 40 GHz; vertical & horizontal polarization; all channels

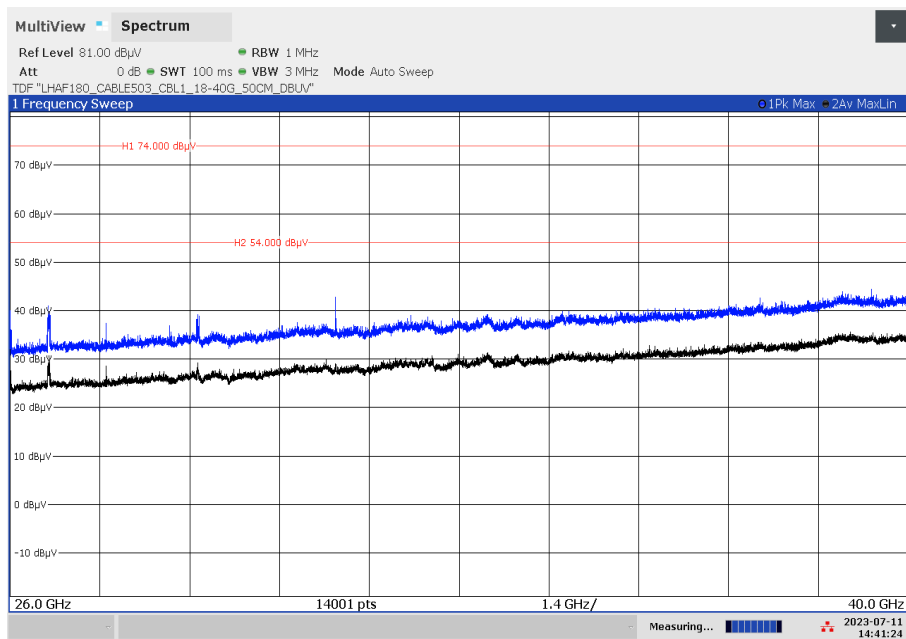


02:41:24 PM 07/11/2023

**Plots:** 40 MHz channel bandwidth


**Plot 1:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; lowest channel

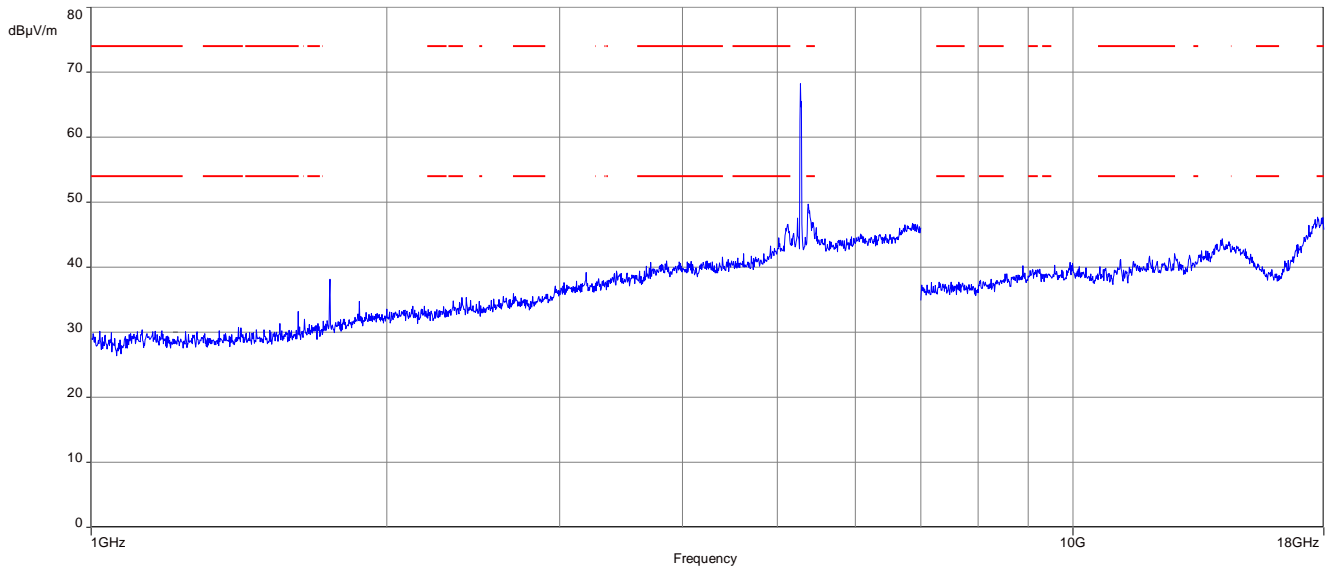


**Plot 2:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; highest channel

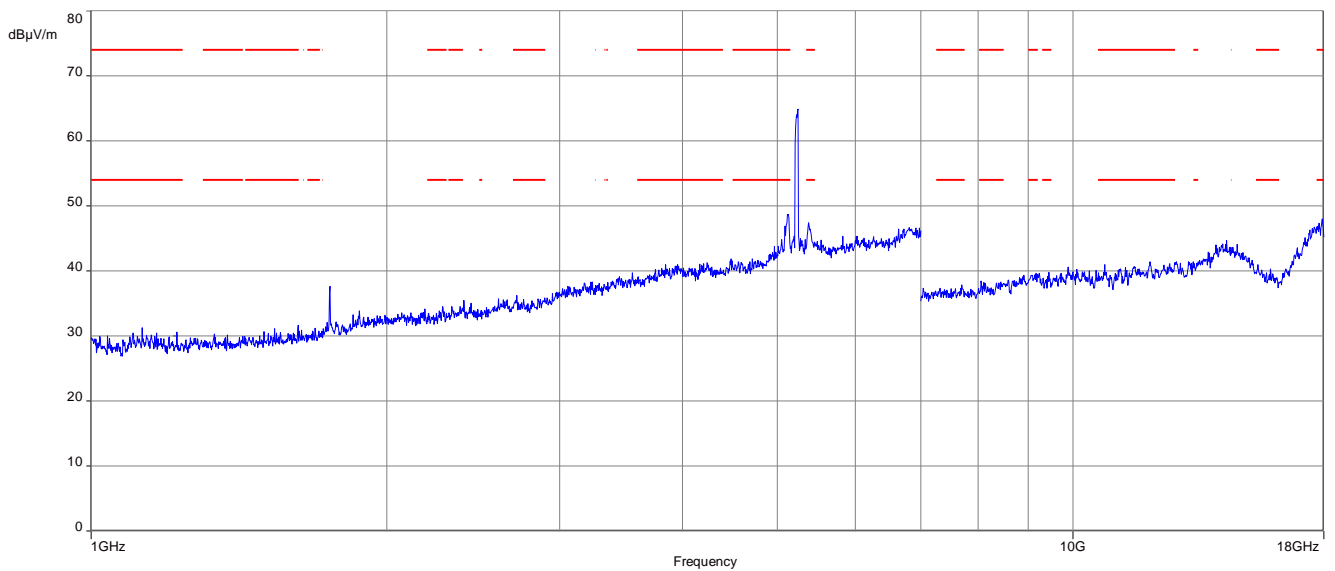


**Plot 3:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; lowest channel

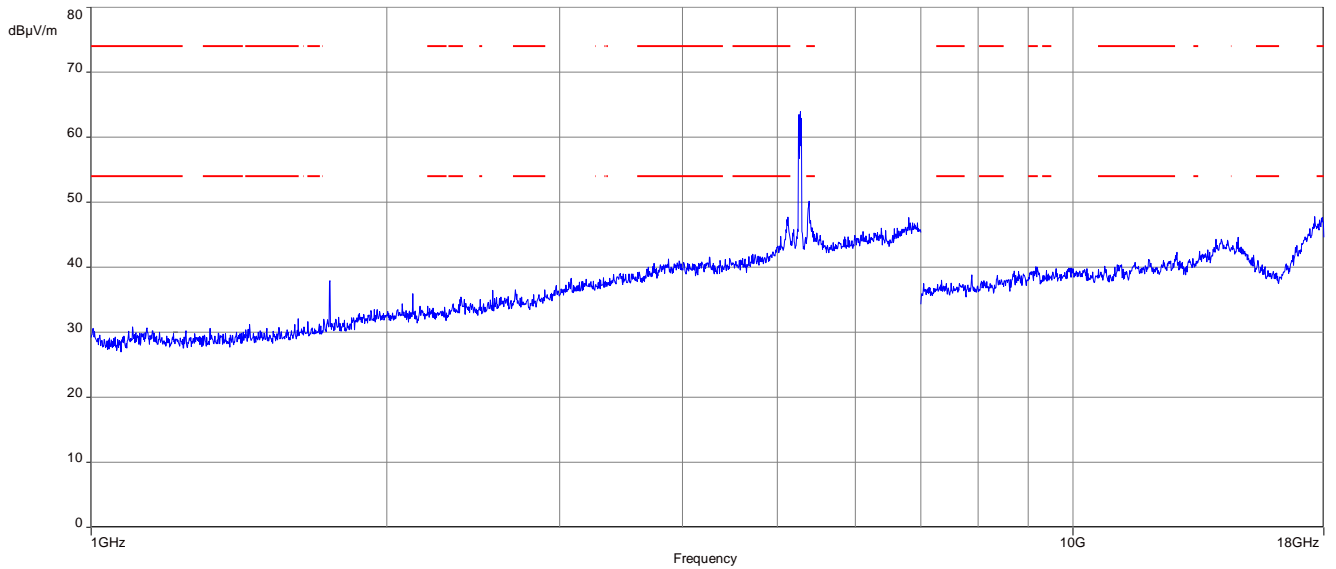


**Plot 4:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; highest channel

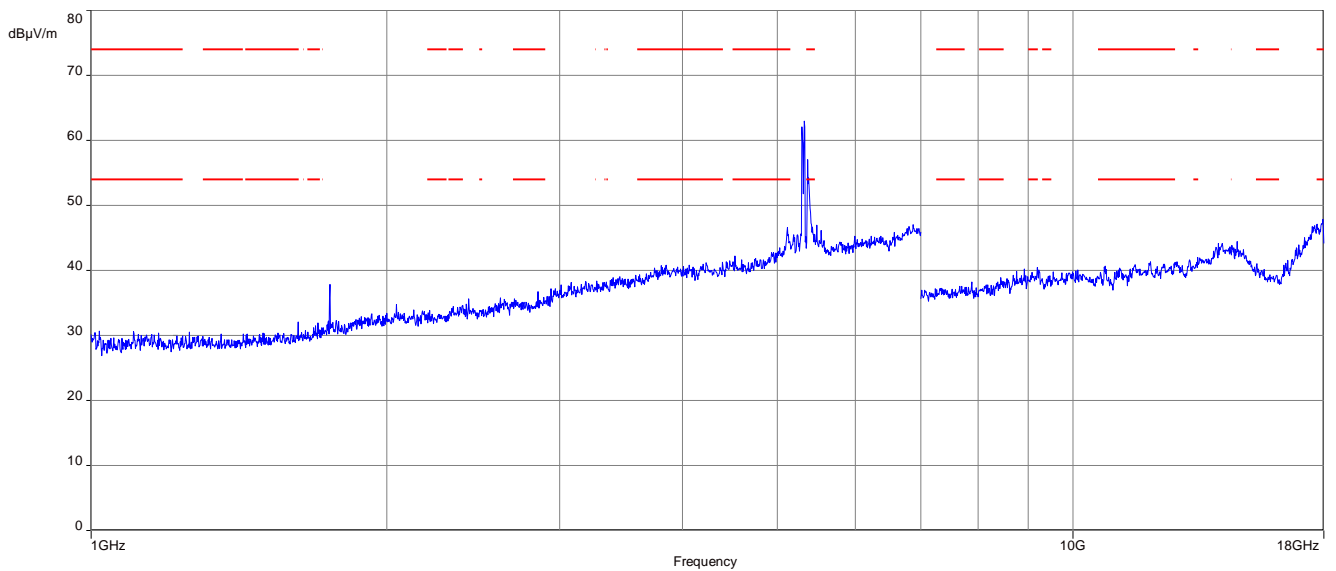


**Plot 5:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; lowest channel

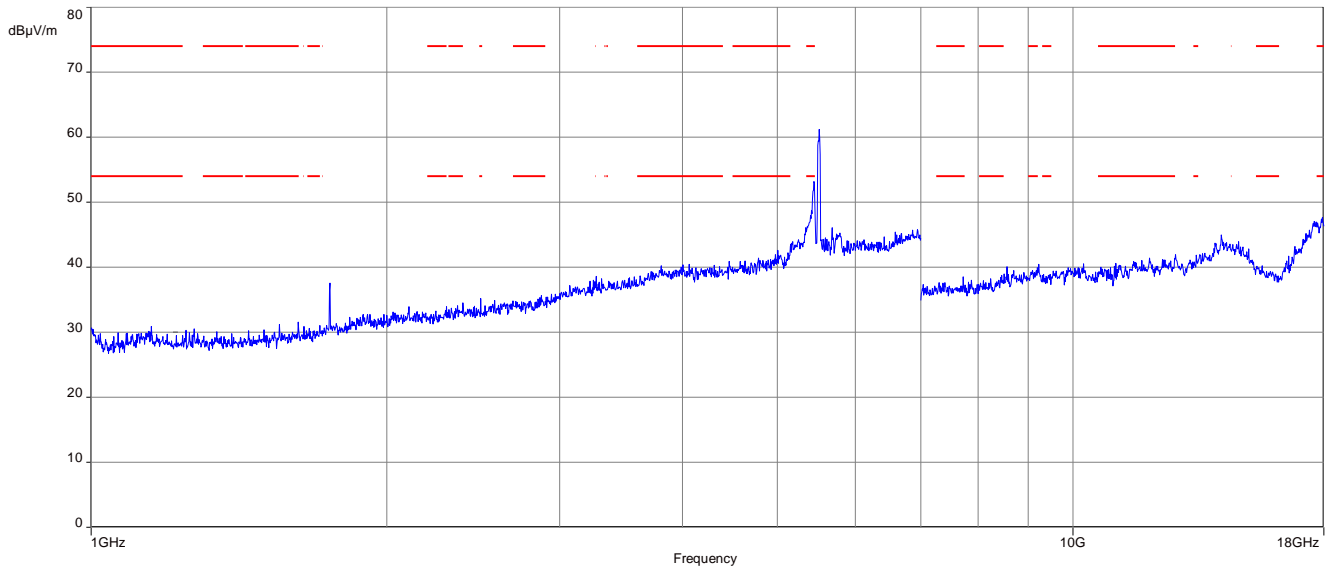


**Plot 6:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; middle channel

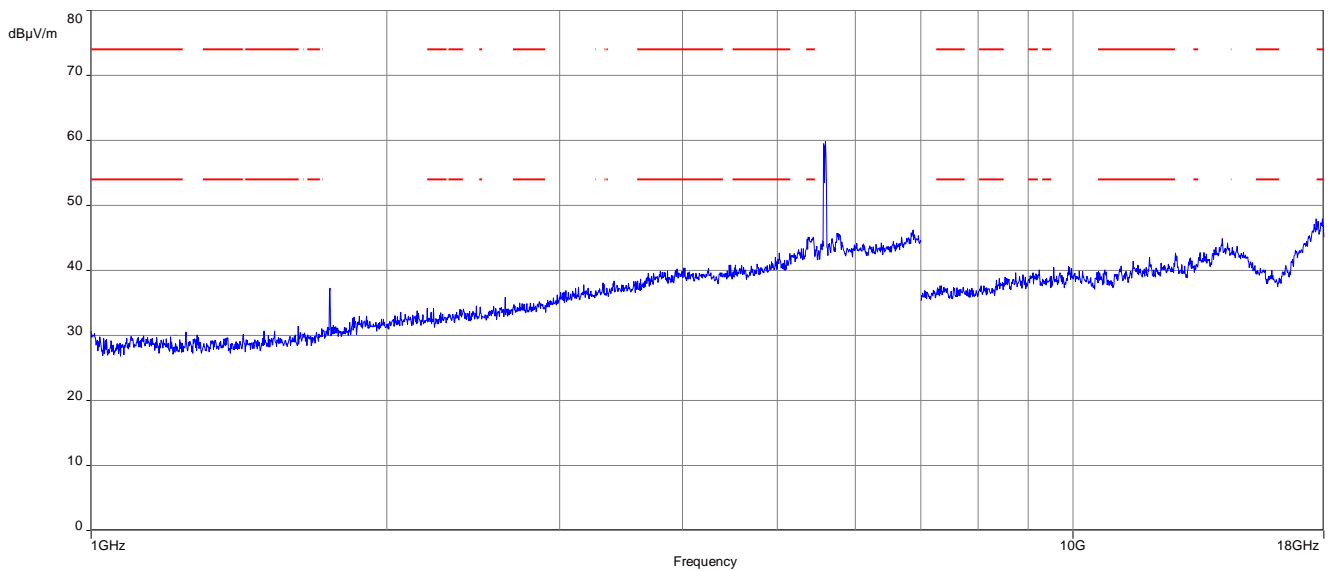

**Plot 7:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; highest channel

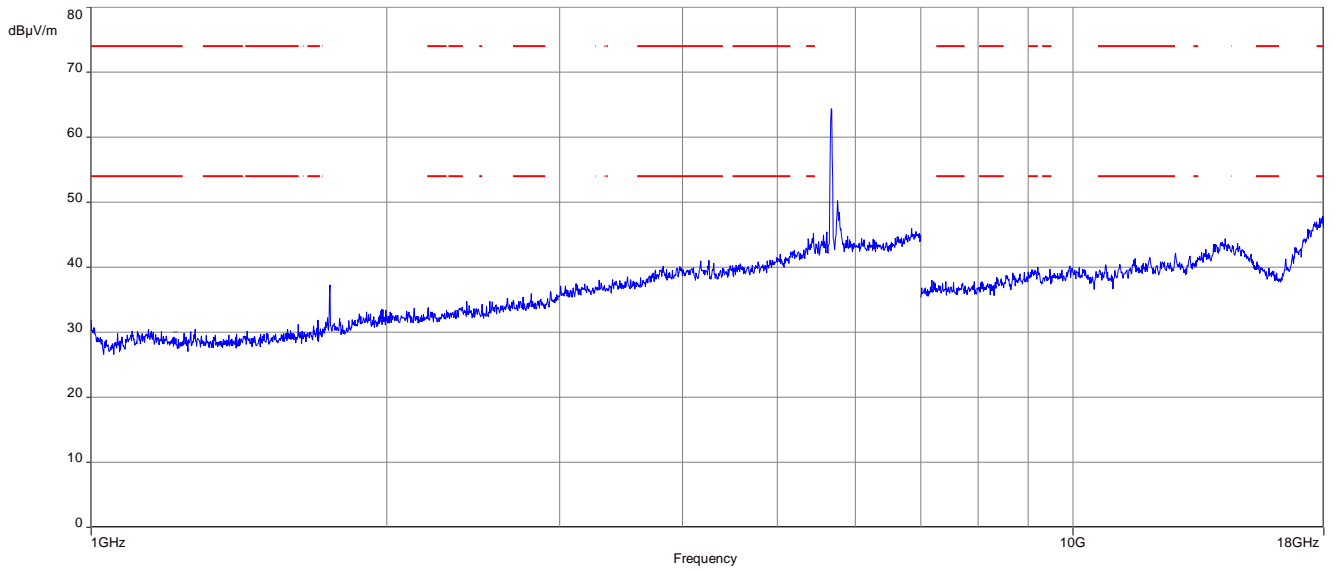


**Plot 8:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; lowest channel

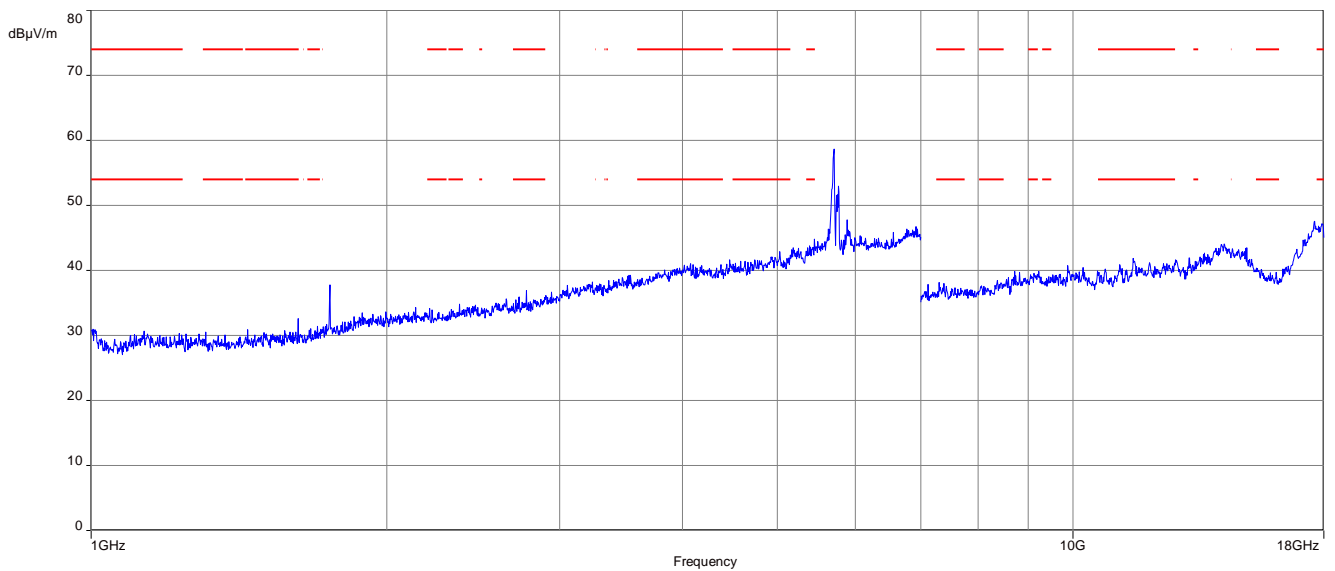





**Plot 9:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; highest channel

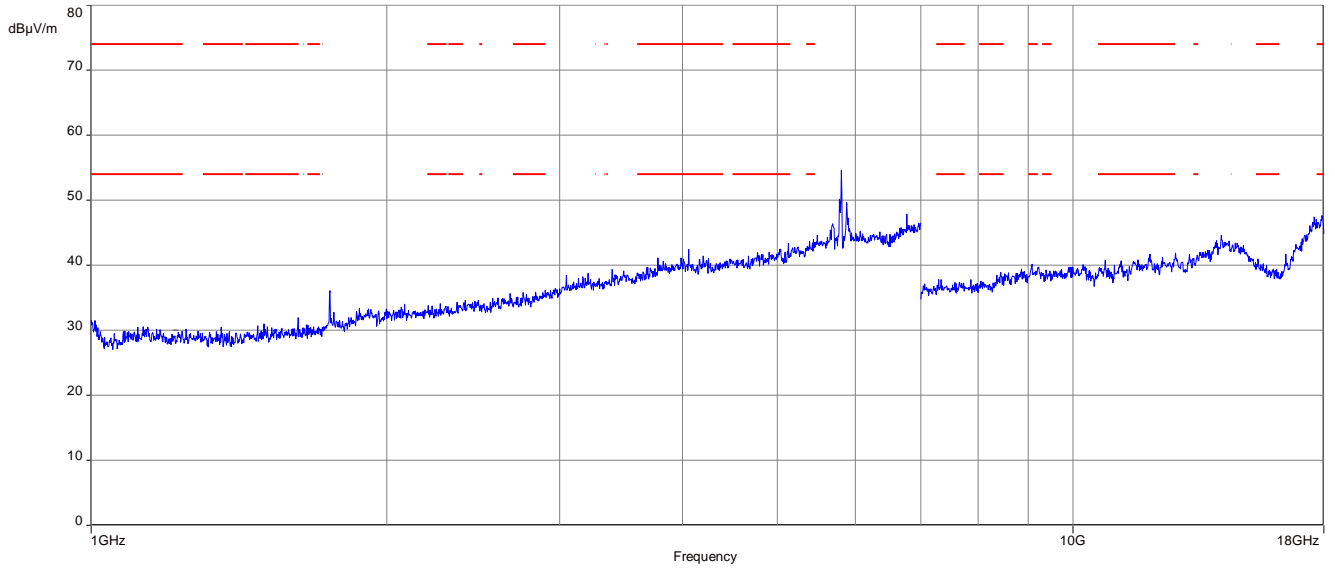

**Plot 10:** 18 GHz to 26 GHz; vertical & horizontal polarization; all channels

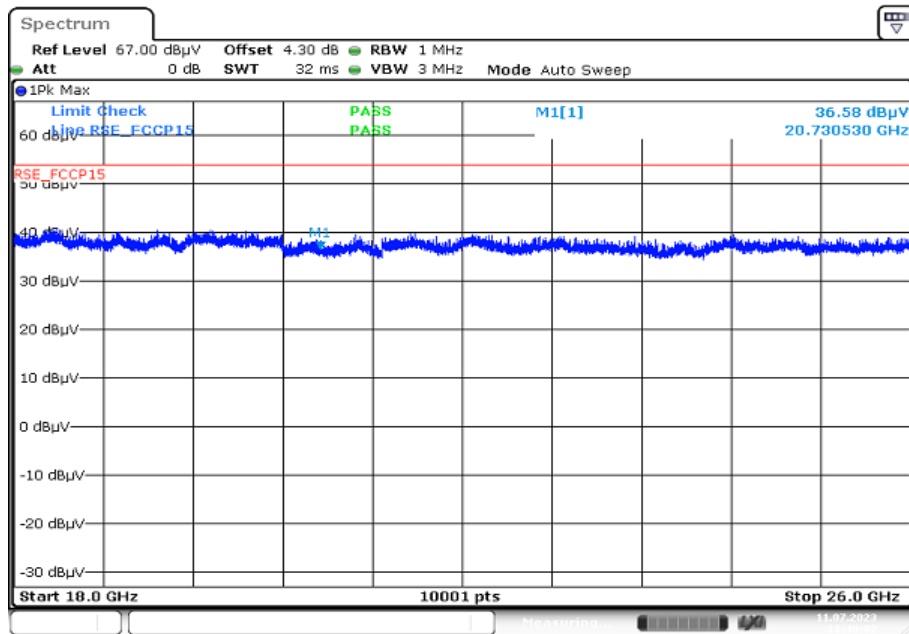


**Plot 11:** 26 GHz to 40 GHz; vertical & horizontal polarization; all channels

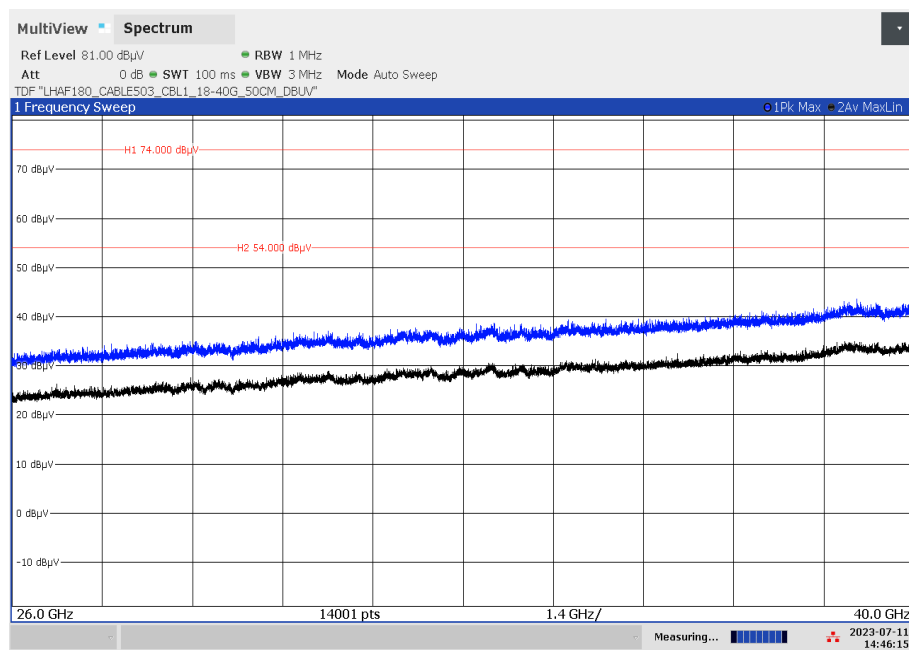


**Plots:** 80 MHz channel bandwidth


**Plot 1:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; middle channel

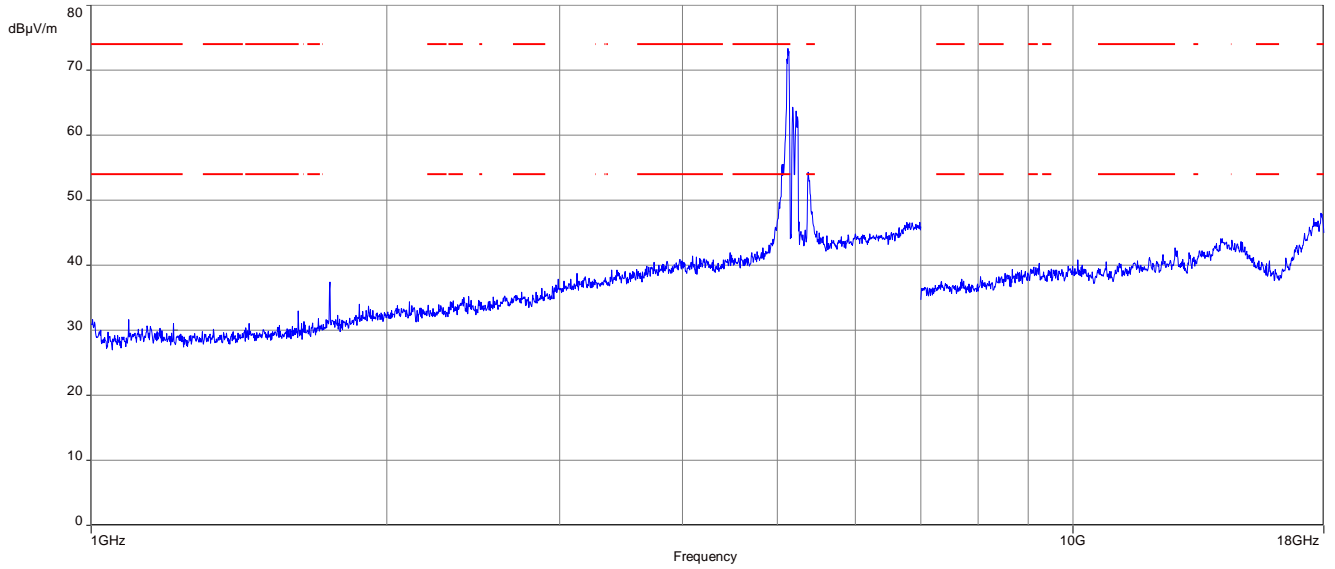


**Plot 2:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; middle channel

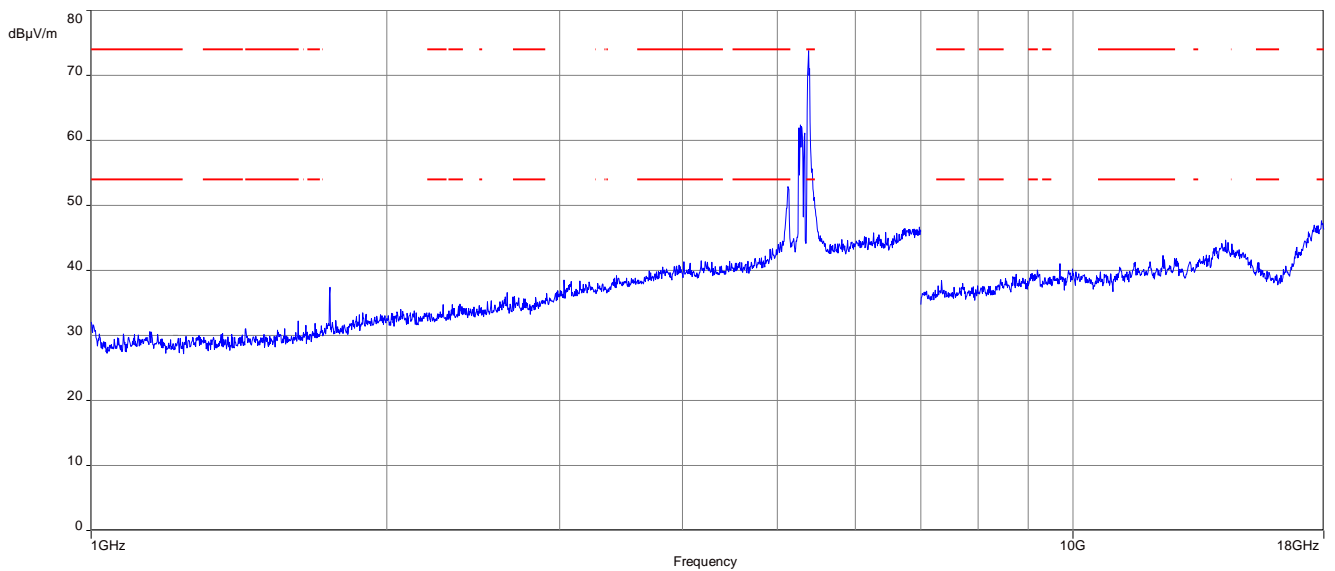


**Plot 3:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; lowest channel

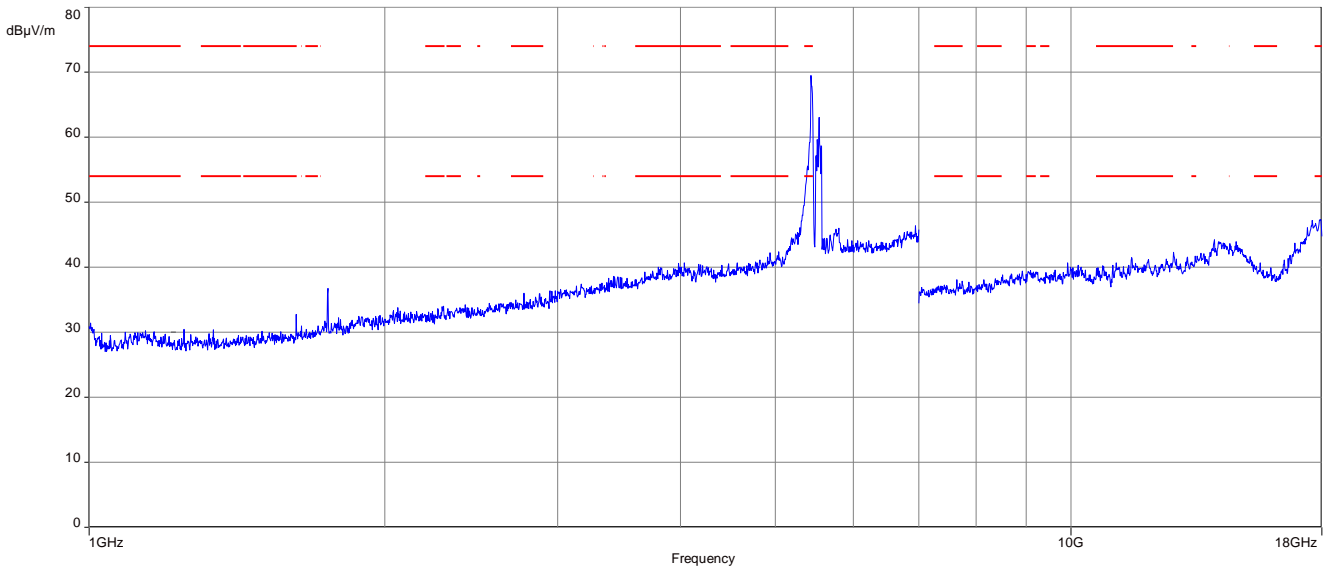


**Plot 4:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; highest channel

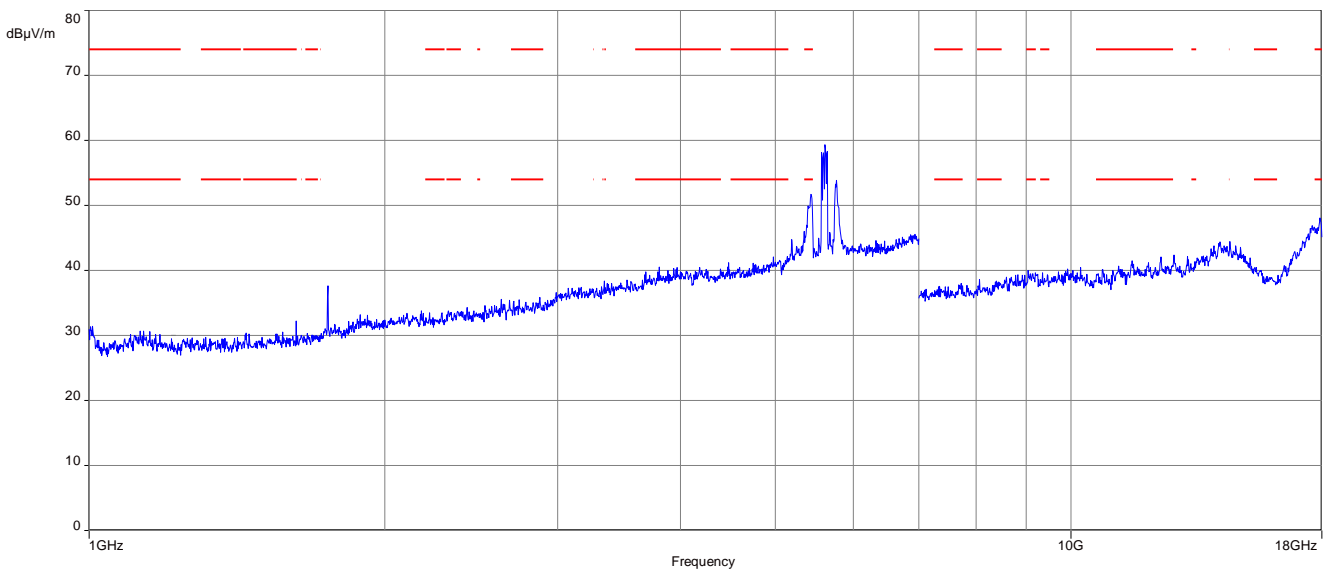

**Plot 5:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; middle channel

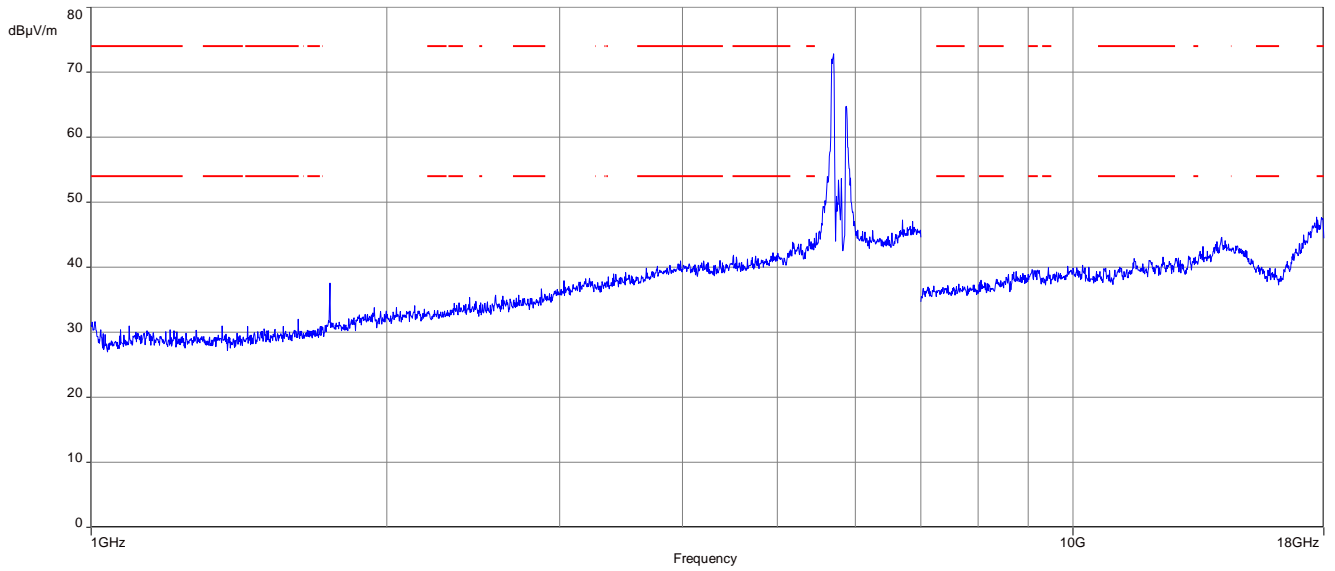


Plot 6: 18 GHz to 26 GHz; vertical & horizontal polarization; all channels

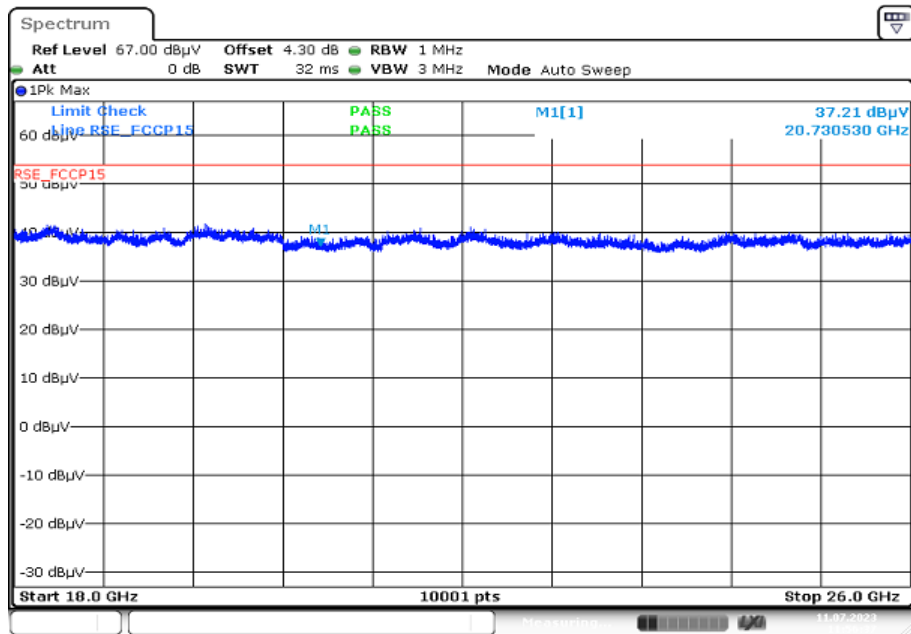

Date: 11 JUL 2023 11:56:27

Plot 7: 26 GHz to 40 GHz; vertical & horizontal polarization; all channels

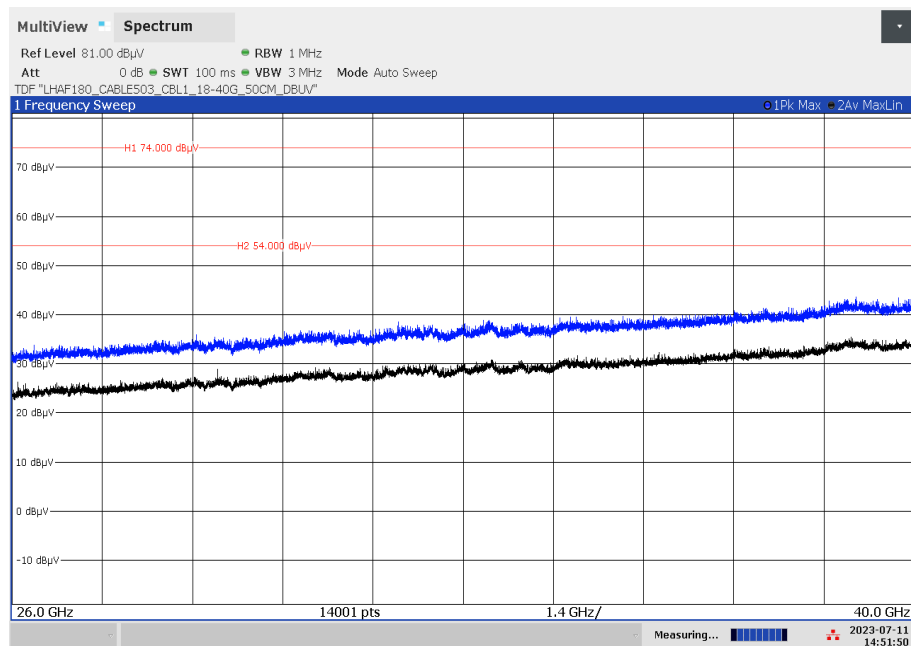

02:51:50 PM 07/11/2023

## 12.14 Spurious emissions conducted < 30 MHz

### Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to middle channel. If critical peaks are found the lowest channel and the highest channel will be measured too. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

### Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	9 kHz
Resolution bandwidth:	100 kHz
Span:	150 kHz to 30 MHz
Trace mode:	Max Hold
Test setup:	See sub clause 7.5 – A
Measurement uncertainty:	See chapter 9


### Limits:

Spurious Emissions Conducted < 30 MHz		
Frequency (MHz)	Quasi-Peak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

\*Decreases with the logarithm of the frequency

**Plots:**

**Plot 1:** 150 kHz to 30 MHz, phase line

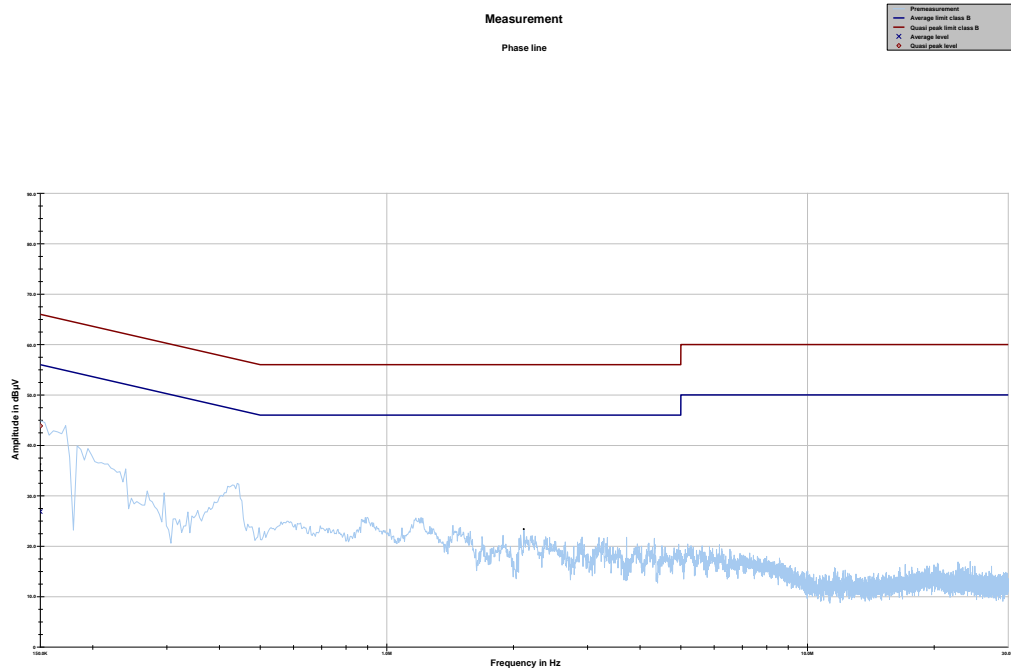


Project ID: 00684

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.15000	43.85	22.15	66.000	26.88	29.12	56.000



**Plot 2:** 150 kHz to 30 MHz, neutral line

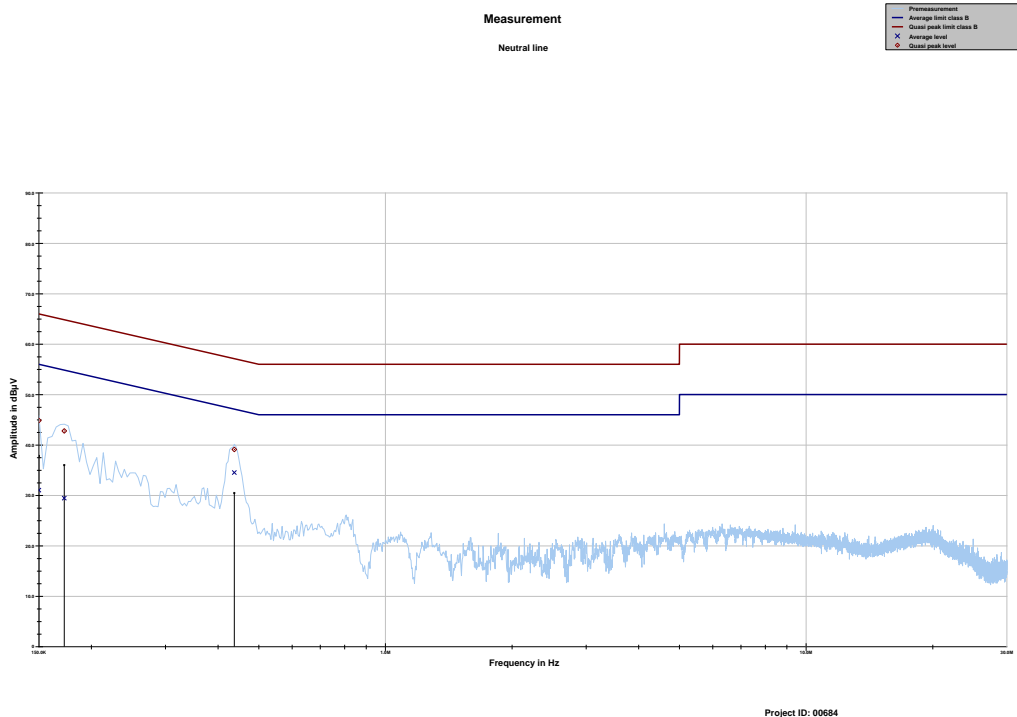

Project ID: 00684

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin Average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.150000	44.86	21.14	66.000	31.04	24.96	56.000
0.172387	42.79	22.06	64.845	29.46	25.90	55.360
0.437306	39.11	18.00	57.113	34.53	13.26	47.791

## 13 Observations

No observations except those reported with the single test cases have been made.

## 14 Glossary

<b>EUT</b>	Equipment under test
<b>DUT</b>	Device under test
<b>UUT</b>	Unit under test
<b>GUE</b>	GNSS User Equipment
<b>FCC</b>	Federal Communications Commission
<b>FCC ID</b>	Company Identifier at FCC
<b>IC</b>	Industry Canada
<b>PMN</b>	Product marketing name
<b>HMN</b>	Host marketing name
<b>HVIN</b>	Hardware version identification number
<b>FVIN</b>	Firmware version identification number
<b>EMC</b>	Electromagnetic Compatibility
<b>HW</b>	Hardware
<b>SW</b>	Software
<b>Inv. No.</b>	Inventory number
<b>S/N or SN</b>	Serial number
<b>C</b>	Compliant
<b>NC</b>	Not compliant
<b>NA</b>	Not applicable
<b>NP</b>	Not performed
<b>PP</b>	Positive peak
<b>QP</b>	Quasi peak
<b>AVG</b>	Average
<b>OC</b>	Operating channel
<b>OCW</b>	Operating channel bandwidth
<b>OBW</b>	Occupied bandwidth
<b>OOB</b>	Out of band
<b>DFS</b>	Dynamic frequency selection
<b>CAC</b>	Channel availability check
<b>OP</b>	Occupancy period
<b>NOP</b>	Non occupancy period
<b>DC</b>	Duty cycle
<b>PER</b>	Packet error rate
<b>CW</b>	Clean wave
<b>MC</b>	Modulated carrier
<b>WLAN</b>	Wireless local area network
<b>RLAN</b>	Radio local area network
<b>DSSS</b>	Dynamic sequence spread spectrum
<b>OFDM</b>	Orthogonal frequency division multiplexing

## 15 Document history

Version	Applied changes	Date of release
-/-	Initial release	2023-07-31

## 16 Accreditation Certificate – D-PL-12076-01-05

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p><b>Accreditation</b> </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory <b>CTC advanced GmbH</b> Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields: <b>Telecommunication (FCC Requirements)</b></p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 05 pages. Registration number of the certificate: <b>D-PL-12076-01-05</b></p> <p>Frankfurt am Main, 09.06.2020  by Jörg Oehl-Ing. (FH) Ralf Egnor Head of Division</p> <p><small>The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH. <a href="https://www.dakks.de/en/content/accredited-bodies-dakks">https://www.dakks.de/en/content/accredited-bodies-dakks</a> See notes overleaf.</small></p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkKS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: <a href="http://www.european-accreditation.org">www.european-accreditation.org</a> ILAC: <a href="http://www.ilac.org">www.ilac.org</a> IAF: <a href="http://www.iaf.nu">www.iaf.nu</a></p>

**Note: The current certificate annex is published on the websites (link see below).**

<https://www.dakks.de/files/data/as/pdf/D-PL-12076-01-05e.pdf>

or

[https://cetecomadvanced.com/files/pdfs/d-pl-12076-01-05\\_tcb\\_usa.pdf](https://cetecomadvanced.com/files/pdfs/d-pl-12076-01-05_tcb_usa.pdf)

##### END OF TEST REPORT #####