



LCIE



Accréditation
N°1-0312
Scope available on
www.cofrac.fr

WIFI 2.4GHz EnergyTemplate: Release April 14th, 2021

TEST REPORT

N°: 172911-765736-D

Version : 02

Subject

Radio spectrum matters
tests according to standards:
47 CFR Part 15.247 & RSS-247 Issue 2 & RSS-Gen Issue 5

Issued to

SAGEMCOM
250 Route de l'Empereur
92848 – RUEIL MALMAISON
FRANCE

Apparatus under test

- Product
- Trade mark
- Manufacturer
- Model under test
- Serial number
- FCC ID
- IC

TV Set Top Box
COGECO
SAGEMCOM
DIW3930 COGECO
6211130035003
VW3DIW3930
9140A-DIW3930

Conclusion

See Test Program chapter

Test date

June 17, 2021 to June 24, 2021

Test location

Moirans

Test Site

6500A-1 & 6500A-3

Registration Number

197516

Designation Number

FR0008

Sample receipt date

June 7, 2021

Composition of document


102 pages

Document issued on

September 30, 2021

Written by :
Armand MAHOUNGOU
Tests operator

Approved by :



This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the items tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified or rule defined by the test method, the decision of conformity doesn't take into account the uncertainty of measures. This document doesn't anticipate any certification decision. This document doesn't anticipate any certification decision. The COFRAC accreditation attests the technical capability of the testing laboratory for the only tests covered by the accreditation. If some tests mentioned in this report are carried out outside the framework of COFRAC accreditation, they are indicated by an asterisk (*).

LCIE

Laboratoire Central des Industries Electriques
Une société de Bureau Veritas

ZI Centr'alp
170 rue de Chatagnon
38430 Moirans FRANCE

Tél : +33 4 76 07 36 36
contact@lcie.fr
www.lcie.fr



PUBLICATION HISTORY

Version	Date	Author	Modification
01	August 3, 2021	Armand MAHOUNGOU	Creation of the document
02	September 30, 2021	Armand MAHOUNGOU	Correction of RF Output Power and PSD values on P43 & 52. Customer request withdraw the pictures of equipment

Each new edition of this test report replaces and cancels the previous edition. The control of the old editions of report is under responsibility of client.



SUMMARY

1.	TEST PROGRAM	4
2.	EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)	5
3.	OCCUPIED BANDWIDTH.....	15
4.	6DB EMISSION BANDWIDTH	21
5.	DUTY CYCLE	27
6.	MAXIMUM CONDUCTED OUTPUT POWER	34
7.	POWER SPECTRAL DENSITY	43
8.	UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS AT THE BAND EDGE	52
9.	UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS.....	58
10.	AC POWER LINE CONDUCTED EMISSIONS.....	69
11.	UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS	77
12.	UNCERTAINTIES CHART	102

1. TEST PROGRAM

References

- 47 CFR Part 15.247
- RSS 247 Issue 2
- RSS Gen Issue 5
- KDB 558074 D01 DTS Meas Guidance v05r02
- KDB 662911 D01 Multiple Transmitter Output v02r01
- ANSI C63.10-2013

Radio requirement:

Clause (47CFR Part 15.247 & RSS-247 Issue 2 & RSS-Gen Issue 5) Test Description	Test result - Comments			
Occupied Bandwidth	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
6dB Bandwidth	☒ PASS	☐ FAIL	☐ NA()	☐ NP(1)
Duty Cycle	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
Maximum Conducted Output Power	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
Power Spectral Density	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
Conducted Spurious Emission at the Band Edge	☒ PASS	☐ FAIL	☐ NA()	☐ NP(1)
Unwanted Emissions into Non-Restricted Frequency Bands	☒ PASS	☐ FAIL	☐ NA()	☐ NP(1)
AC Power Line Conducted Emission	☒ PASS	☐ FAIL	☐ NA(2)	☐ NP(1)
Unwanted Emissions into Restricted Frequency Bands	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)
Receiver Radiated emissions	☒ PASS	☐ FAIL	☐ NA	☐ NP(1)

This table is a summary of test report, see conclusion of each clause of this test report for detail.

(1): Limited program

(2): EUT not directly or indirectly connected to the AC Power Public Network

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement

NA: Not Applicable

NP: Test Not Performed



2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT):
COGECO DIW3930 COGECO

Serial Number: 6211130035003

Power supply:

Name	Type	Rating	Reference / Sn	Comments
Supply1	☒ AC ☐ DC ☐ Battery	100-127Vac; 50/60Hz; 0.3A	NBC12B120100VU / 191636225-xx	-

Inputs/outputs - Cable:

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
1	Main power supply cable	-	☒	☐	☐	-
2	HDMI cable	-	☒	☐	☐	-
3	USB cable	-	☒	☐	☐	-
4	Ethernet cable	-	☒	☐	☐	-

Auxiliary equipment used during test:

Type	Reference	Sn	Comments
Laptop	-	-	Use to set the EUT



Equipment information:

Type:	WIFI			
Chipset Ref :	BCM72180			
Frequency band:	2400MHz-2483.5MHz			
Standard:	☒ 802.11b	☒ 802.11g	☒ 802.11n HT20	☐ 802.11ax HT20
Spectrum Modulation:	☒ DSSS		☒ OFDM	
Number of Channel:	11			
Spacing channel:	5MHz			
Channel bandwidth:	☒ 20MHz		☐ 40MHz	
Antenna Type:	☒ Integral	☐ External	☐ Dedicated	
Antenna connector:	☒ Yes	☐ No	☐ Temporary for test	
Transmit chains:	☐ 1	☒ 2	☐ 3	☐ 4
Beam forming gain:	☐ Yes: XdB		☒ No	
Antenna Requirements §15.203	The transmitter uses an integral antenna with a u.fl connector which is classified as a unique connector			
Receiver chains	☐ 1	☒ 2	☐ 3	☐ 4
Type of equipment:	☒ Stand-alone	☐ Plug-in	☐ Combined	
Equipment arrangement:	☒ Tabletop	☐ Floor-standing	☐ Multiple orientations	
Ad-Hoc mode:	☐ Yes		☒ No	
Duty cycle:	☒ Continuous duty	☐ Intermittent duty	☐ 100% duty	
Operating temperature range:	Tnom:	20°C		
Type of power source:	☒ AC power supply	☐ DC power supply	☐ Battery	
Operating voltage range:	Vnom:	☒ 120V/60Hz	☐ X VDC	
		☐ 240V/50Hz	☐ X VDC	

Antenna Characteristic			
Antenna assembly	Gain (dBi)	Frequency Band (MHz)	Impedance(Ω)
1	1.13	2400 – 2483.5	50
2	0.76	2400 – 2483.5	50
Accumulated	3.96	2400 – 2483.5	50

Accumulated gain calculation		
Formula used for calculation	KDB	Correlated
$10 \log[(10G_1/20 + 10G_2/20 + \dots + 10G_N/20)^2 / NANT] \text{dBi}$	KDB 662911 D01 v02r01	☒ Yes / ☐ No

Hardware information		
Software (if applicable):	V. :	1.1000 RC12.0 wI0: Sep 23 2020 13:56:05 version 18.40.16.20 (189d91e10512e80bb2d12b1a62f0685df28f3968 WLTEST) FWID 01-5932f5f2

CHANNEL PLAN	
802.11b / 802.11g / 802.11n HT20	
Channel	Frequency (MHz)
Cmin: 1	2412
2	2417
3	2422
4	2427
5	2432
Cmid: 6	2437
7	2442
8	2447
9	2452
10	2457
Cmax: 11	2462

CHANNEL PLAN	
802.11n HT40	
Channel	Frequency (MHz)
Cmin: 3	2422
4	2427
5	2432
Cmid: 6	2437
7	2442
8	2447
Cmax: 9	2452

802.11b mode CCK TARGET	
Channels (MHz)	q max
C1 (2412)	88
C7 (2442)	88
C11 (2462)	88

802.11g mode CDD TARGET	
Channels (MHz)	q max
C1 (2412)	58
C7 (2442)	76
C11 (2462)	62

802.11n HT20 mode MIMO TARGET	
Channels (MHz)	q max
C1 (2412)	60
C7 (2442)	76
C11 (2462)	60

802.11ax HT20 mode MIMO TARGET	
Channels (MHz)	q max
C1 (2412)	56
C7 (2442)	76
C11 (2462)	58

DATA RATE		
802.11b		
Data Rate (Mbps)	Modulation Type	Modulation Worst Case
1	DBPSK	☐
2	DQPSK	☐
5.5	DQPSK	☐
11	CCK	☒

DATA RATE		
802.11g		
Data Rate (Mbps)	Modulation Type	Modulation Worst Case
6	BPSK	☒
9	BPSK	☐
12	QPSK	☐
18	QPSK	☐
24	16-QAM	☐
36	16-QAM	☐
48	64-QAM	☐
54	64-QAM	☐



L C I E

DATA RATE									
802.11n HT20									
Available for EUT	MCS Index	Spatial streams	Modulation				Data Rate (Mbps)		Worst Case Modulation
							(GI = 800ns)	(GI = 400ns)	
☑	0	1	BPSK				6.5	7.2	☐
	1	1	QPSK				13	14.4	☐
	2	1	QPSK				19.5	21.7	☐
	3	1	16-QAM				26	28.9	☐
	4	1	16-QAM				39	43.3	☐
	5	1	64-QAM				52	57.8	☐
	6	1	64-QAM				58.5	65	☐
	7	1	64-QAM				65	72.2	☐
☑	32	1	BPSK	-	-	-	-	-	☐
	8	2	BPSK				13	14.4	☒
	9	2	QPSK				26	28.9	☐
	10	2	QPSK				39	43.3	☐
	11	2	16-QAM				52	57.8	☐
	12	2	16-QAM				78	86.7	☐
	13	2	64-QAM				104	115.6	☐
	14	2	64-QAM				117	130.3	☐
	15	2	64-QAM				130	144.4	☐
	33	2	16-QAM	QPSK	-	-	39	43.3	☐
	34	2	64-QAM	QPSK	-	-	52	57.8	☐
	35	2	64-QAM	16-QAM	-	-	65	72.2	☐
	36	2	16-QAM	QPSK	-	-	58.5	65	☐
	37	2	64-QAM	QPSK	-	-	78	86.7	☐
	38	2	64-QAM	16-QAM	-	-	97.5	108.3	☐
☐	16	3	BPSK				19.5	21.7	☐
	17	3	QPSK				39	43.3	☐
	18	3	QPSK				58.5	65	☐
	19	3	16-QAM				78	86.7	☐
	20	3	16-QAM				117	130	☐
	21	3	64-QAM				156	173.3	☐
	22	3	64-QAM				175.5	195	☐
	23	3	64-QAM				195	216.7	☐
	39	3	16-QAM	QPSK	QPSK	-	52	57.8	☐
	40	3	16-QAM	16-QAM	QPSK	-	65	72.2	☐
	41	3	64-QAM	QPSK	QPSK	-	65	72.2	☐
	42	3	64-QAM	16-QAM	QPSK	-	78	86.7	☐
	43	3	64-QAM	16-QAM	16-QAM	-	91	101.1	☐
	44	3	64-QAM	64-QAM	QPSK	-	91	101.1	☐
	45	3	64-QAM	64-QAM	16-QAM	-	104	115.6	☐
	46	3	16-QAM	QPSK	QPSK	-	78	86.7	☐
	47	3	16-QAM	16-QAM	QPSK	-	97.5	108.3	☐
	48	3	64-QAM	QPSK	QPSK	-	97.5	108.3	☐
	49	3	64-QAM	16-QAM	QPSK	-	117	130	☐
	50	3	64-QAM	16-QAM	16-QAM	-	136.5	151.7	☐
	51	3	64-QAM	64-QAM	QPSK	-	136.5	151.7	☐
☐	52	3	64-QAM	64-QAM	16-QAM	-	156	173.3	☐
	24	4	BPSK				26	28.9	☐
	25	4	QPSK				52	57.8	☐
	26	4	QPSK				78	86.7	☐
	27	4	16-QAM				104	115.6	☐
	28	4	16-QAM				156	173.3	☐
	29	4	64-QAM				208	231.1	☐
	30	4	64-QAM				234	260	☐
	31	4	64-QAM				260	288.9	☐
	53	4	16-QAM	QPSK	QPSK	QPSK	65	72.2	☐
	54	4	16-QAM	16-QAM	QPSK	QPSK	78	86.7	☐
	55	4	16-QAM	16-QAM	16-QAM	QPSK	91	101.1	☐
	56	4	64-QAM	QPSK	QPSK	QPSK	78	86.7	☐
	57	4	64-QAM	16-QAM	QPSK	QPSK	91	101.1	☐
	58	4	64-QAM	16-QAM	16-QAM	QPSK	104	115.6	☐
	59	4	64-QAM	16-QAM	16-QAM	16-QAM	117	130	☐
	60	4	64-QAM	QPSK	QPSK	QPSK	104	115.6	☐
	61	4	64-QAM	16-QAM	16-QAM	QPSK	117	130	☐
	62	4	64-QAM	16-QAM	16-QAM	16-QAM	130	144.4	☐
	63	4	64-QAM	64-QAM	64-QAM	QPSK	130	144.4	☐
	64	4	64-QAM	64-QAM	64-QAM	16-QAM	143	158.9	☐
	65	4	16-QAM	QPSK	QPSK	QPSK	97.5	108.3	☐
	66	4	16-QAM	16-QAM	QPSK	QPSK	117	130	☐
	67	4	16-QAM	16-QAM	16-QAM	QPSK	136.5	151.7	☐
	68	4	64-QAM	QPSK	QPSK	QPSK	117	130	☐
	69	4	64-QAM	16-QAM	QPSK	QPSK	136.5	151.7	☐
	70	4	64-QAM	16-QAM	16-QAM	QPSK	156	173.3	☐
	71	4	64-QAM	16-QAM	16-QAM	16-QAM	175.5	195	☐
	72	4	64-QAM	64-QAM	QPSK	QPSK	156	173.3	☐
	73	4	64-QAM	64-QAM	16-QAM	QPSK	175.5	195	☐
	74	4	64-QAM	64-QAM	16-QAM	16-QAM	195	216.7	☐
	75	4	64-QAM	64-QAM	64-QAM	QPSK	195	216.7	☐
	76	4	64-QAM	64-QAM	64-QAM	16-QAM	214.5	238.3	☐



L C I E

DATA RATE									
802.11ax HT20									
Available for EUT	MCS Index	Spatial streams	Modulation				Data Rate (Mbps)		Worst Case Modulation
							(GI = 800ns)	(GI = 400ns)	
☑	0	1	BPSK				6.5	7.2	☐
	1	1	QPSK				13	14.4	☐
	2	1	QPSK				19.5	21.7	☒
	3	1	16-QAM				26	28.9	☐
	4	1	16-QAM				39	43.3	☐
	5	1	64-QAM				52	57.8	☐
	6	1	64-QAM				58.5	65	☐
	7	1	64-QAM				65	72.2	☐
☑	32	1	BPSK	-	-	-	-	-	☐
	8	2	BPSK				13	14.4	☒
	9	2	QPSK				26	28.9	☐
	10	2	QPSK				39	43.3	☐
	11	2	16-QAM				52	57.8	☐
	12	2	16-QAM				78	86.7	☐
	13	2	64-QAM				104	115.6	☐
	14	2	64-QAM				117	130.3	☐
	15	2	64-QAM				130	144.4	☐
	33	2	16-QAM	QPSK	-	-	39	43.3	☐
	34	2	64-QAM	QPSK	-	-	52	57.8	☐
	35	2	64-QAM	16-QAM	-	-	65	72.2	☐
	36	2	16-QAM	QPSK	-	-	58.5	65	☐
	37	2	64-QAM	QPSK	-	-	78	86.7	☐
	38	2	64-QAM	16-QAM	-	-	97.5	108.3	☐
☐	16	3	BPSK				19.5	21.7	☐
	17	3	QPSK				39	43.3	☐
	18	3	QPSK				58.5	65	☐
	19	3	16-QAM				78	86.7	☐
	20	3	16-QAM				117	130	☐
	21	3	64-QAM				156	173.3	☐
	22	3	64-QAM				175.5	195	☐
	23	3	64-QAM				195	216.7	☐
	39	3	16-QAM	QPSK	QPSK	-	52	57.8	☐
	40	3	16-QAM	16-QAM	QPSK	-	65	72.2	☐
	41	3	64-QAM	QPSK	QPSK	-	65	72.2	☐
	42	3	64-QAM	16-QAM	QPSK	-	78	86.7	☐
	43	3	64-QAM	16-QAM	16-QAM	-	91	101.1	☐
	44	3	64-QAM	64-QAM	QPSK	-	91	101.1	☐
	45	3	64-QAM	64-QAM	16-QAM	-	104	115.6	☐
	46	3	16-QAM	QPSK	QPSK	-	78	86.7	☐
	47	3	16-QAM	16-QAM	QPSK	-	97.5	108.3	☐
	48	3	64-QAM	QPSK	QPSK	-	97.5	108.3	☐
	49	3	64-QAM	16-QAM	QPSK	-	117	130	☐
	50	3	64-QAM	16-QAM	16-QAM	-	136.5	151.7	☐
☐	51	3	64-QAM	64-QAM	QPSK	-	136.5	151.7	☐
	52	3	64-QAM	64-QAM	16-QAM	-	156	173.3	☐
	24	4	BPSK				26	28.9	☐
	25	4	QPSK				52	57.8	☐
	26	4	QPSK				78	86.7	☐
	27	4	16-QAM				104	115.6	☐
	28	4	16-QAM				156	173.3	☐
	29	4	64-QAM				208	231.1	☐
	30	4	64-QAM				234	260	☐
	31	4	64-QAM				260	288.9	☐
	53	4	16-QAM	QPSK	QPSK	QPSK	65	72.2	☐
	54	4	16-QAM	16-QAM	QPSK	QPSK	78	86.7	☐
	55	4	16-QAM	16-QAM	16-QAM	QPSK	91	101.1	☐
	56	4	64-QAM	QPSK	QPSK	QPSK	78	86.7	☐
	57	4	64-QAM	16-QAM	QPSK	QPSK	91	101.1	☐
	58	4	64-QAM	16-QAM	16-QAM	QPSK	104	115.6	☐
	59	4	64-QAM	16-QAM	16-QAM	16-QAM	117	130	☐
	60	4	64-QAM	QPSK	QPSK	QPSK	104	115.6	☐
	61	4	64-QAM	16-QAM	16-QAM	QPSK	117	130	☐
	62	4	64-QAM	16-QAM	16-QAM	16-QAM	130	144.4	☐
	63	4	64-QAM	64-QAM	64-QAM	QPSK	130	144.4	☐
	64	4	64-QAM	64-QAM	64-QAM	16-QAM	143	158.9	☐
	65	4	16-QAM	QPSK	QPSK	QPSK	97.5	108.3	☐
	66	4	16-QAM	16-QAM	QPSK	QPSK	117	130	☐
	67	4	16-QAM	16-QAM	16-QAM	QPSK	136.5	151.7	☐
	68	4	64-QAM	QPSK	QPSK	QPSK	117	130	☐
	69	4	64-QAM	16-QAM	QPSK	QPSK	136.5	151.7	☐
	70	4	64-QAM	16-QAM	16-QAM	QPSK	156	173.3	☐
	71	4	64-QAM	16-QAM	16-QAM	16-QAM	175.5	195	☐
	72	4	64-QAM	64-QAM	QPSK	QPSK	156	173.3	☐
	73	4	64-QAM	64-QAM	16-QAM	QPSK	175.5	195	☐
	74	4	64-QAM	64-QAM	16-QAM	16-QAM	195	216.7	☐
	75	4	64-QAM	64-QAM	64-QAM	QPSK	195	216.7	☐
	76	4	64-QAM	64-QAM	64-QAM	16-QAM	214.5	238.3	☐



L C I E

DATA RATE									
802.11n HT40									
Available for EUT	MCS Index	Spatial streams	Modulation				Data Rate (Mbps)		Worst Case Modulation
							(GI = 800ns)	(GI = 400ns)	
☑	0	1	BPSK				13	15	☐
	1	1	QPSK				27	30	☐
	2	1	QPSK				40.5	45	☐
	3	1	16-QAM				54	60	☐
	4	1	16-QAM				81	90	☐
	5	1	64-QAM				108	120	☐
	6	1	64-QAM				121.5	135	☐
	7	1	64-QAM				135	150	☐
☑	32	1	BPSK	-	-	-	6.0	6.7	☐
	8	2	BPSK				27	30	☒
	9	2	QPSK				54	60	☐
	10	2	QPSK				81	90	☐
	11	2	16-QAM				108	120	☐
	12	2	16-QAM				162	180	☐
	13	2	64-QAM				216	240	☐
	14	2	64-QAM				243	270	☐
	15	2	64-QAM				270	300	☐
	33	2	16-QAM	QPSK	-	-	81	90.0	☐
	34	2	64-QAM	QPSK	-	-	108	120	☐
	35	2	64-QAM	16-QAM	-	-	135	150	☐
	36	2	16-QAM	QPSK	-	-	121.5	135	☐
	37	2	64-QAM	QPSK	-	-	162	180	☐
	38	2	64-QAM	16-QAM	-	-	202.5	225	☐
☐	16	3	BPSK				40.5	45	☐
	17	3	QPSK				81	90	☐
	18	3	QPSK				121.5	135	☐
	19	3	16-QAM				162	180	☐
	20	3	16-QAM				243	270	☐
	21	3	64-QAM				324	360	☐
	22	3	64-QAM				364.5	405	☐
	23	3	64-QAM				405	450	☐
	39	3	16-QAM	QPSK	QPSK	-	108	120	☐
	40	3	16-QAM	16-QAM	QPSK	-	135	150	☐
	41	3	64-QAM	QPSK	QPSK	-	135	150	☐
	42	3	64-QAM	16-QAM	QPSK	-	162	180	☐
	43	3	64-QAM	16-QAM	16-QAM	-	189	210	☐
	44	3	64-QAM	64-QAM	QPSK	-	189	210	☐
	45	3	64-QAM	64-QAM	16-QAM	-	216	240	☐
	46	3	16-QAM	QPSK	QPSK	-	162	180	☐
	47	3	16-QAM	16-QAM	QPSK	-	202.5	225	☐
	48	3	64-QAM	QPSK	QPSK	-	202.5	225	☐
	49	3	64-QAM	16-QAM	QPSK	-	243	270	☐
	☐	50	3	64-QAM	16-QAM	16-QAM	-	283.5	315
51		3	64-QAM	64-QAM	QPSK	-	283.5	315	☐
52		3	64-QAM	64-QAM	16-QAM	-	324	360	☐
24		4	BPSK				54	60	☐
25		4	QPSK				108	120	☐
26		4	QPSK				162	180	☐
27		4	16-QAM				216	240	☐
28		4	16-QAM				324	360	☐
29		4	64-QAM				432	480	☐
30		4	64-QAM				486	540	☐
31		4	64-QAM				540	600	☐
☐		53	4	16-QAM	QPSK	QPSK	QPSK	135	150
	54	4	16-QAM	16-QAM	QPSK	QPSK	162	180	☐
	55	4	16-QAM	16-QAM	16-QAM	QPSK	189	210	☐
	56	4	64-QAM	QPSK	QPSK	QPSK	162	180	☐
	57	4	64-QAM	16-QAM	QPSK	QPSK	189	210	☐
	58	4	64-QAM	16-QAM	16-QAM	QPSK	216	240	☐
	59	4	64-QAM	16-QAM	16-QAM	16-QAM	243	270	☐
	60	4	64-QAM	QPSK	QPSK	QPSK	216	240	☐
	61	4	64-QAM	16-QAM	16-QAM	QPSK	243	270	☐
	62	4	64-QAM	16-QAM	16-QAM	16-QAM	270	300	☐
	63	4	64-QAM	64-QAM	64-QAM	QPSK	270	300	☐
	64	4	64-QAM	64-QAM	64-QAM	16-QAM	297	330	☐
	65	4	16-QAM	QPSK	QPSK	QPSK	202.5	225	☐
	66	4	16-QAM	16-QAM	QPSK	QPSK	243	270	☐
	67	4	16-QAM	16-QAM	16-QAM	QPSK	283.5	315	☐
	68	4	64-QAM	QPSK	QPSK	QPSK	243	270	☐
	69	4	64-QAM	16-QAM	QPSK	QPSK	283.5	315	☐
	70	4	64-QAM	16-QAM	16-QAM	QPSK	324	360	☐
	71	4	64-QAM	16-QAM	16-QAM	16-QAM	364.5	405	☐
	72	4	64-QAM	64-QAM	QPSK	QPSK	324	360	☐
	73	4	64-QAM	64-QAM	16-QAM	QPSK	364.5	405	☐
	74	4	64-QAM	64-QAM	16-QAM	16-QAM	405	450	☐
	75	4	64-QAM	64-QAM	64-QAM	QPSK	405	450	☐
	76	4	64-QAM	64-QAM	64-QAM	16-QAM	445.5	495	☐

2.2. RUNNING MODE

Test mode	Description of test mode
Test mode 1	Permanent emission with modulation on a fixed channel in the data rate that produced the highest power
Test mode 2	Permanent reception

Test	Running mode
Occupied Bandwidth	☒ Test mode 1 (1) ☐ Alternative test mode()
6dB Bandwidth	☒ Test mode 1 (1) ☐ Alternative test mode()
Duty Cycle	☒ Test mode 1 (1) ☐ Alternative test mode()
Maximum Conducted Output Power	☒ Test mode 1 (1) ☐ Alternative test mode()
Power Spectral Density	☒ Test mode 1 (1) ☐ Alternative test mode()
Conducted Spurious Emission at the Band Edge	☒ Test mode 1 (1) ☐ Alternative test mode()
Unwanted Emissions into Non-Restricted Frequency Bands	☒ Test mode 1 (1) ☐ Alternative test mode()
AC Power Line Conducted Emission	☒ Test mode 1 (1) ☐ Alternative test mode()
Unwanted Emissions into Restricted Frequency Bands	☒ Test mode 1 (1) ☐ Alternative test mode()
Receiver Radiated emissions	☒ Test mode 2 (1) ☐ Alternative test mode()

- (1) Following commands with the specific test software "MTool_3.1.0.2" are used to set the product:
- See document "AVS31005949_WIFI test commands of M393 COGECO.docx"(provided by customer) for the command used during test.

2.3. EQUIPMENT LABELLING



2.4. EQUIPMENT MODIFICATION

☒ None ☐ Modification:



2.5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow:

$$FS = RA + AF + CF - AG$$

Where
FS = Field Strength
RA = Receiver Amplitude
AF = Antenna Factor
CF = Cable Factor
AG = Amplifier Gain

Assume a receiver reading of 52.5dB μ V is obtained. The antenna factor of 7.4 and a cable factor of 1.1 are added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dB μ V/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}.$$

2.6. CALIBRATION DATE

The calibration intervals are extended at 12+2 months. This extended interval is based on the fact that there is sufficient calibration data to statistically establish a trend or based on experience of use of the test equipment to assure good measurement results for a longer period.

3. OCCUPIED BANDWIDTH

3.1. TEST CONDITIONS

Test performed by : Armand MAHOUNGOU
Date of test : June 23, 2021
Ambient temperature : 26°C
Relative humidity : 44%

3.2. TEST SETUP

- The Equipment Under Test is installed:


- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☐ RSS-Gen Issue 5 § 6.7
- ☒ ANSI C63.10 § 6.9.2

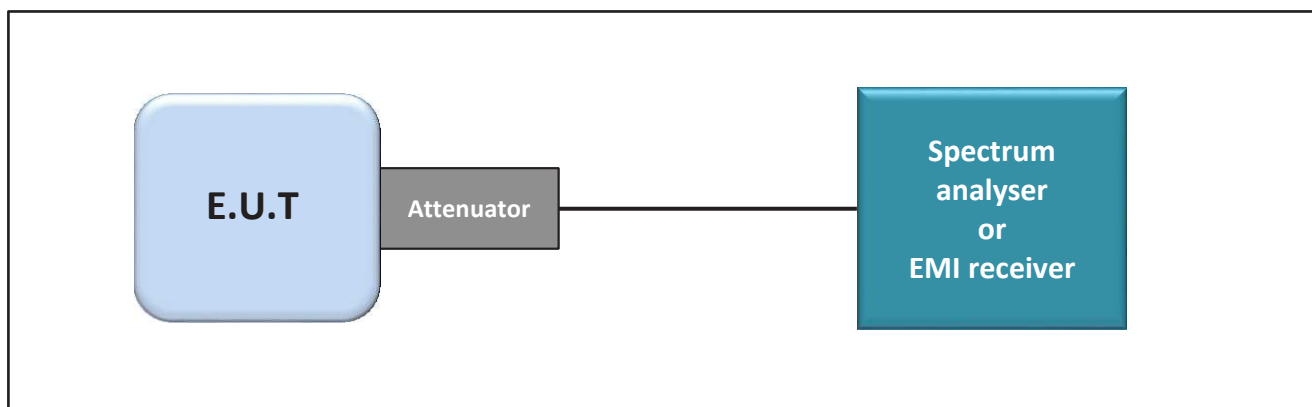

Test set up of Occupied Bandwidth

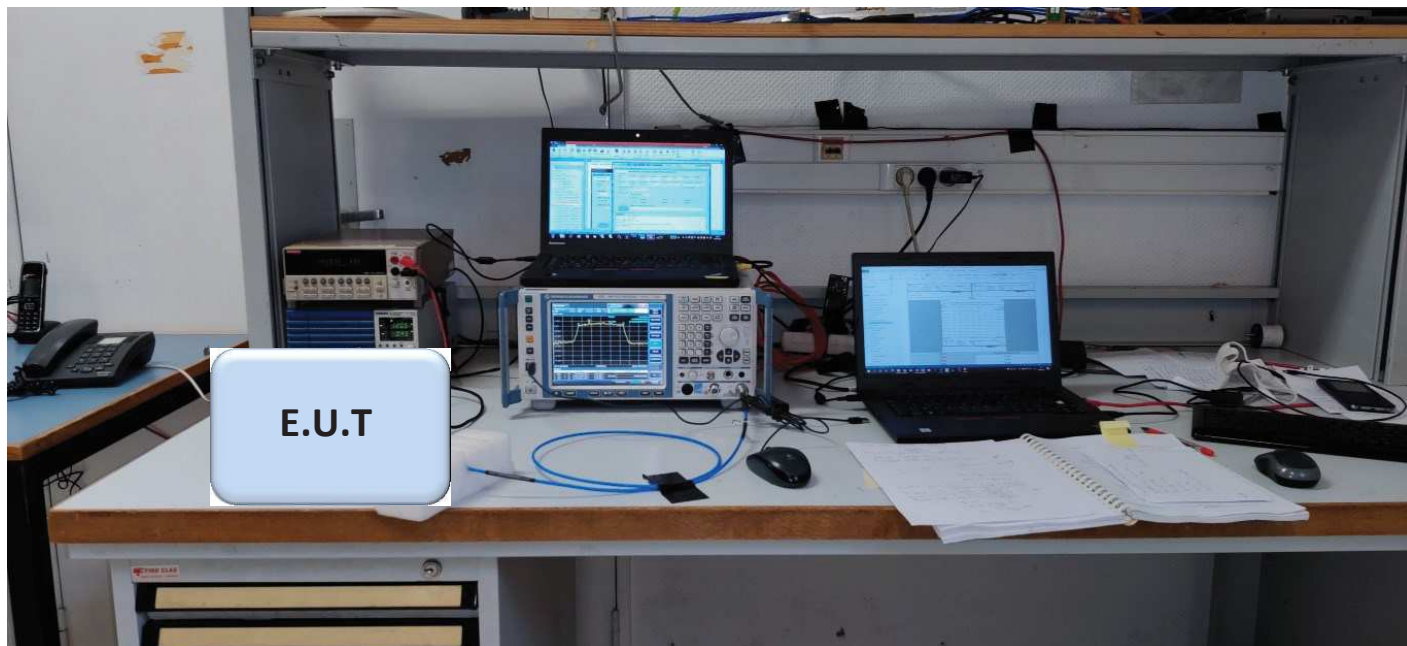

Photograph for Occupied bandwidth

3.3. LIMIT


None

3.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642026	2019/07	2021/07
Cable + Attenuateur 20dB	PASTERNAK	PE350-150CM	A5329970	2020/09	2021/09
Power supply	KIKUSUI	PCR500M	A7049006	See Multimeter	See Multimeter
Multimeter	KEITHLEY	2000	A1242090	2021/03	2023/03
R&S Commander Software	ROHDE & SCHWARZ	Version 1,6,4	-	-	-
Load 50 ohms	TELEGARTNER	-	A7150103	2021/04	2023/04
Load 50 ohms	TELEGARTNER	-	A7150104	2021/04	2023/04

Note: In our quality system, the test equipment calibration due is more & less 2 months

3.5. RESULTS

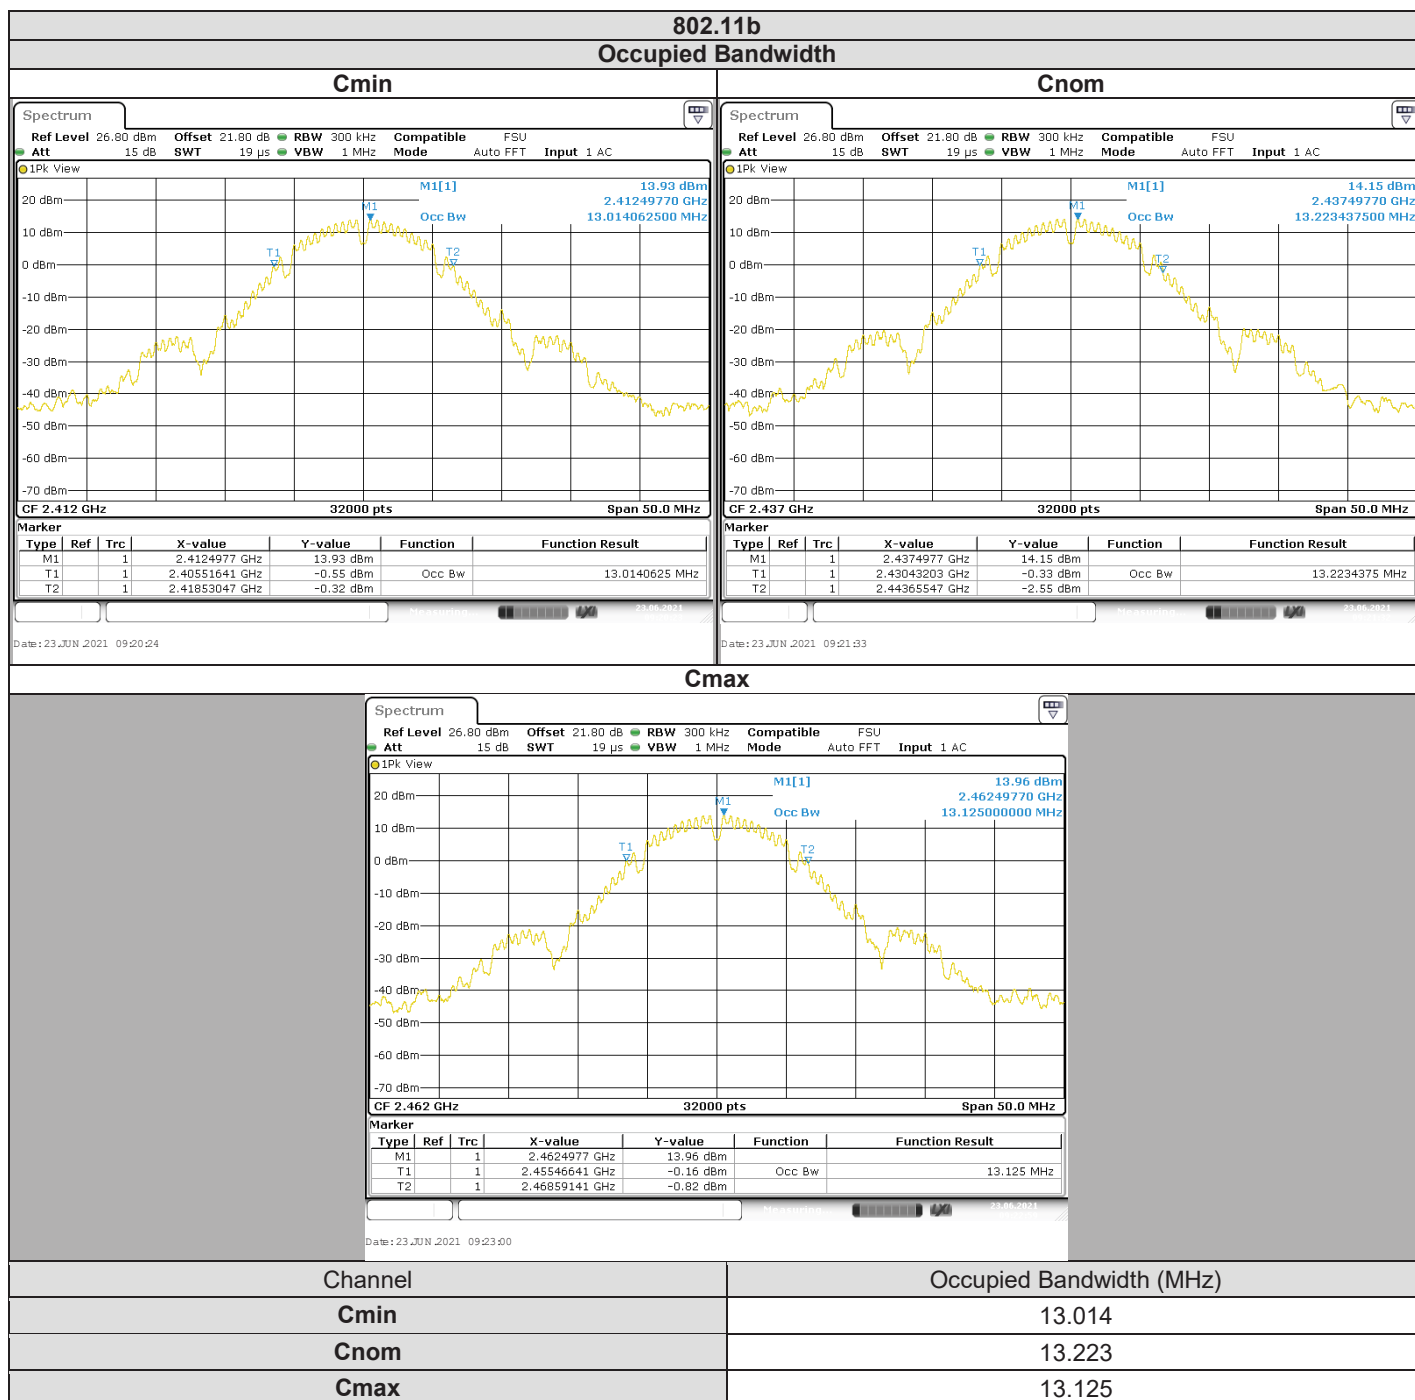







3.6. CONCLUSION

Occupied Channel Bandwidth measurement performed on the sample of the product **COGECO DIW3930 COGECO**, SN: **6211130035003**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS-GEN ISSUE 5** limits.

4. 6dB EMISSION BANDWIDTH

4.1. TEST CONDITIONS

Test performed by : Armand MAHOUGOU
Date of test : June 23, 2021
Ambient temperature : 26°C
Relative humidity : 44%

4.2. TEST SETUP

- The Equipment Under Test is installed:

- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ ANSI C63.10 § 11.8.1
- ☐ ANSI C63.10 § 11.8.2

Measurement Procedure:

1. Set resolution bandwidth (RBW) = 100kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer.

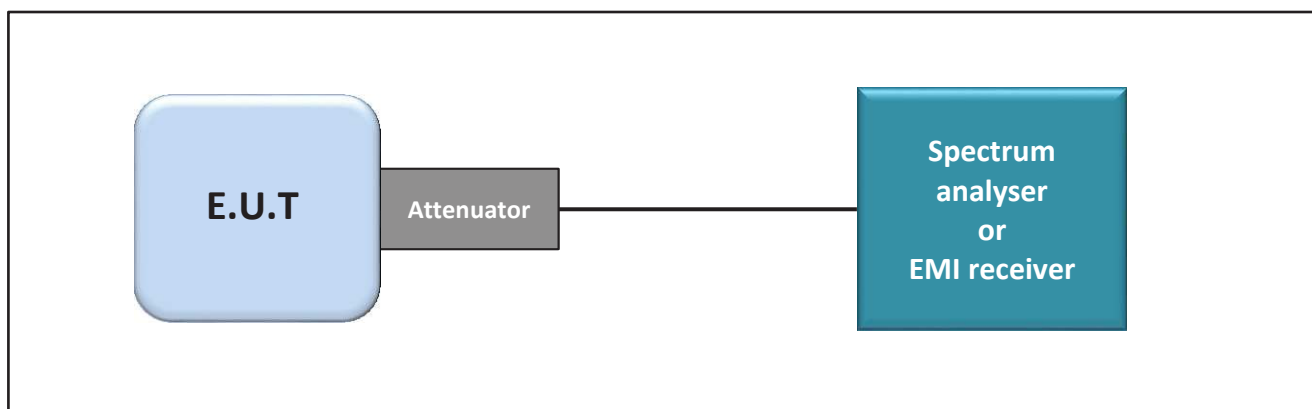

Test set up of 6dB Emission Bandwidth



Photograph for 6dB emission bandwidth

4.3. LIMIT


Frequency range	The 6dB bandwidth Limit
2400MHz to 2483.5MHz	≤500kHz


4.4. TEST EQUIPMENT LIST


DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642026	2019/07	2021/07
Cable + Attenuateur 20dB	PASTERNAK	PE350-150CM	A5329970	2020/09	2021/09
Power supply	KIKUSUI	PCR500M	A7049006	See Multimeter	See Multimeter
Multimeter	KEITHLEY	2000	A1242090	2021/03	2023/03
R&S Commander Software	ROHDE & SCHWARZ	Version 1,6,4	-	-	-
Load 50 ohms	TELEGARTNER	-	A7150103	2021/04	2023/04
Load 50 ohms	TELEGARTNER	-	A7150104	2021/04	2023/04


Note: In our quality system, the test equipment calibration due is more & less 2 months

4.5. RESULTS

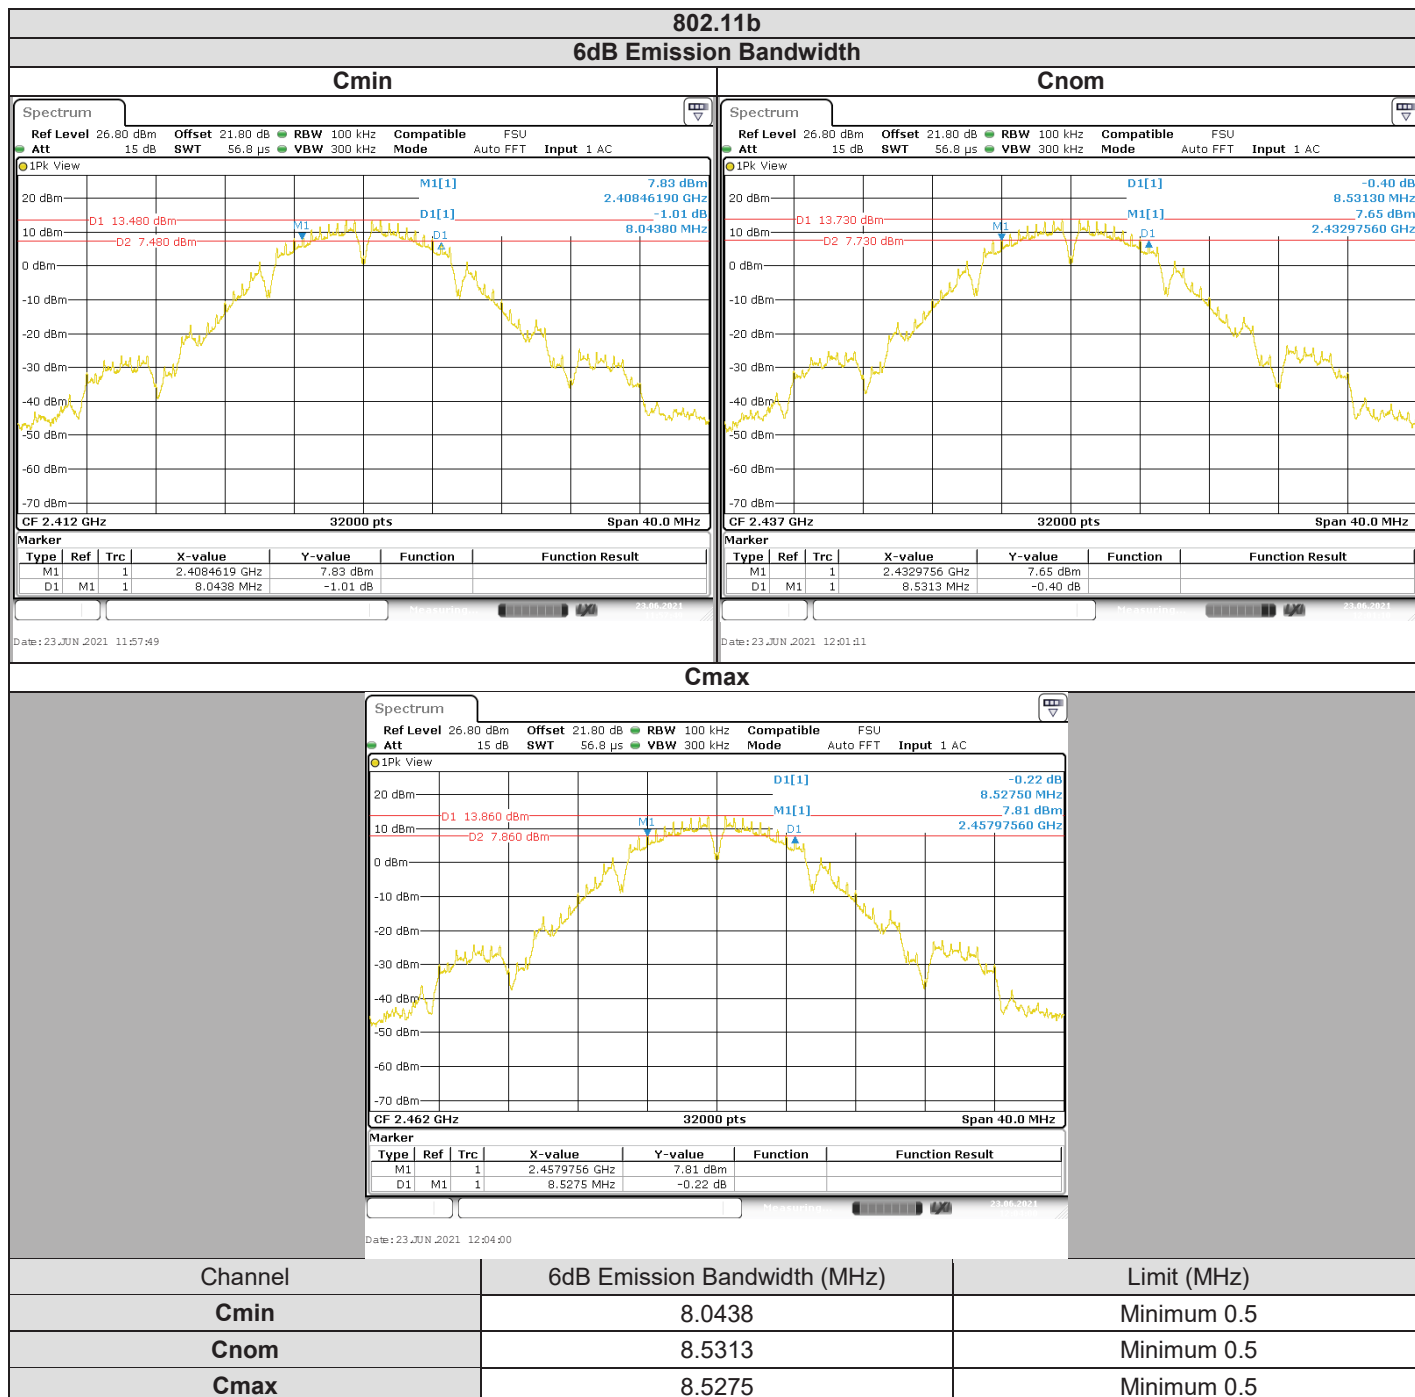

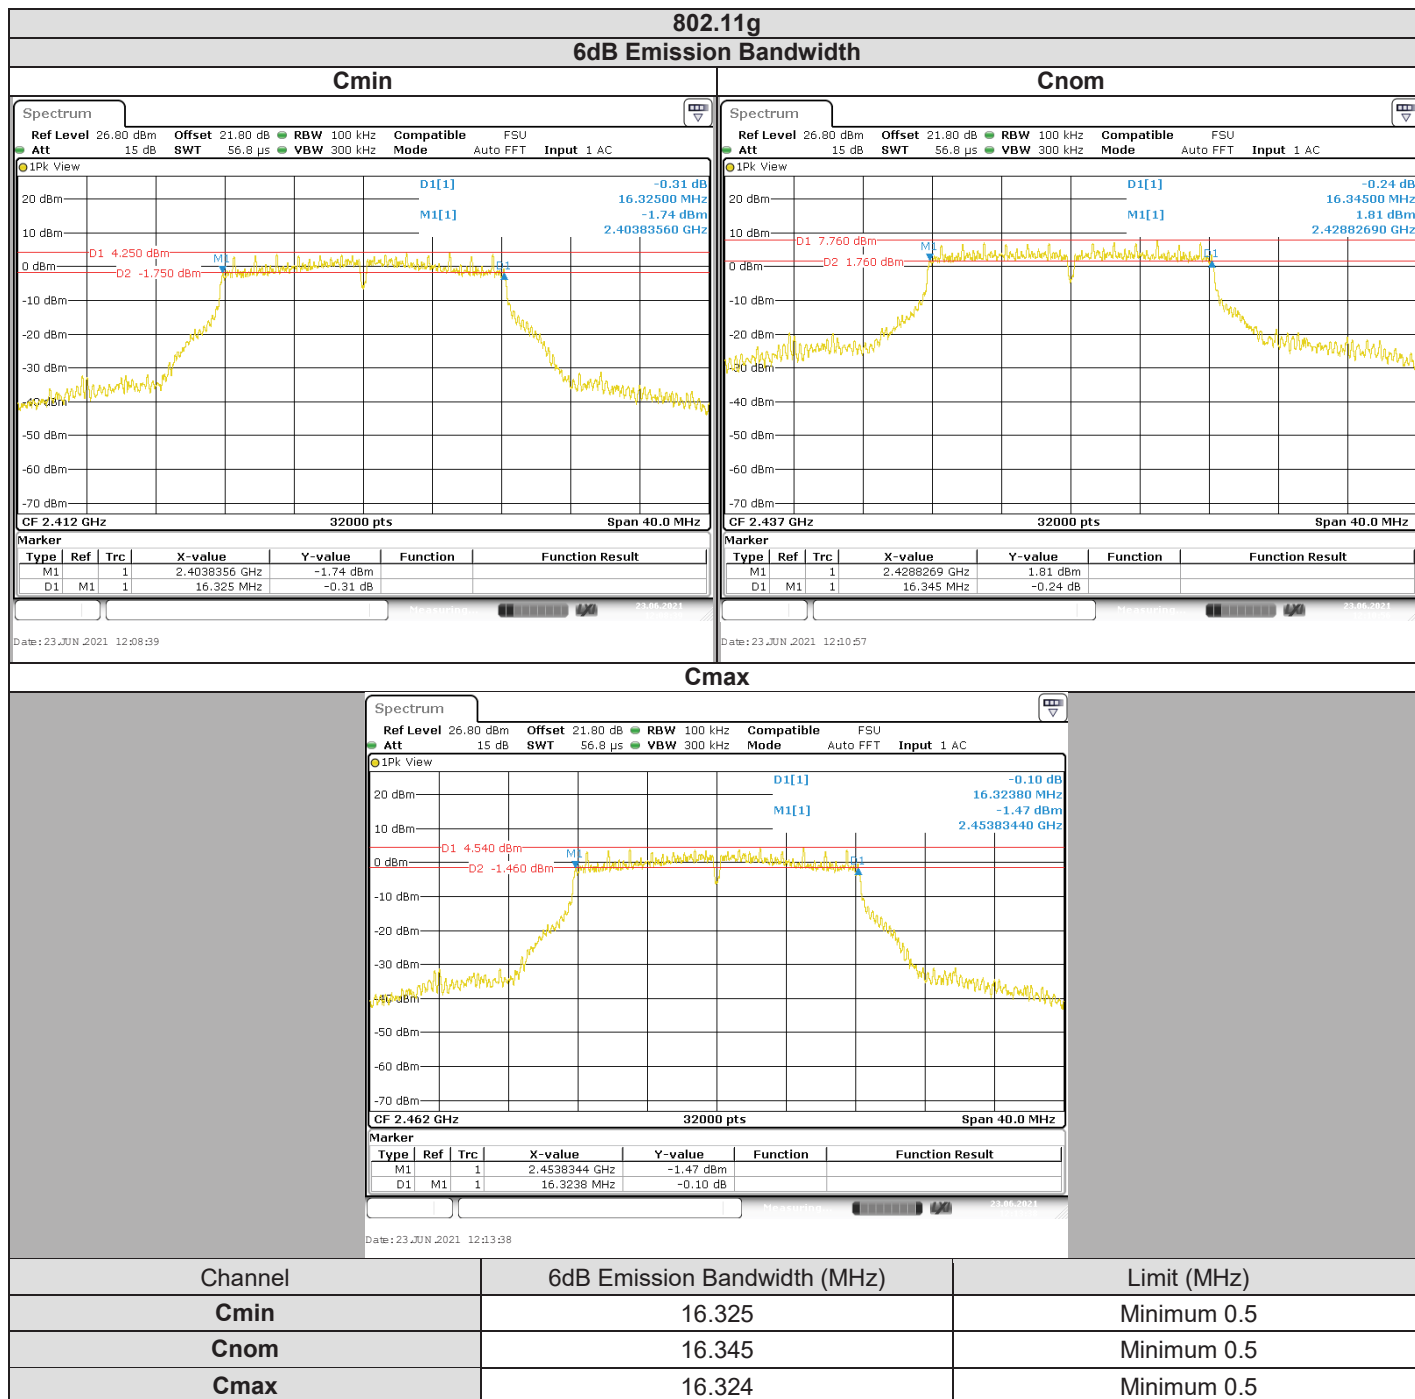

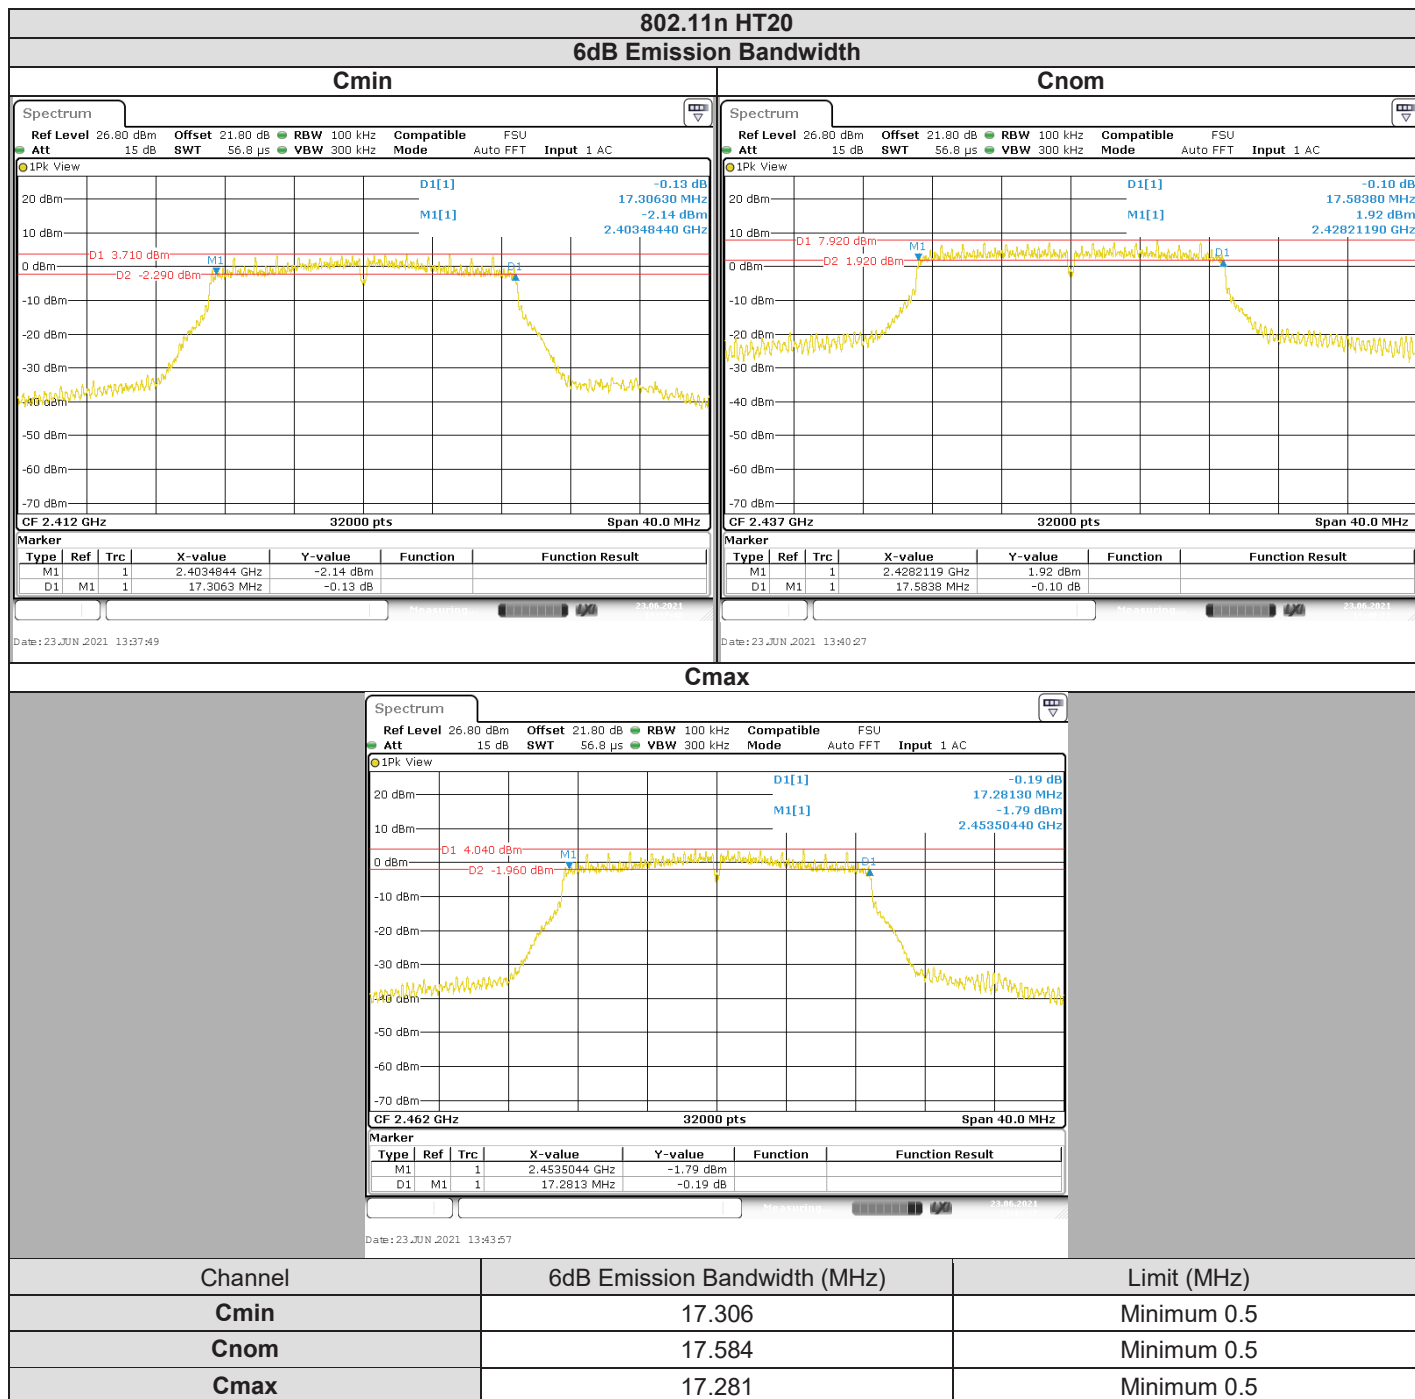

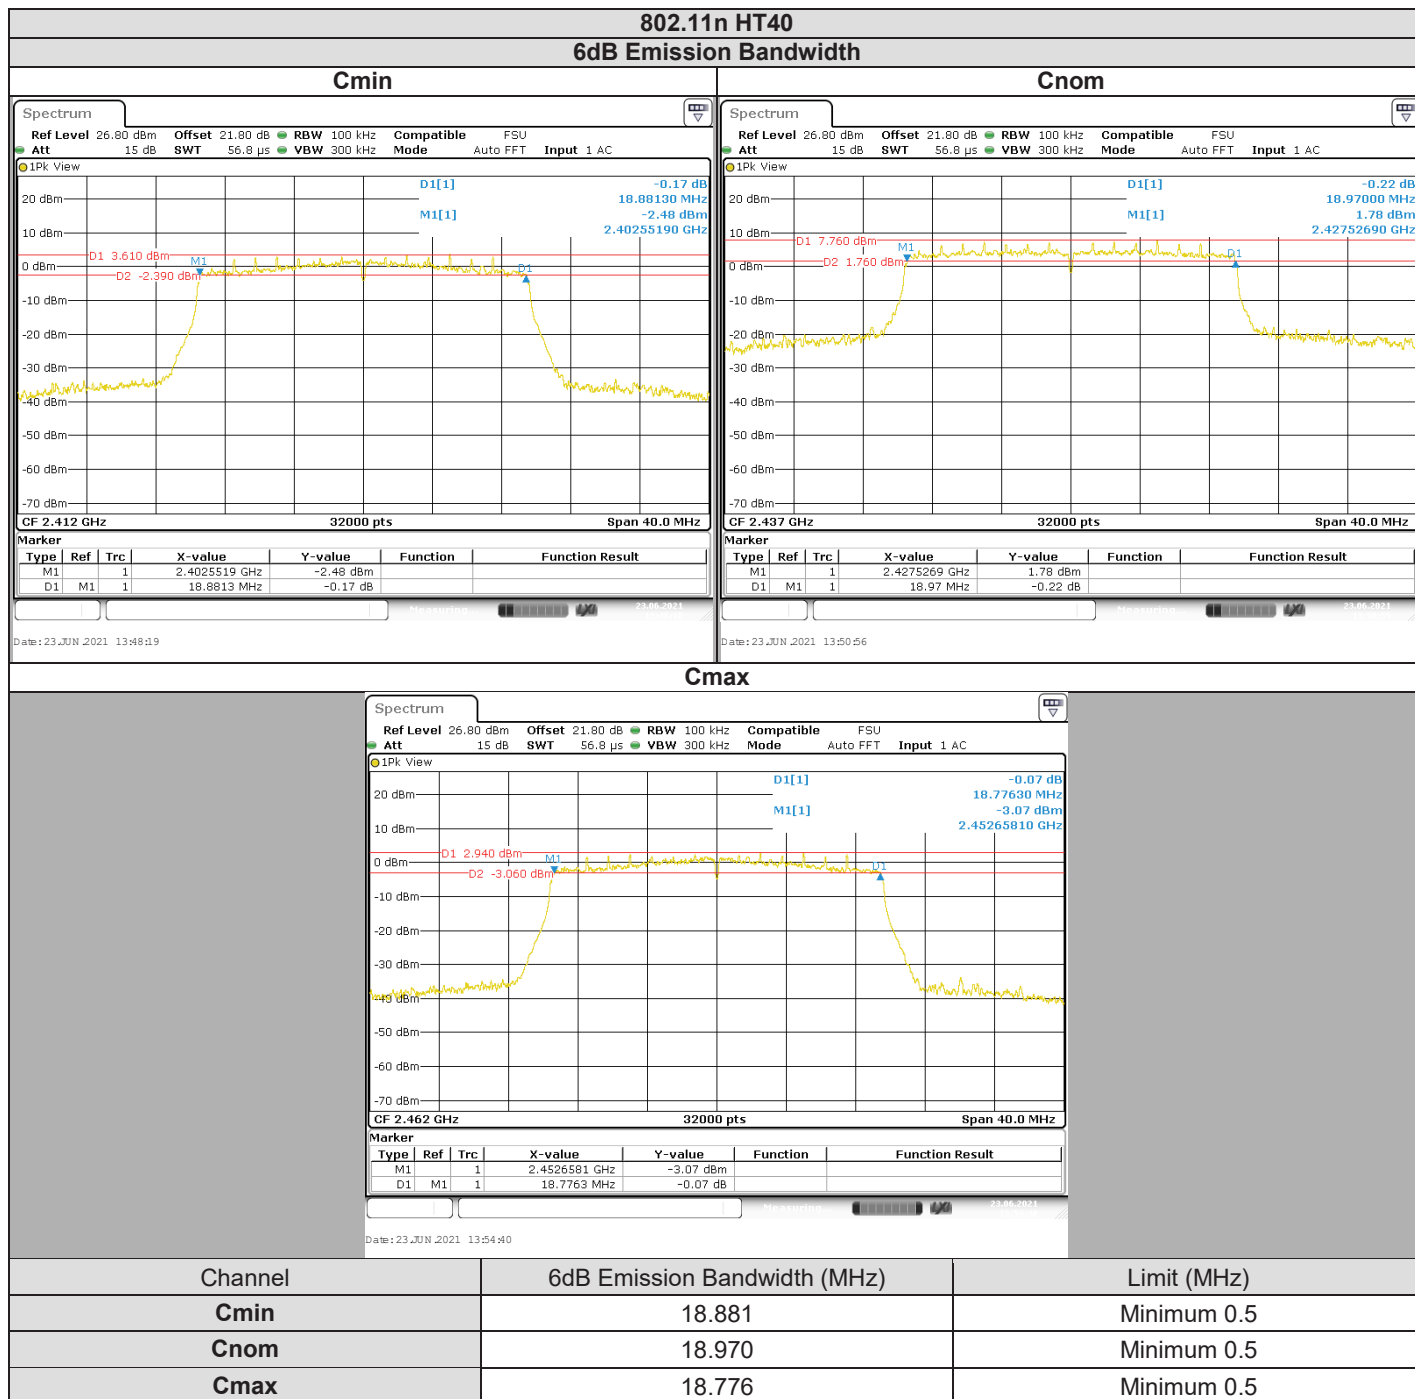

4.6. CONCLUSION

6dB Emission Bandwidth measurement performed on the sample of the product **COGECO DIW3930 COGECO**, SN: **6211130035003**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

5. DUTY CYCLE

5.1. TEST CONDITIONS

Test performed by : Armand MAHOUNGOU
Date of test : June 7, 2021
Ambient temperature : 27°C
Relative humidity : 47%

5.2. TEST SETUP

- The Equipment Under Test is installed:


- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ ANSI C63.10 § 11.6

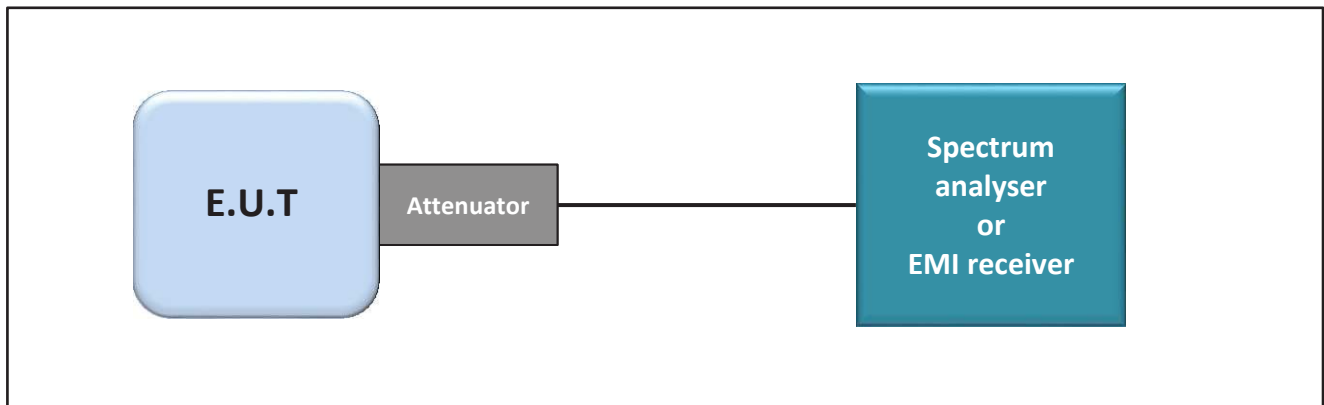

Test set up of Duty Cycle

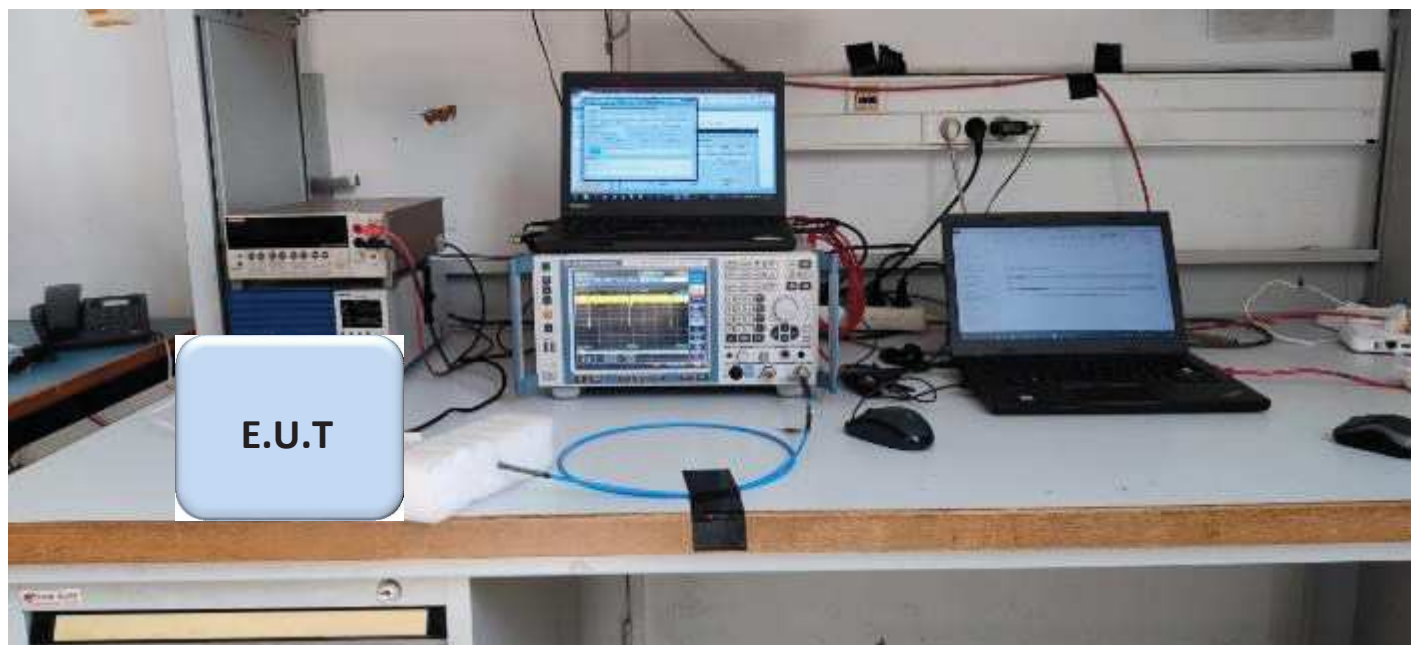

Photograph for Duty Cycle



Photograph for Duty Cycle



5.3. LIMIT


None

5.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642026	2019/07	2021/07
Cable + Attenuateur 20dB	PASTERNAK	PE350-150CM	A5329970	2020/09	2021/09
Power supply	KIKUSUI	PCR500M	A7049006	See Multimeter	See Multimeter
Multimeter	KEITHLEY	2000	A1242090	2021/03	2023/03
R&S Commander Software	ROHDE & SCHWARZ	Version 1,6,4	-	-	-
Load 50 ohms	TELEGARTNER	-	A7150103	2021/04	2023/04
Load 50 ohms	TELEGARTNER	-	A7150104	2021/04	2023/04

Note: In our quality system, the test equipment calibration due is more & less 2 months



5.5. RESULTS

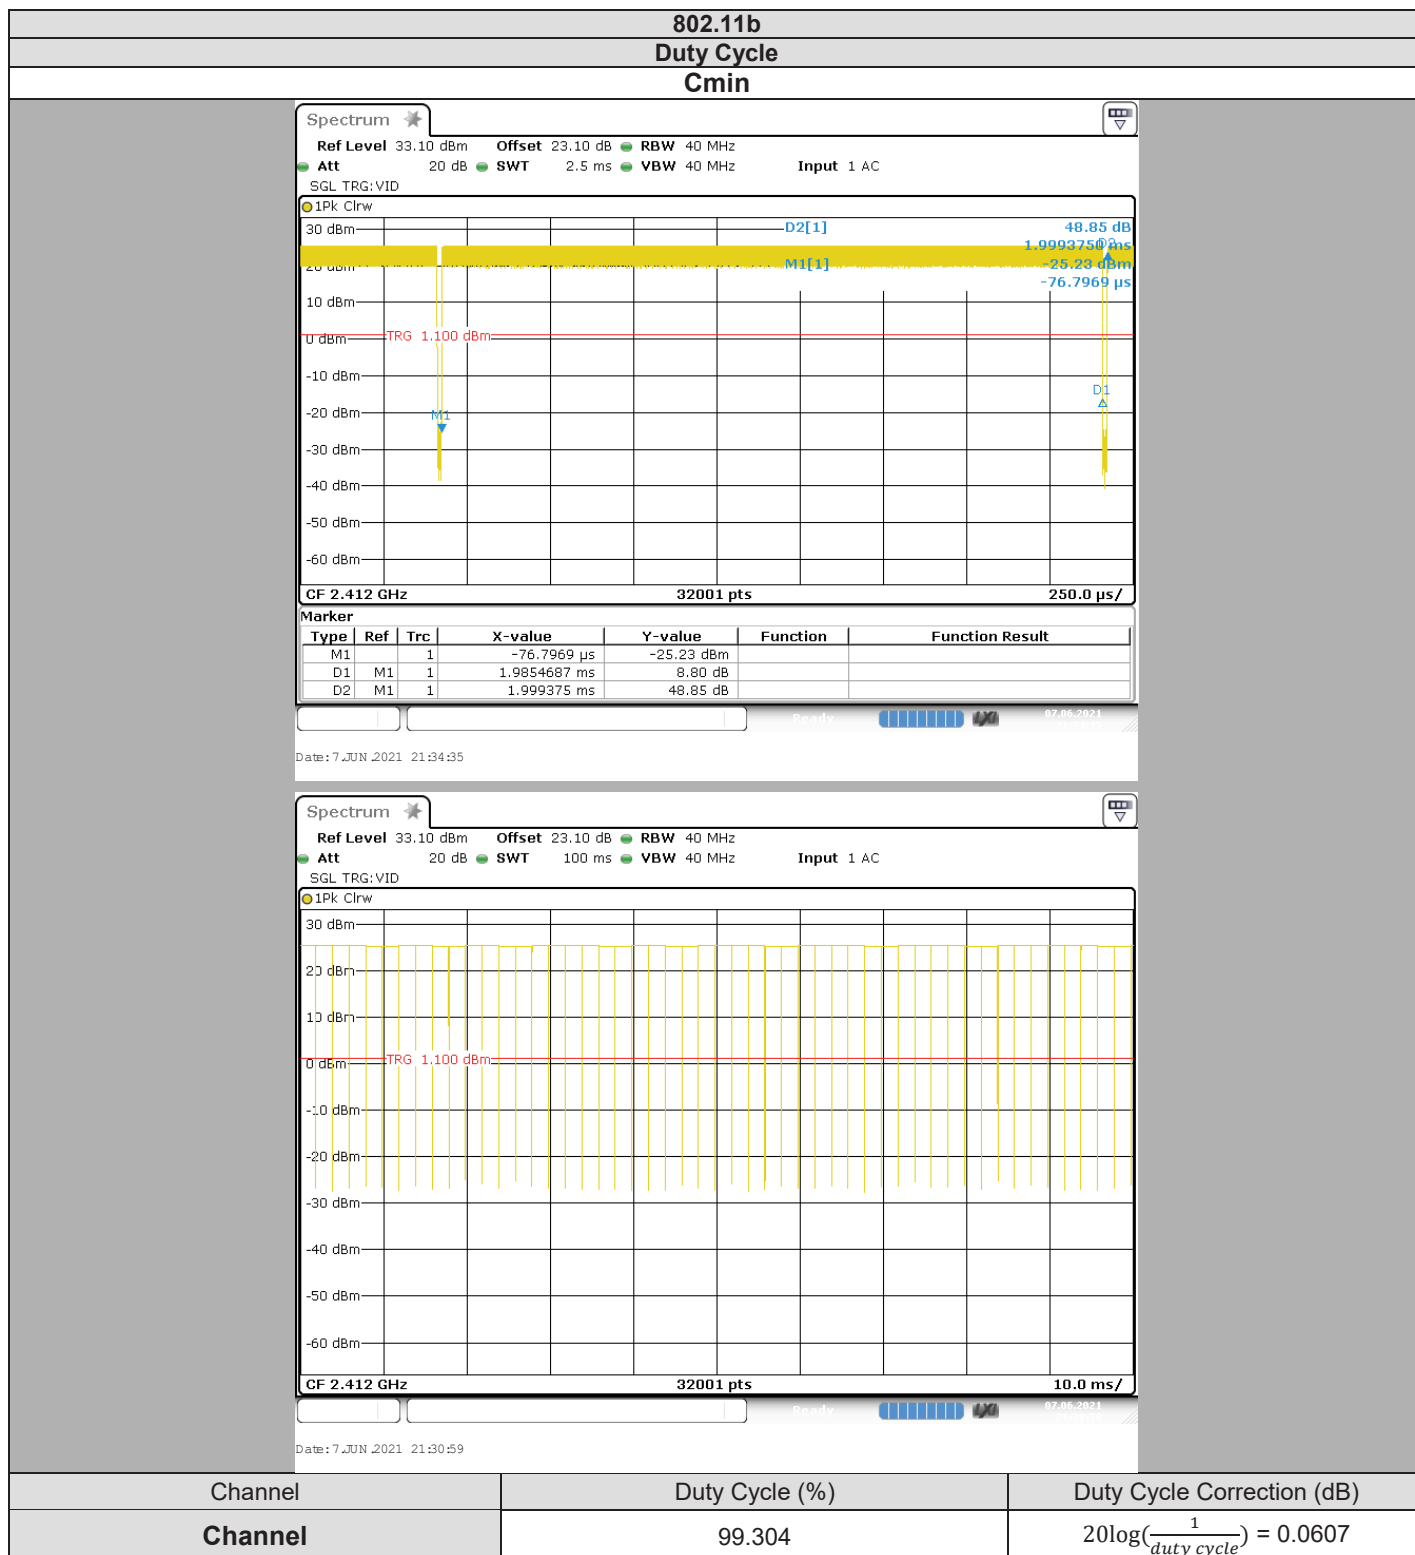



L C I E

802.11g
Duty Cycle
Cmin

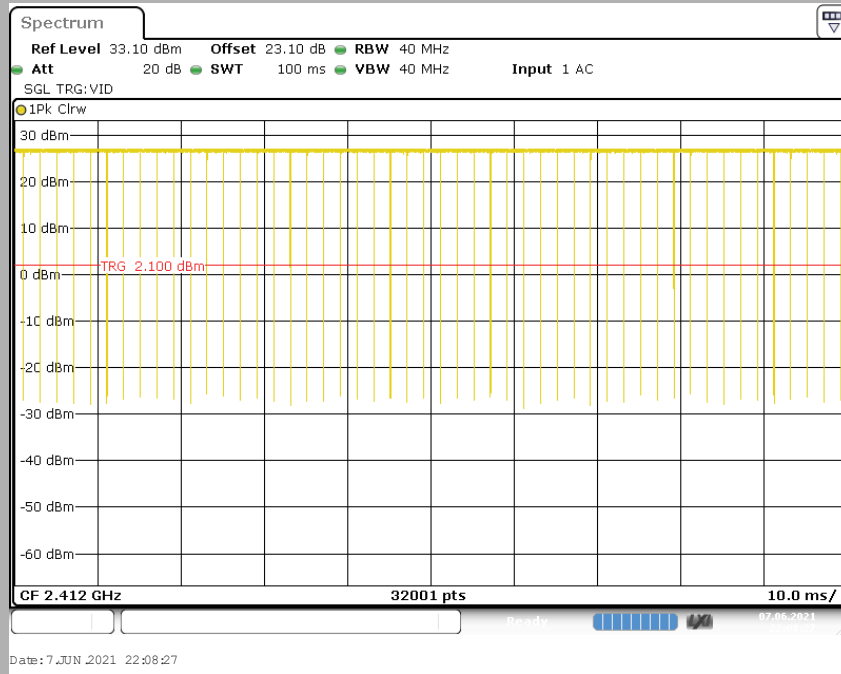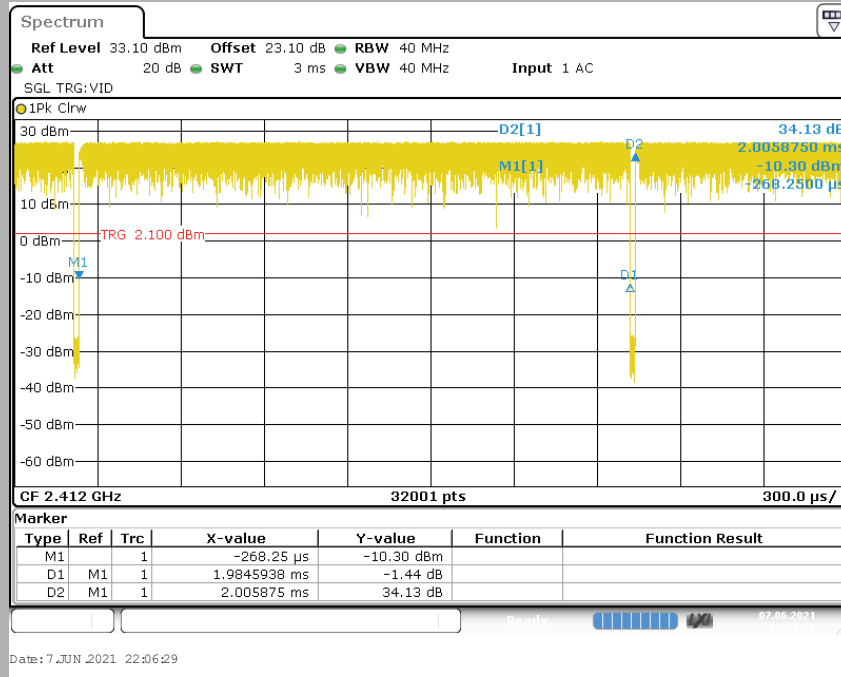

Channel

Duty Cycle (%)

Duty Cycle Correction (dB)

Channel

98.939

$20\log\left(\frac{1}{\text{duty cycle}}\right) = 0.0926$




L C I E


802.11n HT20

Duty Cycle

Channel

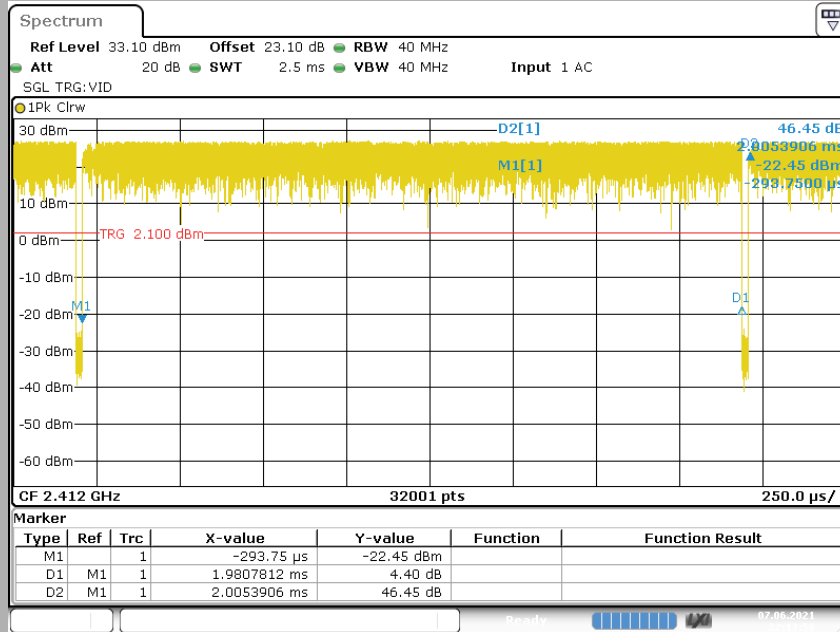

Date: 7 JUN 2021 22:13:59

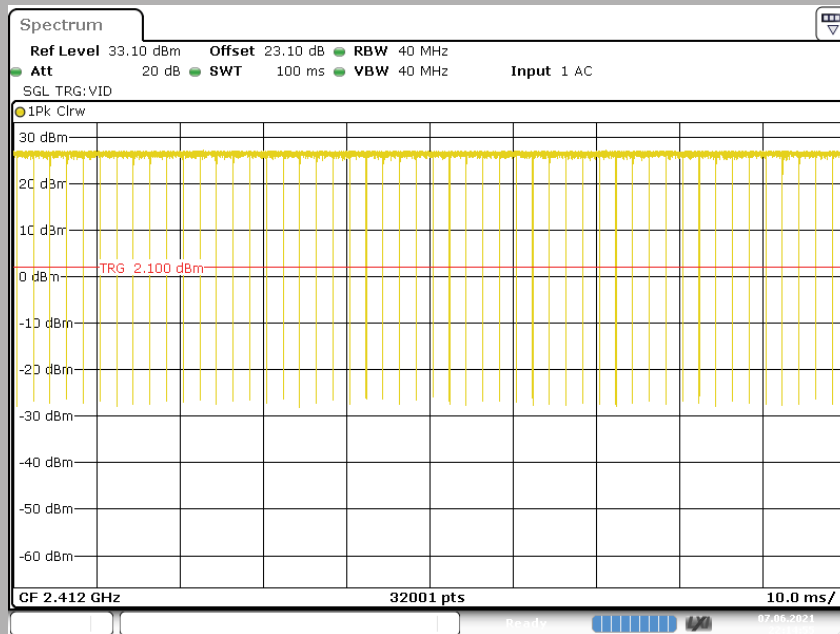

Date: 7 JUN 2021 22:14:55

Channel


Duty Cycle (%)

Duty Cycle Correction (dB)

Channel

98.773

$20\log\left(\frac{1}{\text{duty cycle}}\right) = 0.1072$

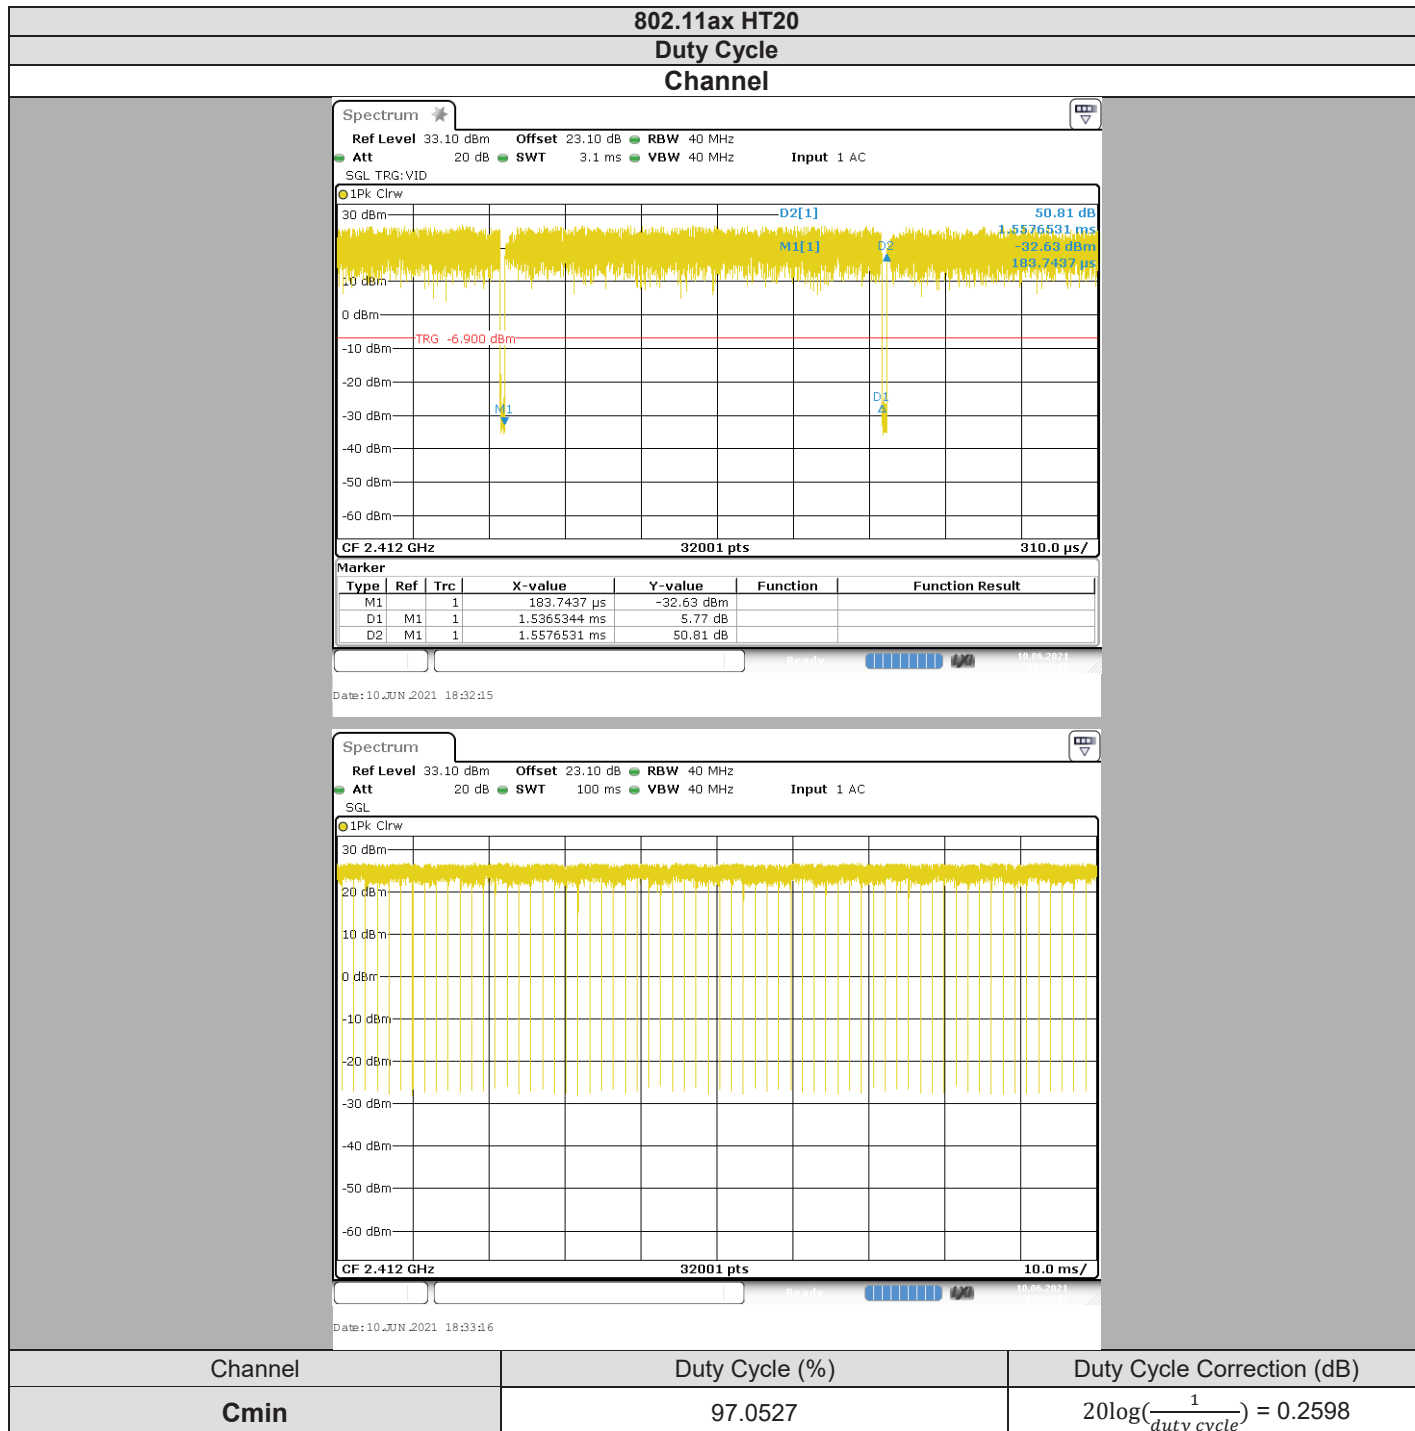

5.6. CONCLUSION

Duty Cycle measurement performed on the sample of the product **COGECO DIW3930 COGECO**, SN: **6211130035003**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1. TEST CONDITIONS

Test performed by : Armand MAHOUNGOU
Date of test : June 23, 2021
Ambient temperature : 25°C
Relative humidity : 44%

6.2. TEST SETUP

- The Equipment Under Test is installed:


- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☐ ANSI C63.10 § 11.9.1.1
- ☐ ANSI C63.10 § 11.9.1.2
- ☒ ANSI C63.10 § 11.9.2.2.2 (Method AVGSA-1)
- ☒ ANSI C63.10 § 11.9.2.2.4 (Method AVGSA-2)
- ☒ KDB 662911 D01 Multiple Transmitter Output v02r01

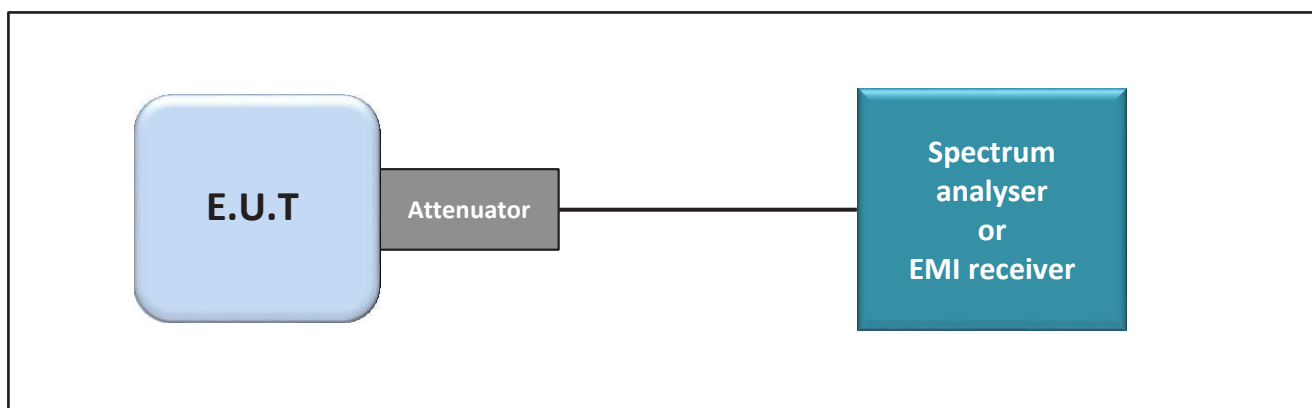

Test set up of Maximum Conducted Output Power

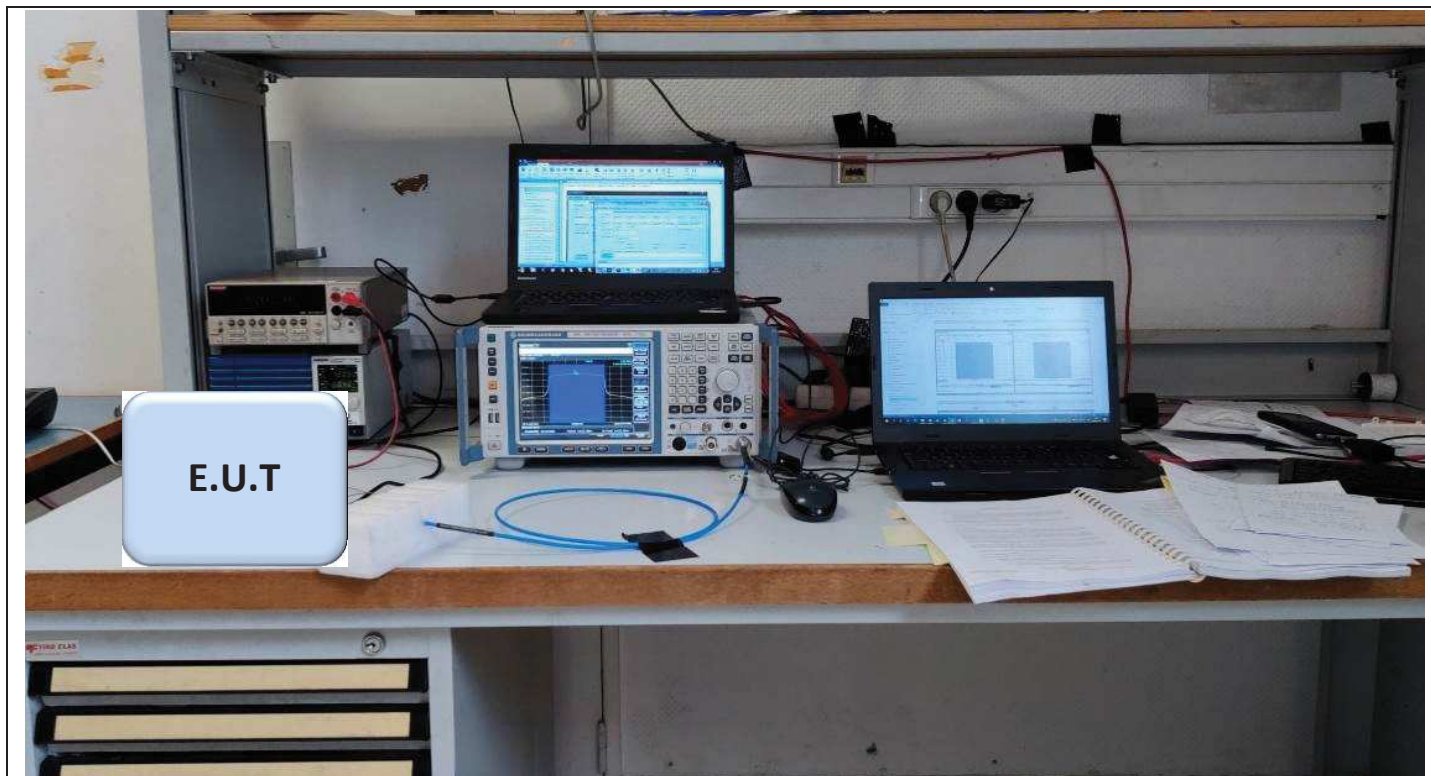

Photograph for Maximum Conducted Output Power

6.3. LIMIT

Frequency range	Maximum Conducted Output Power
2400MHz to 2483.5MHz	≤30dBm*



*Remark: Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi

6.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642026	2019/07	2021/07
Cable + Attenuateur 20dB	PASTERNAK	PE350-150CM	A5329970	2020/09	2021/09
Power supply	KIKUSUI	PCR500M	A7049006	See Multimeter	See Multimeter
Multimeter	KEITHLEY	2000	A1242090	2021/03	2023/03
R&S Commander Software	ROHDE & SCHWARZ	Version 1,6,4	-	-	-
Load 50 ohms	TELEGARTNER	-	A7150103	2021/04	2023/04
Load 50 ohms	TELEGARTNER	-	A7150104	2021/04	2023/04



Note: In our quality system, the test equipment calibration due is more & less 2 months



6.5. RESULTS

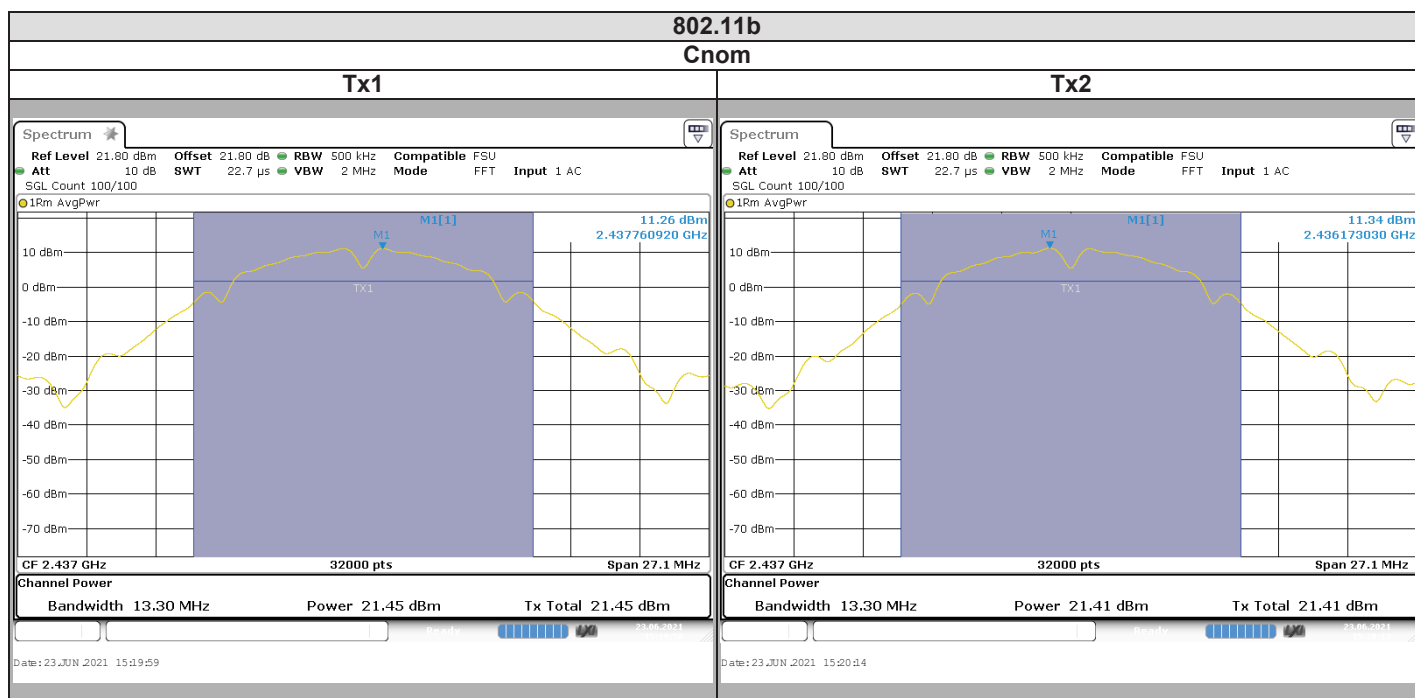
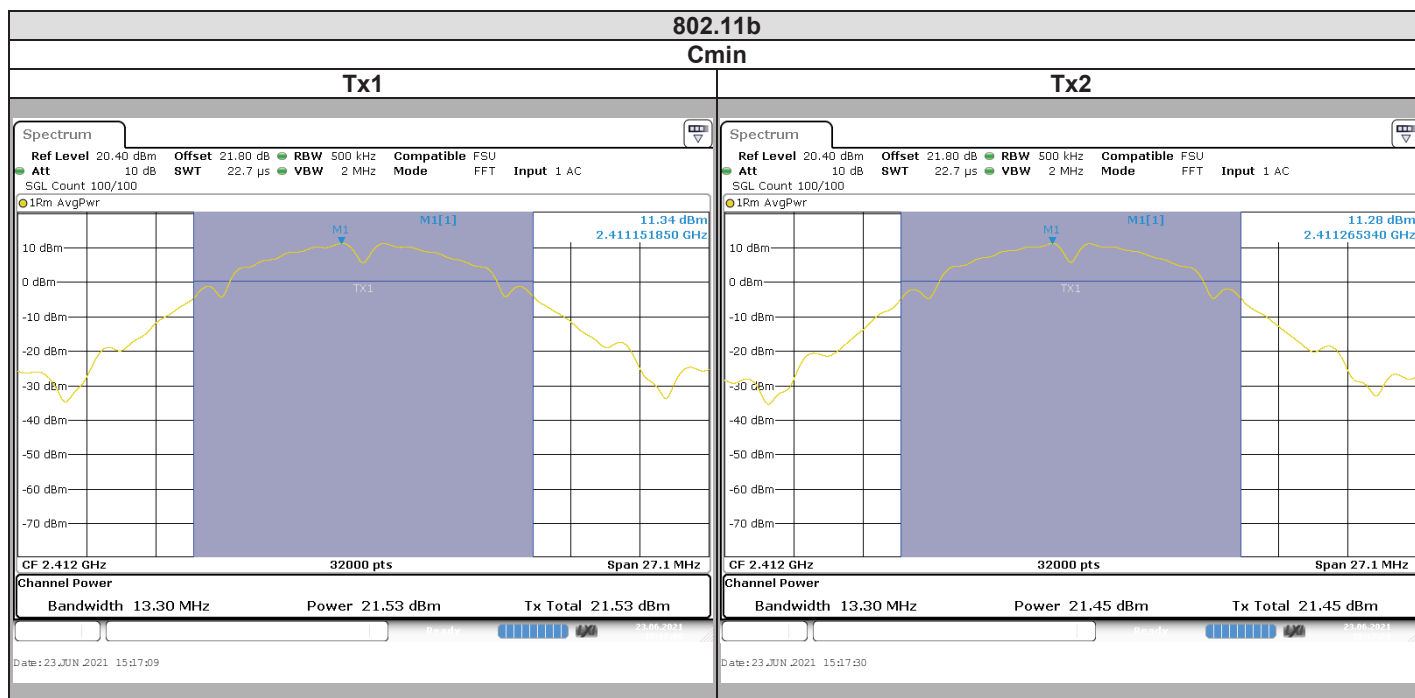








L C I E

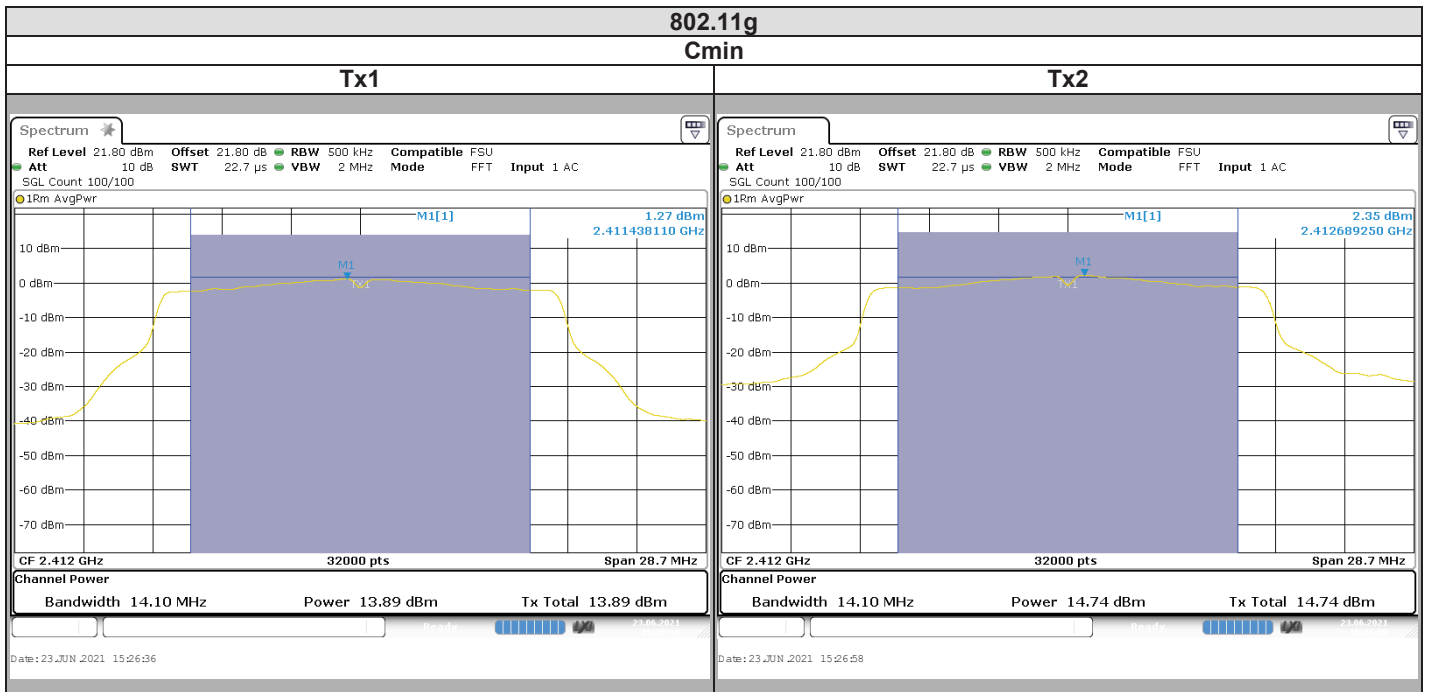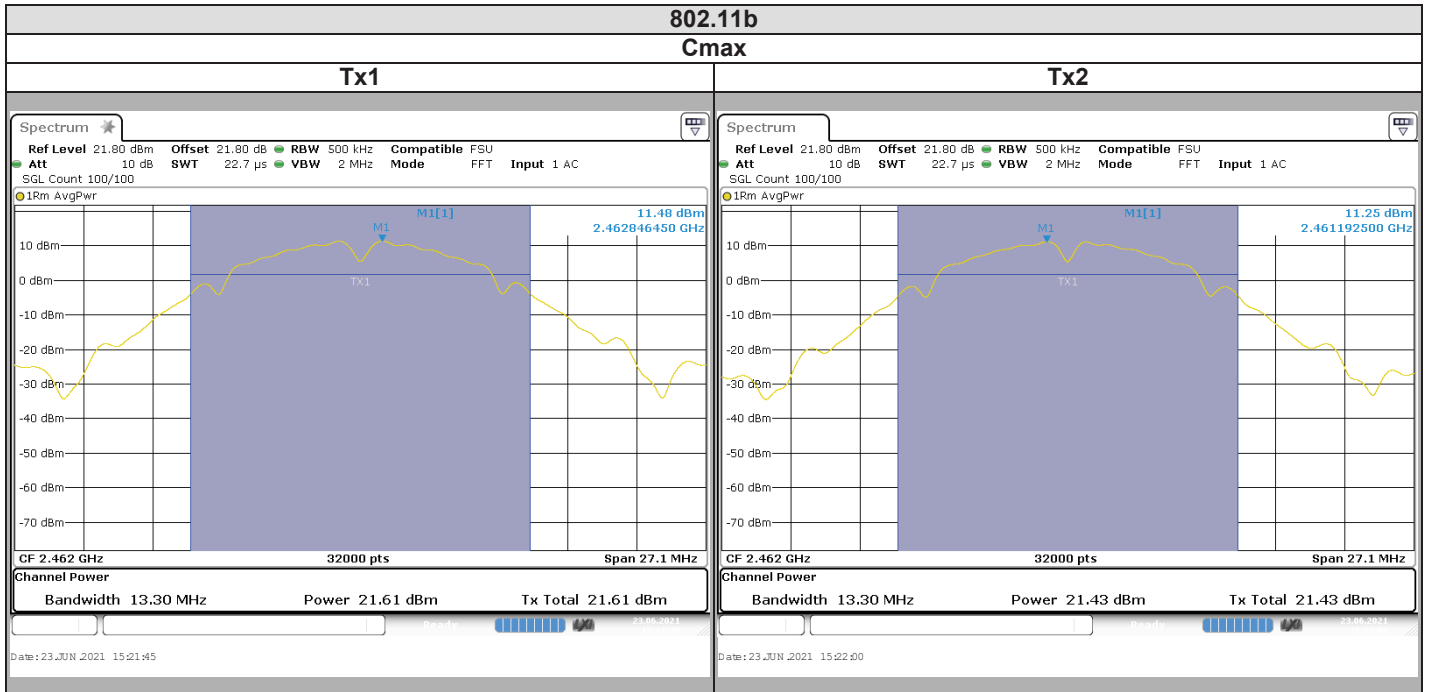

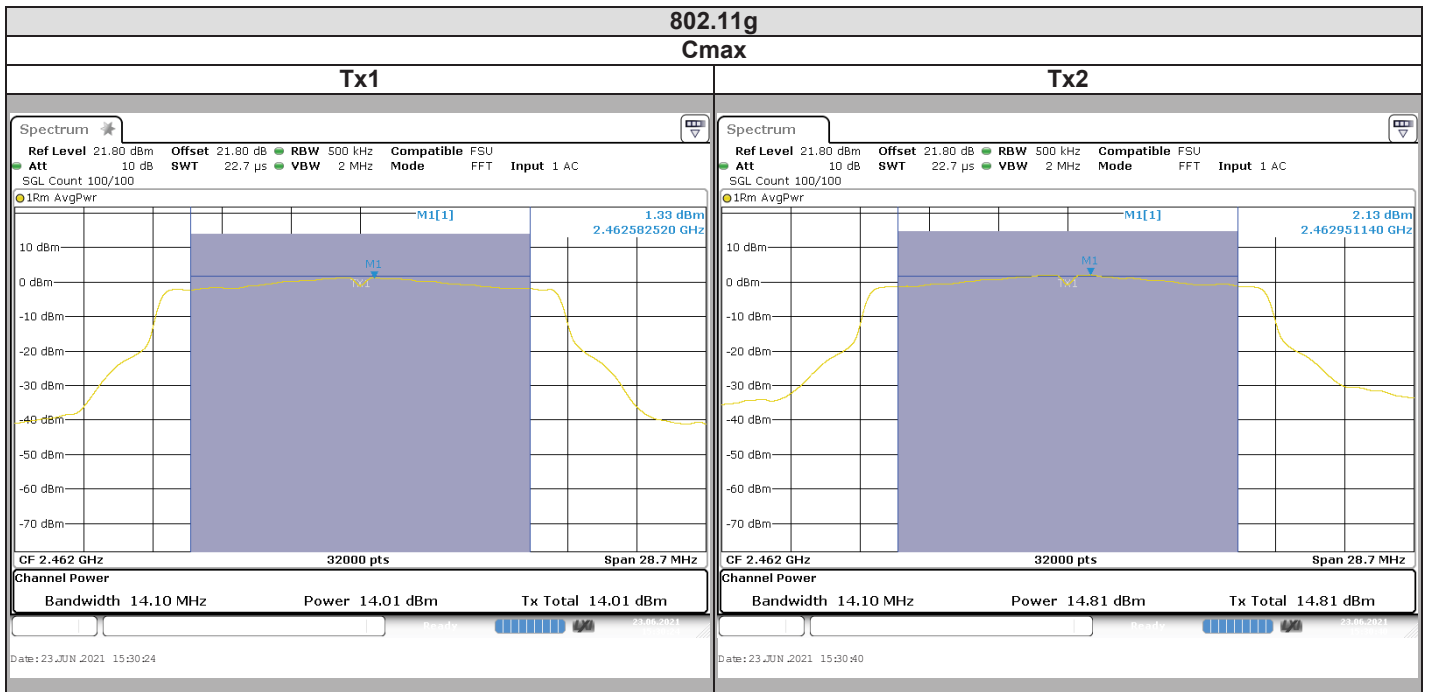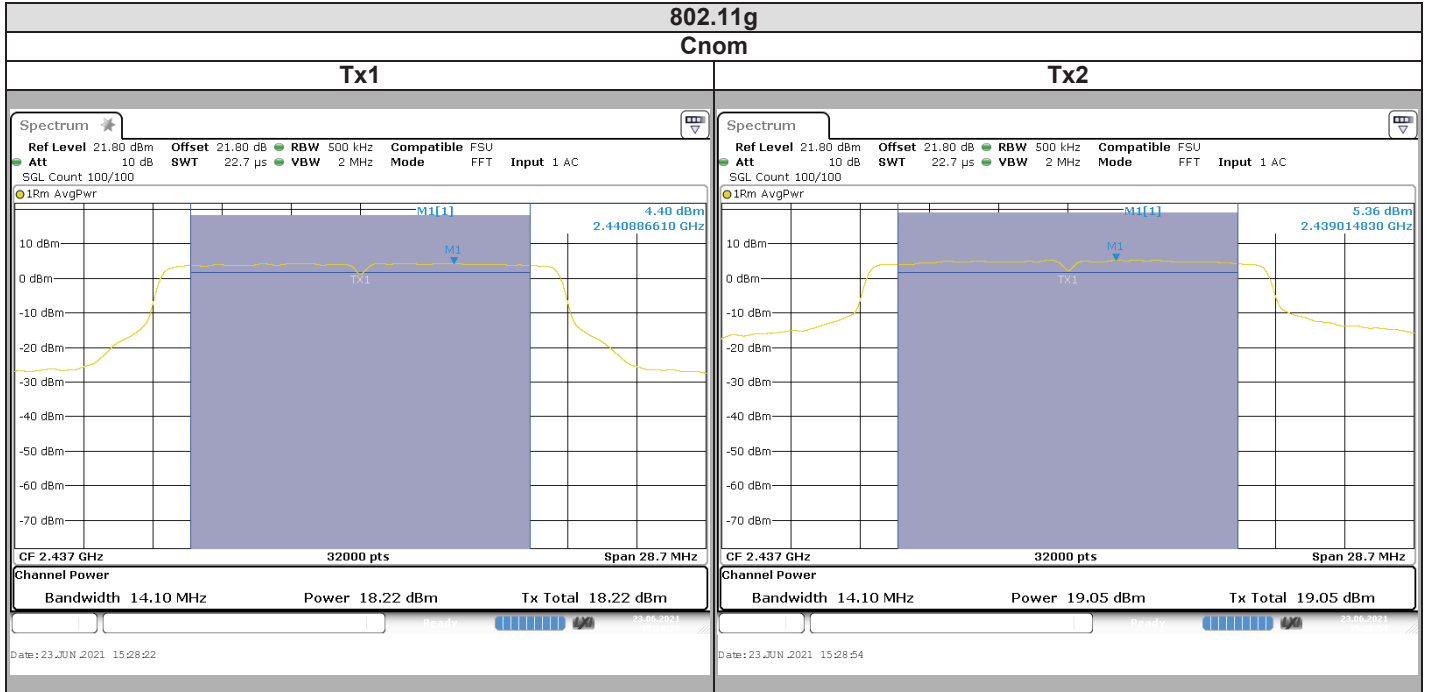

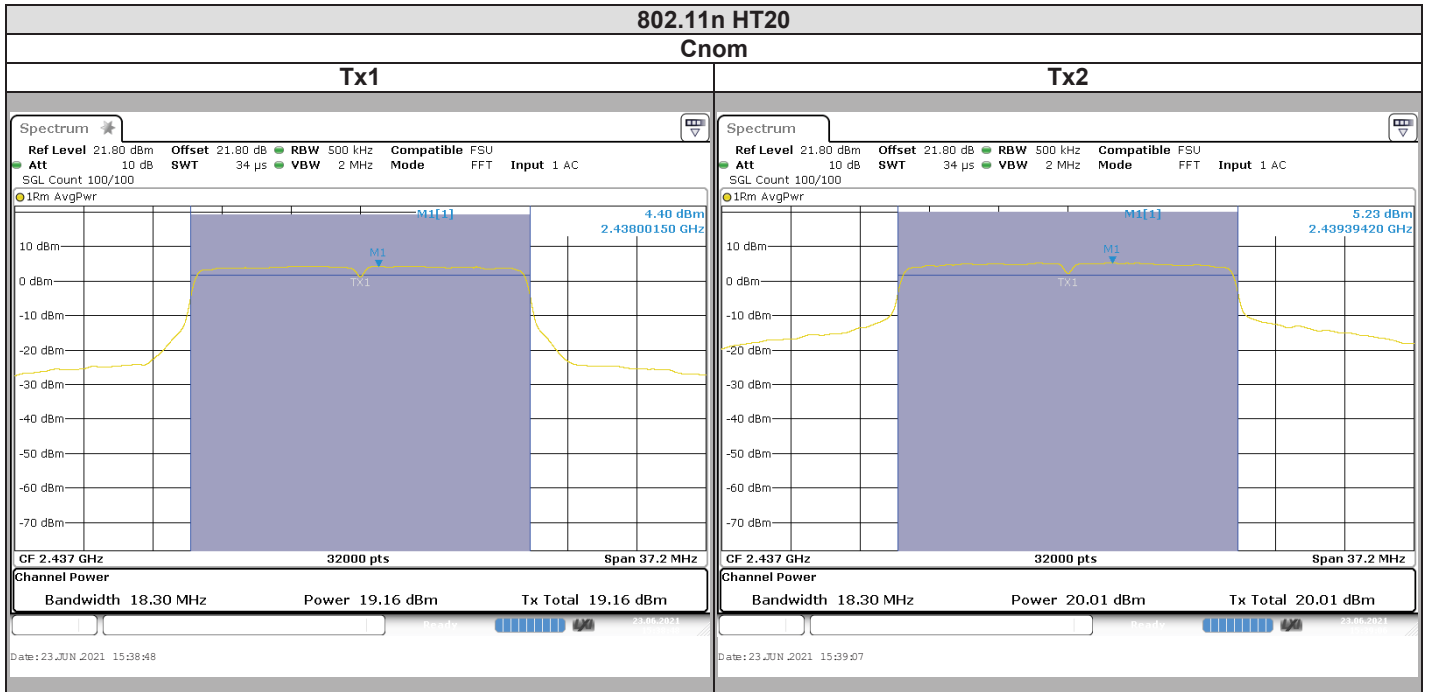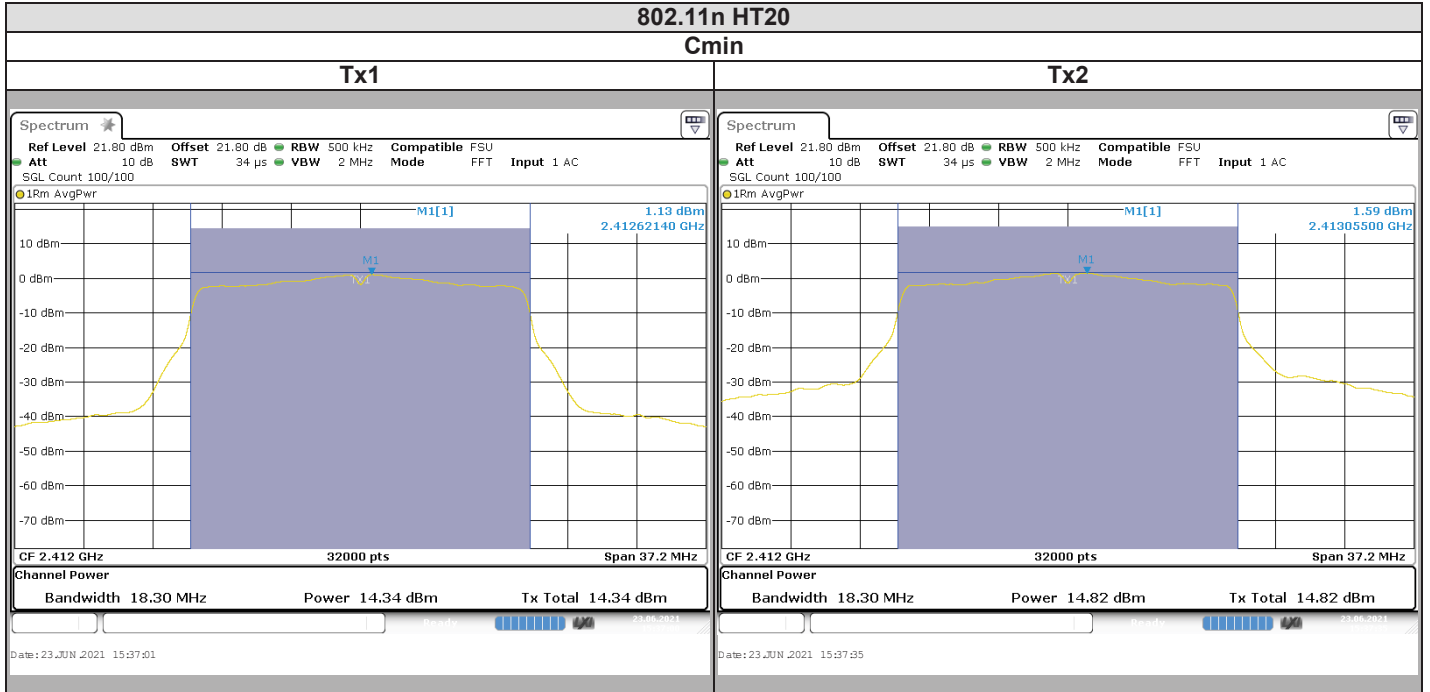

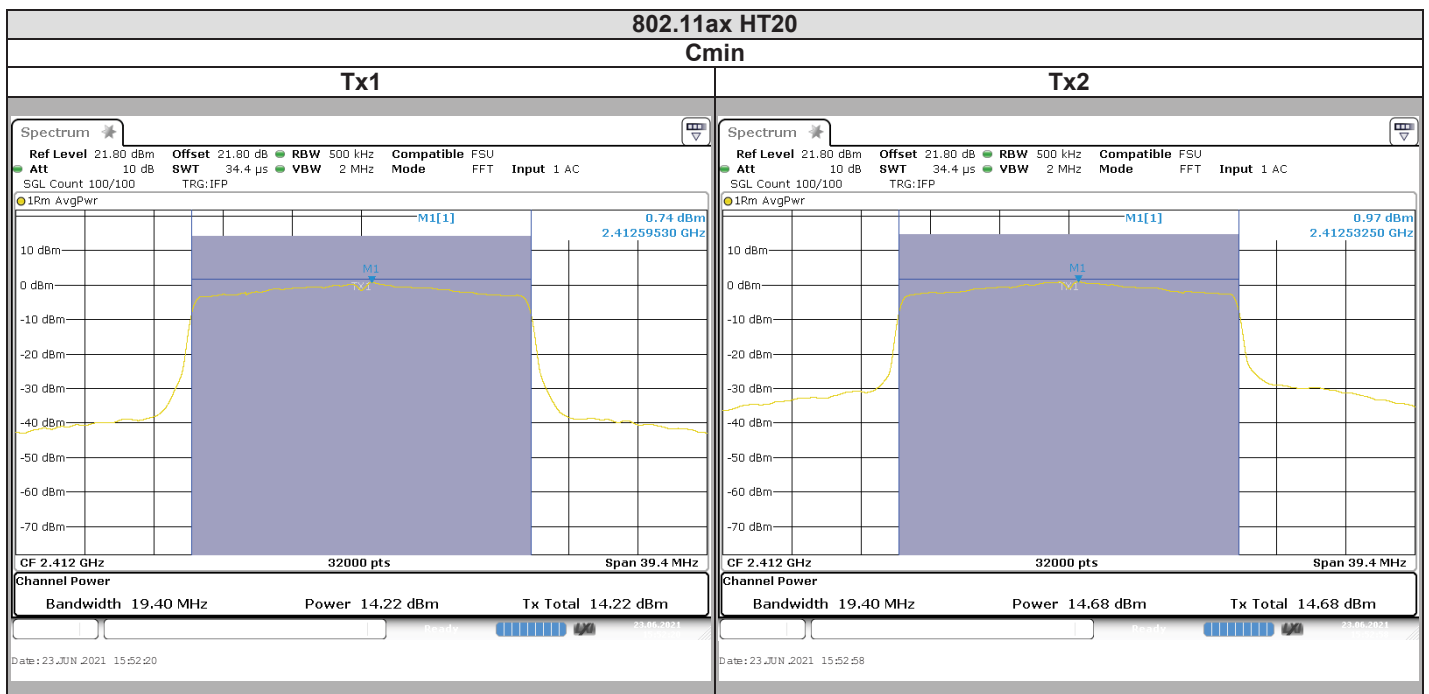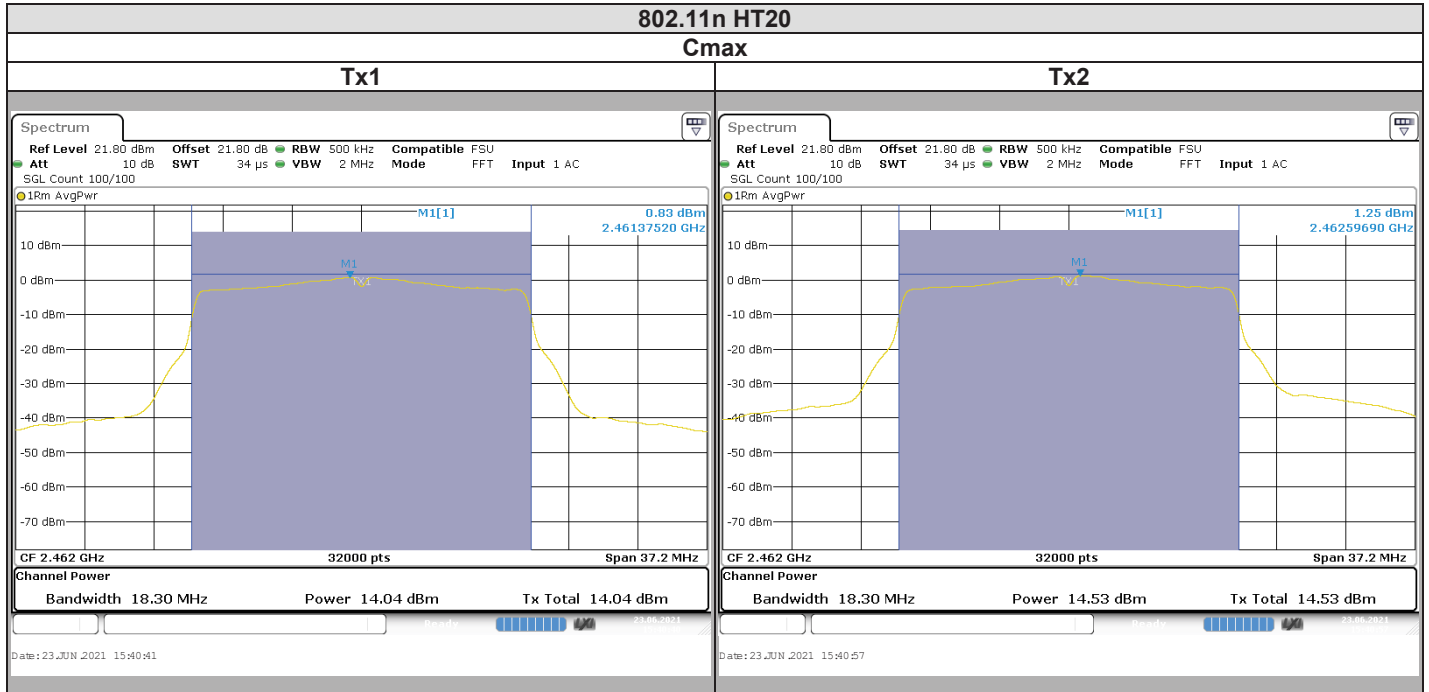

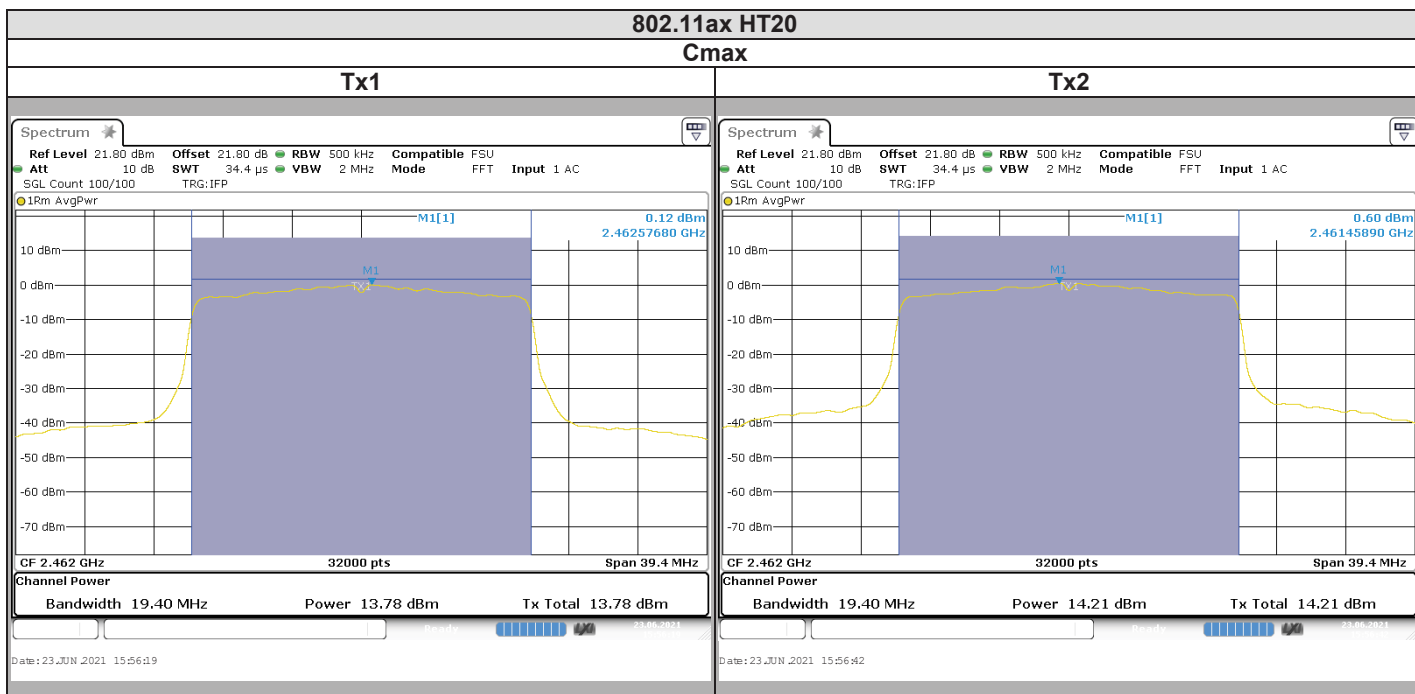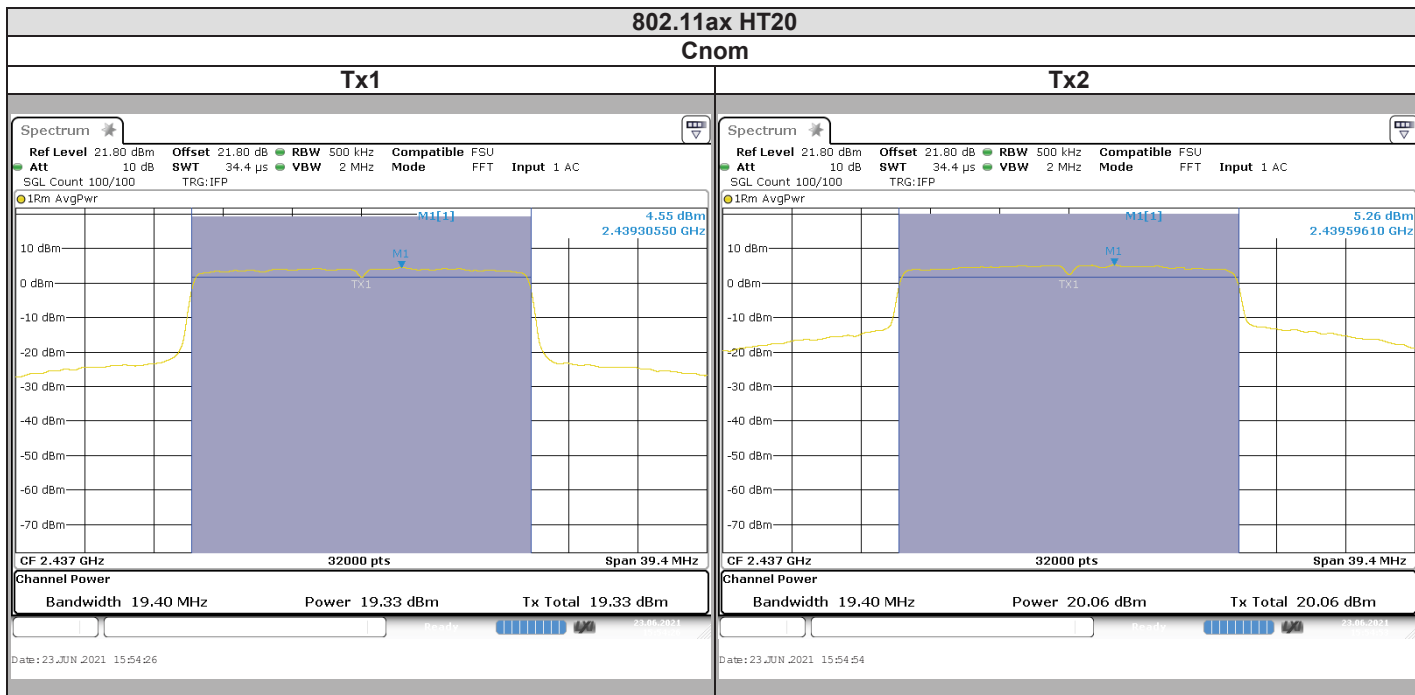

Spectrum Analyzer Offset:
Cable Loss=20dB + Attenuator= 1.8dB

802.11b					
Channel	Tx1 (dBm)	Tx2 (dBm)	Overall Antenna Gain (dBi)	Maximum Conducted Power (dBm)	Limit (dBm)
Cmin	21,53	21,45	3,96	24,50	30
Cnom	21,45	21,41	3,96	24,44	30
Cmax	21,61	21,43	3,96	24,53	30

802.11g					
Channel	Tx1 (dBm)	Tx2 (dBm)	Overall Antenna Gain (dBi)	Maximum Conducted Power (dBm)	Limit (dBm)
Cmin	13,89	14,74	3,96	17,35	30
Cnom	18,22	19,05	3,96	21,67	30
Cmax	14,01	14,81	3,96	17,44	30

802.11n HT20					
Channel	Tx1 (dBm)	Tx2 (dBm)	Overall Antenna Gain (dBi)	Maximum Conducted Power (dBm)	Limit (dBm)
Cmin	14,34	14,82	3,96	17,59	30
Cnom	19,16	20,01	3,96	22,62	30
Cmax	14,04	14,53	3,96	17,30	30

802.11ax HT20					
Channel	Tx1 (dBm)	Tx2 (dBm)	Overall Antenna Gain (dBi)	Maximum Conducted Power (dBm)	Limit (dBm)
Cmin	14,22	14,68	3,96	17,47	30
Cnom	19,33	20,06	3,96	22,72	30
Cmax	13,78	14,21	3,96	17,01	30

6.6. CONCLUSION

Maximum Conducted Output Power measurement performed on the sample of the product **COGECO DIW3930 COGECO**, SN: **6211130035003**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

7. POWER SPECTRAL DENSITY

7.1. TEST CONDITIONS

Test performed by : Armand MAHOUNGOU
Date of test : June 23, 2021
Ambient temperature : 25°C
Relative humidity : 44%

7.2. TEST SETUP

- The Equipment Under Test is installed:


- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ ANSI C63.10 § 11.10.2 (Method PKPSD)
- ☐ ANSI C63.10 § 11.10.3 (Method AVGPSD-1)
- ☒ KDB 662911 D01 Multiple Transmitter Output v02r01

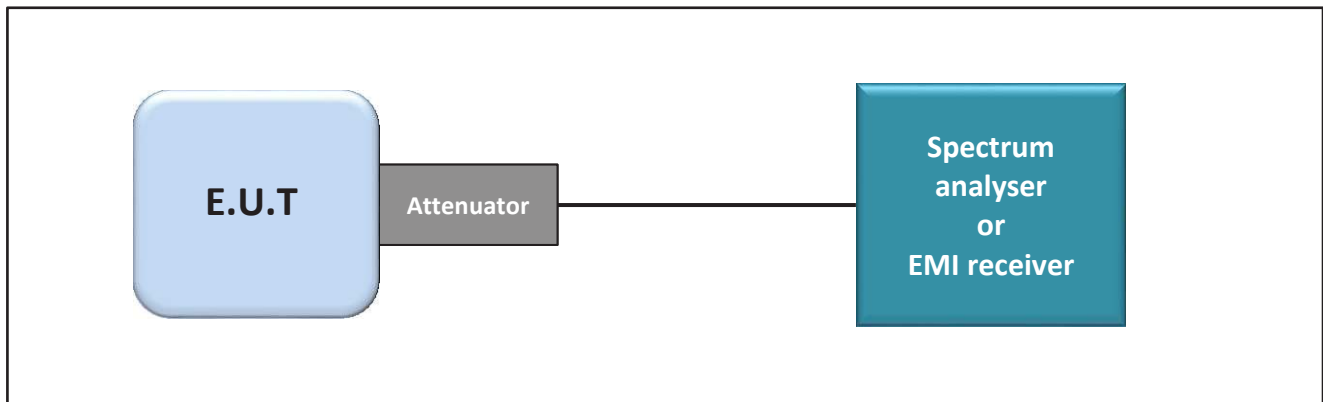

Test set up of Power Spectral Density

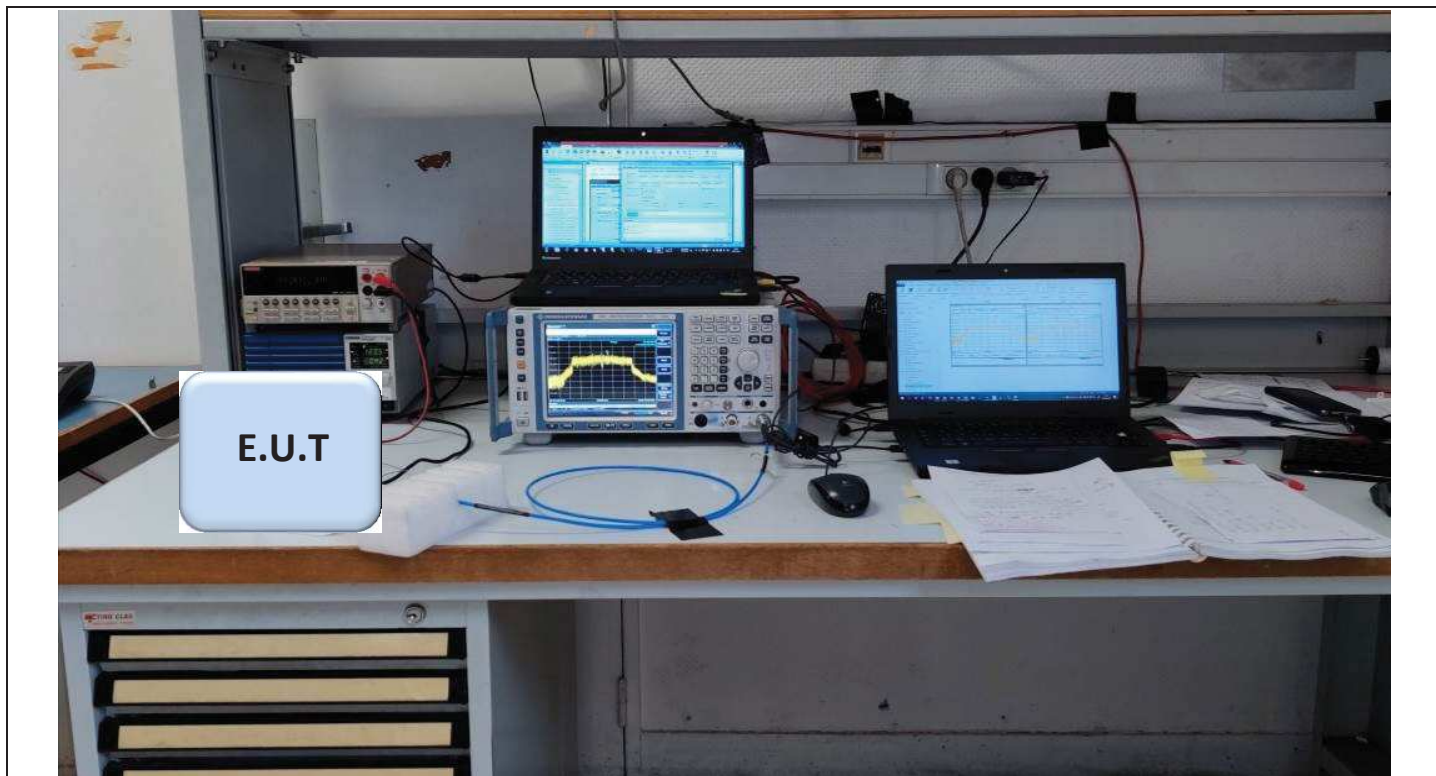

Photograph for Power Spectral Density

7.3. LIMIT

Frequency range	Power Spectral Density
2400MHz to 2483.5MHz	$\leq 8\text{dBm}/3\text{kHz}^*$



*Remark: Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi



7.4. TEST EQUIPMENT LIST



DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642026	2019/07	2021/07
Cable + Attenuateur 20dB	PASTERNAK	PE350-150CM	A5329970	2020/09	2021/09
Power supply	KIKUSUI	PCR500M	A7049006	See Multimeter	See Multimeter
Multimeter	KEITHLEY	2000	A1242090	2021/03	2023/03
R&S Commander Software	ROHDE & SCHWARZ	Version 1,6,4	-	-	-
Load 50 ohms	TELEGARTNER	-	A7150103	2021/04	2023/04
Load 50 ohms	TELEGARTNER	-	A7150104	2021/04	2023/04

Note: In our quality system, the test equipment calibration due is more & less 2 months

7.5. RESULTS

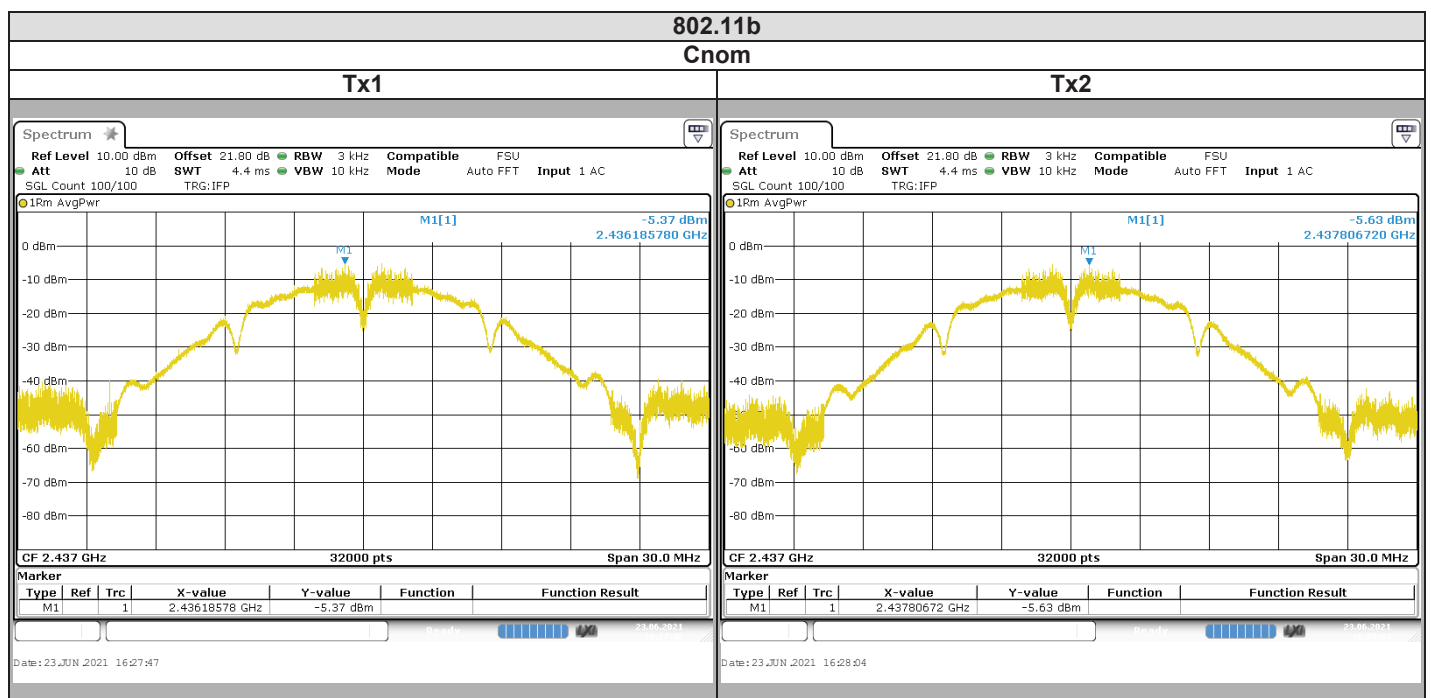
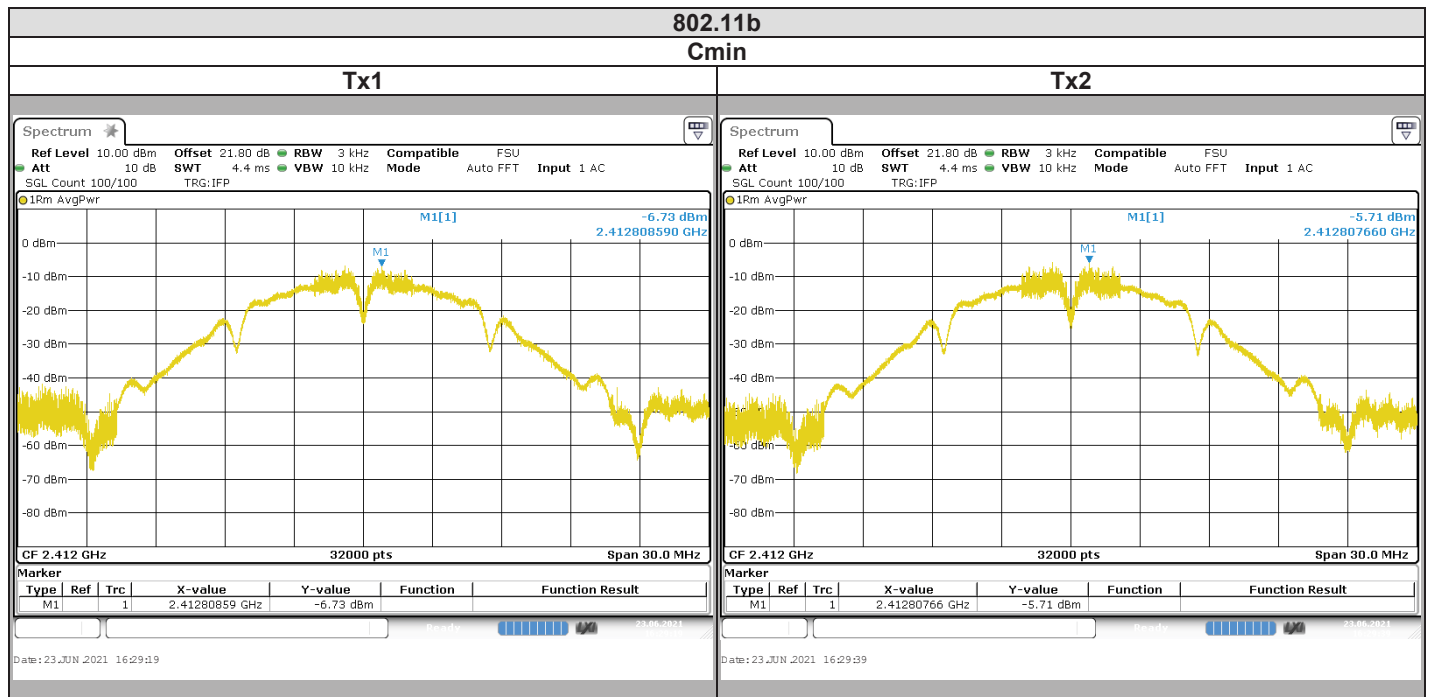


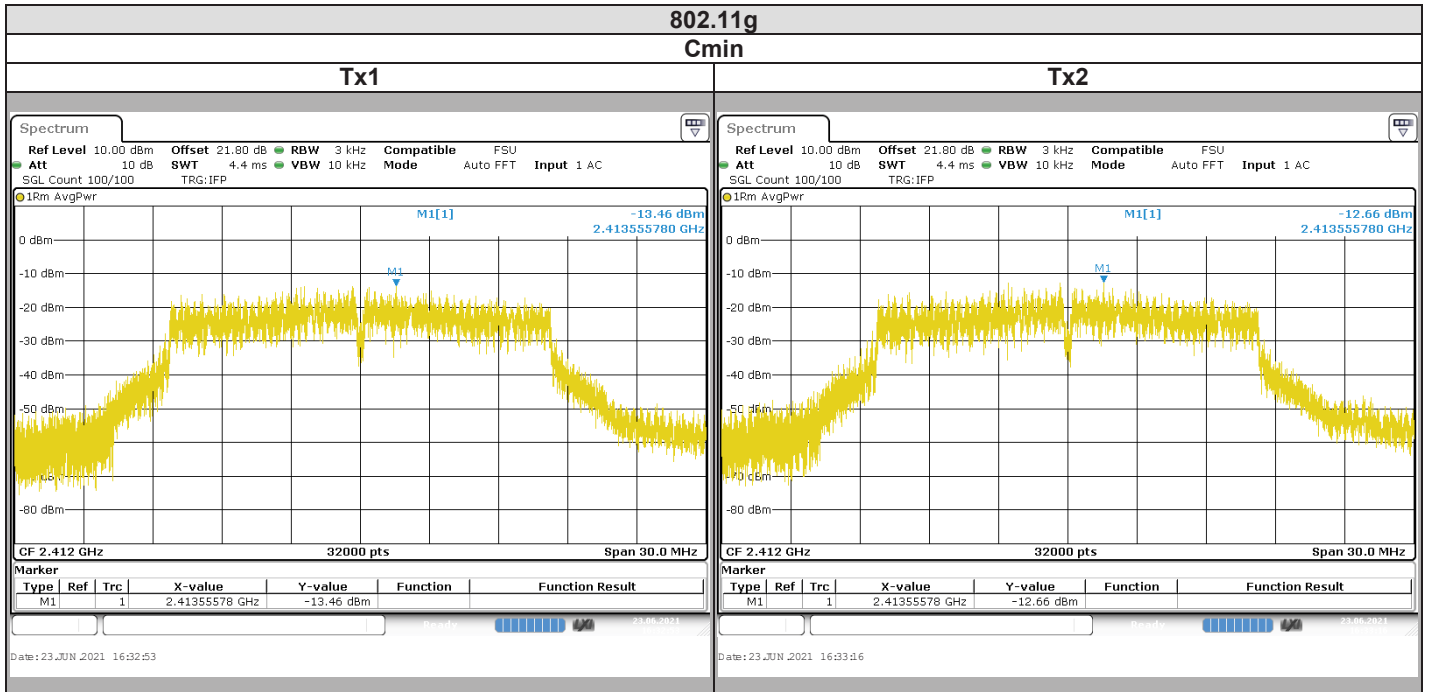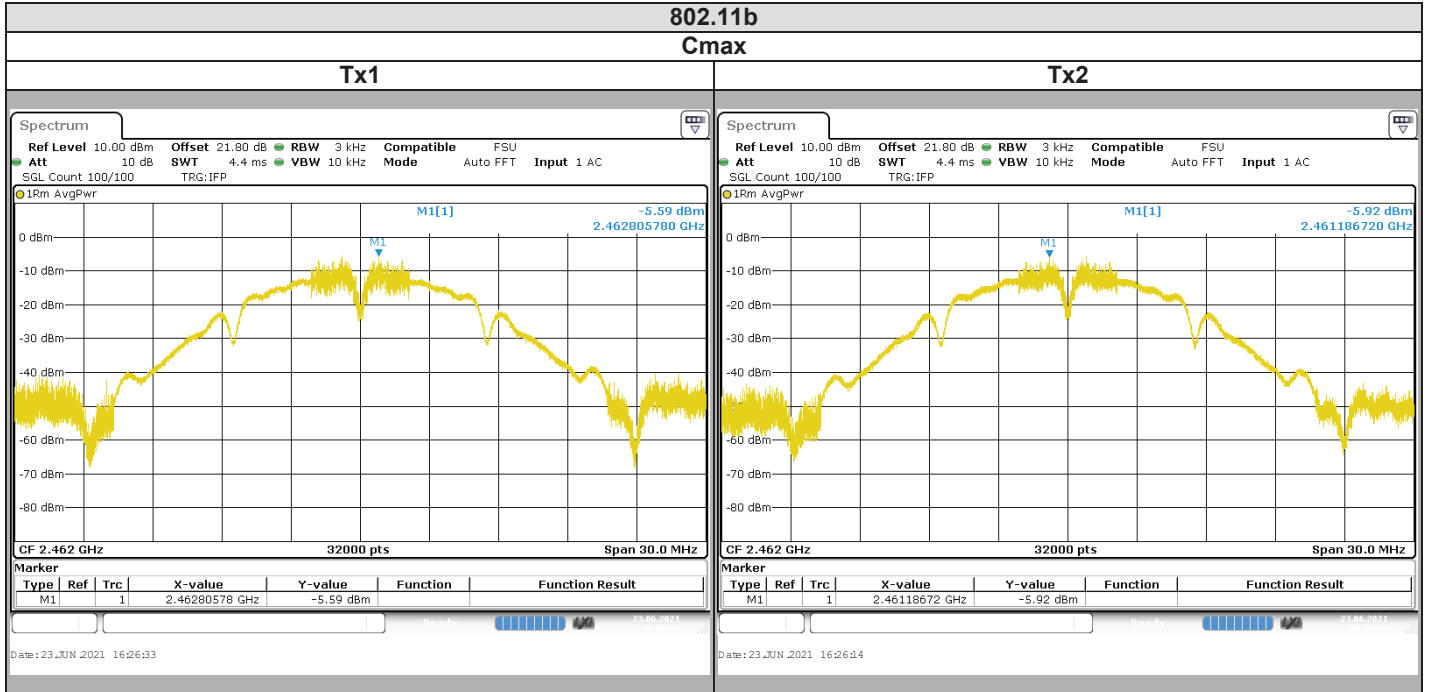

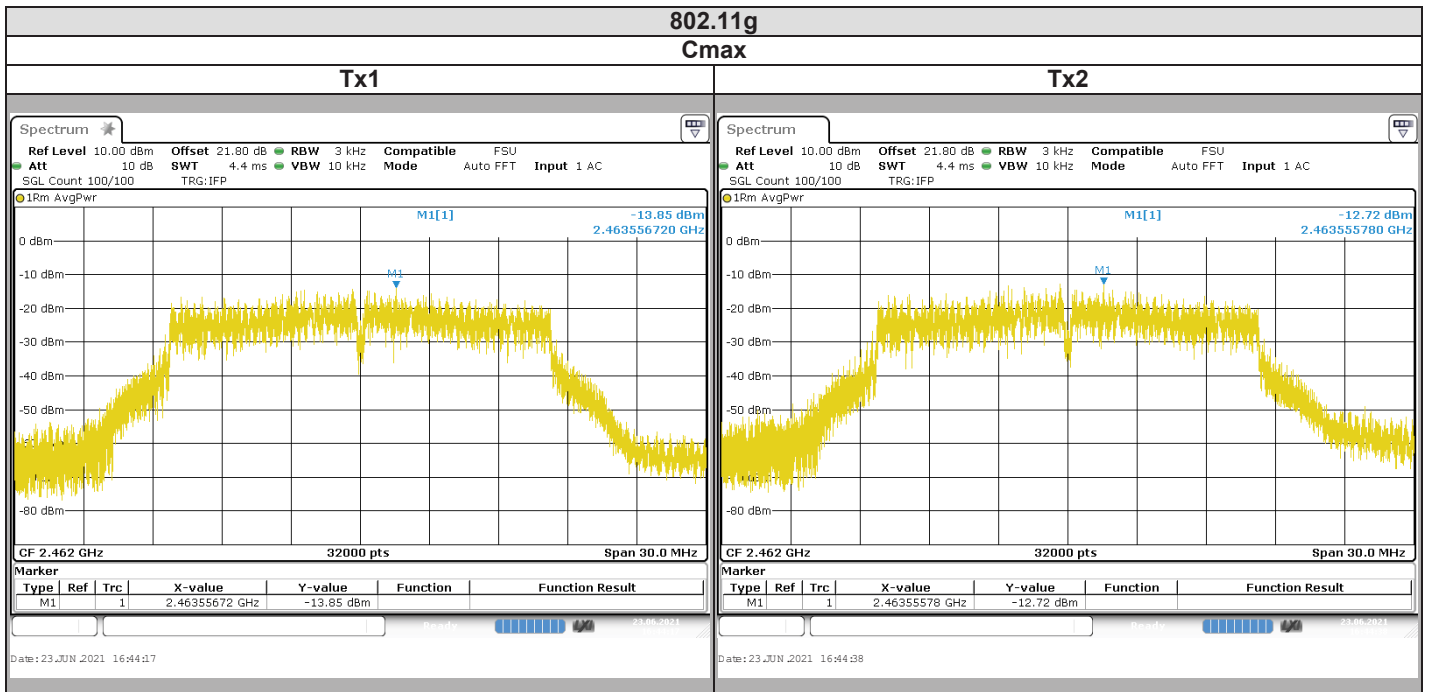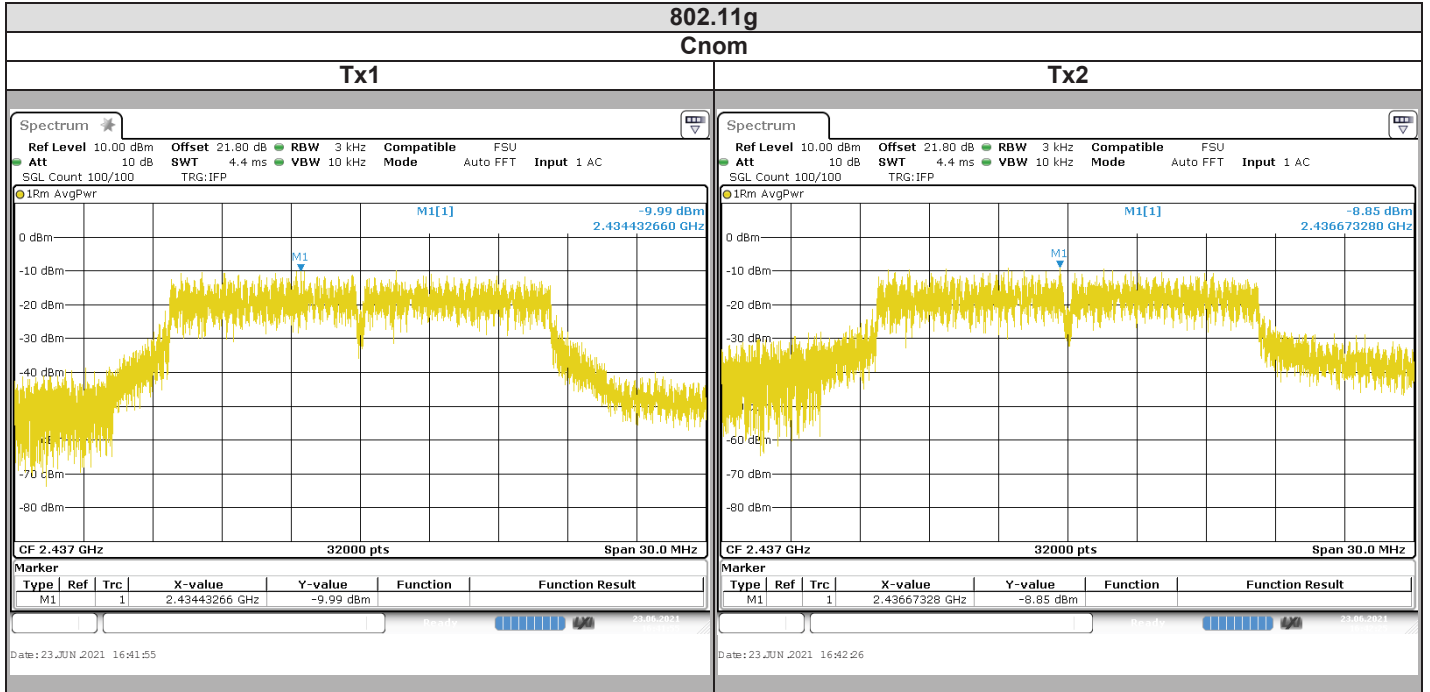







L C I E

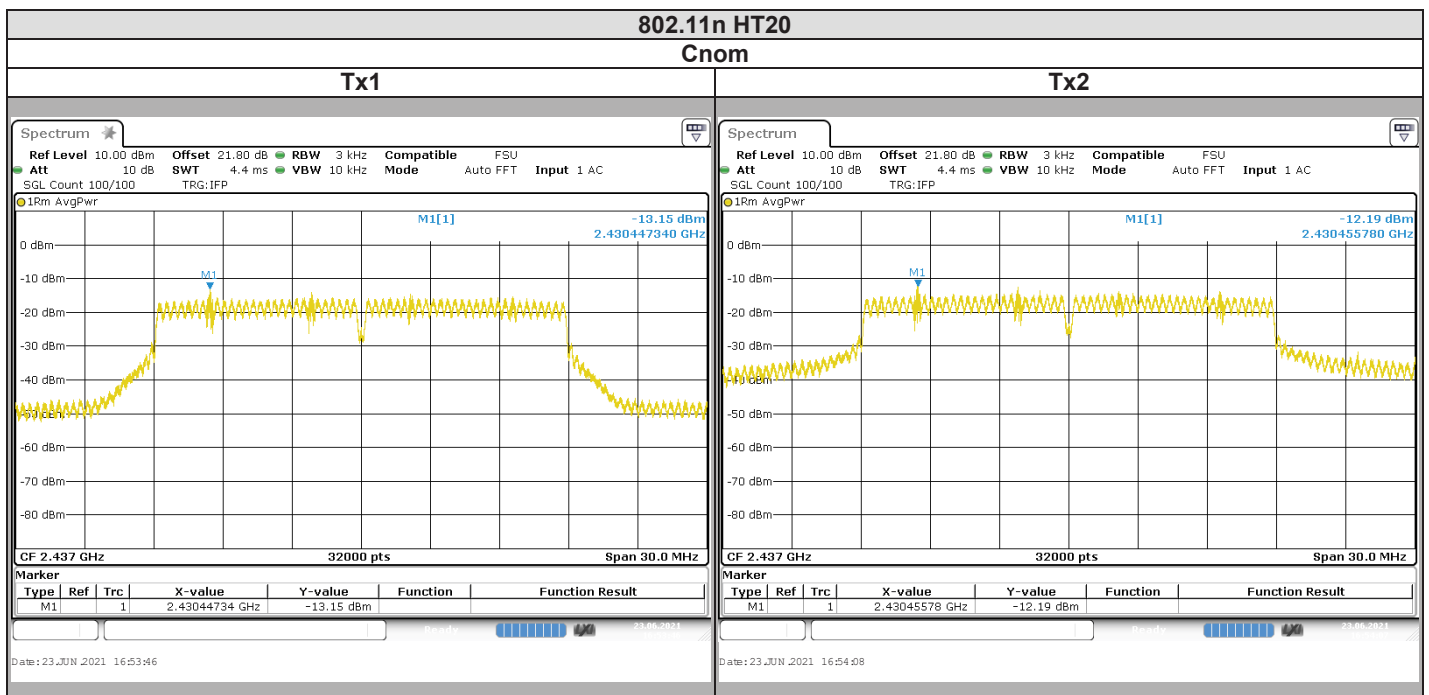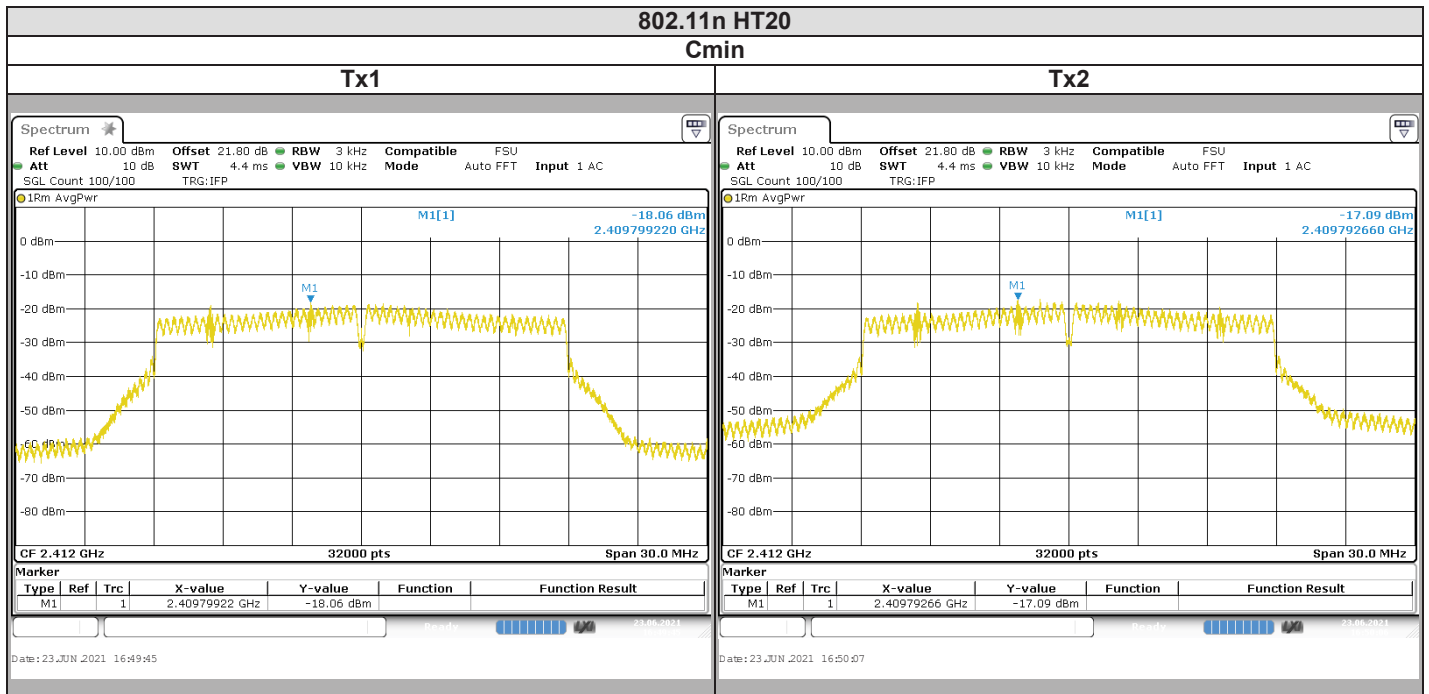



L C I E

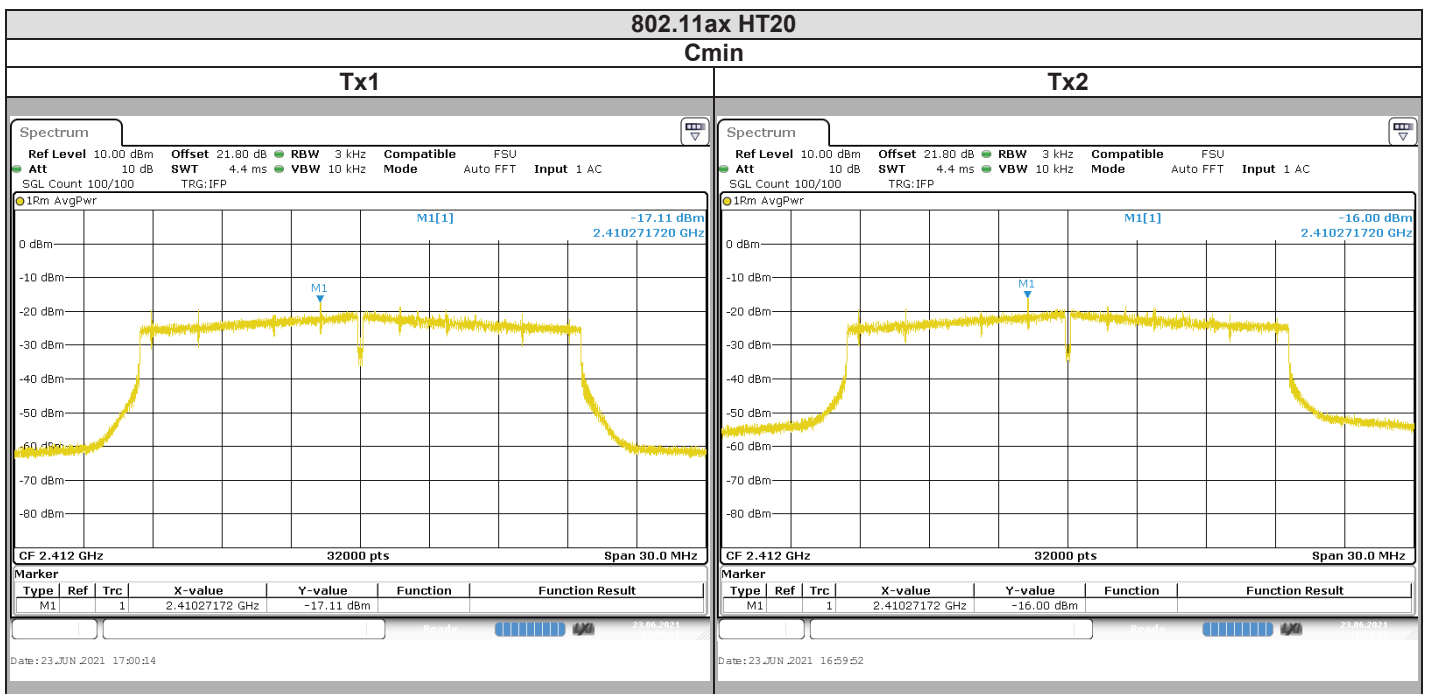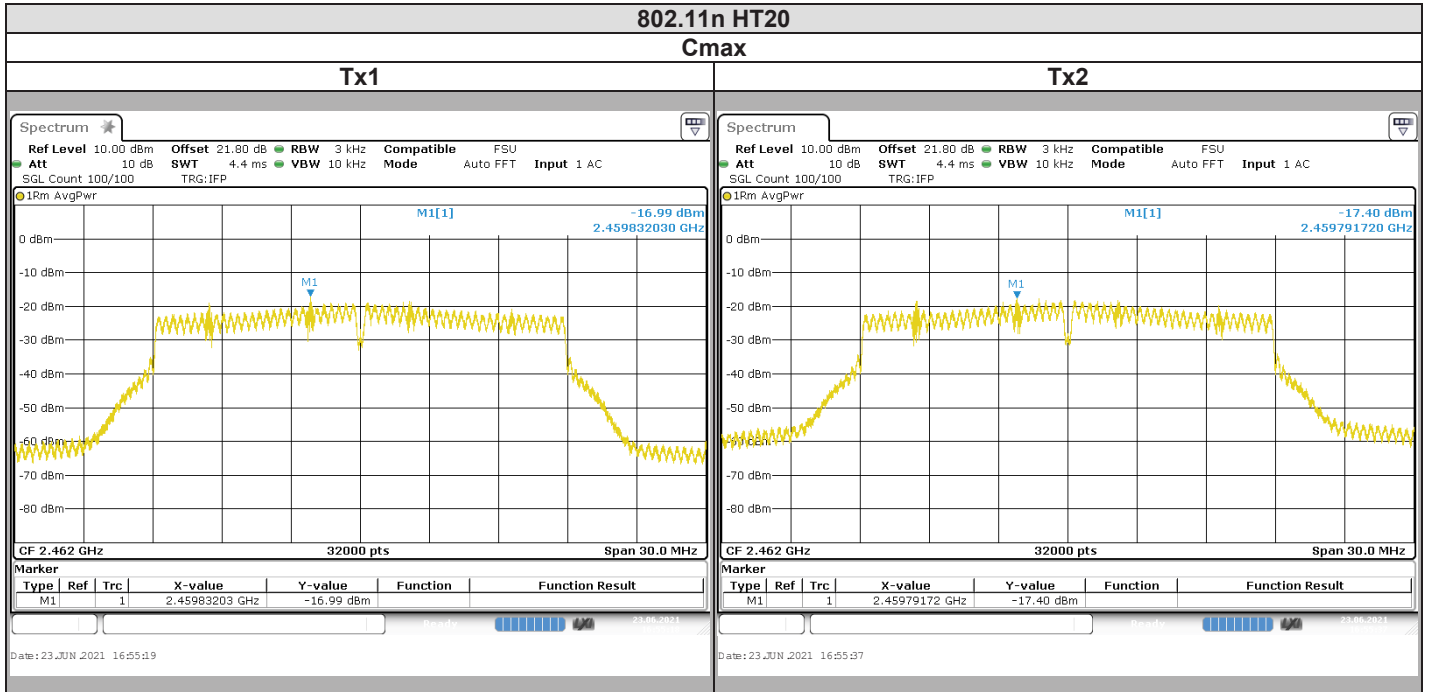

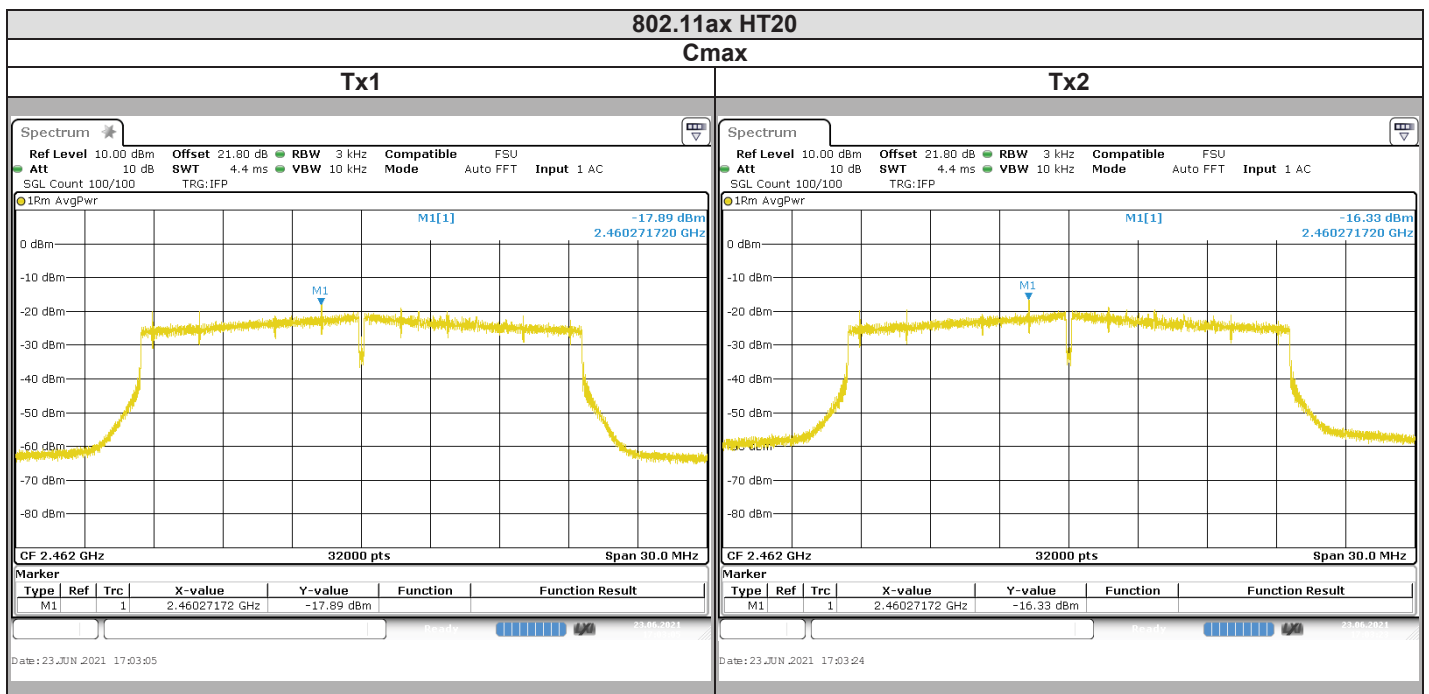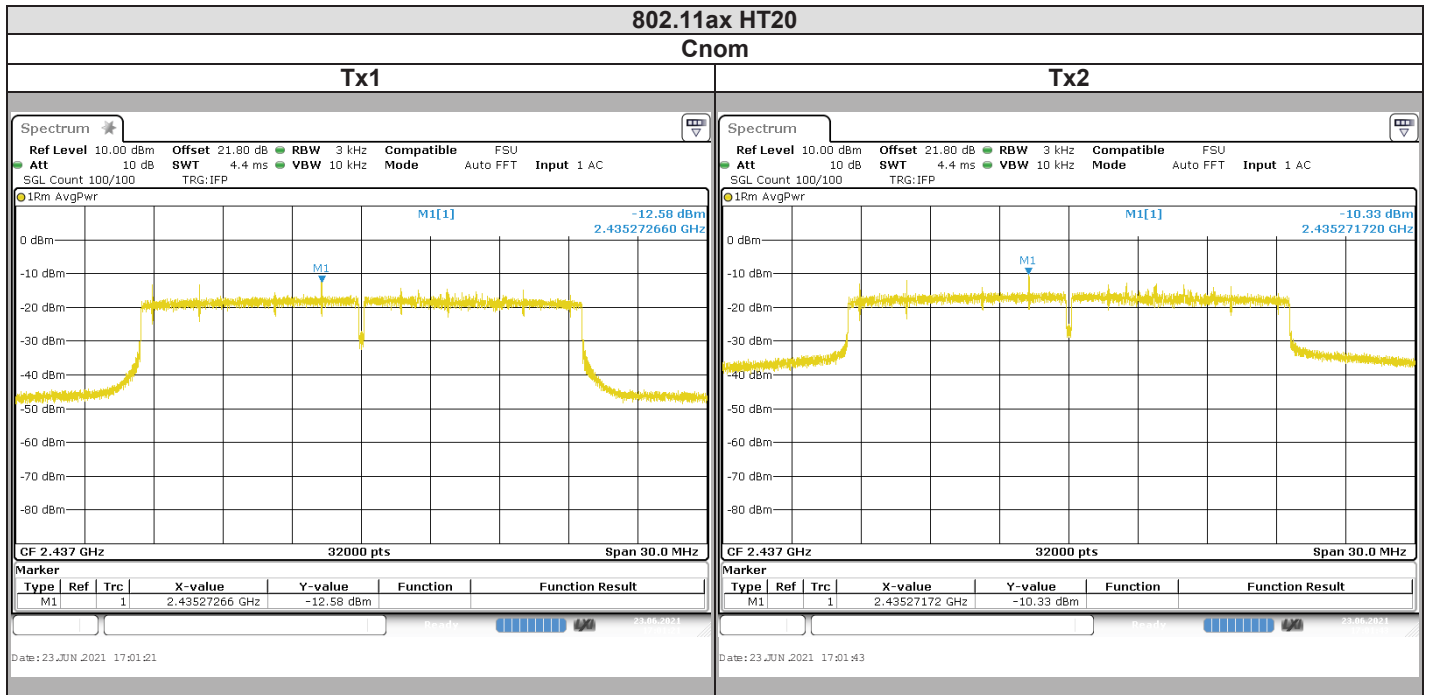



Spectrum Analyzer Offset:
Cable Loss=20dB + Attenuator= 1.8dB

802.11b					
Channel	Tx1 (dBm/3kHz)	Tx2 (dBm/3kHz)	Overall Antenna Gain (dBi)	Power Spectral Density (dBm)	Limit (dBm/3kHz)
Cmin	-6,73	-5,71	3,96	-3,18	8
Cnom	-5,37	-5,63	3,96	-2,49	8
Cmax	-5,59	-5,92	3,96	-2,74	8

802.11g					
Channel	Tx1 (dBm/3kHz)	Tx2 (dBm/3kHz)	Overall Antenna Gain (dBi)	Power Spectral Density (dBm)	Limit (dBm/3kHz)
Cmin	-13,46	-12,66	3,96	-10,03	8
Cnom	-9,99	-8,85	3,96	-6,37	8
Cmax	-13,85	-12,72	3,96	-10,24	8

802.11n HT20					
Channel	Tx1 (dBm/3kHz)	Tx2 (dBm/3kHz)	Overall Antenna Gain (dBi)	Power Spectral Density (dBm)	Limit (dBm/3kHz)
Cmin	-18,06	-17,09	3,96	-14,54	8
Cnom	-13,15	-12,19	3,96	-9,63	8
Cmax	-16,99	-17,4	3,96	-14,18	8

802.11ax HT20					
Channel	Tx1 (dBm/3kHz)	Tx2 (dBm/3kHz)	Overall Antenna Gain (dBi)	Power Spectral Density (dBm)	Limit (dBm/3kHz)
Cmin	-17,11	-16	3,96	-13,51	8
Cnom	-12,58	-10,33	3,96	-8,30	8
Cmax	-17,89	-16,33	3,96	-14,03	8

7.6. CONCLUSION

Power Spectral Density measurement performed on the sample of the product **COGECO DIW3930 COGECO**, SN: **6211130035003**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.