


Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

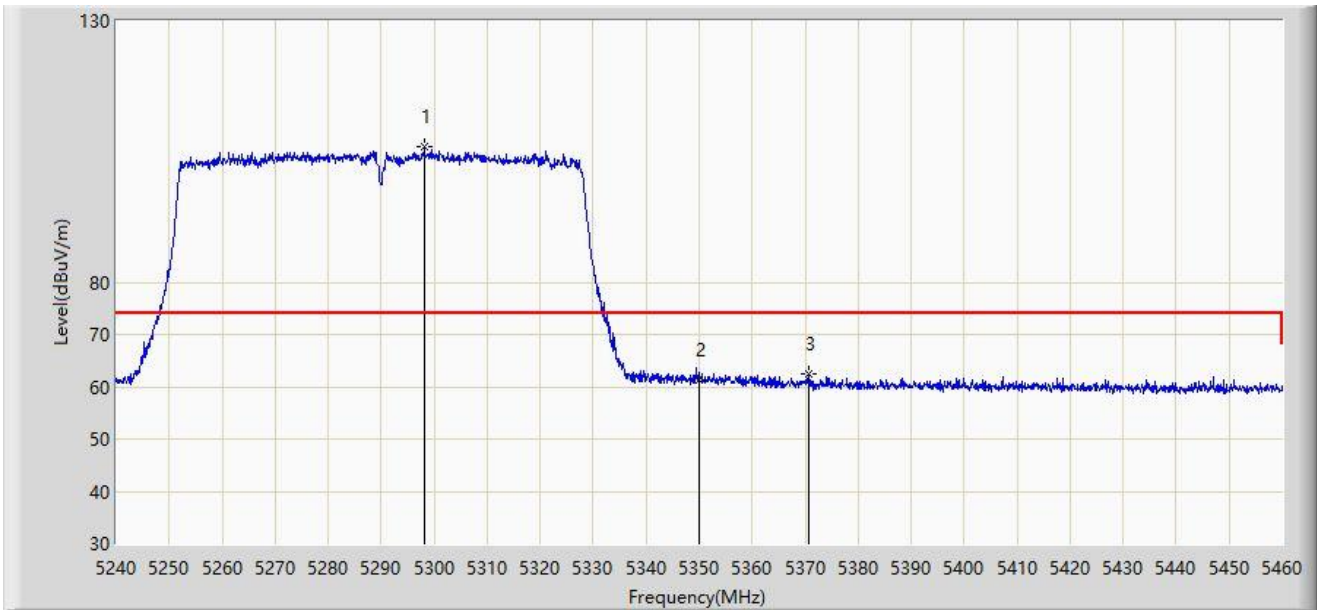


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5298.190	105.830	100.283	N/A	N/A	5.548	PK
2		5350.000	61.415	55.748	-12.585	74.000	5.667	PK
3	*	5370.570	62.584	56.871	-11.416	74.000	5.714	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

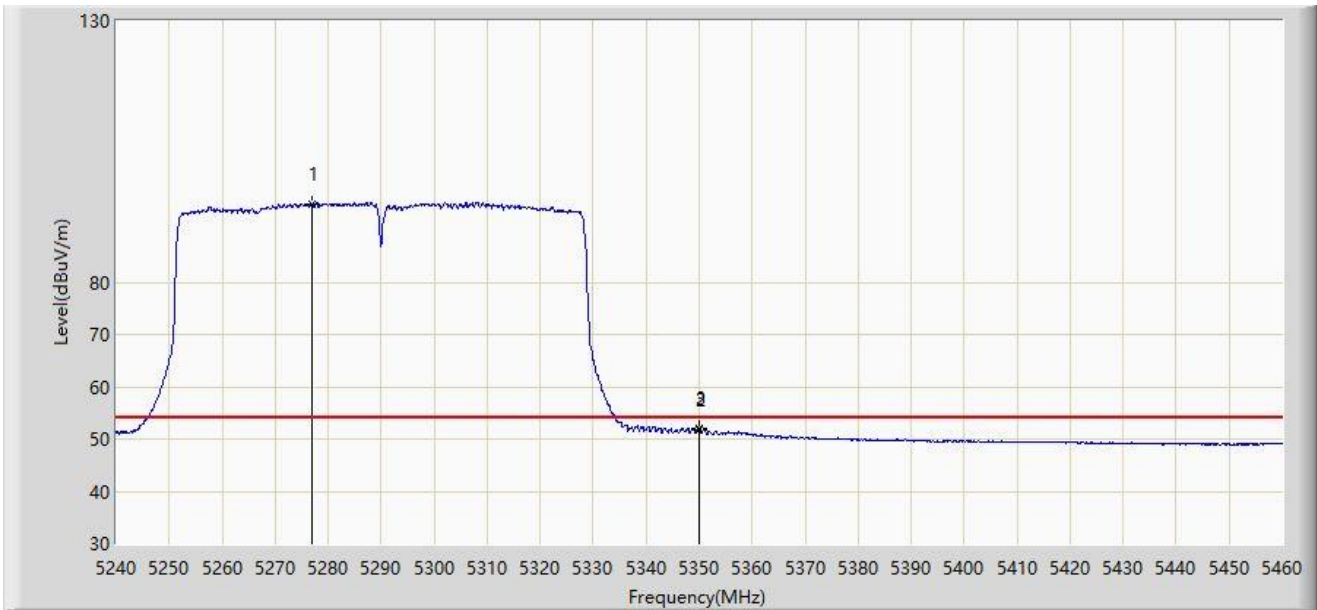


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5276.960	95.067	89.720	N/A	N/A	5.347	AV
2		5350.000	51.780	46.113	-2.220	54.000	5.667	AV
3	*	5350.110	51.911	46.246	-2.089	54.000	5.665	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

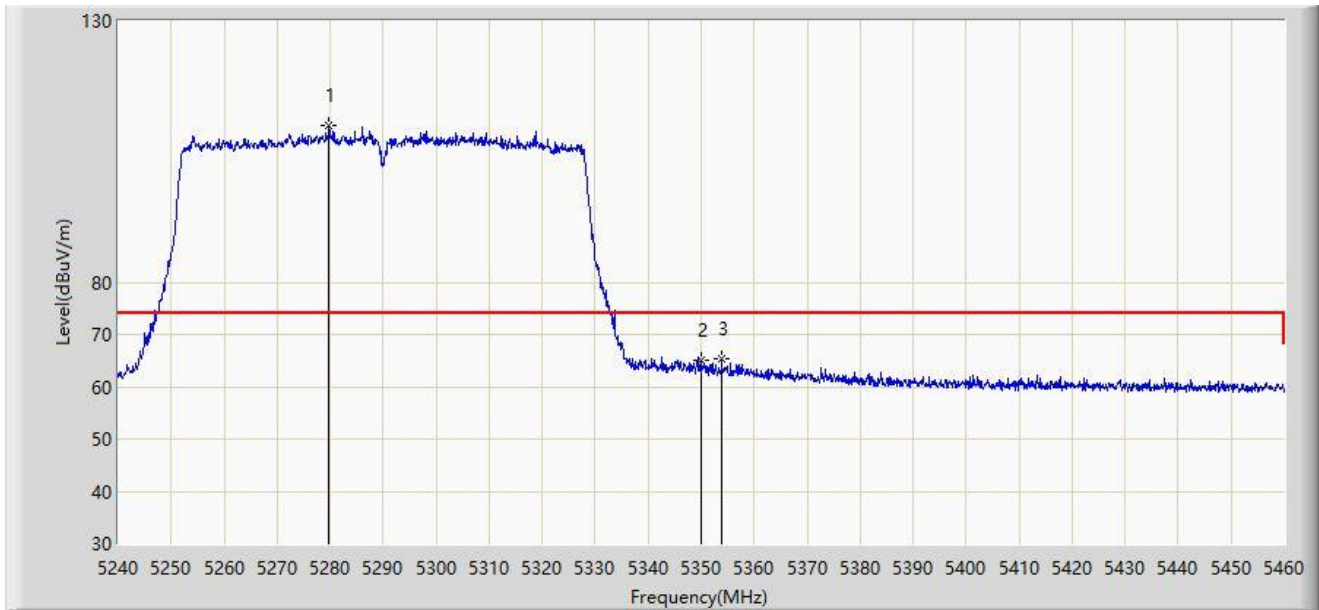


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5279.820	110.059	104.726	N/A	N/A	5.334	PK
2		5350.000	64.981	59.314	-9.019	74.000	5.667	PK
3	*	5353.850	65.286	59.647	-8.714	74.000	5.638	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

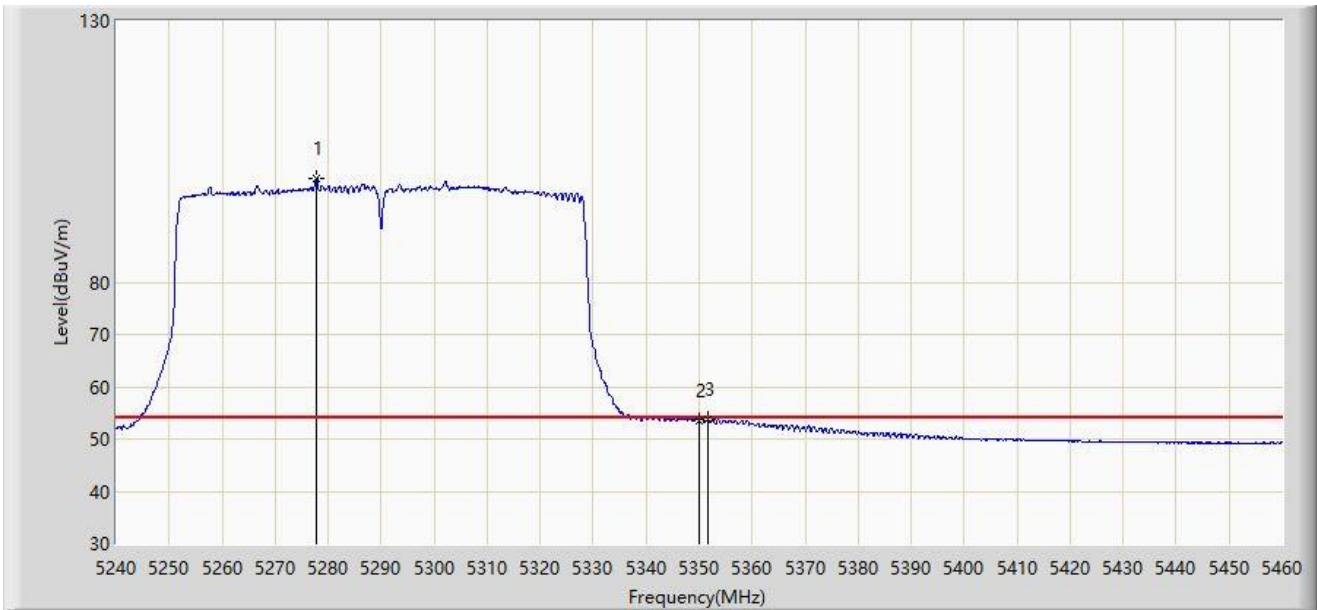


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5277.840	99.743	94.402	N/A	N/A	5.341	AV
2		5350.000	53.342	47.675	-0.658	54.000	5.667	AV
3	*	5351.650	53.868	48.229	-0.132	54.000	5.640	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

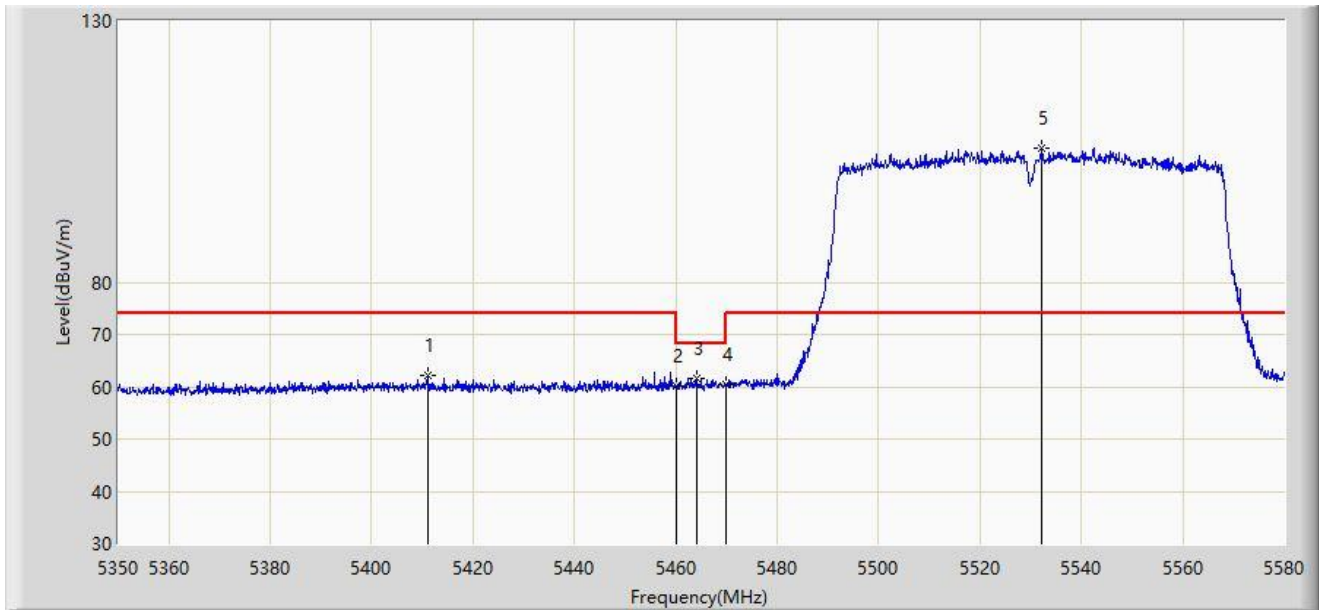


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5411.065	62.261	56.071	-11.739	74.000	6.190	PK
2		5460.000	60.036	54.257	-13.964	74.000	5.779	PK
3	*	5464.080	61.707	55.905	-6.493	68.200	5.802	PK
4		5470.000	60.479	54.527	-7.721	68.200	5.951	PK
5		5532.275	105.751	100.015	N/A	N/A	5.736	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

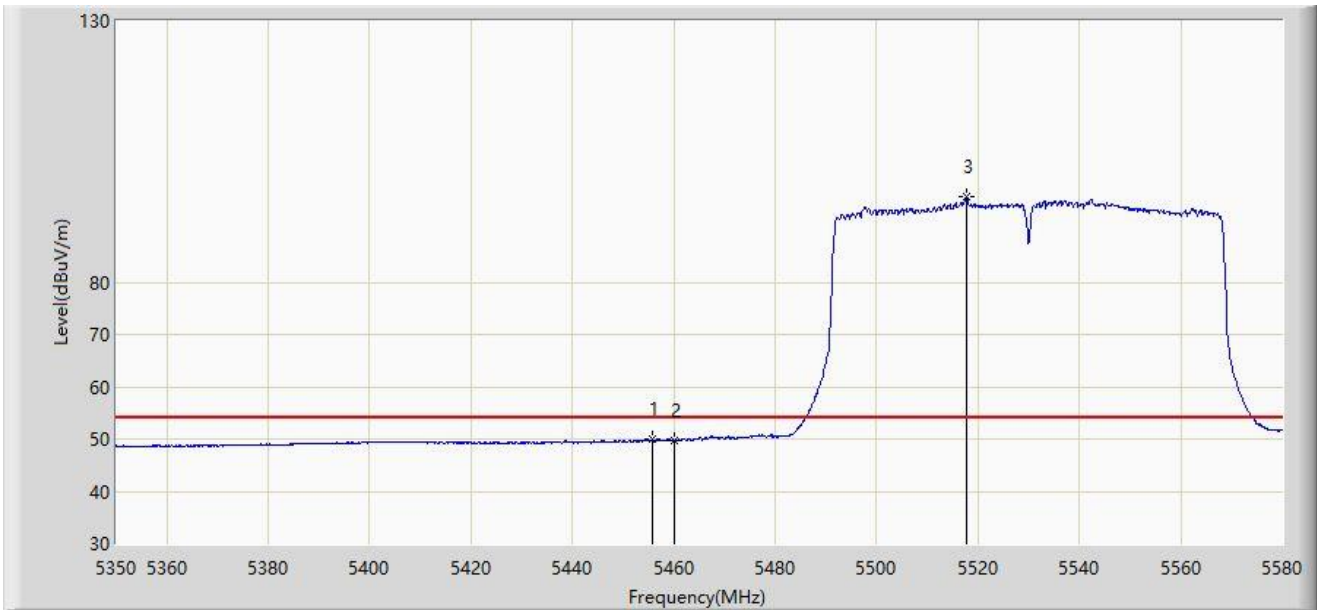


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5455.685	49.978	44.269	-4.022	54.000	5.709	AV
2		5460.000	49.849	44.070	-4.151	54.000	5.779	AV
3		5517.785	96.314	90.730	N/A	N/A	5.584	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

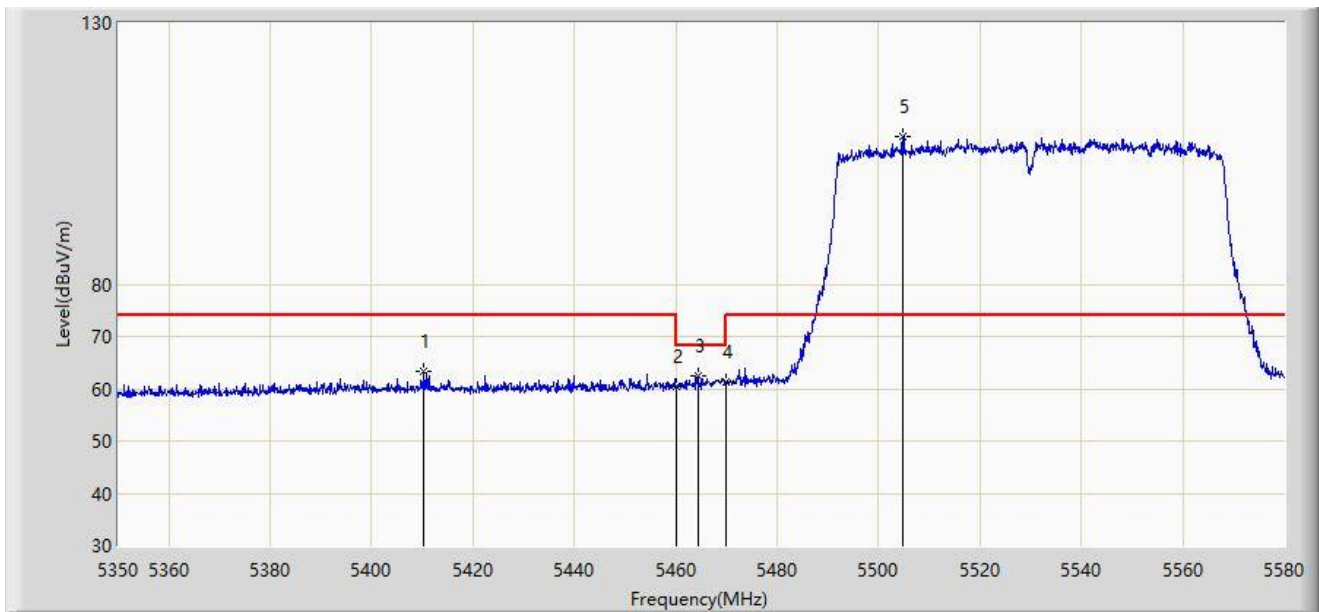


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5410.375	63.295	57.097	-10.705	74.000	6.198	PK
2		5460.000	60.424	54.645	-13.576	74.000	5.779	PK
3	*	5464.310	62.520	56.714	-5.680	68.200	5.806	PK
4		5470.000	61.422	55.470	-6.778	68.200	5.951	PK
5		5504.675	108.211	102.515	N/A	N/A	5.697	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

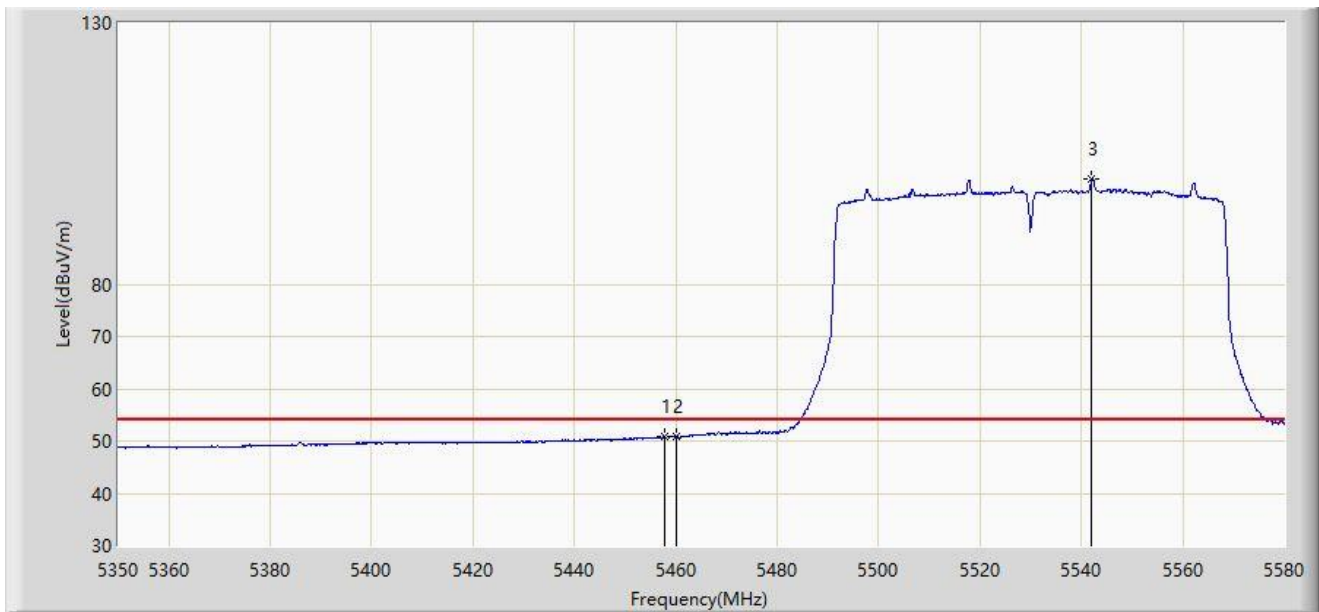

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5457.755	50.858	45.118	-3.142	54.000	5.741	AV
2		5460.000	50.756	44.977	-3.244	54.000	5.779	AV
3		5542.050	100.264	94.428	N/A	N/A	5.837	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

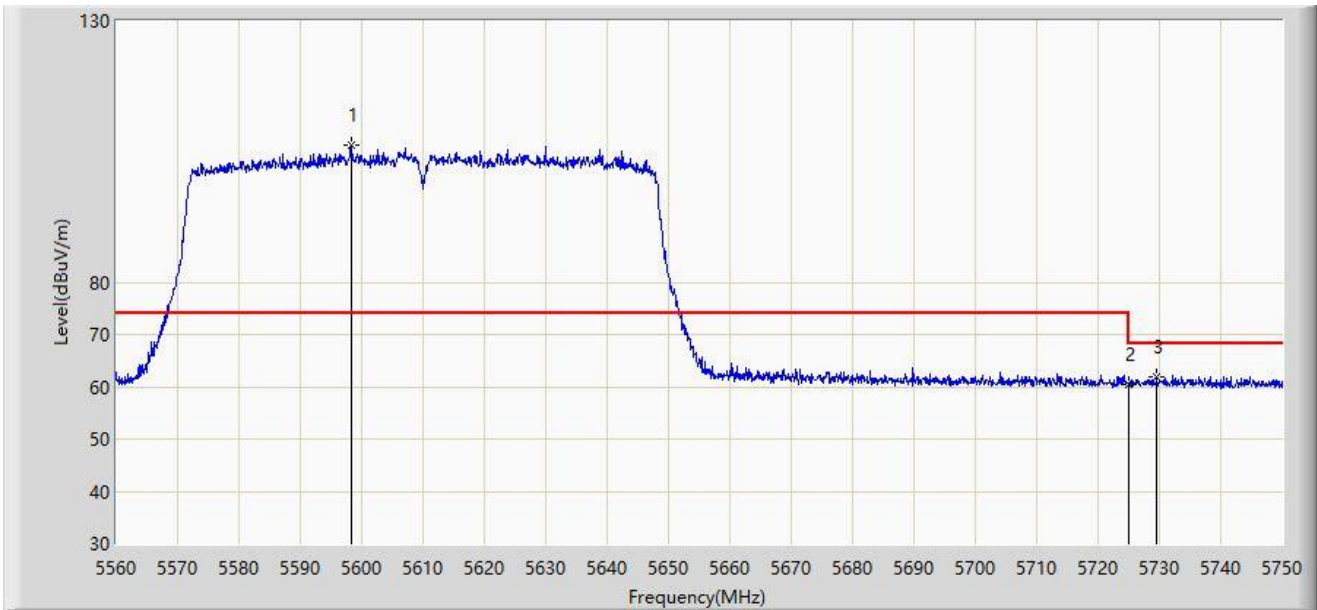


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5598.285	106.222	100.298	N/A	N/A	5.925	PK
2		5725.000	60.366	53.343	-7.834	68.200	7.023	PK
3	*	5729.575	61.755	54.779	-6.445	68.200	6.976	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

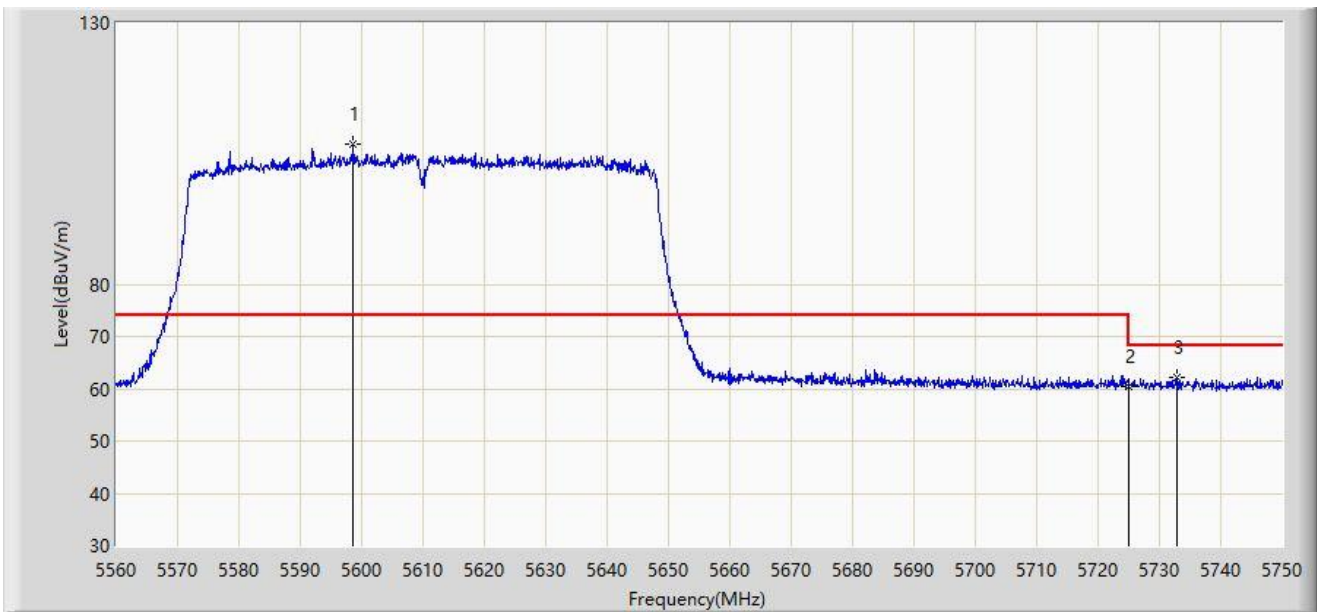


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5598.665	106.791	100.864	N/A	N/A	5.927	PK
2		5725.000	60.465	53.442	-7.735	68.200	7.023	PK
3	*	5732.805	62.118	55.197	-6.082	68.200	6.921	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

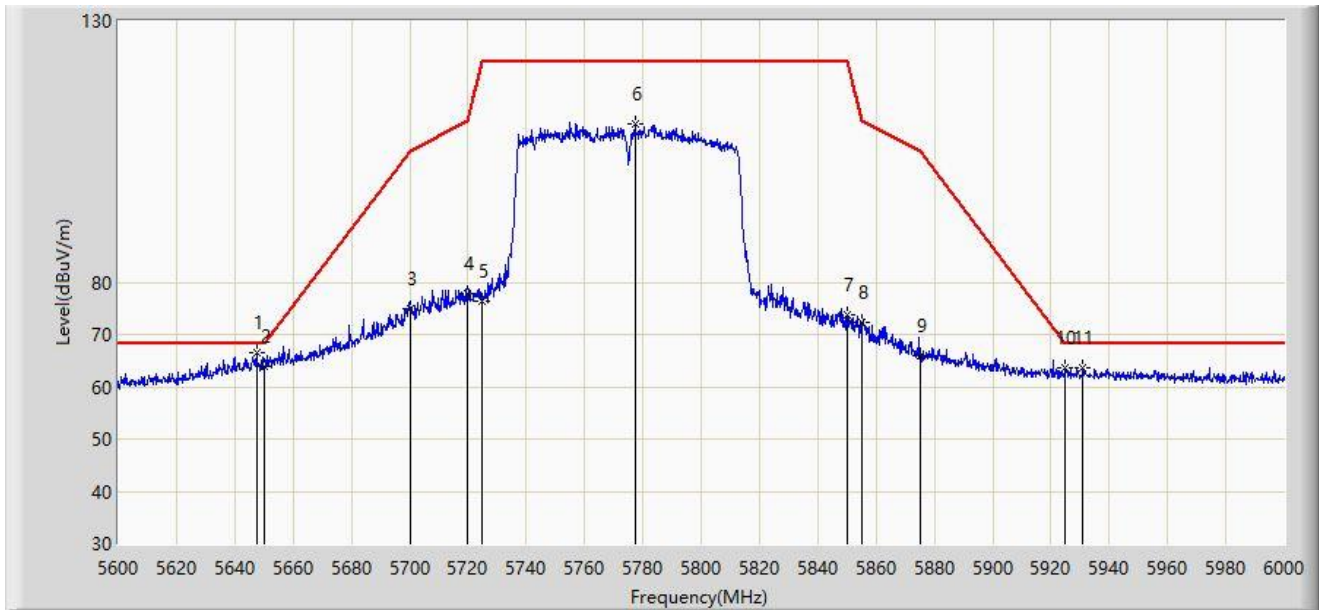


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.400	66.467	59.943	-1.733	68.200	6.525	PK
2		5650.000	64.000	57.492	-4.200	68.200	6.508	PK
3		5700.000	74.793	68.045	-30.407	105.200	6.748	PK
4		5720.000	77.683	70.703	-33.117	110.800	6.979	PK
5		5725.000	76.232	69.209	-45.968	122.200	7.023	PK
6		5777.200	110.406	103.148	N/A	N/A	7.258	PK
7		5850.000	73.667	66.244	-48.533	122.200	7.423	PK
8		5855.000	72.248	64.757	-38.552	110.800	7.491	PK
9		5875.000	65.888	58.242	-39.312	105.200	7.646	PK
10		5925.000	63.492	55.642	-4.708	68.200	7.851	PK
11		5931.000	63.732	55.846	-4.468	68.200	7.887	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

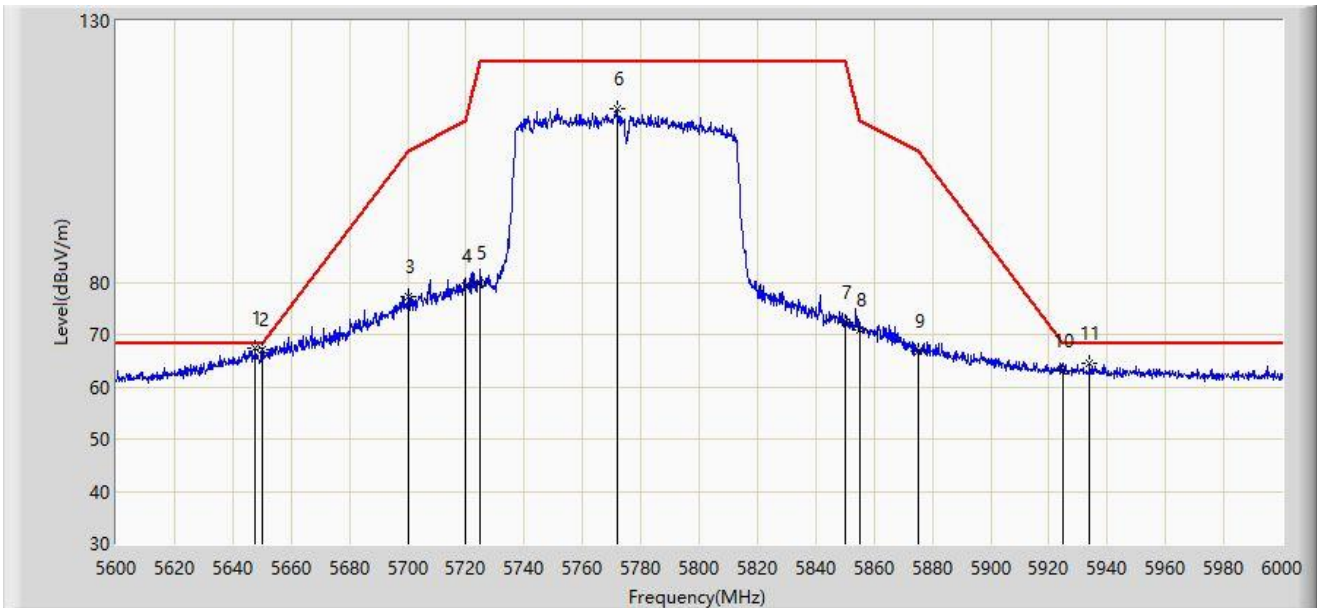


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.800	67.333	60.811	-0.867	68.200	6.522	PK
2		5650.000	67.143	60.635	-1.057	68.200	6.508	PK
3		5700.000	77.158	70.410	-28.042	105.200	6.748	PK
4		5720.000	79.330	72.350	-31.470	110.800	6.979	PK
5		5725.000	79.763	72.740	-42.437	122.200	7.023	PK
6		5772.000	113.076	105.904	N/A	N/A	7.172	PK
7		5850.000	72.349	64.926	-49.851	122.200	7.423	PK
8		5855.000	70.975	63.484	-39.825	110.800	7.491	PK
9		5875.000	66.872	59.226	-38.328	105.200	7.646	PK
10		5925.000	62.956	55.106	-5.244	68.200	7.851	PK
11		5934.000	64.520	56.625	-3.680	68.200	7.895	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5210+5290MHz	

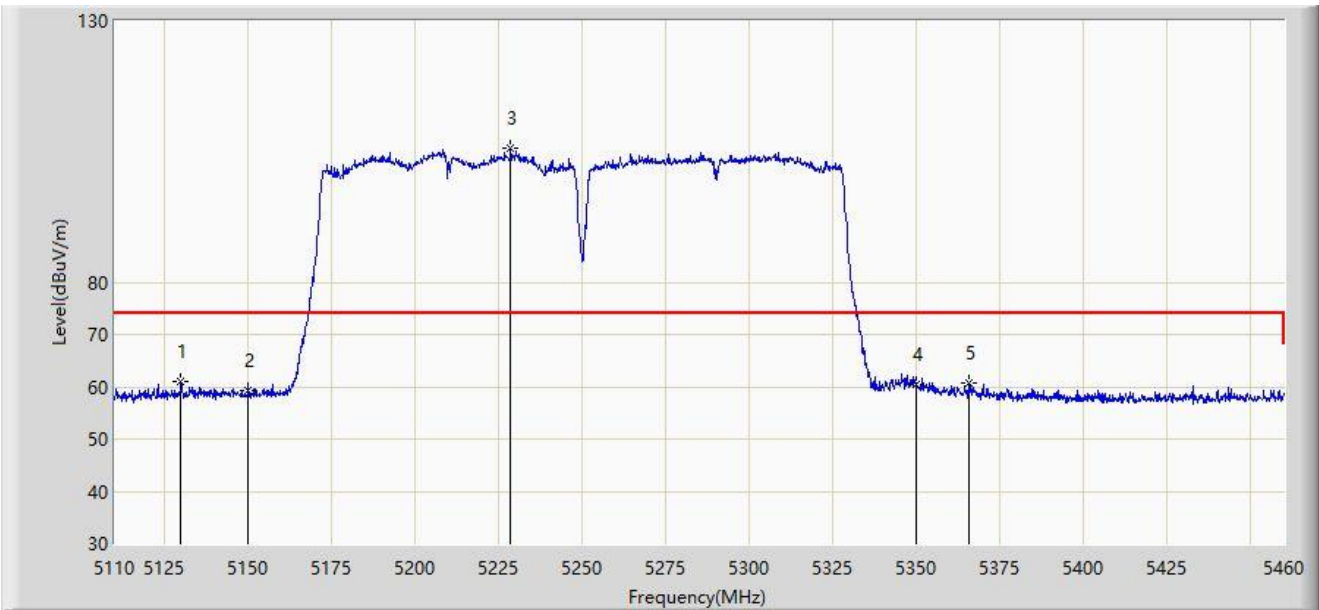


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5129.950	61.106	57.222	-12.894	74.000	3.884	PK
2		5150.000	59.346	55.471	-14.654	74.000	3.876	PK
3		5228.475	105.699	102.056	N/A	N/A	3.644	PK
4		5350.000	60.343	56.809	-13.657	74.000	3.534	PK
5		5365.500	60.762	57.355	-13.238	74.000	3.407	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5210+5290MHz	

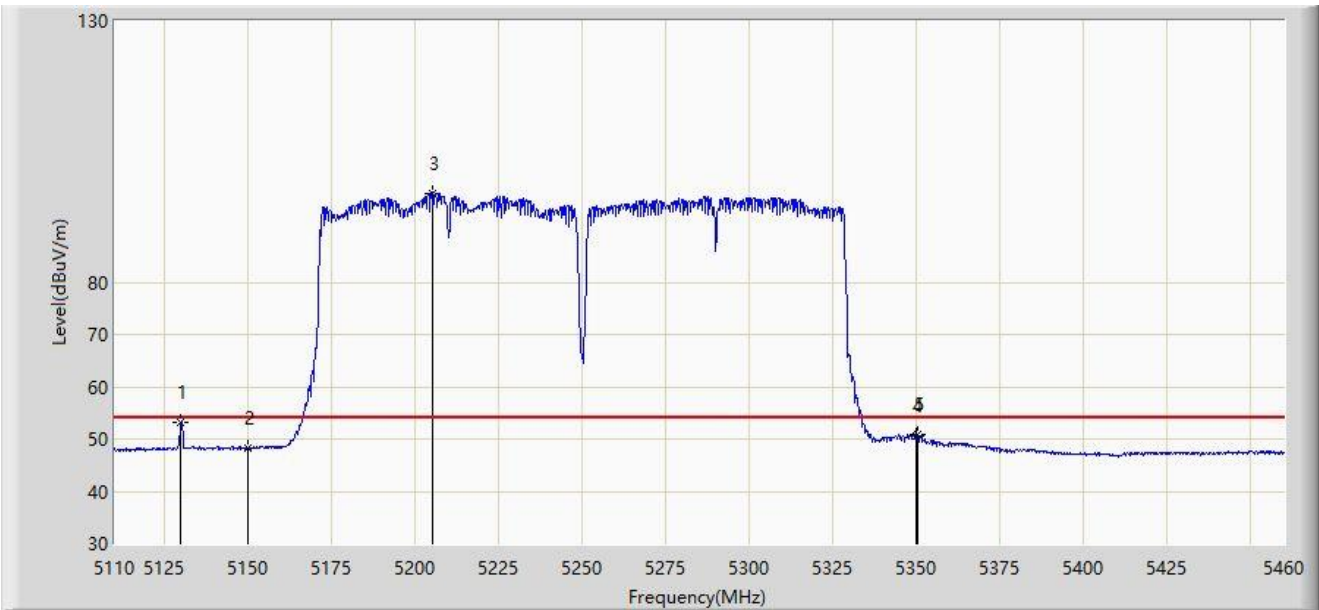


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5129.950	53.170	49.286	-0.830	54.000	3.884	AV
2		5150.000	48.325	44.450	-5.675	54.000	3.876	AV
3		5205.025	97.099	93.554	N/A	N/A	3.545	AV
4		5350.000	50.498	46.964	-3.502	54.000	3.534	AV
5		5350.275	50.781	47.249	-3.219	54.000	3.532	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5210+5290MHz	

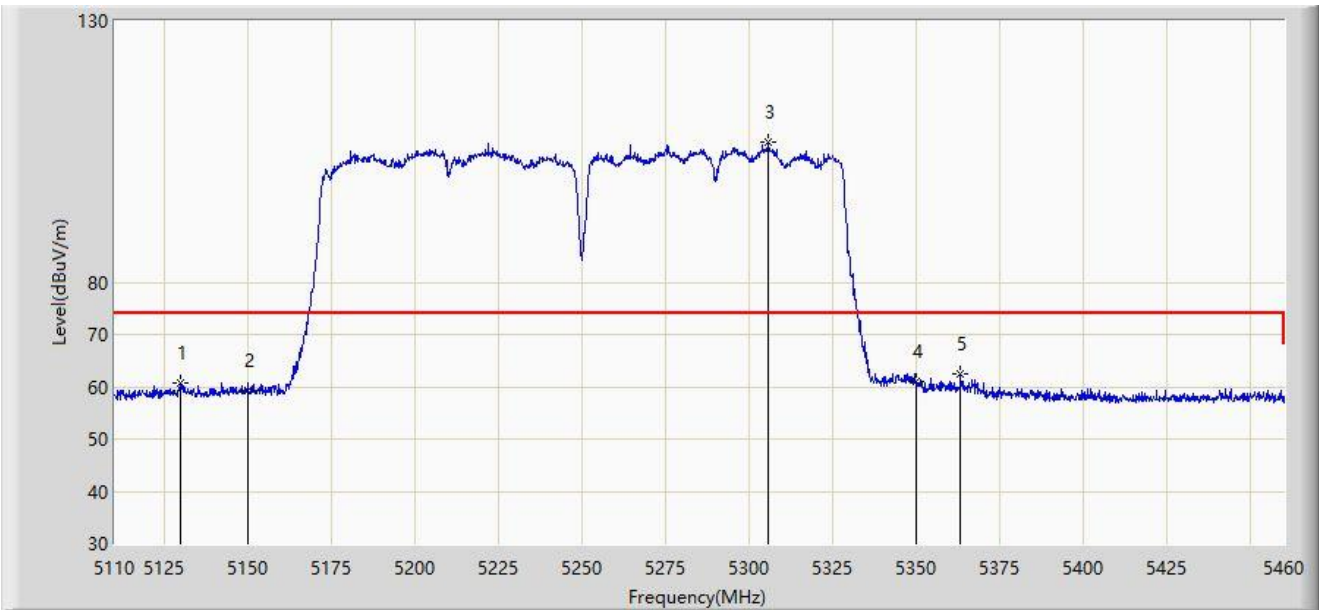

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5129.775	60.772	56.890	-13.228	74.000	3.882	PK
2		5150.000	59.229	55.354	-14.771	74.000	3.876	PK
3		5305.650	106.740	103.106	N/A	N/A	3.634	PK
4		5350.000	60.979	57.445	-13.021	74.000	3.534	PK
5	*	5363.050	62.351	58.923	-11.649	74.000	3.428	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5210+5290MHz	

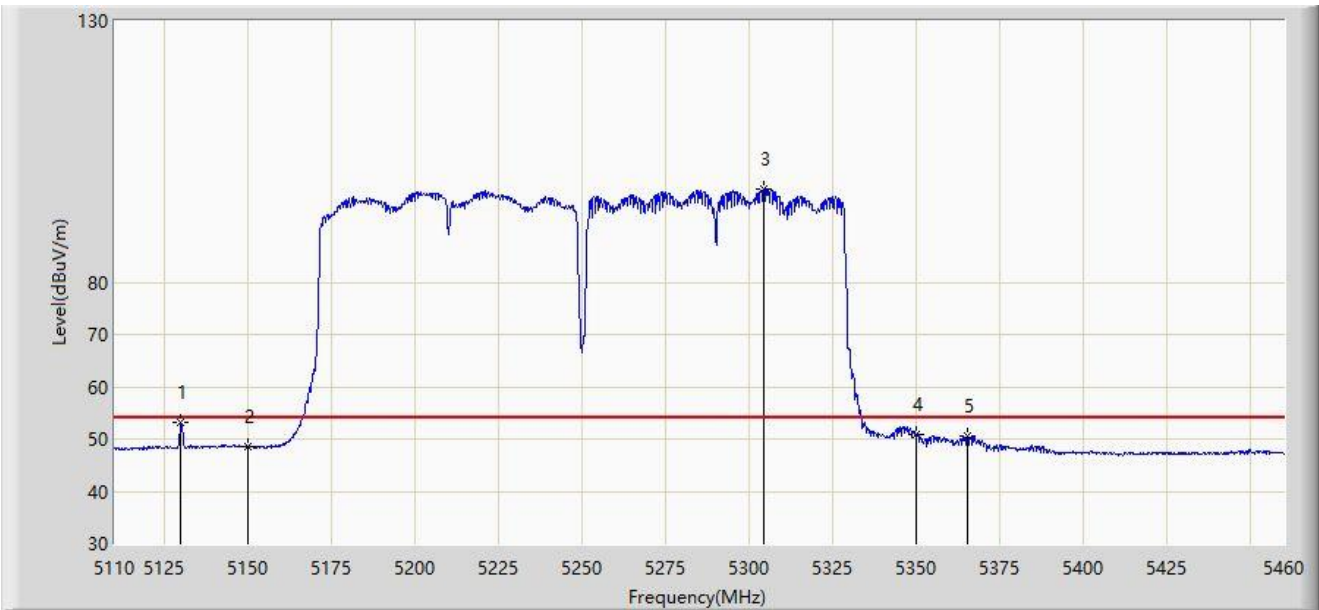

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5129.950	53.241	49.357	-0.759	54.000	3.884	AV
2		5150.000	48.569	44.694	-5.431	54.000	3.876	AV
3		5304.425	97.859	94.227	N/A	N/A	3.632	AV
4		5350.000	50.837	47.303	-3.163	54.000	3.534	AV
5		5365.150	50.533	47.123	-3.467	54.000	3.409	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5530+5610MHz	

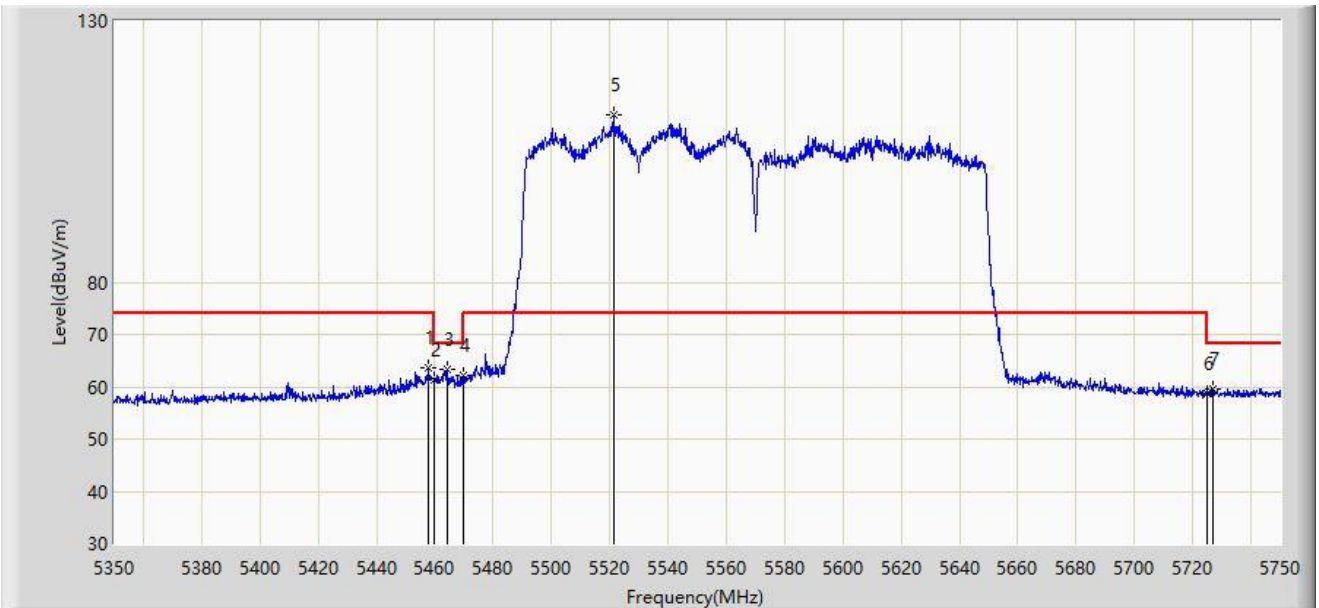


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.800	63.616	59.844	-10.384	74.000	3.773	PK
2		5460.000	61.333	57.552	-12.667	74.000	3.782	PK
3	*	5464.200	63.245	59.446	-4.955	68.200	3.799	PK
4		5470.000	62.240	58.418	-5.960	68.200	3.822	PK
5		5521.200	111.911	107.950	N/A	N/A	3.961	PK
6		5725.000	58.551	54.320	-9.649	68.200	4.231	PK
7		5727.000	59.679	55.442	-8.521	68.200	4.236	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5530+5610MHz	

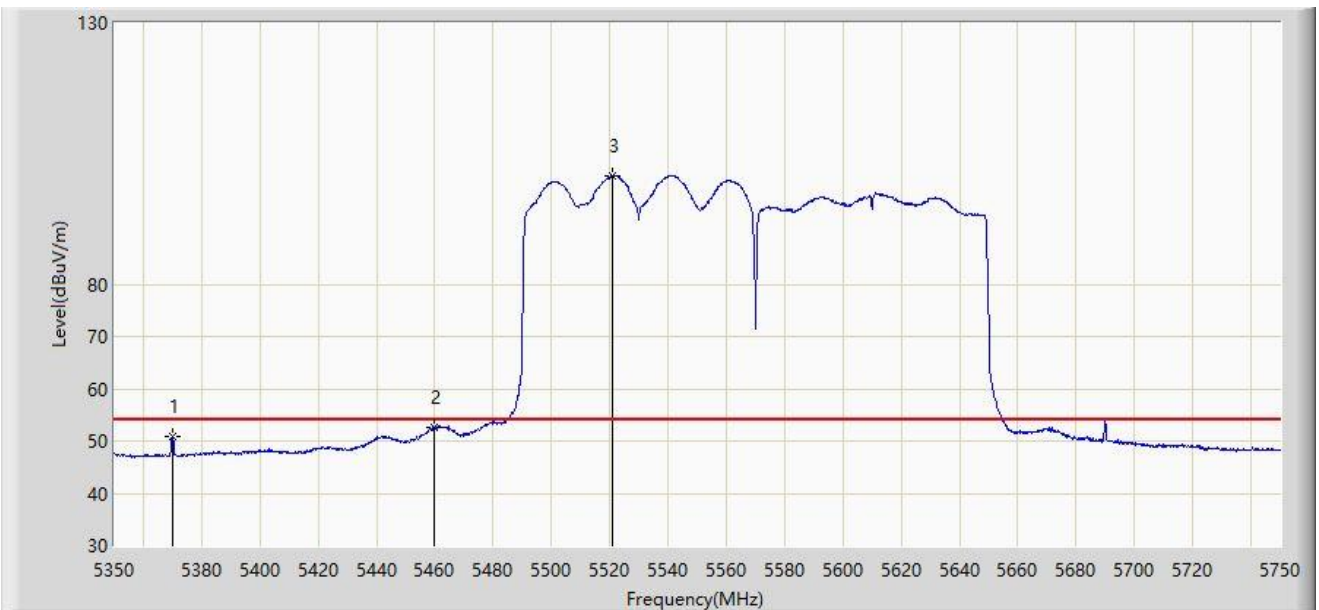


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5370.000	50.978	47.569	-3.022	54.000	3.410	AV
2	*	5460.000	52.473	48.692	-1.527	54.000	3.782	AV
3		5521.000	100.703	96.740	N/A	N/A	3.962	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5530+5610MHz	

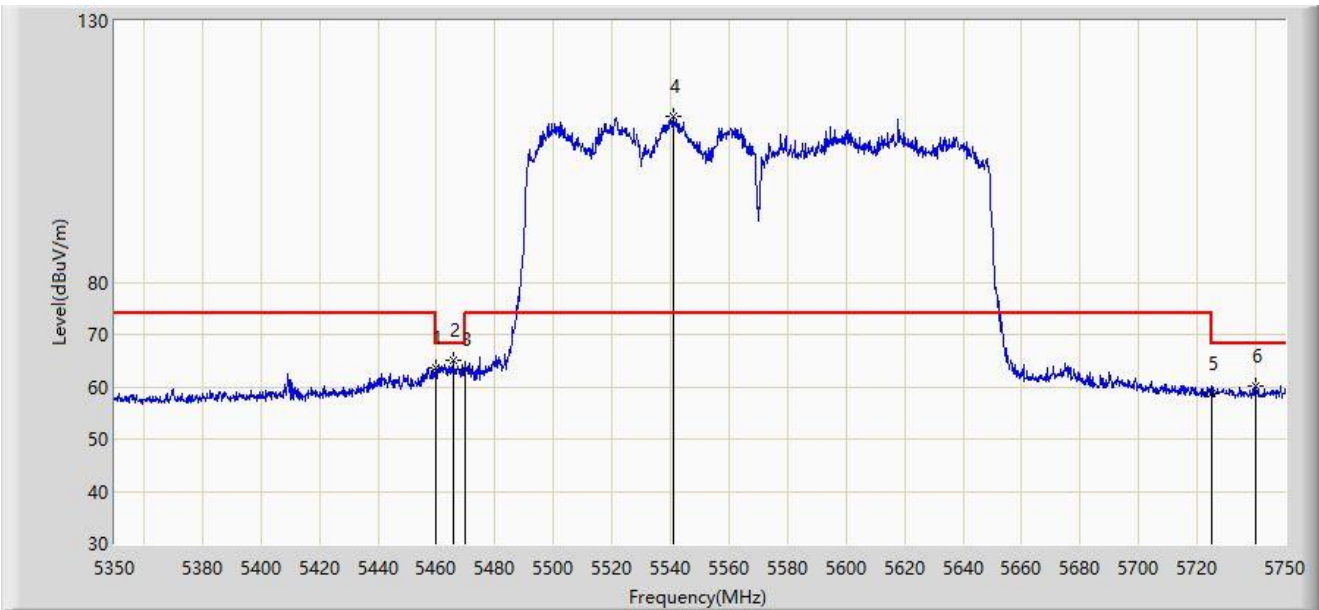


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5460.000	63.701	59.920	-10.299	74.000	3.782	PK
2	*	5465.600	65.077	61.273	-3.123	68.200	3.804	PK
3		5470.000	63.325	59.503	-4.875	68.200	3.822	PK
4		5540.800	111.850	107.931	N/A	N/A	3.920	PK
5		5725.000	58.565	54.334	-9.635	68.200	4.231	PK
6		5740.000	60.125	55.764	-8.075	68.200	4.361	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80+80 at 5530+5610MHz	

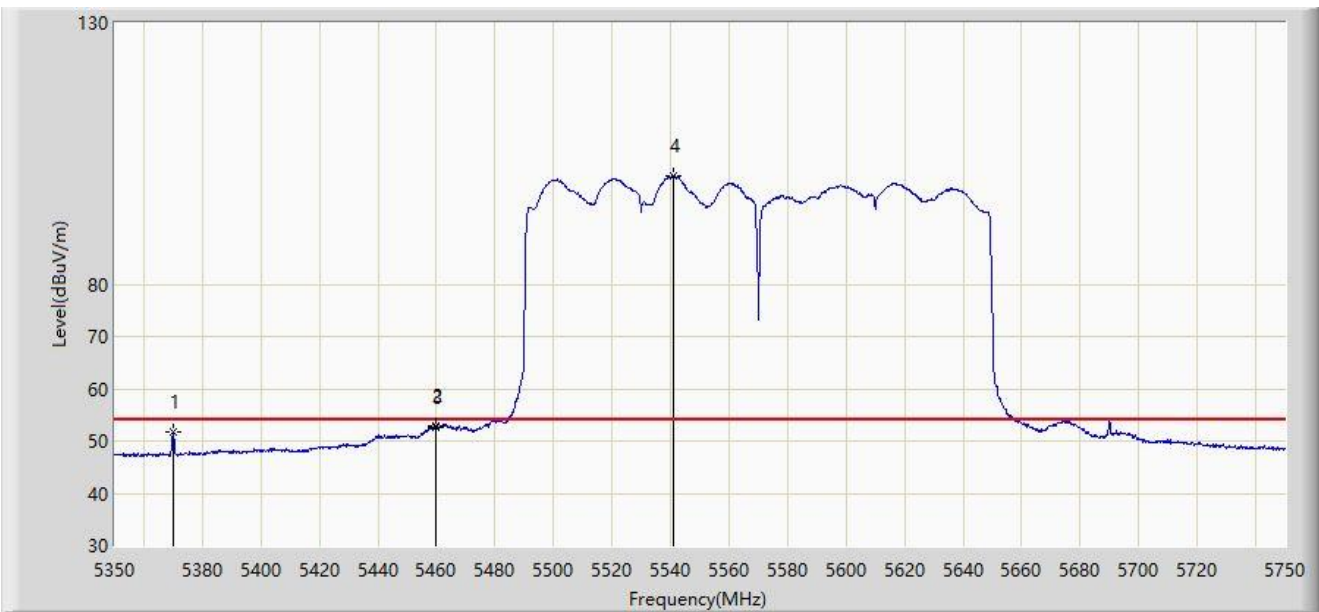


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5370.000	51.661	48.252	-2.339	54.000	3.410	AV
2	*	5459.800	52.893	49.112	-1.107	54.000	3.781	AV
3		5460.000	52.474	48.693	-1.526	54.000	3.782	AV
4		5541.000	100.660	96.740	N/A	N/A	3.920	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

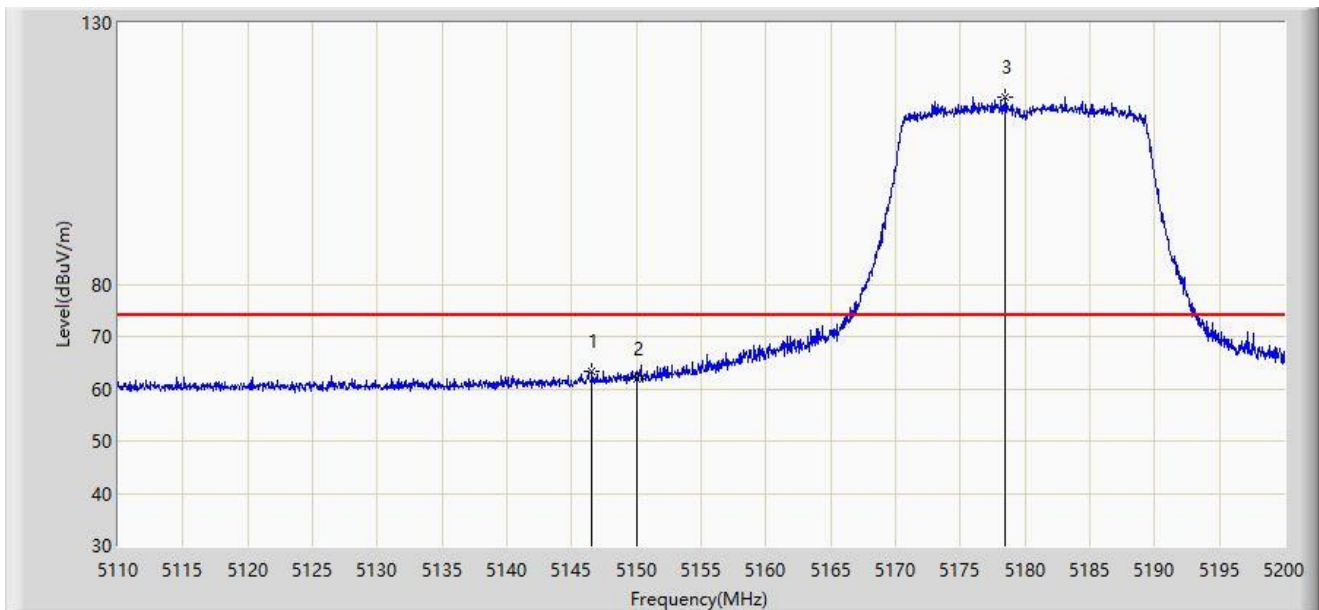


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5146.585	63.323	57.699	-10.677	74.000	5.624	PK
2		5150.000	61.782	56.119	-12.218	74.000	5.663	PK
3		5178.490	115.893	110.271	N/A	N/A	5.622	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

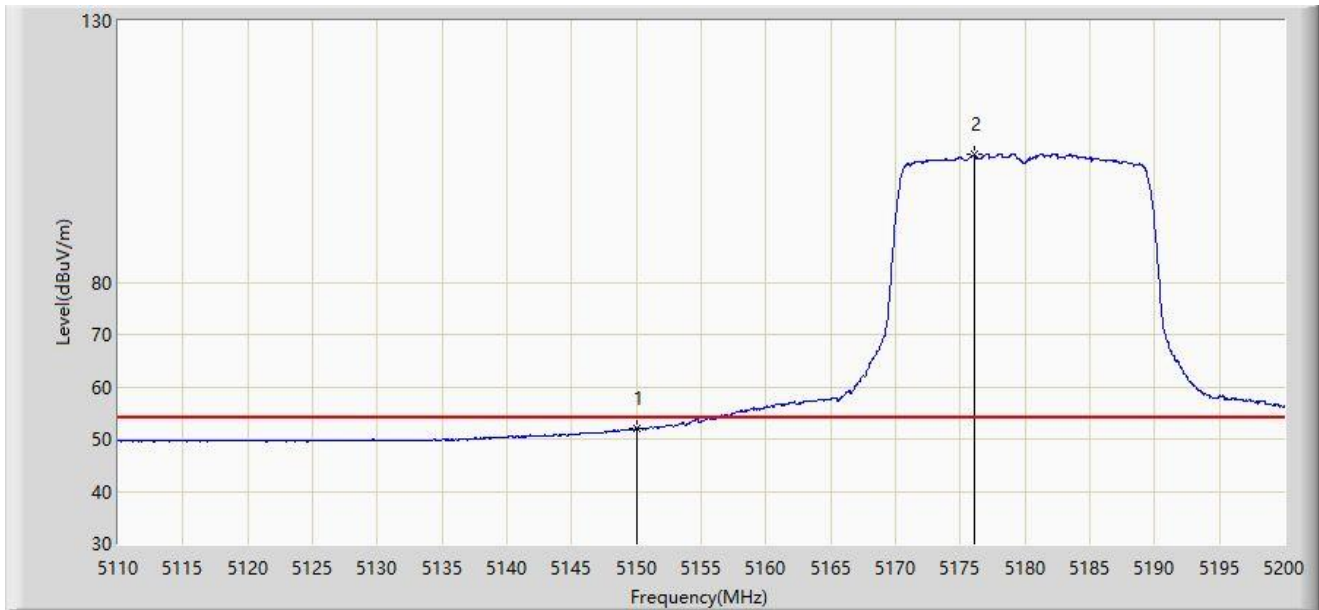


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5150.000	51.983	46.320	-2.017	54.000	5.663	AV
2		5176.060	104.457	98.798	N/A	N/A	5.659	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

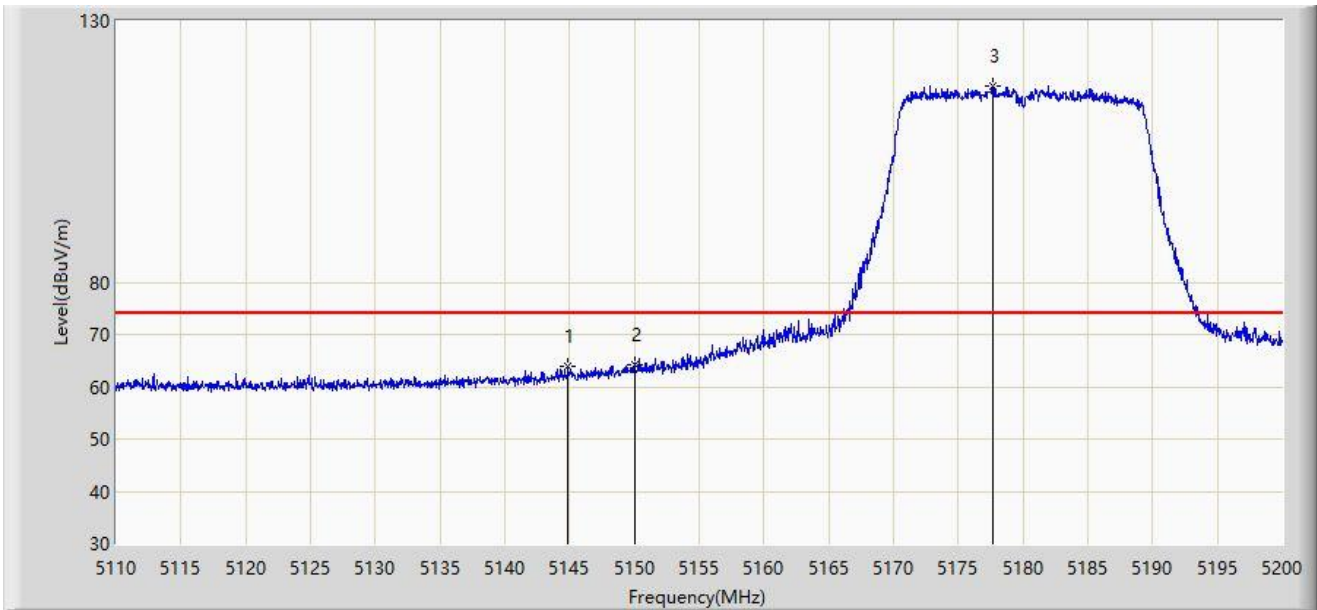


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5144.875	64.053	58.457	-9.947	74.000	5.596	PK
2	*	5150.000	64.308	58.645	-9.692	74.000	5.663	PK
3		5177.725	117.555	111.921	N/A	N/A	5.634	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

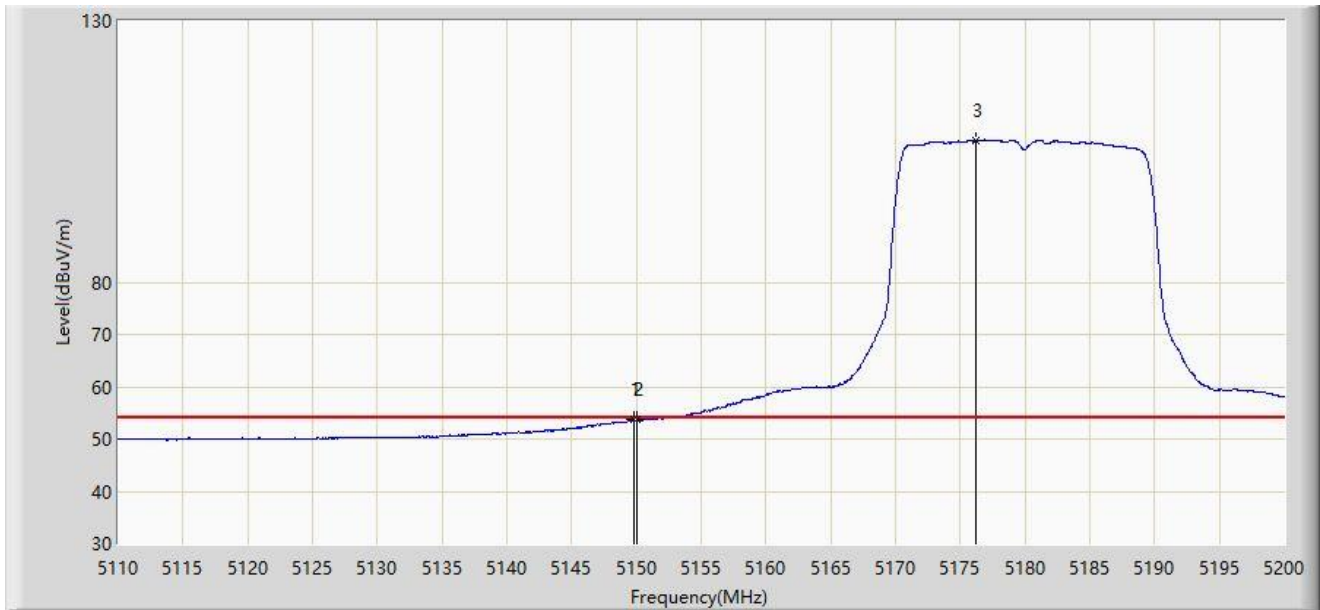

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.780	53.671	48.009	-0.329	54.000	5.662	AV
2		5150.000	53.647	47.984	-0.353	54.000	5.663	AV
3		5176.240	107.212	101.556	N/A	N/A	5.656	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

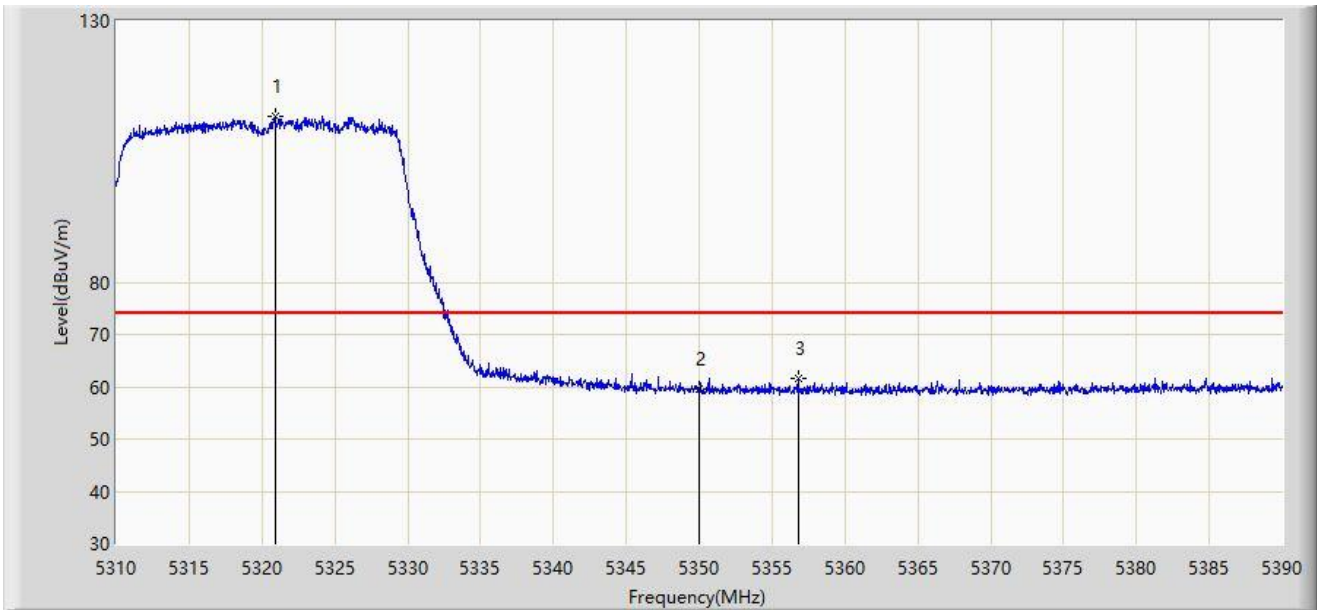


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5320.880	111.788	105.932	N/A	N/A	5.855	PK
2		5350.000	59.465	53.798	-14.535	74.000	5.667	PK
3	*	5356.800	61.541	55.893	-12.459	74.000	5.648	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

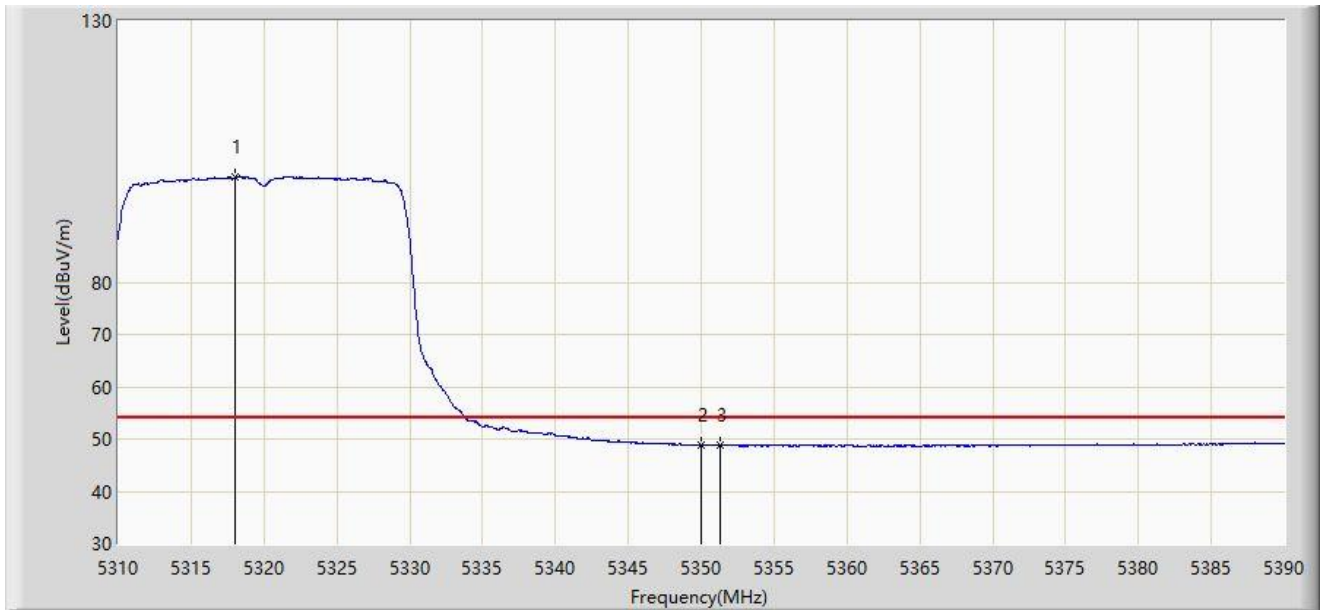


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5318.040	100.044	94.184	N/A	N/A	5.860	AV
2		5350.000	48.897	43.230	-5.103	54.000	5.667	AV
3	*	5351.280	48.956	43.311	-5.044	54.000	5.645	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

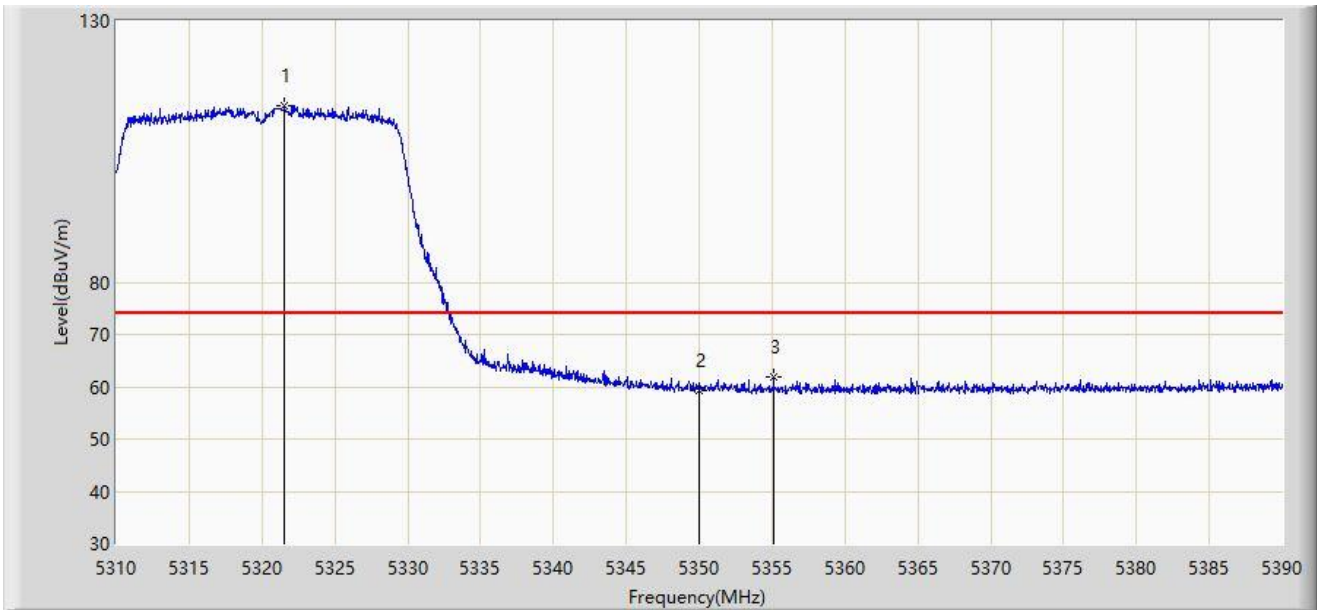


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5321.560	113.833	107.978	N/A	N/A	5.854	PK
2		5350.000	59.184	53.517	-14.816	74.000	5.667	PK
3	*	5355.120	61.744	56.127	-12.256	74.000	5.617	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

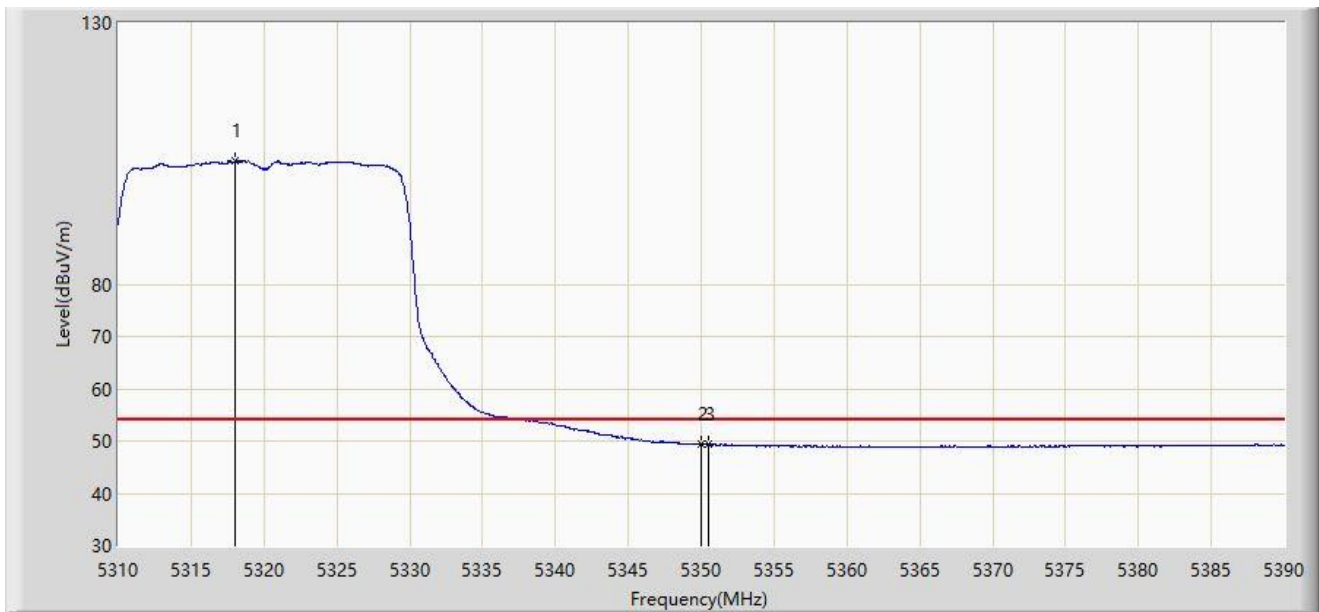


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5318.040	103.537	97.677	N/A	N/A	5.860	AV
2		5350.000	49.343	43.676	-4.657	54.000	5.667	AV
3	*	5350.480	49.414	43.755	-4.586	54.000	5.659	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

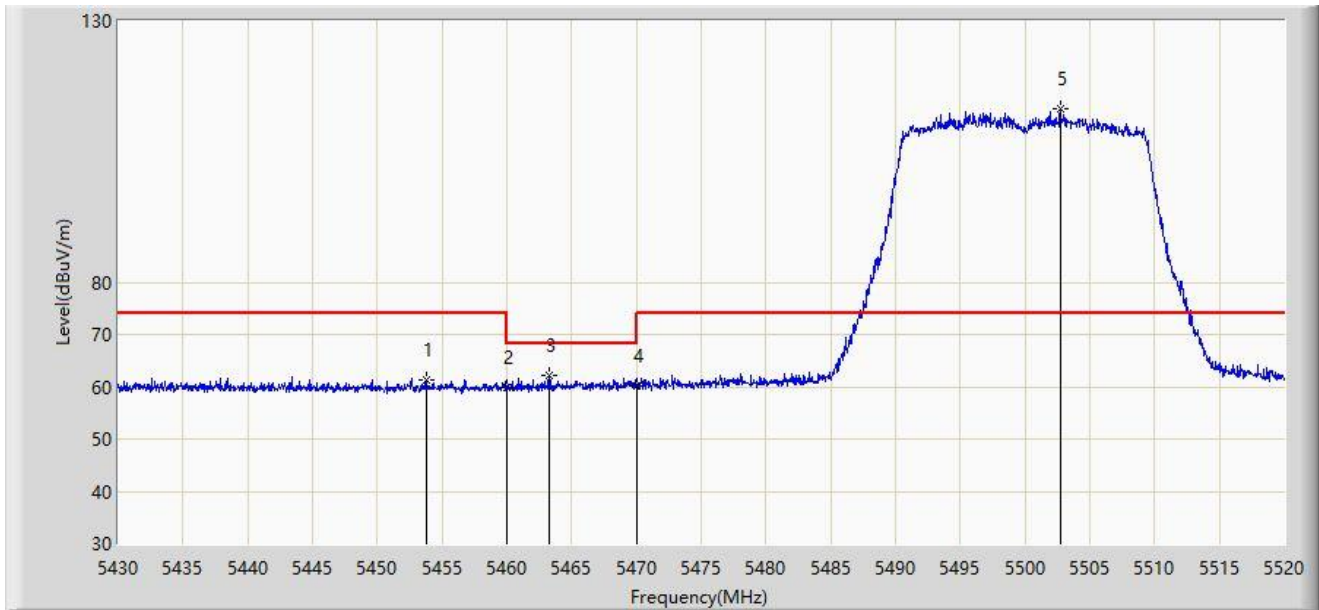


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5453.760	61.443	55.754	-12.557	74.000	5.689	PK
2		5460.000	59.725	53.946	-14.275	74.000	5.779	PK
3	*	5463.255	62.225	56.437	-5.975	68.200	5.788	PK
4		5470.000	60.249	54.297	-7.951	68.200	5.951	PK
5		5502.720	113.306	107.592	N/A	N/A	5.713	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

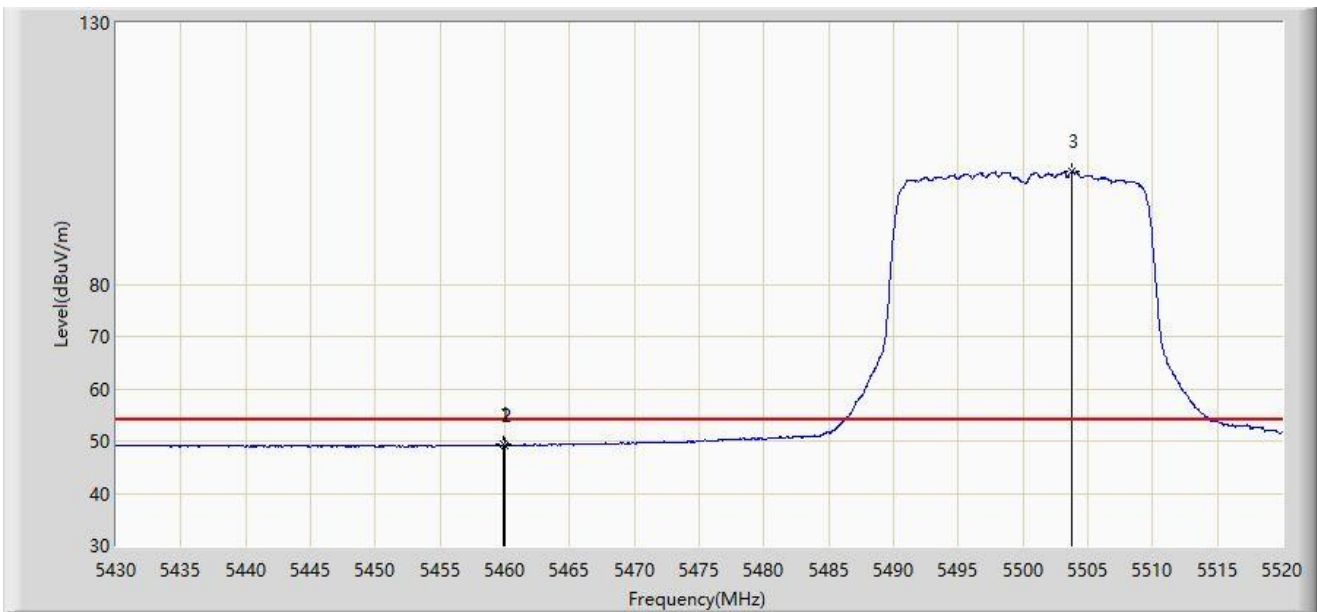


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.925	49.282	43.504	-4.718	54.000	5.778	AV
2		5460.000	49.205	43.426	-4.795	54.000	5.779	AV
3		5503.710	101.468	95.763	N/A	N/A	5.705	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

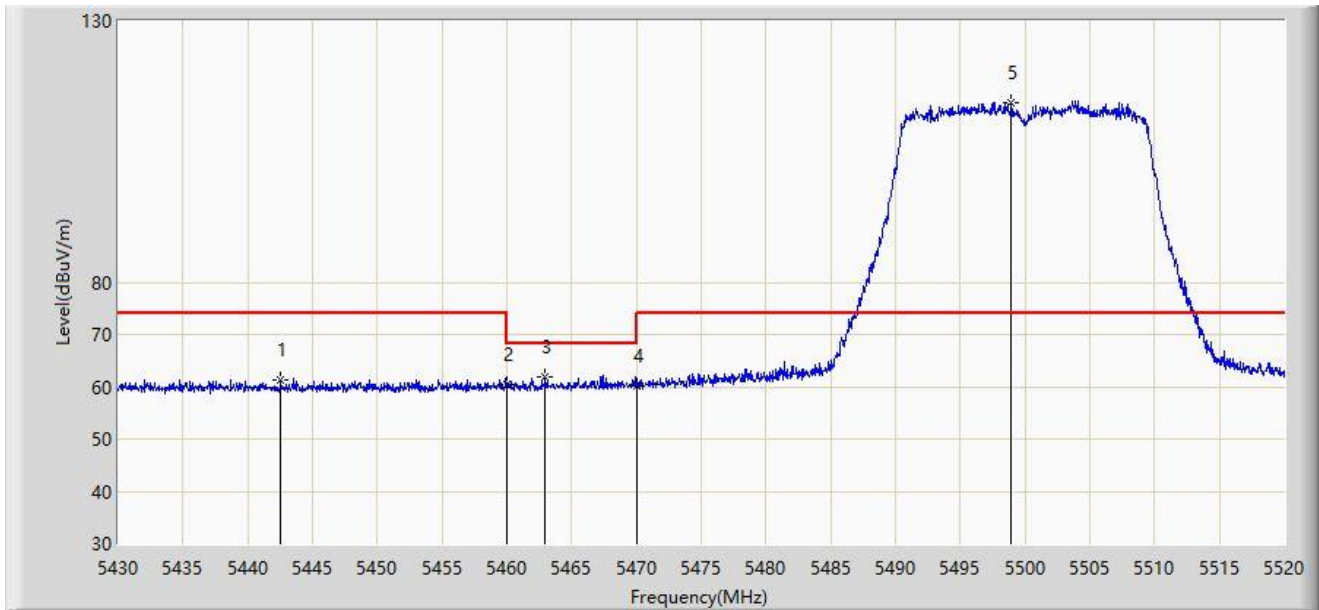


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5442.555	61.343	55.541	-12.657	74.000	5.803	PK
2		5460.000	60.455	54.676	-13.545	74.000	5.779	PK
3	*	5462.985	61.832	56.049	-6.368	68.200	5.783	PK
4		5470.000	60.280	54.328	-7.920	68.200	5.951	PK
5		5498.940	114.326	108.579	N/A	N/A	5.748	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

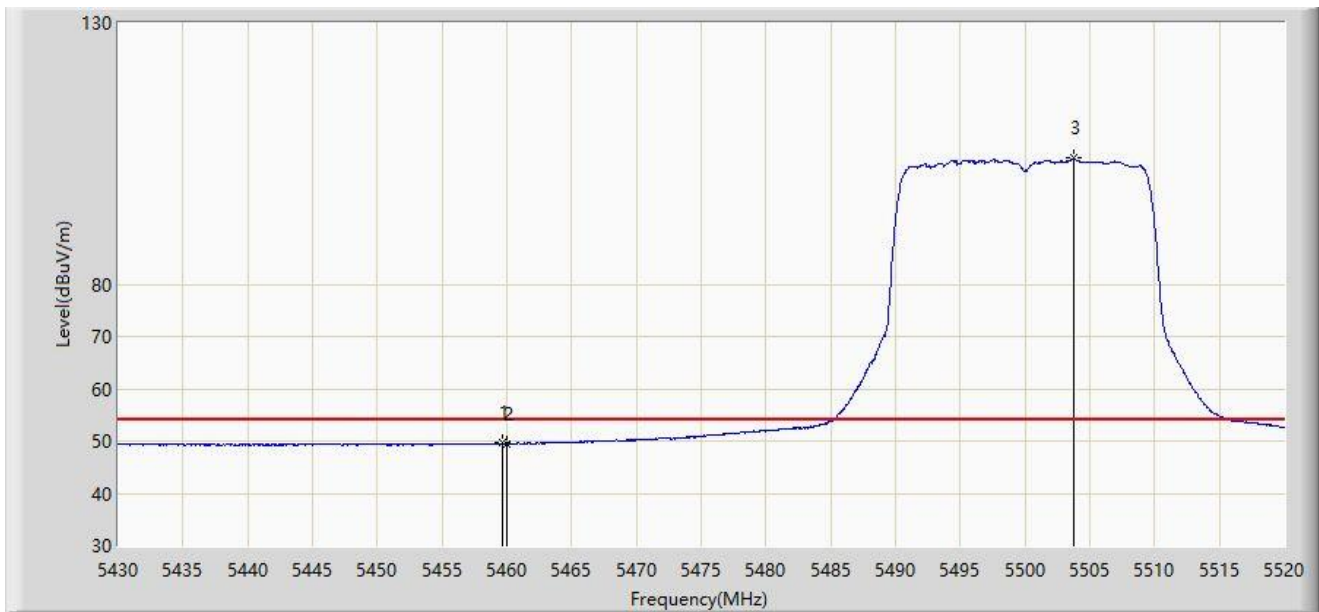

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5459.655	49.597	43.824	-4.403	54.000	5.773	AV
2		5460.000	49.496	43.717	-4.504	54.000	5.779	AV
3		5503.755	104.075	98.370	N/A	N/A	5.705	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

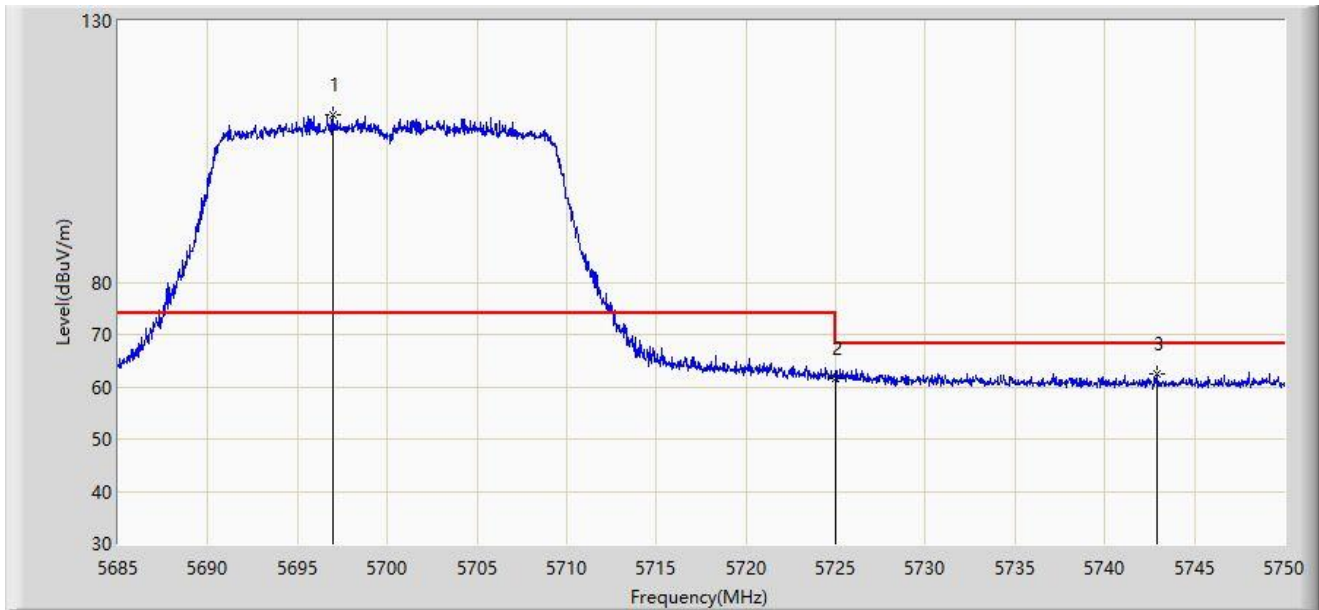


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5696.960	112.114	105.411	N/A	N/A	6.703	PK
2		5725.000	61.535	54.512	-6.665	68.200	7.023	PK
3	*	5742.882	62.538	55.788	-5.662	68.200	6.750	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

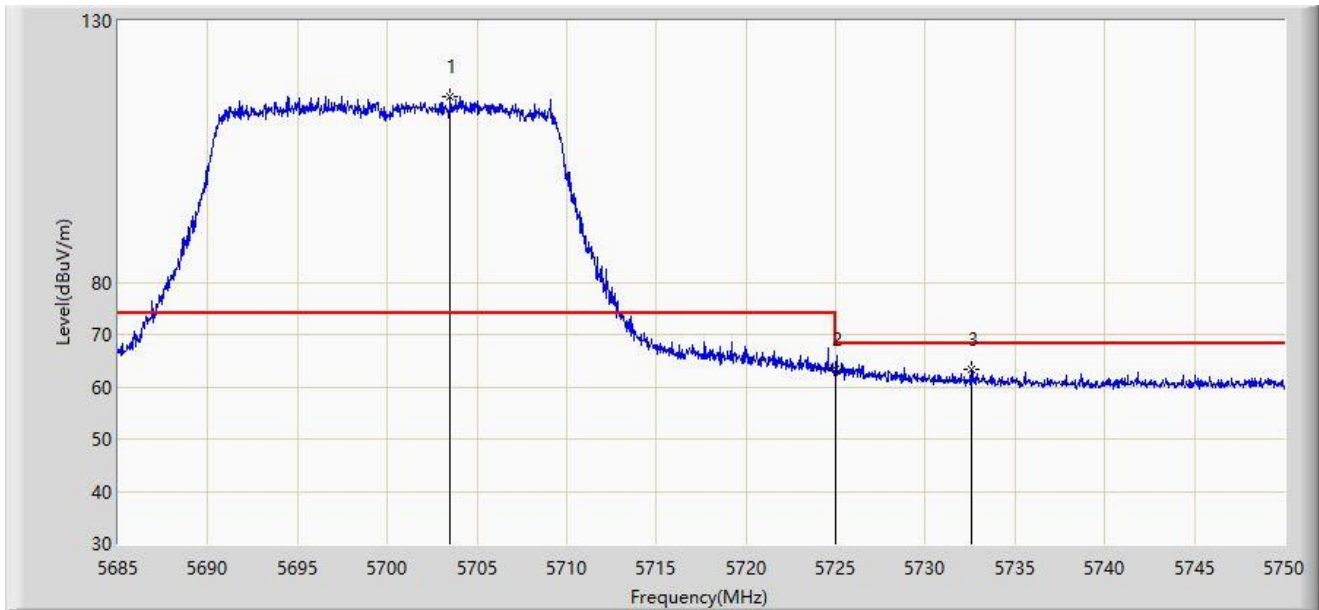


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5703.493	115.573	108.773	N/A	N/A	6.800	PK
2		5725.000	63.375	56.352	-4.825	68.200	7.023	PK
3	*	5732.547	63.474	56.549	-4.726	68.200	6.925	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

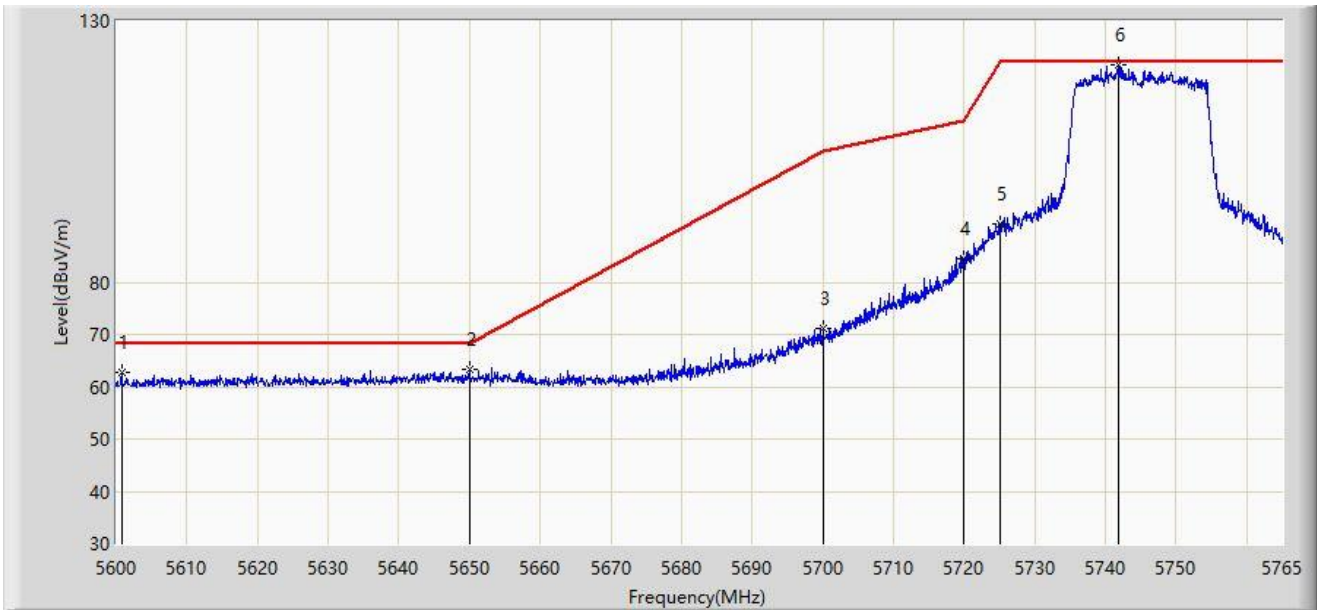


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5600.825	62.683	56.739	-5.517	68.200	5.944	PK
2	*	5650.000	63.213	56.705	-4.987	68.200	6.508	PK
3		5700.000	71.142	64.394	-34.058	105.200	6.748	PK
4		5720.000	84.456	77.476	-26.344	110.800	6.979	PK
5		5725.000	91.055	84.032	-31.145	122.200	7.023	PK
6		5741.900	121.467	114.700	N/A	N/A	6.766	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

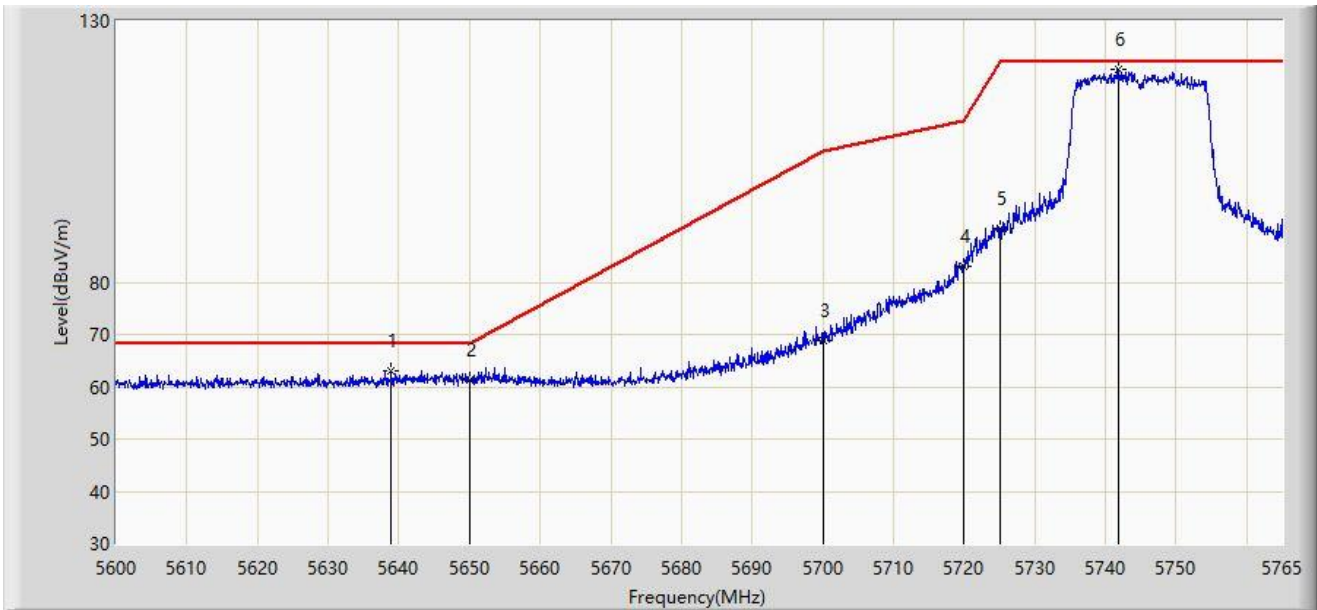


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5638.940	62.906	56.368	-5.294	68.200	6.538	PK
2		5650.000	61.162	54.654	-7.038	68.200	6.508	PK
3		5700.000	68.957	62.209	-36.243	105.200	6.748	PK
4		5720.000	83.021	76.041	-27.779	110.800	6.979	PK
5		5725.000	90.193	83.170	-32.007	122.200	7.023	PK
6		5741.900	120.857	114.090	N/A	N/A	6.766	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

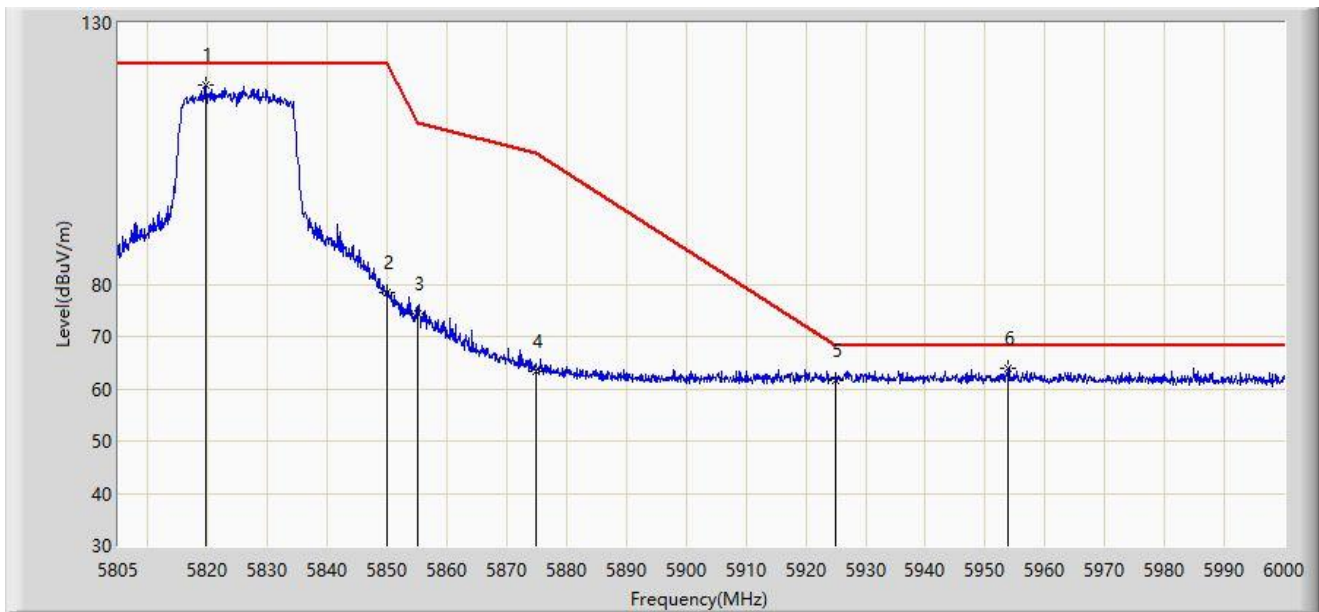


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5819.625	118.198	110.859	N/A	N/A	7.338	PK
2		5850.000	78.343	70.920	-43.857	122.200	7.423	PK
3		5855.000	74.357	66.866	-36.443	110.800	7.491	PK
4		5875.000	63.456	55.810	-41.744	105.200	7.646	PK
5		5925.000	61.536	53.686	-6.664	68.200	7.851	PK
6	*	5953.882	64.020	56.021	-4.180	68.200	7.999	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

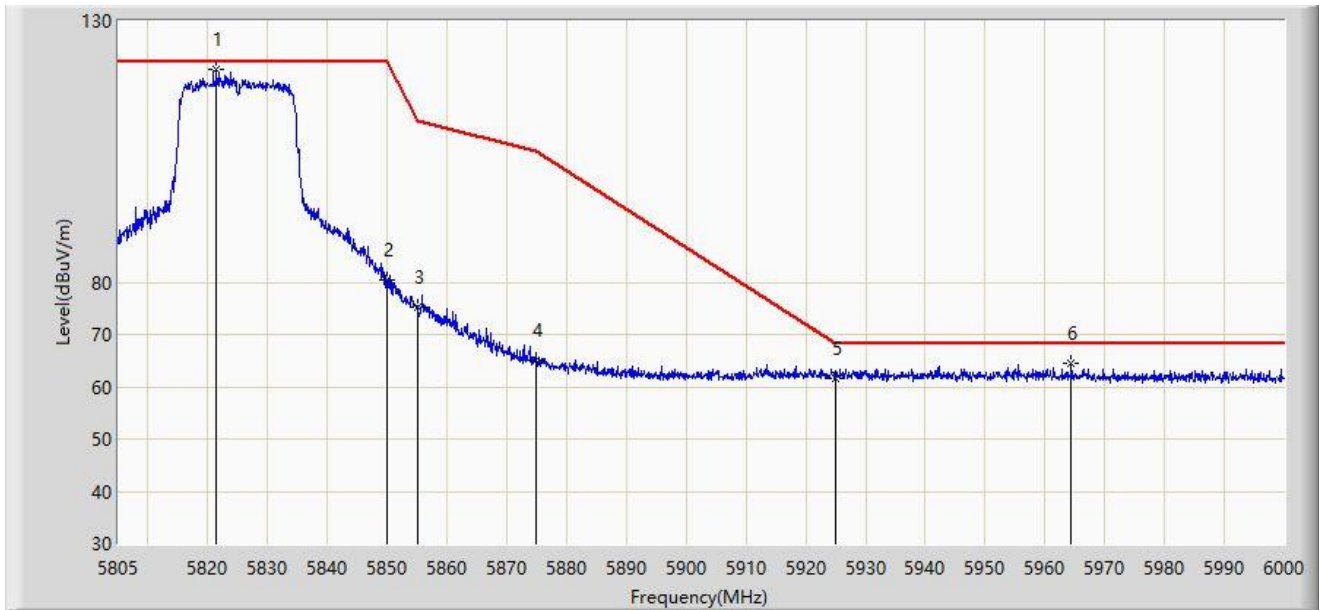


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5821.380	120.779	113.459	N/A	N/A	7.320	PK
2		5850.000	80.358	72.935	-41.842	122.200	7.423	PK
3		5855.000	75.185	67.694	-35.615	110.800	7.491	PK
4		5875.000	65.217	57.571	-39.983	105.200	7.646	PK
5		5925.000	61.678	53.828	-6.522	68.200	7.851	PK
6	*	5964.413	64.415	56.433	-3.785	68.200	7.982	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

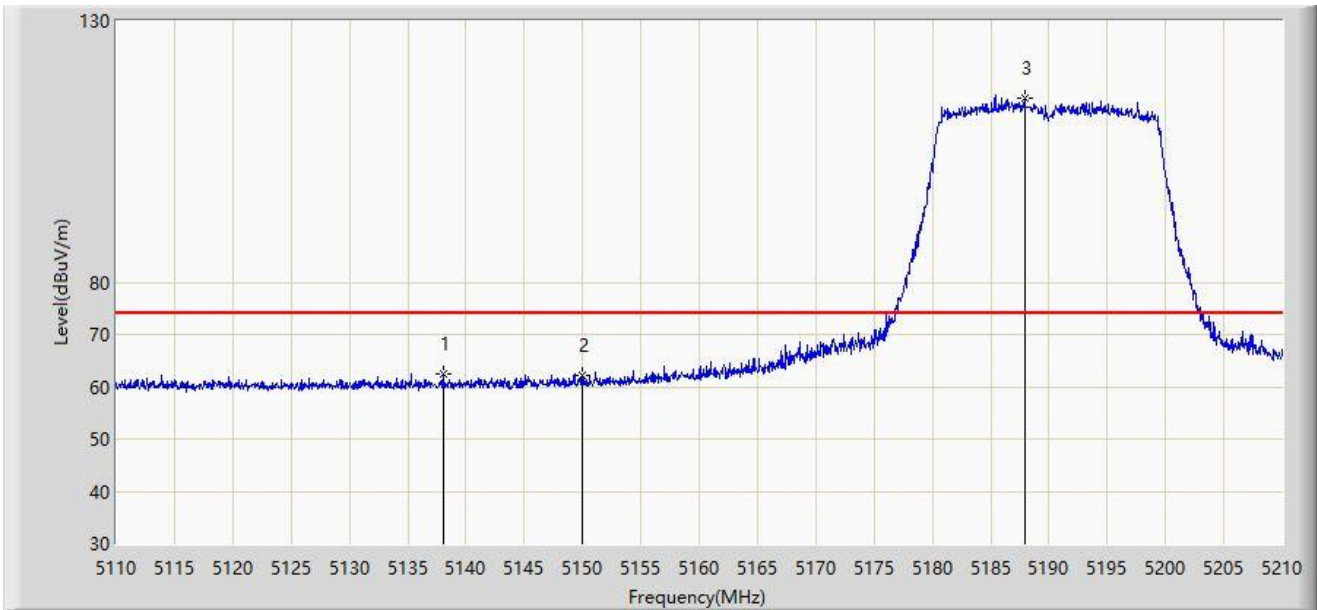


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5138.050	62.438	56.956	-11.562	74.000	5.483	PK
2		5150.000	62.258	56.595	-11.742	74.000	5.663	PK
3		5187.900	115.293	109.829	N/A	N/A	5.464	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

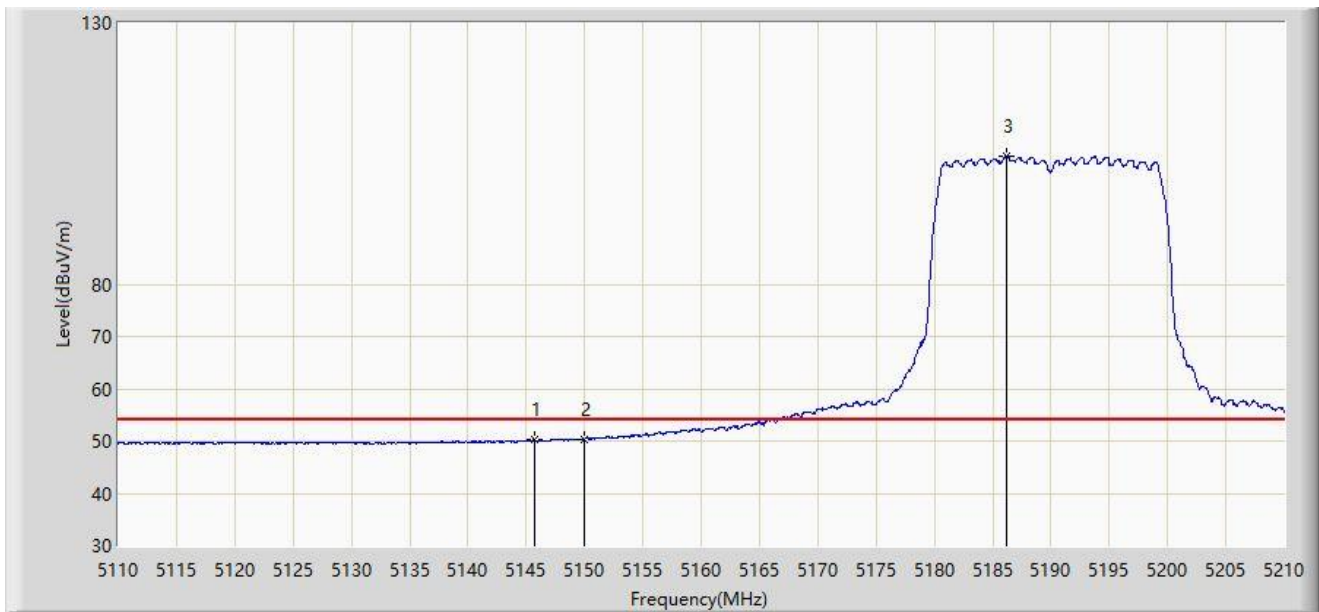

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5145.700	50.323	44.714	-3.677	54.000	5.609	AV
2	*	5150.000	50.328	44.665	-3.672	54.000	5.663	AV
3		5186.150	104.414	98.919	N/A	N/A	5.495	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

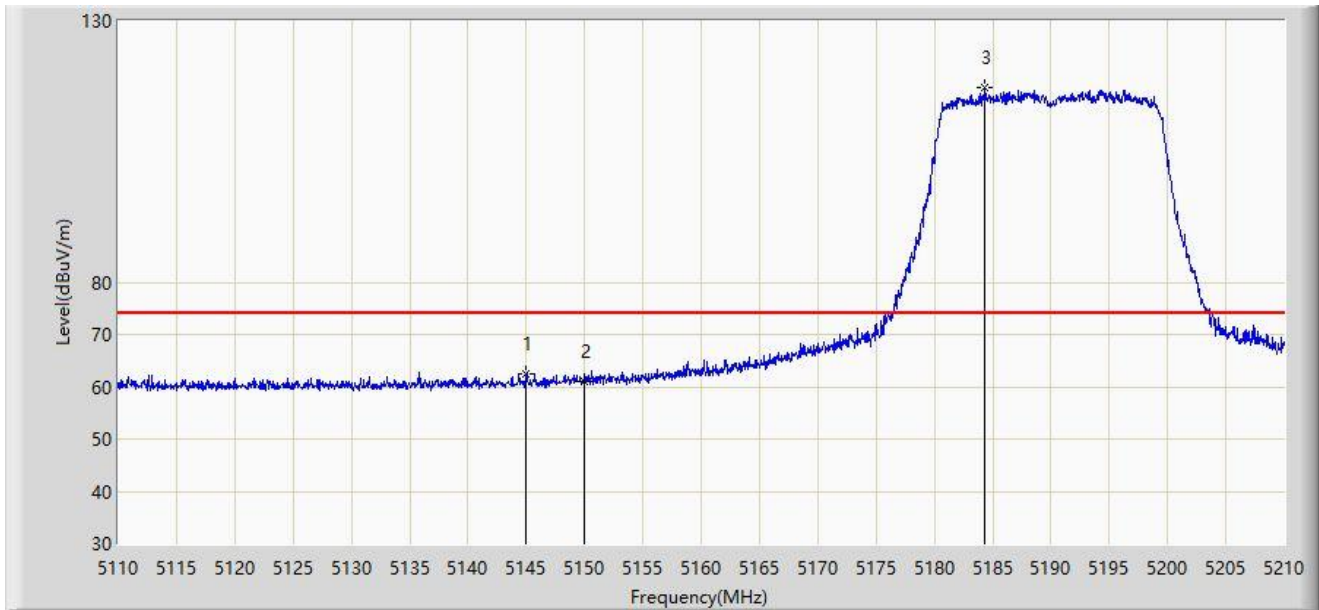


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5144.900	62.579	56.983	-11.421	74.000	5.596	PK
2		5150.000	60.999	55.336	-13.001	74.000	5.663	PK
3		5184.350	117.224	111.697	N/A	N/A	5.528	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

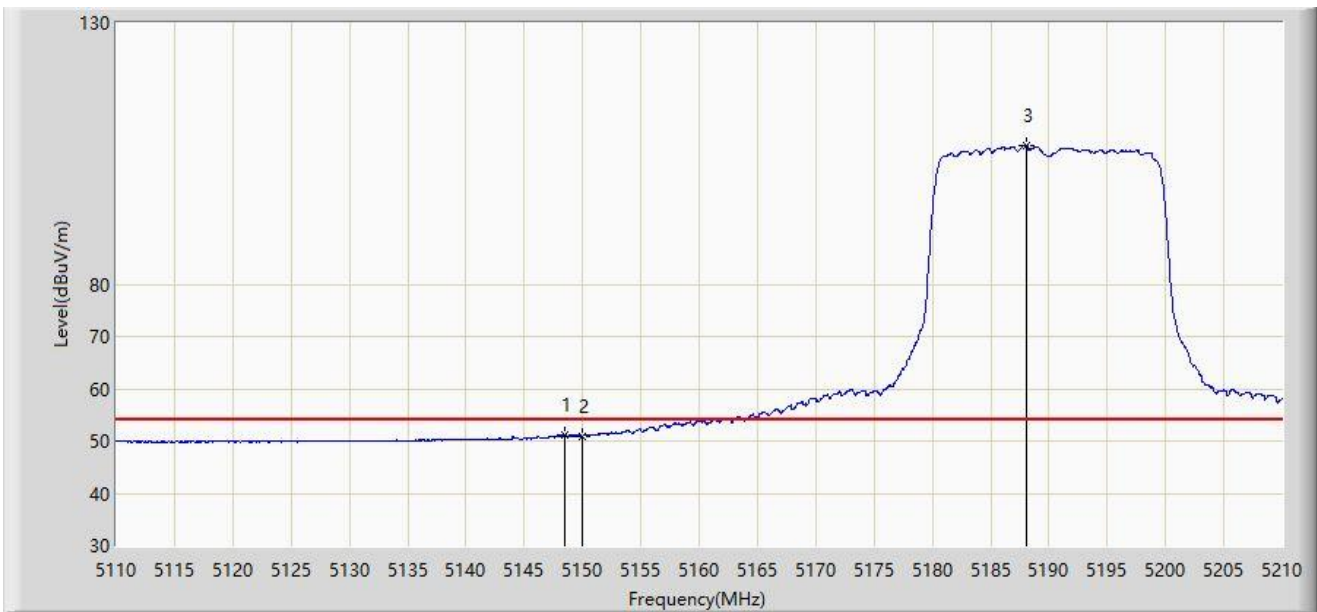


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.500	51.235	45.583	-2.765	54.000	5.652	AV
2		5150.000	50.991	45.328	-3.009	54.000	5.663	AV
3		5188.100	106.578	101.117	N/A	N/A	5.461	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

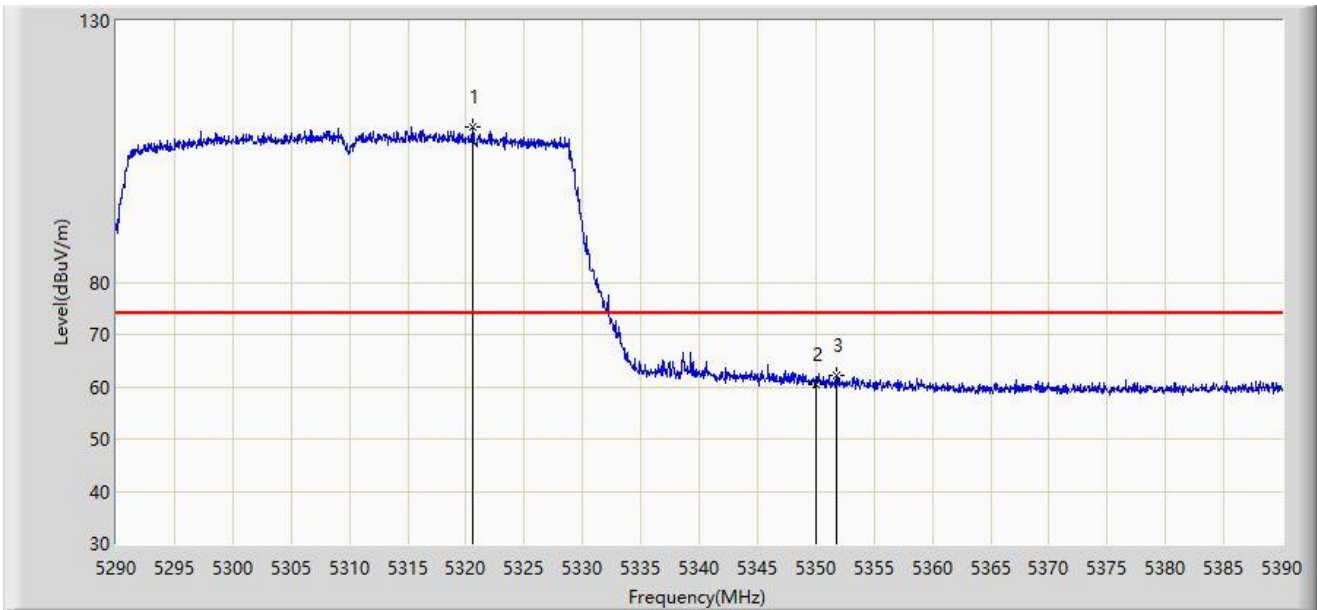


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5320.600	109.823	103.967	N/A	N/A	5.856	PK
2		5350.000	60.526	54.859	-13.474	74.000	5.667	PK
3	*	5351.750	62.286	56.649	-11.714	74.000	5.638	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

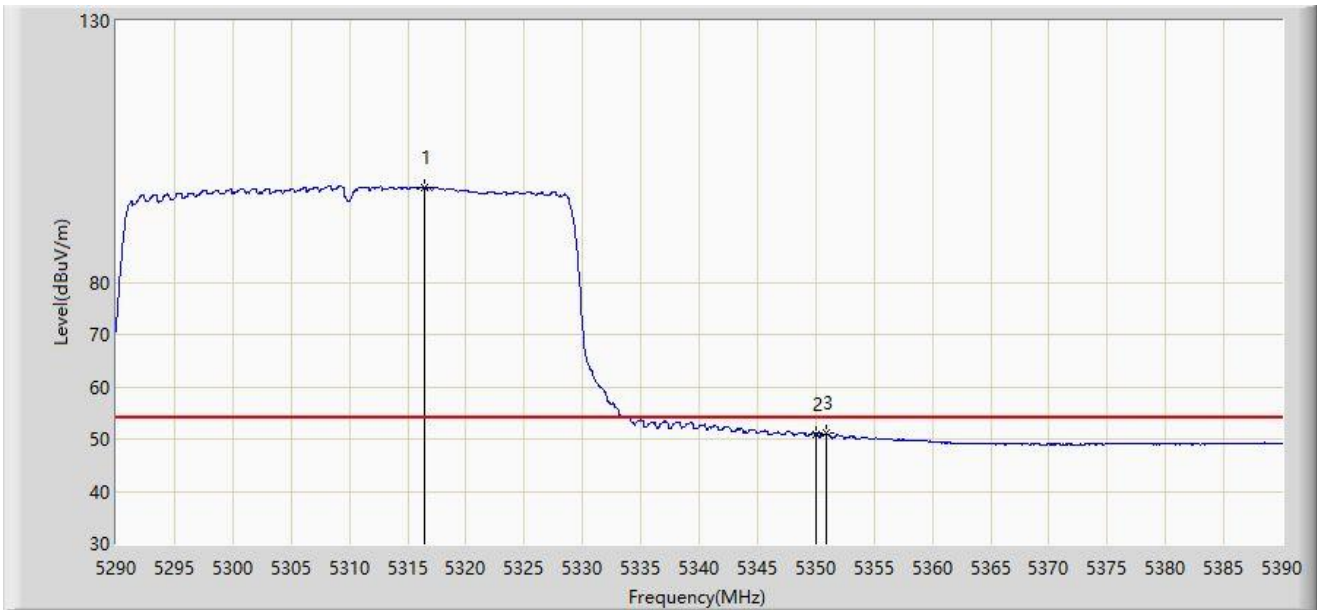


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5316.400	98.203	92.371	N/A	N/A	5.832	AV
2		5350.000	50.996	45.329	-3.004	54.000	5.667	AV
3	*	5350.850	51.129	45.476	-2.871	54.000	5.652	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

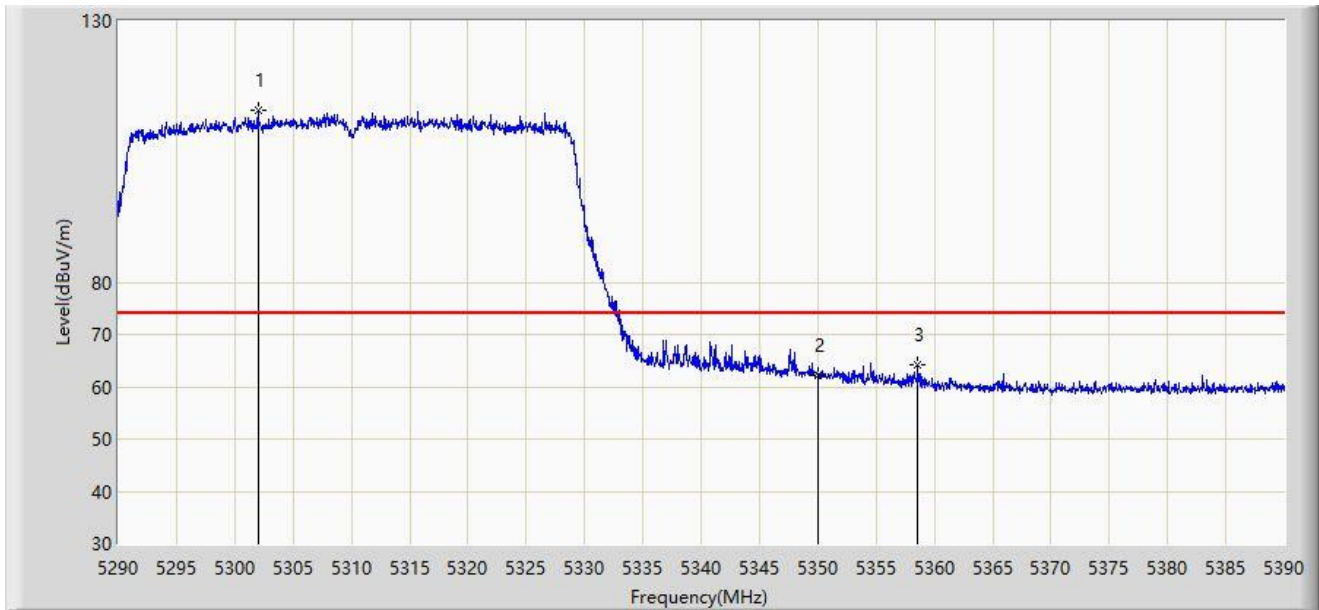


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5302.000	112.987	107.385	N/A	N/A	5.602	PK
2		5350.000	62.051	56.384	-11.949	74.000	5.667	PK
3	*	5358.550	64.138	58.484	-9.862	74.000	5.653	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

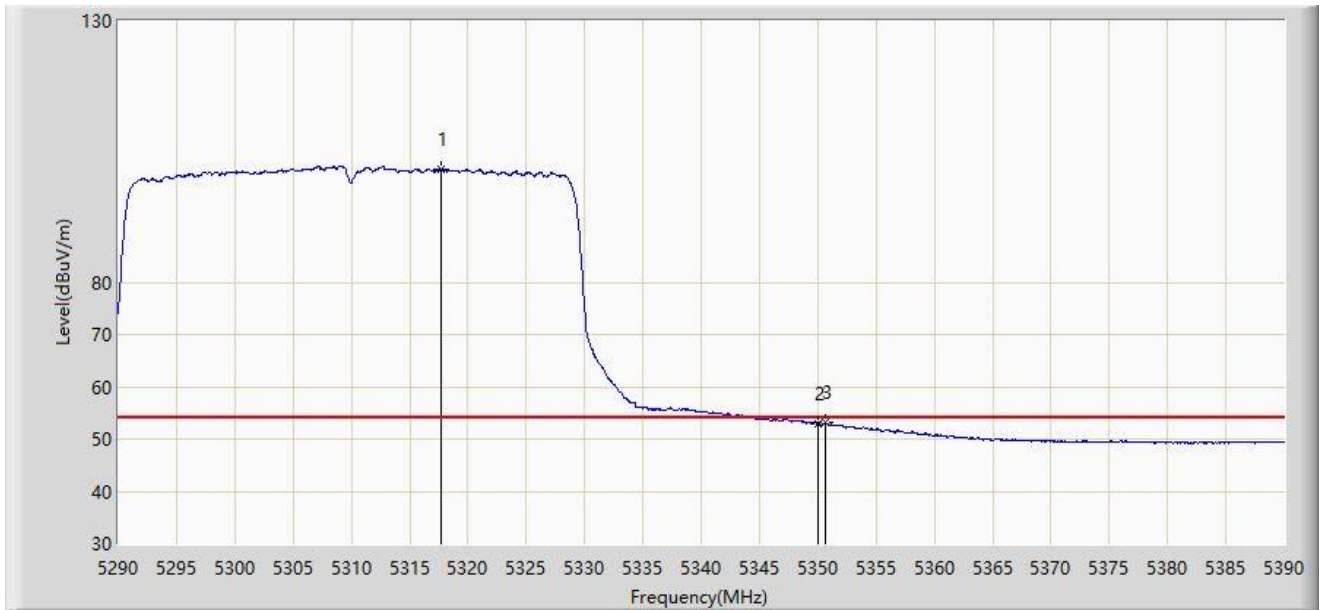


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5317.750	101.649	95.793	N/A	N/A	5.857	AV
2		5350.000	52.871	47.204	-1.129	54.000	5.667	AV
3	*	5350.650	53.060	47.404	-0.940	54.000	5.656	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

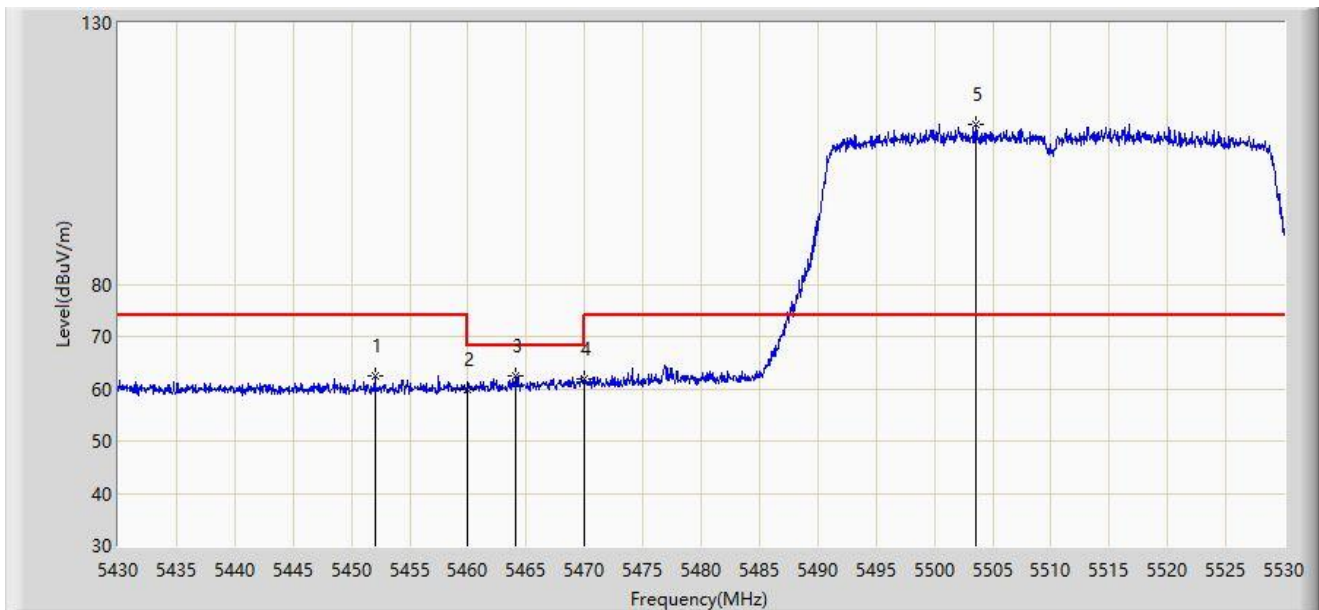


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5452.000	62.509	56.802	-11.491	74.000	5.706	PK
2		5460.000	59.864	54.085	-14.136	74.000	5.779	PK
3	*	5464.050	62.455	56.653	-5.745	68.200	5.802	PK
4		5470.000	61.911	55.959	-6.289	68.200	5.951	PK
5		5503.550	110.495	104.789	N/A	N/A	5.706	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

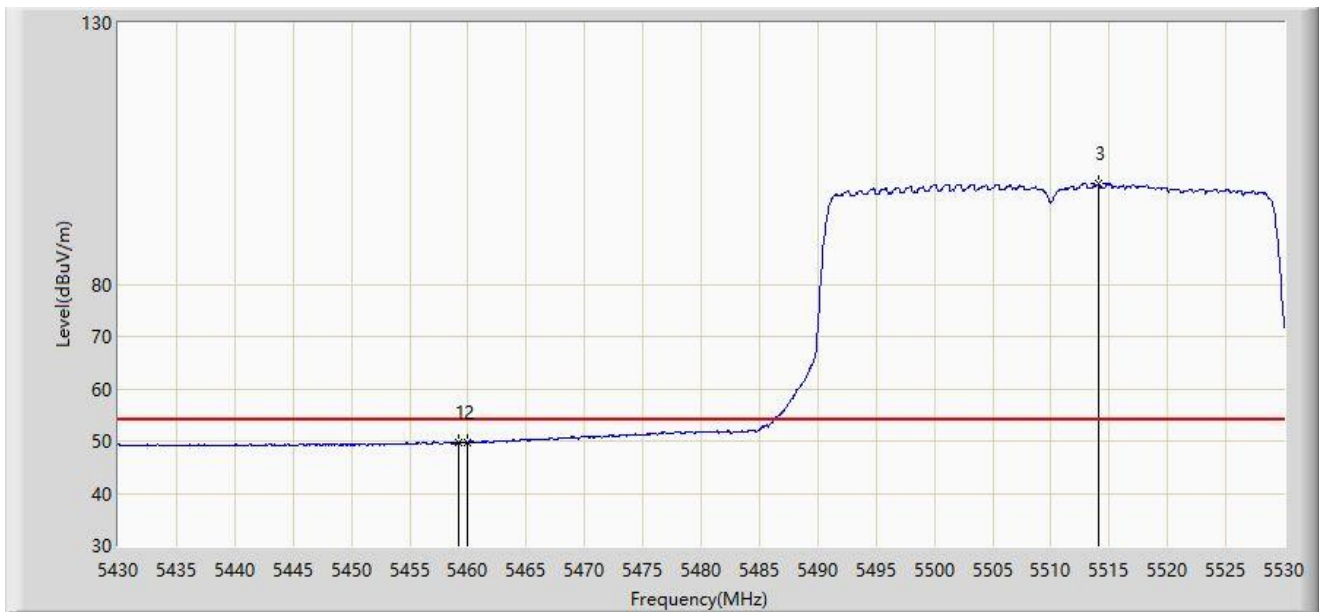

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5459.200	49.849	44.084	-4.151	54.000	5.765	AV
2		5460.000	49.646	43.867	-4.354	54.000	5.779	AV
3		5514.050	99.162	93.556	N/A	N/A	5.606	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

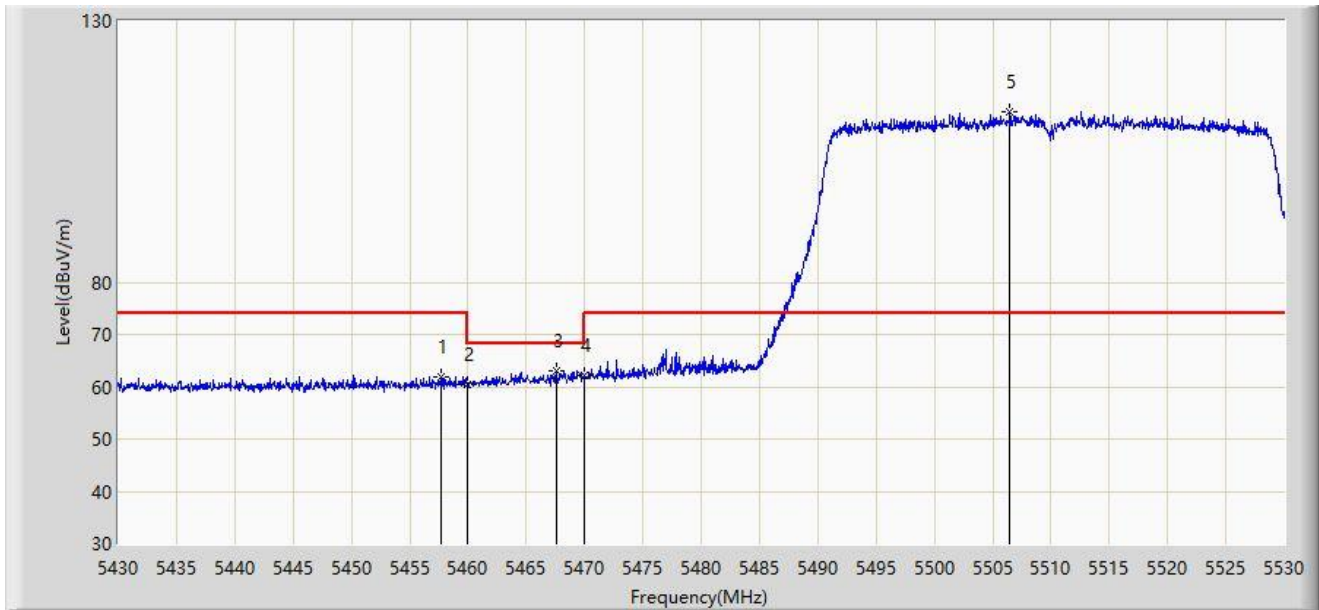


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.650	61.967	56.228	-12.033	74.000	5.738	PK
2		5460.000	60.342	54.563	-13.658	74.000	5.779	PK
3	*	5467.550	63.142	57.279	-5.058	68.200	5.863	PK
4		5470.000	62.133	56.181	-6.067	68.200	5.951	PK
5		5506.500	112.489	106.813	N/A	N/A	5.676	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

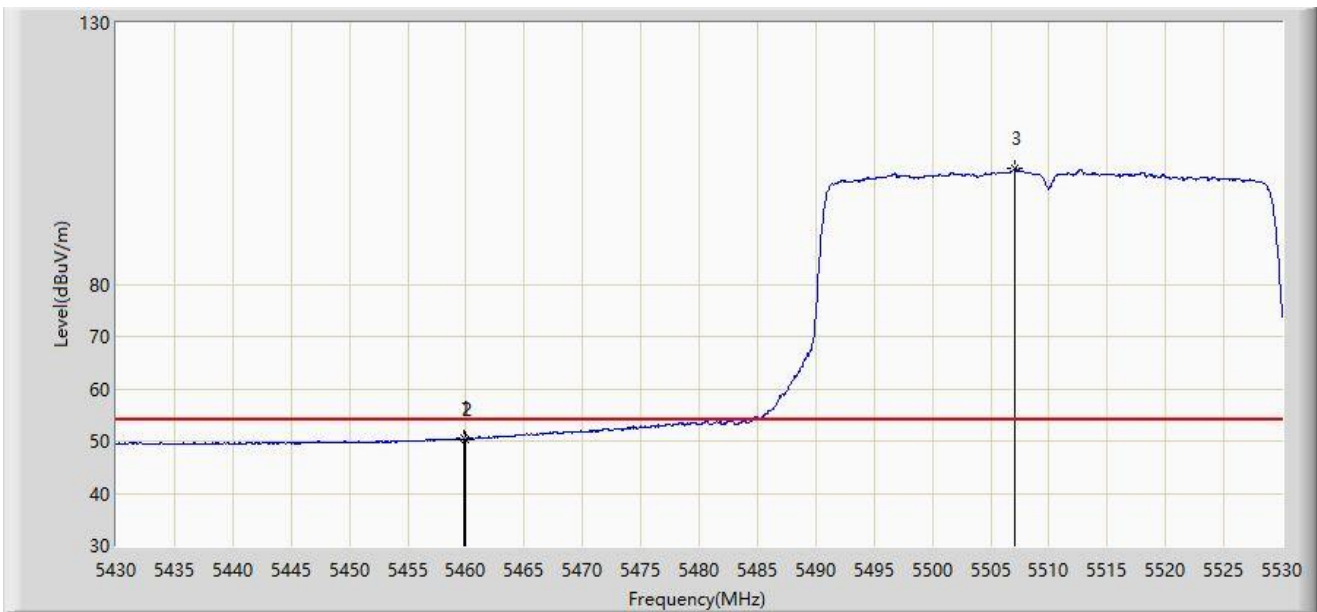


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5459.850	50.440	44.663	-3.560	54.000	5.777	AV
2		5460.000	50.410	44.631	-3.590	54.000	5.779	AV
3		5507.100	102.082	96.413	N/A	N/A	5.669	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

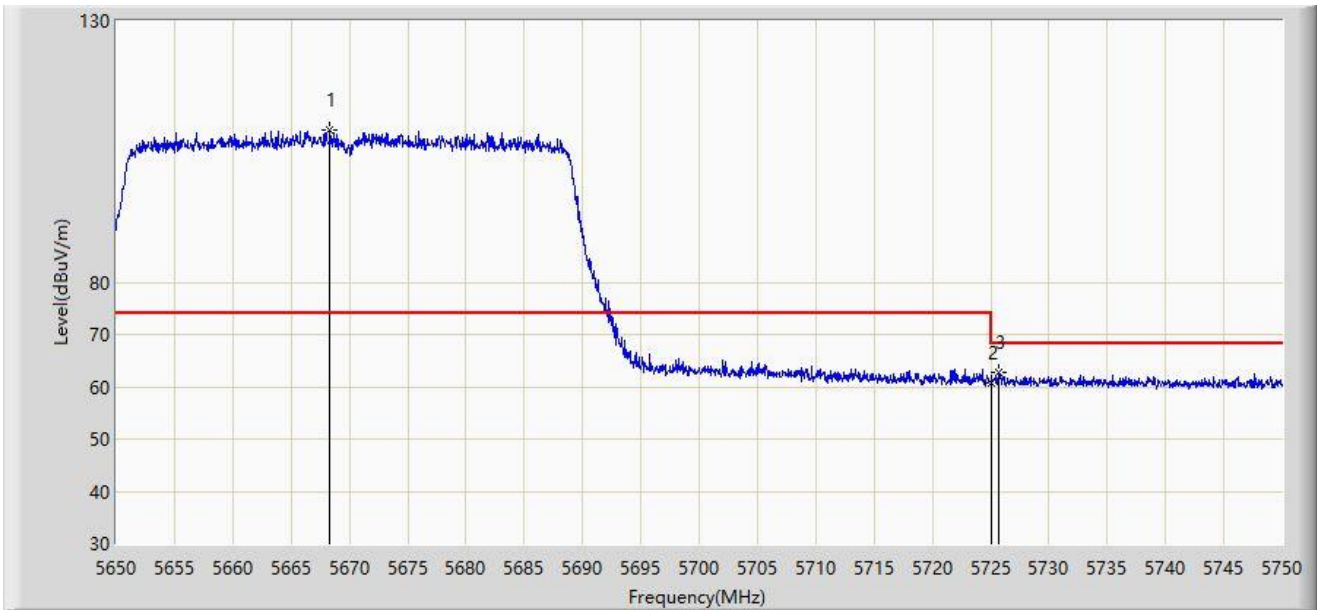


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5668.300	109.043	102.658	N/A	N/A	6.384	PK
2		5725.000	60.825	53.802	-7.375	68.200	7.023	PK
3	*	5725.650	62.761	55.732	-5.439	68.200	7.029	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

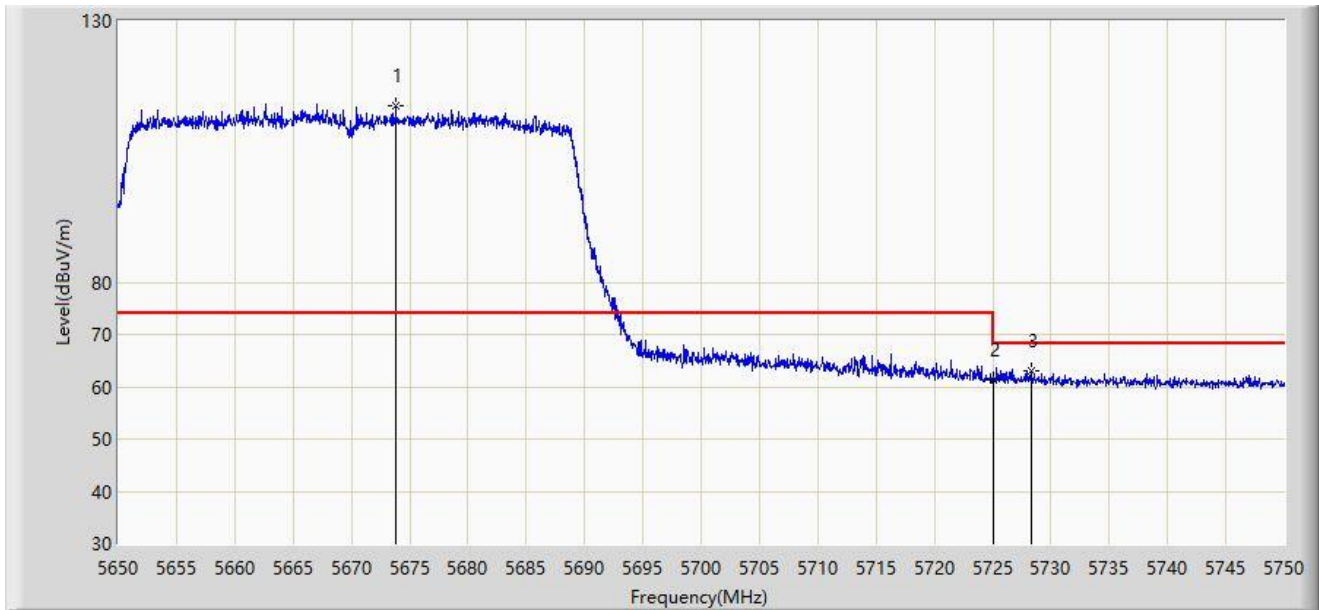


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5673.800	113.626	107.264	N/A	N/A	6.363	PK
2		5725.000	61.307	54.284	-6.893	68.200	7.023	PK
3	*	5728.300	63.111	56.114	-5.089	68.200	6.997	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

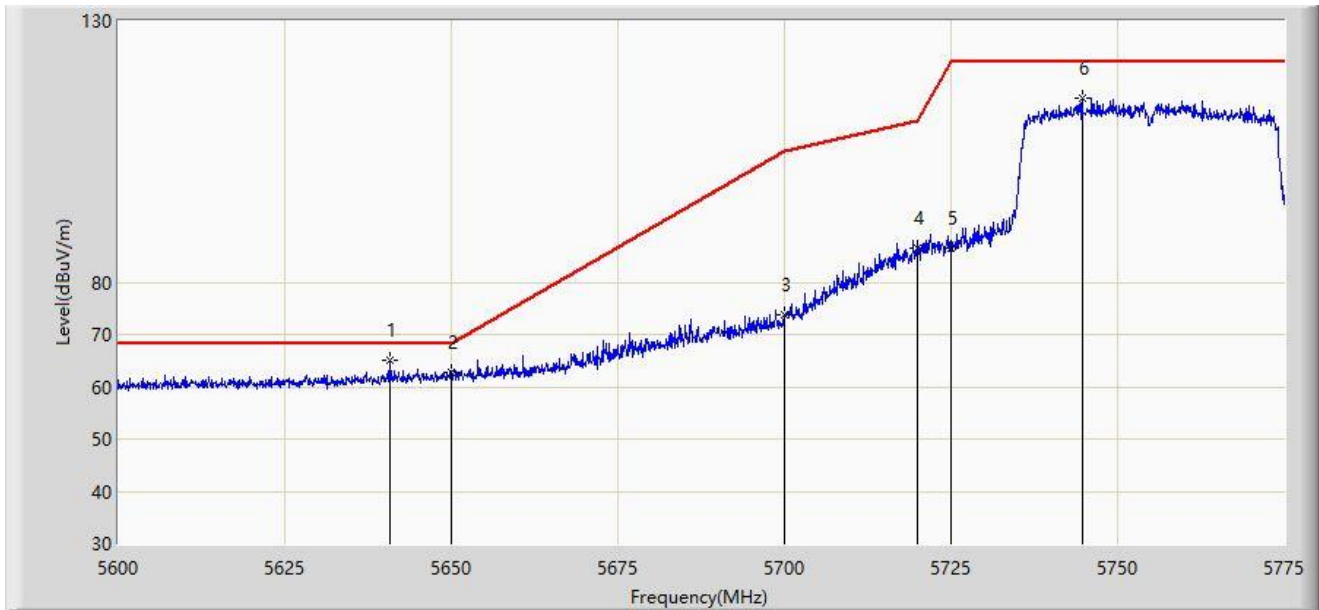


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5640.862	65.077	58.515	-3.123	68.200	6.562	PK
2		5650.000	62.840	56.332	-5.360	68.200	6.508	PK
3		5700.000	73.787	67.039	-31.413	105.200	6.748	PK
4		5720.000	86.605	79.625	-24.195	110.800	6.979	PK
5		5725.000	86.595	79.572	-35.605	122.200	7.023	PK
6		5744.725	115.122	108.368	N/A	N/A	6.753	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

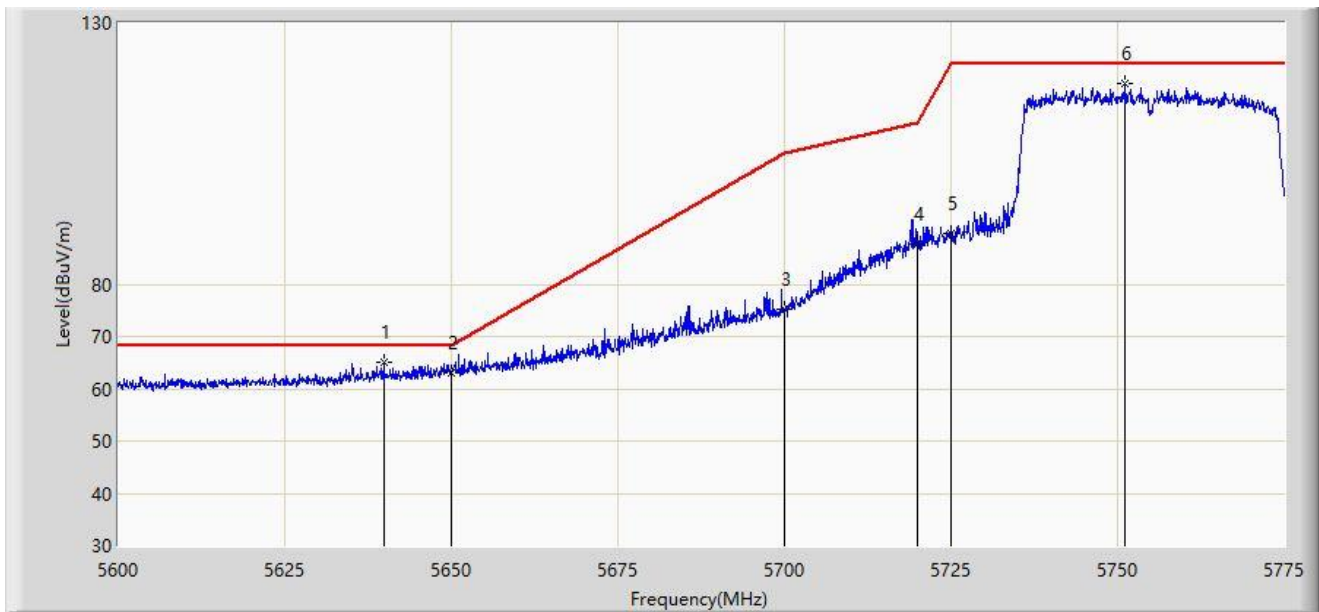


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5639.812	65.145	58.596	-3.055	68.200	6.549	PK
2		5650.000	63.072	56.564	-5.128	68.200	6.508	PK
3		5700.000	75.143	68.395	-30.057	105.200	6.748	PK
4		5720.000	87.653	80.673	-23.147	110.800	6.979	PK
5		5725.000	89.760	82.737	-32.440	122.200	7.023	PK
6		5751.200	118.321	111.484	N/A	N/A	6.837	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

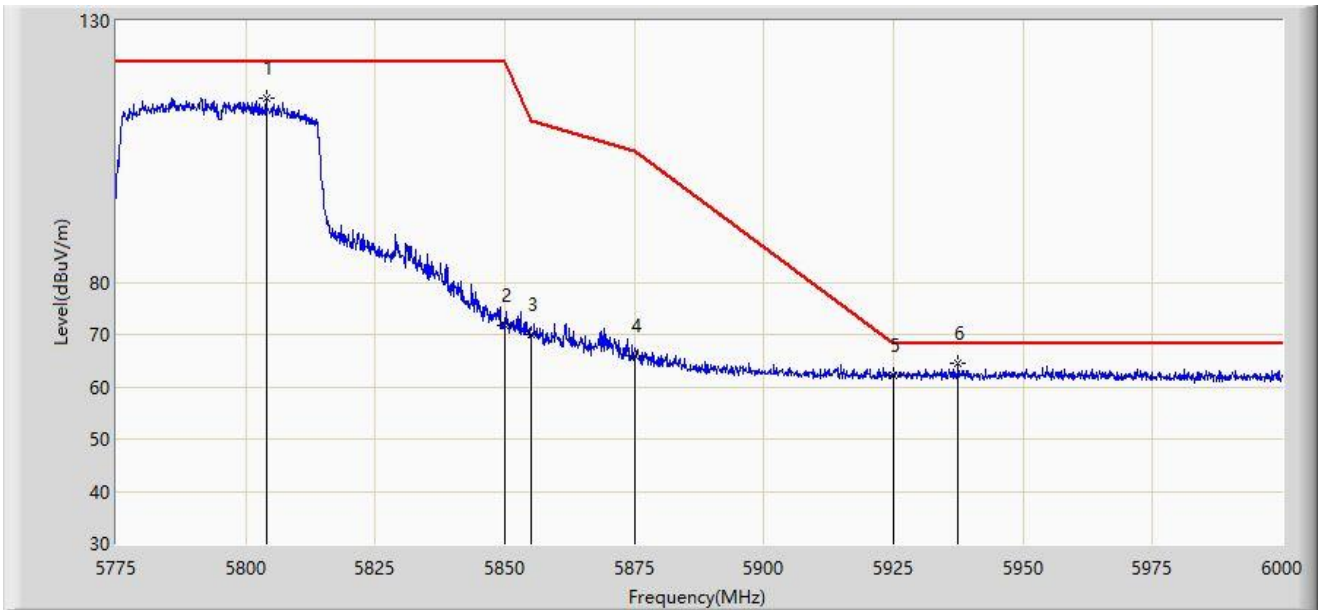


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5803.913	115.105	107.649	N/A	N/A	7.456	PK
2		5850.000	71.766	64.343	-50.434	122.200	7.423	PK
3		5855.000	69.930	62.439	-40.870	110.800	7.491	PK
4		5875.000	65.827	58.181	-39.373	105.200	7.646	PK
5		5925.000	62.232	54.382	-5.968	68.200	7.851	PK
6	*	5937.450	64.362	56.457	-3.838	68.200	7.905	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

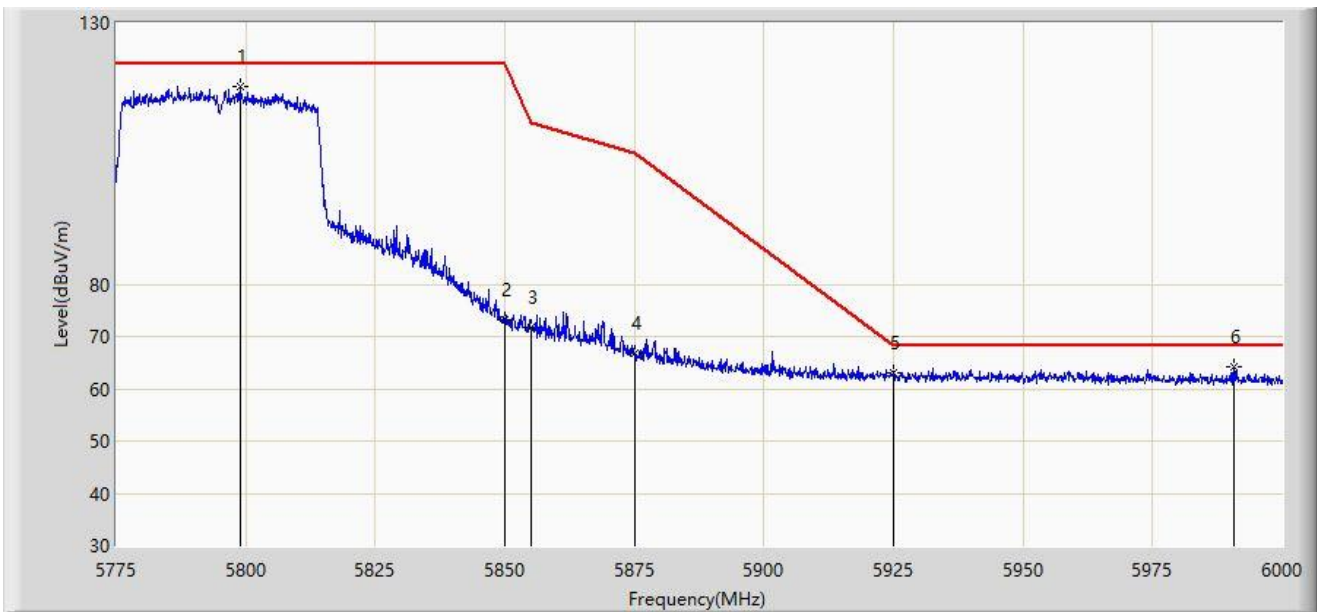

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5798.850	117.792	110.323	N/A	N/A	7.470	PK
2		5850.000	73.270	65.847	-48.930	122.200	7.423	PK
3		5855.000	71.728	64.237	-39.072	110.800	7.491	PK
4		5875.000	66.835	59.189	-38.365	105.200	7.646	PK
5		5925.000	63.140	55.290	-5.060	68.200	7.851	PK
6	*	5990.775	64.122	56.175	-4.078	68.200	7.948	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

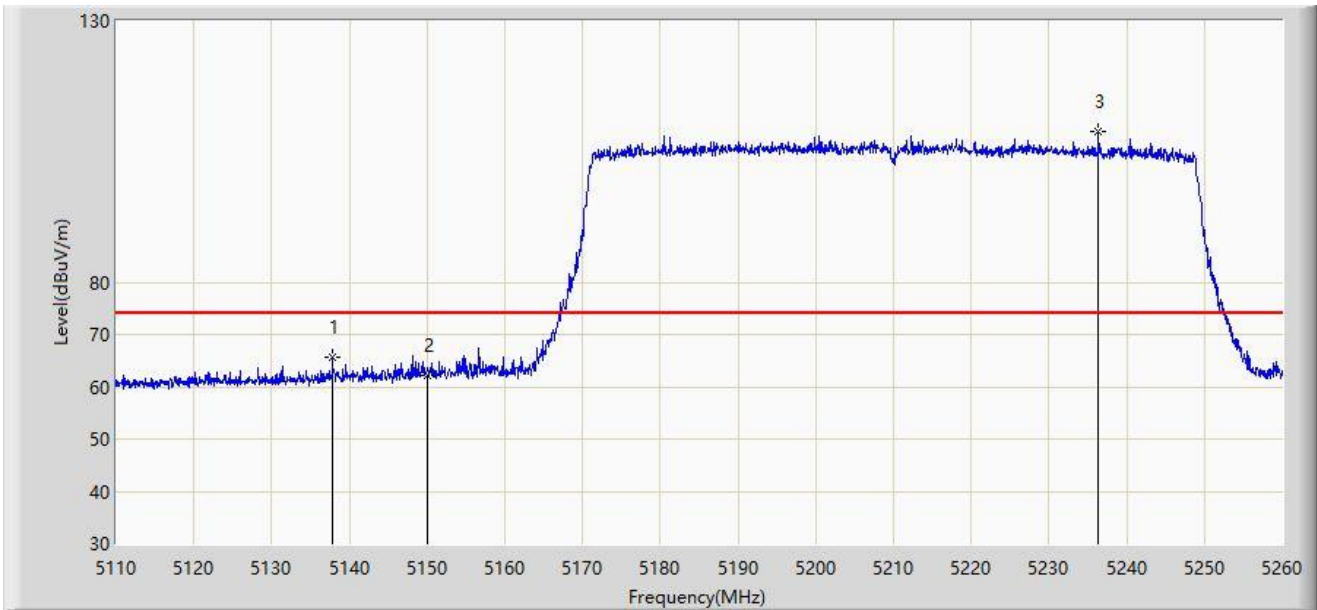


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5137.825	65.632	60.154	-8.368	74.000	5.478	PK
2		5150.000	62.133	56.470	-11.867	74.000	5.663	PK
3		5236.375	108.942	103.100	N/A	N/A	5.842	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

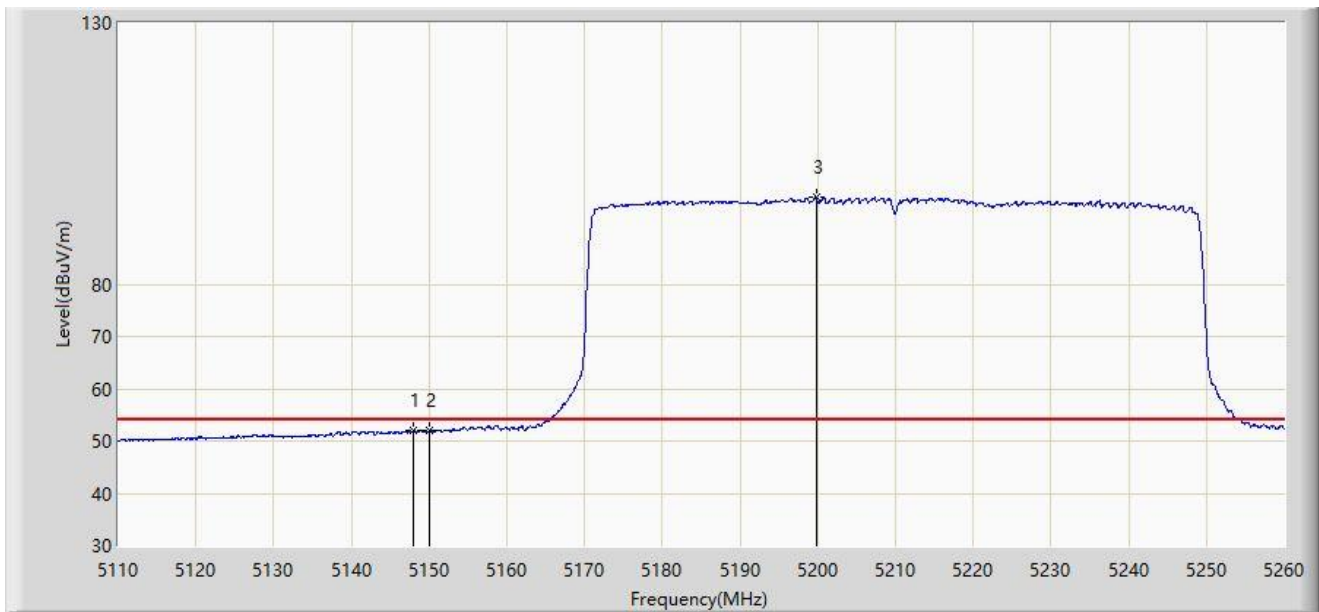


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.025	52.089	46.441	-1.911	54.000	5.647	AV
2		5150.000	52.031	46.368	-1.969	54.000	5.663	AV
3		5199.775	96.622	91.336	N/A	N/A	5.287	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

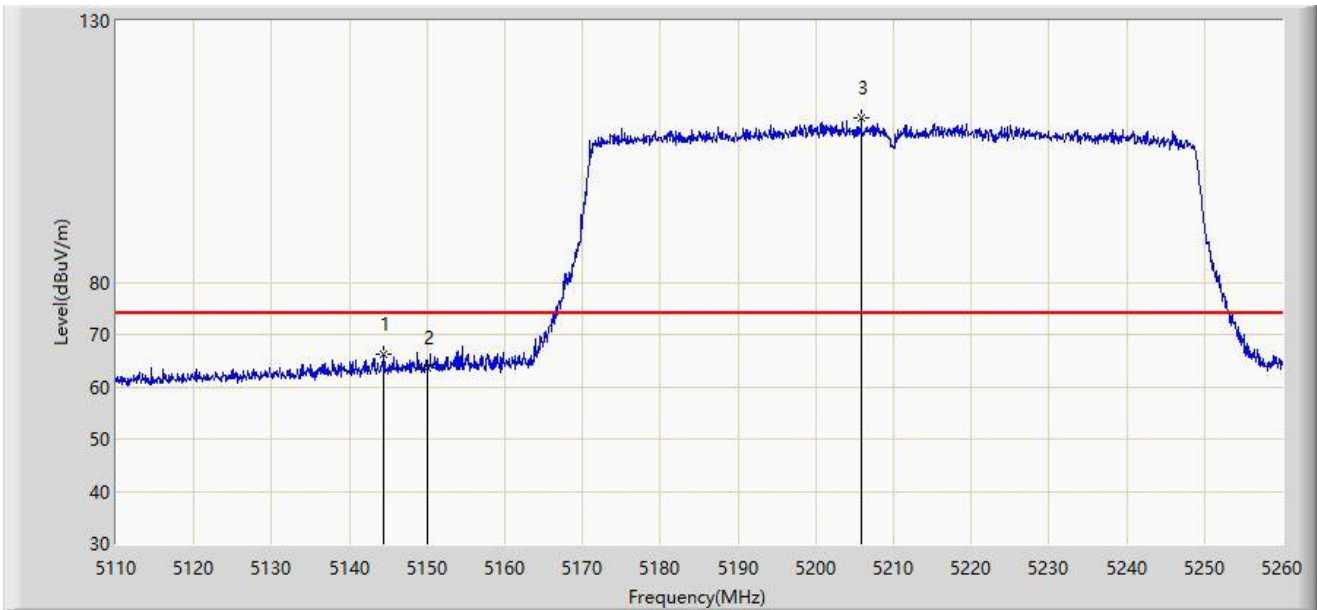


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5144.425	66.200	60.612	-7.800	74.000	5.588	PK
2		5150.000	63.610	57.947	-10.390	74.000	5.663	PK
3		5205.850	111.322	105.981	N/A	N/A	5.341	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

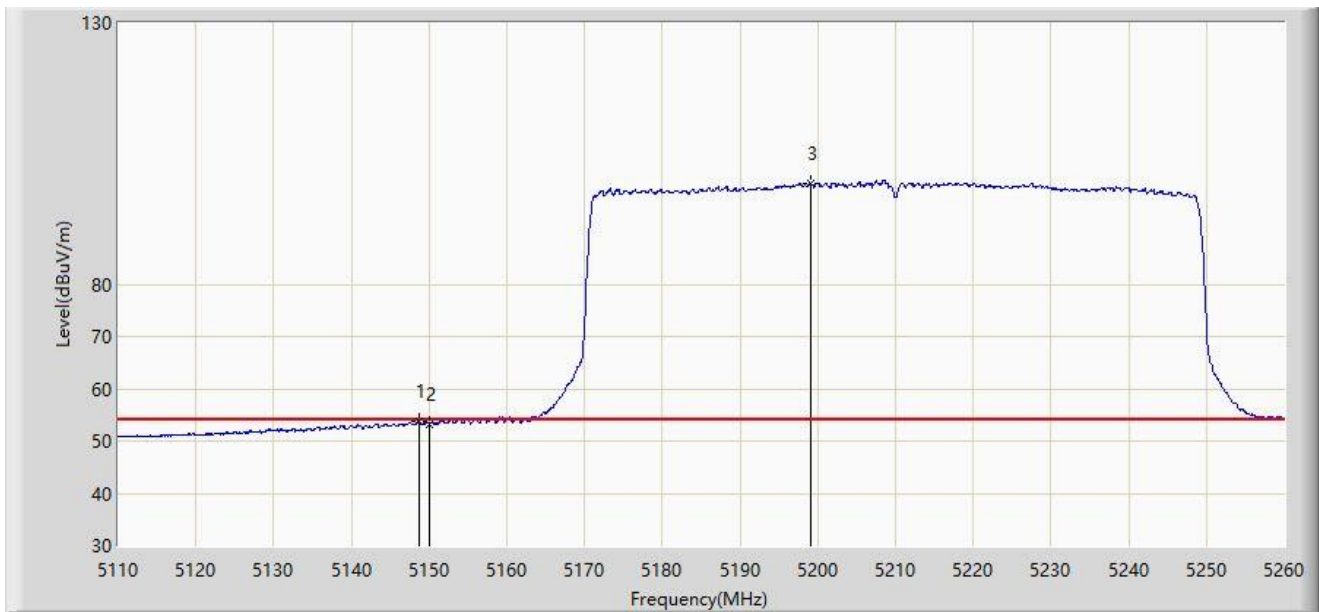


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.700	53.648	47.995	-0.352	54.000	5.653	AV
2		5150.000	53.286	47.623	-0.714	54.000	5.663	AV
3		5199.025	99.242	93.963	N/A	N/A	5.279	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

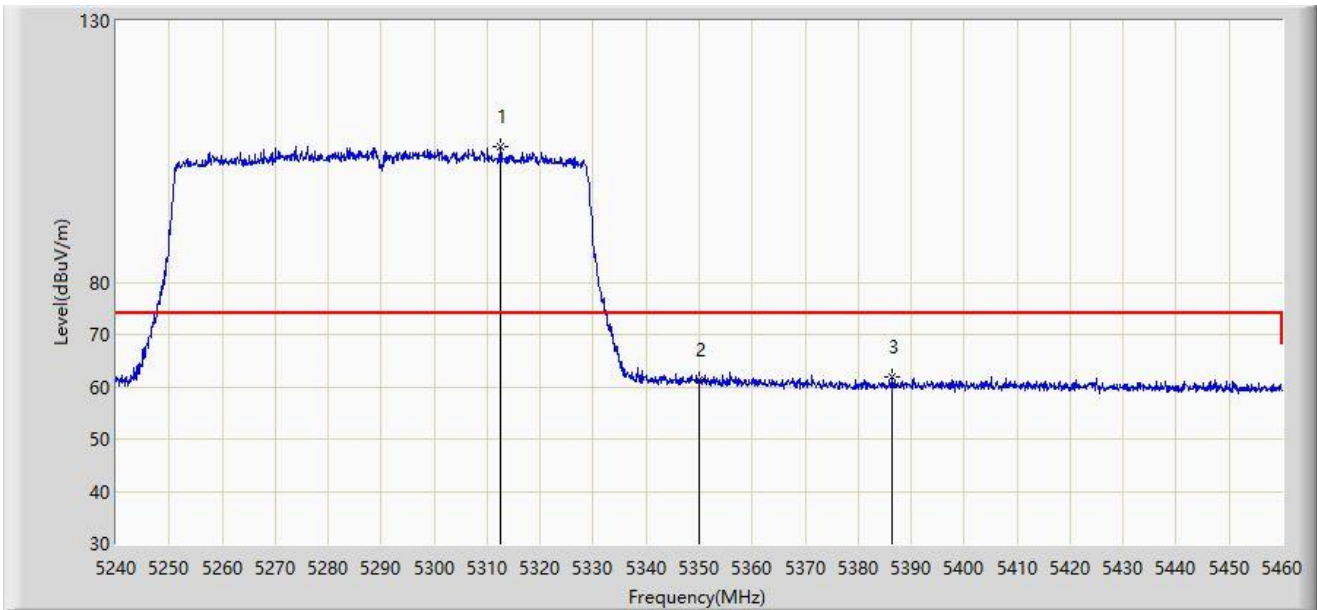


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.600	106.086	100.319	N/A	N/A	5.766	PK
2		5350.000	61.259	55.592	-12.741	74.000	5.667	PK
3	*	5386.300	61.933	55.934	-12.067	74.000	5.999	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

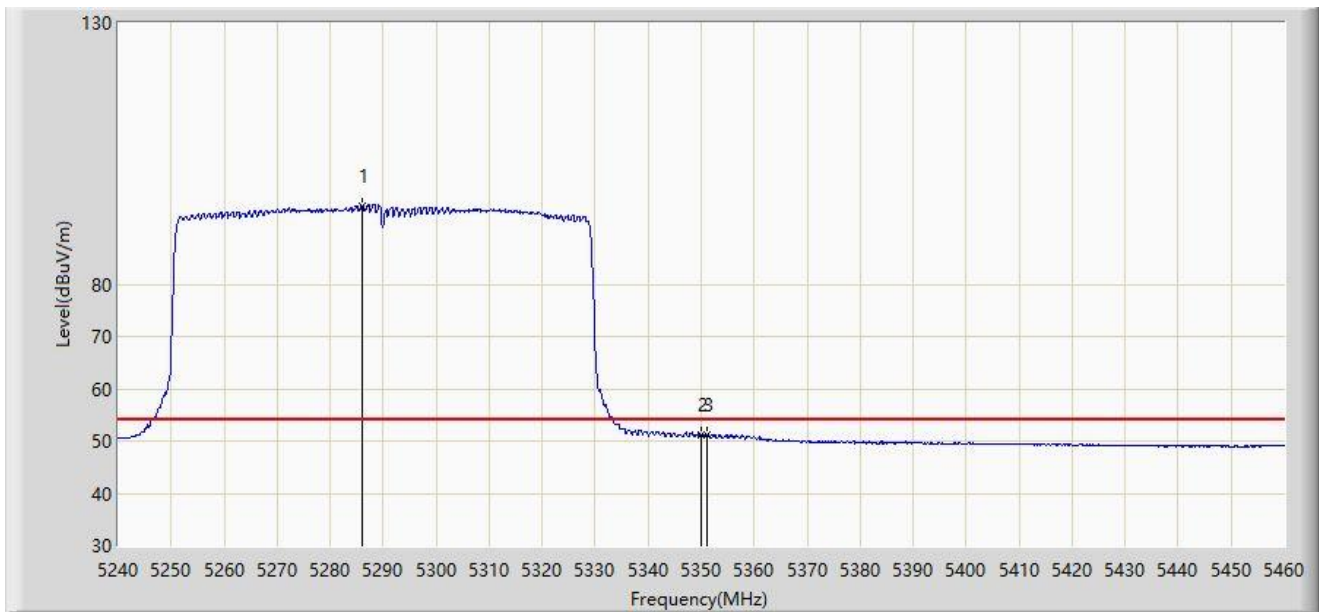


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5286.090	95.069	89.718	N/A	N/A	5.352	AV
2		5350.000	51.248	45.581	-2.752	54.000	5.667	AV
3	*	5351.210	51.259	45.612	-2.741	54.000	5.647	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

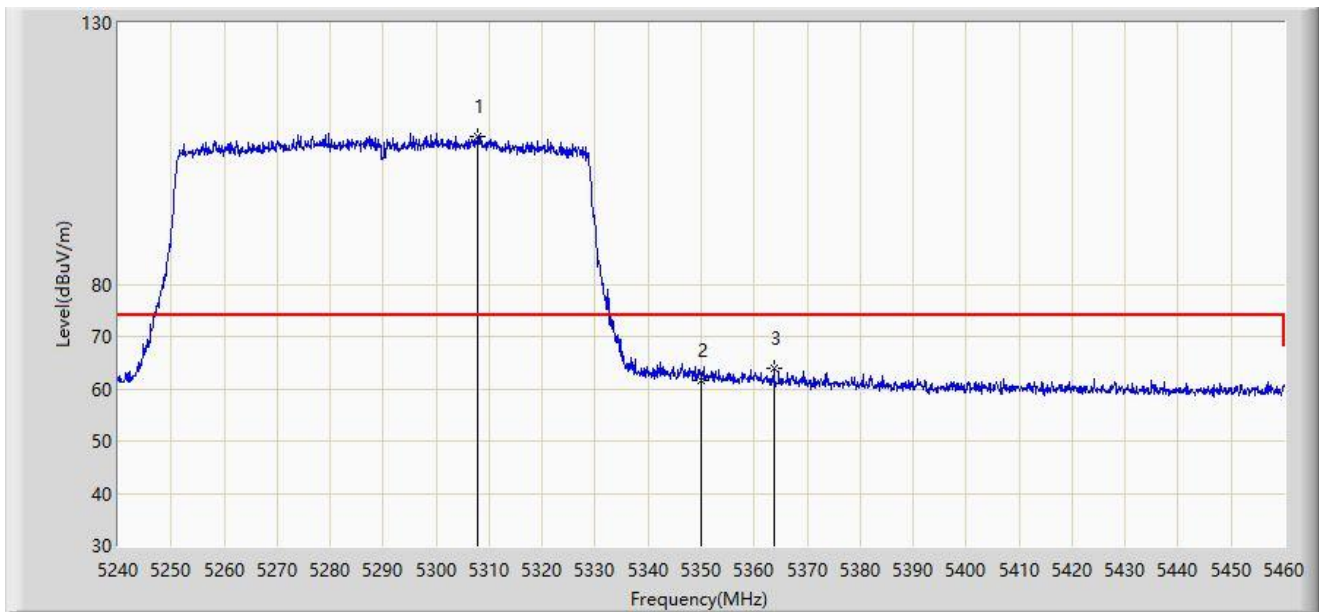


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5307.870	108.400	102.707	N/A	N/A	5.694	PK
2		5350.000	61.626	55.959	-12.374	74.000	5.667	PK
3	*	5363.750	64.038	58.368	-9.962	74.000	5.671	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

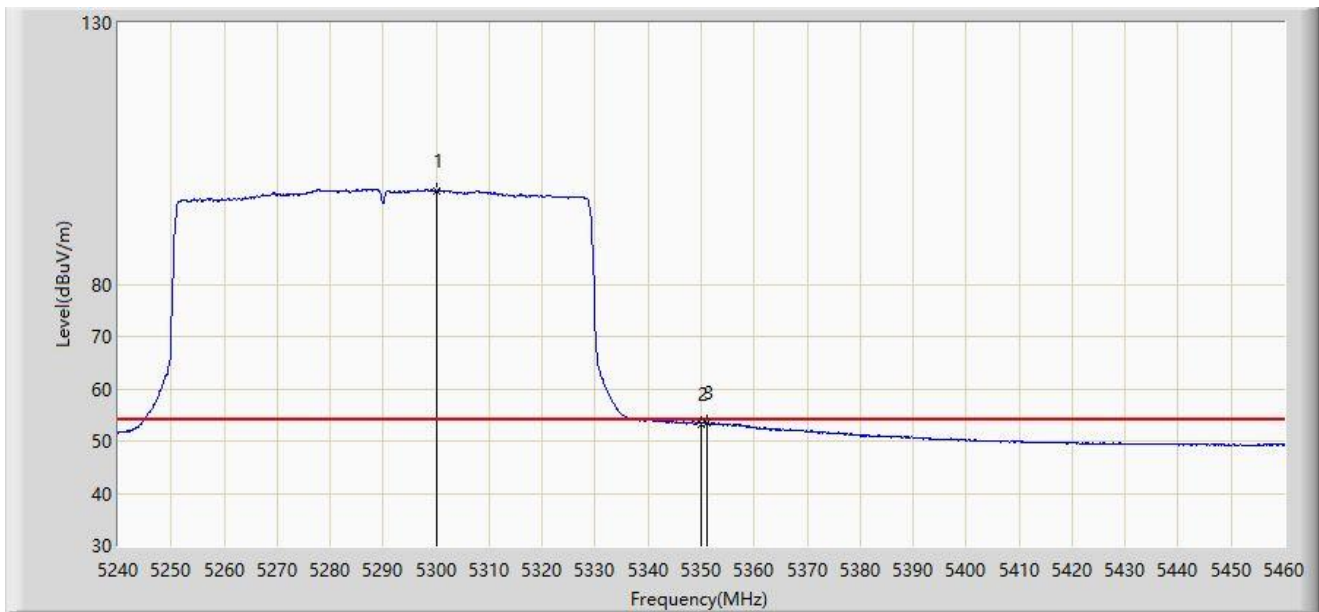

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5300.060	97.859	92.286	N/A	N/A	5.573	AV
2		5350.000	53.266	47.599	-0.734	54.000	5.667	AV
3	*	5351.100	53.480	47.832	-0.520	54.000	5.648	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

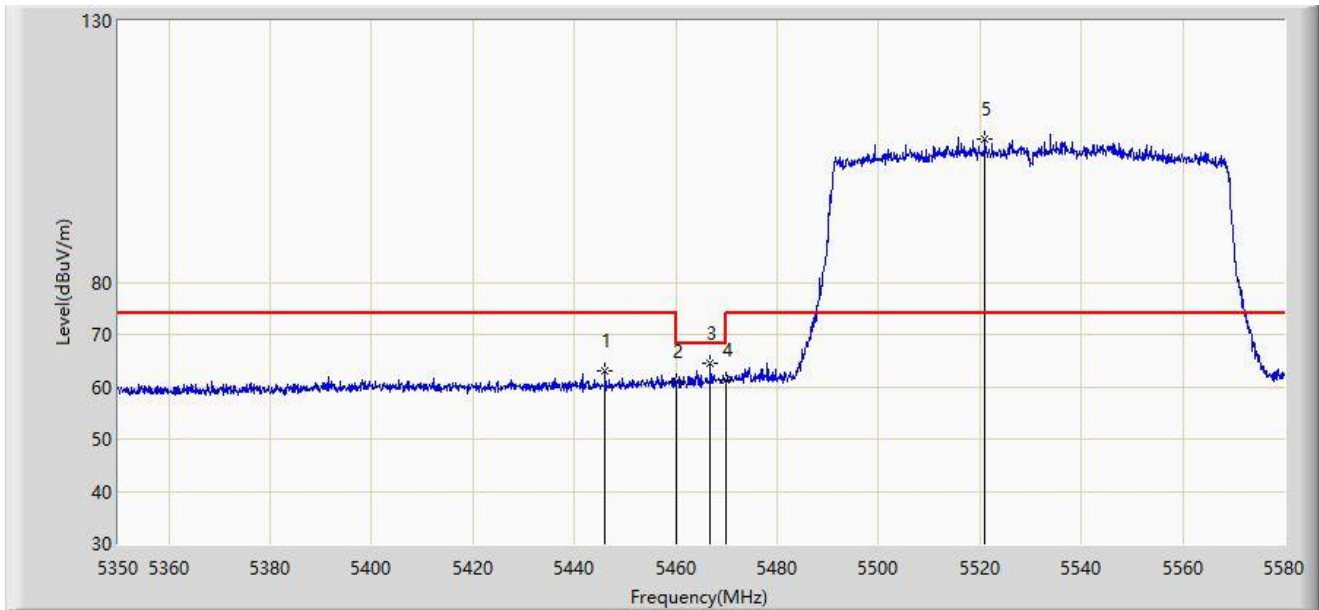


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5446.025	63.112	57.345	-10.888	74.000	5.767	PK
2		5460.000	61.013	55.234	-12.987	74.000	5.779	PK
3	*	5466.840	64.361	58.510	-3.839	68.200	5.851	PK
4		5470.000	61.444	55.492	-6.756	68.200	5.951	PK
5		5521.005	107.420	101.856	N/A	N/A	5.565	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

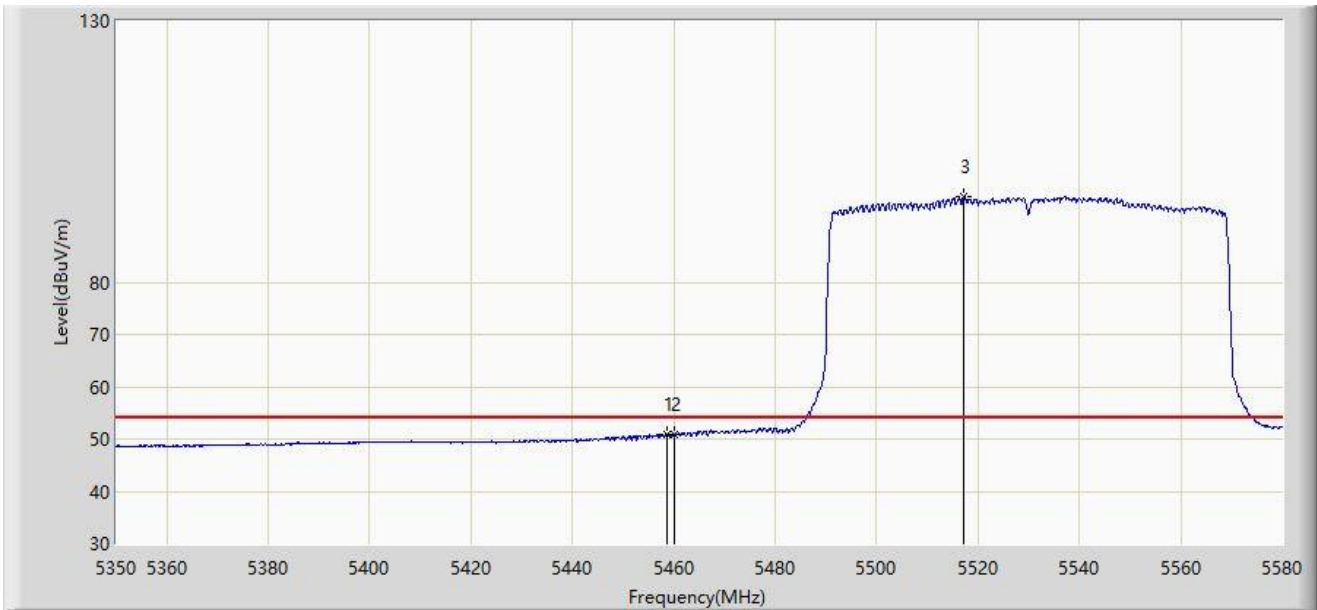


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5458.790	50.807	45.049	-3.193	54.000	5.758	AV
2		5460.000	50.769	44.990	-3.231	54.000	5.779	AV
3		5517.210	96.341	90.754	N/A	N/A	5.588	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

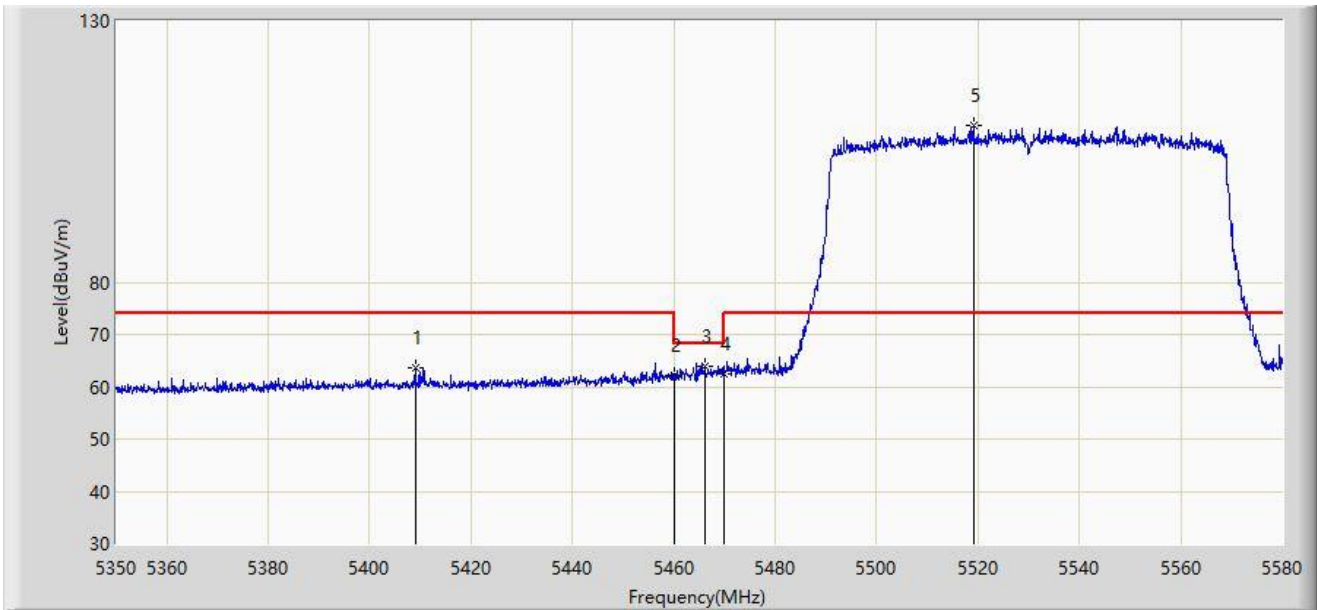


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5408.995	63.501	57.289	-10.499	74.000	6.211	PK
2		5460.000	62.076	56.297	-11.924	74.000	5.779	PK
3	*	5466.150	64.024	58.185	-4.176	68.200	5.838	PK
4		5470.000	62.494	56.542	-5.706	68.200	5.951	PK
5		5519.050	109.965	104.389	N/A	N/A	5.576	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

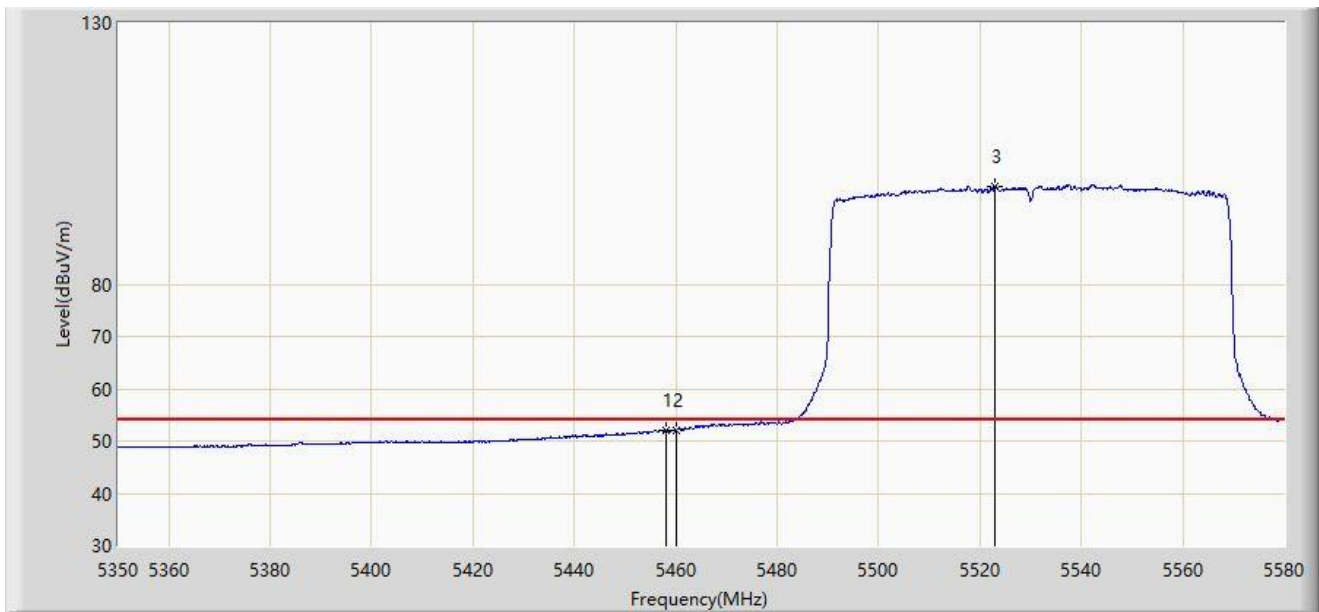


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5457.985	52.164	46.420	-1.836	54.000	5.744	AV
2		5460.000	52.072	46.293	-1.928	54.000	5.779	AV
3		5522.960	98.792	93.214	N/A	N/A	5.578	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

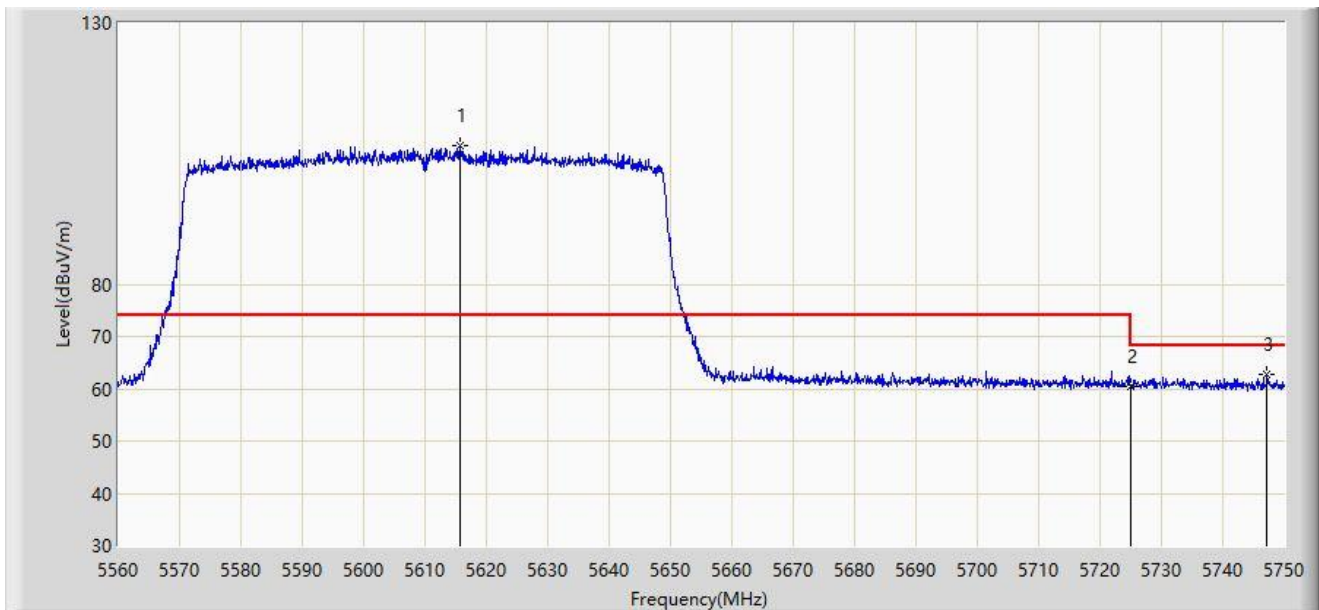


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5615.670	106.464	100.304	N/A	N/A	6.160	PK
2		5725.000	60.375	53.352	-7.825	68.200	7.023	PK
3	*	5747.245	62.741	55.955	-5.459	68.200	6.786	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

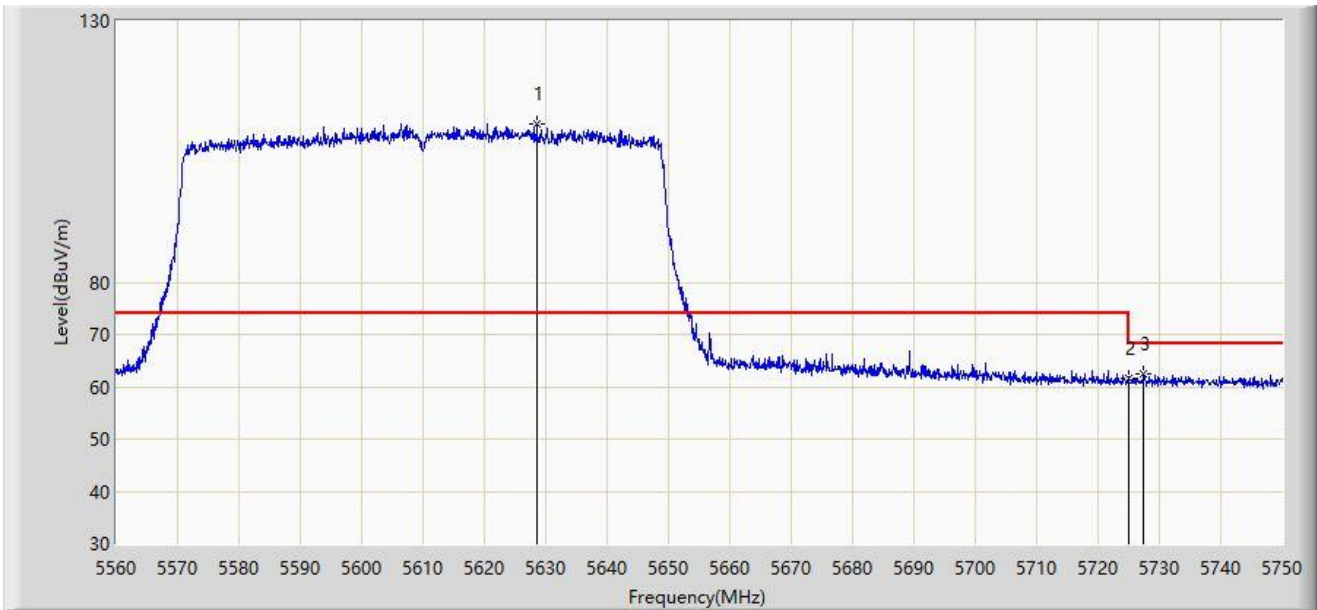


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5628.590	110.359	103.940	N/A	N/A	6.419	PK
2		5725.000	61.599	54.576	-6.601	68.200	7.023	PK
3	*	5727.485	62.408	55.397	-5.792	68.200	7.011	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Horizontal
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

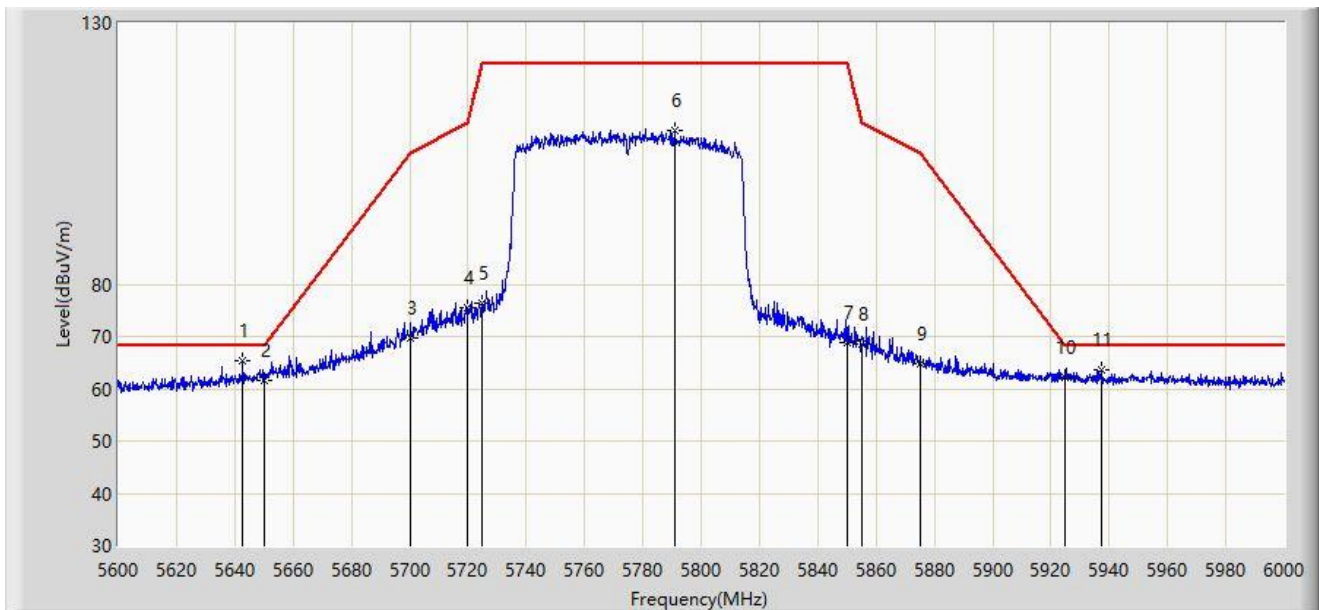


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5642.800	65.283	58.730	-2.917	68.200	6.553	PK
2		5650.000	61.734	55.226	-6.466	68.200	6.508	PK
3		5700.000	69.653	62.905	-35.547	105.200	6.748	PK
4		5720.000	75.508	68.528	-35.292	110.800	6.979	PK
5		5725.000	76.343	69.320	-45.857	122.200	7.023	PK
6		5790.800	109.370	101.886	N/A	N/A	7.484	PK
7		5850.000	68.814	61.391	-53.386	122.200	7.423	PK
8		5855.000	68.602	61.111	-42.198	110.800	7.491	PK
9		5875.000	64.748	57.102	-40.452	105.200	7.646	PK
10		5925.000	62.109	54.259	-6.091	68.200	7.851	PK
11		5937.200	63.721	55.817	-4.479	68.200	7.903	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-10-15
Limit: FCC_5.8G_RE(3m)	Engineer: Carl Jiang
Probe: Horn 3117_1-18GHz	Polarity: Vertical
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

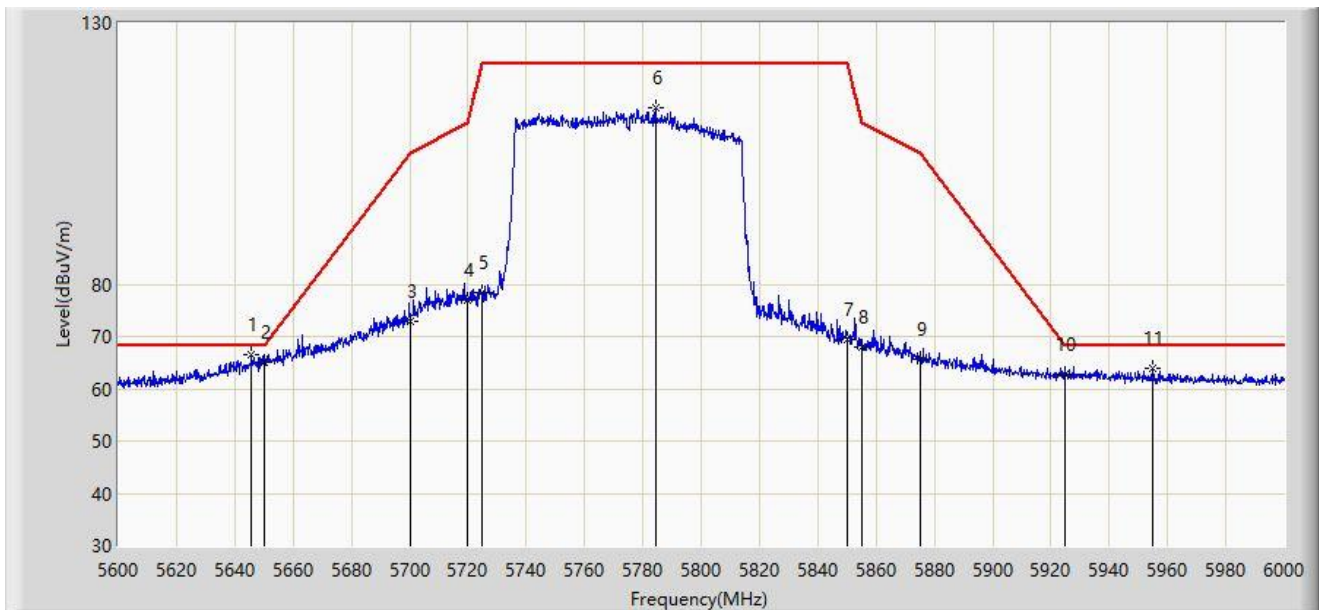

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5645.600	66.462	59.927	-1.738	68.200	6.535	PK
2		5650.000	64.951	58.443	-3.249	68.200	6.508	PK
3		5700.000	72.807	66.059	-32.393	105.200	6.748	PK
4		5720.000	76.898	69.918	-33.902	110.800	6.979	PK
5		5725.000	78.393	71.370	-43.807	122.200	7.023	PK
6		5784.400	113.821	106.478	N/A	N/A	7.342	PK
7		5850.000	69.452	62.029	-52.748	122.200	7.423	PK
8		5855.000	68.078	60.587	-42.722	110.800	7.491	PK
9		5875.000	65.682	58.036	-39.518	105.200	7.646	PK
10		5925.000	62.804	54.954	-5.396	68.200	7.851	PK
11		5955.000	63.893	55.890	-4.307	68.200	8.003	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC1	Test Date: 2023-10-20
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80+80 at 5210+5290MHz	

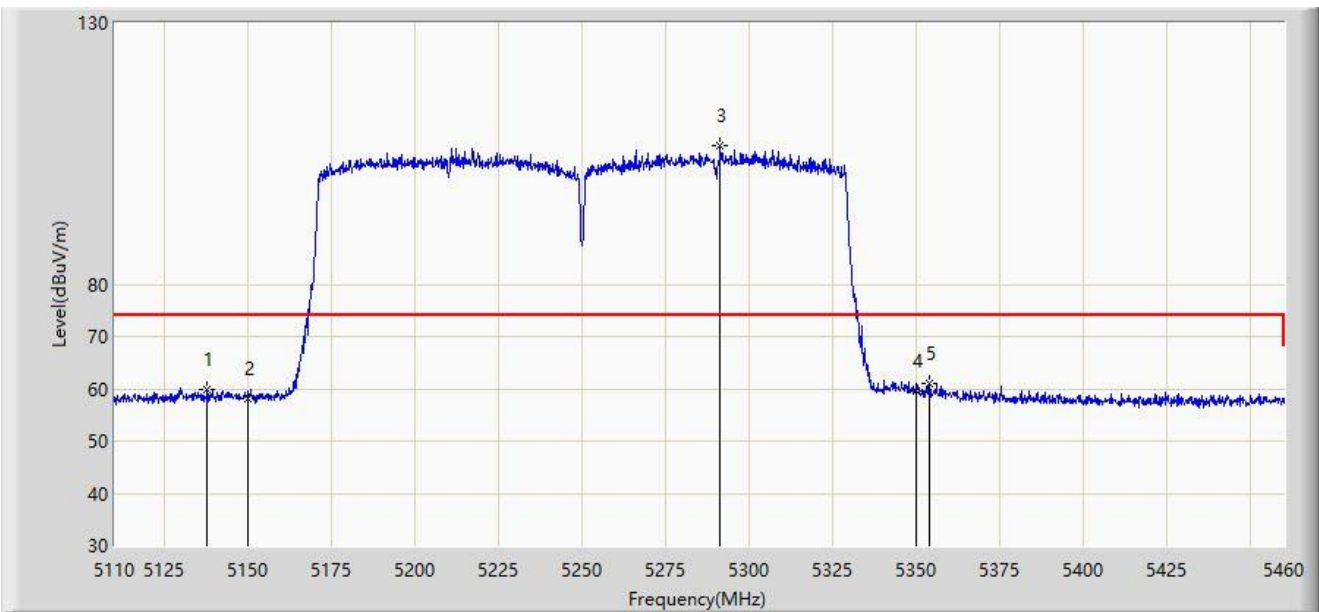


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5137.825	59.748	55.849	-14.252	74.000	3.898	PK
2		5150.000	58.145	54.270	-15.855	74.000	3.876	PK
3		5291.300	106.649	103.149	N/A	N/A	3.500	PK
4		5350.000	59.467	55.933	-14.533	74.000	3.534	PK
5	*	5353.775	60.904	57.398	-13.096	74.000	3.506	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-10-20
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80+80 at 5210+5290MHz	

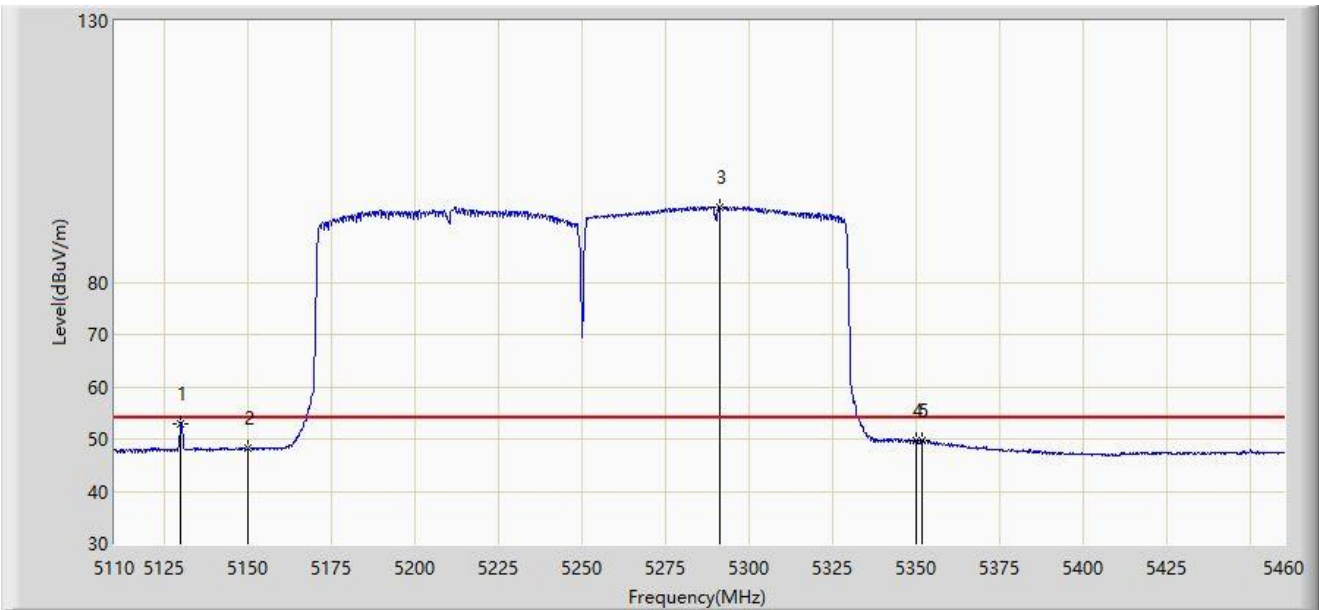


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5129.775	52.835	48.953	-1.165	54.000	3.882	AV
2		5150.000	48.119	44.244	-5.881	54.000	3.876	AV
3		5291.125	94.462	90.965	N/A	N/A	3.497	AV
4		5350.000	49.566	46.032	-4.434	54.000	3.534	AV
5		5351.675	49.815	46.292	-4.185	54.000	3.524	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-10-20
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80+80 at 5210+5290MHz	

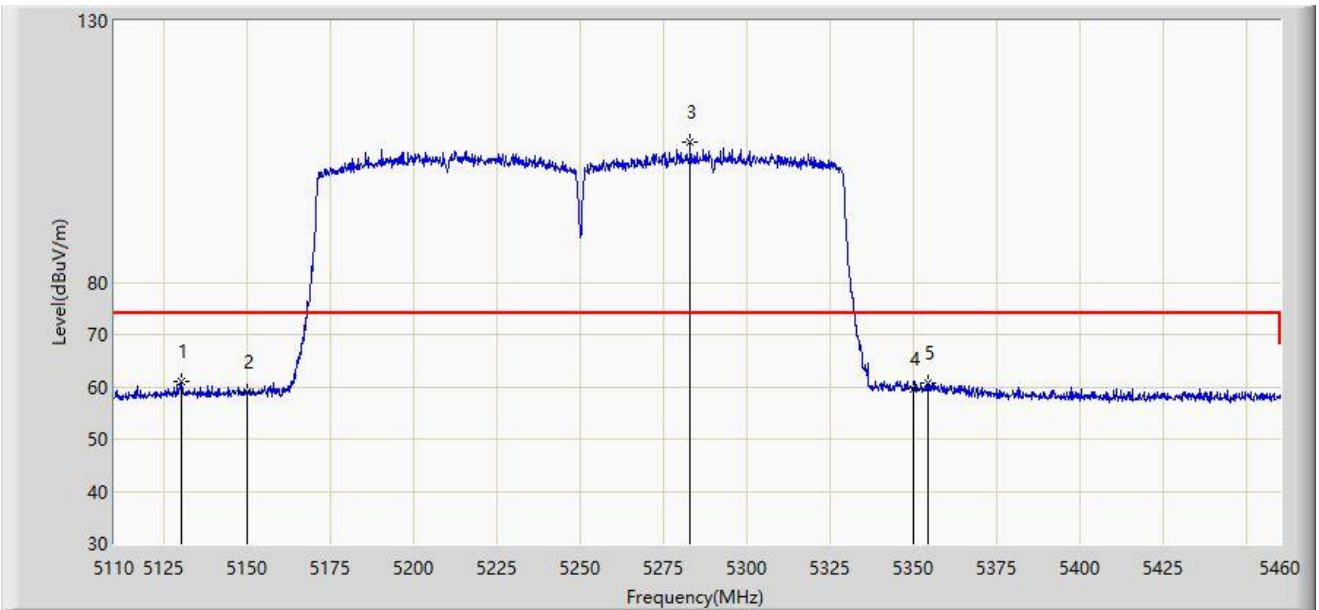


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5130.300	60.965	57.077	-13.035	74.000	3.889	PK
2		5150.000	58.871	54.996	-15.129	74.000	3.876	PK
3		5282.900	106.706	103.332	N/A	N/A	3.373	PK
4		5350.000	59.580	56.046	-14.420	74.000	3.534	PK
5		5354.475	60.824	57.324	-13.176	74.000	3.500	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-10-20
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80+80 at 5210+5290MHz	

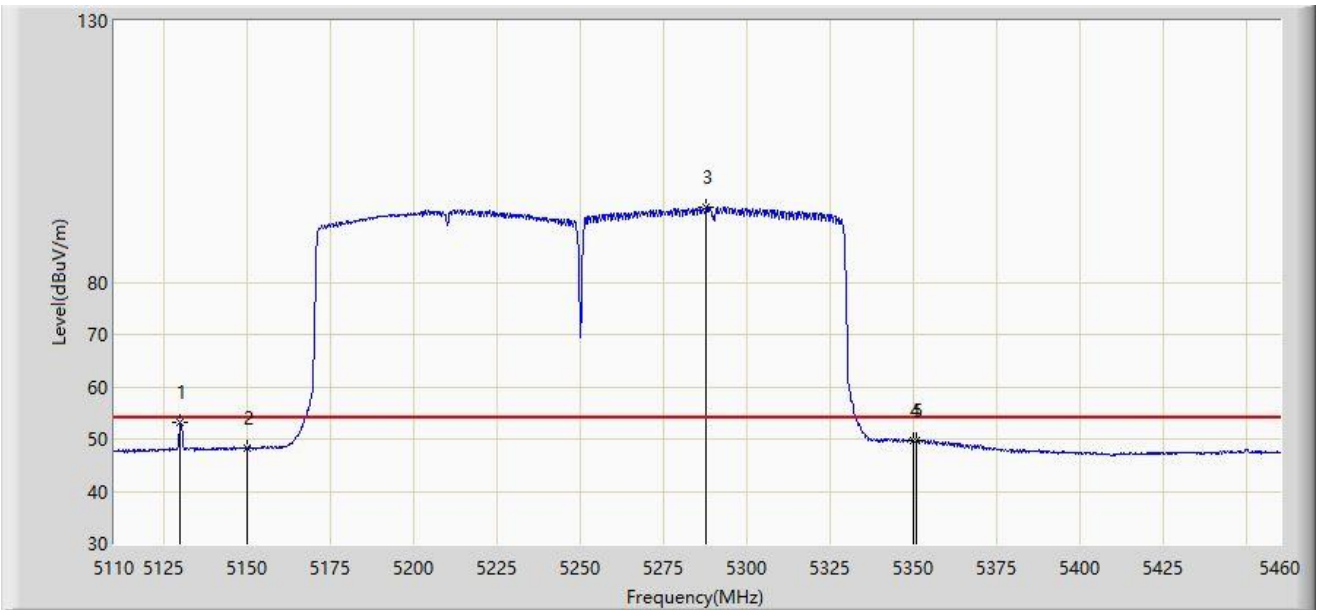


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5129.950	53.107	49.223	-0.893	54.000	3.884	AV
2		5150.000	48.163	44.288	-5.837	54.000	3.876	AV
3		5287.800	94.467	91.028	N/A	N/A	3.439	AV
4		5350.000	49.630	46.096	-4.370	54.000	3.534	AV
5		5350.975	49.714	46.186	-4.286	54.000	3.528	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80+80 at 5530+5610MHz	

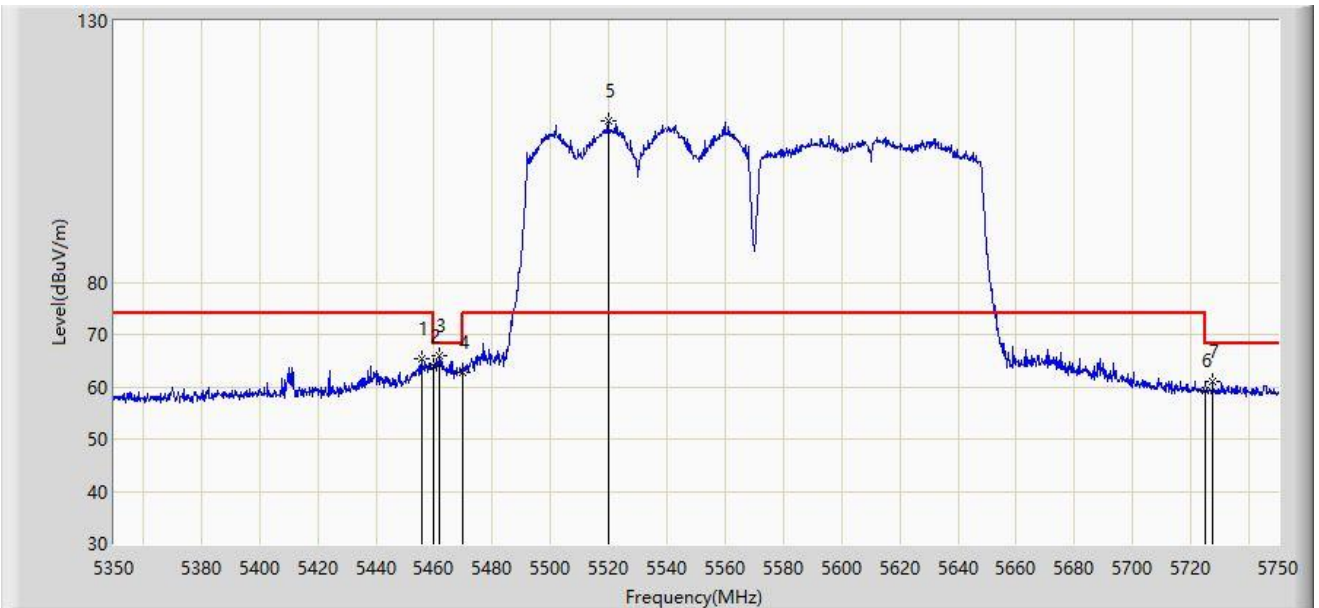

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5455.800	65.255	61.497	-8.745	74.000	3.758	PK
2		5460.000	63.978	60.197	-10.022	74.000	3.782	PK
3	*	5461.600	65.853	62.065	-2.347	68.200	3.789	PK
4		5470.000	62.771	58.949	-5.429	68.200	3.822	PK
5		5519.800	110.820	106.846	N/A	N/A	3.973	PK
6		5725.000	59.198	54.967	-9.002	68.200	4.231	PK
7		5727.400	61.004	56.763	-7.196	68.200	4.241	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80+80 at 5530+5610MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5369.800	52.648	49.243	-1.352	54.000	3.405	AV
2	*	5460.000	52.985	49.204	-1.015	54.000	3.782	AV
3		5521.200	100.366	96.405	N/A	N/A	3.961	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80+80 at 5530+5610MHz	

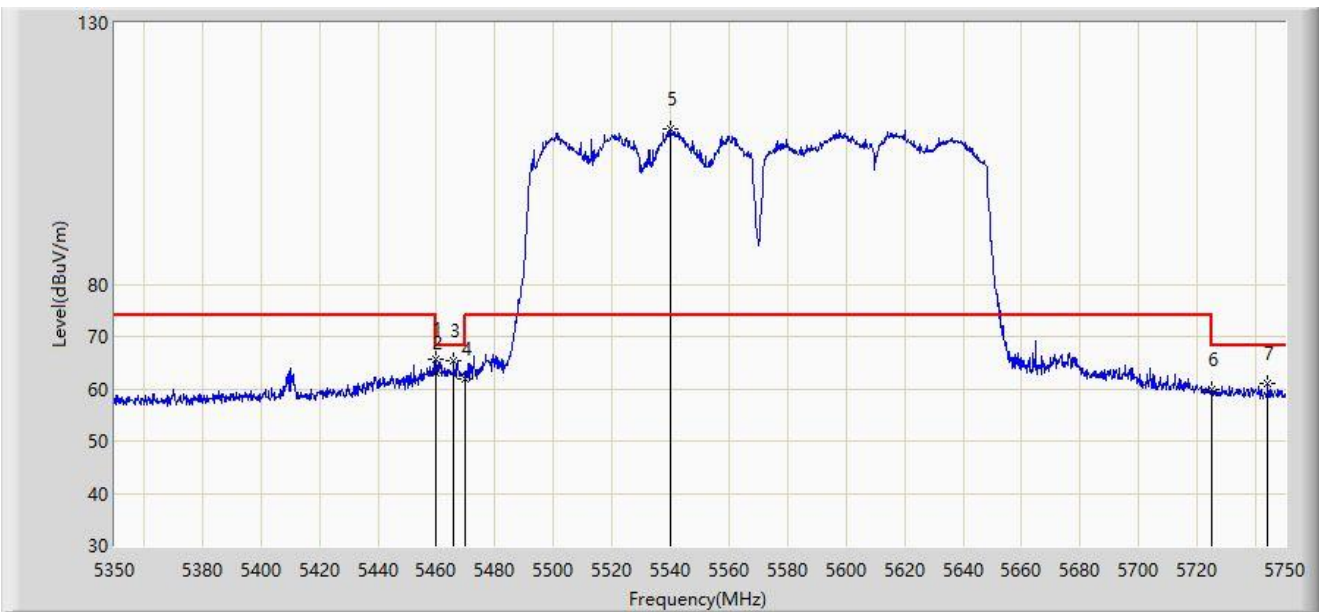


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5459.600	65.521	61.741	-8.479	74.000	3.780	PK
2		5460.000	63.042	59.261	-10.958	74.000	3.782	PK
3	*	5466.000	65.415	61.609	-2.785	68.200	3.806	PK
4		5470.000	61.977	58.155	-6.223	68.200	3.822	PK
5		5539.800	109.609	105.692	N/A	N/A	3.916	PK
6		5725.000	59.731	55.500	-8.469	68.200	4.231	PK
7		5744.200	60.893	56.494	-7.307	68.200	4.398	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_5G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80+80 at 5530+5610MHz	

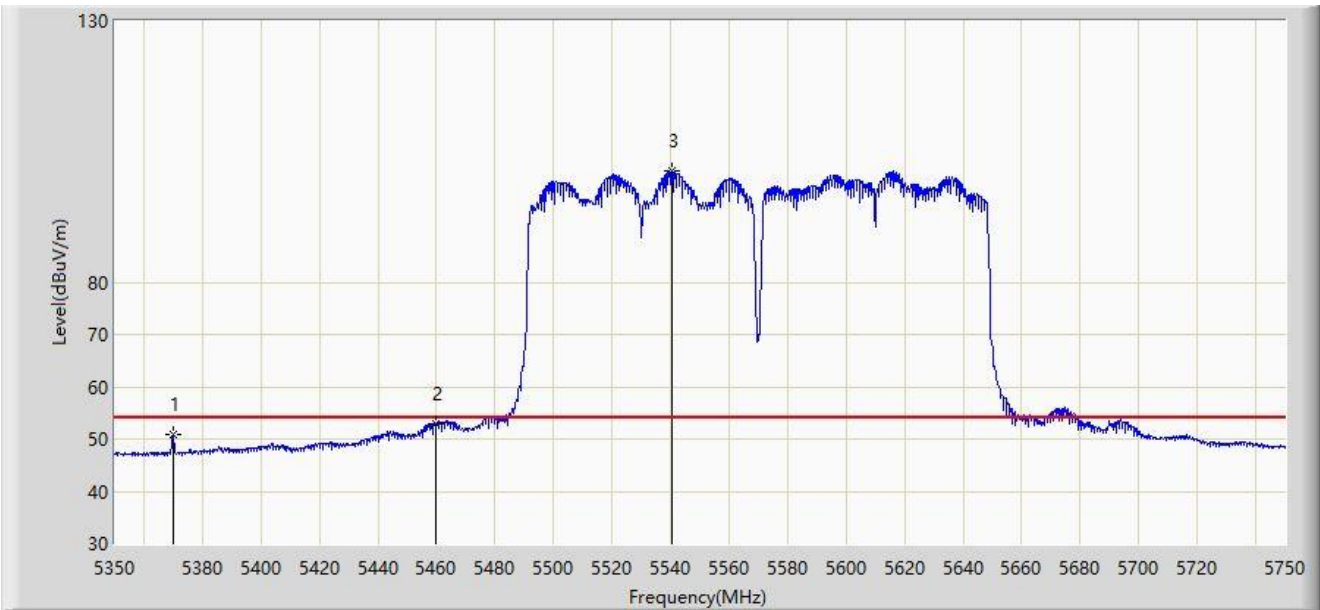

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5369.800	51.001	47.596	-2.999	54.000	3.405	AV
2	*	5460.000	53.016	49.235	-0.984	54.000	3.782	AV
3		5540.400	101.287	97.368	N/A	N/A	3.919	AV

Note 1: " \* ", means this data is the worst emission level.


Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



**A.9 AC Conducted Emissions Test Result**

Site: WZ-SR2	Test Date: 2023-09-26
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_E	Polarity: Line
EUT: 5GNR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

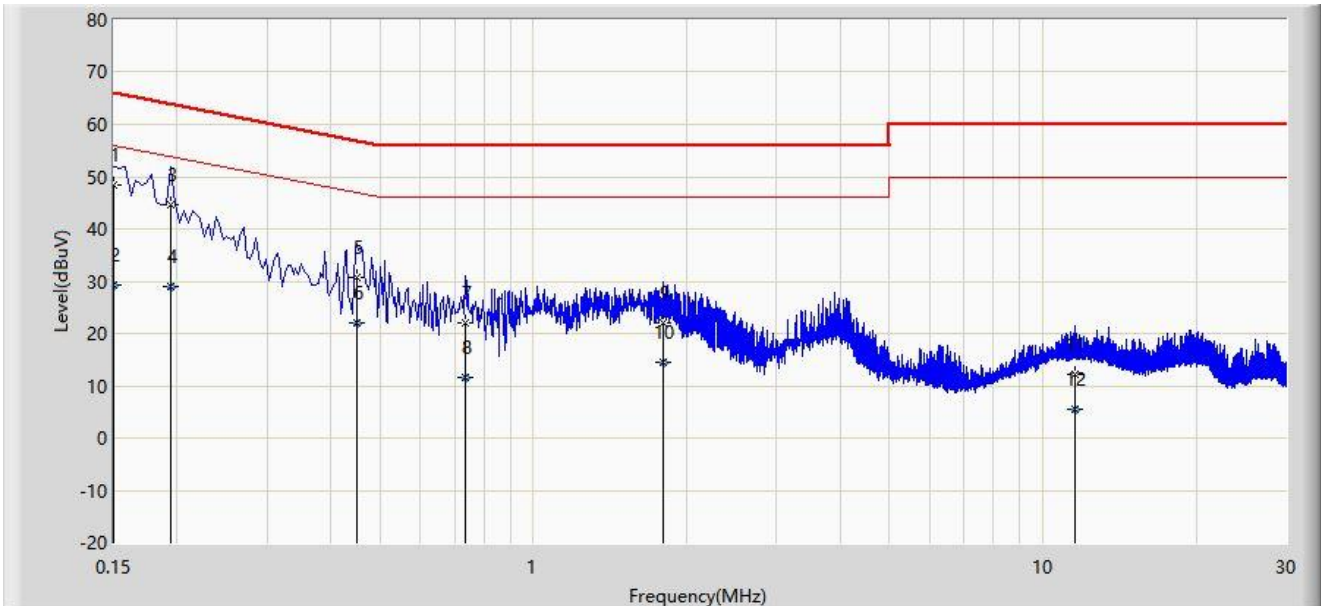


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1	*	0.150	48.315	38.549	-17.685	66.000	9.766	QP
2		0.150	29.344	19.579	-26.656	56.000	9.766	AV
3		0.194	44.496	34.711	-19.367	63.864	9.785	QP
4		0.194	29.074	19.289	-24.789	53.864	9.785	AV
5		0.450	30.584	20.680	-26.291	56.875	9.904	QP
6		0.450	22.100	12.196	-24.775	46.875	9.904	AV
7		0.734	21.887	11.821	-34.113	56.000	10.065	QP
8		0.734	11.561	1.496	-34.439	46.000	10.065	AV
9		1.798	22.106	11.765	-33.894	56.000	10.342	QP
10		1.798	14.489	4.147	-31.511	46.000	10.342	AV
11		11.534	12.127	0.811	-47.873	60.000	11.316	QP
12		11.534	5.465	-5.851	-44.535	50.000	11.316	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Test Date: 2023-09-26
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_E	Polarity: Neutral
EUT: 5G NR CPE Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

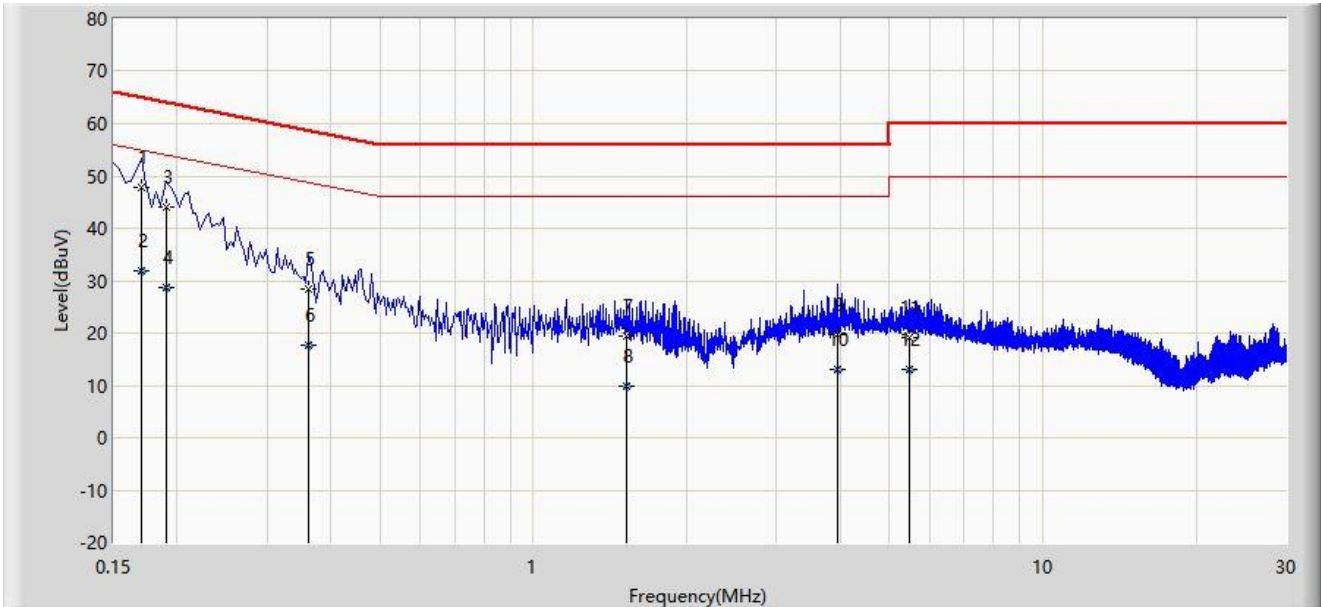

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1	*	0.170	47.915	38.136	-17.046	64.960	9.779	QP
2		0.170	31.791	22.013	-23.169	54.960	9.779	AV
3		0.190	44.106	34.322	-19.931	64.037	9.783	QP
4		0.190	28.628	18.845	-25.409	54.037	9.783	AV
5		0.362	28.336	18.475	-30.347	58.682	9.861	QP
6		0.362	17.642	7.781	-31.041	48.682	9.861	AV
7		1.522	19.383	9.062	-36.617	56.000	10.320	QP
8		1.522	9.983	-0.338	-36.017	46.000	10.320	AV
9		3.942	19.620	8.737	-36.380	56.000	10.883	QP
10		3.942	13.086	2.203	-32.914	46.000	10.883	AV
11		5.478	19.046	7.900	-40.954	60.000	11.146	QP
12		5.478	12.903	1.757	-37.097	50.000	11.146	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## **Appendix B – Test Setup Photograph**

Refer to “2309RSU009-UT” file.

## Appendix C – EUT Photograph

Refer to “2309RSU009-UE” file.

————— The End —————