



RF MEASUREMENT REPORT

FCC ID: VW3F5688A

Applicant: SAGEMCOM BROADBAND SAS

Product: 5GNR CPE Router

Model No.: BGW530-900

Brand Name: SAGEMCOM

FCC Rule(s): Part 2, 22 (H), 24 (E), 27

Result: Complies

Received Date: 2023-09-05

Test Date: 2023-09-07 ~ 2023-10-18

Reviewed By:

Sunny Sun

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2309RSU009-U2	V01	Initial Report	2023-10-24	Invalid
2309RSU009-U2	V02	Updated Max EIRP	2023-10-29	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer.....	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification under Test.....	7
1.6. Description of Available Antennas	8
1.7. Max EIRP.....	8
1.8. Test Methodology	8
2. Test Configuration	9
2.1. Test System Connection Diagram	9
2.2. Test Environment Condition.....	9
3. Measuring Instrument	10
4. Decision Rules and Measurement Uncertainty	12
4.1. Decision Rules.....	12
4.2. Measurement Uncertainty	12
5. Test Result.....	13
5.1. Summary	13
5.2. Equivalent Isotropically Radiated Power Measurement	14
5.2.1. Test Limit.....	14
5.2.2. Test Procedure	14
5.2.3. Test Setting	14
5.2.4. Test Setup.....	15
5.2.5. Test Result	15
5.3. Radiated Spurious Emissions Measurement	16
5.3.1. Test Limit.....	16
5.3.2. Test Procedure	16
5.3.3. Test Setting	16
5.3.4. Test Setup.....	17
5.3.5. Test Result	17
Appendix A - Test Result.....	18
A.1 Equivalent Isotropically Radiated Power Test Result	18
A.2 Radiated Spurious Emissions Test Result.....	204
Appendix B - Test Setup Photograph	214

Appendix C - EUT Photograph215

1. General Information

1.1. Applicant

SAGEMCOM BROADBAND SAS

250 Route de l'Empereur - 92848 RUEIL MALMAISON CEDEX- FRANCE

1.2. Manufacturer

SAGEMCOM BROADBAND SAS

250 Route de l'Empereur - 92848 RUEIL MALMAISON CEDEX- FRANCE

1.3. Testing Facility

<input checked="" type="checkbox"/>	<p>Test Site – MRT Suzhou Laboratory</p> <hr/> <p>Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China</p> <p>Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China</p> <hr/> <p>Laboratory Accreditations</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">A2LA: 3628.01</td> <td style="width: 50%;">CNAS: L10551</td> </tr> <tr> <td>FCC: CN1166</td> <td>ISED: CN0001</td> </tr> <tr> <td>VCCI: <input type="checkbox"/>R-20025</td> <td><input type="checkbox"/>G-20034</td> </tr> <tr> <td><input type="checkbox"/>R-20141</td> <td><input type="checkbox"/>G-20134</td> </tr> <tr> <td></td> <td><input type="checkbox"/>C-20020</td> </tr> <tr> <td></td> <td><input type="checkbox"/>C-20103</td> </tr> <tr> <td></td> <td><input type="checkbox"/>T-20020</td> </tr> <tr> <td></td> <td><input type="checkbox"/>T-20104</td> </tr> </table>	A2LA: 3628.01	CNAS: L10551	FCC: CN1166	ISED: CN0001	VCCI: <input type="checkbox"/> R-20025	<input type="checkbox"/> G-20034	<input type="checkbox"/> R-20141	<input type="checkbox"/> G-20134		<input type="checkbox"/> C-20020		<input type="checkbox"/> C-20103		<input type="checkbox"/> T-20020		<input type="checkbox"/> T-20104
A2LA: 3628.01	CNAS: L10551																
FCC: CN1166	ISED: CN0001																
VCCI: <input type="checkbox"/> R-20025	<input type="checkbox"/> G-20034																
<input type="checkbox"/> R-20141	<input type="checkbox"/> G-20134																
	<input type="checkbox"/> C-20020																
	<input type="checkbox"/> C-20103																
	<input type="checkbox"/> T-20020																
	<input type="checkbox"/> T-20104																
<input type="checkbox"/>	<p>Test Site – MRT Shenzhen Laboratory</p> <hr/> <p>Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China</p> <hr/> <p>Laboratory Accreditations</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">A2LA: 3628.02</td> <td style="width: 50%;">CNAS: L10551</td> </tr> <tr> <td>FCC: CN1284</td> <td>ISED: CN0105</td> </tr> </table>	A2LA: 3628.02	CNAS: L10551	FCC: CN1284	ISED: CN0105												
A2LA: 3628.02	CNAS: L10551																
FCC: CN1284	ISED: CN0105																
<input type="checkbox"/>	<p>Test Site – MRT Taiwan Laboratory</p> <hr/> <p>Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)</p> <hr/> <p>Laboratory Accreditations</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">TAF: 3261</td> <td style="width: 50%;"></td> </tr> <tr> <td>FCC: 291082, TW3261</td> <td>ISED: TW3261</td> </tr> </table>	TAF: 3261		FCC: 291082, TW3261	ISED: TW3261												
TAF: 3261																	
FCC: 291082, TW3261	ISED: TW3261																

1.4. Product Information

Product Name	5G NR CPE Router
Model No.	BGW530-900
Brand Name	SAGEMCOM
IMEI	354240380005524
Wi-Fi Specification	802.11a/b/g/n/ac/ax
3GPP Specification	LTE Band 2/5/12/14/17/30/66 NR SA/NSA Band n2/5/12/30/66/77
Power Type	By AC/DC adapter
Integrated Modular Information	
Modular Name	5G Sub-6 GHz LGA Module
Mode No.	RG520N-AT
FCC ID	XMR2023RG520NAT
Manufacturer	QUECTEL
Accessories	
AC/DC adapter #01	Model No.: ADS-42DG-1212042EPCU-L Input: 100-127V~50/60Hz Max 1.2A Output: 12.0V=3.5A
AC/DC adapter #02	Model No.: G30-V3500R120-042E0-US Input: 100-127V~50/60Hz 1.2A Max Output: 12.0V=3.5A
AC/DC adapter #03	Model No.: NBS42F120350VU Input: 100-127V~50/60Hz 1.0A Output: 12.0V=3.5A
Remark: <ol style="list-style-type: none"> The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer. This device is based on the certification modular to assess the radiated spurious emission and the output power of n30/77. For this report, we select Adapter 1# for testing. 	

1.5. Radio Specification under Test

Single Band	n2, n5, n12, n30, n66, n77
NR SA UL MIMO Band	n77
NR ED-DC Band	DC_66A_n5A
HPUE Band	n77
FDD TX Frequency Range	n2: 1850 ~ 1910 MHz; n5: 824 ~ 849 MHz; n12: 699 ~ 716 MHz; n30: 2305 ~ 2315 MHz; n66: 1710 ~ 1780 MHz;
FDD RX Frequency Range	n2: 1930 ~ 1990 MHz; n5: 869 ~ 894 MHz; n12: 729 ~ 746 MHz; n30: 2350 ~ 2360 MHz n66: 2110 ~ 2200 MHz;
TDD Frequency Range	n77: 3450 ~ 3550MHz; n77: 3700 ~ 3980MHz;
Support Bandwidth	n2, n5: 5, 10, 15, 20MHz; n12: 5, 10, 15MHz; n30: 5, 10MHz; n66: 5, 10, 15, 20, 30, 40MHz; n77: 10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100MHz
SCS for NR cell	FDD Band: 15kHz; TDD Band: 30kHz
Modulation	UL & DL up to 256QAM
Power Class	2 & 3

1.6. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)
n2	1850 ~ 1910	PCB Antenna	4.69
n5	824 ~ 849		2.32
n12	699 ~ 716		2.57
n30	2305 ~ 2315		3.28
n66	1710 ~ 1780		5.73
n77_SA	3450 ~ 3550		3.04
n77_SA	3700 ~ 3980		4.01
n77_MIMO	3450 ~ 3550		3.03
n77_MIMO	3700 ~ 3980		3.91

Note: All antenna information (Antenna type and Peak Gain) is provided by the manufacturer.

1.7. Max EIRP

Technology	Frequency Band (MHz)	Max Conducted Power (dBm)	Antenna Gain (dBi)	Max EIRP (dBm)	Limit (dBm)
NR n2	1850 ~ 1910	22.65	4.69	27.34	33.01
NR n5	824 ~ 849	23.82	2.32	26.14	38.48
NR n12	699 ~ 716	23.54	2.57	26.11	34.77
NR n30	2305 ~ 2315	20.40	3.28	23.68	23.98
NR n66	1710 ~ 1780	22.86	5.73	28.59	30.00
NR n77	3450 ~ 3550	24.23	3.04	27.27	30.00
NR n77	3700 ~ 3980	24.50	4.01	28.51	30.00

Remark: Except the 5G NR n30/77, the Max conducted power extracted from the FCC certificate from FCC ID "XMR2023RG520NAT".


1.8. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 2, Part 22, Part 24, Part 27
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems

2. Test Configuration

2.1. Test System Connection Diagram

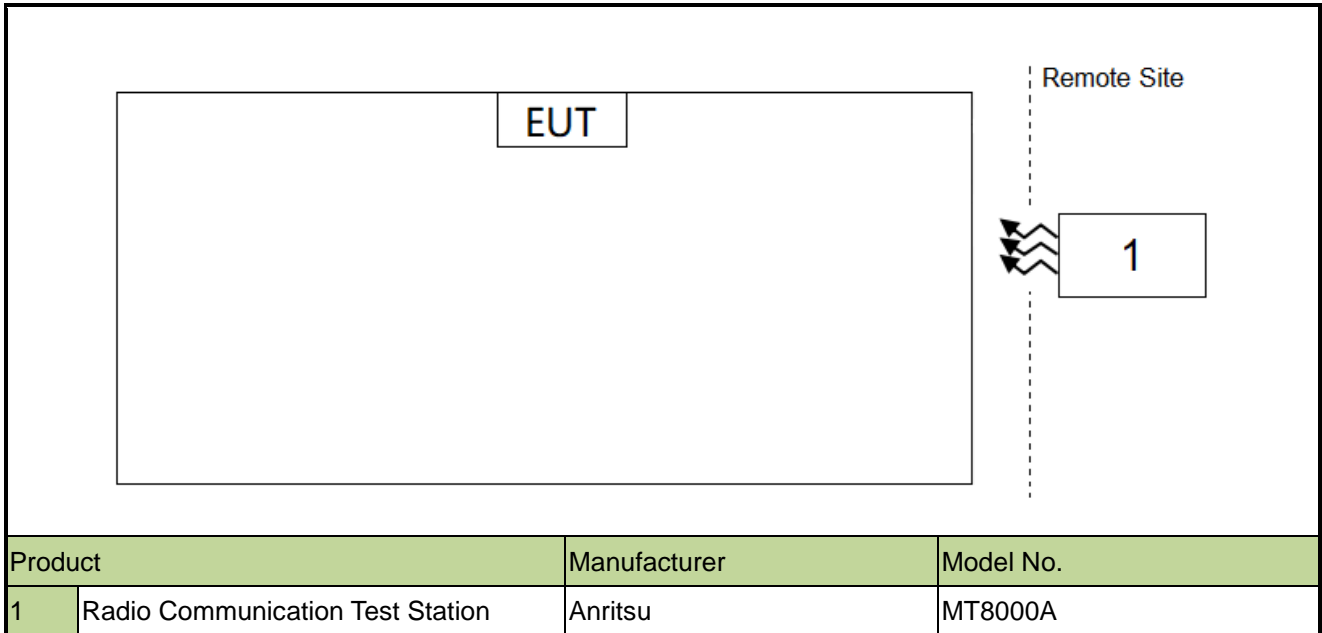

2.2. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2024-05-15	WZ-AC2
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2024-09-17	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2024-05-23	WZ-AC2
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2023-11-27	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2023-10-13	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2024-05-07	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2024-04-20	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2023-11-05	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2024-01-12	WZ-AC2
Preamplifier	EMCI	EMC051845SE	MRTSUE06987	1 year	2024-09-07	WZ-AC2
Radio Communication Test Station	Anritsu	MT8000A	MRTSUE06961	1 year	2024-06-29	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11038	1 year	2023-11-01	WZ-AC2
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2023-12-28	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2024-08-09	WZ-AC1
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2023-09-29	WZ-AC1
				1 year	2024-09-17	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2024-05-07	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2024-06-09	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2024-04-20	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE06403	1 year	2024-05-31	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2023-11-05	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2023-12-28	WZ-AC1
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2024-01-12	WZ-AC1
Preamplifier	EMCI	EMC051845SE	MRTSUE06987	1 year	2024-09-07	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2023-11-01	WZ-AC1
Radio Communication Test Station	Anritsu	MT8000A	MRTSUE06961	1 year	2024-06-29	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE06362	1 year	2024-02-14	WZ-SR6
Shielding Room	HUAMING	WZ-SR6	MRTSUE06443	N/A	N/A	WZ-SR6
Signal Analyzer	Keysight	N9020B	MRTSUE06583	1 year	2024-09-27	WZ-SR6
Signal Generator	Keysight	N5173B	MRTSUE06606	1 year	2023-11-25	WZ-SR6
5G Wireless Test Platform	Keysight	E7515B	MRTSUE06942	1 year	2024-02-29	WZ-SR6

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Radio Communication Analyzer	Anritsu	MT8821C	MRTSUE06960	1 year	2024-07-06	WZ-SR6
Radio Communication Test Station	Anritsu	MT8000A	MRTSUE06961	1 year	2024-06-29	WZ-SR6

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802	2.03C	RE Antenna & Turntable
Controller_MF 7802	1.02	RE Antenna & Turntable
UCTS	V 6.23.217.99	license 3G & 4G & 5G

4. Decision Rules and Measurement Uncertainty

4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Radiated Spurious Emissions	
The maximum measurement uncertainty is evaluated as:	
Coaxial:	9kHz~30MHz: 2.59dB
Coplanar:	9kHz~30MHz: 2.60dB
Horizontal:	30MHz~200MHz: 3.85dB
	200MHz~1GHz: 4.36dB
	1GHz~40GHz: 4.98dB
Vertical:	30MHz~200MHz: 4.06dB
	200MHz~1GHz: 5.28dB
	1GHz~40GHz: 4.91dB
Output Power	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$):	
0.66dB	

5. Test Result

5.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Verdict
27.50(a)(3), (j)(3), (k)(3)	Equivalent Isotropic Radiated Power	Conducted	Pass
2.1051, 22.917(a) 24.238(a), 27.53(g), (h), (l)(2), (m)	Transmitter Spurious Emission	Radiated	Pass

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) The worst-case scenario for all measurements is based on an engineering evaluation and QPSK was observed as the worst one and set for all conducted and radiated.
- 3) UL MIMO mode only support CP-OFDM.

5.2. Equivalent Isotropically Radiated Power Measurement

5.2.1. Test Limit

For n30:

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth

For n77:

The EIRP of mobile transmitters must not exceed 1 watt for n77

5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.2.4.4.2 & 5.2.5.5

5.2.3. Test Setting

When the fundamental condition for average power measurements cannot be realized (i.e., the EUT can not be configured to transmit at full-power on a continuous basis (i.e., duty cycle < 98%) and the instrumentation cannot be configured to measure only during active full-power transmissions), then the following procedure can be used if the EUT duty cycle is constant (i.e., duty cycle variations are less than or equal to $\pm 2\%$).

- a) Set span to 2 × to 3 × the OBW.
- b) Set RBW = 1% to 5% of the OBW.
- c) Set VBW \geq 3 × RBW.
- d) Set number of measurement points in sweep \geq 2 × span / RBW.
- e) Sweep time:
 - 1) Set = auto-couple, or
 - 2) Set \geq [10 × (number of points in sweep) × (transmission symbol period)] for single sweep (automation-compatible) measurement.
- f) Detector = power averaging (rms).
- g) Set sweep trigger to "free run."
- h) Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time,

increase the sweep time.

i) Using the marker function to identify the maximum PSD.

j) Add $10 \log (1/\text{duty cycle})$ to the measured power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25%.

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T \quad (1)$$

where


ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

For devices utilizing multiple antennas, see 6.4 for guidance with respect to determining the effective array transmit antenna gain term to be used in the above equation.

5.2.4. Test Setup

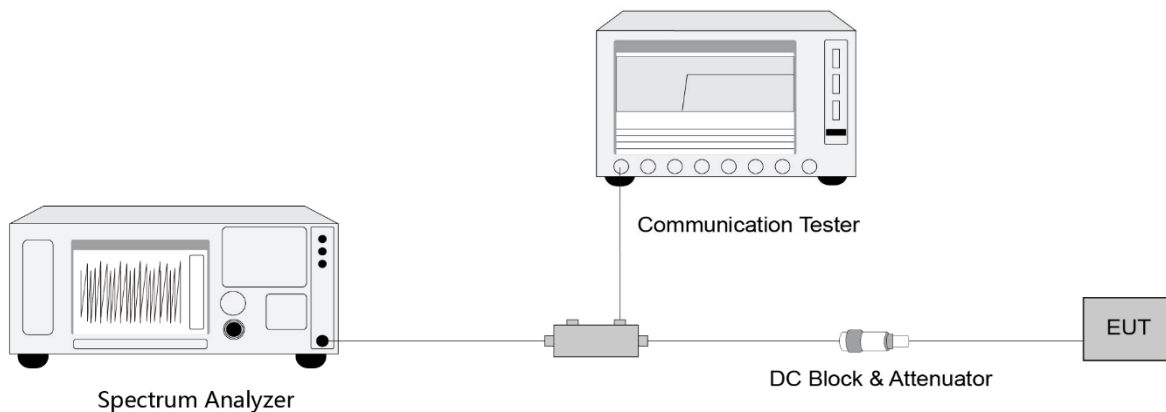

5.2.5. Test Result

Refer to Appendix A.1.

5.3. Radiated Spurious Emissions Measurement

5.3.1. Test Limit

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

For n30, the power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $70 + 10 \log(P)$ dB.

E (dB μ V/m) = EIRP (dBm) - $20 \log D$ + 104.8; where D is the measurement distance in meters. The emission limit equal to 82.3dB μ V/m or 55.3dB μ V/m.

5.3.2. Test Procedure


ANSI C63.26-2015 - Section 5.2.7 & 5.5

5.3.3. Test Setting


1. RBW = 1MHz
2. VBW $\geq 3 \times$ RBW
3. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

5.3.4. Test Setup

Below 1GHz Test Setup:

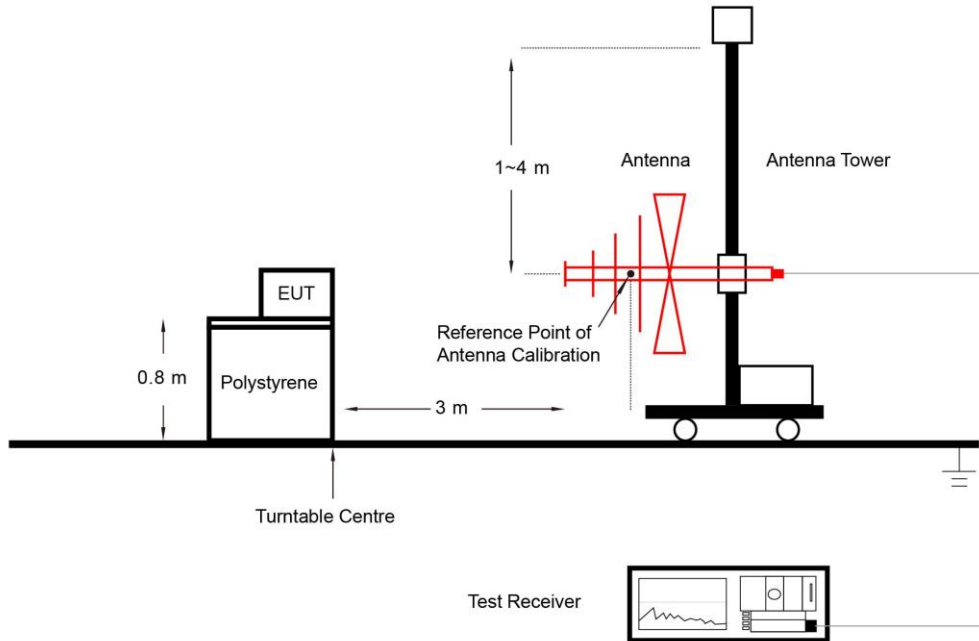

Above 1GHz Test Setup:

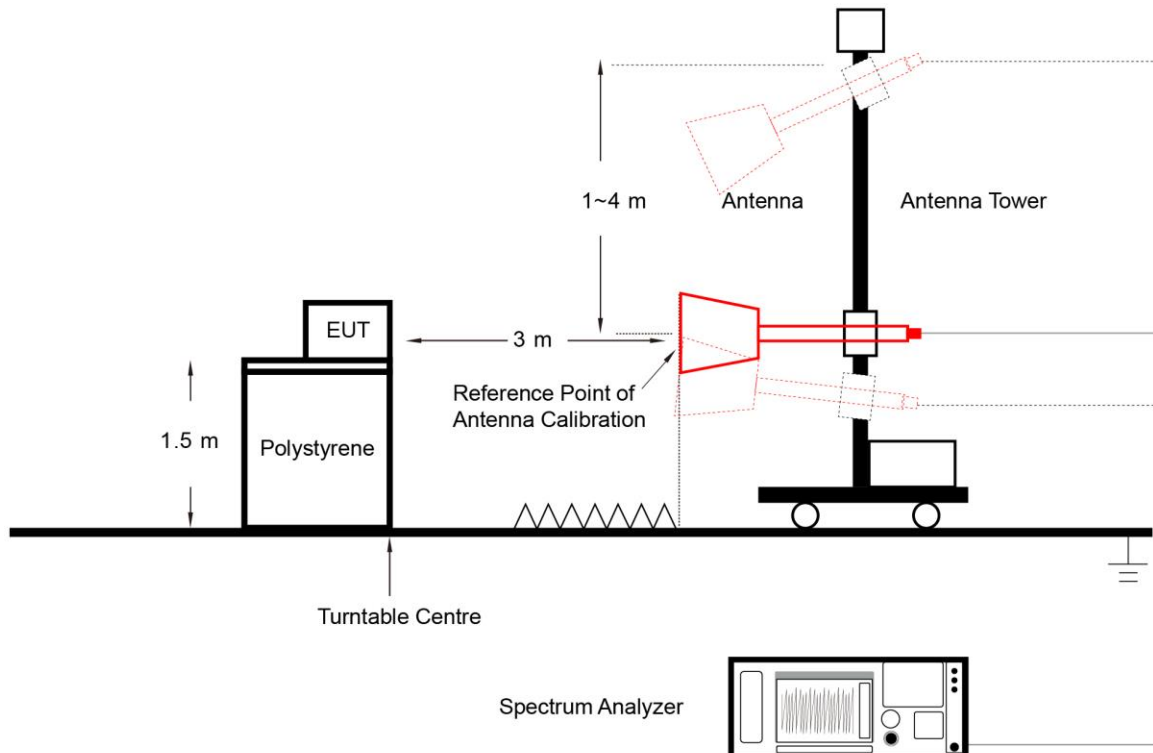

5.3.5. Test Result

Refer to Appendix A.2.

Appendix A - Test Result

A.1 Equivalent Isotropically Radiated Power Test Result

Test Site	WZ-SR6	Test Engineer	Lucas Wang
Test Date	2023-10-17 ~ 2023-10-18	Test Band	n30_SA

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Power Density (dBm/5MHz)	EIRP Density (dBm/5MHz)	Limit (dBm /5MHz)
DFT-s-OFDM PI/2 BPSK						
2307.5	5	1	0	18.90	22.18	< 23.98
		1	1	19.47	22.75	< 23.98
		1	23	19.64	22.92	< 23.98
		1	24	19.07	22.35	< 23.98
		12	6	19.57	22.85	< 23.98
		25	0	19.12	22.40	< 23.98
2310.0	5	1	0	19.09	22.37	< 23.98
		1	1	19.46	22.74	< 23.98
		1	23	19.55	22.83	< 23.98
		1	24	18.90	22.18	< 23.98
		12	6	19.59	22.87	< 23.98
		25	0	18.76	22.04	< 23.98
2312.5	5	1	0	19.09	22.37	< 23.98
		1	1	19.51	22.79	< 23.98
		1	23	19.55	22.83	< 23.98
		1	24	19.09	22.37	< 23.98
		12	6	19.64	22.92	< 23.98
		25	0	19.14	22.42	< 23.98
2310.0	10	1	0	19.30	22.58	< 23.98
		1	1	19.70	22.98	< 23.98
		1	23	19.61	22.89	< 23.98
		1	24	18.95	22.23	< 23.98
		12	6	19.63	22.91	< 23.98
		25	0	16.57	19.85	< 23.98

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Power Density (dBm/5MHz)	EIRP Density (dBm/5MHz)	Limit (dBm /5MHz)
DFT-s-OFDM QPSK						
2307.5	5	1	0	18.96	22.24	< 23.98
		1	1	20.22	23.50	< 23.98
		1	23	19.94	23.22	< 23.98
		1	24	19.15	22.43	< 23.98
		12	6	20.11	23.39	< 23.98
		25	0	18.95	22.23	< 23.98
2310.0	5	1	0	19.04	22.32	< 23.98
		1	1	20.09	23.37	< 23.98
		1	23	19.98	23.26	< 23.98
		1	24	19.11	22.39	< 23.98
		12	6	20.05	23.33	< 23.98
		25	0	18.98	22.26	< 23.98
2312.5	5	1	0	19.03	22.31	< 23.98
		1	1	20.24	23.52	< 23.98
		1	23	19.97	23.25	< 23.98
		1	24	18.69	21.97	< 23.98
		12	6	20.00	23.28	< 23.98
		25	0	19.06	22.34	< 23.98
2310.0	10	1	0	19.15	22.43	< 23.98
		1	1	20.40	23.68	< 23.98
		1	23	19.68	22.96	< 23.98
		1	24	18.72	22.00	< 23.98
		12	6	20.02	23.30	< 23.98
		25	0	16.42	19.70	< 23.98
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Power Density (dBm/5MHz)	EIRP Density (dBm/5MHz)	Limit (dBm /5MHz)
DFT-s-OFDM 16QAM						
2307.5	5	1	0	18.66	21.94	< 23.98
		1	1	19.59	22.87	< 23.98
		1	23	19.53	22.81	< 23.98
		1	24	18.57	21.85	< 23.98
		12	6	19.49	22.77	< 23.98
		25	0	18.54	21.82	< 23.98
2310.0	5	1	0	18.53	21.81	< 23.98
		1	1	19.41	22.69	< 23.98
		1	23	19.41	22.69	< 23.98
		1	24	18.43	21.71	< 23.98
		12	6	19.56	22.84	< 23.98
		25	0	18.50	21.78	< 23.98
2312.5	5	1	0	18.48	21.76	< 23.98
		1	1	19.39	22.67	< 23.98
		1	23	19.36	22.64	< 23.98
		1	24	18.43	21.71	< 23.98
		12	6	19.59	22.87	< 23.98
		25	0	18.51	21.79	< 23.98
2310.0	10	1	0	18.71	21.99	< 23.98
		1	1	19.76	23.04	< 23.98
		1	23	19.57	22.85	< 23.98
		1	24	18.60	21.88	< 23.98
		12	6	19.60	22.88	< 23.98
		25	0	15.96	19.24	< 23.98
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Power Density (dBm/5MHz)	EIRP Density (dBm/5MHz)	Limit (dBm /5MHz)
DFT-s-OFDM 64QAM						
2307.5	5	1	0	18.46	21.74	< 23.98
		1	1	19.31	22.59	< 23.98
		1	23	19.53	22.81	< 23.98
		1	24	18.75	22.03	< 23.98
		12	6	19.59	22.87	< 23.98
		25	0	18.56	21.84	< 23.98
2310.0	5	1	0	18.44	21.72	< 23.98
		1	1	19.74	23.02	< 23.98
		1	23	19.68	22.96	< 23.98
		1	24	18.70	21.98	< 23.98
		12	6	19.60	22.88	< 23.98
		25	0	18.61	21.89	< 23.98
2312.5	5	1	0	18.38	21.66	< 23.98
		1	1	19.48	22.76	< 23.98
		1	23	19.40	22.68	< 23.98
		1	24	18.33	21.61	< 23.98
		12	6	19.58	22.86	< 23.98
		25	0	18.60	21.88	< 23.98
2310.0	10	1	0	18.38	21.66	< 23.98
		1	1	20.05	23.33	< 23.98
		1	23	19.52	22.80	< 23.98
		1	24	18.64	21.92	< 23.98
		12	6	19.54	22.82	< 23.98
		25	0	16.04	19.32	< 23.98
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Power Density (dBm/5MHz)	EIRP Density (dBm/5MHz)	Limit (dBm /5MHz)
DFT-s-OFDM 256QAM						
2307.5	5	1	0	17.77	21.05	< 23.98
		1	1	17.68	20.96	< 23.98
		1	23	17.68	20.96	< 23.98
		1	24	17.61	20.89	< 23.98
		12	6	17.63	20.91	< 23.98
		25	0	17.54	20.82	< 23.98
2310.0	5	1	0	17.39	20.67	< 23.98
		1	1	17.68	20.96	< 23.98
		1	23	17.51	20.79	< 23.98
		1	24	17.57	20.85	< 23.98
		12	6	17.60	20.88	< 23.98
		25	0	17.59	20.87	< 23.98
2312.5	5	1	0	17.28	20.56	< 23.98
		1	1	17.71	20.99	< 23.98
		1	23	17.34	20.62	< 23.98
		1	24	17.47	20.75	< 23.98
		12	6	17.53	20.81	< 23.98
		25	0	17.56	20.84	< 23.98
2310.0	10	1	0	17.39	20.67	< 23.98
		1	1	17.61	20.89	< 23.98
		1	23	17.01	20.29	< 23.98
		1	24	17.34	20.62	< 23.98
		12	6	17.58	20.86	< 23.98
		25	0	15.00	18.28	< 23.98
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Power Density (dBm/5MHz)	EIRP Density (dBm/5MHz)	Limit (dBm /5MHz)
CP-OFDM QPSK						
2307.5	5	1	0	18.89	22.17	< 23.98
		1	1	19.42	22.70	< 23.98
		1	23	19.65	22.93	< 23.98
		1	24	18.84	22.12	< 23.98
		12	6	19.56	22.84	< 23.98
		25	0	19.11	22.39	< 23.98
2310.0	5	1	0	19.13	22.41	< 23.98
		1	1	19.57	22.85	< 23.98
		1	23	19.55	22.83	< 23.98
		1	24	18.91	22.19	< 23.98
		12	6	19.57	22.85	< 23.98
		25	0	19.10	22.38	< 23.98
2312.5	5	1	0	19.06	22.34	< 23.98
		1	1	19.55	22.83	< 23.98
		1	23	19.41	22.69	< 23.98
		1	24	18.98	22.26	< 23.98
		12	6	19.60	22.88	< 23.98
		25	0	19.13	22.41	< 23.98
2310.0	10	1	0	19.19	22.47	< 23.98
		1	1	19.44	22.72	< 23.98
		1	23	19.71	22.99	< 23.98
		1	24	19.28	22.56	< 23.98
		12	6	19.62	22.90	< 23.98
		25	0	16.38	19.66	< 23.98
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Test Site	WZ-SR6	Test Engineer	Lucas Wang
Test Date	2023-10-17 ~ 2023-10-18	Test Band	HPUE n77_SA (3450-3550)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3455.01	10	12	6	23.60	26.64	< 30.00
		1	1	23.52	26.56	< 30.00
		1	22	23.56	26.60	< 30.00
		24	0	23.14	26.18	< 30.00
		1	0	21.11	24.15	< 30.00
		1	23	21.13	24.17	< 30.00
3500.01	10	12	6	23.37	26.41	< 30.00
		1	1	23.34	26.38	< 30.00
		1	22	23.30	26.34	< 30.00
		24	0	23.33	26.37	< 30.00
		1	0	21.29	24.33	< 30.00
		1	23	21.27	24.31	< 30.00
3544.98	10	12	6	23.87	26.91	< 30.00
		1	1	23.83	26.87	< 30.00
		1	22	23.93	26.97	< 30.00
		24	0	23.37	26.41	< 30.00
		1	0	21.38	24.42	< 30.00
		1	23	21.37	24.41	< 30.00
3457.50	15	18	9	23.28	26.32	< 30.00
		1	1	23.29	26.33	< 30.00
		1	36	23.37	26.41	< 30.00
		36	0	23.26	26.30	< 30.00
		1	0	21.32	24.36	< 30.00
		1	37	21.31	24.35	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3500.01	15	18	9	23.47	26.51	< 30.00
		1	1	23.37	26.41	< 30.00
		1	36	23.46	26.50	< 30.00
		36	0	23.45	26.49	< 30.00
		1	0	21.32	24.36	< 30.00
		1	37	21.44	24.48	< 30.00
3542.49	15	18	9	23.42	26.46	< 30.00
		1	1	23.55	26.59	< 30.00
		1	36	23.52	26.56	< 30.00
		36	0	23.50	26.54	< 30.00
		1	0	21.51	24.55	< 30.00
		1	37	21.48	24.52	< 30.00
3460.02	20	25	12	23.30	26.34	< 30.00
		1	1	23.33	26.37	< 30.00
		1	49	23.29	26.33	< 30.00
		50	0	23.24	26.28	< 30.00
		1	0	23.36	26.40	< 30.00
		1	50	23.32	26.36	< 30.00
3500.01	20	25	12	23.45	26.49	< 30.00
		1	1	23.39	26.43	< 30.00
		1	49	23.45	26.49	< 30.00
		50	0	23.43	26.47	< 30.00
		1	0	23.37	26.41	< 30.00
		1	50	23.43	26.47	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3540.00	20	25	12	23.51	26.55	< 30.00
		1	1	23.45	26.49	< 30.00
		1	49	23.43	26.47	< 30.00
		50	0	23.47	26.51	< 30.00
		1	0	23.47	26.51	< 30.00
		1	50	23.46	26.50	< 30.00
3462.51	25	32	16	23.28	26.32	< 30.00
		1	1	23.37	26.41	< 30.00
		1	63	23.24	26.28	< 30.00
		65	0	23.37	26.41	< 30.00
		1	0	21.42	24.46	< 30.00
		1	64	21.26	24.30	< 30.00
3500.01	25	32	16	23.48	26.52	< 30.00
		1	1	23.46	26.50	< 30.00
		1	63	23.50	26.54	< 30.00
		65	0	23.49	26.53	< 30.00
		1	0	21.42	24.46	< 30.00
		1	64	21.51	24.55	< 30.00
3537.48	25	32	16	23.43	26.47	< 30.00
		1	1	23.50	26.54	< 30.00
		1	63	23.46	26.50	< 30.00
		65	0	23.51	26.55	< 30.00
		1	0	21.44	24.48	< 30.00
		1	64	21.37	24.41	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3464.00	30	36	78	23.31	26.35	< 30.00
		1	1	23.44	26.48	< 30.00
		1	76	23.36	26.40	< 30.00
		75	0	23.37	26.41	< 30.00
		1	0	21.50	24.54	< 30.00
		1	77	21.33	24.37	< 30.00
3500.01	30	36	78	23.43	26.47	< 30.00
		1	1	23.50	26.54	< 30.00
		1	76	23.61	26.65	< 30.00
		75	0	23.47	26.51	< 30.00
		1	0	21.50	24.54	< 30.00
		1	77	21.61	24.65	< 30.00
3534.99	30	36	78	23.36	26.40	< 30.00
		1	1	23.67	26.71	< 30.00
		1	76	23.54	26.58	< 30.00
		75	0	23.49	26.53	< 30.00
		1	0	21.65	24.69	< 30.00
		1	77	21.55	24.59	< 30.00
3470.01	40	50	25	23.49	26.53	< 30.00
		1	1	23.51	26.55	< 30.00
		1	104	23.40	26.44	< 30.00
		100	0	23.34	26.38	< 30.00
		1	0	21.52	24.56	< 30.00
		1	105	21.27	24.31	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3500.01	40	50	25	23.40	26.44	< 30.00
		1	1	23.61	26.65	< 30.00
		1	104	23.67	26.71	< 30.00
		100	0	23.47	26.51	< 30.00
		1	0	21.52	24.56	< 30.00
		1	105	21.56	24.60	< 30.00
3529.98	40	50	25	23.44	26.48	< 30.00
		1	1	23.64	26.68	< 30.00
		1	104	23.55	26.59	< 30.00
		100	0	23.54	26.58	< 30.00
		1	0	21.70	24.74	< 30.00
		1	105	21.49	24.53	< 30.00
3475.02	50	64	32	23.05	26.09	< 30.00
		1	1	23.33	26.37	< 30.00
		1	131	22.96	26.00	< 30.00
		128	0	23.10	26.14	< 30.00
		1	0	21.37	24.41	< 30.00
		1	132	20.96	24.00	< 30.00
3500.01	50	64	32	23.26	26.30	< 30.00
		1	1	23.30	26.34	< 30.00
		1	131	23.17	26.21	< 30.00
		128	0	23.23	26.27	< 30.00
		1	0	21.30	24.34	< 30.00
		1	132	21.15	24.19	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3525.00	50	64	32	23.19	26.23	< 30.00
		1	1	23.25	26.29	< 30.00
		1	131	23.02	26.06	< 30.00
		128	0	23.21	26.25	< 30.00
		1	0	21.28	24.32	< 30.00
		1	132	21.07	24.11	< 30.00
3480.00	60	81	40	23.12	26.16	< 30.00
		1	1	23.31	26.35	< 30.00
		1	160	23.02	26.06	< 30.00
		162	0	23.13	26.17	< 30.00
		1	0	21.35	24.39	< 30.00
		1	161	21.03	24.07	< 30.00
3500.01	60	81	40	23.31	26.35	< 30.00
		1	1	23.27	26.31	< 30.00
		1	160	23.27	26.31	< 30.00
		162	0	23.31	26.35	< 30.00
		1	0	21.39	24.43	< 30.00
		1	161	21.25	24.29	< 30.00
3519.99	60	81	40	23.21	26.25	< 30.00
		1	1	23.10	26.14	< 30.00
		1	160	23.12	26.16	< 30.00
		162	0	23.16	26.20	< 30.00
		1	0	21.15	24.19	< 30.00
		1	161	21.07	24.11	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3485.01	70	90	45	23.01	26.05	< 30.00
		1	1	23.15	26.19	< 30.00
		1	187	22.97	26.01	< 30.00
		180	0	23.06	26.10	< 30.00
		1	0	21.22	24.26	< 30.00
		1	188	21.02	24.06	< 30.00
3500.01	70	90	45	23.22	26.26	< 30.00
		1	1	23.26	26.30	< 30.00
		1	187	23.10	26.14	< 30.00
		180	0	23.23	26.27	< 30.00
		1	0	21.25	24.29	< 30.00
		1	188	21.11	24.15	< 30.00
3514.98	70	90	45	23.12	26.16	< 30.00
		1	1	23.19	26.23	< 30.00
		1	187	22.94	25.98	< 30.00
		180	0	23.12	26.16	< 30.00
		1	0	21.07	24.11	< 30.00
		1	188	20.95	23.99	< 30.00
3490.02	80	108	54	22.98	26.02	< 30.00
		1	1	23.13	26.17	< 30.00
		1	215	23.08	26.12	< 30.00
		216	0	23.05	26.09	< 30.00
		1	0	21.13	24.17	< 30.00
		1	216	21.05	24.09	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3500.01	80	108	54	23.20	26.24	< 30.00
		1	1	23.25	26.29	< 30.00
		1	215	23.09	26.13	< 30.00
		216	0	23.14	26.18	< 30.00
		1	0	21.24	24.28	< 30.00
		1	216	21.09	24.13	< 30.00
3510.00	80	108	54	23.16	26.20	< 30.00
		1	1	23.25	26.29	< 30.00
		1	215	22.97	26.01	< 30.00
		216	0	23.14	26.18	< 30.00
		1	0	21.19	24.23	< 30.00
		1	216	21.03	24.07	< 30.00
3495.00	90	120	60	23.20	26.24	< 30.00
		1	1	23.18	26.22	< 30.00
		1	243	23.08	26.12	< 30.00
		243	0	23.09	26.13	< 30.00
		1	0	21.27	24.31	< 30.00
		1	244	21.09	24.13	< 30.00
3500.01	90	120	60	23.25	26.29	< 30.00
		1	1	23.26	26.30	< 30.00
		1	243	23.09	26.13	< 30.00
		243	0	23.25	26.29	< 30.00
		1	0	21.22	24.26	< 30.00
		1	244	21.14	24.18	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3504.99	90	120	60	23.20	26.24	< 30.00
		1	1	23.36	26.40	< 30.00
		1	243	23.19	26.23	< 30.00
		243	0	23.26	26.30	< 30.00
		1	0	21.32	24.36	< 30.00
		1	244	21.18	24.22	< 30.00
3500.01	100	135	67	23.17	26.21	< 30.00
		1	1	23.26	26.30	< 30.00
		1	271	23.16	26.20	< 30.00
		270	0	23.23	26.27	< 30.00
		1	0	21.23	24.27	< 30.00
		1	272	21.06	24.10	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3455.01	10	12	6	23.61	26.65	< 30.00
		1	1	23.52	26.56	< 30.00
		1	22	23.57	26.61	< 30.00
		24	0	23.34	26.38	< 30.00
		1	0	21.26	24.30	< 30.00
		1	23	21.23	24.27	< 30.00
3500.01	10	12	6	23.55	26.59	< 30.00
		1	1	23.57	26.61	< 30.00
		1	22	23.51	26.55	< 30.00
		24	0	23.62	26.66	< 30.00
		1	0	21.62	24.66	< 30.00
		1	23	21.49	24.53	< 30.00
3544.98	10	12	6	23.87	26.91	< 30.00
		1	1	23.83	26.87	< 30.00
		1	22	23.93	26.97	< 30.00
		24	0	23.78	26.82	< 30.00
		1	0	21.80	24.84	< 30.00
		1	23	21.73	24.77	< 30.00
3457.50	15	18	9	23.41	26.45	< 30.00
		1	1	23.45	26.49	< 30.00
		1	36	23.57	26.61	< 30.00
		36	0	23.47	26.51	< 30.00
		1	0	21.44	24.48	< 30.00
		1	37	21.56	24.60	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3500.01	15	18	9	23.74	26.78	< 30.00
		1	1	23.64	26.68	< 30.00
		1	36	23.74	26.78	< 30.00
		36	0	23.73	26.77	< 30.00
		1	0	21.64	24.68	< 30.00
		1	37	21.66	24.70	< 30.00
3542.49	15	18	9	23.94	26.98	< 30.00
		1	1	23.94	26.98	< 30.00
		1	36	23.96	27.00	< 30.00
		36	0	23.95	26.99	< 30.00
		1	0	21.89	24.93	< 30.00
		1	37	21.85	24.89	< 30.00
3460.02	20	25	12	23.48	26.52	< 30.00
		1	1	23.43	26.47	< 30.00
		1	49	23.57	26.61	< 30.00
		50	0	23.47	26.51	< 30.00
		1	0	21.43	24.47	< 30.00
		1	50	21.55	24.59	< 30.00
3500.01	20	25	12	23.72	26.76	< 30.00
		1	1	23.82	26.86	< 30.00
		1	49	23.74	26.78	< 30.00
		50	0	23.64	26.68	< 30.00
		1	0	21.72	24.76	< 30.00
		1	50	21.71	24.75	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3540.00	20	25	12	23.90	26.94	< 30.00
		1	1	23.80	26.84	< 30.00
		1	49	23.94	26.98	< 30.00
		50	0	23.94	26.98	< 30.00
		1	0	21.81	24.85	< 30.00
		1	50	21.91	24.95	< 30.00
3462.51	25	32	16	23.56	26.60	< 30.00
		1	1	23.49	26.53	< 30.00
		1	63	23.62	26.66	< 30.00
		65	0	23.60	26.64	< 30.00
		1	0	21.54	24.58	< 30.00
		1	64	21.64	24.68	< 30.00
3500.01	25	32	16	23.81	26.85	< 30.00
		1	1	23.74	26.78	< 30.00
		1	63	23.72	26.76	< 30.00
		65	0	23.77	26.81	< 30.00
		1	0	21.82	24.86	< 30.00
		1	64	21.82	24.86	< 30.00
3537.48	25	32	16	23.95	26.99	< 30.00
		1	1	23.86	26.90	< 30.00
		1	63	23.88	26.92	< 30.00
		65	0	23.97	27.01	< 30.00
		1	0	21.80	24.84	< 30.00
		1	64	21.95	24.99	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3464.00	30	36	78	23.53	26.57	< 30.00
		1	1	23.65	26.69	< 30.00
		1	76	23.72	26.76	< 30.00
		75	0	23.67	26.71	< 30.00
		1	0	21.61	24.65	< 30.00
		1	77	21.75	24.79	< 30.00
3500.01	30	36	78	23.71	26.75	< 30.00
		1	1	23.88	26.92	< 30.00
		1	76	23.80	26.84	< 30.00
		75	0	23.83	26.87	< 30.00
		1	0	21.95	24.99	< 30.00
		1	77	21.78	24.82	< 30.00
3534.99	30	36	78	23.89	26.93	< 30.00
		1	1	23.99	27.03	< 30.00
		1	76	24.00	27.04	< 30.00
		75	0	23.96	27.00	< 30.00
		1	0	21.98	25.02	< 30.00
		1	77	22.04	25.08	< 30.00
3470.01	40	50	25	23.82	26.86	< 30.00
		1	1	23.68	26.72	< 30.00
		1	104	23.79	26.83	< 30.00
		100	0	23.65	26.69	< 30.00
		1	0	21.68	24.72	< 30.00
		1	105	21.71	24.75	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3500.01	40	50	25	23.78	26.82	< 30.00
		1	1	23.95	26.99	< 30.00
		1	104	23.87	26.91	< 30.00
		100	0	23.85	26.89	< 30.00
		1	0	21.94	24.98	< 30.00
		1	105	21.96	25.00	< 30.00
3529.98	40	50	25	23.91	26.95	< 30.00
		1	1	23.92	26.96	< 30.00
		1	104	24.07	27.11	< 30.00
		100	0	24.01	27.05	< 30.00
		1	0	21.90	24.94	< 30.00
		1	105	22.03	25.07	< 30.00
3475.02	50	64	32	23.51	26.55	< 30.00
		1	1	23.48	26.52	< 30.00
		1	131	23.29	26.33	< 30.00
		128	0	23.48	26.52	< 30.00
		1	0	21.48	24.52	< 30.00
		1	132	21.30	24.34	< 30.00
3500.01	50	64	32	23.55	26.59	< 30.00
		1	1	23.68	26.72	< 30.00
		1	131	23.50	26.54	< 30.00
		128	0	23.62	26.66	< 30.00
		1	0	21.69	24.73	< 30.00
		1	132	21.60	24.64	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3525.00	50	64	32	23.53	26.57	< 30.00
		1	1	23.60	26.64	< 30.00
		1	131	23.55	26.59	< 30.00
		128	0	23.57	26.61	< 30.00
		1	0	21.61	24.65	< 30.00
		1	132	21.63	24.67	< 30.00
3480.00	60	81	40	23.57	26.61	< 30.00
		1	1	23.49	26.53	< 30.00
		1	160	23.38	26.42	< 30.00
		162	0	23.52	26.56	< 30.00
		1	0	21.43	24.47	< 30.00
		1	161	21.41	24.45	< 30.00
3500.01	60	81	40	23.64	26.68	< 30.00
		1	1	23.63	26.67	< 30.00
		1	160	23.65	26.69	< 30.00
		162	0	23.69	26.73	< 30.00
		1	0	21.63	24.67	< 30.00
		1	161	21.61	24.65	< 30.00
3519.99	60	81	40	23.61	26.65	< 30.00
		1	1	23.52	26.56	< 30.00
		1	160	23.59	26.63	< 30.00
		162	0	23.63	26.67	< 30.00
		1	0	21.51	24.55	< 30.00
		1	161	21.54	24.58	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3485.01	70	90	45	23.44	26.48	< 30.00
		1	1	23.32	26.36	< 30.00
		1	187	23.27	26.31	< 30.00
		180	0	23.43	26.47	< 30.00
		1	0	21.34	24.38	< 30.00
		1	188	21.29	24.33	< 30.00
3500.01	70	90	45	23.56	26.60	< 30.00
		1	1	23.61	26.65	< 30.00
		1	187	23.49	26.53	< 30.00
		180	0	23.63	26.67	< 30.00
		1	0	21.52	24.56	< 30.00
		1	188	21.47	24.51	< 30.00
3514.98	70	90	45	23.50	26.54	< 30.00
		1	1	23.48	26.52	< 30.00
		1	187	23.51	26.55	< 30.00
		180	0	23.50	26.54	< 30.00
		1	0	21.55	24.59	< 30.00
		1	188	21.44	24.48	< 30.00
3490.02	80	108	54	23.44	26.48	< 30.00
		1	1	23.31	26.35	< 30.00
		1	215	23.42	26.46	< 30.00
		216	0	23.46	26.50	< 30.00
		1	0	21.32	24.36	< 30.00
		1	216	21.43	24.47	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3500.01	80	108	54	23.61	26.65	< 30.00
		1	1	23.57	26.61	< 30.00
		1	215	23.59	26.63	< 30.00
		216	0	23.61	26.65	< 30.00
		1	0	21.44	24.48	< 30.00
		1	216	21.52	24.56	< 30.00
3510.00	80	108	54	23.57	26.61	< 30.00
		1	1	23.57	26.61	< 30.00
		1	215	23.58	26.62	< 30.00
		216	0	23.56	26.60	< 30.00
		1	0	21.52	24.56	< 30.00
		1	216	21.56	24.60	< 30.00
3495.00	90	120	60	23.41	26.45	< 30.00
		1	1	23.38	26.42	< 30.00
		1	243	23.50	26.54	< 30.00
		243	0	23.45	26.49	< 30.00
		1	0	21.29	24.33	< 30.00
		1	244	21.54	24.58	< 30.00
3500.01	90	120	60	23.61	26.65	< 30.00
		1	1	23.40	26.44	< 30.00
		1	243	23.60	26.64	< 30.00
		243	0	23.60	26.64	< 30.00
		1	0	21.30	24.34	< 30.00
		1	244	21.67	24.71	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3504.99	90	120	60	23.59	26.63	< 30.00
		1	1	23.51	26.55	< 30.00
		1	243	23.62	26.66	< 30.00
		243	0	23.64	26.68	< 30.00
		1	0	21.54	24.58	< 30.00
		1	244	21.64	24.68	< 30.00
3500.01	100	135	67	23.62	26.66	< 30.00
		1	1	23.34	26.38	< 30.00
		1	271	23.62	26.66	< 30.00
		270	0	23.64	26.68	< 30.00
		1	0	21.45	24.49	< 30.00
		1	272	21.66	24.70	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3455.01	10	12	6	22.85	25.89	< 30.00
		1	1	22.81	25.85	< 30.00
		1	22	22.86	25.90	< 30.00
		24	0	22.39	25.43	< 30.00
		1	0	21.23	24.27	< 30.00
		1	23	21.14	24.18	< 30.00
3500.01	10	12	6	23.11	26.15	< 30.00
		1	1	23.14	26.18	< 30.00
		1	22	23.00	26.04	< 30.00
		24	0	22.61	25.65	< 30.00
		1	0	21.52	24.56	< 30.00
		1	23	21.54	24.58	< 30.00
3544.98	10	12	6	23.36	26.40	< 30.00
		1	1	23.27	26.31	< 30.00
		1	22	23.14	26.18	< 30.00
		24	0	22.89	25.93	< 30.00
		1	0	21.71	24.75	< 30.00
		1	23	21.79	24.83	< 30.00
3457.50	15	18	9	22.98	26.02	< 30.00
		1	1	22.83	25.87	< 30.00
		1	36	23.07	26.11	< 30.00
		36	0	22.40	25.44	< 30.00
		1	0	21.41	24.45	< 30.00
		1	37	21.48	24.52	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3500.01	15	18	9	23.25	26.29	< 30.00
		1	1	23.26	26.30	< 30.00
		1	36	23.15	26.19	< 30.00
		36	0	22.71	25.75	< 30.00
		1	0	21.71	24.75	< 30.00
		1	37	21.61	24.65	< 30.00
3542.49	15	18	9	23.43	26.47	< 30.00
		1	1	23.32	26.36	< 30.00
		1	36	23.32	26.36	< 30.00
		36	0	22.90	25.94	< 30.00
		1	0	22.12	25.16	< 30.00
		1	37	22.00	25.04	< 30.00
3460.02	20	25	12	23.04	26.08	< 30.00
		1	1	22.94	25.98	< 30.00
		1	49	23.22	26.26	< 30.00
		50	0	22.55	25.59	< 30.00
		1	0	21.40	24.44	< 30.00
		1	50	21.43	24.47	< 30.00
3500.01	20	25	12	23.15	26.19	< 30.00
		1	1	23.10	26.14	< 30.00
		1	49	23.09	26.13	< 30.00
		50	0	22.65	25.69	< 30.00
		1	0	21.74	24.78	< 30.00
		1	50	21.65	24.69	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3540.00	20	25	12	23.50	26.54	< 30.00
		1	1	23.27	26.31	< 30.00
		1	49	23.36	26.40	< 30.00
		50	0	22.93	25.97	< 30.00
		1	0	21.71	24.75	< 30.00
		1	50	21.99	25.03	< 30.00
3462.51	25	32	16	22.97	26.01	< 30.00
		1	1	23.05	26.09	< 30.00
		1	63	23.15	26.19	< 30.00
		65	0	22.67	25.71	< 30.00
		1	0	21.51	24.55	< 30.00
		1	64	21.71	24.75	< 30.00
3500.01	25	32	16	23.25	26.29	< 30.00
		1	1	23.27	26.31	< 30.00
		1	63	23.23	26.27	< 30.00
		65	0	22.73	25.77	< 30.00
		1	0	21.88	24.92	< 30.00
		1	64	21.89	24.93	< 30.00
3537.48	25	32	16	23.43	26.47	< 30.00
		1	1	23.27	26.31	< 30.00
		1	63	23.42	26.46	< 30.00
		65	0	22.90	25.94	< 30.00
		1	0	21.87	24.91	< 30.00
		1	64	21.93	24.97	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3464.00	30	36	78	23.03	26.07	< 30.00
		1	1	23.01	26.05	< 30.00
		1	76	23.14	26.18	< 30.00
		75	0	22.71	25.75	< 30.00
		1	0	21.62	24.66	< 30.00
		1	77	21.70	24.74	< 30.00
3500.01	30	36	78	23.22	26.26	< 30.00
		1	1	23.33	26.37	< 30.00
		1	76	23.28	26.32	< 30.00
		75	0	22.80	25.84	< 30.00
		1	0	21.92	24.96	< 30.00
		1	77	21.87	24.91	< 30.00
3534.99	30	36	78	23.34	26.38	< 30.00
		1	1	23.41	26.45	< 30.00
		1	76	23.51	26.55	< 30.00
		75	0	22.98	26.02	< 30.00
		1	0	21.97	25.01	< 30.00
		1	77	22.08	25.12	< 30.00
3470.01	40	50	25	23.19	26.23	< 30.00
		1	1	23.07	26.11	< 30.00
		1	104	23.19	26.23	< 30.00
		100	0	22.69	25.73	< 30.00
		1	0	21.74	24.78	< 30.00
		1	105	21.79	24.83	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3500.01	40	50	25	23.28	26.32	< 30.00
		1	1	23.49	26.53	< 30.00
		1	104	23.50	26.54	< 30.00
		100	0	22.85	25.89	< 30.00
		1	0	22.02	25.06	< 30.00
		1	105	21.98	25.02	< 30.00
3529.98	40	50	25	23.37	26.41	< 30.00
		1	1	23.31	26.35	< 30.00
		1	104	23.46	26.50	< 30.00
		100	0	22.86	25.90	< 30.00
		1	0	21.99	25.03	< 30.00
		1	105	22.13	25.17	< 30.00
3475.02	50	64	32	22.93	25.97	< 30.00
		1	1	22.91	25.95	< 30.00
		1	131	22.73	25.77	< 30.00
		128	0	22.50	25.54	< 30.00
		1	0	21.53	24.57	< 30.00
		1	132	21.27	24.31	< 30.00
3500.01	50	64	32	23.09	26.13	< 30.00
		1	1	23.11	26.15	< 30.00
		1	131	22.98	26.02	< 30.00
		128	0	22.68	25.72	< 30.00
		1	0	21.69	24.73	< 30.00
		1	132	21.63	24.67	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3525.00	50	64	32	23.01	26.05	< 30.00
		1	1	23.12	26.16	< 30.00
		1	131	23.13	26.17	< 30.00
		128	0	22.60	25.64	< 30.00
		1	0	21.51	24.55	< 30.00
		1	132	21.49	24.53	< 30.00
3480.00	60	81	40	23.11	26.15	< 30.00
		1	1	22.98	26.02	< 30.00
		1	160	22.94	25.98	< 30.00
		162	0	22.50	25.54	< 30.00
		1	0	21.48	24.52	< 30.00
		1	161	21.48	24.52	< 30.00
3500.01	60	81	40	23.19	26.23	< 30.00
		1	1	23.08	26.12	< 30.00
		1	160	23.17	26.21	< 30.00
		162	0	22.68	25.72	< 30.00
		1	0	21.62	24.66	< 30.00
		1	161	21.69	24.73	< 30.00
3519.99	60	81	40	23.09	26.13	< 30.00
		1	1	23.03	26.07	< 30.00
		1	160	23.13	26.17	< 30.00
		162	0	22.60	25.64	< 30.00
		1	0	21.51	24.55	< 30.00
		1	161	21.56	24.60	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3485.01	70	90	45	22.86	25.90	< 30.00
		1	1	22.86	25.90	< 30.00
		1	187	22.86	25.90	< 30.00
		180	0	22.37	25.41	< 30.00
		1	0	21.36	24.40	< 30.00
		1	188	21.37	24.41	< 30.00
3500.01	70	90	45	23.07	26.11	< 30.00
		1	1	23.06	26.10	< 30.00
		1	187	22.99	26.03	< 30.00
		180	0	22.62	25.66	< 30.00
		1	0	21.68	24.72	< 30.00
		1	188	21.61	24.65	< 30.00
3514.98	70	90	45	23.06	26.10	< 30.00
		1	1	23.09	26.13	< 30.00
		1	187	22.91	25.95	< 30.00
		180	0	22.62	25.66	< 30.00
		1	0	21.50	24.54	< 30.00
		1	188	21.52	24.56	< 30.00
3490.02	80	108	54	22.92	25.96	< 30.00
		1	1	22.83	25.87	< 30.00
		1	215	22.91	25.95	< 30.00
		216	0	22.46	25.50	< 30.00
		1	0	21.36	24.40	< 30.00
		1	216	21.43	24.47	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3500.01	80	108	54	23.11	26.15	< 30.00
		1	1	23.05	26.09	< 30.00
		1	215	23.00	26.04	< 30.00
		216	0	22.55	25.59	< 30.00
		1	0	21.59	24.63	< 30.00
		1	216	21.55	24.59	< 30.00
3510.00	80	108	54	23.01	26.05	< 30.00
		1	1	23.18	26.22	< 30.00
		1	215	23.20	26.24	< 30.00
		216	0	22.56	25.60	< 30.00
		1	0	21.64	24.68	< 30.00
		1	216	21.64	24.68	< 30.00
3495.00	90	120	60	23.04	26.08	< 30.00
		1	1	22.76	25.80	< 30.00
		1	243	23.02	26.06	< 30.00
		243	0	22.52	25.56	< 30.00
		1	0	21.38	24.42	< 30.00
		1	244	21.59	24.63	< 30.00
3500.01	90	120	60	23.12	26.16	< 30.00
		1	1	22.90	25.94	< 30.00
		1	243	23.17	26.21	< 30.00
		243	0	22.62	25.66	< 30.00
		1	0	21.44	24.48	< 30.00
		1	244	21.71	24.75	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3504.99	90	120	60	23.07	26.11	< 30.00
		1	1	23.11	26.15	< 30.00
		1	243	23.20	26.24	< 30.00
		243	0	22.68	25.72	< 30.00
		1	0	21.63	24.67	< 30.00
		1	244	21.63	24.67	< 30.00
3500.01	100	135	67	23.13	26.17	< 30.00
		1	1	22.85	25.89	< 30.00
		1	271	23.12	26.16	< 30.00
		270	0	22.66	25.70	< 30.00
		1	0	21.44	24.48	< 30.00
		1	272	21.71	24.75	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3455.01	10	12	6	22.38	25.42	< 30.00
		1	1	22.38	25.42	< 30.00
		1	22	22.73	25.77	< 30.00
		24	0	21.85	24.89	< 30.00
		1	0	21.52	24.56	< 30.00
		1	23	21.16	24.20	< 30.00
3500.01	10	12	6	22.66	25.70	< 30.00
		1	1	22.54	25.58	< 30.00
		1	22	22.58	25.62	< 30.00
		24	0	22.11	25.15	< 30.00
		1	0	21.67	24.71	< 30.00
		1	23	21.52	24.56	< 30.00
3544.98	10	12	6	22.85	25.89	< 30.00
		1	1	22.76	25.80	< 30.00
		1	22	22.92	25.96	< 30.00
		24	0	22.35	25.39	< 30.00
		1	0	21.79	24.83	< 30.00
		1	23	21.71	24.75	< 30.00
3457.50	15	18	9	22.49	25.53	< 30.00
		1	1	22.44	25.48	< 30.00
		1	36	22.53	25.57	< 30.00
		36	0	22.03	25.07	< 30.00
		1	0	21.47	24.51	< 30.00
		1	37	21.77	24.81	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3500.01	15	18	9	22.78	25.82	< 30.00
		1	1	22.63	25.67	< 30.00
		1	36	22.94	25.98	< 30.00
		36	0	22.30	25.34	< 30.00
		1	0	21.51	24.55	< 30.00
		1	37	21.74	24.78	< 30.00
3542.49	15	18	9	22.91	25.95	< 30.00
		1	1	22.96	26.00	< 30.00
		1	36	23.01	26.05	< 30.00
		36	0	22.39	25.43	< 30.00
		1	0	22.00	25.04	< 30.00
		1	37	21.99	25.03	< 30.00
3460.02	20	25	12	22.52	25.56	< 30.00
		1	1	22.46	25.50	< 30.00
		1	49	22.56	25.60	< 30.00
		50	0	21.97	25.01	< 30.00
		1	0	21.46	24.50	< 30.00
		1	50	21.53	24.57	< 30.00
3500.01	20	25	12	22.66	25.70	< 30.00
		1	1	22.85	25.89	< 30.00
		1	49	22.85	25.89	< 30.00
		50	0	22.20	25.24	< 30.00
		1	0	21.65	24.69	< 30.00
		1	50	21.72	24.76	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3540.00	20	25	12	22.93	25.97	< 30.00
		1	1	22.94	25.98	< 30.00
		1	49	23.09	26.13	< 30.00
		50	0	22.49	25.53	< 30.00
		1	0	21.90	24.94	< 30.00
		1	50	22.00	25.04	< 30.00
3462.51	25	32	16	22.57	25.61	< 30.00
		1	1	22.54	25.58	< 30.00
		1	63	22.61	25.65	< 30.00
		65	0	22.06	25.10	< 30.00
		1	0	21.51	24.55	< 30.00
		1	64	21.70	24.74	< 30.00
3500.01	25	32	16	22.82	25.86	< 30.00
		1	1	22.81	25.85	< 30.00
		1	63	22.75	25.79	< 30.00
		65	0	22.25	25.29	< 30.00
		1	0	21.86	24.90	< 30.00
		1	64	21.91	24.95	< 30.00
3537.48	25	32	16	22.92	25.96	< 30.00
		1	1	22.95	25.99	< 30.00
		1	63	23.03	26.07	< 30.00
		65	0	22.50	25.54	< 30.00
		1	0	21.92	24.96	< 30.00
		1	64	22.03	25.07	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3464.00	30	36	78	22.55	25.59	< 30.00
		1	1	22.67	25.71	< 30.00
		1	76	22.72	25.76	< 30.00
		75	0	22.06	25.10	< 30.00
		1	0	21.72	24.76	< 30.00
		1	77	21.86	24.90	< 30.00
3500.01	30	36	78	22.77	25.81	< 30.00
		1	1	22.93	25.97	< 30.00
		1	76	22.82	25.86	< 30.00
		75	0	22.36	25.40	< 30.00
		1	0	21.99	25.03	< 30.00
		1	77	21.85	24.89	< 30.00
3534.99	30	36	78	22.88	25.92	< 30.00
		1	1	22.97	26.01	< 30.00
		1	76	23.11	26.15	< 30.00
		75	0	22.53	25.57	< 30.00
		1	0	22.00	25.04	< 30.00
		1	77	22.09	25.13	< 30.00
3470.01	40	50	25	22.61	25.65	< 30.00
		1	1	22.72	25.76	< 30.00
		1	104	22.87	25.91	< 30.00
		100	0	22.13	25.17	< 30.00
		1	0	21.82	24.86	< 30.00
		1	105	21.84	24.88	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3500.01	40	50	25	22.82	25.86	< 30.00
		1	1	23.10	26.14	< 30.00
		1	104	23.02	26.06	< 30.00
		100	0	22.43	25.47	< 30.00
		1	0	22.05	25.09	< 30.00
		1	105	22.05	25.09	< 30.00
3529.98	40	50	25	22.88	25.92	< 30.00
		1	1	23.05	26.09	< 30.00
		1	104	23.22	26.26	< 30.00
		100	0	22.41	25.45	< 30.00
		1	0	22.05	25.09	< 30.00
		1	105	22.15	25.19	< 30.00
3475.02	50	64	32	22.57	25.61	< 30.00
		1	1	22.53	25.57	< 30.00
		1	131	22.41	25.45	< 30.00
		128	0	21.98	25.02	< 30.00
		1	0	21.48	24.52	< 30.00
		1	132	21.37	24.41	< 30.00
3500.01	50	64	32	22.71	25.75	< 30.00
		1	1	22.76	25.80	< 30.00
		1	131	22.61	25.65	< 30.00
		128	0	22.14	25.18	< 30.00
		1	0	21.71	24.75	< 30.00
		1	132	21.71	24.75	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3525.00	50	64	32	22.61	25.65	< 30.00
		1	1	22.68	25.72	< 30.00
		1	131	22.67	25.71	< 30.00
		128	0	22.06	25.10	< 30.00
		1	0	21.60	24.64	< 30.00
		1	132	21.62	24.66	< 30.00
3480.00	60	81	40	22.53	25.57	< 30.00
		1	1	22.62	25.66	< 30.00
		1	160	22.48	25.52	< 30.00
		162	0	22.00	25.04	< 30.00
		1	0	21.53	24.57	< 30.00
		1	161	21.52	24.56	< 30.00
3500.01	60	81	40	22.67	25.71	< 30.00
		1	1	22.71	25.75	< 30.00
		1	160	22.69	25.73	< 30.00
		162	0	22.23	25.27	< 30.00
		1	0	21.75	24.79	< 30.00
		1	161	21.71	24.75	< 30.00
3519.99	60	81	40	22.62	25.66	< 30.00
		1	1	22.57	25.61	< 30.00
		1	160	22.67	25.71	< 30.00
		162	0	22.17	25.21	< 30.00
		1	0	21.60	24.64	< 30.00
		1	161	21.64	24.68	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3485.01	70	90	45	22.44	25.48	< 30.00
		1	1	22.37	25.41	< 30.00
		1	187	22.37	25.41	< 30.00
		180	0	21.90	24.94	< 30.00
		1	0	21.34	24.38	< 30.00
		1	188	21.36	24.40	< 30.00
3500.01	70	90	45	22.56	25.60	< 30.00
		1	1	22.66	25.70	< 30.00
		1	187	22.58	25.62	< 30.00
		180	0	22.15	25.19	< 30.00
		1	0	21.70	24.74	< 30.00
		1	188	21.63	24.67	< 30.00
3514.98	70	90	45	22.55	25.59	< 30.00
		1	1	22.62	25.66	< 30.00
		1	187	22.58	25.62	< 30.00
		180	0	22.11	25.15	< 30.00
		1	0	21.66	24.70	< 30.00
		1	188	21.62	24.66	< 30.00
3490.02	80	108	54	22.44	25.48	< 30.00
		1	1	22.39	25.43	< 30.00
		1	215	22.53	25.57	< 30.00
		216	0	21.90	24.94	< 30.00
		1	0	21.44	24.48	< 30.00
		1	216	21.54	24.58	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3500.01	80	108	54	22.60	25.64	< 30.00
		1	1	22.64	25.68	< 30.00
		1	215	22.65	25.69	< 30.00
		216	0	22.11	25.15	< 30.00
		1	0	21.57	24.61	< 30.00
		1	216	21.64	24.68	< 30.00
3510.00	80	108	54	22.48	25.52	< 30.00
		1	1	22.54	25.58	< 30.00
		1	215	22.63	25.67	< 30.00
		216	0	22.09	25.13	< 30.00
		1	0	21.59	24.63	< 30.00
		1	216	21.64	24.68	< 30.00
3495.00	90	120	60	22.42	25.46	< 30.00
		1	1	22.39	25.43	< 30.00
		1	243	22.62	25.66	< 30.00
		243	0	21.91	24.95	< 30.00
		1	0	21.45	24.49	< 30.00
		1	244	21.63	24.67	< 30.00
3500.01	90	120	60	22.69	25.73	< 30.00
		1	1	22.44	25.48	< 30.00
		1	243	22.72	25.76	< 30.00
		243	0	22.09	25.13	< 30.00
		1	0	21.43	24.47	< 30.00
		1	244	21.68	24.72	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3504.99	90	120	60	22.58	25.62	< 30.00
		1	1	22.61	25.65	< 30.00
		1	243	22.61	25.65	< 30.00
		243	0	22.09	25.13	< 30.00
		1	0	21.52	24.56	< 30.00
		1	244	21.76	24.80	< 30.00
3500.01	100	135	67	22.62	25.66	< 30.00
		1	1	22.45	25.49	< 30.00
		1	271	22.72	25.76	< 30.00
		270	0	22.18	25.22	< 30.00
		1	0	21.50	24.54	< 30.00
		1	272	21.74	24.78	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3455.01	10	12	6	20.38	23.42	< 30.00
		1	1	20.20	23.24	< 30.00
		1	22	20.47	23.51	< 30.00
		24	0	19.88	22.92	< 30.00
		1	0	20.44	23.48	< 30.00
		1	23	20.34	23.38	< 30.00
3500.01	10	12	6	20.72	23.76	< 30.00
		1	1	20.79	23.83	< 30.00
		1	22	20.78	23.82	< 30.00
		24	0	20.19	23.23	< 30.00
		1	0	20.87	23.91	< 30.00
		1	23	20.70	23.74	< 30.00
3544.98	10	12	6	20.86	23.90	< 30.00
		1	1	20.77	23.81	< 30.00
		1	22	20.88	23.92	< 30.00
		24	0	20.37	23.41	< 30.00
		1	0	20.89	23.93	< 30.00
		1	23	20.79	23.83	< 30.00
3457.50	15	18	9	20.45	23.49	< 30.00
		1	1	20.41	23.45	< 30.00
		1	36	20.72	23.76	< 30.00
		36	0	20.02	23.06	< 30.00
		1	0	20.48	23.52	< 30.00
		1	37	20.54	23.58	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3500.01	15	18	9	20.79	23.83	< 30.00
		1	1	20.69	23.73	< 30.00
		1	36	20.46	23.50	< 30.00
		36	0	20.18	23.22	< 30.00
		1	0	20.72	23.76	< 30.00
		1	37	20.78	23.82	< 30.00
3542.49	15	18	9	21.08	24.12	< 30.00
		1	1	20.94	23.98	< 30.00
		1	36	20.97	24.01	< 30.00
		36	0	20.45	23.49	< 30.00
		1	0	20.95	23.99	< 30.00
		1	37	20.94	23.98	< 30.00
3460.02	20	25	12	20.44	23.48	< 30.00
		1	1	20.49	23.53	< 30.00
		1	49	20.54	23.58	< 30.00
		50	0	20.00	23.04	< 30.00
		1	0	20.38	23.42	< 30.00
		1	50	20.43	23.47	< 30.00
3500.01	20	25	12	20.66	23.70	< 30.00
		1	1	20.79	23.83	< 30.00
		1	49	20.68	23.72	< 30.00
		50	0	20.23	23.27	< 30.00
		1	0	20.84	23.88	< 30.00
		1	50	20.61	23.65	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3540.00	20	25	12	20.84	23.88	< 30.00
		1	1	20.84	23.88	< 30.00
		1	49	20.83	23.87	< 30.00
		50	0	20.47	23.51	< 30.00
		1	0	21.00	24.04	< 30.00
		1	50	20.98	24.02	< 30.00
3462.51	25	32	16	20.52	23.56	< 30.00
		1	1	20.54	23.58	< 30.00
		1	63	20.67	23.71	< 30.00
		65	0	20.06	23.10	< 30.00
		1	0	20.52	23.56	< 30.00
		1	64	20.64	23.68	< 30.00
3500.01	25	32	16	20.63	23.67	< 30.00
		1	1	20.83	23.87	< 30.00
		1	63	20.78	23.82	< 30.00
		65	0	20.21	23.25	< 30.00
		1	0	20.86	23.90	< 30.00
		1	64	20.86	23.90	< 30.00
3537.48	25	32	16	20.91	23.95	< 30.00
		1	1	20.95	23.99	< 30.00
		1	63	20.95	23.99	< 30.00
		65	0	20.53	23.57	< 30.00
		1	0	20.78	23.82	< 30.00
		1	64	20.95	23.99	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3464.00	30	36	78	20.67	23.71	< 30.00
		1	1	20.66	23.70	< 30.00
		1	76	20.78	23.82	< 30.00
		75	0	20.04	23.08	< 30.00
		1	0	20.57	23.61	< 30.00
		1	77	20.72	23.76	< 30.00
3500.01	30	36	78	20.76	23.80	< 30.00
		1	1	20.97	24.01	< 30.00
		1	76	20.89	23.93	< 30.00
		75	0	20.32	23.36	< 30.00
		1	0	20.95	23.99	< 30.00
		1	77	20.96	24.00	< 30.00
3534.99	30	36	78	20.93	23.97	< 30.00
		1	1	21.05	24.09	< 30.00
		1	76	21.11	24.15	< 30.00
		75	0	20.42	23.46	< 30.00
		1	0	21.07	24.11	< 30.00
		1	77	21.00	24.04	< 30.00
3470.01	40	50	25	20.68	23.72	< 30.00
		1	1	20.79	23.83	< 30.00
		1	104	20.84	23.88	< 30.00
		100	0	20.11	23.15	< 30.00
		1	0	20.71	23.75	< 30.00
		1	105	20.85	23.89	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3500.01	40	50	25	20.85	23.89	< 30.00
		1	1	20.95	23.99	< 30.00
		1	104	21.05	24.09	< 30.00
		100	0	20.42	23.46	< 30.00
		1	0	21.09	24.13	< 30.00
		1	105	21.09	24.13	< 30.00
3529.98	40	50	25	20.92	23.96	< 30.00
		1	1	20.95	23.99	< 30.00
		1	104	21.11	24.15	< 30.00
		100	0	20.36	23.40	< 30.00
		1	0	21.02	24.06	< 30.00
		1	105	21.15	24.19	< 30.00
3475.02	50	64	32	20.53	23.57	< 30.00
		1	1	20.47	23.51	< 30.00
		1	131	20.34	23.38	< 30.00
		128	0	19.91	22.95	< 30.00
		1	0	20.47	23.51	< 30.00
		1	132	20.35	23.39	< 30.00
3500.01	50	64	32	20.65	23.69	< 30.00
		1	1	20.75	23.79	< 30.00
		1	131	20.53	23.57	< 30.00
		128	0	20.05	23.09	< 30.00
		1	0	20.69	23.73	< 30.00
		1	132	20.51	23.55	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3525.00	50	64	32	20.64	23.68	< 30.00
		1	1	20.47	23.51	< 30.00
		1	131	20.53	23.57	< 30.00
		128	0	20.10	23.14	< 30.00
		1	0	20.60	23.64	< 30.00
		1	132	20.60	23.64	< 30.00
3480.00	60	81	40	20.50	23.54	< 30.00
		1	1	20.50	23.54	< 30.00
		1	160	20.45	23.49	< 30.00
		162	0	20.04	23.08	< 30.00
		1	0	20.47	23.51	< 30.00
		1	161	20.28	23.32	< 30.00
3500.01	60	81	40	20.67	23.71	< 30.00
		1	1	20.70	23.74	< 30.00
		1	160	20.64	23.68	< 30.00
		162	0	20.26	23.30	< 30.00
		1	0	20.63	23.67	< 30.00
		1	161	20.64	23.68	< 30.00
3519.99	60	81	40	20.60	23.64	< 30.00
		1	1	20.54	23.58	< 30.00
		1	160	20.59	23.63	< 30.00
		162	0	20.16	23.20	< 30.00
		1	0	20.46	23.50	< 30.00
		1	161	20.58	23.62	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3485.01	70	90	45	20.39	23.43	< 30.00
		1	1	20.37	23.41	< 30.00
		1	187	20.33	23.37	< 30.00
		180	0	19.93	22.97	< 30.00
		1	0	20.27	23.31	< 30.00
		1	188	20.37	23.41	< 30.00
3500.01	70	90	45	20.59	23.63	< 30.00
		1	1	20.71	23.75	< 30.00
		1	187	20.57	23.61	< 30.00
		180	0	20.12	23.16	< 30.00
		1	0	20.65	23.69	< 30.00
		1	188	20.55	23.59	< 30.00
3514.98	70	90	45	20.58	23.62	< 30.00
		1	1	20.52	23.56	< 30.00
		1	187	20.47	23.51	< 30.00
		180	0	20.04	23.08	< 30.00
		1	0	20.50	23.54	< 30.00
		1	188	20.47	23.51	< 30.00
3490.02	80	108	54	20.42	23.46	< 30.00
		1	1	20.42	23.46	< 30.00
		1	215	20.26	23.30	< 30.00
		216	0	19.92	22.96	< 30.00
		1	0	20.31	23.35	< 30.00
		1	216	20.44	23.48	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3500.01	80	108	54	20.59	23.63	< 30.00
		1	1	20.57	23.61	< 30.00
		1	215	20.62	23.66	< 30.00
		216	0	20.18	23.22	< 30.00
		1	0	20.56	23.60	< 30.00
		1	216	20.59	23.63	< 30.00
3510.00	80	108	54	20.55	23.59	< 30.00
		1	1	20.60	23.64	< 30.00
		1	215	20.65	23.69	< 30.00
		216	0	20.10	23.14	< 30.00
		1	0	20.63	23.67	< 30.00
		1	216	20.47	23.51	< 30.00
3495.00	90	120	60	20.59	23.63	< 30.00
		1	1	20.31	23.35	< 30.00
		1	243	20.54	23.58	< 30.00
		243	0	19.97	23.01	< 30.00
		1	0	20.43	23.47	< 30.00
		1	244	20.60	23.64	< 30.00
3500.01	90	120	60	20.58	23.62	< 30.00
		1	1	20.49	23.53	< 30.00
		1	243	20.67	23.71	< 30.00
		243	0	20.19	23.23	< 30.00
		1	0	20.48	23.52	< 30.00
		1	244	20.68	23.72	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3504.99	90	120	60	20.63	23.67	< 30.00
		1	1	20.52	23.56	< 30.00
		1	243	20.70	23.74	< 30.00
		243	0	20.13	23.17	< 30.00
		1	0	20.59	23.63	< 30.00
		1	244	20.66	23.70	< 30.00
3500.01	100	135	67	20.65	23.69	< 30.00
		1	1	20.48	23.52	< 30.00
		1	271	20.66	23.70	< 30.00
		270	0	20.15	23.19	< 30.00
		1	0	20.37	23.41	< 30.00
		1	272	20.69	23.73	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3455.01	10	12	6	23.40	26.44	< 30.00
		1	1	23.42	26.46	< 30.00
		1	22	23.34	26.38	< 30.00
		24	0	21.35	24.39	< 30.00
		1	0	21.41	24.45	< 30.00
		1	23	21.42	24.46	< 30.00
3500.01	10	12	6	23.67	26.71	< 30.00
		1	1	23.60	26.64	< 30.00
		1	22	23.58	26.62	< 30.00
		24	0	21.62	24.66	< 30.00
		1	0	21.60	24.64	< 30.00
		1	23	21.51	24.55	< 30.00
3544.98	10	12	6	23.89	26.93	< 30.00
		1	1	23.87	26.91	< 30.00
		1	22	23.81	26.85	< 30.00
		24	0	21.88	24.92	< 30.00
		1	0	21.86	24.90	< 30.00
		1	23	21.90	24.94	< 30.00
3457.50	15	18	9	23.47	26.51	< 30.00
		1	1	23.57	26.61	< 30.00
		1	36	23.55	26.59	< 30.00
		36	0	21.47	24.51	< 30.00
		1	0	21.44	24.48	< 30.00
		1	37	21.61	24.65	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3500.01	15	18	9	23.75	26.79	< 30.00
		1	1	23.86	26.90	< 30.00
		1	36	23.81	26.85	< 30.00
		36	0	21.65	24.69	< 30.00
		1	0	21.71	24.75	< 30.00
		1	37	21.73	24.77	< 30.00
3542.49	15	18	9	23.90	26.94	< 30.00
		1	1	24.09	27.13	< 30.00
		1	36	23.90	26.94	< 30.00
		36	0	21.91	24.95	< 30.00
		1	0	21.91	24.95	< 30.00
		1	37	22.05	25.09	< 30.00
3460.02	20	25	12	23.46	26.50	< 30.00
		1	1	23.45	26.49	< 30.00
		1	49	23.66	26.70	< 30.00
		50	0	21.56	24.60	< 30.00
		1	0	21.54	24.58	< 30.00
		1	50	21.58	24.62	< 30.00
3500.01	20	25	12	23.60	26.64	< 30.00
		1	1	23.86	26.90	< 30.00
		1	49	23.72	26.76	< 30.00
		50	0	21.74	24.78	< 30.00
		1	0	21.77	24.81	< 30.00
		1	50	21.79	24.83	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3540.00	20	25	12	23.93	26.97	< 30.00
		1	1	23.83	26.87	< 30.00
		1	49	24.06	27.10	< 30.00
		50	0	21.93	24.97	< 30.00
		1	0	21.86	24.90	< 30.00
		1	50	21.96	25.00	< 30.00
3462.51	25	32	16	23.55	26.59	< 30.00
		1	1	23.66	26.70	< 30.00
		1	63	23.66	26.70	< 30.00
		65	0	21.53	24.57	< 30.00
		1	0	21.58	24.62	< 30.00
		1	64	21.67	24.71	< 30.00
3500.01	25	32	16	23.76	26.80	< 30.00
		1	1	23.97	27.01	< 30.00
		1	63	23.84	26.88	< 30.00
		65	0	21.73	24.77	< 30.00
		1	0	21.84	24.88	< 30.00
		1	64	21.84	24.88	< 30.00
3537.48	25	32	16	24.00	27.04	< 30.00
		1	1	23.93	26.97	< 30.00
		1	63	23.98	27.02	< 30.00
		65	0	21.98	25.02	< 30.00
		1	0	21.79	24.83	< 30.00
		1	64	21.99	25.03	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3464.00	30	36	78	23.61	26.65	< 30.00
		1	1	23.71	26.75	< 30.00
		1	76	23.72	26.76	< 30.00
		75	0	21.58	24.62	< 30.00
		1	0	21.74	24.78	< 30.00
		1	77	21.81	24.85	< 30.00
3500.01	30	36	78	23.77	26.81	< 30.00
		1	1	23.97	27.01	< 30.00
		1	76	23.78	26.82	< 30.00
		75	0	21.80	24.84	< 30.00
		1	0	21.94	24.98	< 30.00
		1	77	21.88	24.92	< 30.00
3534.99	30	36	78	23.93	26.97	< 30.00
		1	1	24.10	27.14	< 30.00
		1	76	24.05	27.09	< 30.00
		75	0	21.93	24.97	< 30.00
		1	0	21.97	25.01	< 30.00
		1	77	22.08	25.12	< 30.00
3470.01	40	50	25	23.69	26.73	< 30.00
		1	1	23.72	26.76	< 30.00
		1	104	23.74	26.78	< 30.00
		100	0	21.72	24.76	< 30.00
		1	0	21.72	24.76	< 30.00
		1	105	21.78	24.82	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3500.01	40	50	25	23.81	26.85	< 30.00
		1	1	24.01	27.05	< 30.00
		1	104	24.00	27.04	< 30.00
		100	0	21.88	24.92	< 30.00
		1	0	22.02	25.06	< 30.00
		1	105	22.00	25.04	< 30.00
3529.98	40	50	25	23.91	26.95	< 30.00
		1	1	24.14	27.18	< 30.00
		1	104	24.16	27.20	< 30.00
		100	0	21.97	25.01	< 30.00
		1	0	22.13	25.17	< 30.00
		1	105	22.18	25.22	< 30.00
3475.02	50	64	32	23.45	26.49	< 30.00
		1	1	23.58	26.62	< 30.00
		1	131	23.39	26.43	< 30.00
		128	0	21.50	24.54	< 30.00
		1	0	21.55	24.59	< 30.00
		1	132	21.42	24.46	< 30.00
3500.01	50	64	32	23.60	26.64	< 30.00
		1	1	23.72	26.76	< 30.00
		1	131	23.65	26.69	< 30.00
		128	0	21.68	24.72	< 30.00
		1	0	21.76	24.80	< 30.00
		1	132	21.56	24.60	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3525.00	50	64	32	23.56	26.60	< 30.00
		1	1	23.65	26.69	< 30.00
		1	131	23.61	26.65	< 30.00
		128	0	21.61	24.65	< 30.00
		1	0	21.65	24.69	< 30.00
		1	132	21.66	24.70	< 30.00
3480.00	60	81	40	23.56	26.60	< 30.00
		1	1	23.56	26.60	< 30.00
		1	160	23.43	26.47	< 30.00
		162	0	21.47	24.51	< 30.00
		1	0	21.53	24.57	< 30.00
		1	161	21.36	24.40	< 30.00
3500.01	60	81	40	23.61	26.65	< 30.00
		1	1	23.78	26.82	< 30.00
		1	160	23.70	26.74	< 30.00
		162	0	21.68	24.72	< 30.00
		1	0	21.67	24.71	< 30.00
		1	161	21.62	24.66	< 30.00
3519.99	60	81	40	23.59	26.63	< 30.00
		1	1	23.59	26.63	< 30.00
		1	160	23.60	26.64	< 30.00
		162	0	21.63	24.67	< 30.00
		1	0	21.52	24.56	< 30.00
		1	161	21.64	24.68	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3485.01	70	90	45	23.41	26.45	< 30.00
		1	1	23.47	26.51	< 30.00
		1	187	23.65	26.69	< 30.00
		180	0	21.41	24.45	< 30.00
		1	0	21.42	24.46	< 30.00
		1	188	21.27	24.31	< 30.00
3500.01	70	90	45	23.58	26.62	< 30.00
		1	1	23.85	26.89	< 30.00
		1	187	23.63	26.67	< 30.00
		180	0	21.62	24.66	< 30.00
		1	0	21.62	24.66	< 30.00
		1	188	21.57	24.61	< 30.00
3514.98	70	90	45	23.59	26.63	< 30.00
		1	1	23.68	26.72	< 30.00
		1	187	23.67	26.71	< 30.00
		180	0	21.57	24.61	< 30.00
		1	0	21.59	24.63	< 30.00
		1	188	21.51	24.55	< 30.00
3490.02	80	108	54	23.46	26.50	< 30.00
		1	1	23.51	26.55	< 30.00
		1	215	23.55	26.59	< 30.00
		216	0	21.50	24.54	< 30.00
		1	0	21.33	24.37	< 30.00
		1	216	21.43	24.47	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3500.01	80	108	54	23.56	26.60	< 30.00
		1	1	23.75	26.79	< 30.00
		1	215	23.70	26.74	< 30.00
		216	0	21.65	24.69	< 30.00
		1	0	21.51	24.55	< 30.00
		1	216	21.54	24.58	< 30.00
3510.00	80	108	54	23.54	26.58	< 30.00
		1	1	23.65	26.69	< 30.00
		1	215	23.57	26.61	< 30.00
		216	0	21.58	24.62	< 30.00
		1	0	21.55	24.59	< 30.00
		1	216	21.63	24.67	< 30.00
3495.00	90	120	60	23.55	26.59	< 30.00
		1	1	23.45	26.49	< 30.00
		1	243	23.56	26.60	< 30.00
		243	0	21.46	24.50	< 30.00
		1	0	21.40	24.44	< 30.00
		1	244	21.61	24.65	< 30.00
3500.01	90	120	60	23.63	26.67	< 30.00
		1	1	23.50	26.54	< 30.00
		1	243	23.73	26.77	< 30.00
		243	0	21.65	24.69	< 30.00
		1	0	21.47	24.51	< 30.00
		1	244	21.70	24.74	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3504.99	90	120	60	23.63	26.67	< 30.00
		1	1	23.61	26.65	< 30.00
		1	243	23.66	26.70	< 30.00
		243	0	21.65	24.69	< 30.00
		1	0	21.51	24.55	< 30.00
		1	244	21.64	24.68	< 30.00
3500.01	100	135	67	23.60	26.64	< 30.00
		1	1	23.58	26.62	< 30.00
		1	271	23.77	26.81	< 30.00
		270	0	21.66	24.70	< 30.00
		1	0	21.39	24.43	< 30.00
		1	272	21.74	24.78	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Test Site	WZ-SR6	Test Engineer	Lucas Wang
Test Date	2023-10-17 ~ 2023-10-18	Test Band	HPUE n77_SA (3700-3980)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3705.00	10	12	6	24.00	28.01	< 30.00
		1	1	23.95	27.96	< 30.00
		1	22	24.08	28.09	< 30.00
		24	0	24.01	28.02	< 30.00
		1	0	21.87	25.88	< 30.00
		1	23	22.08	26.09	< 30.00
3840.00	10	12	6	24.23	28.24	< 30.00
		1	1	24.05	28.06	< 30.00
		1	22	24.10	28.11	< 30.00
		24	0	24.21	28.22	< 30.00
		1	0	22.05	26.06	< 30.00
		1	23	22.09	26.10	< 30.00
3975.00	10	12	6	24.18	28.19	< 30.00
		1	1	24.16	28.17	< 30.00
		1	22	24.19	28.20	< 30.00
		24	0	24.25	28.26	< 30.00
		1	0	22.21	26.22	< 30.00
		1	23	22.18	26.19	< 30.00
3707.52	15	18	9	24.13	28.14	< 30.00
		1	1	24.10	28.11	< 30.00
		1	36	24.15	28.16	< 30.00
		36	0	24.09	28.10	< 30.00
		1	0	22.05	26.06	< 30.00
		1	37	22.18	26.19	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3840.00	15	18	9	24.20	28.21	< 30.00
		1	1	24.20	28.21	< 30.00
		1	36	24.17	28.18	< 30.00
		36	0	24.19	28.20	< 30.00
		1	0	22.21	26.22	< 30.00
		1	37	22.19	26.20	< 30.00
3972.48	15	18	9	24.32	28.33	< 30.00
		1	1	24.32	28.33	< 30.00
		1	36	24.31	28.32	< 30.00
		36	0	24.25	28.26	< 30.00
		1	0	22.27	26.28	< 30.00
		1	37	22.21	26.22	< 30.00
3710.01	20	25	12	24.11	28.12	< 30.00
		1	1	24.09	28.10	< 30.00
		1	49	24.19	28.20	< 30.00
		50	0	24.07	28.08	< 30.00
		1	0	24.02	28.03	< 30.00
		1	50	24.16	28.17	< 30.00
3840.00	20	25	12	24.25	28.26	< 30.00
		1	1	24.13	28.14	< 30.00
		1	49	24.19	28.20	< 30.00
		50	0	24.21	28.22	< 30.00
		1	0	24.13	28.14	< 30.00
		1	50	24.15	28.16	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3969.99	20	25	12	24.23	28.24	< 30.00
		1	1	24.28	28.29	< 30.00
		1	49	24.29	28.30	< 30.00
		50	0	24.39	28.40	< 30.00
		1	0	24.25	28.26	< 30.00
		1	50	24.22	28.23	< 30.00
3712.5	25	32	16	24.09	28.10	< 30.00
		1	1	24.11	28.12	< 30.00
		1	63	24.23	28.24	< 30.00
		65	0	24.13	28.14	< 30.00
		1	0	22.07	26.08	< 30.00
		1	64	22.11	26.12	< 30.00
3840.00	25	32	16	24.17	28.18	< 30.00
		1	1	24.23	28.24	< 30.00
		1	63	24.15	28.16	< 30.00
		65	0	24.14	28.15	< 30.00
		1	0	22.14	26.15	< 30.00
		1	64	22.07	26.08	< 30.00
3967.5	25	32	16	24.21	28.22	< 30.00
		1	1	24.26	28.27	< 30.00
		1	63	24.27	28.28	< 30.00
		65	0	24.25	28.26	< 30.00
		1	0	22.21	26.22	< 30.00
		1	64	22.21	26.22	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3715.02	30	36	78	24.25	28.26	< 30.00
		1	1	24.24	28.25	< 30.00
		1	76	24.35	28.36	< 30.00
		75	0	24.31	28.32	< 30.00
		1	0	22.27	26.28	< 30.00
		1	77	22.39	26.40	< 30.00
3840.00	30	36	78	24.31	28.32	< 30.00
		1	1	24.32	28.33	< 30.00
		1	76	24.24	28.25	< 30.00
		75	0	24.27	28.28	< 30.00
		1	0	22.17	26.18	< 30.00
		1	77	22.24	26.25	< 30.00
3964.98	30	36	78	24.35	28.36	< 30.00
		1	1	24.31	28.32	< 30.00
		1	76	24.27	28.28	< 30.00
		75	0	24.37	28.38	< 30.00
		1	0	22.22	26.23	< 30.00
		1	77	22.29	26.30	< 30.00
3720.00	40	50	25	24.28	28.29	< 30.00
		1	1	24.34	28.35	< 30.00
		1	104	24.39	28.40	< 30.00
		100	0	24.24	28.25	< 30.00
		1	0	22.41	26.42	< 30.00
		1	105	22.43	26.44	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3840.00	40	50	25	24.32	28.33	< 30.00
		1	1	24.37	28.38	< 30.00
		1	104	24.25	28.26	< 30.00
		100	0	24.26	28.27	< 30.00
		1	0	22.32	26.33	< 30.00
		1	105	22.31	26.32	< 30.00
3960.00	40	50	25	24.30	28.31	< 30.00
		1	1	24.42	28.43	< 30.00
		1	104	24.35	28.36	< 30.00
		100	0	24.30	28.31	< 30.00
		1	0	22.39	26.40	< 30.00
		1	105	22.28	26.29	< 30.00
3725.01	50	64	32	24.06	28.07	< 30.00
		1	1	23.95	27.96	< 30.00
		1	131	24.09	28.10	< 30.00
		128	0	24.06	28.07	< 30.00
		1	0	21.99	26.00	< 30.00
		1	132	21.99	26.00	< 30.00
3840.00	50	64	32	24.07	28.08	< 30.00
		1	1	24.07	28.08	< 30.00
		1	131	24.05	28.06	< 30.00
		128	0	24.04	28.05	< 30.00
		1	0	22.00	26.01	< 30.00
		1	132	21.97	25.98	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3954.99	50	64	32	24.15	28.16	< 30.00
		1	1	24.14	28.15	< 30.00
		1	131	24.09	28.10	< 30.00
		128	0	24.18	28.19	< 30.00
		1	0	22.19	26.20	< 30.00
		1	132	22.03	26.04	< 30.00
3730.02	60	81	40	24.10	28.11	< 30.00
		1	1	23.90	27.91	< 30.00
		1	160	24.03	28.04	< 30.00
		162	0	24.03	28.04	< 30.00
		1	0	21.93	25.94	< 30.00
		1	161	22.00	26.01	< 30.00
3840.00	60	81	40	24.01	28.02	< 30.00
		1	1	23.98	27.99	< 30.00
		1	160	23.94	27.95	< 30.00
		162	0	24.07	28.08	< 30.00
		1	0	21.95	25.96	< 30.00
		1	161	21.91	25.92	< 30.00
3949.98	60	81	40	23.95	27.96	< 30.00
		1	1	24.11	28.12	< 30.00
		1	160	23.83	27.84	< 30.00
		162	0	23.92	27.93	< 30.00
		1	0	22.07	26.08	< 30.00
		1	161	21.70	25.71	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3735.00	70	90	45	24.03	28.04	< 30.00
		1	1	23.86	27.87	< 30.00
		1	187	23.97	27.98	< 30.00
		180	0	24.00	28.01	< 30.00
		1	0	21.89	25.90	< 30.00
		1	188	22.01	26.02	< 30.00
3840.00	70	90	45	23.88	27.89	< 30.00
		1	1	23.92	27.93	< 30.00
		1	187	23.74	27.75	< 30.00
		180	0	23.95	27.96	< 30.00
		1	0	21.83	25.84	< 30.00
		1	188	21.73	25.74	< 30.00
3945.00	70	90	45	23.93	27.94	< 30.00
		1	1	24.12	28.13	< 30.00
		1	187	23.70	27.71	< 30.00
		180	0	23.93	27.94	< 30.00
		1	0	22.10	26.11	< 30.00
		1	188	21.66	25.67	< 30.00
3740.01	80	108	54	23.94	27.95	< 30.00
		1	1	23.75	27.76	< 30.00
		1	215	24.03	28.04	< 30.00
		216	0	23.96	27.97	< 30.00
		1	0	21.81	25.82	< 30.00
		1	216	21.97	25.98	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3840.00	80	108	54	23.93	27.94	< 30.00
		1	1	23.84	27.85	< 30.00
		1	215	23.82	27.83	< 30.00
		216	0	23.87	27.88	< 30.00
		1	0	21.80	25.81	< 30.00
		1	216	21.73	25.74	< 30.00
3939.99	80	108	54	23.90	27.91	< 30.00
		1	1	24.05	28.06	< 30.00
		1	215	23.72	27.73	< 30.00
		216	0	23.93	27.94	< 30.00
		1	0	22.03	26.04	< 30.00
		1	216	21.63	25.64	< 30.00
3745.02	90	120	60	23.96	27.97	< 30.00
		1	1	23.83	27.84	< 30.00
		1	243	24.06	28.07	< 30.00
		243	0	24.02	28.03	< 30.00
		1	0	21.73	25.74	< 30.00
		1	244	22.05	26.06	< 30.00
3840.00	90	120	60	23.97	27.98	< 30.00
		1	1	23.78	27.79	< 30.00
		1	243	23.82	27.83	< 30.00
		243	0	23.85	27.86	< 30.00
		1	0	21.80	25.81	< 30.00
		1	244	21.75	25.76	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s OFDM PI/2 BPSK						
3934.98	90	120	60	23.92	27.93	< 30.00
		1	1	24.09	28.10	< 30.00
		1	243	23.75	27.76	< 30.00
		243	0	23.91	27.92	< 30.00
		1	0	21.99	26.00	< 30.00
		1	244	21.63	25.64	< 30.00
3750.00	100	135	67	23.99	28.00	< 30.00
		1	1	23.73	27.74	< 30.00
		1	271	24.10	28.11	< 30.00
		270	0	23.95	27.96	< 30.00
		1	0	21.83	25.84	< 30.00
		1	272	22.06	26.07	< 30.00
3840.00	100	135	67	23.97	27.98	< 30.00
		1	1	23.71	27.72	< 30.00
		1	271	23.85	27.86	< 30.00
		270	0	23.87	27.88	< 30.00
		1	0	21.71	25.72	< 30.00
		1	272	21.76	25.77	< 30.00
3930.00	100	135	67	24.04	28.05	< 30.00
		1	1	24.08	28.09	< 30.00
		1	271	23.81	27.82	< 30.00
		270	0	23.93	27.94	< 30.00
		1	0	22.02	26.03	< 30.00
		1	272	21.73	25.74	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3705.00	10	12	6	24.18	28.19	< 30.00
		1	1	24.09	28.10	< 30.00
		1	22	24.05	28.06	< 30.00
		24	0	24.18	28.19	< 30.00
		1	0	22.03	26.04	< 30.00
		1	23	22.06	26.07	< 30.00
3840.00	10	12	6	24.11	28.12	< 30.00
		1	1	24.09	28.10	< 30.00
		1	22	24.04	28.05	< 30.00
		24	0	24.13	28.14	< 30.00
		1	0	22.09	26.10	< 30.00
		1	23	22.06	26.07	< 30.00
3975.00	10	12	6	24.04	28.05	< 30.00
		1	1	24.01	28.02	< 30.00
		1	22	23.98	27.99	< 30.00
		24	0	24.02	28.03	< 30.00
		1	0	21.96	25.97	< 30.00
		1	23	22.06	26.07	< 30.00
3707.52	15	18	9	24.27	28.28	< 30.00
		1	1	24.27	28.28	< 30.00
		1	36	24.13	28.14	< 30.00
		36	0	24.21	28.22	< 30.00
		1	0	22.24	26.25	< 30.00
		1	37	22.19	26.20	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3840.00	15	18	9	24.26	28.27	< 30.00
		1	1	24.26	28.27	< 30.00
		1	36	24.36	28.37	< 30.00
		36	0	24.27	28.28	< 30.00
		1	0	22.14	26.15	< 30.00
		1	37	22.26	26.27	< 30.00
3972.48	15	18	9	24.22	28.23	< 30.00
		1	1	24.17	28.18	< 30.00
		1	36	24.19	28.20	< 30.00
		36	0	24.27	28.28	< 30.00
		1	0	22.17	26.18	< 30.00
		1	37	22.16	26.17	< 30.00
3710.01	20	25	12	24.26	28.27	< 30.00
		1	1	24.22	28.23	< 30.00
		1	49	24.26	28.27	< 30.00
		50	0	24.17	28.18	< 30.00
		1	0	22.18	26.19	< 30.00
		1	50	22.13	26.14	< 30.00
3840.00	20	25	12	24.41	28.42	< 30.00
		1	1	24.28	28.29	< 30.00
		1	49	24.24	28.25	< 30.00
		50	0	24.25	28.26	< 30.00
		1	0	22.16	26.17	< 30.00
		1	50	22.26	26.27	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3969.99	20	25	12	24.17	28.18	< 30.00
		1	1	24.28	28.29	< 30.00
		1	49	24.20	28.21	< 30.00
		50	0	24.18	28.19	< 30.00
		1	0	22.20	26.21	< 30.00
		1	50	22.14	26.15	< 30.00
3712.5	25	32	16	23.97	27.98	< 30.00
		1	1	23.86	27.87	< 30.00
		1	63	24.02	28.03	< 30.00
		65	0	23.96	27.97	< 30.00
		1	0	21.83	25.84	< 30.00
		1	64	21.88	25.89	< 30.00
3840.00	25	32	16	23.97	27.98	< 30.00
		1	1	24.05	28.06	< 30.00
		1	63	23.91	27.92	< 30.00
		65	0	24.02	28.03	< 30.00
		1	0	21.95	25.96	< 30.00
		1	64	21.86	25.87	< 30.00
3967.5	25	32	16	23.99	28.00	< 30.00
		1	1	23.97	27.98	< 30.00
		1	63	23.98	27.99	< 30.00
		65	0	24.06	28.07	< 30.00
		1	0	22.06	26.07	< 30.00
		1	64	21.98	25.99	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3715.02	30	36	78	24.01	28.02	< 30.00
		1	1	23.97	27.98	< 30.00
		1	76	24.05	28.06	< 30.00
		75	0	24.03	28.04	< 30.00
		1	0	21.94	25.95	< 30.00
		1	77	22.03	26.04	< 30.00
3840.00	30	36	78	24.00	28.01	< 30.00
		1	1	23.96	27.97	< 30.00
		1	76	23.94	27.95	< 30.00
		75	0	24.07	28.08	< 30.00
		1	0	21.92	25.93	< 30.00
		1	77	21.88	25.89	< 30.00
3964.98	30	36	78	23.93	27.94	< 30.00
		1	1	24.03	28.04	< 30.00
		1	76	23.91	27.92	< 30.00
		75	0	23.93	27.94	< 30.00
		1	0	22.03	26.04	< 30.00
		1	77	21.90	25.91	< 30.00
3720.00	40	50	25	24.01	28.02	< 30.00
		1	1	24.16	28.17	< 30.00
		1	104	24.15	28.16	< 30.00
		100	0	24.01	28.02	< 30.00
		1	0	22.16	26.17	< 30.00
		1	105	22.09	26.10	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3840.00	40	50	25	24.09	28.10	< 30.00
		1	1	24.10	28.11	< 30.00
		1	104	23.93	27.94	< 30.00
		100	0	24.11	28.12	< 30.00
		1	0	22.03	26.04	< 30.00
		1	105	21.91	25.92	< 30.00
3960.00	40	50	25	23.98	27.99	< 30.00
		1	1	24.17	28.18	< 30.00
		1	104	23.91	27.92	< 30.00
		100	0	24.02	28.03	< 30.00
		1	0	22.18	26.19	< 30.00
		1	105	21.91	25.92	< 30.00
3725.01	50	64	32	23.88	27.89	< 30.00
		1	1	23.75	27.76	< 30.00
		1	131	23.69	27.70	< 30.00
		128	0	23.89	27.90	< 30.00
		1	0	21.75	25.76	< 30.00
		1	132	21.70	25.71	< 30.00
3840.00	50	64	32	23.94	27.95	< 30.00
		1	1	23.88	27.89	< 30.00
		1	131	23.74	27.75	< 30.00
		128	0	23.93	27.94	< 30.00
		1	0	21.75	25.76	< 30.00
		1	132	21.92	25.93	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3954.99	50	64	32	23.78	27.79	< 30.00
		1	1	23.95	27.96	< 30.00
		1	131	23.76	27.77	< 30.00
		128	0	23.80	27.81	< 30.00
		1	0	22.01	26.02	< 30.00
		1	132	21.77	25.78	< 30.00
3730.02	60	81	40	23.84	27.85	< 30.00
		1	1	23.76	27.77	< 30.00
		1	160	23.69	27.70	< 30.00
		162	0	23.89	27.90	< 30.00
		1	0	21.80	25.81	< 30.00
		1	161	21.74	25.75	< 30.00
3840.00	60	81	40	23.95	27.96	< 30.00
		1	1	23.82	27.83	< 30.00
		1	160	23.72	27.73	< 30.00
		162	0	23.94	27.95	< 30.00
		1	0	21.83	25.84	< 30.00
		1	161	21.70	25.71	< 30.00
3949.98	60	81	40	23.83	27.84	< 30.00
		1	1	23.97	27.98	< 30.00
		1	160	23.65	27.66	< 30.00
		162	0	23.86	27.87	< 30.00
		1	0	22.00	26.01	< 30.00
		1	161	21.55	25.56	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3735.00	70	90	45	23.82	27.83	< 30.00
		1	1	23.75	27.76	< 30.00
		1	187	23.70	27.71	< 30.00
		180	0	23.85	27.86	< 30.00
		1	0	21.76	25.77	< 30.00
		1	188	21.59	25.60	< 30.00
3840.00	70	90	45	23.75	27.76	< 30.00
		1	1	23.66	27.67	< 30.00
		1	187	23.42	27.43	< 30.00
		180	0	23.78	27.79	< 30.00
		1	0	21.74	25.75	< 30.00
		1	188	21.49	25.50	< 30.00
3945.00	70	90	45	23.70	27.71	< 30.00
		1	1	23.92	27.93	< 30.00
		1	187	23.44	27.45	< 30.00
		180	0	23.67	27.68	< 30.00
		1	0	21.93	25.94	< 30.00
		1	188	21.47	25.48	< 30.00
3740.01	80	108	54	23.88	27.89	< 30.00
		1	1	23.65	27.66	< 30.00
		1	215	23.64	27.65	< 30.00
		216	0	23.80	27.81	< 30.00
		1	0	21.67	25.68	< 30.00
		1	216	21.64	25.65	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3840.00	80	108	54	23.80	27.81	< 30.00
		1	1	23.67	27.68	< 30.00
		1	215	23.50	27.51	< 30.00
		216	0	23.83	27.84	< 30.00
		1	0	21.54	25.55	< 30.00
		1	216	21.46	25.47	< 30.00
3939.99	80	108	54	23.64	27.65	< 30.00
		1	1	23.92	27.93	< 30.00
		1	215	23.50	27.51	< 30.00
		216	0	23.68	27.69	< 30.00
		1	0	21.89	25.90	< 30.00
		1	216	21.31	25.32	< 30.00
3745.02	90	120	60	23.91	27.92	< 30.00
		1	1	23.70	27.71	< 30.00
		1	243	23.82	27.83	< 30.00
		243	0	23.86	27.87	< 30.00
		1	0	21.77	25.78	< 30.00
		1	244	21.78	25.79	< 30.00
3840.00	90	120	60	23.81	27.82	< 30.00
		1	1	23.64	27.65	< 30.00
		1	243	23.55	27.56	< 30.00
		243	0	23.84	27.85	< 30.00
		1	0	21.61	25.62	< 30.00
		1	244	21.54	25.55	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM QPSK						
3934.98	90	120	60	23.70	27.71	< 30.00
		1	1	23.97	27.98	< 30.00
		1	243	23.45	27.46	< 30.00
		243	0	23.70	27.71	< 30.00
		1	0	21.89	25.90	< 30.00
		1	244	21.46	25.47	< 30.00
3750.00	100	135	67	23.89	27.90	< 30.00
		1	1	23.73	27.74	< 30.00
		1	271	23.86	27.87	< 30.00
		270	0	23.91	27.92	< 30.00
		1	0	21.70	25.71	< 30.00
		1	272	21.81	25.82	< 30.00
3840.00	100	135	67	23.79	27.80	< 30.00
		1	1	23.65	27.66	< 30.00
		1	271	23.60	27.61	< 30.00
		270	0	23.74	27.75	< 30.00
		1	0	21.60	25.61	< 30.00
		1	272	21.57	25.58	< 30.00
3930.00	100	135	67	23.84	27.85	< 30.00
		1	1	23.95	27.96	< 30.00
		1	271	23.57	27.58	< 30.00
		270	0	23.77	27.78	< 30.00
		1	0	22.01	26.02	< 30.00
		1	272	21.49	25.50	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3705.00	10	12	6	23.64	27.65	< 30.00
		1	1	23.52	27.53	< 30.00
		1	22	23.57	27.58	< 30.00
		24	0	23.23	27.24	< 30.00
		1	0	22.06	26.07	< 30.00
		1	23	22.20	26.21	< 30.00
3840.00	10	12	6	23.61	27.62	< 30.00
		1	1	23.38	27.39	< 30.00
		1	22	23.43	27.44	< 30.00
		24	0	23.04	27.05	< 30.00
		1	0	22.05	26.06	< 30.00
		1	23	22.04	26.05	< 30.00
3975.00	10	12	6	23.55	27.56	< 30.00
		1	1	23.51	27.52	< 30.00
		1	22	23.59	27.60	< 30.00
		24	0	23.02	27.03	< 30.00
		1	0	22.06	26.07	< 30.00
		1	23	21.90	25.91	< 30.00
3707.52	15	18	9	23.74	27.75	< 30.00
		1	1	23.78	27.79	< 30.00
		1	36	23.67	27.68	< 30.00
		36	0	23.23	27.24	< 30.00
		1	0	22.16	26.17	< 30.00
		1	37	22.22	26.23	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3840.00	15	18	9	23.72	27.73	< 30.00
		1	1	23.62	27.63	< 30.00
		1	36	23.73	27.74	< 30.00
		36	0	23.27	27.28	< 30.00
		1	0	22.18	26.19	< 30.00
		1	37	22.36	26.37	< 30.00
3972.48	15	18	9	23.65	27.66	< 30.00
		1	1	23.62	27.63	< 30.00
		1	36	23.79	27.80	< 30.00
		36	0	23.18	27.19	< 30.00
		1	0	22.23	26.24	< 30.00
		1	37	22.28	26.29	< 30.00
3710.01	20	25	12	23.73	27.74	< 30.00
		1	1	23.65	27.66	< 30.00
		1	49	23.58	27.59	< 30.00
		50	0	23.27	27.28	< 30.00
		1	0	22.09	26.10	< 30.00
		1	50	22.20	26.21	< 30.00
3840.00	20	25	12	23.78	27.79	< 30.00
		1	1	23.77	27.78	< 30.00
		1	49	23.69	27.70	< 30.00
		50	0	23.22	27.23	< 30.00
		1	0	22.06	26.07	< 30.00
		1	50	22.20	26.21	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3969.99	20	25	12	23.78	27.79	< 30.00
		1	1	23.58	27.59	< 30.00
		1	49	23.68	27.69	< 30.00
		50	0	23.20	27.21	< 30.00
		1	0	22.30	26.31	< 30.00
		1	50	22.01	26.02	< 30.00
3712.5	25	32	16	23.40	27.41	< 30.00
		1	1	23.33	27.34	< 30.00
		1	63	23.13	27.14	< 30.00
		65	0	23.00	27.01	< 30.00
		1	0	21.86	25.87	< 30.00
		1	64	21.90	25.91	< 30.00
3840.00	25	32	16	23.55	27.56	< 30.00
		1	1	23.59	27.60	< 30.00
		1	63	23.41	27.42	< 30.00
		65	0	23.04	27.05	< 30.00
		1	0	22.12	26.13	< 30.00
		1	64	22.02	26.03	< 30.00
3967.5	25	32	16	23.61	27.62	< 30.00
		1	1	23.54	27.55	< 30.00
		1	63	23.59	27.60	< 30.00
		65	0	23.03	27.04	< 30.00
		1	0	22.05	26.06	< 30.00
		1	64	22.12	26.13	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3715.02	30	36	78	23.50	27.51	< 30.00
		1	1	23.40	27.41	< 30.00
		1	76	23.49	27.50	< 30.00
		75	0	23.00	27.01	< 30.00
		1	0	21.99	26.00	< 30.00
		1	77	22.04	26.05	< 30.00
3840.00	30	36	78	23.50	27.51	< 30.00
		1	1	23.29	27.30	< 30.00
		1	76	23.38	27.39	< 30.00
		75	0	23.07	27.08	< 30.00
		1	0	21.93	25.94	< 30.00
		1	77	21.90	25.91	< 30.00
3964.98	30	36	78	23.34	27.35	< 30.00
		1	1	23.38	27.39	< 30.00
		1	76	23.32	27.33	< 30.00
		75	0	22.93	26.94	< 30.00
		1	0	21.95	25.96	< 30.00
		1	77	21.91	25.92	< 30.00
3720.00	40	50	25	23.50	27.51	< 30.00
		1	1	23.59	27.60	< 30.00
		1	104	23.56	27.57	< 30.00
		100	0	23.02	27.03	< 30.00
		1	0	22.23	26.24	< 30.00
		1	105	22.17	26.18	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3840.00	40	50	25	23.57	27.58	< 30.00
		1	1	23.65	27.66	< 30.00
		1	104	23.47	27.48	< 30.00
		100	0	23.03	27.04	< 30.00
		1	0	22.23	26.24	< 30.00
		1	105	21.98	25.99	< 30.00
3960.00	40	50	25	23.48	27.49	< 30.00
		1	1	23.63	27.64	< 30.00
		1	104	23.44	27.45	< 30.00
		100	0	23.05	27.06	< 30.00
		1	0	22.19	26.20	< 30.00
		1	105	21.96	25.97	< 30.00
3725.01	50	64	32	23.41	27.42	< 30.00
		1	1	23.33	27.34	< 30.00
		1	131	23.24	27.25	< 30.00
		128	0	22.88	26.89	< 30.00
		1	0	21.83	25.84	< 30.00
		1	132	21.91	25.92	< 30.00
3840.00	50	64	32	23.49	27.50	< 30.00
		1	1	23.39	27.40	< 30.00
		1	131	23.28	27.29	< 30.00
		128	0	22.86	26.87	< 30.00
		1	0	21.74	25.75	< 30.00
		1	132	21.74	25.75	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3954.99	50	64	32	23.39	27.40	< 30.00
		1	1	23.52	27.53	< 30.00
		1	131	23.20	27.21	< 30.00
		128	0	22.87	26.88	< 30.00
		1	0	22.04	26.05	< 30.00
		1	132	21.65	25.66	< 30.00
3730.02	60	81	40	23.35	27.36	< 30.00
		1	1	23.20	27.21	< 30.00
		1	160	23.15	27.16	< 30.00
		162	0	22.90	26.91	< 30.00
		1	0	21.74	25.75	< 30.00
		1	161	21.71	25.72	< 30.00
3840.00	60	81	40	23.43	27.44	< 30.00
		1	1	23.30	27.31	< 30.00
		1	160	23.14	27.15	< 30.00
		162	0	22.89	26.90	< 30.00
		1	0	21.91	25.92	< 30.00
		1	161	21.81	25.82	< 30.00
3949.98	60	81	40	23.34	27.35	< 30.00
		1	1	23.42	27.43	< 30.00
		1	160	23.01	27.02	< 30.00
		162	0	22.90	26.91	< 30.00
		1	0	22.00	26.01	< 30.00
		1	161	21.56	25.57	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3735.00	70	90	45	23.36	27.37	< 30.00
		1	1	23.32	27.33	< 30.00
		1	187	23.27	27.28	< 30.00
		180	0	22.93	26.94	< 30.00
		1	0	21.86	25.87	< 30.00
		1	188	21.77	25.78	< 30.00
3840.00	70	90	45	23.30	27.31	< 30.00
		1	1	23.13	27.14	< 30.00
		1	187	22.95	26.96	< 30.00
		180	0	22.80	26.81	< 30.00
		1	0	21.64	25.65	< 30.00
		1	188	21.51	25.52	< 30.00
3945.00	70	90	45	23.19	27.20	< 30.00
		1	1	23.42	27.43	< 30.00
		1	187	22.93	26.94	< 30.00
		180	0	22.70	26.71	< 30.00
		1	0	21.98	25.99	< 30.00
		1	188	21.53	25.54	< 30.00
3740.01	80	108	54	23.36	27.37	< 30.00
		1	1	23.14	27.15	< 30.00
		1	215	23.19	27.20	< 30.00
		216	0	22.82	26.83	< 30.00
		1	0	21.61	25.62	< 30.00
		1	216	21.68	25.69	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3840.00	80	108	54	23.30	27.31	< 30.00
		1	1	23.16	27.17	< 30.00
		1	215	23.08	27.09	< 30.00
		216	0	22.82	26.83	< 30.00
		1	0	21.75	25.76	< 30.00
		1	216	21.55	25.56	< 30.00
3939.99	80	108	54	23.25	27.26	< 30.00
		1	1	23.37	27.38	< 30.00
		1	215	23.01	27.02	< 30.00
		216	0	22.67	26.68	< 30.00
		1	0	21.96	25.97	< 30.00
		1	216	21.53	25.54	< 30.00
3745.02	90	120	60	23.40	27.41	< 30.00
		1	1	23.25	27.26	< 30.00
		1	243	23.38	27.39	< 30.00
		243	0	22.81	26.82	< 30.00
		1	0	21.79	25.80	< 30.00
		1	244	21.92	25.93	< 30.00
3840.00	90	120	60	23.20	27.21	< 30.00
		1	1	23.14	27.15	< 30.00
		1	243	23.05	27.06	< 30.00
		243	0	22.72	26.73	< 30.00
		1	0	21.70	25.71	< 30.00
		1	244	21.63	25.64	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 16QAM						
3934.98	90	120	60	23.20	27.21	< 30.00
		1	1	23.45	27.46	< 30.00
		1	243	22.91	26.92	< 30.00
		243	0	22.73	26.74	< 30.00
		1	0	21.97	25.98	< 30.00
		1	244	21.49	25.50	< 30.00
3750.00	100	135	67	23.40	27.41	< 30.00
		1	1	23.18	27.19	< 30.00
		1	271	23.30	27.31	< 30.00
		270	0	22.95	26.96	< 30.00
		1	0	21.75	25.76	< 30.00
		1	272	22.00	26.01	< 30.00
3840.00	100	135	67	23.23	27.24	< 30.00
		1	1	23.05	27.06	< 30.00
		1	271	23.03	27.04	< 30.00
		270	0	22.74	26.75	< 30.00
		1	0	21.71	25.72	< 30.00
		1	272	21.62	25.63	< 30.00
3930.00	100	135	67	23.27	27.28	< 30.00
		1	1	23.47	27.48	< 30.00
		1	271	23.07	27.08	< 30.00
		270	0	22.84	26.85	< 30.00
		1	0	22.07	26.08	< 30.00
		1	272	21.46	25.47	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3705.00	10	12	6	23.15	27.16	< 30.00
		1	1	22.98	26.99	< 30.00
		1	22	23.15	27.16	< 30.00
		24	0	22.67	26.68	< 30.00
		1	0	22.16	26.17	< 30.00
		1	23	22.05	26.06	< 30.00
3840.00	10	12	6	23.20	27.21	< 30.00
		1	1	23.16	27.17	< 30.00
		1	22	23.09	27.10	< 30.00
		24	0	22.68	26.69	< 30.00
		1	0	22.06	26.07	< 30.00
		1	23	22.29	26.30	< 30.00
3975.00	10	12	6	23.03	27.04	< 30.00
		1	1	23.12	27.13	< 30.00
		1	22	22.99	27.00	< 30.00
		24	0	22.55	26.56	< 30.00
		1	0	21.93	25.94	< 30.00
		1	23	22.07	26.08	< 30.00
3707.52	15	18	9	23.30	27.31	< 30.00
		1	1	23.22	27.23	< 30.00
		1	36	23.39	27.40	< 30.00
		36	0	22.81	26.82	< 30.00
		1	0	22.28	26.29	< 30.00
		1	37	22.20	26.21	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3840.00	15	18	9	23.24	27.25	< 30.00
		1	1	23.35	27.36	< 30.00
		1	36	23.38	27.39	< 30.00
		36	0	22.81	26.82	< 30.00
		1	0	22.38	26.39	< 30.00
		1	37	22.28	26.29	< 30.00
3972.48	15	18	9	23.16	27.17	< 30.00
		1	1	23.13	27.14	< 30.00
		1	36	23.06	27.07	< 30.00
		36	0	22.68	26.69	< 30.00
		1	0	22.38	26.39	< 30.00
		1	37	22.27	26.28	< 30.00
3710.01	20	25	12	23.27	27.28	< 30.00
		1	1	23.37	27.38	< 30.00
		1	49	23.31	27.32	< 30.00
		50	0	22.74	26.75	< 30.00
		1	0	22.20	26.21	< 30.00
		1	50	22.17	26.18	< 30.00
3840.00	20	25	12	23.23	27.24	< 30.00
		1	1	23.13	27.14	< 30.00
		1	49	23.42	27.43	< 30.00
		50	0	22.79	26.80	< 30.00
		1	0	22.26	26.27	< 30.00
		1	50	22.39	26.40	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3969.99	20	25	12	23.27	27.28	< 30.00
		1	1	23.47	27.48	< 30.00
		1	49	23.04	27.05	< 30.00
		50	0	22.73	26.74	< 30.00
		1	0	22.33	26.34	< 30.00
		1	50	22.14	26.15	< 30.00
3712.5	25	32	16	22.97	26.98	< 30.00
		1	1	22.97	26.98	< 30.00
		1	63	23.05	27.06	< 30.00
		65	0	22.54	26.55	< 30.00
		1	0	21.94	25.95	< 30.00
		1	64	21.92	25.93	< 30.00
3840.00	25	32	16	23.00	27.01	< 30.00
		1	1	23.12	27.13	< 30.00
		1	63	22.98	26.99	< 30.00
		65	0	22.57	26.58	< 30.00
		1	0	22.08	26.09	< 30.00
		1	64	21.99	26.00	< 30.00
3967.5	25	32	16	22.98	26.99	< 30.00
		1	1	23.14	27.15	< 30.00
		1	63	23.07	27.08	< 30.00
		65	0	22.57	26.58	< 30.00
		1	0	22.20	26.21	< 30.00
		1	64	22.13	26.14	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3715.02	30	36	78	23.02	27.03	< 30.00
		1	1	23.07	27.08	< 30.00
		1	76	23.17	27.18	< 30.00
		75	0	22.58	26.59	< 30.00
		1	0	22.10	26.11	< 30.00
		1	77	22.08	26.09	< 30.00
3840.00	30	36	78	23.02	27.03	< 30.00
		1	1	22.97	26.98	< 30.00
		1	76	23.01	27.02	< 30.00
		75	0	22.56	26.57	< 30.00
		1	0	21.92	25.93	< 30.00
		1	77	21.94	25.95	< 30.00
3964.98	30	36	78	22.88	26.89	< 30.00
		1	1	23.00	27.01	< 30.00
		1	76	22.93	26.94	< 30.00
		75	0	22.38	26.39	< 30.00
		1	0	22.02	26.03	< 30.00
		1	77	21.95	25.96	< 30.00
3720.00	40	50	25	23.05	27.06	< 30.00
		1	1	23.38	27.39	< 30.00
		1	104	23.12	27.13	< 30.00
		100	0	22.62	26.63	< 30.00
		1	0	22.42	26.43	< 30.00
		1	105	22.29	26.30	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3840.00	40	50	25	23.14	27.15	< 30.00
		1	1	23.22	27.23	< 30.00
		1	104	23.03	27.04	< 30.00
		100	0	22.54	26.55	< 30.00
		1	0	22.19	26.20	< 30.00
		1	105	22.01	26.02	< 30.00
3960.00	40	50	25	22.95	26.96	< 30.00
		1	1	23.22	27.23	< 30.00
		1	104	23.02	27.03	< 30.00
		100	0	22.46	26.47	< 30.00
		1	0	22.26	26.27	< 30.00
		1	105	22.03	26.04	< 30.00
3725.01	50	64	32	23.00	27.01	< 30.00
		1	1	22.84	26.85	< 30.00
		1	131	22.79	26.80	< 30.00
		128	0	22.42	26.43	< 30.00
		1	0	21.85	25.86	< 30.00
		1	132	21.79	25.80	< 30.00
3840.00	50	64	32	22.99	27.00	< 30.00
		1	1	22.88	26.89	< 30.00
		1	131	22.76	26.77	< 30.00
		128	0	22.38	26.39	< 30.00
		1	0	22.00	26.01	< 30.00
		1	132	22.02	26.03	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3954.99	50	64	32	22.86	26.87	< 30.00
		1	1	23.13	27.14	< 30.00
		1	131	22.92	26.93	< 30.00
		128	0	22.28	26.29	< 30.00
		1	0	22.10	26.11	< 30.00
		1	132	21.82	25.83	< 30.00
3730.02	60	81	40	22.92	26.93	< 30.00
		1	1	22.87	26.88	< 30.00
		1	160	22.78	26.79	< 30.00
		162	0	22.44	26.45	< 30.00
		1	0	21.83	25.84	< 30.00
		1	161	21.80	25.81	< 30.00
3840.00	60	81	40	22.86	26.87	< 30.00
		1	1	22.92	26.93	< 30.00
		1	160	22.67	26.68	< 30.00
		162	0	22.35	26.36	< 30.00
		1	0	21.88	25.89	< 30.00
		1	161	21.77	25.78	< 30.00
3949.98	60	81	40	22.81	26.82	< 30.00
		1	1	23.10	27.11	< 30.00
		1	160	22.62	26.63	< 30.00
		162	0	22.35	26.36	< 30.00
		1	0	22.06	26.07	< 30.00
		1	161	21.62	25.63	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3735.00	70	90	45	22.90	26.91	< 30.00
		1	1	22.82	26.83	< 30.00
		1	187	22.74	26.75	< 30.00
		180	0	22.37	26.38	< 30.00
		1	0	21.90	25.91	< 30.00
		1	188	21.85	25.86	< 30.00
3840.00	70	90	45	22.75	26.76	< 30.00
		1	1	22.67	26.68	< 30.00
		1	187	22.49	26.50	< 30.00
		180	0	22.26	26.27	< 30.00
		1	0	21.62	25.63	< 30.00
		1	188	21.53	25.54	< 30.00
3945.00	70	90	45	22.68	26.69	< 30.00
		1	1	22.99	27.00	< 30.00
		1	187	22.56	26.57	< 30.00
		180	0	22.28	26.29	< 30.00
		1	0	22.08	26.09	< 30.00
		1	188	21.53	25.54	< 30.00
3740.01	80	108	54	22.79	26.80	< 30.00
		1	1	22.78	26.79	< 30.00
		1	215	22.77	26.78	< 30.00
		216	0	22.30	26.31	< 30.00
		1	0	21.72	25.73	< 30.00
		1	216	21.64	25.65	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3840.00	80	108	54	22.78	26.79	< 30.00
		1	1	22.69	26.70	< 30.00
		1	215	22.53	26.54	< 30.00
		216	0	22.24	26.25	< 30.00
		1	0	21.72	25.73	< 30.00
		1	216	21.53	25.54	< 30.00
3939.99	80	108	54	22.70	26.71	< 30.00
		1	1	22.96	26.97	< 30.00
		1	215	22.49	26.50	< 30.00
		216	0	22.19	26.20	< 30.00
		1	0	21.77	25.78	< 30.00
		1	216	21.44	25.45	< 30.00
3745.02	90	120	60	22.89	26.90	< 30.00
		1	1	22.81	26.82	< 30.00
		1	243	22.85	26.86	< 30.00
		243	0	22.31	26.32	< 30.00
		1	0	21.90	25.91	< 30.00
		1	244	21.89	25.90	< 30.00
3840.00	90	120	60	22.75	26.76	< 30.00
		1	1	22.66	26.67	< 30.00
		1	243	22.65	26.66	< 30.00
		243	0	22.24	26.25	< 30.00
		1	0	21.75	25.76	< 30.00
		1	244	21.68	25.69	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 64QAM						
3934.98	90	120	60	22.72	26.73	< 30.00
		1	1	23.01	27.02	< 30.00
		1	243	22.54	26.55	< 30.00
		243	0	22.26	26.27	< 30.00
		1	0	22.01	26.02	< 30.00
		1	244	21.52	25.53	< 30.00
3750.00	100	135	67	22.95	26.96	< 30.00
		1	1	22.74	26.75	< 30.00
		1	271	22.91	26.92	< 30.00
		270	0	22.42	26.43	< 30.00
		1	0	21.76	25.77	< 30.00
		1	272	21.91	25.92	< 30.00
3840.00	100	135	67	22.75	26.76	< 30.00
		1	1	22.72	26.73	< 30.00
		1	271	22.63	26.64	< 30.00
		270	0	22.19	26.20	< 30.00
		1	0	21.73	25.74	< 30.00
		1	272	21.70	25.71	< 30.00
3930.00	100	135	67	22.82	26.83	< 30.00
		1	1	23.22	27.23	< 30.00
		1	271	22.66	26.67	< 30.00
		270	0	22.31	26.32	< 30.00
		1	0	22.06	26.07	< 30.00
		1	272	21.46	25.47	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3705.00	10	12	6	21.17	25.18	< 30.00
		1	1	21.01	25.02	< 30.00
		1	22	21.09	25.10	< 30.00
		24	0	20.62	24.63	< 30.00
		1	0	21.05	25.06	< 30.00
		1	23	20.99	25.00	< 30.00
3840.00	10	12	6	21.16	25.17	< 30.00
		1	1	21.06	25.07	< 30.00
		1	22	20.81	24.82	< 30.00
		24	0	20.59	24.60	< 30.00
		1	0	21.09	25.10	< 30.00
		1	23	21.14	25.15	< 30.00
3975.00	10	12	6	21.10	25.11	< 30.00
		1	1	21.08	25.09	< 30.00
		1	22	21.12	25.13	< 30.00
		24	0	20.61	24.62	< 30.00
		1	0	21.08	25.09	< 30.00
		1	23	20.93	24.94	< 30.00
3707.52	15	18	9	21.21	25.22	< 30.00
		1	1	21.38	25.39	< 30.00
		1	36	21.25	25.26	< 30.00
		36	0	20.72	24.73	< 30.00
		1	0	21.21	25.22	< 30.00
		1	37	21.34	25.35	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3840.00	15	18	9	21.20	25.21	< 30.00
		1	1	21.28	25.29	< 30.00
		1	36	21.39	25.40	< 30.00
		36	0	20.73	24.74	< 30.00
		1	0	21.25	25.26	< 30.00
		1	37	21.31	25.32	< 30.00
3972.48	15	18	9	21.18	25.19	< 30.00
		1	1	21.20	25.21	< 30.00
		1	36	21.15	25.16	< 30.00
		36	0	20.71	24.72	< 30.00
		1	0	21.21	25.22	< 30.00
		1	37	21.20	25.21	< 30.00
3710.01	20	25	12	21.13	25.14	< 30.00
		1	1	21.30	25.31	< 30.00
		1	49	21.23	25.24	< 30.00
		50	0	20.73	24.74	< 30.00
		1	0	21.36	25.37	< 30.00
		1	50	21.19	25.20	< 30.00
3840.00	20	25	12	21.37	25.38	< 30.00
		1	1	21.27	25.28	< 30.00
		1	49	21.29	25.30	< 30.00
		50	0	20.65	24.66	< 30.00
		1	0	21.23	25.24	< 30.00
		1	50	21.30	25.31	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3969.99	20	25	12	21.12	25.13	< 30.00
		1	1	21.22	25.23	< 30.00
		1	49	21.02	25.03	< 30.00
		50	0	20.62	24.63	< 30.00
		1	0	21.24	25.25	< 30.00
		1	50	21.10	25.11	< 30.00
3712.5	25	32	16	20.93	24.94	< 30.00
		1	1	21.02	25.03	< 30.00
		1	63	20.88	24.89	< 30.00
		65	0	20.36	24.37	< 30.00
		1	0	20.96	24.97	< 30.00
		1	64	20.94	24.95	< 30.00
3840.00	25	32	16	21.03	25.04	< 30.00
		1	1	21.00	25.01	< 30.00
		1	63	20.93	24.94	< 30.00
		65	0	20.52	24.53	< 30.00
		1	0	21.10	25.11	< 30.00
		1	64	21.01	25.02	< 30.00
3967.5	25	32	16	20.99	25.00	< 30.00
		1	1	20.96	24.97	< 30.00
		1	63	21.05	25.06	< 30.00
		65	0	20.52	24.53	< 30.00
		1	0	21.01	25.02	< 30.00
		1	64	20.95	24.96	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3715.02	30	36	78	21.00	25.01	< 30.00
		1	1	21.04	25.05	< 30.00
		1	76	21.16	25.17	< 30.00
		75	0	20.58	24.59	< 30.00
		1	0	21.05	25.06	< 30.00
		1	77	21.14	25.15	< 30.00
3840.00	30	36	78	21.01	25.02	< 30.00
		1	1	20.93	24.94	< 30.00
		1	76	20.99	25.00	< 30.00
		75	0	20.48	24.49	< 30.00
		1	0	20.99	25.00	< 30.00
		1	77	20.90	24.91	< 30.00
3964.98	30	36	78	20.85	24.86	< 30.00
		1	1	21.01	25.02	< 30.00
		1	76	20.94	24.95	< 30.00
		75	0	20.33	24.34	< 30.00
		1	0	21.01	25.02	< 30.00
		1	77	20.93	24.94	< 30.00
3720.00	40	50	25	21.12	25.13	< 30.00
		1	1	21.19	25.20	< 30.00
		1	104	21.15	25.16	< 30.00
		100	0	20.57	24.58	< 30.00
		1	0	21.18	25.19	< 30.00
		1	105	21.07	25.08	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3840.00	40	50	25	21.13	25.14	< 30.00
		1	1	21.09	25.10	< 30.00
		1	104	21.00	25.01	< 30.00
		100	0	20.61	24.62	< 30.00
		1	0	21.15	25.16	< 30.00
		1	105	20.88	24.89	< 30.00
3960.00	40	50	25	21.04	25.05	< 30.00
		1	1	21.11	25.12	< 30.00
		1	104	20.94	24.95	< 30.00
		100	0	20.42	24.43	< 30.00
		1	0	21.16	25.17	< 30.00
		1	105	20.89	24.90	< 30.00
3725.01	50	64	32	20.89	24.90	< 30.00
		1	1	20.76	24.77	< 30.00
		1	131	20.74	24.75	< 30.00
		128	0	20.41	24.42	< 30.00
		1	0	20.88	24.89	< 30.00
		1	132	20.81	24.82	< 30.00
3840.00	50	64	32	20.93	24.94	< 30.00
		1	1	20.73	24.74	< 30.00
		1	131	20.81	24.82	< 30.00
		128	0	20.41	24.42	< 30.00
		1	0	20.77	24.78	< 30.00
		1	132	20.76	24.77	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3954.99	50	64	32	20.84	24.85	< 30.00
		1	1	21.07	25.08	< 30.00
		1	131	20.70	24.71	< 30.00
		128	0	20.36	24.37	< 30.00
		1	0	21.03	25.04	< 30.00
		1	132	20.83	24.84	< 30.00
3730.02	60	81	40	20.93	24.94	< 30.00
		1	1	20.75	24.76	< 30.00
		1	160	20.76	24.77	< 30.00
		162	0	20.39	24.40	< 30.00
		1	0	20.74	24.75	< 30.00
		1	161	20.72	24.73	< 30.00
3840.00	60	81	40	21.04	25.05	< 30.00
		1	1	20.82	24.83	< 30.00
		1	160	20.69	24.70	< 30.00
		162	0	20.42	24.43	< 30.00
		1	0	20.78	24.79	< 30.00
		1	161	20.57	24.58	< 30.00
3949.98	60	81	40	20.80	24.81	< 30.00
		1	1	21.09	25.10	< 30.00
		1	160	20.58	24.59	< 30.00
		162	0	20.31	24.32	< 30.00
		1	0	20.97	24.98	< 30.00
		1	161	20.51	24.52	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3735.00	70	90	45	20.87	24.88	< 30.00
		1	1	20.79	24.80	< 30.00
		1	187	20.73	24.74	< 30.00
		180	0	20.34	24.35	< 30.00
		1	0	20.79	24.80	< 30.00
		1	188	20.67	24.68	< 30.00
3840.00	70	90	45	20.83	24.84	< 30.00
		1	1	20.69	24.70	< 30.00
		1	187	20.46	24.47	< 30.00
		180	0	20.25	24.26	< 30.00
		1	0	20.60	24.61	< 30.00
		1	188	20.32	24.33	< 30.00
3945.00	70	90	45	20.66	24.67	< 30.00
		1	1	20.92	24.93	< 30.00
		1	187	20.42	24.43	< 30.00
		180	0	20.20	24.21	< 30.00
		1	0	20.98	24.99	< 30.00
		1	188	20.42	24.43	< 30.00
3740.01	80	108	54	20.81	24.82	< 30.00
		1	1	20.76	24.77	< 30.00
		1	215	20.71	24.72	< 30.00
		216	0	20.33	24.34	< 30.00
		1	0	20.69	24.70	< 30.00
		1	216	20.78	24.79	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3840.00	80	108	54	20.80	24.81	< 30.00
		1	1	20.68	24.69	< 30.00
		1	215	20.48	24.49	< 30.00
		216	0	20.20	24.21	< 30.00
		1	0	20.60	24.61	< 30.00
		1	216	20.45	24.46	< 30.00
3939.99	80	108	54	20.70	24.71	< 30.00
		1	1	21.00	25.01	< 30.00
		1	215	20.36	24.37	< 30.00
		216	0	20.20	24.21	< 30.00
		1	0	20.97	24.98	< 30.00
		1	216	20.50	24.51	< 30.00
3745.02	90	120	60	20.85	24.86	< 30.00
		1	1	20.79	24.80	< 30.00
		1	243	20.83	24.84	< 30.00
		243	0	20.33	24.34	< 30.00
		1	0	20.78	24.79	< 30.00
		1	244	20.83	24.84	< 30.00
3840.00	90	120	60	20.82	24.83	< 30.00
		1	1	20.72	24.73	< 30.00
		1	243	20.53	24.54	< 30.00
		243	0	20.23	24.24	< 30.00
		1	0	20.66	24.67	< 30.00
		1	244	20.54	24.55	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
DFT-s-OFDM 256QAM						
3934.98	90	120	60	20.73	24.74	< 30.00
		1	1	20.93	24.94	< 30.00
		1	243	20.44	24.45	< 30.00
		243	0	20.14	24.15	< 30.00
		1	0	20.94	24.95	< 30.00
		1	244	20.44	24.45	< 30.00
3750.00	100	135	67	20.89	24.90	< 30.00
		1	1	20.77	24.78	< 30.00
		1	271	20.83	24.84	< 30.00
		270	0	20.40	24.41	< 30.00
		1	0	20.74	24.75	< 30.00
		1	272	20.91	24.92	< 30.00
3840.00	100	135	67	20.74	24.75	< 30.00
		1	1	20.66	24.67	< 30.00
		1	271	20.61	24.62	< 30.00
		270	0	20.16	24.17	< 30.00
		1	0	20.71	24.72	< 30.00
		1	272	20.63	24.64	< 30.00
3930.00	100	135	67	20.79	24.80	< 30.00
		1	1	21.02	25.03	< 30.00
		1	271	20.57	24.58	< 30.00
		270	0	20.21	24.22	< 30.00
		1	0	21.01	25.02	< 30.00
		1	272	20.51	24.52	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3705.00	10	12	6	24.17	28.18	< 30.00
		1	1	24.13	28.14	< 30.00
		1	22	24.10	28.11	< 30.00
		24	0	22.13	26.14	< 30.00
		1	0	22.10	26.11	< 30.00
		1	23	22.14	26.15	< 30.00
3840.00	10	12	6	24.16	28.17	< 30.00
		1	1	24.01	28.02	< 30.00
		1	22	24.10	28.11	< 30.00
		24	0	22.16	26.17	< 30.00
		1	0	22.00	26.01	< 30.00
		1	23	22.05	26.06	< 30.00
3975.00	10	12	6	24.08	28.09	< 30.00
		1	1	24.01	28.02	< 30.00
		1	22	24.03	28.04	< 30.00
		24	0	22.02	26.03	< 30.00
		1	0	22.14	26.15	< 30.00
		1	23	22.04	26.05	< 30.00
3707.52	15	18	9	24.26	28.27	< 30.00
		1	1	24.19	28.20	< 30.00
		1	36	24.31	28.32	< 30.00
		36	0	22.26	26.27	< 30.00
		1	0	22.30	26.31	< 30.00
		1	37	22.33	26.34	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3840.00	15	18	9	24.16	28.17	< 30.00
		1	1	24.19	28.20	< 30.00
		1	36	24.22	28.23	< 30.00
		36	0	22.25	26.26	< 30.00
		1	0	22.18	26.19	< 30.00
		1	37	22.29	26.30	< 30.00
3972.48	15	18	9	24.17	28.18	< 30.00
		1	1	24.24	28.25	< 30.00
		1	36	24.23	28.24	< 30.00
		36	0	22.16	26.17	< 30.00
		1	0	22.30	26.31	< 30.00
		1	37	22.15	26.16	< 30.00
3710.01	20	25	12	24.16	28.17	< 30.00
		1	1	24.23	28.24	< 30.00
		1	49	24.39	28.40	< 30.00
		50	0	22.19	26.20	< 30.00
		1	0	22.23	26.24	< 30.00
		1	50	22.25	26.26	< 30.00
3840.00	20	25	12	24.31	28.32	< 30.00
		1	1	24.31	28.32	< 30.00
		1	49	24.43	28.44	< 30.00
		50	0	22.23	26.24	< 30.00
		1	0	22.15	26.16	< 30.00
		1	50	22.27	26.28	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3969.99	20	25	12	24.30	28.31	< 30.00
		1	1	24.25	28.26	< 30.00
		1	49	24.29	28.30	< 30.00
		50	0	22.20	26.21	< 30.00
		1	0	22.37	26.38	< 30.00
		1	50	22.20	26.21	< 30.00
3712.5	25	32	16	23.90	27.91	< 30.00
		1	1	23.86	27.87	< 30.00
		1	63	23.98	27.99	< 30.00
		65	0	21.94	25.95	< 30.00
		1	0	21.81	25.82	< 30.00
		1	64	21.90	25.91	< 30.00
3840.00	25	32	16	24.05	28.06	< 30.00
		1	1	24.04	28.05	< 30.00
		1	63	23.90	27.91	< 30.00
		65	0	22.05	26.06	< 30.00
		1	0	22.04	26.05	< 30.00
		1	64	21.93	25.94	< 30.00
3967.5	25	32	16	24.06	28.07	< 30.00
		1	1	24.05	28.06	< 30.00
		1	63	23.96	27.97	< 30.00
		65	0	22.05	26.06	< 30.00
		1	0	22.08	26.09	< 30.00
		1	64	21.93	25.94	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3715.02	30	36	78	24.06	28.07	< 30.00
		1	1	24.05	28.06	< 30.00
		1	76	24.05	28.06	< 30.00
		75	0	21.99	26.00	< 30.00
		1	0	22.00	26.01	< 30.00
		1	77	22.04	26.05	< 30.00
3840.00	30	36	78	23.98	27.99	< 30.00
		1	1	24.12	28.13	< 30.00
		1	76	23.99	28.00	< 30.00
		75	0	22.08	26.09	< 30.00
		1	0	21.95	25.96	< 30.00
		1	77	22.05	26.06	< 30.00
3964.98	30	36	78	23.94	27.95	< 30.00
		1	1	23.91	27.92	< 30.00
		1	76	23.87	27.88	< 30.00
		75	0	21.88	25.89	< 30.00
		1	0	22.06	26.07	< 30.00
		1	77	21.95	25.96	< 30.00
3720.00	40	50	25	24.05	28.06	< 30.00
		1	1	24.26	28.27	< 30.00
		1	104	24.19	28.20	< 30.00
		100	0	22.08	26.09	< 30.00
		1	0	22.26	26.27	< 30.00
		1	105	22.20	26.21	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3840.00	40	50	25	24.14	28.15	< 30.00
		1	1	24.18	28.19	< 30.00
		1	104	23.98	27.99	< 30.00
		100	0	22.07	26.08	< 30.00
		1	0	22.11	26.12	< 30.00
		1	105	21.99	26.00	< 30.00
3960.00	40	50	25	23.92	27.93	< 30.00
		1	1	24.19	28.20	< 30.00
		1	104	23.95	27.96	< 30.00
		100	0	22.03	26.04	< 30.00
		1	0	22.21	26.22	< 30.00
		1	105	21.95	25.96	< 30.00
3725.01	50	64	32	23.85	27.86	< 30.00
		1	1	23.86	27.87	< 30.00
		1	131	23.79	27.80	< 30.00
		128	0	21.91	25.92	< 30.00
		1	0	21.85	25.86	< 30.00
		1	132	21.82	25.83	< 30.00
3840.00	50	64	32	23.92	27.93	< 30.00
		1	1	23.89	27.90	< 30.00
		1	131	23.77	27.78	< 30.00
		128	0	21.91	25.92	< 30.00
		1	0	21.87	25.88	< 30.00
		1	132	21.84	25.85	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3954.99	50	64	32	23.87	27.88	< 30.00
		1	1	24.05	28.06	< 30.00
		1	131	23.86	27.87	< 30.00
		128	0	21.83	25.84	< 30.00
		1	0	22.09	26.10	< 30.00
		1	132	21.87	25.88	< 30.00
3730.02	60	81	40	23.89	27.90	< 30.00
		1	1	23.86	27.87	< 30.00
		1	160	23.84	27.85	< 30.00
		162	0	21.89	25.90	< 30.00
		1	0	21.79	25.80	< 30.00
		1	161	21.77	25.78	< 30.00
3840.00	60	81	40	23.97	27.98	< 30.00
		1	1	23.90	27.91	< 30.00
		1	160	23.84	27.85	< 30.00
		162	0	21.96	25.97	< 30.00
		1	0	21.90	25.91	< 30.00
		1	161	21.71	25.72	< 30.00
3949.98	60	81	40	23.83	27.84	< 30.00
		1	1	24.11	28.12	< 30.00
		1	160	23.67	27.68	< 30.00
		162	0	21.77	25.78	< 30.00
		1	0	22.08	26.09	< 30.00
		1	161	21.50	25.51	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3735.00	70	90	45	23.93	27.94	< 30.00
		1	1	23.92	27.93	< 30.00
		1	187	23.75	27.76	< 30.00
		180	0	21.87	25.88	< 30.00
		1	0	21.79	25.80	< 30.00
		1	188	21.72	25.73	< 30.00
3840.00	70	90	45	23.79	27.80	< 30.00
		1	1	23.66	27.67	< 30.00
		1	187	23.67	27.68	< 30.00
		180	0	21.75	25.76	< 30.00
		1	0	21.70	25.71	< 30.00
		1	188	21.49	25.50	< 30.00
3945.00	70	90	45	23.73	27.74	< 30.00
		1	1	23.98	27.99	< 30.00
		1	187	23.52	27.53	< 30.00
		180	0	21.70	25.71	< 30.00
		1	0	22.08	26.09	< 30.00
		1	188	21.49	25.50	< 30.00
3740.01	80	108	54	23.87	27.88	< 30.00
		1	1	23.84	27.85	< 30.00
		1	215	23.84	27.85	< 30.00
		216	0	21.81	25.82	< 30.00
		1	0	21.69	25.70	< 30.00
		1	216	21.77	25.78	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3840.00	80	108	54	23.83	27.84	< 30.00
		1	1	23.72	27.73	< 30.00
		1	215	23.54	27.55	< 30.00
		216	0	21.67	25.68	< 30.00
		1	0	21.62	25.63	< 30.00
		1	216	21.52	25.53	< 30.00
3939.99	80	108	54	23.71	27.72	< 30.00
		1	1	23.99	28.00	< 30.00
		1	215	23.55	27.56	< 30.00
		216	0	21.65	25.66	< 30.00
		1	0	21.99	26.00	< 30.00
		1	216	21.49	25.50	< 30.00
3745.02	90	120	60	23.90	27.91	< 30.00
		1	1	23.86	27.87	< 30.00
		1	243	23.93	27.94	< 30.00
		243	0	21.83	25.84	< 30.00
		1	0	21.73	25.74	< 30.00
		1	244	21.83	25.84	< 30.00
3840.00	90	120	60	23.80	27.81	< 30.00
		1	1	23.65	27.66	< 30.00
		1	243	23.56	27.57	< 30.00
		243	0	21.60	25.61	< 30.00
		1	0	21.63	25.64	< 30.00
		1	244	21.61	25.62	< 30.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
CP-OFDM QPSK						
3934.98	90	120	60	23.75	27.76	< 30.00
		1	1	24.03	28.04	< 30.00
		1	243	23.63	27.64	< 30.00
		243	0	21.74	25.75	< 30.00
		1	0	22.00	26.01	< 30.00
		1	244	21.50	25.51	< 30.00
3750.00	100	135	67	23.83	27.84	< 30.00
		1	1	23.73	27.74	< 30.00
		1	271	23.90	27.91	< 30.00
		270	0	21.84	25.85	< 30.00
		1	0	21.74	25.75	< 30.00
		1	272	21.84	25.85	< 30.00
3840.00	100	135	67	23.75	27.76	< 30.00
		1	1	23.67	27.68	< 30.00
		1	271	23.74	27.75	< 30.00
		270	0	21.73	25.74	< 30.00
		1	0	21.60	25.61	< 30.00
		1	272	21.63	25.64	< 30.00
3930.00	100	135	67	23.76	27.77	< 30.00
		1	1	24.09	28.10	< 30.00
		1	271	23.52	27.53	< 30.00
		270	0	21.76	25.77	< 30.00
		1	0	22.05	26.06	< 30.00
		1	272	21.45	25.46	< 30.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)						

Test Site	WZ-SR6	Test Engineer	Lucas Wang
Test Date	2023-10-17 ~ 2023-10-18	Test Band	HPUE n77_MIMO (3450-3550)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5G NR-P			
CP OFDM QPSK								
3455.01	10	12	6	20.62	21.01	23.83	26.86	< 30.00
		1	1	20.73	20.74	23.75	26.78	< 30.00
		1	22	20.74	20.9	23.83	26.86	< 30.00
		24	0	18.75	18.76	21.77	24.80	< 30.00
		1	0	18.56	18.83	21.71	24.74	< 30.00
		1	23	18.73	18.78	21.77	24.80	< 30.00
3500.01	10	12	6	20.95	20.94	23.96	26.99	< 30.00
		1	1	21.02	20.86	23.95	26.98	< 30.00
		1	22	20.59	20.82	23.72	26.75	< 30.00
		24	0	18.93	18.93	21.94	24.97	< 30.00
		1	0	18.83	19.07	21.96	24.99	< 30.00
		1	23	18.87	18.82	21.86	24.89	< 30.00
3544.98	10	12	6	20.97	20.85	23.92	26.95	< 30.00
		1	1	21.16	20.86	24.02	27.05	< 30.00
		1	22	21.13	20.92	24.04	27.07	< 30.00
		24	0	18.99	18.89	21.95	24.98	< 30.00
		1	0	19.03	19.07	22.06	25.09	< 30.00
		1	23	18.94	18.78	21.87	24.90	< 30.00
3457.50	15	19	9	20.75	20.93	23.85	26.88	< 30.00
		1	1	20.72	21.13	23.94	26.97	< 30.00
		1	36	20.83	20.98	23.92	26.95	< 30.00
		38	0	18.81	18.9	21.87	24.90	< 30.00
		1	0	18.91	19.02	21.98	25.01	< 30.00
		1	37	18.76	19.24	22.02	25.05	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{LTE-M Output Power (dBm)} / 10} + 10^{\text{5G NR-P Output Power (dBm)} / 10}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM QPSK								
3500.01	15	19	9	20.97	21.05	24.02	27.05	< 30.00
		1	1	21.03	20.94	24.00	27.03	< 30.00
		1	36	20.84	21.51	24.20	27.23	< 30.00
		38	0	18.93	19.07	22.01	25.04	< 30.00
		1	0	18.98	18.98	21.99	25.02	< 30.00
		1	37	18.94	18.96	21.96	24.99	< 30.00
3542.49	15	19	9	21.13	20.98	24.07	27.10	< 30.00
		1	1	21.04	21.02	24.04	27.07	< 30.00
		1	36	21.01	20.9	23.97	27.00	< 30.00
		38	0	18.97	18.98	21.99	25.02	< 30.00
		1	0	19.27	19.12	22.21	25.24	< 30.00
		1	37	18.99	18.98	22.00	25.03	< 30.00
3460.02	20	25	12	20.83	20.98	23.92	26.95	< 30.00
		1	1	20.96	21.12	24.05	27.08	< 30.00
		1	49	21.06	20.96	24.02	27.05	< 30.00
		51	0	18.8	18.87	21.85	24.88	< 30.00
		1	0	18.79	18.84	21.83	24.86	< 30.00
		1	50	18.92	18.97	21.96	24.99	< 30.00
3500.01	20	25	12	20.93	20.96	23.96	26.99	< 30.00
		1	1	21.05	20.89	23.98	27.01	< 30.00
		1	49	20.95	20.95	23.96	26.99	< 30.00
		51	0	18.89	18.98	21.95	24.98	< 30.00
		1	0	19.05	18.83	21.95	24.98	< 30.00
		1	50	18.86	19.07	21.98	25.01	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM QPSK								
3540.00	20	25	12	20.95	21.05	24.01	27.04	< 30.00
		1	1	20.94	21.11	24.04	27.07	< 30.00
		1	49	21.32	20.97	24.16	27.19	< 30.00
		51	0	18.95	18.95	21.96	24.99	< 30.00
		1	0	19.06	19.00	22.04	25.07	< 30.00
		1	50	19.10	18.93	22.03	25.06	< 30.00
3462.51	25	33	16	20.84	20.93	23.90	26.93	< 30.00
		1	1	20.85	21.01	23.94	26.97	< 30.00
		1	63	20.97	20.89	23.94	26.97	< 30.00
		65	0	18.85	18.92	21.90	24.93	< 30.00
		1	0	18.75	18.89	21.83	24.86	< 30.00
		1	64	18.95	18.96	21.97	25.00	< 30.00
3500.01	25	32	16	20.96	21.09	24.04	27.07	< 30.00
		1	1	20.97	21.18	24.09	27.12	< 30.00
		1	63	20.97	21.02	24.01	27.04	< 30.00
		65	0	18.95	18.99	21.98	25.01	< 30.00
		1	0	19.05	19.00	22.04	25.07	< 30.00
		1	64	18.94	18.92	21.94	24.97	< 30.00
3537.48	25	32	16	20.96	20.84	23.91	26.94	< 30.00
		1	1	20.99	21.02	24.02	27.05	< 30.00
		1	63	21.15	20.88	24.03	27.06	< 30.00
		65	0	19.03	18.89	21.97	25.00	< 30.00
		1	0	18.94	18.85	21.91	24.94	< 30.00
		1	64	19.21	18.95	22.09	25.12	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM QPSK								
3460.02	30	36	79	20.90	20.90	23.91	26.94	< 30.00
		1	1	20.95	20.93	23.95	26.98	< 30.00
		1	76	21.20	21.03	24.13	27.16	< 30.00
		78	0	18.88	18.98	21.94	24.97	< 30.00
		1	0	19.05	19.11	22.09	25.12	< 30.00
		1	77	19.07	19.00	22.05	25.08	< 30.00
3500.01	30	36	79	20.94	20.89	23.93	26.96	< 30.00
		1	1	21.31	20.92	24.13	27.16	< 30.00
		1	76	21.03	20.92	23.99	27.02	< 30.00
		78	0	19.06	18.93	22.01	25.04	< 30.00
		1	0	19.09	18.93	22.02	25.05	< 30.00
		1	77	19.17	18.90	22.05	25.08	< 30.00
3534.99	30	36	79	21.12	20.94	24.04	27.07	< 30.00
		1	1	21.22	21.22	24.23	27.26	< 30.00
		1	76	21.25	20.84	24.06	27.09	< 30.00
		78	0	19.12	18.94	22.04	25.07	< 30.00
		1	0	19.03	19.04	22.05	25.08	< 30.00
		1	77	19.08	18.86	21.98	25.01	< 30.00
3470.01	40	53	26	20.87	21.08	23.99	27.02	< 30.00
		1	1	20.90	21.23	24.08	27.11	< 30.00
		1	104	21.02	21.09	24.07	27.10	< 30.00
		106	0	18.91	19.01	21.97	25.00	< 30.00
		1	0	18.78	19.12	21.96	24.99	< 30.00
		1	105	19.03	19.13	22.09	25.12	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{LTE-M Output Power (dBm)} / 10} + 10^{\text{5GNR-P Output Power (dBm)} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM QPSK								
3500.01	40	53	26	20.92	21.07	24.01	27.04	< 30.00
		1	1	21.24	21.04	24.15	27.18	< 30.00
		1	104	21.27	21.04	24.17	27.20	< 30.00
		106	0	18.96	19.12	22.05	25.08	< 30.00
		1	0	19.16	19.16	22.17	25.20	< 30.00
		1	105	19.13	19.00	22.08	25.11	< 30.00
3529.98	40	53	26	20.98	21.03	24.02	27.05	< 30.00
		1	1	21.1	21.18	24.15	27.18	< 30.00
		1	104	21.24	20.99	24.13	27.16	< 30.00
		106	0	18.96	18.96	21.97	25.00	< 30.00
		1	0	19.21	19.13	22.18	25.21	< 30.00
		1	105	19.2	19.05	22.14	25.17	< 30.00
3475.02	50	67	33	20.72	20.64	23.69	26.72	< 30.00
		1	1	20.82	20.88	23.86	26.89	< 30.00
		1	131	20.65	20.60	23.64	26.67	< 30.00
		133	0	18.71	18.69	21.71	24.74	< 30.00
		1	0	18.85	18.84	21.86	24.89	< 30.00
		1	132	18.47	18.67	21.58	24.61	< 30.00
3500.01	50	67	33	20.73	20.71	23.73	26.76	< 30.00
		1	1	20.97	20.73	23.86	26.89	< 30.00
		1	131	20.72	20.47	23.61	26.64	< 30.00
		133	0	18.70	18.75	21.74	24.77	< 30.00
		1	0	18.77	18.84	21.82	24.85	< 30.00
		1	132	18.96	18.43	21.71	24.74	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM QPSK								
3525.00	50	67	33	20.65	20.56	23.62	26.65	< 30.00
		1	1	20.71	20.84	23.79	26.82	< 30.00
		1	131	20.70	20.41	23.57	26.60	< 30.00
		133	0	18.83	18.80	21.83	24.86	< 30.00
		1	0	18.66	18.78	21.73	24.76	< 30.00
		1	132	18.80	18.48	21.65	24.68	< 30.00
3480.00	60	81	40	20.80	20.73	23.78	26.81	< 30.00
		1	1	20.84	20.77	23.82	26.85	< 30.00
		1	160	20.53	20.63	23.59	26.62	< 30.00
		162	0	18.74	18.68	21.72	24.75	< 30.00
		1	0	18.81	18.82	21.83	24.86	< 30.00
		1	161	18.56	18.46	21.52	24.55	< 30.00
3500.01	60	81	40	20.88	20.74	23.82	26.85	< 30.00
		1	1	20.92	20.78	23.86	26.89	< 30.00
		1	160	20.75	20.41	23.59	26.62	< 30.00
		162	0	18.78	18.72	21.76	24.79	< 30.00
		1	0	19.20	18.75	21.99	25.02	< 30.00
		1	161	18.63	18.49	21.57	24.60	< 30.00
3519.99	60	81	40	20.78	20.59	23.70	26.73	< 30.00
		1	1	20.87	20.65	23.77	26.80	< 30.00
		1	160	20.76	20.45	23.62	26.65	< 30.00
		162	0	18.70	18.65	21.69	24.72	< 30.00
		1	0	18.82	18.68	21.76	24.79	< 30.00
		1	161	18.61	18.46	21.55	24.58	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM QPSK								
3485.01	70	95	47	20.61	20.60	23.62	26.65	< 30.00
		1	1	20.65	20.88	23.78	26.81	< 30.00
		1	187	20.58	20.32	23.46	26.49	< 30.00
		189	0	18.58	18.58	21.59	24.62	< 30.00
		1	0	18.6	18.68	21.65	24.68	< 30.00
		1	188	18.47	18.40	21.45	24.48	< 30.00
3500.01	70	95	47	20.72	20.59	23.67	26.70	< 30.00
		1	1	20.91	20.81	23.87	26.90	< 30.00
		1	187	20.75	20.41	23.59	26.62	< 30.00
		189	0	18.73	18.68	21.72	24.75	< 30.00
		1	0	18.79	18.71	21.76	24.79	< 30.00
		1	188	18.65	18.37	21.52	24.55	< 30.00
3514.98	70	95	47	20.56	20.55	23.57	26.60	< 30.00
		1	1	20.75	20.97	23.87	26.90	< 30.00
		1	187	20.66	20.36	23.52	26.55	< 30.00
		189	0	18.68	18.56	21.63	24.66	< 30.00
		1	0	18.75	18.75	21.76	24.79	< 30.00
		1	188	18.61	18.40	21.52	24.55	< 30.00
3490.02	80	109	54	20.66	20.62	23.65	26.68	< 30.00
		1	1	20.77	20.56	23.68	26.71	< 30.00
		1	215	20.97	20.38	23.70	26.73	< 30.00
		217	0	18.56	18.59	21.59	24.62	< 30.00
		1	0	18.86	18.56	21.72	24.75	< 30.00
		1	216	18.58	18.38	21.49	24.52	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM QPSK								
3500.01	80	109	54	20.77	20.64	23.72	26.75	< 30.00
		1	1	20.76	20.58	23.68	26.71	< 30.00
		1	215	20.73	20.38	23.57	26.60	< 30.00
		217	0	18.68	18.62	21.66	24.69	< 30.00
		1	0	18.64	18.93	21.80	24.83	< 30.00
		1	216	18.46	18.42	21.45	24.48	< 30.00
3510.00	80	109	54	20.70	20.64	23.68	26.71	< 30.00
		1	1	20.93	20.82	23.89	26.92	< 30.00
		1	215	20.69	20.45	23.58	26.61	< 30.00
		217	0	18.74	18.66	21.71	24.74	< 30.00
		1	0	18.92	18.67	21.81	24.84	< 30.00
		1	216	18.72	18.43	21.59	24.62	< 30.00
3495.00	90	123	61	20.65	20.73	23.70	26.73	< 30.00
		1	1	20.77	20.75	23.77	26.80	< 30.00
		1	243	20.63	20.34	23.50	26.53	< 30.00
		245	0	18.68	18.60	21.65	24.68	< 30.00
		1	0	18.67	18.64	21.67	24.70	< 30.00
		1	244	18.56	18.61	21.60	24.63	< 30.00
3500.01	90	123	61	20.63	20.65	23.65	26.68	< 30.00
		1	1	20.95	20.63	23.80	26.83	< 30.00
		1	243	20.75	20.34	23.56	26.59	< 30.00
		245	0	18.65	18.66	21.67	24.70	< 30.00
		1	0	18.75	18.60	21.69	24.72	< 30.00
		1	244	18.83	18.65	21.75	24.78	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM QPSK								
3504.99	90	123	61	20.65	20.66	23.67	26.70	< 30.00
		1	1	20.91	20.69	23.81	26.84	< 30.00
		1	243	20.66	20.34	23.51	26.54	< 30.00
		245	0	18.71	18.68	21.71	24.74	< 30.00
		1	0	18.78	18.78	21.79	24.82	< 30.00
		1	244	18.70	18.63	21.68	24.71	< 30.00
3500.01	100	137	68	20.69	20.65	23.68	26.71	< 30.00
		1	1	20.79	20.83	23.82	26.85	< 30.00
		1	271	20.73	20.45	23.60	26.63	< 30.00
		273	0	18.73	18.56	21.66	24.69	< 30.00
		1	0	18.61	18.76	21.70	24.73	< 30.00
		1	272	18.77	18.50	21.65	24.68	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3455.01	10	12	6	20.03	20.45	23.26	26.29	< 30.00
		1	1	20.21	20.30	23.27	26.30	< 30.00
		1	22	20.02	20.42	23.23	26.26	< 30.00
		24	0	18.74	18.76	21.76	24.79	< 30.00
		1	0	18.34	18.85	21.61	24.64	< 30.00
		1	23	18.75	19.08	21.93	24.96	< 30.00
3500.01	10	12	6	20.34	20.45	23.41	26.44	< 30.00
		1	1	20.50	20.53	23.53	26.56	< 30.00
		1	22	20.67	20.42	23.56	26.59	< 30.00
		24	0	18.94	18.89	21.93	24.96	< 30.00
		1	0	19.03	18.93	21.99	25.02	< 30.00
		1	23	18.89	18.34	21.63	24.66	< 30.00
3544.98	10	12	6	20.50	20.52	23.52	26.55	< 30.00
		1	1	20.52	20.54	23.54	26.57	< 30.00
		1	22	20.4	20.53	23.48	26.51	< 30.00
		24	0	19.1	18.91	22.02	25.05	< 30.00
		1	0	18.73	18.94	21.85	24.88	< 30.00
		1	23	19.19	18.78	22.00	25.03	< 30.00
3457.50	15	19	9	20.3	20.46	23.39	26.42	< 30.00
		1	1	20.37	20.49	23.44	26.47	< 30.00
		1	36	20.52	20.56	23.55	26.58	< 30.00
		38	0	18.81	18.89	21.86	24.89	< 30.00
		1	0	18.71	18.86	21.80	24.83	< 30.00
		1	37	19.01	18.81	21.92	24.95	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3500.01	15	19	9	20.45	20.53	23.50	26.53	< 30.00
		1	1	20.51	20.38	23.46	26.49	< 30.00
		1	36	20.45	20.46	23.47	26.50	< 30.00
		38	0	18.94	19.07	22.02	25.05	< 30.00
		1	0	19.13	19.05	22.10	25.13	< 30.00
		1	37	18.95	18.50	21.74	24.77	< 30.00
3542.49	15	19	9	20.48	20.50	23.50	26.53	< 30.00
		1	1	20.12	20.61	23.38	26.41	< 30.00
		1	36	20.52	20.55	23.55	26.58	< 30.00
		38	0	19.05	18.89	21.98	25.01	< 30.00
		1	0	19.24	18.84	22.05	25.08	< 30.00
		1	37	19.07	18.61	21.86	24.89	< 30.00
3460.02	20	25	12	20.35	20.40	23.39	26.42	< 30.00
		1	1	20.30	20.23	23.28	26.31	< 30.00
		1	49	20.35	20.45	23.41	26.44	< 30.00
		51	0	18.77	18.94	21.87	24.90	< 30.00
		1	0	18.43	18.93	21.70	24.73	< 30.00
		1	50	18.58	18.71	21.66	24.69	< 30.00
3500.01	20	25	12	20.41	20.59	23.51	26.54	< 30.00
		1	1	20.60	20.36	23.49	26.52	< 30.00
		1	49	20.46	20.23	23.36	26.39	< 30.00
		51	0	18.87	18.88	21.89	24.92	< 30.00
		1	0	19.03	18.94	22.00	25.03	< 30.00
		1	50	18.80	19.05	21.94	24.97	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3540.00	20	25	12	20.45	20.49	23.48	26.51	< 30.00
		1	1	20.29	20.54	23.43	26.46	< 30.00
		1	49	20.71	20.36	23.55	26.58	< 30.00
		51	0	19.03	19.03	22.04	25.07	< 30.00
		1	0	18.82	18.96	21.90	24.93	< 30.00
		1	50	19.09	19.09	22.10	25.13	< 30.00
3462.51	25	33	16	20.32	20.43	23.39	26.42	< 30.00
		1	1	20.16	20.38	23.28	26.31	< 30.00
		1	63	20.46	20.63	23.56	26.59	< 30.00
		65	0	18.95	18.9	21.94	24.97	< 30.00
		1	0	18.98	19.22	22.11	25.14	< 30.00
		1	64	18.56	19.03	21.81	24.84	< 30.00
3500.01	25	32	16	20.43	20.31	23.38	26.41	< 30.00
		1	1	20.45	20.31	23.39	26.42	< 30.00
		1	63	20.22	20.53	23.39	26.42	< 30.00
		65	0	18.90	18.97	21.95	24.98	< 30.00
		1	0	18.94	19.00	21.98	25.01	< 30.00
		1	64	18.57	18.96	21.78	24.81	< 30.00
3537.48	25	32	16	20.48	20.43	23.47	26.50	< 30.00
		1	1	20.39	20.48	23.45	26.48	< 30.00
		1	63	20.36	20.21	23.30	26.33	< 30.00
		65	0	19.02	18.87	21.96	24.99	< 30.00
		1	0	18.89	19.02	21.97	25.00	< 30.00
		1	64	18.86	18.73	21.81	24.84	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3460.02	30	36	79	20.37	20.36	23.38	26.41	< 30.00
		1	1	20.33	20.57	23.46	26.49	< 30.00
		1	76	20.25	20.32	23.30	26.33	< 30.00
		78	0	18.84	18.97	21.92	24.95	< 30.00
		1	0	18.51	18.92	21.73	24.76	< 30.00
		1	77	19.07	18.94	22.02	25.05	< 30.00
3500.01	30	36	79	20.57	20.25	23.42	26.45	< 30.00
		1	1	20.51	20.60	23.57	26.60	< 30.00
		1	76	21.05	20.56	23.82	26.85	< 30.00
		78	0	19.00	18.92	21.97	25.00	< 30.00
		1	0	19.25	18.88	22.08	25.11	< 30.00
		1	77	19.14	18.81	21.99	25.02	< 30.00
3534.99	30	36	79	20.51	20.41	23.47	26.50	< 30.00
		1	1	20.92	20.35	23.65	26.68	< 30.00
		1	76	20.56	20.60	23.59	26.62	< 30.00
		78	0	19.06	18.93	22.01	25.04	< 30.00
		1	0	19.23	19.17	22.21	25.24	< 30.00
		1	77	18.84	18.99	21.93	24.96	< 30.00
3470.01	40	53	26	20.44	20.48	23.47	26.50	< 30.00
		1	1	20.50	20.66	23.59	26.62	< 30.00
		1	104	20.53	20.70	23.63	26.66	< 30.00
		106	0	18.88	19.01	21.96	24.99	< 30.00
		1	0	18.86	18.93	21.91	24.94	< 30.00
		1	105	18.94	19.16	22.06	25.09	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3500.01	40	53	26	20.41	20.55	23.49	26.52	< 30.00
		1	1	20.58	20.39	23.50	26.53	< 30.00
		1	104	20.48	20.31	23.41	26.44	< 30.00
		106	0	19.02	19.01	22.03	25.06	< 30.00
		1	0	19.24	19.11	22.19	25.22	< 30.00
		1	105	18.92	18.82	21.88	24.91	< 30.00
3529.98	40	53	26	20.51	20.46	23.50	26.53	< 30.00
		1	1	20.41	20.40	23.42	26.45	< 30.00
		1	104	20.43	20.53	23.49	26.52	< 30.00
		106	0	19.02	19.03	22.04	25.07	< 30.00
		1	0	18.90	19.10	22.01	25.04	< 30.00
		1	105	19.04	19.01	22.04	25.07	< 30.00
3475.02	50	67	33	20.21	20.23	23.23	26.26	< 30.00
		1	1	20.37	20.32	23.36	26.39	< 30.00
		1	131	19.89	19.74	22.83	25.86	< 30.00
		133	0	18.75	18.67	21.72	24.75	< 30.00
		1	0	18.71	18.94	21.84	24.87	< 30.00
		1	132	18.46	18.64	21.56	24.59	< 30.00
3500.01	50	67	33	20.12	20.24	23.19	26.22	< 30.00
		1	1	20.57	20.38	23.49	26.52	< 30.00
		1	131	20.53	19.93	23.25	26.28	< 30.00
		133	0	18.76	18.74	21.76	24.79	< 30.00
		1	0	18.78	18.79	21.80	24.83	< 30.00
		1	132	18.45	18.52	21.50	24.53	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3525.00	50	67	33	20.18	20.13	23.17	26.20	< 30.00
		1	1	20.18	20.25	23.23	26.26	< 30.00
		1	131	20.14	20.14	23.15	26.18	< 30.00
		133	0	18.75	18.70	21.74	24.77	< 30.00
		1	0	18.85	19.04	21.96	24.99	< 30.00
		1	132	18.91	18.42	21.68	24.71	< 30.00
3480.00	60	81	40	20.28	20.27	23.29	26.32	< 30.00
		1	1	20.11	20.33	23.23	26.26	< 30.00
		1	160	20.00	20.35	23.19	26.22	< 30.00
		162	0	18.74	18.66	21.71	24.74	< 30.00
		1	0	18.55	18.44	21.51	24.54	< 30.00
		1	161	18.51	18.70	21.62	24.65	< 30.00
3500.01	60	81	40	20.39	20.13	23.27	26.30	< 30.00
		1	1	20.20	20.19	23.21	26.24	< 30.00
		1	160	20.21	19.92	23.08	26.11	< 30.00
		162	0	18.72	18.69	21.72	24.75	< 30.00
		1	0	18.95	18.73	21.85	24.88	< 30.00
		1	161	18.69	18.53	21.62	24.65	< 30.00
3519.99	60	81	40	20.17	20.10	23.15	26.18	< 30.00
		1	1	20.31	20.13	23.23	26.26	< 30.00
		1	160	19.98	19.62	22.81	25.84	< 30.00
		162	0	18.77	18.67	21.73	24.76	< 30.00
		1	0	18.55	18.71	21.64	24.67	< 30.00
		1	161	18.90	18.61	21.77	24.80	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3485.01	70	95	47	20.13	20.10	23.13	26.16	< 30.00
		1	1	20.26	20.25	23.27	26.30	< 30.00
		1	187	19.92	19.92	22.93	25.96	< 30.00
		189	0	18.66	18.61	21.65	24.68	< 30.00
		1	0	18.60	18.72	21.67	24.70	< 30.00
		1	188	18.37	18.40	21.40	24.43	< 30.00
3500.01	70	95	47	20.21	20.19	23.21	26.24	< 30.00
		1	1	19.96	20.49	23.24	26.27	< 30.00
		1	187	19.96	20.02	23.00	26.03	< 30.00
		189	0	18.69	18.66	21.69	24.72	< 30.00
		1	0	18.75	18.77	21.77	24.80	< 30.00
		1	188	18.71	18.80	21.77	24.80	< 30.00
3514.98	70	95	47	20.20	20.15	23.19	26.22	< 30.00
		1	1	20.40	20.30	23.36	26.39	< 30.00
		1	187	20.17	19.76	22.98	26.01	< 30.00
		189	0	18.67	18.55	21.62	24.65	< 30.00
		1	0	18.72	18.76	21.75	24.78	< 30.00
		1	188	18.44	18.39	21.43	24.46	< 30.00
3490.02	80	109	54	20.22	20.16	23.20	26.23	< 30.00
		1	1	20.19	19.84	23.03	26.06	< 30.00
		1	215	20.03	19.88	22.97	26.00	< 30.00
		217	0	18.60	18.57	21.60	24.63	< 30.00
		1	0	18.39	18.80	21.61	24.64	< 30.00
		1	216	18.50	18.12	21.32	24.35	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3500.01	80	109	54	20.19	20.02	23.12	26.15	< 30.00
		1	1	20.35	20.29	23.33	26.36	< 30.00
		1	215	19.90	19.94	22.93	25.96	< 30.00
		217	0	18.72	18.51	21.63	24.66	< 30.00
		1	0	18.63	18.58	21.62	24.65	< 30.00
		1	216	18.42	18.47	21.46	24.49	< 30.00
3510.00	80	109	54	20.21	20.19	23.21	26.24	< 30.00
		1	1	20.30	20.26	23.29	26.32	< 30.00
		1	215	20.22	19.66	22.96	25.99	< 30.00
		217	0	18.71	18.63	21.68	24.71	< 30.00
		1	0	19.02	18.87	21.96	24.99	< 30.00
		1	216	18.72	18.39	21.57	24.60	< 30.00
3495.00	90	123	61	20.09	20.07	23.09	26.12	< 30.00
		1	1	20.56	20.39	23.49	26.52	< 30.00
		1	243	19.89	19.88	22.90	25.93	< 30.00
		245	0	18.61	18.59	21.61	24.64	< 30.00
		1	0	18.35	18.53	21.45	24.48	< 30.00
		1	244	18.43	18.46	21.46	24.49	< 30.00
3500.01	90	123	61	20.21	20.09	23.16	26.19	< 30.00
		1	1	20.09	20.12	23.12	26.15	< 30.00
		1	243	20.61	19.90	23.28	26.31	< 30.00
		245	0	18.72	18.56	21.65	24.68	< 30.00
		1	0	18.73	18.45	21.60	24.63	< 30.00
		1	244	18.69	18.57	21.64	24.67	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3504.99	90	123	61	20.20	20.24	23.23	26.26	< 30.00
		1	1	20.22	20.08	23.16	26.19	< 30.00
		1	243	20.12	20.26	23.20	26.23	< 30.00
		245	0	18.66	18.68	21.68	24.71	< 30.00
		1	0	18.57	18.73	21.66	24.69	< 30.00
		1	244	18.82	18.55	21.70	24.73	< 30.00
3500.01	100	137	68	20.22	20.16	23.20	26.23	< 30.00
		1	1	20.13	20.22	23.19	26.22	< 30.00
		1	271	19.98	19.89	22.95	25.98	< 30.00
		273	0	18.73	18.55	21.65	24.68	< 30.00
		1	0	18.40	18.61	21.52	24.55	< 30.00
		1	272	18.71	18.21	21.48	24.51	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3455.01	10	12	6	18.71	18.89	21.81	24.84	< 30.00
		1	1	18.88	19.20	22.05	25.08	< 30.00
		1	22	18.72	18.85	21.80	24.83	< 30.00
		24	0	18.10	18.30	21.21	24.24	< 30.00
		1	0	18.71	19.05	21.89	24.92	< 30.00
		1	23	18.51	18.62	21.58	24.61	< 30.00
3500.01	10	12	6	18.95	18.94	21.96	24.99	< 30.00
		1	1	18.76	18.93	21.86	24.89	< 30.00
		1	22	18.82	18.63	21.74	24.77	< 30.00
		24	0	18.36	18.45	21.42	24.45	< 30.00
		1	0	19.17	18.78	21.99	25.02	< 30.00
		1	23	18.78	18.95	21.88	24.91	< 30.00
3544.98	10	12	6	18.95	18.94	21.96	24.99	< 30.00
		1	1	18.93	18.97	21.96	24.99	< 30.00
		1	22	19.07	18.95	22.02	25.05	< 30.00
		24	0	18.45	18.37	21.42	24.45	< 30.00
		1	0	18.98	18.97	21.99	25.02	< 30.00
		1	23	19.23	18.79	22.03	25.06	< 30.00
3457.50	15	19	9	18.76	19.02	21.90	24.93	< 30.00
		1	1	18.77	18.75	21.77	24.80	< 30.00
		1	36	19.07	19.06	22.08	25.11	< 30.00
		38	0	18.28	18.48	21.39	24.42	< 30.00
		1	0	18.78	19.10	21.95	24.98	< 30.00
		1	37	18.94	19.03	22.00	25.03	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3500.01	15	19	9	18.89	19.09	22.00	25.03	< 30.00
		1	1	19.01	19.05	22.04	25.07	< 30.00
		1	36	19.02	19.20	22.12	25.15	< 30.00
		38	0	18.42	18.50	21.47	24.50	< 30.00
		1	0	19.08	18.96	22.03	25.06	< 30.00
		1	37	18.72	18.98	21.86	24.89	< 30.00
3542.49	15	19	9	19.03	18.96	22.01	25.04	< 30.00
		1	1	19.17	19.09	22.14	25.17	< 30.00
		1	36	19.07	18.70	21.90	24.93	< 30.00
		38	0	18.46	18.50	21.49	24.52	< 30.00
		1	0	19.14	19.23	22.20	25.23	< 30.00
		1	37	19.15	18.85	22.01	25.04	< 30.00
3460.02	20	25	12	18.77	18.98	21.89	24.92	< 30.00
		1	1	18.86	18.61	21.75	24.78	< 30.00
		1	49	19.06	19.09	22.09	25.12	< 30.00
		51	0	18.32	18.44	21.39	24.42	< 30.00
		1	0	18.98	18.73	21.87	24.90	< 30.00
		1	50	18.86	18.86	21.87	24.90	< 30.00
3500.01	20	25	12	18.94	18.99	21.98	25.01	< 30.00
		1	1	19.22	19.02	22.13	25.16	< 30.00
		1	49	18.86	19.08	21.98	25.01	< 30.00
		51	0	18.40	18.35	21.39	24.42	< 30.00
		1	0	18.83	19.10	21.98	25.01	< 30.00
		1	50	18.95	18.85	21.91	24.94	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3540.00	20	25	12	19.07	18.95	22.02	25.05	< 30.00
		1	1	19.17	19.18	22.19	25.22	< 30.00
		1	49	19.36	19.07	22.23	25.26	< 30.00
		51	0	18.46	18.47	21.48	24.51	< 30.00
		1	0	19.06	19.18	22.13	25.16	< 30.00
		1	50	19.03	19.22	22.14	25.17	< 30.00
3462.51	25	33	16	18.79	18.94	21.88	24.91	< 30.00
		1	1	18.84	19.23	22.05	25.08	< 30.00
		1	63	19.14	18.88	22.02	25.05	< 30.00
		65	0	18.36	18.34	21.36	24.39	< 30.00
		1	0	18.87	18.75	21.82	24.85	< 30.00
		1	64	19.18	18.85	22.03	25.06	< 30.00
3500.01	25	32	16	18.85	19.06	21.97	25.00	< 30.00
		1	1	18.99	18.88	21.95	24.98	< 30.00
		1	63	18.98	19.11	22.06	25.09	< 30.00
		65	0	18.43	18.47	21.46	24.49	< 30.00
		1	0	19.01	19.07	22.05	25.08	< 30.00
		1	64	18.76	19.07	21.93	24.96	< 30.00
3537.48	25	32	16	18.92	18.85	21.90	24.93	< 30.00
		1	1	18.98	18.61	21.81	24.84	< 30.00
		1	63	19.38	19.01	22.21	25.24	< 30.00
		65	0	18.45	18.30	21.39	24.42	< 30.00
		1	0	19.18	18.92	22.06	25.09	< 30.00
		1	64	18.93	18.79	21.87	24.90	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3460.02	30	36	79	18.89	18.93	21.92	24.95	< 30.00
		1	1	19.12	19.04	22.09	25.12	< 30.00
		1	76	18.81	18.84	21.84	24.87	< 30.00
		78	0	18.43	18.49	21.47	24.50	< 30.00
		1	0	19.26	18.74	22.02	25.05	< 30.00
		1	77	19.14	18.76	21.96	24.99	< 30.00
3500.01	30	36	79	18.99	18.92	21.97	25.00	< 30.00
		1	1	19.28	19.17	22.24	25.27	< 30.00
		1	76	18.78	19.10	21.95	24.98	< 30.00
		78	0	18.56	18.42	21.50	24.53	< 30.00
		1	0	18.96	19.02	22.00	25.03	< 30.00
		1	77	19.05	19.03	22.05	25.08	< 30.00
3534.99	30	36	79	19.04	18.89	21.98	25.01	< 30.00
		1	1	19.19	19.03	22.12	25.15	< 30.00
		1	76	19.27	19.06	22.18	25.21	< 30.00
		78	0	18.63	18.43	21.54	24.57	< 30.00
		1	0	19.03	19.16	22.11	25.14	< 30.00
		1	77	19.53	18.81	22.20	25.23	< 30.00
3470.01	40	53	26	18.86	19.00	21.94	24.97	< 30.00
		1	1	18.86	18.97	21.93	24.96	< 30.00
		1	104	18.87	19.14	22.02	25.05	< 30.00
		106	0	18.51	18.49	21.51	24.54	< 30.00
		1	0	19.20	18.94	22.08	25.11	< 30.00
		1	105	19.01	19.08	22.06	25.09	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3500.01	40	53	26	18.99	18.89	21.95	24.98	< 30.00
		1	1	19.21	19.34	22.29	25.32	< 30.00
		1	104	19.12	19.07	22.11	25.14	< 30.00
		106	0	18.41	18.52	21.48	24.51	< 30.00
		1	0	19.28	19.30	22.30	25.33	< 30.00
		1	105	19.13	19.19	22.17	25.20	< 30.00
3529.98	40	53	26	19.00	19.00	22.01	25.04	< 30.00
		1	1	19.05	19.45	22.26	25.29	< 30.00
		1	104	19.12	19.12	22.13	25.16	< 30.00
		106	0	18.51	18.53	21.53	24.56	< 30.00
		1	0	19.12	19.22	22.18	25.21	< 30.00
		1	105	19.13	19.12	22.14	25.17	< 30.00
3475.02	50	67	33	18.69	18.73	21.72	24.75	< 30.00
		1	1	18.51	18.96	21.75	24.78	< 30.00
		1	131	18.6	18.48	21.55	24.58	< 30.00
		133	0	18.22	18.19	21.22	24.25	< 30.00
		1	0	18.73	18.52	21.64	24.67	< 30.00
		1	132	18.48	18.22	21.36	24.39	< 30.00
3500.01	50	67	33	18.68	18.66	21.68	24.71	< 30.00
		1	1	19.00	18.78	21.90	24.93	< 30.00
		1	131	18.62	18.02	21.34	24.37	< 30.00
		133	0	18.22	18.18	21.21	24.24	< 30.00
		1	0	19.14	18.81	21.99	25.02	< 30.00
		1	132	18.71	18.42	21.58	24.61	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3525.00	50	67	33	18.71	18.60	21.67	24.70	< 30.00
		1	1	18.69	18.94	21.83	24.86	< 30.00
		1	131	18.76	18.37	21.58	24.61	< 30.00
		133	0	18.19	18.16	21.19	24.22	< 30.00
		1	0	18.73	18.78	21.77	24.80	< 30.00
		1	132	18.70	18.33	21.53	24.56	< 30.00
3480.00	60	81	40	18.84	18.75	21.81	24.84	< 30.00
		1	1	18.68	18.86	21.78	24.81	< 30.00
		1	160	18.53	18.55	21.55	24.58	< 30.00
		162	0	18.26	18.17	21.23	24.26	< 30.00
		1	0	18.93	18.92	21.94	24.97	< 30.00
		1	161	18.32	18.70	21.52	24.55	< 30.00
3500.01	60	81	40	18.73	18.71	21.73	24.76	< 30.00
		1	1	18.92	18.71	21.83	24.86	< 30.00
		1	160	18.66	18.69	21.69	24.72	< 30.00
		162	0	18.23	18.29	21.27	24.30	< 30.00
		1	0	18.97	18.89	21.94	24.97	< 30.00
		1	161	18.71	18.09	21.42	24.45	< 30.00
3519.99	60	81	40	18.78	18.43	21.62	24.65	< 30.00
		1	1	18.89	18.81	21.86	24.89	< 30.00
		1	160	18.58	18.43	21.52	24.55	< 30.00
		162	0	18.20	18.12	21.17	24.20	< 30.00
		1	0	18.94	18.63	21.80	24.83	< 30.00
		1	161	18.41	18.13	21.28	24.31	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3485.01	70	95	47	18.62	18.68	21.66	24.69	< 30.00
		1	1	18.73	18.70	21.73	24.76	< 30.00
		1	187	18.51	18.07	21.31	24.34	< 30.00
		189	0	18.18	18.08	21.14	24.17	< 30.00
		1	0	18.63	18.91	21.78	24.81	< 30.00
		1	188	18.52	18.46	21.50	24.53	< 30.00
3500.01	70	95	47	18.70	18.65	21.69	24.72	< 30.00
		1	1	18.83	18.61	21.73	24.76	< 30.00
		1	187	18.81	18.53	21.68	24.71	< 30.00
		189	0	18.21	18.25	21.24	24.27	< 30.00
		1	0	19.00	18.69	21.86	24.89	< 30.00
		1	188	18.61	18.20	21.42	24.45	< 30.00
3514.98	70	95	47	18.61	18.58	21.61	24.64	< 30.00
		1	1	18.96	18.71	21.85	24.88	< 30.00
		1	187	18.82	18.23	21.55	24.58	< 30.00
		189	0	18.19	18.18	21.20	24.23	< 30.00
		1	0	18.89	18.93	21.92	24.95	< 30.00
		1	188	18.48	18.67	21.59	24.62	< 30.00
3490.02	80	109	54	18.62	18.59	21.62	24.65	< 30.00
		1	1	18.39	18.69	21.55	24.58	< 30.00
		1	215	18.46	18.26	21.37	24.40	< 30.00
		217	0	18.16	18.09	21.14	24.17	< 30.00
		1	0	18.41	18.48	21.46	24.49	< 30.00
		1	216	18.53	18.28	21.42	24.45	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3500.01	80	109	54	18.62	18.65	21.65	24.68	< 30.00
		1	1	18.83	18.56	21.71	24.74	< 30.00
		1	215	18.83	18.30	21.58	24.61	< 30.00
		217	0	18.15	18.10	21.14	24.17	< 30.00
		1	0	18.37	18.44	21.42	24.45	< 30.00
		1	216	18.82	18.58	21.71	24.74	< 30.00
3510.00	80	109	54	18.58	18.60	21.60	24.63	< 30.00
		1	1	18.93	18.94	21.95	24.98	< 30.00
		1	215	18.67	18.16	21.43	24.46	< 30.00
		217	0	18.13	18.15	21.15	24.18	< 30.00
		1	0	18.73	19.06	21.91	24.94	< 30.00
		1	216	18.82	17.97	21.43	24.46	< 30.00
3495.00	90	123	61	18.68	18.58	21.64	24.67	< 30.00
		1	1	18.50	18.69	21.61	24.64	< 30.00
		1	243	18.48	18.53	21.52	24.55	< 30.00
		245	0	18.2	18.03	21.13	24.16	< 30.00
		1	0	18.92	18.66	21.80	24.83	< 30.00
		1	244	18.75	18.32	21.55	24.58	< 30.00
3500.01	90	123	61	18.67	18.55	21.62	24.65	< 30.00
		1	1	18.66	18.59	21.64	24.67	< 30.00
		1	243	18.59	18.35	21.48	24.51	< 30.00
		245	0	18.25	18.02	21.15	24.18	< 30.00
		1	0	18.81	18.30	21.57	24.60	< 30.00
		1	244	18.45	18.67	21.57	24.60	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3504.99	90	123	61	18.71	18.70	21.72	24.75	< 30.00
		1	1	18.90	18.80	21.86	24.89	< 30.00
		1	243	18.62	18.18	21.42	24.45	< 30.00
		245	0	18.18	18.08	21.14	24.17	< 30.00
		1	0	19.07	18.33	21.73	24.76	< 30.00
		1	244	18.52	18.60	21.57	24.60	< 30.00
3500.01	100	137	68	18.70	18.58	21.65	24.68	< 30.00
		1	1	18.78	18.63	21.72	24.75	< 30.00
		1	271	18.91	18.36	21.65	24.68	< 30.00
		273	0	18.24	18.07	21.17	24.20	< 30.00
		1	0	18.65	18.73	21.70	24.73	< 30.00
		1	272	18.80	18.37	21.60	24.63	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3455.01	10	12	6	15.56	15.99	18.79	21.82	< 30.00
		1	1	15.64	15.74	18.70	21.73	< 30.00
		1	22	15.57	15.85	18.72	21.75	< 30.00
		24	0	15.66	15.92	18.80	21.83	< 30.00
		1	0	15.54	15.68	18.62	21.65	< 30.00
		1	23	15.60	15.94	18.78	21.81	< 30.00
3500.01	10	12	6	16.06	15.92	19.00	22.03	< 30.00
		1	1	15.59	16.02	18.82	21.85	< 30.00
		1	22	16.06	15.71	18.90	21.93	< 30.00
		24	0	15.87	15.89	18.89	21.92	< 30.00
		1	0	15.84	15.93	18.90	21.93	< 30.00
		1	23	15.80	15.90	18.86	21.89	< 30.00
3544.98	10	12	6	16.03	15.90	18.98	22.01	< 30.00
		1	1	15.80	15.72	18.77	21.80	< 30.00
		1	22	15.78	15.82	18.81	21.84	< 30.00
		24	0	16.06	15.90	18.99	22.02	< 30.00
		1	0	15.91	15.85	18.89	21.92	< 30.00
		1	23	16.06	15.78	18.93	21.96	< 30.00
3457.50	15	19	9	15.80	15.93	18.88	21.91	< 30.00
		1	1	15.84	15.70	18.78	21.81	< 30.00
		1	36	15.84	16.01	18.94	21.97	< 30.00
		38	0	15.76	15.98	18.88	21.91	< 30.00
		1	0	15.88	15.80	18.85	21.88	< 30.00
		1	37	16.17	16.10	19.15	22.18	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{LTE-M Output Power (dBm)} / 10} + 10^{\text{5GNR-P Output Power (dBm)} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3500.01	15	19	9	15.94	15.98	18.97	22.00	< 30.00
		1	1	15.78	15.69	18.75	21.78	< 30.00
		1	36	16.09	16.17	19.14	22.17	< 30.00
		38	0	15.95	16.04	19.01	22.04	< 30.00
		1	0	15.92	16.05	19.00	22.03	< 30.00
		1	37	16.06	16.05	19.07	22.10	< 30.00
3542.49	15	19	9	16.02	16.00	19.02	22.05	< 30.00
		1	1	16.23	15.88	19.07	22.10	< 30.00
		1	36	16.13	16.12	19.14	22.17	< 30.00
		38	0	16.01	16.02	19.03	22.06	< 30.00
		1	0	16.08	15.94	19.02	22.05	< 30.00
		1	37	16.31	15.99	19.16	22.19	< 30.00
3460.02	20	25	12	15.77	15.98	18.89	21.92	< 30.00
		1	1	15.78	16.31	19.06	22.09	< 30.00
		1	49	15.48	15.68	18.59	21.62	< 30.00
		51	0	15.88	16.02	18.96	21.99	< 30.00
		1	0	15.91	15.88	18.91	21.94	< 30.00
		1	50	15.74	15.80	18.78	21.81	< 30.00
3500.01	20	25	12	15.93	16.06	19.01	22.04	< 30.00
		1	1	16.08	16.13	19.12	22.15	< 30.00
		1	49	15.86	16.24	19.06	22.09	< 30.00
		51	0	15.9	16.00	18.96	21.99	< 30.00
		1	0	16.15	15.92	19.05	22.08	< 30.00
		1	50	15.66	15.98	18.83	21.86	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3540.00	20	25	12	15.97	16.05	19.02	22.05	< 30.00
		1	1	16.04	15.89	18.98	22.01	< 30.00
		1	49	16.06	15.88	18.98	22.01	< 30.00
		51	0	16.02	15.98	19.01	22.04	< 30.00
		1	0	15.97	15.98	18.99	22.02	< 30.00
		1	50	16.15	15.78	18.98	22.01	< 30.00
3462.51	25	33	16	15.84	15.96	18.91	21.94	< 30.00
		1	1	15.69	16.32	19.03	22.06	< 30.00
		1	63	16.12	15.90	19.02	22.05	< 30.00
		65	0	15.85	15.90	18.89	21.92	< 30.00
		1	0	16.06	16.05	19.07	22.10	< 30.00
		1	64	15.85	15.76	18.82	21.85	< 30.00
3500.01	25	32	16	15.87	15.94	18.92	21.95	< 30.00
		1	1	15.77	16.12	18.96	21.99	< 30.00
		1	63	16.08	16.13	19.12	22.15	< 30.00
		65	0	15.92	15.92	18.93	21.96	< 30.00
		1	0	15.93	16.25	19.10	22.13	< 30.00
		1	64	16.15	15.76	18.97	22.00	< 30.00
3537.48	25	32	16	16.01	15.97	19.00	22.03	< 30.00
		1	1	16.08	15.65	18.88	21.91	< 30.00
		1	63	15.98	15.68	18.84	21.87	< 30.00
		65	0	15.99	15.84	18.93	21.96	< 30.00
		1	0	16.13	15.68	18.92	21.95	< 30.00
		1	64	16.24	16.04	19.15	22.18	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{LTE-M Output Power (dBm)} / 10} + 10^{\text{5GNR-P Output Power (dBm)} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3460.02	30	36	79	15.89	15.94	18.93	21.96	< 30.00
		1	1	16.20	15.96	19.09	22.12	< 30.00
		1	76	15.87	16.03	18.96	21.99	< 30.00
		78	0	15.94	16.02	18.99	22.02	< 30.00
		1	0	15.86	16.09	18.99	22.02	< 30.00
		1	77	15.95	15.79	18.88	21.91	< 30.00
3500.01	30	36	79	16.02	15.82	18.93	21.96	< 30.00
		1	1	16.53	15.90	19.24	22.27	< 30.00
		1	76	15.96	15.80	18.89	21.92	< 30.00
		78	0	16.08	16.01	19.06	22.09	< 30.00
		1	0	16.01	16.03	19.03	22.06	< 30.00
		1	77	16.32	15.86	19.11	22.14	< 30.00
3534.99	30	36	79	16.09	15.99	19.05	22.08	< 30.00
		1	1	15.91	16.14	19.04	22.07	< 30.00
		1	76	15.87	16.08	18.99	22.02	< 30.00
		78	0	16.08	15.95	19.03	22.06	< 30.00
		1	0	16.11	15.86	19.00	22.03	< 30.00
		1	77	15.89	16.12	19.02	22.05	< 30.00
3470.01	40	53	26	15.82	16.14	18.99	22.02	< 30.00
		1	1	15.69	16.15	18.94	21.97	< 30.00
		1	104	15.91	16.25	19.09	22.12	< 30.00
		106	0	15.94	16.16	19.06	22.09	< 30.00
		1	0	15.82	16.02	18.93	21.96	< 30.00
		1	105	15.92	16.39	19.17	22.20	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3500.01	40	53	26	15.98	16.03	19.02	22.05	< 30.00
		1	1	16.44	16.10	19.28	22.31	< 30.00
		1	104	16.32	15.95	19.15	22.18	< 30.00
		106	0	15.97	15.95	18.97	22.00	< 30.00
		1	0	16.33	15.97	19.16	22.19	< 30.00
		1	105	16.18	16.11	19.16	22.19	< 30.00
3529.98	40	53	26	16.08	16.10	19.10	22.13	< 30.00
		1	1	16.12	16.26	19.20	22.23	< 30.00
		1	104	16.38	15.98	19.19	22.22	< 30.00
		106	0	15.98	16.03	19.02	22.05	< 30.00
		1	0	16.27	16.18	19.24	22.27	< 30.00
		1	105	16.29	15.97	19.14	22.17	< 30.00
3475.02	50	67	33	15.74	15.75	18.76	21.79	< 30.00
		1	1	15.79	15.91	18.86	21.89	< 30.00
		1	131	15.36	15.15	18.27	21.30	< 30.00
		133	0	15.65	15.65	18.66	21.69	< 30.00
		1	0	15.90	15.74	18.83	21.86	< 30.00
		1	132	15.58	15.50	18.55	21.58	< 30.00
3500.01	50	67	33	15.85	15.73	18.80	21.83	< 30.00
		1	1	15.87	15.53	18.71	21.74	< 30.00
		1	131	16.02	15.71	18.88	21.91	< 30.00
		133	0	15.76	15.72	18.75	21.78	< 30.00
		1	0	15.83	15.82	18.84	21.87	< 30.00
		1	132	15.62	15.41	18.53	21.56	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{LTE-M Output Power (dBm)} / 10} + 10^{\text{5GNR-P Output Power (dBm)} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3525.00	50	67	33	15.74	15.72	18.74	21.77	< 30.00
		1	1	15.69	15.58	18.65	21.68	< 30.00
		1	131	15.70	15.36	18.54	21.57	< 30.00
		133	0	15.69	15.74	18.73	21.76	< 30.00
		1	0	15.67	16.07	18.88	21.91	< 30.00
		1	132	15.80	15.43	18.63	21.66	< 30.00
3480.00	60	81	40	15.82	15.78	18.81	21.84	< 30.00
		1	1	15.88	15.81	18.86	21.89	< 30.00
		1	160	15.78	15.69	18.75	21.78	< 30.00
		162	0	15.74	15.68	18.72	21.75	< 30.00
		1	0	15.63	15.97	18.81	21.84	< 30.00
		1	161	15.57	15.54	18.57	21.60	< 30.00
3500.01	60	81	40	15.84	15.76	18.81	21.84	< 30.00
		1	1	16.24	15.79	19.03	22.06	< 30.00
		1	160	15.78	15.15	18.49	21.52	< 30.00
		162	0	15.78	15.76	18.78	21.81	< 30.00
		1	0	16.05	15.82	18.95	21.98	< 30.00
		1	161	15.58	15.68	18.64	21.67	< 30.00
3519.99	60	81	40	15.79	15.61	18.71	21.74	< 30.00
		1	1	16.05	15.79	18.93	21.96	< 30.00
		1	160	15.57	15.58	18.59	21.62	< 30.00
		162	0	15.80	15.65	18.74	21.77	< 30.00
		1	0	15.66	15.72	18.70	21.73	< 30.00
		1	161	15.77	15.24	18.52	21.55	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3485.01	70	95	47	15.63	15.59	18.62	21.65	< 30.00
		1	1	15.35	15.65	18.51	21.54	< 30.00
		1	187	15.17	15.27	18.23	21.26	< 30.00
		189	0	15.65	15.64	18.66	21.69	< 30.00
		1	0	15.27	15.40	18.35	21.38	< 30.00
		1	188	15.35	15.48	18.43	21.46	< 30.00
3500.01	70	95	47	15.69	15.60	18.66	21.69	< 30.00
		1	1	15.94	15.69	18.83	21.86	< 30.00
		1	187	15.71	15.28	18.51	21.54	< 30.00
		189	0	15.71	15.69	18.71	21.74	< 30.00
		1	0	15.77	15.64	18.72	21.75	< 30.00
		1	188	15.79	15.40	18.61	21.64	< 30.00
3514.98	70	95	47	15.69	15.60	18.66	21.69	< 30.00
		1	1	15.68	15.84	18.77	21.80	< 30.00
		1	187	15.56	15.47	18.53	21.56	< 30.00
		189	0	15.70	15.69	18.71	21.74	< 30.00
		1	0	15.83	15.63	18.74	21.77	< 30.00
		1	188	15.69	15.25	18.49	21.52	< 30.00
3490.02	80	109	54	15.63	15.59	18.62	21.65	< 30.00
		1	1	15.66	15.76	18.72	21.75	< 30.00
		1	215	15.69	15.05	18.39	21.42	< 30.00
		217	0	15.61	15.67	18.65	21.68	< 30.00
		1	0	15.68	15.96	18.83	21.86	< 30.00
		1	216	15.53	15.24	18.40	21.43	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3500.01	80	109	54	15.68	15.71	18.71	21.74	< 30.00
		1	1	15.85	15.89	18.88	21.91	< 30.00
		1	215	15.57	15.56	18.58	21.61	< 30.00
		217	0	15.69	15.53	18.62	21.65	< 30.00
		1	0	15.85	15.50	18.69	21.72	< 30.00
		1	216	15.31	15.41	18.37	21.40	< 30.00
3510.00	80	109	54	15.75	15.59	18.68	21.71	< 30.00
		1	1	15.87	16.11	19.00	22.03	< 30.00
		1	215	15.60	15.26	18.44	21.47	< 30.00
		217	0	15.65	15.61	18.64	21.67	< 30.00
		1	0	15.72	15.51	18.63	21.66	< 30.00
		1	216	15.90	15.37	18.65	21.68	< 30.00
3495.00	90	123	61	15.70	15.73	18.73	21.76	< 30.00
		1	1	16.02	15.86	18.95	21.98	< 30.00
		1	243	15.82	15.67	18.76	21.79	< 30.00
		245	0	15.61	15.60	18.62	21.65	< 30.00
		1	0	15.48	15.86	18.68	21.71	< 30.00
		1	244	15.64	15.41	18.54	21.57	< 30.00
3500.01	90	123	61	15.73	15.73	18.74	21.77	< 30.00
		1	1	15.90	15.49	18.71	21.74	< 30.00
		1	243	15.47	15.24	18.37	21.40	< 30.00
		245	0	15.82	15.59	18.72	21.75	< 30.00
		1	0	15.60	15.50	18.56	21.59	< 30.00
		1	244	15.76	15.47	18.63	21.66	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3504.99	90	123	61	15.73	15.68	18.72	21.75	< 30.00
		1	1	15.82	15.70	18.77	21.80	< 30.00
		1	243	15.62	15.33	18.49	21.52	< 30.00
		245	0	15.72	15.64	18.69	21.72	< 30.00
		1	0	15.79	15.72	18.77	21.80	< 30.00
		1	244	15.76	15.55	18.67	21.70	< 30.00
3500.01	100	137	68	15.73	15.63	18.69	21.72	< 30.00
		1	1	15.78	15.65	18.73	21.76	< 30.00
		1	271	15.65	15.32	18.50	21.53	< 30.00
		273	0	15.69	15.59	18.65	21.68	< 30.00
		1	0	15.59	15.83	18.72	21.75	< 30.00
		1	272	15.89	15.49	18.70	21.73	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Test Site	WZ-SR6	Test Engineer	Lucas Wang
Test Date	2023-10-17 ~ 2023-10-18	Test Band	HPUE n77_MIMO (3700-3980)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5G NR-P			
CP OFDM QPSK								
3705.00	10	12	6	21.51	20.56	24.07	27.98	< 30.00
		1	1	21.62	20.61	24.15	28.06	< 30.00
		1	22	21.54	20.66	24.13	28.04	< 30.00
		24	0	19.52	18.58	22.09	26.00	< 30.00
		1	0	19.55	18.44	22.04	25.95	< 30.00
		1	23	19.55	18.51	22.07	25.98	< 30.00
3840.00	10	12	6	21.46	20.72	24.12	28.03	< 30.00
		1	1	21.60	20.61	24.14	28.05	< 30.00
		1	22	21.44	20.63	24.06	27.97	< 30.00
		24	0	19.56	18.62	22.13	26.04	< 30.00
		1	0	19.46	18.70	22.11	26.02	< 30.00
		1	23	19.36	18.58	22.00	25.91	< 30.00
3975.00	10	12	6	21.58	20.80	24.22	28.13	< 30.00
		1	1	21.44	20.70	24.10	28.01	< 30.00
		1	22	21.44	20.77	24.13	28.04	< 30.00
		24	0	19.43	18.90	22.18	26.09	< 30.00
		1	0	19.49	18.93	22.23	26.14	< 30.00
		1	23	19.39	18.83	22.13	26.04	< 30.00
3707.52	15	19	9	21.53	20.60	24.10	28.01	< 30.00
		1	1	21.93	20.48	24.28	28.19	< 30.00
		1	36	21.64	20.84	24.27	28.18	< 30.00
		38	0	19.66	18.52	22.14	26.05	< 30.00
		1	0	19.84	18.66	22.30	26.21	< 30.00
		1	37	19.62	18.63	22.16	26.07	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{LTE-M Output Power (dBm)} / 10} + 10^{\text{5G NR-P Output Power (dBm)} / 10}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM QPSK								
3840.00	15	19	9	21.59	20.88	24.26	28.17	< 30.00
		1	1	21.79	20.77	24.32	28.23	< 30.00
		1	36	21.76	21.05	24.43	28.34	< 30.00
		38	0	19.55	18.82	22.21	26.12	< 30.00
		1	0	19.59	18.72	22.19	26.10	< 30.00
		1	37	19.73	18.85	22.32	26.23	< 30.00
3972.48	15	19	9	21.59	20.90	24.27	28.18	< 30.00
		1	1	21.67	20.78	24.26	28.17	< 30.00
		1	36	21.67	21.05	24.38	28.29	< 30.00
		38	0	19.68	18.99	22.36	26.27	< 30.00
		1	0	19.86	18.92	22.43	26.34	< 30.00
		1	37	19.71	18.97	22.37	26.28	< 30.00
3710.01	20	25	12	21.55	20.55	24.09	28.00	< 30.00
		1	1	21.7	20.58	24.19	28.10	< 30.00
		1	49	21.63	20.39	24.06	27.97	< 30.00
		51	0	19.60	18.50	22.10	26.01	< 30.00
		1	0	19.78	18.76	22.31	26.22	< 30.00
		1	50	19.83	18.63	22.28	26.19	< 30.00
3840.00	20	25	12	21.54	20.85	24.22	28.13	< 30.00
		1	1	21.78	20.85	24.35	28.26	< 30.00
		1	49	21.57	20.84	24.23	28.14	< 30.00
		51	0	19.63	18.79	22.24	26.15	< 30.00
		1	0	19.65	18.86	22.28	26.19	< 30.00
		1	50	19.64	18.86	22.28	26.19	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM QPSK								
3969.99	20	25	12	21.55	20.92	24.26	28.17	< 30.00
		1	1	21.83	20.80	24.36	28.27	< 30.00
		1	49	21.66	20.92	24.32	28.23	< 30.00
		51	0	19.59	18.83	22.24	26.15	< 30.00
		1	0	19.71	18.84	22.31	26.22	< 30.00
		1	50	19.54	18.93	22.26	26.17	< 30.00
3712.5	25	33	16	21.55	20.49	24.06	27.97	< 30.00
		1	1	21.77	20.55	24.21	28.12	< 30.00
		1	63	21.66	20.43	24.10	28.01	< 30.00
		65	0	19.62	18.59	22.15	26.06	< 30.00
		1	0	19.61	18.54	22.12	26.03	< 30.00
		1	64	19.44	18.68	22.09	26.00	< 30.00
3840.00	25	32	16	21.61	20.81	24.24	28.15	< 30.00
		1	1	21.79	21.00	24.42	28.33	< 30.00
		1	63	21.81	21.01	24.44	28.35	< 30.00
		65	0	19.63	18.89	22.29	26.20	< 30.00
		1	0	19.66	18.89	22.30	26.21	< 30.00
		1	64	19.56	18.71	22.17	26.08	< 30.00
3967.50	25	32	16	21.64	21.04	24.36	28.27	< 30.00
		1	1	21.89	20.82	24.40	28.31	< 30.00
		1	63	21.79	20.96	24.41	28.32	< 30.00
		65	0	19.61	18.91	22.28	26.19	< 30.00
		1	0	19.57	18.83	22.23	26.14	< 30.00
		1	64	19.70	19.06	22.40	26.31	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM QPSK								
3715.02	30	36	79	21.72	20.62	24.22	28.13	< 30.00
		1	1	21.87	20.47	24.24	28.15	< 30.00
		1	76	22.00	20.69	24.40	28.31	< 30.00
		78	0	19.71	18.59	22.20	26.11	< 30.00
		1	0	19.80	18.64	22.27	26.18	< 30.00
		1	77	19.75	18.68	22.26	26.17	< 30.00
3840.00	30	36	79	21.52	20.84	24.20	28.11	< 30.00
		1	1	21.72	20.85	24.32	28.23	< 30.00
		1	76	21.50	20.73	24.14	28.05	< 30.00
		78	0	19.59	18.83	22.24	26.15	< 30.00
		1	0	19.67	18.83	22.28	26.19	< 30.00
		1	77	19.59	18.81	22.23	26.14	< 30.00
3964.98	30	36	79	21.54	20.92	24.25	28.16	< 30.00
		1	1	21.68	20.89	24.31	28.22	< 30.00
		1	76	21.49	20.90	24.22	28.13	< 30.00
		78	0	19.65	18.91	22.31	26.22	< 30.00
		1	0	19.78	19.13	22.48	26.39	< 30.00
		1	77	19.50	19.12	22.32	26.23	< 30.00
3720.00	40	53	26	21.56	20.53	24.09	28.00	< 30.00
		1	1	21.80	20.68	24.29	28.20	< 30.00
		1	104	21.63	20.86	24.27	28.18	< 30.00
		106	0	19.64	18.61	22.17	26.08	< 30.00
		1	0	19.79	18.83	22.35	26.26	< 30.00
		1	105	19.80	18.80	22.34	26.25	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM QPSK								
3840.00	40	53	26	21.56	20.82	24.22	28.13	< 30.00
		1	1	21.72	21.24	24.50	28.41	< 30.00
		1	104	21.64	20.61	24.17	28.08	< 30.00
		106	0	19.59	18.81	22.23	26.14	< 30.00
		1	0	19.71	18.96	22.36	26.27	< 30.00
		1	105	19.69	18.64	22.21	26.12	< 30.00
3960.00	40	53	26	21.57	20.89	24.25	28.16	< 30.00
		1	1	21.71	21.00	24.38	28.29	< 30.00
		1	104	21.64	21.24	24.45	28.36	< 30.00
		106	0	19.60	18.91	22.28	26.19	< 30.00
		1	0	19.75	19.11	22.45	26.36	< 30.00
		1	105	19.58	19.13	22.37	26.28	< 30.00
3725.01	50	67	33	21.52	20.58	24.09	28.00	< 30.00
		1	1	21.38	20.55	24.00	27.91	< 30.00
		1	131	21.47	20.60	24.07	27.98	< 30.00
		133	0	19.58	18.58	22.12	26.03	< 30.00
		1	0	19.45	18.73	22.12	26.03	< 30.00
		1	132	19.34	18.61	22.00	25.91	< 30.00
3840.00	50	67	33	21.51	20.76	24.16	28.07	< 30.00
		1	1	21.37	20.85	24.13	28.04	< 30.00
		1	131	21.29	20.79	24.06	27.97	< 30.00
		133	0	19.48	18.73	22.13	26.04	< 30.00
		1	0	19.37	18.76	22.09	26.00	< 30.00
		1	132	19.45	18.60	22.06	25.97	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM QPSK								
3954.99	50	67	33	21.38	20.70	24.06	27.97	< 30.00
		1	1	21.82	20.66	24.29	28.20	< 30.00
		1	131	21.22	20.93	24.09	28.00	< 30.00
		133	0	19.48	18.72	22.13	26.04	< 30.00
		1	0	19.79	18.76	22.32	26.23	< 30.00
		1	132	19.31	18.78	22.06	25.97	< 30.00
3730.02	60	81	40	21.4	20.50	23.98	27.89	< 30.00
		1	1	21.51	20.53	24.06	27.97	< 30.00
		1	160	21.41	20.89	24.17	28.08	< 30.00
		162	0	19.40	18.55	22.01	25.92	< 30.00
		1	0	19.30	18.47	21.92	25.83	< 30.00
		1	161	19.50	18.68	22.12	26.03	< 30.00
3840.00	60	81	40	21.52	20.73	24.15	28.06	< 30.00
		1	1	21.49	20.91	24.22	28.13	< 30.00
		1	160	21.29	20.52	23.93	27.84	< 30.00
		162	0	19.52	18.73	22.15	26.06	< 30.00
		1	0	19.43	18.66	22.07	25.98	< 30.00
		1	161	19.38	18.64	22.04	25.95	< 30.00
3949.98	60	81	40	21.37	20.64	24.03	27.94	< 30.00
		1	1	21.54	20.60	24.11	28.02	< 30.00
		1	160	21.27	20.60	23.96	27.87	< 30.00
		162	0	19.44	18.67	22.08	25.99	< 30.00
		1	0	19.64	18.64	22.18	26.09	< 30.00
		1	161	19.26	18.88	22.08	25.99	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM QPSK								
3735.00	70	95	47	21.49	20.50	24.03	27.94	< 30.00
		1	1	21.23	20.23	23.77	27.68	< 30.00
		1	187	21.58	20.50	24.08	27.99	< 30.00
		189	0	19.36	18.50	21.96	25.87	< 30.00
		1	0	19.35	18.48	21.95	25.86	< 30.00
		1	188	19.26	18.37	21.85	25.76	< 30.00
3840.00	70	95	47	21.29	20.65	23.99	27.90	< 30.00
		1	1	21.28	20.50	23.92	27.83	< 30.00
		1	187	21.01	20.34	23.70	27.61	< 30.00
		189	0	19.34	18.47	21.94	25.85	< 30.00
		1	0	19.40	18.58	22.02	25.93	< 30.00
		1	188	19.42	18.61	22.04	25.95	< 30.00
3945.00	70	95	47	21.23	20.58	23.93	27.84	< 30.00
		1	1	21.45	20.56	24.04	27.95	< 30.00
		1	187	21.18	20.62	23.92	27.83	< 30.00
		189	0	19.19	18.51	21.87	25.78	< 30.00
		1	0	19.67	18.70	22.22	26.13	< 30.00
		1	188	19.06	18.60	21.85	25.76	< 30.00
3740.01	80	109	54	21.32	20.50	23.94	27.85	< 30.00
		1	1	21.25	20.20	23.77	27.68	< 30.00
		1	215	21.33	20.35	23.88	27.79	< 30.00
		217	0	19.37	18.53	21.98	25.89	< 30.00
		1	0	19.23	18.22	21.76	25.67	< 30.00
		1	216	19.36	18.59	22.00	25.91	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM QPSK								
3840.00	80	109	54	21.30	20.56	23.96	27.87	< 30.00
		1	1	21.14	20.44	23.81	27.72	< 30.00
		1	215	21.24	20.54	23.91	27.82	< 30.00
		217	0	19.33	18.46	21.93	25.84	< 30.00
		1	0	19.11	18.57	21.86	25.77	< 30.00
		1	216	19.14	18.57	21.87	25.78	< 30.00
3939.99	80	109	54	21.19	20.53	23.88	27.79	< 30.00
		1	1	21.47	20.42	23.99	27.90	< 30.00
		1	215	21.13	20.58	23.87	27.78	< 30.00
		217	0	19.22	18.52	21.89	25.80	< 30.00
		1	0	19.67	18.44	22.11	26.02	< 30.00
		1	216	19.12	18.64	21.90	25.81	< 30.00
3745.02	90	123	61	21.35	20.41	23.92	27.83	< 30.00
		1	1	21.33	20.13	23.78	27.69	< 30.00
		1	243	21.41	20.48	23.98	27.89	< 30.00
		245	0	19.36	18.40	21.92	25.83	< 30.00
		1	0	19.27	18.20	21.78	25.69	< 30.00
		1	244	19.64	18.57	22.15	26.06	< 30.00
3840.00	90	123	61	21.37	20.49	23.96	27.87	< 30.00
		1	1	21.31	20.46	23.92	27.83	< 30.00
		1	243	21.31	20.37	23.88	27.79	< 30.00
		245	0	19.33	18.50	21.95	25.86	< 30.00
		1	0	19.11	18.51	21.83	25.74	< 30.00
		1	244	19.07	18.55	21.83	25.74	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM QPSK								
3934.98	90	123	61	21.21	20.43	23.85	27.76	< 30.00
		1	1	21.56	20.40	24.03	27.94	< 30.00
		1	243	21.59	20.49	24.09	28.00	< 30.00
		245	0	19.49	18.42	22.00	25.91	< 30.00
		1	0	19.42	18.55	22.02	25.93	< 30.00
		1	244	19.19	18.58	21.91	25.82	< 30.00
3750.00	100	137	68	21.40	20.5	23.98	27.89	< 30.00
		1	1	21.17	20.33	23.78	27.69	< 30.00
		1	271	21.54	20.46	24.04	27.95	< 30.00
		273	0	19.43	18.41	21.96	25.87	< 30.00
		1	0	19.45	18.25	21.90	25.81	< 30.00
		1	272	19.53	18.48	22.05	25.96	< 30.00
3840.00	100	137	68	21.35	20.32	23.88	27.79	< 30.00
		1	1	21.02	20.33	23.70	27.61	< 30.00
		1	271	21.19	20.45	23.85	27.76	< 30.00
		273	0	19.15	18.43	21.82	25.73	< 30.00
		1	0	19.11	18.46	21.81	25.72	< 30.00
		1	272	19.16	18.45	21.83	25.74	< 30.00
3930.00	100	137	68	21.25	20.49	23.90	27.81	< 30.00
		1	1	21.54	20.48	24.05	27.96	< 30.00
		1	271	20.94	20.66	23.81	27.72	< 30.00
		273	0	19.24	18.46	21.88	25.79	< 30.00
		1	0	19.53	18.60	22.10	26.01	< 30.00
		1	272	19.29	18.63	21.98	25.89	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3705.00	10	12	6	21.07	19.98	23.57	27.48	< 30.00
		1	1	20.96	19.88	23.46	27.37	< 30.00
		1	22	21.19	20.13	23.70	27.61	< 30.00
		24	0	19.64	18.54	22.14	26.05	< 30.00
		1	0	19.49	18.57	22.06	25.97	< 30.00
		1	23	19.44	18.57	22.04	25.95	< 30.00
3840.00	10	12	6	21.03	20.08	23.59	27.50	< 30.00
		1	1	21.03	20.32	23.70	27.61	< 30.00
		1	22	21.20	20.11	23.70	27.61	< 30.00
		24	0	19.60	18.71	22.19	26.10	< 30.00
		1	0	19.34	18.35	21.88	25.79	< 30.00
		1	23	19.29	18.62	21.98	25.89	< 30.00
3975.00	10	12	6	20.91	20.45	23.70	27.61	< 30.00
		1	1	20.86	20.40	23.65	27.56	< 30.00
		1	22	20.75	20.49	23.63	27.54	< 30.00
		24	0	19.34	18.92	22.15	26.06	< 30.00
		1	0	19.21	18.65	21.95	25.86	< 30.00
		1	23	19.10	19.06	22.09	26.00	< 30.00
3707.52	15	19	9	21.16	20.22	23.73	27.64	< 30.00
		1	1	21.07	20.29	23.71	27.62	< 30.00
		1	36	21.14	19.97	23.60	27.51	< 30.00
		38	0	19.62	18.61	22.15	26.06	< 30.00
		1	0	19.42	18.77	22.12	26.03	< 30.00
		1	37	19.50	18.39	21.99	25.90	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3840.00	15	19	9	21.08	20.33	23.73	27.64	< 30.00
		1	1	21.31	20.67	24.01	27.92	< 30.00
		1	36	21.1	19.99	23.59	27.50	< 30.00
		38	0	19.64	18.94	22.31	26.22	< 30.00
		1	0	19.76	18.98	22.40	26.31	< 30.00
		1	37	19.78	18.75	22.31	26.22	< 30.00
3972.48	15	19	9	21.13	20.44	23.81	27.72	< 30.00
		1	1	21.16	20.53	23.87	27.78	< 30.00
		1	36	21.12	20.6	23.88	27.79	< 30.00
		38	0	19.62	18.98	22.32	26.23	< 30.00
		1	0	19.72	18.83	22.31	26.22	< 30.00
		1	37	19.46	18.73	22.12	26.03	< 30.00
3710.01	20	25	12	21.15	20.08	23.66	27.57	< 30.00
		1	1	21.2	19.97	23.64	27.55	< 30.00
		1	49	21.09	19.83	23.52	27.43	< 30.00
		51	0	19.56	18.57	22.10	26.01	< 30.00
		1	0	19.58	18.66	22.15	26.06	< 30.00
		1	50	19.54	18.42	22.03	25.94	< 30.00
3840.00	20	25	12	21.09	20.39	23.76	27.67	< 30.00
		1	1	21.19	20.28	23.77	27.68	< 30.00
		1	49	21.04	19.89	23.51	27.42	< 30.00
		51	0	19.63	18.89	22.29	26.20	< 30.00
		1	0	19.72	18.82	22.30	26.21	< 30.00
		1	50	19.49	18.65	22.10	26.01	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3969.99	20	25	12	21.12	20.29	23.74	27.65	< 30.00
		1	1	21.4	20.26	23.88	27.79	< 30.00
		1	49	21.02	20.6	23.83	27.74	< 30.00
		51	0	19.59	18.8	22.22	26.13	< 30.00
		1	0	19.48	19.22	22.36	26.27	< 30.00
		1	50	19.37	18.62	22.02	25.93	< 30.00
3712.5	25	33	16	21.01	20.04	23.56	27.47	< 30.00
		1	1	21	19.97	23.53	27.44	< 30.00
		1	63	21.01	20.02	23.55	27.46	< 30.00
		65	0	19.59	18.59	22.13	26.04	< 30.00
		1	0	19.45	18.57	22.04	25.95	< 30.00
		1	64	19.64	18.52	22.13	26.04	< 30.00
3840.00	25	32	16	21.07	20.34	23.73	27.64	< 30.00
		1	1	20.99	20.56	23.79	27.70	< 30.00
		1	63	21.32	20.38	23.89	27.80	< 30.00
		65	0	19.63	18.88	22.28	26.19	< 30.00
		1	0	19.8	19.15	22.50	26.41	< 30.00
		1	64	19.76	18.82	22.33	26.24	< 30.00
3967.50	25	32	16	21.14	20.33	23.76	27.67	< 30.00
		1	1	21.15	20.15	23.69	27.60	< 30.00
		1	63	21.06	20.48	23.79	27.70	< 30.00
		65	0	19.61	18.92	22.29	26.20	< 30.00
		1	0	19.83	18.61	22.27	26.18	< 30.00
		1	64	19.5	18.96	22.25	26.16	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3715.02	30	36	79	21.16	20.20	23.72	27.63	< 30.00
		1	1	21.07	20.26	23.69	27.60	< 30.00
		1	76	21.31	19.97	23.70	27.61	< 30.00
		78	0	19.69	18.67	22.22	26.13	< 30.00
		1	0	19.34	18.73	22.06	25.97	< 30.00
		1	77	19.69	18.71	22.24	26.15	< 30.00
3840.00	30	36	79	21.02	20.28	23.68	27.59	< 30.00
		1	1	21.09	20.42	23.78	27.69	< 30.00
		1	76	21.11	20.07	23.63	27.54	< 30.00
		78	0	19.60	18.86	22.26	26.17	< 30.00
		1	0	19.58	18.85	22.24	26.15	< 30.00
		1	77	19.67	18.86	22.29	26.20	< 30.00
3964.98	30	36	79	21.07	20.42	23.77	27.68	< 30.00
		1	1	20.90	20.36	23.65	27.56	< 30.00
		1	76	21.17	20.51	23.86	27.77	< 30.00
		78	0	19.63	18.89	22.29	26.20	< 30.00
		1	0	19.71	19.02	22.39	26.30	< 30.00
		1	77	19.78	19.01	22.42	26.33	< 30.00
3720.00	40	53	26	21.16	20.20	23.72	27.63	< 30.00
		1	1	21.22	20.20	23.75	27.66	< 30.00
		1	104	21.19	20.24	23.75	27.66	< 30.00
		106	0	19.53	18.60	22.10	26.01	< 30.00
		1	0	19.58	18.68	22.16	26.07	< 30.00
		1	105	19.62	18.53	22.12	26.03	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3840.00	40	53	26	21.16	20.29	23.76	27.67	< 30.00
		1	1	21.22	20.26	23.78	27.69	< 30.00
		1	104	20.80	20.09	23.47	27.38	< 30.00
		106	0	19.65	18.80	22.26	26.17	< 30.00
		1	0	19.49	18.65	22.10	26.01	< 30.00
		1	105	19.52	18.47	22.04	25.95	< 30.00
3960.00	40	53	26	21.06	20.38	23.74	27.65	< 30.00
		1	1	21.42	20.54	24.01	27.92	< 30.00
		1	104	20.97	20.76	23.88	27.79	< 30.00
		106	0	19.54	18.89	22.24	26.15	< 30.00
		1	0	19.96	18.84	22.45	26.36	< 30.00
		1	105	19.84	19.19	22.54	26.45	< 30.00
3725.01	50	67	33	20.98	20.12	23.58	27.49	< 30.00
		1	1	20.94	19.87	23.45	27.36	< 30.00
		1	131	20.52	19.98	23.27	27.18	< 30.00
		133	0	19.57	18.67	22.15	26.06	< 30.00
		1	0	19.06	18.88	21.98	25.89	< 30.00
		1	132	19.51	18.60	22.09	26.00	< 30.00
3840.00	50	67	33	20.99	20.25	23.65	27.56	< 30.00
		1	1	20.85	20.42	23.65	27.56	< 30.00
		1	131	21.04	20.06	23.59	27.50	< 30.00
		133	0	19.59	18.71	22.18	26.09	< 30.00
		1	0	19.13	18.61	21.89	25.80	< 30.00
		1	132	19.45	18.69	22.10	26.01	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3954.99	50	67	33	20.93	20.25	23.61	27.52	< 30.00
		1	1	21.23	20.36	23.83	27.74	< 30.00
		1	131	20.96	20.39	23.69	27.60	< 30.00
		133	0	19.47	18.72	22.12	26.03	< 30.00
		1	0	19.65	18.71	22.22	26.13	< 30.00
		1	132	19.14	18.84	22.00	25.91	< 30.00
3730.02	60	81	40	20.95	20.04	23.53	27.44	< 30.00
		1	1	20.97	19.86	23.46	27.37	< 30.00
		1	160	20.97	20.22	23.62	27.53	< 30.00
		162	0	19.43	18.64	22.06	25.97	< 30.00
		1	0	19.22	18.69	21.97	25.88	< 30.00
		1	161	19.43	18.57	22.03	25.94	< 30.00
3840.00	60	81	40	21.01	20.20	23.63	27.54	< 30.00
		1	1	20.80	20.32	23.58	27.49	< 30.00
		1	160	20.59	20.03	23.33	27.24	< 30.00
		162	0	19.50	18.71	22.13	26.04	< 30.00
		1	0	19.28	18.83	22.07	25.98	< 30.00
		1	161	19.16	18.72	21.96	25.87	< 30.00
3949.98	60	81	40	20.89	20.12	23.53	27.44	< 30.00
		1	1	20.87	20.13	23.53	27.44	< 30.00
		1	160	20.82	20.39	23.62	27.53	< 30.00
		162	0	19.41	18.65	22.06	25.97	< 30.00
		1	0	19.55	18.66	22.14	26.05	< 30.00
		1	161	19.06	18.72	21.90	25.81	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3735.00	70	95	47	20.91	20.07	23.52	27.43	< 30.00
		1	1	20.75	19.73	23.28	27.19	< 30.00
		1	187	20.72	19.89	23.34	27.25	< 30.00
		189	0	19.38	18.51	21.98	25.89	< 30.00
		1	0	19.01	18.49	21.77	25.68	< 30.00
		1	188	18.73	18.37	21.56	25.47	< 30.00
3840.00	70	95	47	20.86	20.06	23.49	27.40	< 30.00
		1	1	20.77	20.06	23.44	27.35	< 30.00
		1	187	20.62	20.11	23.38	27.29	< 30.00
		189	0	19.33	18.48	21.94	25.85	< 30.00
		1	0	19.07	18.41	21.76	25.67	< 30.00
		1	188	19.06	18.38	21.74	25.65	< 30.00
3945.00	70	95	47	20.71	20.14	23.44	27.35	< 30.00
		1	1	21.21	19.97	23.64	27.55	< 30.00
		1	187	20.46	20.41	23.45	27.36	< 30.00
		189	0	19.27	18.60	21.96	25.87	< 30.00
		1	0	19.70	18.32	22.07	25.98	< 30.00
		1	188	18.83	18.94	21.90	25.81	< 30.00
3740.01	80	109	54	20.92	19.98	23.49	27.40	< 30.00
		1	1	20.56	20.04	23.32	27.23	< 30.00
		1	215	20.75	20.02	23.41	27.32	< 30.00
		217	0	19.34	18.51	21.96	25.87	< 30.00
		1	0	19.10	18.59	21.86	25.77	< 30.00
		1	216	19.30	18.67	22.01	25.92	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3840.00	80	109	54	20.84	20.08	23.49	27.40	< 30.00
		1	1	20.77	20.10	23.46	27.37	< 30.00
		1	215	20.47	19.70	23.11	27.02	< 30.00
		217	0	19.22	18.54	21.90	25.81	< 30.00
		1	0	19.16	18.65	21.92	25.83	< 30.00
		1	216	19.18	18.39	21.81	25.72	< 30.00
3939.99	80	109	54	20.67	20.03	23.37	27.28	< 30.00
		1	1	20.86	20.38	23.64	27.55	< 30.00
		1	215	20.49	20.21	23.36	27.27	< 30.00
		217	0	19.26	18.52	21.92	25.83	< 30.00
		1	0	19.30	18.51	21.93	25.84	< 30.00
		1	216	19.11	18.66	21.90	25.81	< 30.00
3745.02	90	123	61	20.92	19.99	23.49	27.40	< 30.00
		1	1	21.12	19.77	23.51	27.42	< 30.00
		1	243	20.93	20.16	23.57	27.48	< 30.00
		245	0	19.41	18.39	21.94	25.85	< 30.00
		1	0	19.11	18.25	21.71	25.62	< 30.00
		1	244	19.55	18.43	22.04	25.95	< 30.00
3840.00	90	123	61	20.71	20.00	23.38	27.29	< 30.00
		1	1	20.61	19.99	23.32	27.23	< 30.00
		1	243	20.73	19.77	23.29	27.20	< 30.00
		245	0	19.22	18.49	21.88	25.79	< 30.00
		1	0	19.18	18.05	21.66	25.57	< 30.00
		1	244	18.77	18.43	21.61	25.52	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 16QAM								
3934.98	90	123	61	20.71	19.96	23.36	27.27	< 30.00
		1	1	21.06	19.57	23.39	27.30	< 30.00
		1	243	20.72	19.97	23.37	27.28	< 30.00
		245	0	19.26	18.48	21.90	25.81	< 30.00
		1	0	19.46	18.51	22.02	25.93	< 30.00
		1	244	18.84	18.45	21.66	25.57	< 30.00
3750.00	100	137	68	20.91	20.05	23.51	27.42	< 30.00
		1	1	20.89	19.78	23.38	27.29	< 30.00
		1	271	20.9	20.41	23.67	27.58	< 30.00
		273	0	19.41	18.40	21.94	25.85	< 30.00
		1	0	19.36	18.47	21.95	25.86	< 30.00
		1	272	19.33	18.43	21.91	25.82	< 30.00
3840.00	100	137	68	20.75	19.96	23.38	27.29	< 30.00
		1	1	20.37	19.91	23.16	27.07	< 30.00
		1	271	20.41	20.08	23.26	27.17	< 30.00
		273	0	19.20	18.51	21.88	25.79	< 30.00
		1	0	19.11	18.28	21.73	25.64	< 30.00
		1	272	18.83	18.56	21.71	25.62	< 30.00
3930.00	100	137	68	20.80	20.01	23.43	27.34	< 30.00
		1	1	20.94	19.53	23.30	27.21	< 30.00
		1	271	20.38	20.37	23.39	27.30	< 30.00
		273	0	19.25	18.48	21.89	25.80	< 30.00
		1	0	19.55	18.31	21.98	25.89	< 30.00
		1	272	18.86	18.52	21.70	25.61	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3705.00	10	12	6	19.58	18.52	22.09	26.00	< 30.00
		1	1	19.83	18.89	22.40	26.31	< 30.00
		1	22	19.69	18.13	21.99	25.90	< 30.00
		24	0	19.08	18.04	21.60	25.51	< 30.00
		1	0	19.3	18.68	22.01	25.92	< 30.00
		1	23	19.48	18.78	22.15	26.06	< 30.00
3840.00	10	12	6	19.48	18.69	22.11	26.02	< 30.00
		1	1	19.45	18.44	21.98	25.89	< 30.00
		1	22	19.55	18.81	22.21	26.12	< 30.00
		24	0	19.10	18.17	21.67	25.58	< 30.00
		1	0	19.66	18.57	22.16	26.07	< 30.00
		1	23	19.42	18.65	22.06	25.97	< 30.00
3975.00	10	12	6	19.48	19.02	22.27	26.18	< 30.00
		1	1	19.56	18.8	22.21	26.12	< 30.00
		1	22	19.67	18.82	22.28	26.19	< 30.00
		24	0	18.94	18.42	21.70	25.61	< 30.00
		1	0	19.37	18.82	22.11	26.02	< 30.00
		1	23	19.54	19.11	22.34	26.25	< 30.00
3707.52	15	19	9	19.64	18.67	22.19	26.10	< 30.00
		1	1	19.81	18.61	22.26	26.17	< 30.00
		1	36	19.69	18.76	22.26	26.17	< 30.00
		38	0	19.11	18.09	21.64	25.55	< 30.00
		1	0	19.74	18.62	22.23	26.14	< 30.00
		1	37	19.65	18.45	22.10	26.01	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3840.00	15	19	9	19.65	18.92	22.31	26.22	< 30.00
		1	1	19.65	18.88	22.29	26.20	< 30.00
		1	36	19.69	18.39	22.10	26.01	< 30.00
		38	0	19.12	18.41	21.79	25.70	< 30.00
		1	0	19.93	18.90	22.46	26.37	< 30.00
		1	37	19.66	18.94	22.33	26.24	< 30.00
3972.48	15	19	9	19.60	18.91	22.28	26.19	< 30.00
		1	1	19.85	18.73	22.34	26.25	< 30.00
		1	36	19.80	19.18	22.51	26.42	< 30.00
		38	0	19.07	18.41	21.76	25.67	< 30.00
		1	0	19.65	18.38	22.07	25.98	< 30.00
		1	37	19.64	18.95	22.32	26.23	< 30.00
3710.01	20	25	12	19.65	18.56	22.15	26.06	< 30.00
		1	1	19.71	18.64	22.22	26.13	< 30.00
		1	49	19.57	18.58	22.11	26.02	< 30.00
		51	0	19.08	18.05	21.61	25.52	< 30.00
		1	0	19.63	18.54	22.13	26.04	< 30.00
		1	50	19.47	18.44	22.00	25.91	< 30.00
3840.00	20	25	12	19.68	18.87	22.30	26.21	< 30.00
		1	1	20.02	18.76	22.45	26.36	< 30.00
		1	49	19.40	18.88	22.16	26.07	< 30.00
		51	0	19.13	18.37	21.78	25.69	< 30.00
		1	0	19.52	18.62	22.10	26.01	< 30.00
		1	50	20.01	18.61	22.38	26.29	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3969.99	20	25	12	19.65	18.99	22.34	26.25	< 30.00
		1	1	19.78	18.94	22.39	26.30	< 30.00
		1	49	19.48	19.27	22.39	26.30	< 30.00
		51	0	19.20	18.32	21.79	25.70	< 30.00
		1	0	19.86	18.94	22.43	26.34	< 30.00
		1	50	19.43	18.93	22.20	26.11	< 30.00
3712.5	25	33	16	19.58	18.53	22.10	26.01	< 30.00
		1	1	19.64	18.40	22.07	25.98	< 30.00
		1	63	19.68	18.67	22.21	26.12	< 30.00
		65	0	19.10	18.02	21.60	25.51	< 30.00
		1	0	19.45	18.72	22.11	26.02	< 30.00
		1	64	19.64	18.66	22.19	26.10	< 30.00
3840.00	25	32	16	19.64	18.94	22.31	26.22	< 30.00
		1	1	19.45	18.99	22.24	26.15	< 30.00
		1	63	19.63	18.78	22.24	26.15	< 30.00
		65	0	19.13	18.36	21.77	25.68	< 30.00
		1	0	19.75	19.24	22.51	26.42	< 30.00
		1	64	19.37	18.76	22.09	26.00	< 30.00
3967.50	25	32	16	19.66	18.87	22.29	26.20	< 30.00
		1	1	19.79	18.63	22.26	26.17	< 30.00
		1	63	19.92	19.22	22.59	26.50	< 30.00
		65	0	19.18	18.40	21.82	25.73	< 30.00
		1	0	19.73	19.03	22.40	26.31	< 30.00
		1	64	19.55	18.84	22.22	26.13	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3715.02	30	36	79	19.72	18.59	22.20	26.11	< 30.00
		1	1	19.64	18.87	22.28	26.19	< 30.00
		1	76	19.84	18.76	22.34	26.25	< 30.00
		78	0	19.22	18.11	21.71	25.62	< 30.00
		1	0	19.79	18.73	22.30	26.21	< 30.00
		1	77	19.98	18.50	22.31	26.22	< 30.00
3840.00	30	36	79	19.54	18.76	22.18	26.09	< 30.00
		1	1	19.97	19.04	22.54	26.45	< 30.00
		1	76	19.65	18.84	22.27	26.18	< 30.00
		78	0	19.13	18.33	21.76	25.67	< 30.00
		1	0	19.58	18.71	22.18	26.09	< 30.00
		1	77	19.72	18.92	22.35	26.26	< 30.00
3964.98	30	36	79	19.63	18.81	22.25	26.16	< 30.00
		1	1	19.71	18.80	22.29	26.20	< 30.00
		1	76	19.6	19.12	22.38	26.29	< 30.00
		78	0	19.21	18.38	21.83	25.74	< 30.00
		1	0	19.58	19.06	22.34	26.25	< 30.00
		1	77	19.32	18.97	22.16	26.07	< 30.00
3720.00	40	53	26	19.61	18.60	22.14	26.05	< 30.00
		1	1	19.86	18.81	22.38	26.29	< 30.00
		1	104	19.89	18.83	22.40	26.31	< 30.00
		106	0	19.03	18.10	21.60	25.51	< 30.00
		1	0	19.94	18.70	22.37	26.28	< 30.00
		1	105	19.81	18.92	22.40	26.31	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3840.00	40	53	26	19.59	18.75	22.20	26.11	< 30.00
		1	1	19.76	19.00	22.41	26.32	< 30.00
		1	104	19.51	18.90	22.23	26.14	< 30.00
		106	0	19.16	18.32	21.77	25.68	< 30.00
		1	0	19.78	19.00	22.42	26.33	< 30.00
		1	105	19.45	18.93	22.21	26.12	< 30.00
3960.00	40	53	26	19.58	18.91	22.27	26.18	< 30.00
		1	1	19.74	18.93	22.36	26.27	< 30.00
		1	104	19.72	19.50	22.62	26.53	< 30.00
		106	0	19.11	18.37	21.77	25.68	< 30.00
		1	0	20.24	18.75	22.57	26.48	< 30.00
		1	105	19.74	18.85	22.33	26.24	< 30.00
3725.01	50	67	33	19.46	18.59	22.06	25.97	< 30.00
		1	1	19.37	18.39	21.92	25.83	< 30.00
		1	131	19.35	18.46	21.94	25.85	< 30.00
		133	0	18.86	18.10	21.51	25.42	< 30.00
		1	0	19.63	18.90	22.29	26.20	< 30.00
		1	132	19.37	18.52	21.98	25.89	< 30.00
3840.00	50	67	33	19.56	18.72	22.17	26.08	< 30.00
		1	1	19.94	18.64	22.35	26.26	< 30.00
		1	131	19.24	18.98	22.12	26.03	< 30.00
		133	0	19.01	18.22	21.64	25.55	< 30.00
		1	0	19.53	18.96	22.26	26.17	< 30.00
		1	132	19.17	18.55	21.88	25.79	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3954.99	50	67	33	19.46	18.71	22.11	26.02	< 30.00
		1	1	19.55	18.64	22.13	26.04	< 30.00
		1	131	19.53	18.93	22.25	26.16	< 30.00
		133	0	18.89	18.19	21.56	25.47	< 30.00
		1	0	19.67	18.42	22.10	26.01	< 30.00
		1	132	19.35	19.04	22.21	26.12	< 30.00
3730.02	60	81	40	19.45	18.58	22.05	25.96	< 30.00
		1	1	19.37	18.77	22.09	26.00	< 30.00
		1	160	19.57	18.77	22.20	26.11	< 30.00
		162	0	18.99	18.07	21.56	25.47	< 30.00
		1	0	19.11	18.65	21.90	25.81	< 30.00
		1	161	19.49	18.77	22.16	26.07	< 30.00
3840.00	60	81	40	19.48	18.75	22.14	26.05	< 30.00
		1	1	19.3	18.61	21.98	25.89	< 30.00
		1	160	19.23	18.85	22.05	25.96	< 30.00
		162	0	18.97	18.24	21.63	25.54	< 30.00
		1	0	19.48	18.82	22.17	26.08	< 30.00
		1	161	19.45	18.63	22.07	25.98	< 30.00
3949.98	60	81	40	19.39	18.68	22.06	25.97	< 30.00
		1	1	19.61	18.70	22.19	26.10	< 30.00
		1	160	18.99	18.67	21.84	25.75	< 30.00
		162	0	18.93	18.15	21.57	25.48	< 30.00
		1	0	19.59	18.80	22.22	26.13	< 30.00
		1	161	19.66	18.80	22.26	26.17	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3735.00	70	95	47	19.36	18.49	21.96	25.87	< 30.00
		1	1	19.59	18.15	21.94	25.85	< 30.00
		1	187	19.21	18.68	21.96	25.87	< 30.00
		189	0	18.90	17.99	21.48	25.39	< 30.00
		1	0	18.99	18.27	21.66	25.57	< 30.00
		1	188	19.19	18.71	21.97	25.88	< 30.00
3840.00	70	95	47	19.37	18.61	22.02	25.93	< 30.00
		1	1	19.35	18.54	21.97	25.88	< 30.00
		1	187	18.76	18.32	21.56	25.47	< 30.00
		189	0	18.73	18.08	21.43	25.34	< 30.00
		1	0	19.29	18.80	22.06	25.97	< 30.00
		1	188	18.81	18.60	21.72	25.63	< 30.00
3945.00	70	95	47	19.29	18.59	21.96	25.87	< 30.00
		1	1	19.50	18.52	22.05	25.96	< 30.00
		1	187	19.02	18.72	21.88	25.79	< 30.00
		189	0	18.80	18.11	21.48	25.39	< 30.00
		1	0	19.55	18.68	22.15	26.06	< 30.00
		1	188	18.76	18.58	21.68	25.59	< 30.00
3740.01	80	109	54	19.32	18.55	21.96	25.87	< 30.00
		1	1	19.41	18.18	21.85	25.76	< 30.00
		1	215	19.32	18.65	22.01	25.92	< 30.00
		217	0	18.82	17.90	21.39	25.30	< 30.00
		1	0	19.06	18.19	21.66	25.57	< 30.00
		1	216	19.19	18.58	21.91	25.82	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3840.00	80	109	54	19.30	18.48	21.92	25.83	< 30.00
		1	1	19.12	18.63	21.89	25.80	< 30.00
		1	215	19.30	18.58	21.97	25.88	< 30.00
		217	0	18.74	18.04	21.41	25.32	< 30.00
		1	0	18.98	18.32	21.67	25.58	< 30.00
		1	216	19.33	18.18	21.80	25.71	< 30.00
3939.99	80	109	54	19.25	18.57	21.93	25.84	< 30.00
		1	1	19.53	18.50	22.06	25.97	< 30.00
		1	215	19.14	18.64	21.91	25.82	< 30.00
		217	0	18.68	18.01	21.37	25.28	< 30.00
		1	0	19.56	18.44	22.05	25.96	< 30.00
		1	216	18.72	18.61	21.68	25.59	< 30.00
3745.02	90	123	61	19.39	18.47	21.96	25.87	< 30.00
		1	1	19.23	18.06	21.69	25.60	< 30.00
		1	243	19.37	18.42	21.93	25.84	< 30.00
		245	0	18.89	17.90	21.43	25.34	< 30.00
		1	0	19.06	18.39	21.75	25.66	< 30.00
		1	244	19.61	18.63	22.16	26.07	< 30.00
3840.00	90	123	61	19.31	18.47	21.92	25.83	< 30.00
		1	1	19.51	18.73	22.15	26.06	< 30.00
		1	243	19.03	18.48	21.77	25.68	< 30.00
		245	0	18.73	17.97	21.38	25.29	< 30.00
		1	0	19.14	18.86	22.01	25.92	< 30.00
		1	244	19.14	18.45	21.82	25.73	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 64QAM								
3934.98	90	123	61	19.23	18.50	21.89	25.80	< 30.00
		1	1	19.82	18.39	22.17	26.08	< 30.00
		1	243	19.26	18.66	21.98	25.89	< 30.00
		245	0	18.71	17.97	21.37	25.28	< 30.00
		1	0	19.45	18.60	22.06	25.97	< 30.00
		1	244	19.18	18.45	21.84	25.75	< 30.00
3750.00	100	137	68	19.37	18.47	21.95	25.86	< 30.00
		1	1	19.36	18.10	21.79	25.70	< 30.00
		1	271	19.44	18.36	21.94	25.85	< 30.00
		273	0	18.92	17.91	21.45	25.36	< 30.00
		1	0	19.45	17.99	21.79	25.70	< 30.00
		1	272	19.49	18.30	21.95	25.86	< 30.00
3840.00	100	137	68	19.32	18.50	21.94	25.85	< 30.00
		1	1	19.33	18.56	21.97	25.88	< 30.00
		1	271	19.27	18.55	21.94	25.85	< 30.00
		273	0	18.72	18.01	21.39	25.30	< 30.00
		1	0	19.19	18.34	21.80	25.71	< 30.00
		1	272	19.26	18.52	21.92	25.83	< 30.00
3930.00	100	137	68	19.28	18.49	21.91	25.82	< 30.00
		1	1	19.50	18.45	22.02	25.93	< 30.00
		1	271	19.19	18.46	21.85	25.76	< 30.00
		273	0	18.76	18.07	21.44	25.35	< 30.00
		1	0	19.35	18.56	21.98	25.89	< 30.00
		1	272	19.04	18.65	21.86	25.77	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3705.00	10	12	6	16.58	15.56	19.11	23.02	< 30.00
		1	1	16.59	15.40	19.05	22.96	< 30.00
		1	22	16.56	15.22	18.95	22.86	< 30.00
		24	0	16.55	15.48	19.06	22.97	< 30.00
		1	0	16.42	15.67	19.07	22.98	< 30.00
		1	23	16.47	15.87	19.19	23.10	< 30.00
3840.00	10	12	6	16.51	15.69	19.13	23.04	< 30.00
		1	1	16.48	15.56	19.05	22.96	< 30.00
		1	22	16.41	15.91	19.18	23.09	< 30.00
		24	0	16.55	15.60	19.11	23.02	< 30.00
		1	0	16.34	15.74	19.06	22.97	< 30.00
		1	23	16.4	15.73	19.09	23.00	< 30.00
3975.00	10	12	6	16.46	15.84	19.17	23.08	< 30.00
		1	1	16.13	15.76	18.96	22.87	< 30.00
		1	22	16.24	15.66	18.97	22.88	< 30.00
		24	0	16.48	15.94	19.23	23.14	< 30.00
		1	0	16.7	16.25	19.49	23.40	< 30.00
		1	23	16.52	15.61	19.10	23.01	< 30.00
3707.52	15	19	9	16.62	15.59	19.15	23.06	< 30.00
		1	1	16.51	15.58	19.08	22.99	< 30.00
		1	36	16.41	15.39	18.94	22.85	< 30.00
		38	0	16.67	15.62	19.19	23.10	< 30.00
		1	0	16.83	15.65	19.29	23.20	< 30.00
		1	37	16.54	15.68	19.14	23.05	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3840.00	15	19	9	16.71	15.89	19.33	23.24	< 30.00
		1	1	16.75	15.81	19.32	23.23	< 30.00
		1	36	16.70	15.64	19.21	23.12	< 30.00
		38	0	16.59	15.94	19.29	23.20	< 30.00
		1	0	16.43	15.91	19.19	23.10	< 30.00
		1	37	16.43	15.73	19.10	23.01	< 30.00
3972.48	15	19	9	16.70	15.88	19.32	23.23	< 30.00
		1	1	16.64	15.88	19.29	23.20	< 30.00
		1	36	16.88	15.86	19.41	23.32	< 30.00
		38	0	16.64	15.92	19.31	23.22	< 30.00
		1	0	16.66	16.23	19.46	23.37	< 30.00
		1	37	16.68	16.27	19.49	23.40	< 30.00
3710.01	20	25	12	16.65	15.57	19.15	23.06	< 30.00
		1	1	16.63	15.62	19.16	23.07	< 30.00
		1	49	16.38	15.44	18.95	22.86	< 30.00
		51	0	16.59	15.52	19.10	23.01	< 30.00
		1	0	16.59	15.90	19.27	23.18	< 30.00
		1	50	16.55	15.47	19.05	22.96	< 30.00
3840.00	20	25	12	16.78	15.84	19.35	23.26	< 30.00
		1	1	16.67	15.59	19.17	23.08	< 30.00
		1	49	16.44	15.69	19.09	23.00	< 30.00
		51	0	16.59	15.87	19.26	23.17	< 30.00
		1	0	16.71	15.75	19.27	23.18	< 30.00
		1	50	16.66	15.76	19.24	23.15	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3969.99	20	25	12	16.68	15.90	19.32	23.23	< 30.00
		1	1	16.94	15.70	19.37	23.28	< 30.00
		1	49	16.57	16.35	19.47	23.38	< 30.00
		51	0	16.62	15.85	19.26	23.17	< 30.00
		1	0	16.89	15.81	19.39	23.30	< 30.00
		1	50	16.54	15.81	19.20	23.11	< 30.00
3712.5	25	33	16	16.60	15.51	19.10	23.01	< 30.00
		1	1	16.76	15.46	19.17	23.08	< 30.00
		1	63	16.55	15.60	19.11	23.02	< 30.00
		65	0	16.51	15.59	19.08	22.99	< 30.00
		1	0	16.40	15.35	18.92	22.83	< 30.00
		1	64	16.54	15.32	18.98	22.89	< 30.00
3840.00	25	32	16	16.71	15.83	19.30	23.21	< 30.00
		1	1	16.55	15.94	19.27	23.18	< 30.00
		1	63	16.53	15.93	19.25	23.16	< 30.00
		65	0	16.60	15.86	19.26	23.17	< 30.00
		1	0	16.89	15.84	19.41	23.32	< 30.00
		1	64	16.78	15.44	19.17	23.08	< 30.00
3967.50	25	32	16	16.65	15.96	19.33	23.24	< 30.00
		1	1	16.35	16.13	19.25	23.16	< 30.00
		1	63	16.55	15.72	19.17	23.08	< 30.00
		65	0	16.61	15.86	19.26	23.17	< 30.00
		1	0	16.70	16.17	19.45	23.36	< 30.00
		1	64	16.79	16.16	19.50	23.41	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3715.02	30	36	79	16.56	15.61	19.12	23.03	< 30.00
		1	1	16.67	15.72	19.23	23.14	< 30.00
		1	76	16.85	15.75	19.35	23.26	< 30.00
		78	0	16.66	15.73	19.23	23.14	< 30.00
		1	0	16.75	15.64	19.24	23.15	< 30.00
		1	77	16.68	15.73	19.24	23.15	< 30.00
3840.00	30	36	79	16.60	15.91	19.28	23.19	< 30.00
		1	1	16.69	15.82	19.29	23.20	< 30.00
		1	76	16.59	15.81	19.23	23.14	< 30.00
		78	0	16.58	15.99	19.31	23.22	< 30.00
		1	0	16.93	16.08	19.54	23.45	< 30.00
		1	77	16.65	16.00	19.35	23.26	< 30.00
3964.98	30	36	79	16.56	15.91	19.26	23.17	< 30.00
		1	1	16.72	16.16	19.46	23.37	< 30.00
		1	76	16.56	15.76	19.19	23.10	< 30.00
		78	0	16.62	15.87	19.27	23.18	< 30.00
		1	0	16.29	15.81	19.07	22.98	< 30.00
		1	77	16.60	15.65	19.16	23.07	< 30.00
3720.00	40	53	26	16.59	15.52	19.10	23.01	< 30.00
		1	1	16.80	15.83	19.35	23.26	< 30.00
		1	104	16.69	15.98	19.36	23.27	< 30.00
		106	0	16.60	15.57	19.13	23.04	< 30.00
		1	0	16.82	15.68	19.30	23.21	< 30.00
		1	105	16.85	15.76	19.35	23.26	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3840.00	40	53	26	16.66	15.71	19.22	23.13	< 30.00
		1	1	16.63	16.16	19.41	23.32	< 30.00
		1	104	16.55	15.81	19.21	23.12	< 30.00
		106	0	16.67	15.75	19.24	23.15	< 30.00
		1	0	16.80	15.77	19.33	23.24	< 30.00
		1	105	16.60	15.76	19.21	23.12	< 30.00
3960.00	40	53	26	16.56	15.85	19.23	23.14	< 30.00
		1	1	16.77	15.92	19.38	23.29	< 30.00
		1	104	16.51	16.08	19.31	23.22	< 30.00
		106	0	16.50	15.84	19.19	23.10	< 30.00
		1	0	17.23	15.85	19.60	23.51	< 30.00
		1	105	16.46	15.93	19.21	23.12	< 30.00
3725.01	50	67	33	16.48	15.51	19.03	22.94	< 30.00
		1	1	16.06	15.60	18.85	22.76	< 30.00
		1	131	16.48	15.63	19.09	23.00	< 30.00
		133	0	16.44	15.60	19.05	22.96	< 30.00
		1	0	16.22	15.82	19.03	22.94	< 30.00
		1	132	16.48	15.64	19.09	23.00	< 30.00
3840.00	50	67	33	16.49	15.68	19.11	23.02	< 30.00
		1	1	16.65	15.47	19.11	23.02	< 30.00
		1	131	16.22	15.42	18.85	22.76	< 30.00
		133	0	16.51	15.74	19.15	23.06	< 30.00
		1	0	16.76	15.85	19.34	23.25	< 30.00
		1	132	16.60	15.54	19.11	23.02	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3954.99	50	67	33	16.54	15.69	19.15	23.06	< 30.00
		1	1	16.47	15.63	19.08	22.99	< 30.00
		1	131	16.46	15.67	19.09	23.00	< 30.00
		133	0	16.53	15.71	19.15	23.06	< 30.00
		1	0	16.34	15.64	19.01	22.92	< 30.00
		1	132	16.18	15.56	18.89	22.80	< 30.00
3730.02	60	81	40	16.48	15.51	19.03	22.94	< 30.00
		1	1	16.50	15.25	18.93	22.84	< 30.00
		1	160	16.15	15.62	18.90	22.81	< 30.00
		162	0	16.40	15.57	19.02	22.93	< 30.00
		1	0	16.22	15.6	18.93	22.84	< 30.00
		1	161	16.05	15.67	18.87	22.78	< 30.00
3840.00	60	81	40	16.52	15.71	19.14	23.05	< 30.00
		1	1	16.44	15.64	19.07	22.98	< 30.00
		1	160	16.14	15.43	18.81	22.72	< 30.00
		162	0	16.51	15.72	19.14	23.05	< 30.00
		1	0	16.41	15.85	19.15	23.06	< 30.00
		1	161	16.44	15.40	18.96	22.87	< 30.00
3949.98	60	81	40	16.31	15.68	19.02	22.93	< 30.00
		1	1	16.41	15.23	18.87	22.78	< 30.00
		1	160	16.14	15.87	19.02	22.93	< 30.00
		162	0	16.30	15.69	19.02	22.93	< 30.00
		1	0	16.49	15.66	19.11	23.02	< 30.00
		1	161	16.49	15.76	19.15	23.06	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3735.00	70	95	47	16.39	15.46	18.96	22.87	< 30.00
		1	1	16.21	15.40	18.83	22.74	< 30.00
		1	187	16.28	15.51	18.92	22.83	< 30.00
		189	0	16.35	15.46	18.94	22.85	< 30.00
		1	0	16.34	15.48	18.94	22.85	< 30.00
		1	188	16.15	15.54	18.87	22.78	< 30.00
3840.00	70	95	47	16.32	15.58	18.98	22.89	< 30.00
		1	1	15.92	15.45	18.70	22.61	< 30.00
		1	187	15.99	15.74	18.88	22.79	< 30.00
		189	0	16.29	15.47	18.91	22.82	< 30.00
		1	0	16.25	15.7	18.99	22.90	< 30.00
		1	188	16.12	15.22	18.70	22.61	< 30.00
3945.00	70	95	47	16.32	15.63	19.00	22.91	< 30.00
		1	1	16.38	15.41	18.93	22.84	< 30.00
		1	187	15.67	15.42	18.56	22.47	< 30.00
		189	0	16.30	15.62	18.98	22.89	< 30.00
		1	0	16.59	15.28	18.99	22.90	< 30.00
		1	188	16.41	15.46	18.97	22.88	< 30.00
3740.01	80	109	54	16.37	15.43	18.94	22.85	< 30.00
		1	1	16.13	15.48	18.83	22.74	< 30.00
		1	215	15.97	15.25	18.64	22.55	< 30.00
		217	0	16.36	15.49	18.96	22.87	< 30.00
		1	0	15.98	15.29	18.66	22.57	< 30.00
		1	216	16.31	15.30	18.84	22.75	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3840.00	80	109	54	16.30	15.53	18.94	22.85	< 30.00
		1	1	16.17	15.37	18.80	22.71	< 30.00
		1	215	16.01	15.64	18.84	22.75	< 30.00
		217	0	16.33	15.48	18.94	22.85	< 30.00
		1	0	16.03	15.38	18.73	22.64	< 30.00
		1	216	16.01	14.87	18.49	22.40	< 30.00
3939.99	80	109	54	16.31	15.67	19.01	22.92	< 30.00
		1	1	16.53	15.5	19.06	22.97	< 30.00
		1	215	15.98	15.37	18.70	22.61	< 30.00
		217	0	16.18	15.54	18.88	22.79	< 30.00
		1	0	16.45	15.31	18.93	22.84	< 30.00
		1	216	16.26	15.76	19.03	22.94	< 30.00
3745.02	90	123	61	16.34	15.44	18.92	22.83	< 30.00
		1	1	16.28	15.53	18.93	22.84	< 30.00
		1	243	16.44	15.54	19.02	22.93	< 30.00
		245	0	16.45	15.51	19.02	22.93	< 30.00
		1	0	16.16	15.13	18.69	22.60	< 30.00
		1	244	16.49	15.39	18.99	22.90	< 30.00
3840.00	90	123	61	16.32	15.46	18.92	22.83	< 30.00
		1	1	15.85	15.21	18.55	22.46	< 30.00
		1	243	15.93	15.36	18.66	22.57	< 30.00
		245	0	16.34	15.44	18.92	22.83	< 30.00
		1	0	16.21	15.66	18.95	22.86	< 30.00
		1	244	16.21	15.20	18.74	22.65	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				LTE-M	5GNR-P			
CP OFDM 256QAM								
3934.98	90	123	61	16.32	15.44	18.91	22.82	< 30.00
		1	1	16.43	15.31	18.92	22.83	< 30.00
		1	243	15.89	15.67	18.79	22.70	< 30.00
		245	0	16.22	15.42	18.85	22.76	< 30.00
		1	0	16.36	15.54	18.98	22.89	< 30.00
		1	244	16.09	15.26	18.71	22.62	< 30.00
3750.00	100	137	68	16.43	15.44	18.97	22.88	< 30.00
		1	1	15.91	15.03	18.50	22.41	< 30.00
		1	271	16.24	15.51	18.90	22.81	< 30.00
		273	0	16.36	15.42	18.93	22.84	< 30.00
		1	0	16.24	15.37	18.84	22.75	< 30.00
		1	272	16.42	15.43	18.96	22.87	< 30.00
3840.00	100	137	68	16.32	15.64	19.00	22.91	< 30.00
		1	1	16.39	15.23	18.86	22.77	< 30.00
		1	271	16.20	15.52	18.88	22.79	< 30.00
		273	0	16.33	15.45	18.92	22.83	< 30.00
		1	0	15.94	15.31	18.65	22.56	< 30.00
		1	272	16.41	15.54	19.01	22.92	< 30.00
3930.00	100	137	68	16.26	15.50	18.91	22.82	< 30.00
		1	1	16.35	15.34	18.88	22.79	< 30.00
		1	271	15.99	16.15	19.08	22.99	< 30.00
		273	0	16.25	15.47	18.89	22.80	< 30.00
		1	0	16.63	15.54	19.13	23.04	< 30.00
		1	272	16.10	15.50	18.82	22.73	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{LTE-M Output Power (dBm)} / 10)} + 10^{(\text{5GNR-P Output Power (dBm)} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

A.2 Radiated Spurious Emissions Test Result

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-09-06~2023-09-15	Test Band	n2_SA, 5MHz Bandwidth, 1RB, QPSK

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
Low Channel							
131.200	3.8	17.0	20.8	82.3	-61.5	Quasi-peak	Horizontal
583.300	-5.3	24.9	19.6	82.3	-62.7	Quasi-peak	Horizontal
79.308	5.8	14.4	20.2	82.3	-62.1	Quasi-peak	Vertical
596.100	-6.1	25.4	19.3	82.3	-63.0	Quasi-peak	Vertical
3703.000	42.9	0.1	43.0	82.3	-39.3	Peak	Horizontal
10707.000	35.6	14.2	49.8	82.3	-32.5	Peak	Horizontal
3703.000	40.9	0.1	41.0	82.3	-41.3	Peak	Vertical
10596.500	35.9	14.2	50.1	82.3	-32.2	Peak	Vertical

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and above 18GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-09-06~2023-09-15	Test Band	n5_SA, 5MHz Bandwidth, 1RB, QPSK

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
131.727	2.4	17.0	19.4	82.3	-62.9	Quasi-peak	Horizontal
282.438	-3.2	18.2	15.0	82.3	-67.3	Quasi-peak	Horizontal
37.830	8.1	17.8	25.9	82.3	-56.4	Quasi-peak	Vertical
133.500	1.2	17.2	18.4	82.3	-63.9	Quasi-peak	Vertical
7434.500	37.5	8.5	46.0	82.3	-36.3	Peak	Horizontal
10792.000	35.2	14.3	49.5	82.3	-32.8	Peak	Horizontal
8012.500	37.0	9.3	46.3	82.3	-36.0	Peak	Vertical
10987.500	35.6	14.3	49.9	82.3	-32.4	Peak	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and above 18GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-09-06~2023-09-15	Test Band	n12_SA, 5MHz Bandwidth, 1RB, QPSK

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
Low Channel							
129.870	3.2	16.9	20.1	82.3	-62.2	Quasi-peak	Horizontal
283.170	-2.4	18.2	15.8	82.3	-66.5	Quasi-peak	Horizontal
38.820	7.6	17.9	25.5	82.3	-56.8	Quasi-peak	Vertical
128.740	-0.3	16.7	16.4	82.3	-65.9	Quasi-peak	Vertical
7307.000	36.5	8.3	44.8	82.3	-37.5	Peak	Horizontal
10486.000	35.2	14.2	49.4	82.3	-32.9	Peak	Horizontal
10350.000	35.6	13.6	49.2	82.3	-33.1	Peak	Vertical
14158.000	36.0	15.3	51.3	82.3	-31.0	Peak	Vertical

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and above 18GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-09-06~2023-09-15	Test Band	n30_SA, 5MHz Bandwidth, 1RB, QPSK

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
Low Channel							
129.500	4.6	16.8	21.4	55.3	-33.9	Quasi-peak	Horizontal
288.410	-2.6	18.3	15.7	55.3	-39.6	Quasi-peak	Horizontal
74.350	5.3	15.6	20.9	55.3	-34.4	Quasi-peak	Vertical
130.120	6.3	16.9	23.2	55.3	-32.1	Quasi-peak	Vertical
7077.500	36.6	7.8	44.4	55.3	-10.9	Peak	Horizontal
9228.000	35.5	11.9	47.4	55.3	-7.9	Peak	Horizontal
7485.500	36.9	8.6	45.5	55.3	-9.8	Peak	Vertical
9287.500	35.1	12.2	47.3	55.3	-8.0	Peak	Vertical

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and above 18GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-09-06~2023-09-15	Test Band	n66_SA, 5MHz Bandwidth, 1RB, QPSK

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
Low Channel							
283.600	-3.1	18.2	15.1	82.3	-67.2	Quasi-peak	Horizontal
581.940	-6.1	24.9	18.8	82.3	-63.5	Quasi-peak	Horizontal
131.900	4.8	17.0	21.8	82.3	-60.5	Quasi-peak	Vertical
603.950	-4.6	25.8	21.2	82.3	-61.1	Quasi-peak	Vertical
7375.000	37.6	8.6	46.2	82.3	-36.1	Peak	Horizontal
10945.000	36.1	14.1	50.2	82.3	-32.1	Peak	Horizontal
3482.000	41.3	-0.6	40.7	82.3	-41.6	Peak	Vertical
10639.000	35.7	14.3	50.0	82.3	-32.3	Peak	Vertical

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and above 18GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-09-06~2023-09-15	Test Band	n77_SA_HPUE (3450 ~ 3550MHz) 10MHz Bandwidth, 1RB, QPSK

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
Low Channel							
130.240	2.4	16.9	19.3	82.3	-63.0	Quasi-peak	Horizontal
291.250	-2.6	18.3	15.7	82.3	-66.6	Quasi-peak	Horizontal
80.940	8.4	14.0	22.4	82.3	-59.9	Quasi-peak	Vertical
138.250	1.2	17.6	18.8	82.3	-63.5	Quasi-peak	Vertical
11038.500	35.4	14.1	49.5	82.3	-32.8	Peak	Horizontal
14192.000	36.1	15.6	51.7	82.3	-30.6	Peak	Horizontal
7290.000	37.0	8.5	45.5	82.3	-36.8	Peak	Vertical
10409.500	36.5	13.6	50.1	82.3	-32.2	Peak	Vertical

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and above 18GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-09-06~2023-09-15	Test Band	n77_SA_HPUE (3700 ~ 3980MHz) 10MHz Bandwidth, 1RB, QPSK

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
Low Channel							
129.900	4.0	16.9	20.9	82.3	-61.4	Quasi-peak	Horizontal
290.350	-1.2	18.3	17.1	82.3	-65.2	Quasi-peak	Horizontal
75.140	6.4	15.4	21.8	82.3	-60.5	Quasi-peak	Vertical
136.245	-2.7	17.4	14.7	82.3	-67.6	Quasi-peak	Vertical
10477.500	36.0	14.0	50.0	82.3	-32.3	Peak	Horizontal
14557.500	35.4	15.9	51.3	82.3	-31.0	Peak	Horizontal
10698.500	35.4	14.2	49.6	82.3	-32.7	Peak	Vertical
14617.000	35.6	16.2	51.8	82.3	-30.5	Peak	Vertical

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and above 18GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-09-06~2023-09-15	Test Band	n77_MIMO_PC2 (3450 ~ 3550MHz) 10MHz Bandwidth, 1RB, QPSK

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
Low Channel							
59.600	0.2	19.7	19.9	82.3	-62.4	Quasi-peak	Horizontal
600.100	1.3	27.0	28.3	82.3	-54.0	Quasi-peak	Horizontal
59.000	5.4	19.8	25.2	82.3	-57.1	Quasi-peak	Vertical
598.700	0.4	27.0	27.4	82.3	-54.9	Quasi-peak	Vertical
6899.000	36.8	8.9	45.7	82.3	-36.6	Peak	Horizontal
14464.000	32.7	19.7	52.4	82.3	-29.9	Peak	Horizontal
9321.500	33.0	13.9	46.9	82.3	-35.4	Peak	Vertical
14481.000	32.9	19.2	52.1	82.3	-30.2	Peak	Vertical

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and above 18GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-09-06~2023-09-15	Test Band	n77_MIMO_PC2 (3700 ~ 3980MHz) 10MHz Bandwidth, 1RB, QPSK

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
Low Channel							
102.100	0.1	18.6	18.7	82.3	-63.6	Quasi-peak	Horizontal
595.100	1.3	27.0	28.3	82.3	-54.0	Quasi-peak	Horizontal
34.410	14.6	17.2	31.8	82.3	-50.5	Quasi-peak	Vertical
706.200	1.1	28.6	29.7	82.3	-52.6	Quasi-peak	Vertical
7400.500	35.2	11.7	46.9	82.3	-35.4	Peak	Horizontal
14455.500	32.3	19.8	52.1	82.3	-30.2	Peak	Horizontal
10163.000	33.5	13.9	47.4	82.3	-34.9	Peak	Vertical
14982.500	32.8	19.4	52.2	82.3	-30.1	Peak	Vertical

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and above 18GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-09-06~2023-09-15	Test Band	n5_EN-DC, 5MHz Bandwidth, 1RB, QPSK

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
Low Channel							
58.130	2.6	19.9	22.5	82.3	-59.8	Quasi-peak	Horizontal
940.830	1.3	31.4	32.7	82.3	-49.6	Quasi-peak	Horizontal
54.735	0.3	20.3	20.6	82.3	-61.7	Quasi-peak	Vertical
924.825	1.4	31.1	32.5	82.3	-49.8	Quasi-peak	Vertical
7587.500	32.9	11.4	44.3	82.3	-38.0	Peak	Horizontal
15033.500	33.1	19.2	52.3	82.3	-30.0	Peak	Horizontal
6882.000	33.7	8.6	42.3	82.3	-40.0	Peak	Vertical
14931.500	31.7	20.2	51.9	82.3	-30.4	Peak	Vertical

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and above 18GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Appendix B - Test Setup Photograph

Refer to "2309RSU009-UT" file.

Appendix C - EUT Photograph

Refer to "2309RSU009-UE" file.