

Measurement Results

No.1-3977/22-03-04_Annex_MR_A11

Test logging

This document is electronically signed and valid without handwritten signature.
For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Document authorized:

Michael Dorongovski
Lab Manager
Radio Communications

Table of Content

EUT Information	3
FCC 15.247 # MIMO Power PSD Calculator ~ WLAN5Gx ax-HE160 U-NII-1_2A	4
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-1_2A	6
FCC 15.247 # Max output power and psd ~ WLAN5Gx ax-HE160 U-NII-1_2A	10
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-1_2A	13
FCC 15.247 # Max output power and psd ~ WLAN5Gx ax-HE160 U-NII-1_2A	17
FCC 15.247 # MIMO Power PSD Calculator ~ WLAN5Gx ax-HE160 U-NII-2C	20
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-2C	22
FCC 15.247 # Max output power and psd ~ WLAN5Gx ax-HE160 U-NII-2C	26
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-2C	29
FCC 15.247 # Max output power and psd ~ WLAN5Gx ax-HE160 U-NII-2C	33

EUT Information

EUT DEFINITION

Manufacturer	SAGEMCOM BROADBAND SAS
Type	F5688W
Serial Number	QS2212959002927
Setup Number	1.0
Version SW	NI
Version FW	NI
Version HW	NI
Comment 1	
Comment 2	
Temperature [°C] Min	0
Temperature [°C] Nom	20
Temperature [°C] Max	50
Voltage [V] Min	120
Voltage [V] Nom	120
Voltage [V] Max	120

FCC 15.247 # MIMO Power PSD Calculator ~ WLAN5Gx ax-HE160 U-NII-1_2A

Test References

TC Start	15.12.2022 17:33:19
Ambit Temp [°C] Humidity [rel%]	24.1 22
System Version	3.3.3.0
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC MIMO_Power_PSD_Calculator - WLAN5Gx ax-HE160 U-NII-1_2A
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	AP indoor
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE160
Antenna Port used	several
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5250
Frequency high to test	False Freq [MHz] 0
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	-3.5
Switched Path	None

Test Equipment

Test at TX 5250 MHz

RESULT Power

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ant:2 Max Output Power DC corrected	--	--	20.24	dBm	INFO
Ant:2 BW 26dB	--	--	164.160	MHz	INFO
Ant:1 Max Output Power DC corrected	--	--	20.8	dBm	INFO
Ant:1 BW 26dB	--	--	163.520	MHz	INFO
Σ Limit absolute	--	24	23.54	dBm	PASS
Σ Limit: 11 dBm + 10 log 163.52	--	33.14	23.54	dBm	PASS

RESULT PSD

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ant:2 PSD	--	--	-0.32	dBm/1MHz	INFO
Ant:1 PSD	--	--	0.4	dBm/1MHz	INFO
Σ	--	11	3.07	dBm/1MHz	PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-1_2A

Test References

TC Start	15.12.2022 17:32:09
Ambit Temp [°C] Humidity [rel%]	24.1 22
System Version	3.3.3.0
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE160 U-NII-1_2A
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	AP indoor
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE160
Antenna Port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5250
Frequency high to test	False Freq [MHz] 0
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	-3.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5250 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	10.51	dBm	INFO
Ref. Frequency	---	---	5278.770	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.51 11.59 25
Start [MHz] Stop [MHz]	5050.000 5450.000
RBW [MHz] VBW [MHz]	2.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1 2500 1001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	156.244	MHz	INFO
T1 99%	5150.000000	---	5172.0779	MHz	PASS
T2 99%	---	5350.000000	5328.3217	MHz	PASS

Plot: Bandwidth only

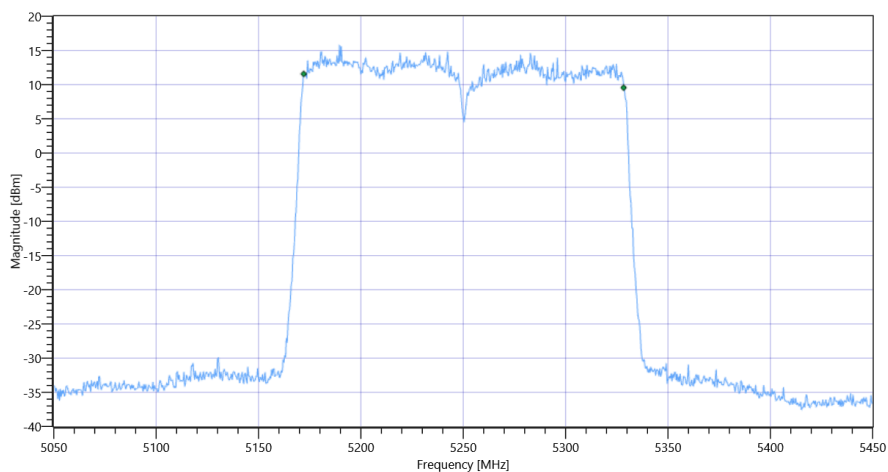

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-1_2A 99PCT

Plot: Bandwidth within Band

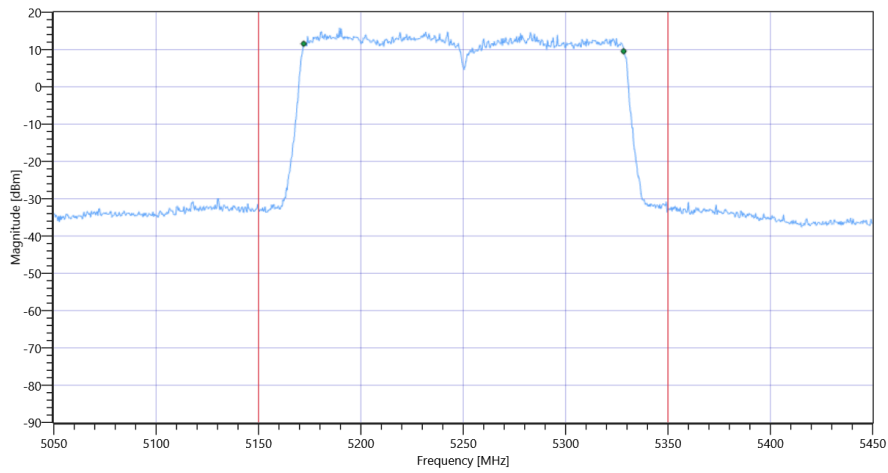


FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-1_2A

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	164	MHz	INFO
T1 26dB	5150.000000	---	5168.0000	MHz	PASS
T2 26dB	---	5350.000000	5332.0000	MHz	PASS

Plot: Bandwidth only

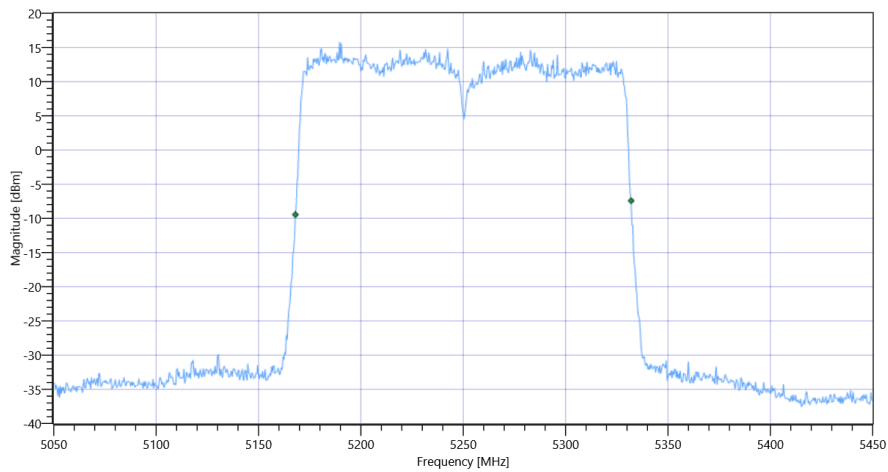

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-1_2A 26dB

Plot: Bandwidth within Band

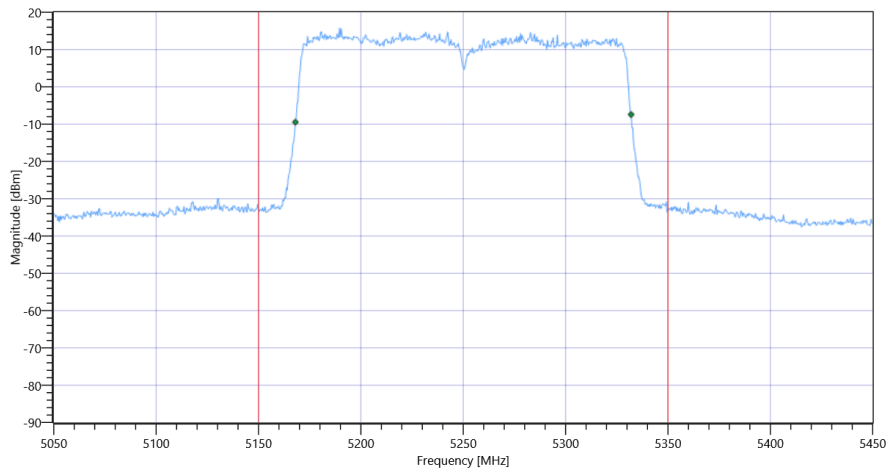

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-1_2A

FCC 15.247 # Max output power and psd ~ WLAN5Gx ax-HE160 U-NII-1_2A

Test References

TC Start	15.12.2022 17:27:32
Ambit Temp [°C] Humidity [rel%]	24.1 22
System Version	3.3.3.0
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F, E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE160 U-NII-1_2A
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	AP indoor
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE160
Antenna Port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5250
Frequency high to test	False Freq [MHz] 0
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	-3.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5250 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	11.18	dBm	INFO
Ref. Frequency	---	---	5202.850	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	164.16	MHz	INFO
T1 26dB	---	---	5168.0800	MHz	INFO
T2 26dB	---	---	5332.2400	MHz	INFO

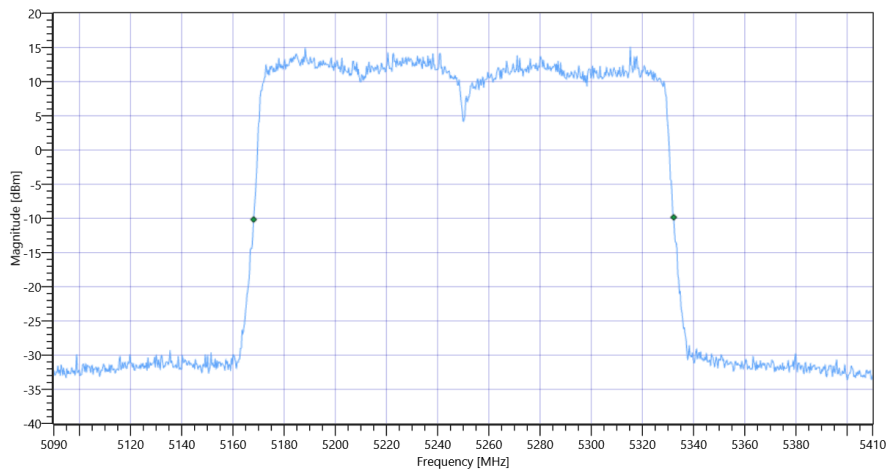

FCC 15.247 # Max output power and psd ~ WLAN5Gx ax-HE160 U-NII-1_2A_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	23.18 11.59 30
Start [MHz] Stop [MHz]	5090.000 5410.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	214000 1 640 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	20.24	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	20.24	dBm	PASS
Limit: 11 dBm + 10 log 164.16					
Max Output Power DC corrected	---	33.15	20.24	dBm	PASS

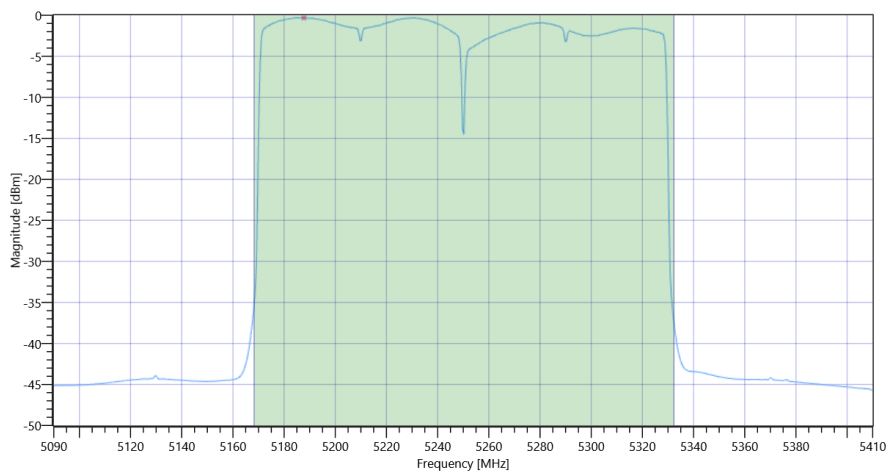

FCC 15.247 # Max output power and psd ~ WLAN5Gx ax-HE160 U-NII-1_2A Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-0.32	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-0.32	dBm/1MHz	PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-1_2A

Test References

TC Start	15.12.2022 17:26:23
Ambit Temp [°C] Humidity [rel%]	24.1 22
System Version	3.3.3.0
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE160 U-NII-1_2A
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	AP indoor
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE160
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5250
Frequency high to test	False Freq [MHz] 0
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	-3.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5250 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	11.70	dBm	INFO
Ref. Frequency	---	---	5204.050	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.70 11.59 25
Start [MHz] Stop [MHz]	5050.000 5450.000
RBW [MHz] VBW [MHz]	2.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1 2500 1001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	155.844	MHz	INFO
T1 99%	5150.000000	---	5172.4775	MHz	PASS
T2 99%	---	5350.000000	5328.3217	MHz	PASS

Plot: Bandwidth only

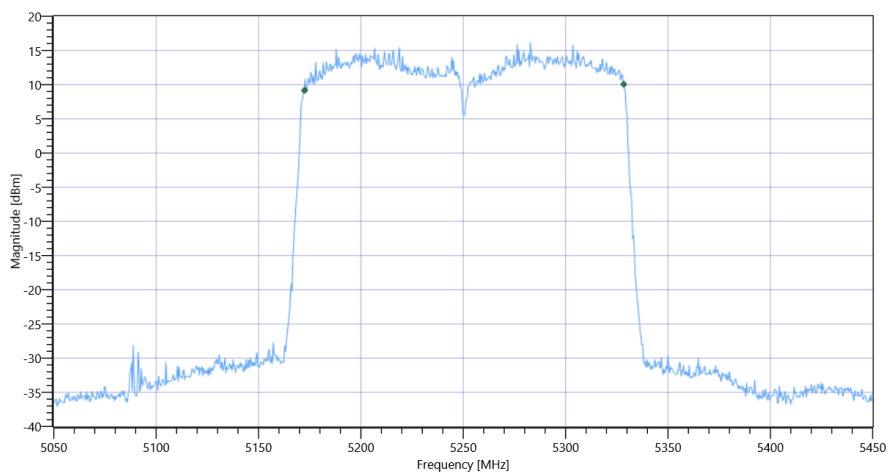

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-1_2A 99PCT

Plot: Bandwidth within Band

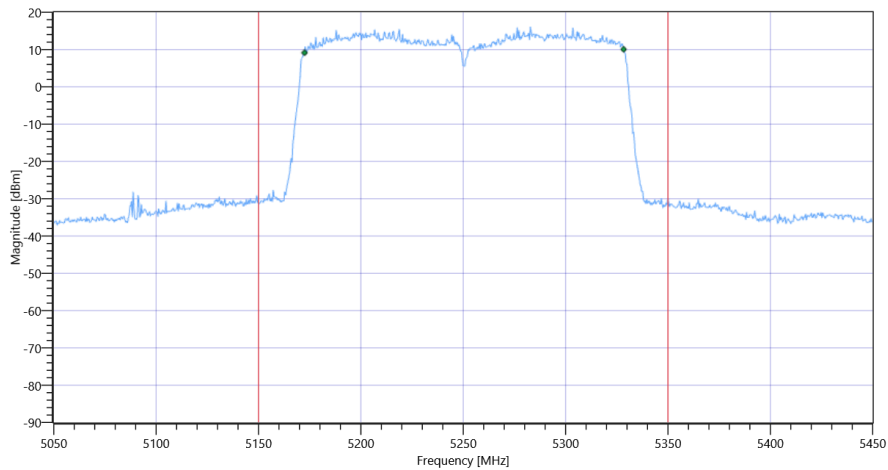


FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-1_2A

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	164.4	MHz	INFO
T1 26dB	5150.000000	---	5168.0000	MHz	PASS
T2 26dB	---	5350.000000	5332.4000	MHz	PASS

Plot: Bandwidth only

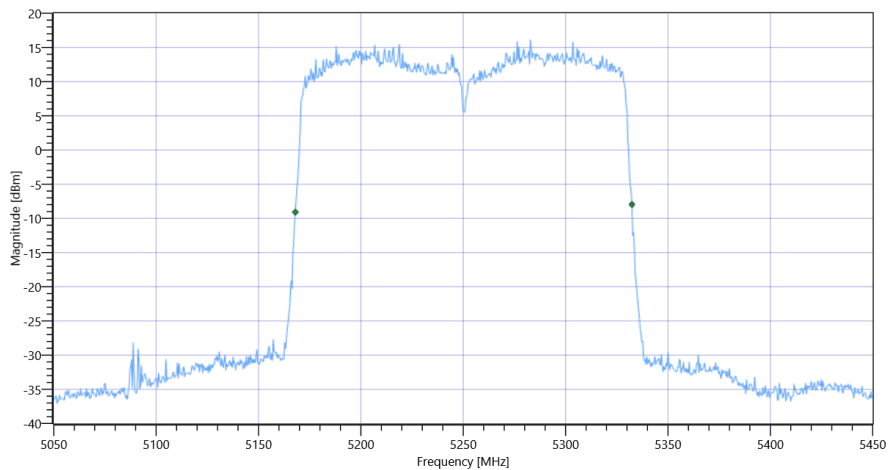

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-1_2A 26dB

Plot: Bandwidth within Band

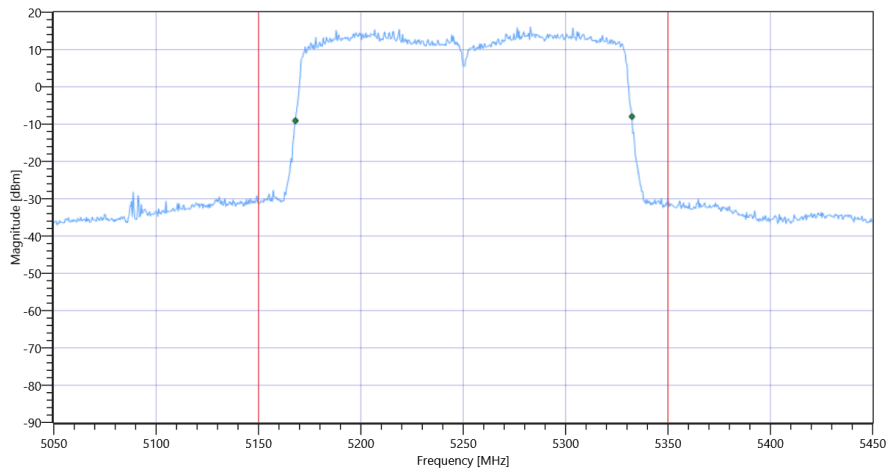

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-1_2A

FCC 15.247 # Max output power and psd ~ WLAN5Gx ax-HE160 U-NII-1_2A

Test References

TC Start	15.12.2022 17:21:45
Ambit Temp [°C] Humidity [rel%]	24.1 22
System Version	3.3.3.0
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F, E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE160 U-NII-1_2A
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	AP indoor
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE160
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5250
Frequency high to test	False Freq [MHz] 0
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	-3.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5250 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	10.17	dBm	INFO
Ref. Frequency	---	---	5284.370	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	163.52	MHz	INFO
T1 26dB	---	---	5168.4000	MHz	INFO
T2 26dB	---	---	5331.9200	MHz	INFO

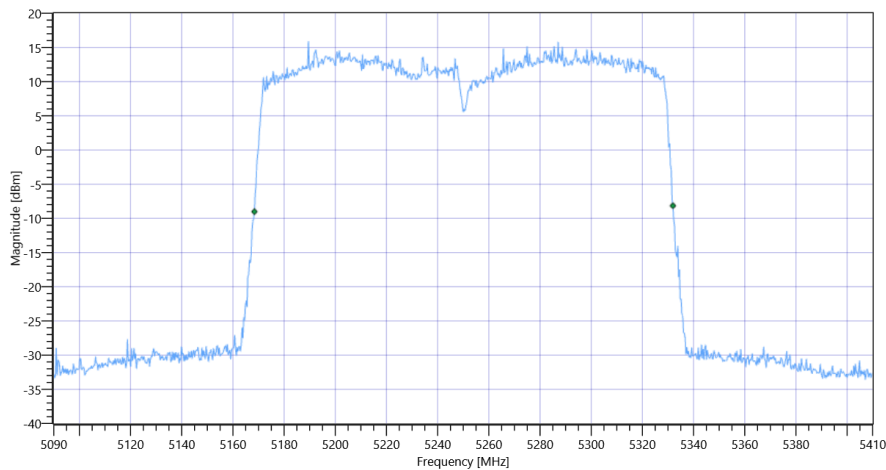

FCC 15.247 # Max output power and psd ~ WLAN5Gx ax-HE160 U-NII-1_2A_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	22.17 11.59 25
Start [MHz] Stop [MHz]	5090.000 5410.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	214000 1 640 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	20.8	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	20.8	dBm	PASS
Limit: 11 dBm + 10 log 163.52					
Max Output Power DC corrected	---	33.14	20.8	dBm	PASS

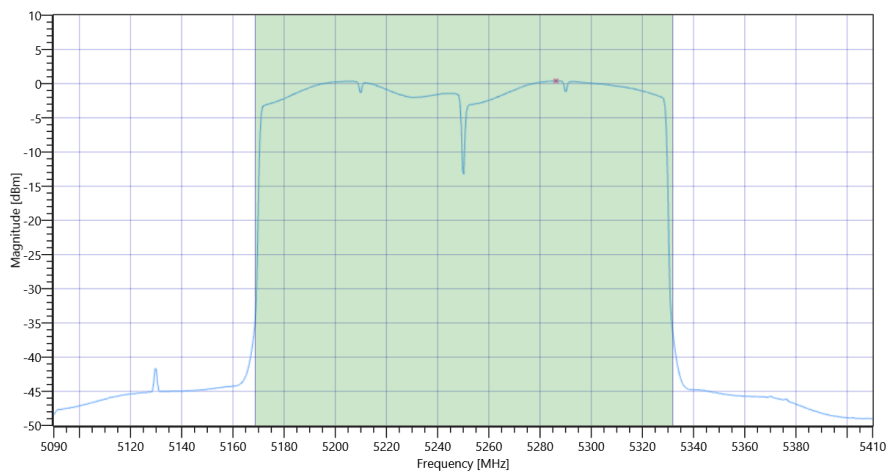

FCC 15.247 # Max output power and psd ~ WLAN5Gx ax-HE160 U-NII-1_2A Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	0.4	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	0.4	dBm/1MHz	PASS

FCC 15.247 # MIMO Power PSD Calculator ~ WLAN5Gx ax-HE160 U-NII-2C

Test References

TC Start	15.12.2022 18:04:02
Ambit Temp [°C] Humidity [rel%]	23.9 22
System Version	3.3.3.0
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC MIMO_Power_PSD_Calculator - WLAN5Gx ax-HE160 U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	AP indoor
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE160
Antenna Port used	several
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5570
Frequency high to test	False Freq [MHz] 0
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	-3.5
Switched Path	None

Test Equipment

Test at TX 5570 MHz

RESULT Power

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ant:2 Max Output Power DC corrected	--	--	20.64	dBm	INFO
Ant:2 BW 26dB	--	--	163.520	MHz	INFO
Ant:1 Max Output Power DC corrected	--	--	20.98	dBm	INFO
Ant:1 BW 26dB	--	--	164.480	MHz	INFO
Σ Limit absolute	--	24	23.82	dBm	PASS
Σ Limit: 11 dBm + 10 log 163.52	--	33.14	23.82	dBm	PASS

RESULT PSD

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ant:2 PSD	--	--	0.94	dBm/1MHz	INFO
Ant:1 PSD	--	--	0.81	dBm/1MHz	INFO
Σ	--	11	3.89	dBm/1MHz	PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-2C

Test References

TC Start	15.12.2022 18:02:57
Ambit Temp [°C] Humidity [rel%]	24.0 22
System Version	3.3.3.0
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE160 U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	AP indoor
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE160
Antenna Port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5570
Frequency high to test	False Freq [MHz] 0
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	-3.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5570 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	11.16	dBm	INFO
Ref. Frequency	---	---	5546.420	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.16 12.07 25
Start [MHz] Stop [MHz]	5370.000 5770.000
RBW [MHz] VBW [MHz]	2.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1 2500 1001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	155.445	MHz	INFO
T1 99%	5470.000000	---	5492.0779	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5647.5225	MHz	

Plot: Bandwidth only

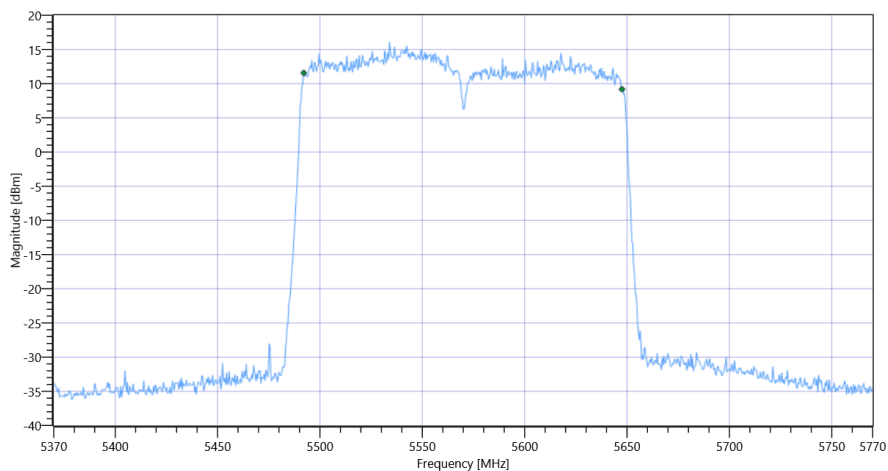

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-2C 99PCT

Plot: Bandwidth within Band

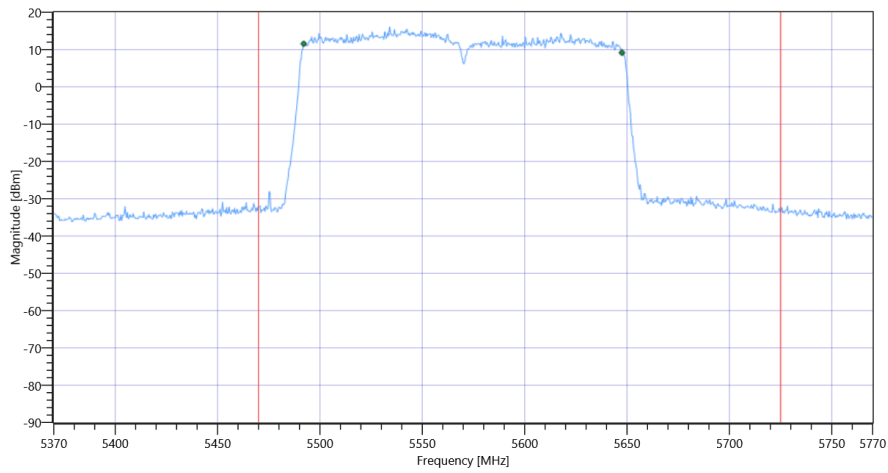


FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-2C

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	163.6	MHz	INFO
T1 26dB	5470.000000	---	5488.0000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5651.6000	MHz	

Plot: Bandwidth only

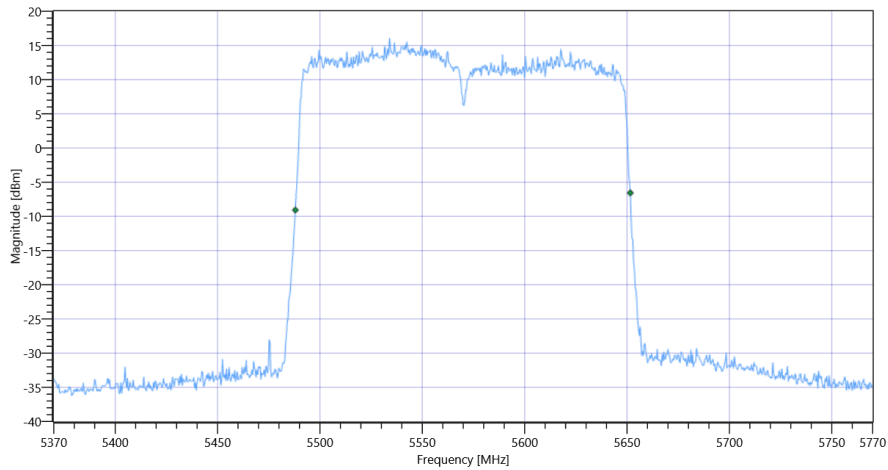

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-2C 26dB

Plot: Bandwidth within Band

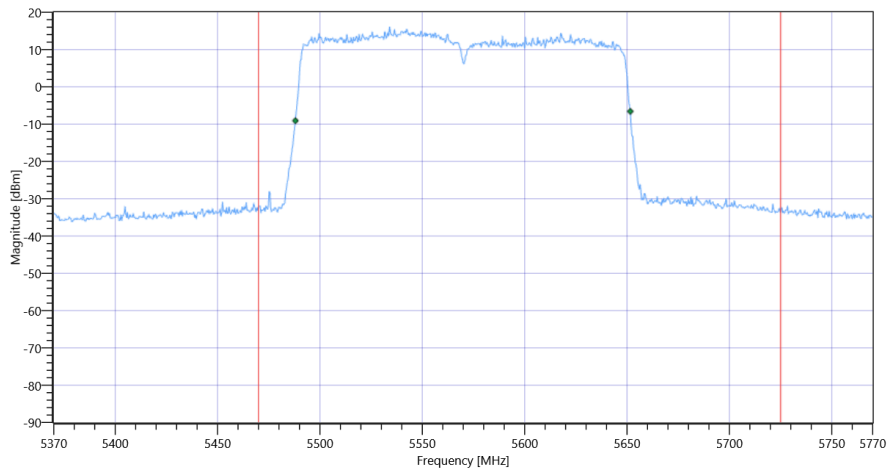

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-2C

FCC 15.247 # Max output power and psd ~ WLAN5Gx ax-HE160 U-NII-2C

Test References

TC Start	15.12.2022 17:58:25
Ambit Temp [°C] Humidity [rel%]	24.0 22
System Version	3.3.3.0
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F, E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE160 U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	AP indoor
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE160
Antenna Port used	2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5570
Frequency high to test	False Freq [MHz] 0
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	-3.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5570 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	11.22	dBm	INFO
Ref. Frequency	---	---	5556.410	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	163.52	MHz	INFO
T1 26dB	---	---	5488.0800	MHz	INFO
T2 26dB	---	---	5651.6000	MHz	INFO

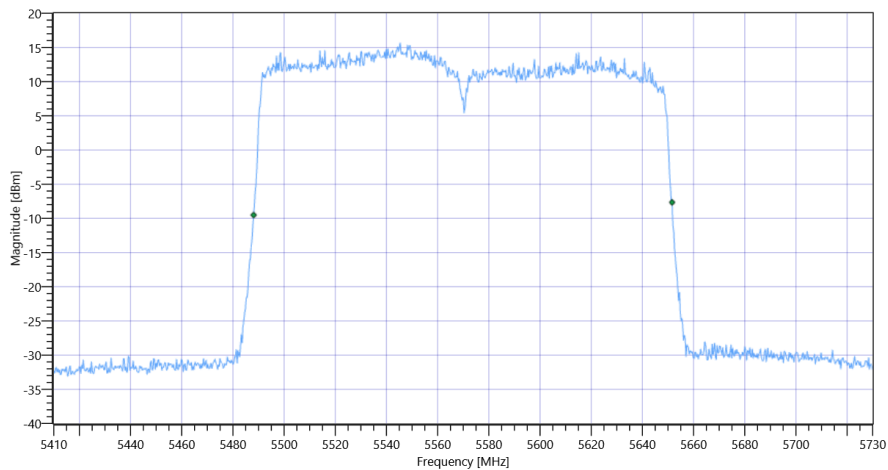

FCC 15.247 # Max output power and psd ~ WLAN5Gx ax-HE160 U-NII-2C_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	23.22 12.07 30
Start [MHz] Stop [MHz]	5410.000 5730.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	214000 1 640 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	20.64	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	20.64	dBm	PASS
Limit: 11 dBm + 10 log 163.52					
Max Output Power DC corrected	---	33.14	20.64	dBm	PASS

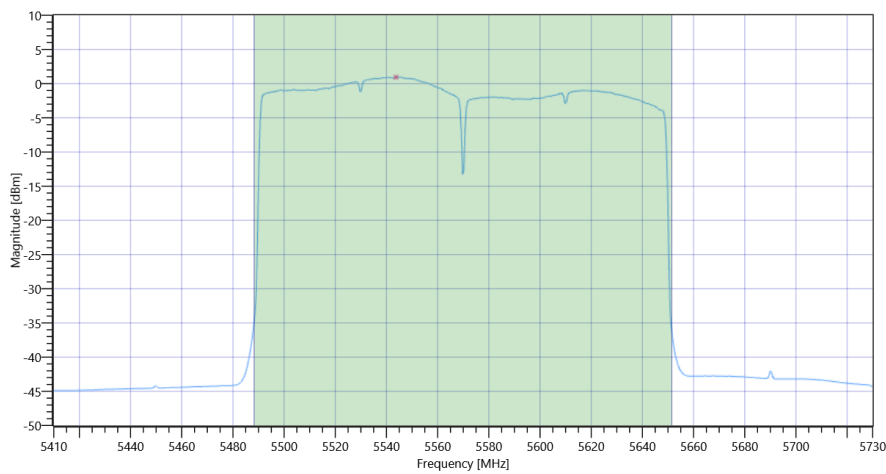

FCC 15.247 # Max output power and psd ~ WLAN5Gx ax-HE160 U-NII-2C Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	0.94	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	0.94	dBm/1MHz	PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-2C

Test References

TC Start	15.12.2022 17:57:20
Ambit Temp [°C] Humidity [rel%]	24.0 22
System Version	3.3.3.0
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx ax-HE160 U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	AP indoor
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE160
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5570
Frequency high to test	False Freq [MHz] 0
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	-3.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5570 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	11.27	dBm	INFO
Ref. Frequency	---	---	5507.260	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.27 12.07 25
Start [MHz] Stop [MHz]	5370.000 5770.000
RBW [MHz] VBW [MHz]	2.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1 2500 1001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	156.643	MHz	INFO
T1 99%	5470.000000	---	5491.6783	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5648.3217	MHz	

Plot: Bandwidth only

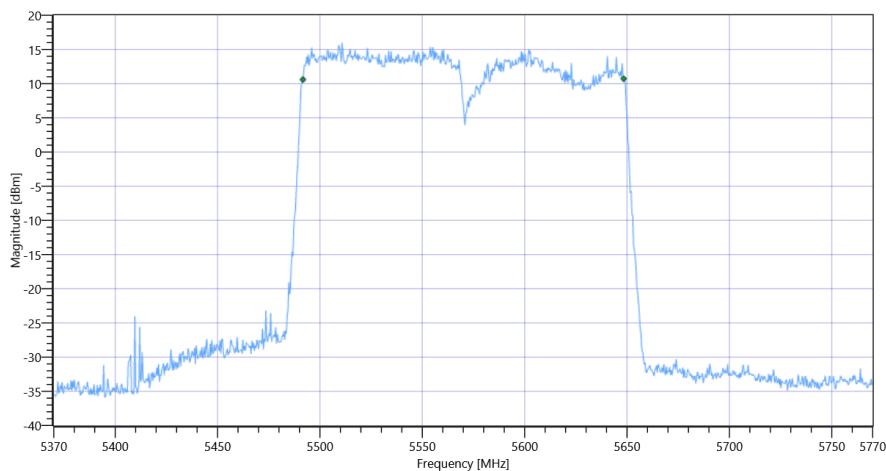

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-2C 99PCT

Plot: Bandwidth within Band

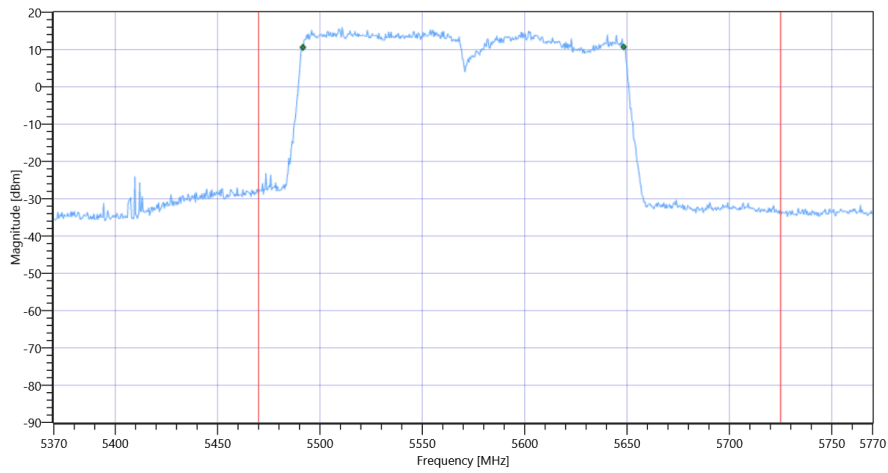


FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-2C

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	165.2	MHz	INFO
T1 26dB	5470.000000	---	5487.6000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5652.8000	MHz	

Plot: Bandwidth only

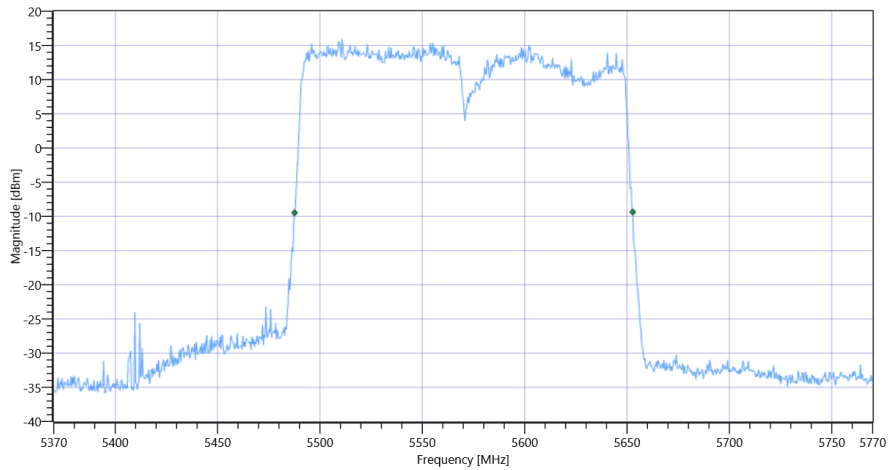

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-2C 26dB

Plot: Bandwidth within Band

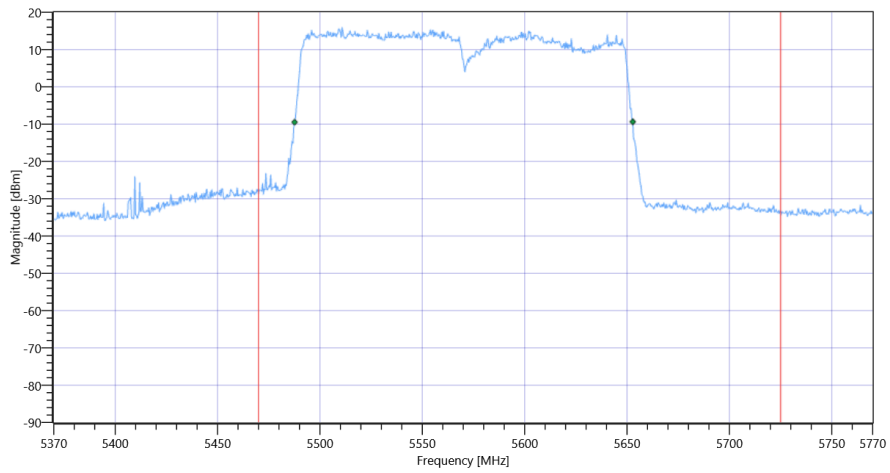

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx ax-HE160 U-NII-2C

FCC 15.247 # Max output power and psd ~ WLAN5Gx ax-HE160 U-NII-2C

Test References

TC Start	15.12.2022 17:52:48
Ambit Temp [°C] Humidity [rel%]	24.0 22
System Version	3.3.3.0
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F, E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ax-HE160 U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	AP indoor
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx ax-HE160
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5570
Frequency high to test	False Freq [MHz] 0
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	-3.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5570 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	12.13	dBm	INFO
Ref. Frequency	---	---	5507.860	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	164.48	MHz	INFO
T1 26dB	---	---	5487.7600	MHz	INFO
T2 26dB	---	---	5652.2400	MHz	INFO

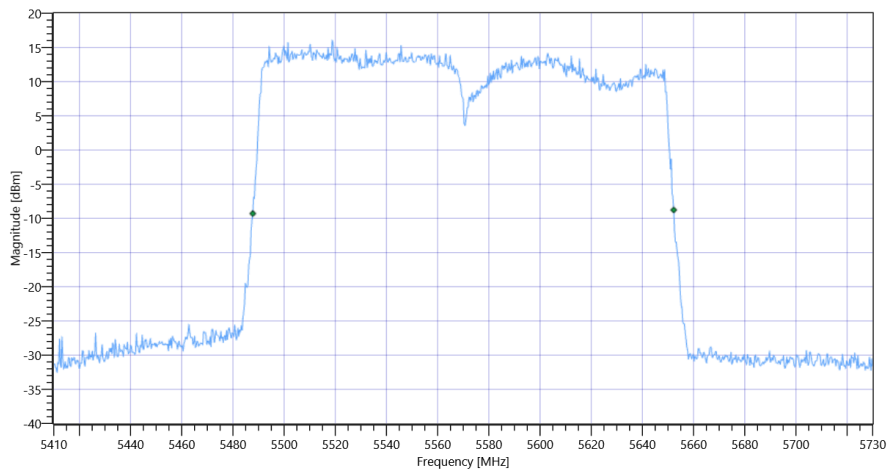

FCC 15.247 # Max output power and psd ~ WLAN5Gx ax-HE160 U-NII-2C_BW


Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	24.13 12.07 30
Start [MHz] Stop [MHz]	5410.000 5730.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	214000 1 640 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	20.98	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	20.98	dBm	PASS
Limit: 11 dBm + 10 log 164.48					
Max Output Power DC corrected	---	33.16	20.98	dBm	PASS

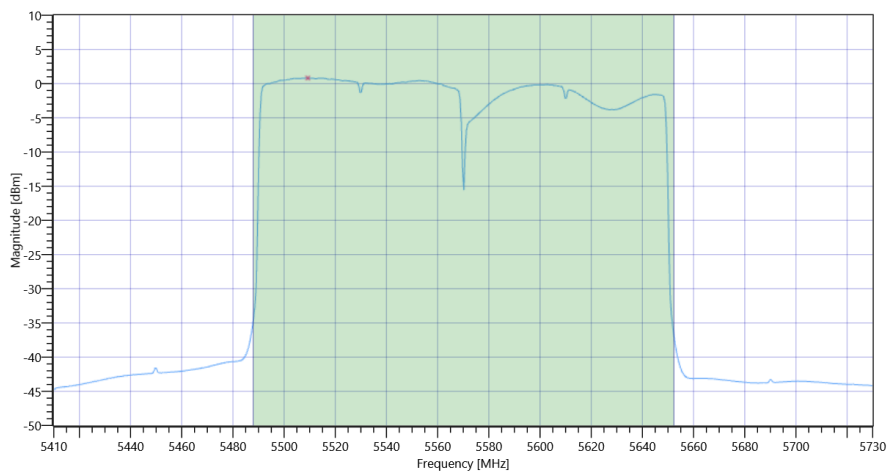

FCC 15.247 # Max output power and psd ~ WLAN5Gx ax-HE160 U-NII-2C Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	0.81	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	0.81	dBm/1MHz	PASS

- END OF DOCUMENT -