

# FCC Test Report

**FCC ID** : VW3FAST3890V3  
**Equipment** : Docsis 3.1 Voice Gateway  
**Brand Name** : Samgemcom  
**Model Name** : F@ST3890 V3  
**Multiple Listing** : F@ST3890 V3XXXXXXXXXXXXX  
(X=0-9,A-Z or blank for marketing purpose)  
**Applicant** : Sagemcom Broadband SAS  
250, route de l'Empereur 92848  
Rueil-Malmaison cedex – France  
**Manufacturer** : Sagemcom Broadband SAS  
250, route de l'Empereur 92848  
Rueil-Malmaison cedex – France  
**Standard** : 47 CFR FCC Part 15.247

The product was received on Apr. 18, 2019, and testing was started from Apr. 18, 2019 and completed on May 06, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



# Table of Contents

**HISTORY OF THIS TEST REPORT .....3**

**SUMMARY OF TEST RESULT .....4**

**1 GENERAL DESCRIPTION .....5**

1.1 Information.....5

1.2 Testing Applied Standards .....7

1.3 Testing Location Information .....7

1.4 Measurement Uncertainty .....7

**2 TEST CONFIGURATION OF EUT.....8**

2.1 Test Condition .....8

2.2 Test Channel Mode .....8

2.3 The Worst Case Measurement Configuration.....9

2.4 Accessories and Support Equipment .....10

2.5 Test Setup Diagram .....11

**3 TRANSMITTER TEST RESULT .....12**

3.1 AC Power-line Conducted Emissions .....12

3.2 DTS Bandwidth.....13

3.3 Maximum Conducted Output Power .....14

3.4 Power Spectral Density .....16

3.5 Emissions in Non-restricted Frequency Bands .....17

3.6 Emissions in Restricted Frequency Bands.....18

**4 TEST EQUIPMENT AND CALIBRATION DATA .....21**

**APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS**

**APPENDIX B. TEST RESULTS OF DTS BANDWIDTH**

**APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER**

**APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY**

**APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS**

**APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS**

**APPENDIX G. TEST RESULTS OF RADIATED EMISSION CO-LOCATION**

**APPENDIX H. TEST PHOTOS**

**PHOTOGRAPHS OF EUT V01**



### History of this test report

Report No.	Version	Description	Issued Date
FR941813AC	01	Initial issue of report	Jul. 02, 2019



### Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	FCC 15.203
3.1	15.207	AC Power-line Conducted Emissions	PASS	FCC 15.207
3.2	15.247(a)	DTS Bandwidth	PASS	≥500kHz
3.3	15.247(b)	Maximum Conducted Output Power	PASS	Power [dBm]: 30
3.4	15.247(e)	Power Spectral Density	PASS	PSD [dBm/3kHz]: 8
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	Non-Restricted Bands: > 30 dBc
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	Restricted Bands: FCC 15.209

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and explanations:**

None

**Reviewed by:** Jackson Tsai

**Report Producer:** Ann Hou

# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20), ac (VHT20)	2412-2462	1-11 [11]
2400-2483.5	n (HT40), ac (VHT40)	2422-2452	3-9 [7]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11b	20	4TX
2.4-2.4835GHz	802.11g	20	4TX
2.4-2.4835GHz	VHT20	20	4TX
2.4-2.4835GHz	VHT40	40	4TX

Note:

- 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- VHT20, VHT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- BWch is the nominal channel bandwidth.

### 1.1.2 Antenna Information

Ant.	Port	Gain (dBi)					Antenna Type	Connector	Brand	Model Name
		2.4G	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3				
1	1	3.04	4.12	3.59	3	3.93	PCB	I-PEX	PEGATRON	FAST3890v3
2	2	3	3.55	4.22	4.39	4.11	PCB	I-PEX	PEGATRON	FAST3890v3
3	3	3.81	3.91	5.03	5.12	4.95	PCB	I-PEX	PEGATRON	FAST3890v3
4	4	3.18	3.44	3.25	3.25	4.1	PCB	I-PEX	PEGATRON	FAST3890v3
<b>Correlated Gain</b>		7.59	7.38	6.99	7.46	7.8	-	-	-	-

Note 1: The EUT has four antennas.

**For 2.4GHz function:**

For IEEE 802.11 b/g mode (4TX/4RX)

Ant. 1 (port 1), Ant. 2 (port 2), Ant. 3 (port 3) and Ant. 4 (port 4) could transmit/receive simultaneously.

**For 5GHz function:**

For IEEE 802.11 n mode (4TX/4RX)

Ant. 1 (port 1), Ant. 2 (port 2), Ant. 3 (port 3) and Ant. 4 (port 4) could transmit/receive simultaneously.



1.1.3 EUT Information

Operational Condition				
EUT Power Type	From AC Adapter			
EUT Function	<input checked="" type="checkbox"/>	Point-to-multipoint	<input type="checkbox"/>	Point-to-point
Beamforming Function	<input type="checkbox"/>	With beamforming	<input checked="" type="checkbox"/>	Without beamforming
Type of EUT				
<input checked="" type="checkbox"/>	Stand-alone			
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device)			
	Combined Equipment - Brand Name / Model No.: ...			
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems)			
	Host System - Brand Name / Model No.: ...			
<input type="checkbox"/>	Other:			

1.1.4 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11b	0.949	0.23	12.42m	100
802.11g	0.952	0.21	2.067m	1k
VHT20	0.986	0.06	n/a (DC>=0.98)	n/a (DC>=0.98)
VHT40	0.972	0.12	954.688u	3k

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.



## 1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ KDB 558074 D01 v05r02
- ◆ KDB 662911 D01 v02r01

## 1.3 Testing Location Information

Testing Location		
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
Test site Designation No. TW1190 with FCC.		
<input type="checkbox"/>	JHUBEI	ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County, Taiwan (R.O.C.) TEL : 886-3-656-9065 FAX : 886-3-656-9085
Test site Designation No. TW0006 with FCC.		

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO01-HY	Jeff	23.2~23.8°C / 55.2~57.1%	30/Apr/2019
RF Conducted	TH01-HY	Andy	23.7~25.2°C / 59.6~61.3%	26/Apr/2019~ 06/May/2019
Radiated	03CH09-HY	Lego	22.3~24.2°C / 65.1~68.2%	18/Apr/2019~ 06/May/2019

## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.54 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	1.6 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.3 dB	Confidence levels of 95%
Temperature	0.7 °C	Confidence levels of 95%
Humidity	4 %	Confidence levels of 95%



## 2 Test Configuration of EUT

### 2.1 Test Condition

RF Conducted	Abbreviation	Remark
TnomVnom	Tnom	20°C
-	Vnom	120V

### 2.2 Test Channel Mode

Test Software Version	accessMTool 3.0.0.2
-----------------------	---------------------


Mode	Power Setting
802.11b_Nss1,(1Mbps)_4TX	-
2412MHz	86
2437MHz	82
2457MHz	82
2462MHz	79
802.11g_Nss1,(6Mbps)_4TX	-
2412MHz	71
2417MHz	79
2437MHz	90
2457MHz	83
2462MHz	68
VHT20_Nss1,(MCS0)_4TX	-
2412MHz	72
2417MHz	75
2437MHz	95
2457MHz	79
2462MHz	66
VHT40_Nss1,(MCS0)_4TX	-
2422MHz	57
2427MHz	57
2437MHz	65
2447MHz	60
2452MHz	52



## 2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	CTX
1	Adapter mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
1	Adapter mode
Operating Mode > 1GHz	CTX
Orthogonal Planes of EUT	<b>Y Plane</b> 
Worst Planes of EUT	V

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Test Condition	Radiated measurement
Operating Mode	Normal Link
1	WLAN 2.4GHz +WLAN 5GHz
Refer to Sporton Test Report No.: FA941813 for Co-location RF Exposure Evaluation and Appendix G for Radiated Emission Co-location.	



## 2.4 Accessories and Support Equipment

Accessories				
AC Adapter	Brand Name	Sagemcom	Model Name	MSA-Z3800IC12.0-48W-P
	Manufacturer	MOSO	P/N	191377516
	Power Rating	I/P: 200-240Vac; 1.2A; O/P: 10Vdc, 3.8A		
	Power Cord	1.5 meter, non-shielded cable, w/o ferrite core		
Power Cable	Brand Name	Sagemcom	Model Name	MSA-Z3800IC12.0-48W-P
	Manufacturer	MOSO	P/N	191377516
	Signal Line	0.9 meter, non-shielded cable, w/o ferrite core		
RJ11 Cable	Brand Name	N/A	Model Name	N/A
	Power Cord	1.45 meter, non-shielded cable		
RJ45 Cable	Brand Name	N/A	Model Name	N/A
	Power Cord	1.45 meter, non-shielded cable		

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment – AC Conduction				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	Dell	PP13S	DoC
2	Client	N/A	N/A	N/A


Note: Support equipment No.2 was provided by customer.

Support Equipment – RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5410	DoC
2	Adapter for Notebook	DELL	HA65NM130	DoC
3	AC Power Source	GW	APS-9102	N/A

Support Equipment – Radiated Emission				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	Dell	PP13S	DoC
2	Client	N/A	N/A	N/A

Note: Support equipment No.2 was provided by customer.

## 2.5 Test Setup Diagram

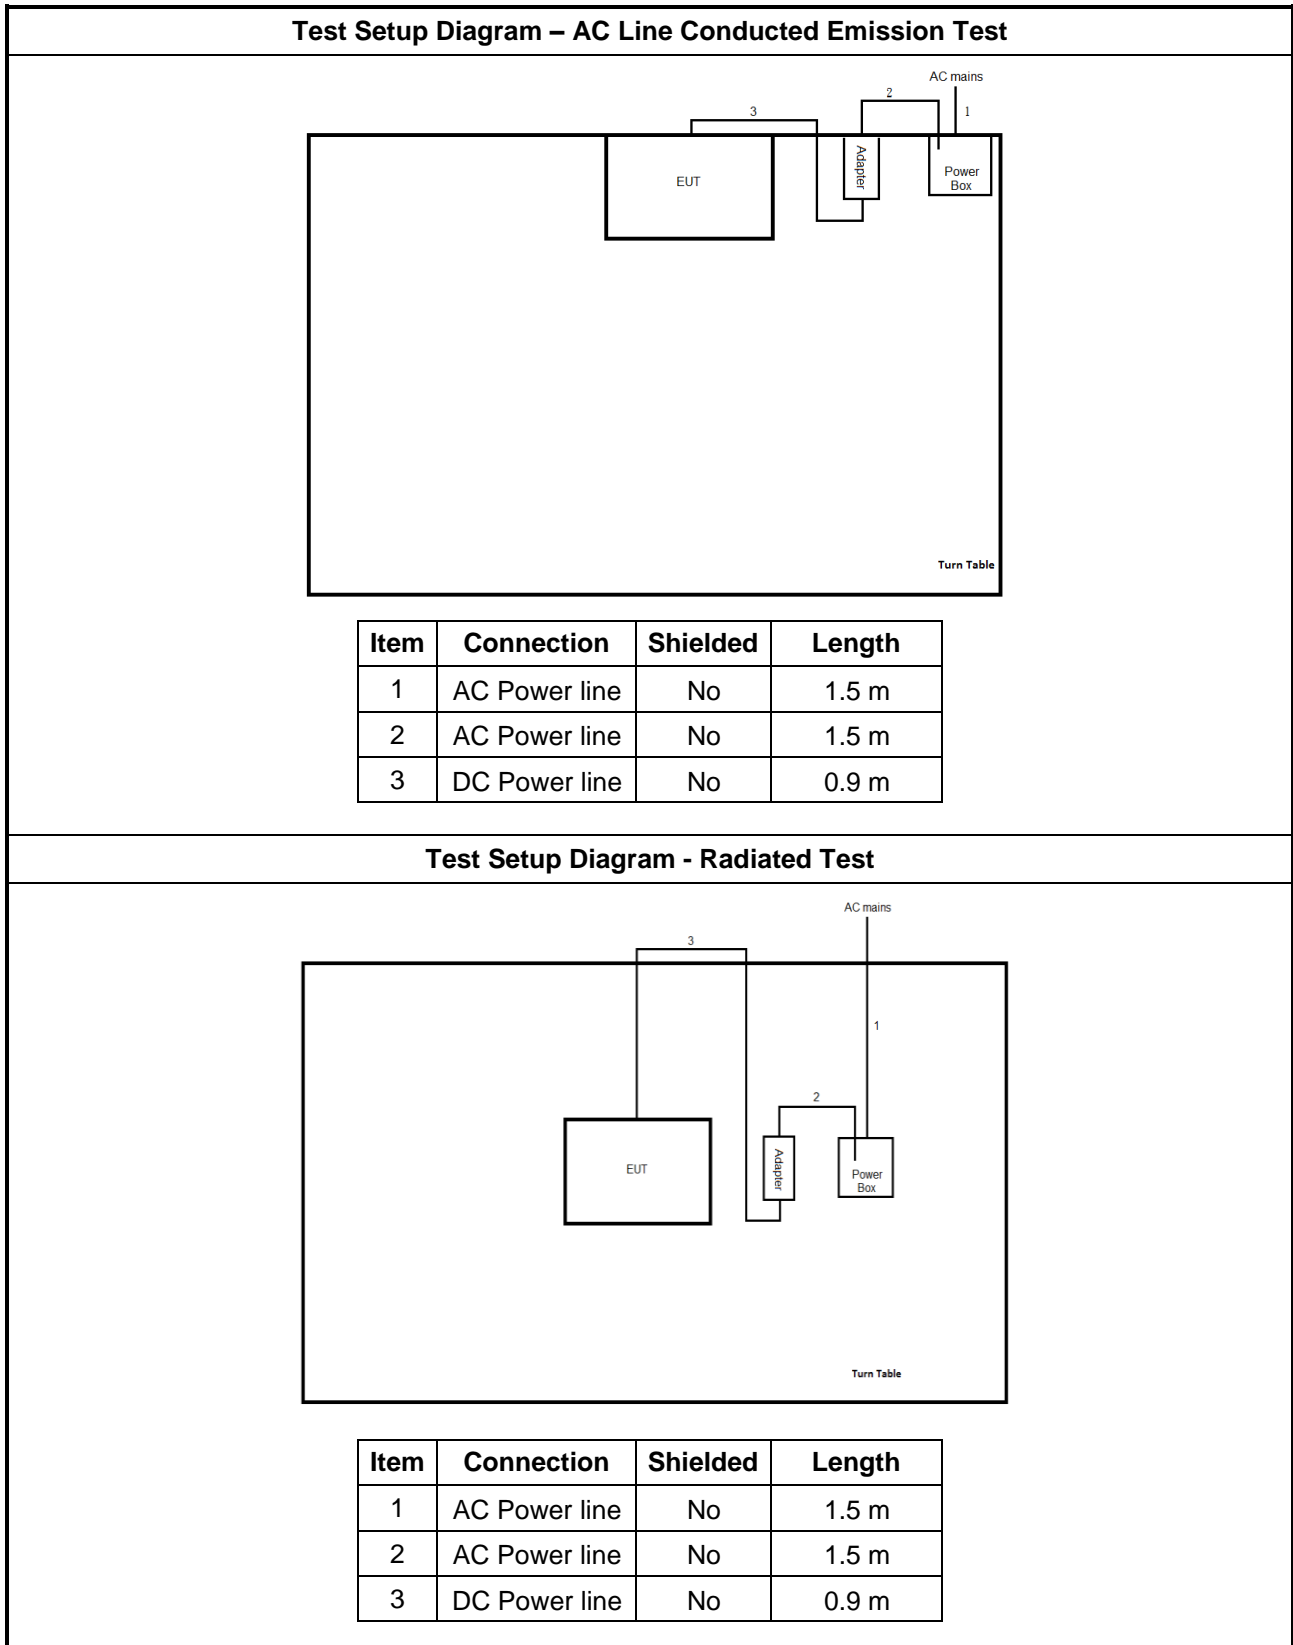

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

##### 3.1.4 Test Setup

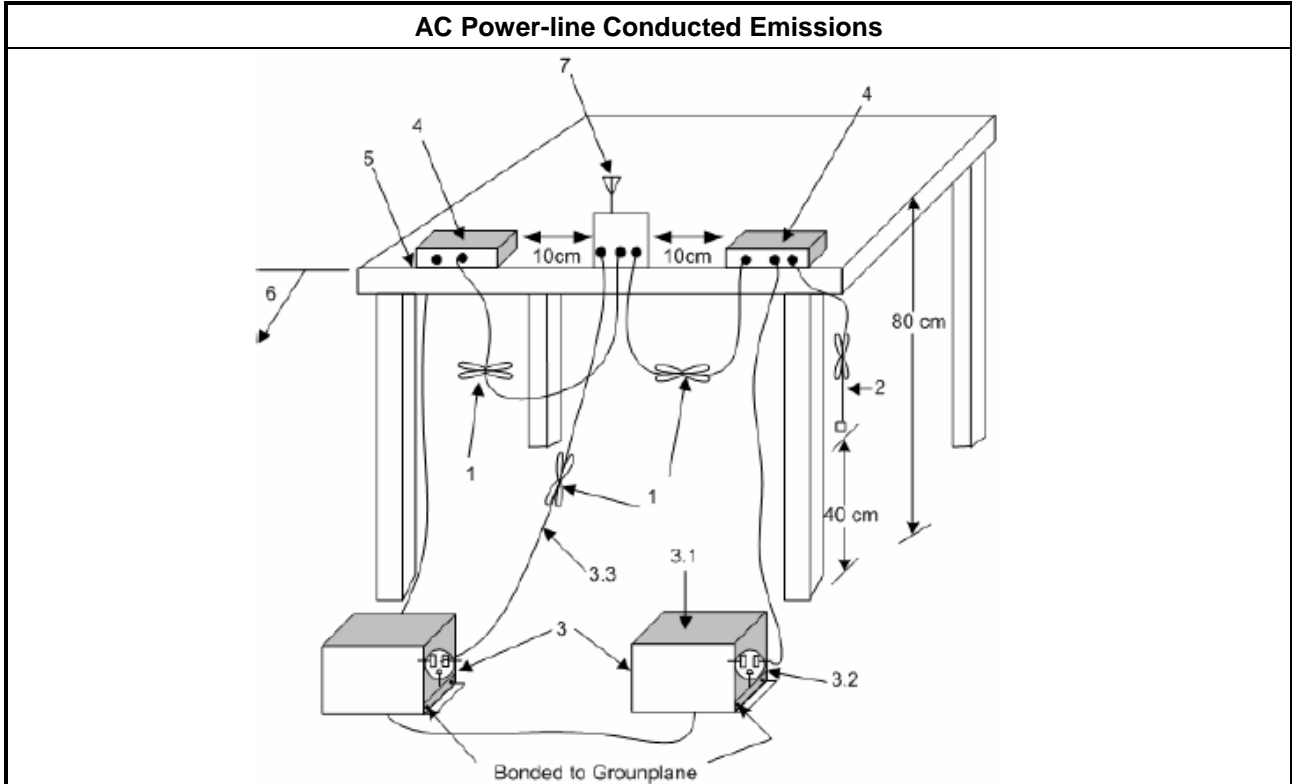

##### 3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

### 3.2 DTS Bandwidth

#### 3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
<ul style="list-style-type: none"> <li>▪ 6 dB bandwidth <math>\geq</math> 500 kHz.</li> </ul>	


#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.2.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>▪ For the emission bandwidth shall be measured using one of the options below:</li> </ul>	
<input checked="" type="checkbox"/>	Refer as KDB 558074. clause 8.2 (11.8 of ANSI C63.10) DTS bandwidth measurement.
<input type="checkbox"/>	Refer as RSS-Gen, clause 6.7 for for occupied bandwidth testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.

#### 3.2.4 Test Setup

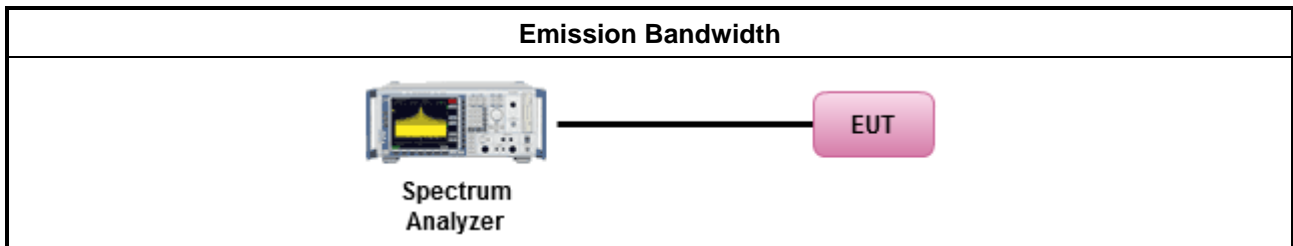

#### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

### 3.3 Maximum Conducted Output Power

#### 3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	<ul style="list-style-type: none"> <li>▪ If <math>G_{TX} \leq 6</math> dBi, then <math>P_{Out} \leq 30</math> dBm (1 W)</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-point systems (P2P): If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Smart antenna system (SAS):</li> </ul>
	<ul style="list-style-type: none"> <li>- Single beam: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Overlap beam: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Aggregate power on all beams: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3 + 8</math> dB dBm</li> </ul>
e.i.r.p. Power Limit:	
	<ul style="list-style-type: none"> <li>▪ 2400-2483.5 MHz Band</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): <math>P_{eirp} \leq 36</math> dBm (4 W)</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-point systems (P2P): <math>P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Smart antenna system (SAS)</li> </ul>
	<ul style="list-style-type: none"> <li>- Single beam: <math>P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Overlap beam: <math>P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Aggregate power on all beams: <math>P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])</math> dBm</li> </ul>
<p><math>P_{Out}</math> = maximum peak conducted output power or maximum conducted output power in dBm,  <math>G_{TX}</math> = the maximum transmitting antenna directional gain in dBi.</p>	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>▪ Maximum Peak Conducted Output Power</li> </ul>	
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.1 (11.9.1.1 of ANSI C63.10) RBW ≥ EBW method.
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.2 (11.9.1.2 of ANSI C63.10) integrated band power method.
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.3 (11.9.1.3 of ANSI C63.10) peak power meter.
<ul style="list-style-type: none"> <li>▪ Maximum Average Conducted Output Power</li> </ul>	
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.2.2 (11.9.2.2 of ANSI C63.10) using a spectrum analyzer.
<input checked="" type="checkbox"/>	Refer as KDB 558074, clause 8.3.2.3 (11.9.2.3 of ANSI C63.10) using a power meter.
<ul style="list-style-type: none"> <li>▪ For conducted measurement.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ If multiple transmit chains, EIRP calculation could be following as methods:  <math display="block">P_{total} = P_1 + P_2 + \dots + P_n</math>                     (calculated in linear unit [mW] and transfer to log unit [dBm])  <math display="block">EIRP_{total} = P_{total} + DG</math> </li> </ul>	

### 3.3.4 Test Setup

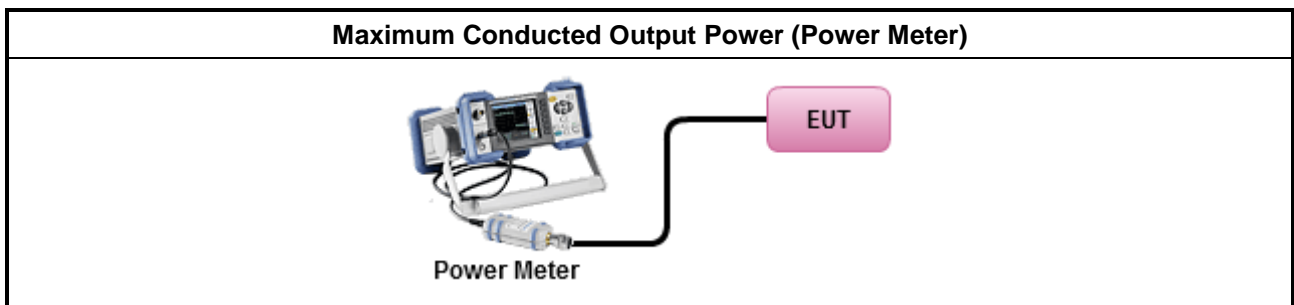

### 3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

### 3.4 Power Spectral Density

#### 3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> <li>Power Spectral Density (PSD) <math>\leq</math> 8 dBm/3kHz</li> </ul>


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).</li> </ul>
<input checked="" type="checkbox"/> Refer as KDB 558074, clause 8.4 (11.10 of ANSI C63.10) Method PKPSD.
<ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>
<ul style="list-style-type: none"> <li>If The EUT supports multiple transmit chains using options given below:             <ul style="list-style-type: none"> <li>Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.</li> </ul> </li> </ul>

#### 3.4.4 Test Setup

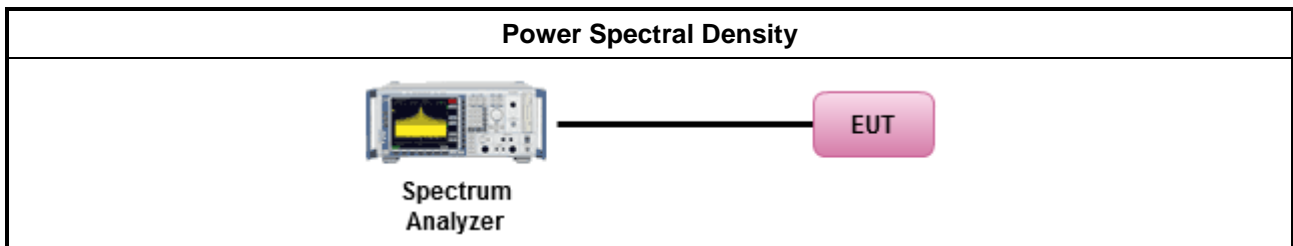

#### 3.4.5 Test Result of Power Spectral Density

Refer as Appendix D



### 3.5 Emissions in Non-restricted Frequency Bands

#### 3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Refer as KDB 558074, clause 8.5 (11.11 of ANSI C63.10) for non-restricted frequency bands.</li> </ul>

#### 3.5.4 Test Setup

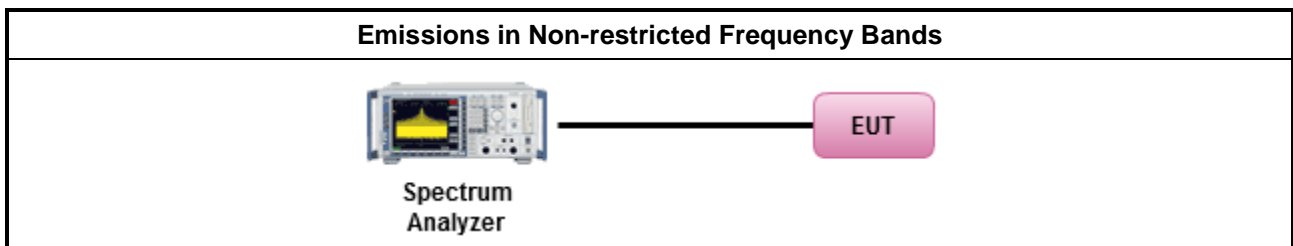

#### 3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



### 3.6 Emissions in Restricted Frequency Bands

#### 3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


#### 3.6.2 Measuring Instruments



Refer a test equipment and calibration data table in this test report.

### 3.6.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>The average emission levels shall be measured in [duty cycle <math>\geq</math> 98 or duty factor].</li> </ul>	
<ul style="list-style-type: none"> <li>Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.</li> </ul>	
<ul style="list-style-type: none"> <li>For the transmitter unwanted emissions shall be measured using following options below:</li> </ul>	
	<ul style="list-style-type: none"> <li>Refer as KDB 558074, clause 8.6 (11.12 of ANSI C63.10) for restricted frequency bands.</li> </ul>
<ul style="list-style-type: none"> <li>For the transmitter band-edge emissions shall be measured using following options below:</li> </ul>	
	<ul style="list-style-type: none"> <li>Refer as KDB 558074 clause 8.7.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.</li> </ul>
	<ul style="list-style-type: none"> <li>Refer as KDB 558074, clause 8.7.2 (6.10.6 of ANSI C63.10) for marker-delta method for band-edge measurements.</li> </ul>
	<ul style="list-style-type: none"> <li>Refer as KDB 558074, clause 8.7.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).</li> </ul>
<ul style="list-style-type: none"> <li>Use the following spectrum analyzer settings:</li> </ul>	
	<ul style="list-style-type: none"> <li>Set RBW=100 kHz for <math>f &lt; 1</math> GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.</li> </ul>
	<ul style="list-style-type: none"> <li>Set RBW = 1 MHz, VBW= 3MHz for <math>f \geq 1</math> GHz for peak measurement. For average measurement, refer as 1.1.4.</li> </ul>

### 3.6.4 Test Setup

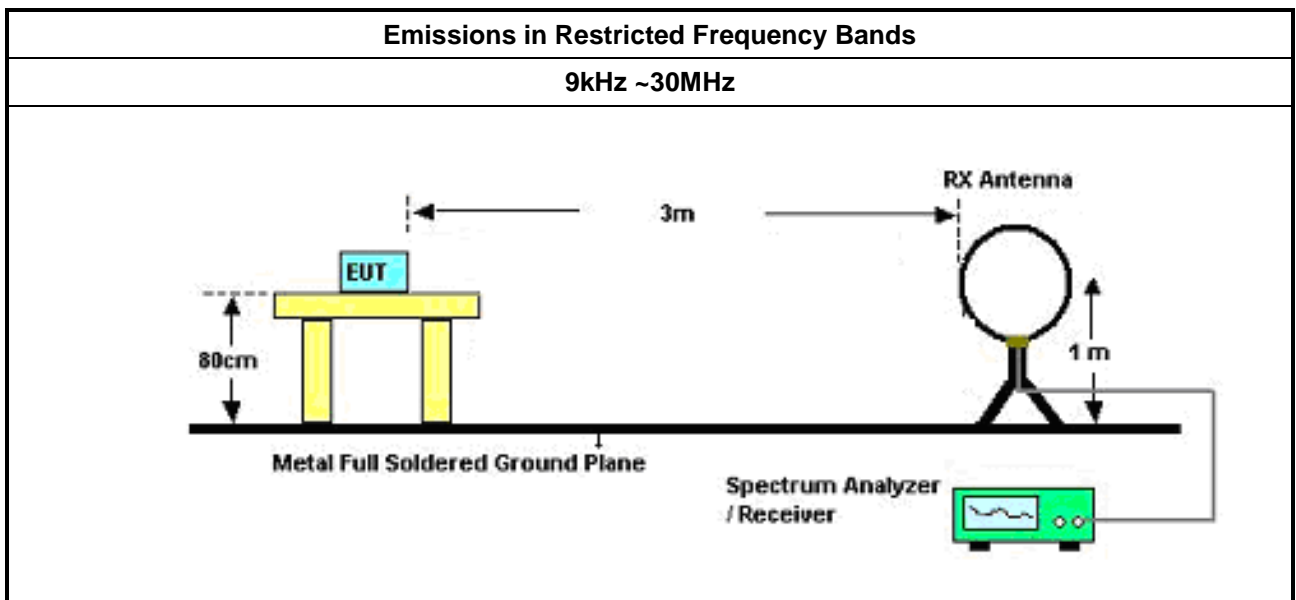

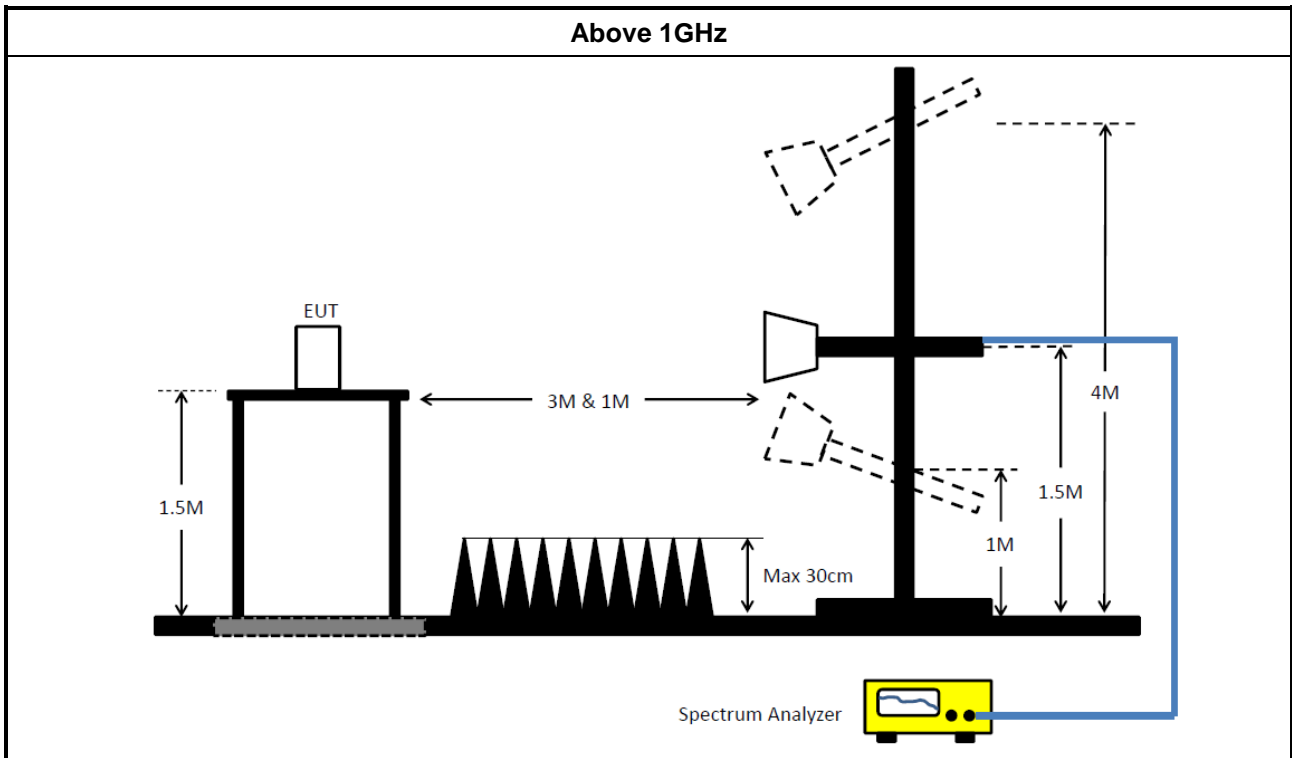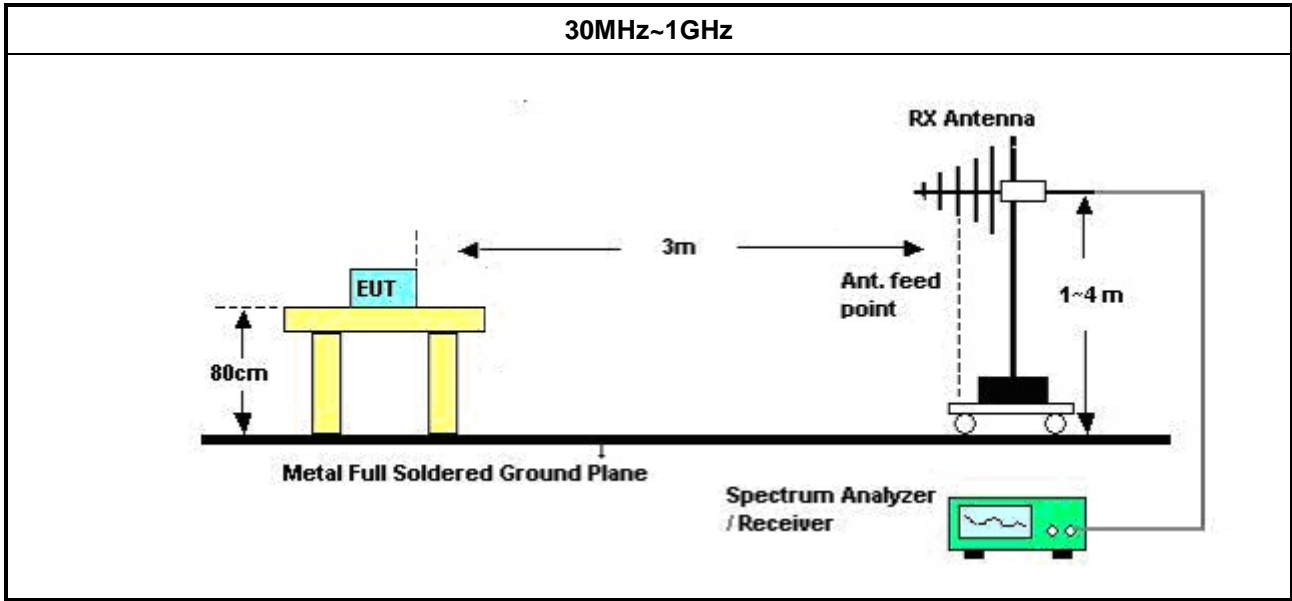

### 3.6.5 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

### 3.6.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



## 4 Test Equipment and Calibration Data

### Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR3	102052	9kHz ~ 3.6GHz	09/Apr/2019	08/Apr/2020
LISN	R&S	ENV 216	101274	9kHz ~ 30MHz	12/Jun/2018	11/Jun/2019
RF Cable-CON	MTJ	RG142	CB001-CO	9kHz ~ 30MHz	17/Sep/2018	16/Sep/2019
AC POWER	APC	AFC-11003G	F308010045	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561F	9495	9kHz ~ 30MHz	11/Oct/2018	10/Oct/2019

NCR : Non-Calibration Require

### Instrument for Radiated Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	30MHz ~ 1GHz	23/Apr/2018	22/Apr/2019
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	1GHz ~ 18GHz	14/Jun/2018	13/Jun/2019
Microwave Preamplifier	Agilent	8449B	3008A02096	1GHz ~ 26.5GHz	10/May/2018	09/May/2019
Amplifier	EMC	EMC9135	980232	9KHz~1GHz	27/Apr/2018	26/Apr/2019
EMI Test Receiver	R&S	ESR3	102052	9kHz ~ 3.6GHz	10/Apr/2018	09/Apr/2019
EXA Signal Analyzer	KEYSIGHT	N9010A	MY54200885	10Hz ~ 44GHz	31/Jul/2018	30/Jul/2019
Bilog Antenna & 5dB Attenuator	TESEQ & MTJ	CBL6111D & MTJ6102-05	35418 / 3	30MHz~1GHz	02/Oct/2018	03/Oct/2019
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA9120 D 1534	1GHz~18GHz	30/Apr/2018	29/Apr/2019
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170339	15GHz ~ 40GHz	11/Apr/2018	10/Apr/2019
Preamplifier	MITEQ	TTA1840-35-H G	1864481	18GHz ~ 40GHz	24/Aug/2018	23/Aug/2019
Loop Antenna	TESEQ	HLA 6120	31244	9k-30MHz	29/Mar/2018	28/Mar/2019
LF-CABLE-20190218	Jye Bao	RG142	CB028	9kHz ~ 1GHz	18/Feb/2019	17/Feb/2020
RF Cable-high	HUBER+SUHNER	SUCOFLEX104	SN 556626/4 + 556627	1GHz ~ 40GHz	14/Mar/2019	13/Mar/2020

### Instrument for Conducted Test


Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101500	10Hz~40GHz	18/Jul/2018	17/Jul/2019
Power Sensor	Anritsu	MA2411B	1339407	300MHz ~ 40GHz	17/Nov/2018	16/Nov/2019
Power Meter	Anritsu	ML2495A	1517010	300MHz ~ 40GHz	17/Nov/2018	16/Nov/2019
Cable 0.2m	HUBER	MY10710/4	RF Cable - 01	30MHz ~18G	10/Jan/2019	09/Jan/2020
Cable 0.2m	HUBER	MY10711/4	RF Cable - 02	30MHz ~18G	10/Jan/2019	09/Jan/2020
Cable 0.5m	HUBER	MY39470/4	RF Cable - 29	30MHz ~18G	10/Jan/2019	09/Jan/2020
SMB100A Signal Generator	R&S	SMB100A03	181147	100kHz~40GHz	12/Nov/2018	10/Nov/2020



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Neutral
Operating Function	Adapter mode		

30/04/2019

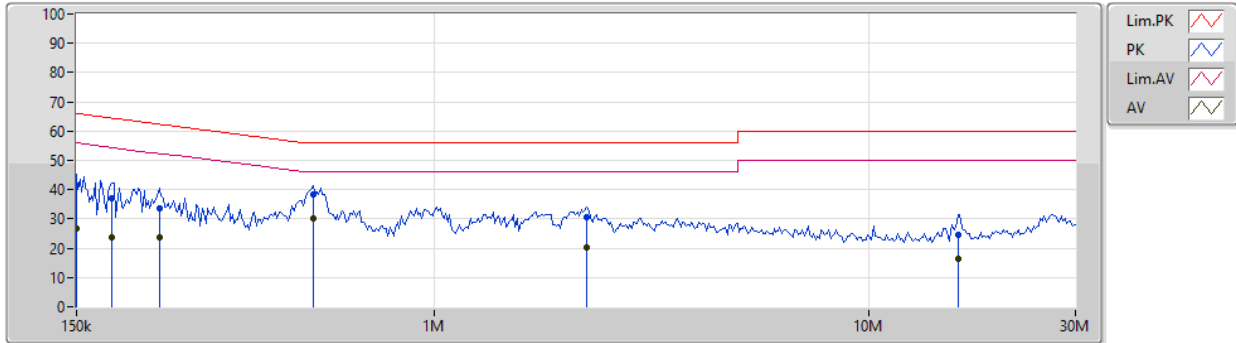


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	150k	41.42	66.00	-24.58	19.52	Neutral	-	21.90	9.65	0.01	9.86
AV	150k	26.77	56.00	-29.23	19.52	Neutral	-	7.25	9.65	0.01	9.86
QP	181.216k	37.26	64.43	-27.17	19.51	Neutral	-	17.75	9.64	0.01	9.86
AV	181.216k	23.77	54.43	-30.66	19.51	Neutral	-	4.26	9.64	0.01	9.86
QP	232.398k	33.68	62.37	-28.69	19.51	Neutral	-	14.17	9.64	0.01	9.86
AV	232.398k	23.75	52.37	-28.62	19.51	Neutral	-	4.24	9.64	0.01	9.86
QP	525.514k	38.57	56.00	-17.43	19.51	Neutral	-	19.06	9.64	0.01	9.86
AV	525.514k	30.10	46.00	-15.90	19.51	Neutral	"Worst"	10.59	9.64	0.01	9.86
QP	2.246M	30.58	56.00	-25.42	19.55	Neutral	-	11.03	9.65	0.03	9.87
AV	2.246M	20.09	46.00	-25.91	19.55	Neutral	-	0.54	9.65	0.03	9.87
QP	16.112M	24.52	60.00	-35.48	19.74	Neutral	-	4.78	9.71	0.09	9.94
AV	16.112M	16.28	50.00	-33.72	19.74	Neutral	-	-3.46	9.71	0.09	9.94

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Adapter mode		

30/04/2019

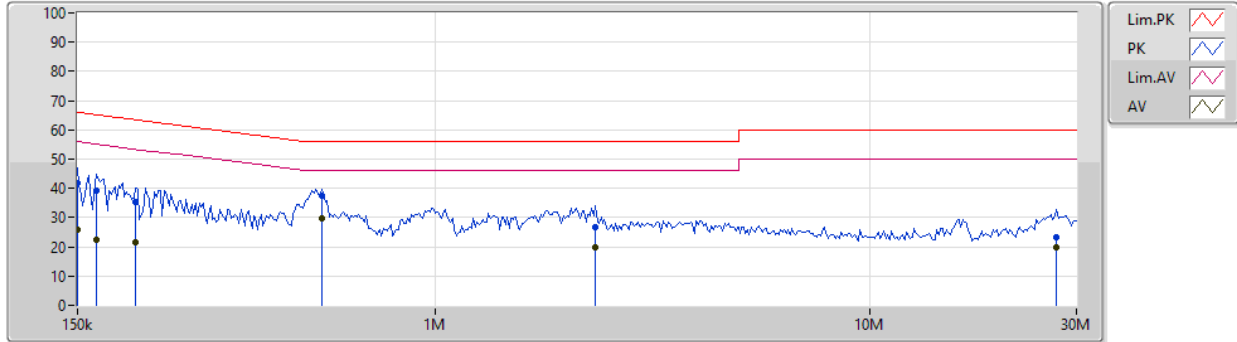

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	150k	41.86	66.00	-24.14	19.48	Line	-	22.38	9.61	0.01	9.86
AV	150k	25.96	56.00	-30.04	19.48	Line	-	6.48	9.61	0.01	9.86
QP	165.693k	39.04	65.18	-26.14	19.48	Line	-	19.56	9.61	0.01	9.86
AV	165.693k	22.56	55.18	-32.62	19.48	Line	-	3.08	9.61	0.01	9.86
QP	204.199k	35.23	63.44	-28.21	19.48	Line	-	15.75	9.61	0.01	9.86
AV	204.199k	21.36	53.44	-32.08	19.48	Line	-	1.88	9.61	0.01	9.86
QP	546.852k	37.61	56.00	-18.39	19.48	Line	-	18.13	9.61	0.01	9.86
AV	546.852k	29.84	46.00	-16.16	19.48	Line	"Worst"	10.36	9.61	0.01	9.86
QP	2.338M	26.86	56.00	-29.14	19.53	Line	-	7.33	9.62	0.04	9.87
AV	2.338M	19.87	46.00	-26.13	19.53	Line	-	0.34	9.62	0.04	9.87
QP	27.03M	23.49	60.00	-36.51	19.68	Line	-	3.81	9.56	0.13	9.99
AV	27.03M	19.67	50.00	-30.33	19.68	Line	-	-0.01	9.56	0.13	9.99



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_4TX	8.075M	11.969M	12M0G1D	7.5M	10.37M
802.11g_Nss1,(6Mbps)_4TX	15.1M	19.49M	19M5D1D	14.375M	16.342M
VHT20_Nss1,(MCS0)_4TX	15.95M	26.362M	26M4D1D	14.95M	17.491M
VHT40_Nss1,(MCS0)_4TX	36.35M	36.332M	36M3D1D	36.1M	36.232M

**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;  
**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;



**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	500k	8.025M	11.819M	8.075M	11.969M	8M	11.419M	7.55M	11.494M
2437MHz_TnomVnom	Pass	500k	8.025M	10.72M	8.025M	11.344M	7.55M	10.67M	8.05M	10.545M
2462MHz_TnomVnom	Pass	500k	8.025M	10.37M	8M	10.545M	8M	10.445M	7.5M	10.42M
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	500k	15.025M	16.367M	15.05M	16.342M	15.05M	16.342M	15.05M	16.342M
2437MHz_TnomVnom	Pass	500k	15.075M	19.09M	15.075M	19.49M	15.025M	18.041M	15.1M	18.091M
2462MHz_TnomVnom	Pass	500k	14.975M	16.367M	15.05M	16.367M	15.025M	16.342M	14.375M	16.342M
VHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	500k	15.05M	17.591M	15M	17.566M	14.975M	17.566M	15.1M	17.566M
2437MHz_TnomVnom	Pass	500k	15.6M	24.913M	15.85M	26.362M	15.075M	24.213M	15.95M	24.313M
2462MHz_TnomVnom	Pass	500k	15.025M	17.516M	15.05M	17.566M	14.95M	17.491M	15.05M	17.541M
VHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2422MHz_TnomVnom	Pass	500k	36.35M	36.232M	36.35M	36.282M	36.35M	36.232M	36.35M	36.282M
2437MHz_TnomVnom	Pass	500k	36.3M	36.332M	36.3M	36.332M	36.1M	36.232M	36.3M	36.232M
2452MHz_TnomVnom	Pass	500k	36.3M	36.232M	36.3M	36.332M	36.35M	36.232M	36.35M	36.232M


**Port X-N dB** = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

### 802.11b\_Nss1,(1Mbps)\_4TX

EBW

2412MHz

29/04/2019

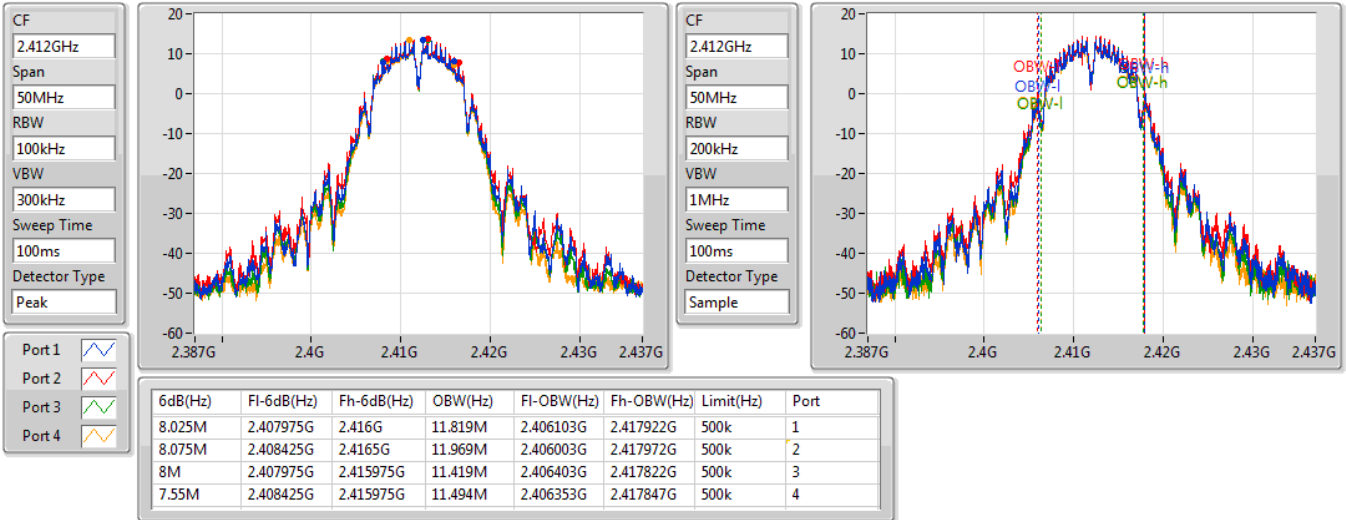


### 802.11b\_Nss1,(1Mbps)\_4TX

EBW

2437MHz

06/05/2019

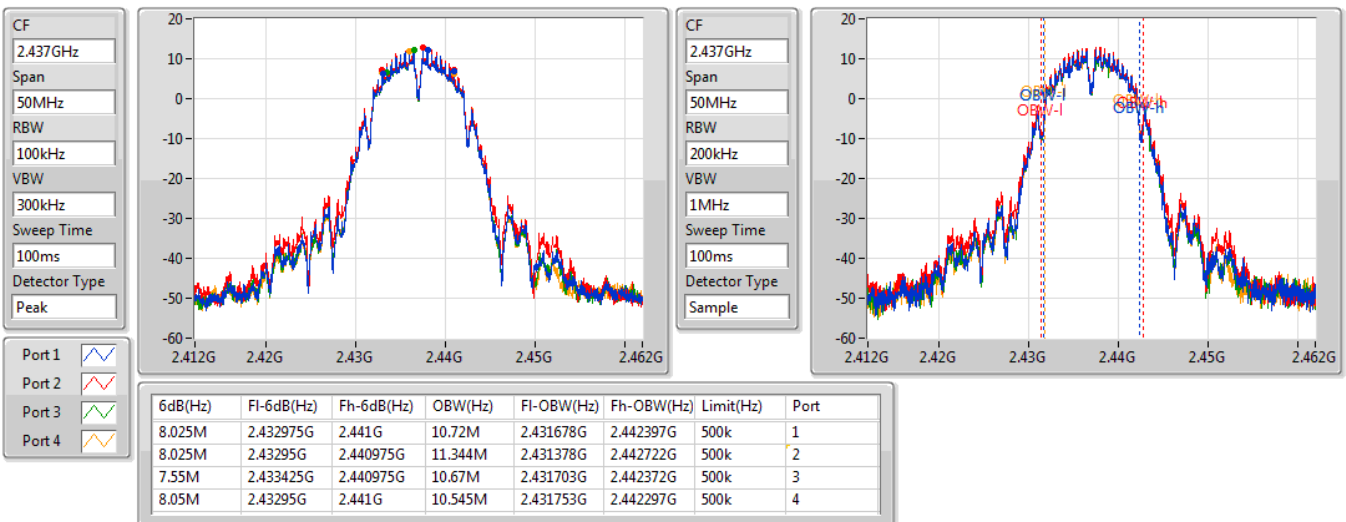


### 802.11b\_Nss1,(1Mbps)\_4TX

EBW

2462MHz

06/05/2019

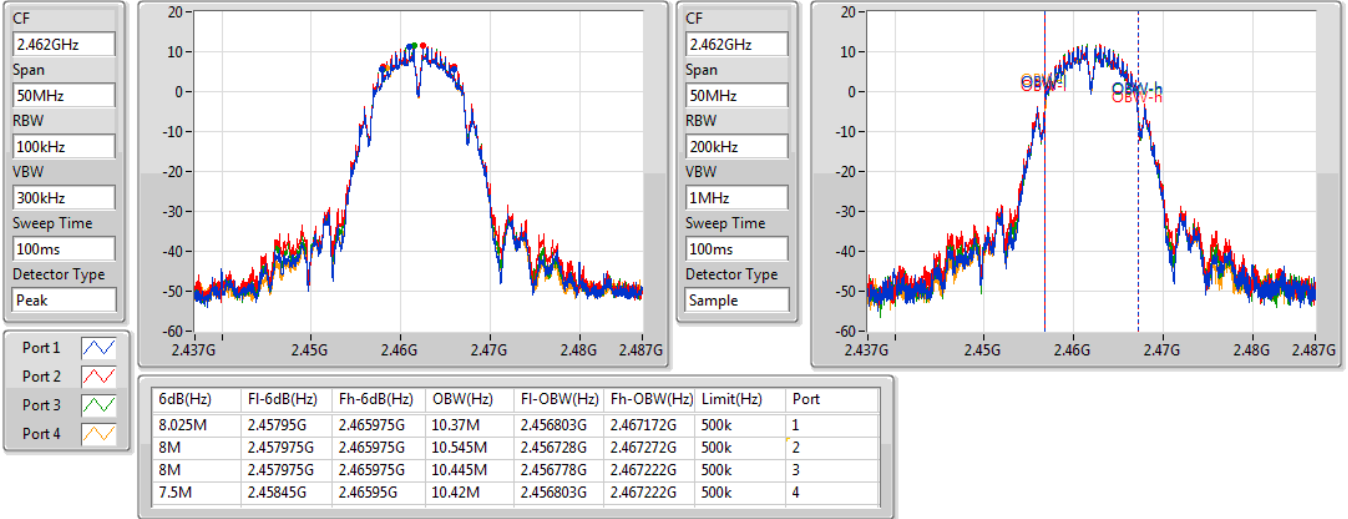


### 802.11g\_Nss1,(6Mbps)\_4TX

EBW

2412MHz

29/04/2019

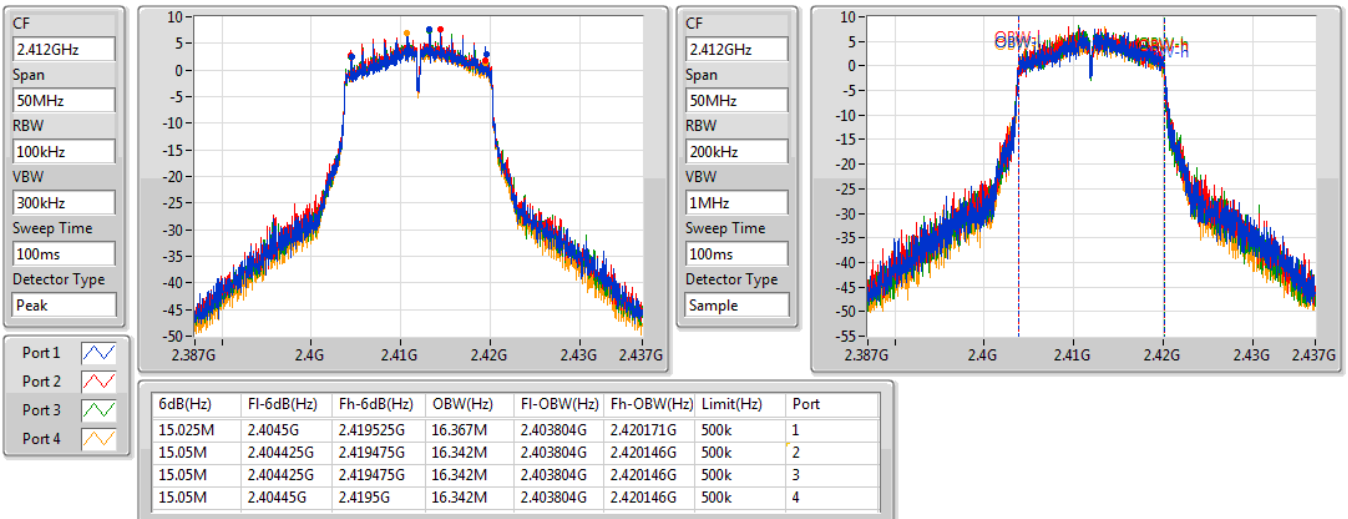


### 802.11g\_Nss1,(6Mbps)\_4TX

EBW

2437MHz

29/04/2019

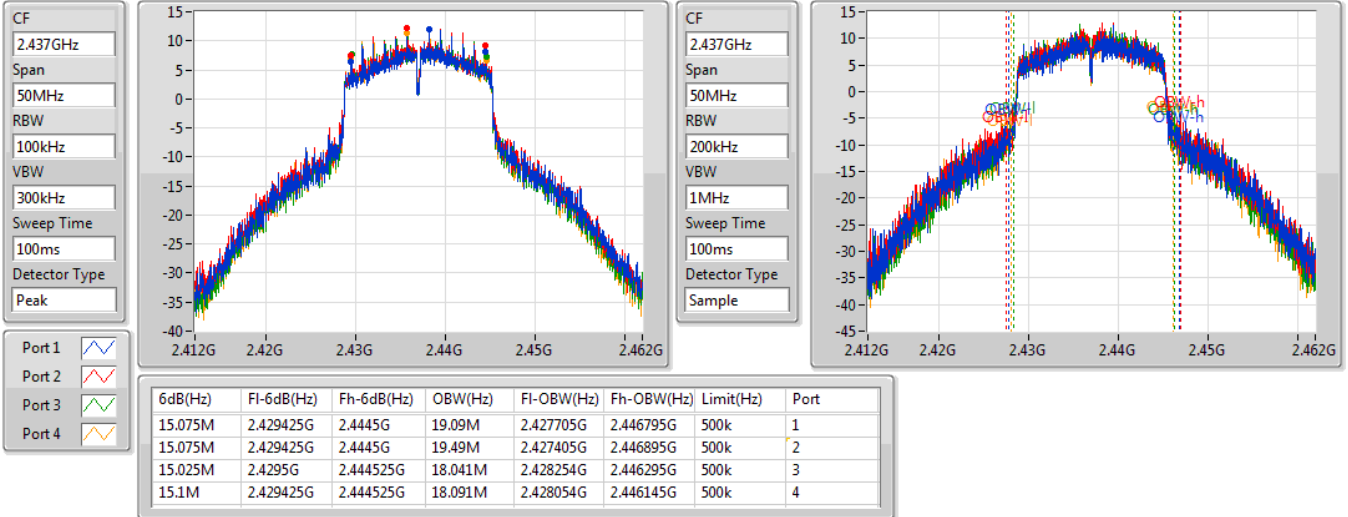


### 802.11g\_Nss1,(6Mbps)\_4TX

EBW

2462MHz

29/04/2019

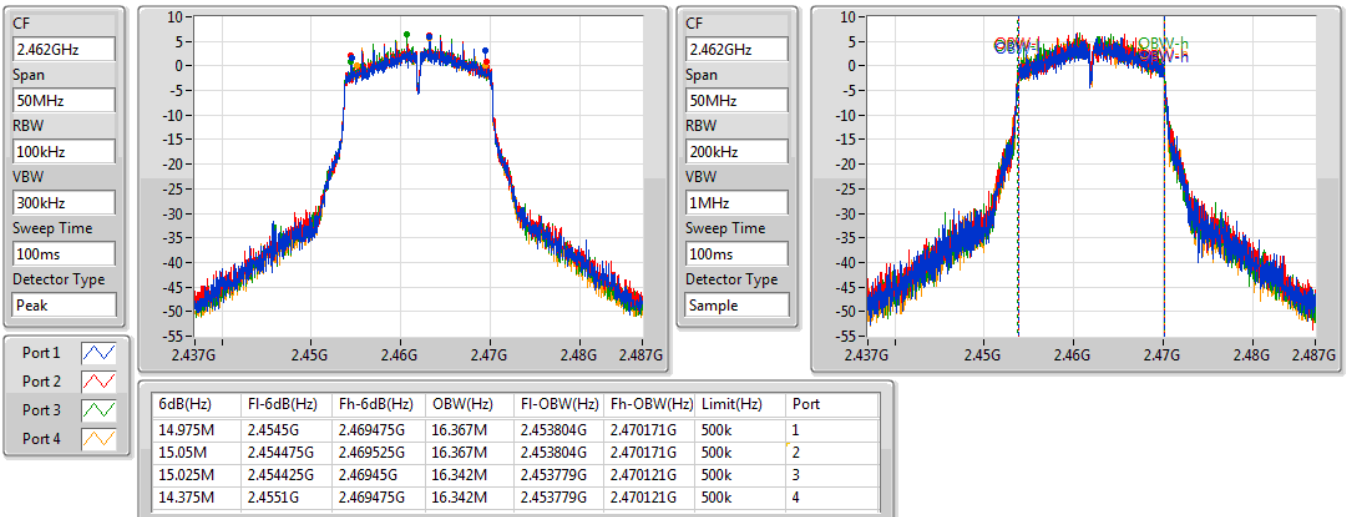


VHT20\_Nss1,(MCS0)\_4TX

EBW

2412MHz

29/04/2019

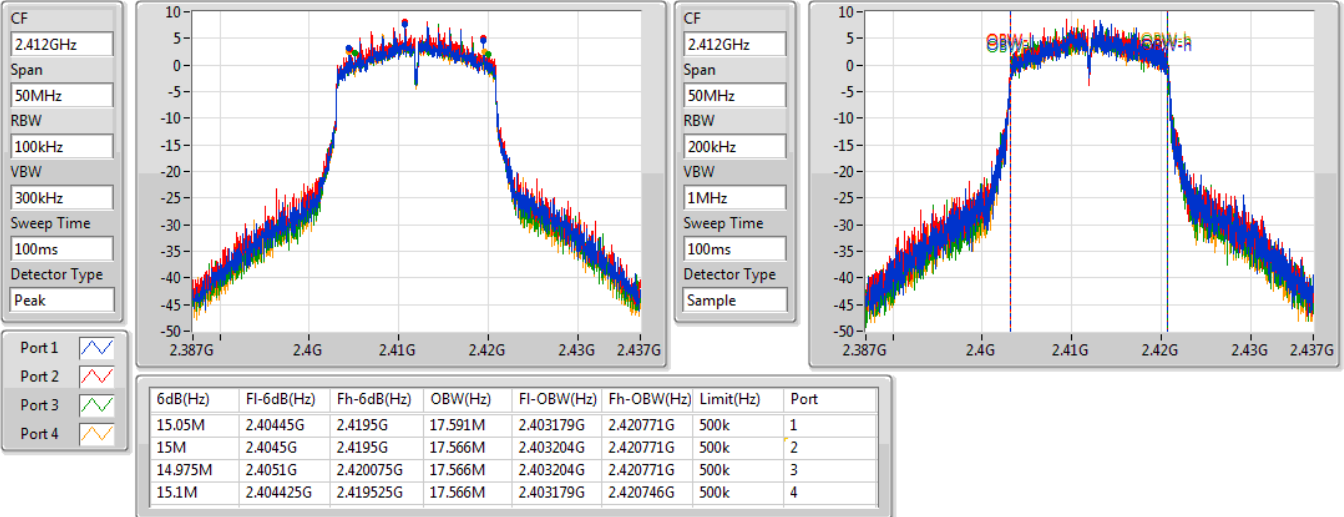


VHT20\_Nss1,(MCS0)\_4TX

EBW

2437MHz

29/04/2019

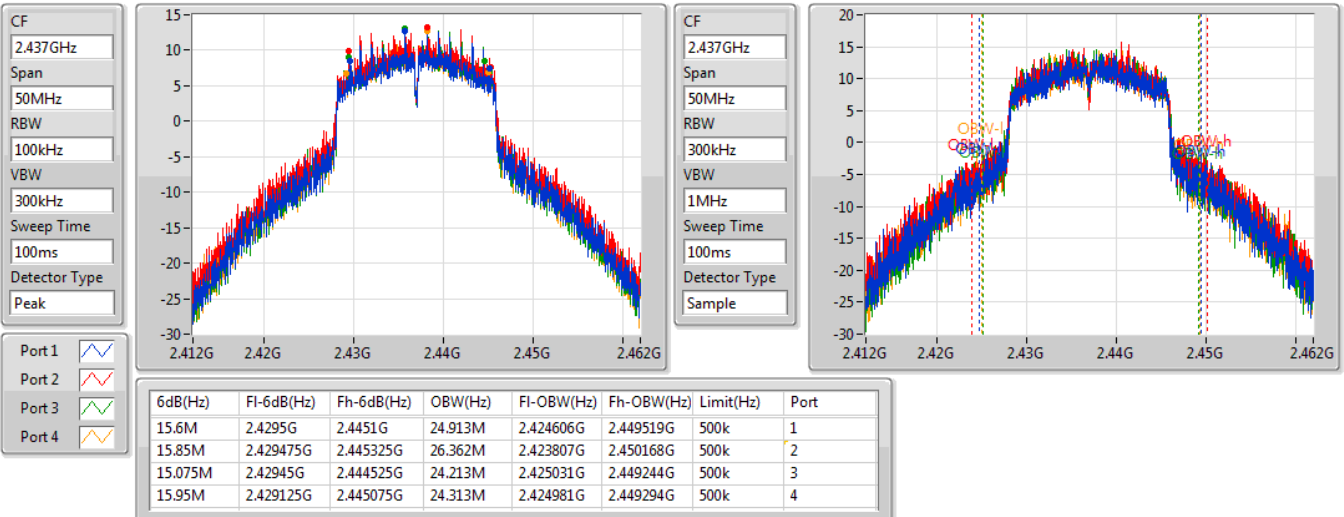


### VHT20\_Nss1,(MCS0)\_4TX

EBW


2462MHz

29/04/2019

CF  
2.462GHz  
Span  
50MHz  
RBW  
100kHz  
VBW  
300kHz  
Sweep Time  
100ms  
Detector Type  
Peak

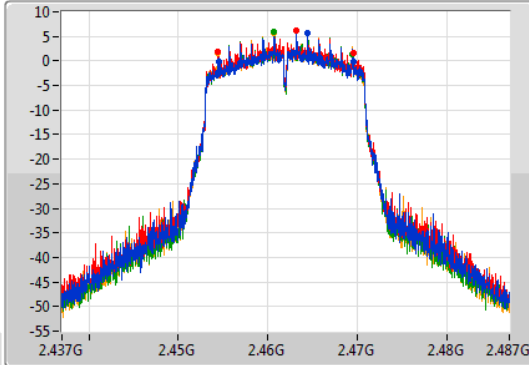

CF  
2.462GHz  
Span  
50MHz  
RBW  
200kHz  
VBW  
1MHz  
Sweep Time  
100ms  
Detector Type  
Sample

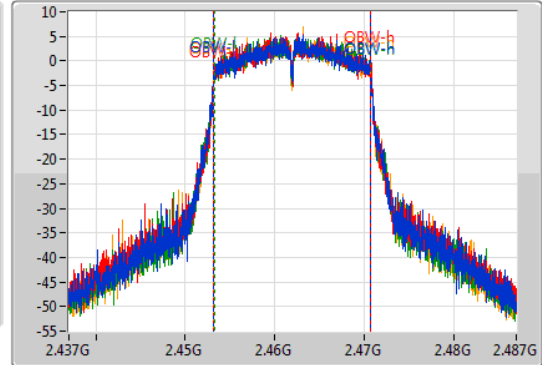

Port 1  
Port 2  
Port 3  
Port 4

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.025M	2.4545G	2.469525G	17.516M	2.453204G	2.470721G	500k	1
15.05M	2.454475G	2.469525G	17.566M	2.453204G	2.470721G	500k	2
14.95M	2.454475G	2.469425G	17.491M	2.453229G	2.470721G	500k	3
15.05M	2.45445G	2.4695G	17.541M	2.453179G	2.470721G	500k	4


### VHT40\_Nss1,(MCS0)\_4TX

EBW


2422MHz

29/04/2019

CF  
2.422GHz  
Span  
100MHz  
RBW  
100kHz  
VBW  
300kHz  
Sweep Time  
100ms  
Detector Type  
Peak

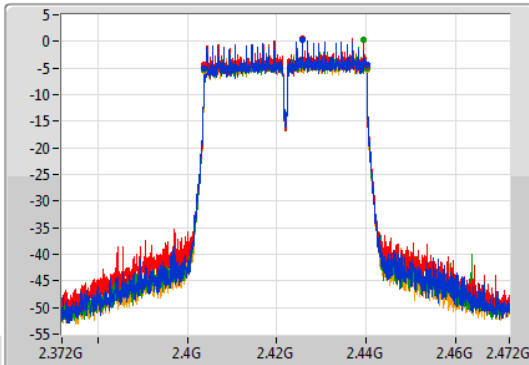

CF  
2.422GHz  
Span  
100MHz  
RBW  
500kHz  
VBW  
2MHz  
Sweep Time  
100ms  
Detector Type  
Sample

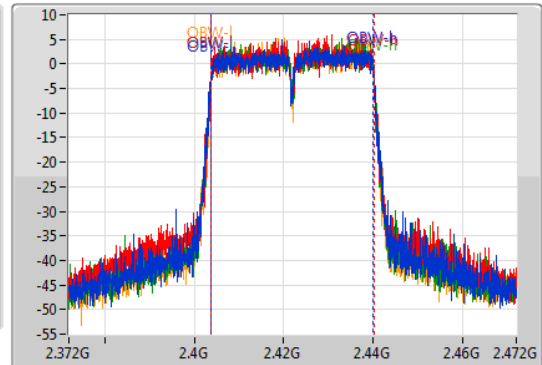

Port 1  
Port 2  
Port 3  
Port 4

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
36.35M	2.4038G	2.44015G	36.232M	2.403859G	2.440091G	500k	1
36.35M	2.4038G	2.44015G	36.282M	2.403859G	2.440141G	500k	2
36.35M	2.4038G	2.44015G	36.232M	2.403859G	2.440091G	500k	3
36.35M	2.4038G	2.44015G	36.282M	2.403809G	2.440091G	500k	4


VHT40\_Nss1,(MCS0)\_4TX

EBW


2437MHz

29/04/2019

CF  
2.437GHz  
Span  
100MHz  
RBW  
100kHz  
VBW  
300kHz  
Sweep Time  
100ms  
Detector Type  
Peak

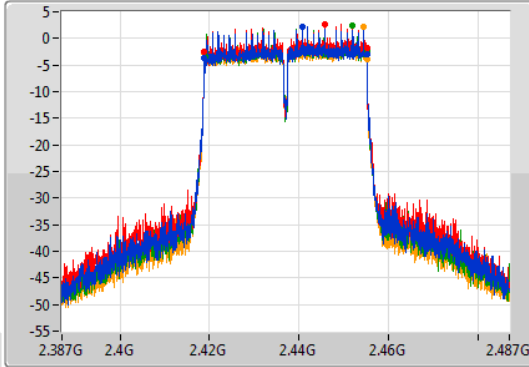

CF  
2.437GHz  
Span  
100MHz  
RBW  
500kHz  
VBW  
2MHz  
Sweep Time  
100ms  
Detector Type  
Sample

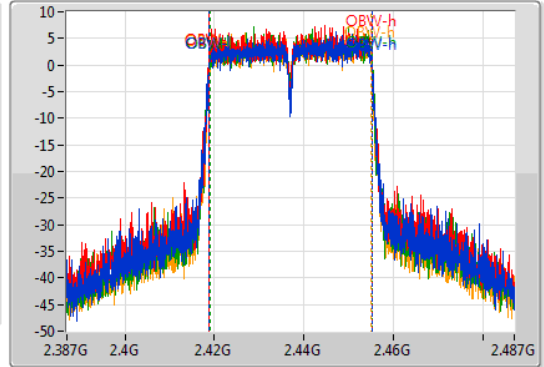

Port 1  
Port 2  
Port 3  
Port 4

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
36.3M	2.41885G	2.45515G	36.332M	2.418809G	2.455141G	500k	1
36.3M	2.41885G	2.45515G	36.332M	2.418809G	2.455141G	500k	2
36.1M	2.41905G	2.45515G	36.232M	2.418909G	2.455141G	500k	3
36.3M	2.41885G	2.45515G	36.232M	2.418809G	2.455041G	500k	4


VHT40\_Nss1,(MCS0)\_4TX

EBW


2452MHz

29/04/2019

CF  
2.452GHz  
Span  
100MHz  
RBW  
100kHz  
VBW  
300kHz  
Sweep Time  
100ms  
Detector Type  
Peak

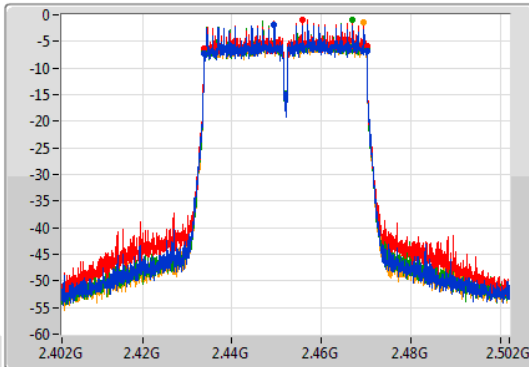

CF  
2.452GHz  
Span  
100MHz  
RBW  
500kHz  
VBW  
2MHz  
Sweep Time  
100ms  
Detector Type  
Sample

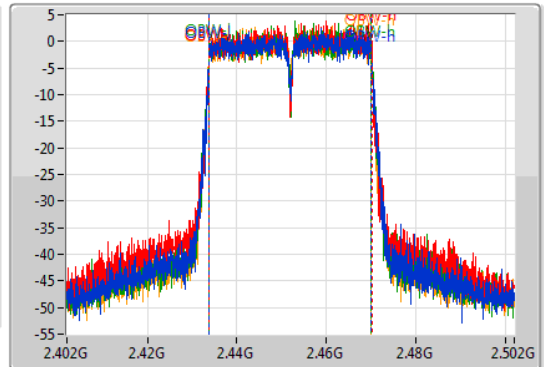

Port 1  
Port 2  
Port 3  
Port 4

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
36.3M	2.43385G	2.47015G	36.232M	2.433859G	2.470091G	500k	1
36.3M	2.43385G	2.47015G	36.332M	2.433809G	2.470141G	500k	2
36.35M	2.4338G	2.47015G	36.232M	2.433859G	2.470091G	500k	3
36.35M	2.4338G	2.47015G	36.232M	2.433809G	2.470041G	500k	4



**Summary**

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_4TX	27.76	0.59704
802.11g_Nss1,(6Mbps)_4TX	28.24	0.66681
VHT20_Nss1,(MCS0)_4TX	29.37	0.86497
VHT40_Nss1,(MCS0)_4TX	22.28	0.16904





Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	3.81	21.36	22.18	21.80	21.58	27.76	30.00
2437MHz_TnomVnom	Pass	3.81	20.50	21.18	20.63	20.61	26.76	30.00
2457MHz_TnomVnom	Pass	3.81	20.45	21.03	20.53	20.58	26.67	30.00
2462MHz_TnomVnom	Pass	3.81	19.41	19.89	19.81	19.64	25.71	30.00
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	3.81	17.67	18.21	18.21	17.70	23.98	30.00
2417MHz_TnomVnom	Pass	3.81	19.55	20.08	19.93	19.64	25.83	30.00
2437MHz_TnomVnom	Pass	3.81	21.92	22.43	22.32	22.18	28.24	30.00
2457MHz_TnomVnom	Pass	3.81	20.07	20.76	20.53	20.46	26.48	30.00
2462MHz_TnomVnom	Pass	3.81	16.36	16.92	17.11	16.87	22.84	30.00
VHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	3.81	17.84	18.28	17.96	17.93	24.03	30.00
2417MHz_TnomVnom	Pass	3.81	18.47	19.05	18.77	18.58	24.74	30.00
2437MHz_TnomVnom	Pass	3.81	22.95	23.68	23.42	23.33	29.37	30.00
2457MHz_TnomVnom	Pass	3.81	19.07	19.52	19.67	19.21	25.39	30.00
2462MHz_TnomVnom	Pass	3.81	15.91	16.24	16.15	16.18	22.14	30.00
VHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz_TnomVnom	Pass	3.81	14.33	14.61	14.51	14.32	20.46	30.00
2427MHz_TnomVnom	Pass	3.81	14.30	14.67	14.51	14.24	20.45	30.00
2437MHz_TnomVnom	Pass	3.81	16.02	16.68	16.34	15.94	22.28	30.00
2447MHz_TnomVnom	Pass	3.81	14.80	15.07	15.00	14.87	20.96	30.00
2452MHz_TnomVnom	Pass	3.81	12.75	13.19	12.94	12.70	18.92	30.00

DG = Directional Gain; Port X = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_4TX	2.21
802.11g_Nss1,(6Mbps)_4TX	1.19
VHT20_Nss1,(MCS0)_4TX	1.25
VHT40_Nss1,(MCS0)_4TX	-8.16




RBW=3 kHz.




**Result**




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	7.59	-1.05	-0.55	-1.25	-0.79	2.21	6.41
2437MHz_TnomVnom	Pass	7.59	-2.00	-1.74	-2.55	-1.37	1.18	6.41
2462MHz_TnomVnom	Pass	7.59	-4.30	-2.88	-3.25	-4.15	-0.38	6.41
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	7.59	-7.73	-8.43	-7.65	-7.39	-2.76	6.41
2437MHz_TnomVnom	Pass	7.59	-3.47	-2.91	-3.29	-3.16	1.19	6.41
2462MHz_TnomVnom	Pass	7.59	-8.51	-8.41	-7.33	-7.92	-3.37	6.41
VHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	7.59	-6.43	-6.33	-7.69	-6.04	-3.20	6.41
2437MHz_TnomVnom	Pass	7.59	-2.75	-1.85	-2.42	-2.37	1.25	6.41
2462MHz_TnomVnom	Pass	7.59	-9.29	-9.03	-9.13	-8.39	-5.99	6.41
VHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz_TnomVnom	Pass	7.59	-13.91	-14.08	-13.60	-13.91	-10.77	6.41
2437MHz_TnomVnom	Pass	7.59	-12.83	-11.77	-11.94	-11.29	-8.16	6.41
2452MHz_TnomVnom	Pass	7.59	-16.01	-15.26	-15.37	-15.96	-12.11	6.41




DG = Directional Gain; RBW=3 kHz;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

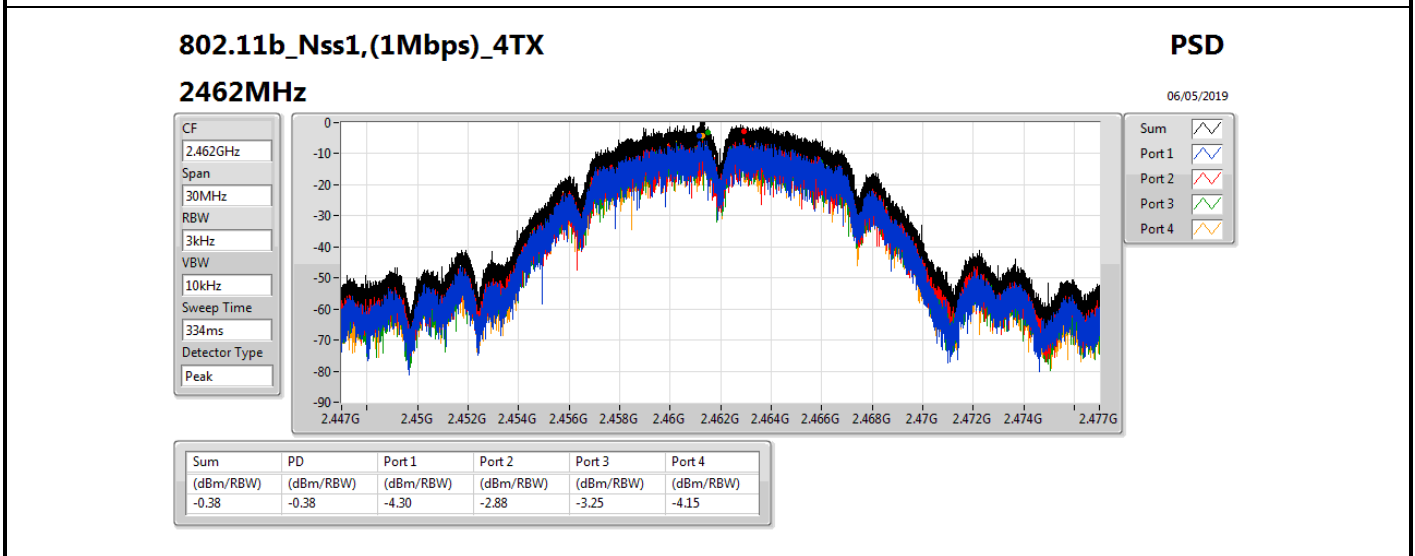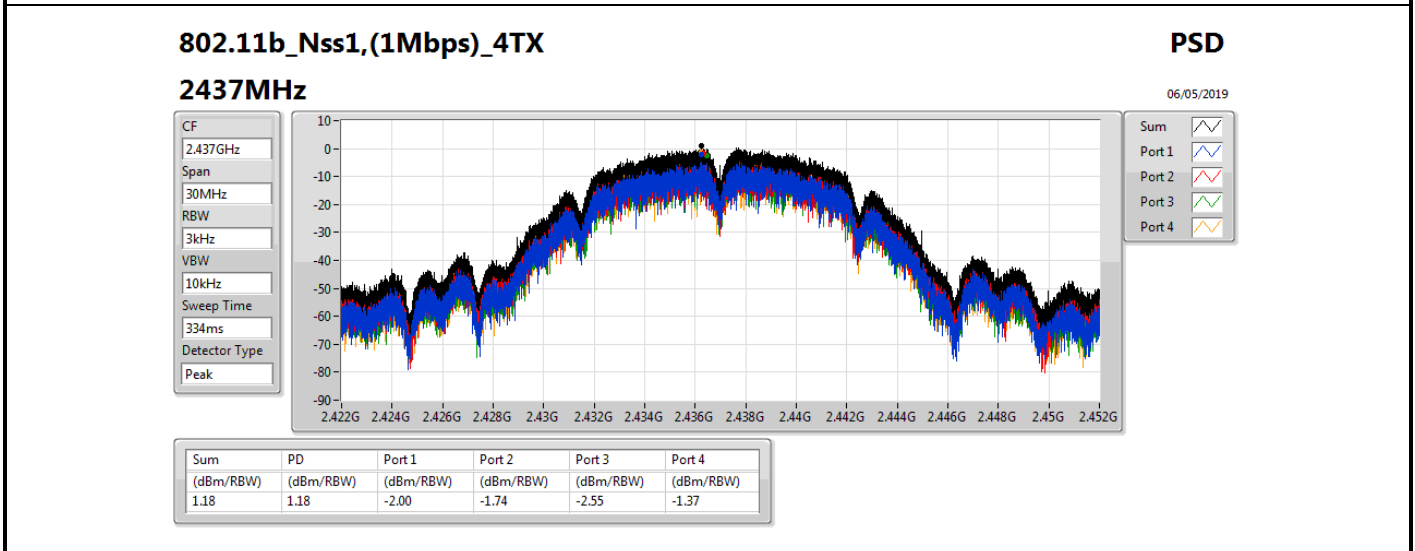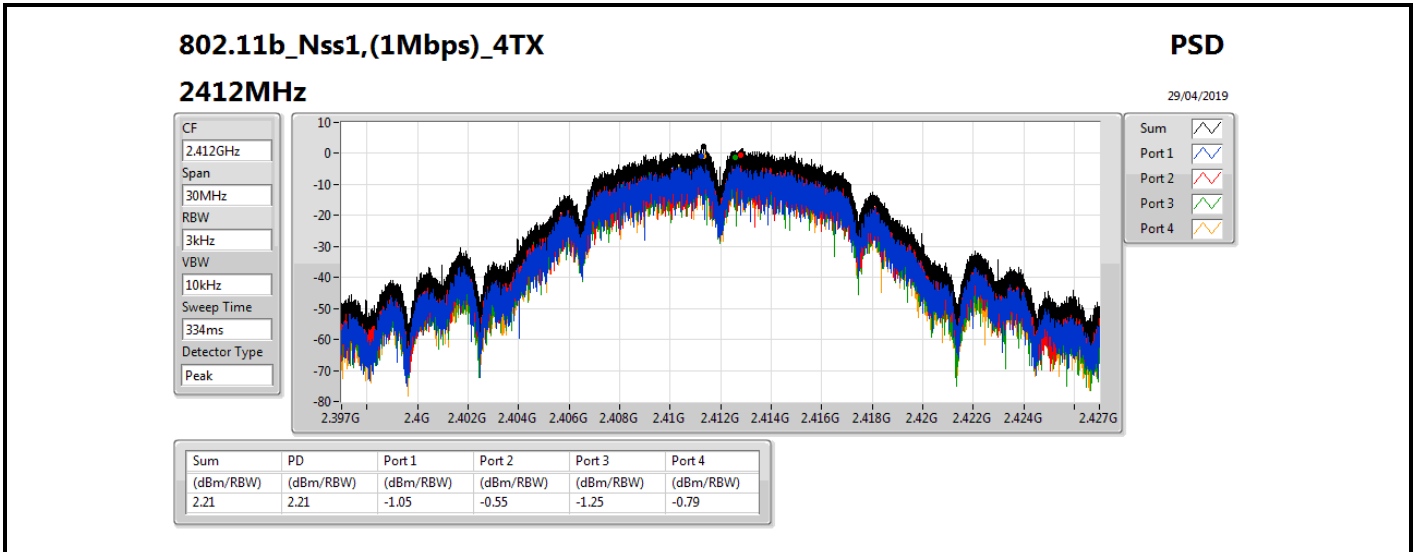

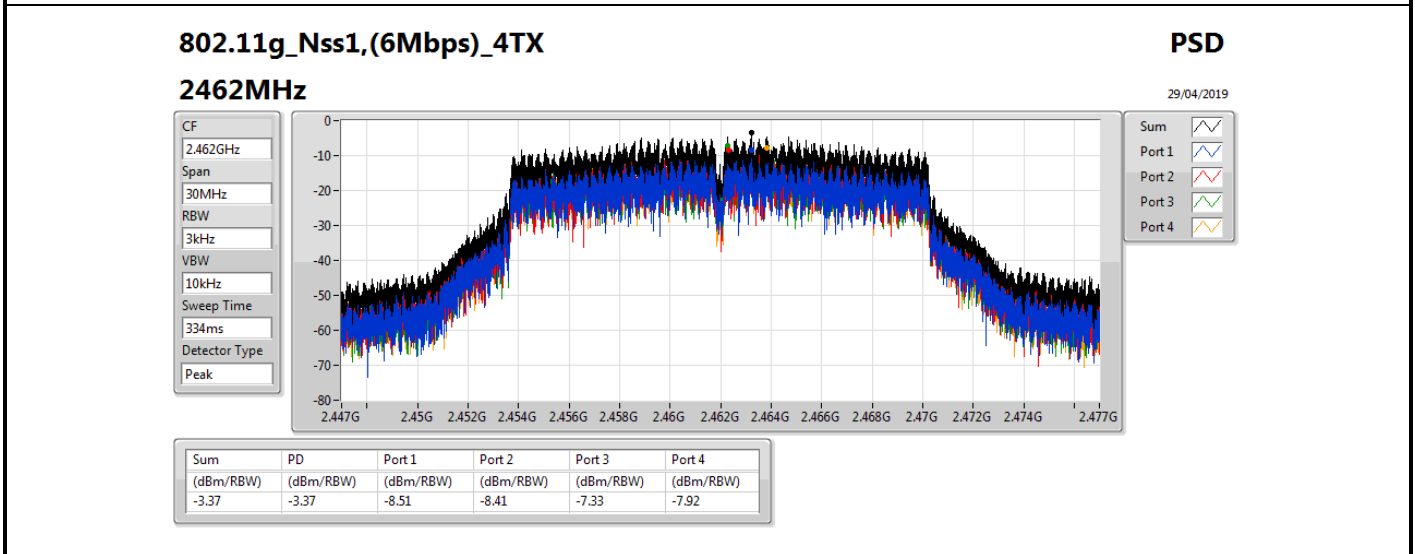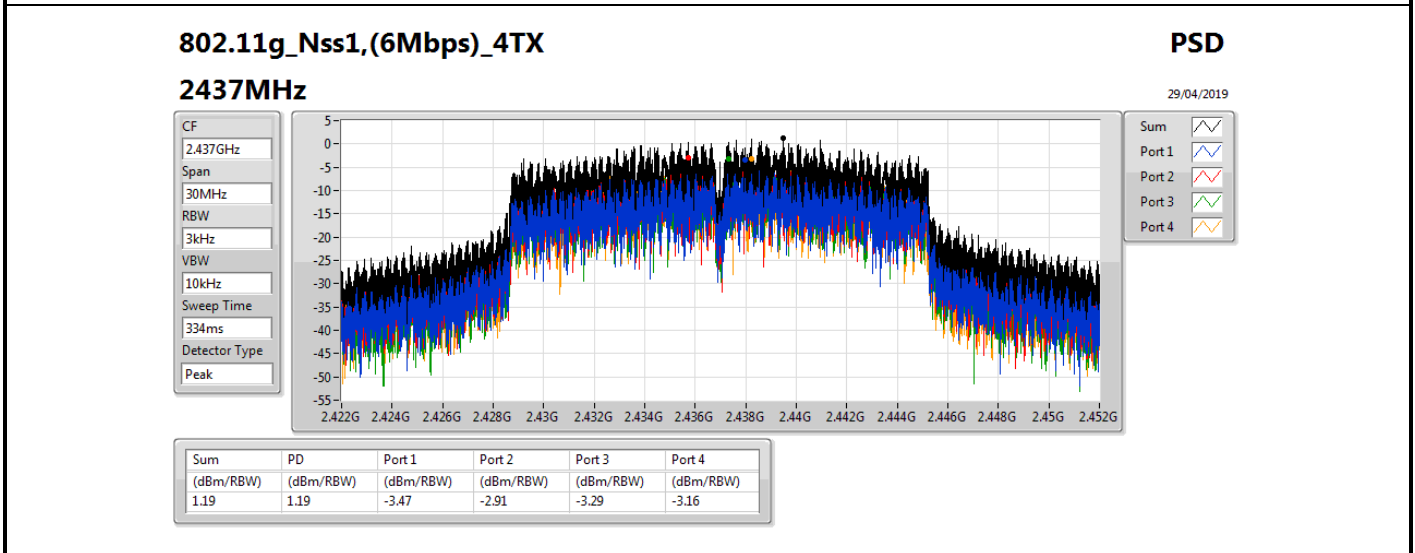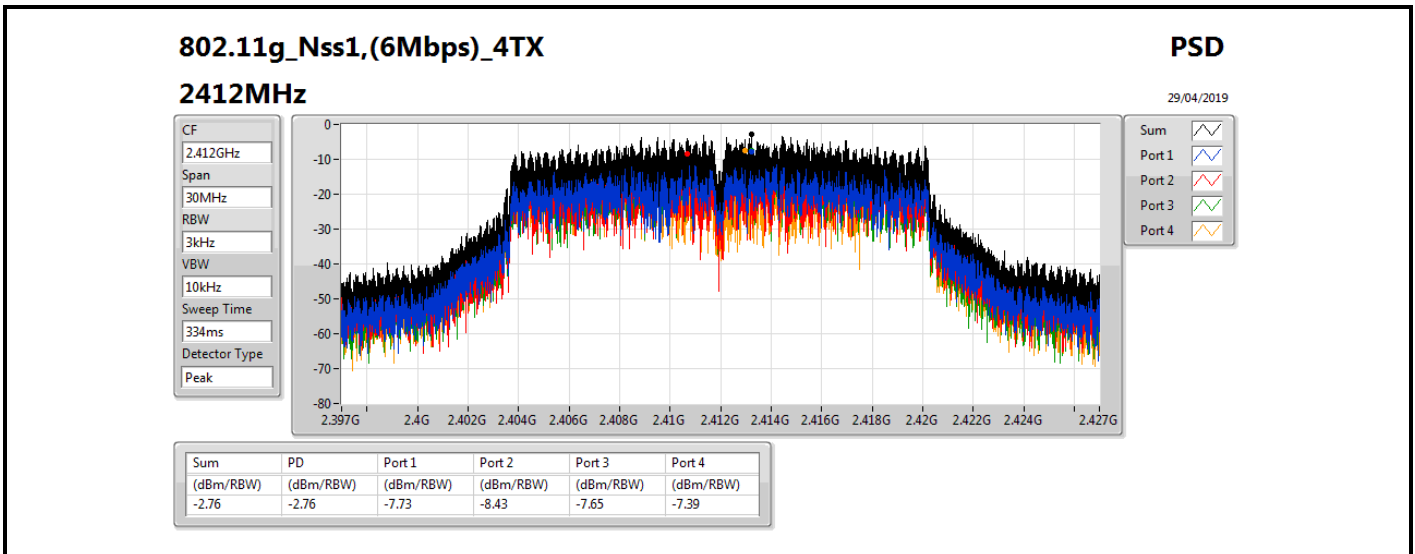

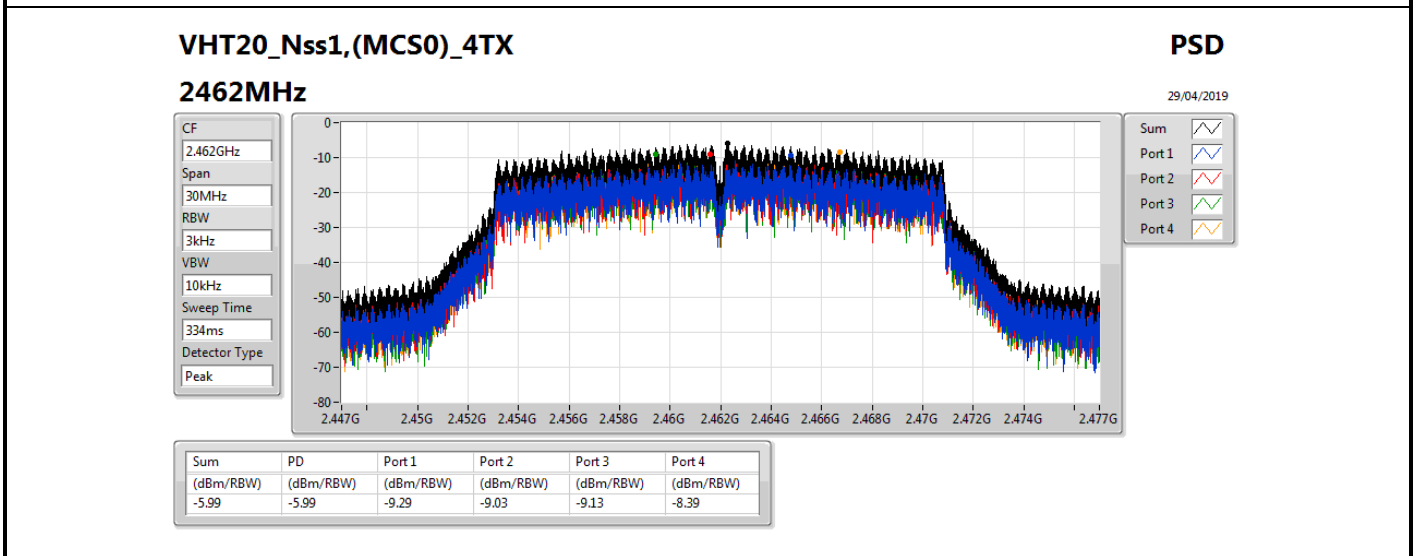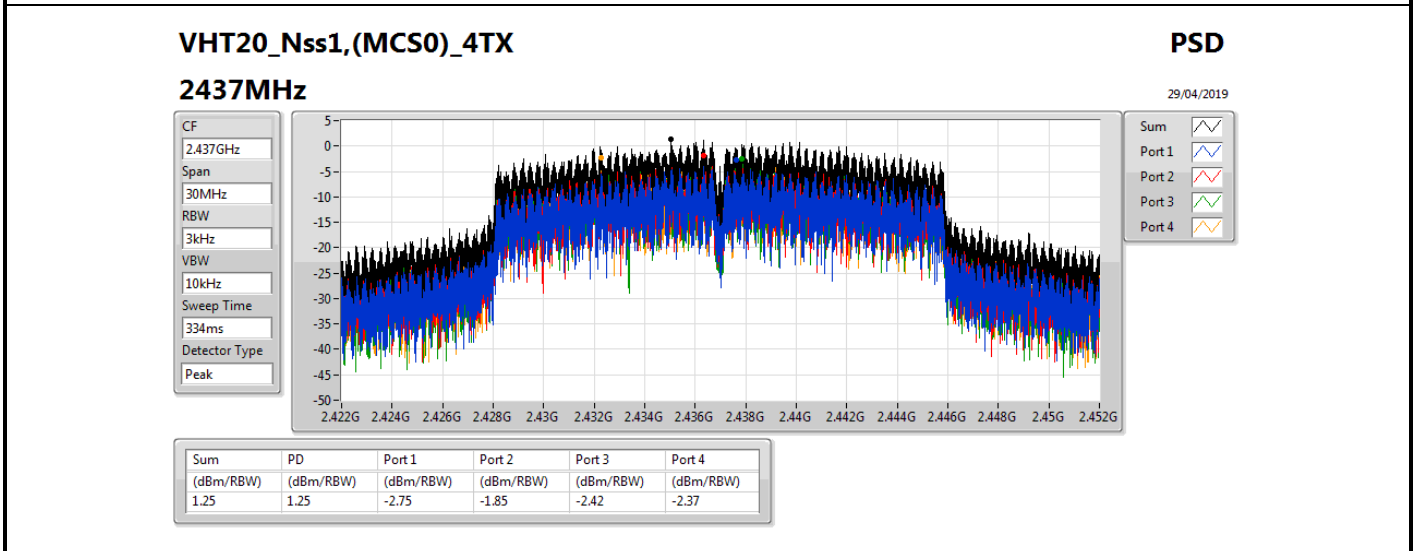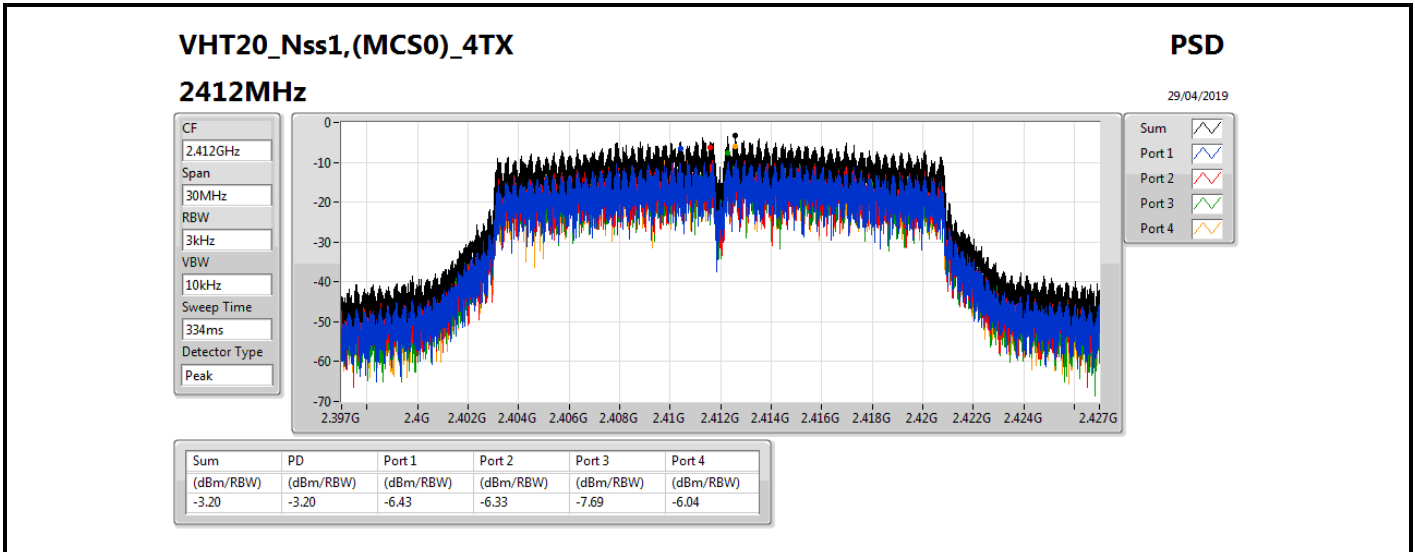

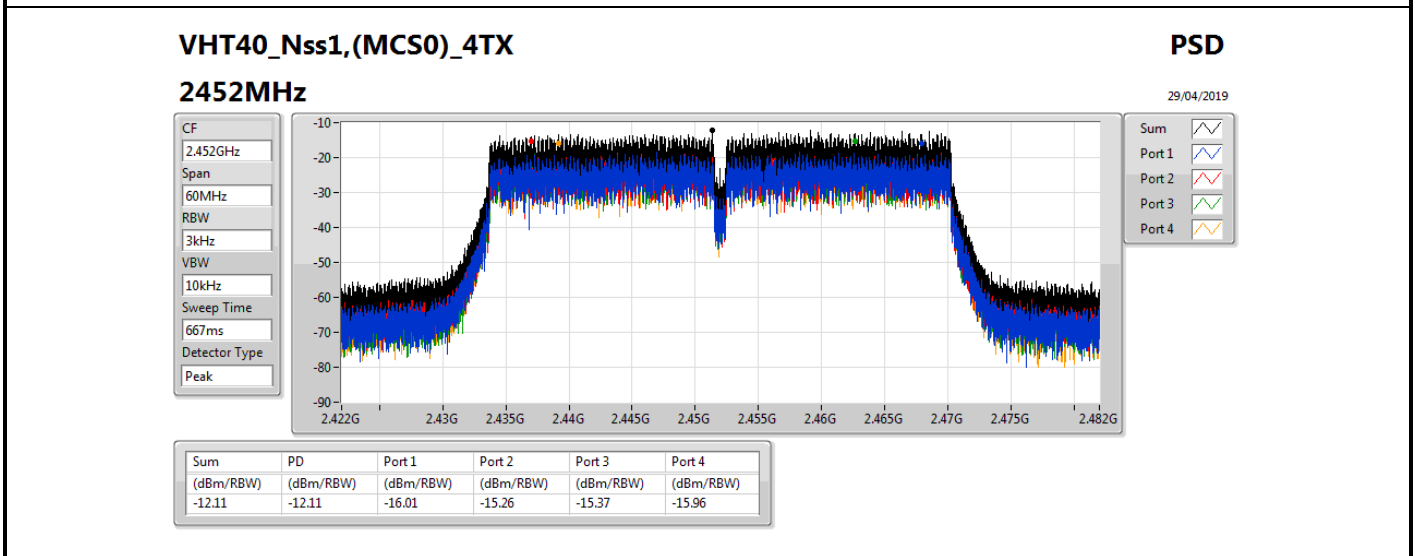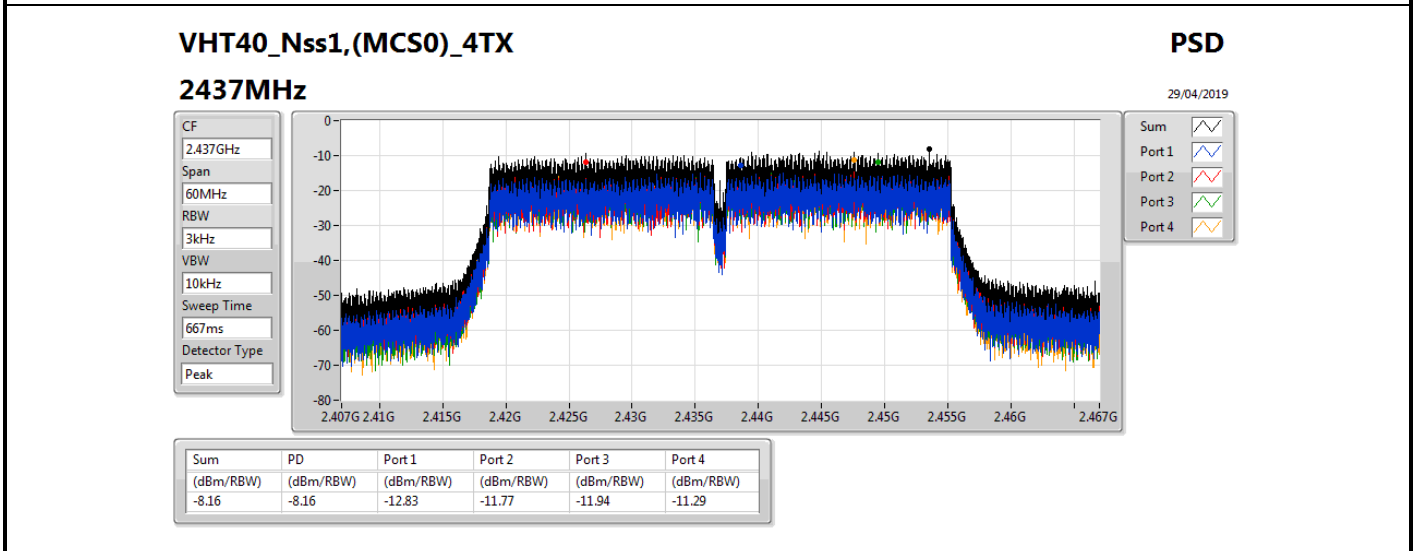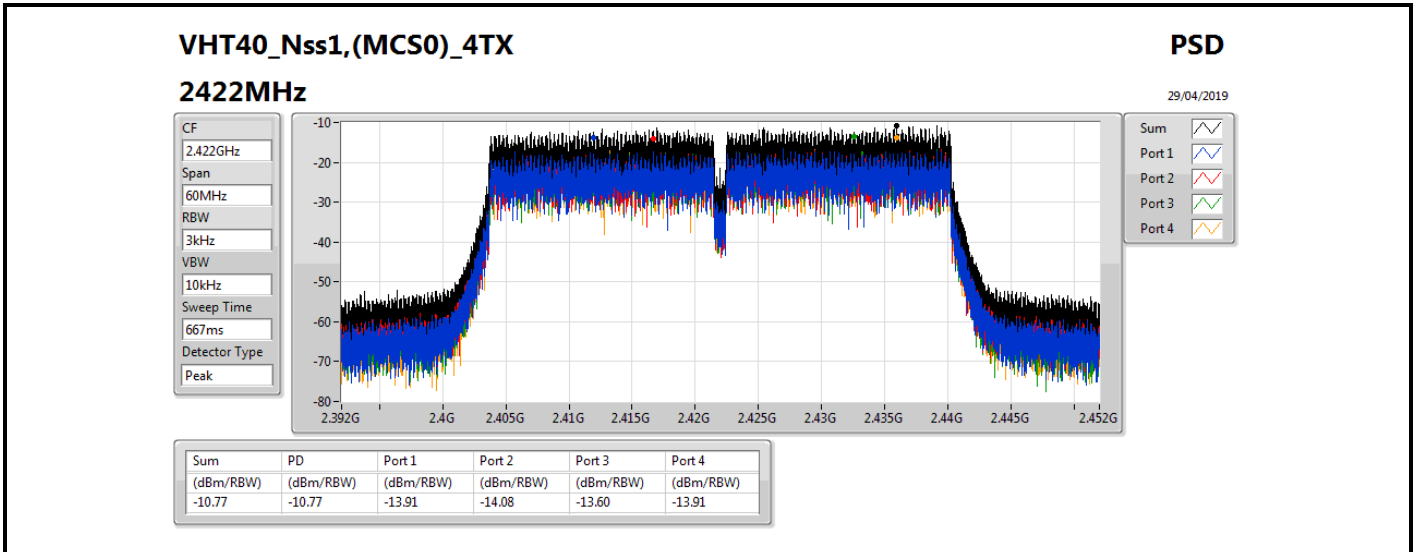



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_4TX	Pass	2.41248G	13.34	-16.66	1.94351G	-53.82	2.39898G	-26.46	2.48732G	-44.63	24.34818G	-41.18	2
802.11g_Nss1,(6Mbps)_4TX	Pass	2.4357G	12.12	-17.88	2.3067G	-54.53	2.39972G	-26.42	2.48734G	-46.15	24.50552G	-40.14	2
VHT20_Nss1,(MCS0)_4TX	Pass	2.43824G	13.25	-16.75	2.30204G	-53.82	2.3998G	-23.64	2.48734G	-43.00	24.39313G	-39.25	1
VHT40_Nss1,(MCS0)_4TX	Pass	2.44071G	3.10	-26.90	2.15684G	-54.49	2.3994G	-33.91	2.4845G	-42.01	24.40263G	-39.93	2









Result



Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	2.41248G	13.34	-16.66	2.14477G	-53.51	2.39998G	-29.61	2.48736G	-43.54	24.93257G	-39.78	1
2412MHz_TnomVnom	Pass	2.41248G	13.34	-16.66	1.94351G	-53.82	2.39898G	-26.46	2.48732G	-44.63	24.34818G	-41.18	2
2412MHz_TnomVnom	Pass	2.41248G	13.34	-16.66	1.95982G	-54.27	2.39998G	-29.19	2.48734G	-44.78	23.3845G	-40.11	3
2412MHz_TnomVnom	Pass	2.41248G	13.34	-16.66	2.12118G	-54.58	2.39896G	-30.80	2.48732G	-42.68	24.29761G	-40.57	4
2437MHz_TnomVnom	Pass	2.41248G	13.34	-16.66	880.16M	-54.53	2.39998G	-48.59	2.51312G	-43.36	17.54904G	-40.51	1
2437MHz_TnomVnom	Pass	2.41248G	13.34	-16.66	2.15816G	-54.14	2.3995G	-51.17	2.51312G	-41.98	24.01384G	-40.77	2
2437MHz_TnomVnom	Pass	2.41248G	13.34	-16.66	2.18787G	-54.64	2.3939G	-51.97	2.51312G	-44.89	23.56431G	-40.96	3
2437MHz_TnomVnom	Pass	2.41248G	13.34	-16.66	2.30758G	-53.47	2.39726G	-51.88	2.51314G	-47.34	24.96629G	-40.77	4
2462MHz_TnomVnom	Pass	2.41248G	13.34	-16.66	1.99943G	-54.42	2.39998G	-50.68	2.51998G	-44.76	24.24704G	-40.66	1
2462MHz_TnomVnom	Pass	2.41248G	13.34	-16.66	2.00235G	-53.89	2.39888G	-53.77	2.48594G	-46.60	24.01946G	-40.45	2
2462MHz_TnomVnom	Pass	2.41248G	13.34	-16.66	761.62M	-53.84	2.3981G	-53.54	2.48356G	-45.61	24.9129G	-40.06	3
2462MHz_TnomVnom	Pass	2.41248G	13.34	-16.66	2.07749G	-53.38	2.39942G	-53.40	2.48572G	-46.87	24.88762G	-40.21	4
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	2.4357G	12.12	-17.88	2.14389G	-53.59	2.3998G	-27.18	2.48734G	-44.33	24.03913G	-39.41	1
2412MHz_TnomVnom	Pass	2.4357G	12.12	-17.88	2.3067G	-54.53	2.39972G	-26.42	2.48734G	-46.15	24.50552G	-40.14	2
2412MHz_TnomVnom	Pass	2.4357G	12.12	-17.88	2.17972G	-54.30	2.3982G	-26.62	2.48732G	-42.65	24.5589G	-39.15	3
2412MHz_TnomVnom	Pass	2.4357G	12.12	-17.88	364.06M	-47.06	2.39822G	-28.89	2.48732G	-39.89	24.1487G	-39.70	4
2437MHz_TnomVnom	Pass	2.4357G	12.12	-17.88	2.13108G	-53.66	2.39756G	-42.50	2.51312G	-43.79	23.19907G	-39.17	1
2437MHz_TnomVnom	Pass	2.4357G	12.12	-17.88	2.17389G	-54.04	2.39822G	-41.26	2.51312G	-42.20	24.51114G	-39.84	2
2437MHz_TnomVnom	Pass	2.4357G	12.12	-17.88	2.30991G	-54.54	2.39784G	-42.99	2.51312G	-42.01	24.45494G	-39.10	3
2437MHz_TnomVnom	Pass	2.4357G	12.12	-17.88	293.58M	-43.25	2.39946G	-43.69	2.51314G	-41.51	24.05037G	-40.14	4
2462MHz_TnomVnom	Pass	2.4357G	12.12	-17.88	2.30728G	-52.78	2.39998G	-50.07	2.48354G	-42.55	23.40136G	-39.59	1
2462MHz_TnomVnom	Pass	2.4357G	12.12	-17.88	2.30816G	-52.69	2.39048G	-52.98	2.48354G	-40.45	24.31447G	-38.76	2
2462MHz_TnomVnom	Pass	2.4357G	12.12	-17.88	2.03322G	-54.32	2.39708G	-53.06	2.48384G	-42.64	24.45494G	-39.57	3
2462MHz_TnomVnom	Pass	2.4357G	12.12	-17.88	2.30816G	-52.85	2.39072G	-52.86	2.4837G	-45.06	24.05599G	-39.26	4
VHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz_TnomVnom	Pass	2.43824G	13.25	-16.75	2.30204G	-53.82	2.3998G	-23.64	2.48734G	-43.00	24.39313G	-39.25	1
2412MHz_TnomVnom	Pass	2.43824G	13.25	-16.75	1.89371G	-54.10	2.39694G	-23.85	2.48734G	-43.20	23.43788G	-39.49	2
2412MHz_TnomVnom	Pass	2.43824G	13.25	-16.75	2.30961G	-55.16	2.3982G	-26.07	2.48734G	-44.00	24.51956G	-39.31	3
2412MHz_TnomVnom	Pass	2.43824G	13.25	-16.75	335.52M	-53.88	2.39882G	-24.35	2.48734G	-42.22	24.0588G	-39.74	4
2437MHz_TnomVnom	Pass	2.43824G	13.25	-16.75	2.0737G	-53.08	2.39982G	-36.30	2.48382G	-42.43	24.42966G	-39.82	1
2437MHz_TnomVnom	Pass	2.43824G	13.25	-16.75	2.19603G	-54.56	2.39946G	-34.42	2.48822G	-40.25	24.18242G	-39.60	2
2437MHz_TnomVnom	Pass	2.43824G	13.25	-16.75	2.14768G	-53.90	2.39854G	-34.93	2.48824G	-40.97	24.05037G	-39.43	3
2437MHz_TnomVnom	Pass	2.43824G	13.25	-16.75	310.77M	-39.85	2.3998G	-36.96	2.48602G	-41.54	24.44652G	-39.19	4
2462MHz_TnomVnom	Pass	2.43824G	13.25	-16.75	2.12758G	-53.62	2.39996G	-51.47	2.48448G	-43.24	24.42404G	-39.77	1
2462MHz_TnomVnom	Pass	2.43824G	13.25	-16.75	2.1538G	-54.26	2.39052G	-52.88	2.48386G	-41.70	17.54623G	-39.57	2
2462MHz_TnomVnom	Pass	2.43824G	13.25	-16.75	2.07749G	-54.00	2.39674G	-53.03	2.48382G	-43.44	24.06161G	-39.72	3
2462MHz_TnomVnom	Pass	2.43824G	13.25	-16.75	2.30816G	-53.41	2.39286G	-53.65	2.48394G	-43.98	24.53923G	-39.39	4
VHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz_TnomVnom	Pass	2.44071G	3.10	-26.90	2.10617G	-54.78	2.3998G	-38.60	2.51998G	-41.51	24.49237G	-39.58	1
2422MHz_TnomVnom	Pass	2.44071G	3.10	-26.90	2.13938G	-54.42	2.397G	-35.50	2.48366G	-48.17	23.22752G	-39.38	2
2422MHz_TnomVnom	Pass	2.44071G	3.10	-26.90	2.30254G	-52.91	2.39956G	-40.50	2.4839G	-48.83	24.39141G	-38.78	3
2422MHz_TnomVnom	Pass	2.44071G	3.10	-26.90	335.43M	-51.65	2.3982G	-40.26	2.48622G	-48.65	24.00718G	-39.58	4
2437MHz_TnomVnom	Pass	2.44071G	3.10	-26.90	2.15999G	-53.68	2.39948G	-37.53	2.51998G	-39.54	24.05767G	-39.80	1
2437MHz_TnomVnom	Pass	2.44071G	3.10	-26.90	2.15684G	-54.49	2.3994G	-33.91	2.4845G	-42.01	24.40263G	-39.93	2
2437MHz_TnomVnom	Pass	2.44071G	3.10	-26.90	2.16228G	-54.81	2.39948G	-37.70	2.48454G	-43.35	24.49798G	-38.92	3
2437MHz_TnomVnom	Pass	2.44071G	3.10	-26.90	285.62M	-50.63	2.39952G	-39.39	2.48602G	-43.61	24.38861G	-39.68	4







Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2452MHz_TnomVnom	Pass	2.44071G	3.10	-26.90	2.1846G	-55.01	2.39904G	-49.50	2.51998G	-42.54	24.45872G	-39.38	1
2452MHz_TnomVnom	Pass	2.44071G	3.10	-26.90	2.08842G	-54.51	2.39024G	-50.55	2.48506G	-40.96	24.0801G	-39.56	2
2452MHz_TnomVnom	Pass	2.44071G	3.10	-26.90	2.17659G	-55.02	2.39992G	-50.17	2.48946G	-44.62	23.45749G	-39.41	3
2452MHz_TnomVnom	Pass	2.44071G	3.10	-26.90	2.30626G	-54.23	2.39152G	-51.75	2.48358G	-47.32	24.09693G	-39.55	4

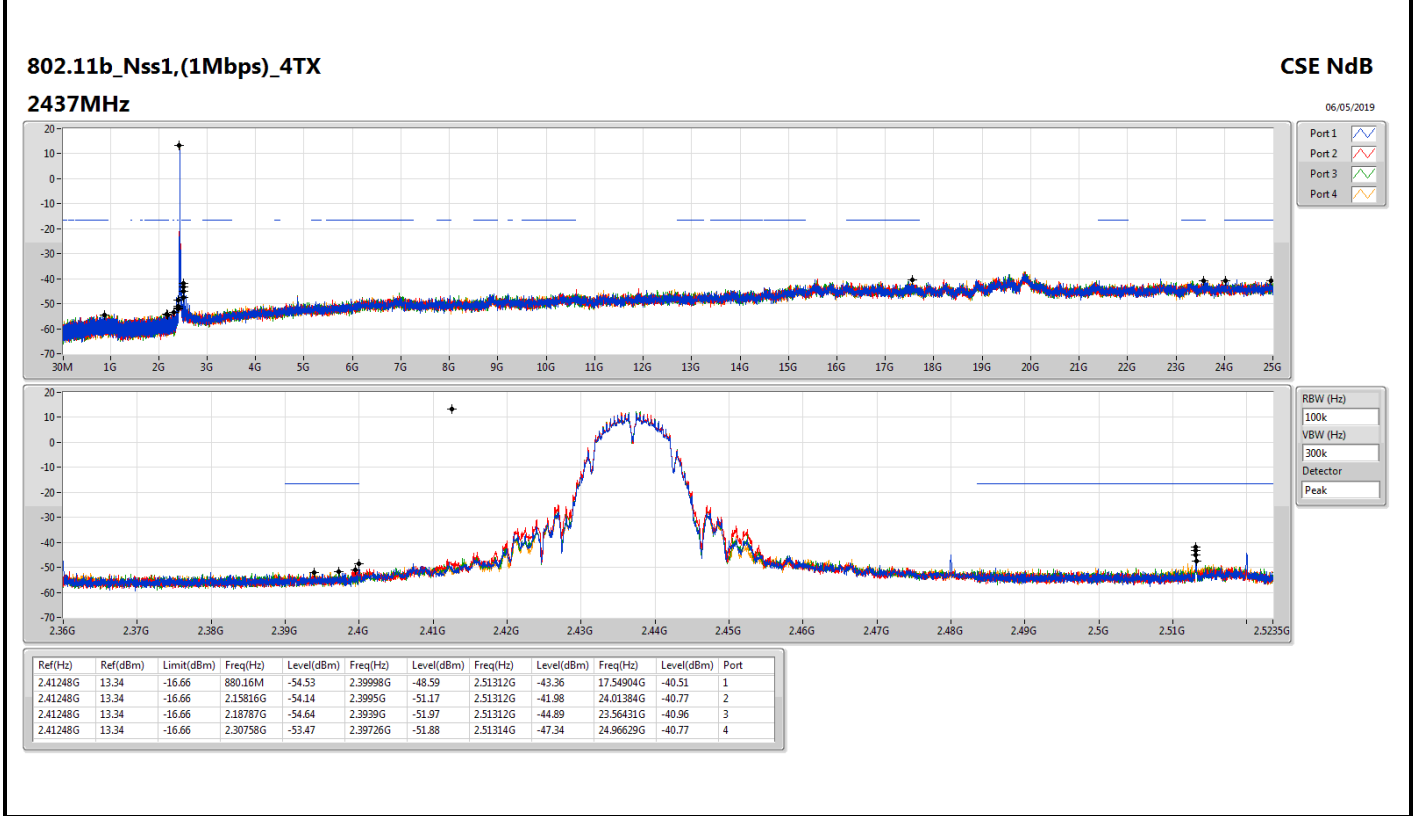
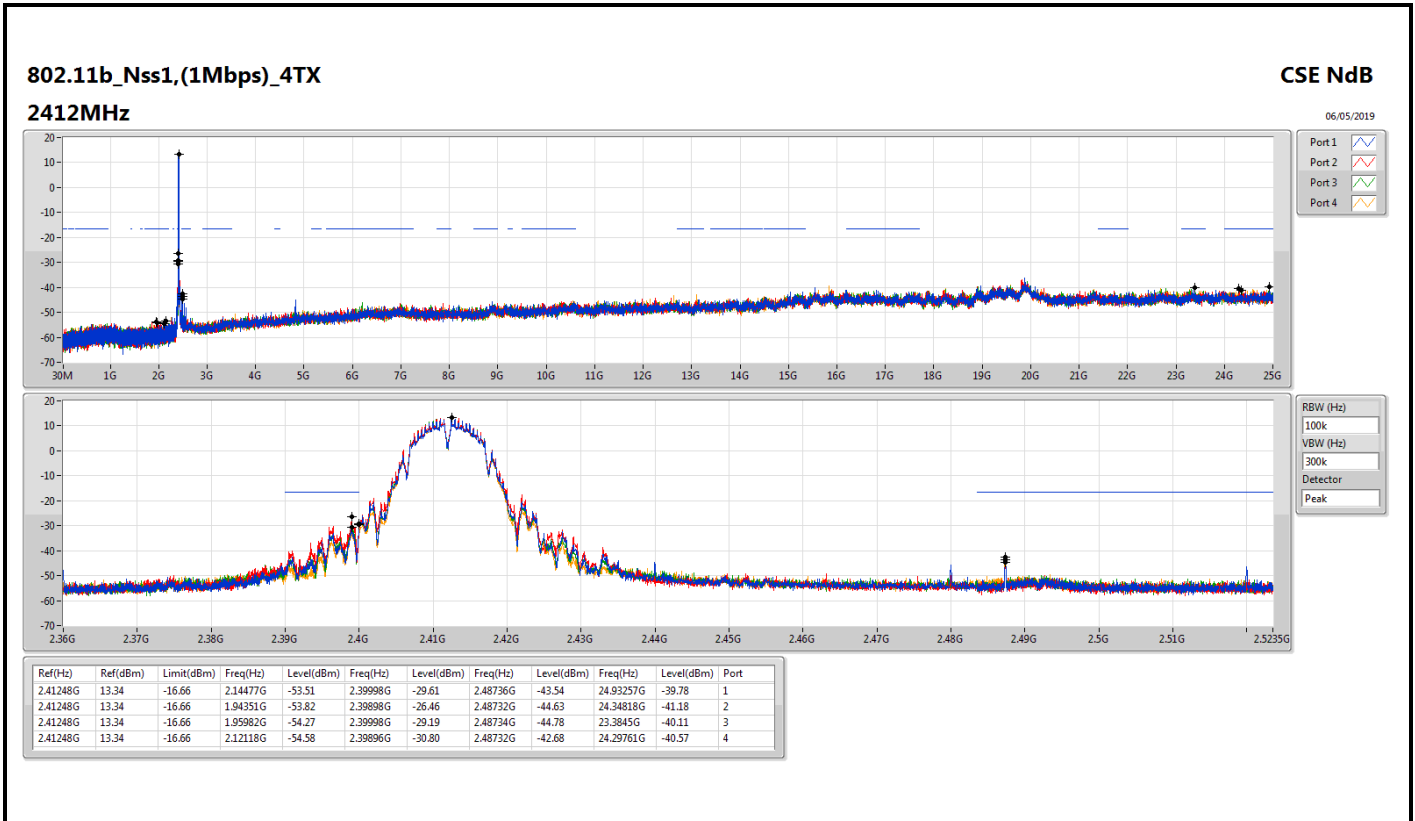


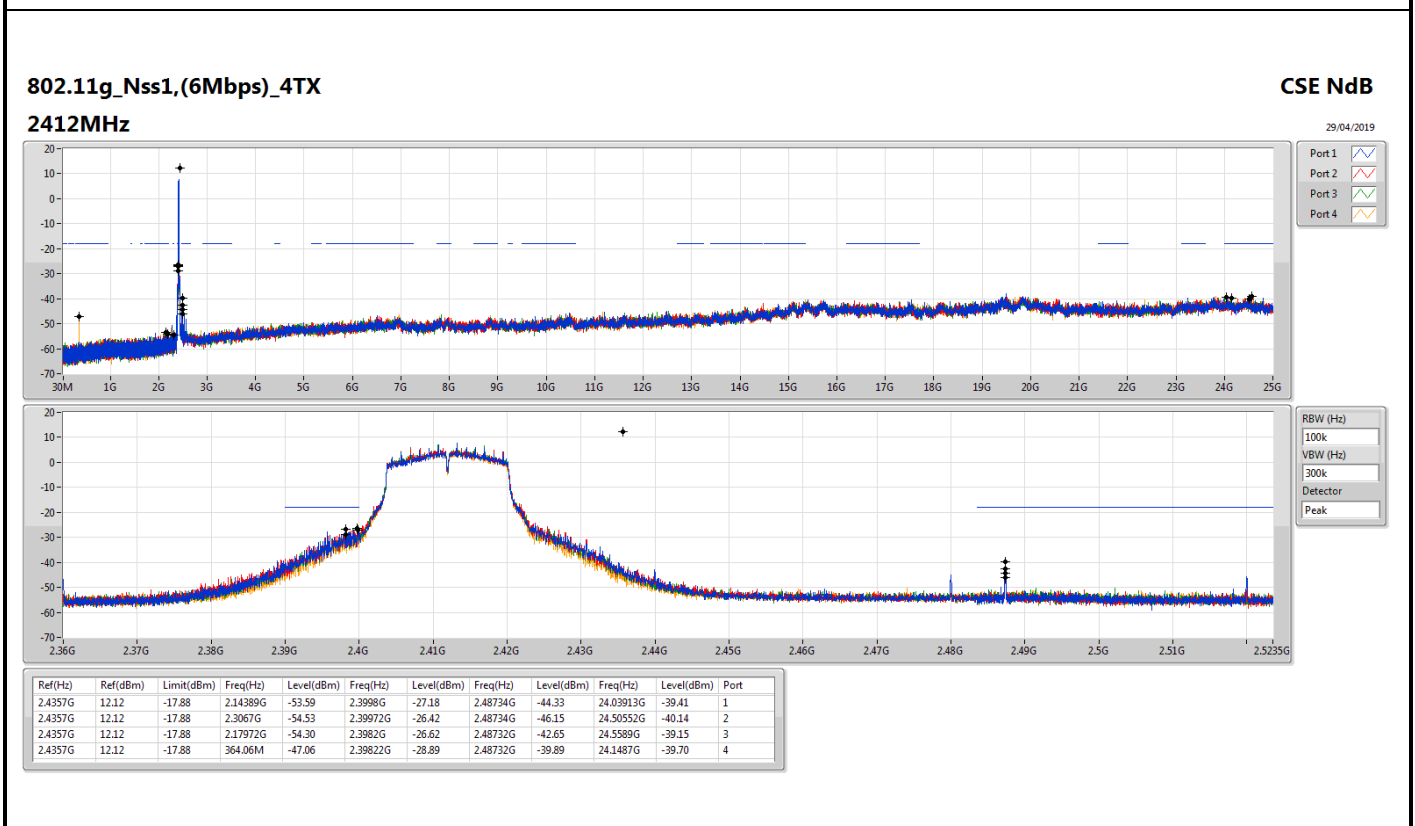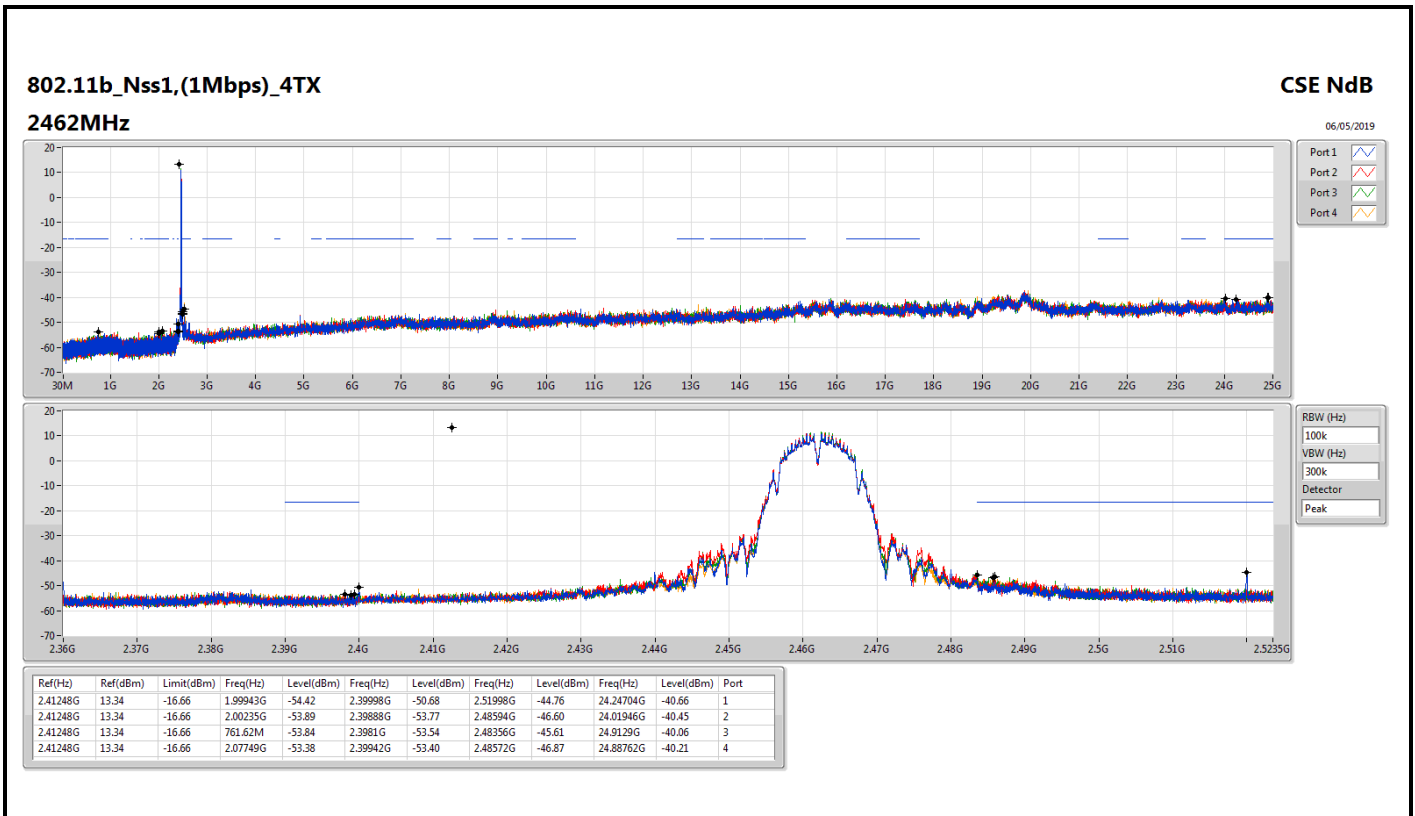

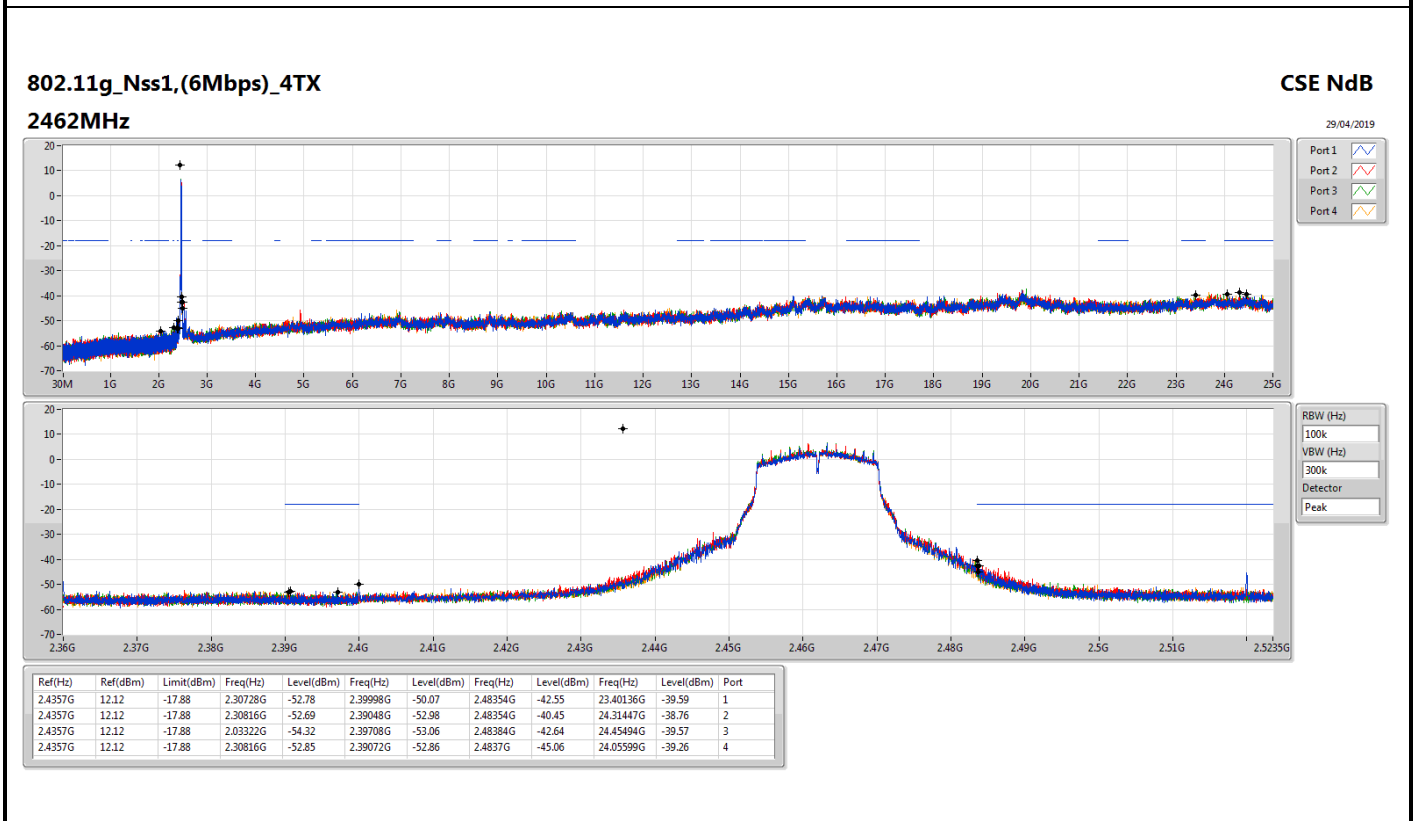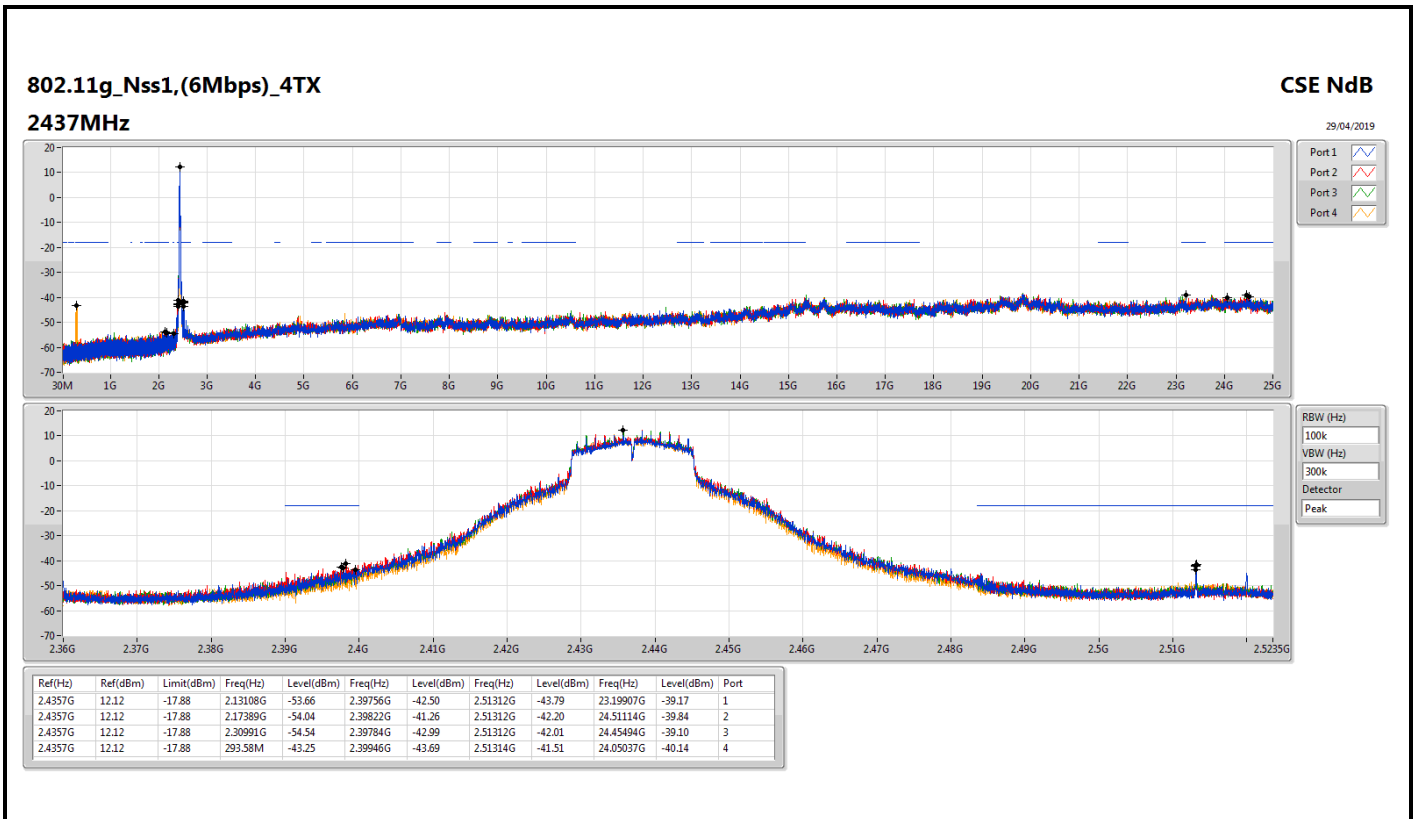

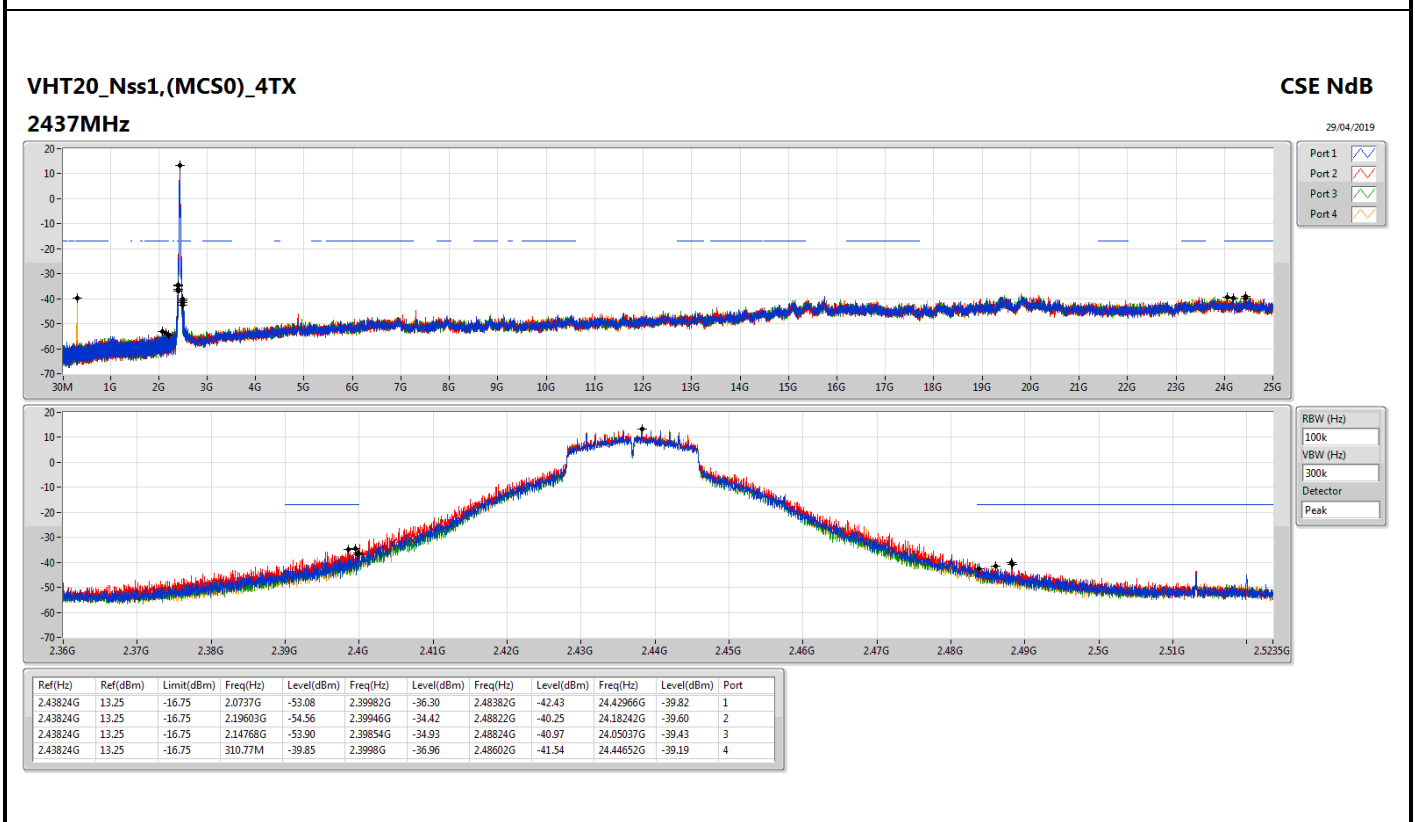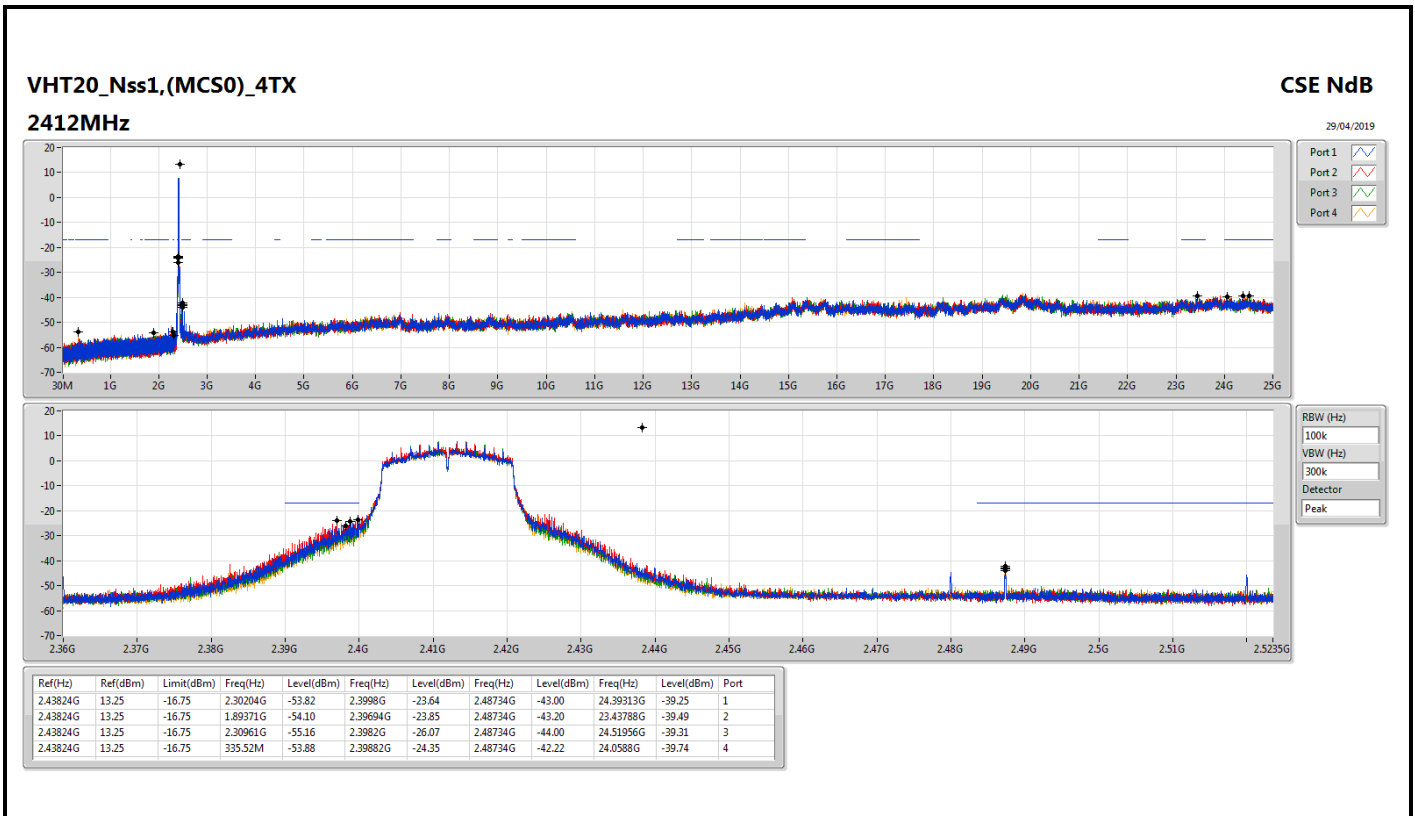

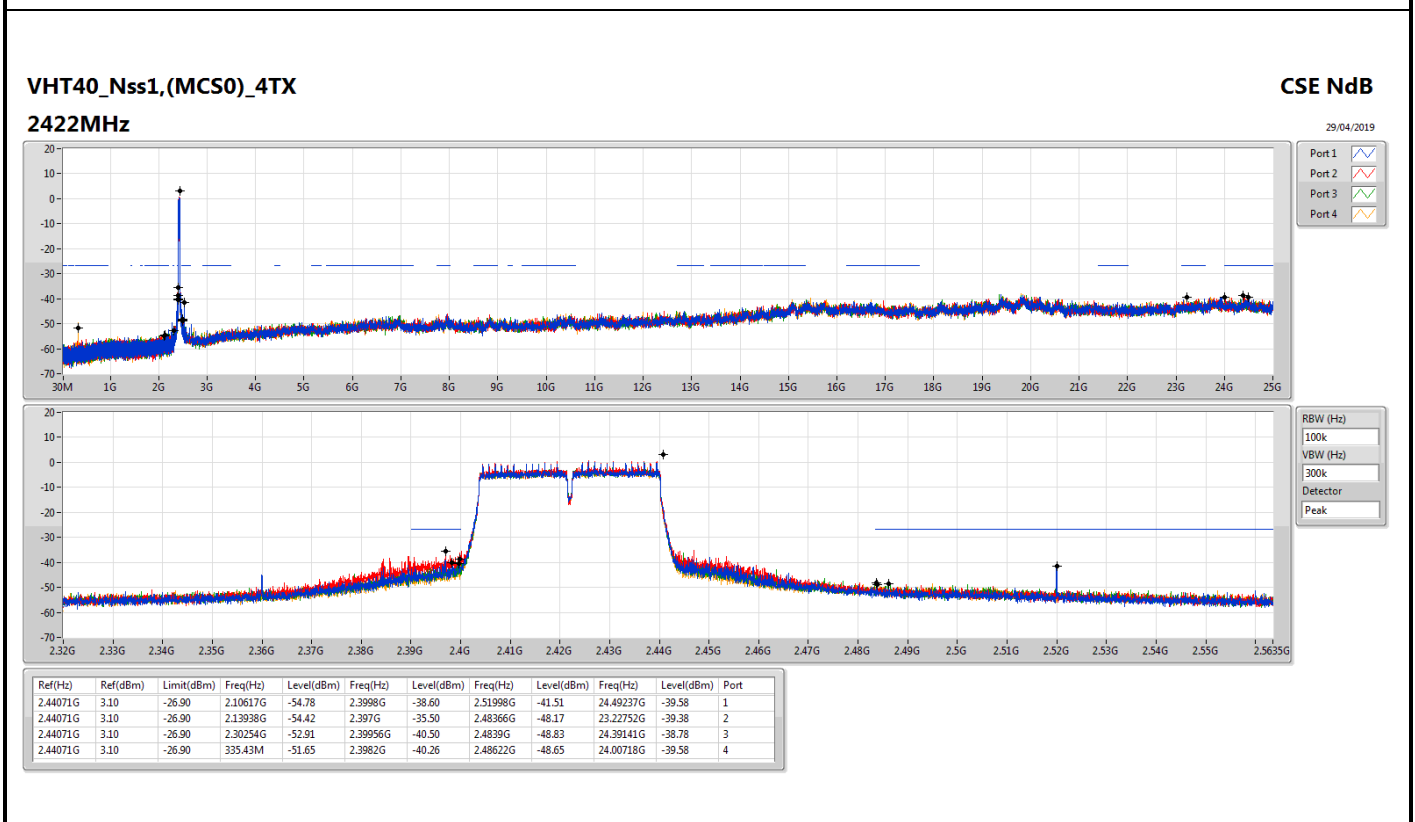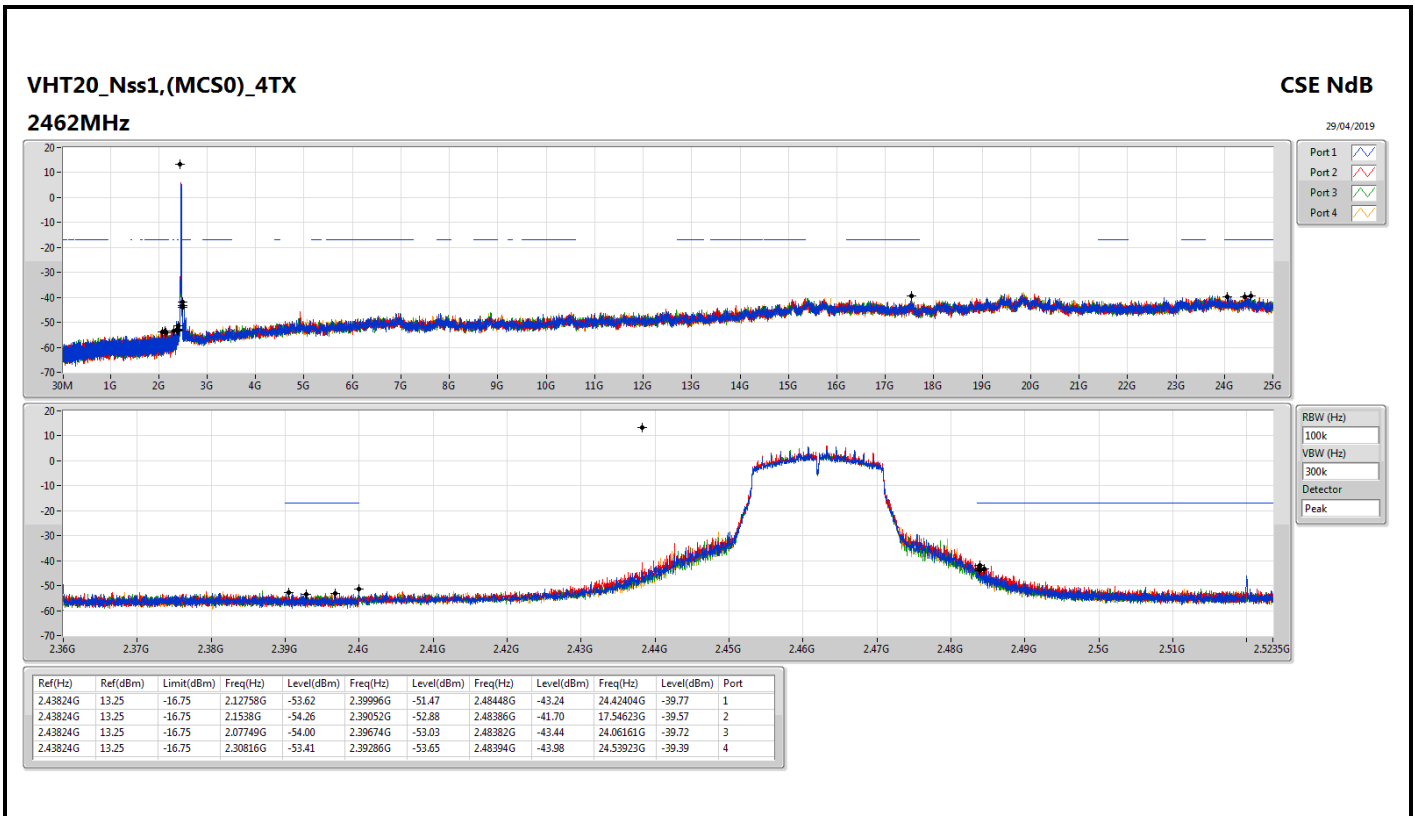

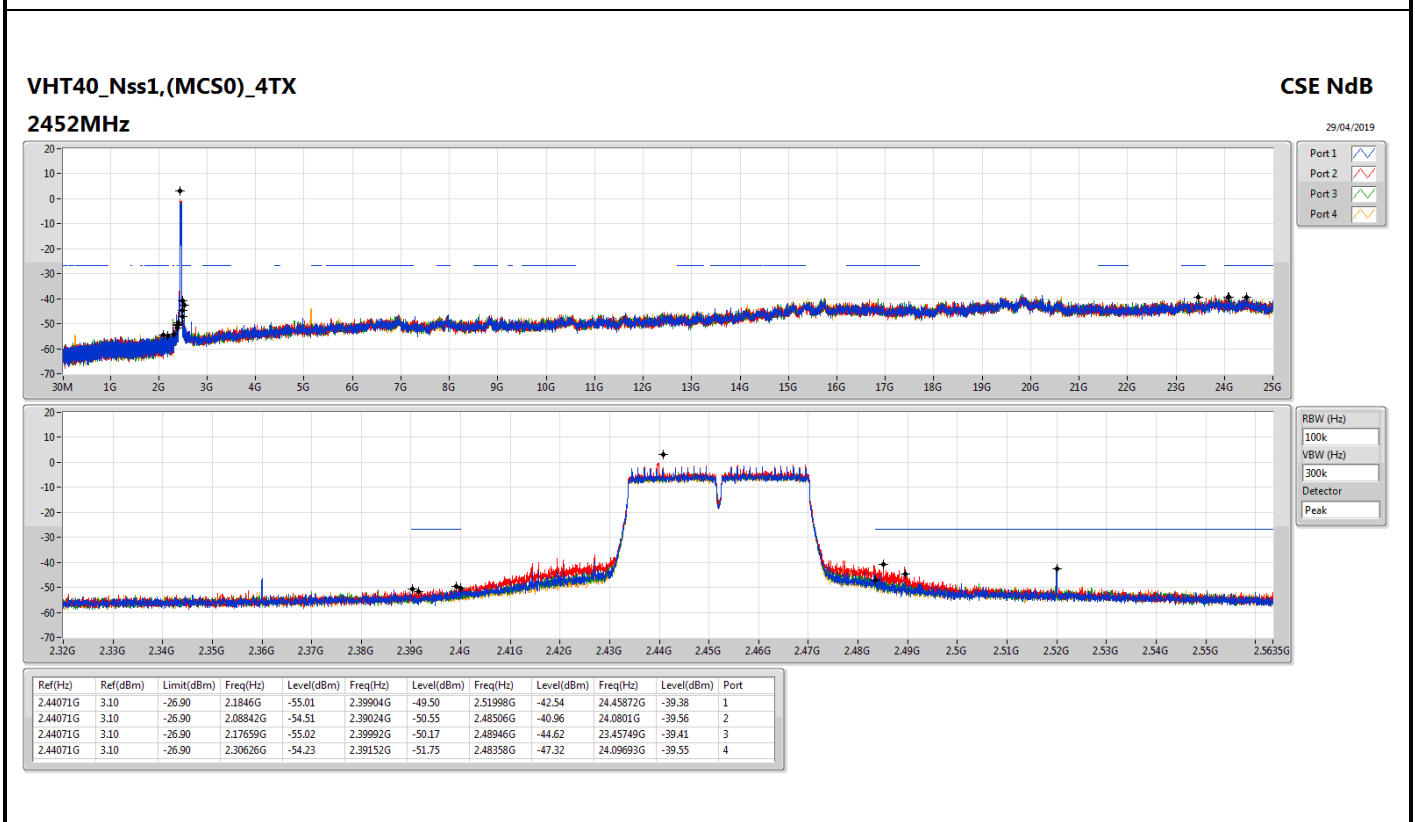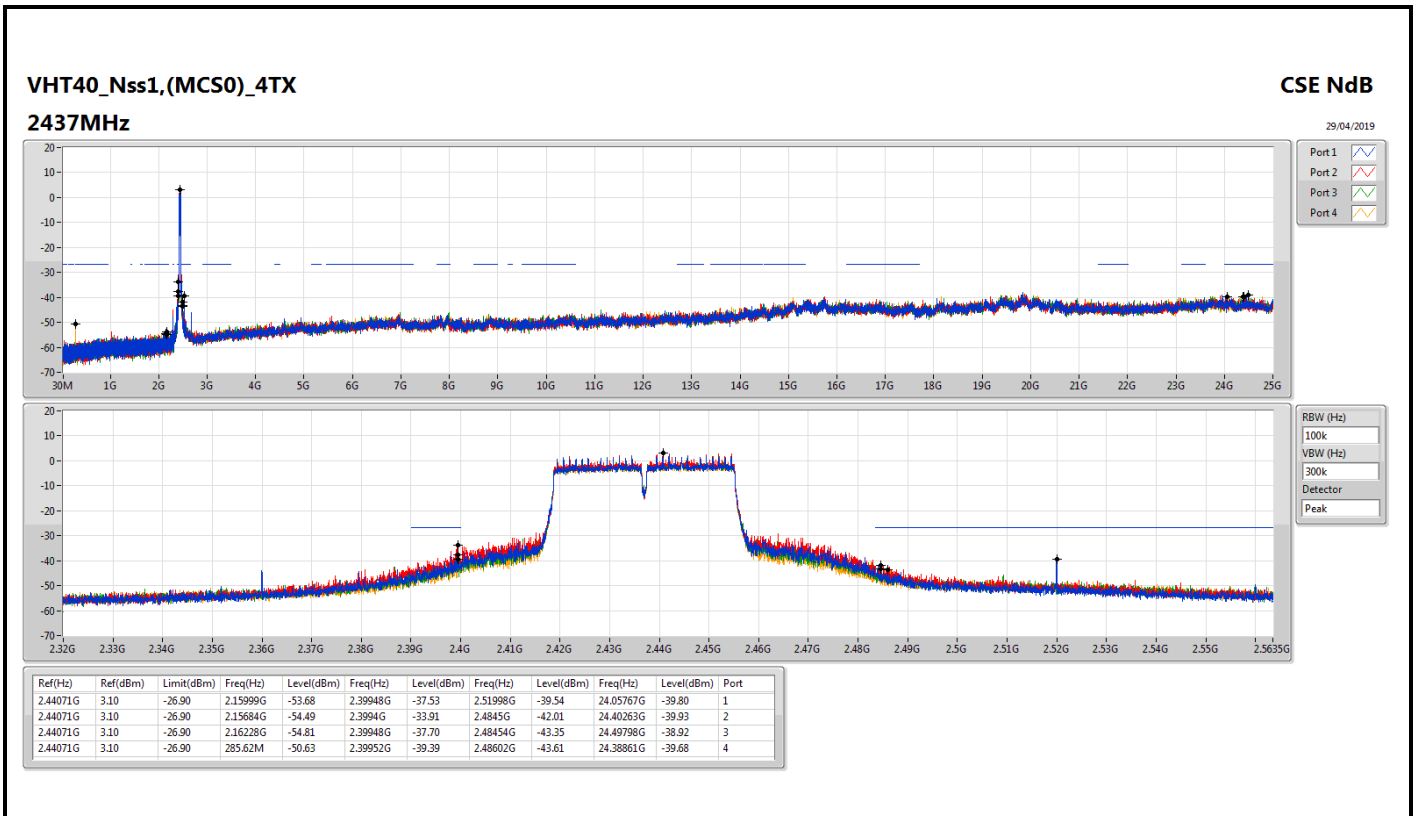





Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
VHT40_Nss1,(MCS0)_4TX	Pass	PK	61.04M	34.76	40.00	-5.24	-25.47	3	Horizontal	360	1.00	-




Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
VHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-
2437MHz	Pass	PK	72.68M	34.19	40.00	-5.81	-24.72	3	Vertical	0	1.00	-
2437MHz	Pass	PK	127M	30.24	43.50	-13.26	-18.98	3	Vertical	0	1.00	-
2437MHz	Pass	PK	235.64M	28.17	46.00	-17.83	-19.10	3	Vertical	0	1.00	-
2437MHz	Pass	PK	289.96M	26.57	46.00	-19.43	-16.86	3	Vertical	0	1.00	-
2437MHz	Pass	PK	493.66M	29.68	46.00	-16.32	-11.91	3	Vertical	0	1.00	-
2437MHz	Pass	PK	769.14M	30.31	46.00	-15.69	-7.77	3	Vertical	0	1.00	-
2437MHz	Pass	PK	61.04M	34.76	40.00	-5.24	-25.47	3	Horizontal	360	1.00	-
2437MHz	Pass	PK	117.3M	31.34	43.50	-12.16	-19.26	3	Horizontal	360	1.00	-
2437MHz	Pass	PK	167.74M	28.76	43.50	-14.74	-20.43	3	Horizontal	360	1.00	-
2437MHz	Pass	PK	301.6M	37.37	46.00	-8.63	-16.64	3	Horizontal	360	1.00	-
2437MHz	Pass	PK	633.34M	27.19	46.00	-18.81	-9.56	3	Horizontal	360	1.00	-
2437MHz	Pass	PK	771.08M	29.22	46.00	-16.78	-7.75	3	Horizontal	360	1.00	-

### VHT40\_Nss1,(MCS0)\_4TX

26/04/2019

### 2437MHz\_Adapter

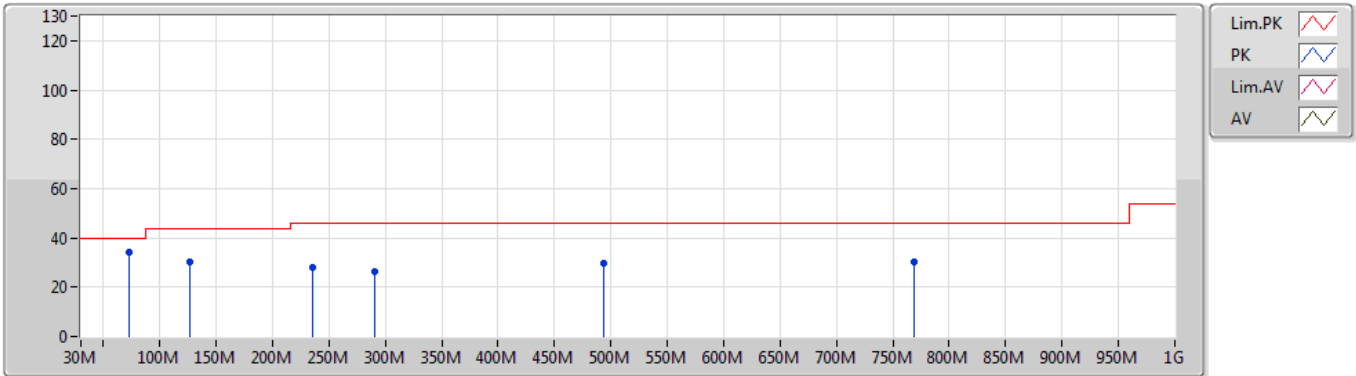


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
PK	72.68M	34.19	40.00	-5.81	-24.72	3	Vertical	0	1.00	-
PK	127M	30.24	43.50	-13.26	-18.98	3	Vertical	0	1.00	-
PK	235.64M	28.17	46.00	-17.83	-19.10	3	Vertical	0	1.00	-
PK	289.96M	26.57	46.00	-19.43	-16.86	3	Vertical	0	1.00	-
PK	493.66M	29.68	46.00	-16.32	-11.91	3	Vertical	0	1.00	-
PK	769.14M	30.31	46.00	-15.69	-7.77	3	Vertical	0	1.00	-

### VHT40\_Nss1,(MCS0)\_4TX

26/04/2019

### 2437MHz\_Adapter

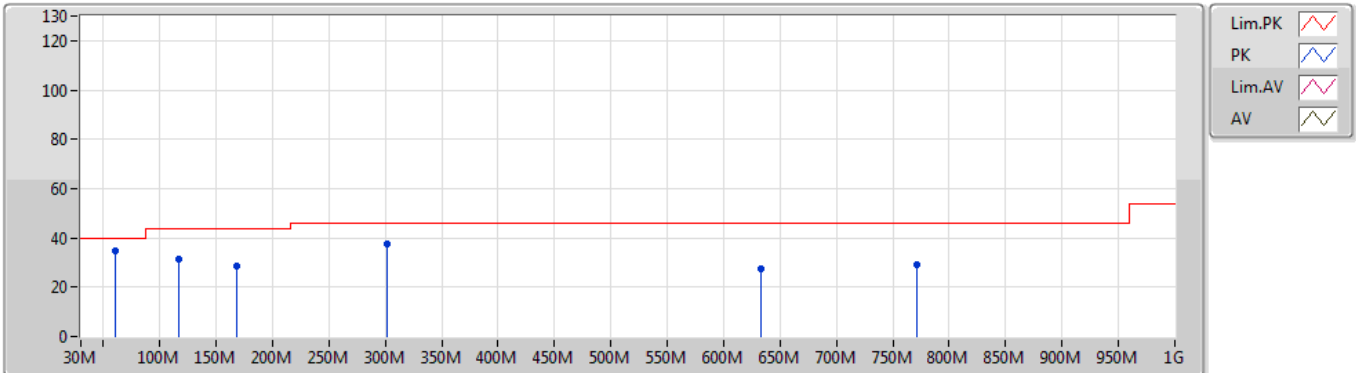

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
PK	61.04M	34.76	40.00	-5.24	-25.47	3	Horizontal	360	1.00	-
PK	117.3M	31.34	43.50	-12.16	-19.26	3	Horizontal	360	1.00	-
PK	167.74M	28.76	43.50	-14.74	-20.43	3	Horizontal	360	1.00	-
PK	301.6M	37.37	46.00	-8.63	-16.64	3	Horizontal	360	1.00	-
PK	633.34M	27.19	46.00	-18.81	-9.56	3	Horizontal	360	1.00	-
PK	771.08M	29.22	46.00	-16.78	-7.75	3	Horizontal	360	1.00	-



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_4TX	Pass	AV	2.39G	53.84	54.00	-0.16	31.11	3	Horizontal	111	1.92	-
802.11g_Nss1,(6Mbps)_4TX	Pass	AV	2.39G	53.80	54.00	-0.20	31.11	3	Vertical	75	2.29	-
VHT20_Nss1,(MCS0)_4TX	Pass	AV	2.3876G	53.91	54.00	-0.09	31.11	3	Horizontal	329	1.45	-
VHT40_Nss1,(MCS0)_4TX	Pass	AV	2.3892G	53.96	54.00	-0.04	31.11	3	Horizontal	99	2.12	-



Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	AV	2.3882G	49.45	54.00	-4.55	31.11	3	Vertical	266	1.15	-
2412MHz	Pass	AV	2.4112G	110.66	Inf	-Inf	31.20	3	Vertical	266	1.15	-
2412MHz	Pass	PK	2.3886G	59.51	74.00	-14.49	31.11	3	Vertical	266	1.15	-
2412MHz	Pass	PK	2.4112G	113.10	Inf	-Inf	31.20	3	Vertical	266	1.15	-
2412MHz	Pass	AV	2.39G	53.84	54.00	-0.16	31.11	3	Horizontal	111	1.92	-
2412MHz	Pass	AV	2.4112G	111.38	Inf	-Inf	31.20	3	Horizontal	111	1.92	-
2412MHz	Pass	PK	2.39G	61.75	74.00	-12.25	31.11	3	Horizontal	111	1.92	-
2412MHz	Pass	PK	2.4128G	114.34	Inf	-Inf	31.21	3	Horizontal	111	1.92	-
2412MHz	Pass	AV	4.82396G	51.48	54.00	-2.52	3.46	3	Vertical	278	1.49	-
2412MHz	Pass	PK	4.82394G	54.28	74.00	-19.72	3.46	3	Vertical	278	1.49	-
2412MHz	Pass	AV	4.82396G	47.24	54.00	-6.76	3.46	3	Horizontal	227	1.50	-
2412MHz	Pass	PK	4.824G	50.92	74.00	-23.08	3.46	3	Horizontal	227	1.50	-
2437MHz	Pass	AV	2.3598G	44.81	54.00	-9.19	30.99	3	Vertical	268	1.28	-
2437MHz	Pass	AV	2.4362G	110.90	Inf	-Inf	31.31	3	Vertical	268	1.28	-
2437MHz	Pass	AV	2.491G	44.91	54.00	-9.09	31.54	3	Vertical	268	1.28	-
2437MHz	Pass	PK	2.3562G	56.75	74.00	-17.25	30.97	3	Vertical	268	1.28	-
2437MHz	Pass	PK	2.4378G	113.55	Inf	-Inf	31.32	3	Vertical	268	1.28	-
2437MHz	Pass	PK	2.4982G	58.11	74.00	-15.89	31.57	3	Vertical	268	1.28	-
2437MHz	Pass	AV	2.3582G	43.82	54.00	-10.18	30.97	3	Horizontal	111	1.45	-
2437MHz	Pass	AV	2.4378G	110.93	Inf	-Inf	31.32	3	Horizontal	111	1.45	-
2437MHz	Pass	AV	2.4846G	44.39	54.00	-9.61	31.52	3	Horizontal	111	1.45	-
2437MHz	Pass	PK	2.3498G	56.51	74.00	-17.49	30.94	3	Horizontal	111	1.45	-
2437MHz	Pass	PK	2.4378G	113.77	Inf	-Inf	31.32	3	Horizontal	111	1.45	-
2437MHz	Pass	PK	2.4946G	57.29	74.00	-16.71	31.55	3	Horizontal	111	1.45	-
2437MHz	Pass	AV	4.87394G	49.09	54.00	-4.91	3.58	3	Vertical	273	1.63	-
2437MHz	Pass	AV	7.31168G	53.59	54.00	-0.41	9.50	3	Vertical	77	1.50	-
2437MHz	Pass	PK	4.87396G	52.79	74.00	-21.21	3.58	3	Vertical	273	1.63	-
2437MHz	Pass	PK	7.31132G	58.54	74.00	-15.46	9.50	3	Vertical	77	1.50	-
2437MHz	Pass	AV	4.87394G	42.30	54.00	-11.70	3.58	3	Horizontal	323	1.59	-
2437MHz	Pass	AV	7.31012G	51.19	54.00	-2.81	9.50	3	Horizontal	316	1.43	-
2437MHz	Pass	PK	4.87406G	47.85	74.00	-26.15	3.58	3	Horizontal	323	1.59	-
2437MHz	Pass	PK	7.31138G	57.00	74.00	-17.00	9.50	3	Horizontal	316	1.43	-
2457MHz	Pass	AV	2.4562G	110.99	Inf	-Inf	31.40	3	Vertical	268	1.16	-
2457MHz	Pass	AV	2.4862G	48.31	54.00	-5.69	31.52	3	Vertical	268	1.16	-
2457MHz	Pass	PK	2.4578G	113.73	Inf	-Inf	31.40	3	Vertical	268	1.16	-
2457MHz	Pass	PK	2.4856G	59.95	74.00	-14.05	31.52	3	Vertical	268	1.16	-
2457MHz	Pass	AV	2.4562G	111.37	Inf	-Inf	31.40	3	Horizontal	110	1.89	-
2457MHz	Pass	AV	2.4835G	47.75	54.00	-6.25	31.51	3	Horizontal	110	1.89	-
2457MHz	Pass	PK	2.4562G	113.94	Inf	-Inf	31.40	3	Horizontal	110	1.89	-
2457MHz	Pass	PK	2.4844G	59.76	74.00	-14.24	31.52	3	Horizontal	110	1.89	-
2462MHz	Pass	AV	2.4612G	110.32	Inf	-Inf	31.41	3	Vertical	269	1.18	-
2462MHz	Pass	AV	2.4835G	50.02	54.00	-3.98	31.51	3	Vertical	269	1.18	-
2462MHz	Pass	PK	2.4628G	112.76	Inf	-Inf	31.43	3	Vertical	269	1.18	-
2462MHz	Pass	PK	2.4836G	60.51	74.00	-13.49	31.51	3	Vertical	269	1.18	-
2462MHz	Pass	AV	2.4612G	109.35	Inf	-Inf	31.41	3	Horizontal	36	1.19	-
2462MHz	Pass	AV	2.4835G	49.34	54.00	-4.66	31.51	3	Horizontal	36	1.19	-
2462MHz	Pass	PK	2.4628G	111.69	Inf	-Inf	31.43	3	Horizontal	36	1.19	-



Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2462MHz	Pass	PK	2.4858G	60.00	74.00	-14.00	31.52	3	Horizontal	36	1.19	-
2462MHz	Pass	AV	4.92394G	48.36	54.00	-5.64	3.71	3	Vertical	270	1.60	-
2462MHz	Pass	AV	7.38512G	53.84	54.00	-0.16	9.73	3	Vertical	64	1.65	-
2462MHz	Pass	PK	4.92392G	52.18	74.00	-21.82	3.71	3	Vertical	270	1.60	-
2462MHz	Pass	PK	7.3868G	59.13	74.00	-14.87	9.74	3	Vertical	64	1.65	-
2462MHz	Pass	AV	4.92395G	45.24	54.00	-8.76	3.68	3	Horizontal	205	1.69	-
2462MHz	Pass	AV	7.38512G	49.90	54.00	-4.10	9.73	3	Horizontal	317	1.50	-
2462MHz	Pass	PK	4.92397G	49.89	74.00	-24.11	3.68	3	Horizontal	205	1.69	-
2462MHz	Pass	PK	7.3863G	56.38	74.00	-17.62	9.73	3	Horizontal	317	1.50	-
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	AV	2.39G	53.80	54.00	-0.20	31.11	3	Vertical	75	2.29	-
2412MHz	Pass	AV	2.4102G	106.17	Inf	-Inf	31.20	3	Vertical	75	2.29	-
2412MHz	Pass	PK	2.39G	73.32	74.00	-0.68	31.11	3	Vertical	75	2.29	-
2412MHz	Pass	PK	2.4106G	115.40	Inf	-Inf	31.20	3	Vertical	75	2.29	-
2412MHz	Pass	AV	2.39G	51.79	54.00	-2.21	31.11	3	Horizontal	101	1.91	-
2412MHz	Pass	AV	2.413G	106.49	Inf	-Inf	31.21	3	Horizontal	101	1.91	-
2412MHz	Pass	PK	2.39G	68.56	74.00	-5.44	31.11	3	Horizontal	101	1.91	-
2412MHz	Pass	PK	2.4126G	115.31	Inf	-Inf	31.21	3	Horizontal	101	1.91	-
2412MHz	Pass	AV	4.82118G	33.99	54.00	-20.01	3.44	3	Vertical	75	2.24	-
2412MHz	Pass	PK	4.82034G	46.36	74.00	-27.64	3.44	3	Vertical	75	2.24	-
2412MHz	Pass	AV	4.8276G	36.60	54.00	-17.40	3.46	3	Horizontal	161	1.88	-
2412MHz	Pass	PK	4.82742G	49.22	74.00	-24.78	3.46	3	Horizontal	161	1.88	-
2417MHz	Pass	AV	2.39G	48.75	54.00	-5.25	31.11	3	Vertical	305	1.97	-
2417MHz	Pass	AV	2.4134G	106.36	Inf	-Inf	31.21	3	Vertical	305	1.97	-
2417MHz	Pass	PK	2.3856G	64.52	74.00	-9.48	31.09	3	Vertical	305	1.97	-
2417MHz	Pass	PK	2.4128G	116.26	Inf	-Inf	31.21	3	Vertical	305	1.97	-
2417MHz	Pass	AV	2.39G	53.44	54.00	-0.56	31.11	3	Horizontal	92	1.90	-
2417MHz	Pass	AV	2.4152G	109.20	Inf	-Inf	31.22	3	Horizontal	92	1.90	-
2417MHz	Pass	PK	2.3898G	69.41	74.00	-4.59	31.11	3	Horizontal	92	1.90	-
2417MHz	Pass	PK	2.4152G	118.16	Inf	-Inf	31.22	3	Horizontal	92	1.90	-
2437MHz	Pass	AV	2.3822G	44.53	54.00	-9.47	31.08	3	Vertical	271	1.49	-
2437MHz	Pass	AV	2.4382G	105.95	Inf	-Inf	31.32	3	Vertical	271	1.49	-
2437MHz	Pass	AV	2.4838G	46.78	54.00	-7.22	31.51	3	Vertical	271	1.49	-
2437MHz	Pass	PK	2.389G	57.94	74.00	-16.06	31.11	3	Vertical	271	1.49	-
2437MHz	Pass	PK	2.4386G	114.75	Inf	-Inf	31.32	3	Vertical	271	1.49	-
2437MHz	Pass	PK	2.4835G	65.99	74.00	-8.01	31.51	3	Vertical	271	1.49	-
2437MHz	Pass	AV	2.3834G	45.17	54.00	-8.83	31.08	3	Horizontal	101	2.09	-
2437MHz	Pass	AV	2.439G	110.11	Inf	-Inf	31.32	3	Horizontal	101	2.09	-
2437MHz	Pass	AV	2.4835G	47.10	54.00	-6.90	31.51	3	Horizontal	101	2.09	-
2437MHz	Pass	PK	2.3822G	60.94	74.00	-13.06	31.08	3	Horizontal	101	2.09	-
2437MHz	Pass	PK	2.4394G	119.20	Inf	-Inf	31.32	3	Horizontal	101	2.09	-
2437MHz	Pass	PK	2.4838G	65.25	74.00	-8.75	31.51	3	Horizontal	101	2.09	-
2437MHz	Pass	AV	4.87424G	48.81	54.00	-5.19	3.58	3	Vertical	230	1.64	-
2437MHz	Pass	AV	7.31442G	53.19	54.00	-0.81	9.51	3	Vertical	57	1.58	-
2437MHz	Pass	PK	4.87454G	61.93	74.00	-12.07	3.58	3	Vertical	230	1.64	-
2437MHz	Pass	PK	7.31424G	67.01	74.00	-6.99	9.51	3	Vertical	57	1.58	-
2437MHz	Pass	AV	4.87616G	49.32	54.00	-4.68	3.59	3	Horizontal	224	2.71	-
2437MHz	Pass	AV	7.31256G	49.02	54.00	-4.98	9.50	3	Horizontal	304	2.72	-
2437MHz	Pass	PK	4.87448G	61.42	74.00	-12.58	3.58	3	Horizontal	224	2.71	-



Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2437MHz	Pass	PK	7.31244G	62.33	74.00	-11.67	9.50	3	Horizontal	304	2.72	-
2457MHz	Pass	AV	2.4562G	108.50	Inf	-Inf	31.40	3	Vertical	275	1.01	-
2457MHz	Pass	AV	2.4835G	52.22	54.00	-1.78	31.51	3	Vertical	275	1.01	-
2457MHz	Pass	PK	2.4556G	117.15	Inf	-Inf	31.40	3	Vertical	275	1.01	-
2457MHz	Pass	PK	2.4836G	67.43	74.00	-6.57	31.51	3	Vertical	275	1.01	-
2457MHz	Pass	AV	2.4562G	106.76	Inf	-Inf	31.40	3	Horizontal	89	2.75	-
2457MHz	Pass	AV	2.4835G	53.74	54.00	-0.26	31.51	3	Horizontal	89	2.75	-
2457MHz	Pass	PK	2.4554G	115.98	Inf	-Inf	31.39	3	Horizontal	89	2.75	-
2457MHz	Pass	PK	2.4852G	69.51	74.00	-4.49	31.52	3	Horizontal	89	2.75	-
2462MHz	Pass	AV	2.4612G	104.72	Inf	-Inf	31.41	3	Vertical	258	1.85	-
2462MHz	Pass	AV	2.4835G	51.52	54.00	-2.48	31.51	3	Vertical	258	1.85	-
2462MHz	Pass	PK	2.4606G	113.65	Inf	-Inf	31.41	3	Vertical	258	1.85	-
2462MHz	Pass	PK	2.4835G	67.09	74.00	-6.91	31.51	3	Vertical	258	1.85	-
2462MHz	Pass	AV	2.4644G	104.10	Inf	-Inf	31.43	3	Horizontal	320	1.00	-
2462MHz	Pass	AV	2.4836G	52.94	54.00	-1.06	31.51	3	Horizontal	320	1.00	-
2462MHz	Pass	PK	2.465G	113.09	Inf	-Inf	31.43	3	Horizontal	320	1.00	-
2462MHz	Pass	PK	2.4836G	69.36	74.00	-4.64	31.51	3	Horizontal	320	1.00	-
2462MHz	Pass	AV	4.92658G	49.54	54.00	-4.46	3.72	3	Vertical	299	1.46	-
2462MHz	Pass	AV	7.38588G	46.07	54.00	-7.93	9.73	3	Vertical	61	1.67	-
2462MHz	Pass	PK	4.92652G	62.81	74.00	-11.19	3.72	3	Vertical	299	1.46	-
2462MHz	Pass	PK	7.38912G	57.75	74.00	-16.25	9.74	3	Vertical	61	1.67	-
2462MHz	Pass	AV	4.924G	50.37	54.00	-3.63	3.71	3	Horizontal	12	1.50	-
2462MHz	Pass	AV	7.38606G	42.80	54.00	-11.20	9.73	3	Horizontal	299	1.50	-
2462MHz	Pass	PK	4.92286G	64.08	74.00	-9.92	3.71	3	Horizontal	12	1.50	-
2462MHz	Pass	PK	7.38648G	55.70	74.00	-18.30	9.73	3	Horizontal	299	1.50	-
VHT20_Nss1_(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	AV	2.39G	52.85	54.00	-1.15	31.11	3	Vertical	283	1.45	-
2412MHz	Pass	AV	2.4108G	103.85	Inf	-Inf	31.20	3	Vertical	283	1.45	-
2412MHz	Pass	PK	2.3888G	72.16	74.00	-1.84	31.11	3	Vertical	283	1.45	-
2412MHz	Pass	PK	2.4108G	114.07	Inf	-Inf	31.20	3	Vertical	283	1.45	-
2412MHz	Pass	AV	2.3876G	53.91	54.00	-0.09	31.11	3	Horizontal	329	1.45	-
2412MHz	Pass	AV	2.4126G	105.28	Inf	-Inf	31.21	3	Horizontal	329	1.45	-
2412MHz	Pass	PK	2.3876G	70.91	74.00	-3.09	31.11	3	Horizontal	329	1.45	-
2412MHz	Pass	PK	2.4126G	114.84	Inf	-Inf	31.21	3	Horizontal	329	1.45	-
2412MHz	Pass	AV	4.82664G	44.01	54.00	-9.99	3.46	3	Vertical	68	2.02	-
2412MHz	Pass	PK	4.82628G	56.58	74.00	-17.42	3.46	3	Vertical	68	2.02	-
2412MHz	Pass	AV	4.82676G	36.84	54.00	-17.16	3.46	3	Horizontal	143	1.84	-
2412MHz	Pass	PK	4.8267G	48.79	74.00	-25.21	3.46	3	Horizontal	143	1.84	-
2417MHz	Pass	AV	2.3896G	51.45	54.00	-2.55	31.11	3	Vertical	86	1.81	-
2417MHz	Pass	AV	2.4148G	104.95	Inf	-Inf	31.22	3	Vertical	86	1.81	-
2417MHz	Pass	PK	2.3892G	65.60	74.00	-8.40	31.11	3	Vertical	86	1.81	-
2417MHz	Pass	PK	2.4196G	114.34	Inf	-Inf	31.23	3	Vertical	86	1.81	-
2417MHz	Pass	AV	2.3898G	53.80	54.00	-0.20	31.11	3	Horizontal	82	1.23	-
2417MHz	Pass	AV	2.4146G	106.00	Inf	-Inf	31.22	3	Horizontal	82	1.23	-
2417MHz	Pass	PK	2.3892G	70.42	74.00	-3.58	31.11	3	Horizontal	82	1.23	-
2417MHz	Pass	PK	2.4194G	116.71	Inf	-Inf	31.23	3	Horizontal	82	1.23	-
2437MHz	Pass	AV	2.3886G	49.98	54.00	-4.02	31.11	3	Vertical	280	1.36	-
2437MHz	Pass	AV	2.4358G	109.53	Inf	-Inf	31.31	3	Vertical	280	1.36	-
2437MHz	Pass	AV	2.4858G	52.45	54.00	-1.55	31.52	3	Vertical	280	1.36	-





Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2437MHz	Pass	PK	2.389G	64.37	74.00	-9.63	31.11	3	Vertical	280	1.36	-
2437MHz	Pass	PK	2.4358G	119.01	Inf	-Inf	31.31	3	Vertical	280	1.36	-
2437MHz	Pass	PK	2.4862G	70.13	74.00	-3.87	31.52	3	Vertical	280	1.36	-
2437MHz	Pass	AV	2.3874G	49.68	54.00	-4.32	31.10	3	Horizontal	324	1.61	-
2437MHz	Pass	AV	2.4378G	110.62	Inf	-Inf	31.32	3	Horizontal	324	1.61	-
2437MHz	Pass	AV	2.4835G	52.22	54.00	-1.78	31.51	3	Horizontal	324	1.61	-
2437MHz	Pass	PK	2.3882G	65.70	74.00	-8.30	31.11	3	Horizontal	324	1.61	-
2437MHz	Pass	PK	2.4378G	120.03	Inf	-Inf	31.32	3	Horizontal	324	1.61	-
2437MHz	Pass	PK	2.4835G	67.05	74.00	-6.95	31.51	3	Horizontal	324	1.61	-
2437MHz	Pass	AV	4.87904G	48.58	54.00	-5.42	3.60	3	Vertical	213	1.55	-
2437MHz	Pass	AV	7.31376G	52.85	54.00	-1.15	9.51	3	Vertical	44	1.55	-
2437MHz	Pass	PK	4.87394G	62.19	74.00	-11.81	3.58	3	Vertical	213	1.55	-
2437MHz	Pass	PK	7.30902G	66.22	74.00	-7.78	9.49	3	Vertical	44	1.55	-
2437MHz	Pass	AV	4.8782G	48.98	54.00	-5.02	3.60	3	Horizontal	211	1.48	-
2437MHz	Pass	AV	7.31124G	49.02	54.00	-4.98	9.50	3	Horizontal	287	1.58	-
2437MHz	Pass	PK	4.87862G	61.21	74.00	-12.79	3.60	3	Horizontal	211	1.48	-
2437MHz	Pass	PK	7.31136G	64.22	74.00	-9.78	9.50	3	Horizontal	287	1.58	-
2457MHz	Pass	AV	2.4562G	105.77	Inf	-Inf	31.40	3	Vertical	294	1.50	-
2457MHz	Pass	AV	2.486G	51.09	54.00	-2.91	31.52	3	Vertical	294	1.50	-
2457MHz	Pass	PK	2.4562G	115.52	Inf	-Inf	31.40	3	Vertical	294	1.50	-
2457MHz	Pass	PK	2.4846G	68.27	74.00	-5.73	31.52	3	Vertical	294	1.50	-
2457MHz	Pass	AV	2.4578G	106.63	Inf	-Inf	31.40	3	Horizontal	348	1.17	-
2457MHz	Pass	AV	2.4835G	53.51	54.00	-0.49	31.51	3	Horizontal	348	1.17	-
2457MHz	Pass	PK	2.4578G	115.66	Inf	-Inf	31.40	3	Horizontal	348	1.17	-
2457MHz	Pass	PK	2.4835G	69.07	74.00	-4.93	31.51	3	Horizontal	348	1.17	-
2462MHz	Pass	AV	2.461G	102.82	Inf	-Inf	31.41	3	Vertical	275	1.29	-
2462MHz	Pass	AV	2.4856G	51.39	54.00	-2.61	31.52	3	Vertical	275	1.29	-
2462MHz	Pass	PK	2.4608G	112.37	Inf	-Inf	31.41	3	Vertical	275	1.29	-
2462MHz	Pass	PK	2.485G	67.75	74.00	-6.25	31.52	3	Vertical	275	1.29	-
2462MHz	Pass	AV	2.4628G	103.52	Inf	-Inf	31.43	3	Horizontal	318	1.19	-
2462MHz	Pass	AV	2.4835G	52.85	54.00	-1.15	31.51	3	Horizontal	318	1.19	-
2462MHz	Pass	PK	2.4628G	112.57	Inf	-Inf	31.43	3	Horizontal	318	1.19	-
2462MHz	Pass	PK	2.4835G	70.65	74.00	-3.35	31.51	3	Horizontal	318	1.19	-
2462MHz	Pass	AV	4.92592G	46.45	54.00	-7.55	3.72	3	Vertical	234	1.50	-
2462MHz	Pass	AV	7.38588G	45.90	54.00	-8.10	9.73	3	Vertical	57	1.71	-
2462MHz	Pass	PK	4.92574G	59.61	74.00	-14.39	3.72	3	Vertical	234	1.50	-
2462MHz	Pass	PK	7.38594G	57.73	74.00	-16.27	9.73	3	Vertical	57	1.71	-
2462MHz	Pass	AV	4.92874G	48.34	54.00	-5.66	3.74	3	Horizontal	7	1.30	-
2462MHz	Pass	AV	7.38624G	41.69	54.00	-12.31	9.73	3	Horizontal	292	1.34	-
2462MHz	Pass	PK	4.92916G	63.29	74.00	-10.71	3.74	3	Horizontal	7	1.30	-
2462MHz	Pass	PK	7.3815G	54.02	74.00	-19.98	9.72	3	Horizontal	292	1.34	-
VHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	AV	2.39G	53.88	54.00	-0.12	31.11	3	Vertical	94	1.78	-
2422MHz	Pass	AV	2.4352G	98.44	Inf	-Inf	31.31	3	Vertical	94	1.78	-
2422MHz	Pass	AV	2.4848G	47.90	54.00	-6.10	31.52	3	Vertical	94	1.78	-
2422MHz	Pass	PK	2.3896G	66.07	74.00	-7.93	31.11	3	Vertical	94	1.78	-
2422MHz	Pass	PK	2.4352G	107.07	Inf	-Inf	31.31	3	Vertical	94	1.78	-
2422MHz	Pass	PK	2.4996G	59.12	74.00	-14.88	31.58	3	Vertical	94	1.78	-
2422MHz	Pass	AV	2.3892G	53.96	54.00	-0.04	31.11	3	Horizontal	99	2.12	-



Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2422MHz	Pass	AV	2.4316G	98.01	Inf	-Inf	31.29	3	Horizontal	99	2.12	-
2422MHz	Pass	AV	2.484G	46.61	54.00	-7.39	31.52	3	Horizontal	99	2.12	-
2422MHz	Pass	PK	2.3892G	66.95	74.00	-7.05	31.11	3	Horizontal	99	2.12	-
2422MHz	Pass	PK	2.4316G	106.92	Inf	-Inf	31.29	3	Horizontal	99	2.12	-
2422MHz	Pass	PK	2.4936G	58.10	74.00	-15.90	31.55	3	Horizontal	99	2.12	-
2422MHz	Pass	AV	4.84808G	34.83	54.00	-19.17	3.51	3	Vertical	210	1.50	-
2422MHz	Pass	AV	7.266G	44.74	54.00	-9.26	9.36	3	Vertical	195	1.52	-
2422MHz	Pass	PK	4.85304G	48.22	74.00	-25.78	3.53	3	Vertical	210	1.50	-
2422MHz	Pass	PK	7.2658G	52.53	74.00	-21.47	9.36	3	Vertical	195	1.52	-
2422MHz	Pass	AV	4.84633G	35.24	54.00	-18.76	3.50	3	Horizontal	291	2.88	-
2422MHz	Pass	AV	7.26604G	41.02	54.00	-12.98	9.36	3	Horizontal	221	1.50	-
2422MHz	Pass	PK	4.84138G	47.39	74.00	-26.61	3.50	3	Horizontal	291	2.88	-
2422MHz	Pass	PK	7.266G	50.79	74.00	-23.21	9.36	3	Horizontal	221	1.50	-
2427MHz	Pass	AV	2.3898G	50.44	54.00	-3.56	31.11	3	Vertical	92	1.74	-
2427MHz	Pass	AV	2.435G	97.08	Inf	-Inf	31.31	3	Vertical	92	1.74	-
2427MHz	Pass	AV	2.4918G	47.49	54.00	-6.51	31.55	3	Vertical	92	1.74	-
2427MHz	Pass	PK	2.3898G	63.30	74.00	-10.70	31.11	3	Vertical	92	1.74	-
2427MHz	Pass	PK	2.435G	105.98	Inf	-Inf	31.31	3	Vertical	92	1.74	-
2427MHz	Pass	PK	2.4835G	59.00	74.00	-15.00	31.51	3	Vertical	92	1.74	-
2427MHz	Pass	AV	2.3894G	53.61	54.00	-0.39	31.11	3	Horizontal	78	1.56	-
2427MHz	Pass	AV	2.4442G	96.37	Inf	-Inf	31.34	3	Horizontal	78	1.56	-
2427MHz	Pass	AV	2.4878G	47.80	54.00	-6.20	31.53	3	Horizontal	78	1.56	-
2427MHz	Pass	PK	2.389G	65.71	74.00	-8.29	31.11	3	Horizontal	78	1.56	-
2427MHz	Pass	PK	2.4442G	106.12	Inf	-Inf	31.34	3	Horizontal	78	1.56	-
2427MHz	Pass	PK	2.487G	59.38	74.00	-14.62	31.52	3	Horizontal	78	1.56	-
2437MHz	Pass	AV	2.389G	48.32	54.00	-5.68	31.11	3	Vertical	271	1.22	-
2437MHz	Pass	AV	2.4506G	99.31	Inf	-Inf	31.37	3	Vertical	271	1.22	-
2437MHz	Pass	AV	2.4858G	52.06	54.00	-1.94	31.52	3	Vertical	271	1.22	-
2437MHz	Pass	PK	2.3894G	63.30	74.00	-10.70	31.11	3	Vertical	271	1.22	-
2437MHz	Pass	PK	2.4458G	108.24	Inf	-Inf	31.35	3	Vertical	271	1.22	-
2437MHz	Pass	PK	2.4838G	68.79	74.00	-5.21	31.51	3	Vertical	271	1.22	-
2437MHz	Pass	AV	2.3878G	51.66	54.00	-2.34	31.11	3	Horizontal	318	1.59	-
2437MHz	Pass	AV	2.4426G	100.84	Inf	-Inf	31.34	3	Horizontal	318	1.59	-
2437MHz	Pass	AV	2.4835G	53.59	54.00	-0.41	31.51	3	Horizontal	318	1.59	-
2437MHz	Pass	PK	2.3878G	68.00	74.00	-6.00	31.11	3	Horizontal	318	1.59	-
2437MHz	Pass	PK	2.4326G	109.60	Inf	-Inf	31.29	3	Horizontal	318	1.59	-
2437MHz	Pass	PK	2.4838G	68.81	74.00	-5.19	31.51	3	Horizontal	318	1.59	-
2437MHz	Pass	AV	4.87652G	37.45	54.00	-16.55	3.59	3	Vertical	244	1.50	-
2437MHz	Pass	AV	7.31092G	44.74	54.00	-9.26	9.50	3	Vertical	198	1.49	-
2437MHz	Pass	PK	4.8766G	49.33	74.00	-24.67	3.59	3	Vertical	244	1.50	-
2437MHz	Pass	PK	7.3111G	52.53	74.00	-21.47	9.50	3	Vertical	198	1.49	-
2437MHz	Pass	AV	4.88312G	37.33	54.00	-16.67	3.60	3	Horizontal	197	1.50	-
2437MHz	Pass	AV	7.311G	41.19	54.00	-12.81	9.50	3	Horizontal	281	1.50	-
2437MHz	Pass	PK	4.88328G	49.25	74.00	-24.75	3.60	3	Horizontal	197	1.50	-
2437MHz	Pass	PK	7.31312G	52.99	74.00	-21.01	9.50	3	Horizontal	281	1.50	-
2447MHz	Pass	AV	2.3602G	45.69	54.00	-8.31	30.99	3	Vertical	292	1.47	-
2447MHz	Pass	AV	2.4562G	97.92	Inf	-Inf	31.40	3	Vertical	292	1.47	-
2447MHz	Pass	AV	2.4858G	53.51	54.00	-0.49	31.52	3	Vertical	292	1.47	-
2447MHz	Pass	PK	2.3858G	57.43	74.00	-16.57	31.09	3	Vertical	292	1.47	-




Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2447MHz	Pass	PK	2.451G	106.75	Inf	-Inf	31.37	3	Vertical	292	1.47	-
2447MHz	Pass	PK	2.4835G	69.56	74.00	-4.44	31.51	3	Vertical	292	1.47	-
2447MHz	Pass	AV	2.3878G	47.13	54.00	-6.87	31.11	3	Horizontal	3	1.83	-
2447MHz	Pass	AV	2.4526G	98.61	Inf	-Inf	31.38	3	Horizontal	3	1.83	-
2447MHz	Pass	AV	2.4835G	53.76	54.00	-0.24	31.51	3	Horizontal	3	1.83	-
2447MHz	Pass	PK	2.387G	60.12	74.00	-13.88	31.10	3	Horizontal	3	1.83	-
2447MHz	Pass	PK	2.4526G	108.21	Inf	-Inf	31.38	3	Horizontal	3	1.83	-
2447MHz	Pass	PK	2.4874G	69.11	74.00	-4.89	31.52	3	Horizontal	3	1.83	-
2452MHz	Pass	AV	2.36G	45.17	54.00	-8.83	30.99	3	Vertical	299	1.07	-
2452MHz	Pass	AV	2.466G	96.52	Inf	-Inf	31.43	3	Vertical	299	1.07	-
2452MHz	Pass	AV	2.486G	49.75	54.00	-4.25	31.52	3	Vertical	299	1.07	-
2452MHz	Pass	PK	2.3896G	56.09	74.00	-17.91	31.11	3	Vertical	299	1.07	-
2452MHz	Pass	PK	2.466G	105.14	Inf	-Inf	31.43	3	Vertical	299	1.07	-
2452MHz	Pass	PK	2.488G	63.32	74.00	-10.68	31.53	3	Vertical	299	1.07	-
2452MHz	Pass	AV	2.3896G	45.71	54.00	-8.29	31.11	3	Horizontal	101	1.50	-
2452MHz	Pass	AV	2.4464G	96.84	Inf	-Inf	31.35	3	Horizontal	101	1.50	-
2452MHz	Pass	AV	2.484G	53.57	54.00	-0.43	31.52	3	Horizontal	101	1.50	-
2452MHz	Pass	PK	2.378G	57.42	74.00	-16.58	31.06	3	Horizontal	101	1.50	-
2452MHz	Pass	PK	2.4468G	106.01	Inf	-Inf	31.35	3	Horizontal	101	1.50	-
2452MHz	Pass	PK	2.4896G	67.37	74.00	-6.63	31.53	3	Horizontal	101	1.50	-
2452MHz	Pass	AV	4.9058G	38.92	54.00	-15.08	3.67	3	Vertical	228	1.50	-
2452MHz	Pass	AV	7.35596G	44.67	54.00	-9.33	9.65	3	Vertical	200	1.57	-
2452MHz	Pass	PK	4.90616G	50.93	74.00	-23.07	3.67	3	Vertical	228	1.50	-
2452MHz	Pass	PK	7.35592G	52.49	74.00	-21.51	9.65	3	Vertical	200	1.57	-
2452MHz	Pass	AV	4.9248G	40.15	54.00	-13.85	3.71	3	Horizontal	203	1.50	-
2452MHz	Pass	AV	7.35584G	42.25	54.00	-11.75	9.65	3	Horizontal	301	1.93	-
2452MHz	Pass	PK	4.9245G	52.77	74.00	-21.23	3.71	3	Horizontal	203	1.50	-
2452MHz	Pass	PK	7.35578G	51.65	74.00	-22.35	9.65	3	Horizontal	301	1.93	-

### 802.11b\_Nss1,(1Mbps)\_4TX

06/05/2019

### 2412MHz\_TX

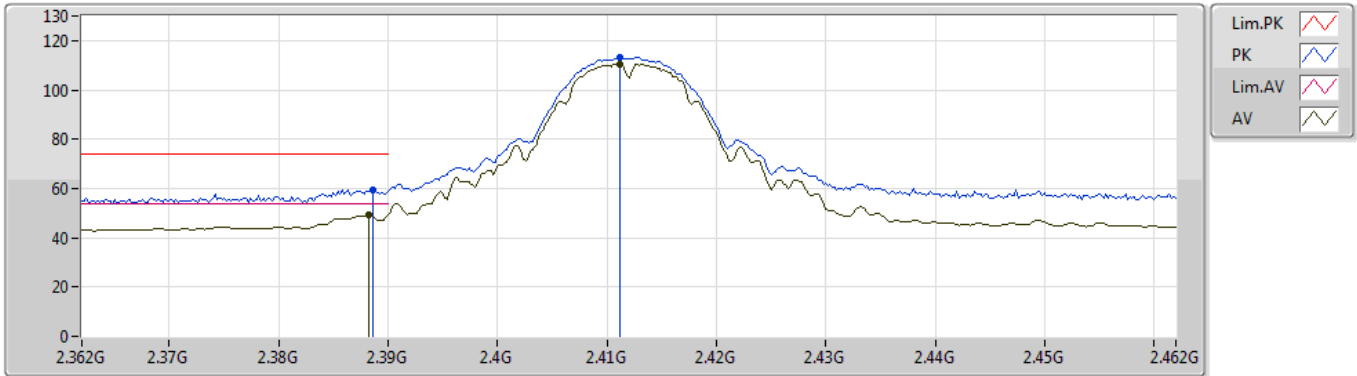


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3882G	49.45	54.00	-4.55	31.11	3	Vertical	266	1.15	-
AV	2.4112G	110.66	Inf	-Inf	31.20	3	Vertical	266	1.15	-
PK	2.3886G	59.51	74.00	-14.49	31.11	3	Vertical	266	1.15	-
PK	2.4112G	113.10	Inf	-Inf	31.20	3	Vertical	266	1.15	-

### 802.11b\_Nss1,(1Mbps)\_4TX

06/05/2019

### 2412MHz\_TX

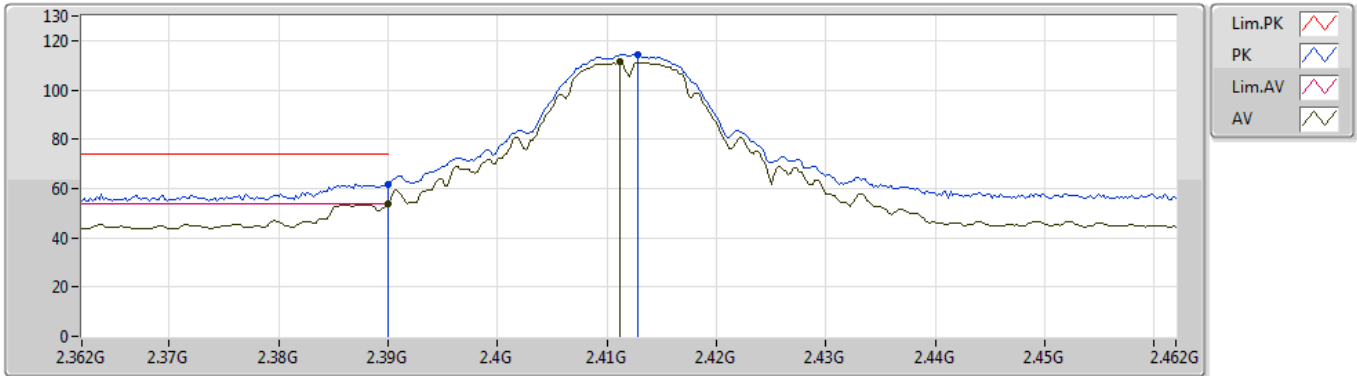


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.39G	53.84	54.00	-0.16	31.11	3	Horizontal	111	1.92	-
AV	2.4112G	111.38	Inf	-Inf	31.20	3	Horizontal	111	1.92	-
PK	2.39G	61.75	74.00	-12.25	31.11	3	Horizontal	111	1.92	-
PK	2.4128G	114.34	Inf	-Inf	31.21	3	Horizontal	111	1.92	-

### 802.11b\_Nss1,(1Mbps)\_4TX

06/05/2019

### 2412MHz\_TX

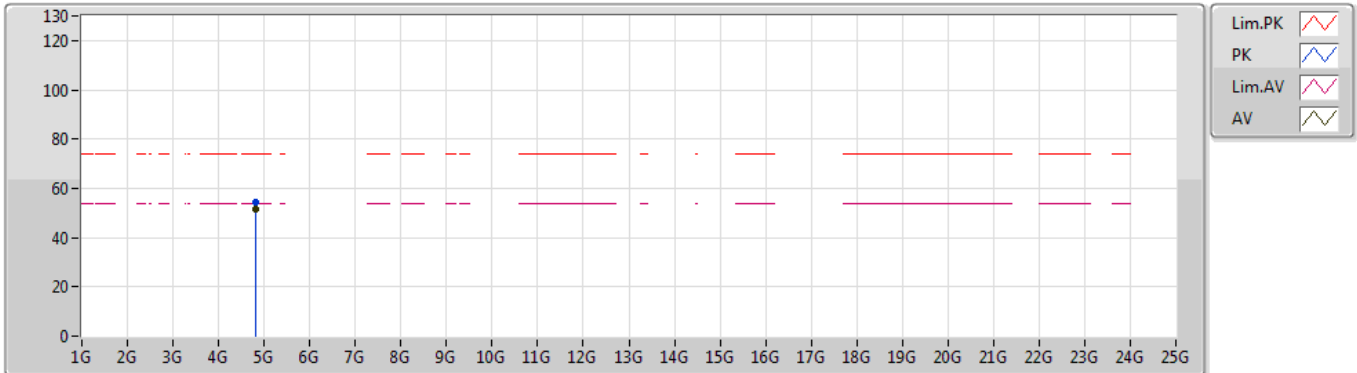


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.82396G	51.48	54.00	-2.52	3.46	3	Vertical	278	1.49	-
PK	4.82394G	54.28	74.00	-19.72	3.46	3	Vertical	278	1.49	-

### 802.11b\_Nss1,(1Mbps)\_4TX

06/05/2019

### 2412MHz\_TX

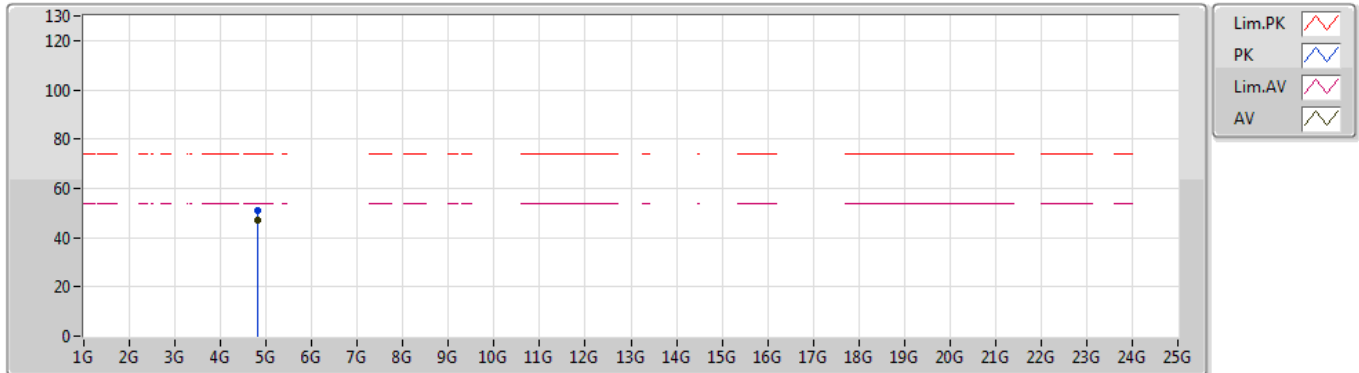


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.82396G	47.24	54.00	-6.76	3.46	3	Horizontal	227	1.50	-
PK	4.824G	50.92	74.00	-23.08	3.46	3	Horizontal	227	1.50	-

### 802.11b\_Nss1,(1Mbps)\_4TX

06/05/2019

### 2437MHz\_TX

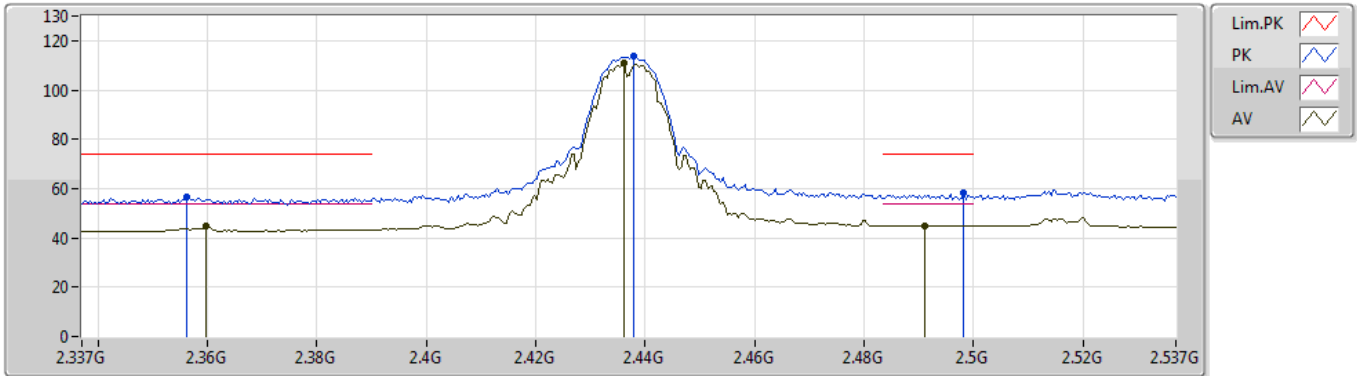


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3598G	44.81	54.00	-9.19	30.99	3	Vertical	268	1.28	-
AV	2.4362G	110.90	Inf	-Inf	31.31	3	Vertical	268	1.28	-
AV	2.491G	44.91	54.00	-9.09	31.54	3	Vertical	268	1.28	-
PK	2.3562G	56.75	74.00	-17.25	30.97	3	Vertical	268	1.28	-
PK	2.4378G	113.55	Inf	-Inf	31.32	3	Vertical	268	1.28	-
PK	2.4982G	58.11	74.00	-15.89	31.57	3	Vertical	268	1.28	-



### 802.11b\_Nss1,(1Mbps)\_4TX

06/05/2019

### 2437MHz\_TX

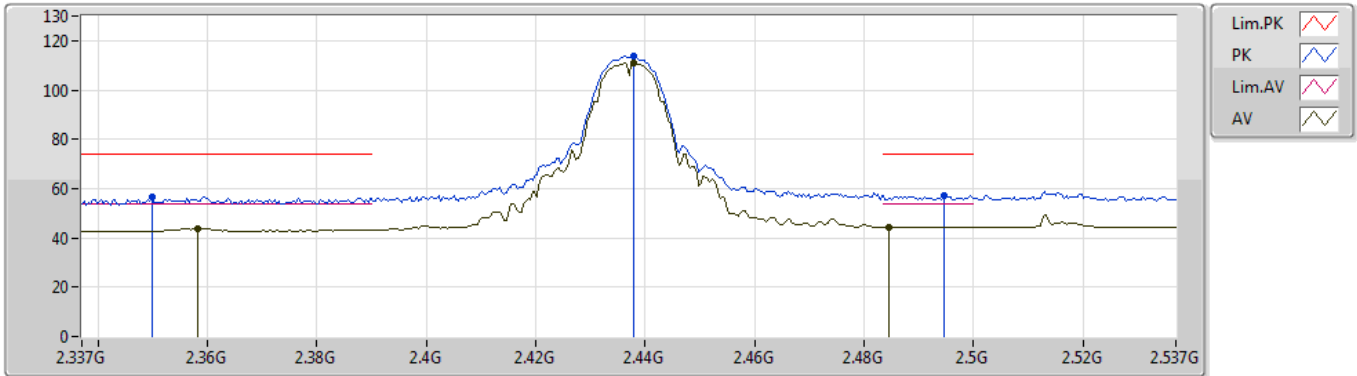


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3582G	43.82	54.00	-10.18	30.97	3	Horizontal	111	1.45	-
AV	2.4378G	110.93	Inf	-Inf	31.32	3	Horizontal	111	1.45	-
AV	2.4846G	44.39	54.00	-9.61	31.52	3	Horizontal	111	1.45	-
PK	2.3498G	56.51	74.00	-17.49	30.94	3	Horizontal	111	1.45	-
PK	2.4378G	113.77	Inf	-Inf	31.32	3	Horizontal	111	1.45	-
PK	2.4946G	57.29	74.00	-16.71	31.55	3	Horizontal	111	1.45	-

### 802.11b\_Nss1,(1Mbps)\_4TX

03/05/2019

### 2437MHz\_TX

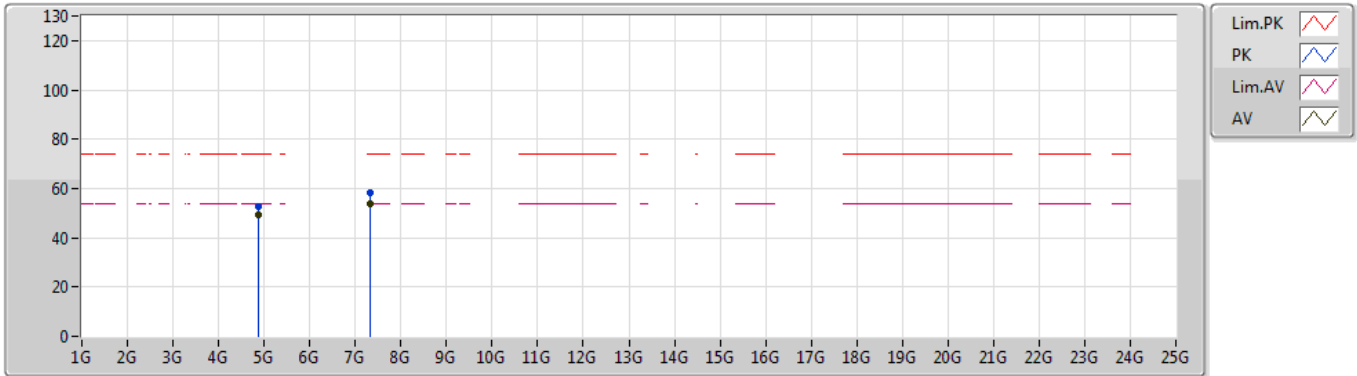


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.87394G	49.09	54.00	-4.91	3.58	3	Vertical	273	1.63	-
AV	7.31168G	53.59	54.00	-0.41	9.50	3	Vertical	77	1.50	-
PK	4.87396G	52.79	74.00	-21.21	3.58	3	Vertical	273	1.63	-
PK	7.31132G	58.54	74.00	-15.46	9.50	3	Vertical	77	1.50	-

### 802.11b\_Nss1,(1Mbps)\_4TX

03/05/2019

### 2437MHz\_TX

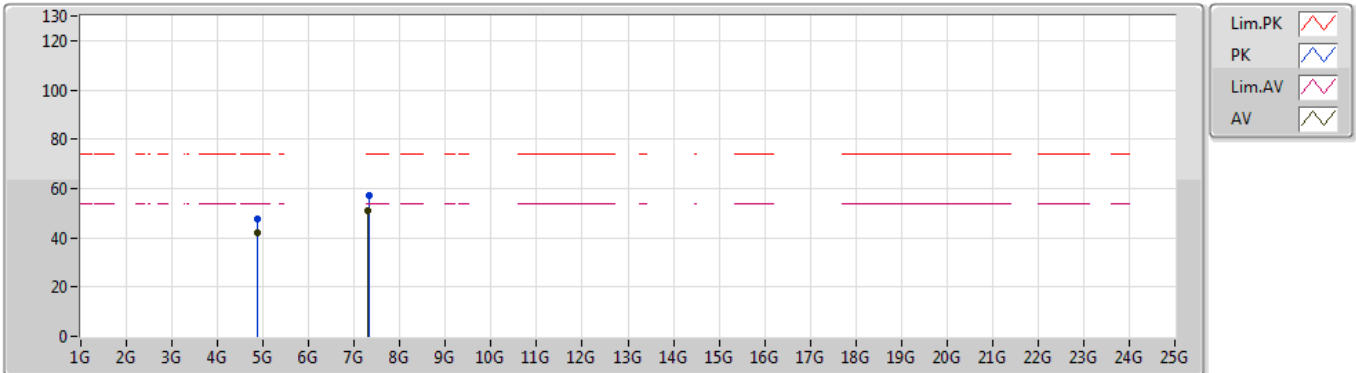


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.87394G	42.30	54.00	-11.70	3.58	3	Horizontal	323	1.59	-
AV	7.31012G	51.19	54.00	-2.81	9.50	3	Horizontal	316	1.43	-
PK	4.87406G	47.85	74.00	-26.15	3.58	3	Horizontal	323	1.59	-
PK	7.31138G	57.00	74.00	-17.00	9.50	3	Horizontal	316	1.43	-

### 802.11b\_Nss1,(1Mbps)\_4TX

06/05/2019

### 2457MHz\_TX

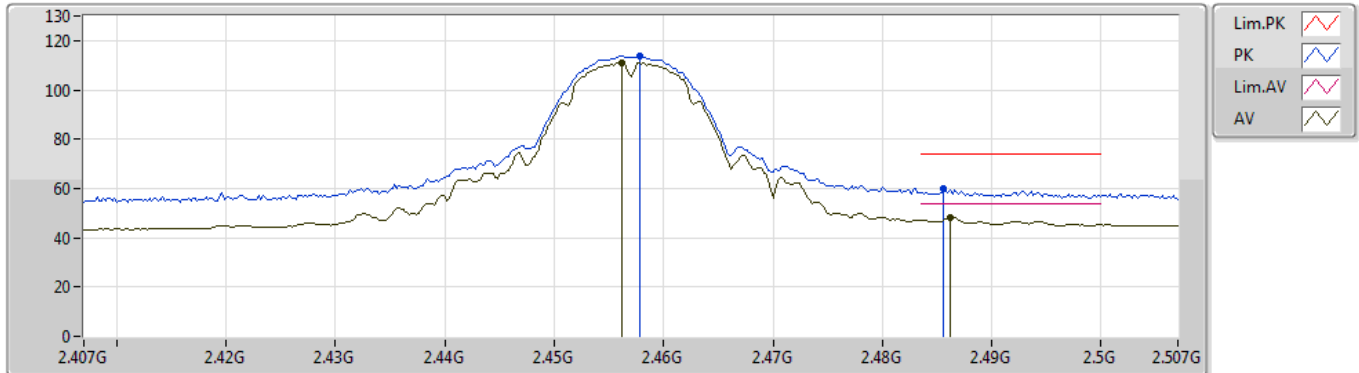


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.4562G	110.99	Inf	-Inf	31.40	3	Vertical	268	1.16	-
AV	2.4862G	48.31	54.00	-5.69	31.52	3	Vertical	268	1.16	-
PK	2.4578G	113.73	Inf	-Inf	31.40	3	Vertical	268	1.16	-
PK	2.4856G	59.95	74.00	-14.05	31.52	3	Vertical	268	1.16	-

### 802.11b\_Nss1,(1Mbps)\_4TX

06/05/2019

### 2457MHz\_TX

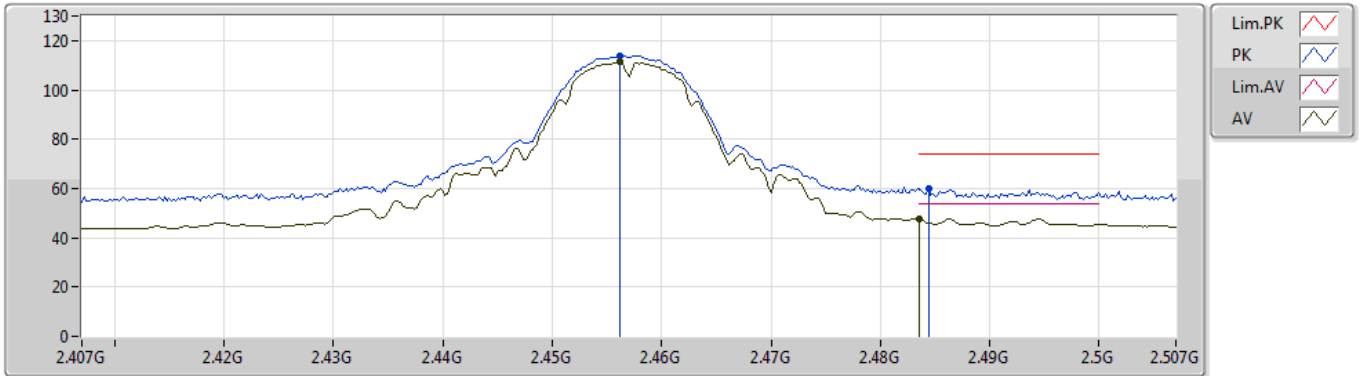


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.4562G	111.37	Inf	-Inf	31.40	3	Horizontal	110	1.89	-
AV	2.4835G	47.75	54.00	-6.25	31.51	3	Horizontal	110	1.89	-
PK	2.4562G	113.94	Inf	-Inf	31.40	3	Horizontal	110	1.89	-
PK	2.4844G	59.76	74.00	-14.24	31.52	3	Horizontal	110	1.89	-

### 802.11b\_Nss1,(1Mbps)\_4TX

06/05/2019

### 2462MHz\_TX

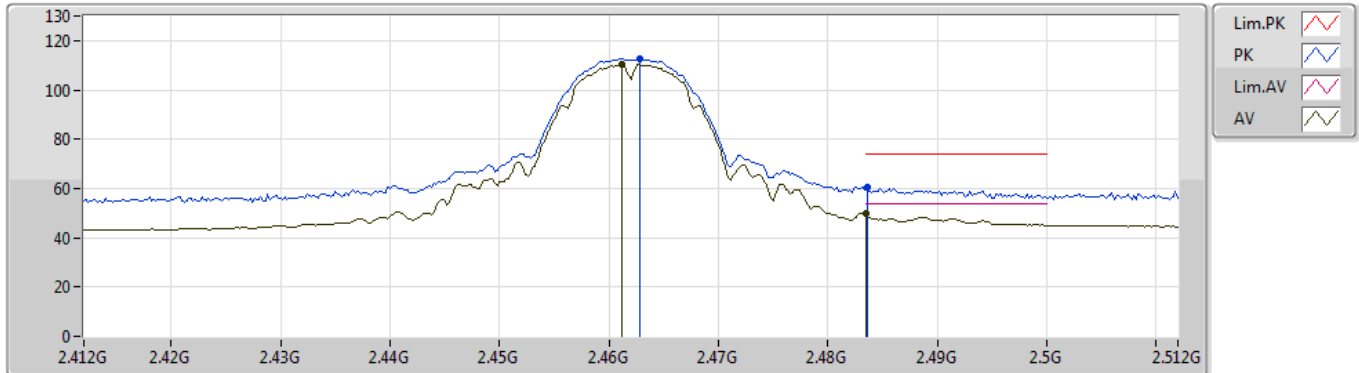


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.4612G	110.32	Inf	-Inf	31.41	3	Vertical	269	1.18	-
AV	2.4835G	50.02	54.00	-3.98	31.51	3	Vertical	269	1.18	-
PK	2.4628G	112.76	Inf	-Inf	31.43	3	Vertical	269	1.18	-
PK	2.4836G	60.51	74.00	-13.49	31.51	3	Vertical	269	1.18	-

### 802.11b\_Nss1,(1Mbps)\_4TX

06/05/2019

### 2462MHz\_TX

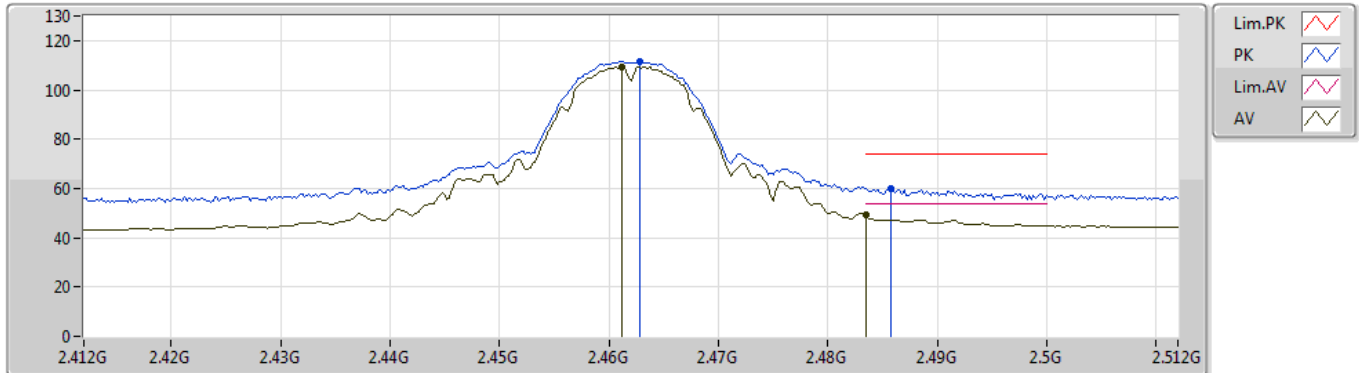


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.4612G	109.35	Inf	-Inf	31.41	3	Horizontal	36	1.19	-
AV	2.4835G	49.34	54.00	-4.66	31.51	3	Horizontal	36	1.19	-
PK	2.4628G	111.69	Inf	-Inf	31.43	3	Horizontal	36	1.19	-
PK	2.4858G	60.00	74.00	-14.00	31.52	3	Horizontal	36	1.19	-

### 802.11b\_Nss1,(1Mbps)\_4TX

03/05/2019

### 2462MHz\_TX

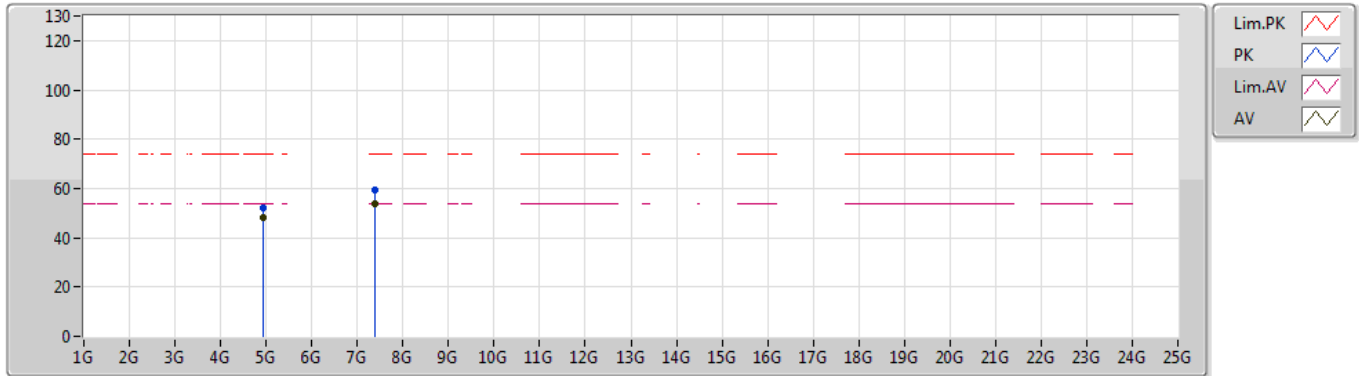


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.92394G	48.36	54.00	-5.64	3.71	3	Vertical	270	1.60	-
AV	7.38512G	53.84	54.00	-0.16	9.73	3	Vertical	64	1.65	-
PK	4.92392G	52.18	74.00	-21.82	3.71	3	Vertical	270	1.60	-
PK	7.3868G	59.13	74.00	-14.87	9.74	3	Vertical	64	1.65	-



### 802.11b\_Nss1,(1Mbps)\_4TX

03/05/2019

### 2462MHz\_TX

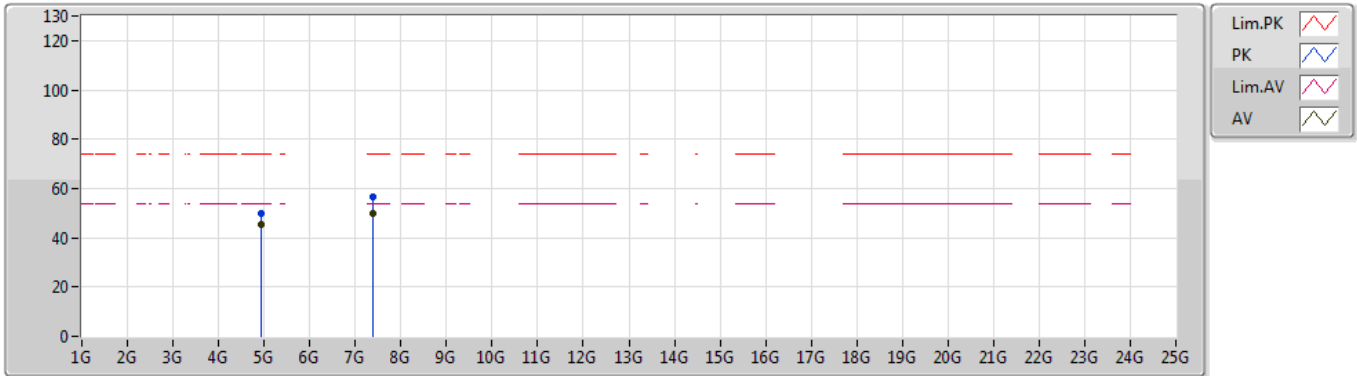


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.92395G	45.24	54.00	-8.76	3.68	3	Horizontal	205	1.69	-
AV	7.38512G	49.90	54.00	-4.10	9.73	3	Horizontal	317	1.50	-
PK	4.92397G	49.89	74.00	-24.11	3.68	3	Horizontal	205	1.69	-
PK	7.3863G	56.38	74.00	-17.62	9.73	3	Horizontal	317	1.50	-

### 802.11g\_Nss1,(6Mbps)\_4TX

24/04/2019

### 2412MHz\_TX

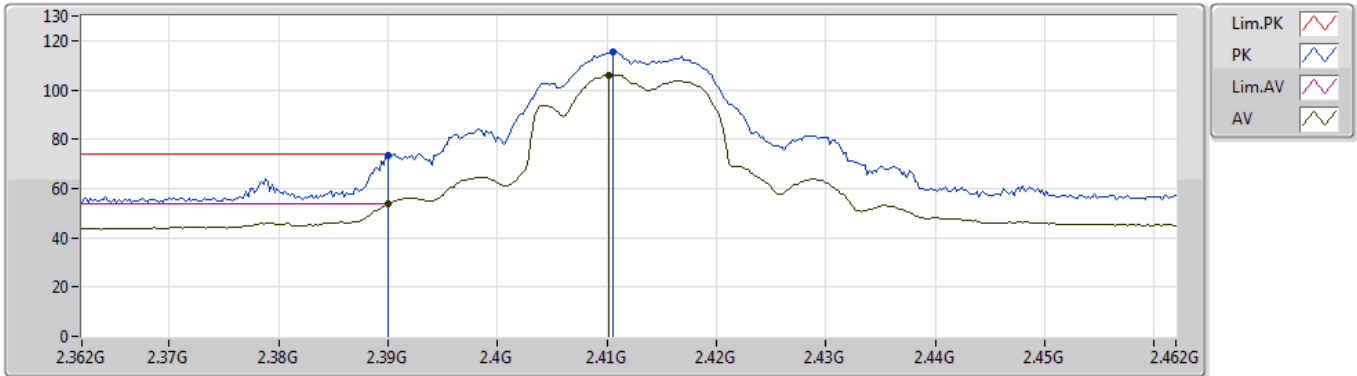


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.39G	53.80	54.00	-0.20	31.11	3	Vertical	75	2.29	-
AV	2.4102G	106.17	Inf	-Inf	31.20	3	Vertical	75	2.29	-
PK	2.39G	73.32	74.00	-0.68	31.11	3	Vertical	75	2.29	-
PK	2.4106G	115.40	Inf	-Inf	31.20	3	Vertical	75	2.29	-

### 802.11g\_Nss1,(6Mbps)\_4TX

24/04/2019

### 2412MHz\_TX

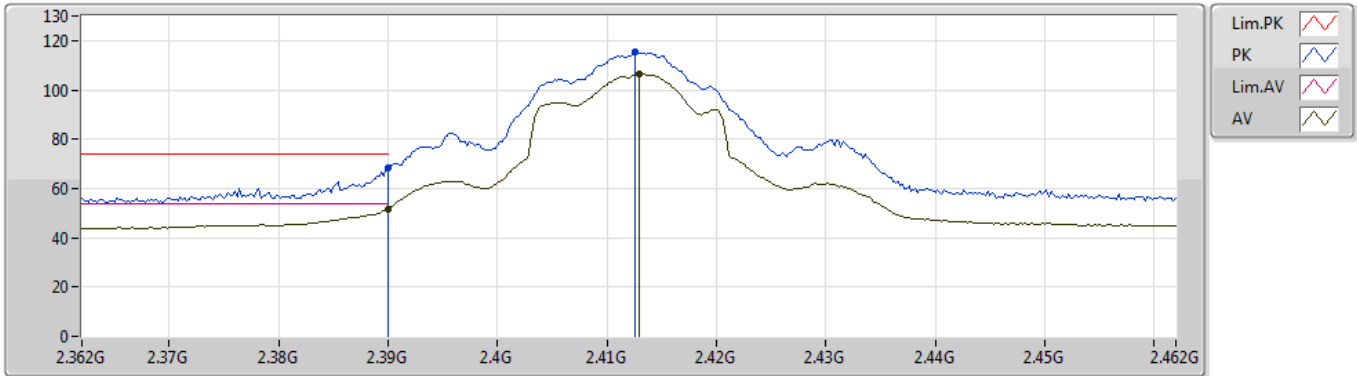


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.39G	51.79	54.00	-2.21	31.11	3	Horizontal	101	1.91	-
AV	2.413G	106.49	Inf	-Inf	31.21	3	Horizontal	101	1.91	-
PK	2.39G	68.56	74.00	-5.44	31.11	3	Horizontal	101	1.91	-
PK	2.4126G	115.31	Inf	-Inf	31.21	3	Horizontal	101	1.91	-

### 802.11g\_Nss1,(6Mbps)\_4TX

24/04/2019

### 2412MHz\_TX

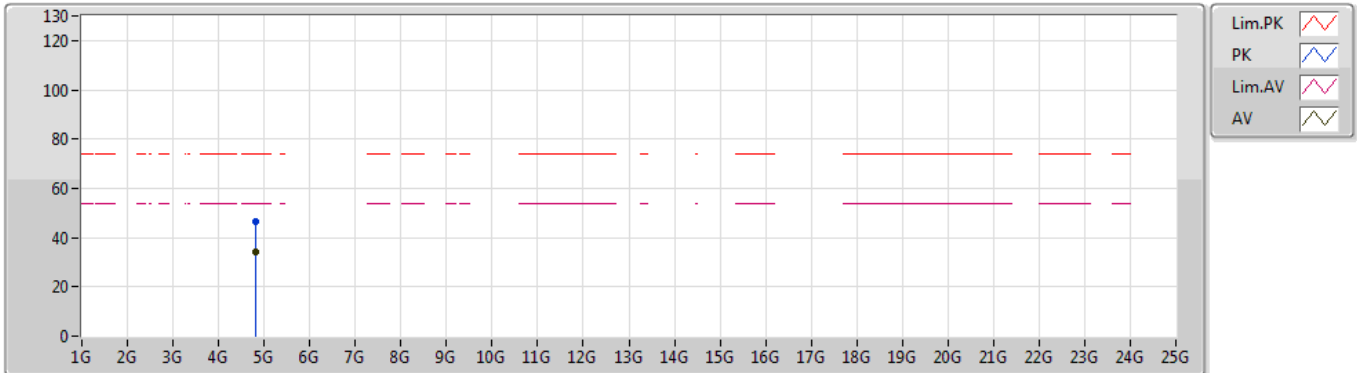


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.82118G	33.99	54.00	-20.01	3.44	3	Vertical	75	2.24	-
PK	4.82034G	46.36	74.00	-27.64	3.44	3	Vertical	75	2.24	-

### 802.11g\_Nss1,(6Mbps)\_4TX

24/04/2019

### 2412MHz\_TX

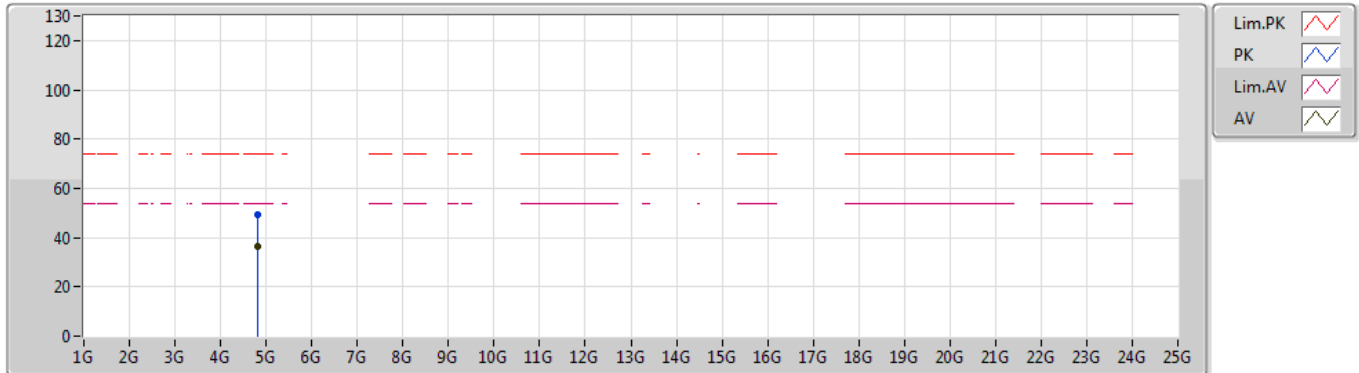


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.8276G	36.60	54.00	-17.40	3.46	3	Horizontal	161	1.88	-
PK	4.82742G	49.22	74.00	-24.78	3.46	3	Horizontal	161	1.88	-

### 802.11g\_Nss1,(6Mbps)\_4TX

29/04/2019

### 2417MHz\_TX

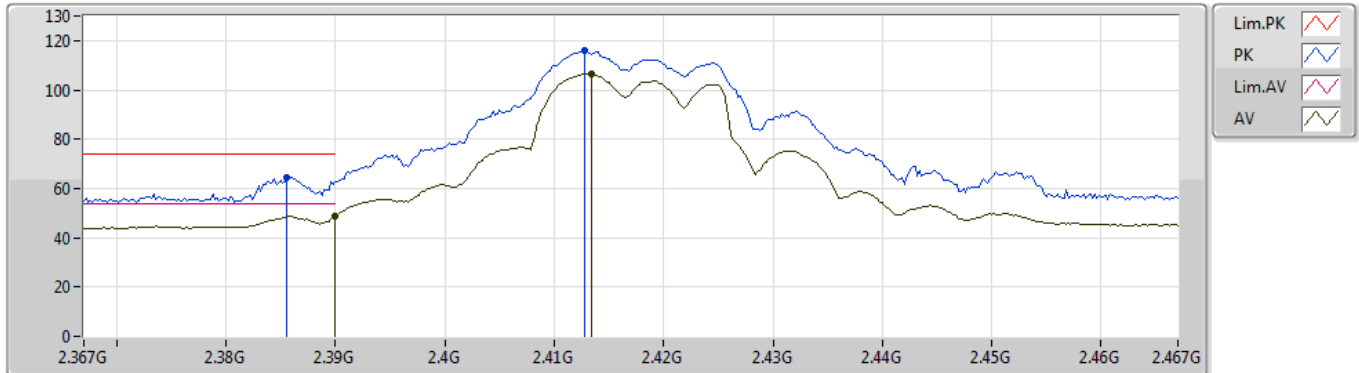


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.39G	48.75	54.00	-5.25	31.11	3	Vertical	305	1.97	-
AV	2.4134G	106.36	Inf	-Inf	31.21	3	Vertical	305	1.97	-
PK	2.3856G	64.52	74.00	-9.48	31.09	3	Vertical	305	1.97	-
PK	2.4128G	116.26	Inf	-Inf	31.21	3	Vertical	305	1.97	-

### 802.11g\_Nss1,(6Mbps)\_4TX

29/04/2019

### 2417MHz\_TX

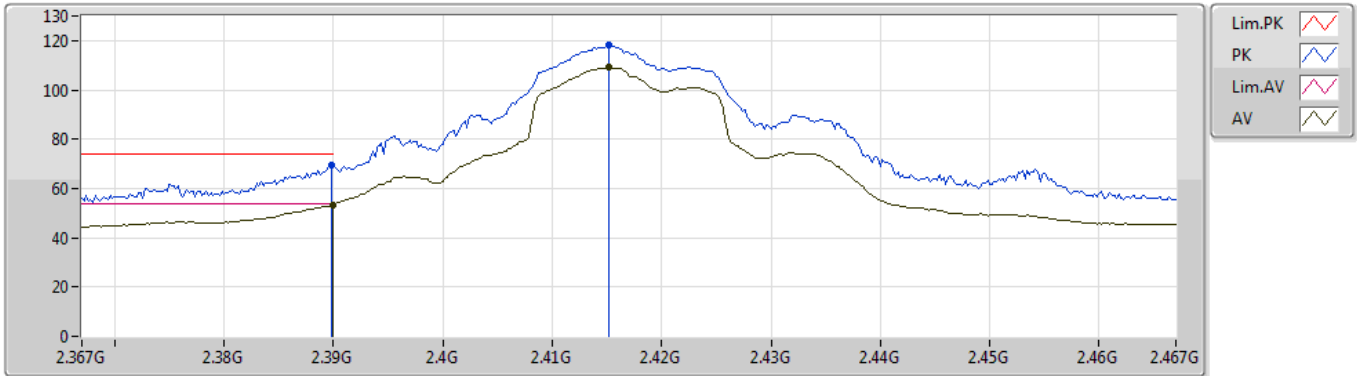


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.39G	53.44	54.00	-0.56	31.11	3	Horizontal	92	1.90	-
AV	2.4152G	109.20	Inf	-Inf	31.22	3	Horizontal	92	1.90	-
PK	2.3898G	69.41	74.00	-4.59	31.11	3	Horizontal	92	1.90	-
PK	2.4152G	118.16	Inf	-Inf	31.22	3	Horizontal	92	1.90	-

### 802.11g\_Nss1,(6Mbps)\_4TX

24/04/2019

### 2437MHz\_TX

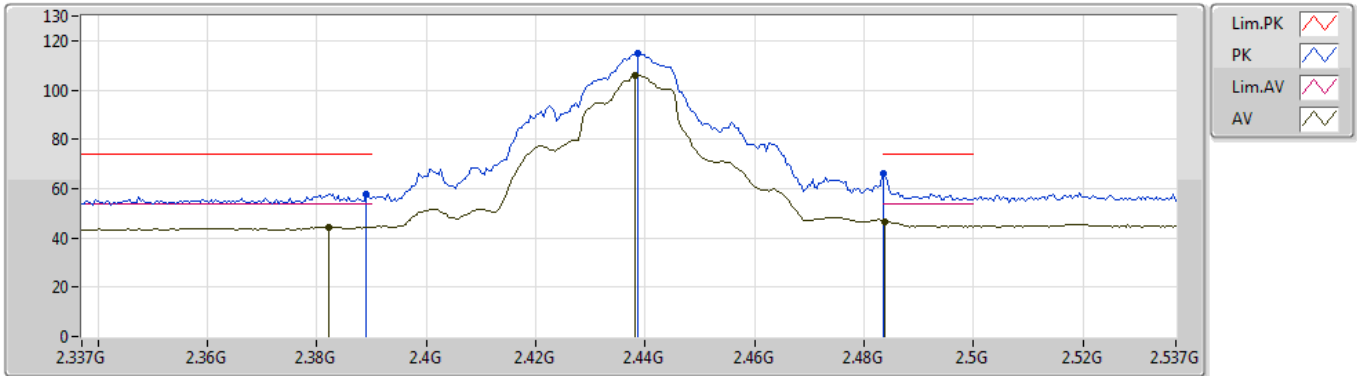


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3822G	44.53	54.00	-9.47	31.08	3	Vertical	271	1.49	-
AV	2.4382G	105.95	Inf	-Inf	31.32	3	Vertical	271	1.49	-
AV	2.4838G	46.78	54.00	-7.22	31.51	3	Vertical	271	1.49	-
PK	2.389G	57.94	74.00	-16.06	31.11	3	Vertical	271	1.49	-
PK	2.4386G	114.75	Inf	-Inf	31.32	3	Vertical	271	1.49	-
PK	2.4835G	65.99	74.00	-8.01	31.51	3	Vertical	271	1.49	-



### 802.11g\_Nss1,(6Mbps)\_4TX

24/04/2019

### 2437MHz\_TX

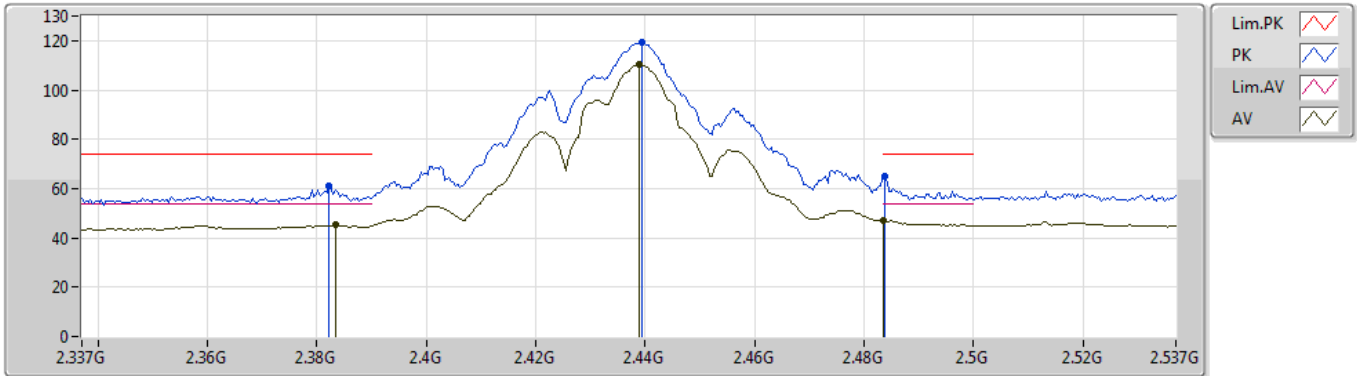


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3834G	45.17	54.00	-8.83	31.08	3	Horizontal	101	2.09	-
AV	2.439G	110.11	Inf	-Inf	31.32	3	Horizontal	101	2.09	-
AV	2.4835G	47.10	54.00	-6.90	31.51	3	Horizontal	101	2.09	-
PK	2.3822G	60.94	74.00	-13.06	31.08	3	Horizontal	101	2.09	-
PK	2.4394G	119.20	Inf	-Inf	31.32	3	Horizontal	101	2.09	-
PK	2.4838G	65.25	74.00	-8.75	31.51	3	Horizontal	101	2.09	-

### 802.11g\_Nss1,(6Mbps)\_4TX

24/04/2019

### 2437MHz\_TX

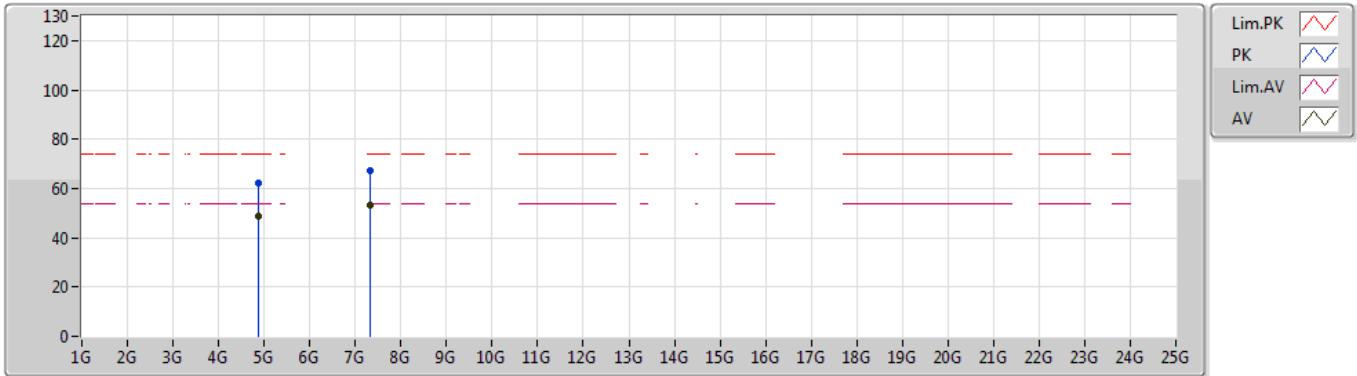


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.87424G	48.81	54.00	-5.19	3.58	3	Vertical	230	1.64	-
AV	7.31442G	53.19	54.00	-0.81	9.51	3	Vertical	57	1.58	-
PK	4.87454G	61.93	74.00	-12.07	3.58	3	Vertical	230	1.64	-
PK	7.31424G	67.01	74.00	-6.99	9.51	3	Vertical	57	1.58	-

### 802.11g\_Nss1,(6Mbps)\_4TX

24/04/2019

### 2437MHz\_TX

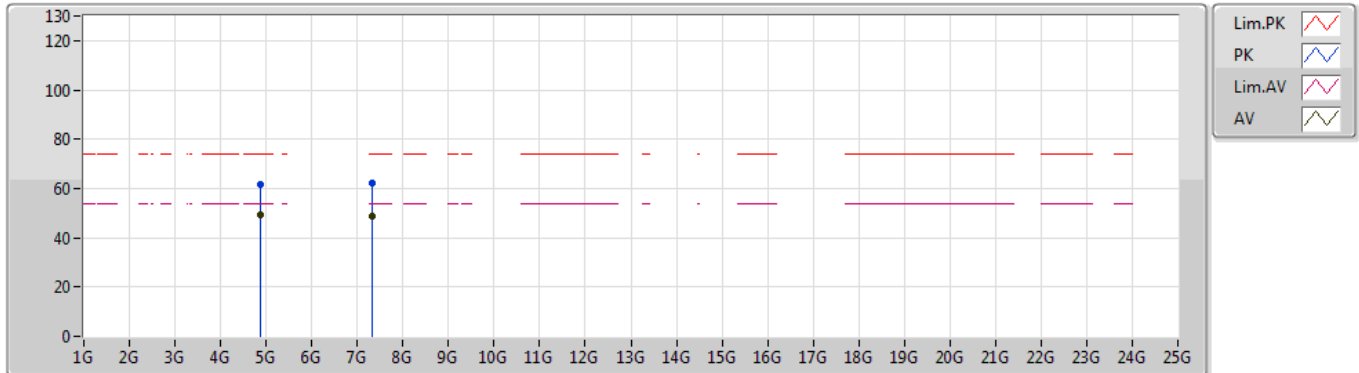


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.87616G	49.32	54.00	-4.68	3.59	3	Horizontal	224	2.71	-
AV	7.31256G	49.02	54.00	-4.98	9.50	3	Horizontal	304	2.72	-
PK	4.87448G	61.42	74.00	-12.58	3.58	3	Horizontal	224	2.71	-
PK	7.31244G	62.33	74.00	-11.67	9.50	3	Horizontal	304	2.72	-

### 802.11g\_Nss1,(6Mbps)\_4TX

29/04/2019

### 2457MHz\_TX

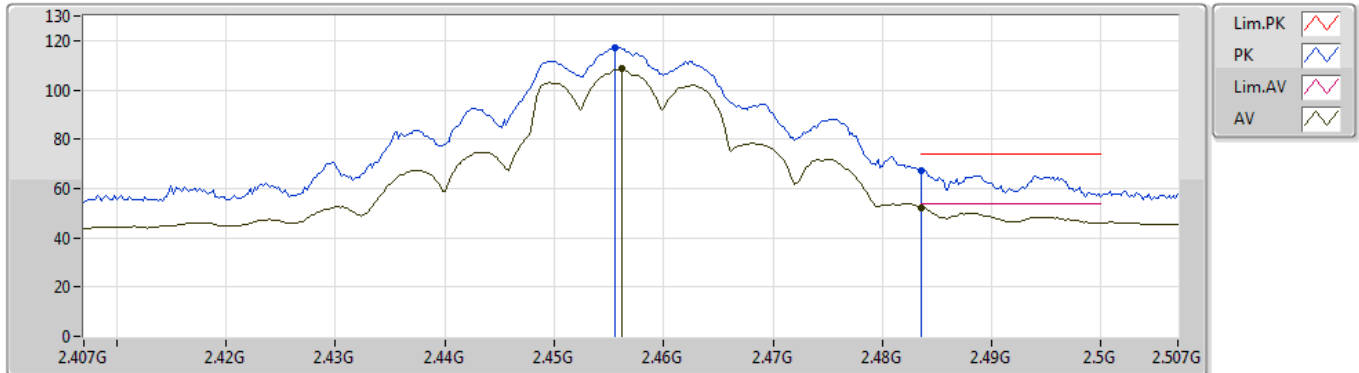


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.4562G	108.50	Inf	-Inf	31.40	3	Vertical	275	1.01	-
AV	2.4835G	52.22	54.00	-1.78	31.51	3	Vertical	275	1.01	-
PK	2.4556G	117.15	Inf	-Inf	31.40	3	Vertical	275	1.01	-
PK	2.4836G	67.43	74.00	-6.57	31.51	3	Vertical	275	1.01	-

### 802.11g\_Nss1,(6Mbps)\_4TX

29/04/2019

### 2457MHz\_TX

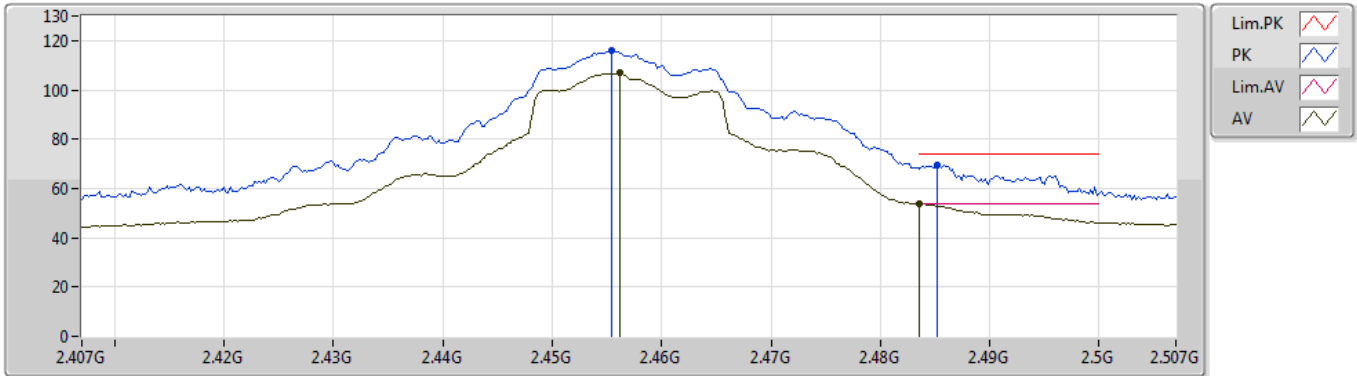


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.4562G	106.76	Inf	-Inf	31.40	3	Horizontal	89	2.75	-
AV	2.4835G	53.74	54.00	-0.26	31.51	3	Horizontal	89	2.75	-
PK	2.4554G	115.98	Inf	-Inf	31.39	3	Horizontal	89	2.75	-
PK	2.4852G	69.51	74.00	-4.49	31.52	3	Horizontal	89	2.75	-

### 802.11g\_Nss1,(6Mbps)\_4TX

24/04/2019

### 2462MHz\_TX

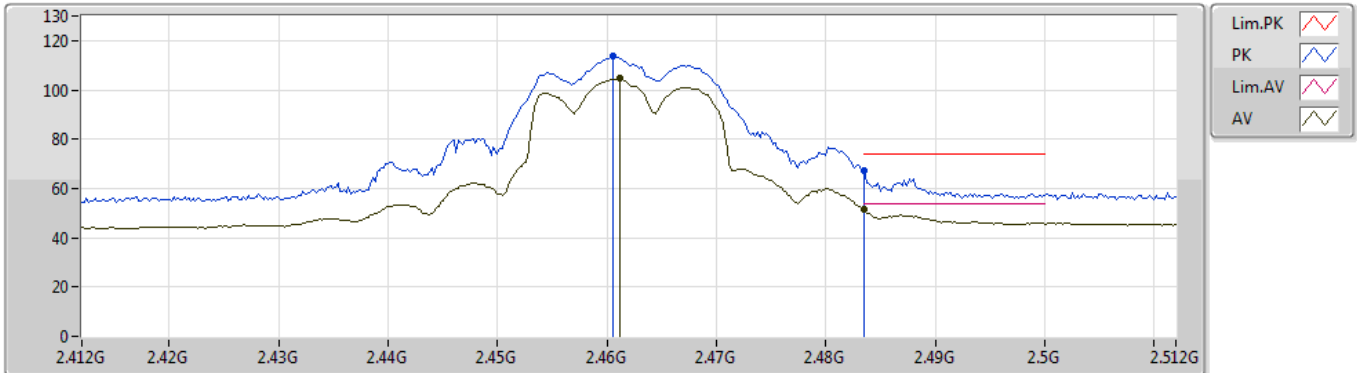


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.4612G	104.72	Inf	-Inf	31.41	3	Vertical	258	1.85	-
AV	2.4835G	51.52	54.00	-2.48	31.51	3	Vertical	258	1.85	-
PK	2.4606G	113.65	Inf	-Inf	31.41	3	Vertical	258	1.85	-
PK	2.4835G	67.09	74.00	-6.91	31.51	3	Vertical	258	1.85	-

### 802.11g\_Nss1,(6Mbps)\_4TX

24/04/2019

### 2462MHz\_TX

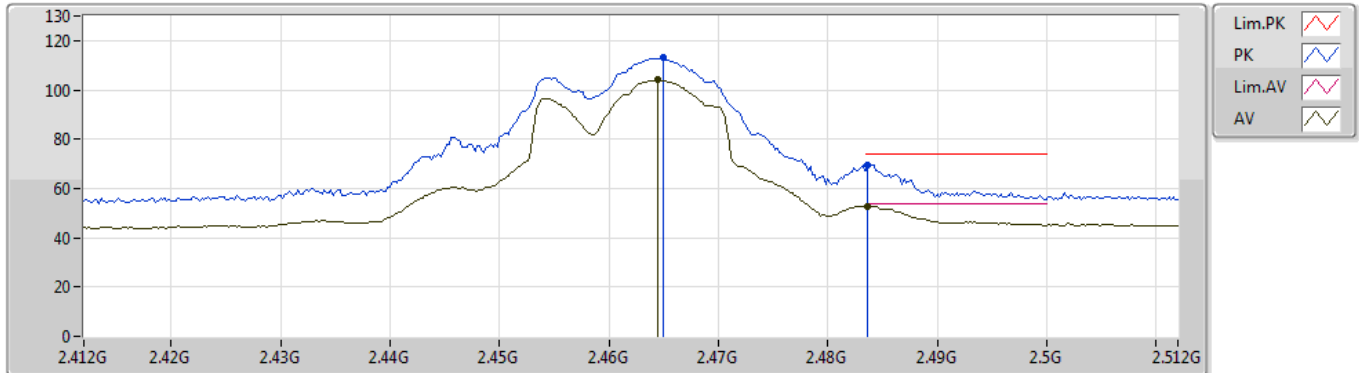


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.4644G	104.10	Inf	-Inf	31.43	3	Horizontal	320	1.00	-
AV	2.4836G	52.94	54.00	-1.06	31.51	3	Horizontal	320	1.00	-
PK	2.465G	113.09	Inf	-Inf	31.43	3	Horizontal	320	1.00	-
PK	2.4836G	69.36	74.00	-4.64	31.51	3	Horizontal	320	1.00	-

### 802.11g\_Nss1,(6Mbps)\_4TX

24/04/2019

### 2462MHz\_TX

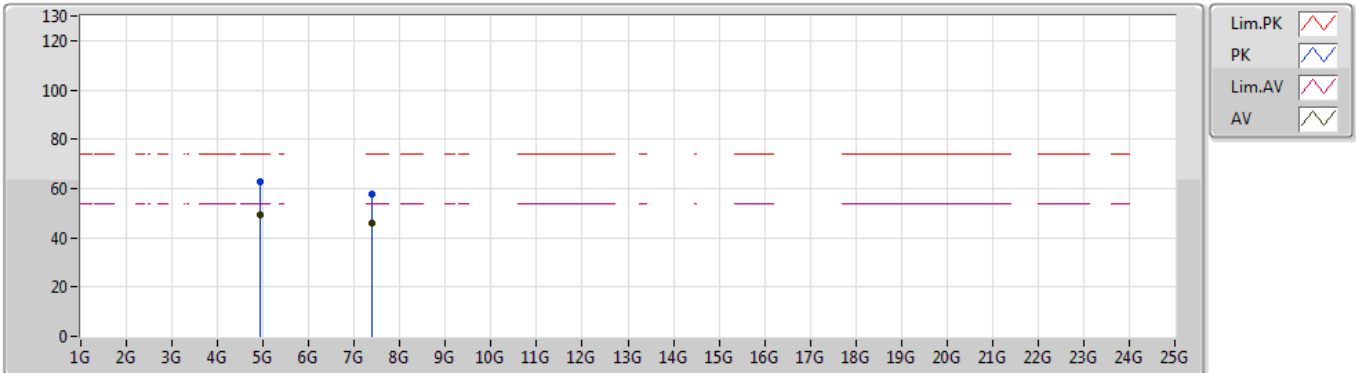


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.92658G	49.54	54.00	-4.46	3.72	3	Vertical	299	1.46	-
AV	7.38588G	46.07	54.00	-7.93	9.73	3	Vertical	61	1.67	-
PK	4.92652G	62.81	74.00	-11.19	3.72	3	Vertical	299	1.46	-
PK	7.38912G	57.75	74.00	-16.25	9.74	3	Vertical	61	1.67	-



### 802.11g\_Nss1,(6Mbps)\_4TX

24/04/2019

### 2462MHz\_TX

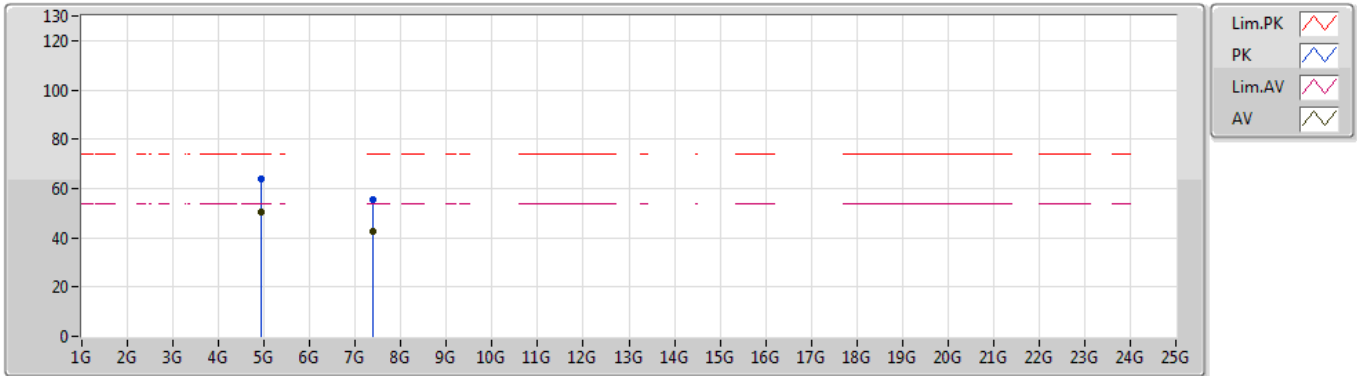


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.924G	50.37	54.00	-3.63	3.71	3	Horizontal	12	1.50	-
AV	7.38606G	42.80	54.00	-11.20	9.73	3	Horizontal	299	1.50	-
PK	4.92286G	64.08	74.00	-9.92	3.71	3	Horizontal	12	1.50	-
PK	7.38648G	55.70	74.00	-18.30	9.73	3	Horizontal	299	1.50	-

### VHT20\_Nss1,(MCS0)\_4TX

24/04/2019

### 2412MHz\_TX

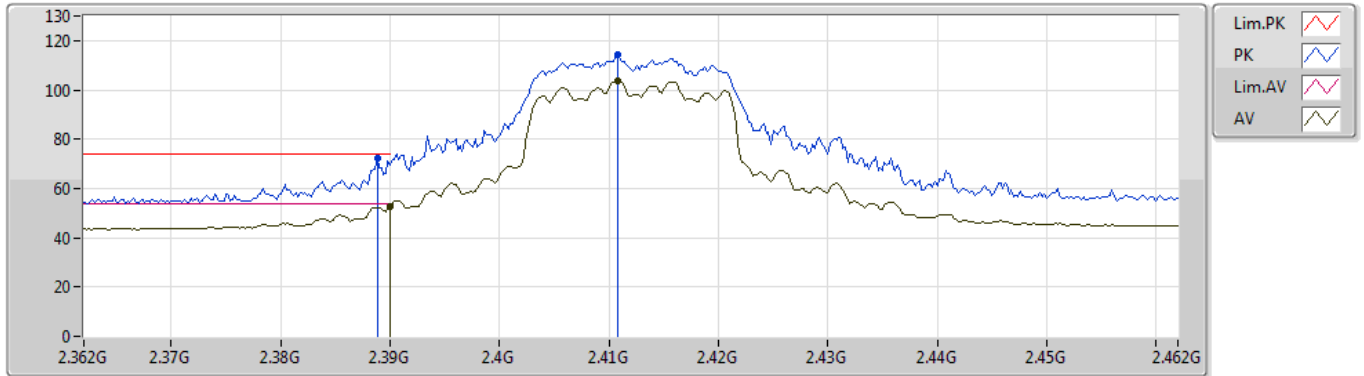


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.39G	52.85	54.00	-1.15	31.11	3	Vertical	283	1.45	-
AV	2.4108G	103.85	Inf	-Inf	31.20	3	Vertical	283	1.45	-
PK	2.3888G	72.16	74.00	-1.84	31.11	3	Vertical	283	1.45	-
PK	2.4108G	114.07	Inf	-Inf	31.20	3	Vertical	283	1.45	-

### VHT20\_Nss1,(MCS0)\_4TX

24/04/2019

### 2412MHz\_TX

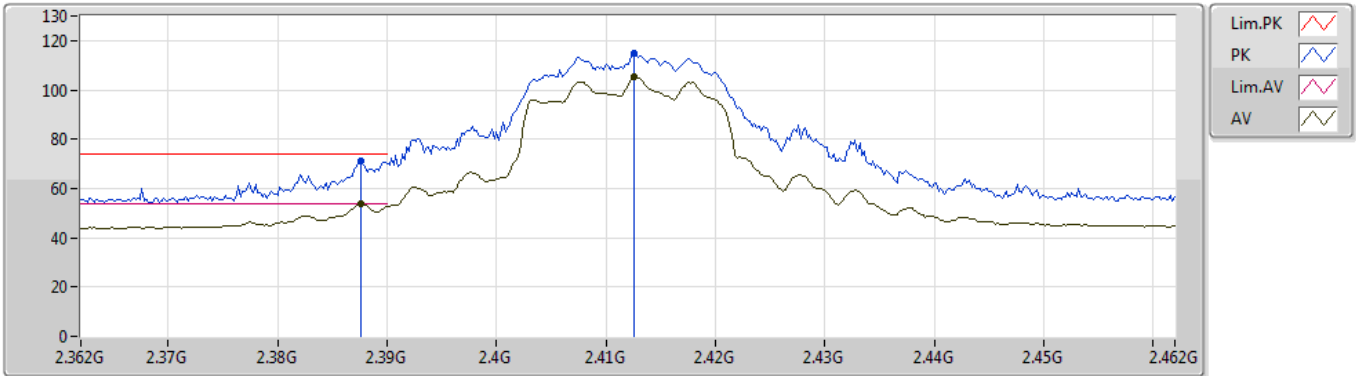


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3876G	53.91	54.00	-0.09	31.11	3	Horizontal	329	1.45	-
AV	2.4126G	105.28	Inf	-Inf	31.21	3	Horizontal	329	1.45	-
PK	2.3876G	70.91	74.00	-3.09	31.11	3	Horizontal	329	1.45	-
PK	2.4126G	114.84	Inf	-Inf	31.21	3	Horizontal	329	1.45	-

### VHT20\_Nss1,(MCS0)\_4TX

24/04/2019

### 2412MHz\_TX

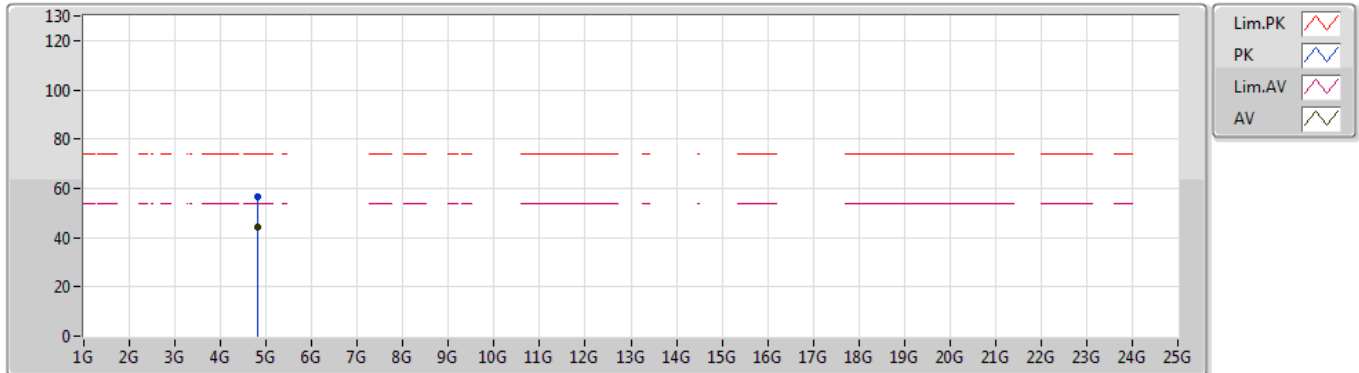


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.82664G	44.01	54.00	-9.99	3.46	3	Vertical	68	2.02	-
PK	4.82628G	56.58	74.00	-17.42	3.46	3	Vertical	68	2.02	-

### VHT20\_Nss1,(MCS0)\_4TX

24/04/2019

### 2412MHz\_TX

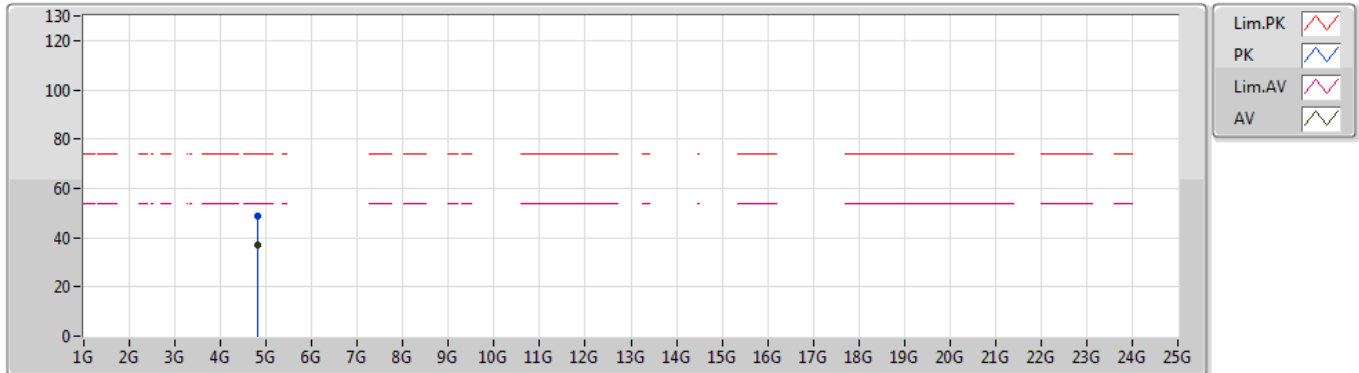


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.82676G	36.84	54.00	-17.16	3.46	3	Horizontal	143	1.84	-
PK	4.8267G	48.79	74.00	-25.21	3.46	3	Horizontal	143	1.84	-

### VHT20\_Nss1,(MCS0)\_4TX

29/04/2019

### 2417MHz\_TX

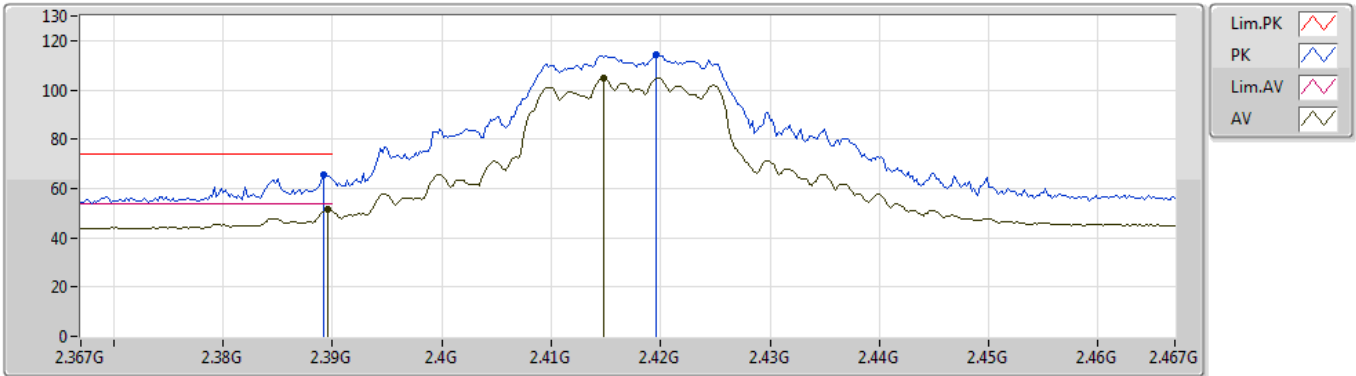


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3896G	51.45	54.00	-2.55	31.11	3	Vertical	86	1.81	-
AV	2.4148G	104.95	Inf	-Inf	31.22	3	Vertical	86	1.81	-
PK	2.3892G	65.60	74.00	-8.40	31.11	3	Vertical	86	1.81	-
PK	2.4196G	114.34	Inf	-Inf	31.23	3	Vertical	86	1.81	-

VHT20\_Nss1,(MCS0)\_4TX

29/04/2019

2417MHz\_TX

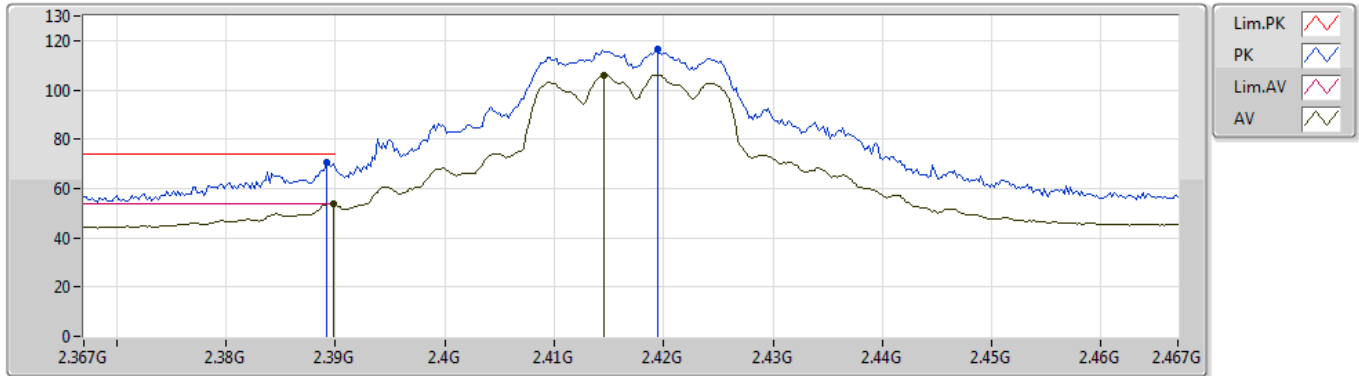


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3898G	53.80	54.00	-0.20	31.11	3	Horizontal	82	1.23	-
AV	2.4146G	106.00	Inf	-Inf	31.22	3	Horizontal	82	1.23	-
PK	2.3892G	70.42	74.00	-3.58	31.11	3	Horizontal	82	1.23	-
PK	2.4194G	116.71	Inf	-Inf	31.23	3	Horizontal	82	1.23	-

### VHT20\_Nss1,(MCS0)\_4TX

24/04/2019

### 2437MHz\_TX

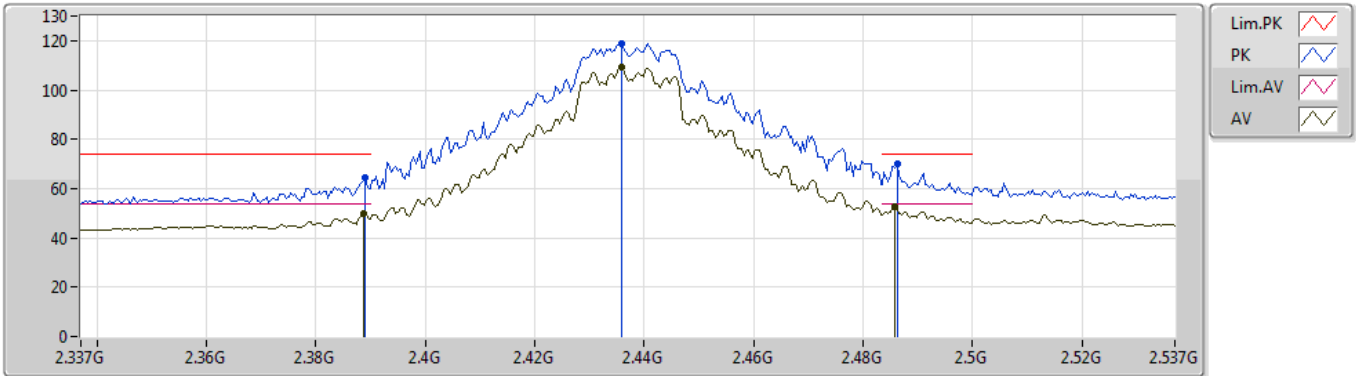


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3886G	49.98	54.00	-4.02	31.11	3	Vertical	280	1.36	-
AV	2.4358G	109.53	Inf	-Inf	31.31	3	Vertical	280	1.36	-
AV	2.4858G	52.45	54.00	-1.55	31.52	3	Vertical	280	1.36	-
PK	2.389G	64.37	74.00	-9.63	31.11	3	Vertical	280	1.36	-
PK	2.4358G	119.01	Inf	-Inf	31.31	3	Vertical	280	1.36	-
PK	2.4862G	70.13	74.00	-3.87	31.52	3	Vertical	280	1.36	-



VHT20\_Nss1,(MCS0)\_4TX

24/04/2019

2437MHz\_TX

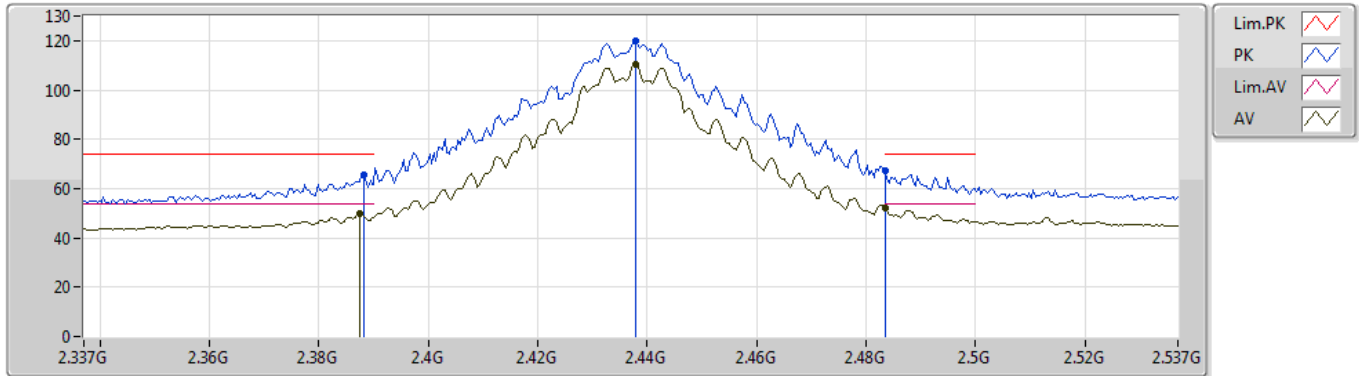


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3874G	49.68	54.00	-4.32	31.10	3	Horizontal	324	1.61	-
AV	2.4378G	110.62	Inf	-Inf	31.32	3	Horizontal	324	1.61	-
AV	2.4835G	52.22	54.00	-1.78	31.51	3	Horizontal	324	1.61	-
PK	2.3882G	65.70	74.00	-8.30	31.11	3	Horizontal	324	1.61	-
PK	2.4378G	120.03	Inf	-Inf	31.32	3	Horizontal	324	1.61	-
PK	2.4835G	67.05	74.00	-6.95	31.51	3	Horizontal	324	1.61	-

### VHT20\_Nss1,(MCS0)\_4TX

24/04/2019

### 2437MHz\_TX

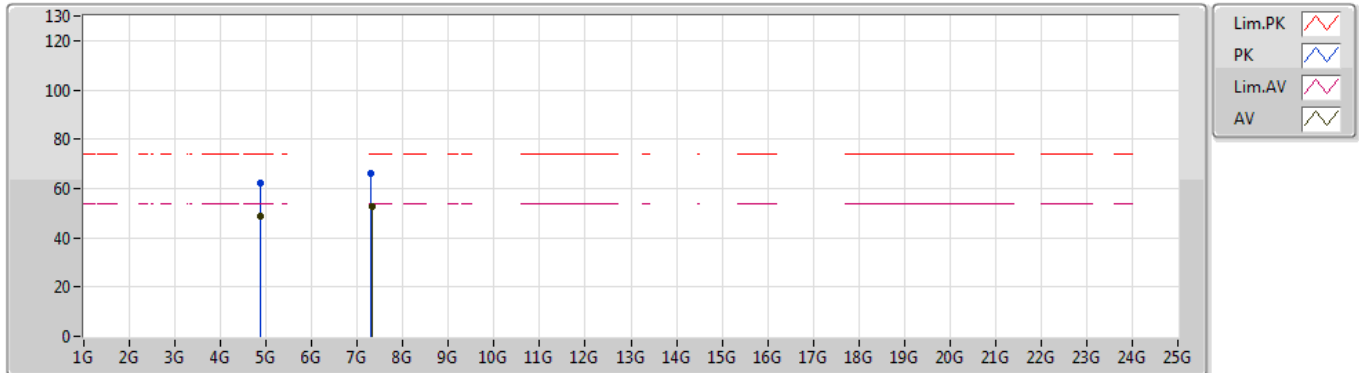


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.87904G	48.58	54.00	-5.42	3.60	3	Vertical	213	1.55	-
AV	7.31376G	52.85	54.00	-1.15	9.51	3	Vertical	44	1.55	-
PK	4.87394G	62.19	74.00	-11.81	3.58	3	Vertical	213	1.55	-
PK	7.30902G	66.22	74.00	-7.78	9.49	3	Vertical	44	1.55	-

### VHT20\_Nss1,(MCS0)\_4TX

24/04/2019

### 2437MHz\_TX

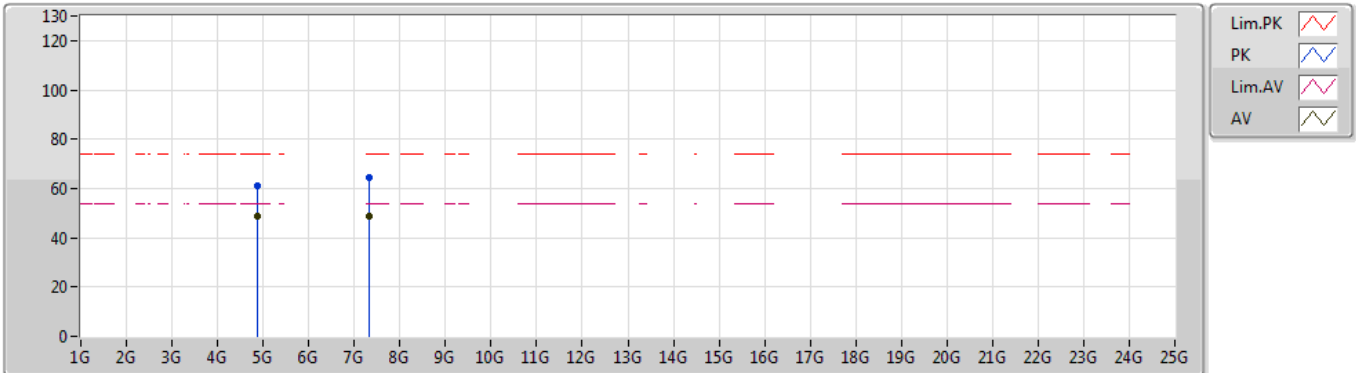


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.8782G	48.98	54.00	-5.02	3.60	3	Horizontal	211	1.48	-
AV	7.31124G	49.02	54.00	-4.98	9.50	3	Horizontal	287	1.58	-
PK	4.87862G	61.21	74.00	-12.79	3.60	3	Horizontal	211	1.48	-
PK	7.31136G	64.22	74.00	-9.78	9.50	3	Horizontal	287	1.58	-

VHT20\_Nss1,(MCS0)\_4TX

29/04/2019

2457MHz\_TX

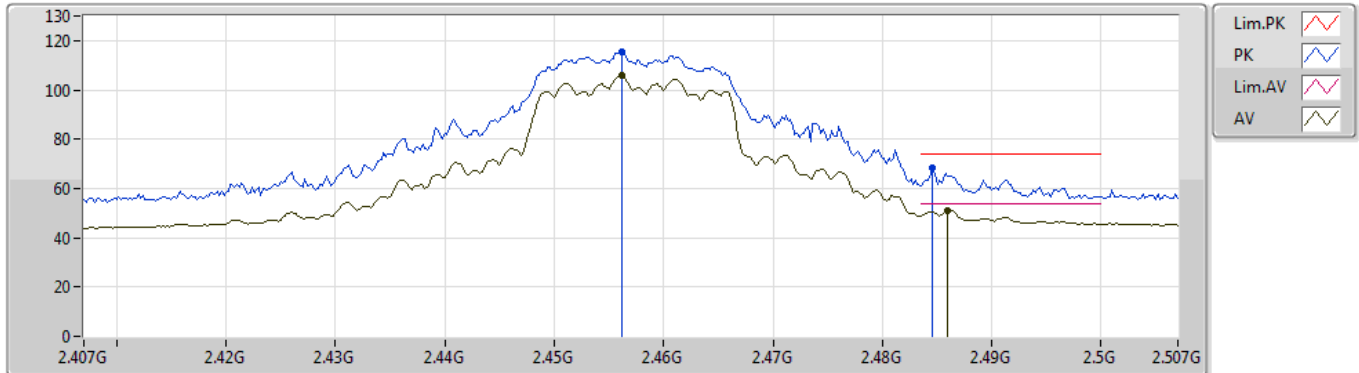


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.4562G	105.77	Inf	-Inf	31.40	3	Vertical	294	1.50	-
AV	2.486G	51.09	54.00	-2.91	31.52	3	Vertical	294	1.50	-
PK	2.4562G	115.52	Inf	-Inf	31.40	3	Vertical	294	1.50	-
PK	2.4846G	68.27	74.00	-5.73	31.52	3	Vertical	294	1.50	-

### VHT20\_Nss1,(MCS0)\_4TX

29/04/2019

### 2457MHz\_TX

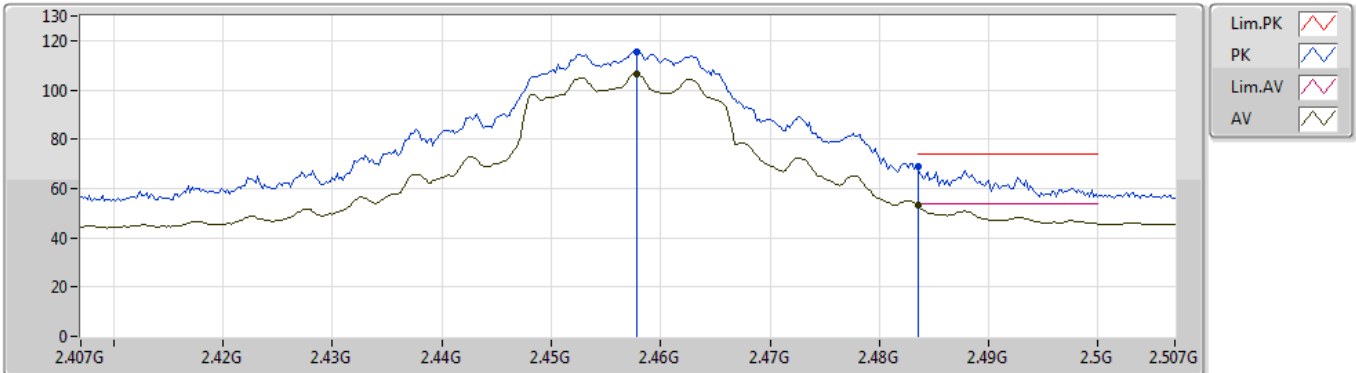


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.4578G	106.63	Inf	-Inf	31.40	3	Horizontal	348	1.17	-
AV	2.4835G	53.51	54.00	-0.49	31.51	3	Horizontal	348	1.17	-
PK	2.4578G	115.66	Inf	-Inf	31.40	3	Horizontal	348	1.17	-
PK	2.4835G	69.07	74.00	-4.93	31.51	3	Horizontal	348	1.17	-

### VHT20\_Nss1,(MCS0)\_4TX

24/04/2019

### 2462MHz\_TX

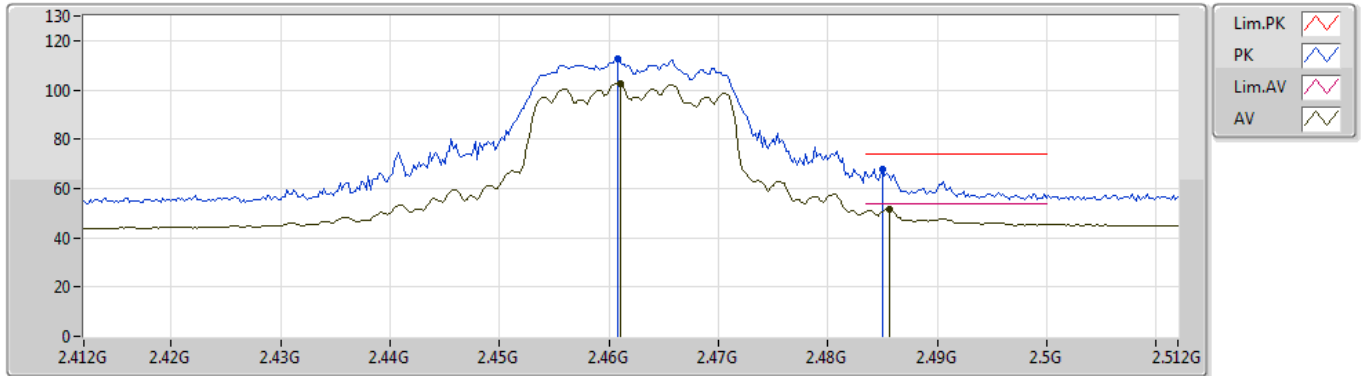


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.461G	102.82	Inf	-Inf	31.41	3	Vertical	275	1.29	-
AV	2.4856G	51.39	54.00	-2.61	31.52	3	Vertical	275	1.29	-
PK	2.4608G	112.37	Inf	-Inf	31.41	3	Vertical	275	1.29	-
PK	2.485G	67.75	74.00	-6.25	31.52	3	Vertical	275	1.29	-

### VHT20\_Nss1,(MCS0)\_4TX

24/04/2019

### 2462MHz\_TX

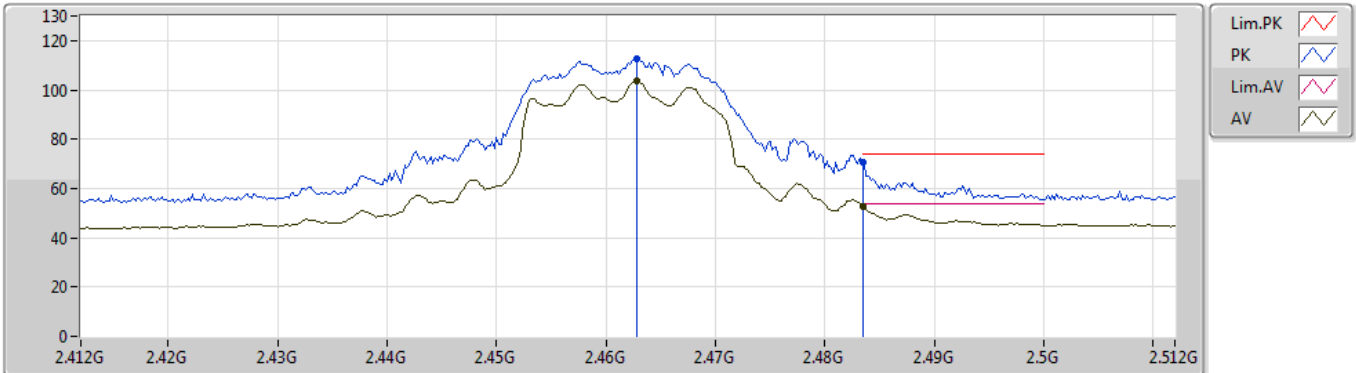


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.4628G	103.52	Inf	-Inf	31.43	3	Horizontal	318	1.19	-
AV	2.4835G	52.85	54.00	-1.15	31.51	3	Horizontal	318	1.19	-
PK	2.4628G	112.57	Inf	-Inf	31.43	3	Horizontal	318	1.19	-
PK	2.4835G	70.65	74.00	-3.35	31.51	3	Horizontal	318	1.19	-

### VHT20\_Nss1,(MCS0)\_4TX

24/04/2019

### 2462MHz\_TX

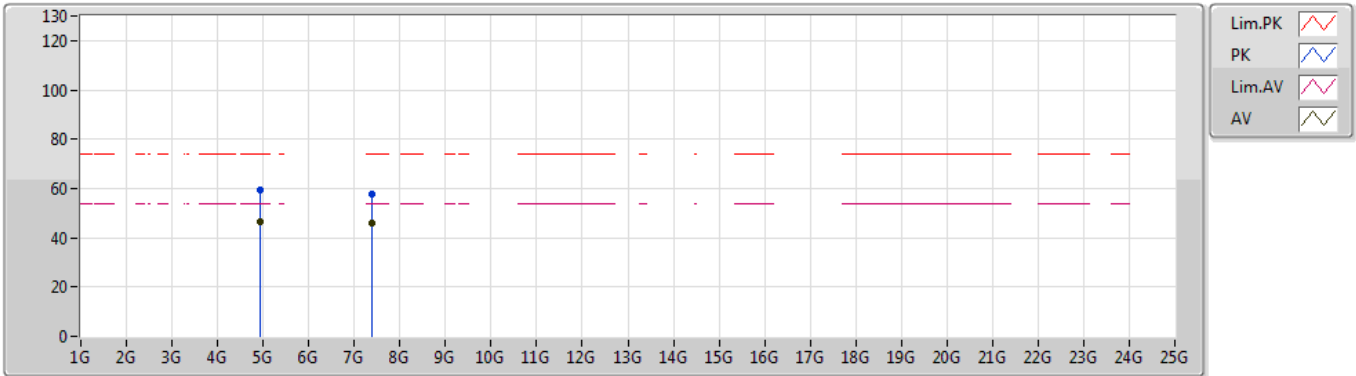


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.92592G	46.45	54.00	-7.55	3.72	3	Vertical	234	1.50	-
AV	7.38588G	45.90	54.00	-8.10	9.73	3	Vertical	57	1.71	-
PK	4.92574G	59.61	74.00	-14.39	3.72	3	Vertical	234	1.50	-
PK	7.38594G	57.73	74.00	-16.27	9.73	3	Vertical	57	1.71	-



### VHT20\_Nss1,(MCS0)\_4TX

24/04/2019

### 2462MHz\_TX

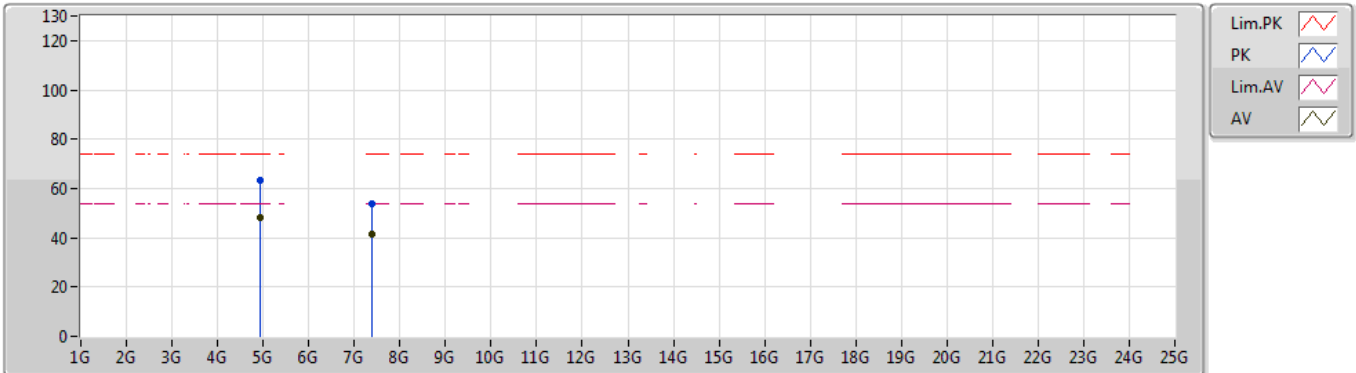


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.92874G	48.34	54.00	-5.66	3.74	3	Horizontal	7	1.30	-
AV	7.38624G	41.69	54.00	-12.31	9.73	3	Horizontal	292	1.34	-
PK	4.92916G	63.29	74.00	-10.71	3.74	3	Horizontal	7	1.30	-
PK	7.3815G	54.02	74.00	-19.98	9.72	3	Horizontal	292	1.34	-

### VHT40\_Nss1,(MCS0)\_4TX

24/04/2019

### 2422MHz\_TX

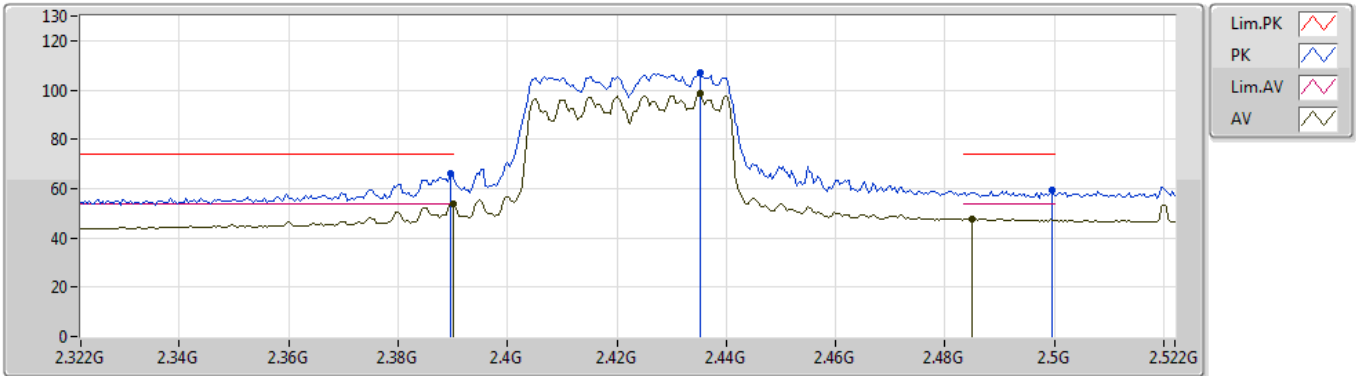


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.39G	53.88	54.00	-0.12	31.11	3	Vertical	94	1.78	-
AV	2.4352G	98.44	Inf	-Inf	31.31	3	Vertical	94	1.78	-
AV	2.4848G	47.90	54.00	-6.10	31.52	3	Vertical	94	1.78	-
PK	2.3896G	66.07	74.00	-7.93	31.11	3	Vertical	94	1.78	-
PK	2.4352G	107.07	Inf	-Inf	31.31	3	Vertical	94	1.78	-
PK	2.4996G	59.12	74.00	-14.88	31.58	3	Vertical	94	1.78	-

### VHT40\_Nss1,(MCS0)\_4TX

24/04/2019

### 2422MHz\_TX

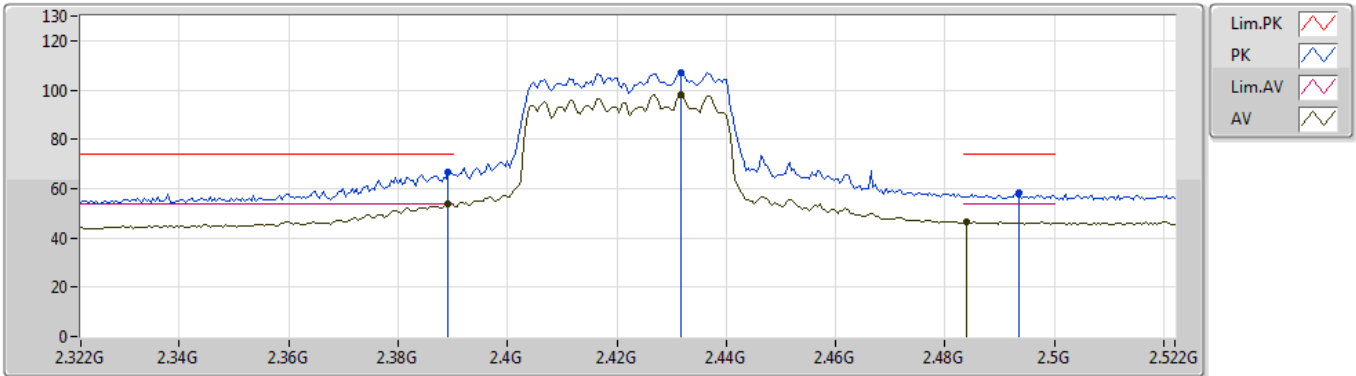


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3892G	53.96	54.00	-0.04	31.11	3	Horizontal	99	2.12	-
AV	2.4316G	98.01	Inf	-Inf	31.29	3	Horizontal	99	2.12	-
AV	2.484G	46.61	54.00	-7.39	31.52	3	Horizontal	99	2.12	-
PK	2.3892G	66.95	74.00	-7.05	31.11	3	Horizontal	99	2.12	-
PK	2.4316G	106.92	Inf	-Inf	31.29	3	Horizontal	99	2.12	-
PK	2.4936G	58.10	74.00	-15.90	31.55	3	Horizontal	99	2.12	-

VHT40\_Nss1,(MCS0)\_4TX

24/04/2019

2422MHz\_TX

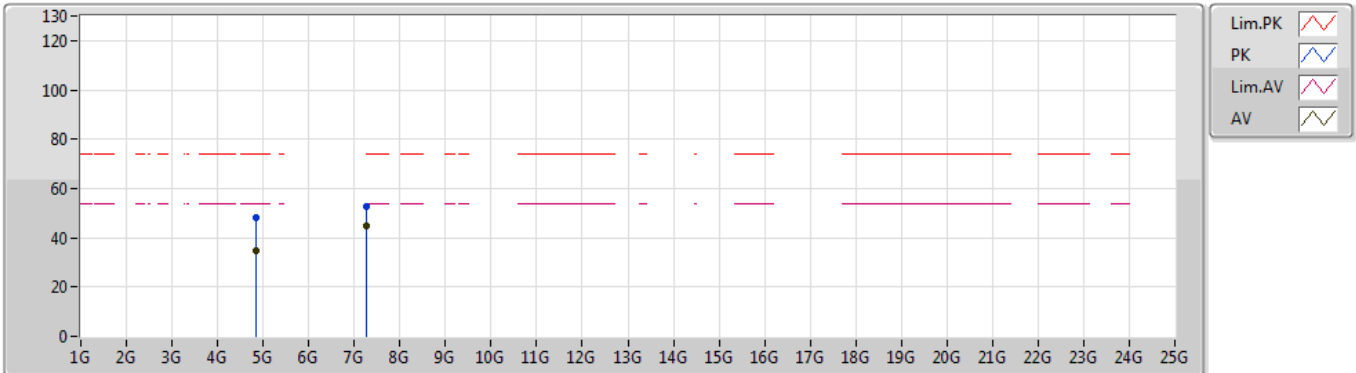


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.84808G	34.83	54.00	-19.17	3.51	3	Vertical	210	1.50	-
AV	7.266G	44.74	54.00	-9.26	9.36	3	Vertical	195	1.52	-
PK	4.85304G	48.22	74.00	-25.78	3.53	3	Vertical	210	1.50	-
PK	7.2658G	52.53	74.00	-21.47	9.36	3	Vertical	195	1.52	-

### VHT40\_Nss1,(MCS0)\_4TX

24/04/2019

### 2422MHz\_TX

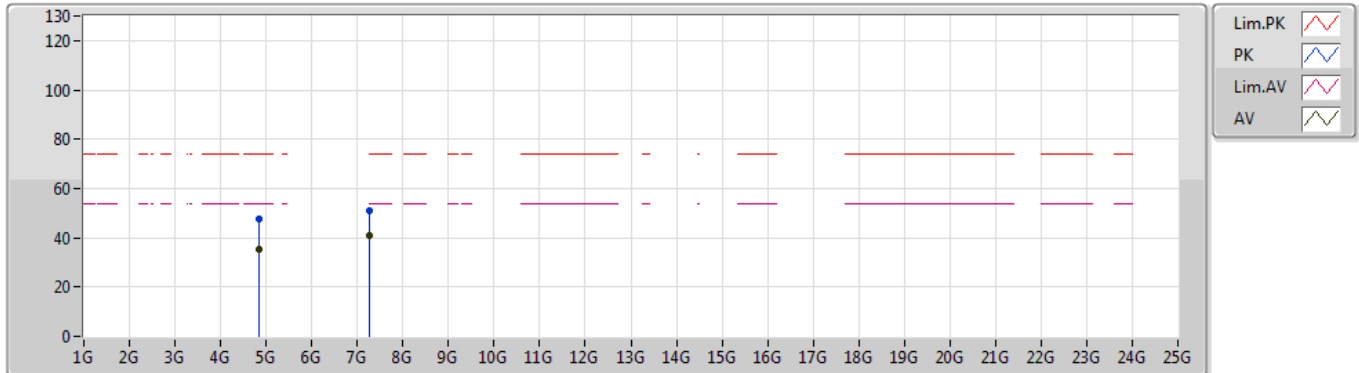


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.84633G	35.24	54.00	-18.76	3.50	3	Horizontal	291	2.88	-
AV	7.26604G	41.02	54.00	-12.98	9.36	3	Horizontal	221	1.50	-
PK	4.84138G	47.39	74.00	-26.61	3.50	3	Horizontal	291	2.88	-
PK	7.266G	50.79	74.00	-23.21	9.36	3	Horizontal	221	1.50	-

VHT40\_Nss1,(MCS0)\_4TX

29/04/2019

2427MHz\_TX

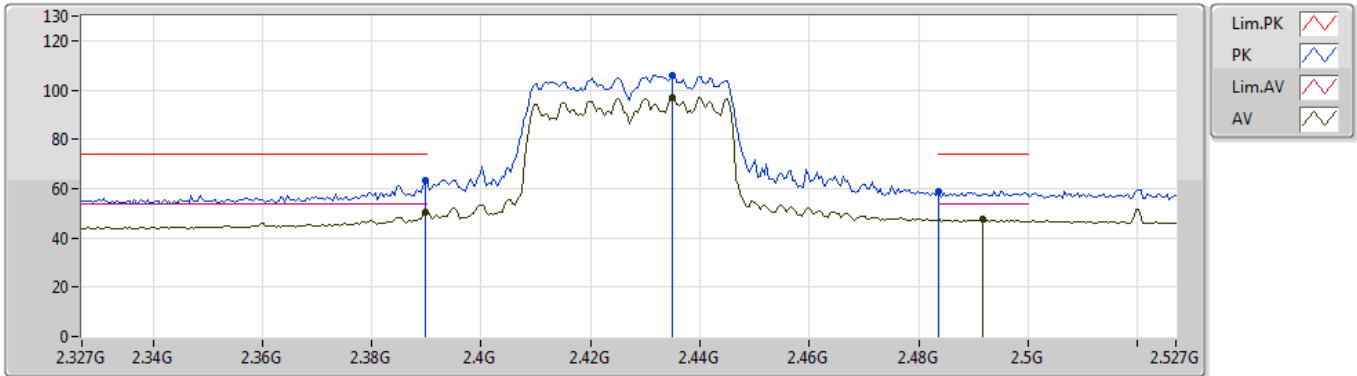


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3898G	50.44	54.00	-3.56	31.11	3	Vertical	92	1.74	-
AV	2.435G	97.08	Inf	-Inf	31.31	3	Vertical	92	1.74	-
AV	2.4918G	47.49	54.00	-6.51	31.55	3	Vertical	92	1.74	-
PK	2.3898G	63.30	74.00	-10.70	31.11	3	Vertical	92	1.74	-
PK	2.435G	105.98	Inf	-Inf	31.31	3	Vertical	92	1.74	-
PK	2.4835G	59.00	74.00	-15.00	31.51	3	Vertical	92	1.74	-

### VHT40\_Nss1,(MCS0)\_4TX

29/04/2019

### 2427MHz\_TX

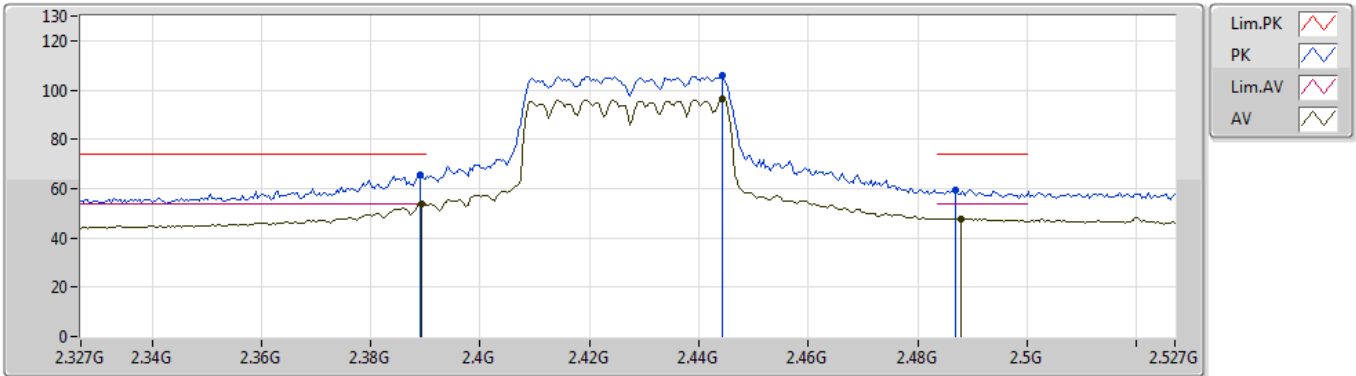


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3894G	53.61	54.00	-0.39	31.11	3	Horizontal	78	1.56	-
AV	2.4442G	96.37	Inf	-Inf	31.34	3	Horizontal	78	1.56	-
AV	2.4878G	47.80	54.00	-6.20	31.53	3	Horizontal	78	1.56	-
PK	2.389G	65.71	74.00	-8.29	31.11	3	Horizontal	78	1.56	-
PK	2.4442G	106.12	Inf	-Inf	31.34	3	Horizontal	78	1.56	-
PK	2.487G	59.38	74.00	-14.62	31.52	3	Horizontal	78	1.56	-

### VHT40\_Nss1,(MCS0)\_4TX

24/04/2019

### 2437MHz\_TX

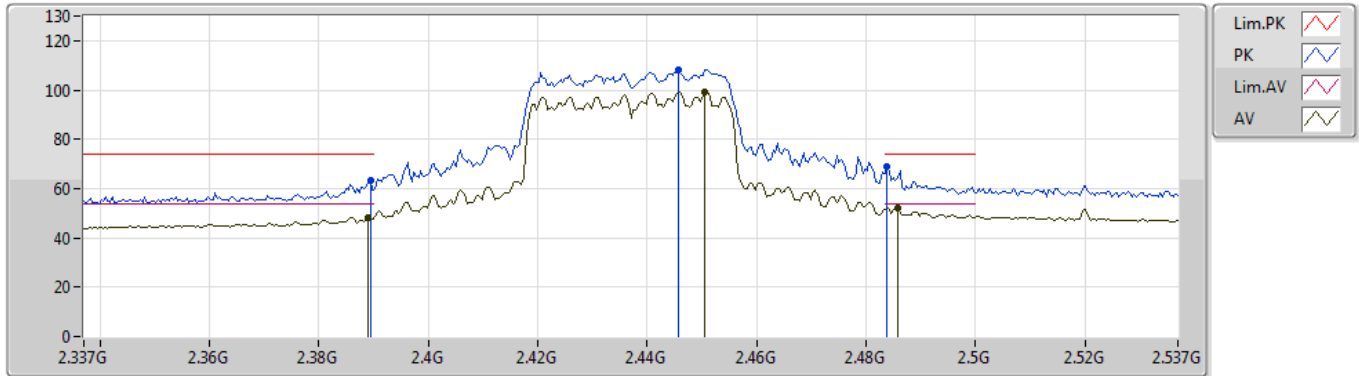


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.389G	48.32	54.00	-5.68	31.11	3	Vertical	271	1.22	-
AV	2.4506G	99.31	Inf	-Inf	31.37	3	Vertical	271	1.22	-
AV	2.4858G	52.06	54.00	-1.94	31.52	3	Vertical	271	1.22	-
PK	2.3894G	63.30	74.00	-10.70	31.11	3	Vertical	271	1.22	-
PK	2.4458G	108.24	Inf	-Inf	31.35	3	Vertical	271	1.22	-
PK	2.4838G	68.79	74.00	-5.21	31.51	3	Vertical	271	1.22	-



### VHT40\_Nss1,(MCS0)\_4TX

24/04/2019

### 2437MHz\_TX

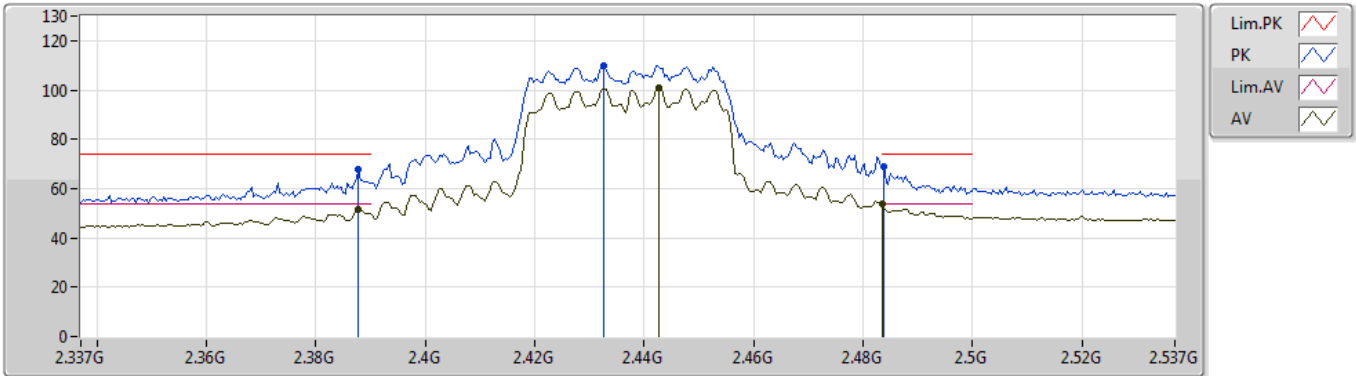


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3878G	51.66	54.00	-2.34	31.11	3	Horizontal	318	1.59	-
AV	2.4426G	109.84	Inf	-Inf	31.34	3	Horizontal	318	1.59	-
AV	2.4835G	53.59	54.00	-0.41	31.51	3	Horizontal	318	1.59	-
PK	2.3878G	68.00	74.00	-6.00	31.11	3	Horizontal	318	1.59	-
PK	2.4326G	109.60	Inf	-Inf	31.29	3	Horizontal	318	1.59	-
PK	2.4838G	68.81	74.00	-5.19	31.51	3	Horizontal	318	1.59	-

VHT40\_Nss1,(MCS0)\_4TX

24/04/2019

2437MHz\_TX

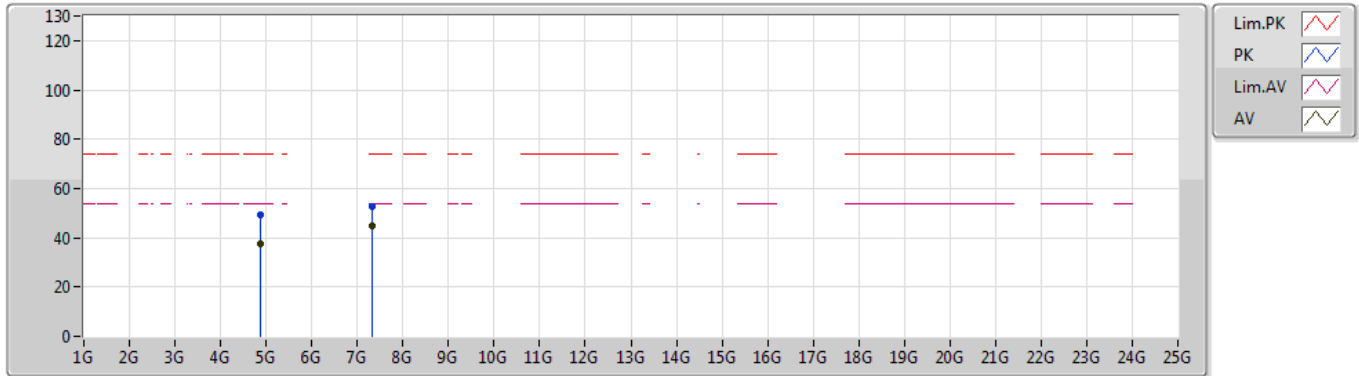


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.87652G	37.45	54.00	-16.55	3.59	3	Vertical	244	1.50	-
AV	7.31092G	44.74	54.00	-9.26	9.50	3	Vertical	198	1.49	-
PK	4.8766G	49.33	74.00	-24.67	3.59	3	Vertical	244	1.50	-
PK	7.3111G	52.53	74.00	-21.47	9.50	3	Vertical	198	1.49	-

### VHT40\_Nss1,(MCS0)\_4TX

24/04/2019

### 2437MHz\_TX

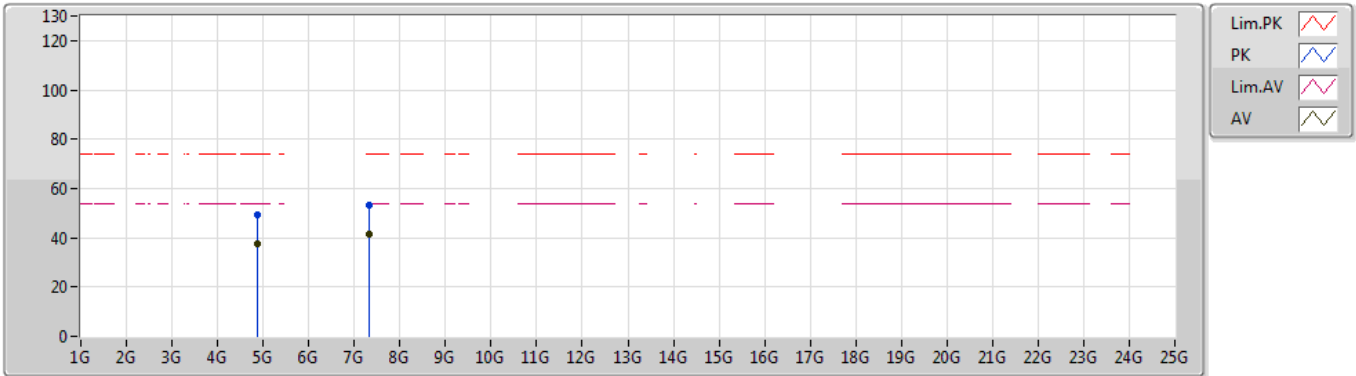


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.88312G	37.33	54.00	-16.67	3.60	3	Horizontal	197	1.50	-
AV	7.311G	41.19	54.00	-12.81	9.50	3	Horizontal	281	1.50	-
PK	4.88328G	49.25	74.00	-24.75	3.60	3	Horizontal	197	1.50	-
PK	7.31312G	52.99	74.00	-21.01	9.50	3	Horizontal	281	1.50	-

VHT40\_Nss1,(MCS0)\_4TX

29/04/2019

2447MHz\_TX

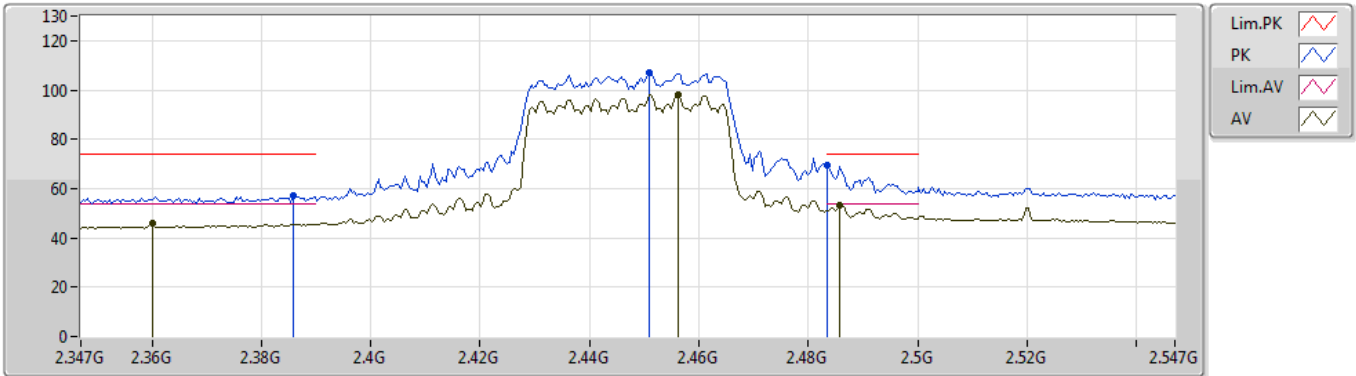


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3602G	45.69	54.00	-8.31	30.99	3	Vertical	292	1.47	-
AV	2.4562G	97.92	Inf	-Inf	31.40	3	Vertical	292	1.47	-
AV	2.4858G	53.51	54.00	-0.49	31.52	3	Vertical	292	1.47	-
PK	2.3858G	57.43	74.00	-16.57	31.09	3	Vertical	292	1.47	-
PK	2.451G	106.75	Inf	-Inf	31.37	3	Vertical	292	1.47	-
PK	2.4835G	69.56	74.00	-4.44	31.51	3	Vertical	292	1.47	-

### VHT40\_Nss1,(MCS0)\_4TX

29/04/2019

### 2447MHz\_TX

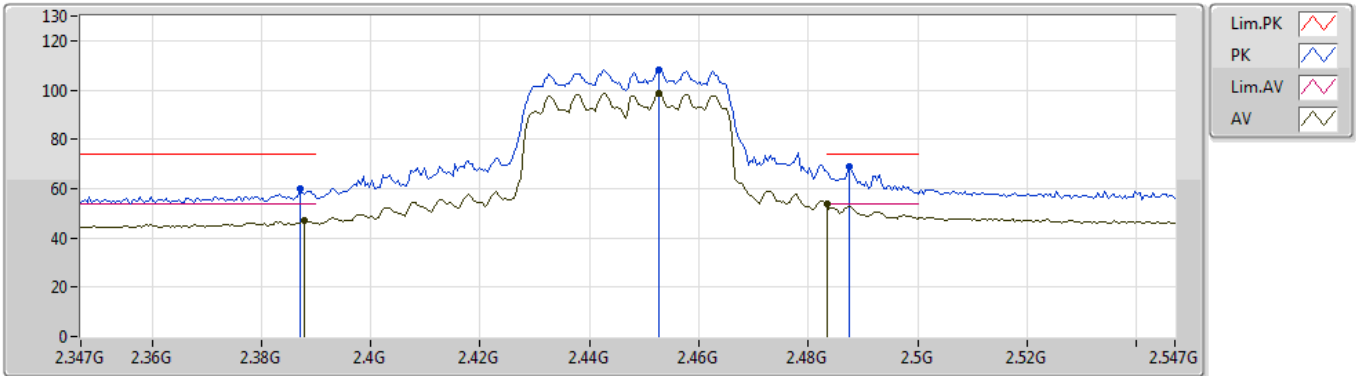


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3878G	47.13	54.00	-6.87	31.11	3	Horizontal	3	1.83	-
AV	2.4526G	98.61	Inf	-Inf	31.38	3	Horizontal	3	1.83	-
AV	2.4835G	53.76	54.00	-0.24	31.51	3	Horizontal	3	1.83	-
PK	2.387G	60.12	74.00	-13.88	31.10	3	Horizontal	3	1.83	-
PK	2.4526G	108.21	Inf	-Inf	31.38	3	Horizontal	3	1.83	-
PK	2.4874G	69.11	74.00	-4.89	31.52	3	Horizontal	3	1.83	-

### VHT40\_Nss1,(MCS0)\_4TX

26/04/2019

### 2452MHz\_TX

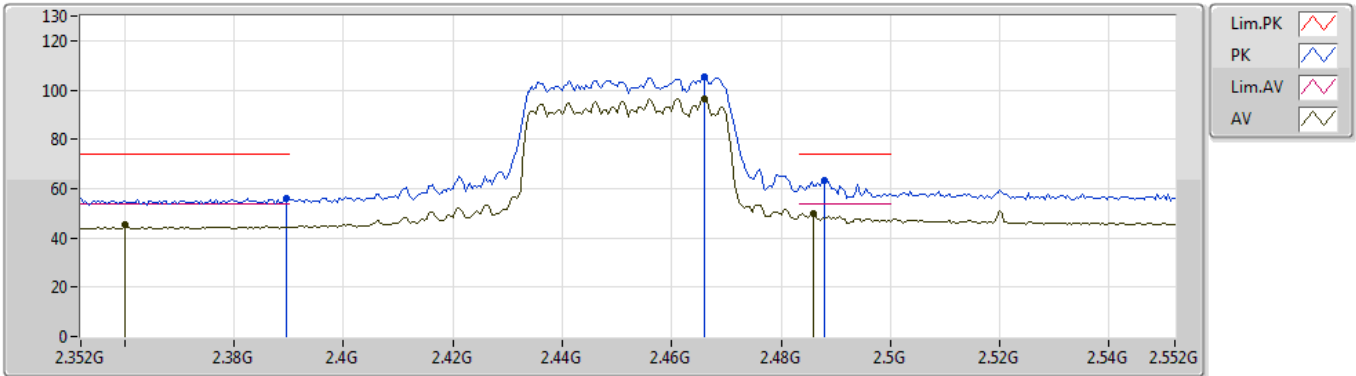


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.36G	45.17	54.00	-8.83	30.99	3	Vertical	299	1.07	-
AV	2.466G	96.52	Inf	-Inf	31.43	3	Vertical	299	1.07	-
AV	2.486G	49.75	54.00	-4.25	31.52	3	Vertical	299	1.07	-
PK	2.3896G	56.09	74.00	-17.91	31.11	3	Vertical	299	1.07	-
PK	2.466G	105.14	Inf	-Inf	31.43	3	Vertical	299	1.07	-
PK	2.488G	63.32	74.00	-10.68	31.53	3	Vertical	299	1.07	-

### VHT40\_Nss1,(MCS0)\_4TX

26/04/2019

### 2452MHz\_TX

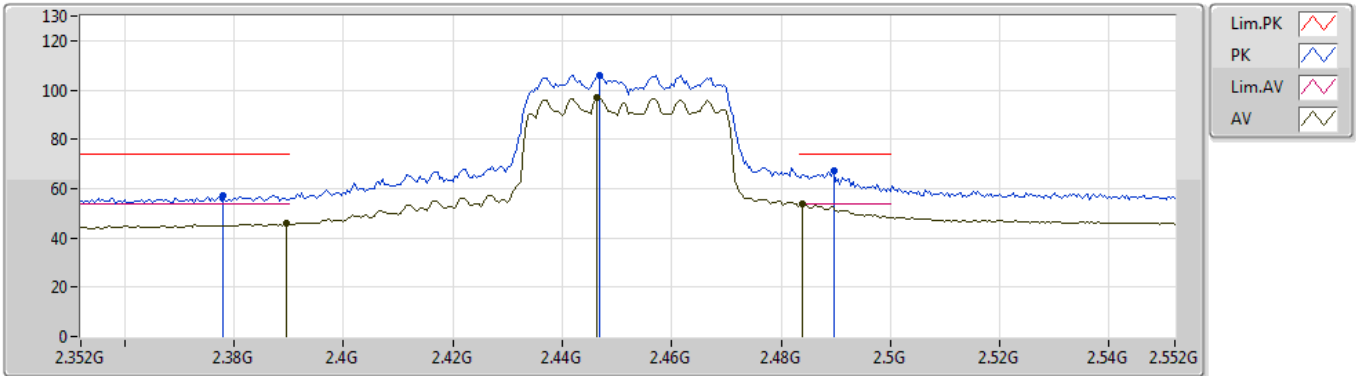


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3896G	45.71	54.00	-8.29	31.11	3	Horizontal	101	1.50	-
AV	2.4464G	96.84	Inf	-Inf	31.35	3	Horizontal	101	1.50	-
AV	2.484G	53.57	54.00	-0.43	31.52	3	Horizontal	101	1.50	-
PK	2.378G	57.42	74.00	-16.58	31.06	3	Horizontal	101	1.50	-
PK	2.4468G	106.01	Inf	-Inf	31.35	3	Horizontal	101	1.50	-
PK	2.4896G	67.37	74.00	-6.63	31.53	3	Horizontal	101	1.50	-

VHT40\_Nss1,(MCS0)\_4TX

26/04/2019

2452MHz\_TX

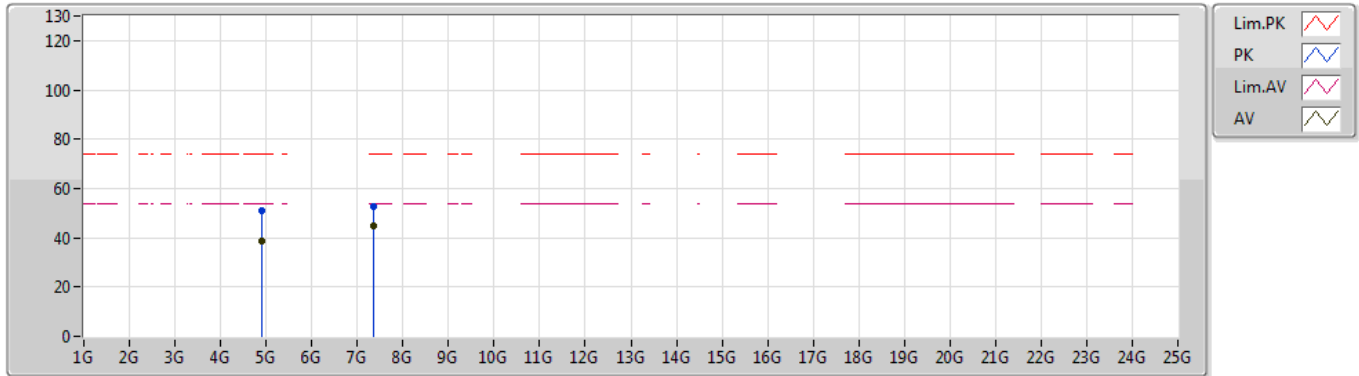


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.9058G	38.92	54.00	-15.08	3.67	3	Vertical	228	1.50	-
AV	7.35596G	44.67	54.00	-9.33	9.65	3	Vertical	200	1.57	-
PK	4.90616G	50.93	74.00	-23.07	3.67	3	Vertical	228	1.50	-
PK	7.35592G	52.49	74.00	-21.51	9.65	3	Vertical	200	1.57	-



### VHT40\_Nss1,(MCS0)\_4TX

26/04/2019

### 2452MHz\_TX

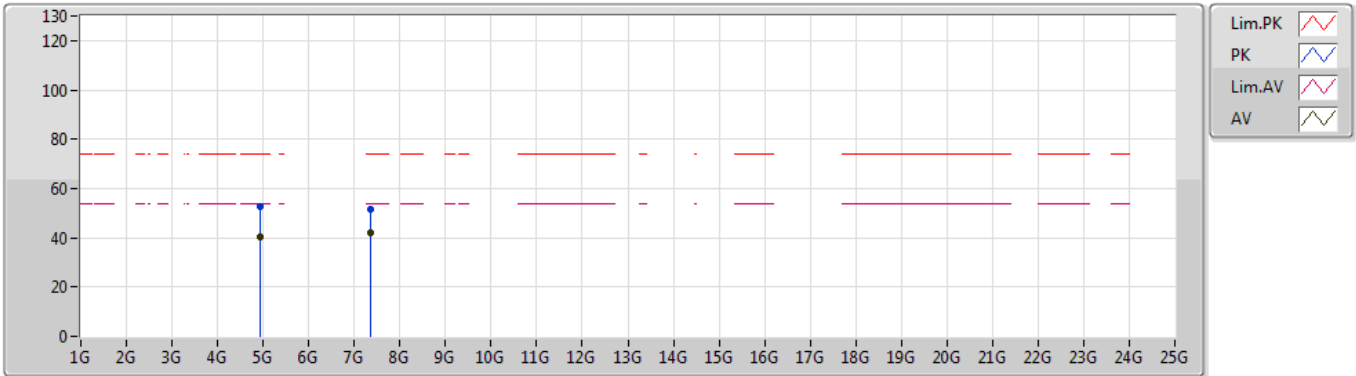

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.9248G	40.15	54.00	-13.85	3.71	3	Horizontal	203	1.50	-
AV	7.35584G	42.25	54.00	-11.75	9.65	3	Horizontal	301	1.93	-
PK	4.9245G	52.77	74.00	-21.23	3.71	3	Horizontal	203	1.50	-
PK	7.35578G	51.65	74.00	-22.35	9.65	3	Horizontal	301	1.93	-



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4G+5G	-	-	-	-	-	-	-	-	-	-	-	-
VHT20+11a_Nss1,(6Mbps)_4TX	Pass	AV	15.7189G	51.65	54.00	-2.35	15.82	3	Vertical	288	1.40	-




Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
VHT20+11a_Nss1_(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-
2437MHz,5240MHz	Pass	AV	4.87436G	44.33	54.00	-9.67	3.58	3	Vertical	260	1.50	-
2437MHz,5240MHz	Pass	AV	7.3136G	49.47	54.00	-4.53	9.51	3	Vertical	68	1.49	-
2437MHz,5240MHz	Pass	AV	10.4821G	49.32	Inf	-Inf	14.65	3	Vertical	118	1.53	-
2437MHz,5240MHz	Pass	AV	15.7189G	51.65	54.00	-2.35	15.82	3	Vertical	288	1.40	-
2437MHz,5240MHz	Pass	PK	4.87532G	58.64	74.00	-15.36	3.59	3	Vertical	260	1.50	-
2437MHz,5240MHz	Pass	PK	7.3112G	63.67	74.00	-10.33	9.50	3	Vertical	68	1.49	-
2437MHz,5240MHz	Pass	PK	10.4816G	64.42	68.20	-3.78	14.65	3	Vertical	118	1.53	-
2437MHz,5240MHz	Pass	PK	15.7206G	65.35	74.00	-8.65	15.81	3	Vertical	288	1.40	-
2437MHz,5240MHz	Pass	AV	4.87424G	37.00	54.00	-17.00	3.58	3	Horizontal	224	2.11	-
2437MHz,5240MHz	Pass	AV	7.31142G	47.31	54.00	-6.69	9.50	3	Horizontal	299	1.50	-
2437MHz,5240MHz	Pass	AV	10.48192G	49.02	Inf	-Inf	14.65	3	Horizontal	120	1.50	-
2437MHz,5240MHz	Pass	AV	15.72504G	51.46	54.00	-2.54	15.80	3	Horizontal	230	1.32	-
2437MHz,5240MHz	Pass	PK	4.87376G	59.27	74.00	-14.73	3.58	3	Horizontal	224	2.11	-
2437MHz,5240MHz	Pass	PK	7.3113G	60.93	74.00	-13.07	9.50	3	Horizontal	299	1.50	-
2437MHz,5240MHz	Pass	PK	10.48126G	63.08	68.20	-5.12	14.65	3	Horizontal	120	1.50	-
2437MHz,5240MHz	Pass	PK	15.72324G	66.98	74.00	-7.02	15.80	3	Horizontal	230	1.32	-

### VHT20+11a\_Nss1,(6Mbps)\_4TX

23/04/2019

### 2437MHz,5240MHz\_TX

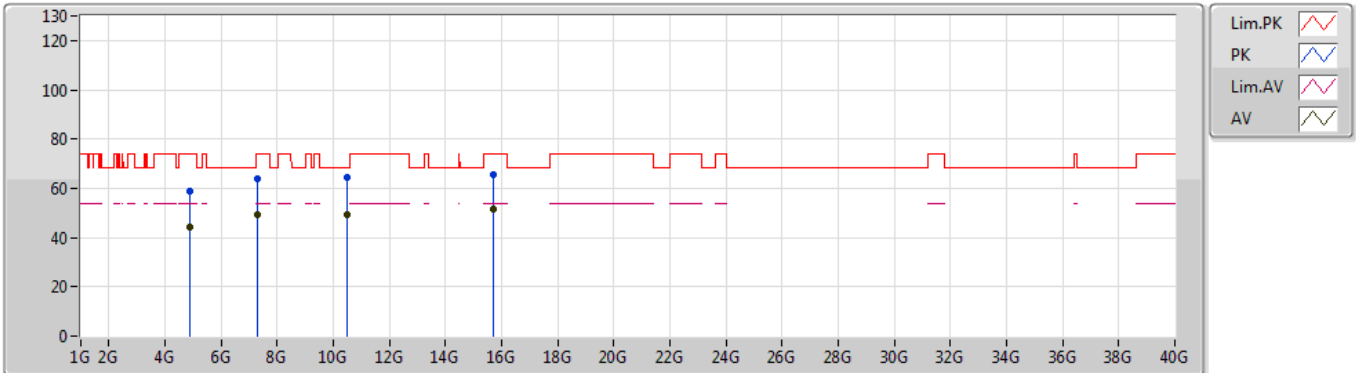


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.87436G	44.33	54.00	-9.67	3.58	3	Vertical	260	1.50	-
AV	7.3136G	49.47	54.00	-4.53	9.51	3	Vertical	68	1.49	-
AV	10.4821G	49.32	Inf	-Inf	14.65	3	Vertical	118	1.53	-
AV	15.7189G	51.65	54.00	-2.35	15.82	3	Vertical	288	1.40	-
PK	4.87532G	58.64	74.00	-15.36	3.59	3	Vertical	260	1.50	-
PK	7.3112G	63.67	74.00	-10.33	9.50	3	Vertical	68	1.49	-
PK	10.4816G	64.42	68.20	-3.78	14.65	3	Vertical	118	1.53	-
PK	15.7206G	65.35	74.00	-8.65	15.81	3	Vertical	288	1.40	-

### VHT20+11a\_Nss1,(6Mbps)\_4TX

23/04/2019

### 2437MHz,5240MHz\_TX

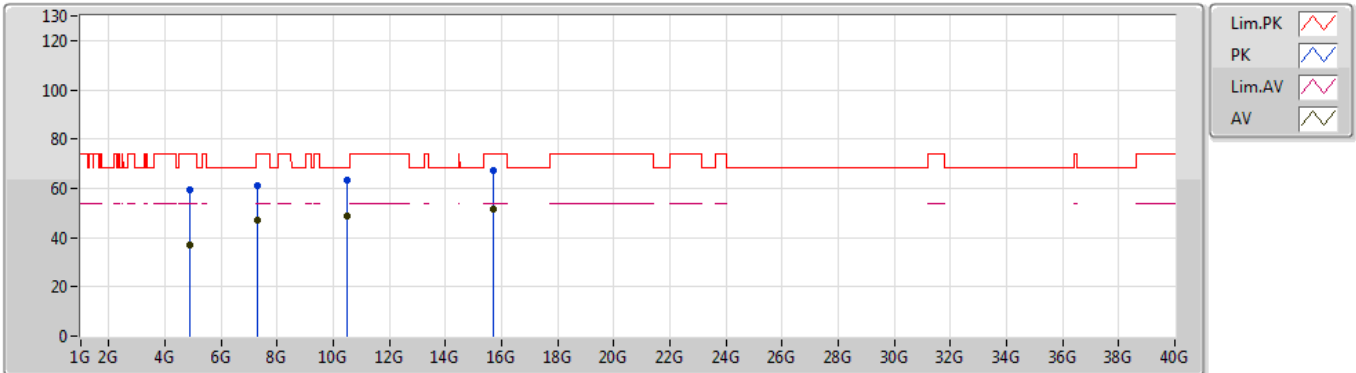

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.87424G	37.00	54.00	-17.00	3.58	3	Horizontal	224	2.11	-
AV	7.31142G	47.31	54.00	-6.69	9.50	3	Horizontal	299	1.50	-
AV	10.48192G	49.02	Inf	-Inf	14.65	3	Horizontal	120	1.50	-
AV	15.72504G	51.46	54.00	-2.54	15.80	3	Horizontal	230	1.32	-
PK	4.87376G	59.27	74.00	-14.73	3.58	3	Horizontal	224	2.11	-
PK	7.3113G	60.93	74.00	-13.07	9.50	3	Horizontal	299	1.50	-
PK	10.48126G	63.08	68.20	-5.12	14.65	3	Horizontal	120	1.50	-
PK	15.72324G	66.98	74.00	-7.02	15.80	3	Horizontal	230	1.32	-