


Site: WZ-AC2	Time: 2022/03/07 - 11:02
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE80 at Channel 5610MHz	

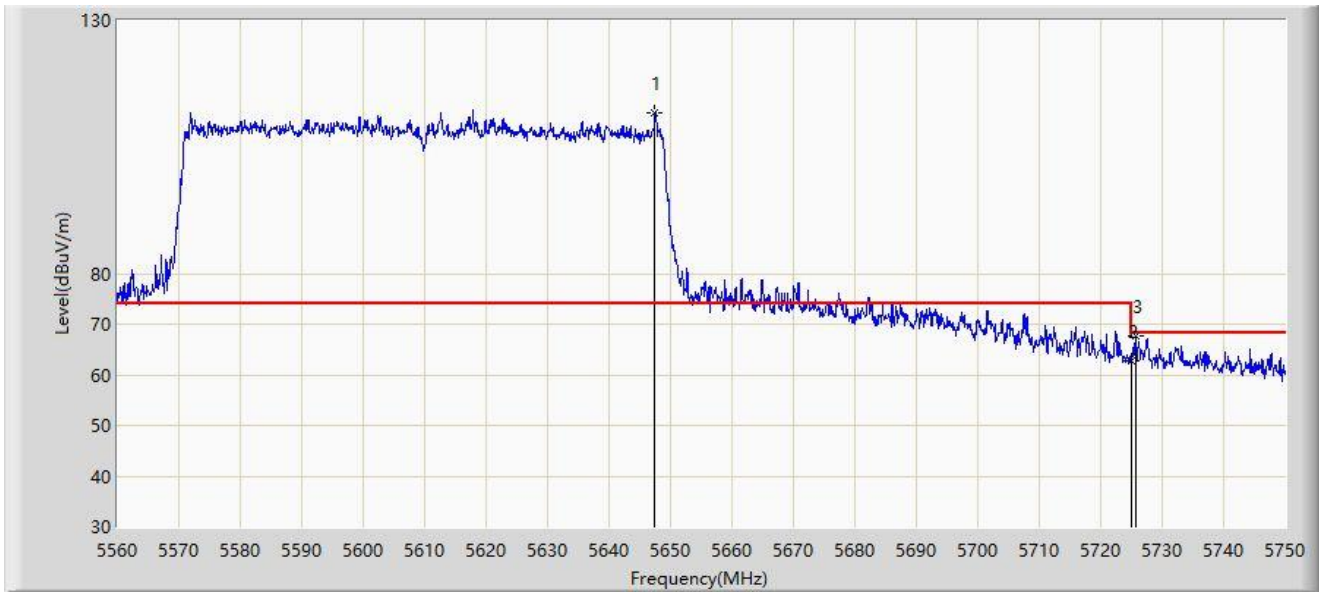


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5647.495	111.702	106.924	N/A	N/A	4.778	PK
2			5725.000	62.781	57.415	-5.419	68.200	5.366	PK
3			5725.680	67.766	62.385	-0.434	68.200	5.381	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 11:24
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE160 at Channel 5250MHz	

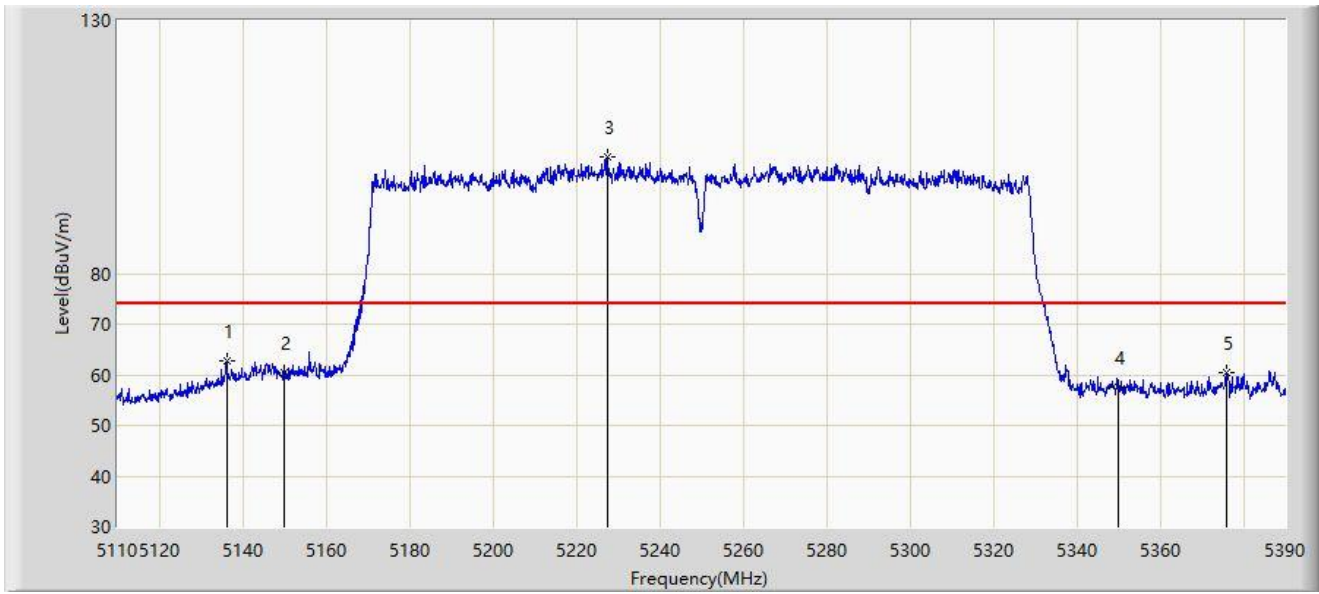


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5136.180	62.644	58.508	-11.356	74.000	4.136	PK
2			5150.000	60.345	56.173	-13.655	74.000	4.173	PK
3		*	5227.460	103.145	99.317	N/A	N/A	3.828	PK
4			5350.000	57.466	53.580	-16.534	74.000	3.886	PK
5			5376.000	60.476	56.225	-13.524	74.000	4.252	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 11:22
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE160 at Channel 5250MHz	

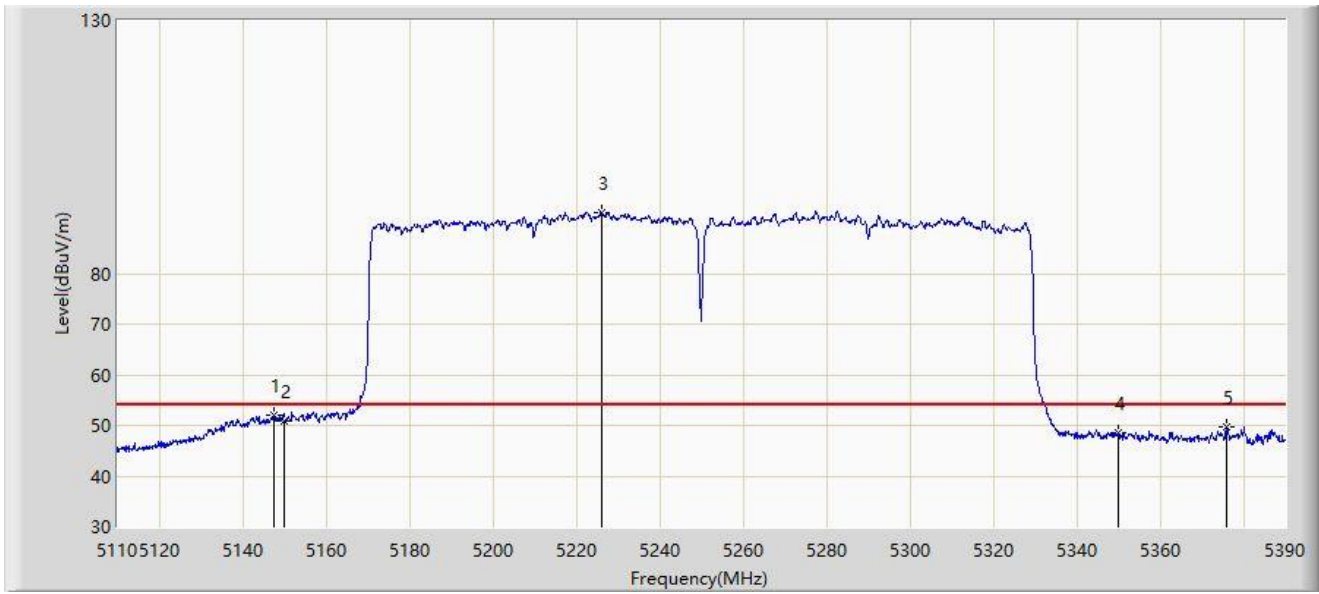


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5147.380	51.988	47.783	-2.012	54.000	4.205	AV
2			5150.000	50.810	46.638	-3.190	54.000	4.173	AV
3		*	5226.060	91.980	88.141	N/A	N/A	3.840	AV
4			5350.000	48.454	44.758	-5.546	54.000	3.697	AV
5			5376.000	49.573	45.528	-4.427	54.000	4.046	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 11:21
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE160 at Channel 5250MHz	

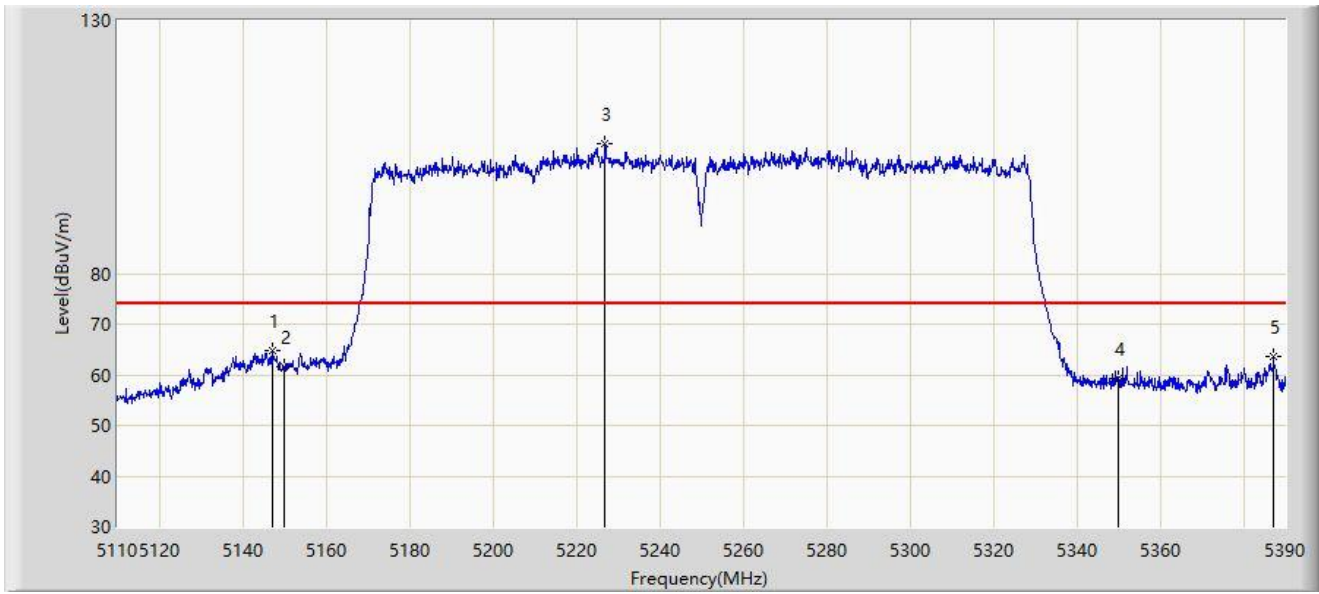


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5147.100	64.669	60.466	-9.331	74.000	4.203	PK
2			5150.000	61.460	57.288	-12.540	74.000	4.173	PK
3		*	5226.900	105.715	101.882	N/A	N/A	3.833	PK
4			5350.000	59.232	55.346	-14.768	74.000	3.886	PK
5			5387.200	63.570	59.289	-10.430	74.000	4.281	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 11:18
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE160 at Channel 5250MHz	

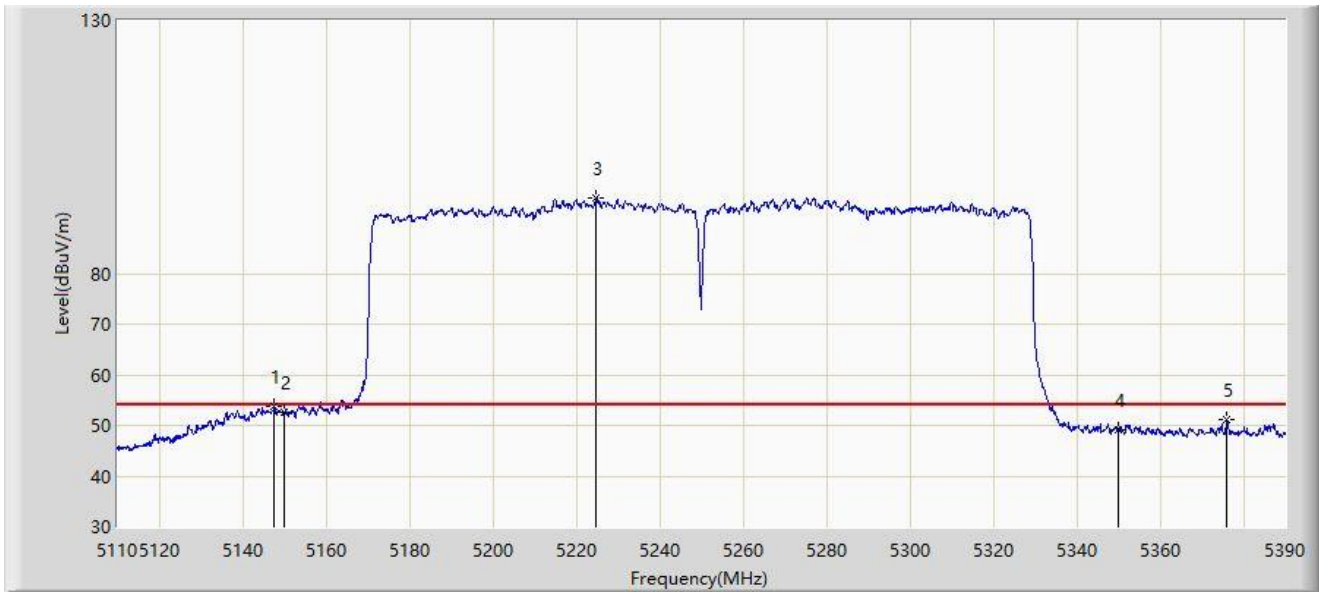


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5147.520	53.839	49.633	-0.161	54.000	4.206	AV
2			5150.000	52.577	48.405	-1.423	54.000	4.173	AV
3		*	5224.800	94.819	90.970	N/A	N/A	3.849	AV
4			5350.000	49.244	45.548	-4.756	54.000	3.697	AV
5			5376.140	51.272	47.226	-2.728	54.000	4.045	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 11:35
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE160 at Channel 5570MHz	

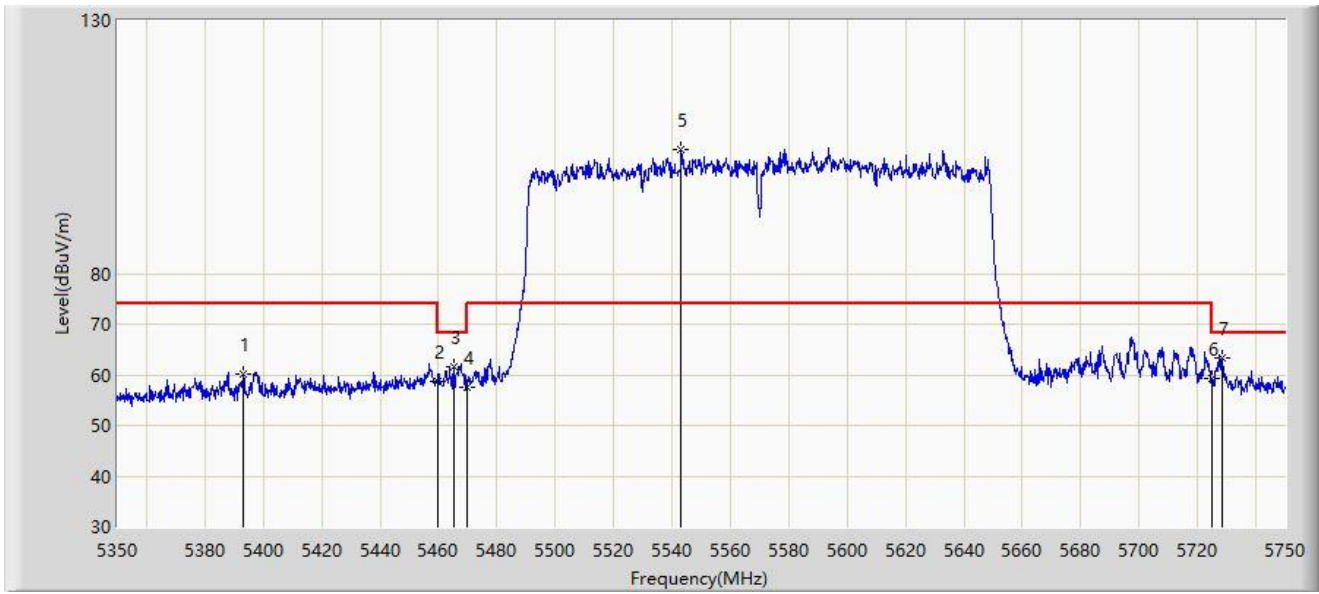


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5393.000	60.120	55.872	-13.880	74.000	4.248	PK
2			5460.000	58.790	54.582	-15.210	74.000	4.208	PK
3			5465.400	61.489	57.348	-6.711	68.200	4.141	PK
4			5470.000	57.648	53.564	-10.552	68.200	4.084	PK
5		*	5543.200	104.409	100.179	N/A	N/A	4.230	PK
6			5725.000	59.377	54.011	-8.823	68.200	5.366	PK
7			5728.200	63.416	58.012	-4.784	68.200	5.404	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 11:33
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE160 at Channel 5570MHz	

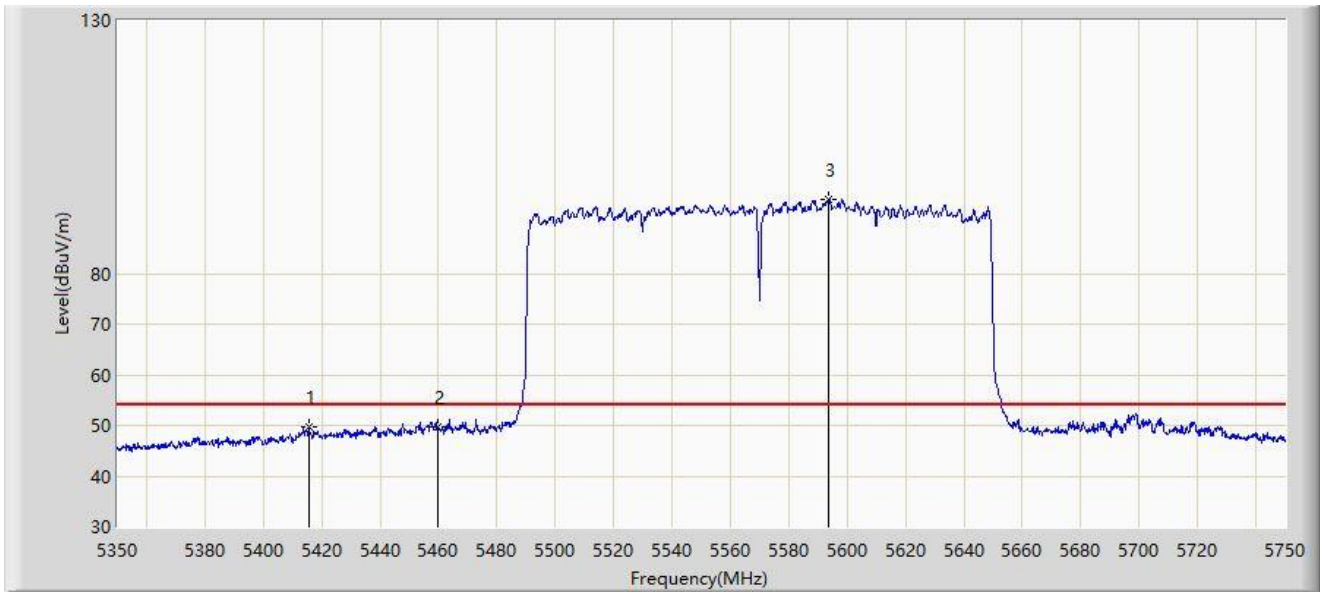


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5415.600	49.607	45.336	-4.393	54.000	4.271	AV
2			5460.000	49.801	45.593	-4.199	54.000	4.208	AV
3		*	5593.800	94.603	89.832	N/A	N/A	4.770	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 11:32
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE160 at Channel 5570MHz	

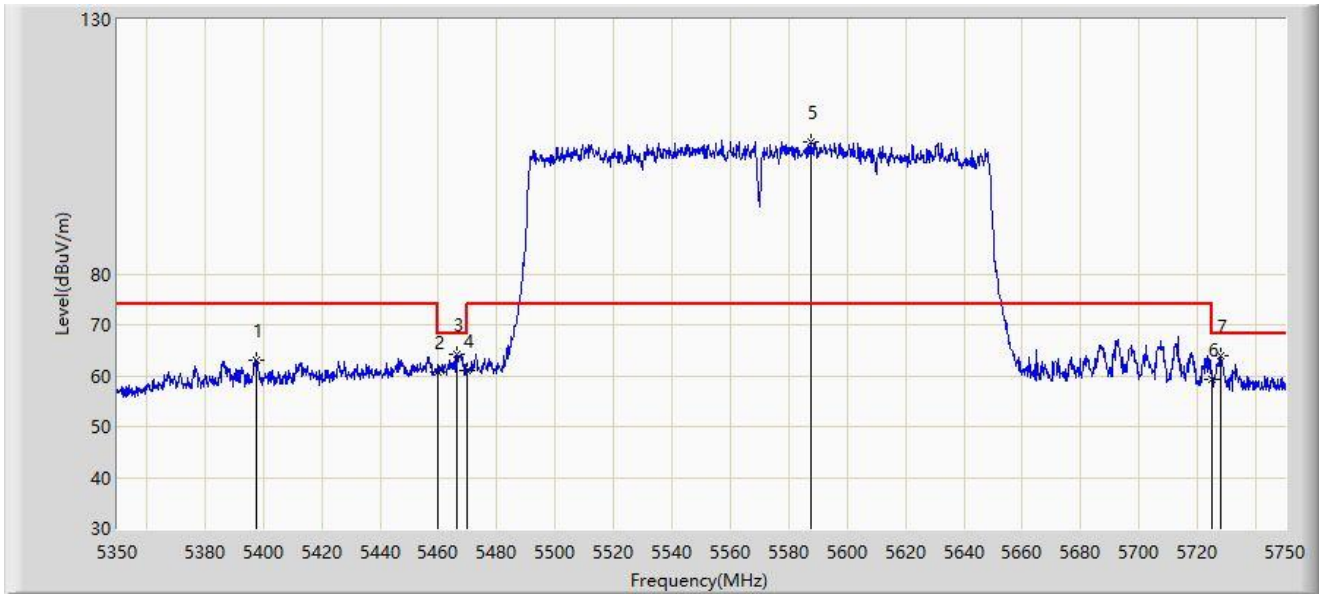


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5397.600	63.102	58.880	-10.898	74.000	4.222	PK
2			5460.000	60.805	56.597	-13.195	74.000	4.208	PK
3			5466.400	64.072	59.943	-4.128	68.200	4.129	PK
4			5470.000	60.966	56.882	-7.234	68.200	4.084	PK
5		*	5587.800	106.055	101.260	N/A	N/A	4.796	PK
6			5725.000	59.188	53.822	-9.012	68.200	5.366	PK
7			5728.000	63.986	58.583	-4.214	68.200	5.403	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Time: 2022/03/07 - 11:28
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Fiber Wireless Router FWR226e	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE160 at Channel 5570MHz	

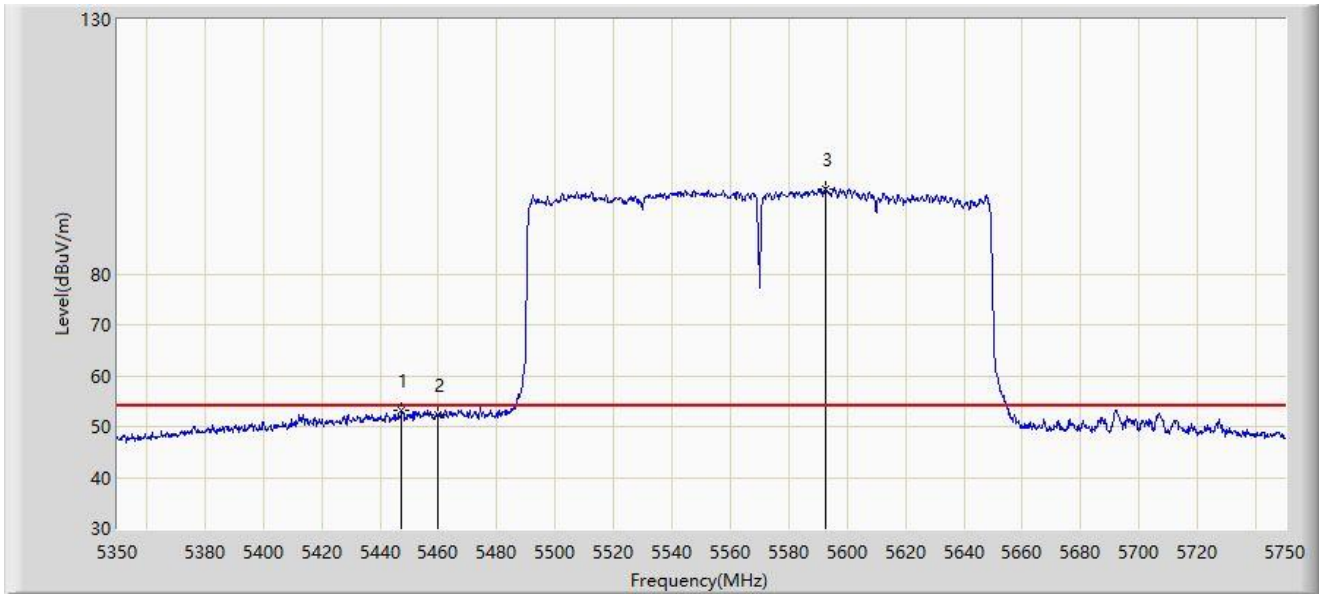

No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5447.400	53.170	48.834	-0.830	54.000	4.336	AV
2			5460.000	52.253	48.045	-1.747	54.000	4.208	AV
3		*	5592.400	96.667	91.881	N/A	N/A	4.787	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Appendix B - Test Setup Photograph

Refer to "2202RSU047-UT" file.

Appendix C - EUT Photograph

Refer to "2202RSU047-UE" file.