



Incumbent Signal Calibration Plots (NII-5 Band)


802.11be-EHT20 / CH33

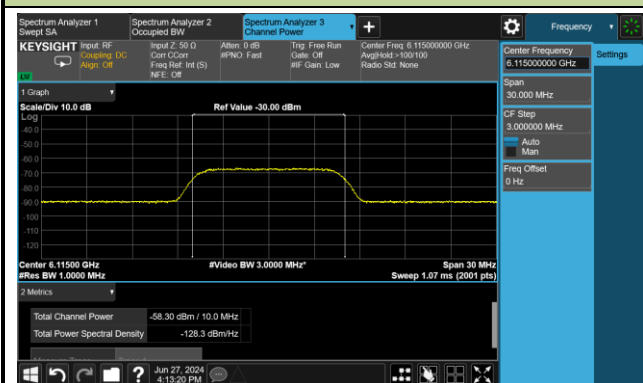


802.11be-EHT320 / CH63 (Low Edge)

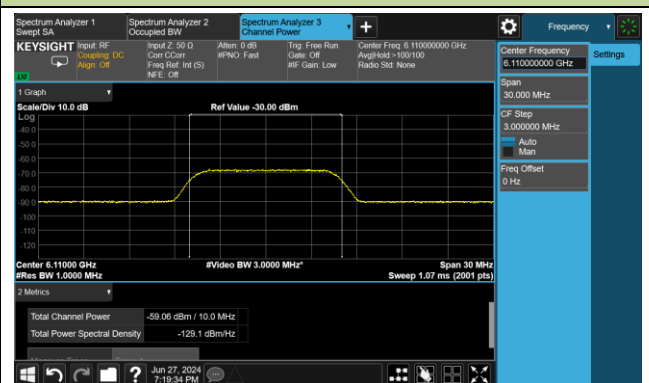

802.11be-EHT320 / CH63 (Middle)

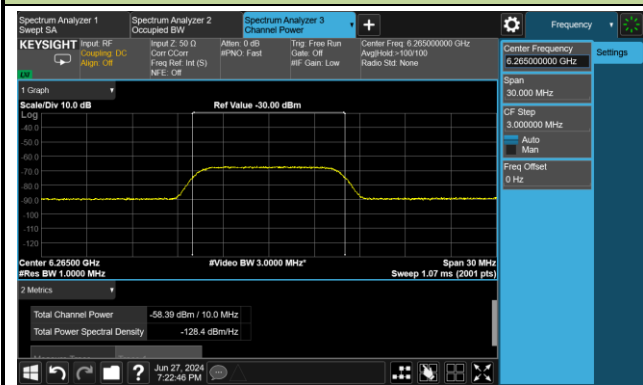


802.11be-EHT320 / CH63 (High Edge)

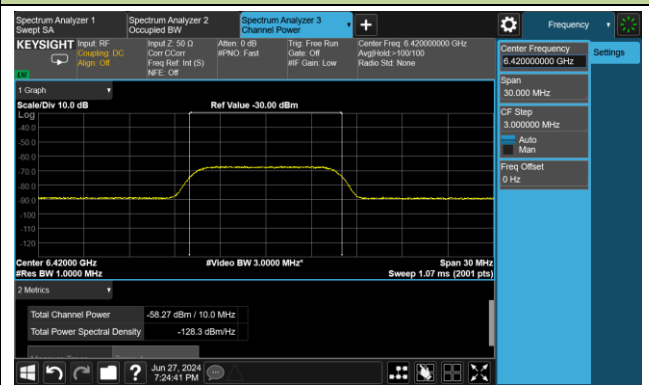


Incumbent Signal Calibration Plots (NII-6 Band)


802.11be-EHT20 / CH97

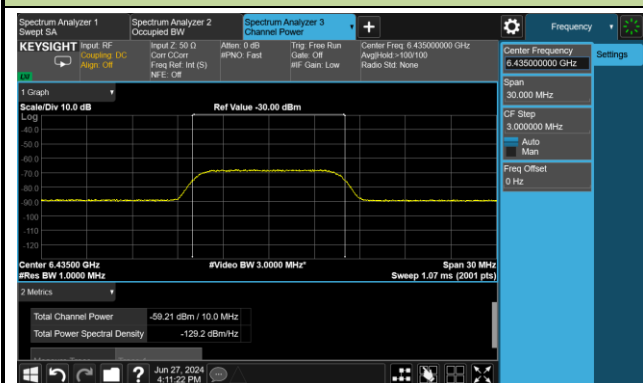


802.11be-EHT320 / CH95 (Low Edge)

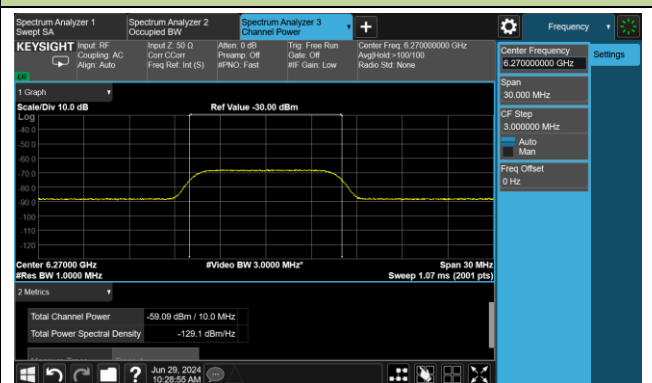

802.11be-EHT320 / CH95 (Middle)

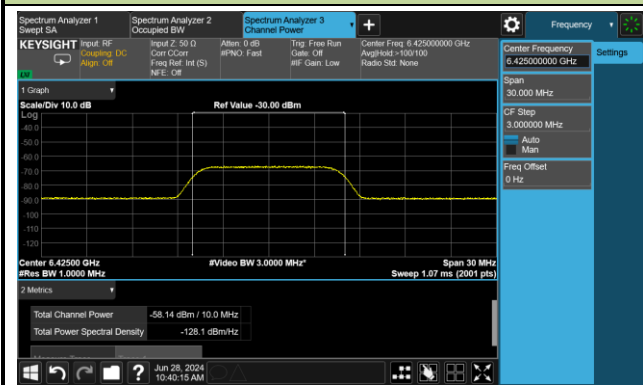


802.11be-EHT320 / CH95 (High Edge)

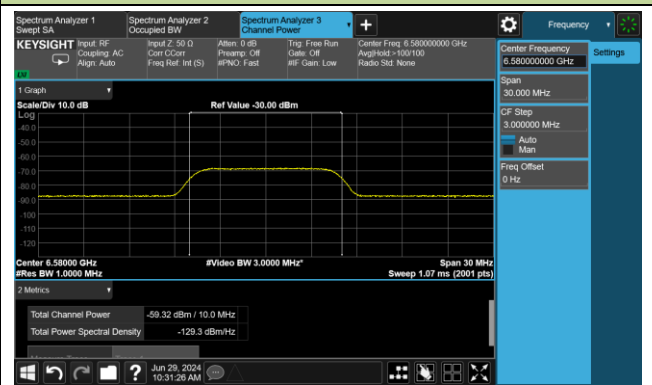


Incumbent Signal Calibration Plots (NII-7 Band)


802.11be-EHT20 / CH181

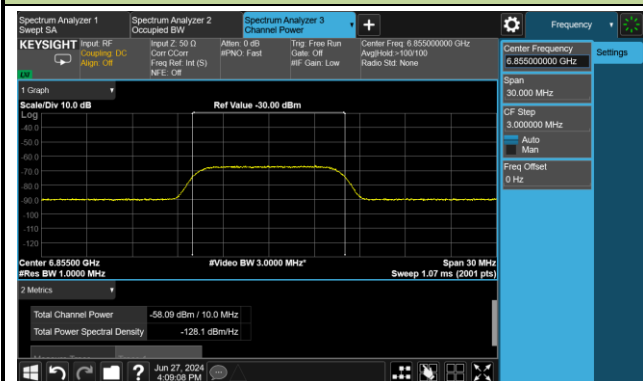


802.11be-EHT320 / CH159 (Low Edge)

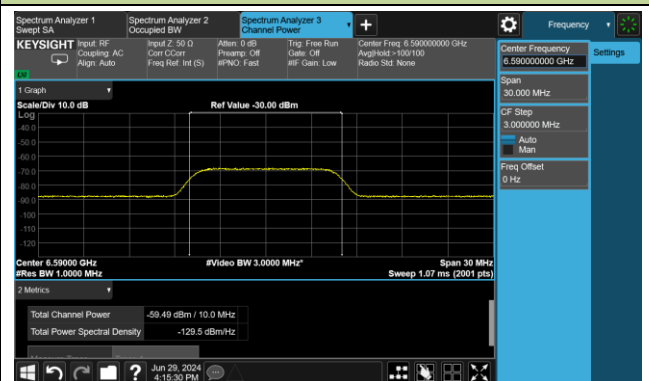

802.11be-EHT320 / CH159 (Middle)

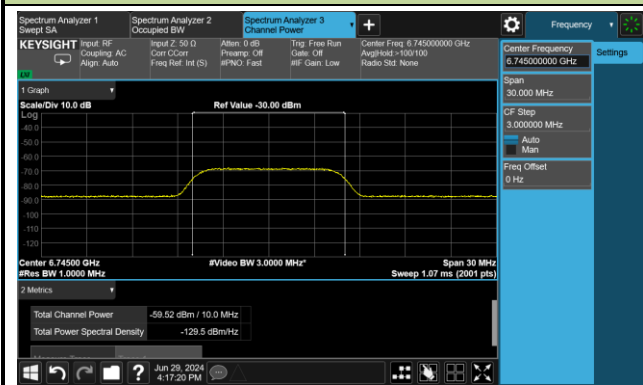


802.11be-EHT320 / CH159 (High Edge)

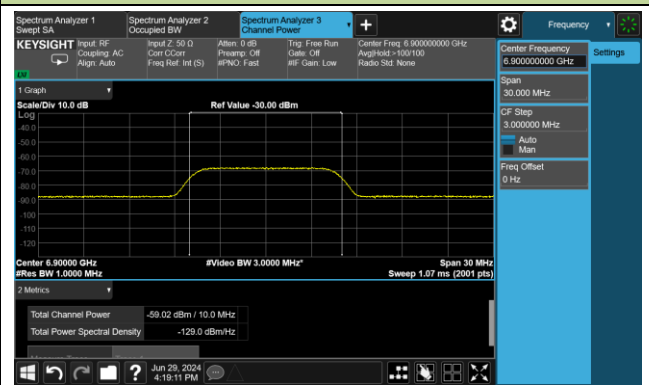


Incumbent Signal Calibration Plots (NII-8 Band)


802.11be-EHT20 / CH213

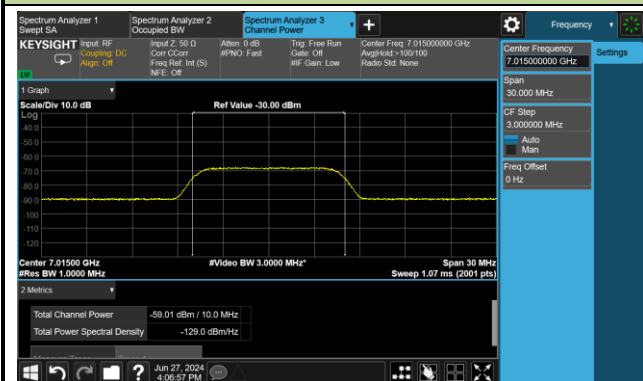


802.11be-EHT320 / CH191 (Low Edge)

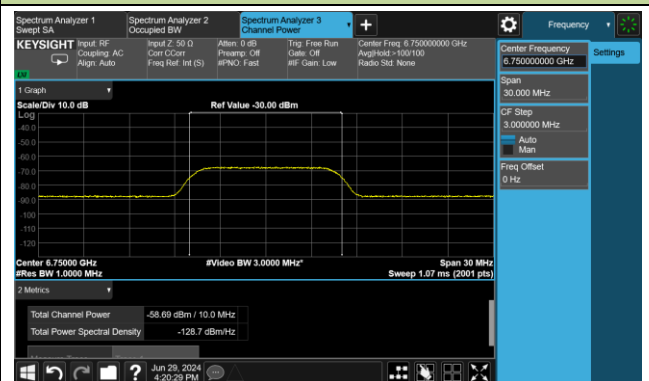

802.11be-EHT320 / CH191 (Middle)

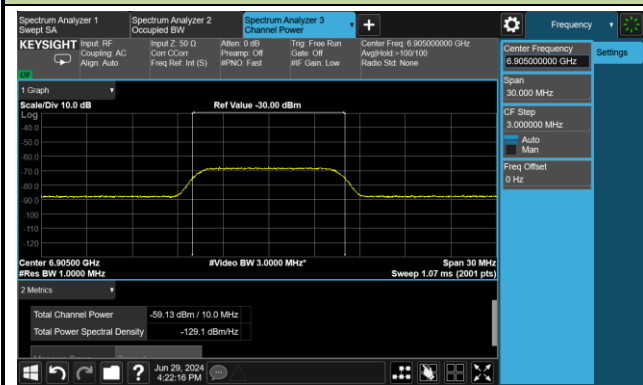


802.11be-EHT320 / CH191 (High Edge)

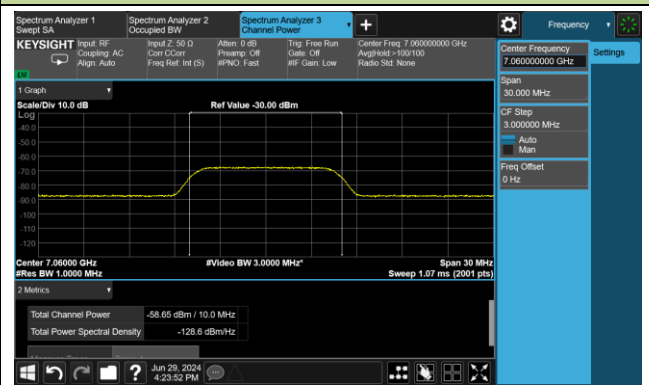


Test Result of EUT ceased transmission (NII-5 Band)


802.11be-EHT20 / CH33

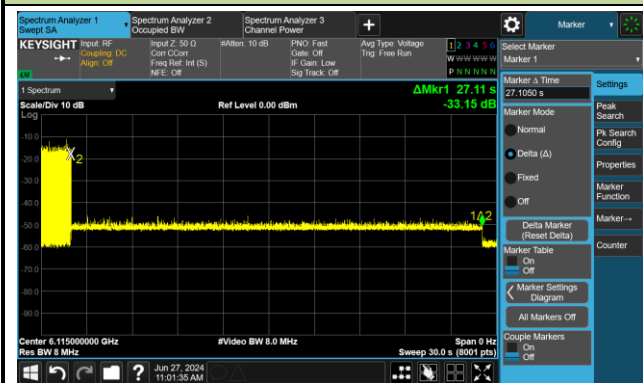


802.11be-EHT320 / CH63 (Low Edge)

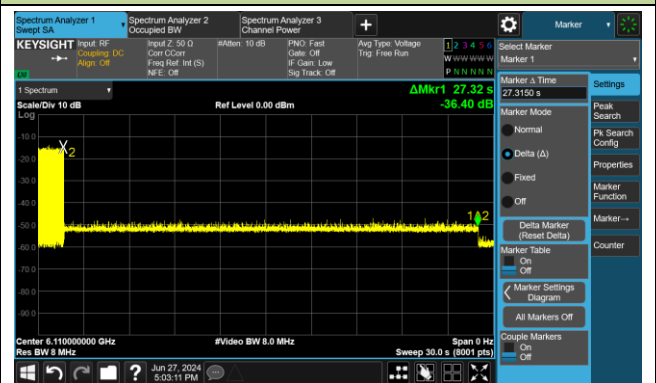

802.11be-EHT320 / CH63 (Middle)

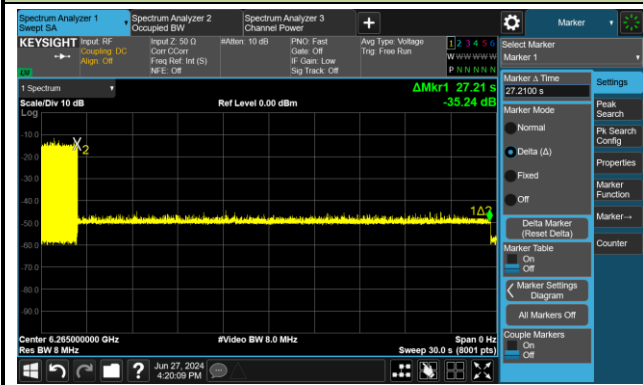


802.11be-EHT320 / CH63 (High Edge)

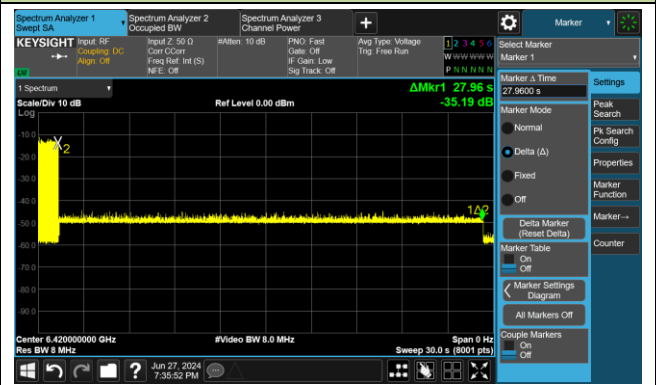


Test Result of EUT ceased transmission (NII-6 Band)


802.11be-EHT20 / CH97

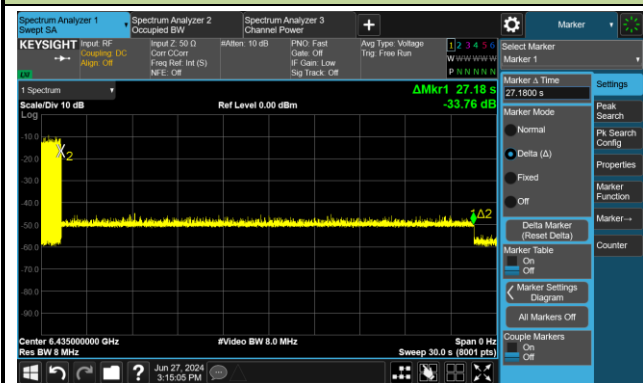


802.11be-EHT320 / CH95 (Low Edge)

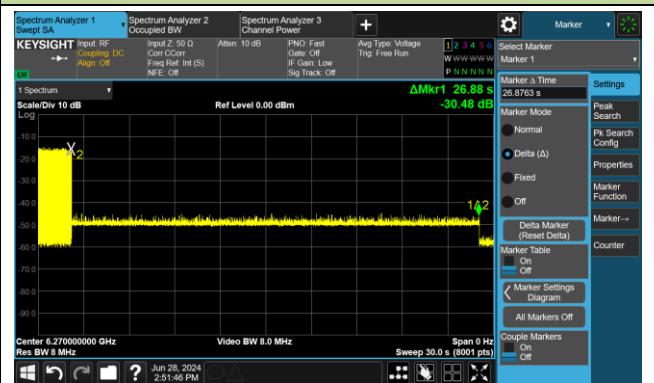

802.11be-EHT320 / CH95 (Middle)

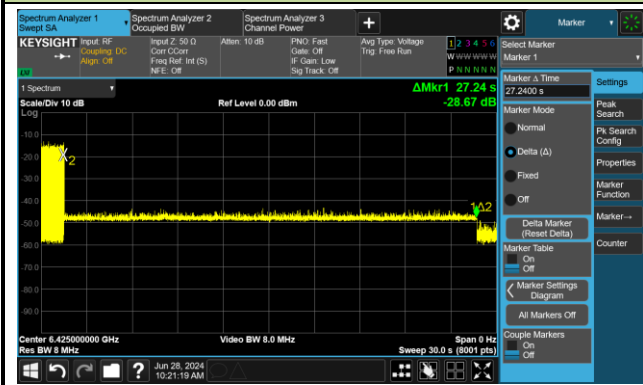


802.11be-EHT320 / CH95 (High Edge)

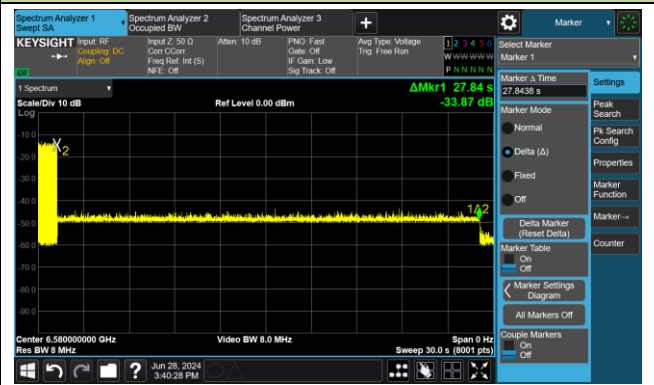


Test Result of EUT ceased transmission (NII-7 Band)


802.11be-EHT20 / CH181

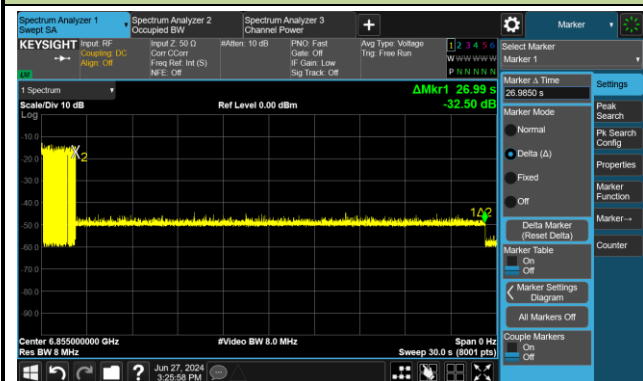


802.11be-EHT320 / CH159 (Low Edge)

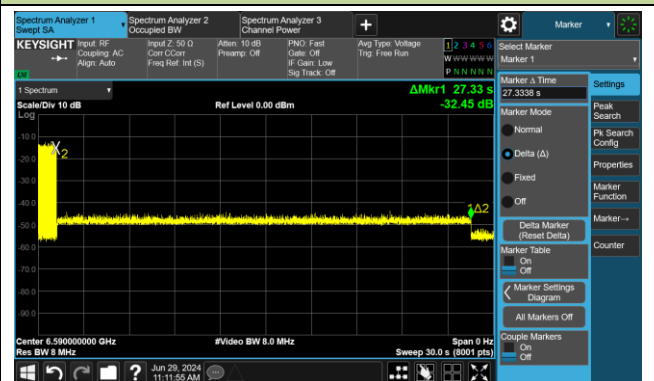

802.11be-EHT320 / CH159 (Middle)

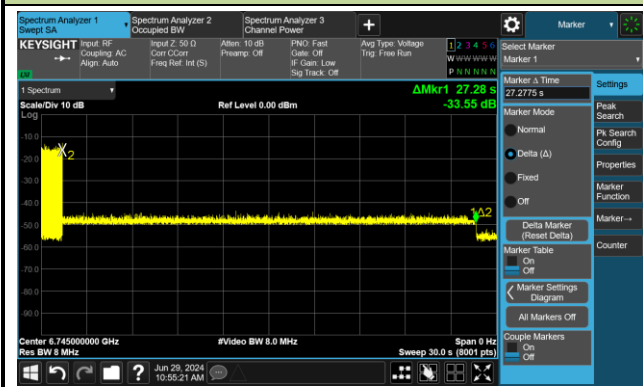


802.11be-EHT320 / CH159 (High Edge)

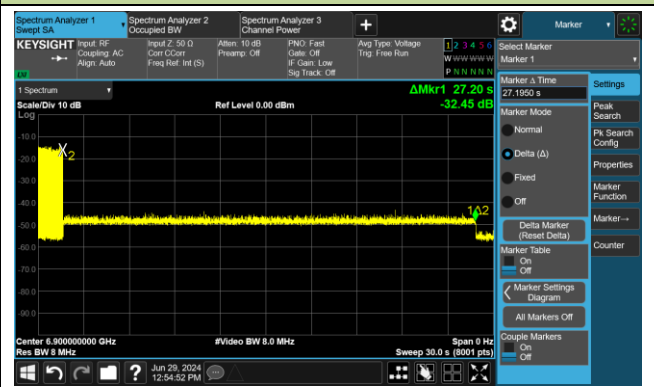


Test Result of EUT ceased transmission (NII-8 Band)

802.11be-EHT20 / CH213

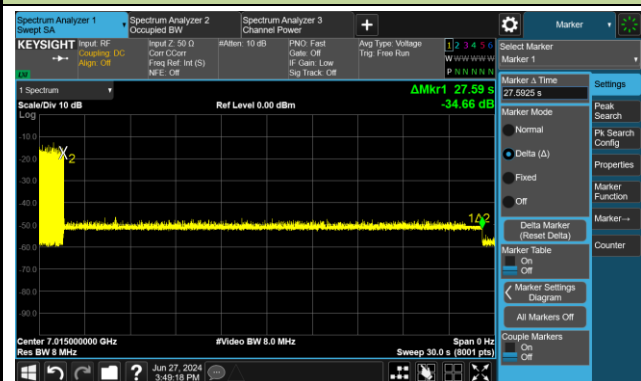


802.11be-EHT320 / CH191 (Low Edge)

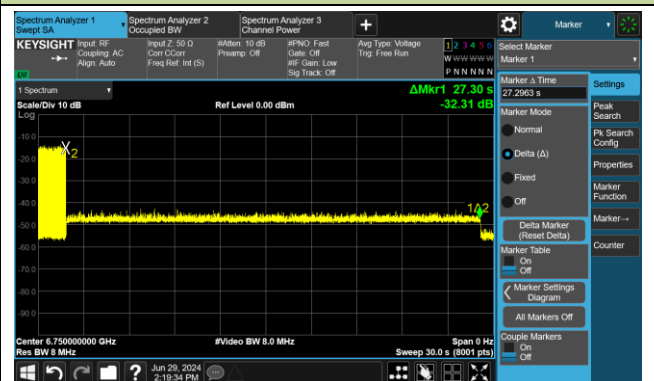

802.11be-EHT320 / CH191 (Middle)



802.11be-EHT320 / CH191 (High Edge)

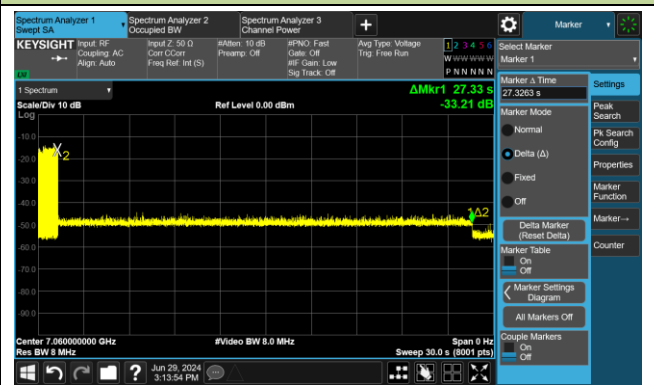

A.8 Radiated Spurious Emission Test Result

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2024-07-01	Test Mode	802.11a – Channel 1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
*	9925.0	35.2	14.5	49.7	88.2	-38.5	Peak	Horizontal
	11366.6	35.4	14.7	50.1	74.0	-23.9	Peak	Horizontal
	13374.3	36.9	13.6	50.5	74.0	-23.5	Peak	Horizontal
*	14382.4	36.3	16.6	52.9	88.2	-35.3	Peak	Horizontal
	9362.3	35.2	13.5	48.7	74.0	-25.3	Peak	Vertical
*	9930.1	34.4	14.4	48.8	88.2	-39.4	Peak	Vertical
	11363.2	35.6	14.7	50.3	74.0	-23.7	Peak	Vertical
*	14355.2	37.2	16.6	53.8	88.2	-34.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2024-07-01	Test Mode	802.11a – Channel 49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8056.7	35.7	10.4	46.1	74.0	-27.9	Peak	Horizontal
*	9923.3	35.3	14.5	49.8	88.2	-38.4	Peak	Horizontal
	11279.9	35.2	14.7	49.9	74.0	-24.1	Peak	Horizontal
*	14367.1	36.5	16.6	53.1	88.2	-35.1	Peak	Horizontal
	9180.4	36.1	12.9	49.0	74.0	-25.0	Peak	Vertical
*	9936.9	35.1	14.2	49.3	88.2	-38.9	Peak	Vertical
	11662.4	35.9	14.2	50.1	74.0	-23.9	Peak	Vertical
*	14277.0	36.7	16.4	53.1	88.2	-35.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11a – Channel 93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9914.8	34.9	14.4	49.3	88.2	-38.9	Peak	Horizontal
	10693.4	34.7	15.1	49.8	74.0	-24.2	Peak	Horizontal
	11397.2	34.9	14.8	49.7	74.0	-24.3	Peak	Horizontal
*	12789.5	37.4	13.3	50.7	88.2	-37.5	Peak	Horizontal
	8347.4	35.8	10.0	45.8	74.0	-28.2	Peak	Vertical
*	9926.7	37.0	14.5	51.5	88.2	-36.7	Peak	Vertical
	11026.6	34.4	15.4	49.8	74.0	-24.2	Peak	Vertical
*	14623.8	35.1	16.6	51.7	88.2	-36.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11a – Channel 97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9301.1	34.9	13.6	48.5	74.0	-25.5	Peak	Horizontal
*	9845.1	34.5	14.1	48.6	88.2	-39.6	Peak	Horizontal
	11404.0	35.3	14.8	50.1	74.0	-23.9	Peak	Horizontal
*	17442.4	35.9	17.9	53.8	88.2	-34.4	Peak	Horizontal
	9132.8	35.1	12.3	47.4	74.0	-26.6	Peak	Vertical
*	9916.5	34.5	14.4	48.9	88.2	-39.3	Peak	Vertical
	11072.5	35.2	15.1	50.3	74.0	-23.7	Peak	Vertical
*	14188.6	36.2	16.2	52.4	88.2	-35.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11a – Channel 105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8352.5	36.1	10.0	46.1	74.0	-27.9	Peak	Horizontal
*	9775.4	34.5	14.2	48.7	88.2	-39.5	Peak	Horizontal
	11291.8	35.6	14.7	50.3	74.0	-23.7	Peak	Horizontal
*	17495.1	35.4	18.9	54.3	88.2	-33.9	Peak	Horizontal
	8354.2	36.2	10.0	46.2	74.0	-27.8	Peak	Vertical
*	9926.7	34.3	14.5	48.8	88.2	-39.4	Peak	Vertical
	10994.3	34.6	15.3	49.9	74.0	-24.1	Peak	Vertical
*	17544.4	34.7	18.9	53.6	88.2	-34.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11a – Channel 113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9076.7	35.6	12.3	47.9	74.0	-26.1	Peak	Horizontal
*	10004.9	34.7	14.1	48.8	88.2	-39.4	Peak	Horizontal
	11686.2	35.2	14.2	49.4	74.0	-24.6	Peak	Horizontal
*	17452.6	34.9	18.2	53.1	88.2	-35.1	Peak	Horizontal
	9075.0	34.8	12.3	47.1	74.0	-26.9	Peak	Vertical
	11438.0	34.9	15.0	49.9	74.0	-24.1	Peak	Vertical
*	13785.7	36.8	14.7	51.5	88.2	-36.7	Peak	Vertical
*	17469.6	35.9	18.4	54.3	88.2	-33.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11a – Channel 117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8282.8	35.8	9.9	45.7	74.0	-28.3	Peak	Horizontal
*	9833.2	34.6	14.4	49.0	88.2	-39.2	Peak	Horizontal
	11502.6	35.6	14.9	50.5	74.0	-23.5	Peak	Horizontal
*	14186.9	36.6	16.2	52.8	88.2	-35.4	Peak	Horizontal
	9324.9	34.4	13.7	48.1	74.0	-25.9	Peak	Vertical
*	9993.0	34.7	14.1	48.8	88.2	-39.4	Peak	Vertical
	11290.1	35.8	14.7	50.5	74.0	-23.5	Peak	Vertical
*	17476.4	36.0	18.5	54.5	88.2	-33.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11a – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9302.8	35.7	13.6	49.3	74.0	-24.7	Peak	Horizontal
*	9928.4	34.5	14.4	48.9	88.2	-39.3	Peak	Horizontal
	11291.8	35.4	14.7	50.1	74.0	-23.9	Peak	Horizontal
*	14974.0	37.3	15.6	52.9	88.2	-35.3	Peak	Horizontal
	8272.6	35.9	9.9	45.8	74.0	-28.2	Peak	Vertical
	9313.0	35.9	13.7	49.6	74.0	-24.4	Peak	Vertical
*	9921.6	35.4	14.5	49.9	88.2	-38.3	Peak	Vertical
*	16956.2	36.0	15.9	51.9	88.2	-36.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11a – Channel 181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9372.5	35.5	13.6	49.1	74.0	-24.9	Peak	Horizontal
	11674.3	35.8	14.2	50.0	74.0	-24.0	Peak	Horizontal
*	14362.0	36.2	16.7	52.9	88.2	-35.3	Peak	Horizontal
*	17282.6	35.6	16.5	52.1	88.2	-36.1	Peak	Horizontal
	11041.9	34.7	15.2	49.9	74.0	-24.1	Peak	Vertical
	11393.8	35.6	14.8	50.4	74.0	-23.6	Peak	Vertical
*	14270.2	35.8	16.4	52.2	88.2	-36.0	Peak	Vertical
*	16871.2	37.1	15.5	52.6	88.2	-35.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11a – Channel 185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9364.0	35.3	13.5	48.8	74.0	-25.2	Peak	Horizontal
	11483.9	35.1	14.7	49.8	74.0	-24.2	Peak	Horizontal
*	14739.4	35.8	16.3	52.1	88.2	-36.1	Peak	Horizontal
*	17020.8	36.7	16.2	52.9	88.2	-35.3	Peak	Horizontal
*	8743.5	37.3	11.7	49.0	88.2	-39.2	Peak	Vertical
	11060.6	34.8	15.2	50.0	74.0	-24.0	Peak	Vertical
	11424.4	35.4	14.7	50.1	74.0	-23.9	Peak	Vertical
*	16937.5	36.6	16.1	52.7	88.2	-35.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11a – Channel 189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9469.4	35.5	13.5	49.0	74.0	-25.0	Peak	Horizontal
	11166.0	34.9	14.9	49.8	74.0	-24.2	Peak	Horizontal
*	14297.4	35.9	16.4	52.3	88.2	-35.9	Peak	Horizontal
*	17493.4	35.6	18.8	54.4	88.2	-33.8	Peak	Horizontal
	9115.8	35.1	12.3	47.4	74.0	-26.6	Peak	Vertical
*	9868.9	35.5	14.3	49.8	88.2	-38.4	Peak	Vertical
	10916.1	34.8	15.4	50.2	74.0	-23.8	Peak	Vertical
*	14273.6	35.9	16.4	52.3	88.2	-35.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11a – Channel 209
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9355.5	35.9	13.5	49.4	74.0	-24.6	Peak	Horizontal
	11274.8	35.0	14.7	49.7	74.0	-24.3	Peak	Horizontal
*	12784.4	37.8	13.2	51.0	88.2	-37.2	Peak	Horizontal
*	14598.3	35.7	16.6	52.3	88.2	-35.9	Peak	Horizontal
	9347.0	34.6	13.4	48.0	74.0	-26.0	Peak	Vertical
*	10518.3	35.2	15.1	50.3	88.2	-37.9	Peak	Vertical
	11261.2	34.9	14.6	49.5	74.0	-24.5	Peak	Vertical
*	14688.4	35.8	16.5	52.3	88.2	-35.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11a – Channel 229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9777.1	35.5	14.1	49.6	88.2	-38.6	Peak	Horizontal
	11077.6	35.7	15.0	50.7	74.0	-23.3	Peak	Horizontal
	11538.3	35.2	14.7	49.9	74.0	-24.1	Peak	Horizontal
*	14596.6	36.3	16.6	52.9	88.2	-35.3	Peak	Horizontal
	9347.0	35.5	13.4	48.9	74.0	-25.1	Peak	Vertical
	11585.9	35.6	14.5	50.1	74.0	-23.9	Peak	Vertical
*	14050.9	36.6	15.4	52.0	88.2	-36.2	Peak	Vertical
*	17024.2	35.9	16.2	52.1	88.2	-36.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2024-07-01	Test Mode	802.11ax-HE20 – Channel 1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9770.3	34.5	14.3	48.8	88.2	-39.4	Peak	Horizontal
	11023.2	35.2	15.3	50.5	74.0	-23.5	Peak	Horizontal
	11475.4	35.3	14.8	50.1	74.0	-23.9	Peak	Horizontal
*	14785.3	36.6	16.3	52.9	88.2	-35.3	Peak	Horizontal
	8185.9	35.8	10.1	45.9	74.0	-28.1	Peak	Vertical
*	9930.1	34.8	14.4	49.2	88.2	-39.0	Peak	Vertical
	11296.9	35.6	14.7	50.3	74.0	-23.7	Peak	Vertical
*	16913.7	37.0	15.6	52.6	88.2	-35.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2024-07-01	Test Mode	802.11ax-HE20 – Channel 49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9352.1	36.1	13.5	49.6	74.0	-24.4	Peak	Horizontal
	10972.2	35.1	15.3	50.4	74.0	-23.6	Peak	Horizontal
*	14271.9	35.9	16.4	52.3	88.2	-35.9	Peak	Horizontal
*	17031.0	36.4	16.2	52.6	88.2	-35.6	Peak	Horizontal
	12289.7	35.8	13.3	49.1	74.0	-24.9	Peak	Vertical
*	13882.6	35.1	15.6	50.7	88.2	-37.5	Peak	Vertical
*	15060.7	35.5	15.2	50.7	88.2	-37.5	Peak	Vertical
	15750.9	35.3	12.4	47.7	74.0	-26.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE20 – Channel 93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9068.2	35.4	12.3	47.7	74.0	-26.3	Peak	Horizontal
*	9273.9	35.1	13.5	48.6	88.2	-39.6	Peak	Horizontal
	11116.7	35.3	14.8	50.1	74.0	-23.9	Peak	Horizontal
*	14237.9	35.9	16.4	52.3	88.2	-35.9	Peak	Horizontal
	9313.0	34.5	13.7	48.2	74.0	-25.8	Peak	Vertical
	11524.7	35.6	14.7	50.3	74.0	-23.7	Peak	Vertical
*	14734.3	36.1	16.3	52.4	88.2	-35.8	Peak	Vertical
*	17025.9	36.8	16.2	53.0	88.2	-35.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE20 – Channel 97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9904.6	34.7	14.2	48.9	88.2	-39.3	Peak	Horizontal
	11278.2	34.6	14.7	49.3	74.0	-24.7	Peak	Horizontal
	11720.2	35.4	13.9	49.3	74.0	-24.7	Peak	Horizontal
*	14503.1	36.4	16.7	53.1	88.2	-35.1	Peak	Horizontal
	9302.8	35.4	13.6	49.0	74.0	-25.0	Peak	Vertical
	11298.6	35.7	14.7	50.4	74.0	-23.6	Peak	Vertical
*	13505.2	36.4	14.3	50.7	88.2	-37.5	Peak	Vertical
*	14438.5	36.6	16.5	53.1	88.2	-35.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE20 – Channel 105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10076.3	34.7	13.9	48.6	88.2	-39.6	Peak	Horizontal
	10933.1	34.2	15.3	49.5	74.0	-24.5	Peak	Horizontal
	11524.7	35.3	14.7	50.0	74.0	-24.0	Peak	Horizontal
*	14229.4	35.6	16.0	51.6	88.2	-36.6	Peak	Horizontal
	9022.3	35.6	12.0	47.6	74.0	-26.4	Peak	Vertical
*	9931.8	34.8	14.4	49.2	88.2	-39.0	Peak	Vertical
	11558.7	35.2	14.7	49.9	74.0	-24.1	Peak	Vertical
*	14266.8	36.9	16.4	53.3	88.2	-34.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE20 – Channel 113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9309.6	34.5	13.7	48.2	74.0	-25.8	Peak	Horizontal
*	9964.1	35.0	14.1	49.1	88.2	-39.1	Peak	Horizontal
	11264.6	35.1	14.7	49.8	74.0	-24.2	Peak	Horizontal
*	14355.2	35.8	16.6	52.4	88.2	-35.8	Peak	Horizontal
	9307.9	34.3	13.7	48.0	74.0	-26.0	Peak	Vertical
*	9960.7	36.2	14.0	50.2	88.2	-38.0	Peak	Vertical
	11279.9	35.0	14.7	49.7	74.0	-24.3	Peak	Vertical
*	14292.3	35.8	16.4	52.2	88.2	-36.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE20 – Channel 117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9967.5	35.2	14.1	49.3	88.2	-38.9	Peak	Horizontal
	10984.1	34.3	15.4	49.7	74.0	-24.3	Peak	Horizontal
	11268.0	35.3	14.7	50.0	74.0	-24.0	Peak	Horizontal
*	14605.1	36.2	16.6	52.8	88.2	-35.4	Peak	Horizontal
	9319.8	35.0	13.7	48.7	74.0	-25.3	Peak	Vertical
*	10020.2	35.2	14.0	49.2	88.2	-39.0	Peak	Vertical
	11446.5	35.2	14.9	50.1	74.0	-23.9	Peak	Vertical
*	14258.3	35.6	16.5	52.1	88.2	-36.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9926.7	34.6	14.5	49.1	88.2	-39.1	Peak	Horizontal
	11172.8	34.9	14.8	49.7	74.0	-24.3	Peak	Horizontal
	11509.4	35.0	14.9	49.9	74.0	-24.1	Peak	Horizontal
*	14268.5	35.8	16.4	52.2	88.2	-36.0	Peak	Horizontal
	9364.0	35.5	13.5	49.0	74.0	-25.0	Peak	Vertical
*	10251.4	35.6	14.5	50.1	88.2	-38.1	Peak	Vertical
	11489.0	35.9	14.6	50.5	74.0	-23.5	Peak	Vertical
*	14275.3	35.8	16.4	52.2	88.2	-36.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE20 – Channel 181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9455.8	36.1	13.5	49.6	74.0	-24.4	Peak	Horizontal
*	9874.0	35.9	14.2	50.1	88.2	-38.1	Peak	Horizontal
	10963.7	36.4	15.2	51.6	74.0	-22.4	Peak	Horizontal
*	13841.8	37.2	15.1	52.3	88.2	-35.9	Peak	Horizontal
	8396.7	37.3	10.2	47.5	74.0	-26.5	Peak	Vertical
*	9862.1	36.9	14.3	51.2	88.2	-37.0	Peak	Vertical
	10926.3	35.6	15.4	51.0	74.0	-23.0	Peak	Vertical
*	14331.4	36.5	16.5	53.0	88.2	-35.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE20 – Channel 185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8245.4	36.6	9.9	46.5	74.0	-27.5	Peak	Horizontal
*	9914.8	35.7	14.4	50.1	88.2	-38.1	Peak	Horizontal
	11444.8	36.2	14.9	51.1	74.0	-22.9	Peak	Horizontal
*	14028.8	37.0	15.7	52.7	88.2	-35.5	Peak	Horizontal
	9455.8	35.9	13.5	49.4	74.0	-24.6	Peak	Vertical
*	10351.7	35.7	14.7	50.4	88.2	-37.8	Peak	Vertical
	11013.0	35.4	15.3	50.7	74.0	-23.3	Peak	Vertical
*	14212.4	36.4	16.2	52.6	88.2	-35.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE20 – Channel 189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9316.4	36.1	13.7	49.8	74.0	-24.2	Peak	Horizontal
	11150.7	35.9	14.7	50.6	74.0	-23.4	Peak	Horizontal
*	14215.8	37.0	16.1	53.1	88.2	-35.1	Peak	Horizontal
*	14647.6	37.5	16.3	53.8	88.2	-34.4	Peak	Horizontal
	9302.8	35.6	13.6	49.2	74.0	-24.8	Peak	Vertical
*	9926.7	35.9	14.5	50.4	88.2	-37.8	Peak	Vertical
	11460.1	36.0	14.8	50.8	74.0	-23.2	Peak	Vertical
*	14045.8	36.4	15.6	52.0	88.2	-36.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE20 – Channel 209
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9309.6	35.9	13.7	49.6	74.0	-24.4	Peak	Horizontal
*	9931.8	35.6	14.4	50.0	88.2	-38.2	Peak	Horizontal
	11319.0	35.9	14.5	50.4	74.0	-23.6	Peak	Horizontal
*	12872.8	37.7	13.3	51.0	88.2	-37.2	Peak	Horizontal
	9375.9	35.7	13.6	49.3	74.0	-24.7	Peak	Vertical
*	9921.6	35.3	14.5	49.8	88.2	-38.4	Peak	Vertical
	11108.2	35.9	14.9	50.8	74.0	-23.2	Peak	Vertical
*	14261.7	35.9	16.4	52.3	88.2	-35.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE20 – Channel 229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9319.8	35.9	13.7	49.6	74.0	-24.4	Peak	Horizontal
*	9930.1	36.0	14.4	50.4	88.2	-37.8	Peak	Horizontal
	11269.7	36.1	14.7	50.8	74.0	-23.2	Peak	Horizontal
*	14039.0	36.5	15.7	52.2	88.2	-36.0	Peak	Horizontal
	9316.4	36.0	13.7	49.7	74.0	-24.3	Peak	Vertical
	11223.8	35.7	14.7	50.4	74.0	-23.6	Peak	Vertical
*	14373.9	36.6	16.6	53.2	88.2	-35.0	Peak	Vertical
*	17022.5	37.0	16.2	53.2	88.2	-35.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE40 – Channel 3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9399.7	35.2	13.4	48.6	74.0	-25.4	Peak	Horizontal
*	9962.4	36.1	14.1	50.2	88.2	-38.0	Peak	Horizontal
	11193.2	35.9	14.8	50.7	74.0	-23.3	Peak	Horizontal
*	14377.3	36.9	16.6	53.5	88.2	-34.7	Peak	Horizontal
	9318.1	35.5	13.7	49.2	74.0	-24.8	Peak	Vertical
*	9942.0	35.1	14.1	49.2	88.2	-39.0	Peak	Vertical
	11526.4	35.7	14.7	50.4	74.0	-23.6	Peak	Vertical
*	14108.7	35.5	16.0	51.5	88.2	-36.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE40 – Channel 51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9306.2	35.7	13.6	49.3	74.0	-24.7	Peak	Horizontal
	10627.1	35.0	15.3	50.3	74.0	-23.7	Peak	Horizontal
*	13996.5	36.2	15.6	51.8	88.2	-36.4	Peak	Horizontal
*	17061.6	37.4	15.9	53.3	88.2	-34.9	Peak	Horizontal
*	9800.9	35.4	14.2	49.6	88.2	-38.6	Peak	Vertical
	10618.6	34.7	15.3	50.0	74.0	-24.0	Peak	Vertical
	11310.5	35.5	14.6	50.1	74.0	-23.9	Peak	Vertical
*	14241.3	36.1	16.5	52.6	88.2	-35.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE40 – Channel 91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9355.5	35.3	13.5	48.8	74.0	-25.2	Peak	Horizontal
*	9879.1	35.2	14.2	49.4	88.2	-38.8	Peak	Horizontal
	11084.4	36.1	14.9	51.0	74.0	-23.0	Peak	Horizontal
*	14006.7	36.1	15.7	51.8	88.2	-36.4	Peak	Horizontal
	9408.2	34.7	13.6	48.3	74.0	-25.7	Peak	Vertical
*	9921.6	35.2	14.5	49.7	88.2	-38.5	Peak	Vertical
	11465.2	35.4	14.8	50.2	74.0	-23.8	Peak	Vertical
*	14962.1	36.6	15.8	52.4	88.2	-35.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE40 – Channel 99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10003.2	35.9	14.1	50.0	88.2	-38.2	Peak	Horizontal
	11028.3	34.0	15.4	49.4	74.0	-24.6	Peak	Horizontal
	11363.2	36.0	14.7	50.7	74.0	-23.3	Peak	Horizontal
*	14596.6	36.5	16.6	53.1	88.2	-35.1	Peak	Horizontal
	9450.7	34.9	13.4	48.3	74.0	-25.7	Peak	Vertical
	11402.3	35.8	14.8	50.6	74.0	-23.4	Peak	Vertical
*	12869.4	37.4	13.2	50.6	88.2	-37.6	Peak	Vertical
*	13930.2	36.5	15.4	51.9	88.2	-36.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE40 – Channel 107
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9313.0	35.4	13.7	49.1	74.0	-24.9	Peak	Horizontal
*	9918.2	36.1	14.4	50.5	88.2	-37.7	Peak	Horizontal
	11035.1	34.7	15.3	50.0	74.0	-24.0	Peak	Horizontal
*	14734.3	37.2	16.3	53.5	88.2	-34.7	Peak	Horizontal
	9423.5	35.0	13.6	48.6	74.0	-25.4	Peak	Vertical
*	9940.3	34.9	14.1	49.0	88.2	-39.2	Peak	Vertical
	11242.5	35.6	14.5	50.1	74.0	-23.9	Peak	Vertical
*	14319.5	35.9	16.5	52.4	88.2	-35.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE40 – Channel 115
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9307.9	35.5	13.7	49.2	74.0	-24.8	Peak	Horizontal
*	10011.7	35.1	14.1	49.2	88.2	-39.0	Peak	Horizontal
	11196.6	36.1	14.8	50.9	74.0	-23.1	Peak	Horizontal
*	14390.9	36.1	16.6	52.7	88.2	-35.5	Peak	Horizontal
	9314.7	35.6	13.7	49.3	74.0	-24.7	Peak	Vertical
*	9817.9	35.9	14.6	50.5	88.2	-37.7	Peak	Vertical
	11475.4	35.6	14.8	50.4	74.0	-23.6	Peak	Vertical
*	13884.3	37.1	15.6	52.7	88.2	-35.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE40 – Channel 123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9090.3	35.8	12.1	47.9	74.0	-26.1	Peak	Horizontal
*	9882.5	35.5	14.1	49.6	88.2	-38.6	Peak	Horizontal
	11438.0	35.2	15.0	50.2	74.0	-23.8	Peak	Horizontal
*	14394.3	36.2	16.6	52.8	88.2	-35.4	Peak	Horizontal
	9389.5	35.2	13.4	48.6	74.0	-25.4	Peak	Vertical
*	10013.4	35.7	14.1	49.8	88.2	-38.4	Peak	Vertical
	11526.4	35.2	14.7	49.9	74.0	-24.1	Peak	Vertical
*	14277.0	36.2	16.4	52.6	88.2	-35.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE40 – Channel 147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9460.9	35.9	13.5	49.4	74.0	-24.6	Peak	Horizontal
*	9930.1	34.7	14.4	49.1	88.2	-39.1	Peak	Horizontal
	11432.9	35.1	14.9	50.0	74.0	-24.0	Peak	Horizontal
*	14576.2	35.9	16.5	52.4	88.2	-35.8	Peak	Horizontal
	9024.0	36.3	12.0	48.3	74.0	-25.7	Peak	Vertical
*	10351.7	34.4	14.7	49.1	88.2	-39.1	Peak	Vertical
	11201.7	36.0	14.8	50.8	74.0	-23.2	Peak	Vertical
*	14203.9	35.3	16.2	51.5	88.2	-36.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE40 – Channel 179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9013.8	36.8	12.0	48.8	74.0	-25.2	Peak	Horizontal
*	9753.3	36.6	14.0	50.6	88.2	-37.6	Peak	Horizontal
	11468.6	35.2	14.8	50.0	74.0	-24.0	Peak	Horizontal
*	14101.9	36.0	16.0	52.0	88.2	-36.2	Peak	Horizontal
	10856.6	34.8	15.3	50.1	74.0	-23.9	Peak	Vertical
	11385.3	35.4	14.8	50.2	74.0	-23.8	Peak	Vertical
*	14358.6	36.2	16.6	52.8	88.2	-35.4	Peak	Vertical
*	17022.5	36.7	16.2	52.9	88.2	-35.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE40 – Channel 187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9697.2	35.0	13.9	48.9	88.2	-39.3	Peak	Horizontal
	11016.4	35.1	15.3	50.4	74.0	-23.6	Peak	Horizontal
	11465.2	35.0	14.8	49.8	74.0	-24.2	Peak	Horizontal
*	14603.4	35.5	16.6	52.1	88.2	-36.1	Peak	Horizontal
	9469.4	35.1	13.5	48.6	74.0	-25.4	Peak	Vertical
*	9928.4	35.4	14.4	49.8	88.2	-38.4	Peak	Vertical
	11441.4	35.7	15.0	50.7	74.0	-23.3	Peak	Vertical
*	14421.5	36.8	16.3	53.1	88.2	-35.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE40 – Channel 195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9459.2	35.5	13.5	49.0	74.0	-25.0	Peak	Horizontal
*	10003.2	35.2	14.1	49.3	88.2	-38.9	Peak	Horizontal
	11283.3	34.9	14.7	49.6	74.0	-24.4	Peak	Horizontal
*	13862.2	38.1	15.2	53.3	88.2	-34.9	Peak	Horizontal
	9469.4	36.2	13.5	49.7	74.0	-24.3	Peak	Vertical
*	9904.6	34.5	14.2	48.7	88.2	-39.5	Peak	Vertical
	11475.4	35.4	14.8	50.2	74.0	-23.8	Peak	Vertical
*	13829.9	36.0	15.2	51.2	88.2	-37.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE40 – Channel 211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9217.8	36.1	13.2	49.3	88.2	-38.9	Peak	Horizontal
*	9792.4	35.3	14.0	49.3	88.2	-38.9	Peak	Horizontal
	10892.3	34.8	15.1	49.9	74.0	-24.1	Peak	Horizontal
	11472.0	34.7	14.8	49.5	74.0	-24.5	Peak	Horizontal
	9017.2	35.7	12.0	47.7	74.0	-26.3	Peak	Vertical
*	9982.8	35.4	14.2	49.6	88.2	-38.6	Peak	Vertical
	11451.6	35.3	14.8	50.1	74.0	-23.9	Peak	Vertical
*	14591.5	36.0	16.6	52.6	88.2	-35.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE40 – Channel 227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9877.4	35.0	14.2	49.2	88.2	-39.0	Peak	Horizontal
	10999.4	34.1	15.3	49.4	74.0	-24.6	Peak	Horizontal
	11451.6	35.6	14.8	50.4	74.0	-23.6	Peak	Horizontal
*	13989.7	36.6	15.6	52.2	88.2	-36.0	Peak	Horizontal
	9494.9	34.9	13.4	48.3	74.0	-25.7	Peak	Vertical
*	9911.4	35.9	14.4	50.3	88.2	-37.9	Peak	Vertical
	11565.5	35.3	14.5	49.8	74.0	-24.2	Peak	Vertical
*	16898.4	37.2	15.3	52.5	88.2	-35.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE80 – Channel 7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
	9391.2	34.9	13.4	48.3	74.0	-25.7	Peak	Horizontal
*	10069.5	35.0	13.9	48.9	88.2	-39.3	Peak	Horizontal
	10990.9	35.3	15.4	50.7	74.0	-23.3	Peak	Horizontal
*	17063.3	36.6	15.9	52.5	88.2	-35.7	Peak	Horizontal
	9347.0	35.3	13.4	48.7	74.0	-25.3	Peak	Vertical
*	10384.0	34.4	14.7	49.1	88.2	-39.1	Peak	Vertical
	11220.4	35.8	14.7	50.5	74.0	-23.5	Peak	Vertical
*	14397.7	36.1	16.6	52.7	88.2	-35.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE80 – Channel 55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9411.6	35.0	13.7	48.7	74.0	-25.3	Peak	Horizontal
*	10176.6	36.3	14.2	50.5	88.2	-37.7	Peak	Horizontal
	11489.0	35.7	14.6	50.3	74.0	-23.7	Peak	Horizontal
*	14700.3	36.6	16.4	53.0	88.2	-35.2	Peak	Horizontal
	8304.9	35.5	10.0	45.5	74.0	-28.5	Peak	Vertical
*	9896.1	35.9	13.9	49.8	88.2	-38.4	Peak	Vertical
	11203.4	35.0	14.8	49.8	74.0	-24.2	Peak	Vertical
*	14341.6	35.9	16.5	52.4	88.2	-35.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE80 – Channel 87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9423.5	35.9	13.6	49.5	74.0	-24.5	Peak	Horizontal
*	9817.9	34.1	14.6	48.7	88.2	-39.5	Peak	Horizontal
	11591.0	36.1	14.6	50.7	74.0	-23.3	Peak	Horizontal
*	14270.2	35.9	16.4	52.3	88.2	-35.9	Peak	Horizontal
	9367.4	35.2	13.6	48.8	74.0	-25.2	Peak	Vertical
*	9935.2	36.0	14.3	50.3	88.2	-37.9	Peak	Vertical
	11509.4	35.3	14.9	50.2	74.0	-23.8	Peak	Vertical
*	14256.6	36.9	16.5	53.4	88.2	-34.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE80 – Channel 103
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9369.1	34.6	13.6	48.2	74.0	-25.8	Peak	Horizontal
*	9928.4	35.0	14.4	49.4	88.2	-38.8	Peak	Horizontal
	12165.6	36.9	13.6	50.5	74.0	-23.5	Peak	Horizontal
*	14375.6	35.5	16.6	52.1	88.2	-36.1	Peak	Horizontal
	9364.0	35.3	13.5	48.8	74.0	-25.2	Peak	Vertical
*	9914.8	35.5	14.4	49.9	88.2	-38.3	Peak	Vertical
	11613.1	36.2	14.3	50.5	74.0	-23.5	Peak	Vertical
*	14244.7	34.9	16.6	51.5	88.2	-36.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE80 – Channel 119
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9335.1	35.1	13.5	48.6	74.0	-25.4	Peak	Horizontal
*	9936.9	34.8	14.2	49.0	88.2	-39.2	Peak	Horizontal
	11302.0	35.0	14.7	49.7	74.0	-24.3	Peak	Horizontal
*	14113.8	35.4	15.9	51.3	88.2	-36.9	Peak	Horizontal
	9357.2	35.8	13.5	49.3	74.0	-24.7	Peak	Vertical
*	9911.4	34.8	14.4	49.2	88.2	-39.0	Peak	Vertical
	11103.1	34.8	14.9	49.7	74.0	-24.3	Peak	Vertical
*	14584.7	36.3	16.6	52.9	88.2	-35.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE80 – Channel 135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9367.4	35.0	13.6	48.6	74.0	-25.4	Peak	Horizontal
*	9833.2	34.1	14.4	48.5	88.2	-39.7	Peak	Horizontal
	10912.7	34.7	15.4	50.1	74.0	-23.9	Peak	Horizontal
*	14103.6	35.6	16.0	51.6	88.2	-36.6	Peak	Horizontal
	9413.3	34.6	13.7	48.3	74.0	-25.7	Peak	Vertical
*	10101.8	34.4	14.0	48.4	88.2	-39.8	Peak	Vertical
	11431.2	35.0	14.9	49.9	74.0	-24.1	Peak	Vertical
*	14649.3	35.9	16.2	52.1	88.2	-36.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE80 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9911.4	34.9	14.4	49.3	88.2	-38.9	Peak	Horizontal
	11240.8	35.8	14.6	50.4	74.0	-23.6	Peak	Horizontal
*	13231.5	38.3	13.5	51.8	88.2	-36.4	Peak	Horizontal
	15548.6	35.9	12.4	48.3	74.0	-25.7	Peak	Horizontal
	9352.1	35.5	13.5	49.0	74.0	-25.0	Peak	Vertical
*	9829.8	35.1	14.5	49.6	88.2	-38.6	Peak	Vertical
	11492.4	35.2	14.7	49.9	74.0	-24.1	Peak	Vertical
*	14890.7	36.1	16.1	52.2	88.2	-36.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE80 – Channel 167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9307.9	35.0	13.7	48.7	74.0	-25.3	Peak	Horizontal
*	9918.2	34.8	14.4	49.2	88.2	-39.0	Peak	Horizontal
	11281.6	35.2	14.7	49.9	74.0	-24.1	Peak	Horizontal
*	14433.4	36.5	16.4	52.9	88.2	-35.3	Peak	Horizontal
	9398.0	35.2	13.4	48.6	74.0	-25.4	Peak	Vertical
*	9933.5	35.2	14.3	49.5	88.2	-38.7	Peak	Vertical
	11507.7	35.3	14.9	50.2	74.0	-23.8	Peak	Vertical
*	14271.9	35.7	16.4	52.1	88.2	-36.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE80 – Channel 183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9965.8	35.6	14.1	49.7	88.2	-38.5	Peak	Horizontal
	11028.3	35.1	15.4	50.5	74.0	-23.5	Peak	Horizontal
	11439.7	35.4	15.0	50.4	74.0	-23.6	Peak	Horizontal
*	14560.9	36.6	16.4	53.0	88.2	-35.2	Peak	Horizontal
*	9930.1	35.8	14.4	50.2	88.2	-38.0	Peak	Vertical
	11014.7	34.8	15.3	50.1	74.0	-23.9	Peak	Vertical
	11349.6	36.2	14.7	50.9	74.0	-23.1	Peak	Vertical
*	14453.8	36.4	16.6	53.0	88.2	-35.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE80 – Channel 199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9314.7	34.9	13.7	48.6	74.0	-25.4	Peak	Horizontal
*	9921.6	35.1	14.5	49.6	88.2	-38.6	Peak	Horizontal
	11390.4	35.0	14.8	49.8	74.0	-24.2	Peak	Horizontal
*	13897.9	37.4	15.5	52.9	88.2	-35.3	Peak	Horizontal
*	9851.9	35.6	14.2	49.8	88.2	-38.4	Peak	Vertical
	10715.5	34.8	15.2	50.0	74.0	-24.0	Peak	Vertical
	11286.7	34.9	14.7	49.6	74.0	-24.4	Peak	Vertical
*	14615.3	35.6	16.6	52.2	88.2	-36.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE80 – Channel 215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9834.9	34.8	14.3	49.1	88.2	-39.1	Peak	Horizontal
	10997.7	34.2	15.3	49.5	74.0	-24.5	Peak	Horizontal
	11393.8	34.7	14.8	49.5	74.0	-24.5	Peak	Horizontal
*	13875.8	37.2	15.5	52.7	88.2	-35.5	Peak	Horizontal
	9316.4	34.6	13.7	48.3	74.0	-25.7	Peak	Vertical
*	10582.9	34.9	15.2	50.1	88.2	-38.1	Peak	Vertical
	11319.0	35.5	14.5	50.0	74.0	-24.0	Peak	Vertical
*	14188.6	36.2	16.2	52.4	88.2	-35.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE160 – Channel 15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9382.7	35.5	13.5	49.0	74.0	-25.0	Peak	Horizontal
*	9918.2	36.0	14.4	50.4	88.2	-37.8	Peak	Horizontal
	11113.3	36.0	14.9	50.9	74.0	-23.1	Peak	Horizontal
*	14392.6	36.5	16.6	53.1	88.2	-35.1	Peak	Horizontal
	9411.6	34.8	13.7	48.5	74.0	-25.5	Peak	Vertical
*	9639.4	35.5	13.6	49.1	88.2	-39.1	Peak	Vertical
	11104.8	35.6	14.9	50.5	74.0	-23.5	Peak	Vertical
*	14776.8	37.1	16.4	53.5	88.2	-34.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE160 – Channel 47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9700.6	35.9	13.9	49.8	88.2	-38.4	Peak	Horizontal
	10890.6	35.1	15.1	50.2	74.0	-23.8	Peak	Horizontal
	11485.6	36.4	14.7	51.1	74.0	-22.9	Peak	Horizontal
*	14220.9	36.3	16.0	52.3	88.2	-35.9	Peak	Horizontal
	9313.0	34.7	13.7	48.4	74.0	-25.6	Peak	Vertical
*	9787.3	36.2	13.9	50.1	88.2	-38.1	Peak	Vertical
	11434.6	30.2	14.9	45.1	54.0	-8.9	Average	Vertical
	11434.6	36.2	14.9	51.1	74.0	-22.9	Peak	Vertical
*	14254.9	36.4	16.5	52.9	88.2	-35.3	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE160 – Channel 79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9343.6	35.7	13.4	49.1	74.0	-24.9	Peak	Horizontal
*	10078.0	35.3	13.9	49.2	88.2	-39.0	Peak	Horizontal
	11062.3	34.8	15.2	50.0	74.0	-24.0	Peak	Horizontal
*	14209.0	35.8	16.2	52.0	88.2	-36.2	Peak	Horizontal
	9372.5	35.0	13.6	48.6	74.0	-25.4	Peak	Vertical
*	9972.6	35.5	14.2	49.7	88.2	-38.5	Peak	Vertical
	10788.6	35.0	15.3	50.3	74.0	-23.7	Peak	Vertical
*	14241.3	36.1	16.5	52.6	88.2	-35.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE160 – Channel 111
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9330.0	35.4	13.6	49.0	74.0	-25.0	Peak	Horizontal
*	10263.3	35.1	14.5	49.6	88.2	-38.6	Peak	Horizontal
	11307.1	35.2	14.6	49.8	74.0	-24.2	Peak	Horizontal
*	14158.0	36.5	15.8	52.3	88.2	-35.9	Peak	Horizontal
	9394.6	34.6	13.4	48.0	74.0	-26.0	Peak	Vertical
*	10008.3	35.6	14.1	49.7	88.2	-38.5	Peak	Vertical
	11613.1	36.5	14.3	50.8	74.0	-23.2	Peak	Vertical
*	14288.9	35.9	16.4	52.3	88.2	-35.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE160 – Channel 143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9403.1	34.7	13.5	48.2	74.0	-25.8	Peak	Horizontal
*	10256.5	34.1	14.5	48.6	88.2	-39.6	Peak	Horizontal
	11512.8	35.0	14.8	49.8	74.0	-24.2	Peak	Horizontal
*	16951.1	36.6	16.1	52.7	88.2	-35.5	Peak	Horizontal
	9319.8	34.8	13.7	48.5	74.0	-25.5	Peak	Vertical
*	10263.3	34.6	14.5	49.1	88.2	-39.1	Peak	Vertical
	11065.7	35.4	15.2	50.6	74.0	-23.4	Peak	Vertical
*	17080.3	36.6	16.0	52.6	88.2	-35.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE160 – Channel 175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9369.1	34.9	13.6	48.5	74.0	-25.5	Peak	Horizontal
*	9804.3	34.9	14.3	49.2	88.2	-39.0	Peak	Horizontal
	11436.3	34.8	14.9	49.7	74.0	-24.3	Peak	Horizontal
*	14248.1	36.6	16.5	53.1	88.2	-35.1	Peak	Horizontal
	9345.3	35.3	13.4	48.7	74.0	-25.3	Peak	Vertical
*	9970.9	35.0	14.2	49.2	88.2	-39.0	Peak	Vertical
	11353.0	35.9	14.7	50.6	74.0	-23.4	Peak	Vertical
*	14652.7	36.5	16.1	52.6	88.2	-35.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11ax-HE160 – Channel 207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9355.5	35.4	13.5	48.9	74.0	-25.1	Peak	Horizontal
*	9884.2	35.3	14.1	49.4	88.2	-38.8	Peak	Horizontal
	11220.4	35.6	14.7	50.3	74.0	-23.7	Peak	Horizontal
*	13982.9	36.6	15.5	52.1	88.2	-36.1	Peak	Horizontal
	9345.3	35.5	13.4	48.9	74.0	-25.1	Peak	Vertical
*	10067.8	34.7	13.9	48.6	88.2	-39.6	Peak	Vertical
	10921.2	35.1	15.4	50.5	74.0	-23.5	Peak	Vertical
*	14297.4	36.9	16.4	53.3	88.2	-34.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2024-07-01	Test Mode	802.11be-EHT20 – Channel 1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9319.8	35.4	13.7	49.1	74.0	-24.9	Peak	Horizontal
*	10259.9	34.7	14.5	49.2	88.2	-39.0	Peak	Horizontal
	11456.7	35.7	14.8	50.5	74.0	-23.5	Peak	Horizontal
*	17304.7	37.0	16.5	53.5	88.2	-34.7	Peak	Horizontal
	9398.0	34.5	13.4	47.9	74.0	-26.1	Peak	Vertical
	11563.8	34.9	14.6	49.5	74.0	-24.5	Peak	Vertical
*	14010.1	35.2	15.7	50.9	88.2	-37.3	Peak	Vertical
*	14897.5	35.6	15.9	51.5	88.2	-36.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2024-07-01	Test Mode	802.11be-EHT20 – Channel 49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9919.9	36.1	14.4	50.5	88.2	-37.7	Peak	Horizontal
	10916.1	35.5	15.4	50.9	74.0	-23.1	Peak	Horizontal
	11500.9	36.2	14.8	51.0	74.0	-23.0	Peak	Horizontal
*	14756.4	36.7	16.3	53.0	88.2	-35.2	Peak	Horizontal
	12364.5	35.8	13.1	48.9	74.0	-25.1	Peak	Vertical
	13308.0	35.7	13.7	49.4	74.0	-24.6	Peak	Vertical
*	14037.3	35.0	15.7	50.7	88.2	-37.5	Peak	Vertical
*	14880.5	35.8	16.2	52.0	88.2	-36.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2024-07-01	Test Mode	802.11be-EHT20 – Channel 61
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBUV)	Factor (dB/m)	Measure Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Polarization
*	10033.8	35.3	14.0	49.3	88.2	-38.9	Peak	Horizontal
	11126.9	35.4	14.7	50.1	74.0	-23.9	Peak	Horizontal
	11545.1	36.1	14.7	50.8	74.0	-23.2	Peak	Horizontal
*	16998.7	37.3	15.8	53.1	88.2	-35.1	Peak	Horizontal
	9404.8	34.8	13.5	48.3	74.0	-25.7	Peak	Vertical
	10992.6	34.6	15.3	49.9	74.0	-24.1	Peak	Vertical
*	14552.4	36.2	16.4	52.6	88.2	-35.6	Peak	Vertical
*	17020.8	37.0	16.2	53.2	88.2	-35.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBUV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT20 – Channel 93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9314.7	35.3	13.7	49.0	74.0	-25.0	Peak	Horizontal
*	9894.4	35.8	13.9	49.7	88.2	-38.5	Peak	Horizontal
	11635.2	35.6	14.4	50.0	74.0	-24.0	Peak	Horizontal
*	14447.0	35.9	16.6	52.5	88.2	-35.7	Peak	Horizontal
	9425.2	35.3	13.6	48.9	74.0	-25.1	Peak	Vertical
*	9957.3	35.7	14.0	49.7	88.2	-38.5	Peak	Vertical
	11308.8	35.6	14.6	50.2	74.0	-23.8	Peak	Vertical
*	14290.6	35.3	16.4	51.7	88.2	-36.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT20 – Channel 97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9066.5	35.3	12.2	47.5	74.0	-26.5	Peak	Horizontal
*	9743.1	35.1	14.1	49.2	88.2	-39.0	Peak	Horizontal
	10943.3	34.8	15.3	50.1	74.0	-23.9	Peak	Horizontal
*	14521.8	36.7	16.6	53.3	88.2	-34.9	Peak	Horizontal
	9313.0	36.0	13.7	49.7	74.0	-24.3	Peak	Vertical
*	9714.2	35.3	14.0	49.3	88.2	-38.9	Peak	Vertical
	11383.6	35.5	14.8	50.3	74.0	-23.7	Peak	Vertical
*	14253.2	35.6	16.5	52.1	88.2	-36.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT20 – Channel 105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9452.4	35.1	13.4	48.5	74.0	-25.5	Peak	Horizontal
*	9829.8	35.6	14.5	50.1	88.2	-38.1	Peak	Horizontal
	11089.5	35.3	14.9	50.2	74.0	-23.8	Peak	Horizontal
*	17099.0	36.3	16.0	52.3	88.2	-35.9	Peak	Horizontal
	9301.1	35.3	13.6	48.9	74.0	-25.1	Peak	Vertical
*	9894.4	35.2	13.9	49.1	88.2	-39.1	Peak	Vertical
	11203.4	34.9	14.8	49.7	74.0	-24.3	Peak	Vertical
*	14367.1	36.0	16.6	52.6	88.2	-35.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT20 – Channel 113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9409.9	35.3	13.7	49.0	74.0	-25.0	Peak	Horizontal
*	10254.8	34.6	14.5	49.1	88.2	-39.1	Peak	Horizontal
	11473.7	35.5	14.8	50.3	74.0	-23.7	Peak	Horizontal
*	14185.2	36.9	16.2	53.1	88.2	-35.1	Peak	Horizontal
	9459.2	35.6	13.5	49.1	74.0	-24.9	Peak	Vertical
*	9914.8	34.4	14.4	48.8	88.2	-39.4	Peak	Vertical
	11028.3	35.0	15.4	50.4	74.0	-23.6	Peak	Vertical
*	14236.2	36.4	16.3	52.7	88.2	-35.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT20 – Channel 117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9967.5	34.6	14.1	48.7	88.2	-39.5	Peak	Horizontal
	11060.6	34.4	15.2	49.6	74.0	-24.4	Peak	Horizontal
	11414.2	34.9	14.7	49.6	74.0	-24.4	Peak	Horizontal
*	16983.4	37.1	15.7	52.8	88.2	-35.4	Peak	Horizontal
	9379.3	35.2	13.6	48.8	74.0	-25.2	Peak	Vertical
*	10547.2	34.6	15.0	49.6	88.2	-38.6	Peak	Vertical
	11296.9	35.1	14.7	49.8	74.0	-24.2	Peak	Vertical
*	14234.5	36.8	16.2	53.0	88.2	-35.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9398.0	35.5	13.4	48.9	74.0	-25.1	Peak	Horizontal
*	10265.0	34.9	14.5	49.4	88.2	-38.8	Peak	Horizontal
	11295.2	34.7	14.7	49.4	74.0	-24.6	Peak	Horizontal
*	14377.3	35.8	16.6	52.4	88.2	-35.8	Peak	Horizontal
	9309.6	35.1	13.7	48.8	74.0	-25.2	Peak	Vertical
*	9697.2	35.1	13.9	49.0	88.2	-39.2	Peak	Vertical
	11295.2	35.3	14.7	50.0	74.0	-24.0	Peak	Vertical
*	17017.4	36.3	16.2	52.5	88.2	-35.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT20 – Channel 181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9313.0	34.9	13.7	48.6	74.0	-25.4	Peak	Horizontal
*	10074.6	35.7	13.9	49.6	88.2	-38.6	Peak	Horizontal
	11290.1	35.5	14.7	50.2	74.0	-23.8	Peak	Horizontal
*	14202.2	36.4	16.2	52.6	88.2	-35.6	Peak	Horizontal
	9403.1	35.6	13.5	49.1	74.0	-24.9	Peak	Vertical
*	9987.9	35.7	14.2	49.9	88.2	-38.3	Peak	Vertical
	11431.2	35.7	14.9	50.6	74.0	-23.4	Peak	Vertical
*	16942.6	36.2	16.2	52.4	88.2	-35.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT20 – Channel 185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9319.8	35.4	13.7	49.1	74.0	-24.9	Peak	Horizontal
*	9704.0	36.1	14.0	50.1	88.2	-38.1	Peak	Horizontal
	11084.4	35.3	14.9	50.2	74.0	-23.8	Peak	Horizontal
*	14679.9	35.9	16.4	52.3	88.2	-35.9	Peak	Horizontal
	9313.0	35.9	13.7	49.6	74.0	-24.4	Peak	Vertical
*	9891.0	36.0	14.0	50.0	88.2	-38.2	Peak	Vertical
	10963.7	34.9	15.2	50.1	74.0	-23.9	Peak	Vertical
*	16923.9	35.9	15.8	51.7	88.2	-36.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT20 – Channel 189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9756.7	35.4	14.0	49.4	88.2	-38.8	Peak	Horizontal
	10928.0	34.3	15.4	49.7	74.0	-24.3	Peak	Horizontal
	11546.8	35.6	14.7	50.3	74.0	-23.7	Peak	Horizontal
*	14396.0	36.6	16.6	53.2	88.2	-35.0	Peak	Horizontal
*	9923.3	35.8	14.5	50.3	88.2	-37.9	Peak	Vertical
	11013.0	35.0	15.3	50.3	74.0	-23.7	Peak	Vertical
	11497.5	35.4	14.8	50.2	74.0	-23.8	Peak	Vertical
*	14246.4	36.0	16.6	52.6	88.2	-35.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT20 – Channel 209
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9449.0	36.7	13.4	50.1	74.0	-23.9	Peak	Horizontal
*	9746.5	35.6	14.0	49.6	88.2	-38.6	Peak	Horizontal
	11385.3	36.0	14.8	50.8	74.0	-23.2	Peak	Horizontal
*	17391.4	35.6	17.6	53.2	88.2	-35.0	Peak	Horizontal
	8264.1	35.3	10.0	45.3	74.0	-28.7	Peak	Vertical
*	9256.9	35.7	13.3	49.0	88.2	-39.2	Peak	Vertical
*	10001.5	35.3	14.1	49.4	88.2	-38.8	Peak	Vertical
	11495.8	35.1	14.7	49.8	74.0	-24.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT20 – Channel 229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9318.1	35.2	13.7	48.9	74.0	-25.1	Peak	Horizontal
*	10120.5	35.1	14.2	49.3	88.2	-38.9	Peak	Horizontal
	11436.3	34.9	14.9	49.8	74.0	-24.2	Peak	Horizontal
*	17020.8	36.6	16.2	52.8	88.2	-35.4	Peak	Horizontal
	8415.4	35.7	10.1	45.8	74.0	-28.2	Peak	Vertical
*	9979.4	35.1	14.2	49.3	88.2	-38.9	Peak	Vertical
	11602.9	35.0	14.4	49.4	74.0	-24.6	Peak	Vertical
*	14375.6	35.7	16.6	52.3	88.2	-35.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT40 – Channel 3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8257.3	35.1	10.0	45.1	74.0	-28.9	Peak	Horizontal
*	9953.9	35.4	14.0	49.4	88.2	-38.8	Peak	Horizontal
	11278.2	35.6	14.7	50.3	74.0	-23.7	Peak	Horizontal
*	17003.8	36.1	16.0	52.1	88.2	-36.1	Peak	Horizontal
	8378.0	35.5	9.9	45.4	74.0	-28.6	Peak	Vertical
*	9964.1	35.1	14.1	49.2	88.2	-39.0	Peak	Vertical
	11426.1	35.0	14.8	49.8	74.0	-24.2	Peak	Vertical
*	14195.4	35.9	16.3	52.2	88.2	-36.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT40 – Channel 51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9347.0	35.1	13.4	48.5	74.0	-25.5	Peak	Horizontal
	10922.9	34.8	15.4	50.2	74.0	-23.8	Peak	Horizontal
*	14462.3	36.1	16.6	52.7	88.2	-35.5	Peak	Horizontal
*	17071.8	37.4	16.0	53.4	88.2	-34.8	Peak	Horizontal
	9413.3	35.4	13.7	49.1	74.0	-24.9	Peak	Vertical
*	9969.2	34.4	14.1	48.5	88.2	-39.7	Peak	Vertical
	11262.9	34.9	14.7	49.6	74.0	-24.4	Peak	Vertical
*	17078.6	36.2	16.0	52.2	88.2	-36.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT40 – Channel 91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9365.7	36.1	13.6	49.7	74.0	-24.3	Peak	Horizontal
*	9741.4	35.4	14.1	49.5	88.2	-38.7	Peak	Horizontal
	11307.1	35.4	14.6	50.0	74.0	-24.0	Peak	Horizontal
*	14362.0	36.3	16.7	53.0	88.2	-35.2	Peak	Horizontal
	8447.7	35.4	10.3	45.7	74.0	-28.3	Peak	Vertical
*	9914.8	35.6	14.4	50.0	88.2	-38.2	Peak	Vertical
	11116.7	35.1	14.8	49.9	74.0	-24.1	Peak	Vertical
*	14356.9	35.6	16.6	52.2	88.2	-36.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT40 – Channel 99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9348.7	35.8	13.5	49.3	74.0	-24.7	Peak	Horizontal
*	9930.1	35.1	14.4	49.5	88.2	-38.7	Peak	Horizontal
	11155.8	35.3	14.7	50.0	74.0	-24.0	Peak	Horizontal
*	16961.3	36.8	15.9	52.7	88.2	-35.5	Peak	Horizontal
	9387.8	35.8	13.4	49.2	74.0	-24.8	Peak	Vertical
*	9974.3	36.1	14.2	50.3	88.2	-37.9	Peak	Vertical
	11057.2	34.8	15.2	50.0	74.0	-24.0	Peak	Vertical
*	17019.1	36.0	16.2	52.2	88.2	-36.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT40 – Channel 107
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8221.6	35.5	10.0	45.5	74.0	-28.5	Peak	Horizontal
*	9928.4	35.6	14.4	50.0	88.2	-38.2	Peak	Horizontal
	11072.5	35.4	15.1	50.5	74.0	-23.5	Peak	Horizontal
*	16983.4	36.5	15.7	52.2	88.2	-36.0	Peak	Horizontal
	7342.7	37.0	8.8	45.8	74.0	-28.2	Peak	Vertical
*	9823.0	34.9	14.7	49.6	88.2	-38.6	Peak	Vertical
	11064.0	36.0	15.3	51.3	74.0	-22.7	Peak	Vertical
	16942.6	31.6	16.2	47.8	68.2	-20.4	Average	Vertical
*	16942.6	36.6	16.2	52.8	88.2	-35.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT40 – Channel 115
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8048.2	35.7	10.3	46.0	74.0	-28.0	Peak	Horizontal
*	9875.7	36.0	14.2	50.2	88.2	-38.0	Peak	Horizontal
	11580.8	36.0	14.4	50.4	74.0	-23.6	Peak	Horizontal
*	14333.1	35.6	16.5	52.1	88.2	-36.1	Peak	Horizontal
	8262.4	35.3	10.0	45.3	74.0	-28.7	Peak	Vertical
*	9933.5	35.4	14.3	49.7	88.2	-38.5	Peak	Vertical
	11548.5	35.7	14.7	50.4	74.0	-23.6	Peak	Vertical
*	17073.5	36.5	16.0	52.5	88.2	-35.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT40 – Channel 123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9455.8	35.7	13.5	49.2	74.0	-24.8	Peak	Horizontal
*	10069.5	34.0	13.9	47.9	88.2	-40.3	Peak	Horizontal
	11492.4	35.4	14.7	50.1	74.0	-23.9	Peak	Horizontal
*	17007.2	36.2	16.1	52.3	88.2	-35.9	Peak	Horizontal
	9408.2	35.4	13.6	49.0	74.0	-25.0	Peak	Vertical
*	9885.9	35.5	14.1	49.6	88.2	-38.6	Peak	Vertical
	10990.9	35.0	15.4	50.4	74.0	-23.6	Peak	Vertical
*	14334.8	35.8	16.5	52.3	88.2	-35.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT40 – Channel 147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9314.7	35.3	13.7	49.0	74.0	-25.0	Peak	Horizontal
*	9969.2	35.1	14.1	49.2	88.2	-39.0	Peak	Horizontal
	11404.0	35.1	14.8	49.9	74.0	-24.1	Peak	Horizontal
*	16963.0	37.0	15.9	52.9	88.2	-35.3	Peak	Horizontal
*	9928.4	34.8	14.4	49.2	88.2	-39.0	Peak	Vertical
	10853.2	34.7	15.3	50.0	74.0	-24.0	Peak	Vertical
	11601.2	34.9	14.4	49.3	74.0	-24.7	Peak	Vertical
*	14453.8	35.3	16.6	51.9	88.2	-36.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT40 – Channel 179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8174.0	36.1	10.2	46.3	74.0	-27.7	Peak	Horizontal
*	9275.6	35.8	13.5	49.3	88.2	-38.9	Peak	Horizontal
*	9909.7	35.3	14.3	49.6	88.2	-38.6	Peak	Horizontal
	11575.7	35.8	14.4	50.2	74.0	-23.8	Peak	Horizontal
	8371.2	35.9	9.9	45.8	74.0	-28.2	Peak	Vertical
	9306.2	34.9	13.6	48.5	74.0	-25.5	Peak	Vertical
*	9976.0	35.1	14.2	49.3	88.2	-38.9	Peak	Vertical
*	14909.4	36.7	15.7	52.4	88.2	-35.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT40 – Channel 187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9314.7	34.9	13.7	48.6	74.0	-25.4	Peak	Horizontal
*	9977.7	35.0	14.2	49.2	88.2	-39.0	Peak	Horizontal
	11101.4	35.0	14.9	49.9	74.0	-24.1	Peak	Horizontal
*	14326.3	36.5	16.5	53.0	88.2	-35.2	Peak	Horizontal
*	10344.9	34.3	14.7	49.0	88.2	-39.2	Peak	Vertical
	11455.0	35.3	14.8	50.1	74.0	-23.9	Peak	Vertical
	12094.2	35.7	13.5	49.2	74.0	-24.8	Peak	Vertical
*	14278.7	36.3	16.4	52.7	88.2	-35.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT40 – Channel 195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9316.4	35.3	13.7	49.0	74.0	-25.0	Peak	Horizontal
*	10208.9	36.0	14.3	50.3	88.2	-37.9	Peak	Horizontal
	11264.6	35.3	14.7	50.0	74.0	-24.0	Peak	Horizontal
*	15048.8	36.2	15.2	51.4	88.2	-36.8	Peak	Horizontal
	9302.8	34.9	13.6	48.5	74.0	-25.5	Peak	Vertical
	11065.7	33.7	15.2	48.9	74.0	-25.1	Peak	Vertical
*	14868.6	34.6	16.3	50.9	88.2	-37.3	Peak	Vertical
*	17046.3	36.1	15.8	51.9	88.2	-36.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT40 – Channel 211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9416.7	34.8	13.7	48.5	74.0	-25.5	Peak	Horizontal
*	9925.0	35.0	14.5	49.5	88.2	-38.7	Peak	Horizontal
	11444.8	34.1	14.9	49.0	74.0	-25.0	Peak	Horizontal
*	14217.5	35.4	16.1	51.5	88.2	-36.7	Peak	Horizontal
	9432.0	35.0	13.5	48.5	74.0	-25.5	Peak	Vertical
*	9935.2	35.2	14.3	49.5	88.2	-38.7	Peak	Vertical
	11036.8	35.5	15.3	50.8	74.0	-23.2	Peak	Vertical
*	14406.2	35.7	16.5	52.2	88.2	-36.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT40 – Channel 227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9421.8	35.0	13.6	48.6	74.0	-25.4	Peak	Horizontal
*	10169.8	34.1	14.2	48.3	88.2	-39.9	Peak	Horizontal
	11449.9	34.4	14.9	49.3	74.0	-24.7	Peak	Horizontal
*	14243.0	35.8	16.5	52.3	88.2	-35.9	Peak	Horizontal
	8318.5	35.5	9.9	45.4	74.0	-28.6	Peak	Vertical
*	9909.7	34.3	14.3	48.6	88.2	-39.6	Peak	Vertical
	11550.2	35.5	14.7	50.2	74.0	-23.8	Peak	Vertical
*	17083.7	36.6	16.1	52.7	88.2	-35.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT80 – Channel 7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8306.6	36.2	10.0	46.2	74.0	-27.8	Peak	Horizontal
*	9969.2	37.1	14.1	51.2	88.2	-37.0	Peak	Horizontal
	11589.3	36.4	14.5	50.9	74.0	-23.1	Peak	Horizontal
*	16852.5	37.1	15.5	52.6	88.2	-35.6	Peak	Horizontal
	9415.0	35.5	13.7	49.2	74.0	-24.8	Peak	Vertical
*	9746.5	36.1	14.0	50.1	88.2	-38.1	Peak	Vertical
	11028.3	30.8	15.4	46.2	54.0	-7.8	Average	Vertical
	11028.3	36.6	15.4	52.0	74.0	-22.0	Peak	Vertical
*	17014.0	37.4	16.2	53.6	88.2	-34.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT80 – Channel 55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9052.9	37.0	11.9	48.9	74.0	-25.1	Peak	Horizontal
*	9739.7	35.5	14.1	49.6	88.2	-38.6	Peak	Horizontal
	11553.6	35.8	14.7	50.5	74.0	-23.5	Peak	Horizontal
*	14363.7	36.1	16.7	52.8	88.2	-35.4	Peak	Horizontal
	9311.3	35.9	13.7	49.6	74.0	-24.4	Peak	Vertical
	10917.8	30.2	15.4	45.6	54.0	-8.4	Average	Vertical
	10917.8	35.8	15.4	51.2	74.0	-22.8	Peak	Vertical
*	13918.3	36.7	15.5	52.2	88.2	-36.0	Peak	Vertical
*	16944.3	36.9	16.2	53.1	88.2	-35.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT80 – Channel 87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	10367.0	34.9	14.6	49.5	88.2	-38.7	Peak	Horizontal
*	11036.8	35.6	15.3	50.9	74.0	-23.1	Peak	Horizontal
*	11653.9	36.7	14.3	51.0	74.0	-23.0	Peak	Horizontal
	14438.5	36.8	16.5	53.3	88.2	-34.9	Peak	Horizontal
	9243.3	35.6	13.3	48.9	88.2	-39.3	Peak	Vertical
*	10652.6	35.8	15.2	51.0	74.0	-23.0	Peak	Vertical
*	11443.1	35.5	14.9	50.4	74.0	-23.6	Peak	Vertical
	14006.7	37.1	15.7	52.8	88.2	-35.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT80 – Channel 103
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9309.6	35.7	13.7	49.4	74.0	-24.6	Peak	Horizontal
*	9930.1	34.6	14.4	49.0	88.2	-39.2	Peak	Horizontal
	11502.6	35.9	14.9	50.8	74.0	-23.2	Peak	Horizontal
*	17121.1	37.2	16.2	53.4	88.2	-34.8	Peak	Horizontal
	9313.0	35.3	13.7	49.0	74.0	-25.0	Peak	Vertical
*	9666.6	36.4	13.9	50.3	88.2	-37.9	Peak	Vertical
	11101.4	35.9	14.9	50.8	74.0	-23.2	Peak	Vertical
*	16934.1	36.3	16.0	52.3	88.2	-35.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT80 – Channel 119
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9018.9	36.6	12.0	48.6	74.0	-25.4	Peak	Horizontal
*	9923.3	36.8	14.5	51.3	88.2	-36.9	Peak	Horizontal
	11431.2	30.3	14.9	45.2	54.0	-8.8	Average	Horizontal
	11431.2	36.3	14.9	51.2	74.0	-22.8	Peak	Horizontal
*	14953.6	37.0	15.8	52.8	88.2	-35.4	Peak	Horizontal
*	9838.3	35.4	14.2	49.6	88.2	-38.6	Peak	Vertical
	10916.1	34.3	15.4	49.7	74.0	-24.3	Peak	Vertical
	11448.2	35.6	14.9	50.5	74.0	-23.5	Peak	Vertical
*	16468.3	38.5	12.8	51.3	88.2	-36.9	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT80 – Channel 135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9347.0	34.4	13.4	47.8	74.0	-26.2	Peak	Horizontal
*	9698.9	35.8	13.9	49.7	88.2	-38.5	Peak	Horizontal
	11517.9	35.4	14.8	50.2	74.0	-23.8	Peak	Horizontal
*	16906.9	36.5	15.4	51.9	88.2	-36.3	Peak	Horizontal
	9311.3	35.4	13.7	49.1	74.0	-24.9	Peak	Vertical
*	9879.1	34.6	14.2	48.8	88.2	-39.4	Peak	Vertical
	11001.1	34.6	15.3	49.9	74.0	-24.1	Peak	Vertical
*	17257.1	36.1	16.0	52.1	88.2	-36.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT80 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9360.6	35.1	13.5	48.6	74.0	-25.4	Peak	Horizontal
*	10263.3	34.7	14.5	49.2	88.2	-39.0	Peak	Horizontal
	11594.4	35.5	14.5	50.0	74.0	-24.0	Peak	Horizontal
*	17066.7	36.9	16.0	52.9	88.2	-35.3	Peak	Horizontal
	9382.7	34.5	13.5	48.0	74.0	-26.0	Peak	Vertical
*	9909.7	35.3	14.3	49.6	88.2	-38.6	Peak	Vertical
	10980.7	34.7	15.4	50.1	74.0	-23.9	Peak	Vertical
*	17456.0	35.9	18.3	54.2	88.2	-34.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT80 – Channel 167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9314.7	34.9	13.7	48.6	74.0	-25.4	Peak	Horizontal
*	9925.0	35.1	14.5	49.6	88.2	-38.6	Peak	Horizontal
	11400.6	35.1	14.8	49.9	74.0	-24.1	Peak	Horizontal
*	14771.7	36.2	16.4	52.6	88.2	-35.6	Peak	Horizontal
	9336.8	34.5	13.5	48.0	74.0	-26.0	Peak	Vertical
*	10098.4	35.0	14.0	49.0	88.2	-39.2	Peak	Vertical
	11477.1	34.8	14.8	49.6	74.0	-24.4	Peak	Vertical
*	17029.3	36.3	16.2	52.5	88.2	-35.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT80 – Channel 183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9335.1	34.3	13.5	47.8	74.0	-26.2	Peak	Horizontal
*	9868.9	34.5	14.3	48.8	88.2	-39.4	Peak	Horizontal
	11302.0	35.0	14.7	49.7	74.0	-24.3	Peak	Horizontal
*	13738.1	38.0	14.8	52.8	88.2	-35.4	Peak	Horizontal
	9365.7	34.3	13.6	47.9	74.0	-26.1	Peak	Vertical
*	10166.4	34.3	14.2	48.5	88.2	-39.7	Peak	Vertical
	11404.0	34.2	14.8	49.0	74.0	-25.0	Peak	Vertical
*	14591.5	35.9	16.6	52.5	88.2	-35.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT80 – Channel 199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9918.2	35.0	14.4	49.4	88.2	-38.8	Peak	Horizontal
	11380.2	36.1	14.8	50.9	74.0	-23.1	Peak	Horizontal
	14475.9	37.2	16.5	53.7	74.0	-20.3	Peak	Horizontal
*	16961.3	37.0	15.9	52.9	88.2	-35.3	Peak	Horizontal
	9457.5	34.9	13.5	48.4	74.0	-25.6	Peak	Vertical
*	9926.7	35.3	14.5	49.8	88.2	-38.4	Peak	Vertical
	11405.7	35.5	14.8	50.3	74.0	-23.7	Peak	Vertical
*	14277.0	35.5	16.4	51.9	88.2	-36.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT80 – Channel 215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9913.1	34.3	14.4	48.7	88.2	-39.5	Peak	Horizontal
	11193.2	35.7	14.8	50.5	74.0	-23.5	Peak	Horizontal
	11453.3	35.2	14.8	50.0	74.0	-24.0	Peak	Horizontal
*	14345.0	35.3	16.5	51.8	88.2	-36.4	Peak	Horizontal
	9404.8	34.1	13.5	47.6	74.0	-26.4	Peak	Vertical
*	10055.9	35.0	14.0	49.0	88.2	-39.2	Peak	Vertical
	10996.0	35.0	15.3	50.3	74.0	-23.7	Peak	Vertical
*	17090.5	36.1	16.0	52.1	88.2	-36.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT160 – Channel 15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9377.6	35.2	13.6	48.8	74.0	-25.2	Peak	Horizontal
*	9926.7	35.3	14.5	49.8	88.2	-38.4	Peak	Horizontal
	11432.9	35.0	14.9	49.9	74.0	-24.1	Peak	Horizontal
*	17024.2	35.6	16.2	51.8	88.2	-36.4	Peak	Horizontal
	9413.3	35.2	13.7	48.9	74.0	-25.1	Peak	Vertical
*	9976.0	35.3	14.2	49.5	88.2	-38.7	Peak	Vertical
	11256.1	35.7	14.6	50.3	74.0	-23.7	Peak	Vertical
*	17073.5	36.9	16.0	52.9	88.2	-35.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT160 – Channel 47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9355.5	35.0	13.5	48.5	74.0	-25.5	Peak	Horizontal
*	9919.9	34.5	14.4	48.9	88.2	-39.3	Peak	Horizontal
	11500.9	35.5	14.8	50.3	74.0	-23.7	Peak	Horizontal
*	16959.6	36.2	15.9	52.1	88.2	-36.1	Peak	Horizontal
	9379.3	34.5	13.6	48.1	74.0	-25.9	Peak	Vertical
*	9911.4	35.9	14.4	50.3	88.2	-37.9	Peak	Vertical
	11477.1	35.9	14.8	50.7	74.0	-23.3	Peak	Vertical
*	17041.2	36.6	15.9	52.5	88.2	-35.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT160 – Channel 79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9379.3	34.5	13.6	48.1	74.0	-25.9	Peak	Horizontal
*	9911.4	35.9	14.4	50.3	88.2	-37.9	Peak	Horizontal
	11477.1	35.9	14.8	50.7	74.0	-23.3	Peak	Horizontal
*	17041.2	36.6	15.9	52.5	88.2	-35.7	Peak	Horizontal
	9421.8	35.4	13.6	49.0	74.0	-25.0	Peak	Vertical
*	9928.4	34.9	14.4	49.3	88.2	-38.9	Peak	Vertical
	11664.1	35.7	14.2	49.9	74.0	-24.1	Peak	Vertical
*	17488.3	34.8	18.7	53.5	88.2	-34.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT160 – Channel 111
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9421.8	35.4	13.6	49.0	74.0	-25.0	Peak	Horizontal
*	9928.4	34.9	14.4	49.3	88.2	-38.9	Peak	Horizontal
	11664.1	35.7	14.2	49.9	74.0	-24.1	Peak	Horizontal
*	17488.3	34.8	18.7	53.5	88.2	-34.7	Peak	Horizontal
	9437.1	34.6	13.4	48.0	74.0	-26.0	Peak	Vertical
*	9964.1	34.8	14.1	48.9	88.2	-39.3	Peak	Vertical
	11538.3	34.8	14.7	49.5	74.0	-24.5	Peak	Vertical
*	17017.4	36.5	16.2	52.7	88.2	-35.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT160 – Channel 143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9447.3	33.3	13.3	46.6	74.0	-27.4	Peak	Horizontal
	11111.6	35.9	14.9	50.8	74.0	-23.2	Peak	Horizontal
*	14333.1	36.6	16.5	53.1	88.2	-35.1	Peak	Horizontal
*	17263.9	35.3	15.9	51.2	88.2	-37.0	Peak	Horizontal
	9367.4	34.2	13.6	47.8	74.0	-26.2	Peak	Vertical
	11468.6	35.2	14.8	50.0	74.0	-24.0	Peak	Vertical
*	14307.6	35.1	16.4	51.5	88.2	-36.7	Peak	Vertical
*	17012.3	36.5	16.2	52.7	88.2	-35.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT160 – Channel 175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9353.8	35.1	13.5	48.6	74.0	-25.4	Peak	Horizontal
*	9919.9	34.9	14.4	49.3	88.2	-38.9	Peak	Horizontal
	11057.2	35.5	15.2	50.7	74.0	-23.3	Peak	Horizontal
*	17161.9	36.4	15.9	52.3	88.2	-35.9	Peak	Horizontal
	8257.3	35.4	10.0	45.4	74.0	-28.6	Peak	Vertical
*	10013.4	35.1	14.1	49.2	88.2	-39.0	Peak	Vertical
	11109.9	35.3	14.9	50.2	74.0	-23.8	Peak	Vertical
*	14103.6	36.3	16.0	52.3	88.2	-35.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT160 – Channel 207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8318.5	34.5	9.9	44.4	74.0	-29.6	Peak	Horizontal
*	9986.2	34.0	14.2	48.2	88.2	-40.0	Peak	Horizontal
	11160.9	34.3	14.8	49.1	74.0	-24.9	Peak	Horizontal
*	16993.6	37.8	15.7	53.5	88.2	-34.7	Peak	Horizontal
	8315.1	35.5	10.0	45.5	74.0	-28.5	Peak	Vertical
*	10265.0	34.4	14.5	48.9	88.2	-39.3	Peak	Vertical
	11495.8	35.5	14.7	50.2	74.0	-23.8	Peak	Vertical
*	13872.4	36.6	15.4	52.0	88.2	-36.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT320-1 – Channel 31
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8202.9	35.8	10.0	45.8	74.0	-28.2	Peak	Horizontal
*	9906.3	35.4	14.2	49.6	88.2	-38.6	Peak	Horizontal
	11353.0	35.9	14.7	50.6	74.0	-23.4	Peak	Horizontal
*	16920.5	37.2	15.7	52.9	88.2	-35.3	Peak	Horizontal
	8202.9	36.7	10.0	46.7	74.0	-27.3	Peak	Vertical
*	9969.2	35.4	14.1	49.5	88.2	-38.7	Peak	Vertical
	11494.1	35.9	14.7	50.6	74.0	-23.4	Peak	Vertical
*	16974.9	35.7	15.9	51.6	88.2	-36.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT320-1 – Channel 95
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9423.5	34.4	13.6	48.0	74.0	-26.0	Peak	Horizontal
*	9970.9	34.6	14.2	48.8	88.2	-39.4	Peak	Horizontal
	11431.2	34.6	14.9	49.5	74.0	-24.5	Peak	Horizontal
*	16963.0	36.1	15.9	52.0	88.2	-36.2	Peak	Horizontal
	9416.7	34.1	13.7	47.8	74.0	-26.2	Peak	Vertical
	11475.4	35.1	14.8	49.9	74.0	-24.1	Peak	Vertical
*	14380.7	36.0	16.6	52.6	88.2	-35.6	Peak	Vertical
*	17478.1	35.5	18.5	54.0	88.2	-34.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT320-1 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9423.5	34.4	13.6	48.0	74.0	-26.0	Peak	Horizontal
*	9970.9	34.6	14.2	48.8	88.2	-39.4	Peak	Horizontal
	11431.2	34.6	14.9	49.5	74.0	-24.5	Peak	Horizontal
*	16963.0	36.1	15.9	52.0	88.2	-36.2	Peak	Horizontal
	9336.8	34.5	13.5	48.0	74.0	-26.0	Peak	Vertical
*	9923.3	34.7	14.5	49.2	88.2	-39.0	Peak	Vertical
	11630.1	35.1	14.4	49.5	74.0	-24.5	Peak	Vertical
*	16905.2	36.4	15.4	51.8	88.2	-36.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT320-2 – Channel 63
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9416.7	35.0	13.7	48.7	74.0	-25.3	Peak	Horizontal
*	9921.6	34.9	14.5	49.4	88.2	-38.8	Peak	Horizontal
	11446.5	35.5	14.9	50.4	74.0	-23.6	Peak	Horizontal
*	14205.6	36.0	16.2	52.2	88.2	-36.0	Peak	Horizontal
	9316.4	34.9	13.7	48.6	74.0	-25.4	Peak	Vertical
*	9930.1	35.4	14.4	49.8	88.2	-38.4	Peak	Vertical
	11475.4	35.5	14.8	50.3	74.0	-23.7	Peak	Vertical
*	17396.5	35.1	17.7	52.8	88.2	-35.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT320-2 – Channel 127
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		


Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8230.1	35.8	10.0	45.8	74.0	-28.2	Peak	Horizontal
*	10004.9	34.8	14.1	48.9	88.2	-39.3	Peak	Horizontal
	11472.0	35.1	14.8	49.9	74.0	-24.1	Peak	Horizontal
*	13818.0	37.4	15.1	52.5	88.2	-35.7	Peak	Horizontal
	9338.5	35.1	13.4	48.5	74.0	-25.5	Peak	Vertical
*	9749.9	35.8	14.0	49.8	88.2	-38.4	Peak	Vertical
	11432.9	35.2	14.9	50.1	74.0	-23.9	Peak	Vertical
*	16850.8	37.2	15.5	52.7	88.2	-35.5	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	WZ-AC1	Test Engineer	Dick Shen
Test Site	2024-07-01	Test Mode	802.11be-EHT320-2 – Channel 191
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9353.8	35.3	13.5	48.8	74.0	-25.2	Peak	Horizontal
*	9938.6	34.8	14.2	49.0	88.2	-39.2	Peak	Horizontal
	11546.8	35.6	14.7	50.3	74.0	-23.7	Peak	Horizontal
*	13916.6	38.0	15.5	53.5	88.2	-34.7	Peak	Horizontal
	9374.2	35.3	13.7	49.0	74.0	-25.0	Peak	Vertical
*	9872.3	36.0	14.2	50.2	88.2	-38.0	Peak	Vertical
	11618.2	35.9	14.3	50.2	74.0	-23.8	Peak	Vertical
*	16857.6	36.6	15.6	52.2	88.2	-36.0	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

The Result of Radiated Emission for 30MHz ~ 1GHz:

Site	WZ-AC1	Test Date	2024-07-11
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	VULB 9168_25-1000MHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6745MHz		

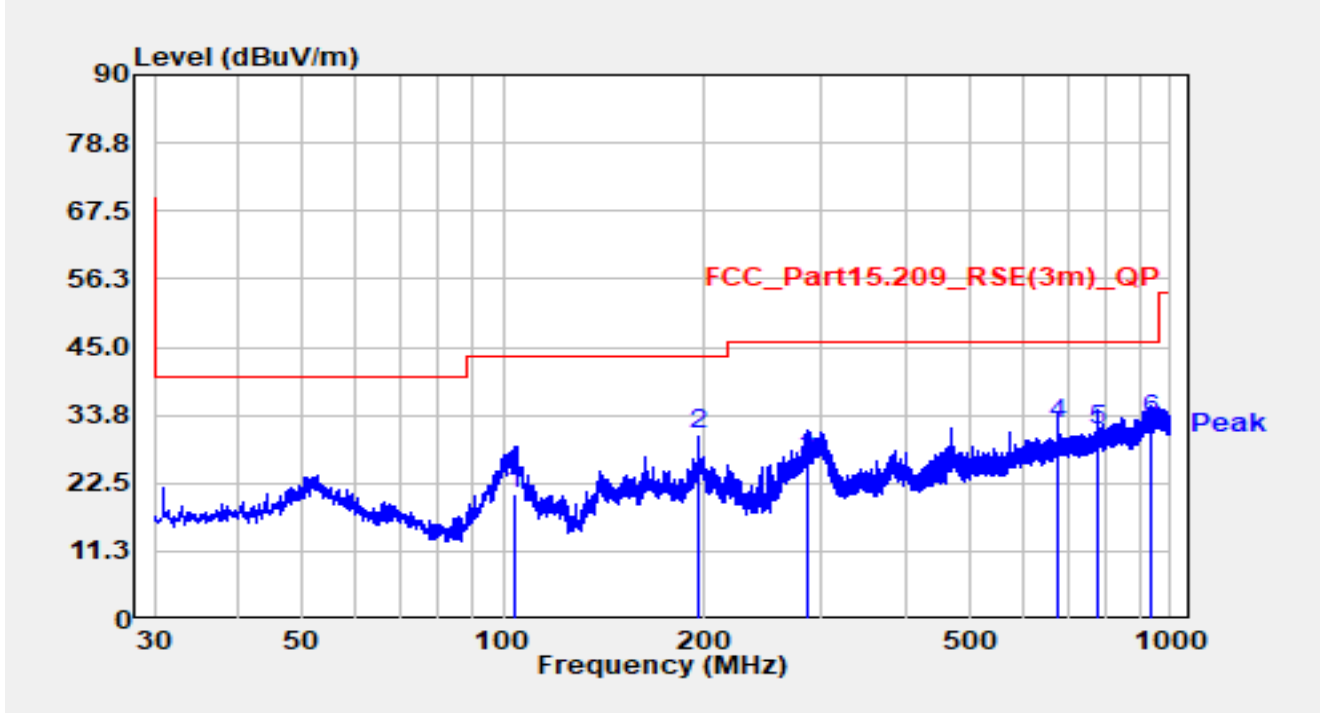


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		103.720	6.36	14.51	20.87	-22.63	43.50	QP
2	*	196.840	15.30	15.22	30.52	-12.98	43.50	QP
3		285.983	7.53	18.50	26.03	-19.97	46.00	QP
4		676.020	5.32	26.97	32.29	-13.71	46.00	QP
5		780.101	2.30	28.85	31.15	-14.85	46.00	QP
6		938.114	2.30	30.69	32.99	-13.01	46.00	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	WZ-AC1	Test Date	2024-07-11
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	VULB 9168_25-1000MHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6745MHz		

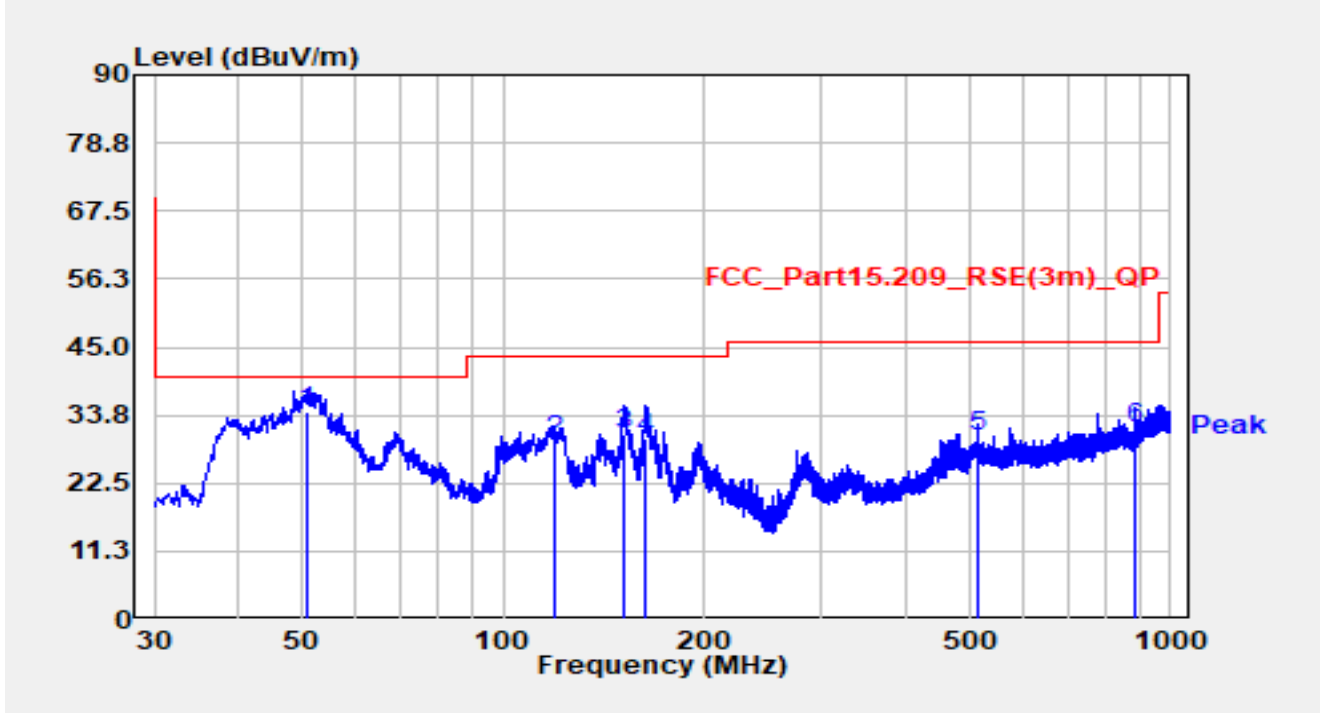


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	50.758	15.69	18.50	34.19	-5.81	40.00	QP
2		119.337	13.30	16.16	29.46	-14.04	43.50	QP
3		151.735	12.30	18.28	30.58	-12.92	43.50	QP
4		163.084	11.66	18.40	30.06	-13.44	43.50	QP
5		515.776	6.32	24.04	30.36	-15.64	46.00	QP
6		884.085	2.32	29.42	31.74	-14.26	46.00	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.9 Radiated Restricted Band Edge Test Result

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5955MHz		

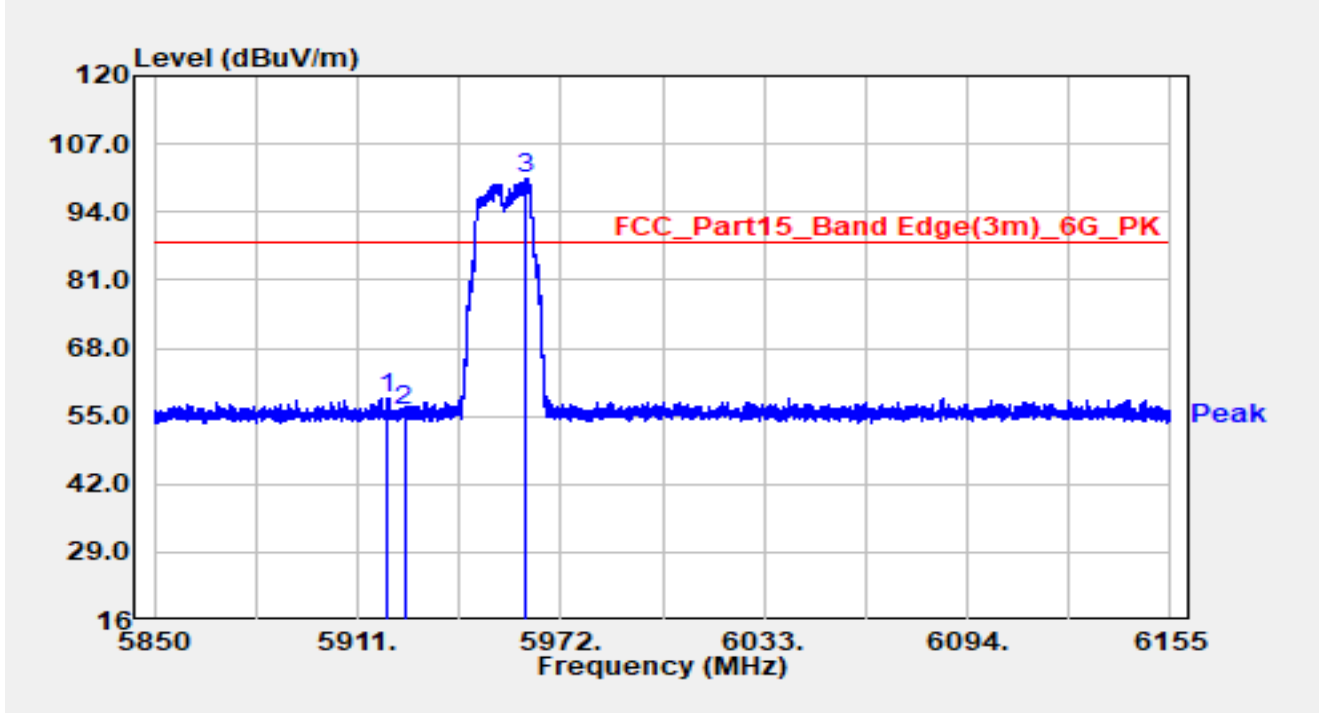


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.181	53.00	5.54	58.54	-29.66	88.20	Peak
2		5925.000	50.37	5.55	55.92	-32.28	88.20	Peak
3		5961.569	94.95	5.34	100.29	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5955MHz		

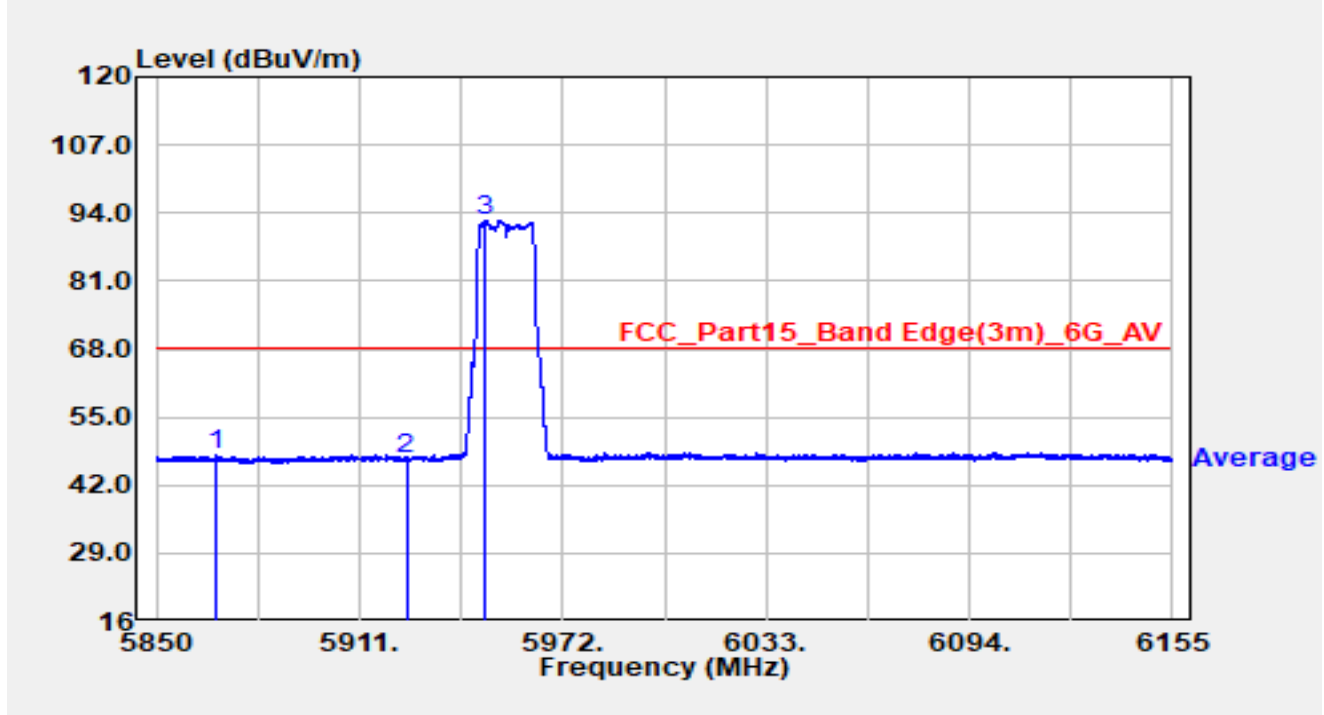


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5867.995	42.13	5.54	47.67	-20.53	68.20	Average
2		5925.000	41.39	5.55	46.95	-21.25	68.20	Average
3		5948.362	87.07	5.47	92.55	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5955MHz		

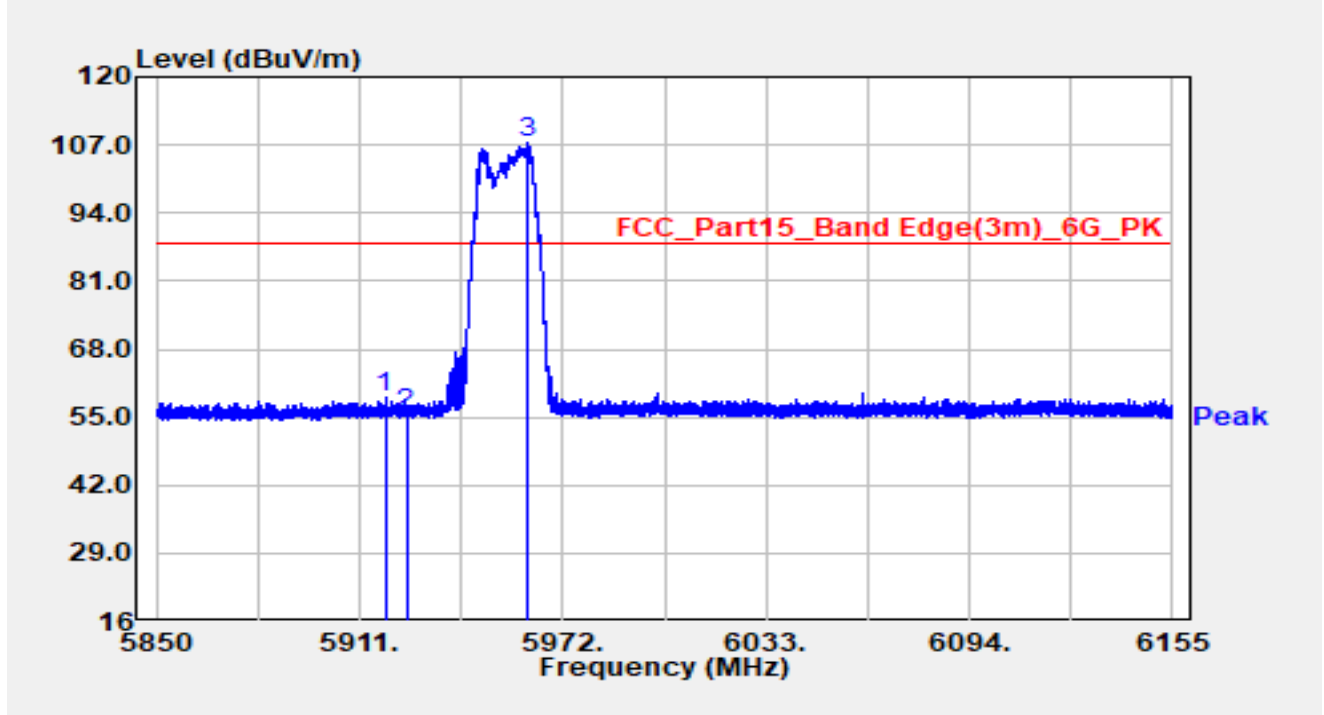


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5918.625	53.10	5.53	58.64	-29.56	88.20	Peak
2		5925.000	49.93	5.55	55.49	-32.71	88.20	Peak
3		5961.233	101.94	5.35	107.28	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5955MHz		

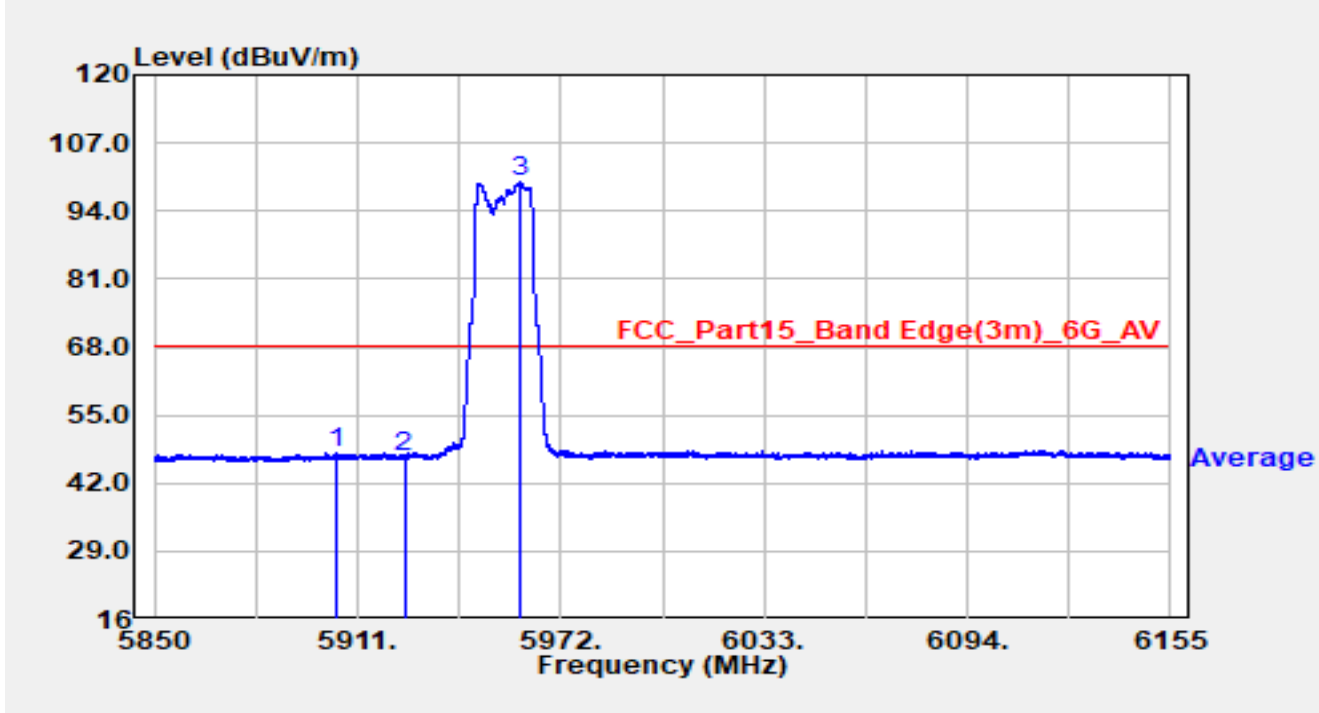


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5904.717	42.47	5.42	47.89	-20.31	68.20	Average
2		5925.000	41.44	5.55	47.00	-21.20	68.20	Average
3		5959.556	94.19	5.37	99.55	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 7095MHz		

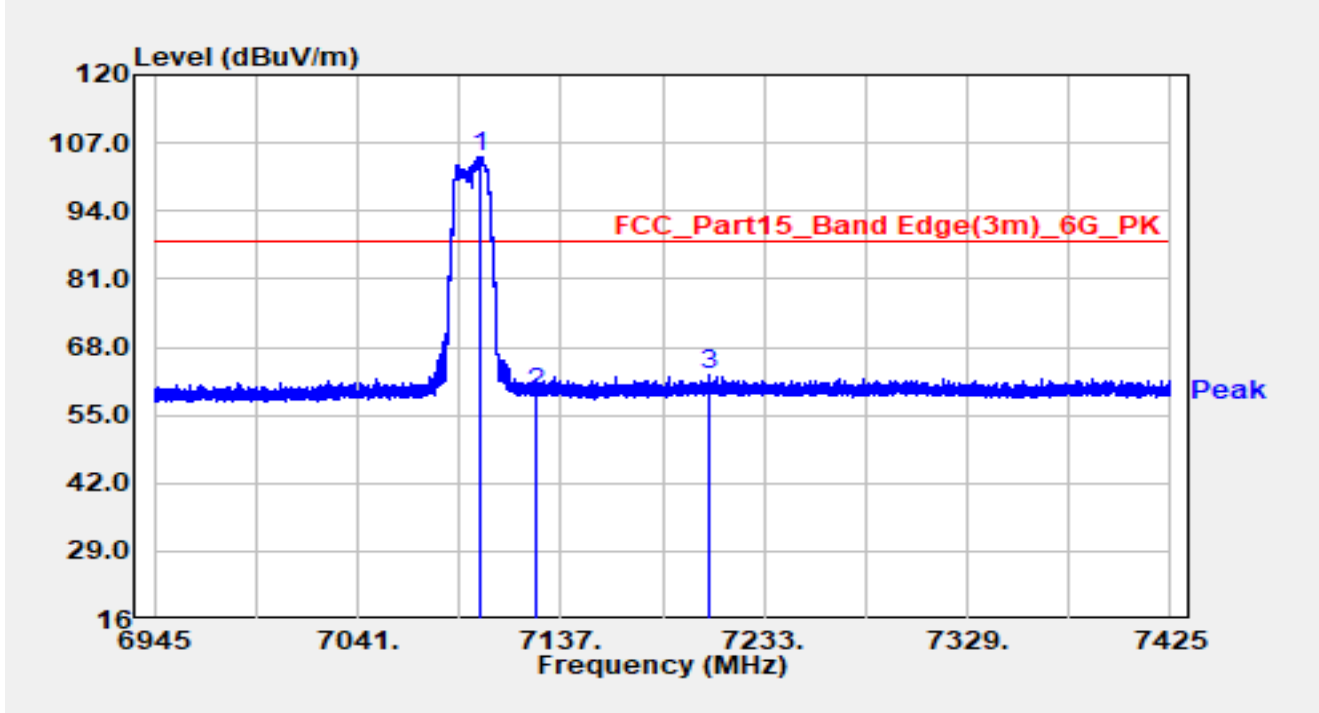


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7098.792	95.75	8.64	104.39	N/A	N/A	Peak
2		7125.000	50.22	8.76	58.98	-29.22	88.20	Peak
3	*	7206.840	53.57	9.06	62.63	-25.57	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 7095MHz		

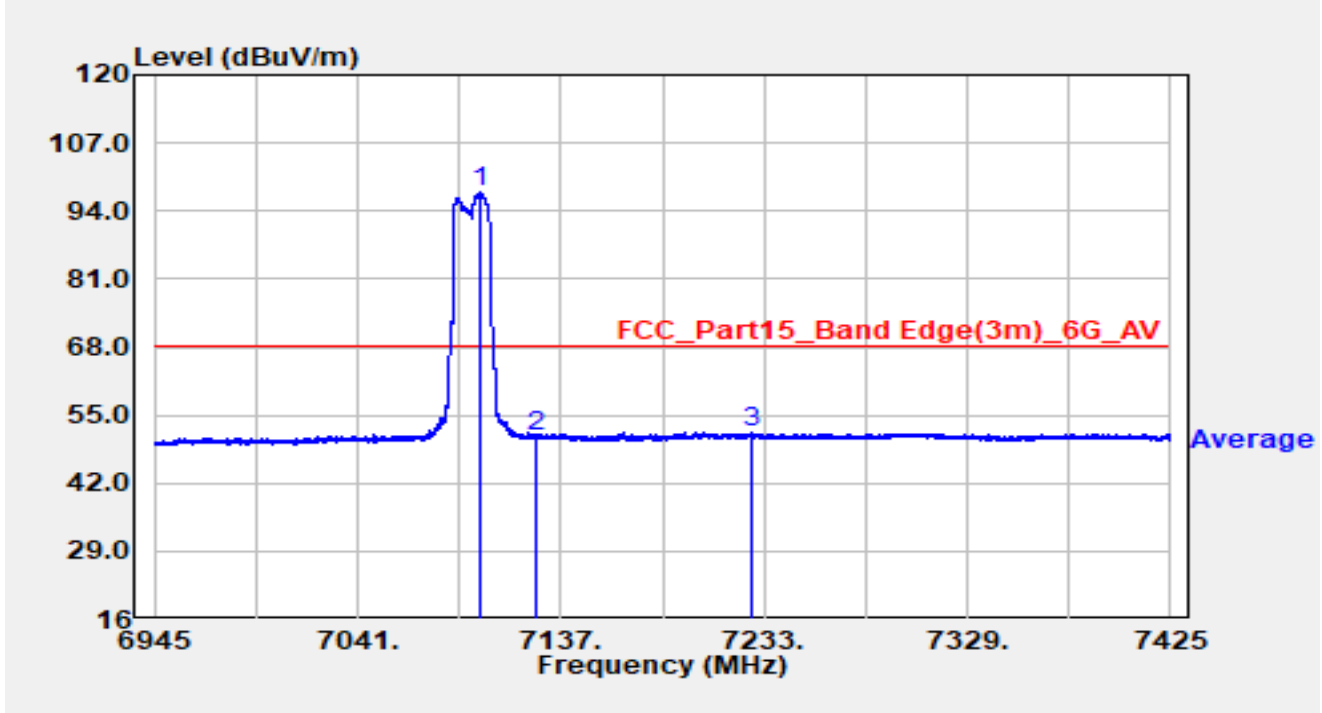


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7099.224	88.99	8.65	97.64	N/A	N/A	Average
2		7125.000	42.04	8.76	50.80	-17.40	68.20	Average
3	*	7227.624	42.67	8.96	51.63	-16.57	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 7095MHz		

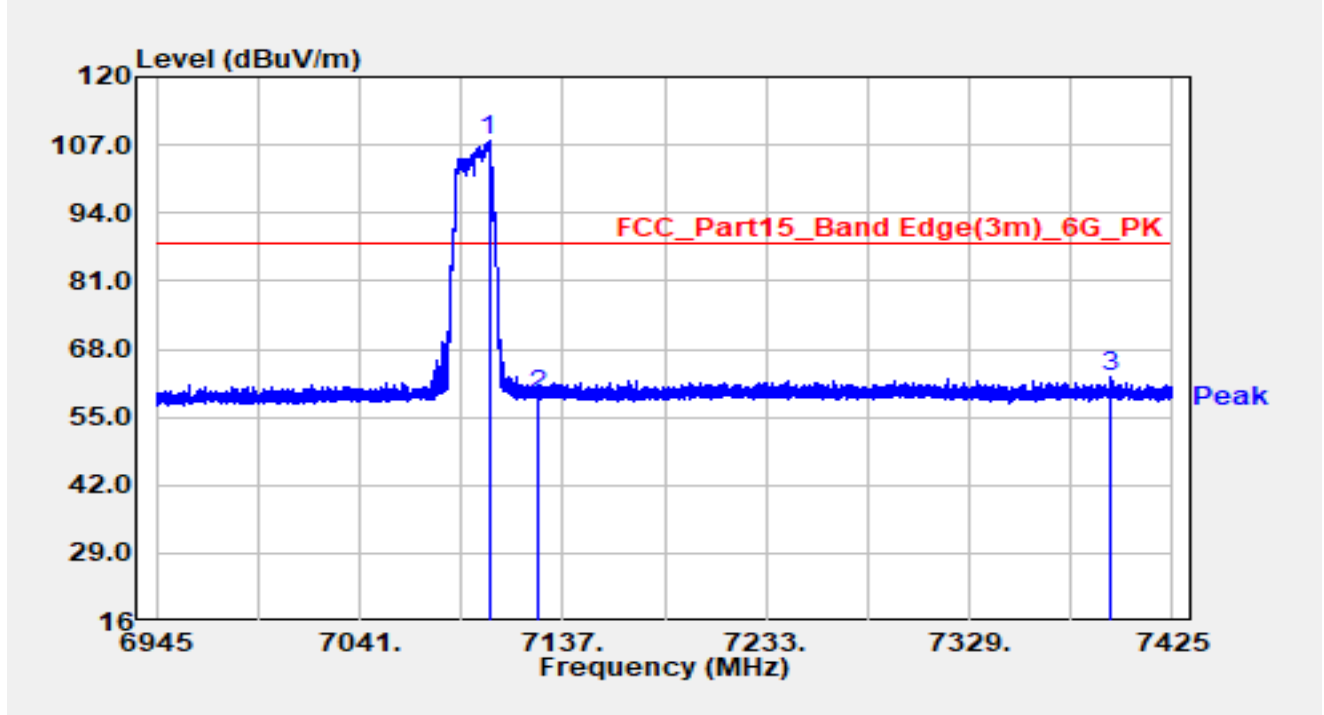


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7102.056	98.97	8.72	107.69	N/A	N/A	Peak
2		7125.000	50.54	8.76	59.30	-28.90	88.20	Peak
3	*	7395.480	53.44	9.29	62.73	-25.47	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 7095MHz		

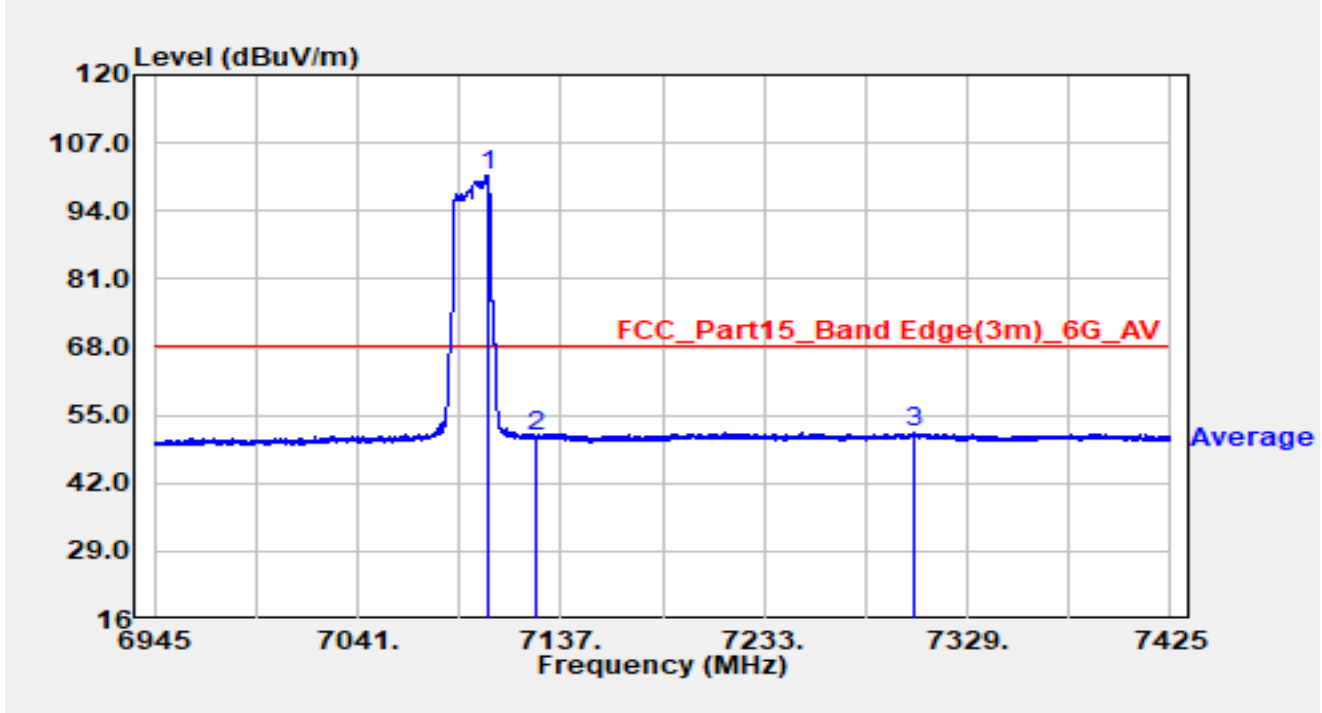


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7102.104	92.03	8.72	100.75	N/A	N/A	Average
2		7125.000	42.11	8.76	50.87	-17.33	68.20	Average
3	*	7303.464	42.29	9.34	51.62	-16.58	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

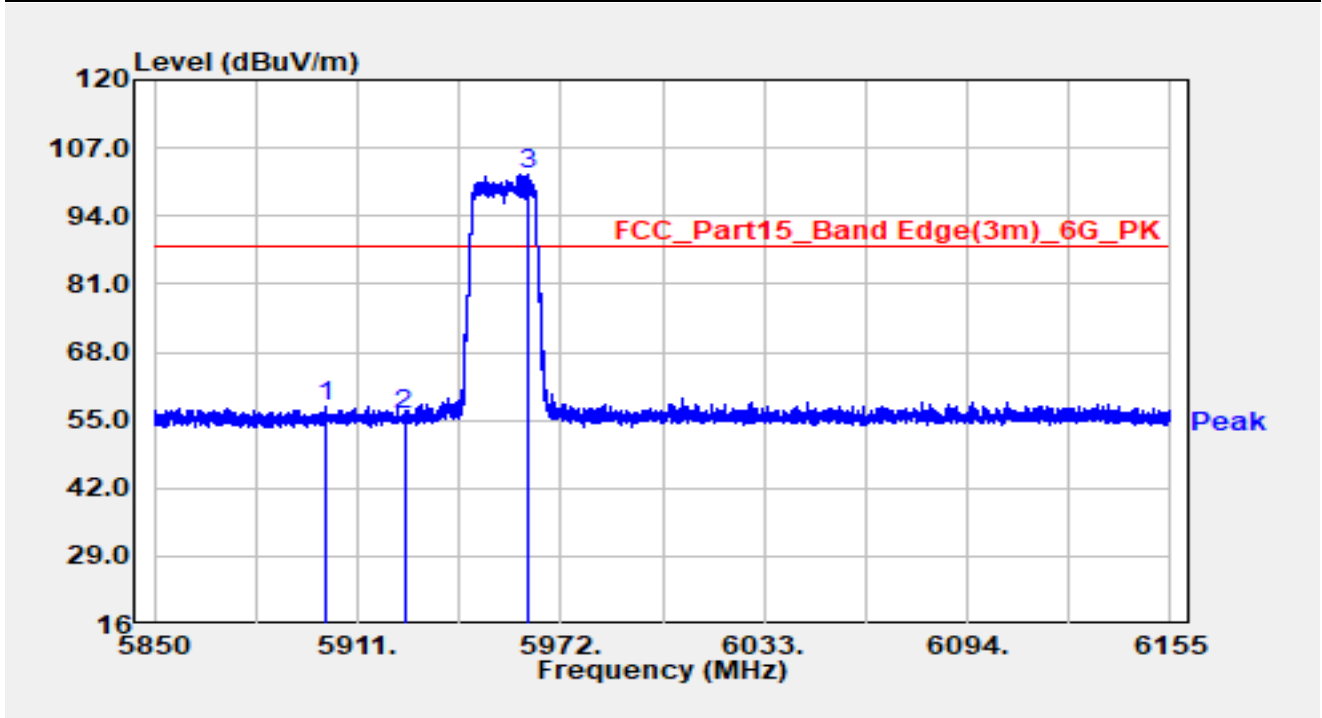


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5901.515	52.02	5.39	57.41	-30.79	88.20	Peak
2		5925.000	50.63	5.55	56.18	-32.02	88.20	Peak
3		5961.843	96.70	5.34	102.04	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

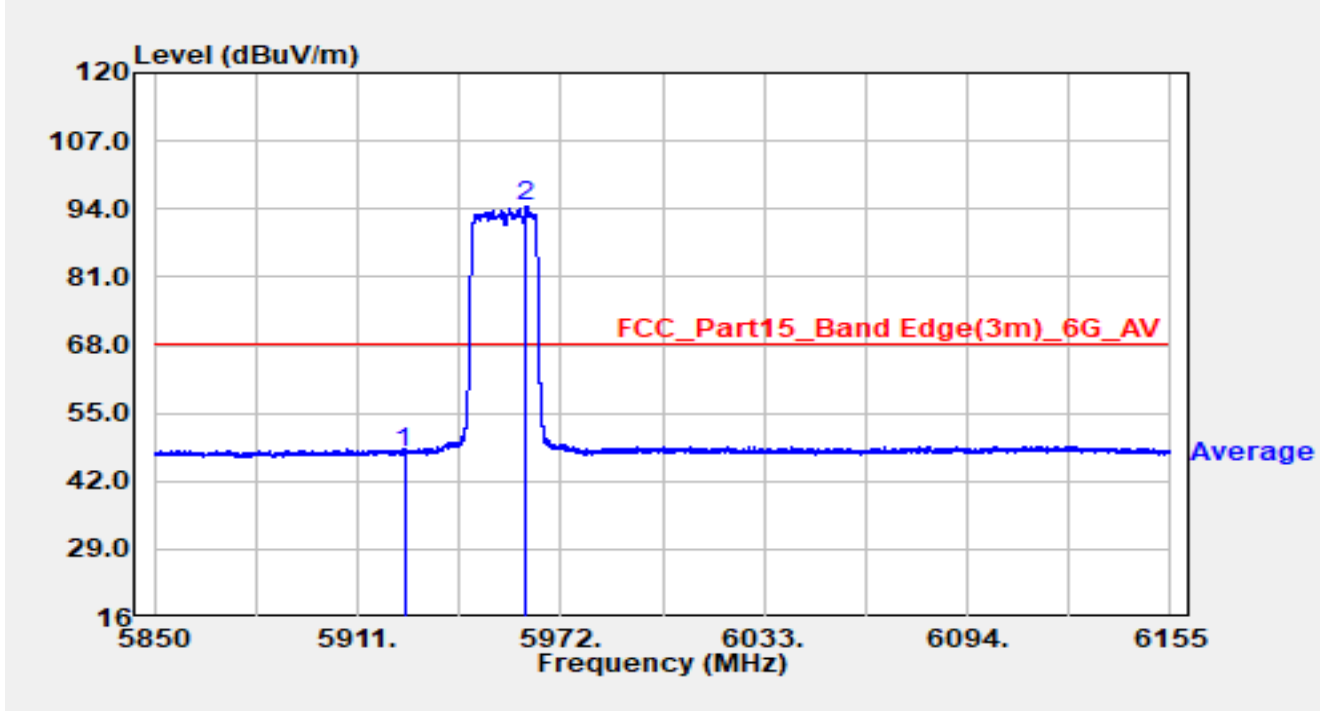


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	41.73	5.55	47.28	-20.92	68.20	Average
2		5961.722	89.13	5.34	94.47	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

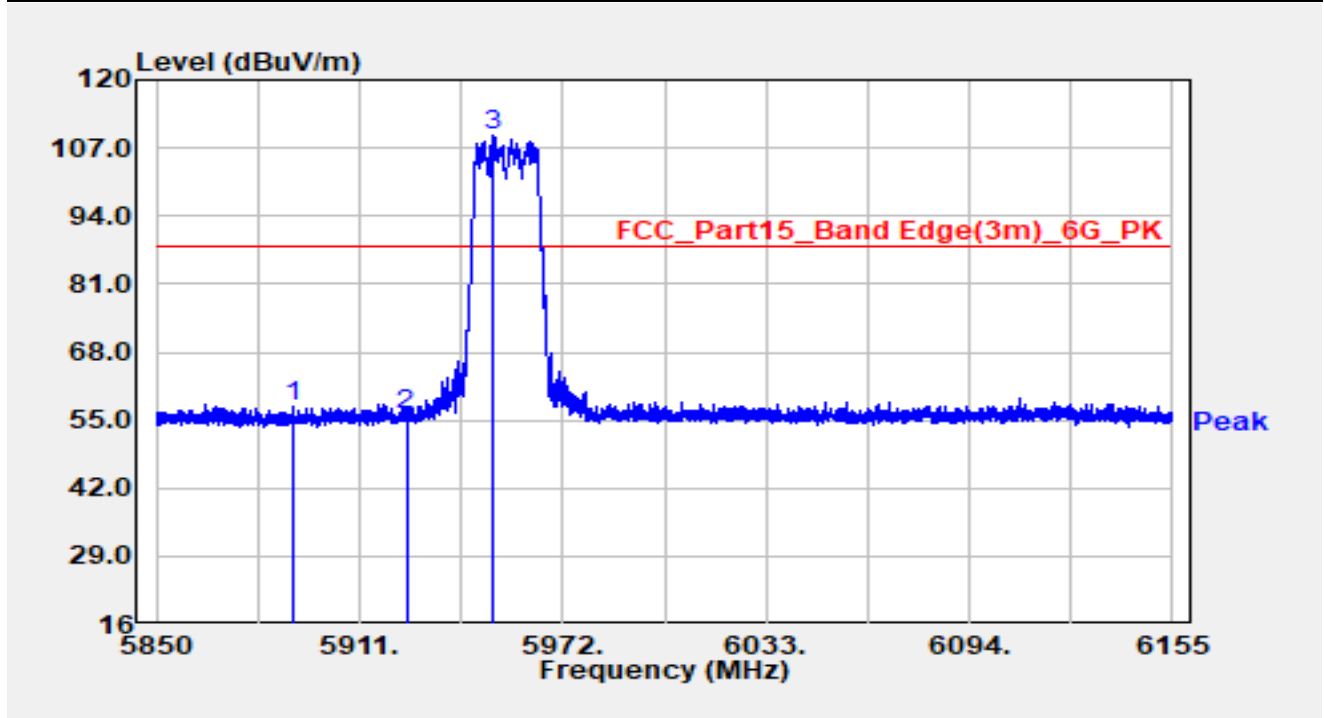


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5891.083	52.31	5.34	57.65	-30.55	88.20	Peak
2		5925.000	50.56	5.55	56.12	-32.08	88.20	Peak
3		5951.168	104.12	5.45	109.57	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

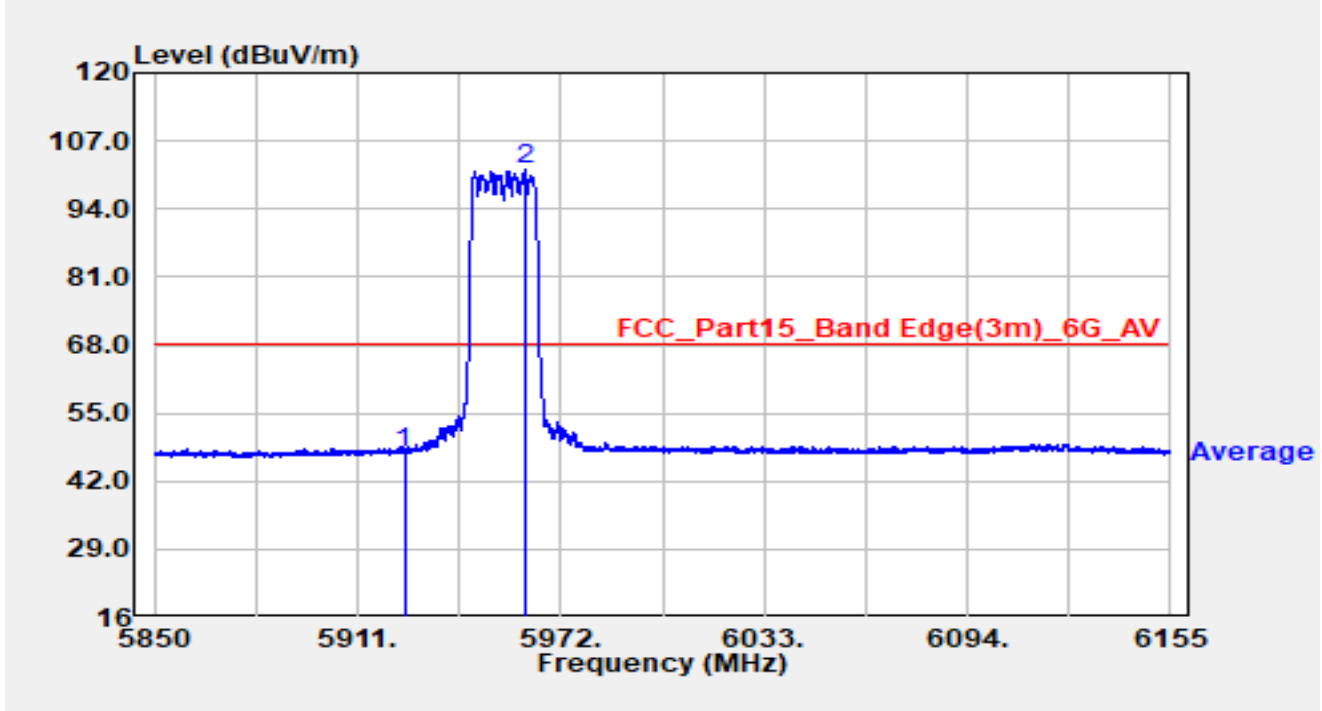


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	42.04	5.55	47.59	-20.61	68.20	Average
2		5961.142	96.11	5.35	101.46	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

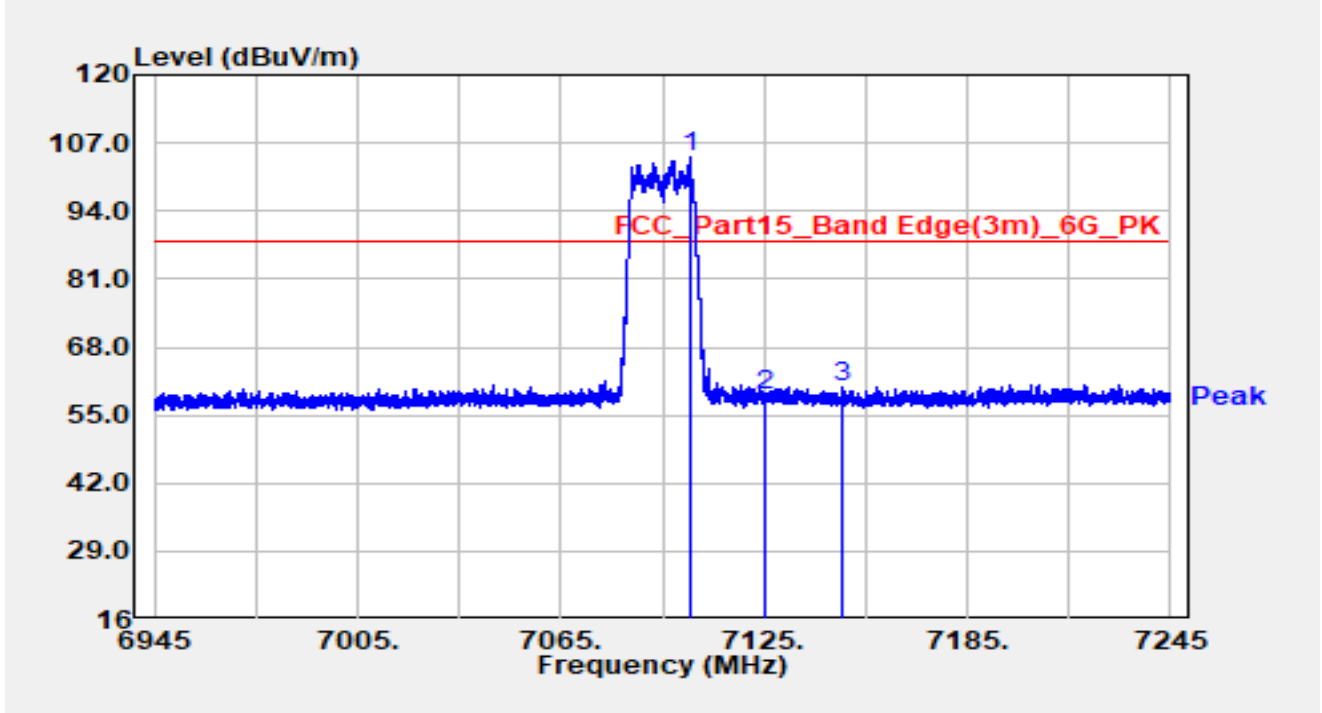


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7103.100	95.76	8.74	104.50	N/A	N/A	Peak
2		7125.000	50.02	8.76	58.78	-29.42	88.20	Peak
3	*	7148.010	51.54	8.71	60.25	-27.95	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

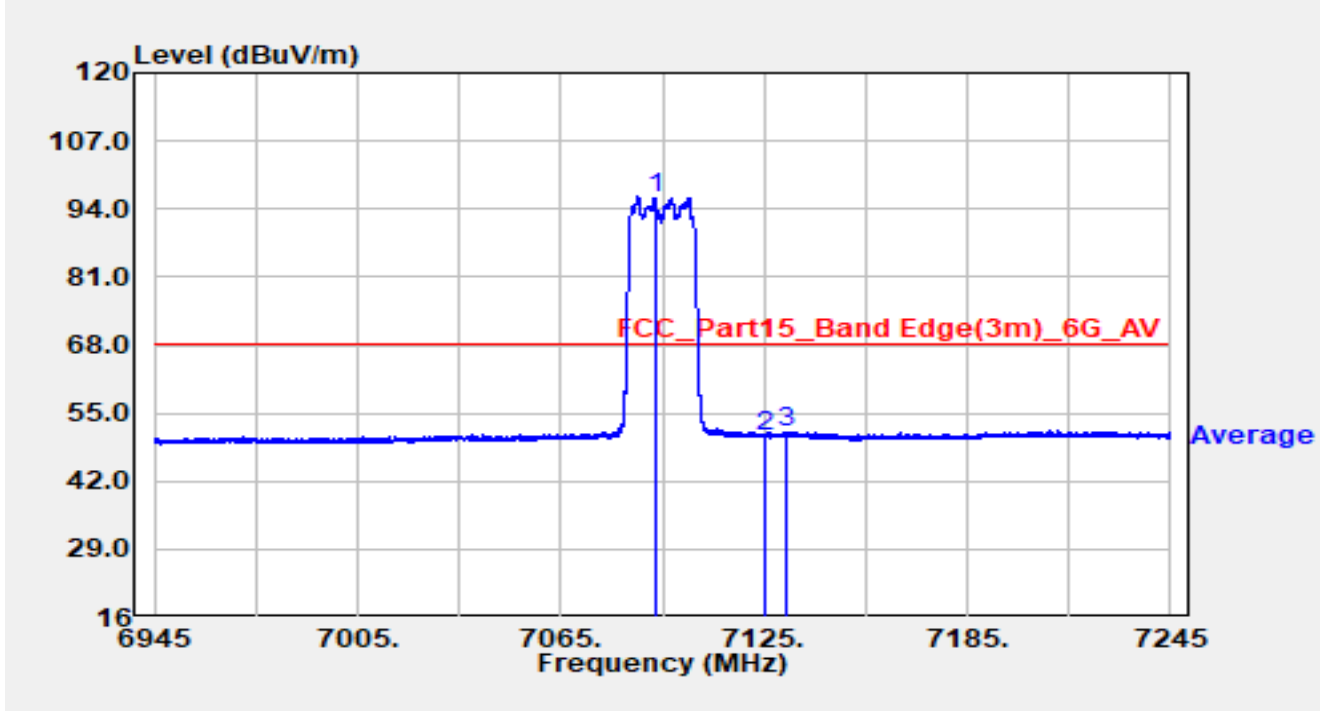


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7092.720	87.56	8.51	96.07	N/A	N/A	Average
2		7125.000	41.87	8.76	50.63	-17.57	68.20	Average
3	*	7131.390	42.68	8.81	51.49	-16.71	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

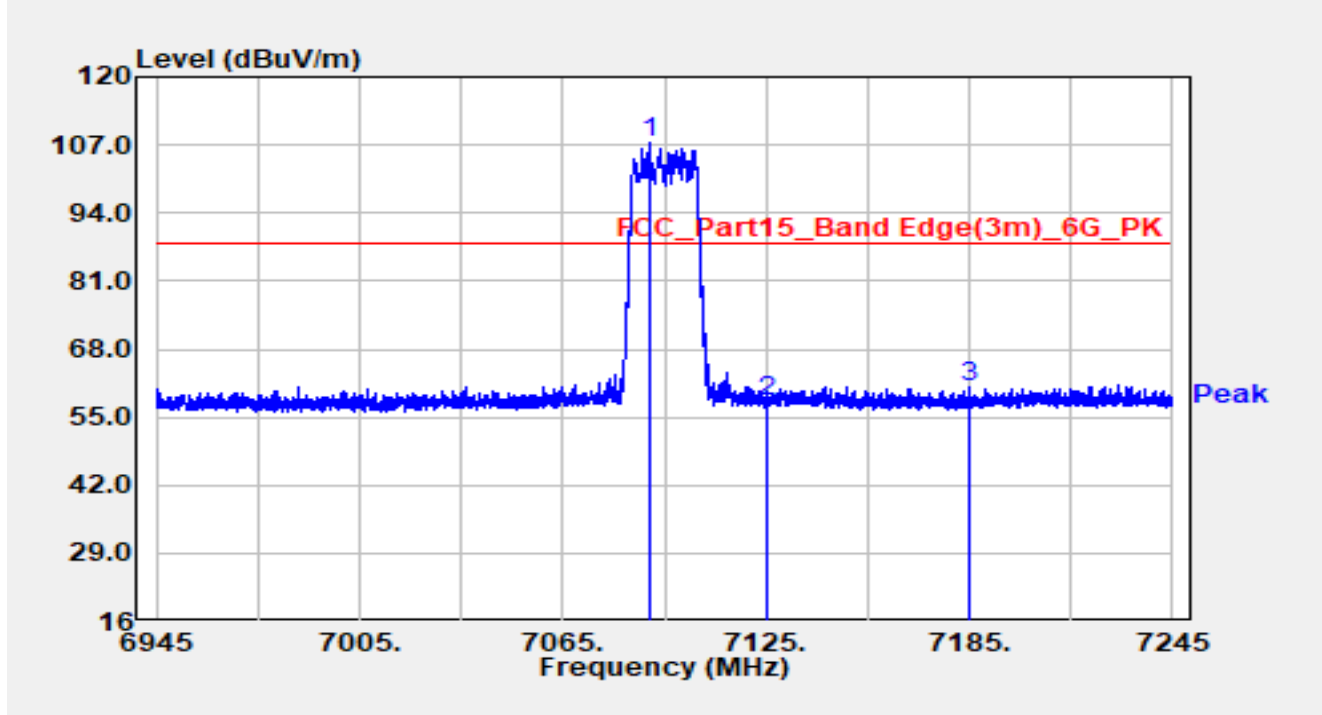


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7090.380	98.80	8.46	107.26	N/A	N/A	Peak
2		7125.000	49.30	8.76	58.06	-30.14	88.20	Peak
3	*	7184.790	51.73	8.82	60.55	-27.65	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 7095MHz		

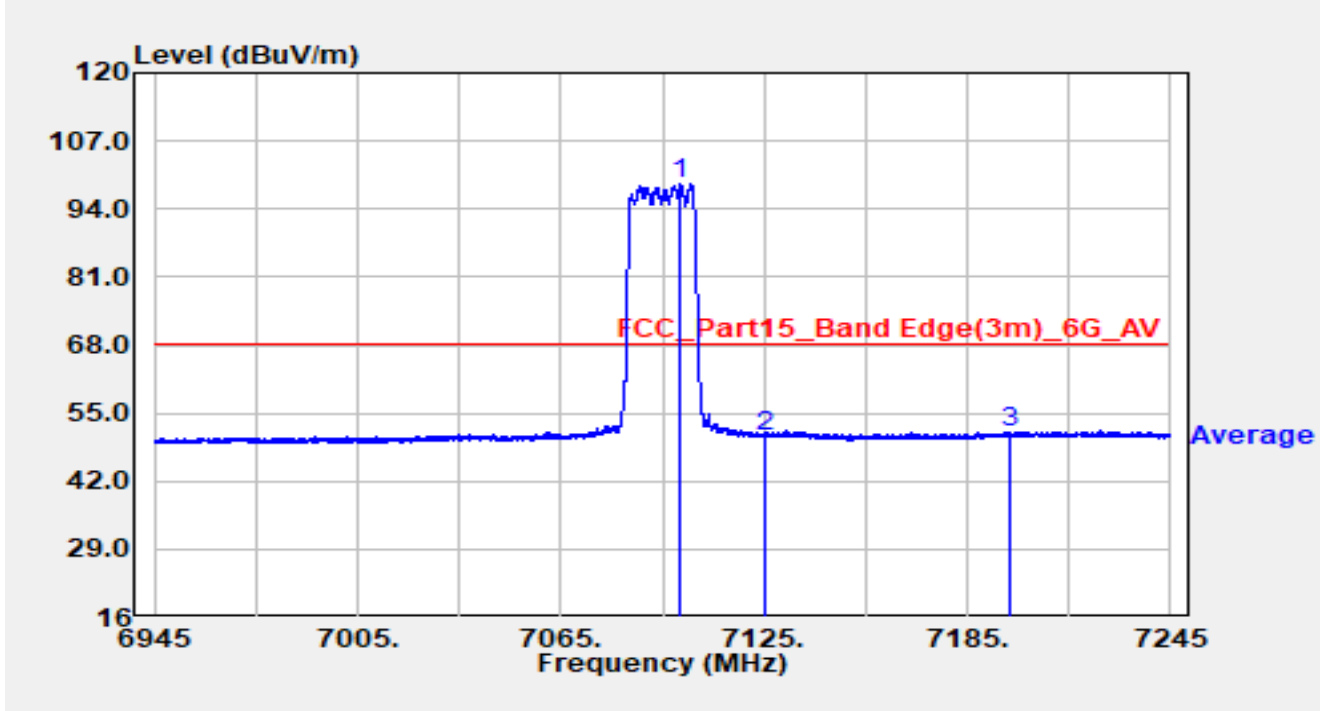


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7100.400	90.03	8.68	98.71	N/A	N/A	Average
2		7125.000	41.76	8.76	50.52	-17.68	68.20	Average
3	*	7197.300	42.45	9.00	51.45	-16.75	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

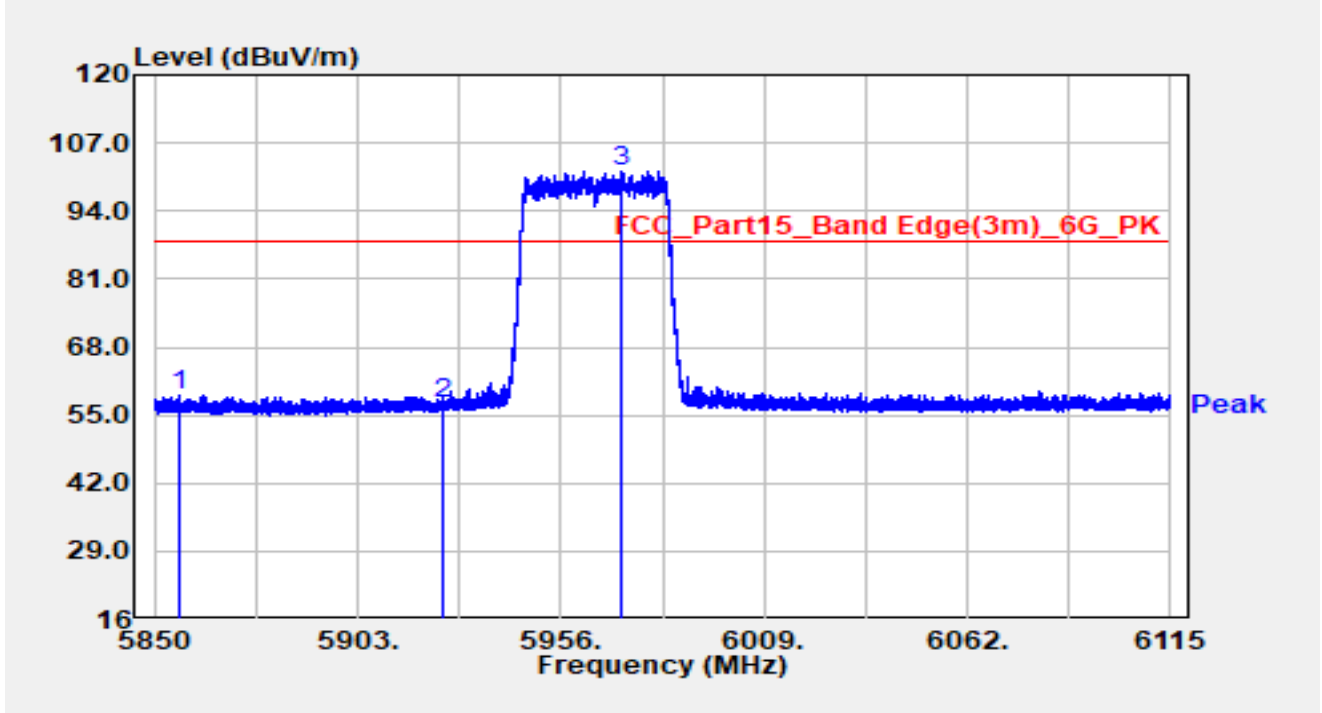


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5856.599	53.22	5.58	58.81	-29.39	88.20	Peak
2		5925.000	51.64	5.55	57.19	-31.01	88.20	Peak
3		5971.529	96.39	5.33	101.72	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

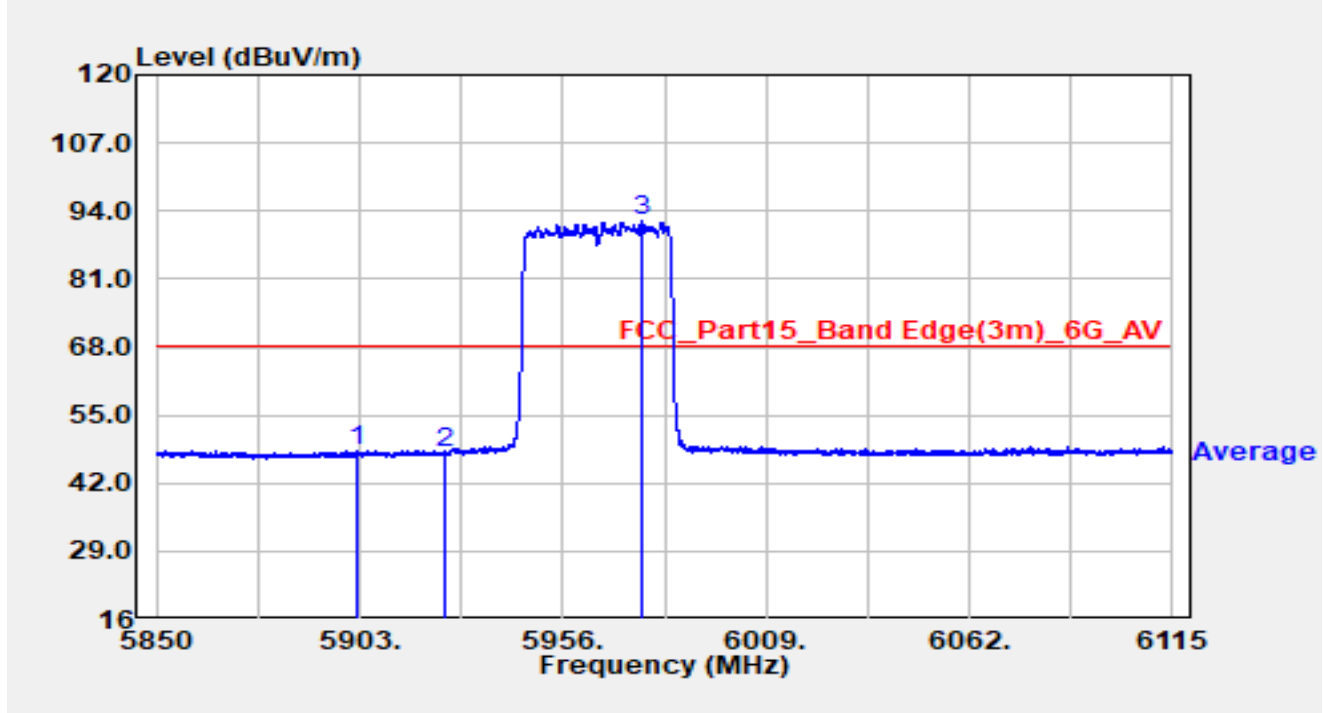


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5902.152	42.79	5.40	48.18	-20.02	68.20	Average
2		5925.000	42.26	5.55	47.81	-20.39	68.20	Average
3		5976.484	86.67	5.35	92.02	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

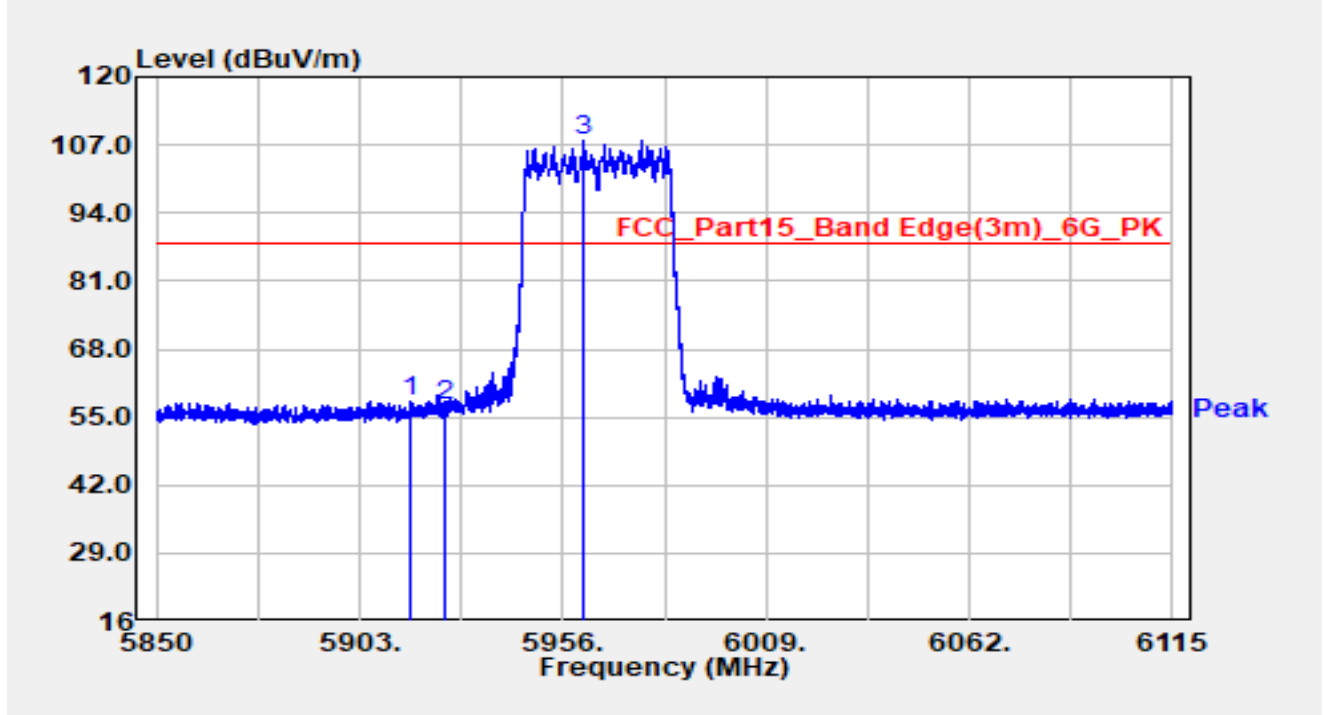


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5916.303	52.57	5.52	58.10	-30.10	88.20	Peak
2		5925.000	51.63	5.55	57.18	-31.02	88.20	Peak
3		5961.379	102.60	5.35	107.95	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

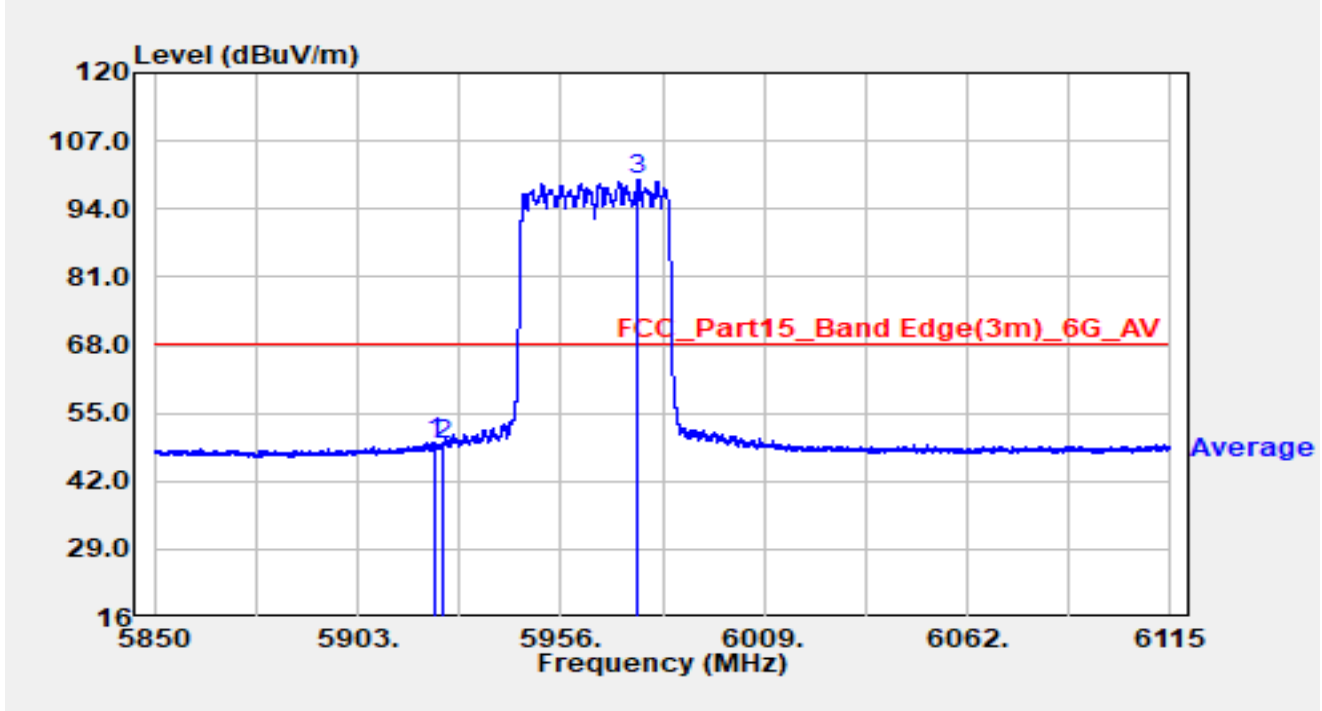


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.849	43.95	5.55	49.50	-18.70	68.20	Average
2		5925.000	43.25	5.55	48.80	-19.40	68.20	Average
3		5976.167	94.12	5.35	99.46	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

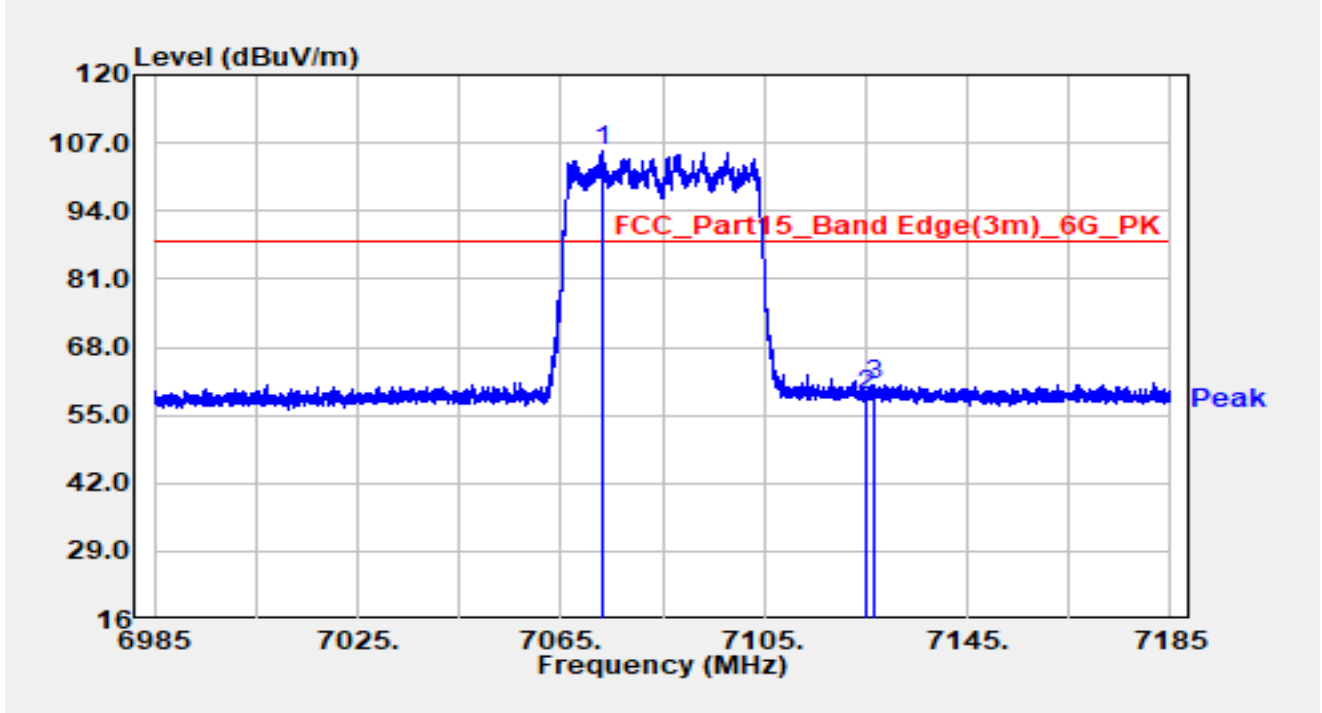


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7073.200	97.09	8.45	105.54	N/A	N/A	Peak
2		7125.000	49.89	8.76	58.65	-29.55	88.20	Peak
3	*	7126.440	51.98	8.76	60.75	-27.45	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

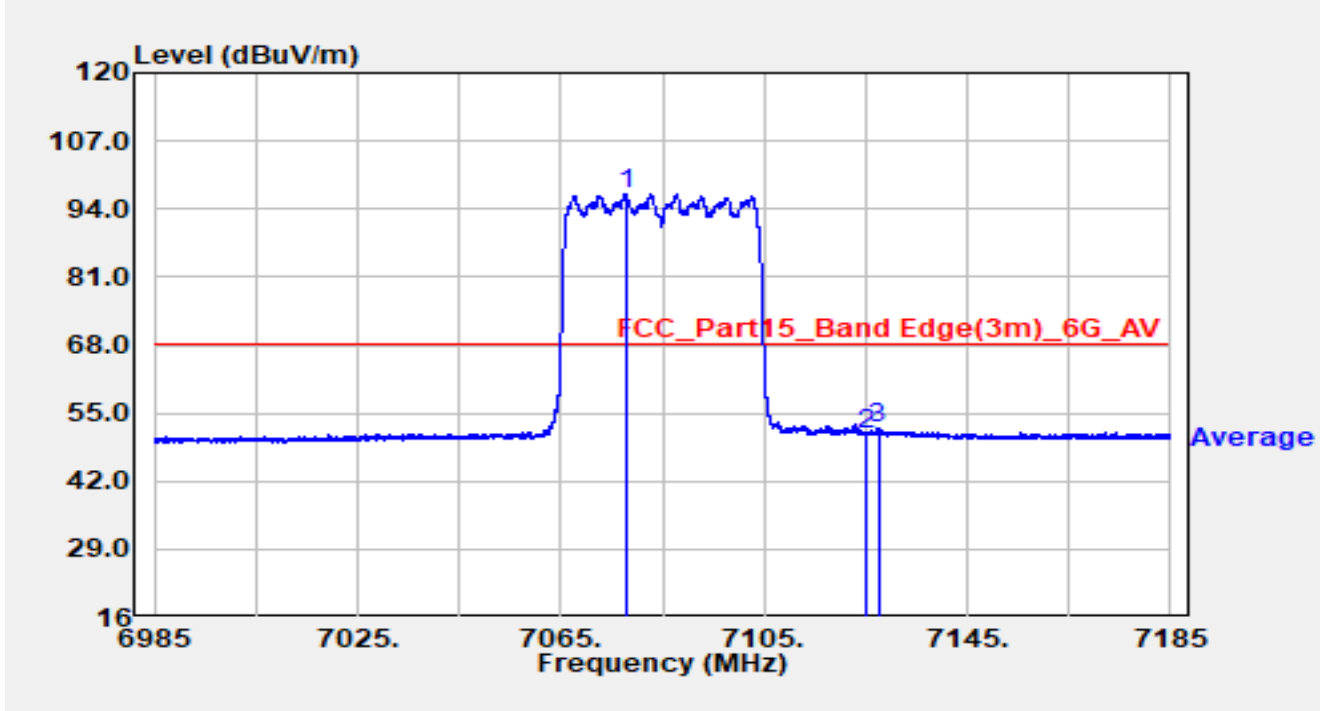


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7077.700	88.56	8.42	96.98	N/A	N/A	Average
2		7125.000	42.08	8.76	50.84	-17.36	68.20	Average
3	*	7127.440	43.29	8.77	52.05	-16.15	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

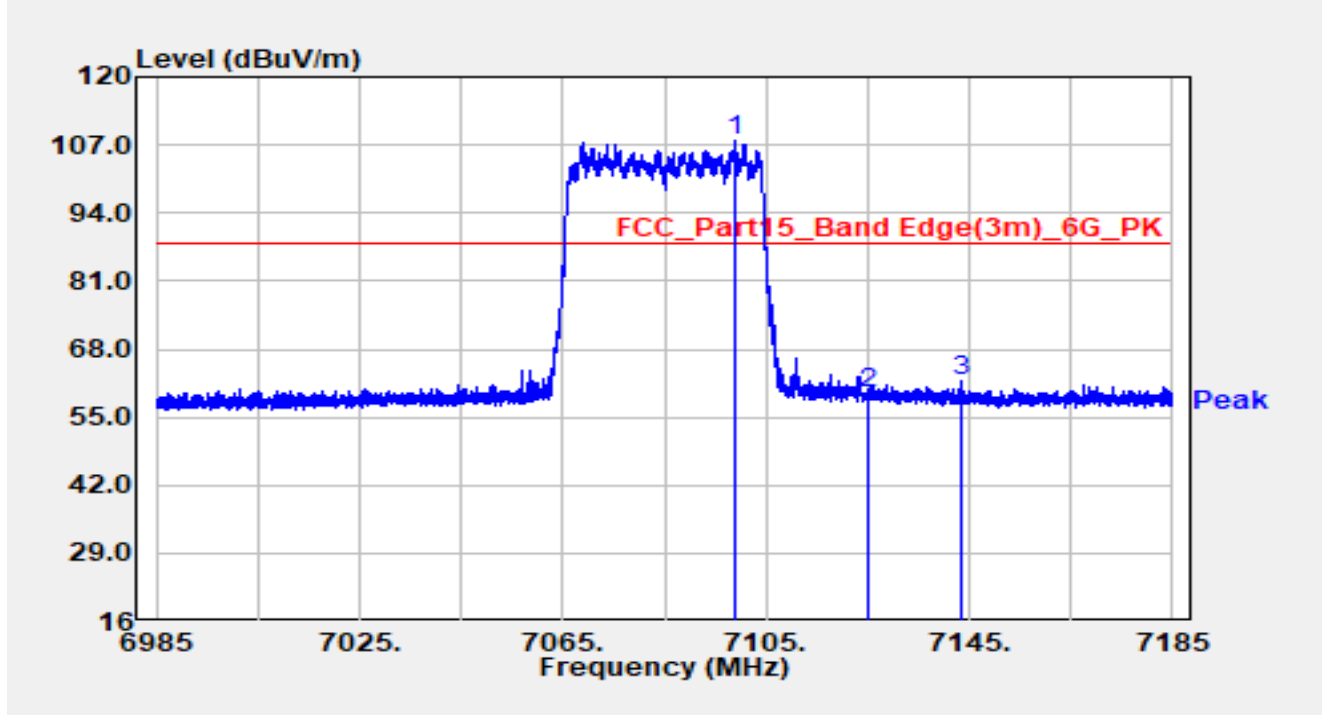


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7099.100	99.04	8.65	107.69	N/A	N/A	Peak
2		7125.000	50.86	8.76	59.62	-28.58	88.20	Peak
3	*	7143.280	53.01	8.79	61.80	-26.40	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 7085MHz		

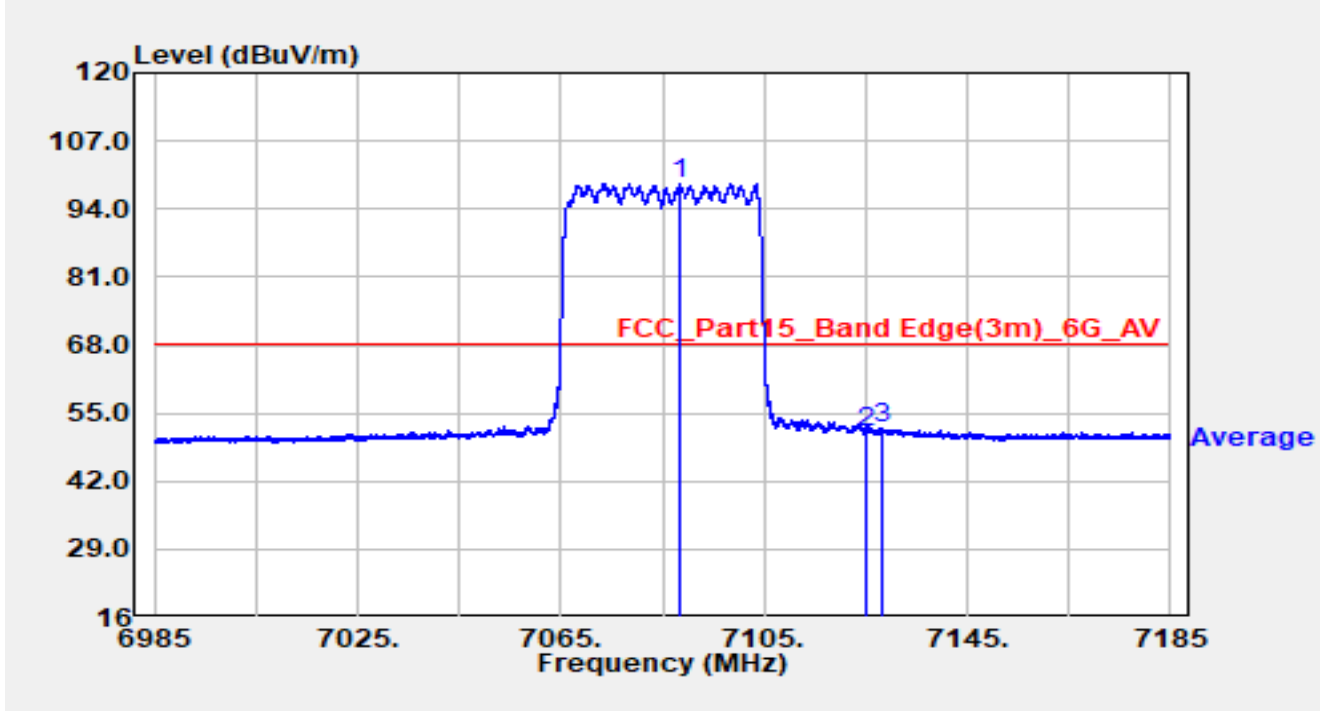


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7088.440	90.33	8.42	98.75	N/A	N/A	Average
2		7125.000	42.74	8.76	51.50	-16.70	68.20	Average
3	*	7128.200	43.45	8.77	52.22	-15.98	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

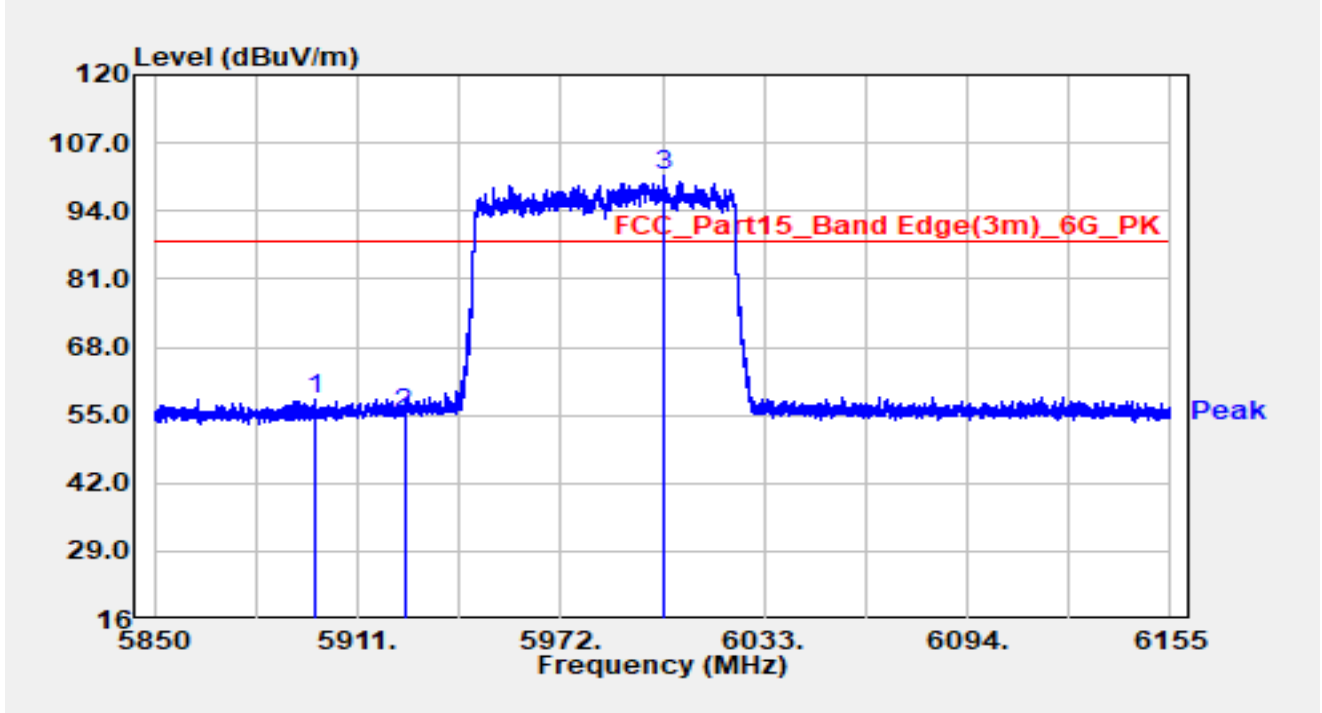


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5898.495	52.67	5.36	58.04	-30.16	88.20	Peak
2		5925.000	49.60	5.55	55.15	-33.05	88.20	Peak
3		6002.744	95.07	5.56	100.63	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

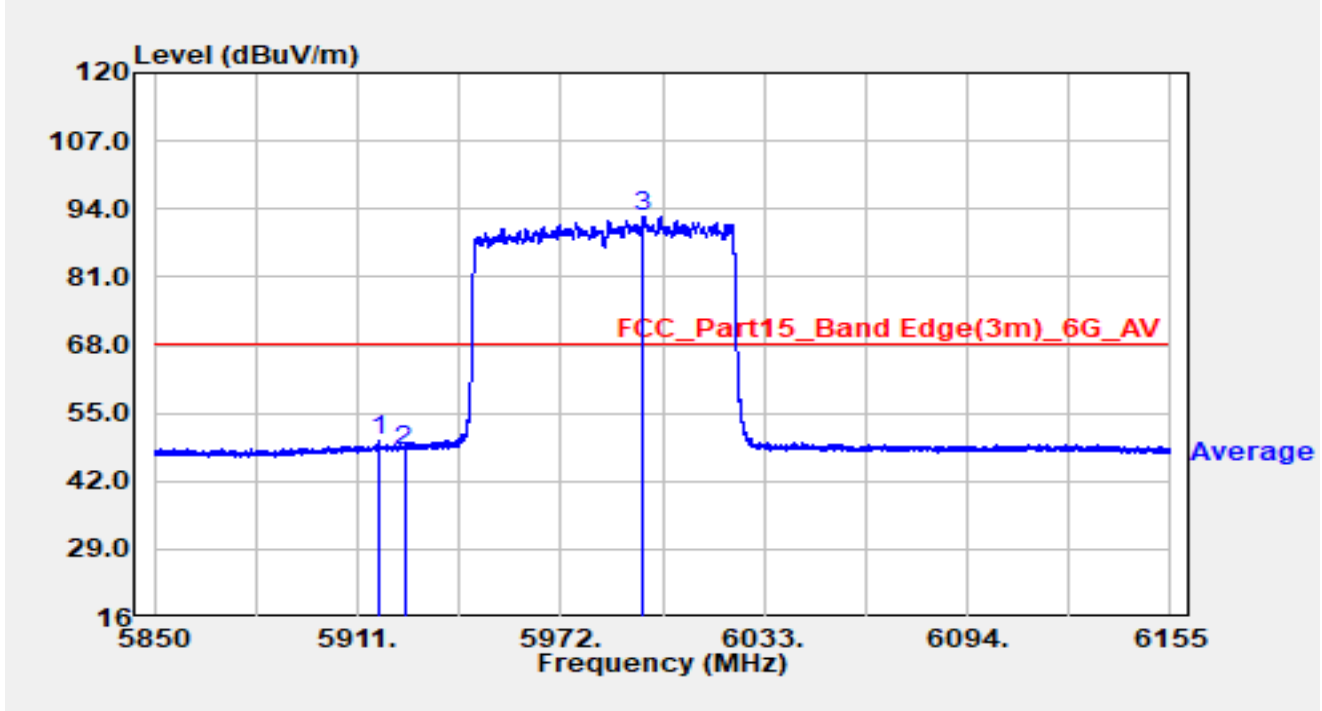


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5917.375	44.24	5.53	49.76	-18.44	68.20	Average
2		5925.000	42.43	5.55	47.98	-20.22	68.20	Average
3		5996.613	87.16	5.51	92.67	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

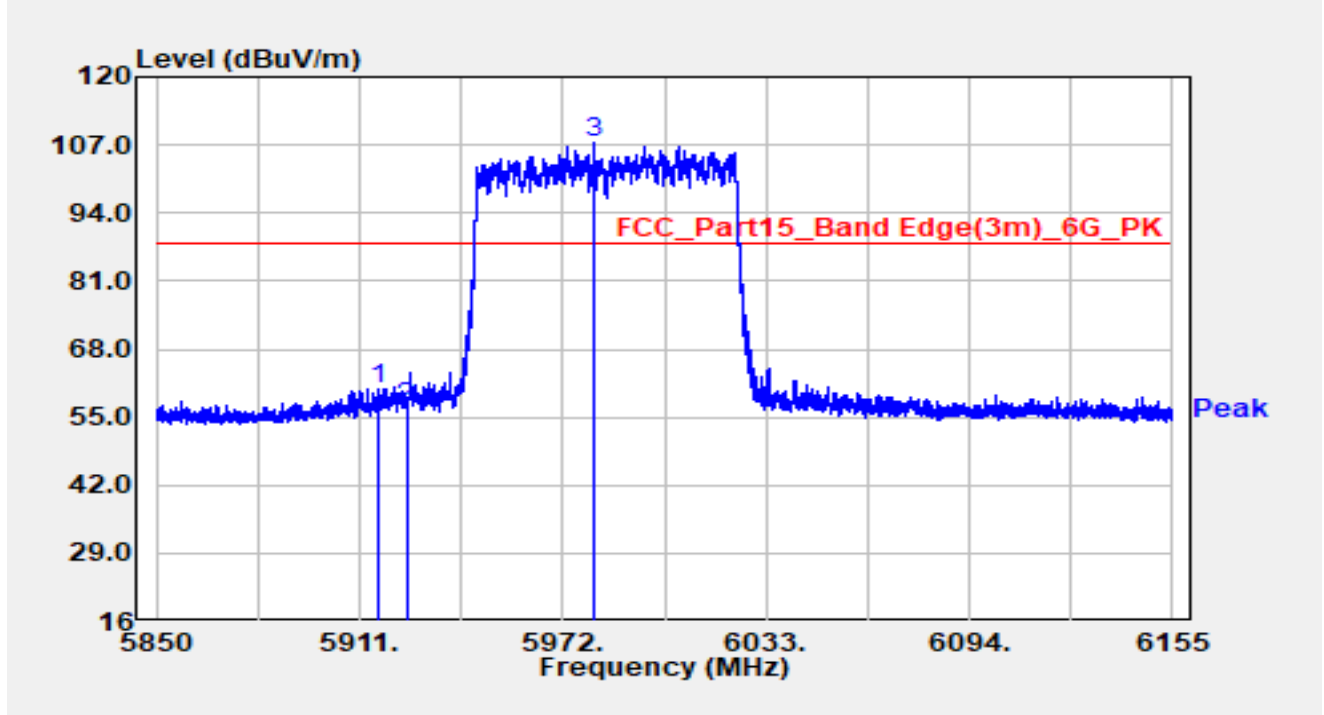


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5916.917	55.01	5.53	60.53	-27.67	88.20	Peak
2		5925.000	51.36	5.55	56.91	-31.29	88.20	Peak
3		5981.303	102.05	5.33	107.38	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

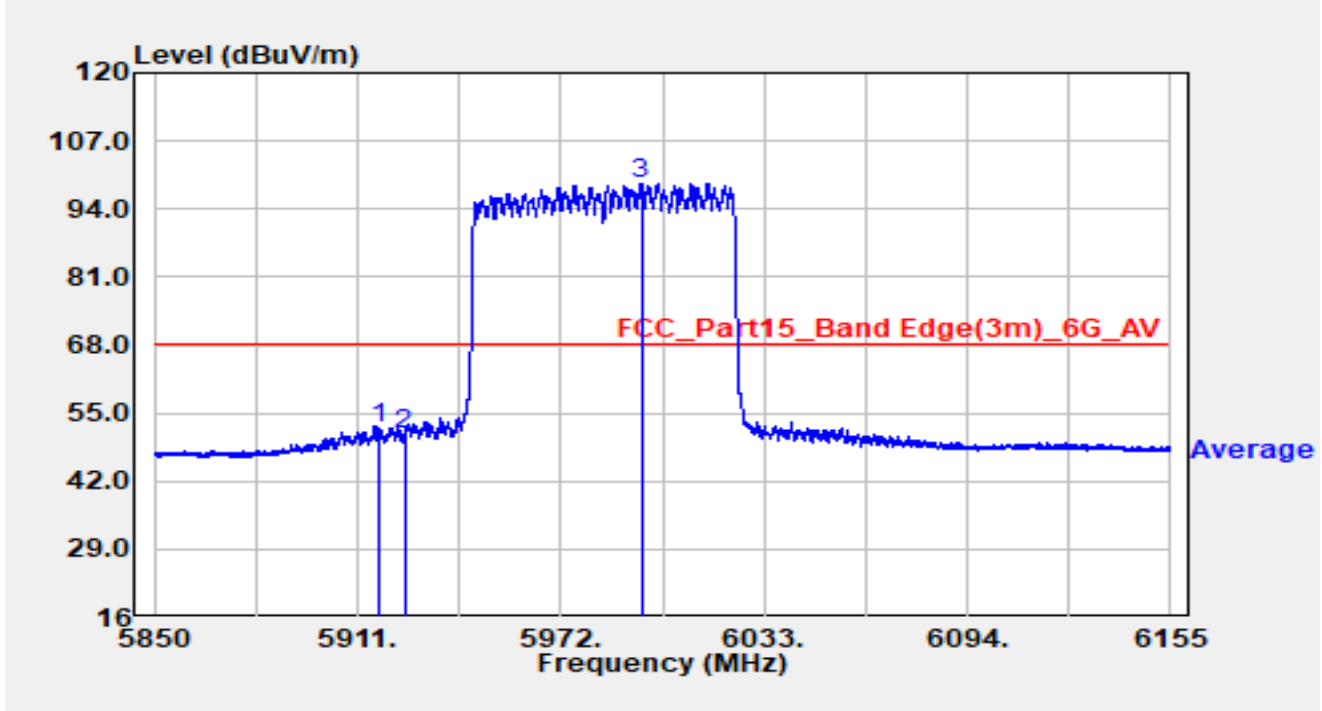


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5917.680	46.75	5.53	52.28	-15.92	68.20	Average
2		5925.000	45.19	5.55	50.74	-17.46	68.20	Average
3		5996.125	93.31	5.50	98.80	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

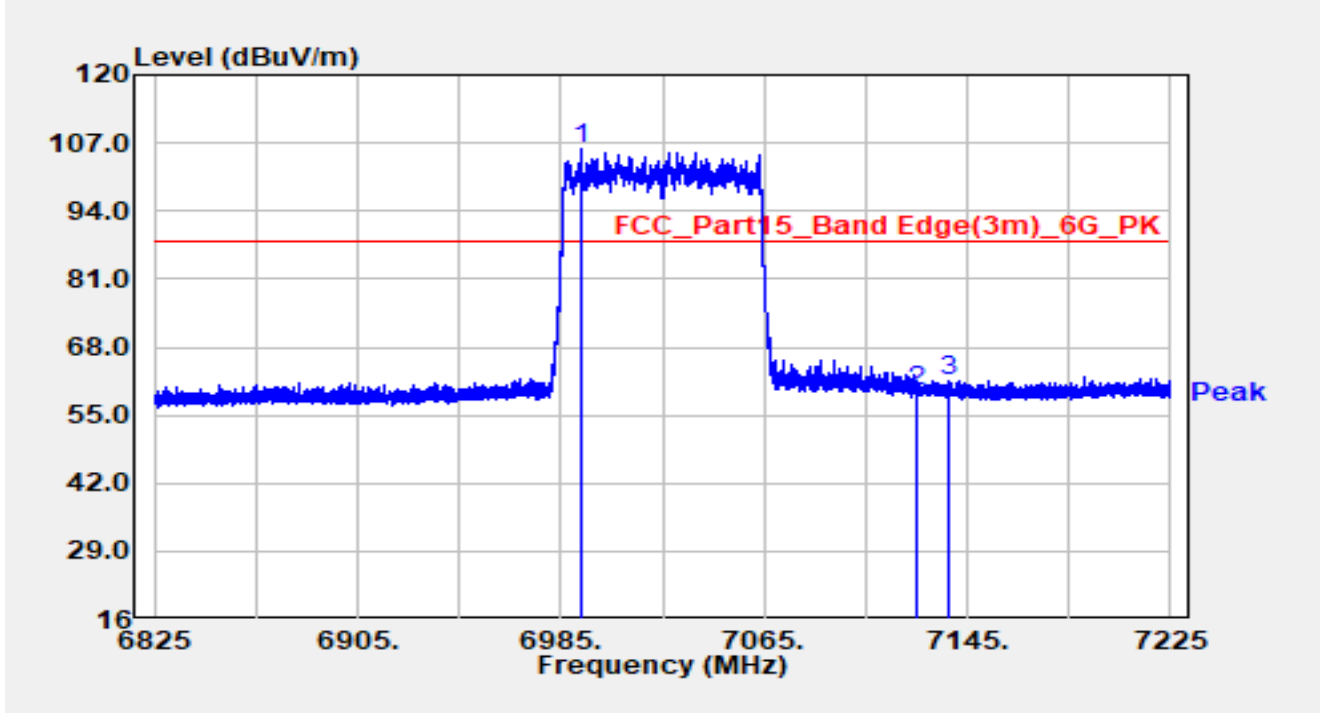


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6992.800	97.73	8.02	105.74	N/A	N/A	Peak
2		7125.000	50.77	8.76	59.53	-28.67	88.20	Peak
3	*	7137.440	52.75	8.88	61.63	-26.57	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

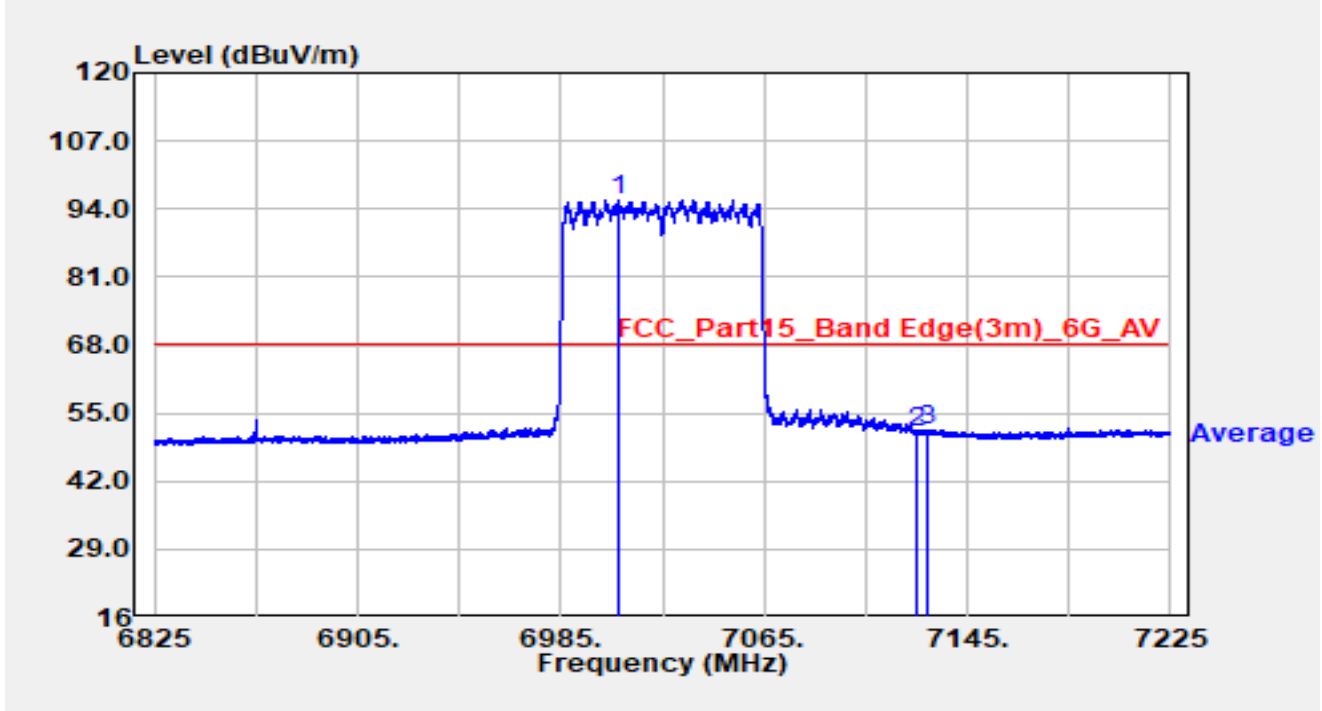


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7007.840	87.74	8.07	95.81	N/A	N/A	Average
2		7125.000	42.70	8.76	51.46	-16.74	68.20	Average
3	*	7129.760	43.03	8.79	51.81	-16.39	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

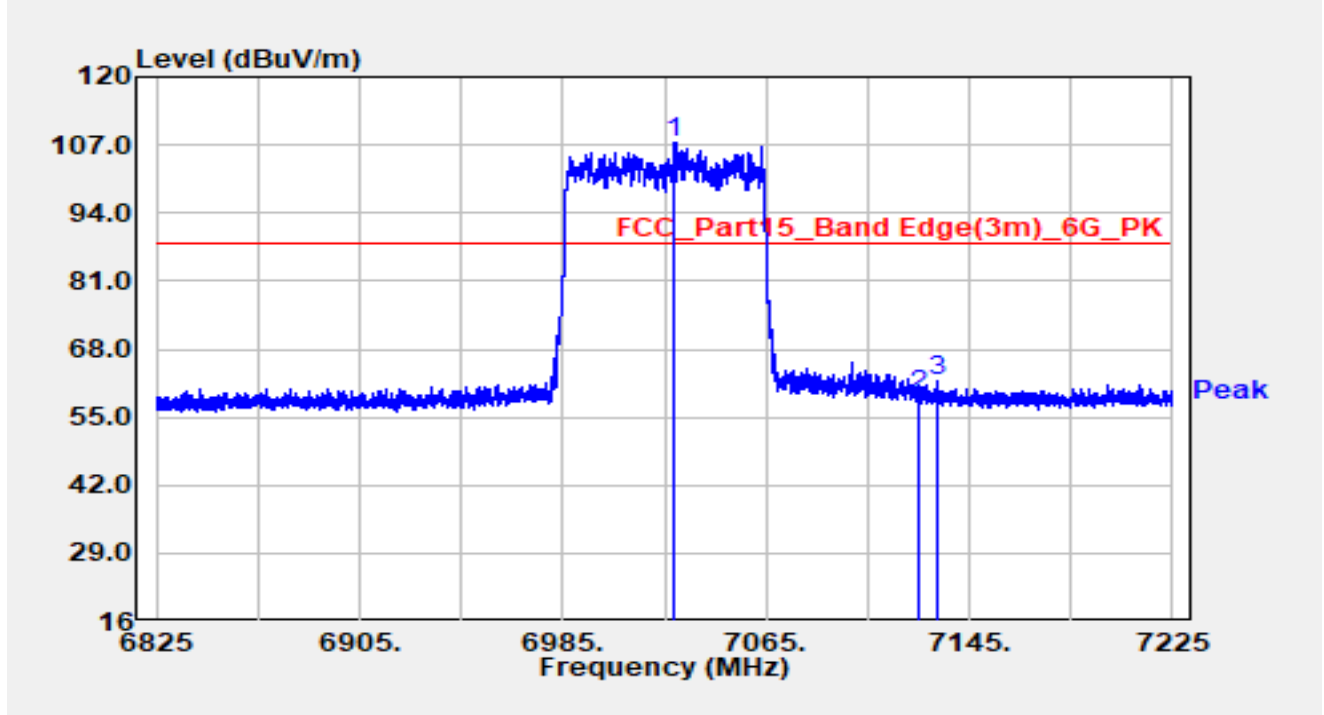


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7029.160	99.10	8.37	107.48	N/A	N/A	Peak
2		7125.000	50.31	8.76	59.07	-29.13	88.20	Peak
3	*	7132.560	52.92	8.83	61.74	-26.46	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 7025MHz		

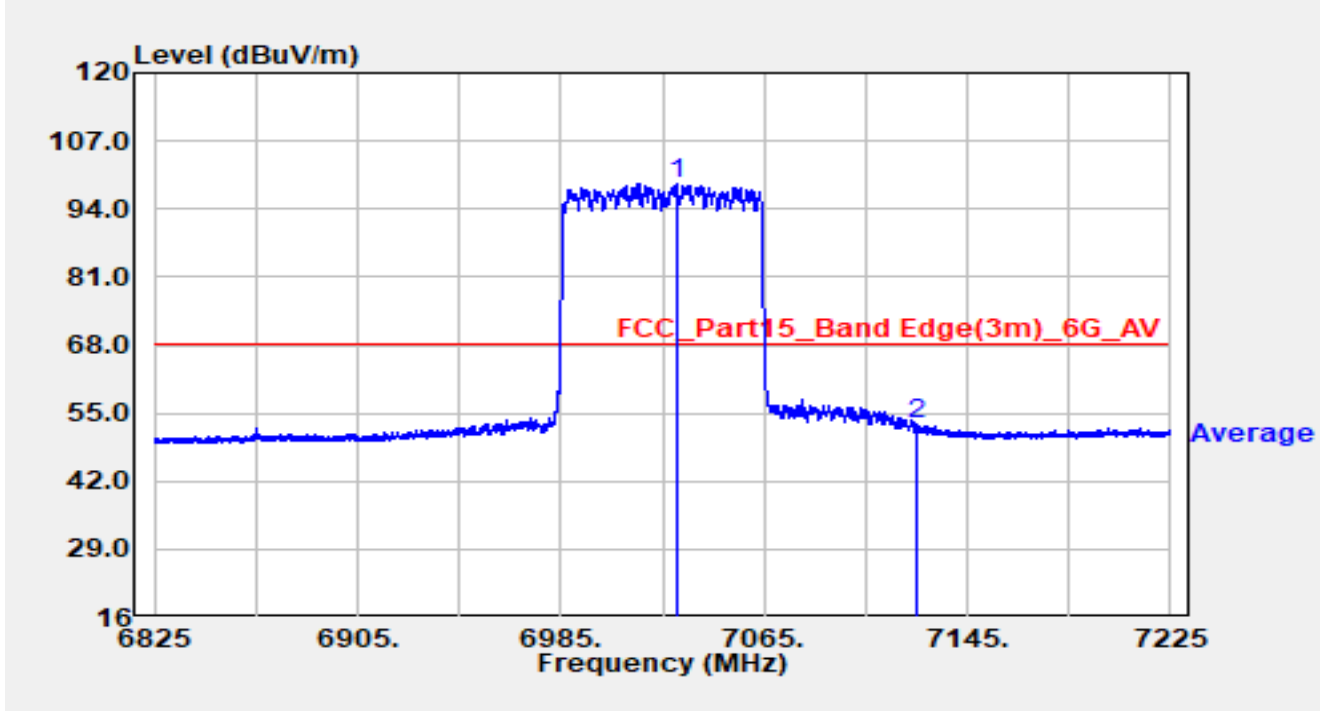


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7030.520	90.47	8.41	98.88	30.68	68.20	Average
2	*	7125.000	44.14	8.76	52.90	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

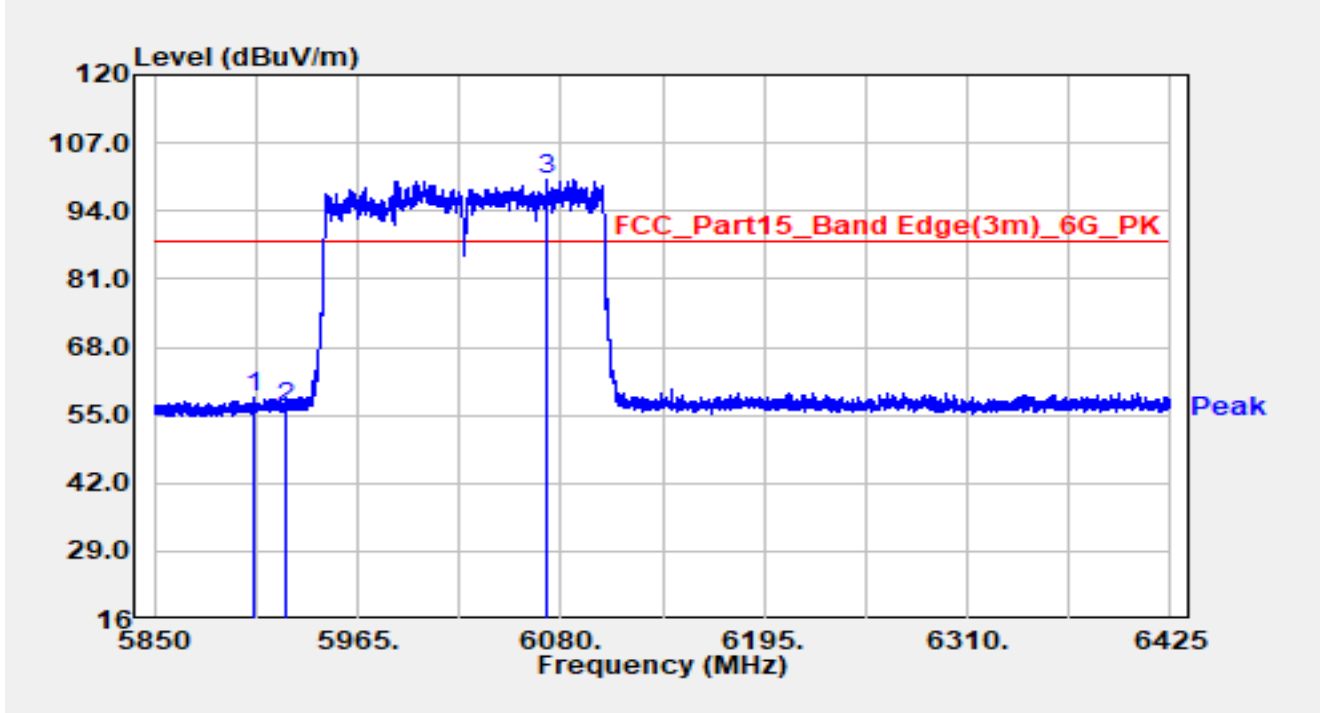


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5906.695	53.13	5.44	58.57	-29.63	88.20	Peak
2		5925.000	50.98	5.55	56.53	-31.67	88.20	Peak
3		6071.547	94.46	5.52	99.98	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

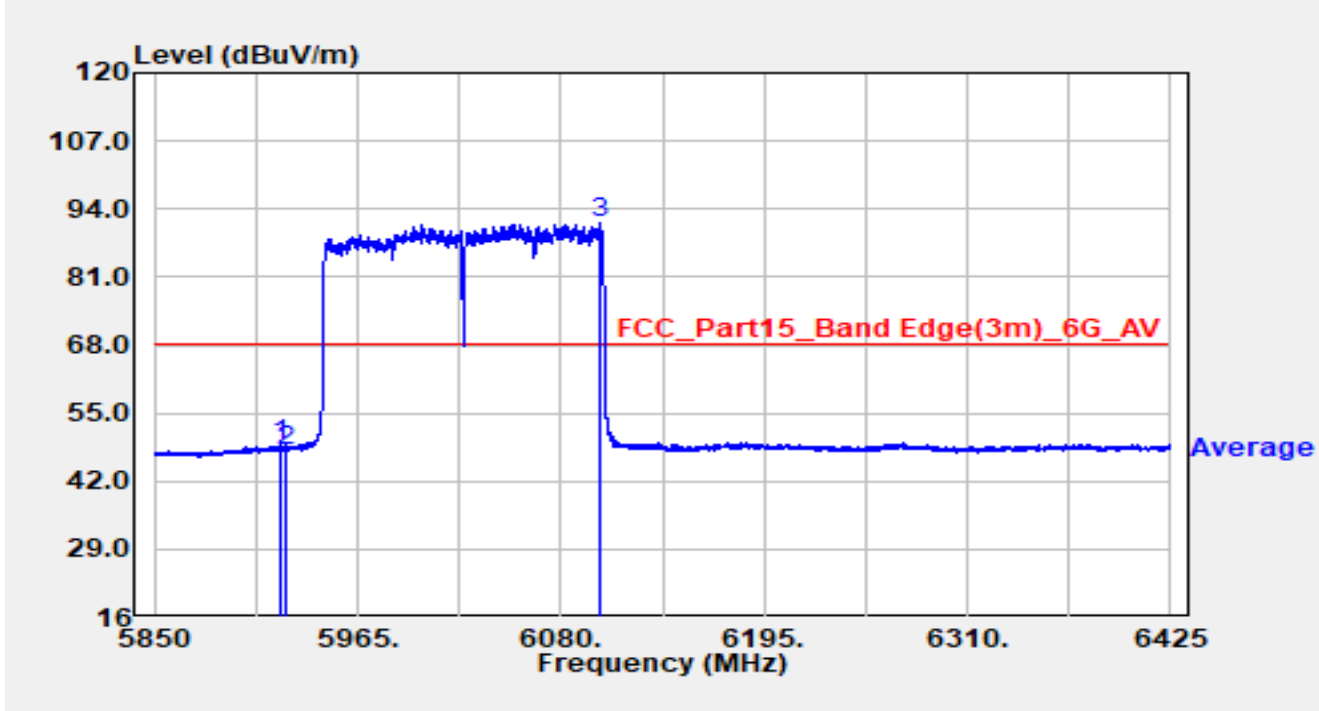


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.587	43.35	5.55	48.90	-19.30	68.20	Average
2		5925.000	42.39	5.55	47.94	-20.26	68.20	Average
3		6101.620	85.87	5.63	91.50	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

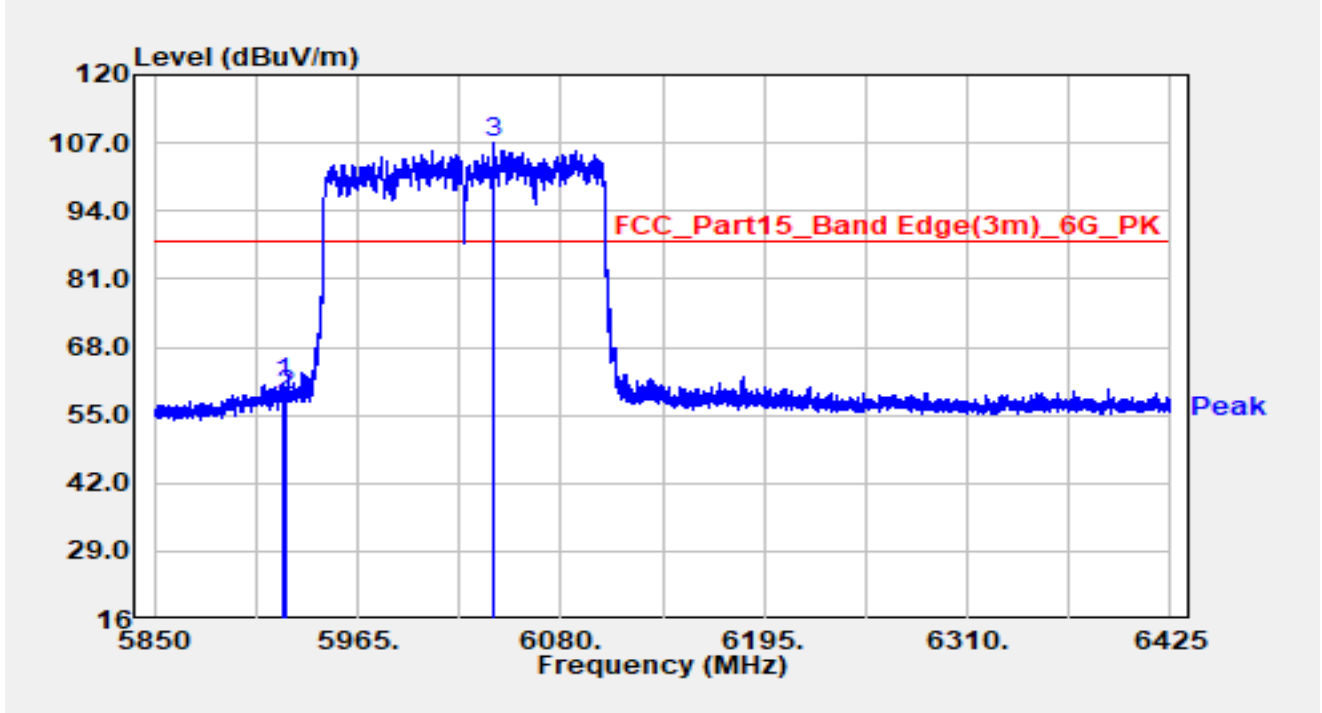


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.428	55.60	5.55	61.16	-27.04	88.20	Peak
2		5925.000	53.23	5.55	58.78	-29.42	88.20	Peak
3		6041.533	101.76	5.46	107.23	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

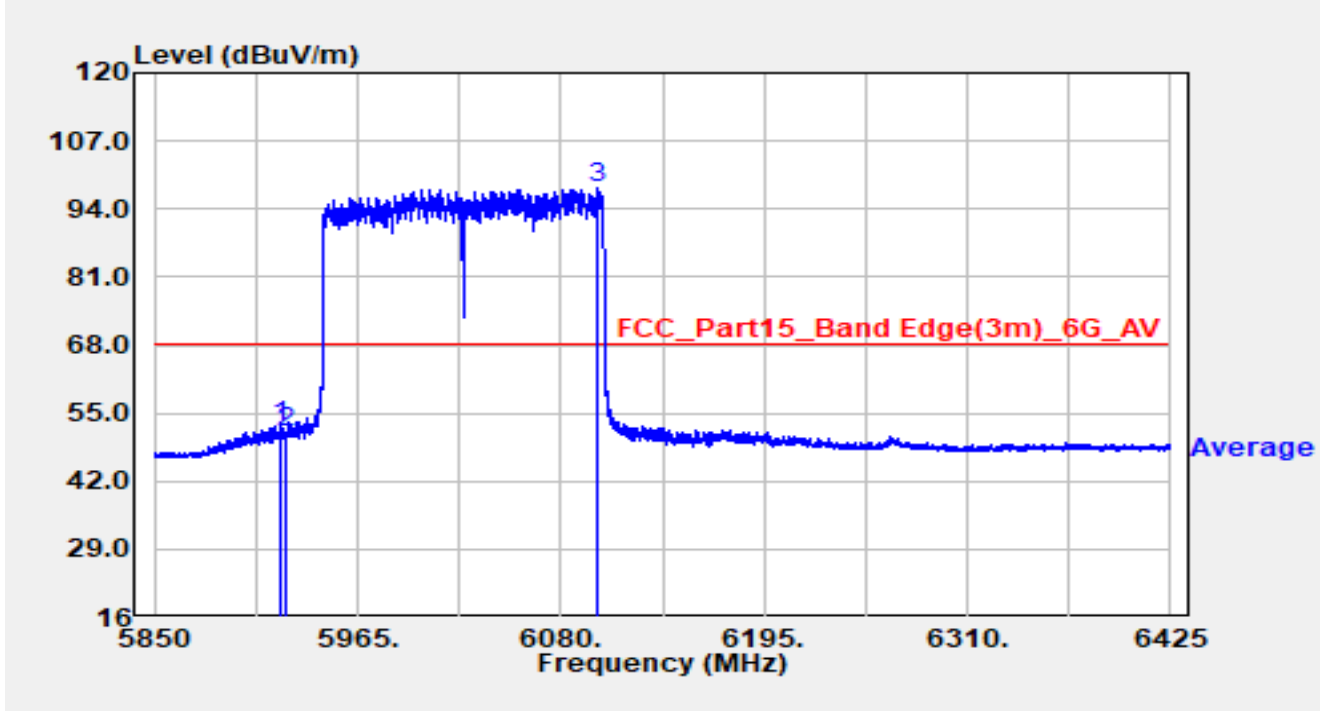


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.955	47.05	5.54	52.59	-15.61	68.20	Average
2		5925.000	45.62	5.55	51.17	-17.03	68.20	Average
3		6101.103	92.39	5.62	98.01	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

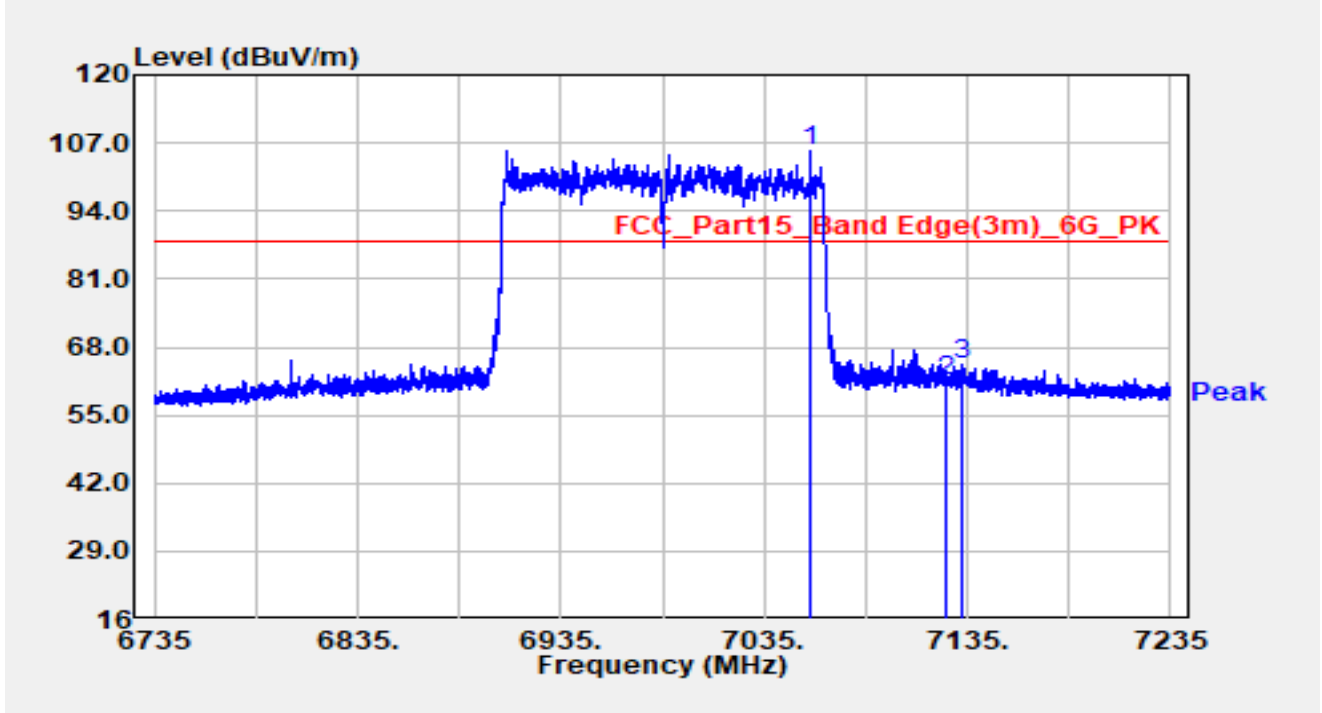


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7058.050	97.15	8.44	105.59	N/A	N/A	Peak
2		7125.000	52.59	8.76	61.35	-26.85	88.20	Peak
3	*	7132.550	55.94	8.83	64.76	-23.44	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

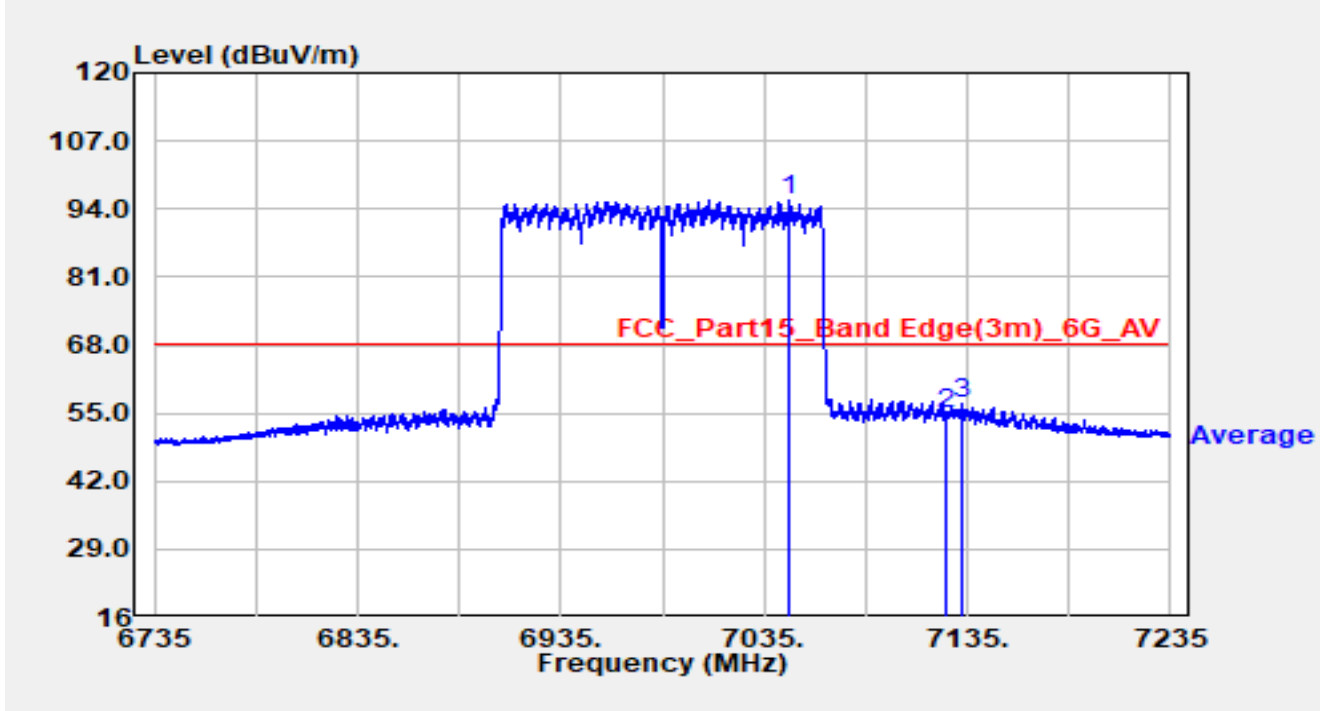


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7047.700	87.17	8.41	95.58	N/A	N/A	Average
2		7125.000	46.26	8.76	55.02	-13.18	68.20	Average
3	*	7132.600	47.92	8.83	56.74	-11.46	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

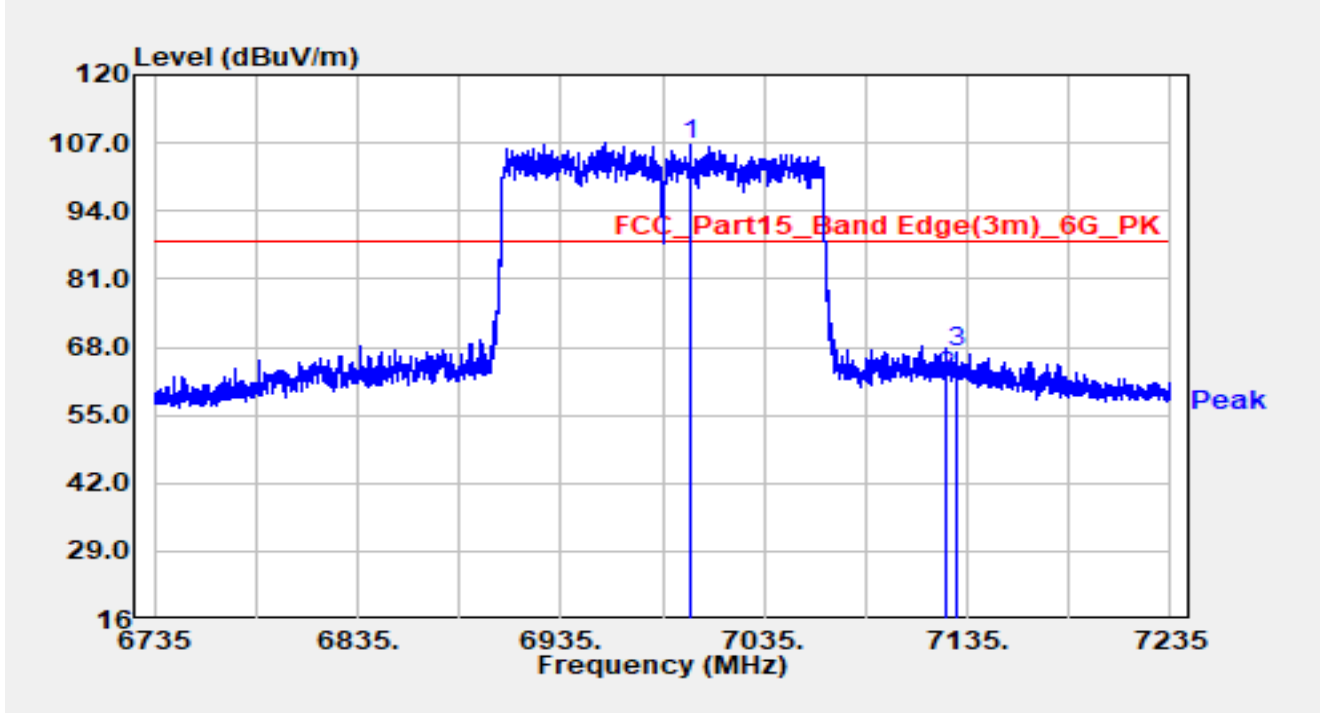


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6998.550	98.54	8.04	106.58	N/A	N/A	Peak
2		7125.000	53.57	8.76	62.33	-25.87	88.20	Peak
3	*	7129.600	58.10	8.79	66.88	-21.32	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz		

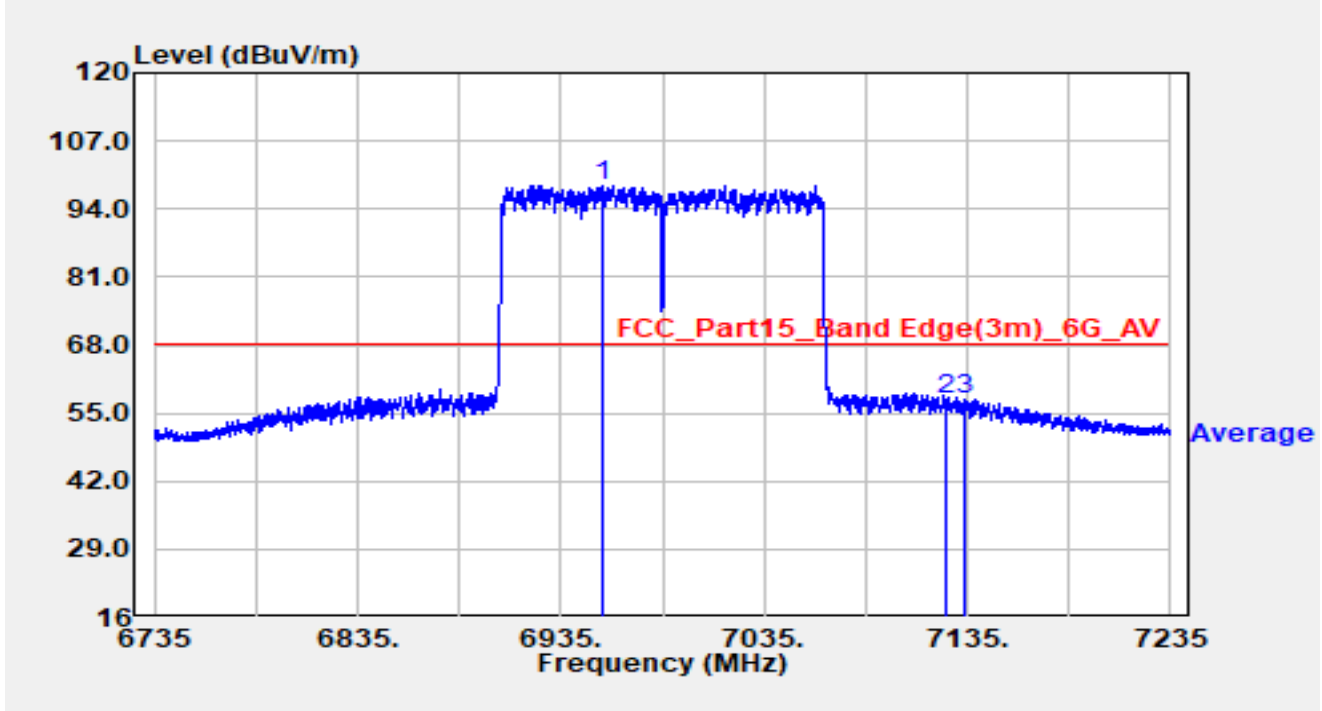


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6955.750	90.69	7.92	98.61	N/A	N/A	Average
2		7125.000	48.67	8.76	57.43	-10.77	68.20	Average
3	*	7133.750	48.87	8.84	57.71	-10.49	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

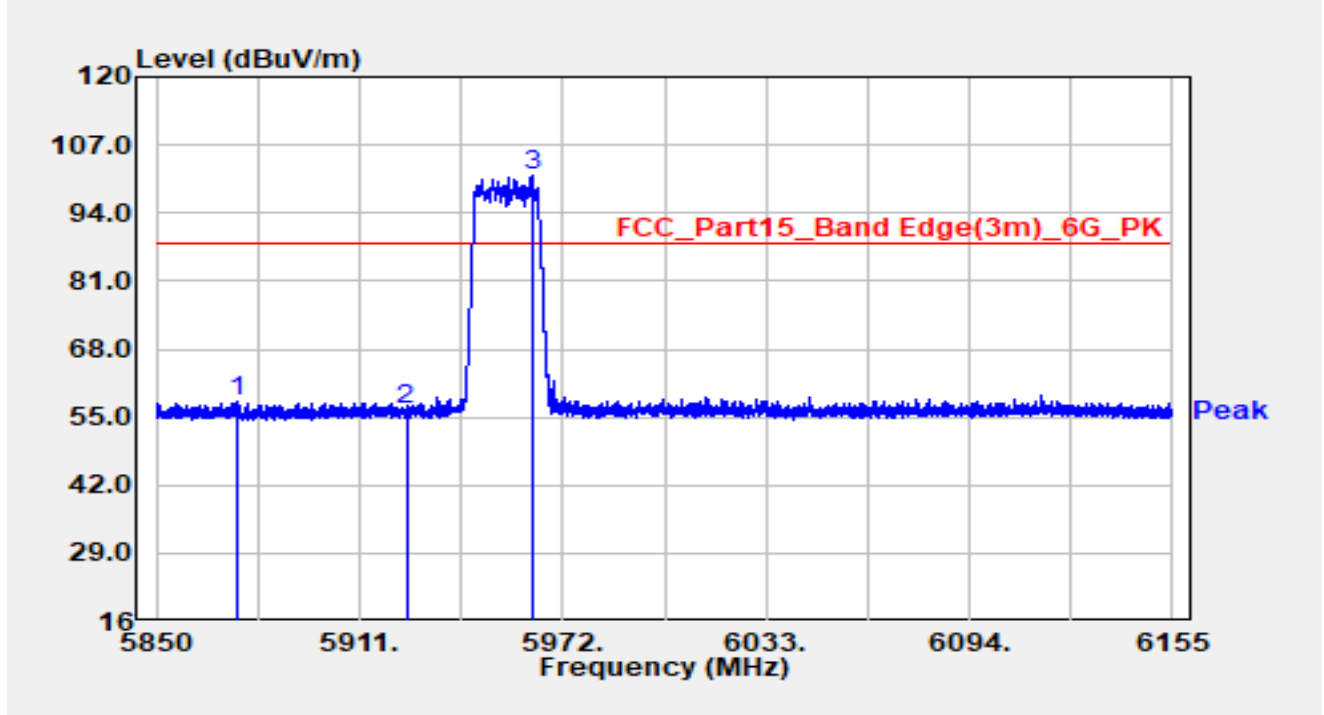


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5874.064	52.42	5.45	57.87	-30.33	88.20	Peak
2		5925.000	51.02	5.55	56.58	-31.62	88.20	Peak
3		5962.606	96.00	5.33	101.33	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

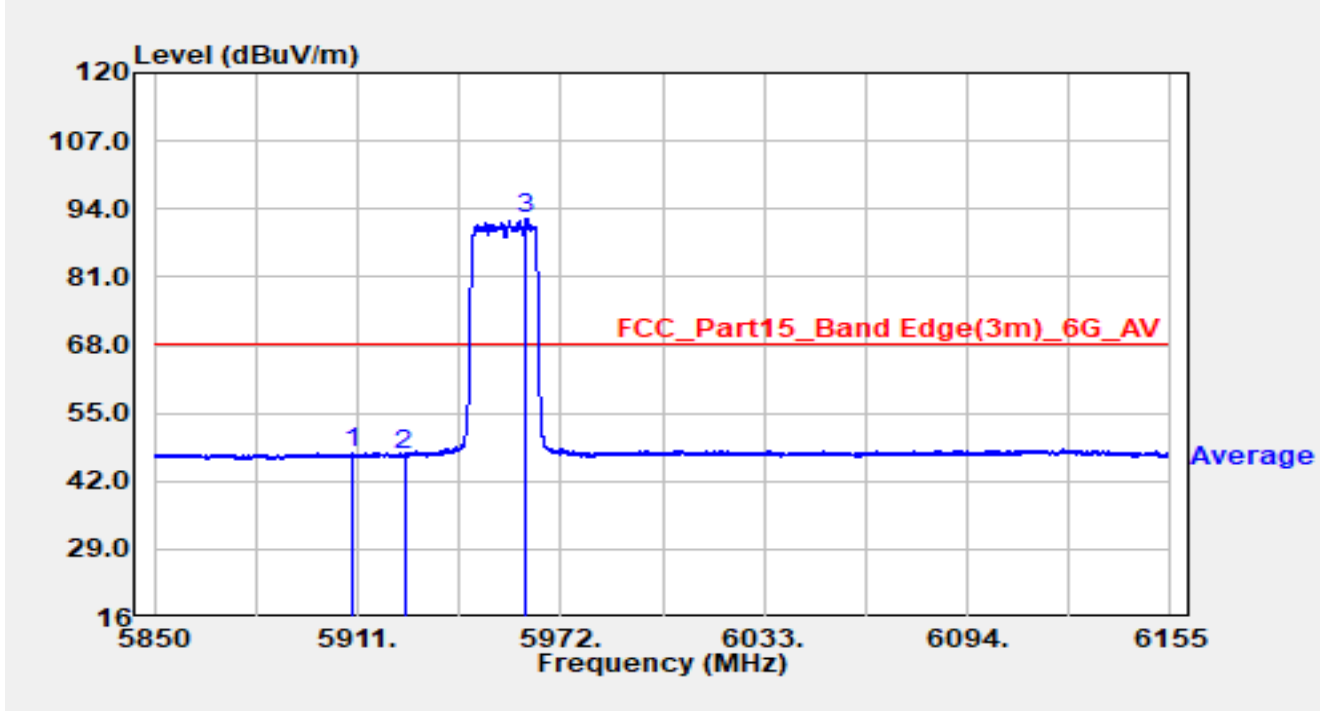


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5909.475	41.87	5.47	47.34	-20.86	68.20	Average
2		5925.000	41.56	5.55	47.11	-21.09	68.20	Average
3		5961.600	86.83	5.34	92.17	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

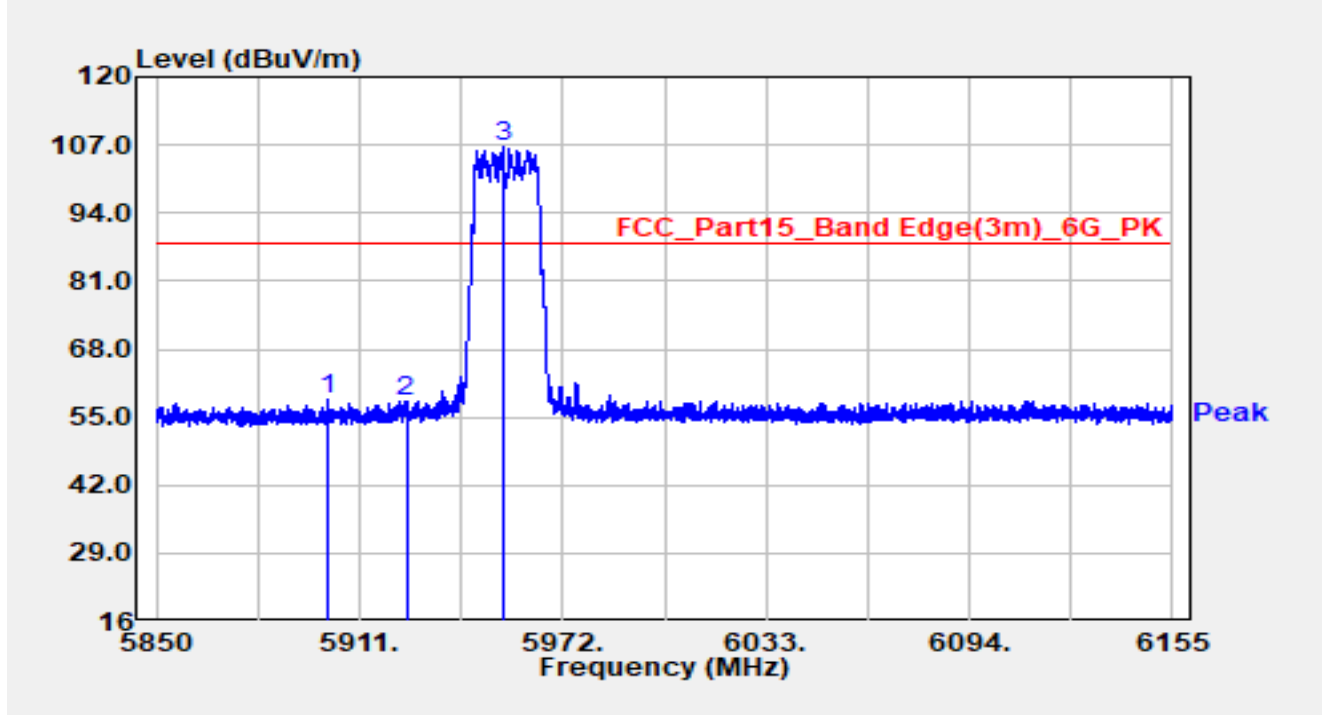


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5901.545	52.92	5.39	58.32	-29.88	88.20	Peak
2		5925.000	52.40	5.55	57.95	-30.25	88.20	Peak
3		5953.944	101.29	5.42	106.71	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

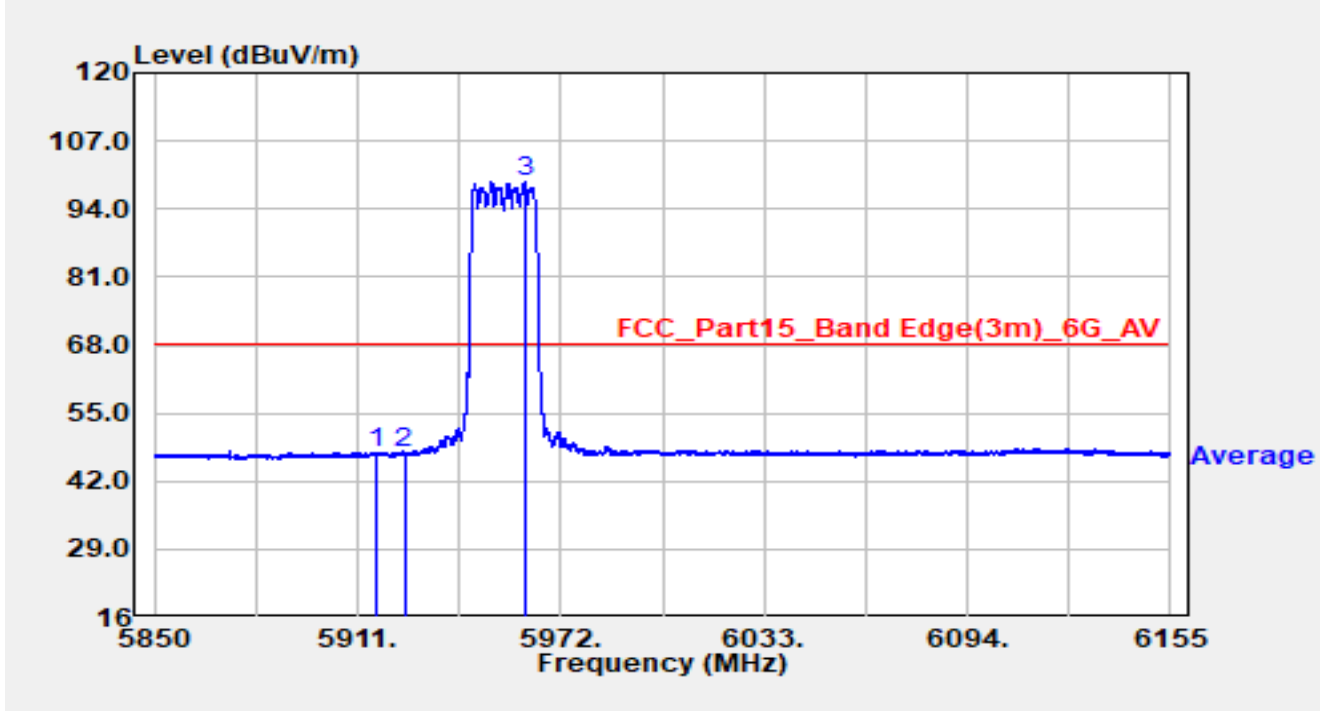


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5916.887	41.85	5.53	47.38	-20.82	68.20	Average
2		5925.000	41.65	5.55	47.20	-21.00	68.20	Average
3		5961.050	93.77	5.35	99.12	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

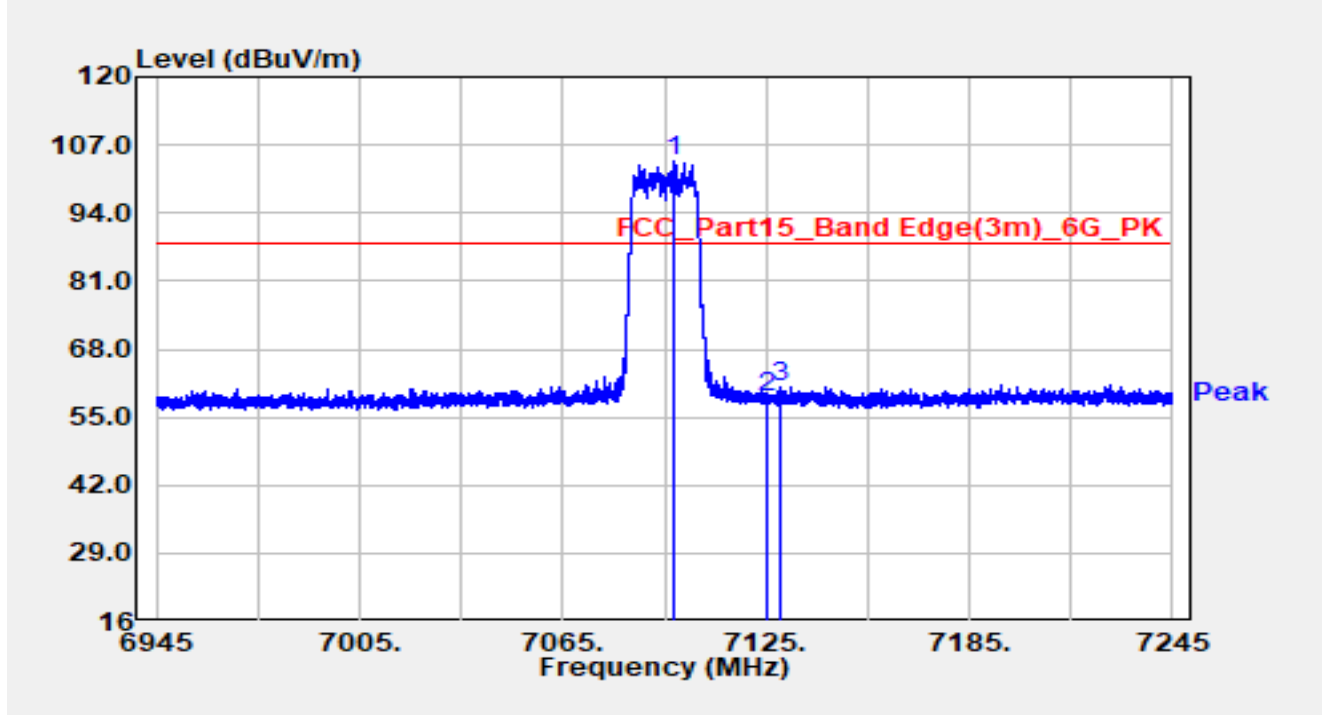


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7098.060	95.48	8.63	104.10	N/A	N/A	Peak
2		7125.000	49.93	8.76	58.69	-29.51	88.20	Peak
3	*	7129.140	51.81	8.78	60.59	-27.61	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

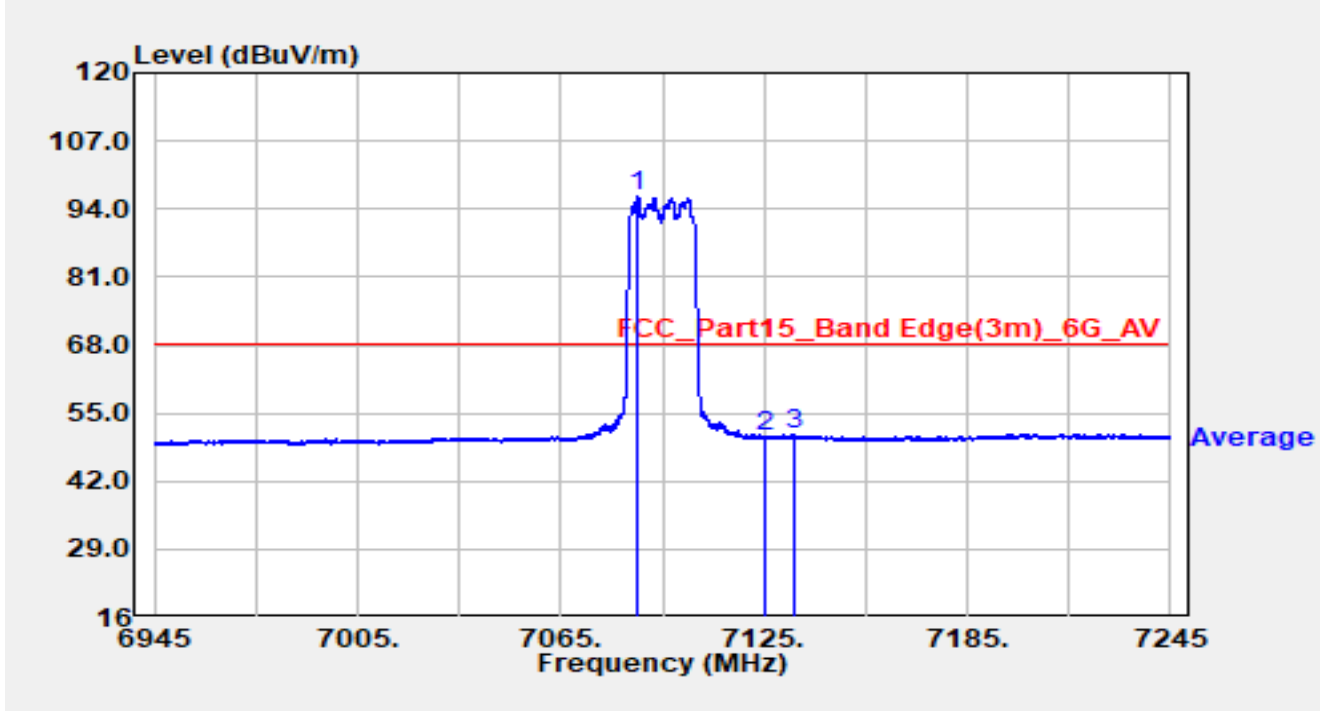


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7087.740	87.90	8.40	96.30	N/A	N/A	Average
2		7125.000	41.68	8.76	50.44	-17.76	68.20	Average
3	*	7134.270	41.98	8.85	50.83	-17.37	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

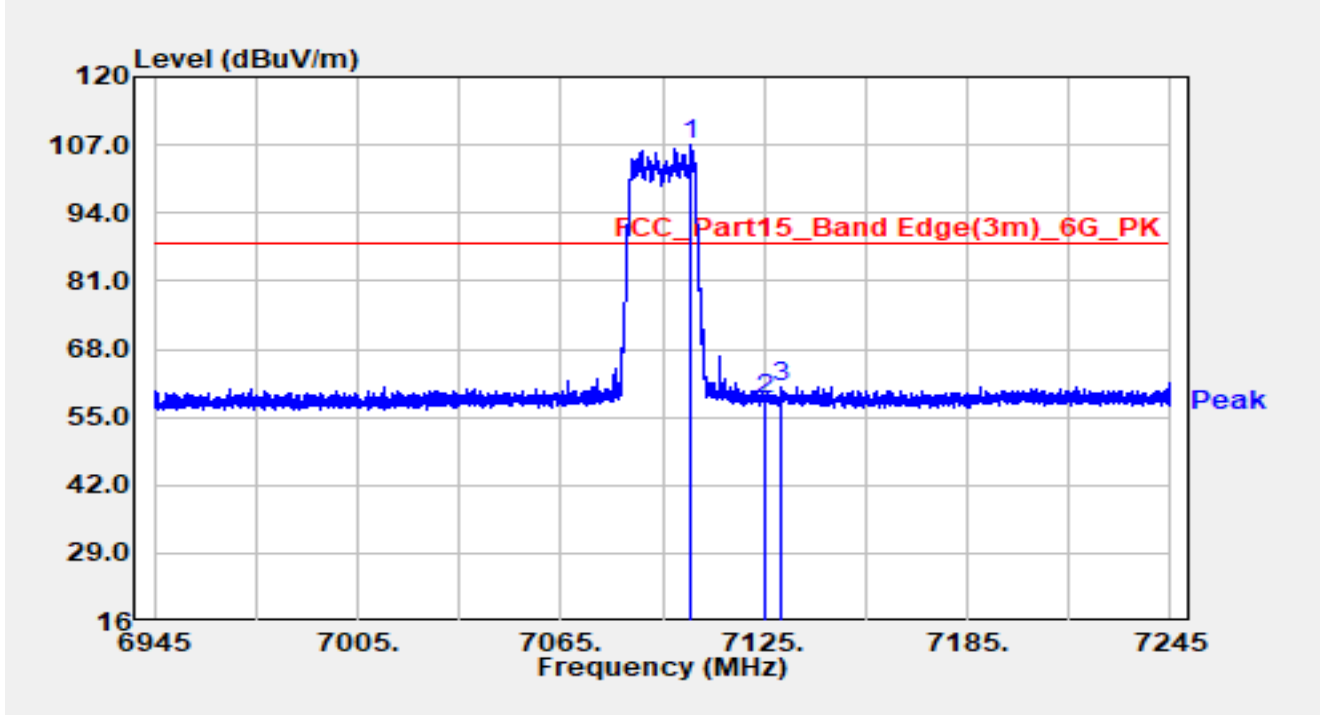


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7103.430	98.28	8.74	107.02	N/A	N/A	Peak
2		7125.000	49.44	8.76	58.20	-30.00	88.20	Peak
3	*	7130.190	51.90	8.79	60.70	-27.50	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz		

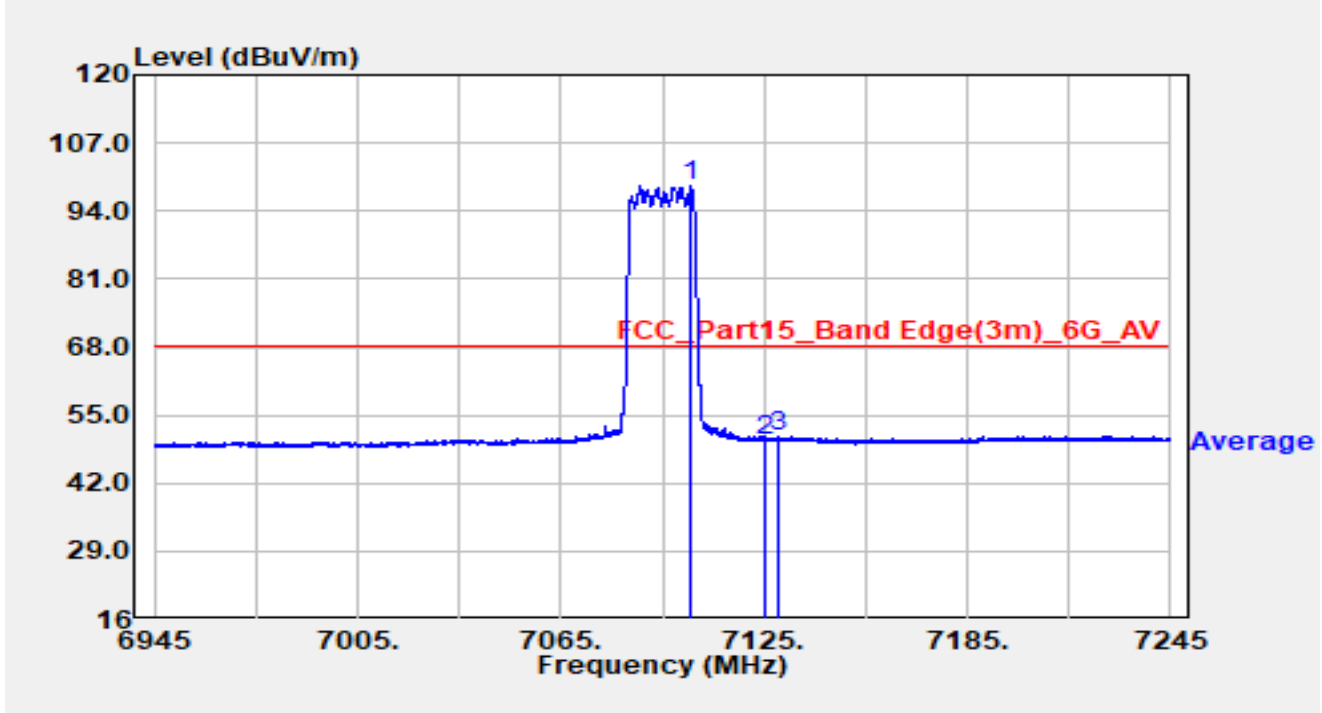


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7103.310	89.99	8.74	98.74	N/A	N/A	Average
2		7125.000	41.50	8.76	50.26	-17.94	68.20	Average
3	*	7129.200	42.32	8.78	51.10	-17.10	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

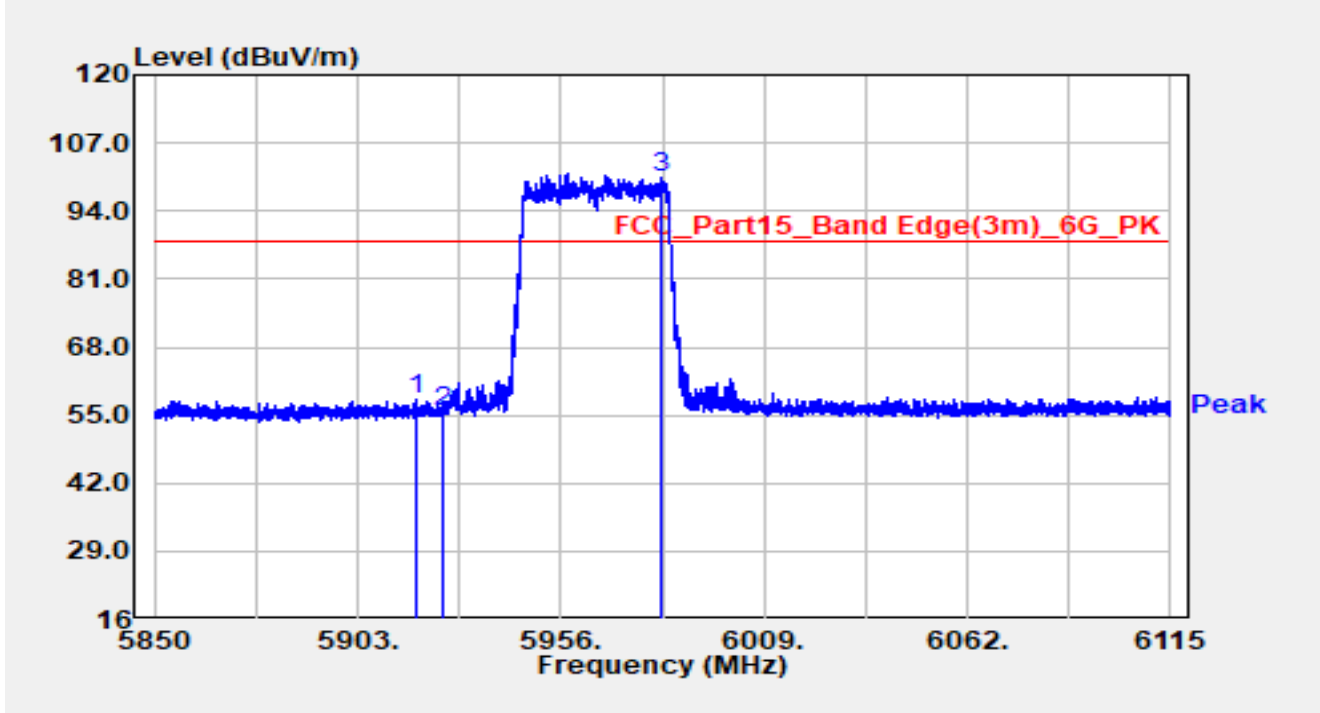


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.237	52.60	5.53	58.13	-30.07	88.20	Peak
2		5925.000	50.17	5.55	55.72	-32.48	88.20	Peak
3		5982.049	95.12	5.34	100.46	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

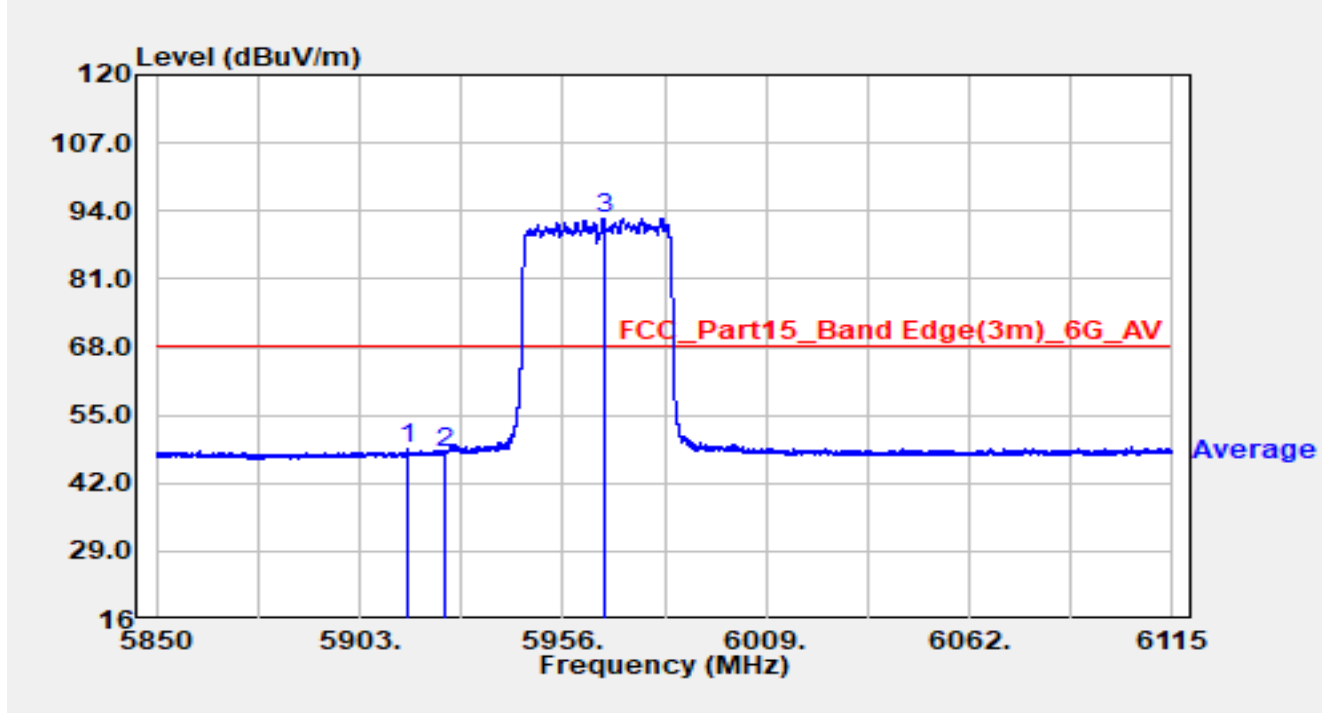


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5915.614	42.99	5.52	48.51	-19.69	68.20	Average
2		5925.000	42.09	5.55	47.65	-20.55	68.20	Average
3		5966.574	87.24	5.32	92.56	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

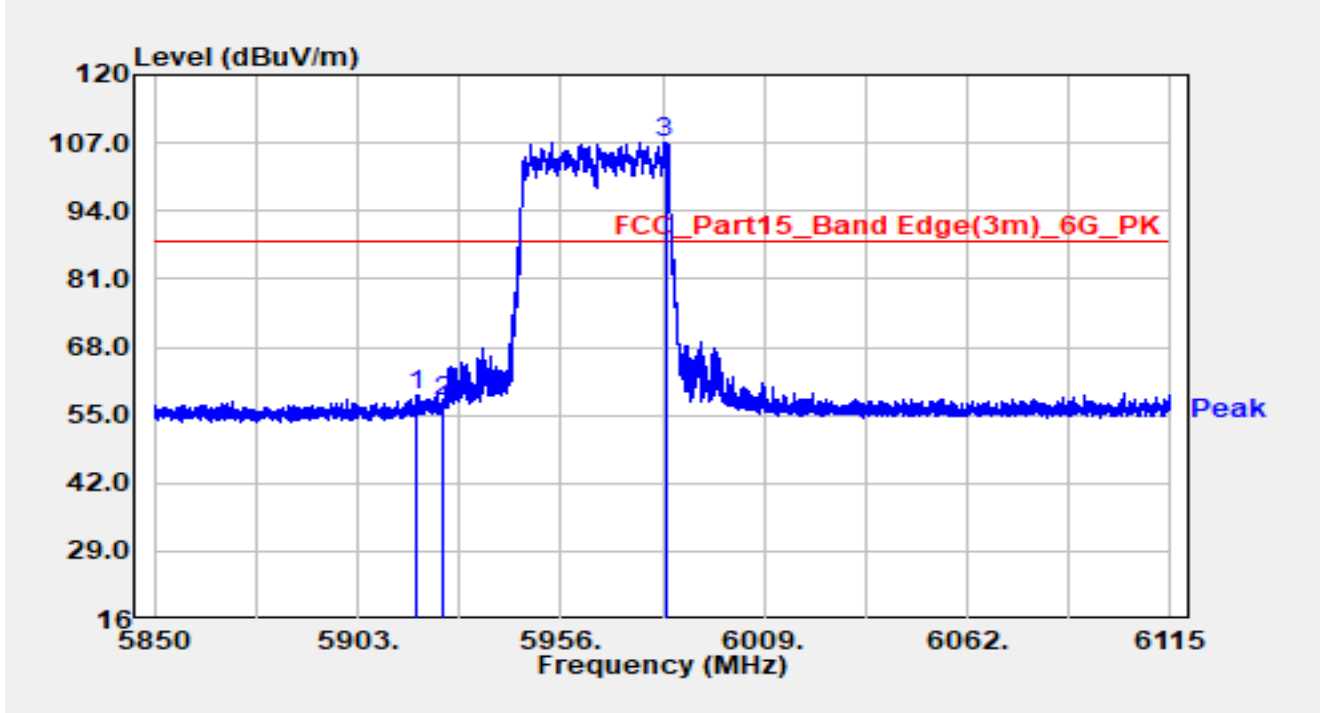


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.608	53.09	5.53	58.63	-29.57	88.20	Peak
2		5925.000	51.93	5.55	57.48	-30.72	88.20	Peak
3		5983.215	101.86	5.35	107.21	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

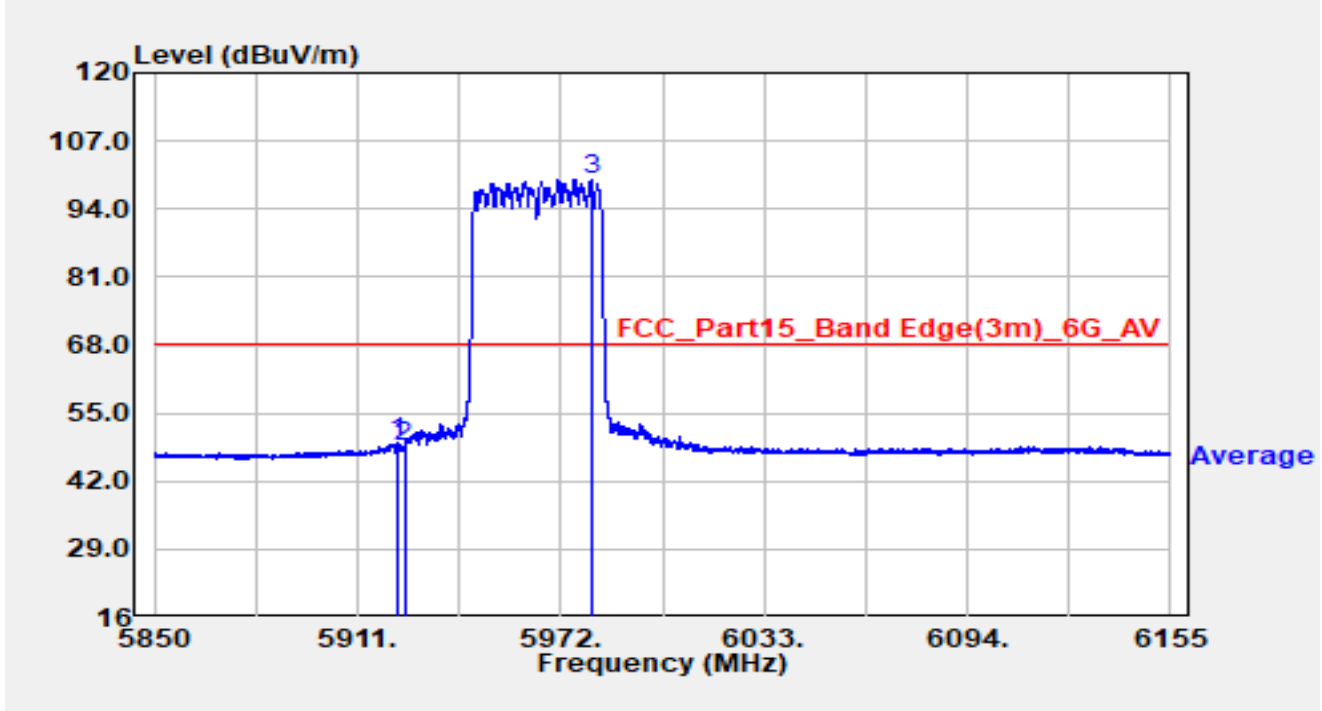


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.139	43.70	5.55	49.25	-18.95	68.20	Average
2		5925.000	42.91	5.55	48.47	-19.73	68.20	Average
3		5981.181	94.40	5.33	99.73	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

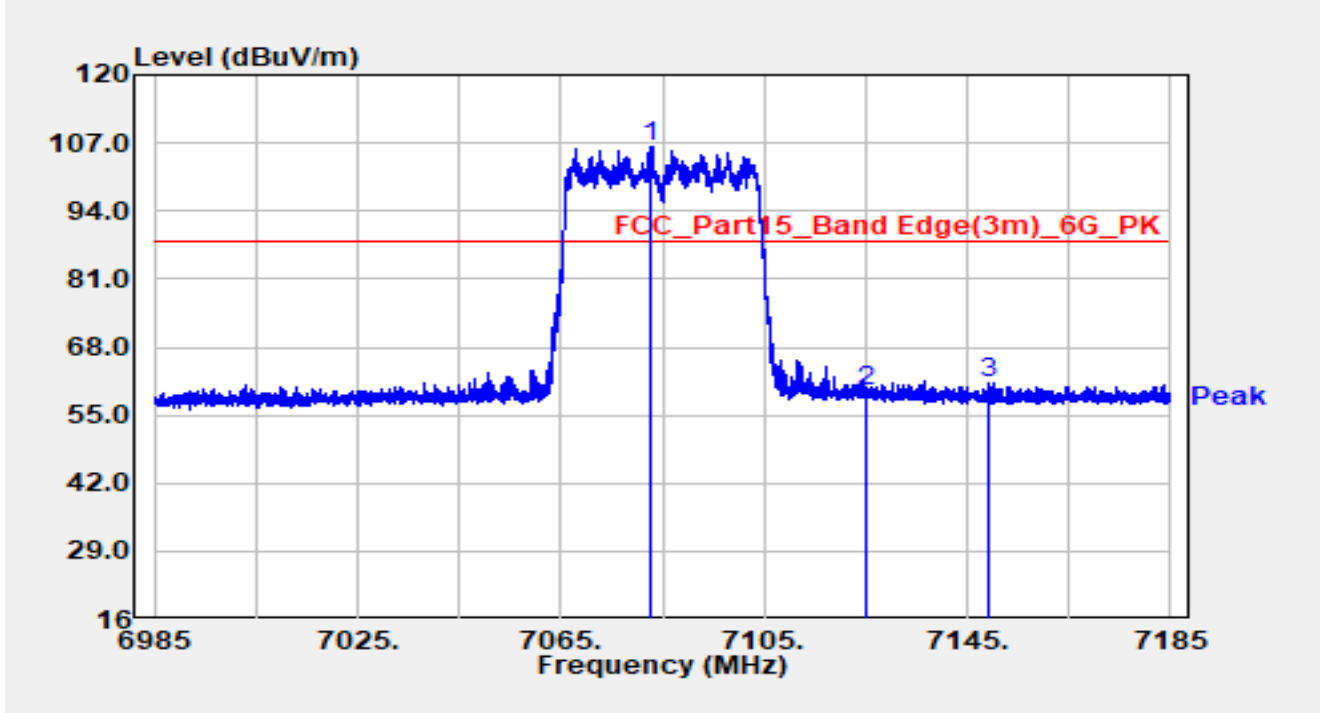


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7082.900	98.07	8.38	106.46	N/A	N/A	Peak
2		7125.000	50.80	8.76	59.56	-28.64	88.20	Peak
3	*	7149.280	52.55	8.69	61.24	-26.96	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

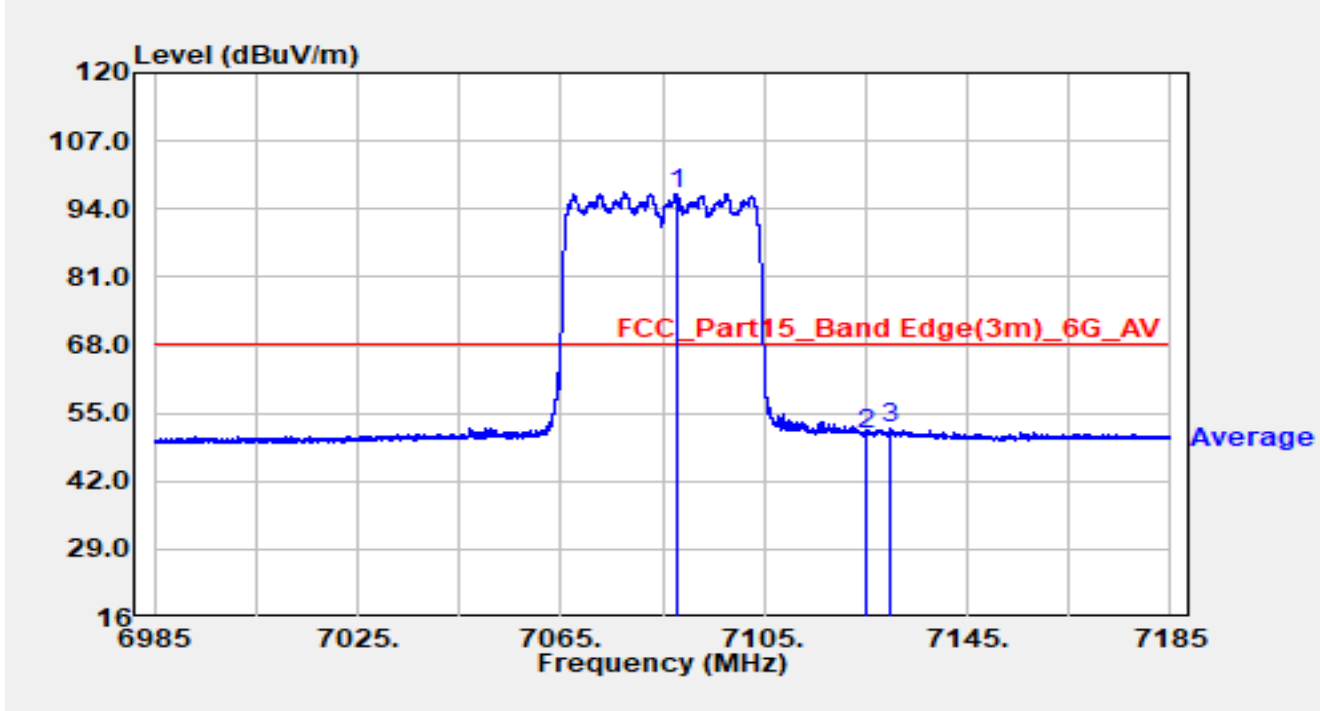


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7087.780	88.62	8.40	97.02	N/A	N/A	Average
2		7125.000	42.30	8.76	51.06	-17.14	68.20	Average
3	*	7129.880	43.48	8.79	52.27	-15.93	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	120/60V
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

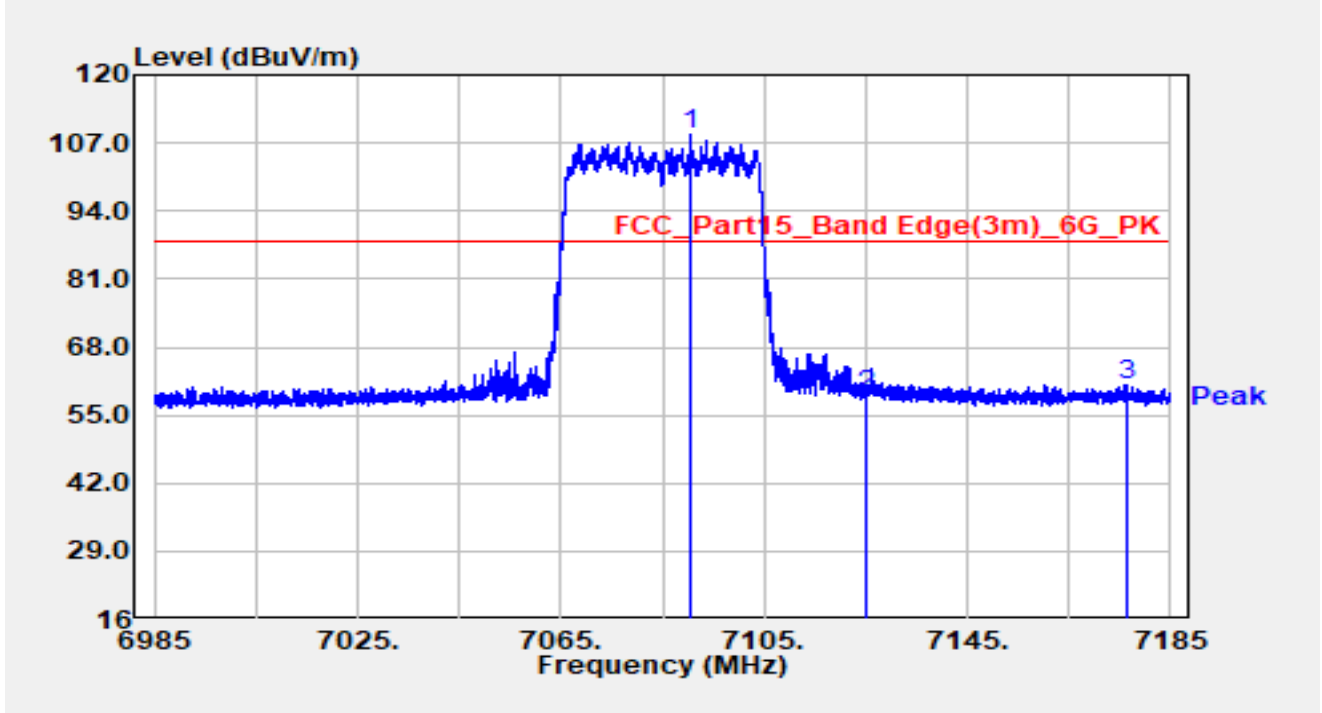


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	7090.420	99.98	8.46	108.44	20.24	88.20	Peak
2		7125.000	49.98	8.76	58.74	-29.46	88.20	Peak
3		7176.480	52.19	8.74	60.92	-27.28	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz		

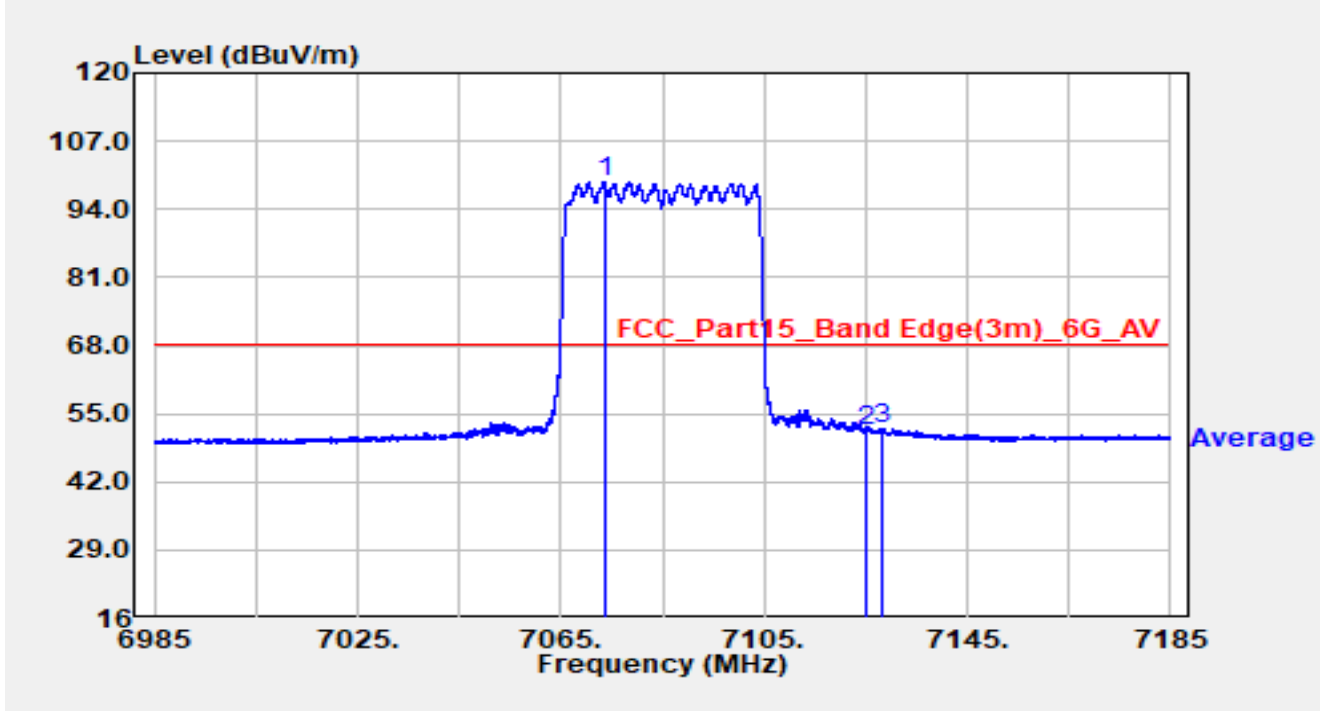


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7073.520	90.93	8.45	99.37	N/A	N/A	Average
2		7125.000	43.11	8.76	51.88	-16.32	68.20	Average
3	*	7128.260	43.44	8.77	52.21	-15.99	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

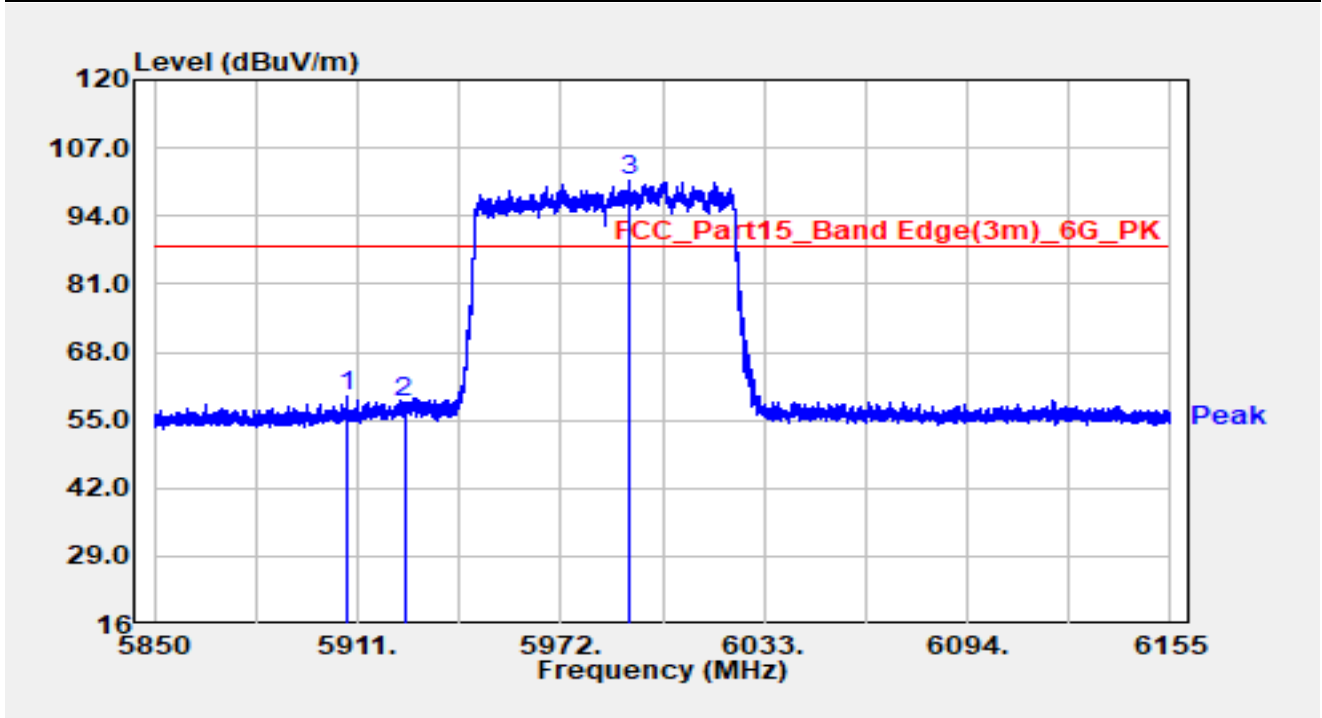


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5908.072	54.14	5.46	59.59	-28.61	88.20	Peak
2		5925.000	52.76	5.55	58.31	-29.89	88.20	Peak
3		5992.740	95.39	5.46	100.85	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

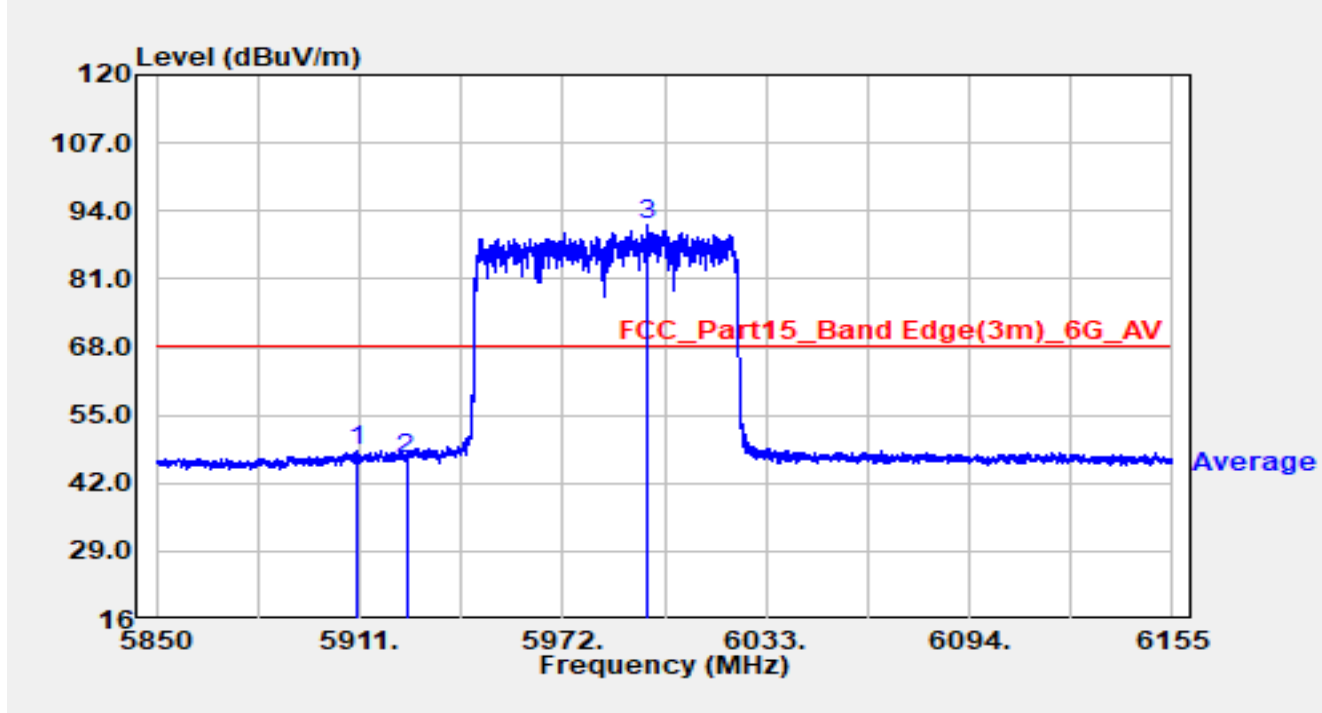


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5910.573	42.60	5.48	48.08	-20.12	68.20	Average
2		5925.000	41.15	5.55	46.70	-21.50	68.20	Average
3		5997.467	85.66	5.52	91.18	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

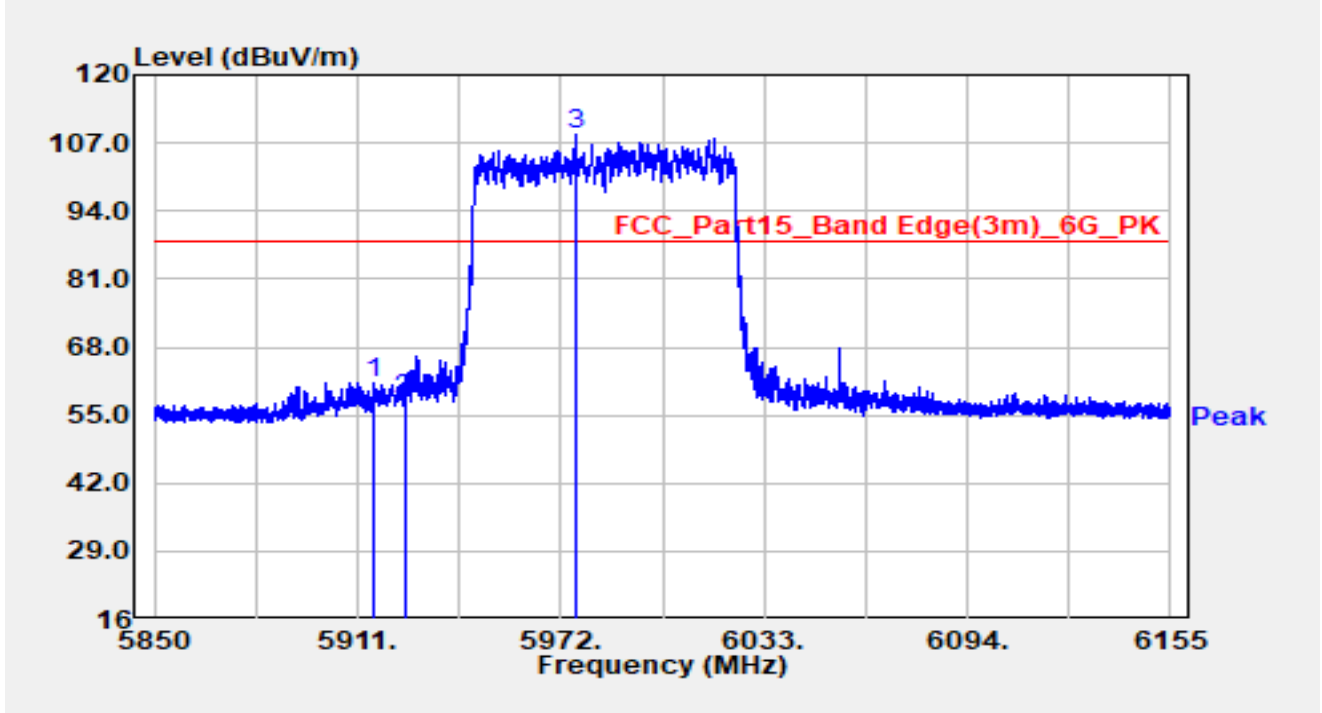


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5916.124	55.48	5.52	61.00	-27.20	88.20	Peak
2		5925.000	52.47	5.55	58.03	-30.17	88.20	Peak
3		5976.483	103.21	5.35	108.55	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

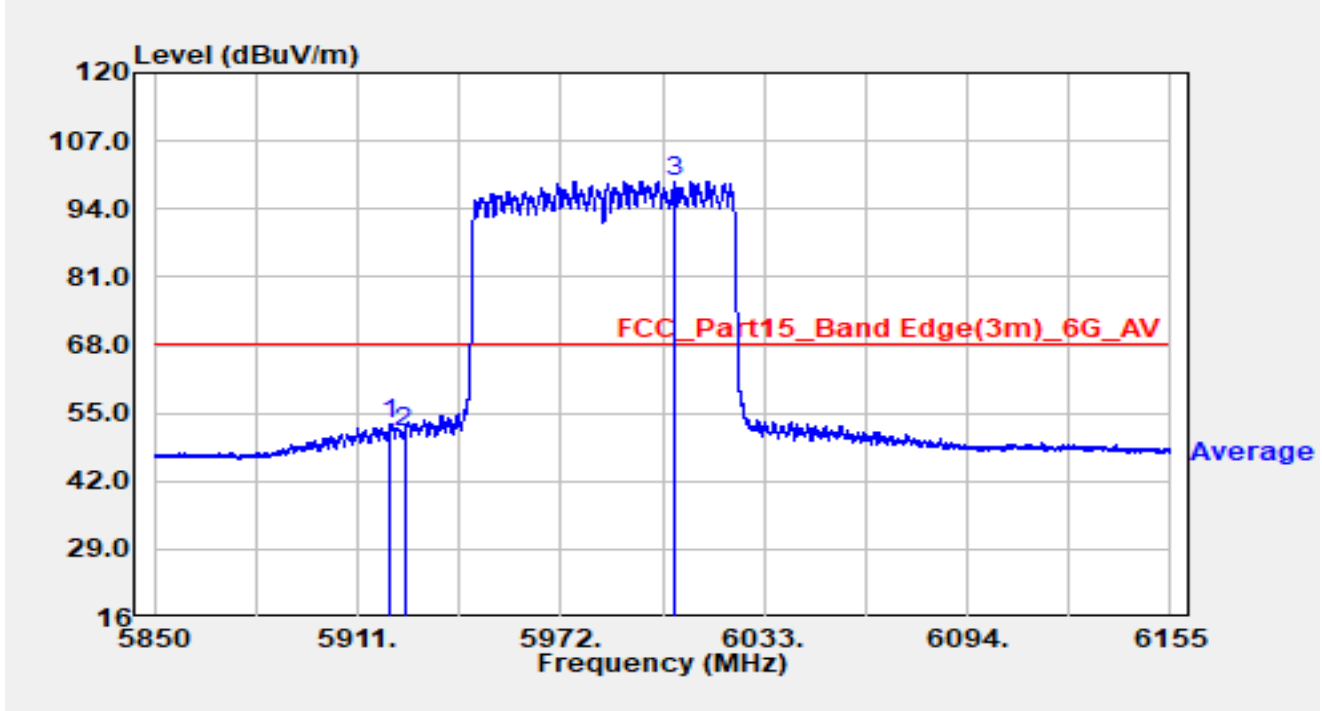


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.791	47.20	5.54	52.74	-15.46	68.20	Average
2		5925.000	45.68	5.55	51.23	-16.97	68.20	Average
3		6006.129	93.51	5.58	99.10	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

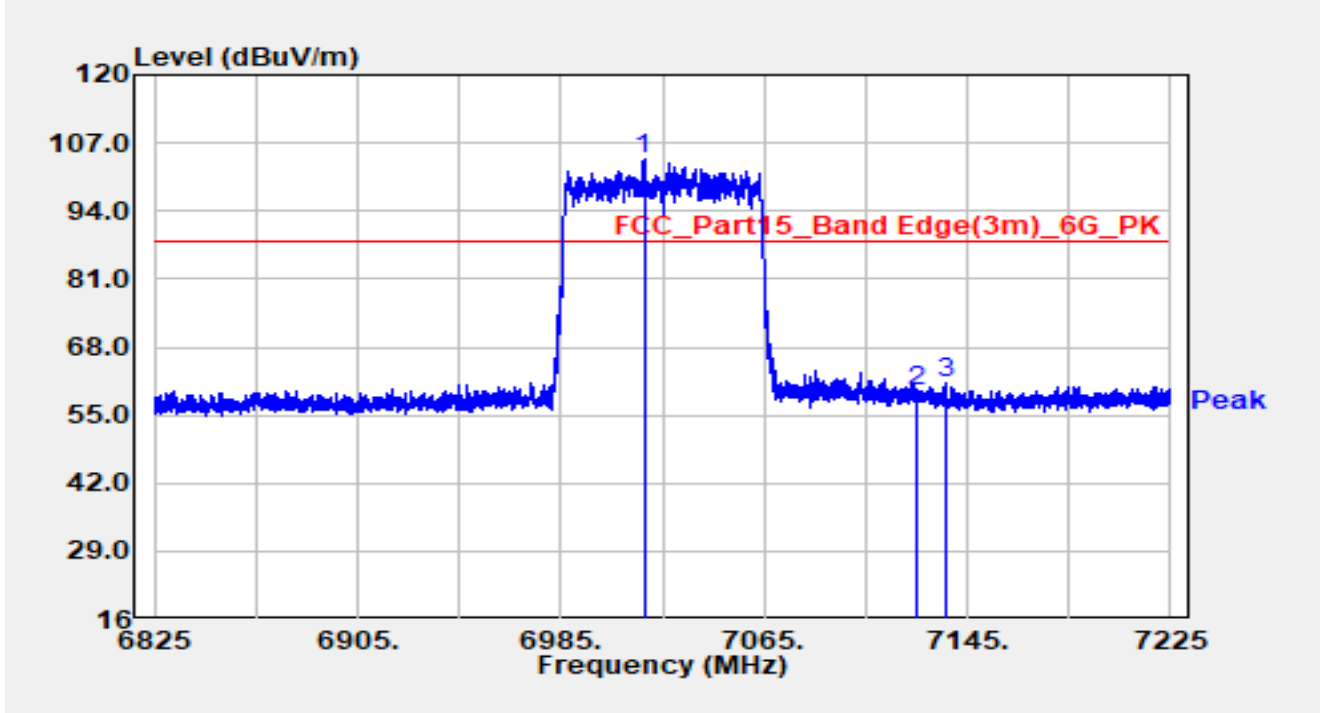


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7017.680	95.63	8.09	103.72	N/A	N/A	Peak
2		7125.000	50.87	8.76	59.63	-28.57	88.20	Peak
3	*	7136.640	52.32	8.88	61.20	-27.00	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

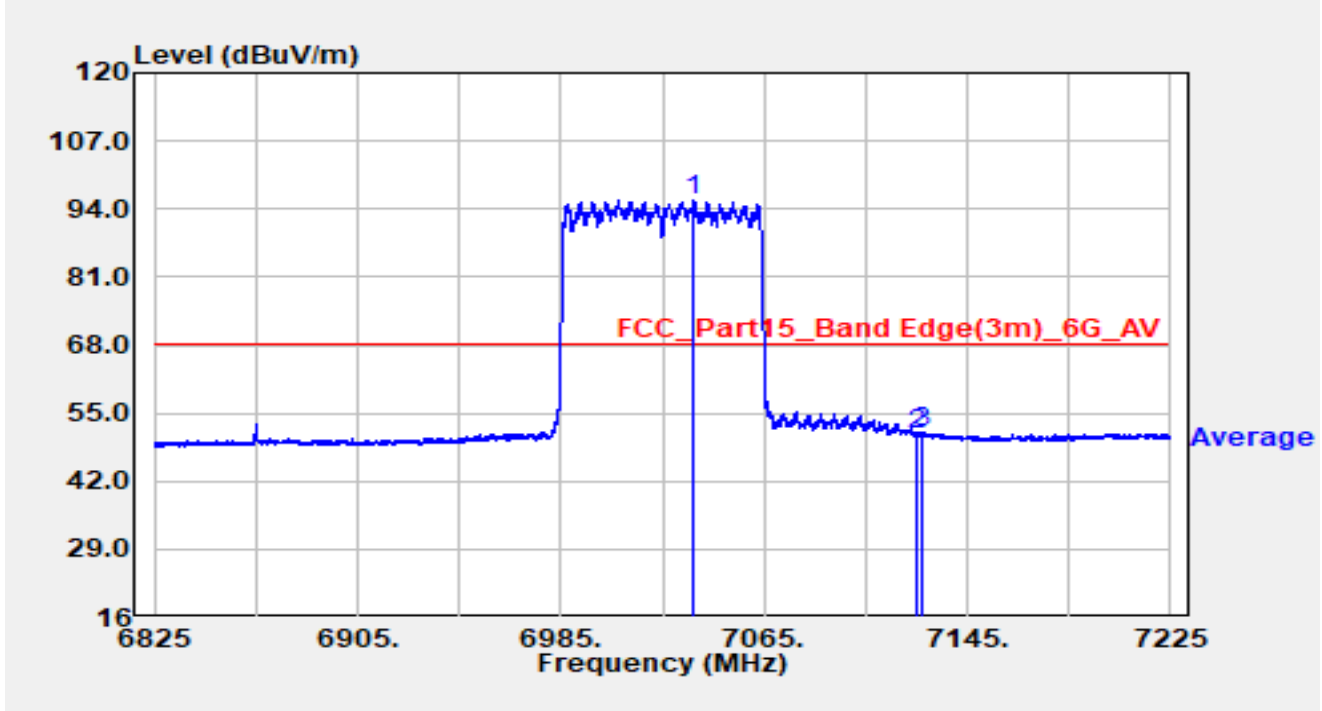


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7037.520	87.02	8.50	95.52	N/A	N/A	Average
2		7125.000	42.22	8.76	50.98	-17.22	68.20	Average
3	*	7127.360	42.75	8.77	51.52	-16.68	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

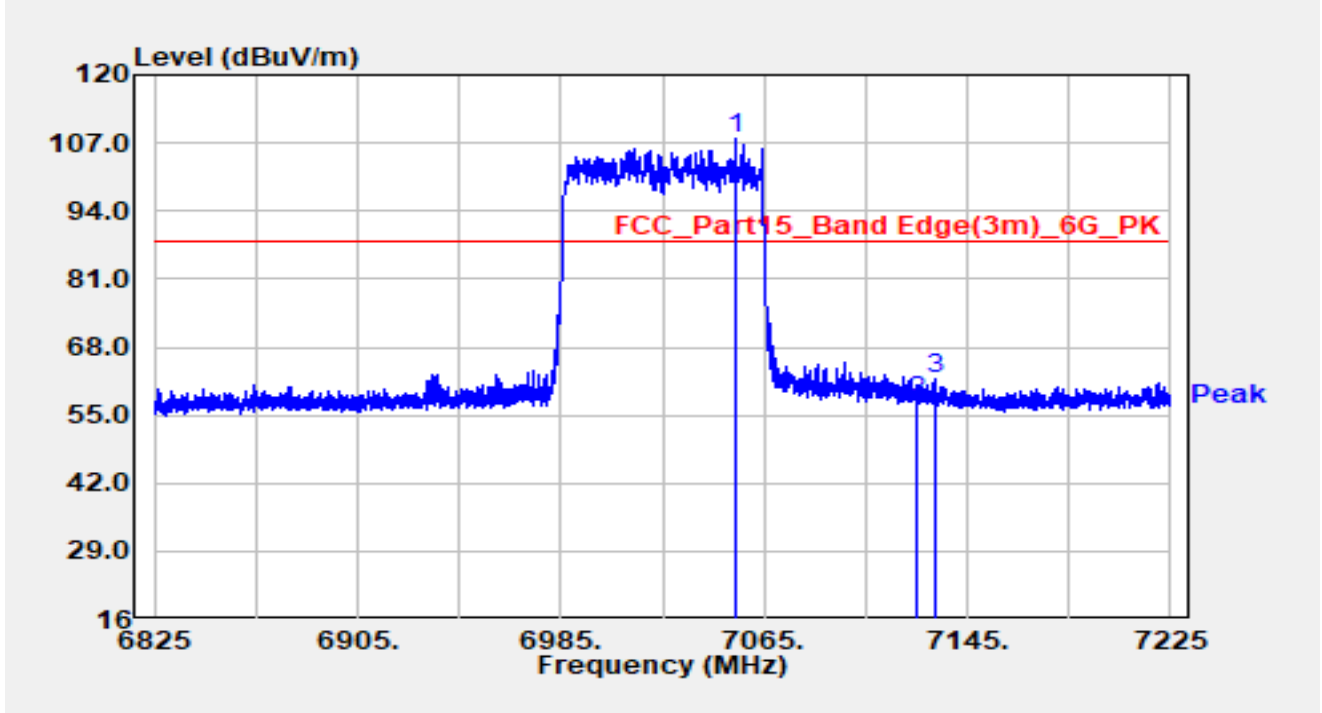


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7053.960	99.54	8.40	107.94	N/A	N/A	Peak
2		7125.000	48.90	8.76	57.66	-30.54	88.20	Peak
3	*	7132.760	53.14	8.83	61.97	-26.23	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz		

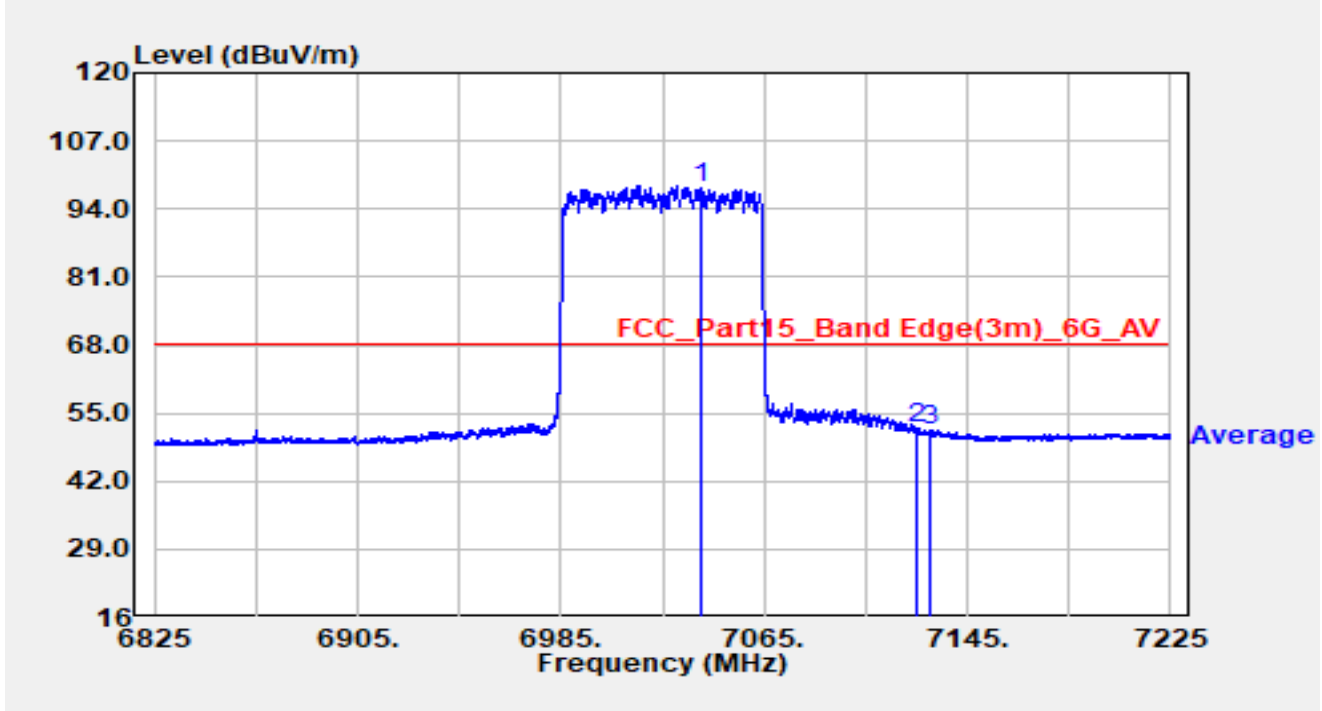


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7040.520	89.63	8.48	98.11	N/A	N/A	Average
2	*	7125.000	43.46	8.76	52.22	-15.98	68.20	Average
3		7130.360	43.11	8.80	51.90	-16.30	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

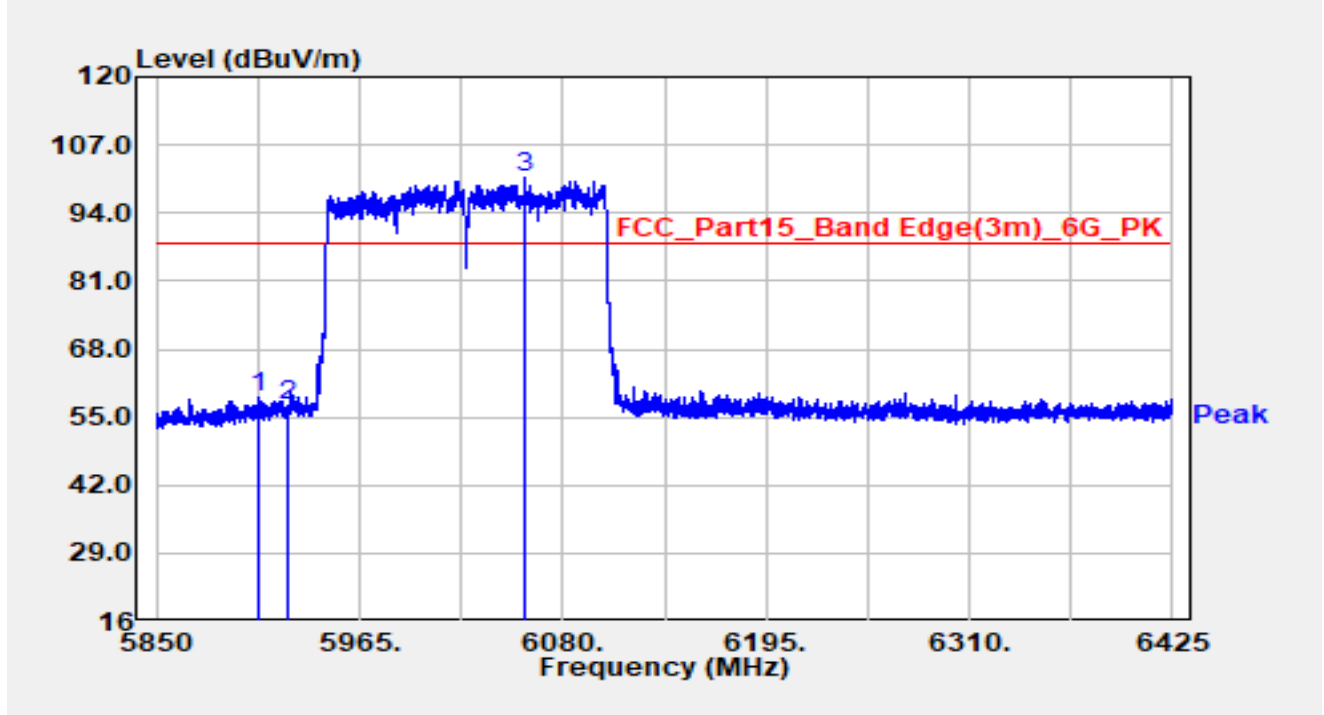


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5908.190	53.42	5.46	58.87	-29.33	88.20	Peak
2		5925.000	51.68	5.55	57.23	-30.97	88.20	Peak
3		6058.840	95.23	5.46	100.68	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

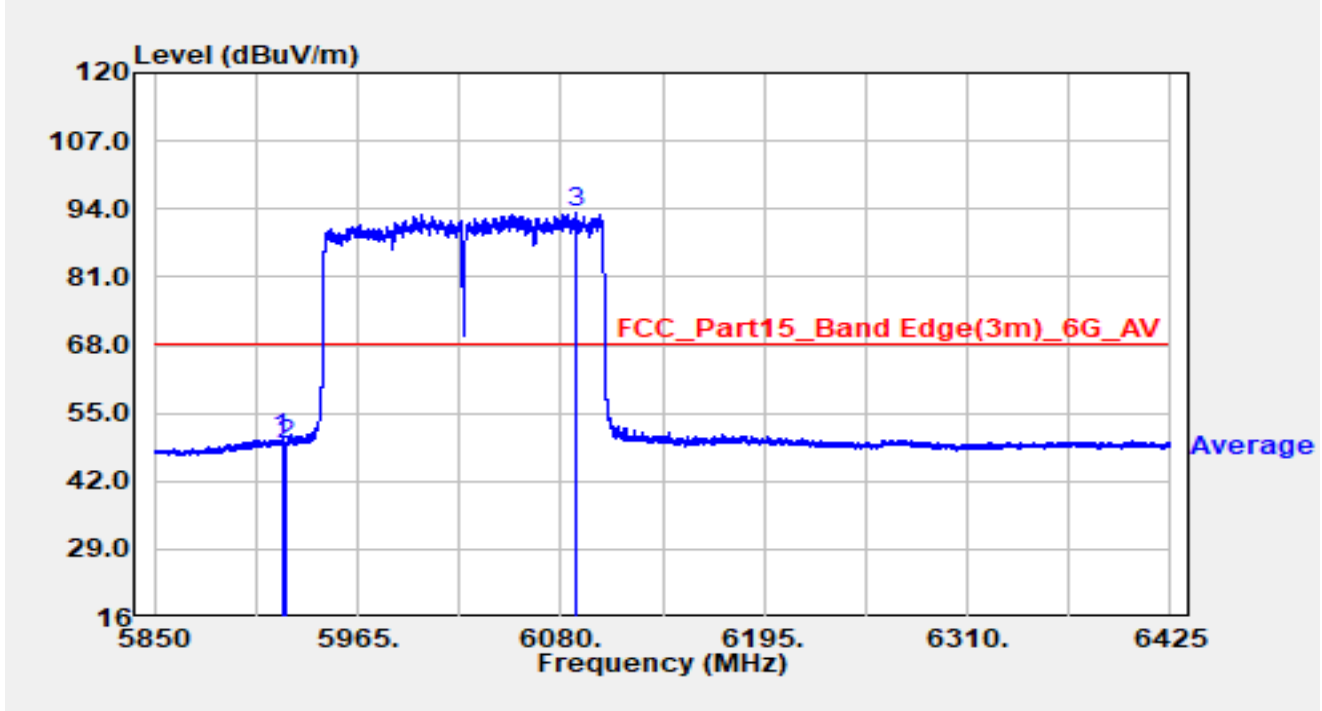


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.105	44.77	5.55	50.32	-17.88	68.20	Average
2		5925.000	43.61	5.55	49.16	-19.04	68.20	Average
3		6088.337	87.68	5.64	93.31	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

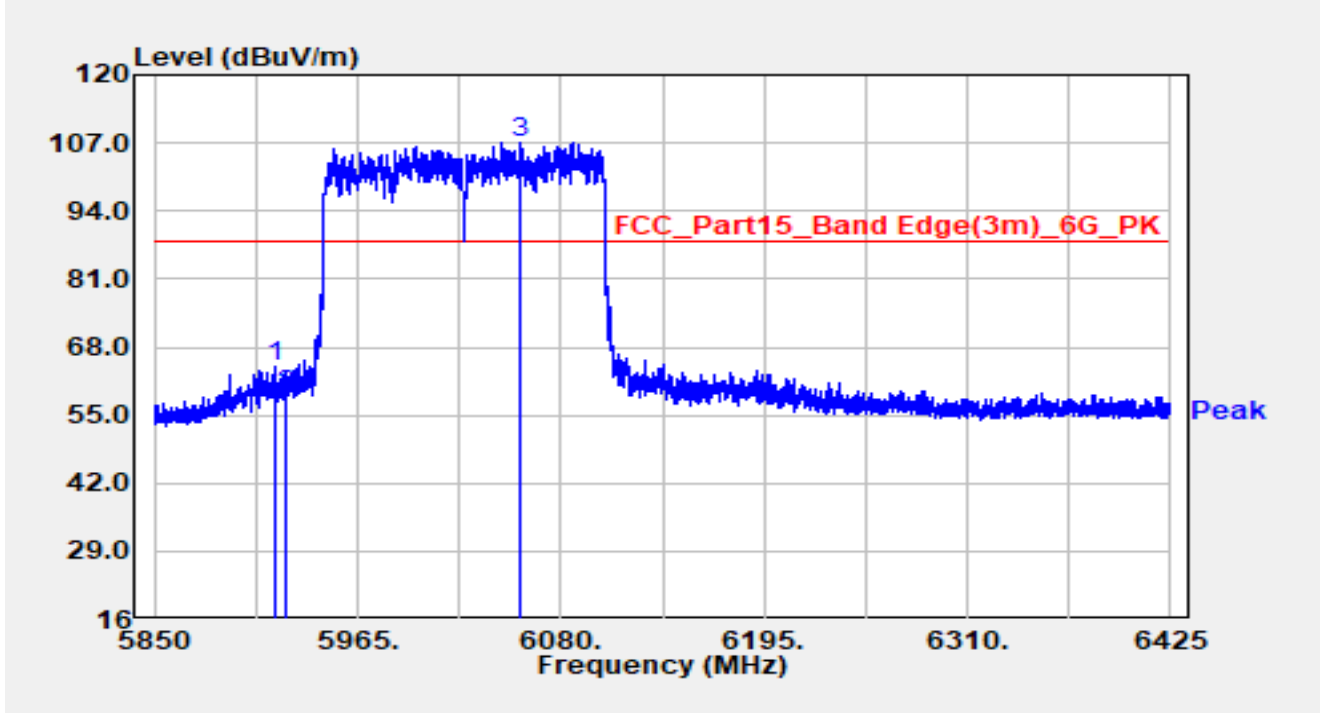


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.482	58.69	5.53	64.22	-23.98	88.20	Peak
2		5925.000	53.26	5.55	58.81	-29.39	88.20	Peak
3		6056.655	101.52	5.45	106.97	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

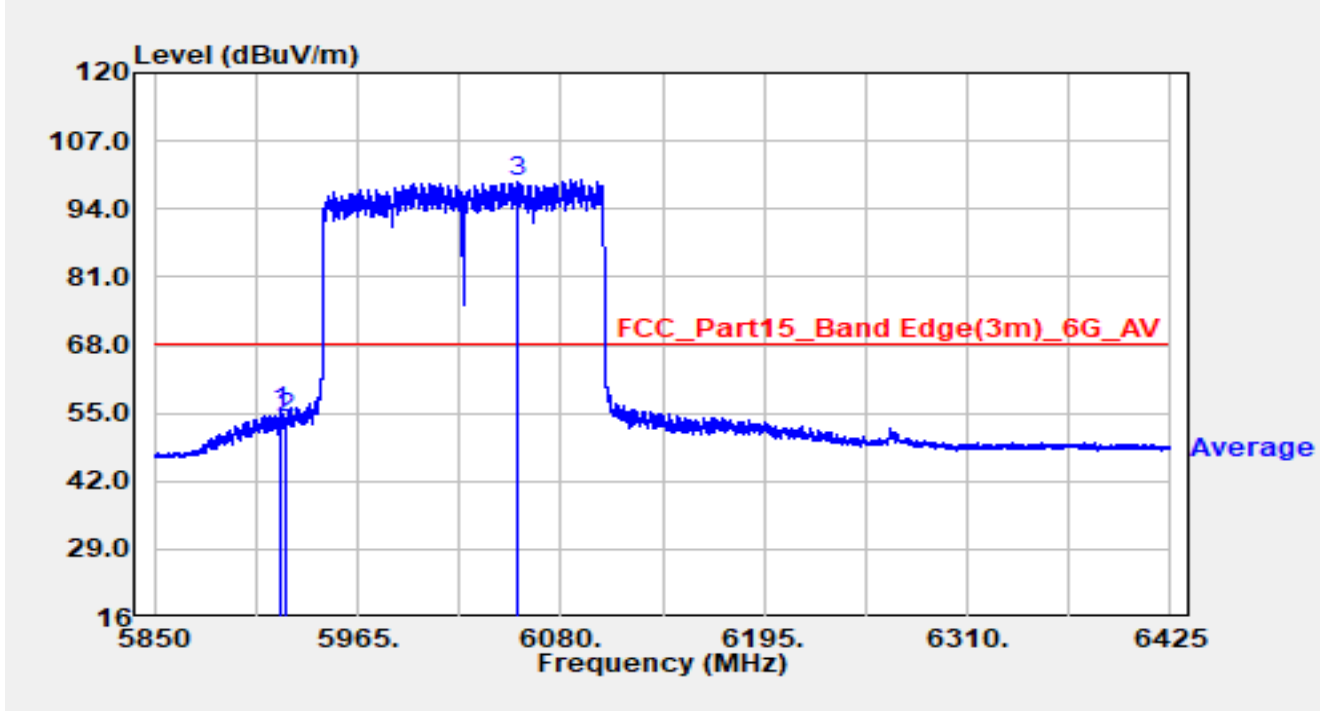


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.185	49.57	5.54	55.12	-13.08	68.20	Average
2		5925.000	48.59	5.55	54.15	-14.05	68.20	Average
3		6056.022	93.81	5.45	99.26	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

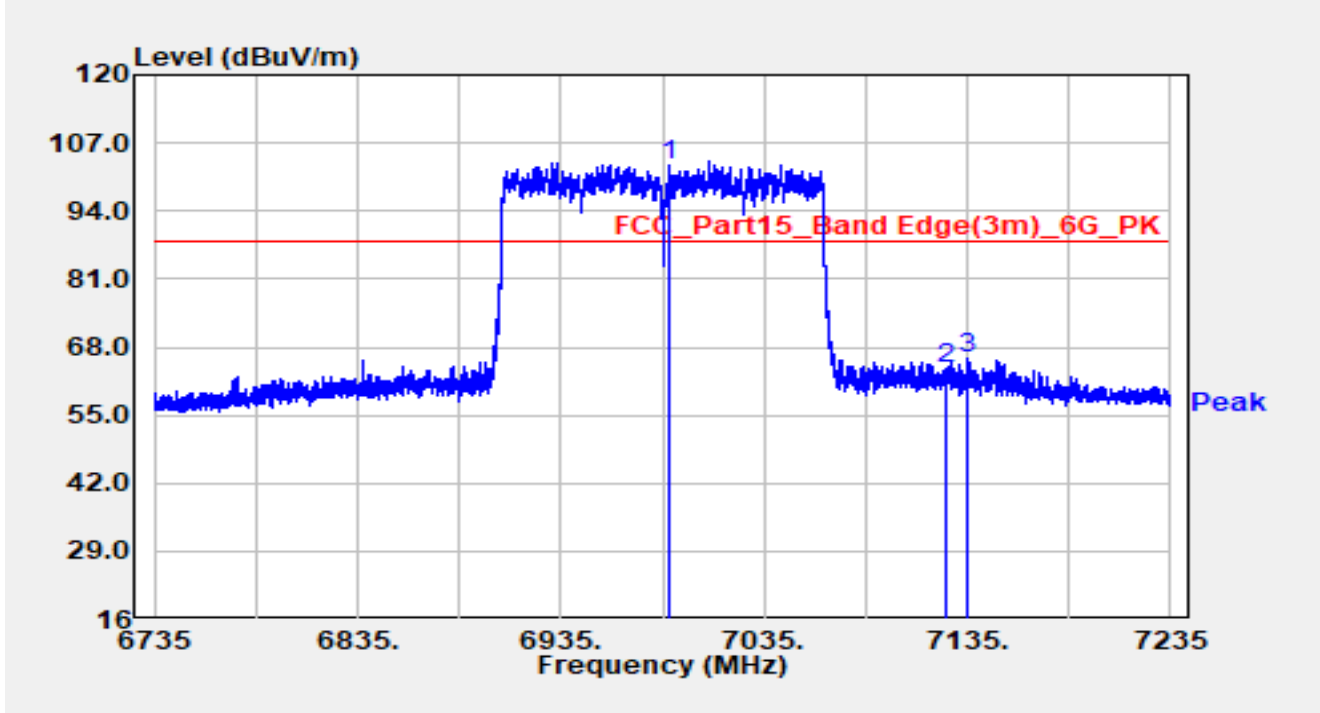


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6987.800	94.74	8.00	102.74	N/A	N/A	Peak
2		7125.000	55.18	8.76	63.94	-24.26	88.20	Peak
3	*	7135.500	56.99	8.87	65.85	-22.35	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

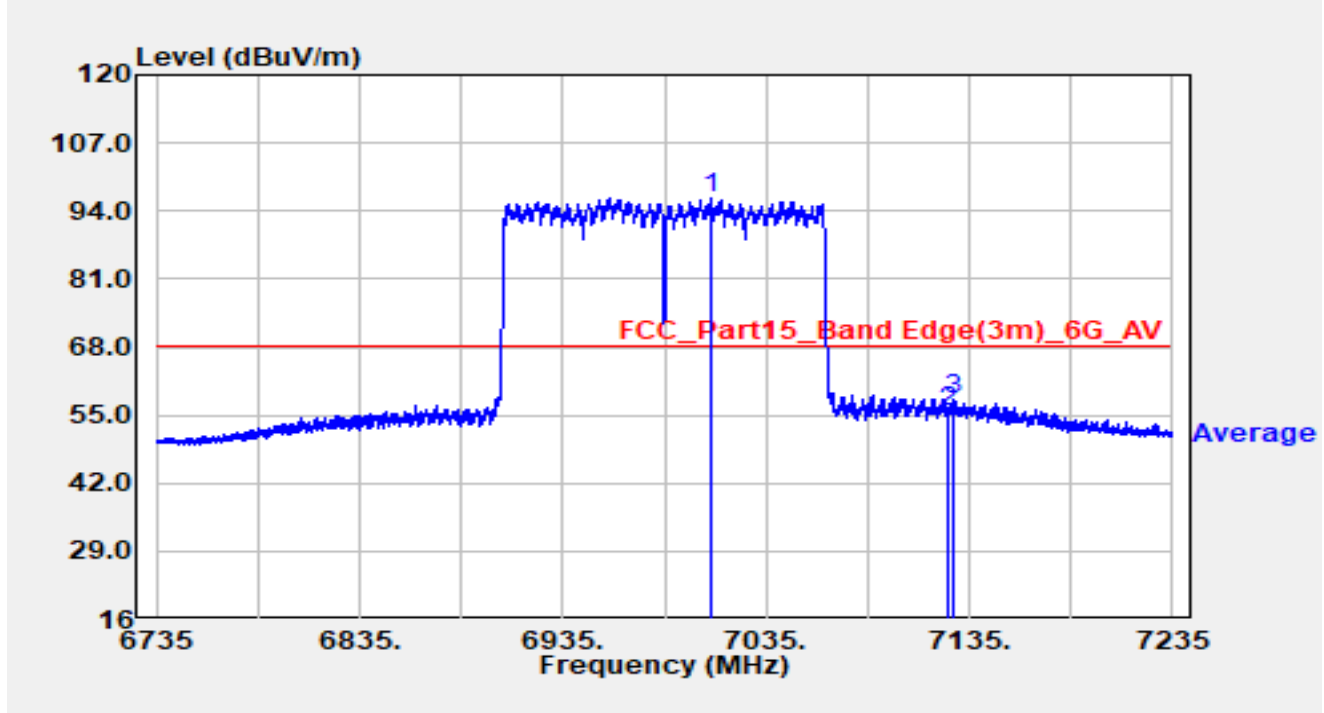


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7007.650	88.36	8.07	96.43	N/A	N/A	Average
2		7125.000	46.93	8.76	55.69	-12.51	68.20	Average
3	*	7127.450	49.29	8.77	58.06	-10.14	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

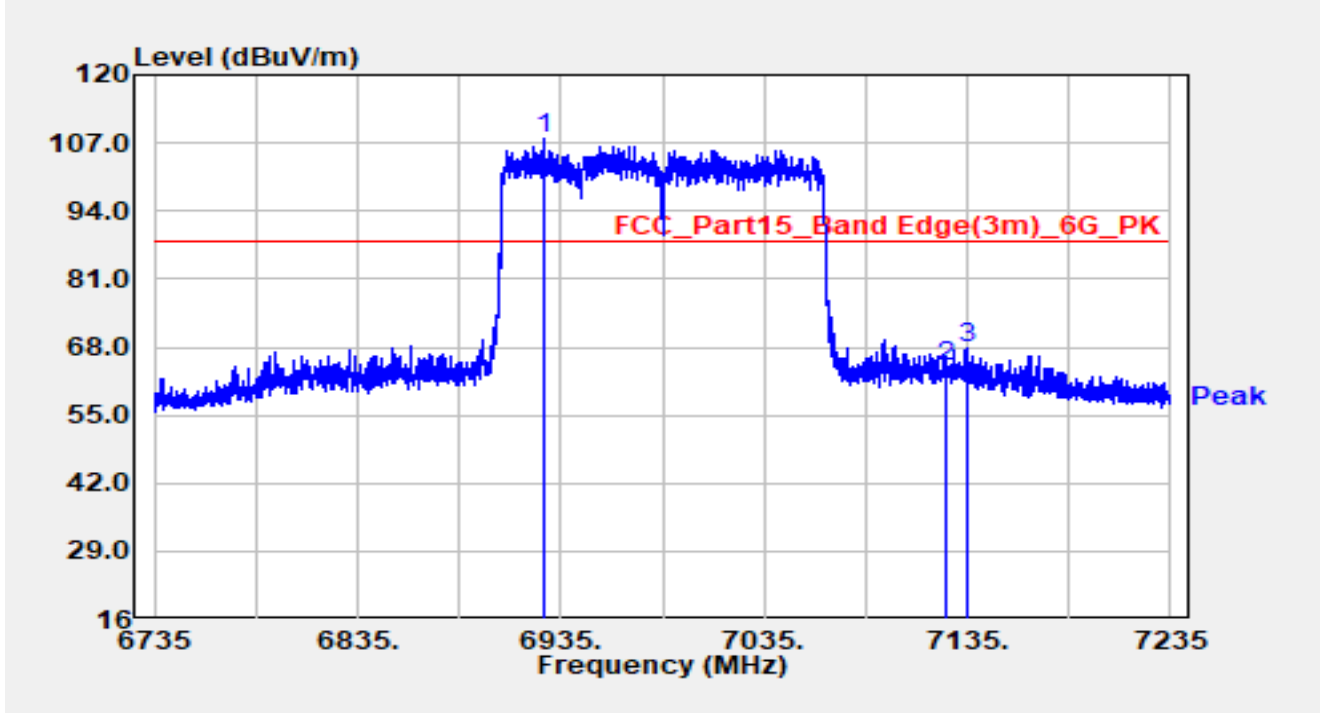


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6926.550	100.38	7.61	107.99	N/A	N/A	Peak
2		7125.000	55.61	8.76	64.37	-23.83	88.20	Peak
3	*	7135.500	58.84	8.87	67.70	-20.50	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz		

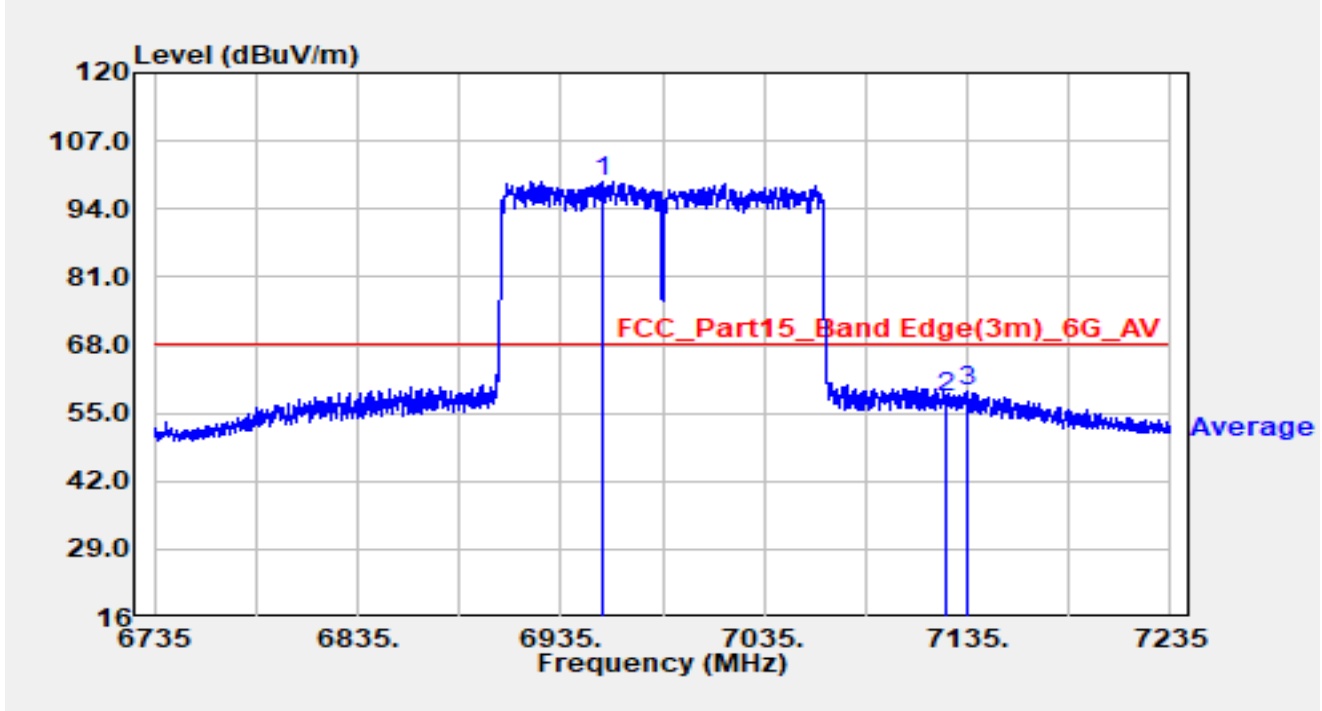


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6955.550	91.30	7.91	99.22	N/A	N/A	Average
2		7125.000	49.24	8.76	58.00	-10.20	68.20	Average
3	*	7134.900	50.27	8.86	59.13	-9.07	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6265MHz		

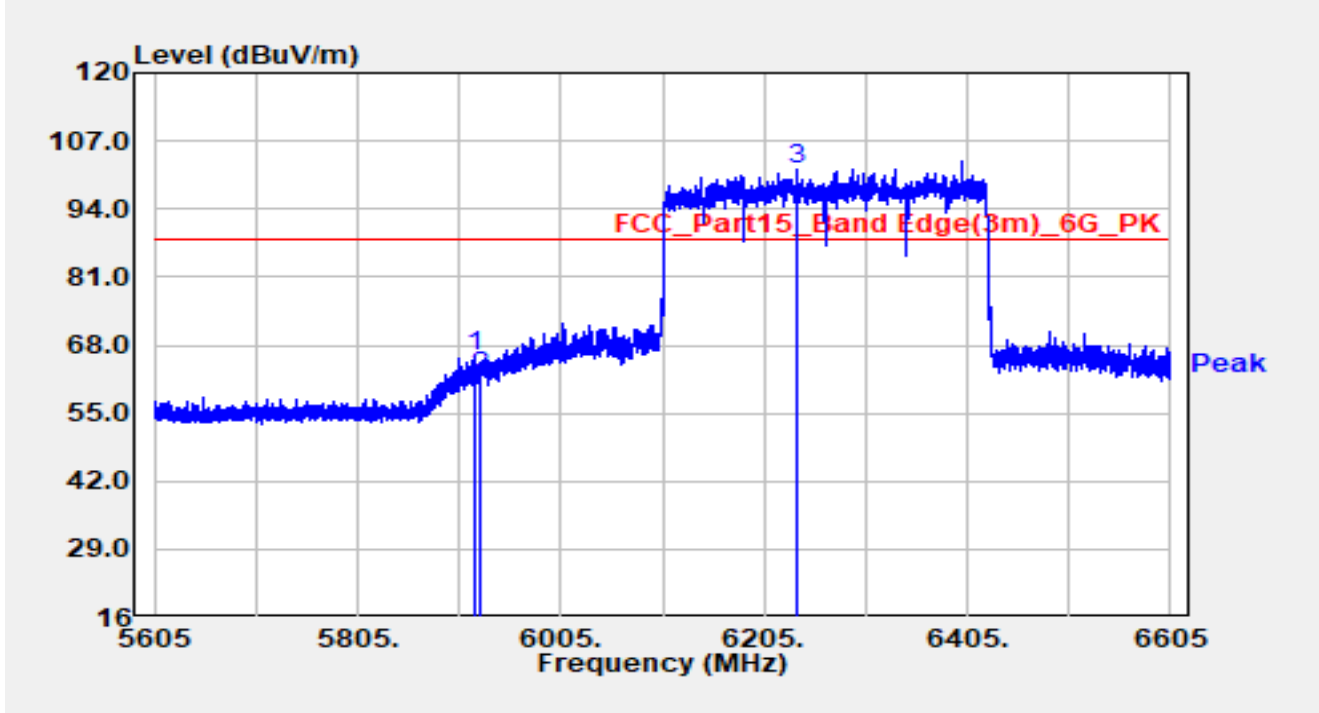


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.000	60.32	5.54	65.86	-22.34	88.20	Peak
2		5925.000	56.35	5.55	61.91	-26.29	88.20	Peak
3		6237.000	95.62	5.82	101.44	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6265MHz		

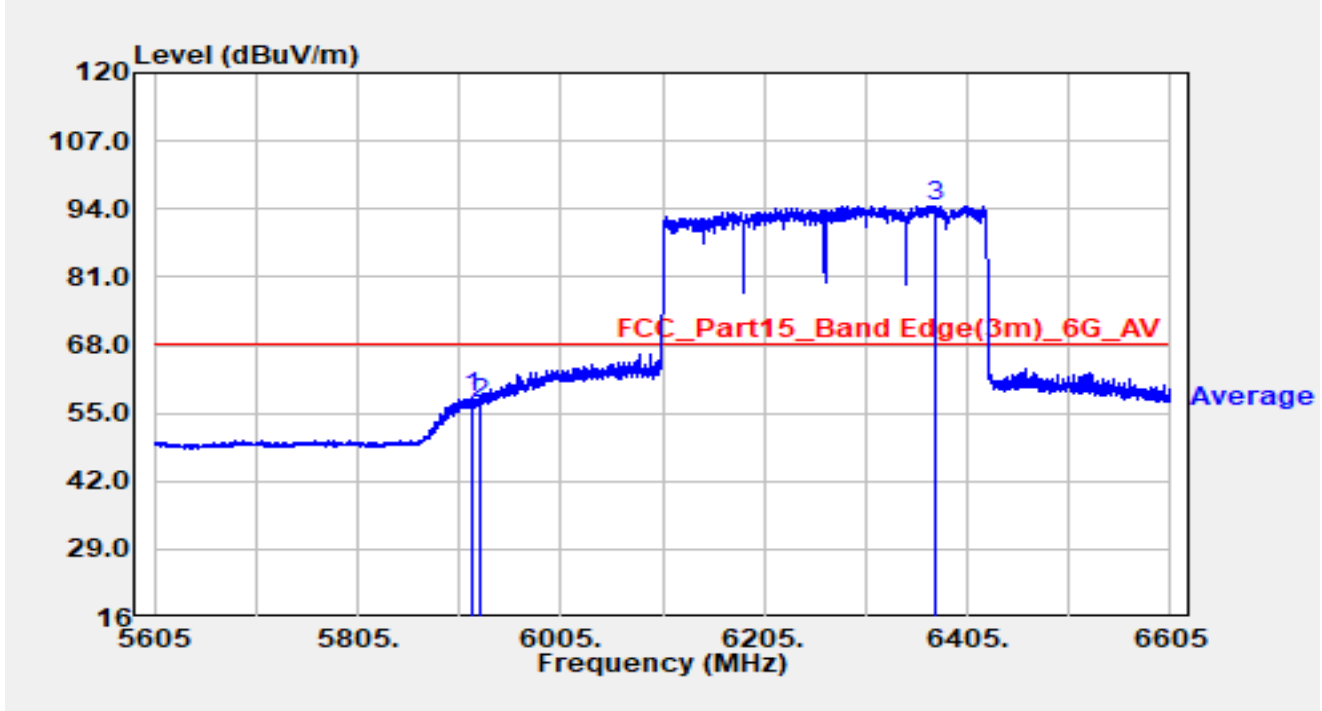


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5917.400	52.43	5.53	57.96	-10.24	68.20	Average
2		5925.000	51.27	5.55	56.82	-11.38	68.20	Average
3		6374.500	87.90	6.69	94.59	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6265MHz		

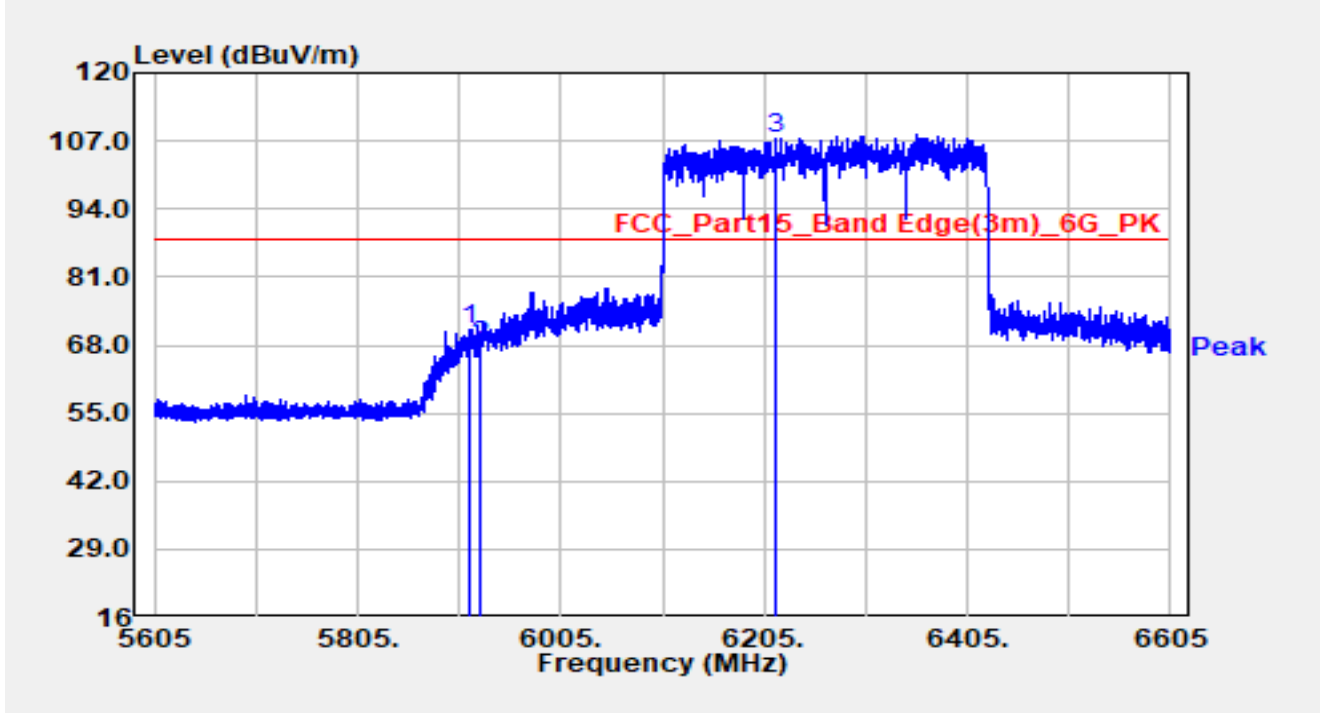


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5915.700	65.30	5.52	70.82	-17.38	88.20	Peak
2		5925.000	62.36	5.55	67.92	-20.28	88.20	Peak
3		6216.700	101.44	6.15	107.59	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6265MHz		

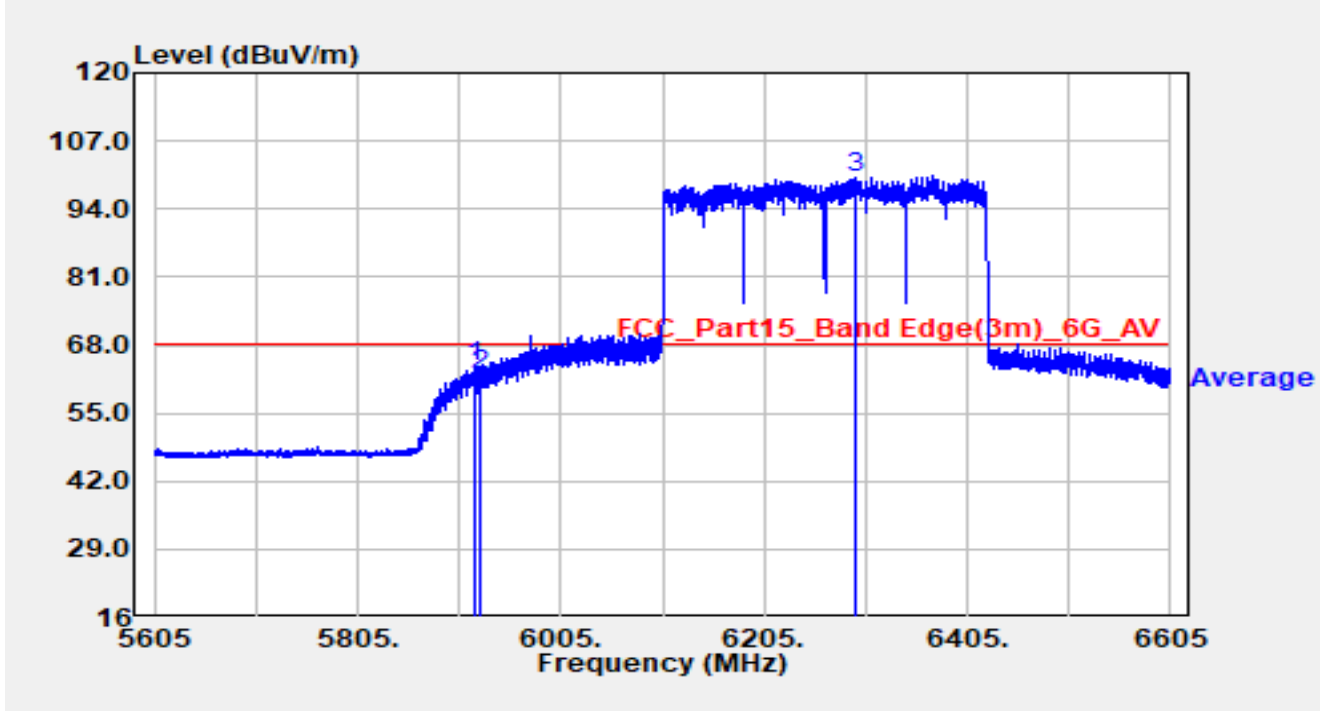


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.200	58.47	5.54	64.01	-4.19	68.20	Average
2		5925.000	56.88	5.55	62.43	-5.77	68.20	Average
3		6296.000	93.58	6.27	99.85	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6905MHz		

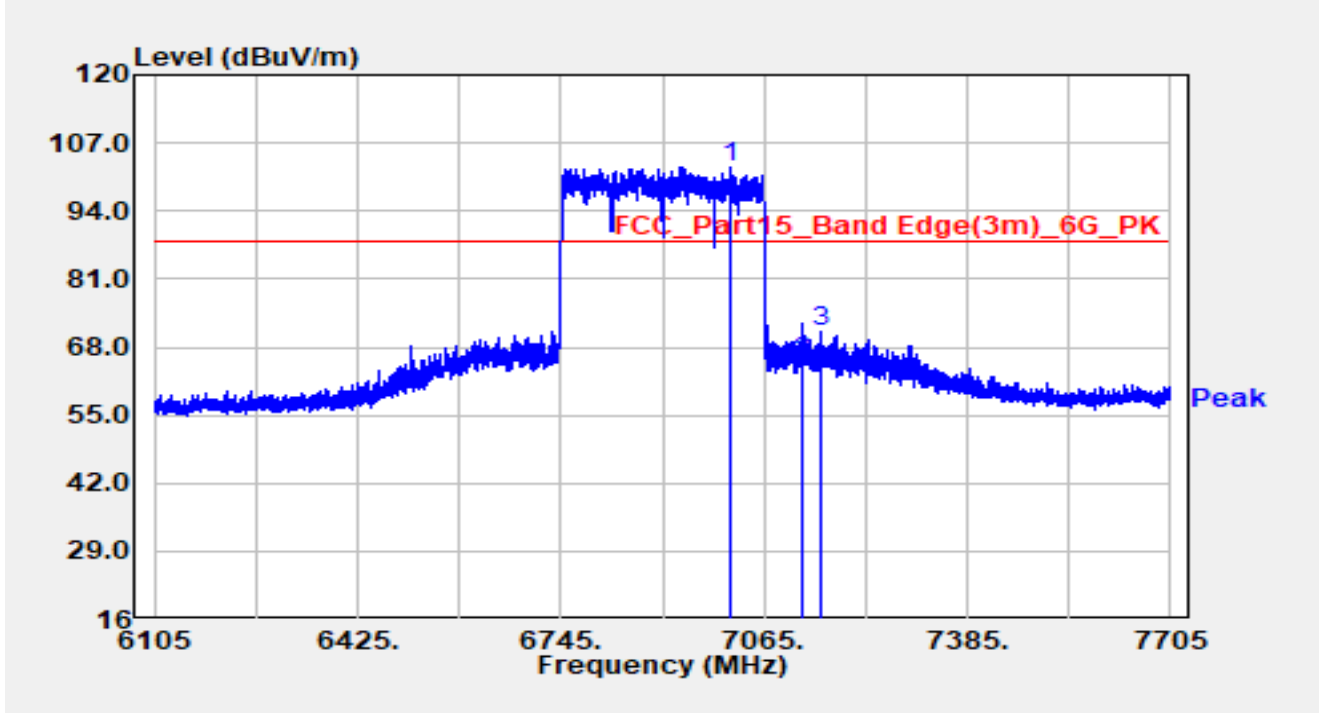


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7011.560	94.08	8.07	102.15	N/A	N/A	Peak
2		7125.000	56.23	8.76	64.99	-23.21	88.20	Peak
3	*	7153.160	62.39	8.62	71.01	-17.19	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6905MHz		

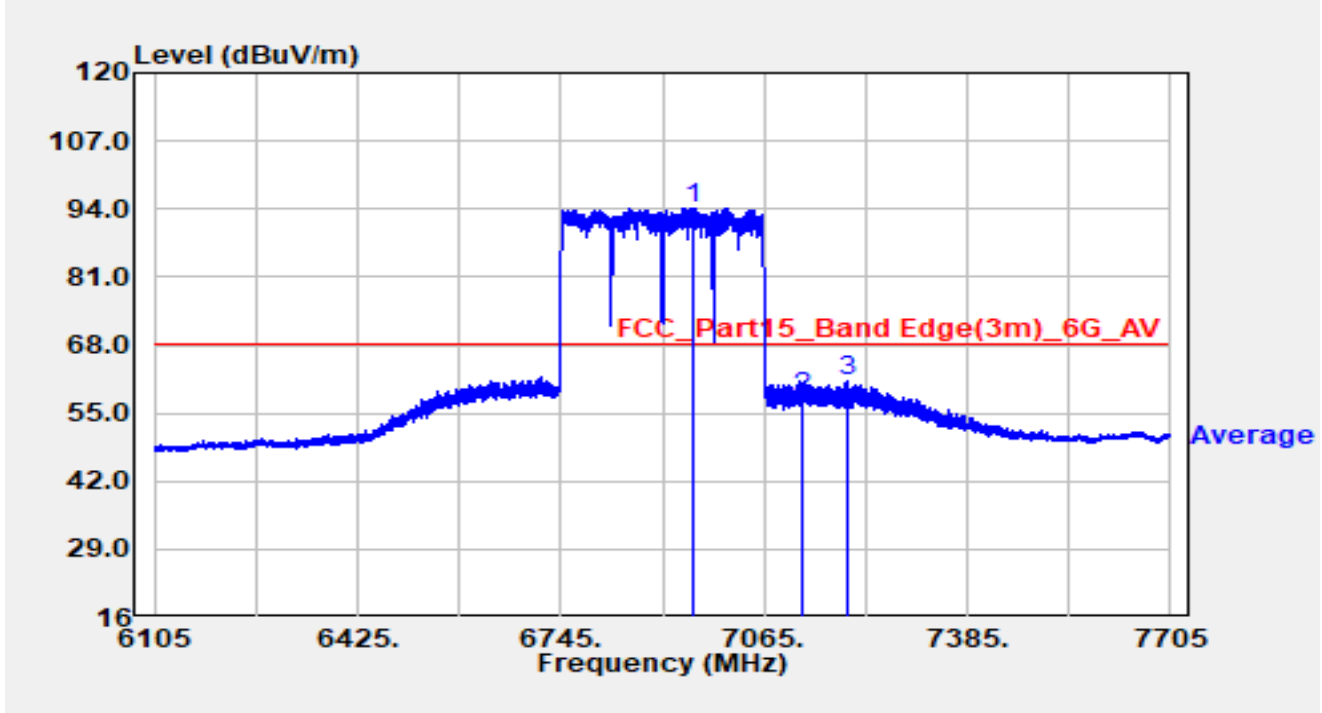


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		6952.360	86.33	7.88	94.21	N/A	N/A	Average
2		7125.000	49.32	8.76	58.08	-10.12	68.20	Average
3	*	7195.240	52.10	8.97	61.08	-7.12	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6905MHz		

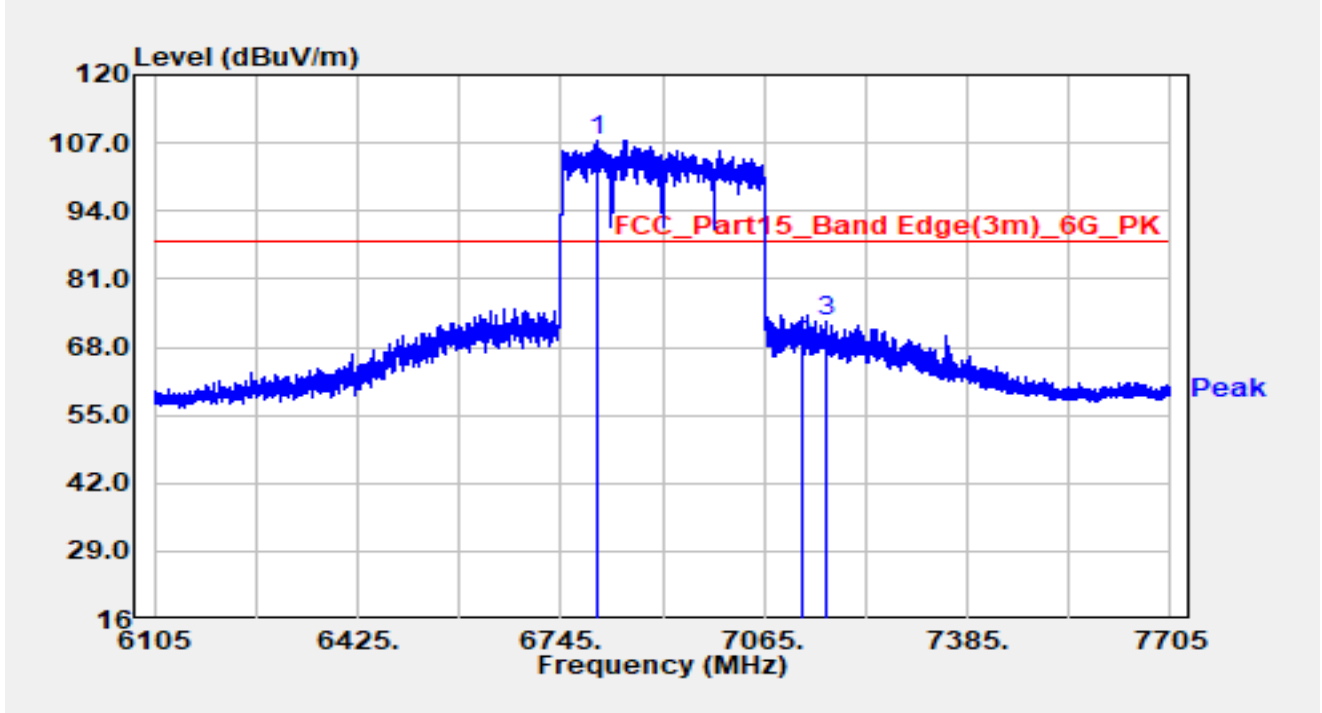


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6801.160	100.12	7.37	107.49	N/A	N/A	Peak
2		7125.000	59.31	8.76	68.07	-20.13	88.20	Peak
3	*	7164.520	64.20	8.67	72.87	-15.33	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-02
Test Engineer	Dick Shen	Temp./Humidity	24.8°C/55.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6905MHz		

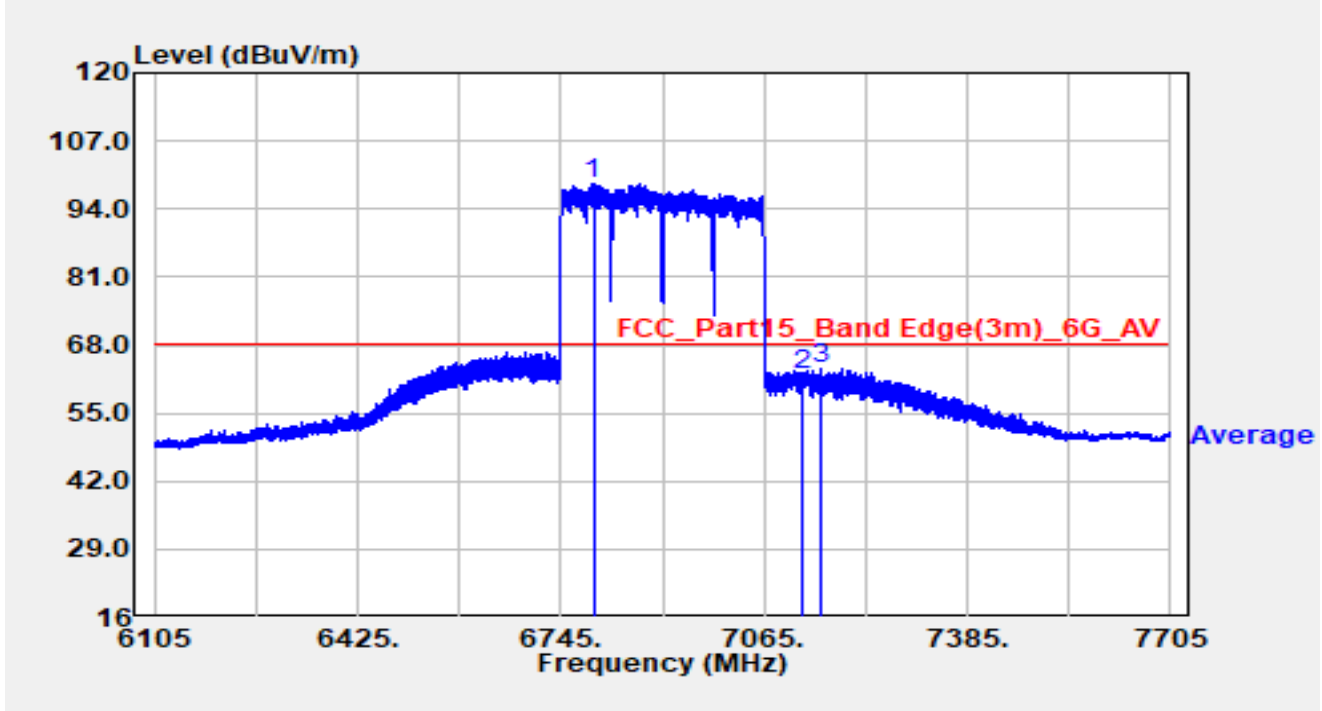


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6796.040	91.47	7.37	98.84	N/A	N/A	Average
2		7125.000	53.56	8.76	62.32	-5.88	68.20	Average
3	*	7153.640	54.96	8.61	63.58	-4.62	68.20	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

A.10 AC Conducted Emissions Test Result

Site	SIP-SR2	Test Date	2024-07-01
Test Engineer	Arvin Ding	Temp./Humidity	26.3°C /65.9%
Factor	SIP-SR2-ENV216_101684_E	Polarity	Line
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6745MHz		

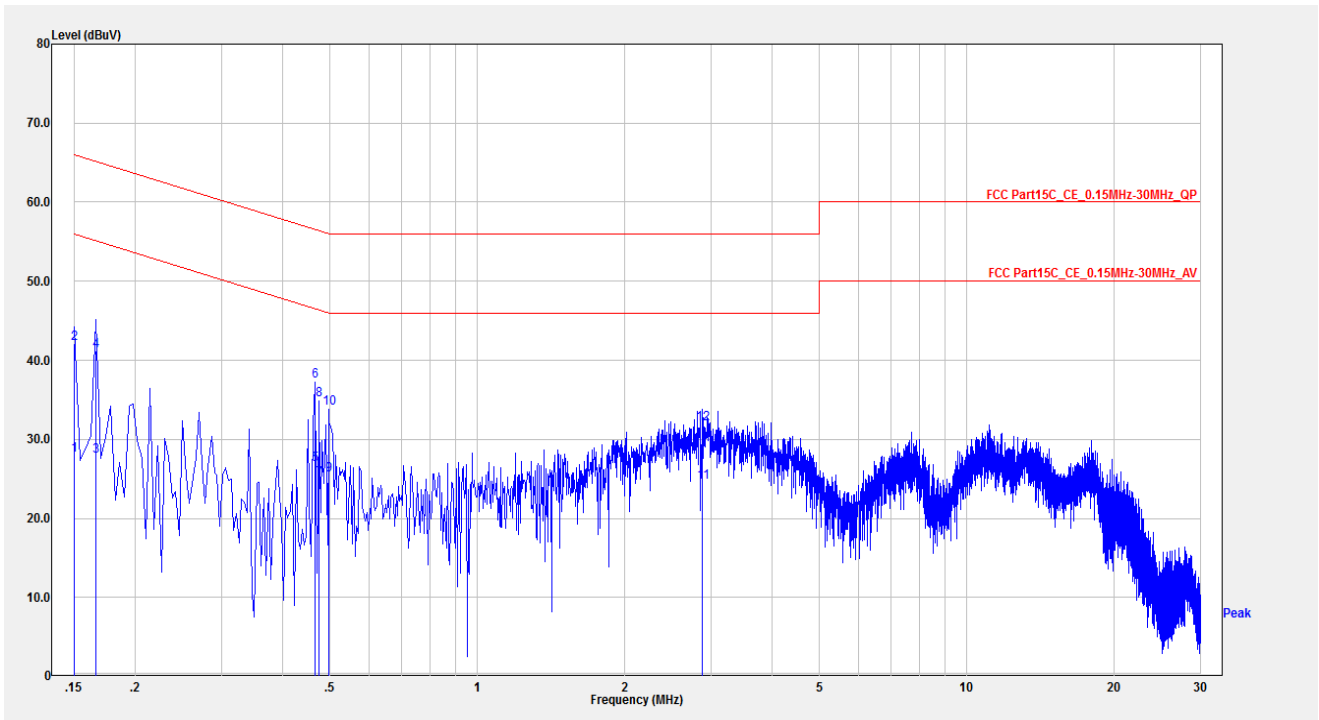


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.150	18.19	9.76	27.94	-28.06	56.00	Average
2		0.150	32.38	9.76	42.14	-23.86	66.00	QP
3		0.166	18.11	9.73	27.84	-27.32	55.16	Average
4		0.166	31.43	9.73	41.16	-24.00	65.16	QP
5		0.466	17.04	9.83	26.86	-19.72	46.59	Average
6	*	0.466	27.58	9.83	37.40	-19.18	56.59	QP
7		0.474	15.16	9.83	24.99	-21.45	46.44	Average
8		0.474	25.14	9.83	34.96	-21.48	56.44	QP
9		0.498	15.62	9.83	25.45	-20.58	46.03	Average
10		0.498	24.05	9.83	33.88	-22.15	56.03	QP
11		2.882	14.51	10.06	24.56	-21.44	46.00	Average
12		2.882	21.89	10.06	31.95	-24.05	56.00	QP

Notes:

1. " *", means this data is the worst emission level.

2. C.F (dB) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dB μ V) = Reading(dB μ V) + C.F (dB).

Site	SIP-SR2	Test Date	2024-07-01
Test Engineer	Arvin Ding	Temp./Humidity	26.3°C /65.9%
Factor	SIP-SR2-ENV216_101684_E	Polarity	Neutral
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6745MHz		

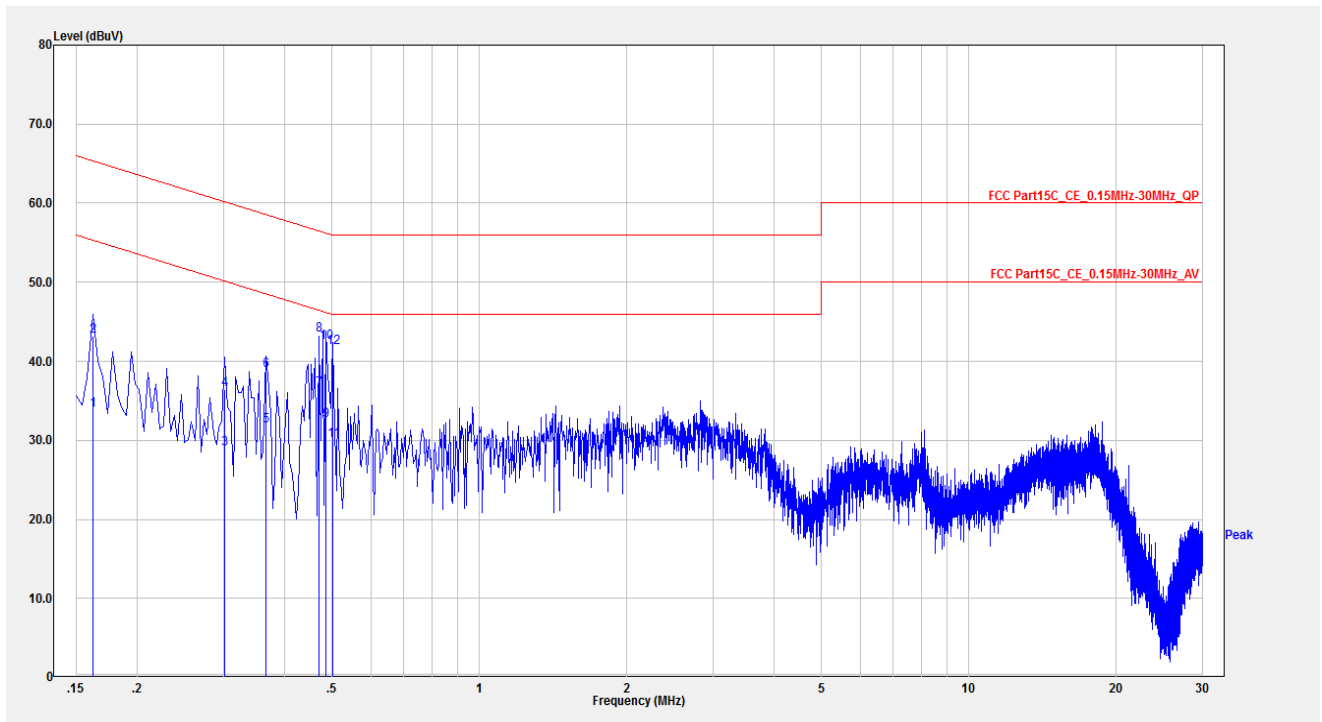

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.162	24.04	9.71	33.75	-21.61	55.36	Average
2		0.162	33.46	9.71	43.18	-22.19	65.36	QP
3		0.302	19.17	9.79	28.96	-21.23	50.19	Average
4		0.302	26.58	9.79	36.37	-23.81	60.19	QP
5		0.366	21.98	9.80	31.78	-16.81	48.59	Average
6		0.366	28.95	9.80	38.75	-19.84	58.59	QP
7	*	0.470	26.64	9.81	36.45	-10.07	46.51	Average
8		0.470	33.48	9.81	43.29	-13.22	56.51	QP
9		0.486	22.64	9.81	32.45	-13.79	46.24	Average
10		0.486	32.63	9.81	42.44	-13.80	56.24	QP
11		0.502	20.20	9.81	30.01	-15.99	46.00	Average
12		0.502	31.90	9.81	41.71	-14.29	56.00	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB)+ Cable Loss (dB).

3. Measurement(dB μ V) = Reading(dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “2406RSU023-UT” file.

Appendix C – EUT Photograph

Refer to “2406RSU023-UE” file.

_____ The End _____