



TEST REPORT

BNetzA-CAB-02/21-102

Test report no.: 1-3977/22-02-02

Testing laboratory

CTC advanced GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://www.ctcadvanced.com>

e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

Applicant

SAGEMCOM BROADBAND SAS

250, route de l' Empereur

92848 Rueil-Malmaison Cedex / FRANCE

Phone: -/-

Contact: Ludovic Bomba

e-mail: ludovic.bomba-ext@sagemcom.com

Manufacturer

SAGEMCOM BROADBAND SAS

250, route de l' Empereur

92848 Rueil-Malmaison Cedex / FRANCE

Test standard/s

FCC - Title 47 CFR Part 22

FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 22 - Public mobile services

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:	Gateway
Model name:	F5688W
FCC ID:	VW3FAST5688W
Frequency:	LTE band 26a 824 MHz to 849 MHz
Technology tested:	LTE
Antenna:	Integrated antenna
Power supply:	102 V to 138 V AC by power mains
Temperature range:	-30°C to +50°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

p.o.

Marco Bertolino
Lab Manager
Radio Communications

Test performed:

Andreas Luckenbill
Head of Department
Radio Communications

1 Table of contents

1	Table of contents.....	2
2	General information.....	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Test laboratories sub-contracted	3
3	Test standard/s, references and accreditations	4
4	Reporting statements of conformity – decision rule	5
5	Test environment.....	6
6	Test item	6
6.1	General description	6
6.2	Additional information	6
7	Description of the test setup.....	7
7.1	Shielded fully anechoic chamber.....	8
7.2	Conducted measurements normal and extreme conditions	9
8	Measurement uncertainty	10
9	Additional information and comments	11
10	Summary of measurement results	12
10.1	Part 22: LTE band 26a.....	12
11	RF measurements.....	13
11.1	Description of test setup.....	13
11.2	Results LTE band 26a	13
11.2.1	RF output power	13
11.2.2	Frequency stability	25
11.2.3	Spurious emissions radiated.....	27
11.2.4	Spurious emissions conducted.....	34
11.2.5	Block edge compliance	59
11.2.6	Occupied bandwidth	75
12	Glossary	124
13	Document history	125
14	Accreditation Certificate – D-PL-12076-01-05	125

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2022-03-11
Date of receipt of test item:	2022-03-01
Start of test:*	2022-03-09
End of test:*	2022-05-31
Person(s) present during the test:	-/-

*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 22	-/-	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 22 - Public mobile services

Guidance	Version	Description
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.26-2015	-/-	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
Power Meas License Systems: KDB 971168 D01	v03r01	Measurement Guidance for Certification of Licensed Digital Transmitters

Accreditation	Description
D-PL-12076-01-05	Telecommunication FCC requirements https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf




FCC designation number: DE0002

4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 8, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

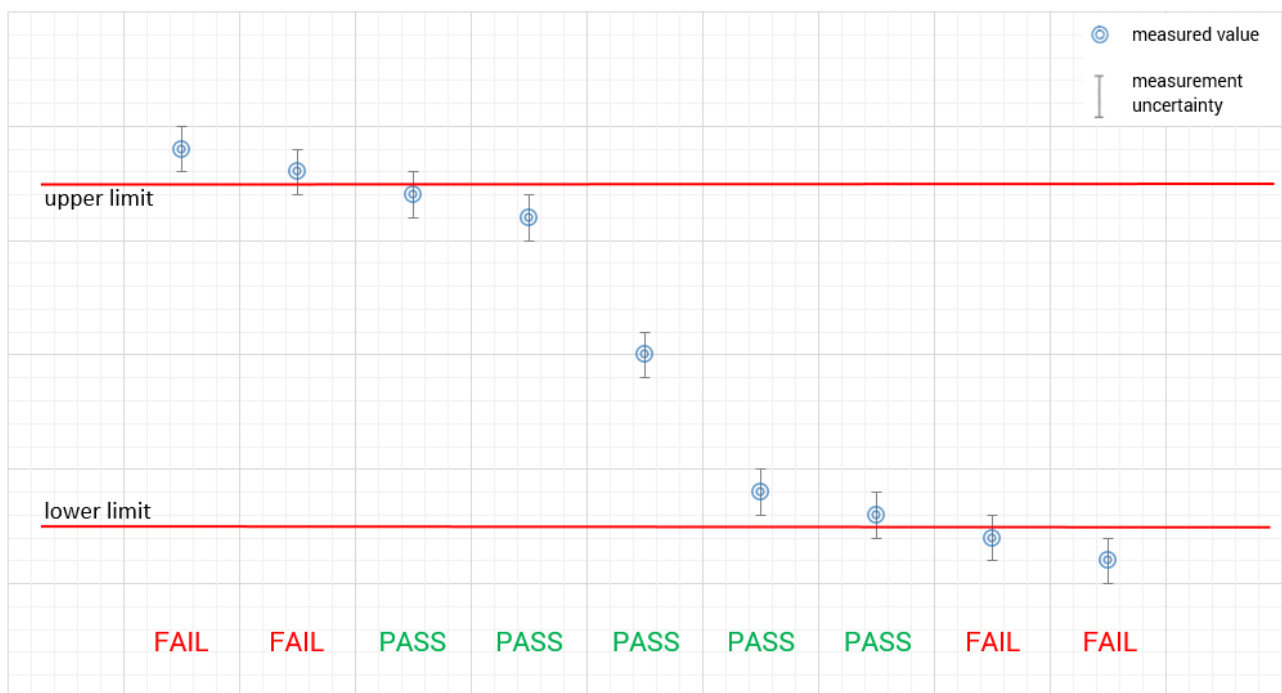

5 Test environment

Temperature	T _{nom}	+20 °C during room temperature tests
	T _{max}	+50 °C during high temperature tests
	T _{min}	-30 °C during low temperature tests
Relative humidity content		38 %
Barometric pressure		1016 hpa
Power supply	V _{nom}	120 V AC by power mains
	V _{max}	138 V
	V _{min}	102 V

6 Test item

6.1 General description

Kind of test item	Gateway	
Model name	F5688W	
S/N serial number	Radiated unit:	DM2205259000020 (IMEI: 359509840011321)
	Conducted units:	DM2201959000030 (IMEI: 359509840005463)
		DM2205259000045 (IMEI: 359509840012014)
Hardware status	V1.0	
Software status	SGJi10000C/SG520TMDAR01A02M4G_01.001.01.001_V03	
Firmware status	SGJi10000C/SG520TMDAR01A02M4G_01.001.01.001_V03	
Frequency band	LTE band 26a 824 MHz to 849 MHz	
Type of radio transmission	OFDM	
Use of frequency spectrum		
Type of modulation	QPSK, 16 – QAM, 64 – QAM	
Antenna	Integrated antenna	
Power supply	102 V to 138 V AC by power mains	
Temperature range	-30°C to +50°C	

6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report: 1-3977/22-02-01_AnnexA
 1-3977/22-02-01_AnnexB
 1-3977/22-02-01_AnnexC

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

7.1 Shielded fully anechoic chamber

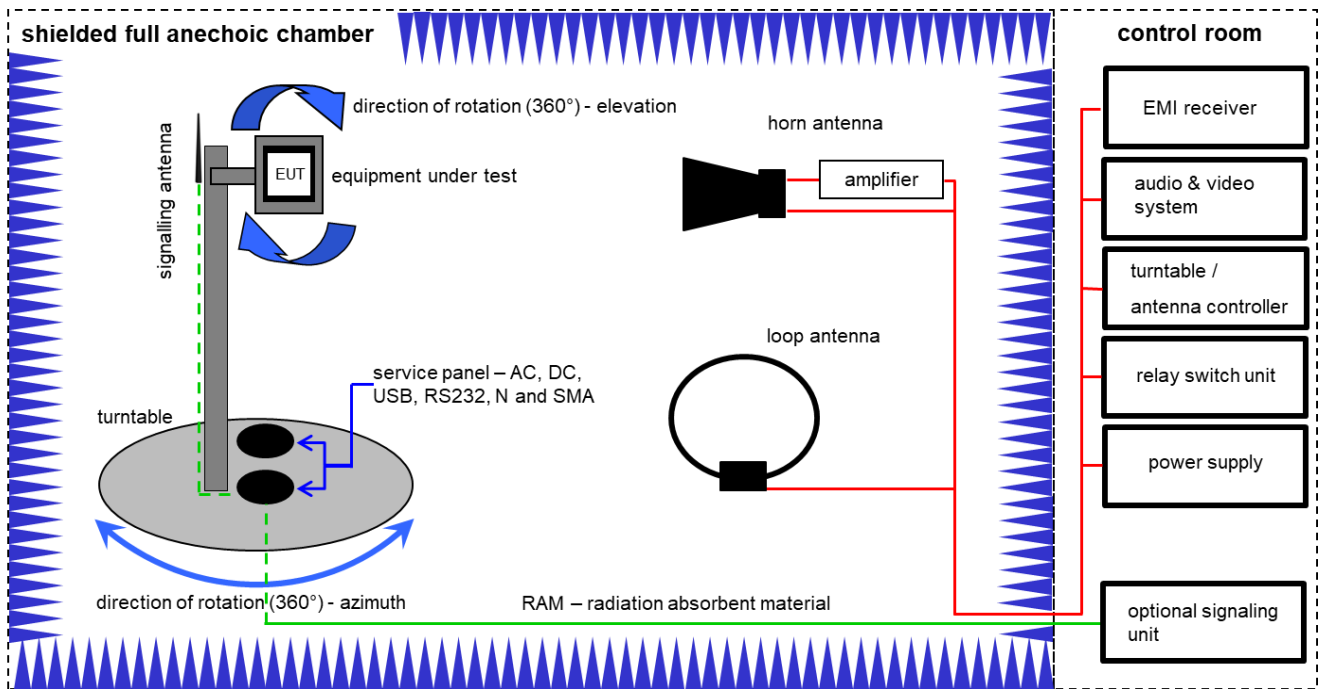

Measurement distance: horn antenna 3 meter; loop antenna 3 meter

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)

Example calculation:


$$OP \text{ [dBm]} = -39.0 \text{ [dBm]} + 57.0 \text{ [dB]} - 12.0 \text{ [dBi]} + (-36.0) \text{ [dB]} = -30 \text{ [dBm]} (1 \mu\text{W})$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vKI!	01.07.2021	31.07.2023
2	A	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev	-/-	-/-
3	A	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3089	300000307	vKI!	11.02.2022	29.02.2024
4	A	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	09.12.2021	31.12.2022
5	A	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev	-/-	-/-
6	A	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	19	300003790	ne	-/-	-/-
7	A	High Pass Filter	VHF-3500+	Mini Circuits	-/-	400000193	ne	-/-	-/-
8	A	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22049	300004481	ev	-/-	-/-
9	A	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	-/-
10	A	NEXIO EMV-Software	BAT EMC V3.21.0.27	EMCO	-/-	300004682	ne	-/-	-/-
11	A	RF-Amplifier	AMF-6F06001800-30-10P-R	NARDA-MITEQ Inc	2011572	300005241	ev	-/-	-/-

7.2 Conducted measurements normal and extreme conditions

Conducted measurements normal & extreme conditions

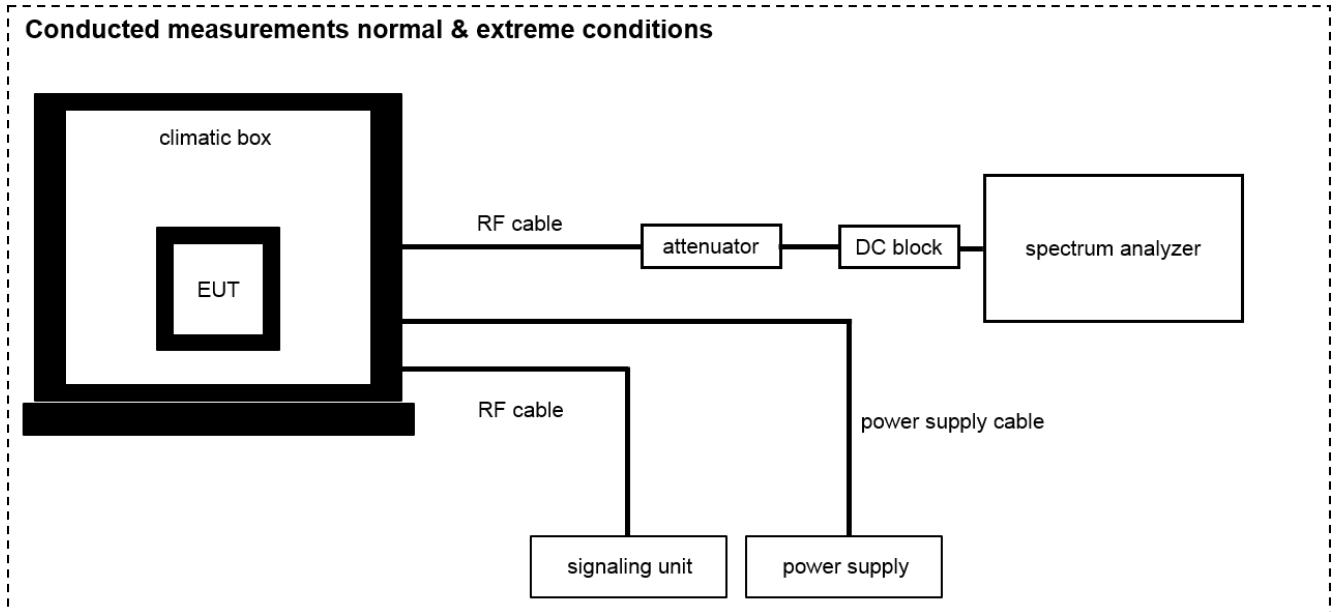

OP = AV + CA
(OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal analyzer	FSV40	Rohde&Schwarz	101042	300004517	k	25.01.2022	31.01.2023
2	A	Teststand	Teststand Custom Sequence Editor	National Instruments GmbH		300004590	ne	-/-	-/-
3	A	RF-Cable	ST18/SMAm/SMAm /72	Huber & Suhner	Batch no. 699714	400001184	ev	-/-	-/-
4	A	DC-Blocker 0.1-40 GHz	8141A	Inmet		400001185	ev	-/-	-/-
5	A	Synchron Power Meter	SPM-4	CTC	1	300005580	ev	-/-	-/-
6	A	RF-Cable	ST18/SMAm/SMAm /36	Huber & Suhner	Batch no. 601494	400001309	ev	-/-	-/-
7	A	Temperature Test Chamber	T-40/50	CTS GmbH	064023	300003540	ev	08.05.2020	07.05.2022

8 Measurement uncertainty

Measurement uncertainty		
Test case	Uncertainty	
Antenna gain	± 3 dB	
99 % bandwidth	± RBW	
-26 dB bandwidth	± RBW	
Frequency stability	10 ⁻⁶	
Maximum output power conducted	± 1.56 dB	
Block edge compliance	± 1.56 dB	
Spurious emissions conducted	> 3.6 GHz	± 1.56 dB
	> 7 GHz	± 1.56 dB
	> 18 GHz	± 2.31 dB
	≥ 40 GHz	± 2.97 dB
Spurious emissions radiated below 30 MHz	± 3 dB	
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB	
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB	
Spurious emissions radiated above 12.75 GHz	± 4.5 dB	

9 Additional information and comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

- EUT selection:
- Only one device available
 - Devices selected by the customer
 - Devices selected by the laboratory (Randomly)

10 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC: CFR Part 2 & Part 22	See table!	2022-05-31	-/-

10.1 Part 22: LTE band 5 + 26a

Test Case	temperature conditions	power source voltages	C	NC	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Extreme	Extreme	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

11 RF measurements

11.1 Description of test setup

For the spurious measurements, we use the substitution method according TIA/EIA 603.

11.2 Results LTE band 5 + 26a

The EUT was set to transmit the maximum power.

11.2.1 RF output power

Description:

This paragraph contains conducted average power, ERP and Peak-to-Average Power Ratio measurements for the mobile station.

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector:	Sample
AQT:	See plot
Resolution bandwidth:	40 MHz
Used equipment:	See chapter 7.1 setup A & 7.2 setup A
Measurement uncertainty:	see chapter 8
Measurement procedure:	FCC: § 2.1046

Limits:

FCC
§ 22.913(a)(5) & (d)
(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 W. (d) The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.
Power: 38.45 dBm ERP PAPR: 13 dB

Results:

Output Power (conducted) – LTE band 5						
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM	Average Output Power (dBm) 64-QAM	Average Output Power (dBm) 256-QAM
1.4	20407 / 824.7	1 RB low	22.5	21.9	21.1	-/-
		1 RB mid	22.5	21.9	21.1	-/-
		1 RB high	22.5	21.8	21.1	-/-
		50% RB low	22.4	21.7	20.9	-/-
		50% RB mid	22.6	21.7	20.9	-/-
		50% RB high	22.5	21.6	21.0	-/-
		100% RB	21.5	20.6	20.0	-/-
	20525 / 836.5	1 RB low	22.4	21.6	20.9	-/-
		1 RB mid	22.5	21.6	21.0	-/-
		1 RB high	22.4	21.9	21.1	-/-
		50% RB low	22.5	21.6	20.8	-/-
		50% RB mid	22.5	21.6	20.8	-/-
		50% RB high	22.5	21.6	20.9	-/-
		100% RB	21.4	20.6	19.8	-/-
	20643 / 848.3	1 RB low	22.3	21.8	21.0	-/-
		1 RB mid	22.4	21.6	21.0	-/-
		1 RB high	22.3	21.5	20.9	-/-
		50% RB low	22.3	21.3	20.6	-/-
		50% RB mid	22.3	21.6	21.0	-/-
		50% RB high	22.4	21.5	20.7	-/-
		100% RB	21.3	20.4	19.6	-/-
3	20415 / 825.5	1 RB low	22.3	21.6	20.8	-/-
		1 RB mid	22.6	21.8	21.1	-/-
		1 RB high	22.5	21.9	21.1	-/-
		50% RB low	21.5	20.5	19.7	-/-
		50% RB mid	21.6	20.6	20.0	-/-
		50% RB high	21.6	20.6	20.0	-/-
		100% RB	21.6	20.6	19.9	-/-
	20525 / 836.5	1 RB low	22.5	21.5	20.9	-/-
		1 RB mid	22.5	22.0	21.2	-/-
		1 RB high	22.5	21.9	21.1	-/-
		50% RB low	21.4	20.4	19.6	-/-
		50% RB mid	21.3	20.6	19.9	-/-
		50% RB high	21.5	20.6	19.8	-/-
		100% RB	21.4	20.4	19.6	-/-
	20635 / 847.5	1 RB low	22.3	21.6	21.0	-/-
		1 RB mid	22.4	21.7	21.1	-/-
		1 RB high	22.3	21.6	20.9	-/-
		50% RB low	21.4	20.4	19.8	-/-

Output Power (conducted) – LTE band 5						
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM	Average Output Power (dBm) 64-QAM	Average Output Power (dBm) 256-QAM
5		50% RB mid	21.4	20.5	19.7	-/-
		50% RB high	21.4	20.5	19.7	-/-
		100% RB	21.4	20.4	19.6	-/-
	20425 / 826.5	1 RB low	22.5	21.8	21.1	-/-
		1 RB mid	22.6	22.2	21.4	-/-
		1 RB high	22.5	21.8	21.0	-/-
		50% RB low	21.4	20.6	20.0	-/-
		50% RB mid	21.6	20.7	20.1	-/-
		50% RB high	21.5	20.6	19.9	-/-
		100% RB	21.6	20.6	20.0	-/-
	20525 / 836.5	1 RB low	22.4	21.6	20.8	-/-
		1 RB mid	22.5	21.8	21.0	-/-
		1 RB high	22.5	21.7	20.9	-/-
		50% RB low	21.4	20.4	19.7	-/-
		50% RB mid	21.5	20.5	19.7	-/-
		50% RB high	21.6	20.6	19.8	-/-
	20625 / 846.5	1 RB low	22.3	21.7	21.1	-/-
		1 RB mid	22.4	21.9	21.2	-/-
		1 RB high	22.4	21.8	21.2	-/-
		50% RB low	21.4	20.4	19.6	-/-
		50% RB mid	21.4	20.4	19.6	-/-
50% RB high		21.4	20.5	19.7	-/-	
10	20450 / 829.0	1 RB low	22.4	21.7	20.9	-/-
		1 RB mid	22.6	21.8	21.0	-/-
		1 RB high	22.1	21.5	20.9	-/-
		50% RB low	21.4	20.4	19.8	-/-
		50% RB mid	21.6	20.6	19.9	-/-
		50% RB high	21.5	20.4	19.8	-/-
		100% RB	21.5	20.5	19.7	-/-
	20525 / 836.5	1 RB low	22.2	21.5	20.7	-/-
		1 RB mid	22.5	21.7	20.9	-/-
		1 RB high	22.3	21.6	20.9	-/-
		50% RB low	21.4	20.5	19.7	-/-
		50% RB mid	21.4	20.5	19.7	-/-
		50% RB high	21.5	20.5	19.9	-/-
	20600 / 844.0	1 RB low	22.2	21.4	20.7	-/-
		1 RB mid	22.6	21.9	21.3	-/-
		1 RB high	22.1	21.4	20.6	-/-
		50% RB low	21.3	20.3	19.5	-/-

Output Power (conducted) – LTE band 5						
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM	Average Output Power (dBm) 64-QAM	Average Output Power (dBm) 256-QAM
		50% RB mid	21.4	20.5	19.7	-/-
		50% RB high	21.4	20.4	19.7	-/-
		100% RB	21.2	20.3	19.5	-/-

Output Power (conducted) – LTE band 26a						
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM	Average Output Power (dBm) 64-QAM	Average Output Power (dBm) 256-QAM
1.4	26797 / 824.7	1 RB low	22.5	21.7	21.0	-/-
		1 RB mid	22.6	21.9	21.1	-/-
		1 RB high	22.6	21.7	21.0	-/-
		50% RB low	22.6	21.7	20.9	-/-
		50% RB mid	22.6	21.7	20.9	-/-
		50% RB high	22.5	21.8	20.8	-/-
		100% RB	21.6	20.7	19.8	-/-
	26915 / 836.5	1 RB low	22.5	21.7	20.9	-/-
		1 RB mid	22.5	21.9	21.0	-/-
		1 RB high	22.6	21.7	20.9	-/-
		50% RB low	22.5	21.6	20.9	-/-
		50% RB mid	22.4	21.7	20.9	-/-
		50% RB high	22.5	21.6	20.9	-/-
		100% RB	21.4	20.5	19.9	-/-
	27033 / 848.3	1 RB low	22.4	21.8	20.7	-/-
		1 RB mid	22.5	21.7	20.9	-/-
		1 RB high	22.5	21.7	20.9	-/-
		50% RB low	22.5	21.7	20.7	-/-
		50% RB mid	22.5	21.7	20.8	-/-
		50% RB high	22.5	21.5	20.6	-/-
		100% RB	21.5	20.6	19.6	-/-
3	26805 / 825.5	1 RB low	22.5	21.7	20.8	-/-
		1 RB mid	22.6	21.8	21.1	-/-
		1 RB high	22.5	21.8	20.9	-/-
		50% RB low	21.5	20.5	19.8	-/-
		50% RB mid	21.6	20.7	19.9	-/-
		50% RB high	21.6	20.6	19.9	-/-
		100% RB	21.6	20.6	19.8	-/-
	26915 / 836.5	1 RB low	22.5	21.8	20.8	-/-
		1 RB mid	22.5	21.8	21.0	-/-
		1 RB high	22.4	21.8	20.9	-/-

Output Power (conducted) – LTE band 26a								
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM	Average Output Power (dBm) 64-QAM	Average Output Power (dBm) 256-QAM		
		50% RB low	21.4	20.5	19.8	-/-		
		50% RB mid	21.6	20.6	19.8	-/-		
		50% RB high	21.6	20.6	19.8	-/-		
		100% RB	21.5	20.5	19.8	-/-		
	27025 / 847.5	1 RB low	22.4	21.8	20.6	-/-		
		1 RB mid	22.6	21.7	20.8	-/-		
		1 RB high	22.4	21.9	20.7	-/-		
		50% RB low	21.3	20.5	19.6	-/-		
		50% RB mid	21.4	20.5	19.7	-/-		
		50% RB high	21.6	20.6	19.8	-/-		
		100% RB	21.4	20.5	19.6	-/-		
		5	26815 / 826.5	1 RB low	22.4	21.7	20.8	-/-
				1 RB mid	22.5	22.2	21.2	-/-
1 RB high	22.5			22.0	21.0	-/-		
50% RB low	21.5			20.6	19.7	-/-		
50% RB mid	21.6			20.6	19.9	-/-		
50% RB high	21.6			20.6	19.9	-/-		
100% RB	21.6			20.5	19.8	-/-		
26915 / 836.5	1 RB low		22.5	21.7	20.9	-/-		
	1 RB mid		22.6	22.0	21.0	-/-		
	1 RB high		22.6	21.8	21.2	-/-		
	50% RB low		21.4	20.4	19.7	-/-		
	50% RB mid		21.5	20.5	19.8	-/-		
	50% RB high		21.5	20.6	19.9	-/-		
	100% RB	21.5	20.5	19.8	-/-			
27015 / 846.5	1 RB low	22.4	21.8	20.7	-/-			
	1 RB mid	22.5	21.9	20.9	-/-			
	1 RB high	22.4	21.7	20.8	-/-			
	50% RB low	21.4	20.4	19.6	-/-			
	50% RB mid	21.5	20.6	19.7	-/-			
	50% RB high	21.5	20.5	19.7	-/-			
	100% RB	21.5	20.5	19.6	-/-			
10	26840 / 829.0	1 RB low	22.4	21.7	20.8	-/-		
		1 RB mid	22.6	21.9	21.2	-/-		
		1 RB high	22.3	21.8	20.7	-/-		
		50% RB low	21.5	20.5	19.7	-/-		
		50% RB mid	21.6	20.7	19.9	-/-		
		50% RB high	21.5	20.5	19.9	-/-		
		100% RB	21.6	20.5	19.8	-/-		
	26915 / 836.5	1 RB low	22.4	21.6	20.8	-/-		
		1 RB mid	22.5	21.8	21.1	-/-		
		1 RB high	22.3	21.5	20.9	-/-		

Output Power (conducted) – LTE band 26a								
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM	Average Output Power (dBm) 64-QAM	Average Output Power (dBm) 256-QAM		
		50% RB low	21.4	20.5	19.7	-/-		
		50% RB mid	21.5	20.6	19.9	-/-		
		50% RB high	21.5	20.5	19.8	-/-		
		100% RB	21.5	20.5	19.8	-/-		
	26990 / 844.0	1 RB low	22.3	21.6	20.8	-/-		
		1 RB mid	22.6	21.8	20.9	-/-		
		1 RB high	22.3	21.7	20.6	-/-		
		50% RB low	21.5	20.4	19.7	-/-		
		50% RB mid	21.4	20.5	19.7	-/-		
		50% RB high	21.5	20.5	19.7	-/-		
		100% RB	21.4	20.5	19.8	-/-		
		15	26865 / 831.5	1 RB low	22.0	21.3	20.8	-/-
				1 RB mid	22.5	21.8	21.2	-/-
1 RB high	22.0			21.3	20.4	-/-		
50% RB low	21.3			20.3	19.6	-/-		
50% RB mid	21.4			20.5	19.6	-/-		
50% RB high	21.3			20.4	19.6	-/-		
100% RB	21.4			20.4	19.5	-/-		
26915 / 836.5	1 RB low		22.3	21.4	20.6	-/-		
	1 RB mid		22.4	21.7	20.9	-/-		
	1 RB high		21.9	21.3	20.4	-/-		
	50% RB low		21.3	20.3	19.5	-/-		
	50% RB mid		21.4	20.3	19.6	-/-		
	50% RB high		21.3	20.3	19.6	-/-		
	100% RB	21.2	20.2	19.5	-/-			
26965 / 841.5	1 RB low	22.0	21.3	20.5	-/-			
	1 RB mid	22.4	21.8	20.8	-/-			
	1 RB high	22.0	21.1	20.3	-/-			
	50% RB low	21.2	20.2	19.5	-/-			
	50% RB mid	21.4	20.4	19.5	-/-			
	50% RB high	21.4	20.4	19.5	-/-			
	100% RB	21.4	20.3	19.5	-/-			

The radiated output power is measured in the mode with the highest conducted output power.

Output Power (ERP) – LTE band 5					
Bandwidth (MHz)	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (dBm)	Average Output Power (dBm)	Average Output Power (dBm)
		QPSK	16-QAM	64-QAM	256-QAM
1.4	824.7	23.7	23.0	22.2	-/-
	836.5	24.1	23.5	22.7	-/-
	848.3	24.0	23.4	22.6	-/-
3	825.5	23.7	23.0	22.2	-/-
	836.5	24.1	23.6	22.8	-/-
	847.5	24.0	23.3	22.7	-/-
5	826.5	23.7	23.3	22.5	-/-
	836.5	24.1	23.4	22.6	-/-
	846.5	24.0	23.5	22.8	-/-
10	829.0	23.7	22.9	22.1	-/-
	836.5	24.1	23.3	22.5	-/-
	844.0	24.2	23.5	22.9	-/-
15	831.5	23.7	23.0	22.2	-/-
	836.5	24.1	23.5	22.7	-/-
	841.5	24.0	23.4	22.6	-/-

Output Power (ERP) – LTE band 26a					
Bandwidth (MHz)	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (dBm)	Average Output Power (dBm)	Average Output Power (dBm)
		QPSK	16-QAM	64-QAM	256-QAM
1.4	824.7	23.7	23.0	22.2	-/-
	836.5	24.2	23.5	22.6	-/-
	848.3	24.1	23.4	22.5	-/-
3	825.5	23.7	22.9	22.2	-/-
	836.5	24.1	23.4	22.6	-/-
	847.5	24.2	23.5	22.4	-/-
5	826.5	23.6	23.3	22.3	-/-
	836.5	24.2	23.6	22.8	-/-
	846.5	24.1	23.5	22.5	-/-

10	829.0	23.7	23.0	22.3	-/-
	836.5	24.1	23.4	22.7	-/-
	844.0	24.2	23.4	22.5	-/-
15	831.5	23.6	22.9	22.3	-/-
	836.5	24.0	23.3	22.5	-/-
	841.5	24.0	23.4	22.4	-/-

Peak to Average ratio – LTE band 5						
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Peak to Average ratio (dB) QPSK	Peak to Average ratio (dB) 16-QAM	Peak to Average ratio (dB) 64-QAM	Peak to Average ratio (dB) 256-QAM
1.4	20407 / 824.7	1 RB low	4.4	5.2	5.8	-/-
		1 RB mid	4.4	5.1	5.9	-/-
		1 RB high	4.4	5.2	5.9	-/-
		50% RB low	4.4	5.2	5.7	-/-
		50% RB mid	4.3	5.2	5.3	-/-
		50% RB high	4.3	5.2	5.8	-/-
		100% RB	5.3	6.3	7.3	-/-
	20525 / 836.5	1 RB low	4.5	5.3	5.7	-/-
		1 RB mid	4.4	5.3	5.8	-/-
		1 RB high	4.5	5.3	6.1	-/-
		50% RB low	4.4	5.3	6.1	-/-
		50% RB mid	4.4	5.3	5.8	-/-
		50% RB high	4.4	5.2	5.6	-/-
		100% RB	5.4	6.3	7.1	-/-
	20643 / 848.3	1 RB low	4.3	5.0	5.8	-/-
		1 RB mid	4.3	5.0	5.7	-/-
		1 RB high	4.3	5.1	5.2	-/-
		50% RB low	4.3	5.2	6.1	-/-
		50% RB mid	4.3	5.1	5.1	-/-
		50% RB high	4.2	5.1	5.4	-/-
		100% RB	5.2	6.2	6.9	-/-
3	20415 / 825.5	1 RB low	4.5	5.3	5.9	-/-
		1 RB mid	4.3	5.1	5.4	-/-
		1 RB high	4.3	5.0	6.0	-/-
		50% RB low	5.3	6.3	7.1	-/-
		50% RB mid	5.2	6.2	6.7	-/-
		50% RB high	5.2	6.1	6.4	-/-
		100% RB	5.2	6.2	6.6	-/-
	20525 / 836.5	1 RB low	4.4	5.3	6.3	-/-
		1 RB mid	4.4	5.2	5.7	-/-
		1 RB high	4.4	5.2	6.0	-/-

Peak to Average ratio – LTE band 5								
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Peak to Average ratio (dB) QPSK	Peak to Average ratio (dB) 16-QAM	Peak to Average ratio (dB) 64-QAM	Peak to Average ratio (dB) 256-QAM		
		50% RB low	5.4	6.4	6.5	-/-		
		50% RB mid	5.4	6.3	6.3	-/-		
		50% RB high	5.4	6.3	6.3	-/-		
		100% RB	5.4	6.4	7.2	-/-		
	20635 / 847.5	1 RB low	4.3	5.2	6.1	-/-		
		1 RB mid	4.3	5.1	5.5	-/-		
		1 RB high	4.2	5.1	5.4	-/-		
		50% RB low	5.2	6.2	6.2	-/-		
		50% RB mid	5.2	6.2	6.9	-/-		
		50% RB high	5.2	6.2	6.9	-/-		
		100% RB	5.3	6.3	7.3	-/-		
		5	20425 / 826.5	1 RB low	4.4	5.1	5.8	-/-
				1 RB mid	4.3	4.8	5.3	-/-
1 RB high	4.2			4.9	5.2	-/-		
50% RB low	5.3			6.2	7.0	-/-		
50% RB mid	5.2			6.1	6.4	-/-		
50% RB high	5.1			6.1	7.0	-/-		
100% RB	5.2			6.2	7.1	-/-		
20525 / 836.5	1 RB low		4.4	5.2	5.6	-/-		
	1 RB mid		4.4	5.2	5.8	-/-		
	1 RB high		4.4	5.2	5.8	-/-		
	50% RB low		5.4	6.4	7.3	-/-		
	50% RB mid		5.4	6.4	7.1	-/-		
	50% RB high		5.4	6.3	6.7	-/-		
	100% RB	5.4	6.4	6.5	-/-			
20625 / 846.5	1 RB low	4.3	5.0	5.7	-/-			
	1 RB mid	4.3	5.0	5.4	-/-			
	1 RB high	4.3	5.0	5.9	-/-			
	50% RB low	5.2	6.2	6.8	-/-			
	50% RB mid	5.2	6.3	7.0	-/-			
	50% RB high	5.3	6.2	6.7	-/-			
	100% RB	5.4	6.3	6.8	-/-			
10	20450 / 829.0	1 RB low	4.4	5.1	5.2	-/-		
		1 RB mid	4.2	4.8	5.4	-/-		
		1 RB high	4.4	5.2	5.6	-/-		
		50% RB low	5.2	6.2	6.4	-/-		
		50% RB mid	5.1	6.1	7.1	-/-		
		50% RB high	5.2	6.2	7.1	-/-		
		100% RB	5.3	6.2	6.3	-/-		
	20525 / 836.5	1 RB low	4.3	5.2	5.2	-/-		
		1 RB mid	4.4	5.2	6.0	-/-		
		1 RB high	4.3	5.1	5.9	-/-		

Peak to Average ratio – LTE band 5						
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Peak to Average ratio (dB) QPSK	Peak to Average ratio (dB) 16-QAM	Peak to Average ratio (dB) 64-QAM	Peak to Average ratio (dB) 256-QAM
		50% RB low	5.4	6.3	6.4	-/-
		50% RB mid	5.4	6.4	7.0	-/-
		50% RB high	5.4	6.3	6.8	-/-
		100% RB	5.4	6.4	6.8	-/-
	20600 / 844.0	1 RB low	4.5	5.2	5.5	-/-
		1 RB mid	4.1	4.9	5.3	-/-
		1 RB high	4.3	5.1	5.3	-/-
		50% RB low	5.3	6.3	6.6	-/-
		50% RB mid	5.3	6.2	6.4	-/-
		50% RB high	5.3	6.3	6.9	-/-
		100% RB	5.5	6.3	7.3	-/-

Peak to Average ratio – LTE band 26a						
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Peak to Average ratio (dB) QPSK	Peak to Average ratio (dB) 16-QAM	Peak to Average ratio (dB) 64-QAM	Peak to Average ratio (dB) 256-QAM
1.4	26797 / 824.7	1 RB low	5.20	6.00	6.70	-/-
		1 RB mid	5.00	5.80	6.70	-/-
		1 RB high	5.10	5.90	6.70	-/-
		50% RB low	5.00	5.90	6.80	-/-
		50% RB mid	5.00	5.90	6.70	-/-
		50% RB high	5.00	5.90	6.60	-/-
		100% RB	5.80	6.60	7.00	-/-
	26915 / 836.5	1 RB low	5.20	6.00	6.60	-/-
		1 RB mid	5.20	5.90	6.50	-/-
		1 RB high	5.20	6.00	6.70	-/-
		50% RB low	5.20	6.00	6.50	-/-
		50% RB mid	5.20	6.00	6.60	-/-
		50% RB high	5.10	6.10	6.60	-/-
		100% RB	5.90	6.70	6.80	-/-
	27033 / 848.3	1 RB low	4.90	5.60	6.30	-/-
		1 RB mid	4.80	5.70	6.20	-/-
		1 RB high	4.90	5.70	6.20	-/-
		50% RB low	4.80	5.70	6.30	-/-
		50% RB mid	4.80	5.70	6.20	-/-
		50% RB high	4.80	5.80	6.30	-/-
		100% RB	5.50	6.50	6.70	-/-
3	26805 / 825.5	1 RB low	4.40	5.30	6.30	-/-
		1 RB mid	4.30	5.20	6.10	-/-
		1 RB high	4.30	5.10	6.20	-/-

Peak to Average ratio – LTE band 26a						
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Peak to Average ratio (dB) QPSK	Peak to Average ratio (dB) 16-QAM	Peak to Average ratio (dB) 64-QAM	Peak to Average ratio (dB) 256-QAM
		50% RB low	5.40	6.30	7.00	-/-
		50% RB mid	5.30	6.20	7.00	-/-
		50% RB high	5.20	6.20	6.90	-/-
		100% RB	5.30	6.30	6.90	-/-
	26915 / 836.5	1 RB low	4.40	5.30	6.10	-/-
		1 RB mid	4.40	5.20	6.10	-/-
		1 RB high	4.50	5.30	6.30	-/-
		50% RB low	5.40	6.30	6.80	-/-
		50% RB mid	5.40	6.30	6.90	-/-
		50% RB high	5.40	6.30	6.80	-/-
		100% RB	5.40	6.40	6.90	-/-
		27025 / 847.5	1 RB low	4.30	5.00	6.10
	1 RB mid		4.20	5.00	6.00	-/-
	1 RB high		4.30	5.10	6.10	-/-
	50% RB low		5.20	6.10	6.70	-/-
	50% RB mid		5.20	6.20	6.60	-/-
	50% RB high		5.20	6.10	6.80	-/-
	100% RB		5.30	6.20	6.60	-/-
5	26815 / 826.5	1 RB low	4.50	5.10	6.20	-/-
		1 RB mid	4.30	5.00	6.00	-/-
		1 RB high	4.20	4.90	6.00	-/-
		50% RB low	5.30	6.30	6.90	-/-
		50% RB mid	5.20	6.20	6.80	-/-
		50% RB high	5.10	6.10	6.80	-/-
		100% RB	5.30	6.30	6.80	-/-
	26915 / 836.5	1 RB low	4.40	5.20	6.10	-/-
		1 RB mid	4.40	5.10	6.10	-/-
		1 RB high	4.50	5.20	6.10	-/-
		50% RB low	5.40	6.40	6.80	-/-
		50% RB mid	5.40	6.40	6.80	-/-
		50% RB high	5.40	6.40	6.80	-/-
		100% RB	5.40	6.40	6.80	-/-
	27015 / 846.5	1 RB low	4.20	4.90	6.00	-/-
		1 RB mid	4.20	5.00	5.90	-/-
		1 RB high	4.30	5.10	6.00	-/-
		50% RB low	5.20	6.10	6.80	-/-
		50% RB mid	5.20	6.10	6.60	-/-
		50% RB high	5.20	6.20	6.80	-/-
		100% RB	5.30	6.20	6.70	-/-
10	26840 / 829.0	1 RB low	4.60	5.20	6.20	-/-
		1 RB mid	4.30	5.00	6.00	-/-
		1 RB high	4.30	5.10	6.20	-/-

Peak to Average ratio – LTE band 26a							
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Peak to Average ratio (dB) QPSK	Peak to Average ratio (dB) 16-QAM	Peak to Average ratio (dB) 64-QAM	Peak to Average ratio (dB) 256-QAM	
		50% RB low	5.40	6.40	6.90	-/-	
		50% RB mid	5.20	6.20	6.80	-/-	
		50% RB high	5.20	6.20	6.80	-/-	
		100% RB	5.40	6.30	6.80	-/-	
	26915 / 836.5	1 RB low	4.40	5.20	6.10	-/-	
		1 RB mid	4.40	5.20	6.00	-/-	
		1 RB high	4.40	5.20	6.20	-/-	
		50% RB low	5.30	6.30	6.70	-/-	
		50% RB mid	5.40	6.40	6.80	-/-	
		50% RB high	5.40	6.40	6.80	-/-	
		100% RB	5.50	6.40	6.80	-/-	
		26990 / 844.0	1 RB low	4.50	5.40	6.20	-/-
	1 RB mid		4.20	4.90	6.10	-/-	
	1 RB high		4.30	5.10	6.00	-/-	
	50% RB low		5.30	6.30	6.80	-/-	
	50% RB mid		5.30	6.20	6.80	-/-	
	50% RB high		5.20	6.20	6.70	-/-	
	100% RB		5.40	6.30	6.70	-/-	
	15	26865 / 831.5	1 RB low	4.60	5.30	6.10	-/-
			1 RB mid	4.20	4.90	5.90	-/-
			1 RB high	4.50	5.20	6.30	-/-
50% RB low			5.30	6.30	6.80	-/-	
50% RB mid			5.20	6.20	6.80	-/-	
50% RB high			5.30	6.20	6.80	-/-	
100% RB			5.50	6.30	6.80	-/-	
26915 / 836.5		1 RB low	4.20	5.00	6.10	-/-	
		1 RB mid	4.50	5.30	6.10	-/-	
		1 RB high	4.30	5.00	6.20	-/-	
		50% RB low	5.30	6.30	6.70	-/-	
		50% RB mid	5.40	6.40	6.80	-/-	
		50% RB high	5.40	6.30	6.80	-/-	
		100% RB	5.70	6.50	6.80	-/-	
26965 / 841.5		1 RB low	4.50	5.20	6.10	-/-	
		1 RB mid	4.30	5.10	6.20	-/-	
		1 RB high	4.30	5.20	6.10	-/-	
		50% RB low	5.50	6.40	6.80	-/-	
		50% RB mid	5.40	6.30	6.90	-/-	
		50% RB high	5.40	6.30	6.80	-/-	
		100% RB	5.60	6.40	6.80	-/-	

11.2.2 Frequency stability

Description:

In order to measure the carrier frequency under normal conditions it is necessary to make measurements with the mobile station connected to a R&S CMW500 Wideband Radio Communication Tester.

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with V_{nom} , connected to the CMW500 on the center channel with channel bandwidth of 10 MHz, measure the carrier frequency. These measurements should be made within two minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 15 minutes at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with V_{nom} . Vary supply voltage to V_{min} and measure the carrier frequency then setup V_{max} and repeat the measurement.
6. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Measurement:

Measurement parameters	
Detector:	Measured with CMW500
Sweep time:	
Video bandwidth:	
Resolution bandwidth:	
Span:	
Trace-Mode:	
Test setup:	See chapter 7.2 setup A
Measurement uncertainty:	See chapter 8
Measurement procedure:	FCC: § 2.1055

Limits:

FCC
§ 22.355 (Mobile Station, 821 – 896 MHz)
The carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1.
± 2.5 ppm

Results:**AFC FREQ ERROR versus VOLTAGE**

Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
102	-4	-0.0048
120	4	0.0048
138	-5	-0.0060

AFC FREQ ERROR versus TEMPERATURE

Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-5	-0.0060
-20	-8	-0.0096
-10	7	0.0084
± 0	4	0.0048
10	-7	-0.0084
20	-6	-0.0072
30	-7	-0.0084
40	-7	-0.0084
50	-6	-0.0072

11.2.3 Spurious emissions radiated

Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2014 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 844 MHz. Measurement made up to 9 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to lowest, middle and highest channels of the LTE band 26a.

Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	2 s
Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Span:	100 MHz Steps
Trace mode:	Max Hold
Used equipment:	See chapter 7.1 setup A
Measurement uncertainty:	See chapter 9
Measurement procedure:	FCC: § 2.1053

Limits:

FCC
§ 22.917(a) & (b)
<p>(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.</p> <p>(b)(1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a RBW of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.</p> <p>(b)(2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz.</p>
-13 dBm

Results:

QPSK:

Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

16-QAM:


Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

64-QAM:


Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

Plots:


Plot 1: QPSK - Middle channel (9 kHz - 30 MHz)

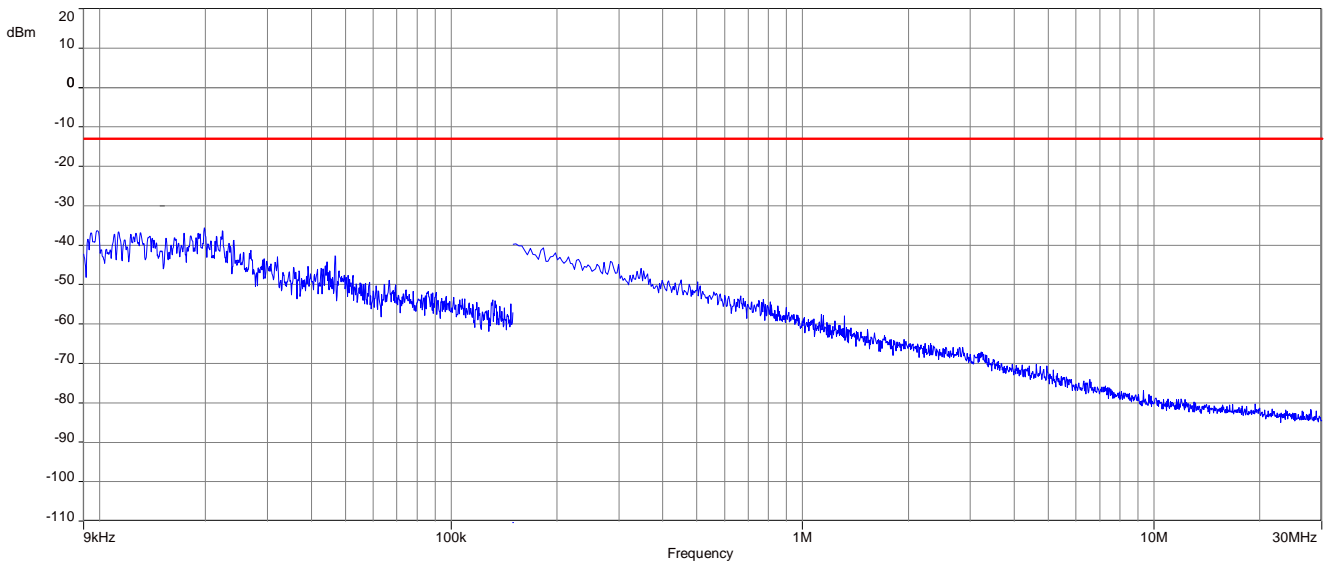


Plot 2: QPSK - Middle channel (30 MHz – 1 GHz)

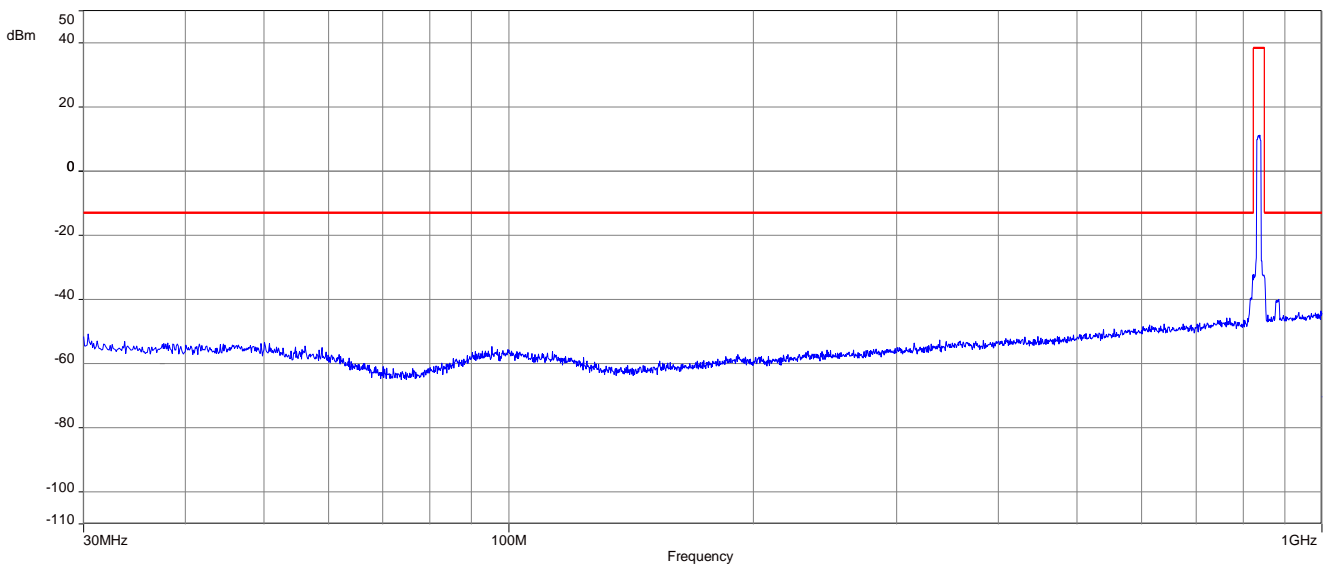


Plot 3: QPSK - Middle channel (1 GHz – 9 GHz)

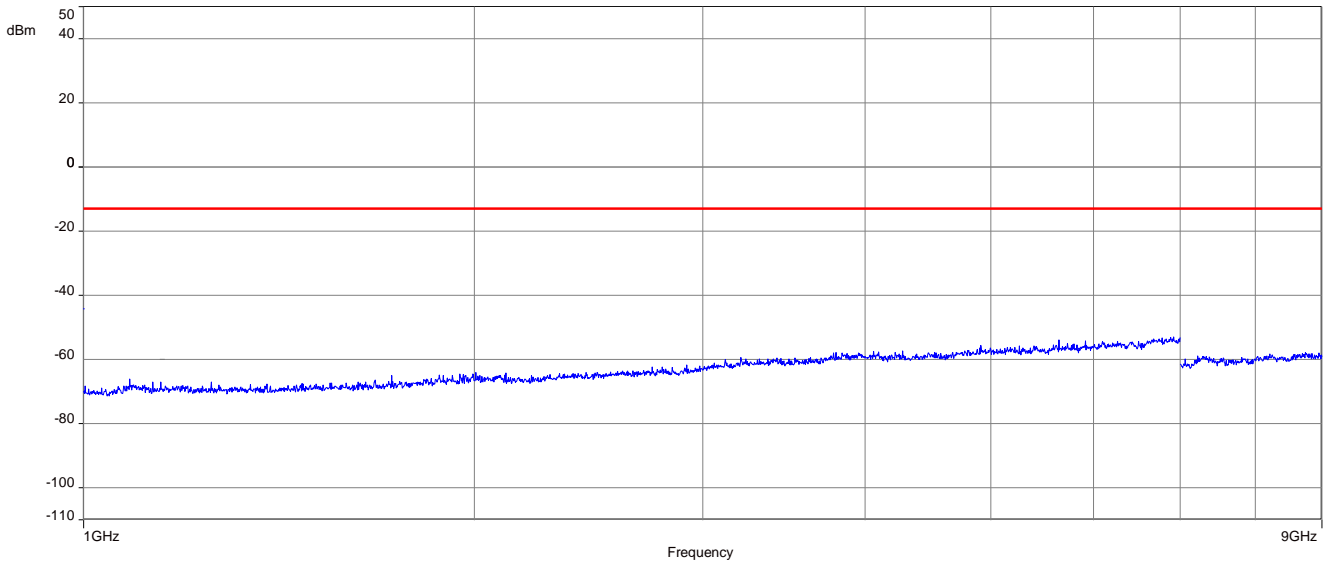


Plot 4: 16-QAM - Middle channel (9 kHz - 30 MHz)

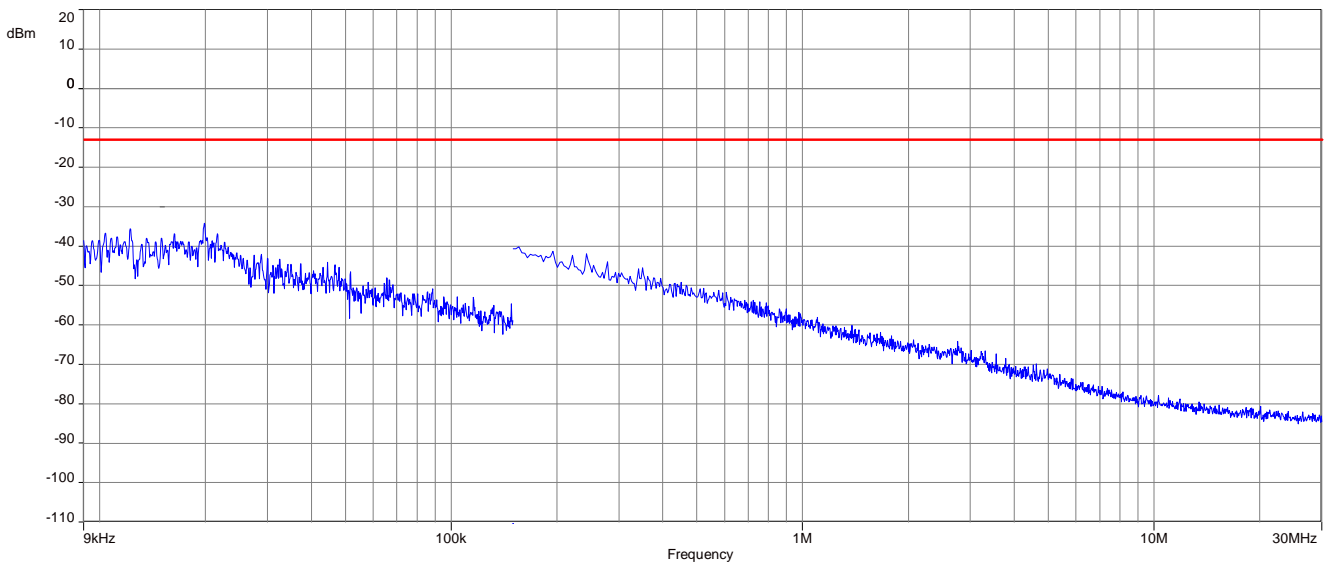


Plot 5: 16-QAM - Middle channel (30 MHz – 1 GHz)

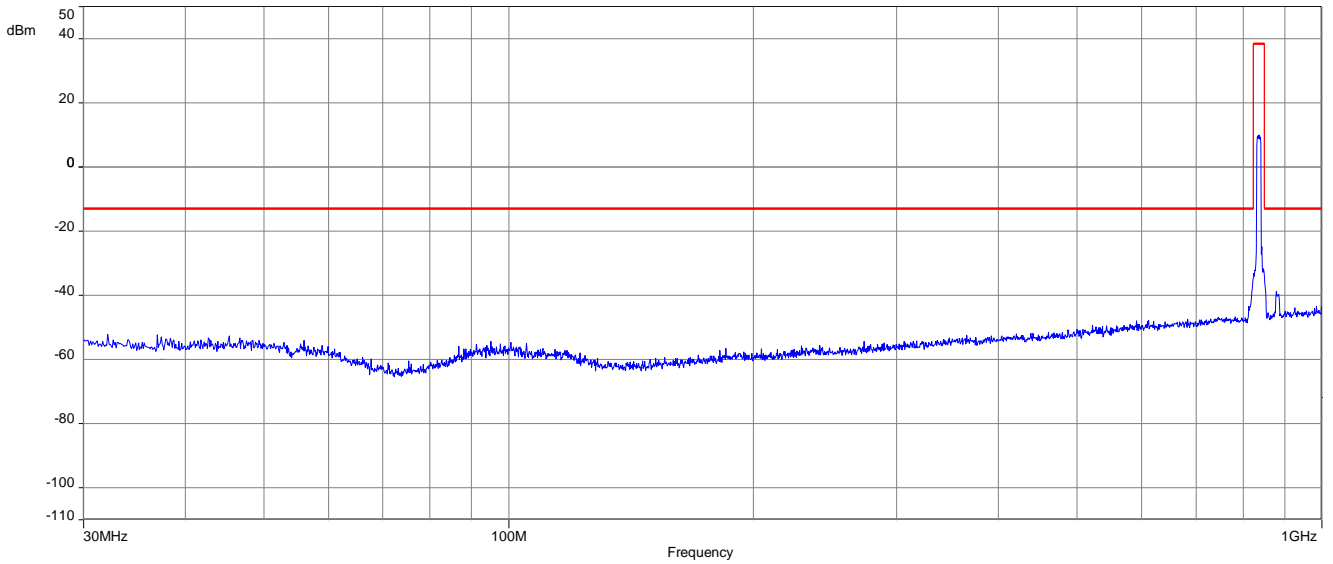


Plot 6: 16-QAM - Middle channel (1 GHz – 9 GHz)

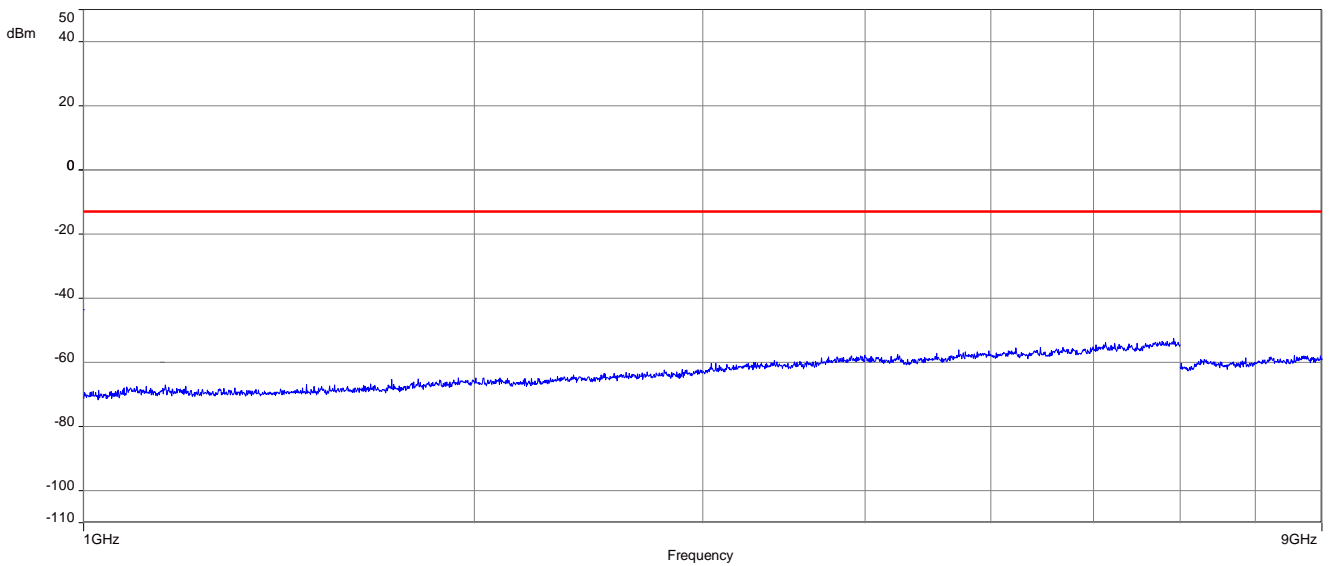


Plot 7: 64-QAM - Middle channel (9 kHz - 30 MHz)

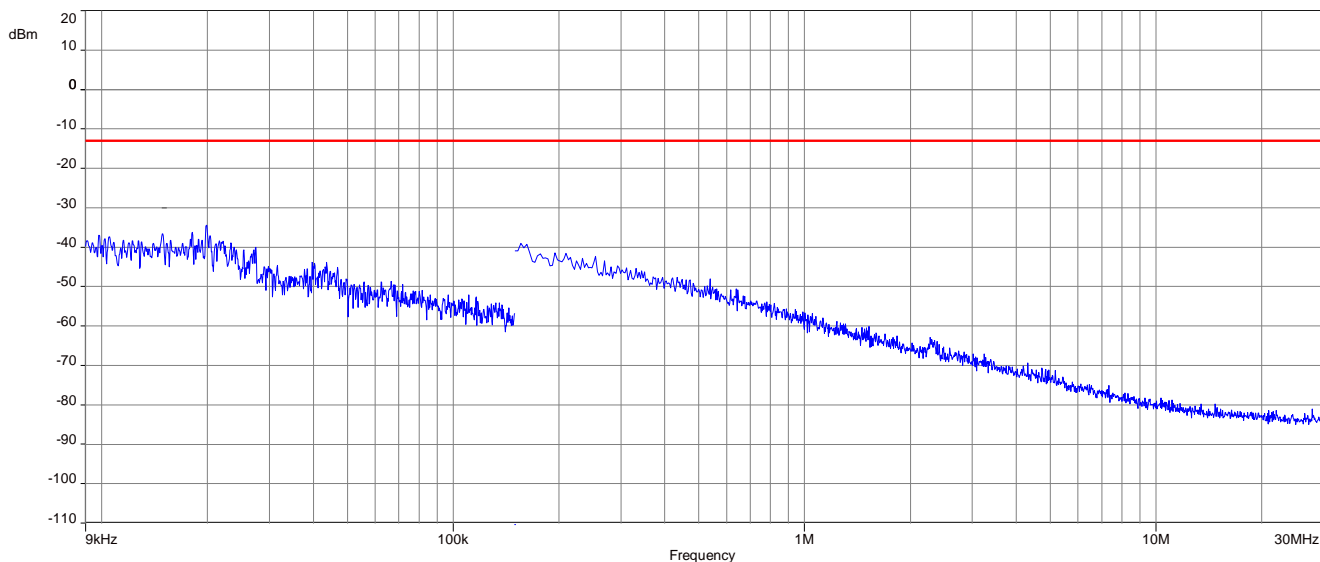

Plot 8: 64-QAM - Middle channel (30 MHz – 1 GHz)

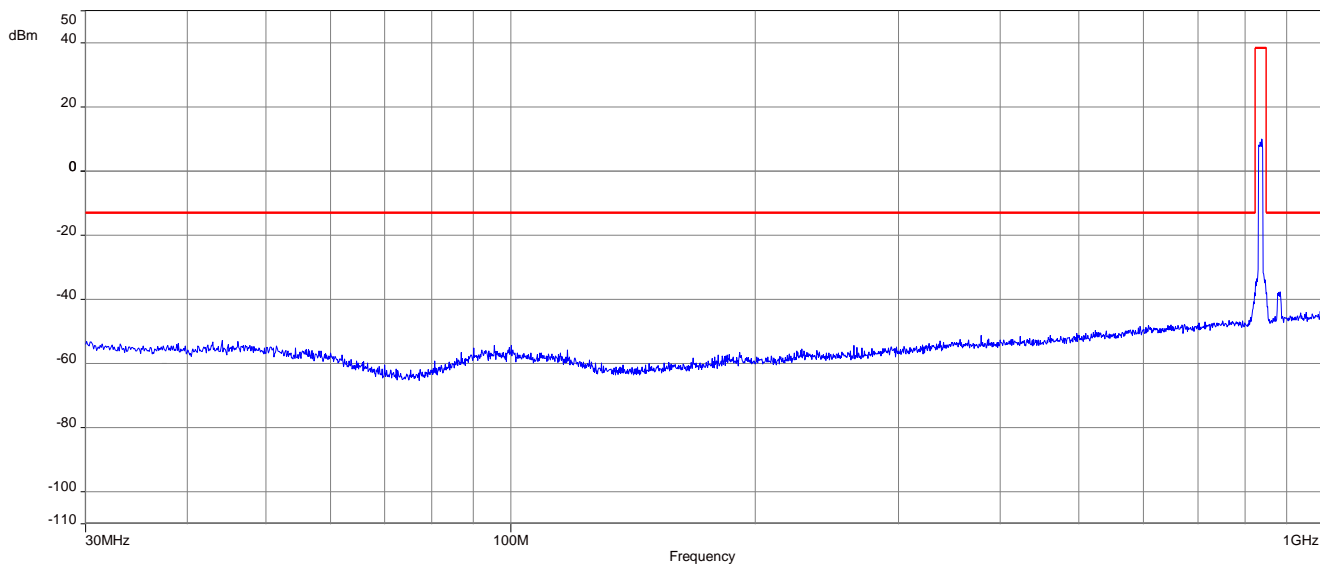

Plot 9: 64-QAM - Middle channel (1 GHz – 9 GHz)

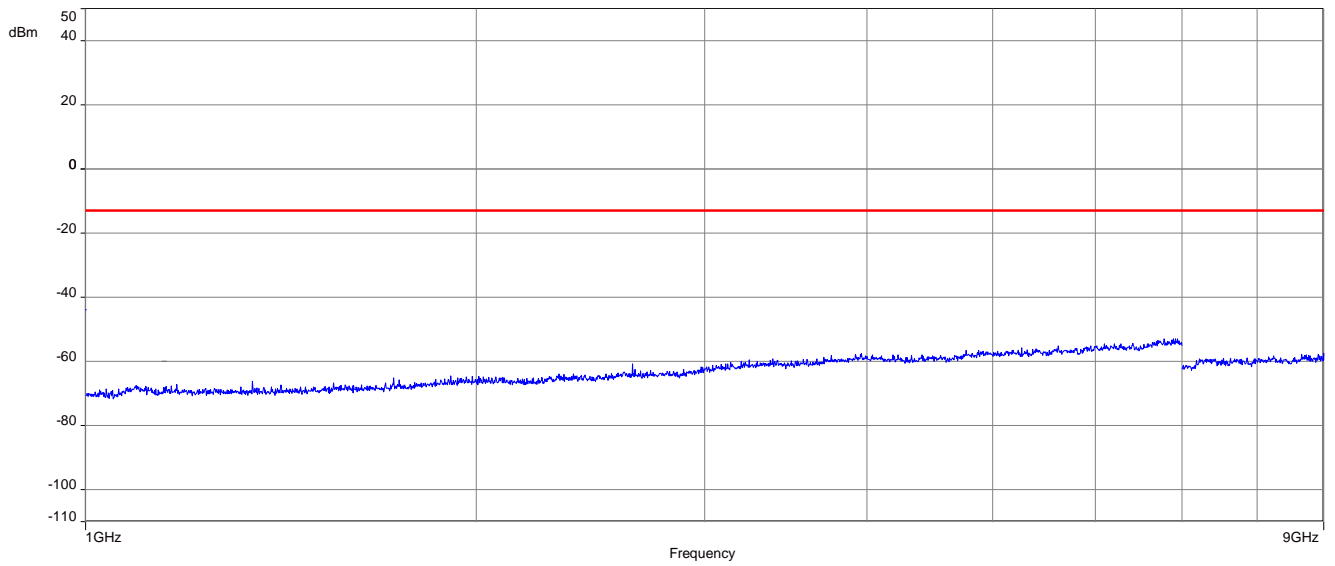

11.2.4 Spurious emissions conducted

Description:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From § 2.1057 & RSS-Gen, 6.13.2 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

2. Determine mobile station transmits frequencies: below outlines, the band edge frequencies pertinent to conducted emissions testing.

Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Span:	10 MHz – 8.5 GHz
Trace mode:	Max Hold
Used equipment:	See chapter 7.2 setup A
Measurement uncertainty:	See chapter 8
Measurement procedure:	FCC: § 2.1051

Limits:

FCC
§ 22.917(a) & (b)
<p>(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.</p> <p>(b)(1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a RBW of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.</p> <p>(b)(2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz.</p>
-13 dBm

Results:

QPSK:

Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

16-QAM:


Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

64-QAM:


Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

Plots:


Plot 1: 1.4 MHz – QPSK - Lowest Channel (10 MHz – 8.5 GHz)

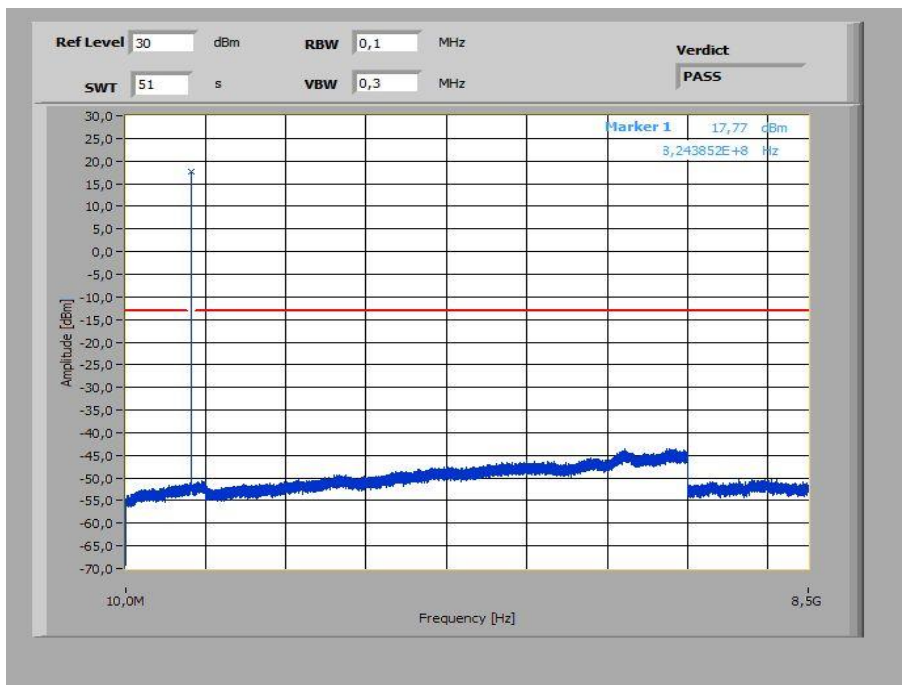


Plot 2: 1.4 MHz – QPSK - Middle Channel (10 MHz – 8.5 GHz)

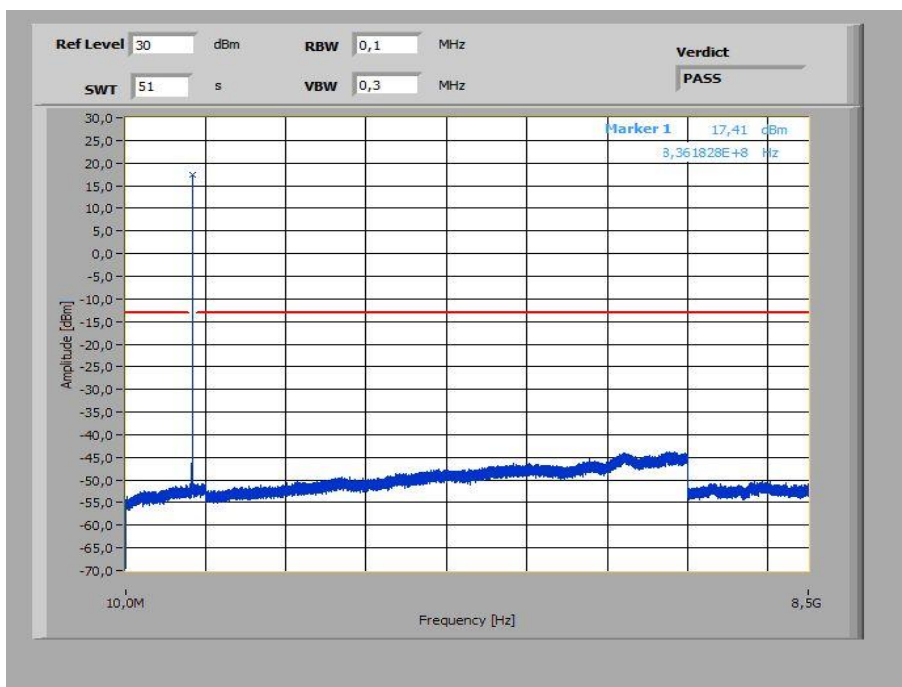


Plot 3: 1.4 MHz – QPSK - Highest Channel (10 MHz – 8.5 GHz)

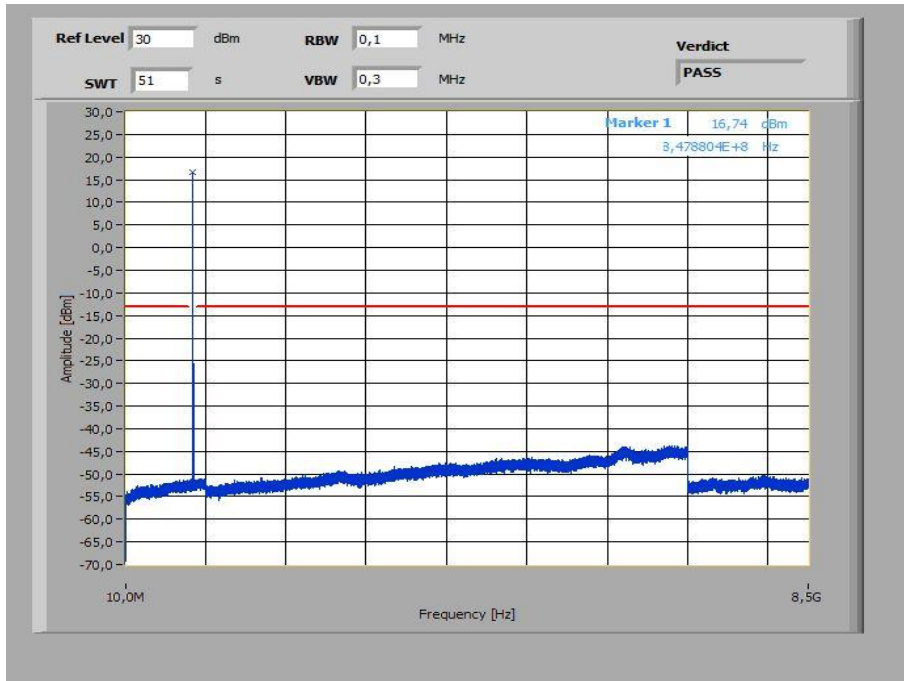


Plot 4: 3 MHz – QPSK - Lowest Channel (10 MHz – 8.5 GHz)

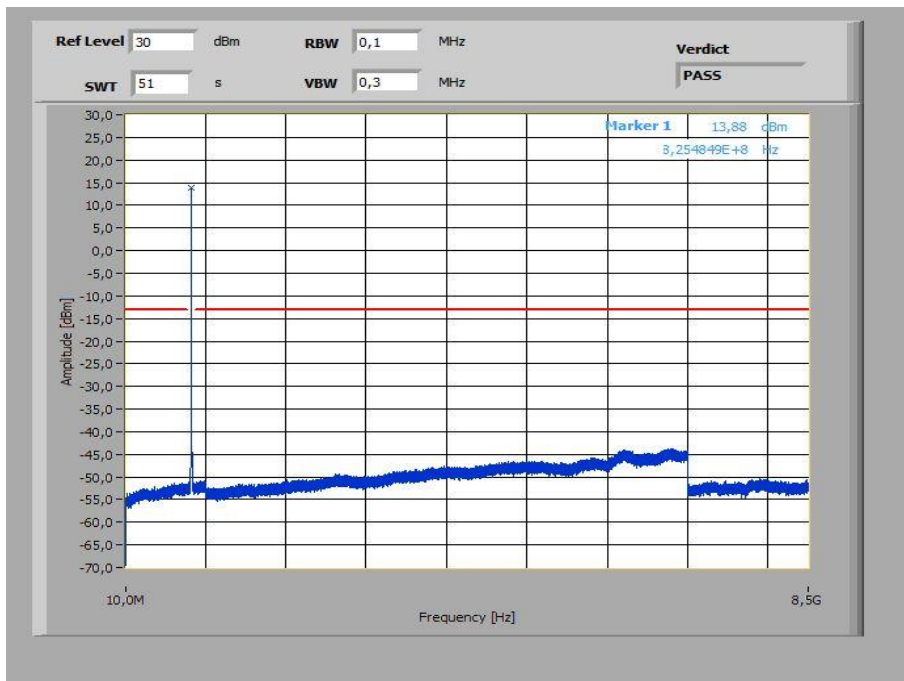


Plot 5: 3 MHz – QPSK - Middle Channel (10 MHz – 8.5 GHz)

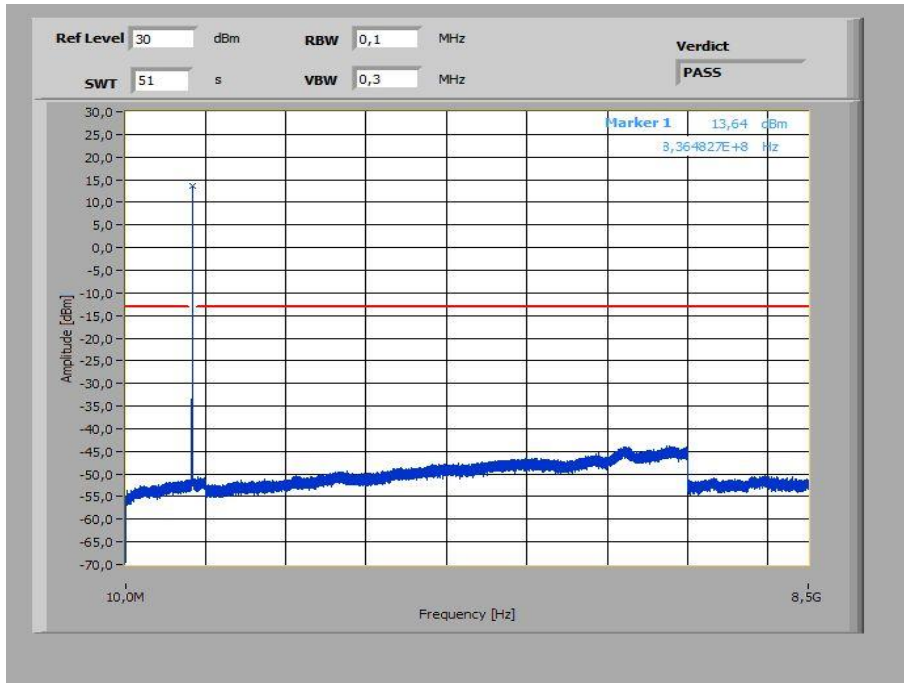


Plot 6: 3 MHz – QPSK - Highest Channel (10 MHz – 8.5 GHz)

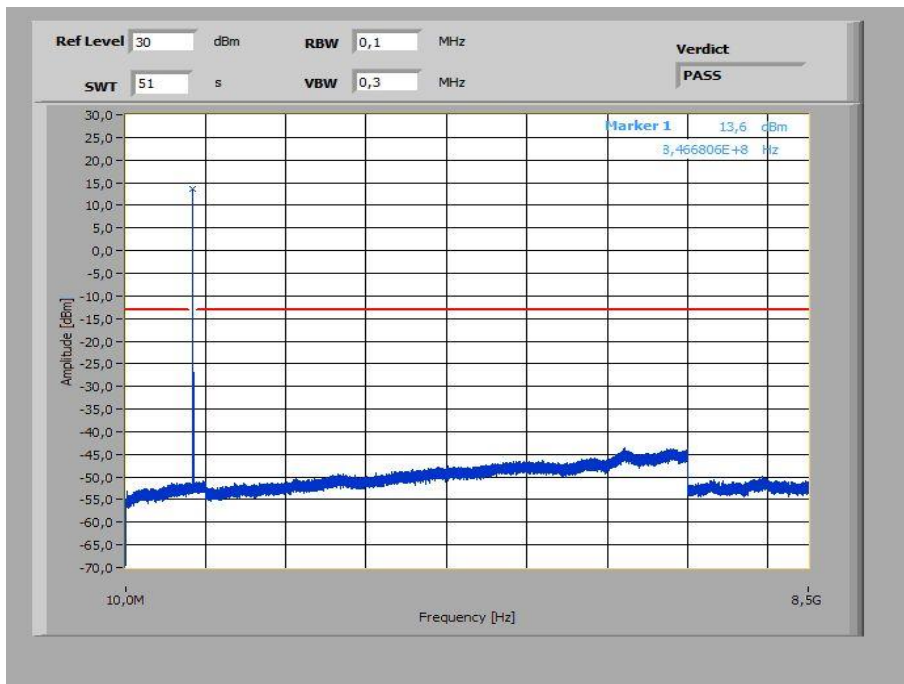


Plot 7: 5 MHz – QPSK - Lowest Channel (10 MHz – 8.5 GHz)

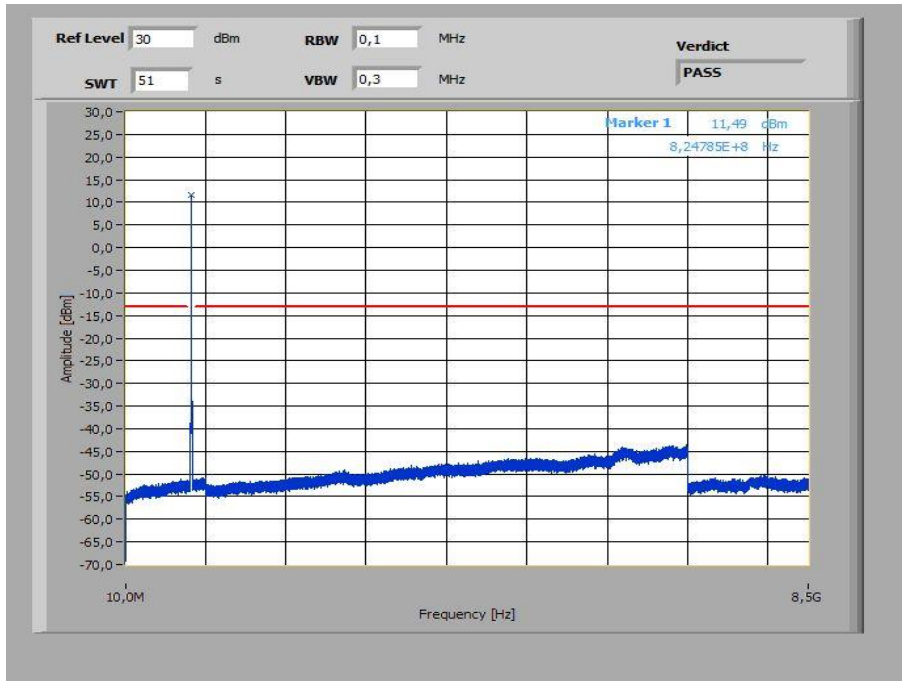


Plot 8: 5 MHz – QPSK - Middle Channel (10 MHz – 8.5 GHz)

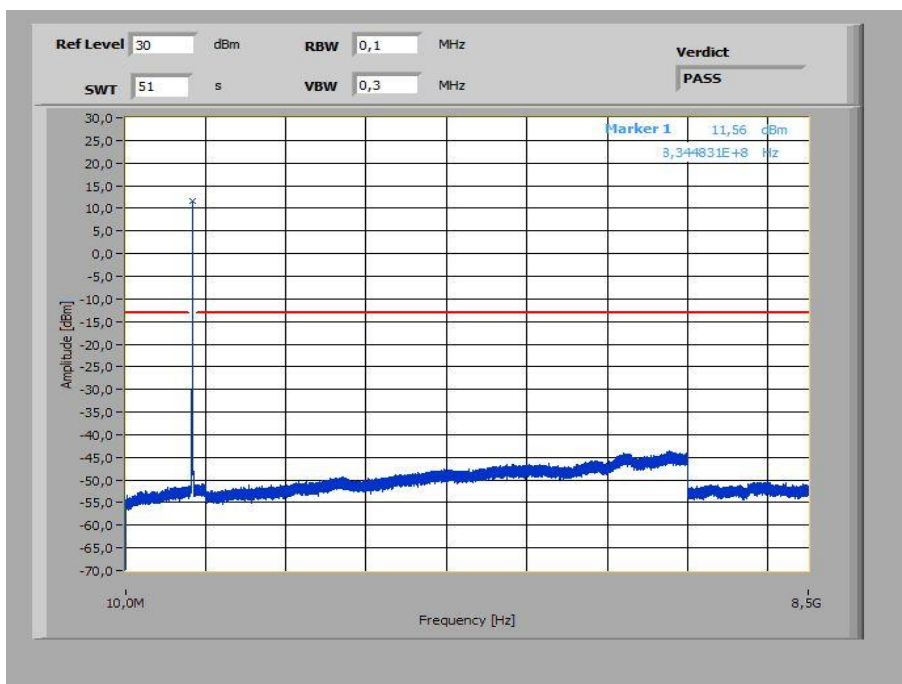


Plot 9: 5 MHz – QPSK - Highest Channel (10 MHz – 8.5 GHz)

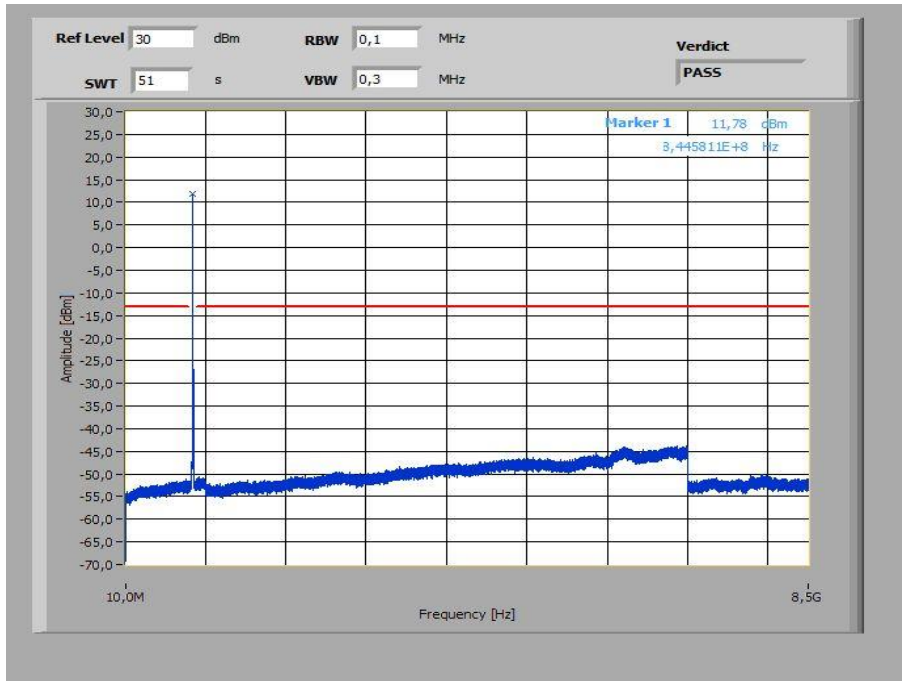


Plot 10: 10 MHz – QPSK - Lowest Channel (10 MHz – 8.5 GHz)

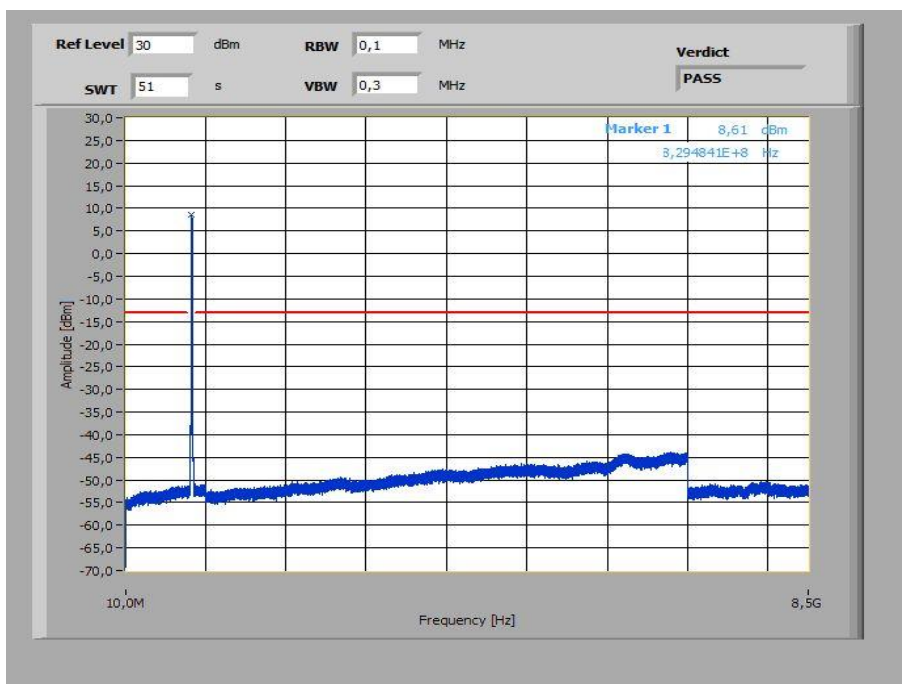


Plot 11: 10 MHz – QPSK - Middle Channel (10 MHz – 8.5 GHz)

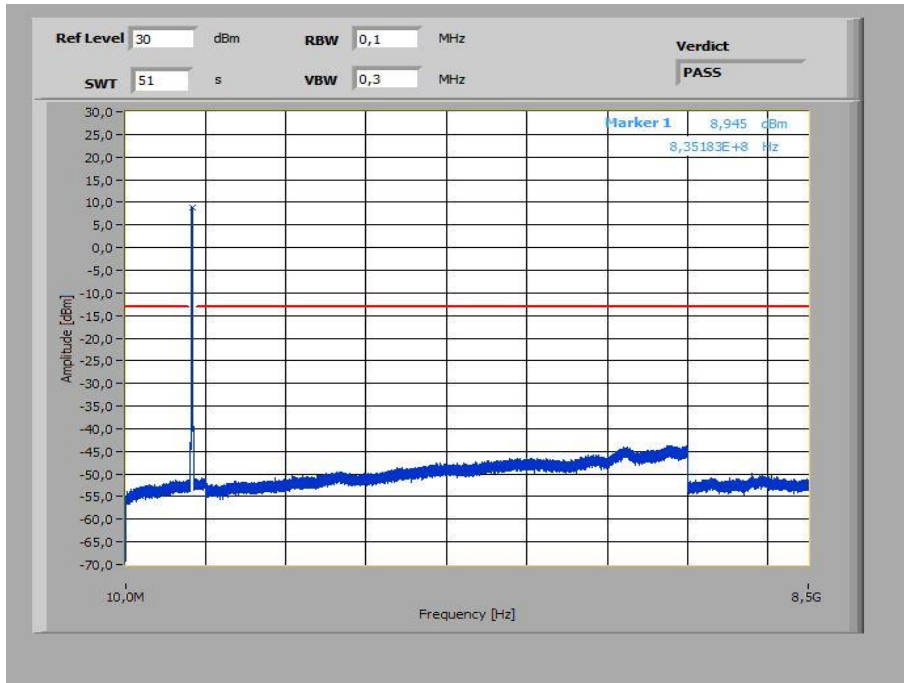


Plot 12: 10 MHz – QPSK - Highest Channel (10 MHz – 8.5 GHz)

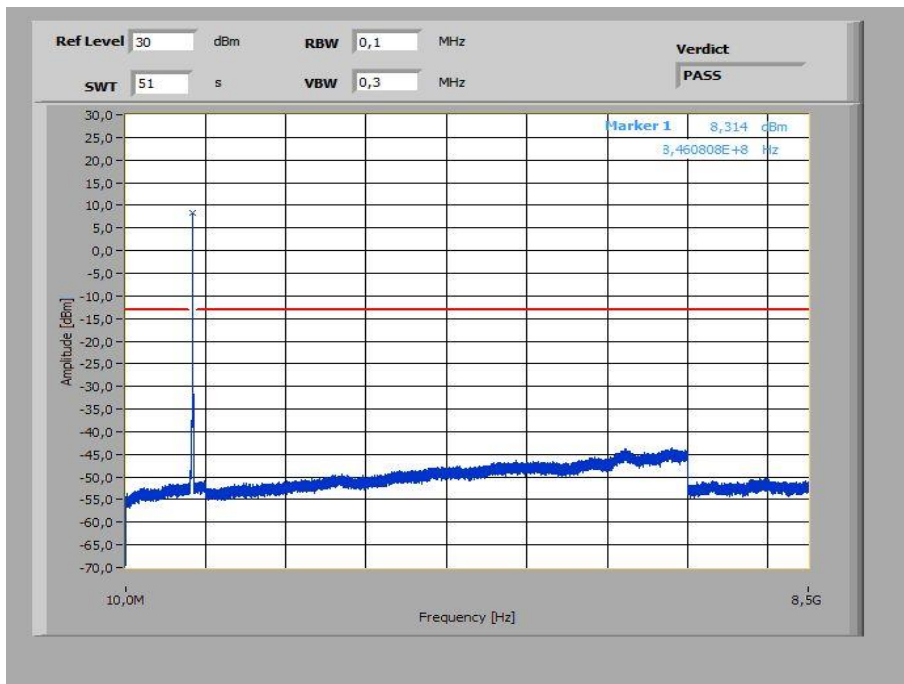


Plot 13: 15 MHz – QPSK - Lowest Channel (10 MHz – 8.5 GHz)

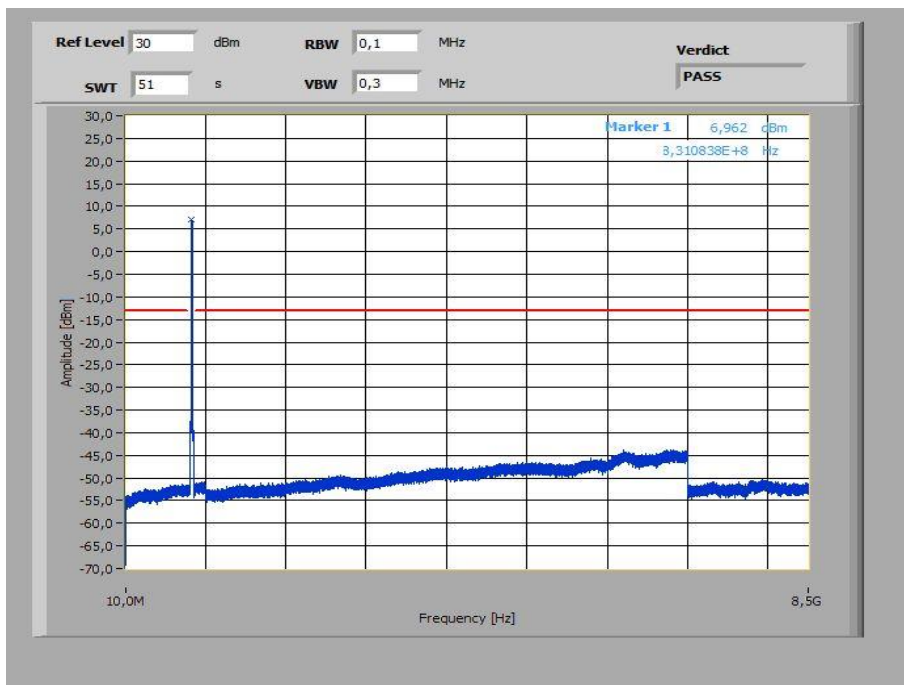


Plot 14: 15 MHz – QPSK - Middle Channel (10 MHz – 8.5 GHz)

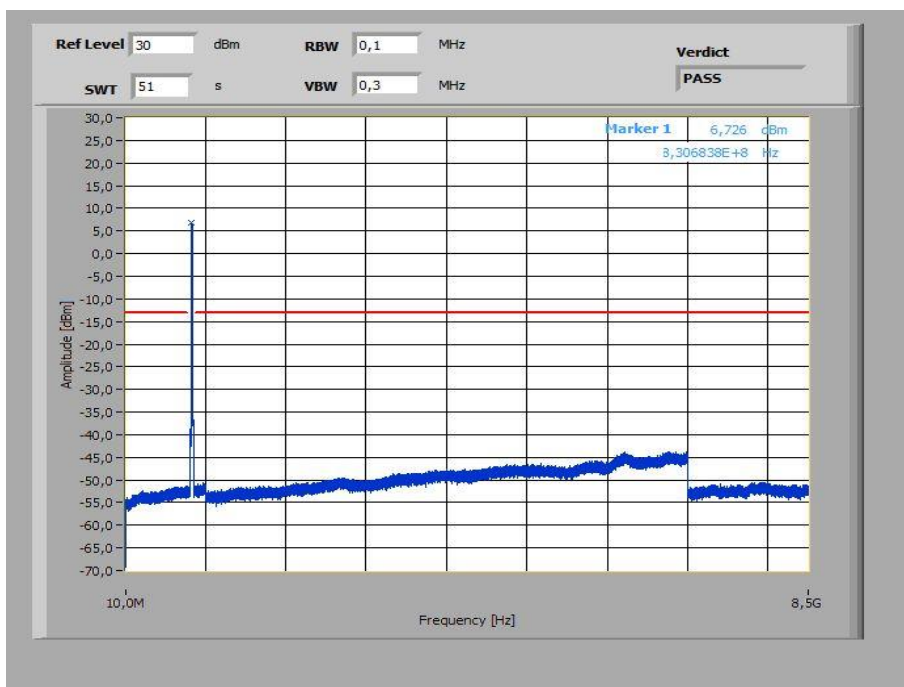


Plot 15: 15 MHz – QPSK - Highest Channel (10 MHz – 8.5 GHz)

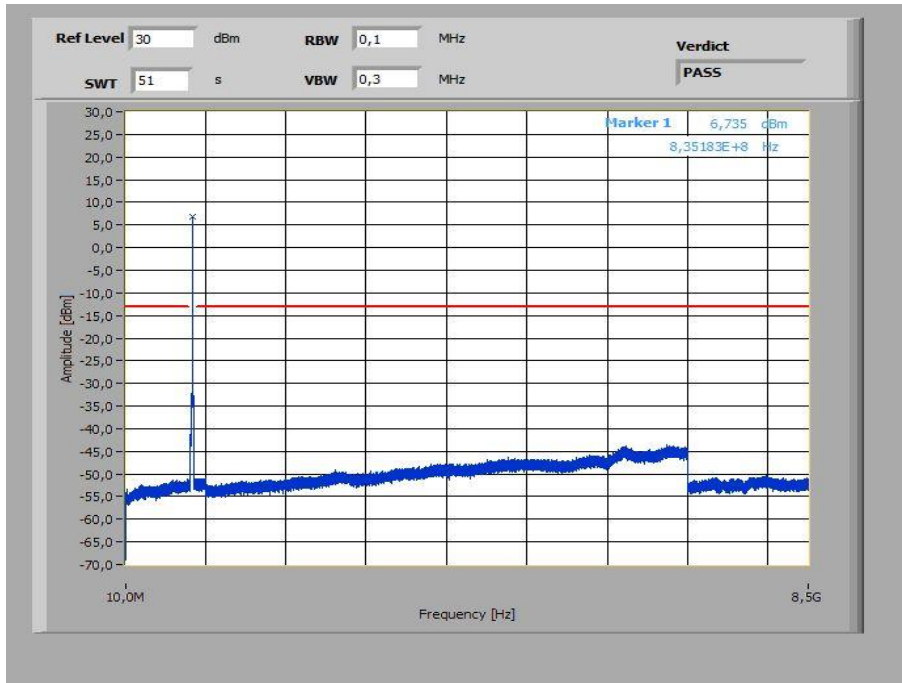


Plot 16: 1.4 MHz – 16-QAM - Lowest Channel (10 MHz – 8.5 GHz)

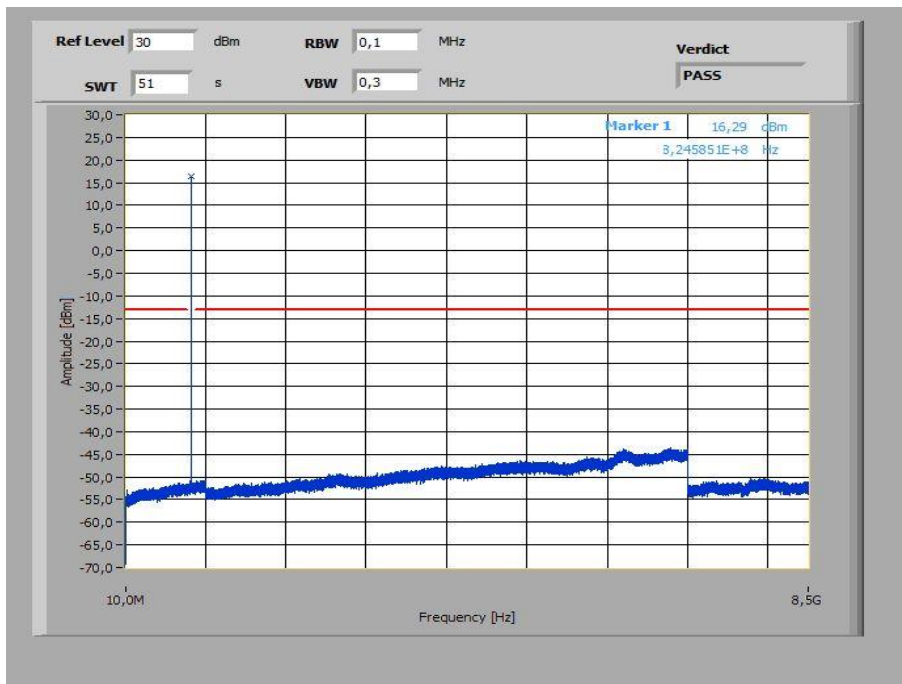


Plot 17: 1.4 MHz – 16-QAM - Middle Channel (10 MHz – 8.5 GHz)

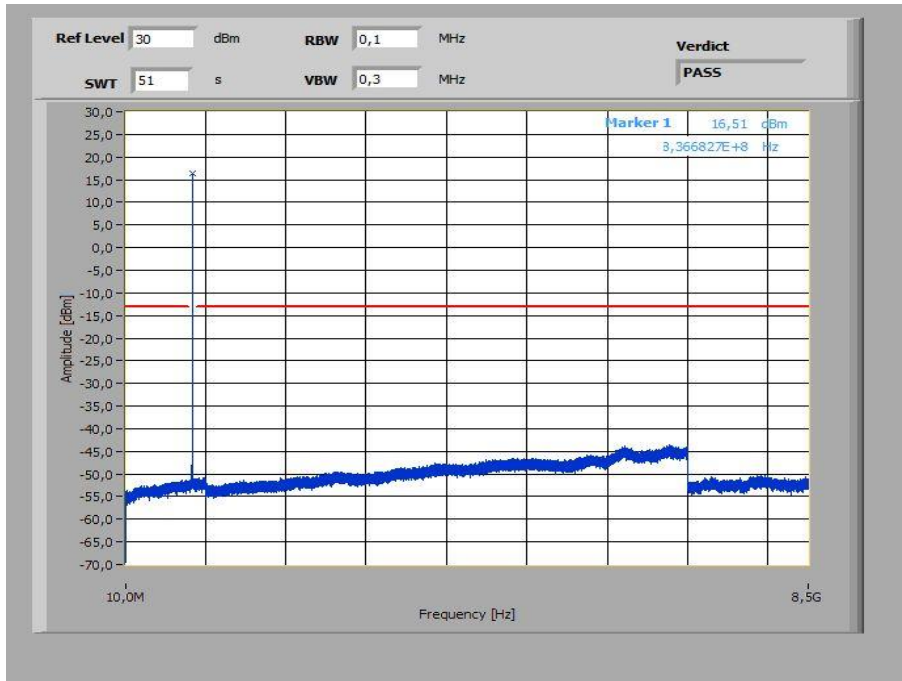


Plot 18: 1.4 MHz – 16-QAM - Highest Channel (10 MHz – 8.5 GHz)

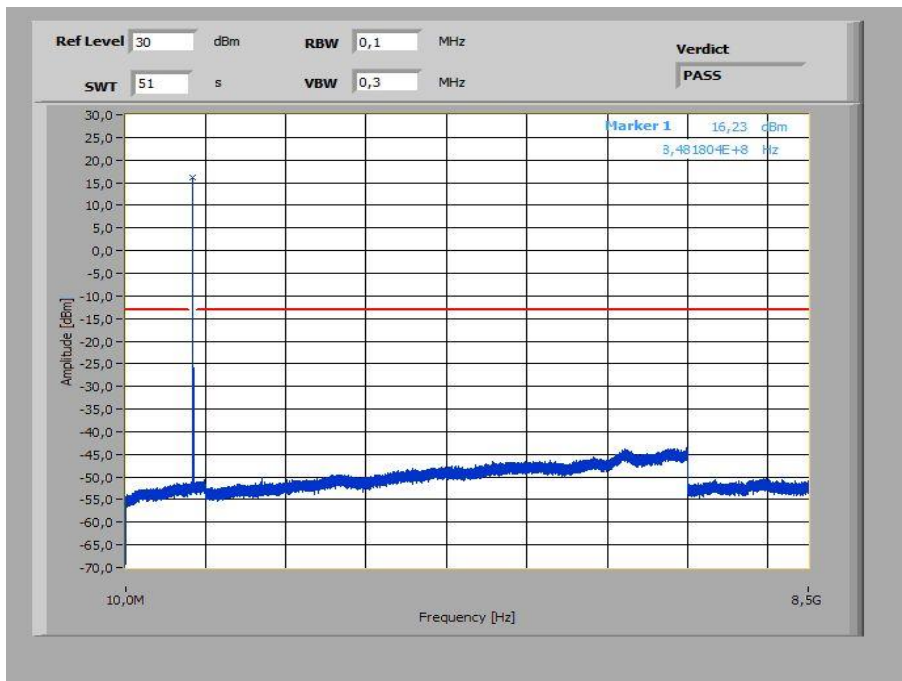


Plot 19: 3 MHz – 16-QAM - Lowest Channel (10 MHz – 8.5 GHz)

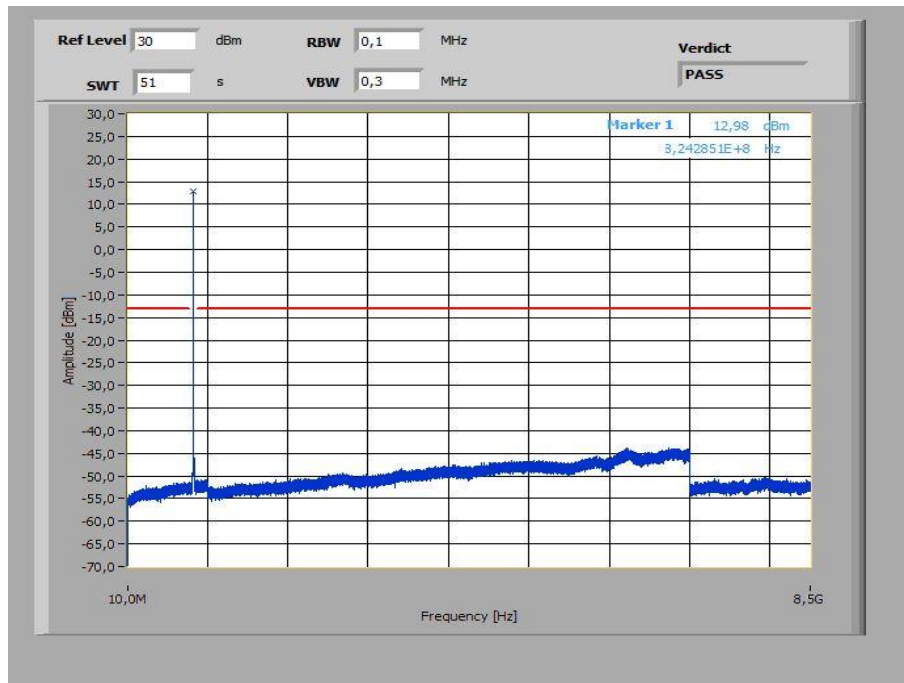


Plot 20: 3 MHz – 16-QAM - Middle Channel (10 MHz – 8.5 GHz)

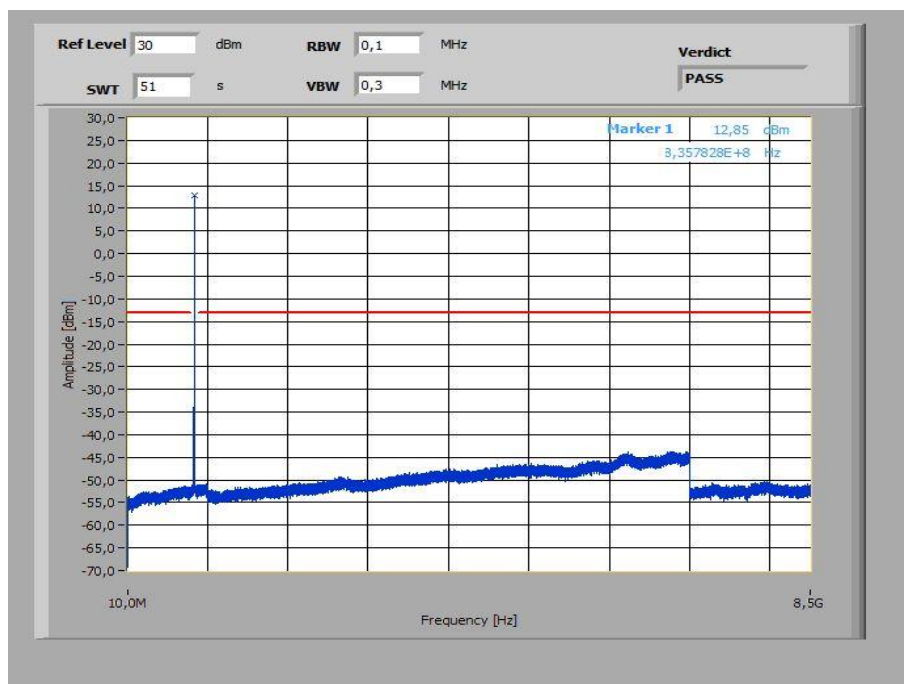


Plot 21: 3 MHz – 16-QAM - Highest Channel (10 MHz – 8.5 GHz)

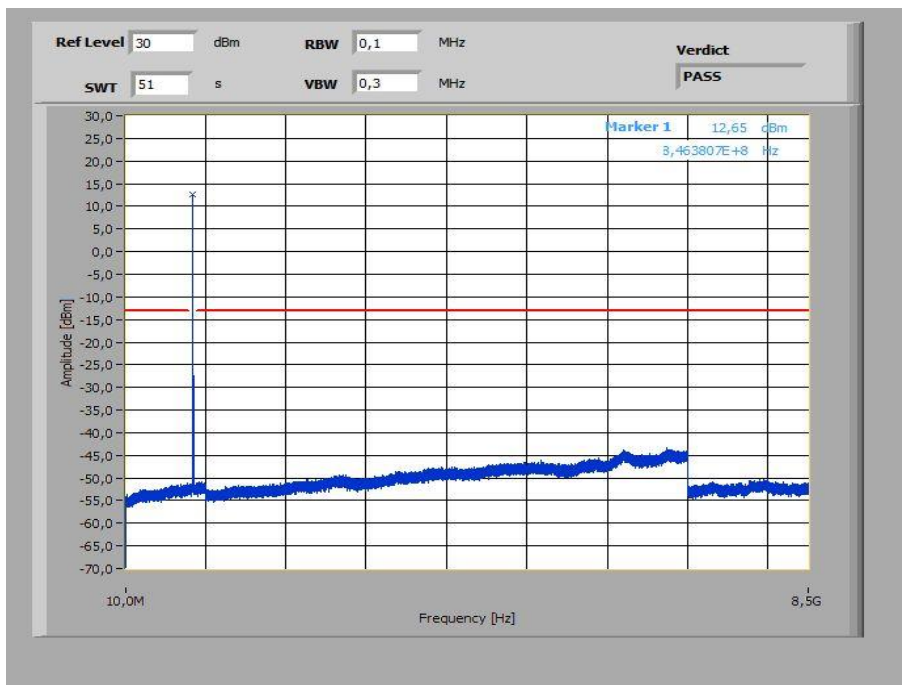


Plot 22: 5 MHz – 16-QAM - Lowest Channel (10 MHz – 8.5 GHz)

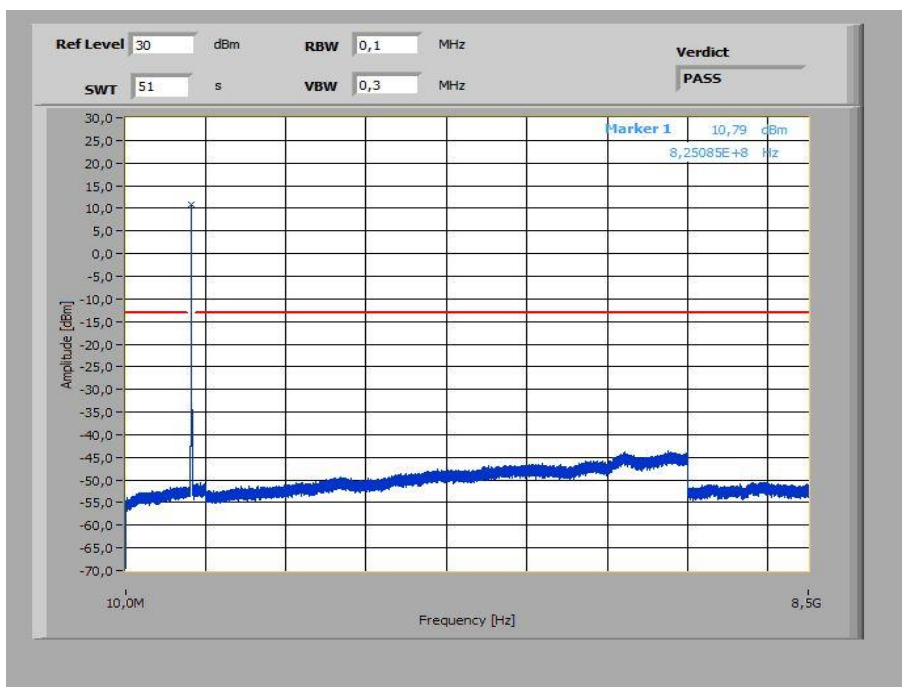


Plot 23: 5 MHz – 16-QAM - Middle Channel (10 MHz – 8.5 GHz)

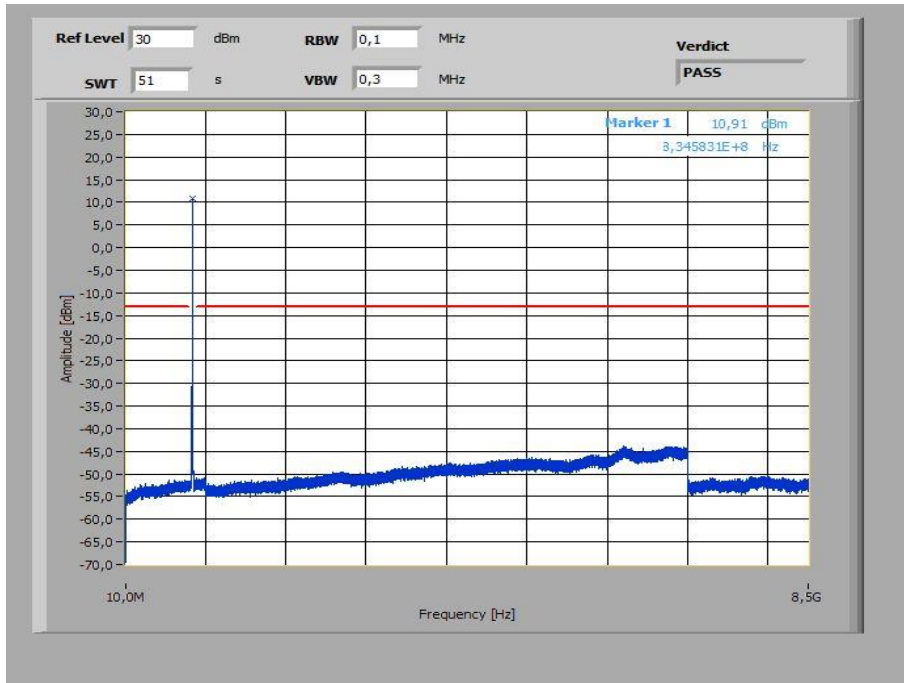


Plot 24: 5 MHz – 16-QAM - Highest Channel (10 MHz – 8.5 GHz)

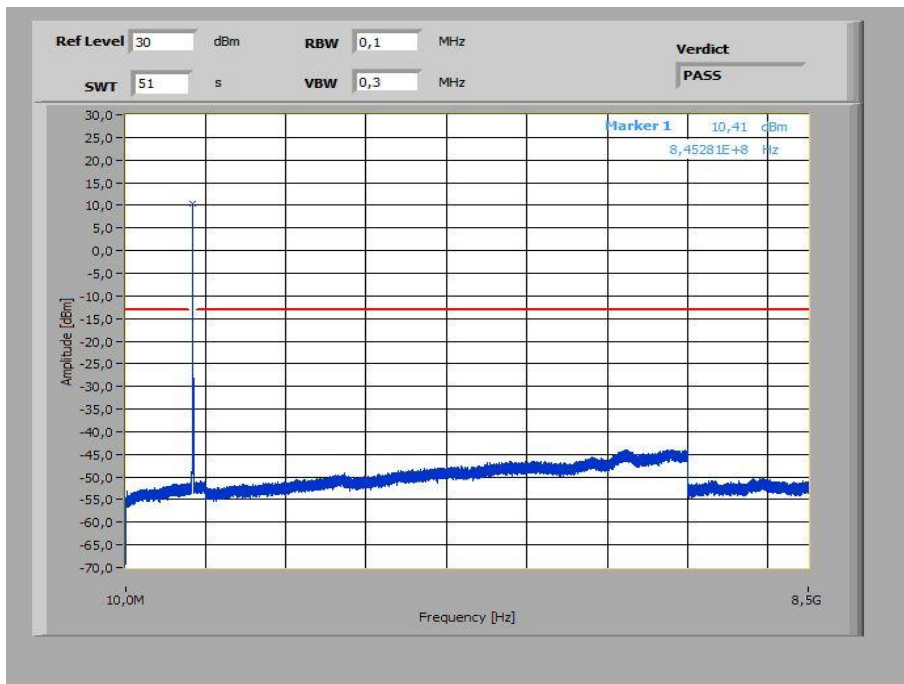


Plot 25: 10 MHz – 16-QAM - Lowest Channel (10 MHz – 8.5 GHz)

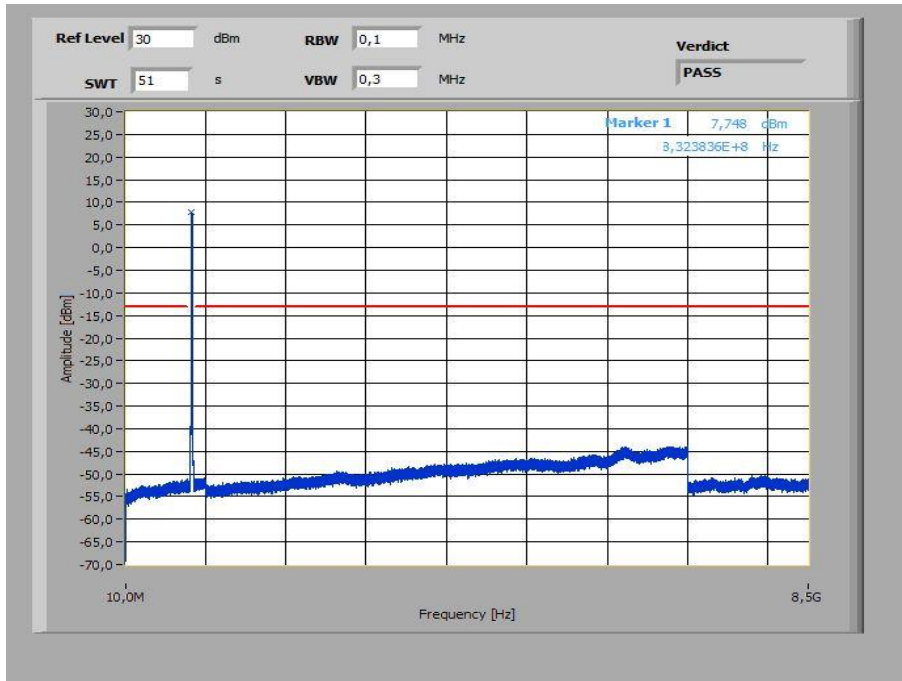


Plot 26: 10 MHz – 16-QAM - Middle Channel (10 MHz – 8.5 GHz)

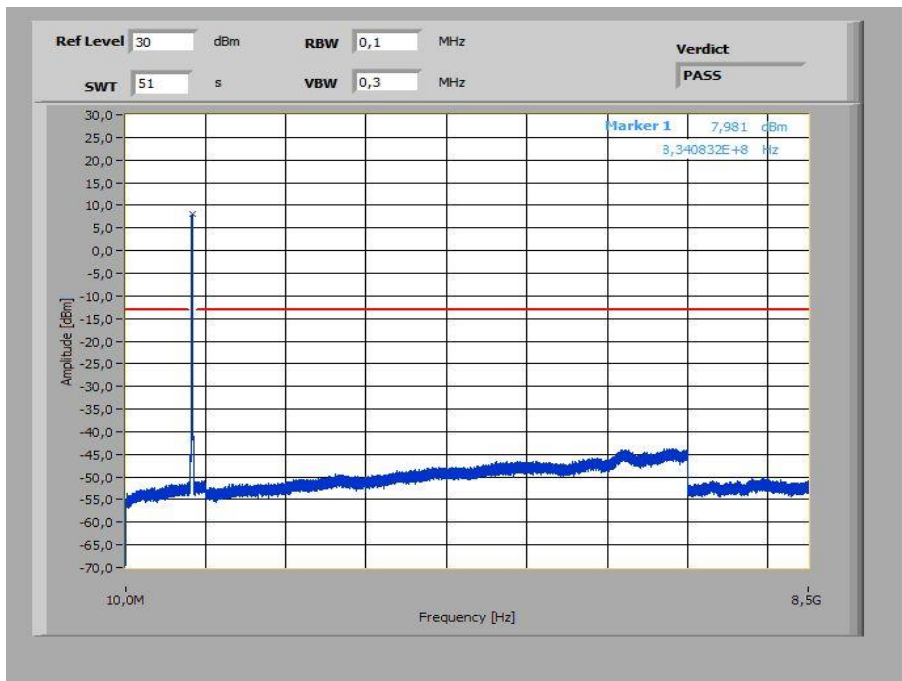


Plot 27: 10 MHz – 16-QAM - Highest Channel (10 MHz – 8.5 GHz)

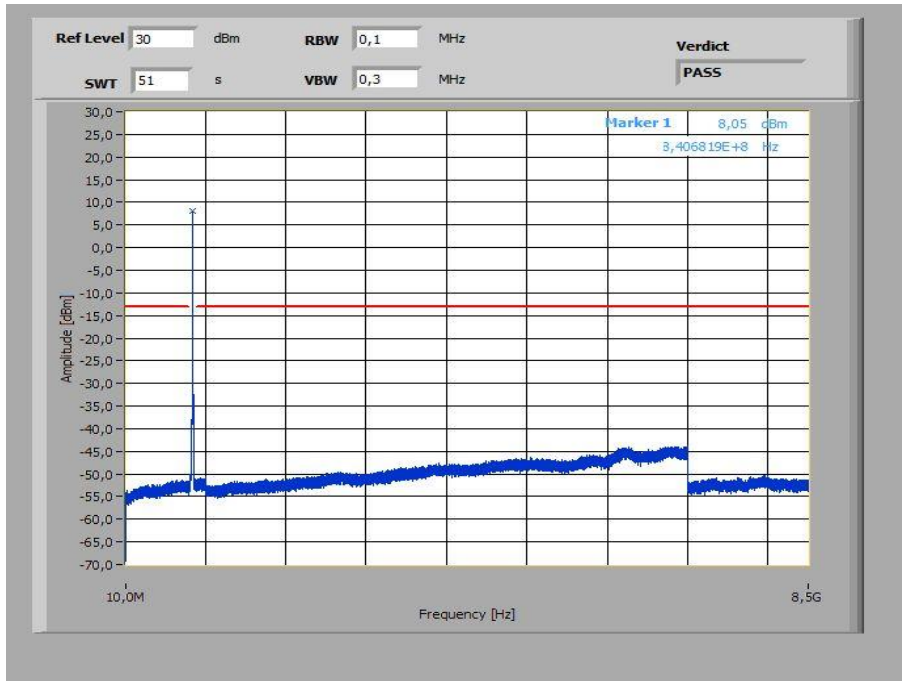


Plot 28: 15 MHz – 16-QAM - Lowest Channel (10 MHz – 8.5 GHz)

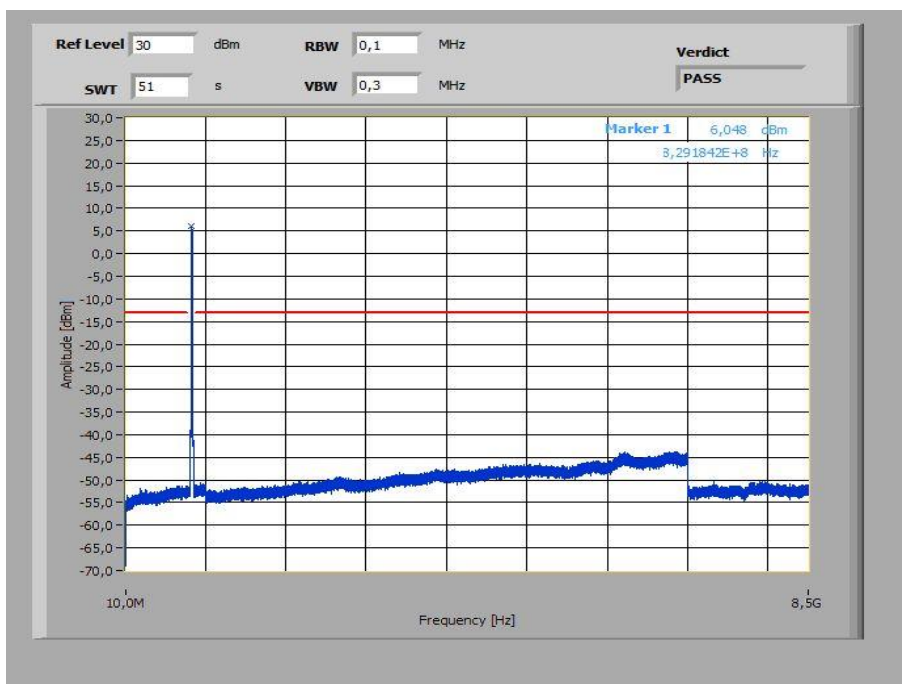


Plot 29: 15 MHz – 16-QAM - Middle Channel (10 MHz – 8.5 GHz)

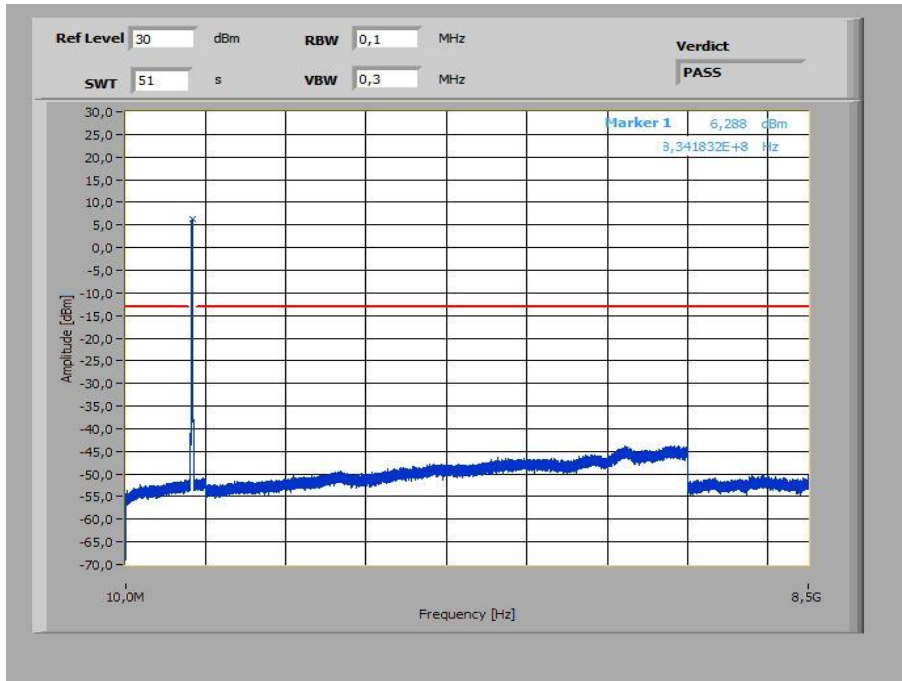


Plot 30: 15 MHz – 16-QAM - Highest Channel (10 MHz – 8.5 GHz)

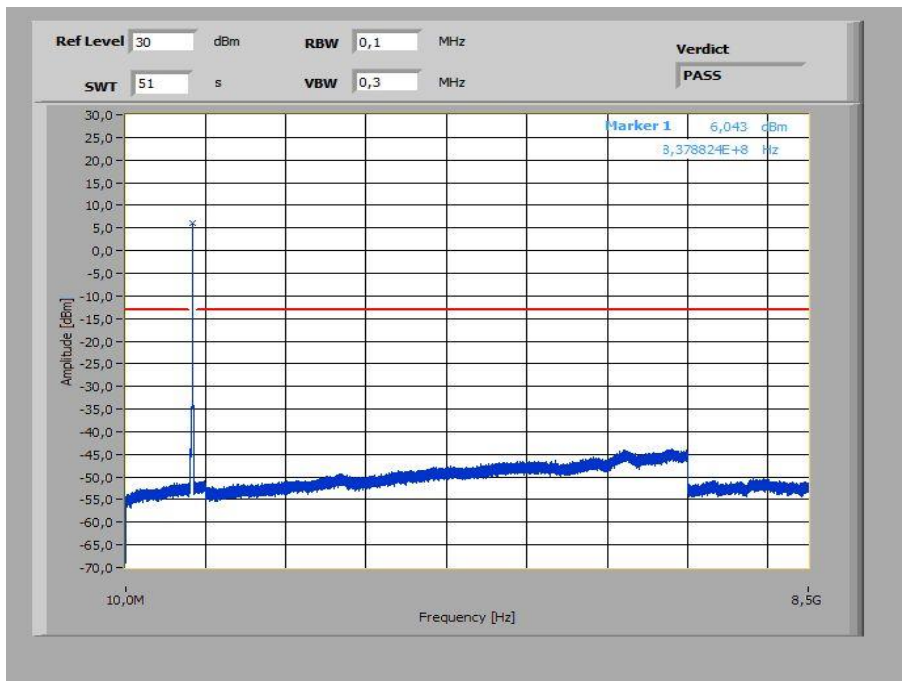


Plot 31: 1.4 MHz – 64-QAM - Lowest Channel (10 MHz – 8.5 GHz)

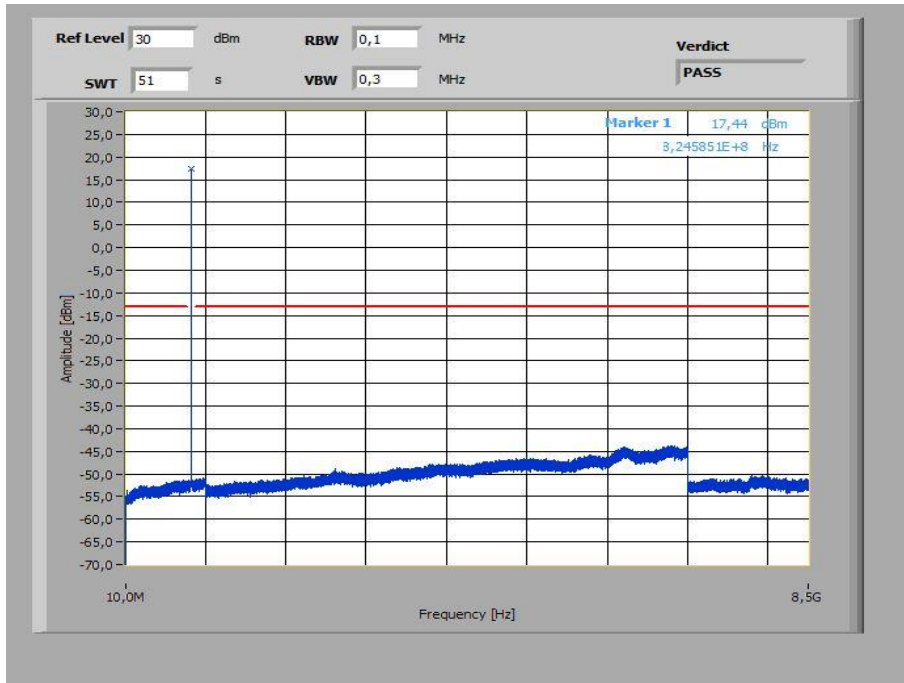


Plot 32: 1.4 MHz – 64-QAM - Middle Channel (10 MHz – 8.5 GHz)

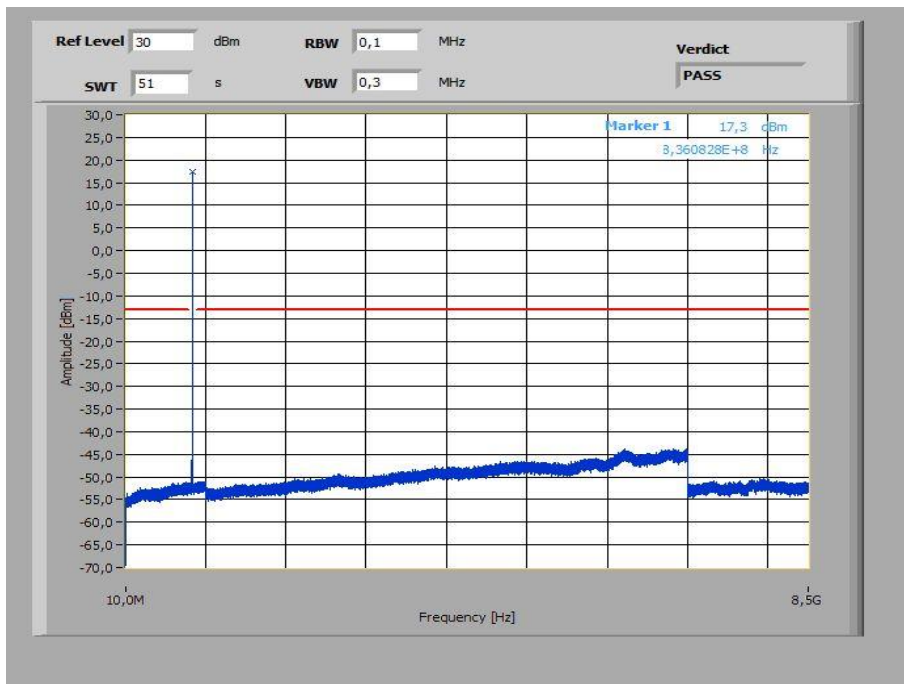


Plot 33: 1.4 MHz – 64-QAM - Highest Channel (10 MHz – 8.5 GHz)

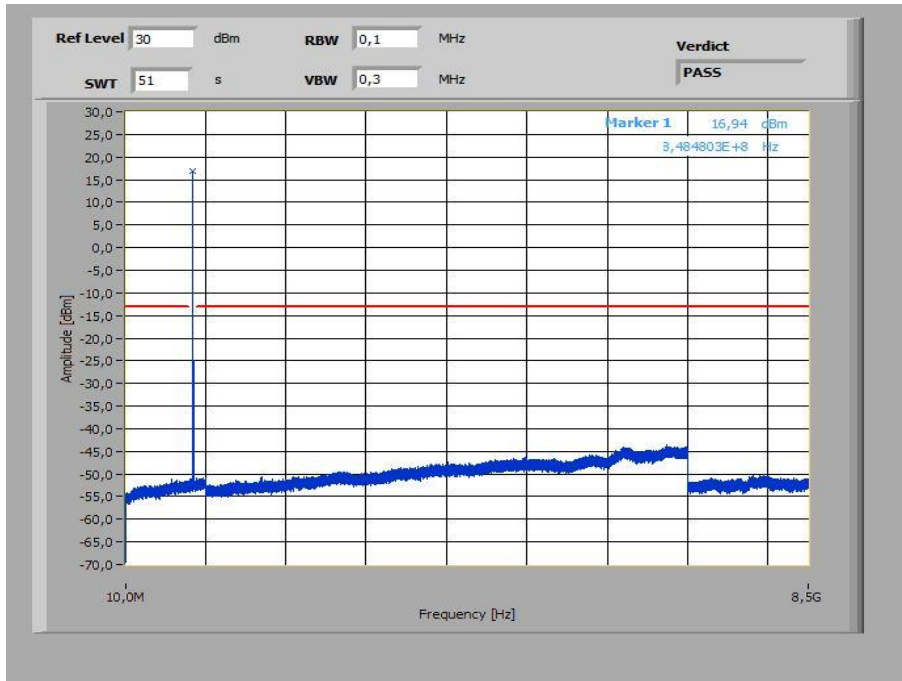


Plot 34: 3 MHz – 64-QAM - Lowest Channel (10 MHz – 8.5 GHz)

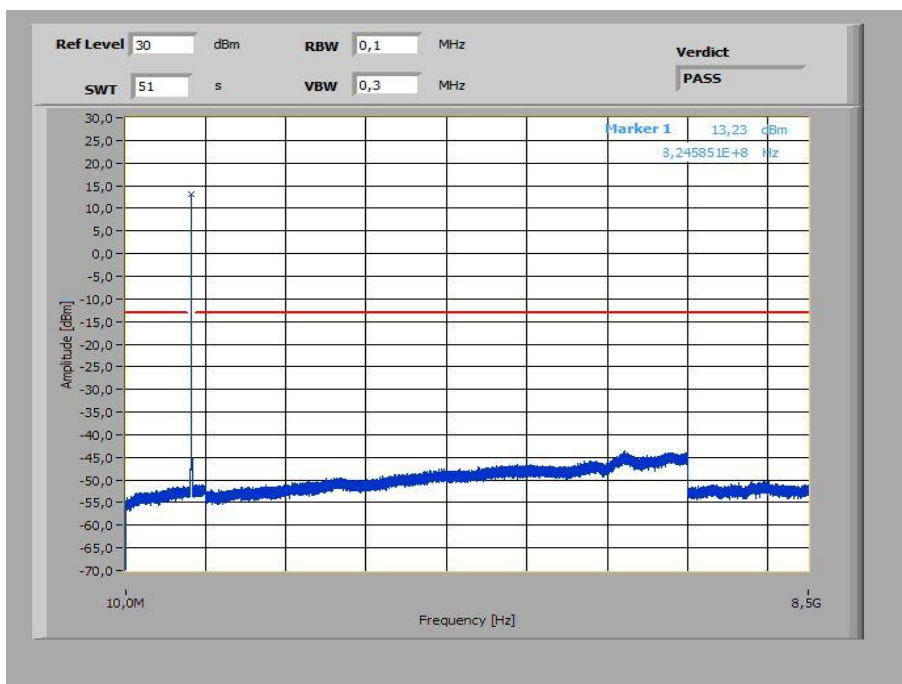


Plot 35: 3 MHz – 64-QAM - Middle Channel (10 MHz – 8.5 GHz)

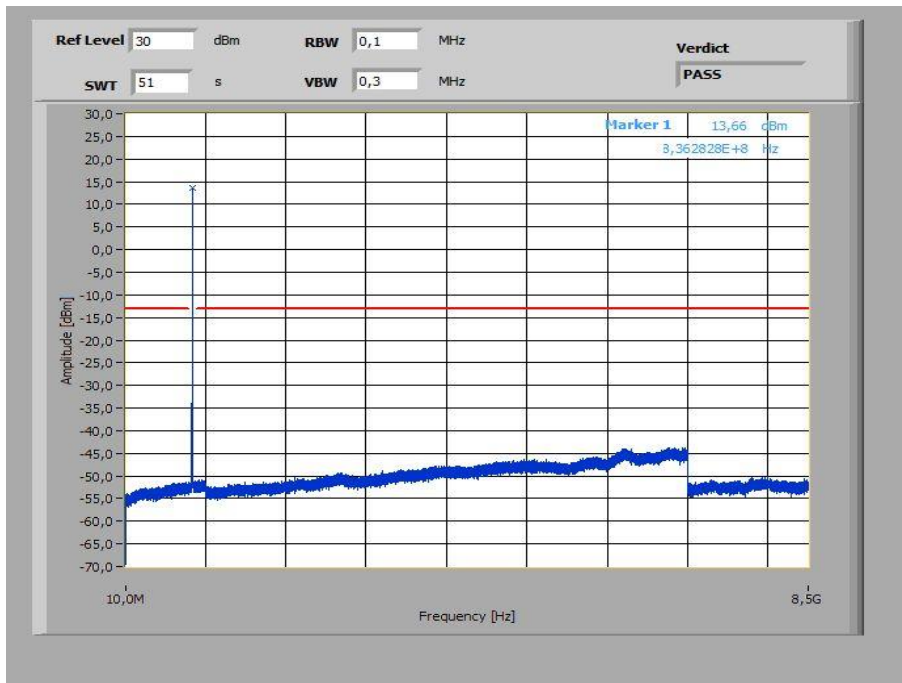


Plot 36: 3 MHz – 64-QAM - Highest Channel (10 MHz – 8.5 GHz)

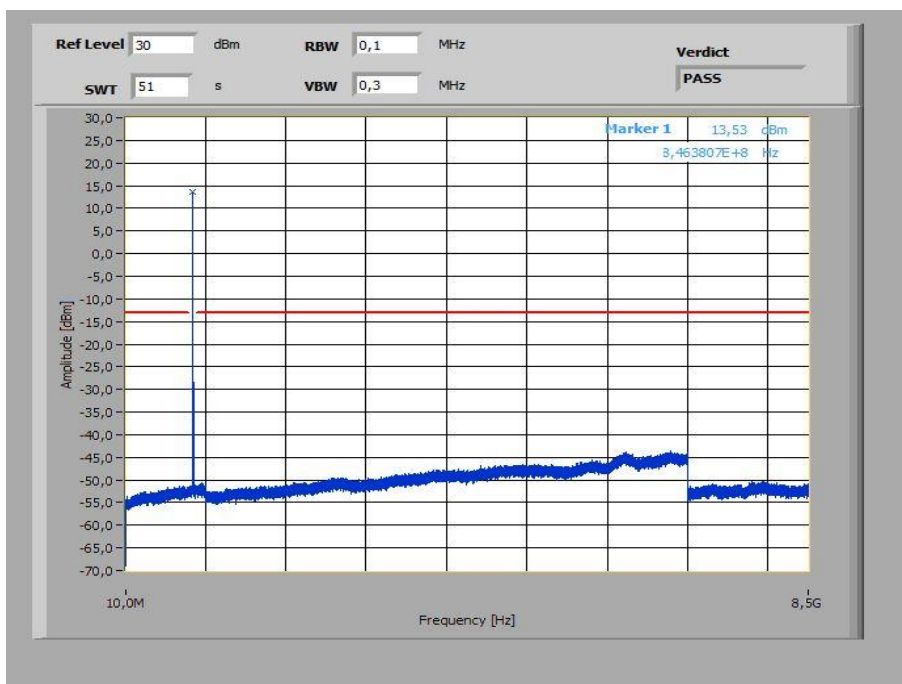


Plot 37: 5 MHz – 64-QAM - Lowest Channel (10 MHz – 8.5 GHz)

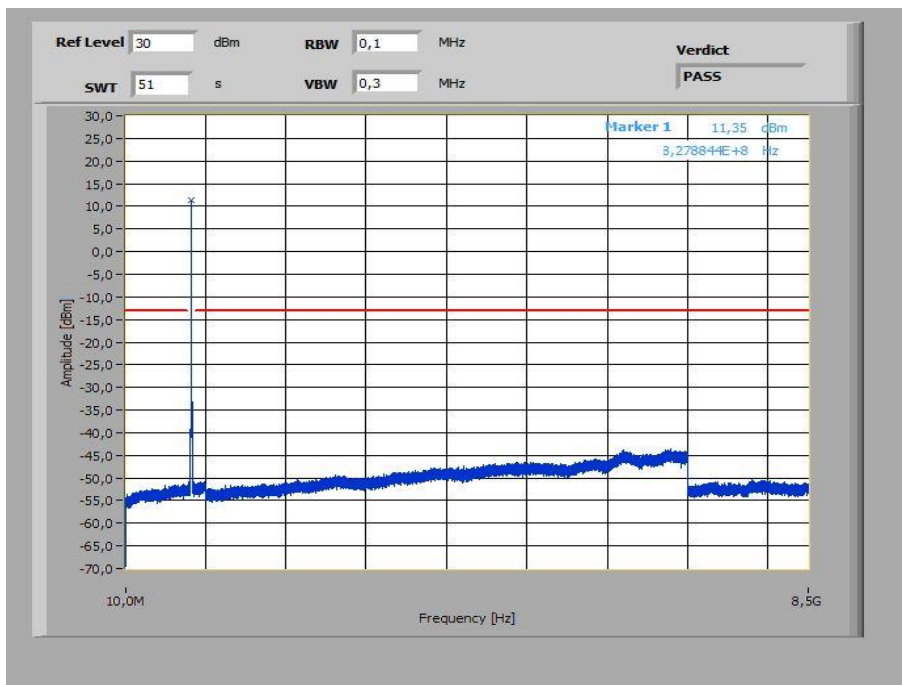


Plot 38: 5 MHz – 64-QAM - Middle Channel (10 MHz – 8.5 GHz)

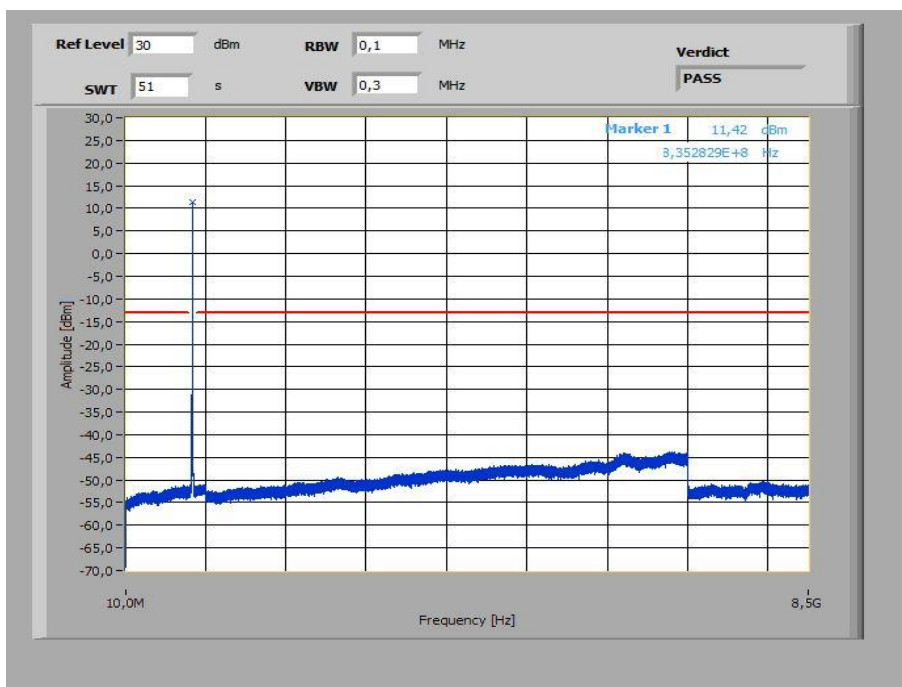


Plot 39: 5 MHz – 64-QAM - Highest Channel (10 MHz – 8.5 GHz)

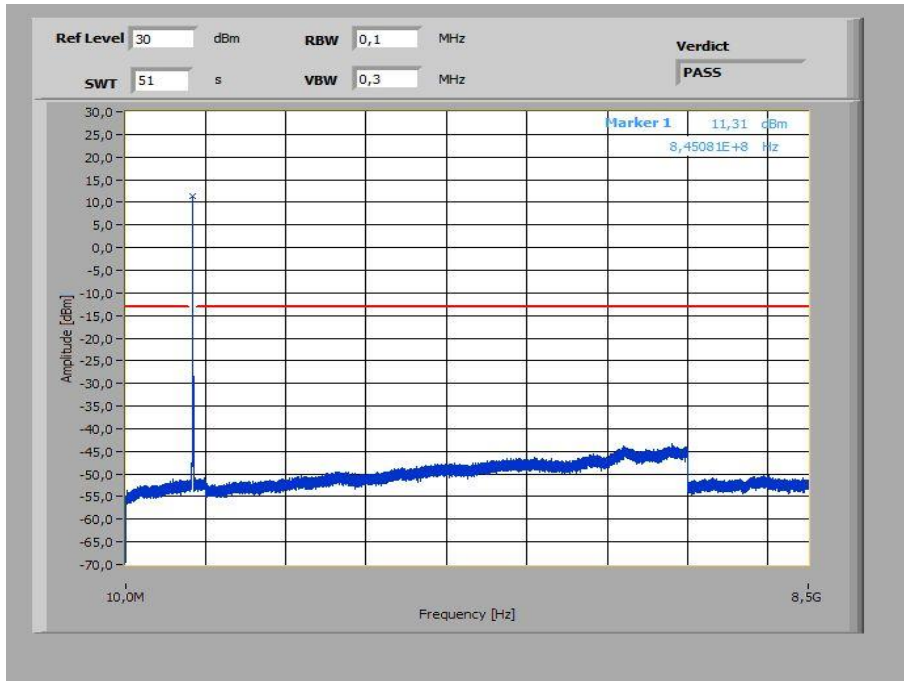


Plot 40: 10 MHz – 64-QAM - Lowest Channel (10 MHz – 8.5 GHz)

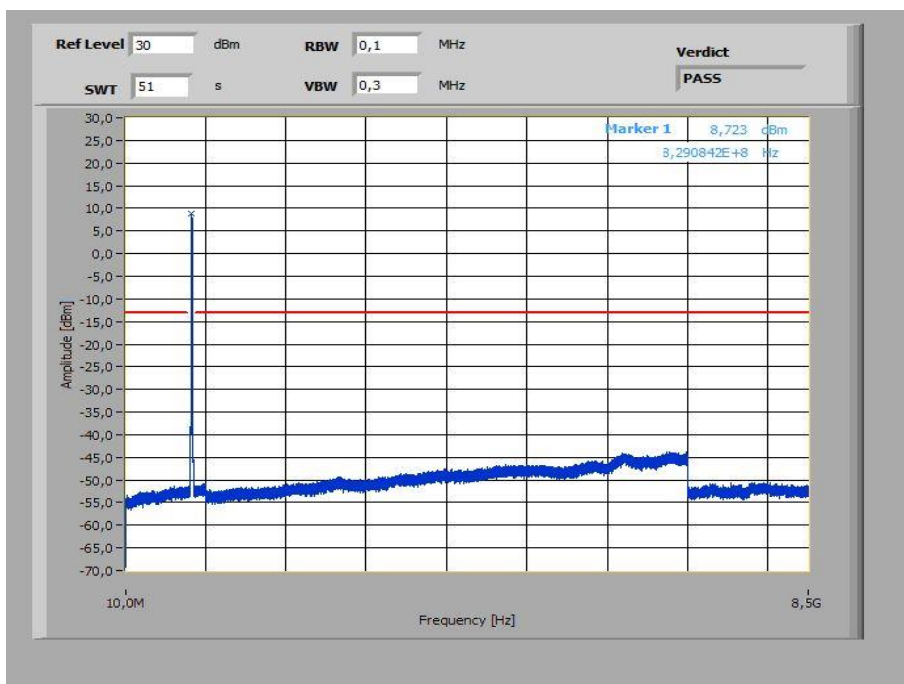


Plot 41: 10 MHz – 64-QAM - Middle Channel (10 MHz – 8.5 GHz)

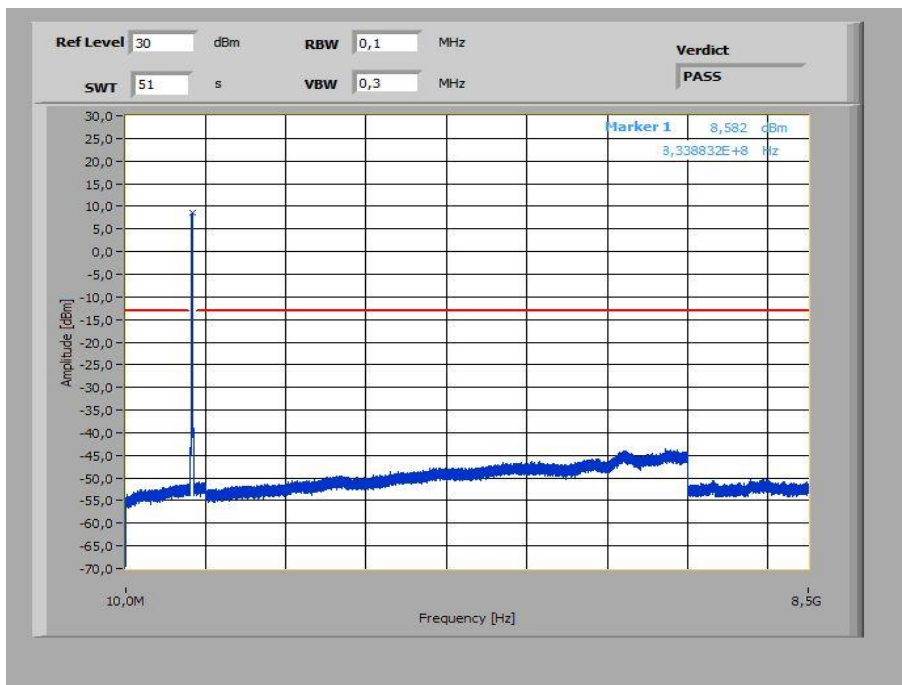


Plot 42: 10 MHz – 64-QAM - Highest Channel (10 MHz – 8.5 GHz)

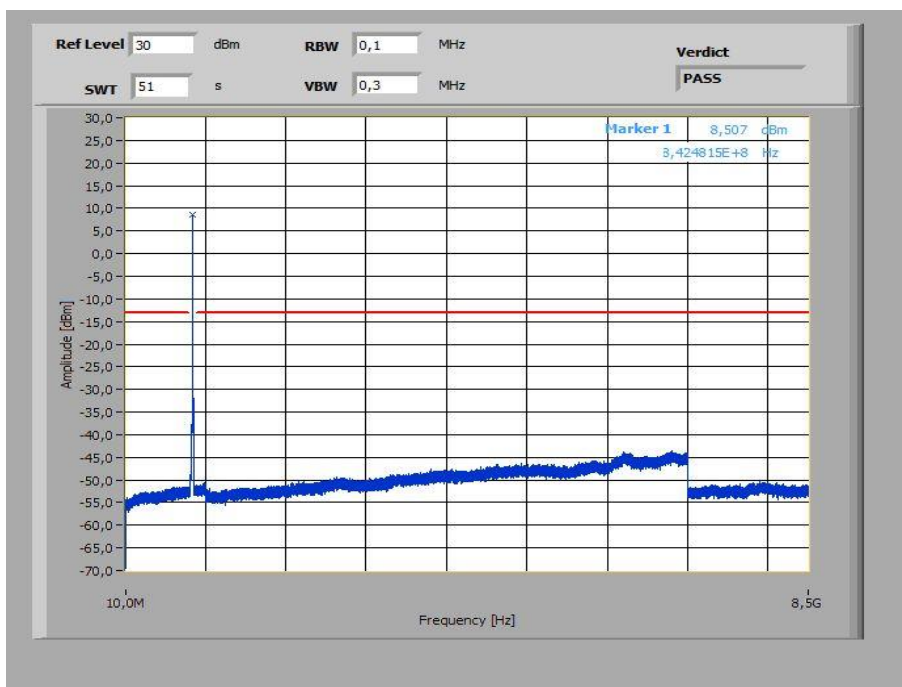

Plot 43: 15 MHz – 64-QAM - Lowest Channel (10 MHz – 8.5 GHz)

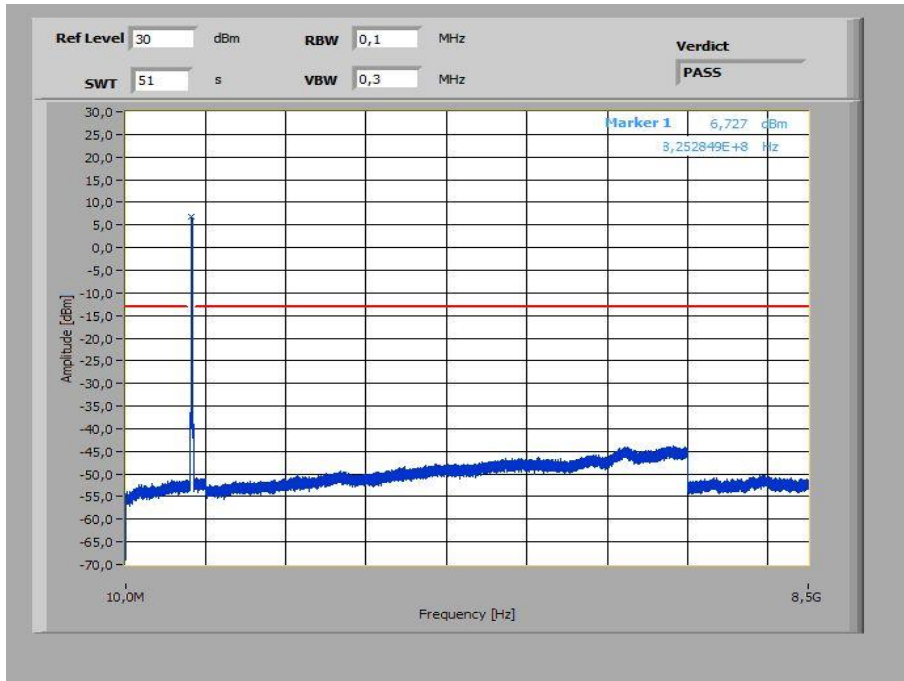

Plot 44: 15 MHz – 64-QAM - Middle Channel (10 MHz – 8.5 GHz)

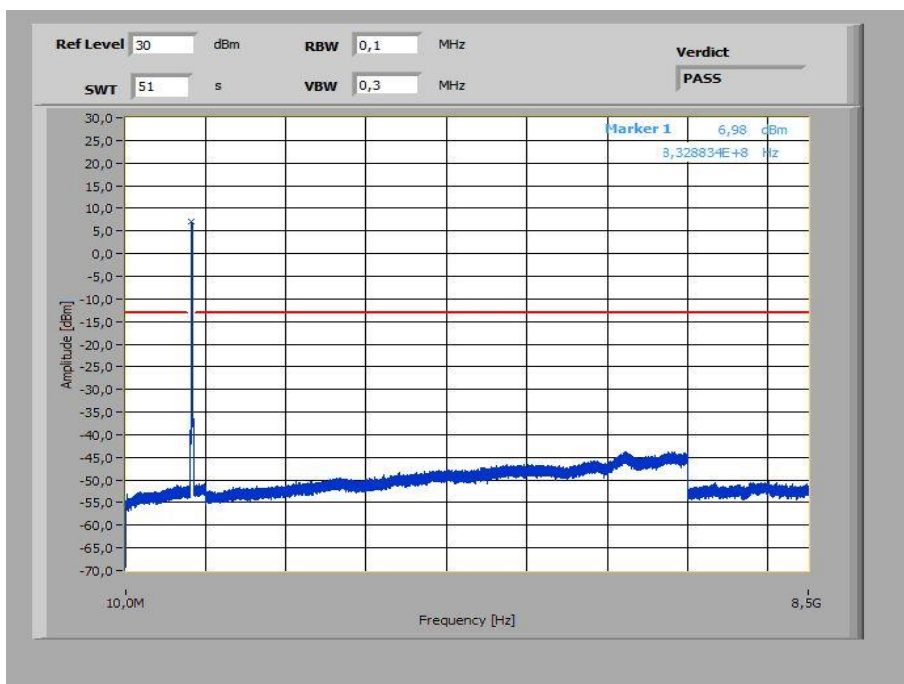

Plot 45: 15 MHz – 64-QAM - Highest Channel (10 MHz – 8.5 GHz)

