WIFI 5GHz Template: Release October 14th, 2019

TEST REPORT

N°: 163647-742968-D **Version : 01**

Subject	**Radio spectrum matters tests according to standards: 47 CFR Part 15.407 & RSS-247 Issue 2 & RSS-Gen Issue 5 (RF Test Only)**
Issued to	**SAGEMCOM BROADBAND SAS 250 Route de l' Empereur 92500 – RUEIL MALMAISON FRANCE**
Apparatus under test	
Product	**Mini Sound Box**
Trade mark	**SAGEMCOM**
Manufacturer	**SAGEMCOM**
Model under test	**Mini Sound Box MSBDV00**
Serial number	**253837310**
FCC ID	**VW3MSBDV00**
IC	**9140A-MSBDV00**
Conclusion	See Test Program chapter
Test date	: October 10, 2019 to November 15, 2019
Test location	Fontenay Aux Roses
Test Site	6230B-1
Sample receipt date	October 8, 2019
Composition of document	184 pages
Document issued on	January 13, 2020

Written by :
Julien Palard
Tests operator

Approved by :
Arnaud FAYETTE
Technical manager

LABORATOIRE CENTRAL DES INDUSTRIES ELECTRIQUES S.A.S au capital de 15.745.984 € RCS Nanterre B 408 363 174 33 avenue du Général Leclerc F - 92260 FONTENAY AUX ROSES

PUBLICATION HISTORY

Version	Date	Author	Modification
01	November 22, 2019	Julien Palard	Creation of the document

Each new edition of this test report replaces and cancels the previous edition. The control of the old editions of report is under responsibility of client.

SUMMARY

1. TEST PROGRAM

References

- **47 CFR Part 15.407**
- **RSS 247 Issue 2**
- **RSS Gen Issue 5**
- **KDB 789033 D02 General U-NII Tests Procedures New Rules v02r01**
- **KDB 662911 D01 Multiple Transmitter Output v02r01**
- **ANSI C63.10-2013**

Radio requirement:

Clause (47CFR Part 15.407 & RSS-247 Issue 2 & RSS-Gen Issue 5) Test Description	Test result - Comments			
Occupied Bandwidth	☑ PASS	☐ FAIL	☐ NA	☐ NP(1)
26dB Bandwidth	☑ PASS	☐ FAIL	☐ NA(2)	☐ NP(1)
6dB Bandwidth	☑ PASS	☐ FAIL	☐ NA(3)	☐ NP(1)
Duty Cycle	☑ PASS	☐ FAIL	☐ NA	☐ NP(1)
EIRP	☑ PASS	☐ FAIL	☐ NA	☐ NP(1)
Maximum Conducted Output Power	☑ PASS	☐ FAIL	☐ NA	☐ NP(1)
Power Spectral Density	☑ PASS	☐ FAIL	☐ NA	☐ NP(1)
Transmit Power Control	☐ PASS	☐ FAIL	☑ NA(4)	☐ NP(1)
AC Power Line Conducted Emission	☑ PASS	☐ FAIL	☐ NA(5)	☐ NP(1)
Unwanted Emissions & Undesirable Emission	☑ PASS	☐ FAIL	☐ NA	☐ NP(1)
Frequency Stability	☑ PASS	☐ FAIL	☐ NA	☐ NP(1)
This table is a summary of test report, see conclusion of each clause of this test report for detail.				

(1): Limited program
(2): EUT only operates outside the 5725MHz-5850MHz band
(3): EUT only operates inside the 5725MHz-5850MHz band
(4): EIRP below 27dBm
(5): EUT not directly or indirectly connected to the AC Power Public Network

2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT):
SAGEMCOM Mini Sound Box MSBDV00 **Serial Number: 253837310**

Power supply:
During all the tests, EUT is supplied by V_{nom}: 120VAC / 60Hz
For measurement with different voltage, it will be presented in test method.

Name	Type	Rating	Reference / Sn	Comments
Supply1	☑ AC ☐ DC ☐ Battery	100V-240V	NBC40B200200M2	Sold with the product

Voltage table used (for Power Line Conducted Emissions):

Type	**Measurement performed:**	
☑ AC	☑ **120VAC/60Hz**	☑ **240VAC/50Hz**
☐ DC	☐ **+**12**VDC**	☐ **-....VDC**
☐ Battery	☐ **+**3.6**VDC**	☐ **-....VDC**
☐ USB (Laptop auxiliary)	☐ **120VAC/60Hz (Laptop auxiliary)**	☑ **240VAC/50Hz(Laptop auxiliary)**

Inputs/outputs - Cable:

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
Access 1	Power supply	-	☐	☐	☑	-
Access 2	Ethernet cable	-	☐	☐	☑	-
Access 3	Electronic card	-	☐	☐	☑	-

Auxiliary equipment used during test:

Type	Reference	Sn	Comments
Laptop	-	-	Use to set the EUT

Equipment information:

Type:	**WIFI**			
Frequency band:	☑ 5150MHz-5250MHz	☑ 5250MHz-5350MHz	☑ 5470MHz-5725MHz	
	☑ 5725MHz-5850MHz			
Standard:	☑ 802.11a	☑ 802.11n HT20	☑ 802.11n HT40	
	☑ 802.11ac VHT20	☑ 802.11ac VHT40	☑ 802.11ac VHT80	
	☐ 802.11ac VHT160			
Spectrum Modulation:	☑ OFDM			
Channel bandwidth:	☑ 20MHz	☑ 40MHz	☑ 80MHz	☐ 160MHz
Antenna Type:	☑ Integral	☐ External	☐ Dedicated	
Antenna connector:	☑ Yes	☐ No	☐ Temporary for test	
Transmit chains:	☐ 1	☑ 2	☐ 3	☐ 4
	☐ 5	☐ 6	☐ 7	☐ 8
TPC:	☑ Yes		☐ No	
Receiver chains	☐ 1	☑ 2	☐ 3	☐ 4
	☐ 5	☐ 6	☐ 7	☐ 8
Type of equipment:	☑ Stand-alone	☐ Plug-in	☐ Combined	
Operating temperature range:	Tmin:	☐ -20°C	☑ 0°C	☐ X °C
	Tnom:	20°C		
	Tmax:	☐ 35°C	☐ 55°C	☑ 40 °C
Type of power source:	☑ AC power supply	☐ DC power supply	☐ Battery Battery Type	
Operating voltage range:	Vmin:	☑ 110 V/60Hz	☐ X Vdc	
	Vnom:	☑ 120V/60Hz	☐ X Vdc	
	Vmax	☑ 130 V/60Hz	☐ X Vdc	
Mode:	☐ Master	☐ Slave with radar detection	☑ Slave without radar detection	
	☐ Bridge		☐ Mesh	
Fixed outdoor P to P/M application:	☐ Yes		☑ No	
System architectures:	☑ IP based		☐ Frame based	
User access restriction:	☑ Yes (The manufacturer declares that information regarding the parameters of the detected Radar Waveforms is not available to the end user)		☐ No	

Antenna Characteristic			
Antenna assembly	**Gain (dBi)**	**Frequency Band (MHz)**	**Impedance(Ω)**
1	2.637	5150-5350	50
1	2.185	5470-5825	50
2	2.039	5150-5350	50
2	5.507	5470-5825	50
Accumulated	5.353	5150-5350	50
Accumulated	7.014	5470-5825	50

Accumulated gain calculation		
Formula used for calculation	**KDB**	**Correlated**
10 log[(10G1 /20 + 10G2 /20 + … + 10GN /20)2 /NANT]dBi	KDB 662911 D01 v02r01	☑ Yes / ☐ No

Hardware information		
Software (if applicable):	**V. :**	**-**

CHANNEL PLAN		
802.11a / 802.11n HT20/ 802.11ac VHT20		
Channel	**Frequency (MHz)**	**Available Channel**
C1=36	5180	☑
C2=40	5200	☑
44	5220	☑
C3=48	5240	☑
C4=52	5260	☑
56	5280	☑
C5=60	5300	☑
C6=64	5320	☑
C7=100	5500	☑
104	5520	☑
108	5540	☑
112	5560	☑
C8=116	5580	☑
120	5600	☑
124	5620	☑
128	5640	☑
132	5660	☑
136	5680	☑
C9=140	5700	☑
C10=144	5720	☑
C11=149	5745	☑
153	5765	☑
C12=157	5785	☑
161	5805	☑
C13=165	5825	☑

CHANNEL PLAN		
802.11n HT40/ 802.11ac VHT40		
Channel	Frequency (MHz)	Available Channel
C14=36+40	5190	☑
C15=44+48	5230	☑
C16=52+56	5270	☑
C17=60+64	5310	☑
C18=100+104	5510	☑
C19=108+112	5550	☑
116+120	5590	☑
124+128	5630	☑
C20=132+136	5670	☑
C21=140+144	5710	☑
C22=149+153	5755	☑
C23=157+161	5795	☑

CHANNEL PLAN		
802.11ac VHT80		
Channel	Frequency (MHz)	Available Channel
C24=36+40+44+48	5210	☑
C25=52+56+60+64	5290	☑
C26=100+104+108+112	5530	☑
C27=116+120+124+128	5610	☑
C28=132+136+140+144	5690	☑
C29=149+153+157+161	5775	☑

No DFS Channel
DFS Channel
Weather DFS Channel (Not Authorised for RSS-247)

Target used :

802.11a mode CDD	
Channels (MHz)	**q max**
C36 (5180)	**56**
C40 (5200)	**56**
C48 (5240)	**58**
C52 (5260)	**64**
C60 (5300)	**66**
C64 (5320)	**65**
C100 (5500)	**64**
C116 (5580)	**74**
C140 (5700)	**62**
C144 (5720)	**74**
C149 (5745)	**74**
C157 (5785)	**74**
C165 (5825)	**74**

802.11n/ac HT20 mode MIMO	
Channels (MHz)	**q max**
C36 (5180)	**58**
C40 (5200)	**58**
C48 (5240)	**60**
C52 (5260)	**66**
C60 (5300)	**66**
C64 (5320)	**65**
C100 (5500)	**66**
C116 (5580)	**74**
C140 (5700)	**59**
C144 (5720)	**74**
C149 (5745)	**74**
C157 (5785)	**74**
C165 (5825)	**74**

802.11n/ac HT40 mode MIMO	
Channels (MHz)	**q max**
C36 (5190)	**58**
C44(5230)	**66**
C52 (5270)	**66**
C60 (5310)	**63**
C100 (5510)	**58**
C108 (5550)	**74**
C132(5670)	**65**
C140 (5710)	**74**
C149 (5755)	**74**
C157 (5795)	**74**

802.11ac HT80 mode MIMO	
Channels (MHz)	**q max**
C36 (5210)	**58**
C52 (5290)	**63**
C100 (5530)	**56**
C116(5610)	**69**
C132(5690)	**72**
C149 (5775)	**66**

DATA RATE		
802.11a		
Data Rate (Mbps)	**Modulation Type**	**Modulation Worst Case**
6	BPSK	☑
9	BPSK	☐
12	QPSK	☐
18	QPSK	☐
24	16-QAM	☐
36	16-QAM	☐
48	64-QAM	☐
54	64-QAM	☐

DATA RATE									
802.11n HT20									
Available for EUT	MCS Index	Spatial streams	Modulation				Data Rate (Mbps)		Worst Case Modulation
							(GI = 800ns)	(GI = 400ns)	
☑	0	1	BPSK				6.5	7.2	☐
	1	1	QPSK				13	14.4	☐
	2	1	QPSK				19.5	21.7	☐
	3	1	16-QAM				26	28.9	☐
	4	1	16-QAM				39	43.3	☐
	5	1	64-QAM				52	57.8	☐
	6	1	64-QAM				58.5	65	☐
	7	1	64-QAM				65	72.2	☐
☑	8	2	BPSK				13	14.4	☑
	9	2	QPSK				26	28.9	☐
	10	2	QPSK				39	43.3	☐
	11	2	16-QAM				52	57.8	☐
	12	2	16-QAM				78	86.7	☐
	13	2	64-QAM				104	115.6	☐
	14	2	64-QAM				117	130.3	☐
	15	2	64-QAM				130	144.4	☐
☐	16	3	BPSK				19.5	21.7	☐
	17	3	QPSK				39	43.3	☐
	18	3	QPSK				58.5	65	☐
	19	3	16-QAM				78	86.7	☐
	20	3	16-QAM				117	130	☐
	21	3	64-QAM				156	173.3	☐
	22	3	64-QAM				175.5	195	☐
	23	3	64-QAM				195	216.7	☐
☐	24	4	BPSK				26	28.9	☐
	25	4	QPSK				52	57.8	☐
	26	4	QPSK				78	86.7	☐
	27	4	16-QAM				104	115.6	☐
	28	4	16-QAM				156	173.3	☐
	29	4	64-QAM				208	231.1	☐
	30	4	64-QAM				234	260	☐
	31	4	64-QAM				260	288.9	☐
☐	32	1	BPSK	-	-	-	-	-	☐
☐	33	2	16-QAM	QPSK	-	-	39	43.3	☐
	34	2	64-QAM	QPSK	-	-	52	57.8	☐
	35	2	64-QAM	16-QAM	-	-	65	72.2	☐
	36	2	16-QAM	QPSK	-	-	58.5	65	☐
	37	2	64-QAM	QPSK	-	-	78	86.7	☐
	38	2	64-QAM	16-QAM	-	-	97.5	108.3	☐
☐	39	3	16-QAM	QPSK	QPSK	-	52	57.8	☐
	40	3	16-QAM	16-QAM	QPSK	-	65	72.2	☐
	41	3	64-QAM	QPSK	QPSK	-	65	72.2	☐
	42	3	64-QAM	16-QAM	QPSK	-	78	86.7	☐
	43	3	64-QAM	16-QAM	16-QAM	-	91	101.1	☐
	44	3	64-QAM	64-QAM	QPSK	-	91	101.1	☐
	45	3	64-QAM	64-QAM	16-QAM	-	104	115.6	☐
	46	3	16-QAM	QPSK	QPSK	-	78	86.7	☐
	47	3	16-QAM	16-QAM	QPSK	-	97.5	108.3	☐
	48	3	64-QAM	QPSK	QPSK	-	97.5	108.3	☐
	49	3	64-QAM	16-QAM	QPSK	-	117	130	☐
	50	3	64-QAM	16-QAM	16-QAM	-	136.5	151.7	☐
	51	3	64-QAM	64-QAM	QPSK	-	136.5	151.7	☐
	52	3	64-QAM	64-QAM	16-QAM	-	156	173.3	☐
☐	53	4	16-QAM	QPSK	QPSK	QPSK	65	72.2	☐
	54	4	16-QAM	16-QAM	QPSK	QPSK	78	86.7	☐
	55	4	16-QAM	16-QAM	16-QAM	QPSK	91	101.1	☐
	56	4	64-QAM	QPSK	QPSK	QPSK	78	86.7	☐
	57	4	64-QAM	16-QAM	QPSK	QPSK	91	101.1	☐
	58	4	64-QAM	16-QAM	16-QAM	QPSK	104	115.6	☐
	59	4	64-QAM	16-QAM	16-QAM	16-QAM	117	130	☐
	60	4	64-QAM	QPSK	QPSK	QPSK	104	115.6	☐
	61	4	64-QAM	16-QAM	16-QAM	QPSK	117	130	☐
	62	4	64-QAM	16-QAM	16-QAM	16-QAM	130	144.4	☐
	63	4	64-QAM	64-QAM	64-QAM	QPSK	130	144.4	☐
	64	4	64-QAM	64-QAM	64-QAM	16-QAM	143	158.9	☐
	65	4	16-QAM	QPSK	QPSK	QPSK	97.5	108.3	☐
	66	4	16-QAM	16-QAM	QPSK	QPSK	117	130	☐
	67	4	16-QAM	16-QAM	16-QAM	QPSK	136.5	151.7	☐
	68	4	64-QAM	QPSK	QPSK	QPSK	117	130	☐
	69	4	64-QAM	16-QAM	QPSK	QPSK	136.5	151.7	☐
	70	4	64-QAM	16-QAM	16-QAM	QPSK	156	173.3	☐
	71	4	64-QAM	16-QAM	16-QAM	16-QAM	175.5	195	☐
	72	4	64-QAM	64-QAM	QPSK	QPSK	156	173.3	☐
	73	4	64-QAM	64-QAM	16-QAM	QPSK	175.5	195	☐
	74	4	64-QAM	64-QAM	16-QAM	16-QAM	195	216.7	☐
	75	4	64-QAM	64-QAM	64-QAM	QPSK	195	216.7	☐
	76	4	64-QAM	64-QAM	64-QAM	16-QAM	214.5	238.3	☐

DATA RATE									
802.11n HT40									
Available for EUT	MCS Index	Spatial streams	Modulation				Data Rate (Mbps)		Worst Case Modulation
							(GI = 800ns)	(GI = 400ns)	
☑	0	1	BPSK				13	15	☐
	1	1	QPSK				27	30	☐
	2	1	QPSK				40.5	45	☐
	3	1	16-QAM				54	60	☐
	4	1	16-QAM				81	90	☐
	5	1	64-QAM				108	120	☐
	6	1	64-QAM				121.5	135	☐
	7	1	64-QAM				135	150	☐
☑	8	2	BPSK				27	30	☑
	9	2	QPSK				54	60	☐
	10	2	QPSK				81	90	☐
	11	2	16-QAM				108	120	☐
	12	2	16-QAM				162	180	☐
	13	2	64-QAM				216	240	☐
	14	2	64-QAM				243	270	☐
	15	2	64-QAM				270	300	☐
☐	16	3	BPSK				40.5	45	☐
	17	3	QPSK				81	90	☐
	18	3	QPSK				121.5	135	☐
	19	3	16-QAM				162	180	☐
	20	3	16-QAM				243	270	☐
	21	3	64-QAM				324	360	☐
	22	3	64-QAM				364.5	405	☐
	23	3	64-QAM				405	450	☐
☐	24	4	BPSK				54	60	☐
	25	4	QPSK				108	120	☐
	26	4	QPSK				162	180	☐
	27	4	16-QAM				216	240	☐
	28	4	16-QAM				324	360	☐
	29	4	64-QAM				432	480	☐
	30	4	64-QAM				486	540	☐
	31	4	64-QAM				540	600	☐
☐	32	1	BPSK	-	-	-	6.0	6.7	☐
☐	33	2	16-QAM	QPSK	-	-	81	90.0	☐
	34	2	64-QAM	QPSK	-	-	108	120	☐
	35	2	64-QAM	16-QAM	-	-	135	150	☐
	36	2	16-QAM	QPSK	-	-	121.5	135	☐
	37	2	64-QAM	QPSK	-	-	162	180	☐
	38	2	64-QAM	16-QAM	-	-	202.5	225	☐
☐	39	3	16-QAM	QPSK	QPSK	-	108	120	☐
	40	3	16-QAM	16-QAM	QPSK	-	135	150	☐
	41	3	64-QAM	QPSK	QPSK	-	135	150	☐
	42	3	64-QAM	16-QAM	QPSK	-	162	180	☐
	43	3	64-QAM	16-QAM	16-QAM	-	189	210	☐
	44	3	64-QAM	64-QAM	QPSK	-	189	210	☐
	45	3	64-QAM	64-QAM	16-QAM	-	216	240	☐
	46	3	16-QAM	QPSK	QPSK	-	162	180	☐
	47	3	16-QAM	16-QAM	QPSK	-	202.5	225	☐
	48	3	64-QAM	QPSK	QPSK	-	202.5	225	☐
	49	3	64-QAM	16-QAM	QPSK	-	243	270	☐
	50	3	64-QAM	16-QAM	16-QAM	-	283.5	315	☐
	51	3	64-QAM	64-QAM	QPSK	-	283.5	315	☐
	52	3	64-QAM	64-QAM	16-QAM	-	324	360	☐
☐	53	4	16-QAM	QPSK	QPSK	QPSK	135	150	☐
	54	4	16-QAM	16-QAM	QPSK	QPSK	162	180	☐
	55	4	16-QAM	16-QAM	16-QAM	QPSK	189	210	☐
	56	4	64-QAM	QPSK	QPSK	QPSK	162	180	☐
	57	4	64-QAM	16-QAM	QPSK	QPSK	189	210	☐
	58	4	64-QAM	16-QAM	16-QAM	QPSK	216	240	☐
	59	4	64-QAM	16-QAM	16-QAM	16-QAM	243	270	☐
	60	4	64-QAM	QPSK	QPSK	QPSK	216	240	☐
	61	4	64-QAM	16-QAM	16-QAM	QPSK	243	270	☐
	62	4	64-QAM	16-QAM	16-QAM	16-QAM	270	300	☐
	63	4	64-QAM	64-QAM	64-QAM	QPSK	270	300	☐
	64	4	64-QAM	64-QAM	64-QAM	16-QAM	297	330	☐
	65	4	16-QAM	QPSK	QPSK	QPSK	202.5	225	☐
	66	4	16-QAM	16-QAM	QPSK	QPSK	243	270	☐
	67	4	16-QAM	16-QAM	16-QAM	QPSK	283.5	315	☐
	68	4	64-QAM	QPSK	QPSK	QPSK	243	270	☐
	69	4	64-QAM	16-QAM	QPSK	QPSK	283.5	315	☐
	70	4	64-QAM	16-QAM	16-QAM	QPSK	324	360	☐
	71	4	64-QAM	16-QAM	16-QAM	16-QAM	364.5	405	☐
	72	4	64-QAM	64-QAM	QPSK	QPSK	324	360	☐
	73	4	64-QAM	64-QAM	16-QAM	QPSK	364.5	405	☐
	74	4	64-QAM	64-QAM	16-QAM	16-QAM	405	450	☐
	75	4	64-QAM	64-QAM	64-QAM	QPSK	405	450	☐
	76	4	64-QAM	64-QAM	64-QAM	16-QAM	445.5	495	☐

DATA RATE: 802.11ac VHT20							
Available for EUT	MCS Index	Nbr of spatial streams	Modulation (Stream 1/2/3/4)	Coding rate	GI = 800ns	GI = 400ns	Worst Case Modulation
	0	1	BPSK	1/2	6,5	7,2	☐
	1	1	QPSK	1/2	13	14,4	☐
	2	1	QPSK	3/4	19,5	21,7	☐
	3	1	16-QAM	1/2	26	28,9	☐
☑	4	1	16-QAM	3/4	39	43,3	☐
	5	1	64-QAM	2/3	52	57,8	☐
	6	1	64-QAM	3/4	58,5	65	☐
	7	1	64-QAM	5/6	65	72,2	☐
	8	1	256-QAM	3/4	78	86,7	☐
	9	1	256-QAM	5/6	N/A	N/A	☐
	10	2	BPSK	1/2	13	14,4	☑
	11	2	QPSK	1/2	26	28,8	☐
	12	2	QPSK	3/4	39	43,4	☐
	13	2	16-QAM	1/2	52	57,8	☐
☑	14	2	16-QAM	3/4	78	86,6	☐
	15	2	64-QAM	2/3	104	115,6	☐
	16	2	64-QAM	3/4	117	130	☐
	17	2	64-QAM	5/6	130	144,4	☐
	18	2	256-QAM	3/4	156	173,4	☐
	19	2	256-QAM	5/6	N/A	N/A	☐
	20	3	BPSK	1/2	19,5	21,6	☐
	21	3	QPSK	1/2	39	43,2	☐
	22	3	QPSK	3/4	58,5	65,1	☐
	23	3	16-QAM	1/2	78	86,7	☐
☐	24	3	16-QAM	3/4	117	129,9	☐
	25	3	64-QAM	2/3	156	173,4	☐
	26	3	64-QAM	3/4	175,5	195	☐
	27	3	64-QAM	5/6	195	216,6	☐
	28	3	256-QAM	3/4	234	260,1	☐
	29	3	256-QAM	5/6	N/A	N/A	☐
	30	4	BPSK	1/2	26	28,8	☐
	31	4	QPSK	1/2	52	57,6	☐
	32	4	QPSK	3/4	78	86,8	☐
	33	4	16-QAM	1/2	104	115,6	☐
☐	34	4	16-QAM	3/4	156	173,2	☐
	35	4	64-QAM	2/3	208	231,2	☐
	36	4	64-QAM	3/4	234	260	☐
	37	4	64-QAM	5/6	260	288,8	☐
	38	4	256-QAM	3/4	312	346,8	☐
	39	4	256-QAM	5/6	N/A	N/A	☐
	40	5	BPSK	1/2	32,5	36	☐
	41	5	QPSK	1/2	65	72	☐
	42	5	QPSK	3/4	97,5	108,5	☐
	43	5	16-QAM	1/2	130	144,5	☐
☐	44	5	16-QAM	3/4	195	216,5	☐
	45	5	64-QAM	2/3	260	289	☐
	46	5	64-QAM	3/4	292,5	325	☐
	47	5	64-QAM	5/6	325	361	☐
	48	5	256-QAM	3/4	390	433,5	☐
	49	5	256-QAM	5/6	N/A	N/A	☐
	50	6	BPSK	1/2	39	43,2	☐
	51	6	QPSK	1/2	78	86,4	☐
	52	6	QPSK	3/4	117	130,2	☐
	53	6	16-QAM	1/2	156	173,4	☐
☐	54	6	16-QAM	3/4	234	259,8	☐
	55	6	64-QAM	2/3	312	346,8	☐
	56	6	64-QAM	3/4	351	390	☐
	57	6	64-QAM	5/6	390	433,2	☐
	58	6	256-QAM	3/4	468	520,2	☐
	59	6	256-QAM	5/6	N/A	N/A	☐
	60	7	BPSK	1/2	45,5	50,4	☐
	61	7	QPSK	1/2	91	100,8	☐
	62	7	QPSK	3/4	136,5	151,9	☐
	63	7	16-QAM	1/2	182	202,3	☐
☐	64	7	16-QAM	3/4	273	303,1	☐
	65	7	64-QAM	2/3	364	404,6	☐
	66	7	64-QAM	3/4	409,5	455	☐
	67	7	64-QAM	5/6	455	505,4	☐
	68	7	256-QAM	3/4	546	606,9	☐
	69	7	256-QAM	5/6	N/A	N/A	☐
	70	8	BPSK	1/2	52	57,6	☐
	71	8	QPSK	1/2	104	115,2	☐
	72	8	QPSK	3/4	156	173,6	☐
	73	8	16-QAM	1/2	208	231,2	☐
☐	74	8	16-QAM	3/4	312	346,4	☐
	75	8	64-QAM	2/3	416	462,4	☐
	76	8	64-QAM	3/4	468	520	☐
	77	8	64-QAM	5/6	520	577,6	☐
	78	8	256-QAM	3/4	624	693,6	☐
	79	8	256-QAM	5/6	N/A	N/A	☐

DATA RATE: 802.11ac VHT40							
Available for EUT	MCS Index	Nbr of spatial streams	Modulation (Stream 1/2/3/4)	Coding rate	GI = 800ns	GI = 400ns	Worst Case Modulation
	0	1	BPSK	1/2	13,5	15	☐
	1	1	QPSK	1/2	27	30	☐
	2	1	QPSK	3/4	40,5	45	☐
	3	1	16-QAM	1/2	54	60	☐
☑	4	1	16-QAM	3/4	81	90	☐
	5	1	64-QAM	2/3	108	120	☐
	6	1	64-QAM	3/4	121,5	135	☐
	7	1	64-QAM	5/6	135	150	☐
	8	1	256-QAM	3/4	162	180	☐
	9	1	256-QAM	5/6	180	200	☐
	10	2	BPSK	1/2	27	30	☑
	11	2	QPSK	1/2	54	60	☐
	12	2	QPSK	3/4	81	90	☐
	13	2	16-QAM	1/2	108	120	☐
☑	14	2	16-QAM	3/4	162	180	☐
	15	2	64-QAM	2/3	216	240	☐
	16	2	64-QAM	3/4	243	270	☐
	17	2	64-QAM	5/6	270	300	☐
	18	2	256-QAM	3/4	324	360	☐
	19	2	256-QAM	5/6	360	400	☐
	20	3	BPSK	1/2	40,5	45	☐
	21	3	QPSK	1/2	81	90	☐
	22	3	QPSK	3/4	121,5	135	☐
	23	3	16-QAM	1/2	162	180	☐
☐	24	3	16-QAM	3/4	243	270	☐
	25	3	64-QAM	2/3	324	360	☐
	26	3	64-QAM	3/4	364,5	405	☐
	27	3	64-QAM	5/6	405	450	☐
	28	3	256-QAM	3/4	486	540	☐
	29	3	256-QAM	5/6	540	600	☐
	30	4	BPSK	1/2	54	60	☐
	31	4	QPSK	1/2	108	120	☐
	32	4	QPSK	3/4	162	180	☐
	33	4	16-QAM	1/2	216	240	☐
☐	34	4	16-QAM	3/4	324	360	☐
	35	4	64-QAM	2/3	432	480	☐
	36	4	64-QAM	3/4	486	540	☐
	37	4	64-QAM	5/6	540	600	☐
	38	4	256-QAM	3/4	648	720	☐
	39	4	256-QAM	5/6	720	800	☐
	40	5	BPSK	1/2	67,5	75	☐
	41	5	QPSK	1/2	135	150	☐
	42	5	QPSK	3/4	202,5	225	☐
	43	5	16-QAM	1/2	270	300	☐
☐	44	5	16-QAM	3/4	405	450	☐
	45	5	64-QAM	2/3	540	600	☐
	46	5	64-QAM	3/4	607,5	675	☐
	47	5	64-QAM	5/6	675	750	☐
	48	5	256-QAM	3/4	810	900	☐
	49	5	256-QAM	5/6	900	1000	☐
	50	6	BPSK	1/2	81	90	☐
	51	6	QPSK	1/2	162	180	☐
	52	6	QPSK	3/4	243	270	☐
	53	6	16-QAM	1/2	324	360	☐
☐	54	6	16-QAM	3/4	486	540	☐
	55	6	64-QAM	2/3	648	720	☐
	56	6	64-QAM	3/4	729	810	☐
	57	6	64-QAM	5/6	810	900	☐
	58	6	256-QAM	3/4	972	1080	☐
	59	6	256-QAM	5/6	1080	1200	☐
	60	7	BPSK	1/2	94,5	105	☐
	61	7	QPSK	1/2	189	210	☐
	62	7	QPSK	3/4	283,5	315	☐
	63	7	16-QAM	1/2	378	420	☐
☐	64	7	16-QAM	3/4	567	630	☐
	65	7	64-QAM	2/3	756	840	☐
	66	7	64-QAM	3/4	850,5	945	☐
	67	7	64-QAM	5/6	945	1050	☐
	68	7	256-QAM	3/4	1134	1260	☐
	69	7	256-QAM	5/6	1260	1400	☐
	70	8	BPSK	1/2	108	120	☐
	71	8	QPSK	1/2	216	240	☐
	72	8	QPSK	3/4	324	360	☐
	73	8	16-QAM	1/2	432	480	☐
☐	74	8	16-QAM	3/4	648	720	☐
	75	8	64-QAM	2/3	864	960	☐
	76	8	64-QAM	3/4	972	1080	☐
	77	8	64-QAM	5/6	1080	1200	☐
	78	8	256-QAM	3/4	1296	1440	☐
	79	8	256-QAM	5/6	1440	1600	☐

DATA RATE: 802.11ac VHT80							
Available for EUT	MCS Index	Nbr of spatial streams	Modulation (Stream 1/2/3/4)	Coding rate	GI = 800ns	GI = 400ns	Worst Case Modulation
	0	1	BPSK	1/2	29.3	32.5	☐
	1	1	QPSK	1/2	58.5	65	☐
	2	1	QPSK	3/4	87.8	97.5	☐
	3	1	16-QAM	1/2	117	130	☐
☑	4	1	16-QAM	3/4	175.5	195	☐
	5	1	64-QAM	2/3	234	260	☐
	6	1	64-QAM	3/4	263.3	292.5	☐
	7	1	64-QAM	5/6	292.5	325	☐
	8	1	256-QAM	3/4	351	390	☐
	9	1	256-QAM	5/6	390	433.3	☐
	10	2	BPSK	1/2	58.6	65	☑
	11	2	QPSK	1/2	117	130	☐
	12	2	QPSK	3/4	175.6	195	☐
	13	2	16-QAM	1/2	234	260	☐
☑	14	2	16-QAM	3/4	351	390	☐
	15	2	64-QAM	2/3	468	520	☐
	16	2	64-QAM	3/4	526.6	585	☐
	17	2	64-QAM	5/6	585	650	☐
	18	2	256-QAM	3/4	702	780	☐
	19	2	256-QAM	5/6	780	866.6	☐
	20	3	BPSK	1/2	87.9	97.5	☐
	21	3	QPSK	1/2	175.5	195	☐
	22	3	QPSK	3/4	263.4	292.5	☐
	23	3	16-QAM	1/2	351	390	☐
☐	24	3	16-QAM	3/4	526.5	585	☐
	25	3	64-QAM	2/3	702	780	☐
	26	3	64-QAM	3/4	789.9	877.5	☐
	27	3	64-QAM	5/6	877.5	975	☐
	28	3	256-QAM	3/4	1053	1170	☐
	29	3	256-QAM	5/6	1170	1299.9	☐
	30	4	BPSK	1/2	117.2	130	☐
	31	4	QPSK	1/2	234	260	☐
	32	4	QPSK	3/4	351.2	390	☐
	33	4	16-QAM	1/2	468	520	☐
☐	34	4	16-QAM	3/4	702	780	☐
	35	4	64-QAM	2/3	936	1040	☐
	36	4	64-QAM	3/4	1053.2	1170	☐
	37	4	64-QAM	5/6	1170	1300	☐
	38	4	256-QAM	3/4	1404	1560	☐
	39	4	256-QAM	5/6	1560	1733.2	☐
	40	5	BPSK	1/2	146.5	162.5	☐
	41	5	QPSK	1/2	292.5	325	☐
	42	5	QPSK	3/4	439	487.5	☐
	43	5	16-QAM	1/2	585	650	☐
☐	44	5	16-QAM	3/4	877.5	975	☐
	45	5	64-QAM	2/3	1170	1300	☐
	46	5	64-QAM	3/4	1316.5	1462.5	☐
	47	5	64-QAM	5/6	1462.5	1625	☐
	48	5	256-QAM	3/4	1755	1950	☐
	49	5	256-QAM	5/6	1950	2166.5	☐
	50	6	BPSK	1/2	175.8	195	☐
	51	6	QPSK	1/2	351	390	☐
	52	6	QPSK	3/4	526.8	585	☐
	53	6	16-QAM	1/2	702	780	☐
☐	54	6	16-QAM	3/4	1053	1170	☐
	55	6	64-QAM	2/3	1404	1560	☐
	56	6	64-QAM	3/4	1579.8	1755	☐
	57	6	64-QAM	5/6	1755	1950	☐
	58	6	256-QAM	3/4	2106	2340	☐
	59	6	256-QAM	5/6	2340	2599.8	☐
	60	7	BPSK	1/2	205.1	227.5	☐
	61	7	QPSK	1/2	409.5	455	☐
	62	7	QPSK	3/4	614.6	682.5	☐
	63	7	16-QAM	1/2	819	910	☐
☐	64	7	16-QAM	3/4	1228.5	1365	☐
	65	7	64-QAM	2/3	1638	1820	☐
	66	7	64-QAM	3/4	1843.1	2047.5	☐
	67	7	64-QAM	5/6	2047.5	2275	☐
	68	7	256-QAM	3/4	2457	2730	☐
	69	7	256-QAM	5/6	2730	3033.1	☐
	70	8	BPSK	1/2	234.4	260	☐
	71	8	QPSK	1/2	468	520	☐
	72	8	QPSK	3/4	702.4	780	☐
	73	8	16-QAM	1/2	936	1040	☐
☐	74	8	16-QAM	3/4	1404	1560	☐
	75	8	64-QAM	2/3	1872	2080	☐
	76	8	64-QAM	3/4	2106.4	2340	☐
	77	8	64-QAM	5/6	2340	2600	☐
	78	8	256-QAM	3/4	2808	3120	☐
	79	8	256-QAM	5/6	3120	3466.4	☐

2.2. RUNNING MODE

Test mode	Description of test mode
Test mode 1	Permanent emission with modulation on a fixed channel in the data rate that produced the highest power
Test mode 3	Permanent emission with modulation on a fixed channel in the data rate that produced the lowest power

Test	Running mode	
Occupied Bandwidth	☑ Test mode 1 (1)	☐ Alternative test mode()
26dB Bandwidth	☑ Test mode 1 (1)	☐ Alternative test mode()
6dB Bandwidth	☑ Test mode 1 (1)	☐ Alternative test mode()
Duty Cycle	☑ Test mode 1 (1)	☐ Alternative test mode()
EIRP	☑ Test mode 1 (1)	☐ Alternative test mode()
Maximum Conducted Output Power	☑ Test mode 1 (1)	☐ Alternative test mode()
Power Spectral Density	☑ Test mode 1 (1)	☐ Alternative test mode()
Transmit Power Control	☑ Test mode 2 (1)	☐ Alternative test mode()
AC Power Line Conducted Emission	☑ Test mode 1 (1)	☐ Alternative test mode()
Unwanted Emissions & Undesirable Emission	☑ Test mode 1 (1)	☐ Alternative test mode()
Frequency Stability	☑ Test mode 1 (1)	☐ Alternative test mode()

(1) Following commands with the specific test software “Cypress Mtool V3.0.0.1” are used to set the product:

a. – See document “TARGETS FINALES 2.4 & 5GHz_SBD_Commandes LCIE_WIFI test commands of MSB.docx”(provided by customer) for the command used during test.

2.3. EQUIPMENT LABELLING

Code barre type 128

MSO Part Number: 43640

Code barre type 128

SGC S/N: 123456789012

MAC : aa:bb:cc:dd:ee:ff

FCTRY S/N : XXXXXXXXX

c UL us LISTED
I.T.E.
E308616

IC: 9140A-MSBDV00
CAN ICES-3(B)/NMB-3(B)
FCC ID: VW3MSBDV00

Sagemcom

Mini Sound Box MSBDV00
253837310-ind
20V⎓ 2A
Date Code: WW/YY
SSID : amplify-eeff
Made in China

Manufactured under license from Dolby Laboratories. Dolby, Dolby Audio and the double-D symbol are trademarks of Dolby Laboratories.

2.4. EQUIPMENT MODIFICATION

☑ None ☐ Modification:

3. OCCUPIED BANDWIDTH

3.1. TEST CONDITIONS

Test performed by	: Julien Palard
Date of test	: October 22, 2019
Ambient temperature	: 23 °C
Relative humidity	: 42 %

3.2. TEST SETUP

- The Equipment Under Test is installed:
☑ On a table
☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:
☑ Conducted Method
☐ Radiated Method

- Test Procedure:
☑ KDB 789033 D02 General UNII Test Procedures New Rules v02r01 § D

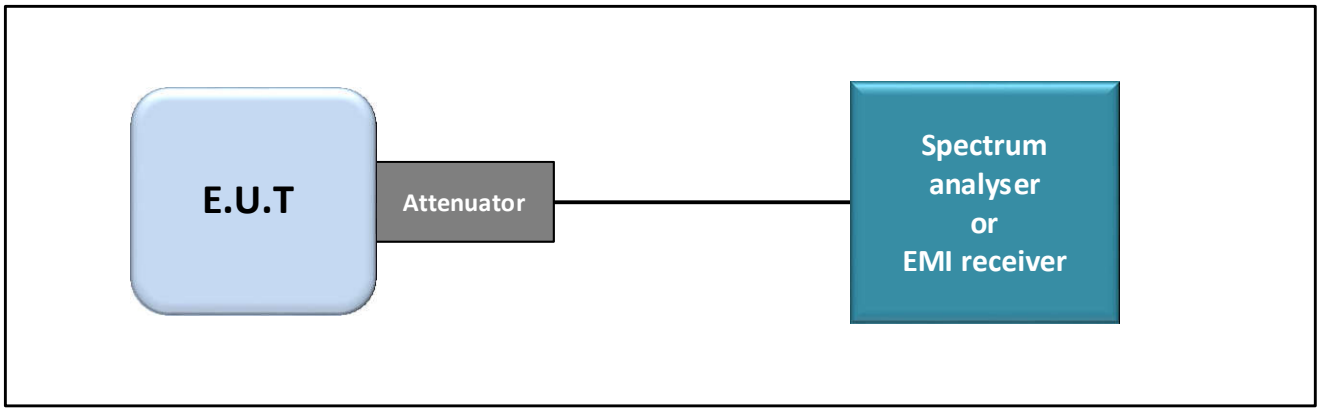

Test set up of Occupied Bandwidth

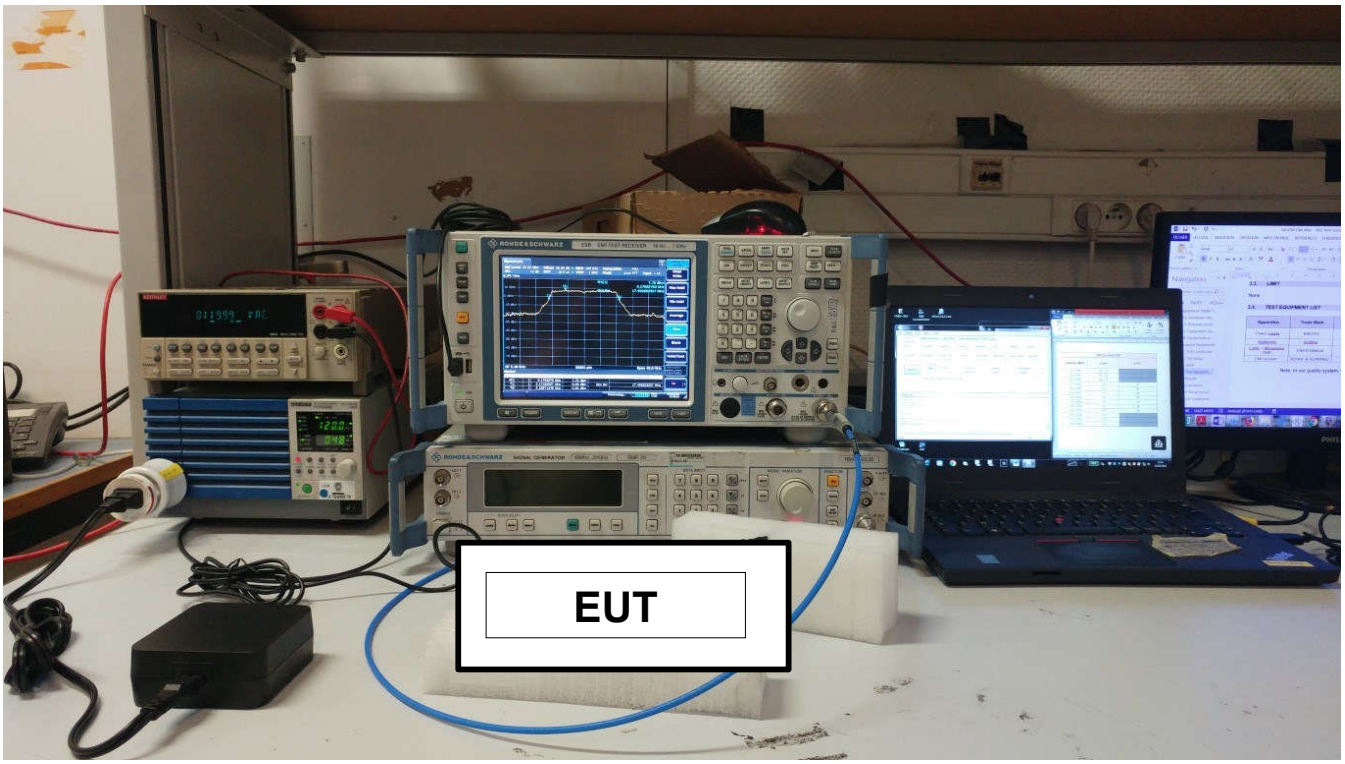

Photograph for Occupied bandwidth

3.3. LIMIT

None

3.4. TEST EQUIPMENT LIST

Apparatus	Trade Mark	Type	Registration number	Cal_Date	Cal_Due
Power supply	KIKUSUI	PCR500M	A7040079	Calibrated with multimeter	Calibrated with multimeter
Multimeter	Keithley	2000	A1241084	2018/12	2020/12
Cable + Attenuateur 20dB	PASTERNACK	PE350-150CM	A5329868	2018/12	2019/12
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642023	2019/01	2021/01

Note: In our quality system, the test equipment calibration due is more & less 2 months

3.5. RESULTS

802.11a		
Antenna 1 (White)		
C1	C2	C3
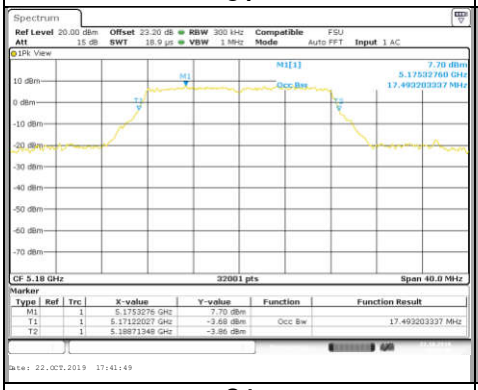	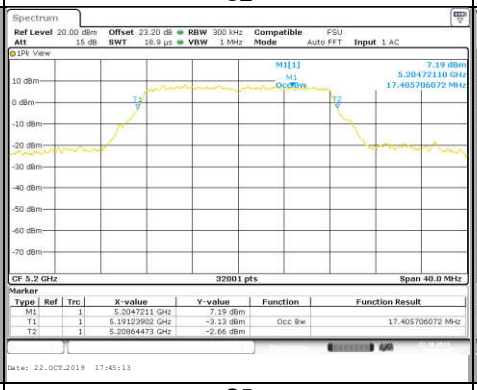	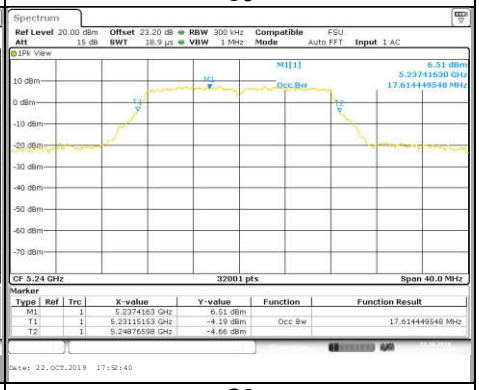
C4	C5	C6
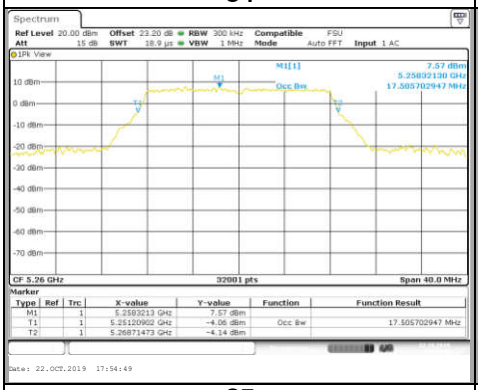	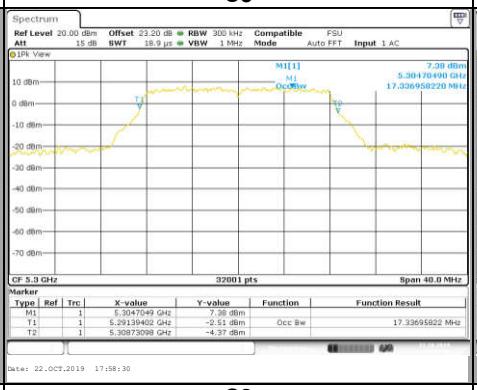	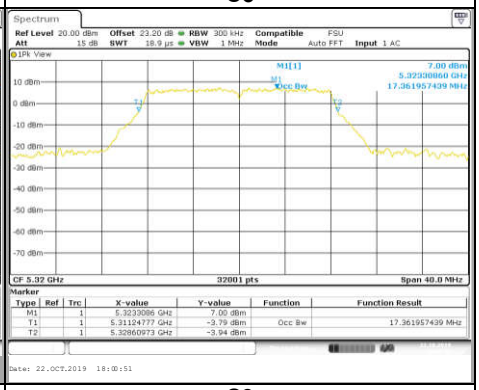
C7	C8	C9
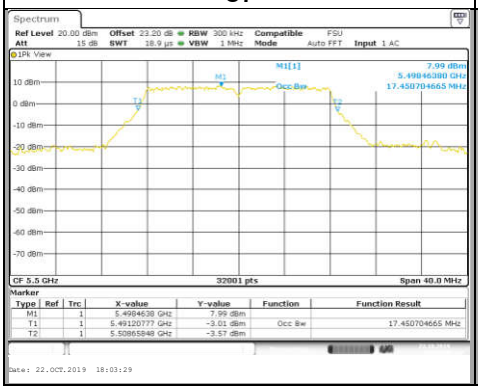	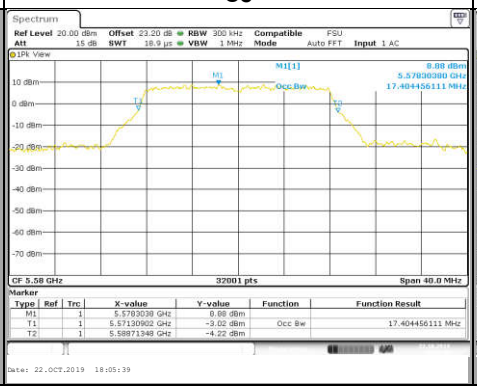	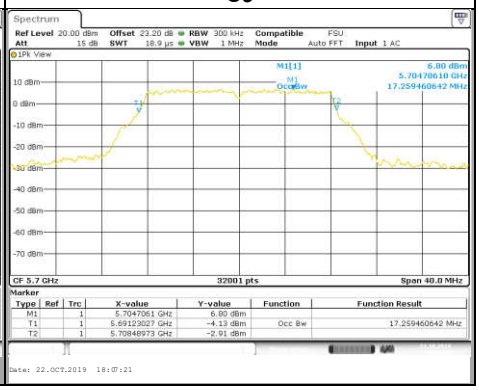

802.11a		
Antenna 1 (White)		
C10		
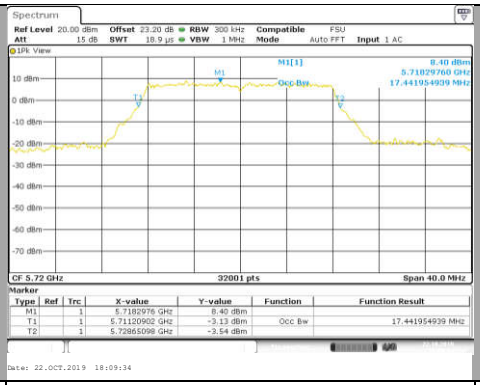		
C11	C12	C13
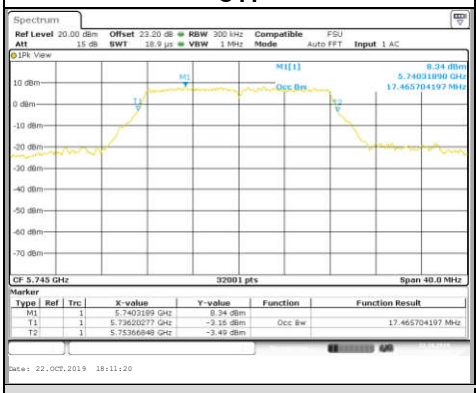	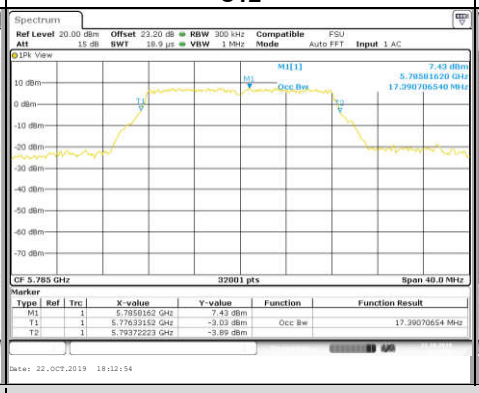	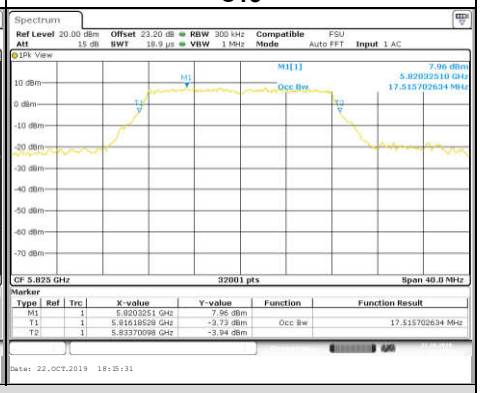

Channel	Occupied Channel Bandwidth (MHz)
C1	17.49
C2	17.41
C3	17.61
C4	17.51
C5	17.34
C6	17.36
C7	17.45
C8	17.40
C9	17.26
C10	17.44
C11	17.47
C12	17.39
C13	17.52

802.11n HT20/ac VHT20

C1

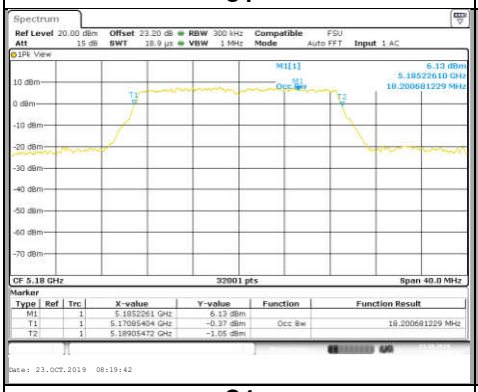

C2

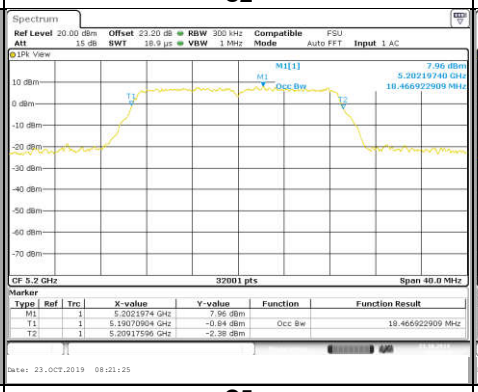

C3

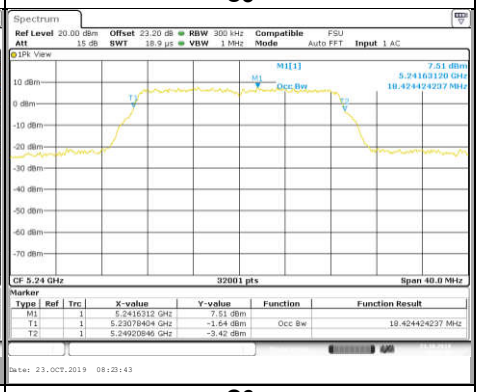

C4

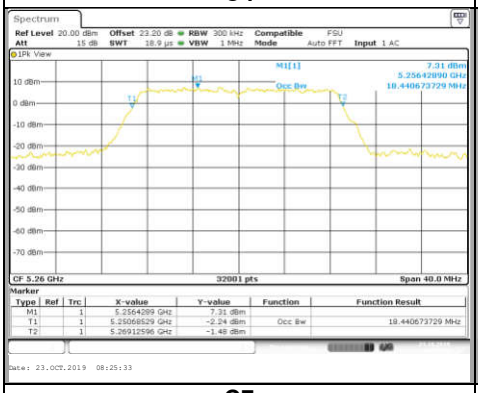

C5

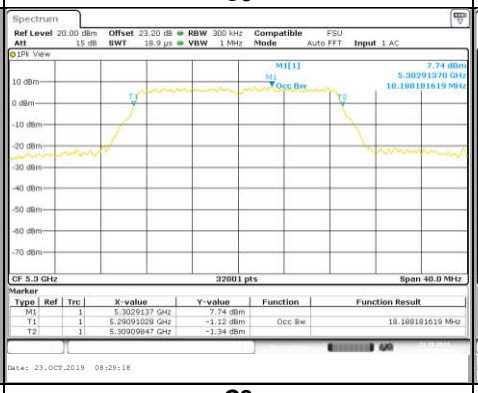

C6

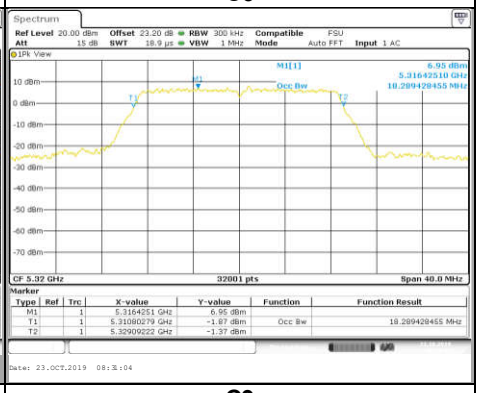

C7

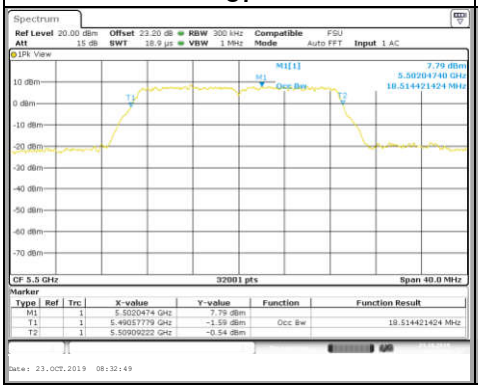

C8

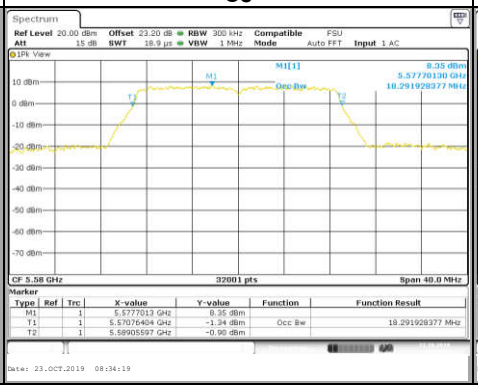

C9

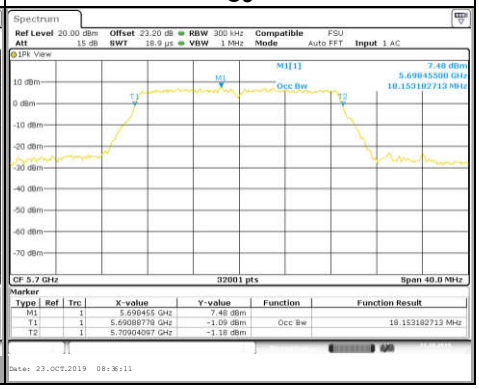

802.11n HT20/ac VHT20		
C10		
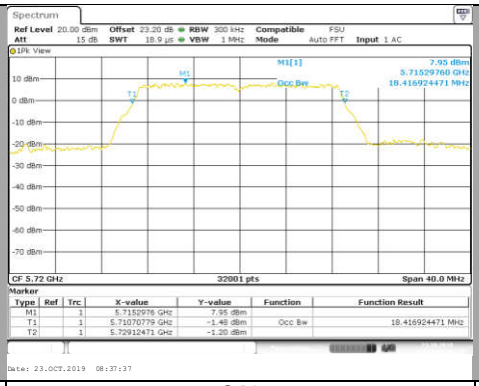		
C11	C12	C13
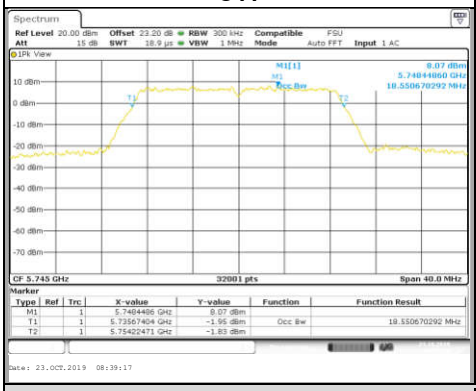	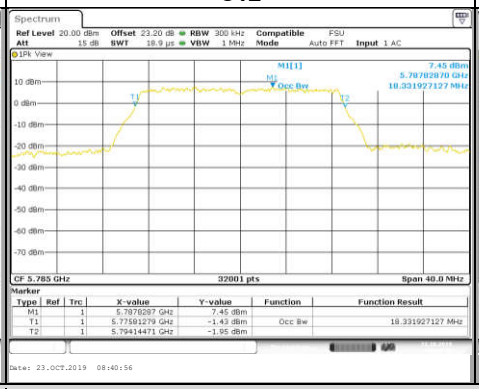	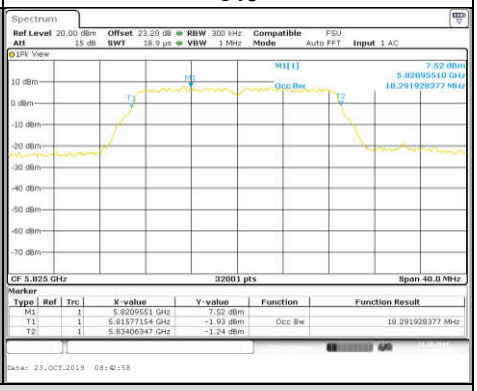

Channel	Occupied Channel Bandwidth (MHz)
C1	18.20
C2	18.47
C3	18.42
C4	18.44
C5	18.19
C6	18.29
C7	18.51
C8	18.29
C9	18.15
C10	18.42
C11	18.55
C12	18.33
C13	18.29

802.11n HT40/ac VHT40	
C14	C15
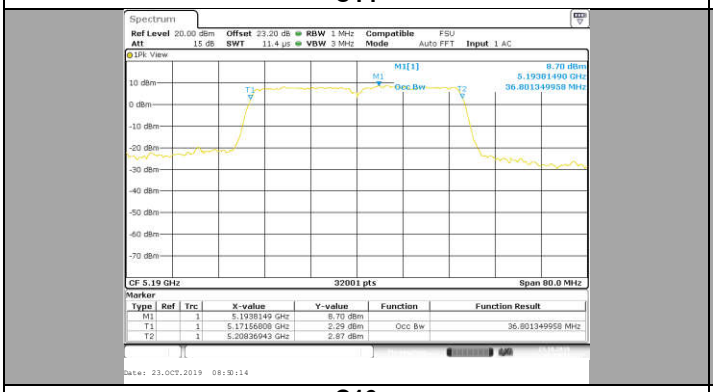	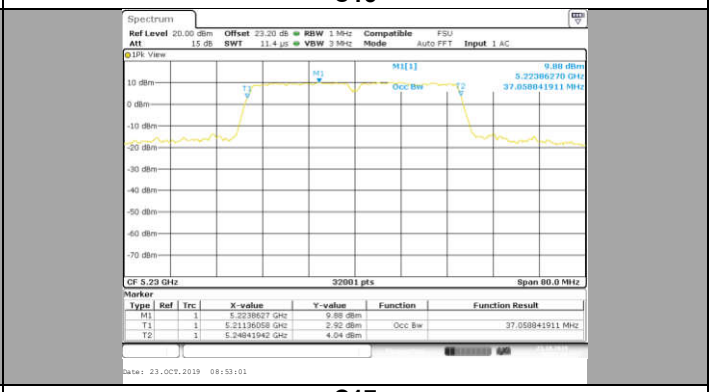
C16	C17
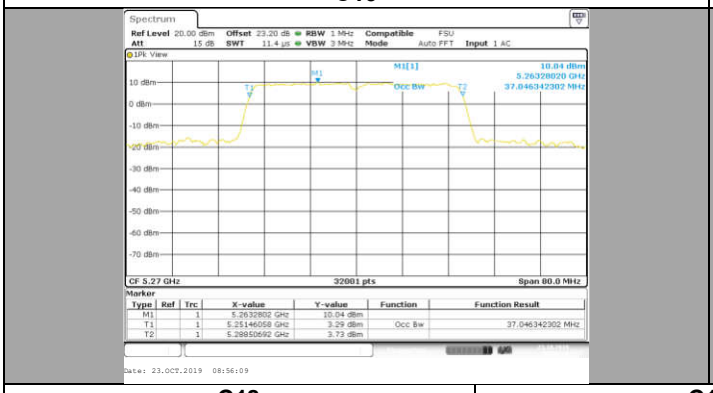	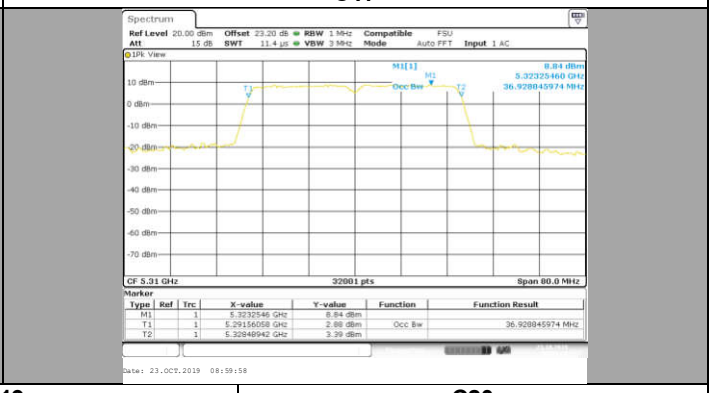

C18	C19	C20
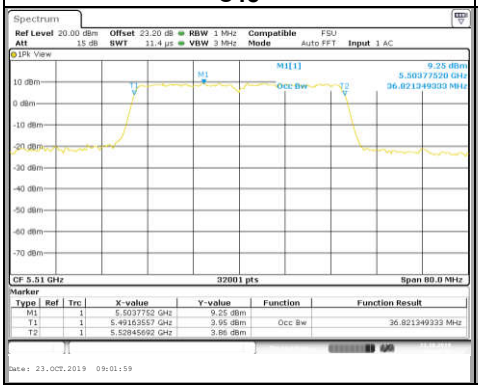	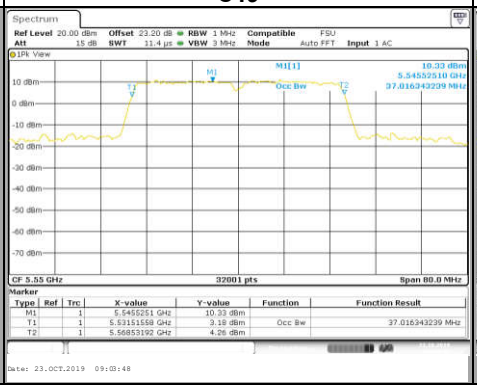	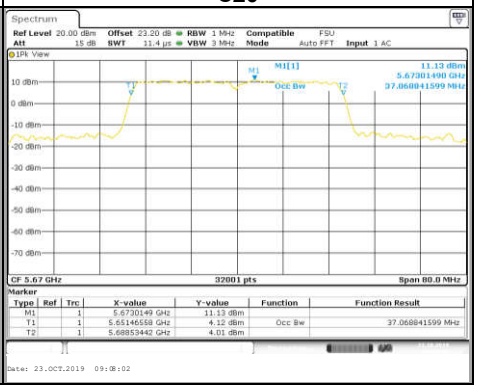

802.11n HT40/ac VHT40	
C21	
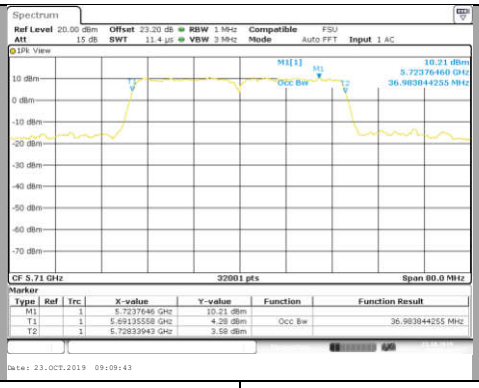	
C22	C23
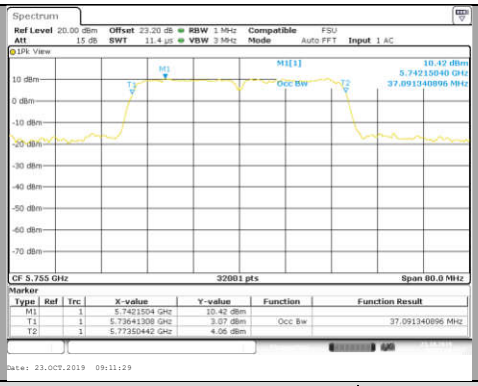	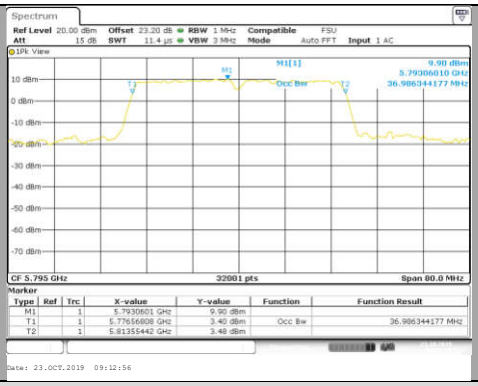

Channel	Occupied Channel Bandwidth (MHz)
C14	36.80
C15	37.06
C16	37.05
C17	36.93
C18	36.82
C19	37.02
C20	37.07
C21	36.98
C22	37.09
C23	36.98

802.11ac VHT80	
C24	
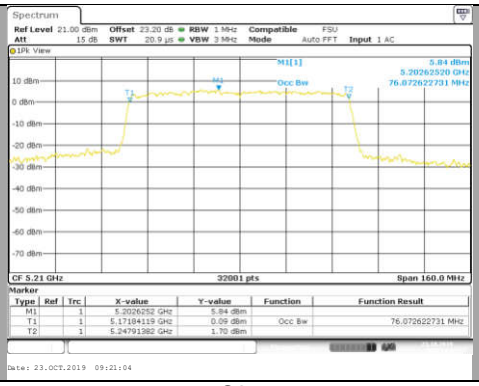	
C25	
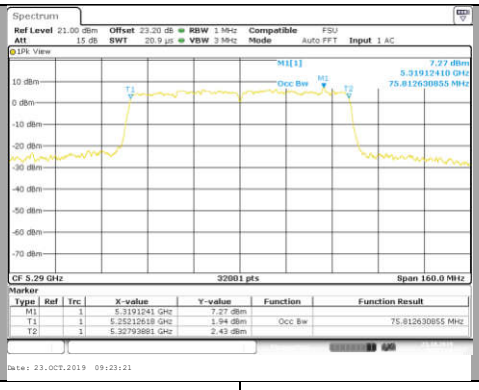	
C26	C27
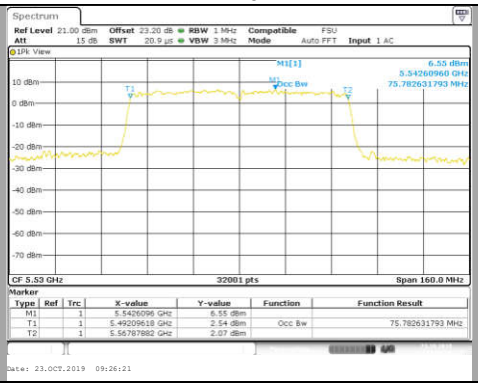	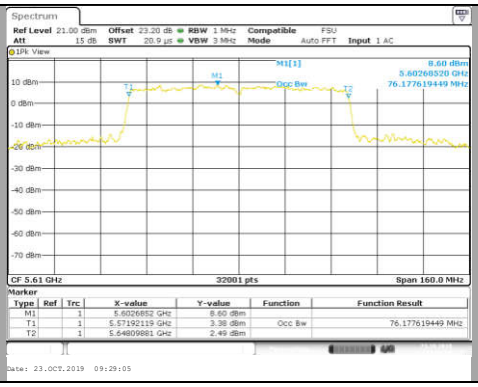

802.11ac VHT80	
C28	
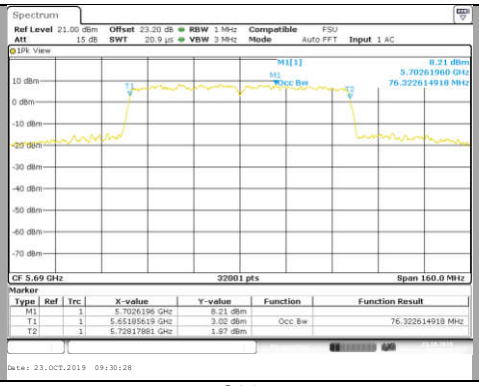	
C29	
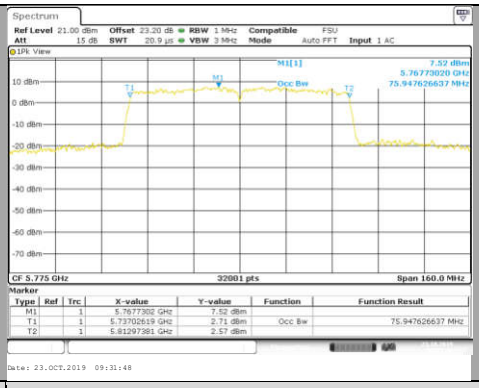	
Channel	Occupied Channel Bandwidth (MHz)
C24	76.07
C25	75.81
C26	75.78
C27	76.18
C28	76.32
C29	75.95

3.6. CONCLUSION

Occupied Channel Bandwidth measurement performed on the sample of the product **SAGEMCOM Mini Sound Box MSBDV00**, SN: **253837310**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.407 & RSS-GEN ISSUE 5** limits.

4. CARRIER FREQUENCIES

4.1. TEST CONDITIONS

Test performed by	: Julien Palard
Date of test	: October 25, 2019
Ambient temperature	: 23 °C
Relative humidity	: 46 %

4.2. TEST SETUP

- The Equipment under Test is installed:
☑ In the climatic chamber
☐ On a table
☐ In an anechoic chamber

-Measurement is performed with a spectrum analyzer
☑ On the EUT conducted access
☐ With a test fixture

-Method of measurement
☐ Unmodulated (Spectrum Analyzer Counter Function)
☑ Modulated (Spectrum Analyzer NdB down Function)

In case of smart antenna systems operating in a multiple transmit chains active simultaneously, the measurement is only performed on one of the active transmit chains.

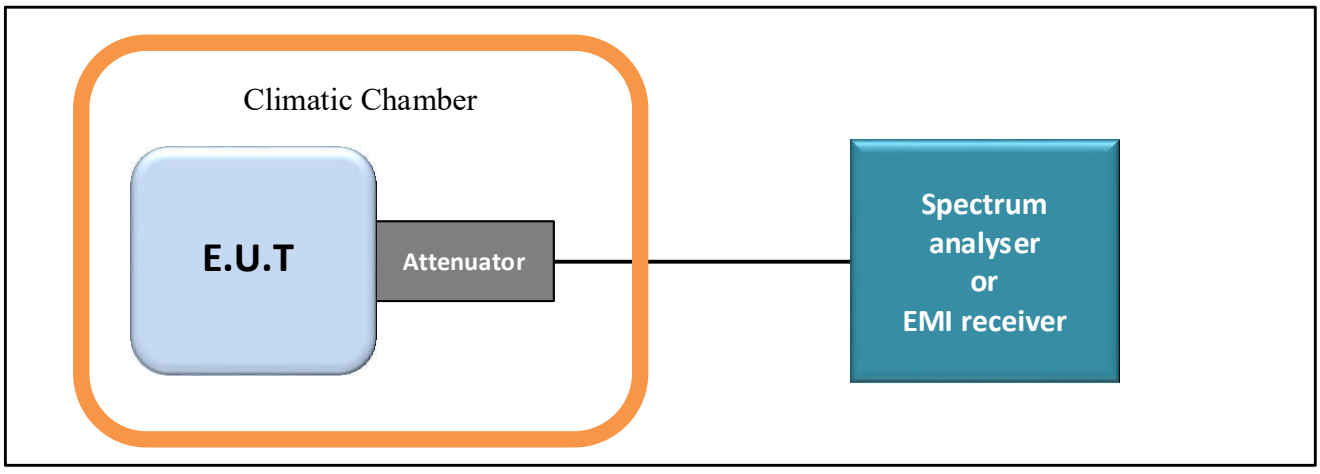

Test set up of Carrier Frequencies

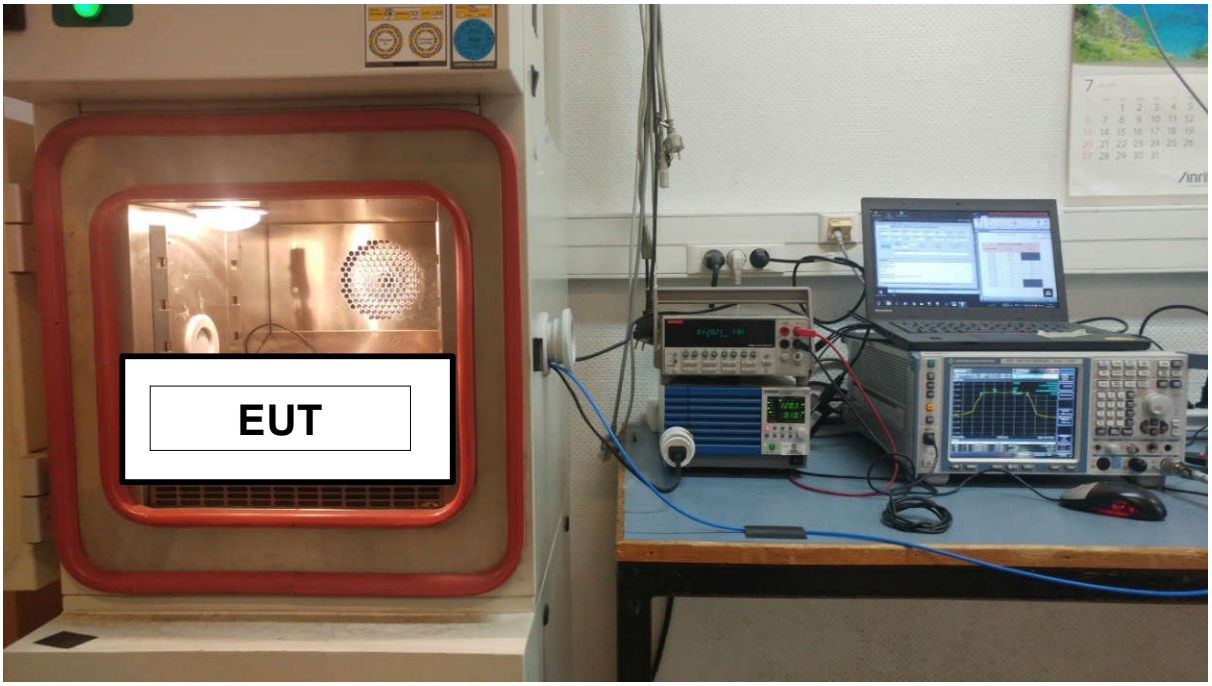

Photograph for Carrier Frequencies in normal conditions

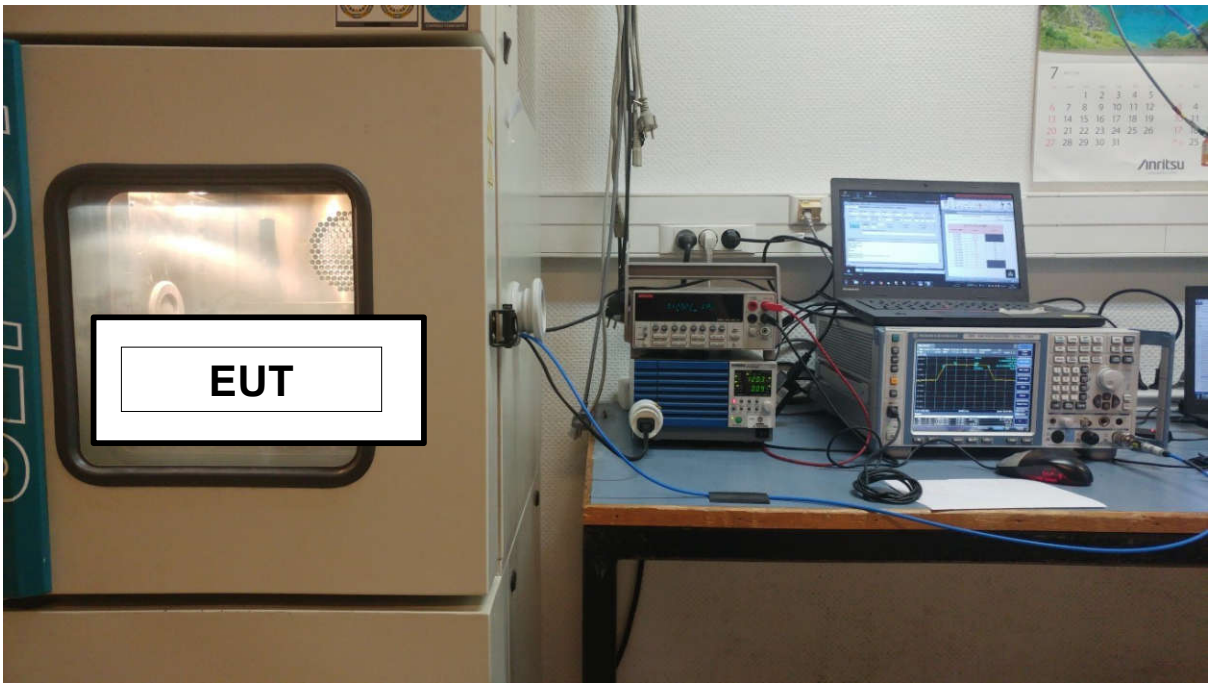

Photograph for Carrier Frequencies in extrem conditions

4.3. LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

4.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Climatic chamber	SECASI	SLT34	D1024029	See Hygrometer	See Hygrometer
Hygrometer	AOIP	TM360	B4041042	2018/06	2019/12
Power supply	KIKUSUI	PCR500M	A7040079	Calibrated with multimeter	Calibrated with multimeter
Multimeter	Keithley	2000	A1241084	2018/12	2020/12
Cable + Attenuateur 20dB	PASTERNACK	PE350-150CM	A5329868	2018/12	2019/12
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642023	2019/01	2021/01

Note: In our quality system, the test equipment calibration due is more & less 2 months

4.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

☑ None ☐ Divergence:

4.6. RESULTS

802.11a/802.11nHT20/ac VHT20	
Tmin	
Vmin	
C2	C5
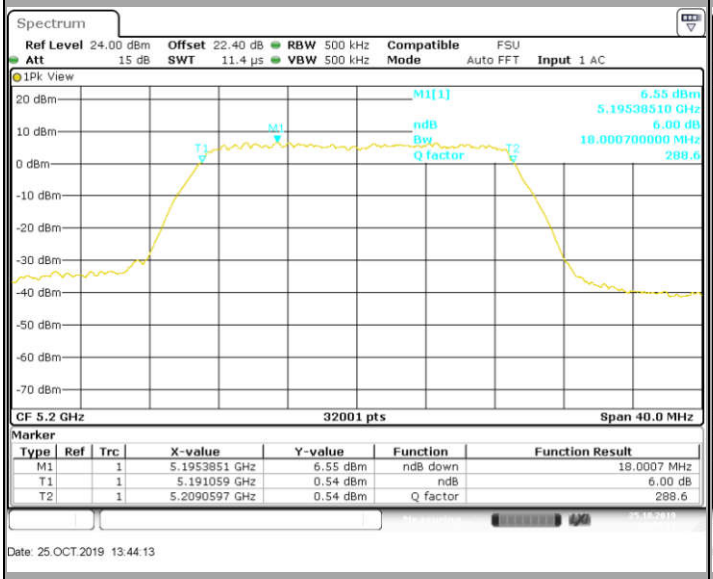	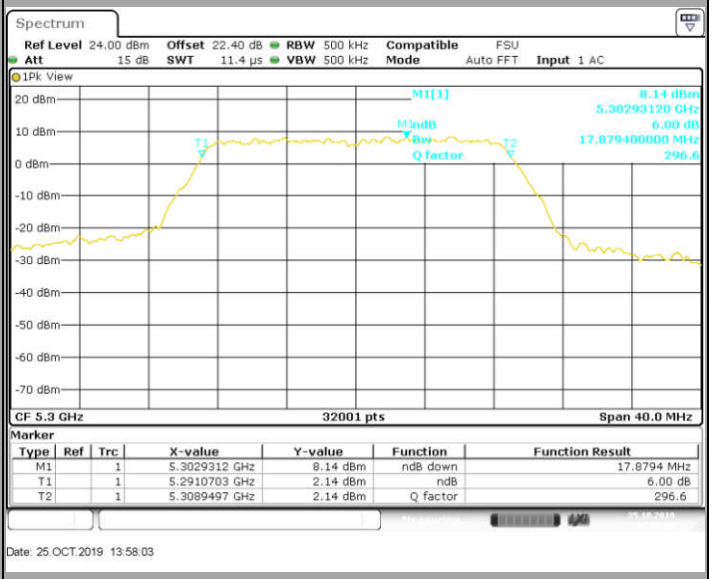
C8	C12
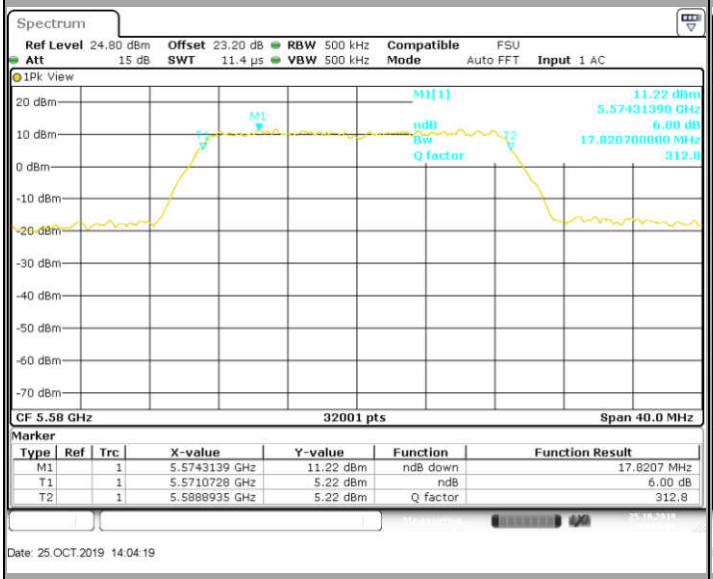	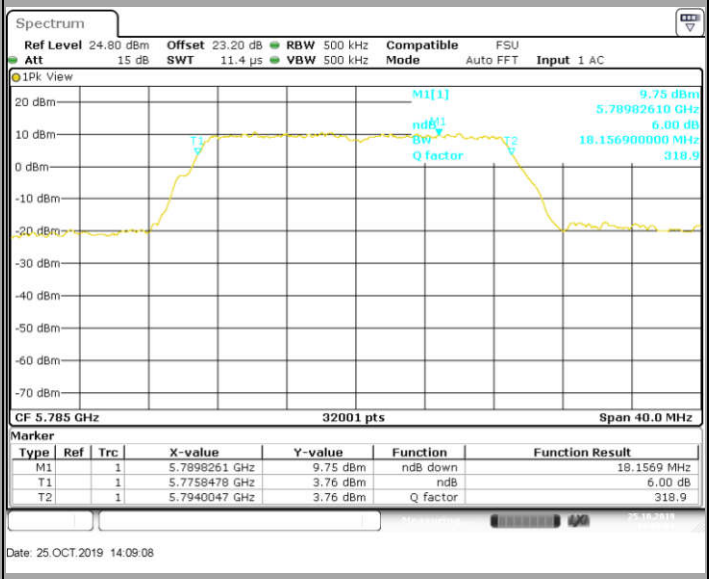

802.11a/802.11nHT20/ac VHT20	
Tmin	
Vnom	
C2	C5
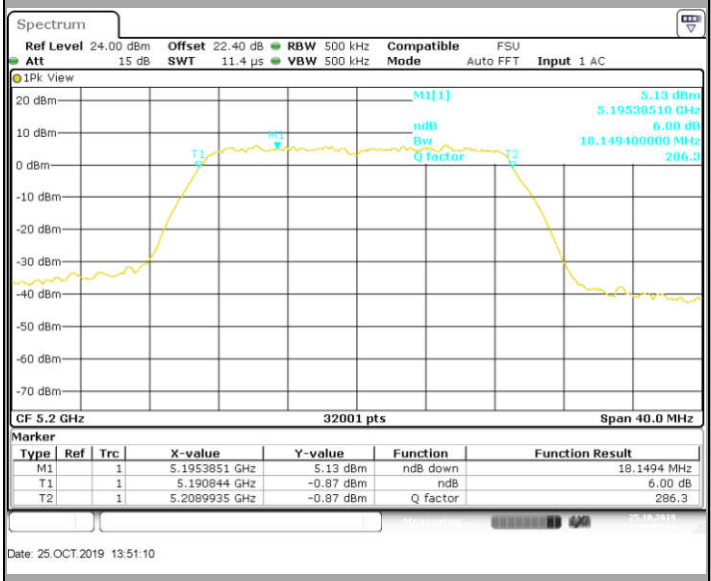	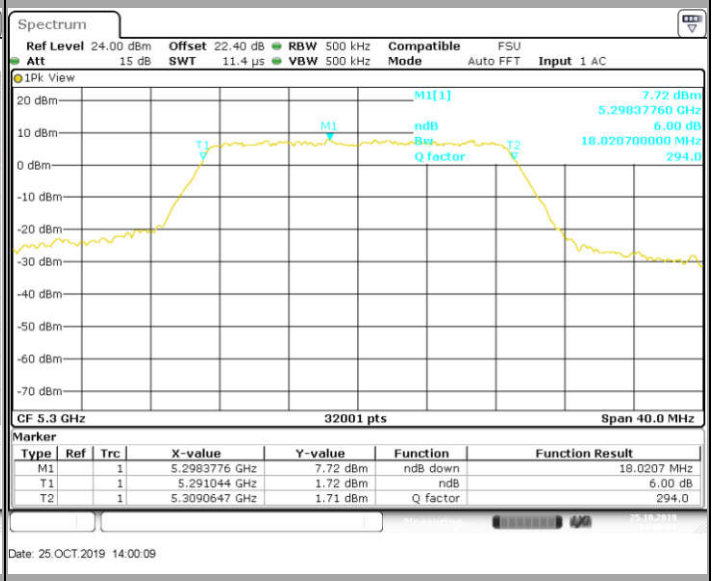
C8	C12
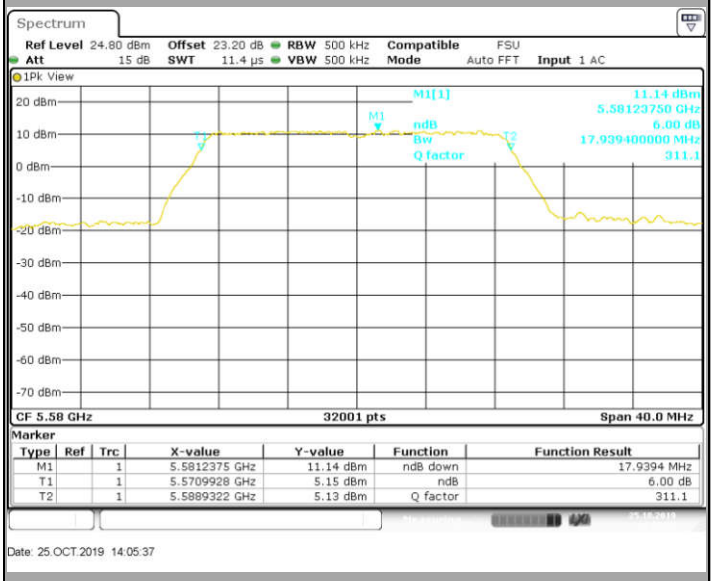	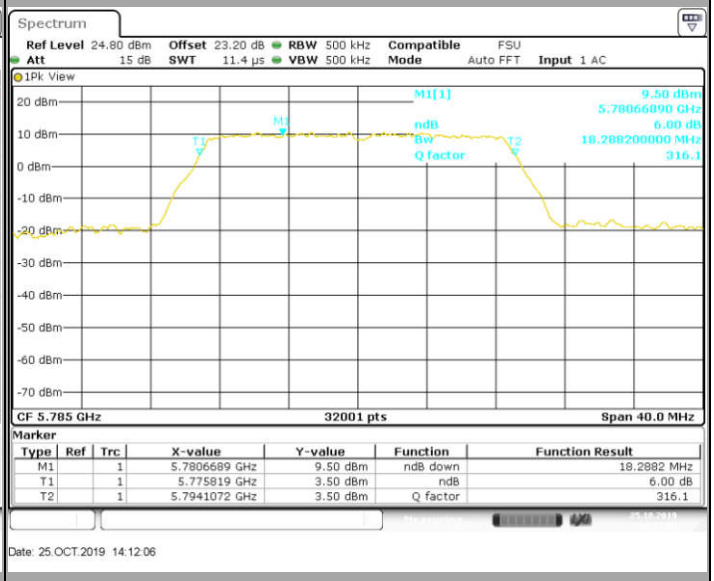

802.11a/802.11nHT20/ac VHT20	
Tmin	
Vmax	
C2	C5
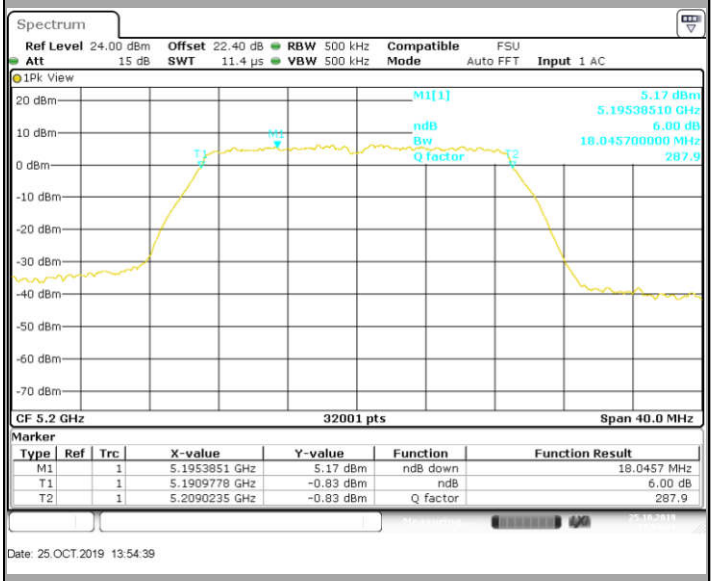	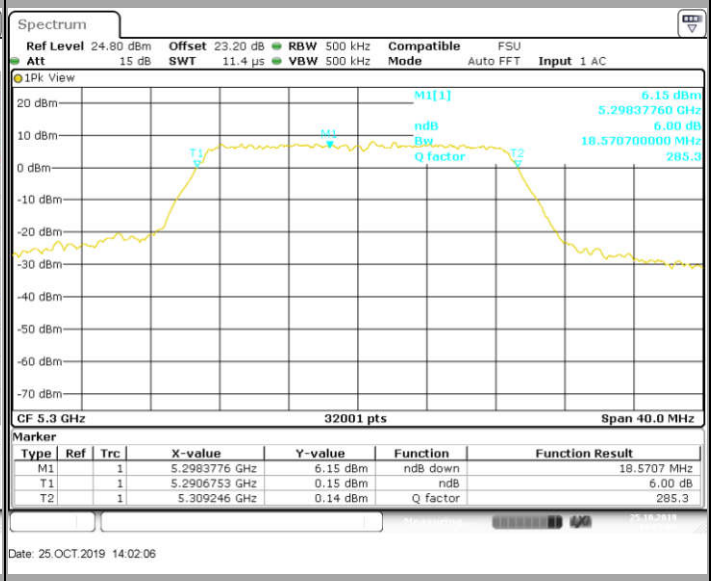
C8	C12
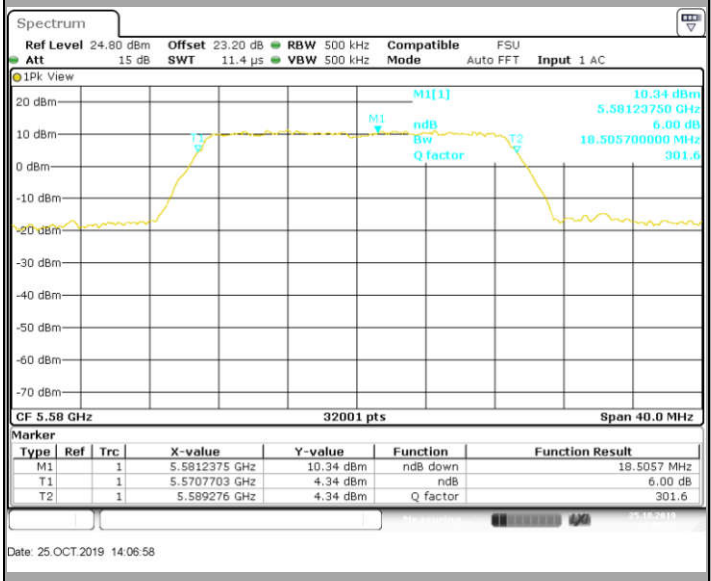	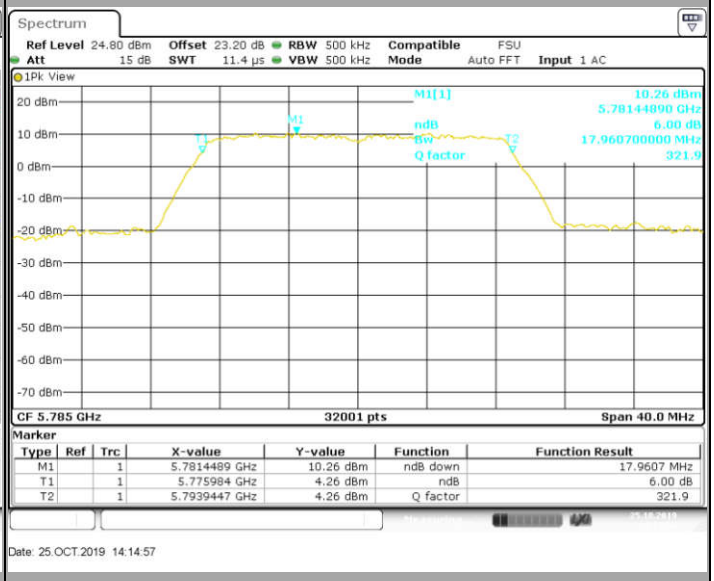

802.11a/802.11nHT20/ac VHT20	
Tnom	
Vmin	
C2	C5
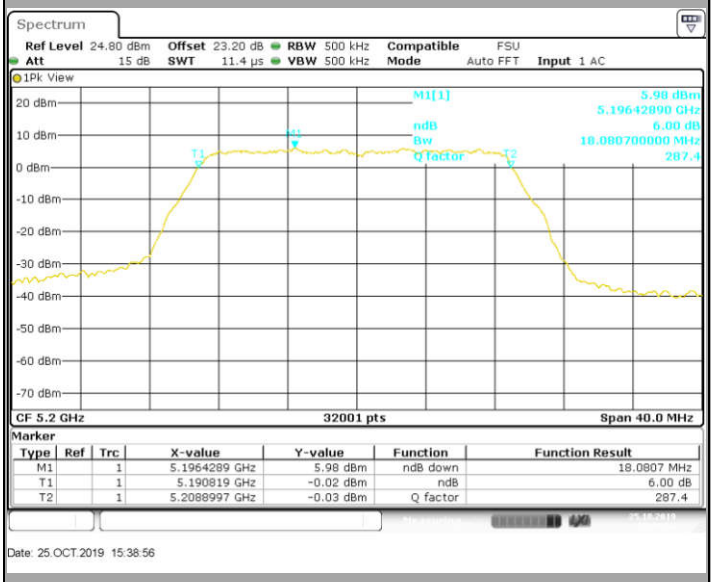	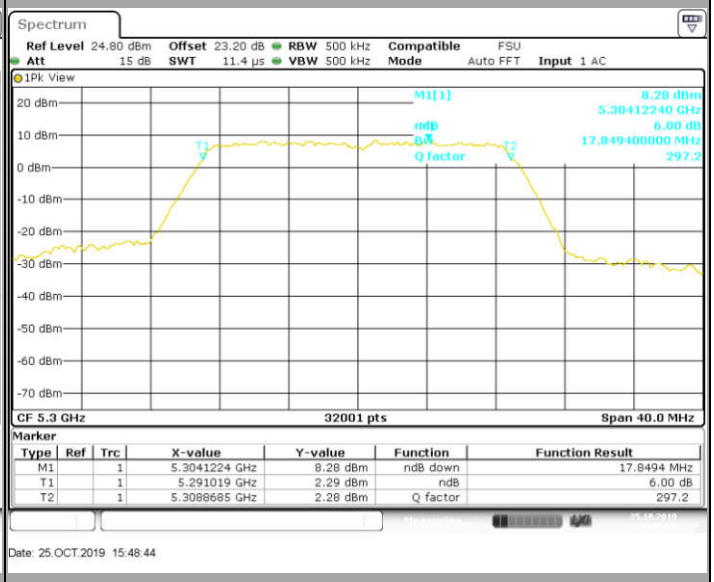
C8	C12
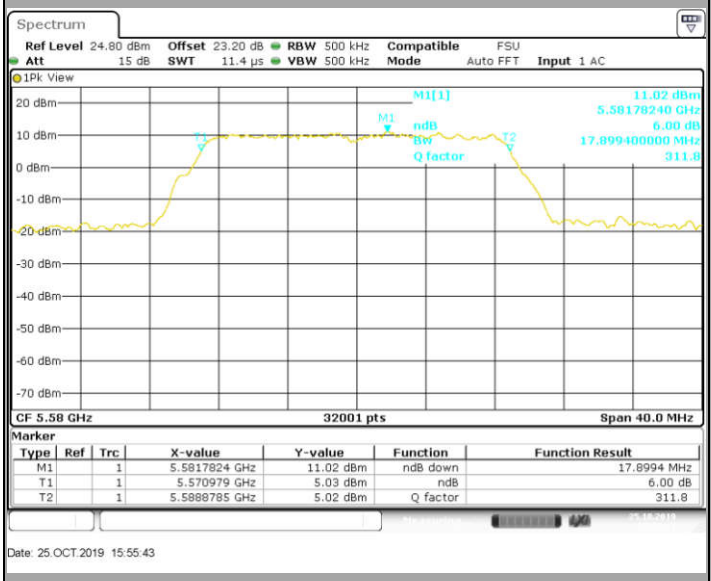	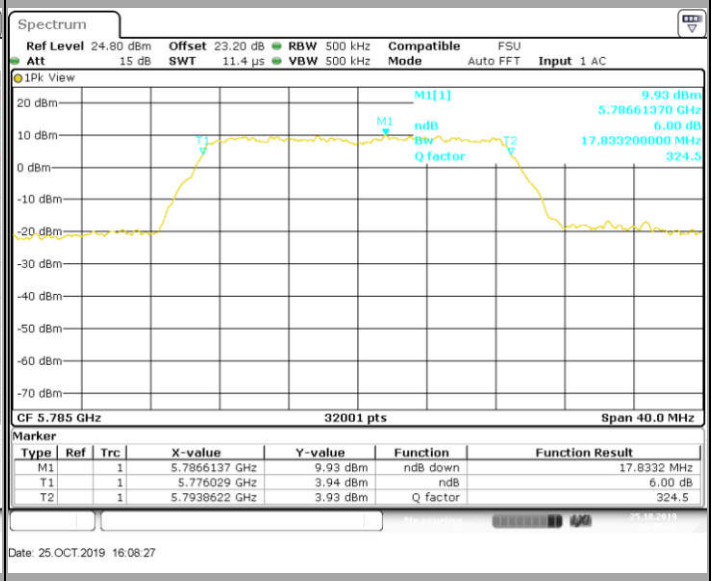

802.11a/802.11nHT20/ac VHT20	
Tnom	
Vnom	
C2	C5
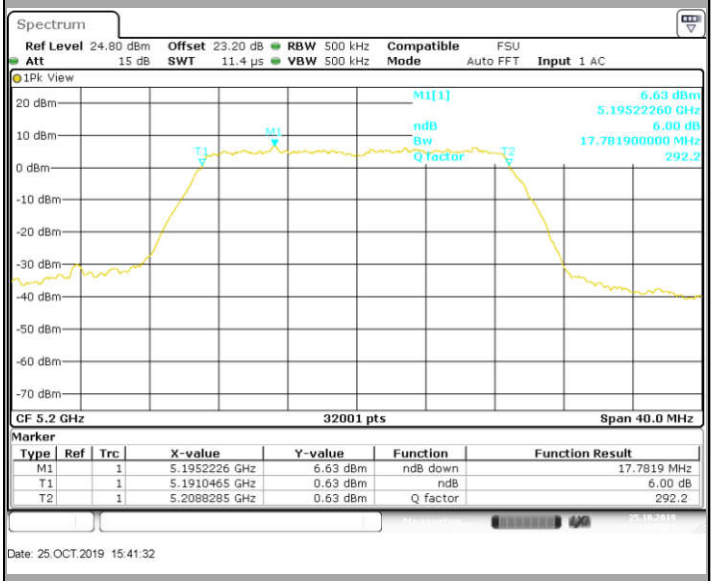	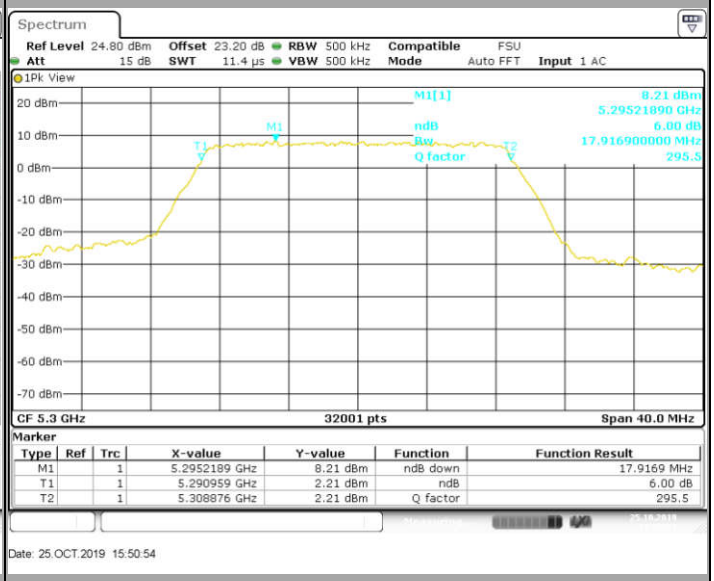
C8	C12
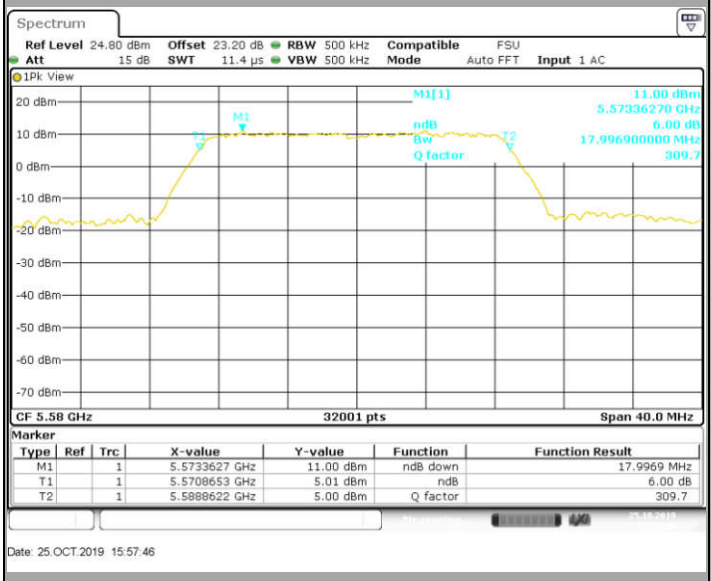	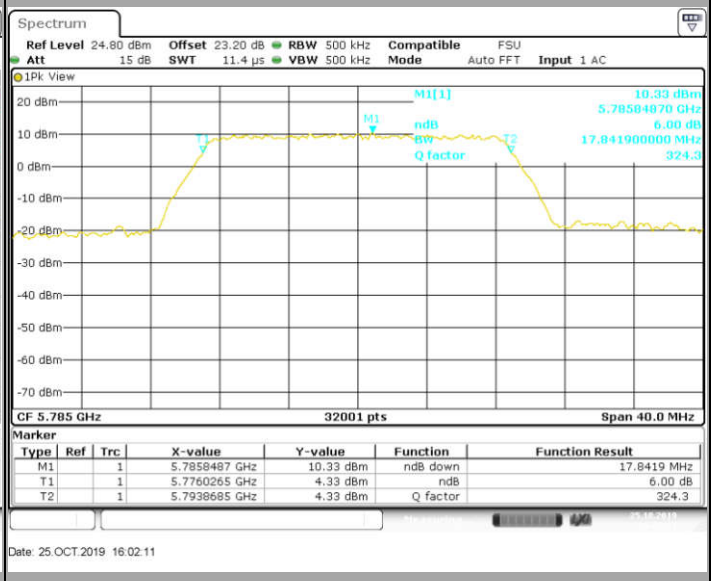

802.11a/802.11nHT20/ac VHT20	
Tnom	
Vmax	
C2	C5
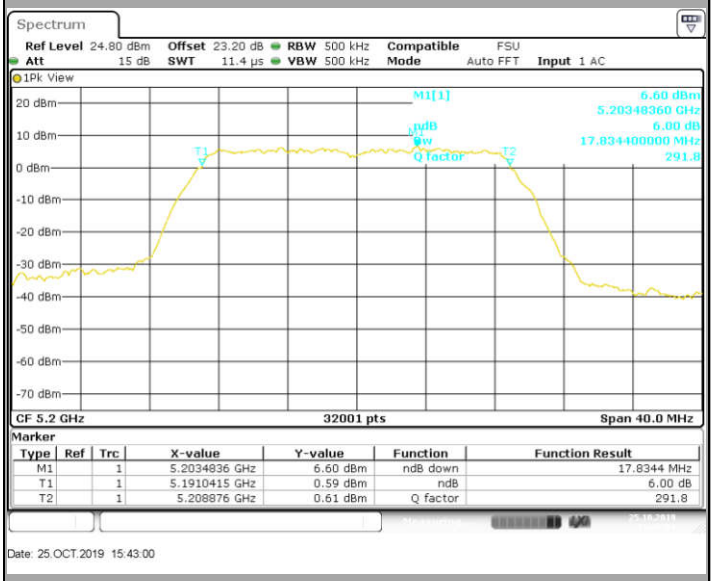	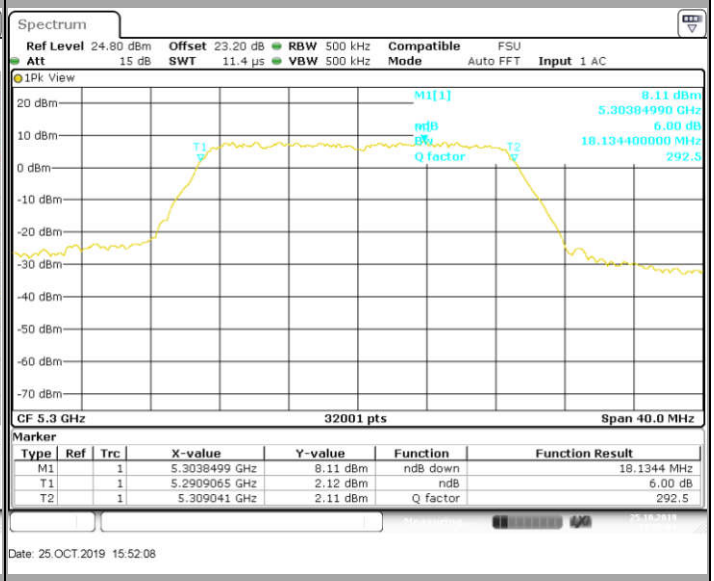
C8	C12
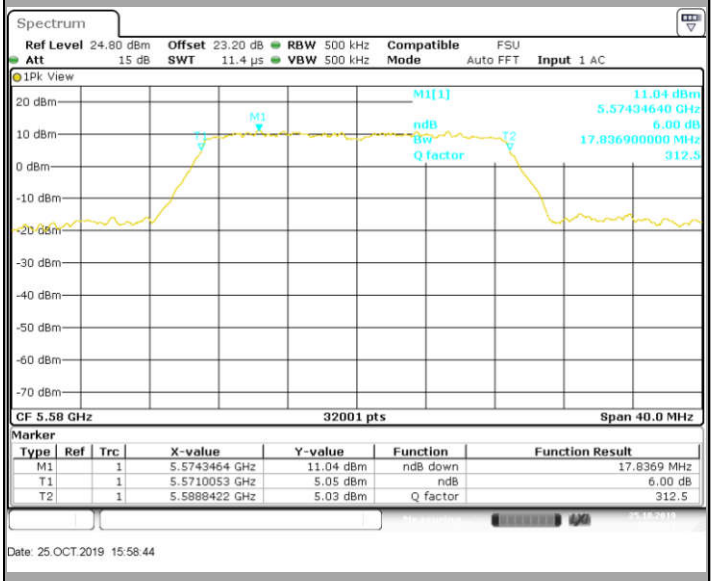	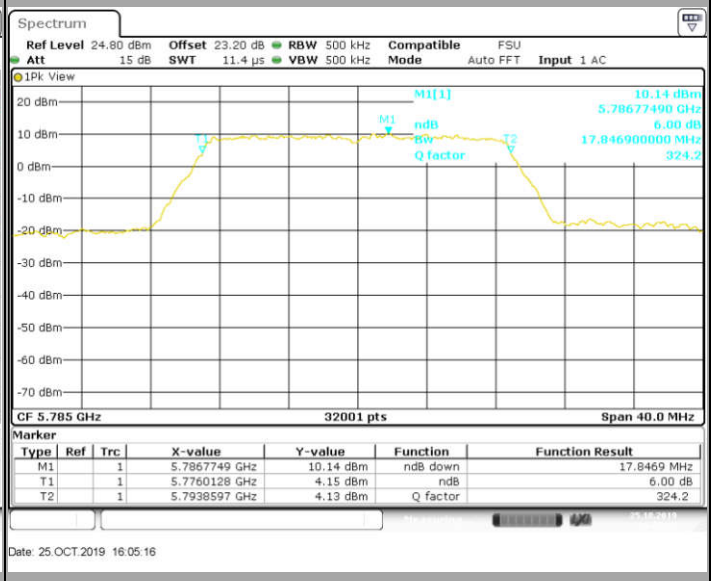

802.11a/802.11nHT20/ac VHT20	
Tmax	
Vmin	
C2	C5
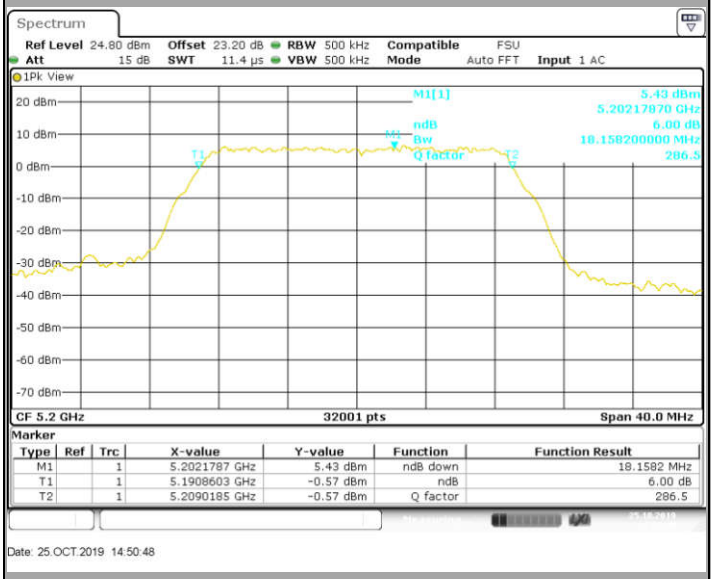	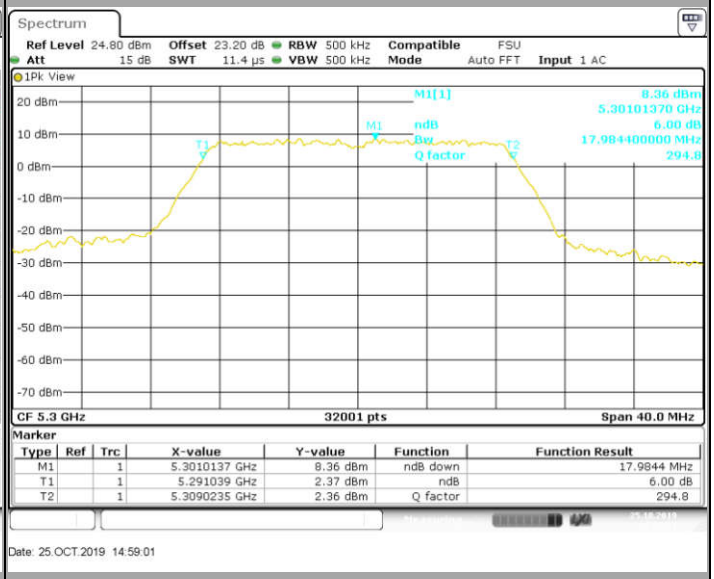
C8	C12
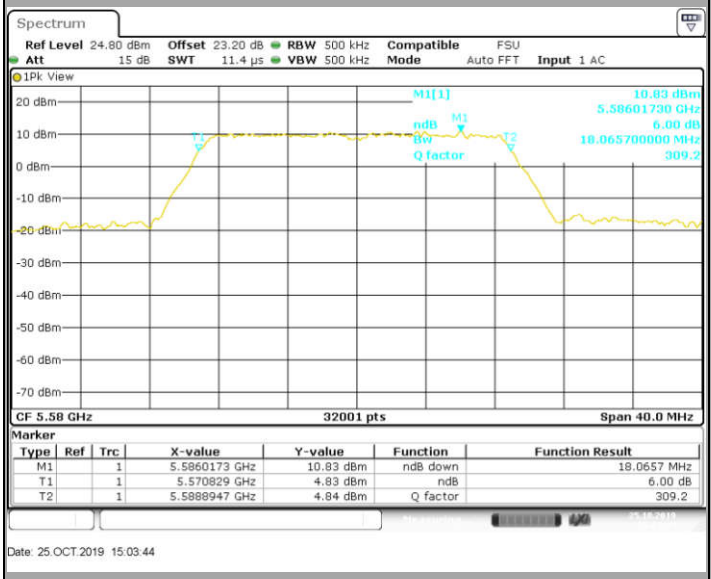	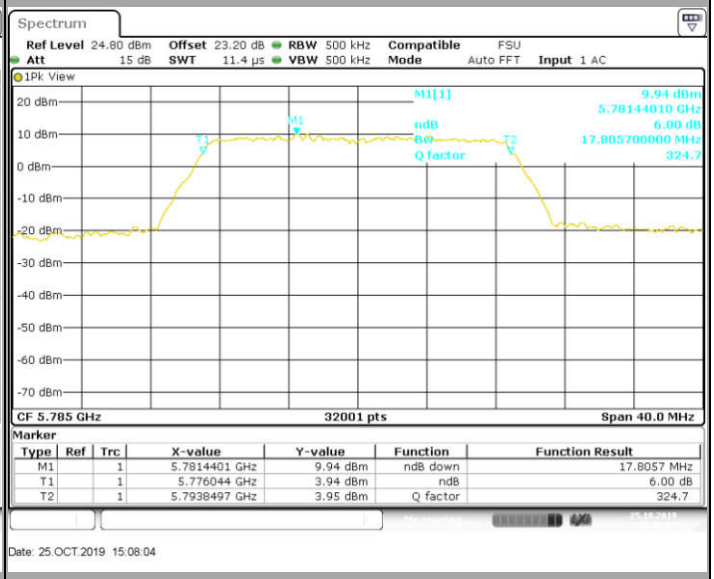

802.11a/802.11nHT20/ac VHT20	
Tmax	
Vnom	
C2	C5
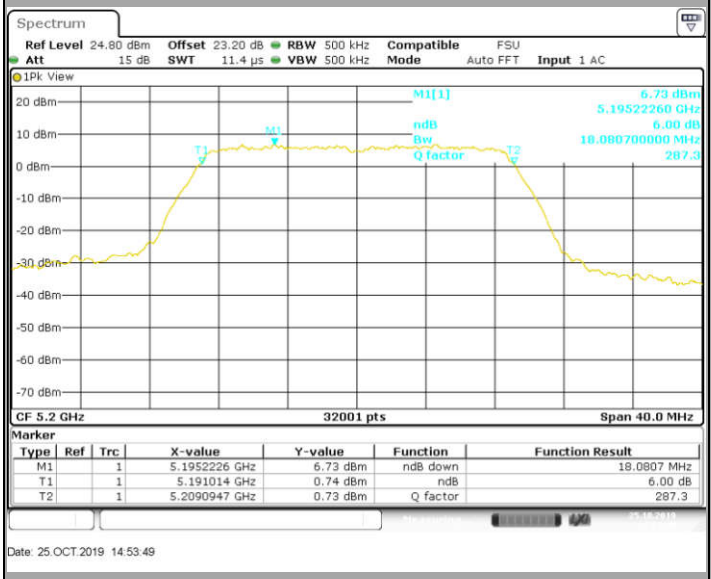	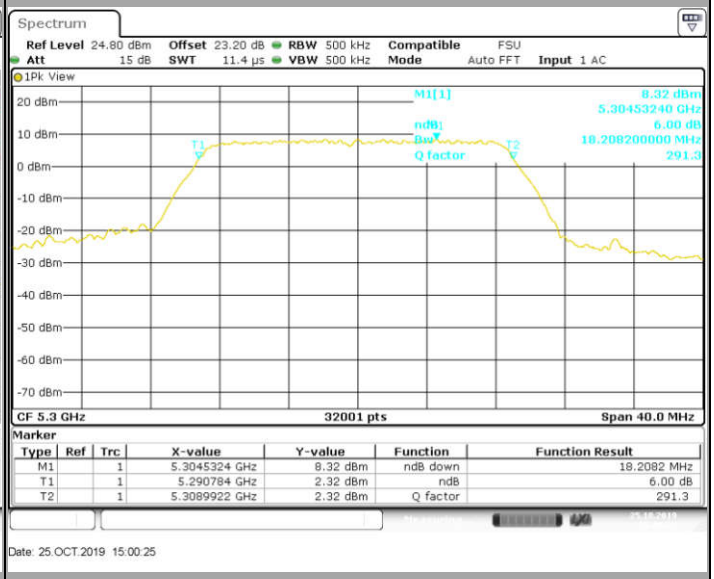
C8	C12
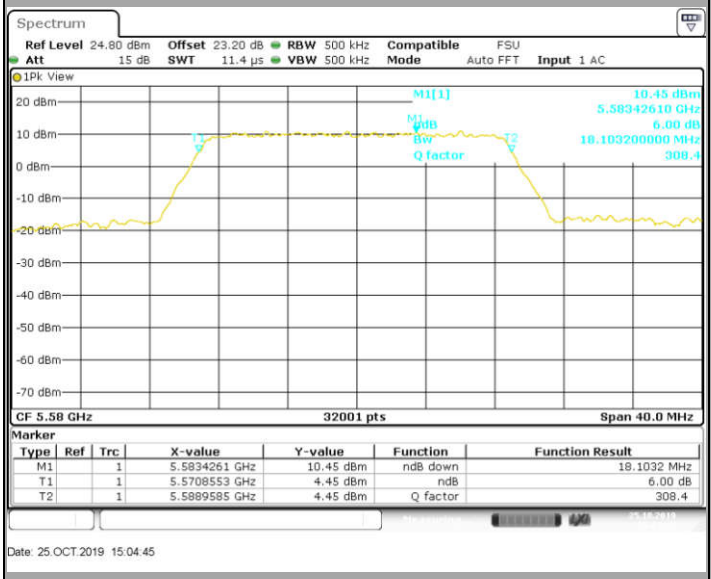	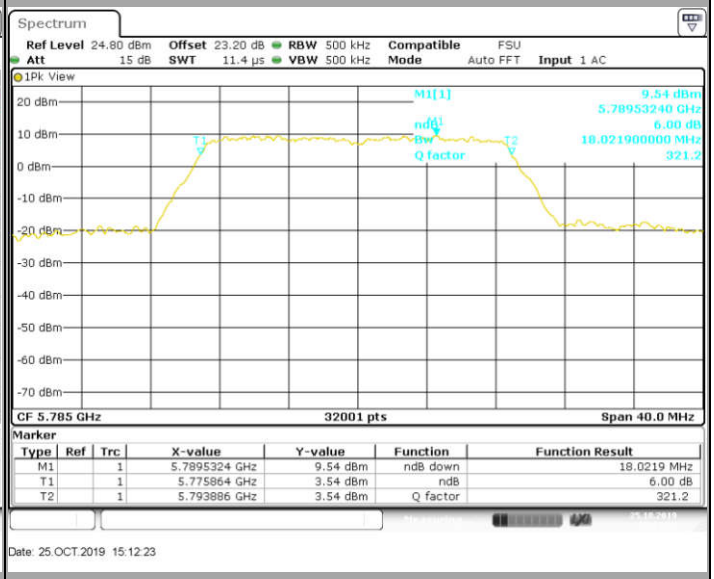

802.11a/802.11nHT20/ac VHT20	
Tmax	
Vmax	
C2	C5
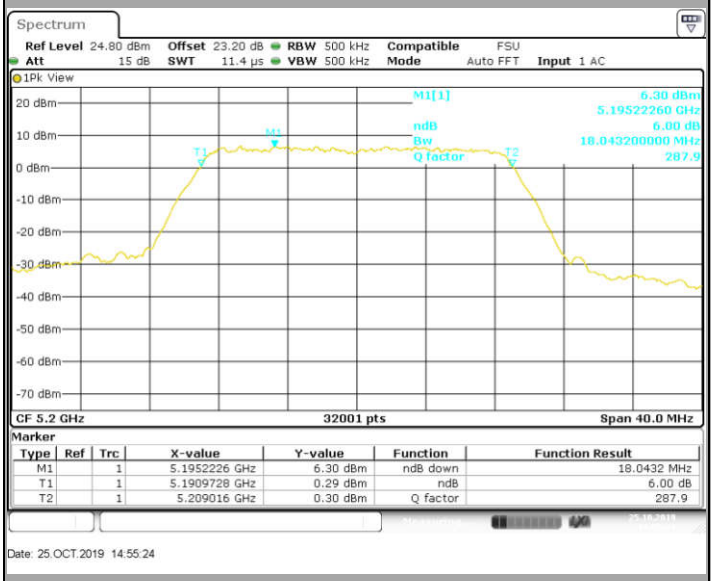	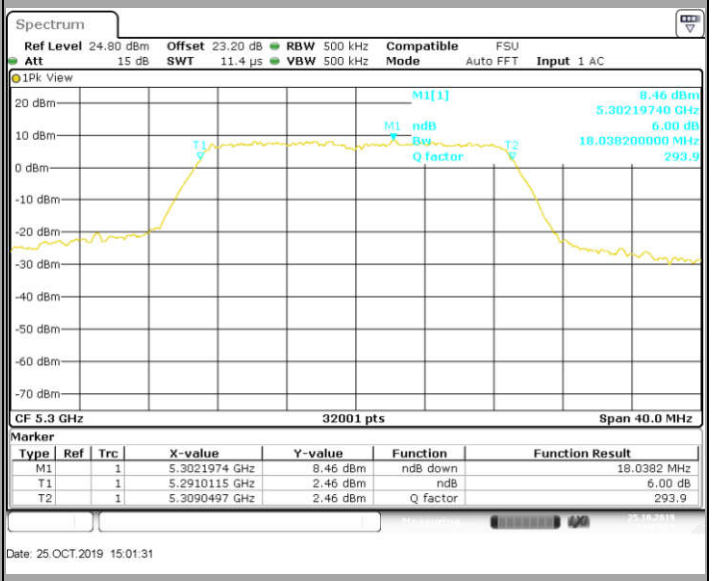
C8	C12
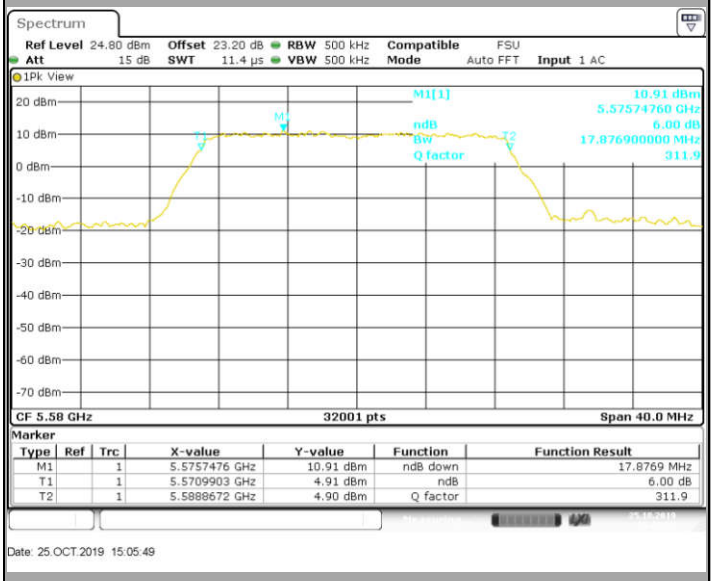	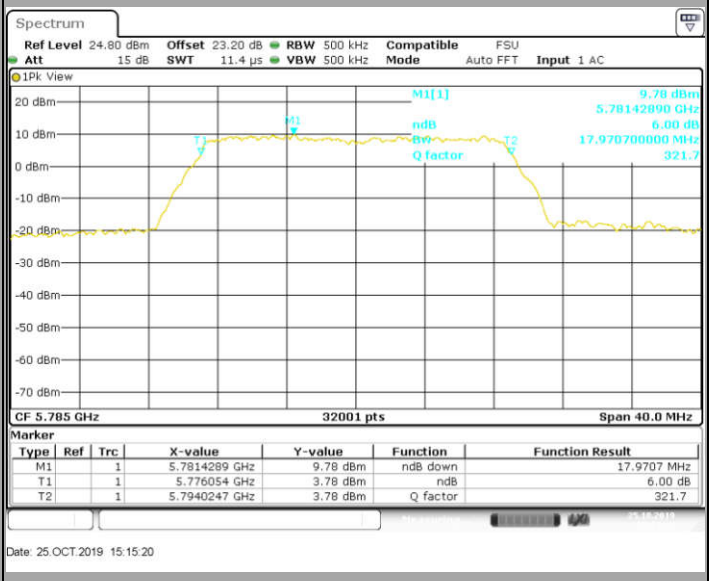

802.11a/802.11nHT20/ac VHT20

Temperature	Tmin				Tnom				Tmax			
Voltage	**Vmin**											
Channel	C2	C5	C8	C12	C2	C5	C8	C12	C2	C5	C8	C12
Frequency drift (ppm)	11,4	-3,3	-3,0	-12,7	-18,7	-10,6	-12,7	-9,4	-11,6	5,8	-16,7	-9,2
Voltage	**Vnom**											
Channel	C2	C5	C8	C12	C2	C5	C8	C12	C2	C5	C8	C12
Frequency drift (ppm)	-15,7	10,3	-6,7	-6,4	-12,0	-15,6	-24,5	-11,6	10,5	-21,1	-16,7	-21,6
Voltage	**Vmax**											
Channel	C2	C5	C8	C12	C2	C5	C8	C12	C2	C5	C8	C12
Frequency drift (ppm)	0,2	-7,5	4,1	-6,1	-7,9	-4,9	-13,7	-11,0	-1,1	5,8	-12,8	6,8

4.7. CONCLUSION

Carrier frequencies measurement performed on the sample of the product **SAGEMCOM Mini Sound Box MSBDV00,** SN: **253837310**, in configuration and description presented in this test report, show levels **compliant** to the 47 CFR PART 15.407 & RSS 247 ISSUE 2 limits.

5. 26DB EMISSION BANDWIDTH

5.1. TEST CONDITIONS

Test performed by	: Julien Palard
Date of test	: October 23, 2019
Ambient temperature	: 24 °C
Relative humidity	: 48 %

5.2. TEST SETUP

- The Equipment Under Test is installed:
☑ On a table
☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:
☑ Conducted Method
☐ Radiated Method

- Test Procedure:
☑ KDB 789033 D02 General UNII Test Procedures New Rules v02r01 § C1

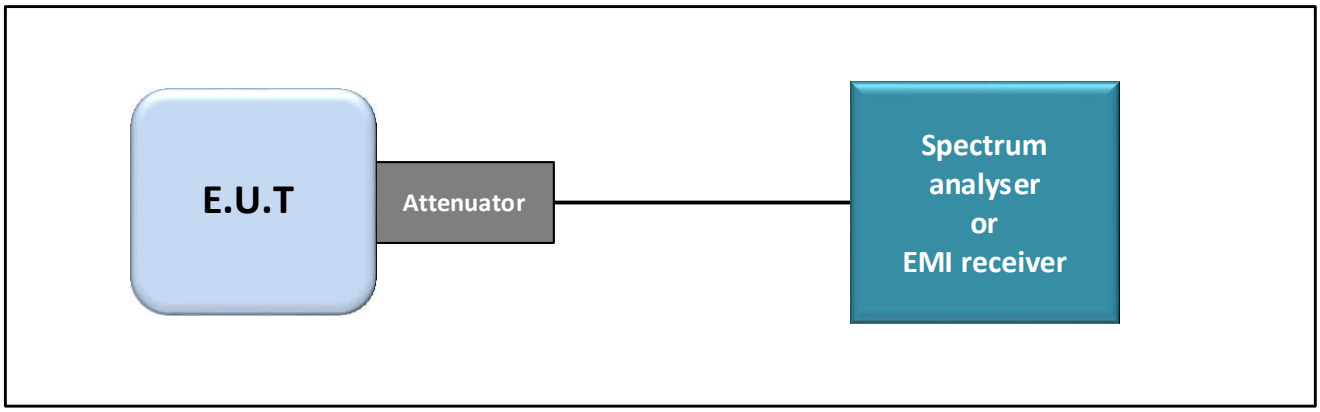

Test set up of 26dB Emission Bandwidth

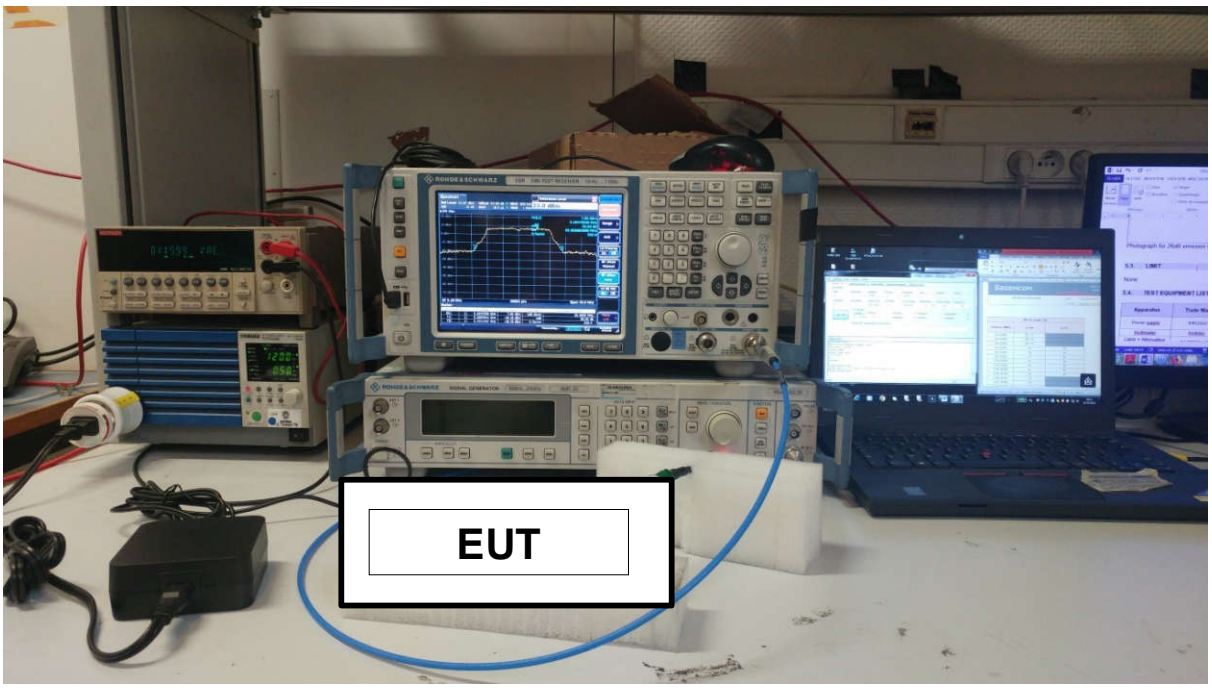

Photograph for 26dB emission bandwidth

5.3. LIMIT

None

5.4. TEST EQUIPMENT LIST

Apparatus	Trade Mark	Type	Registration number	Cal_Date	Cal_Due
Power supply	KIKUSUI	PCR500M	A7040079	Calibrated with multimeter	Calibrated with multimeter
Multimeter	Keithley	2000	A1241084	2018/12	2020/12
Cable + Attenuateur 20dB	PASTERNACK	PE350-150CM	A5329868	2018/12	2019/12
EMI receiver	ROHDE & SCHWARZ	ESR7	A2642023	2019/01	2021/01

Note: In our quality system, the test equipment calibration due is more & less 2 months

5.5. RESULTS

802.11a		
C1	C2	C3
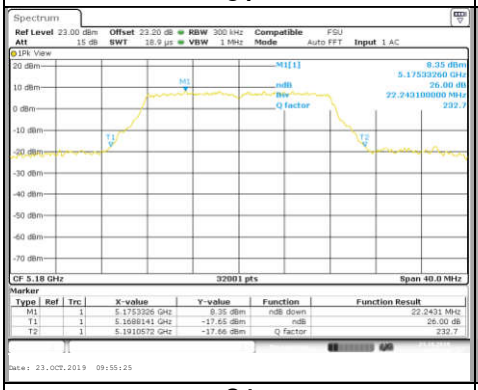	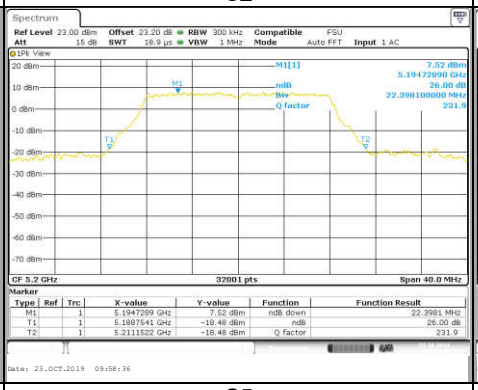	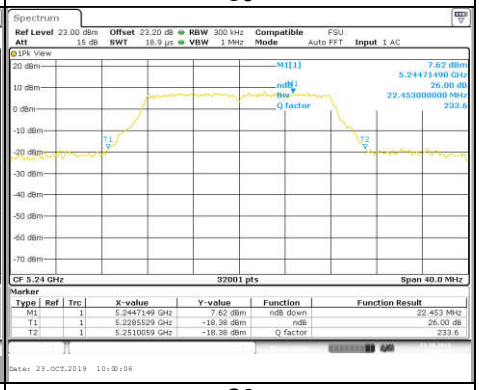
C4	C5	C6
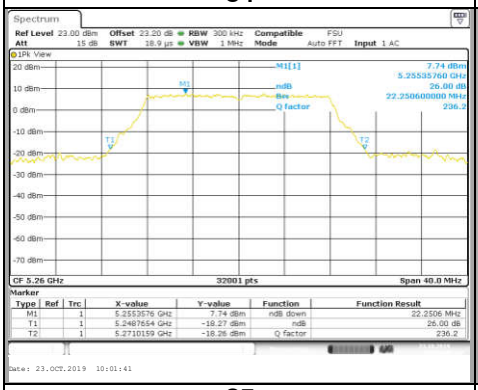	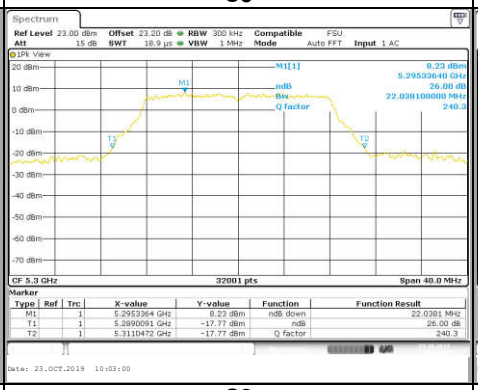	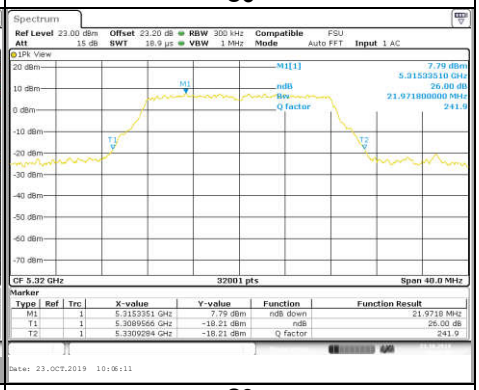
C7	C8	C9
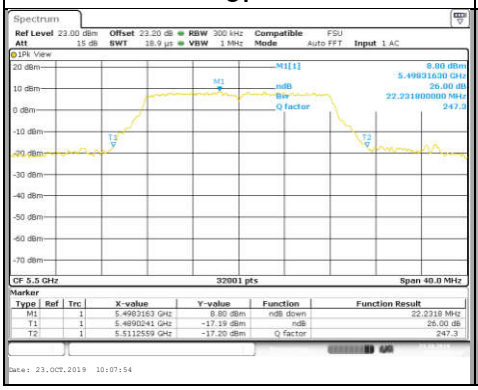	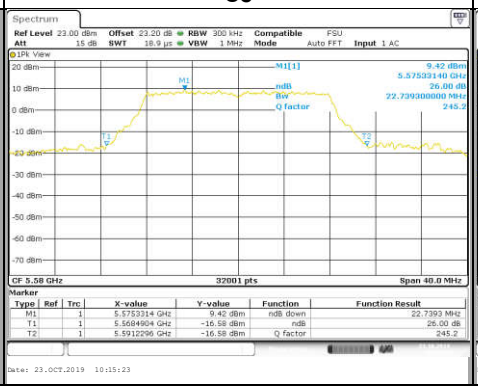	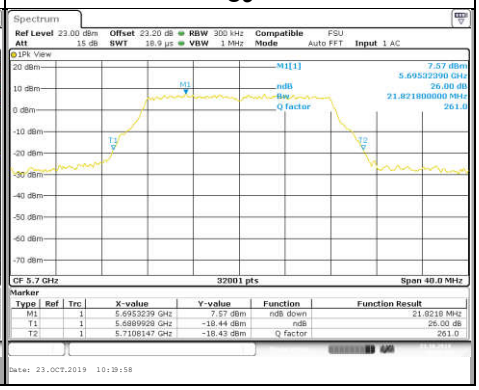

802.11a	
C10	
	
Channel	26dB Emission Bandwidth (MHz)
C1	22.24
C2	22.40
C3	22.45
C4	22.25
C5	22.04
C6	21.97
C7	22.23
C8	22.74
C9	21.82
C10	22.37

802.11n HT20/ac VHT20		
C1	C2	C3
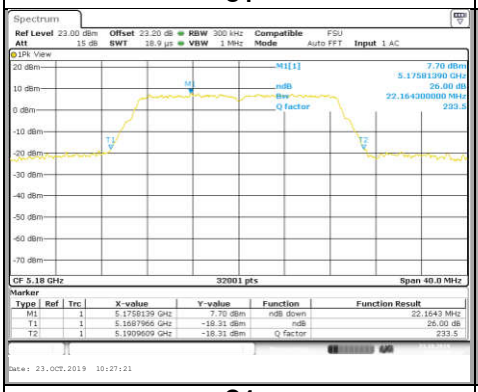	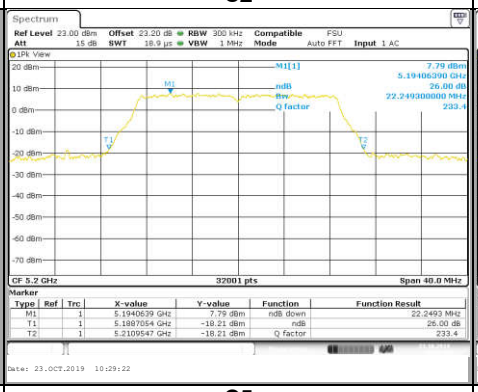	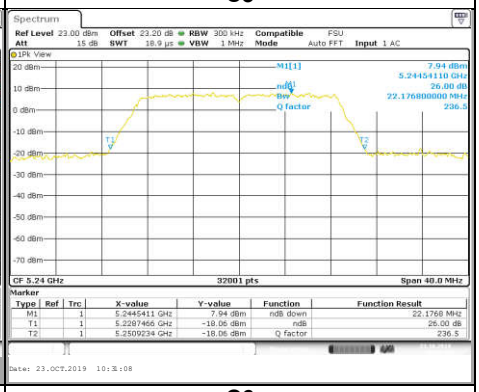
C4	C5	C6
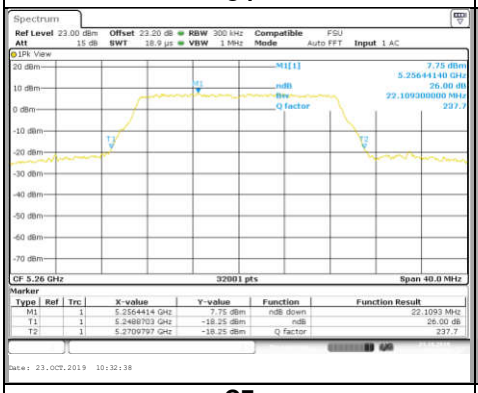	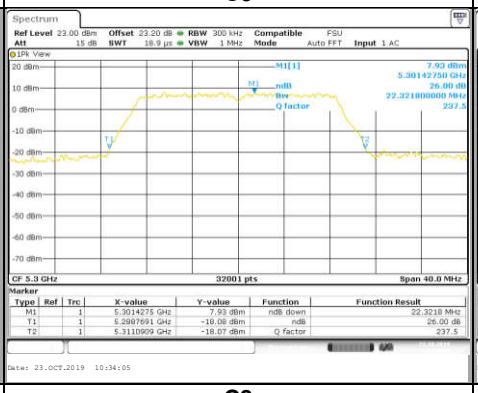	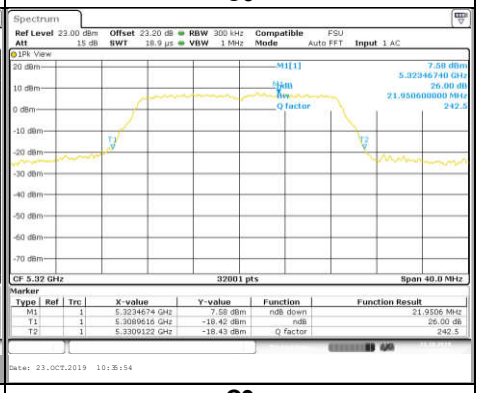
C7	C8	C9
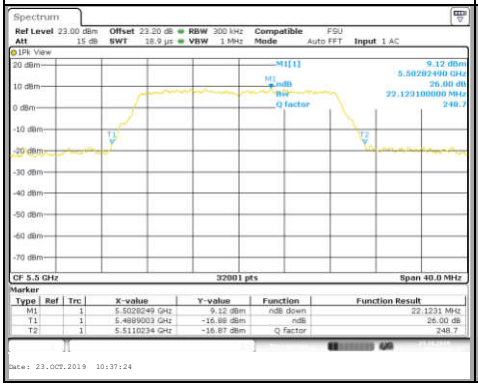	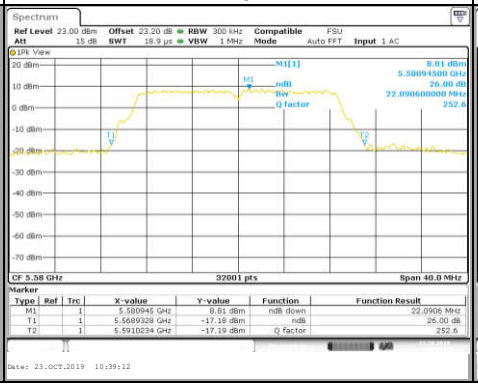	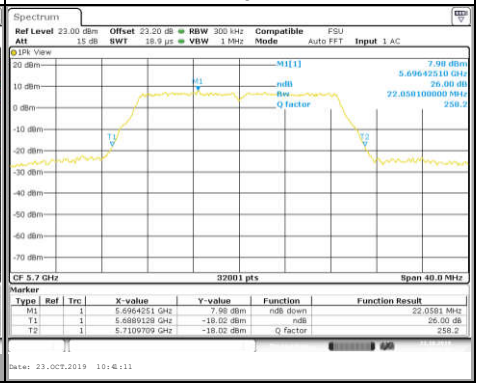

802.11n HT20/ac VHT20	
C10	
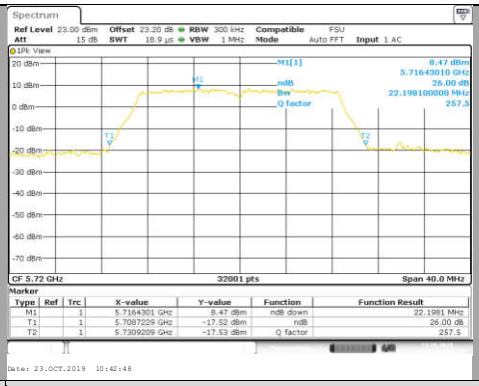	
Channel	26dB Emission Bandwidth (MHz)
C1	22.16
C2	22.25
C3	22.18
C4	22.11
C5	22.32
C6	21.95
C7	22.12
C8	22.09
C9	22.06
C10	22.20

802.11n HT40/ac VHT40	
C14	C15
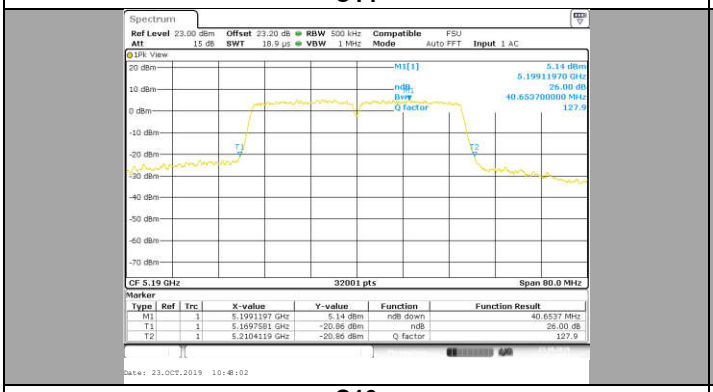	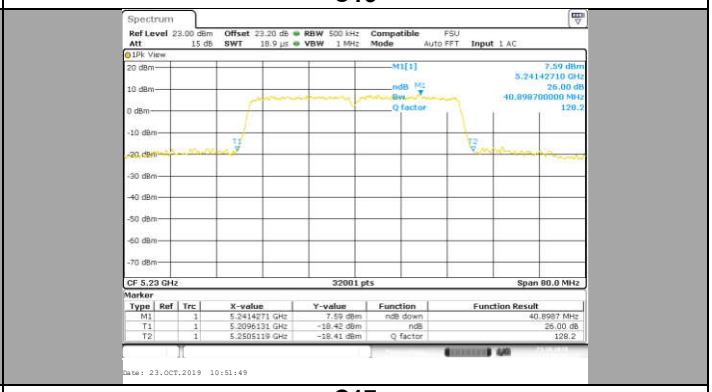
C16	C17
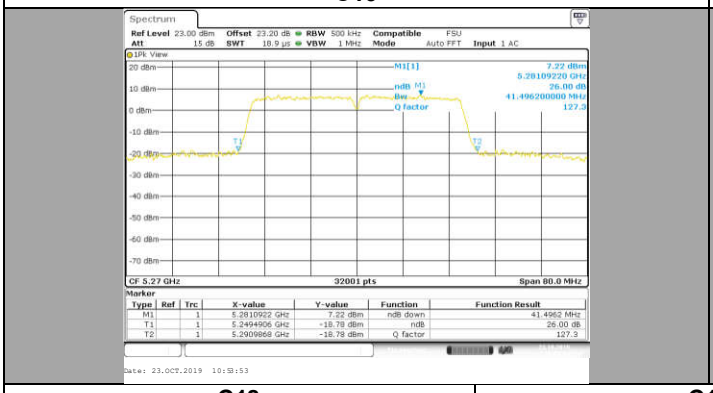	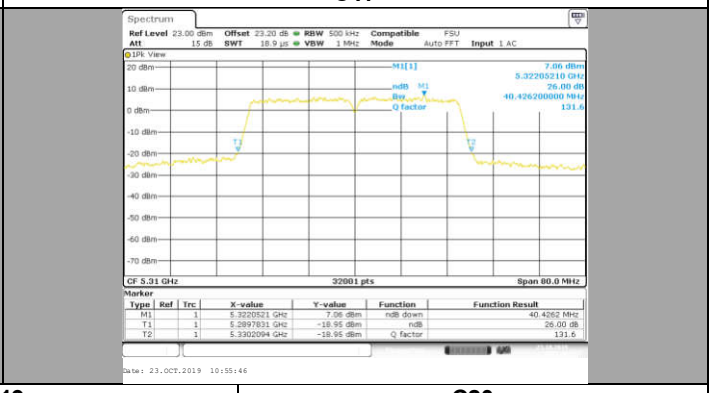
C18	C19	C20
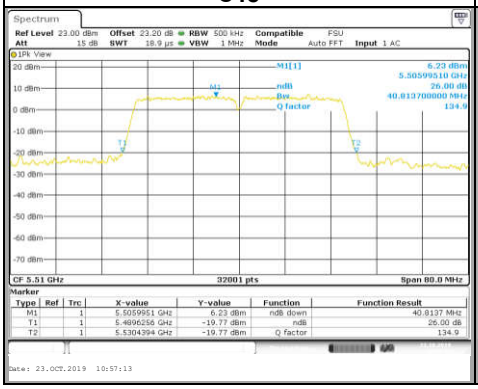	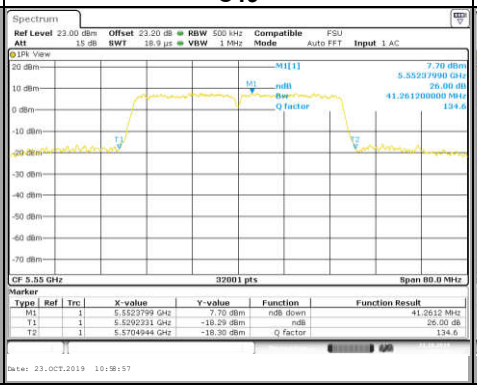	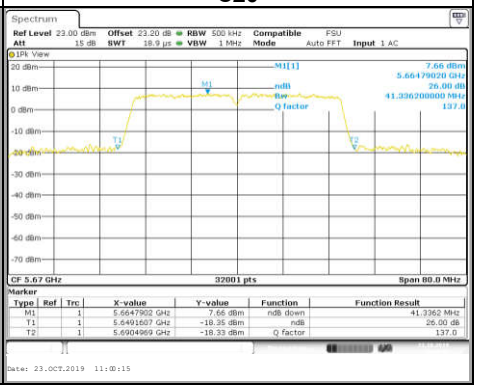

802.11n HT40/ac VHT40	
C21	
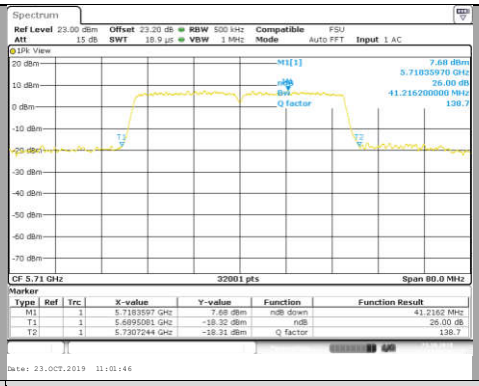	
Channel	26dB Emission Bandwidth (MHz)
C14	40.65
C15	40.90
C16	41.50
C17	40.43
C18	40.81
C19	41.26
C20	41.34
C21	41.22

802.11ac VHT80	
C24	
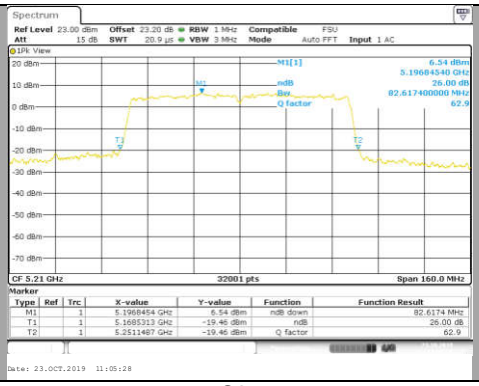	
C25	
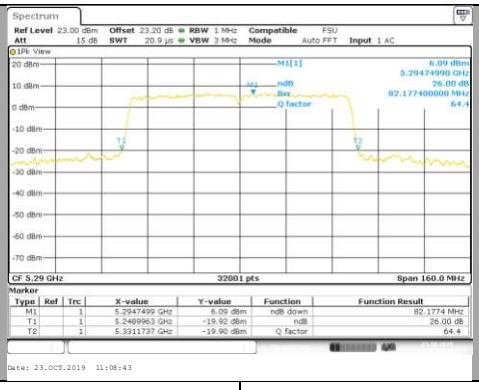	
C26	C27