



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2460.650	101.01	-2.48	98.53			Peak	Horizontal
2.	2483.500	51.59	-2.35	49.24	74.00	-24.76	Peak	Horizontal
1.	2461.250	97.43	-2.47	94.96			Average	Horizontal
2.	2483.500	41.37	-2.35	39.02	54.00	-14.98	Average	Horizontal

IEEE 802.11b mode (Antenna 1)

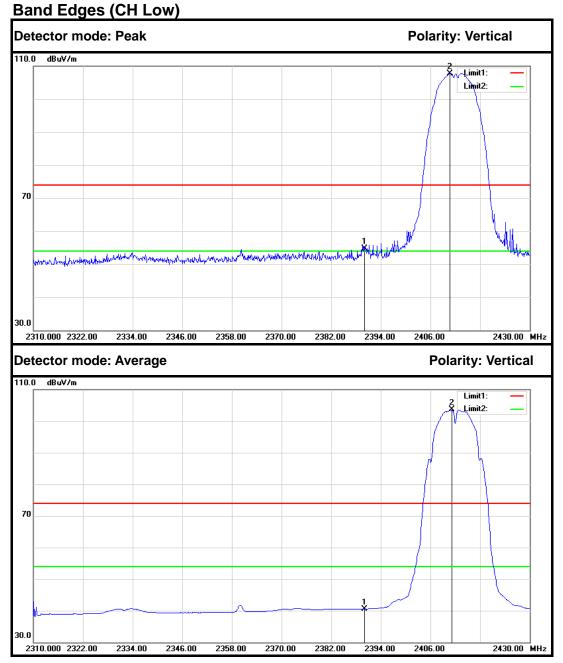


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	57.63	-2.86	54.77	74.00	-19.23	Peak	Vertical
2.	2410.680	110.48	-2.75	107.73			Peak	Vertical
1.	2390.000	43.41	-2.86	40.55	54.00	-13.45	Average	Vertical
2.	2411.160	106.47	-2.75	103.72			Average	Vertical

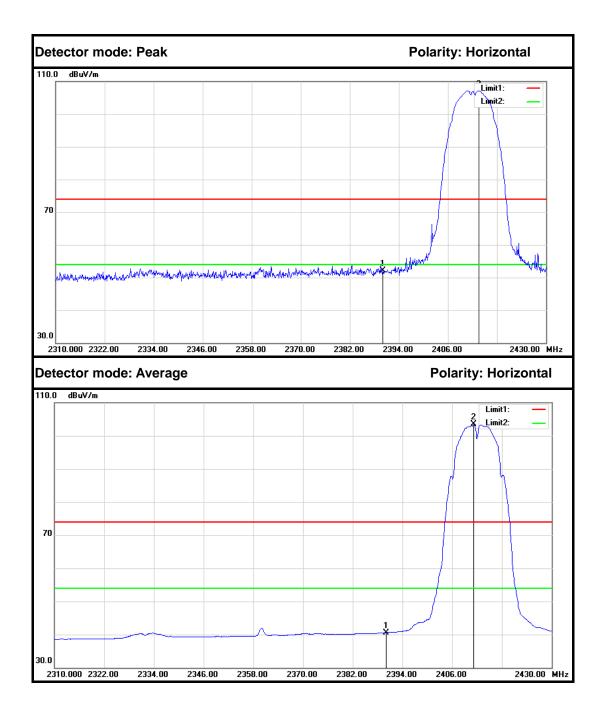


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	54.97	-2.86	52.11	74.00	-21.89	Peak	Horizontal
2.	2413.560	109.86	-2.73	107.13			Peak	Horizontal
1.	2390.000	43.38	-2.86	40.52	54.00	-13.48	Average	Horizontal
2.	2411.160	106.20	-2.75	103.45			Average	Horizontal

Band Edges (CH High)

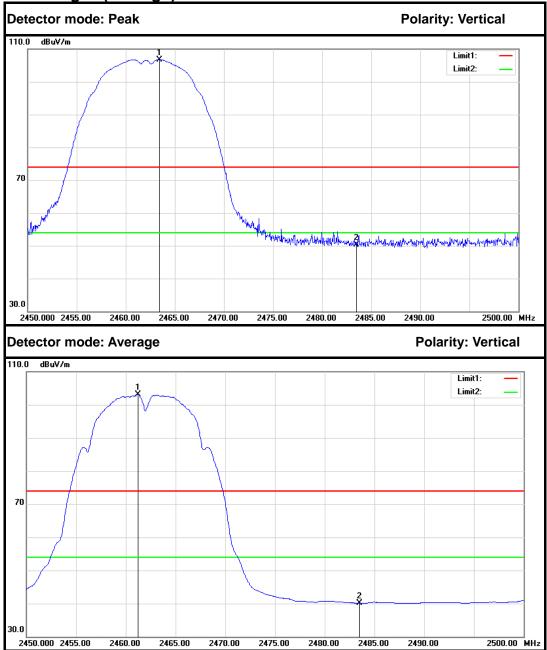

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2463.400	109.24	-2.46	106.78			Peak	Vertical
2.	2483.500	52.63	-2.35	50.28	74.00	-23.72	Peak	Vertical
1.	2461.250	105.58	-2.47	103.11			Average	Vertical
2.	2483.500	42.54	-2.35	40.19	54.00	-13.81	Average	Vertical

FCC ID: VW7SR570A Page 124 /172 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

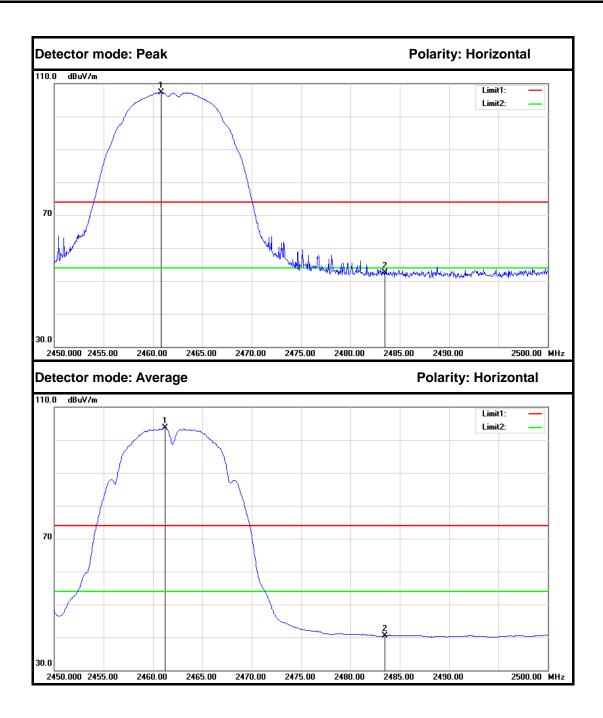


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2460.850	109.76	-2.47	107.29			Peak	Horizontal
2.	2483.500	54.84	-2.35	52.49	74.00	-21.51	Peak	Horizontal
1.	2461.200	106.18	-2.47	103.71			Average	Horizontal
2.	2483.500	42.84	-2.35	40.49	54.00	-13.51	Average	Horizontal




IEEE 802.11b mode (Antenna 2)

Band Edges (CH Low)

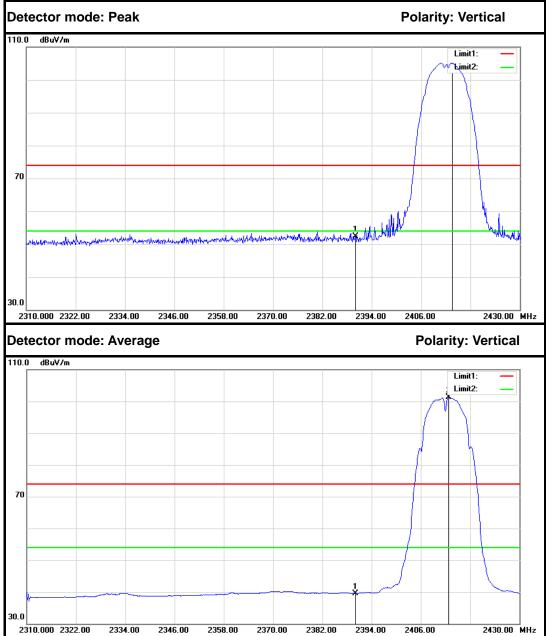


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	55.06	-2.86	52.20	74.00	-21.80	Peak	Vertical
2.	2413.560	107.79	-2.73	105.06			Peak	Vertical
1.	2390.000	42.30	-2.86	39.44	54.00	-14.56	Average	Vertical
2.	2412.840	104.00	-2.74	101.26			Average	Vertical

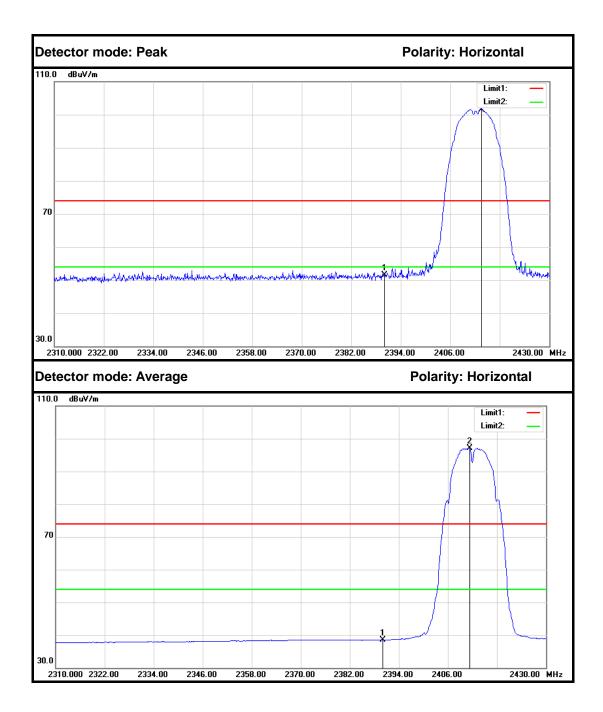


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	54.30	-2.86	51.44	74.00	-22.56	Peak	Horizontal
2.	2413.560	104.31	-2.73	101.58			Peak	Horizontal
1.	2390.000	41.45	-2.86	38.59	54.00	-15.41	Average	Horizontal
2.	2411.280	99.95	-2.75	97.20			Average	Horizontal

Band Edges (CH High)

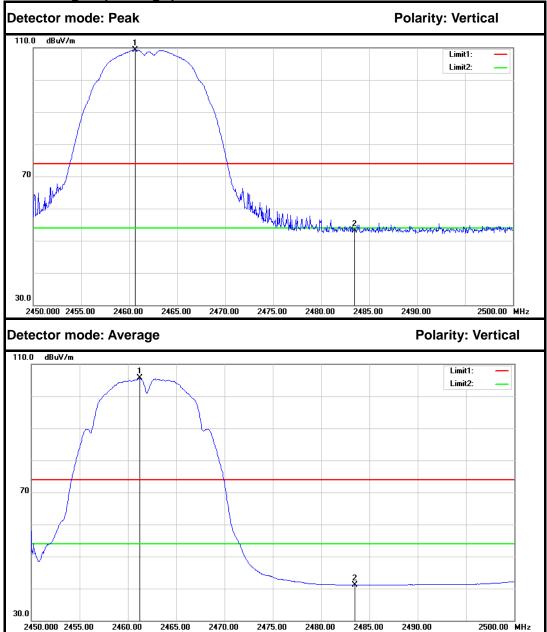

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2460.600	111.82	-2.48	109.34			Peak	Vertical
2.	2483.500	55.39	-2.35	53.04	74.00	-20.96	Peak	Vertical
1.	2461.250	108.13	-2.47	105.66			Average	Vertical
2.	2483.500	43.50	-2.35	41.15	54.00	-12.85	Average	Vertical

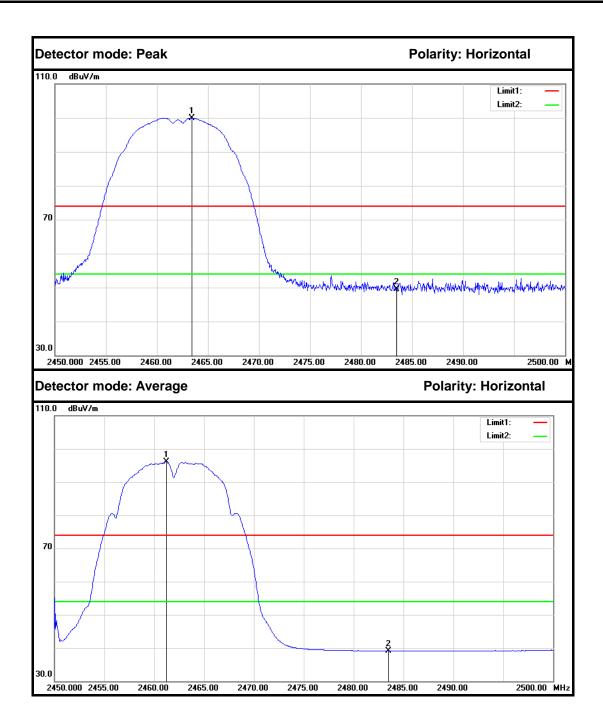


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2463.400	102.45	-2.46	99.99			Peak	Horizontal
2.	2483.500	51.77	-2.35	49.42	74.00	-24.58	Peak	Horizontal
1.	2461.200	98.54	-2.47	96.07			Average	Horizontal
2.	2483.500	41.47	-2.35	39.12	54.00	-14.88	Average	Horizontal

Band Edges (CH Low) Detector mode: Peak Polarity: Vertical 110.0 dBuV/m Limit1: Limit2: 2 70 window what we want have a marked with the the state of the hour and det the article was have been and the showing the 30.0 2310.000 2322.00 2334.00 2346.00 2358.00 2370.00 2382.00 2394.00 2406.00 2430.00 MHz **Detector mode: Average Polarity: Vertical** 100.0 dBuV/m Limit1: Limit2: 60 20.0 2430.00 MHz 2310.000 2322.00 2334.00 2346.00 2358.00 2370.00 2382.00 2394.00 2406.00

IEEE 802.11g mode (Antenna 0)


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2390.000	60.40	-2.86	57.54	74.00	-16.46	Peak	Vertical
2	2410.440	104.36	-2.75	101.61			Peak	Vertical
1.	2390.000	43.29	-2.86	40.43	54.00	-13.57	Average	Vertical
2.	2413.440	93.11	-2.73	90.38			Average	Vertical

FCC ID: VW7SR570A Page 130 /172 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

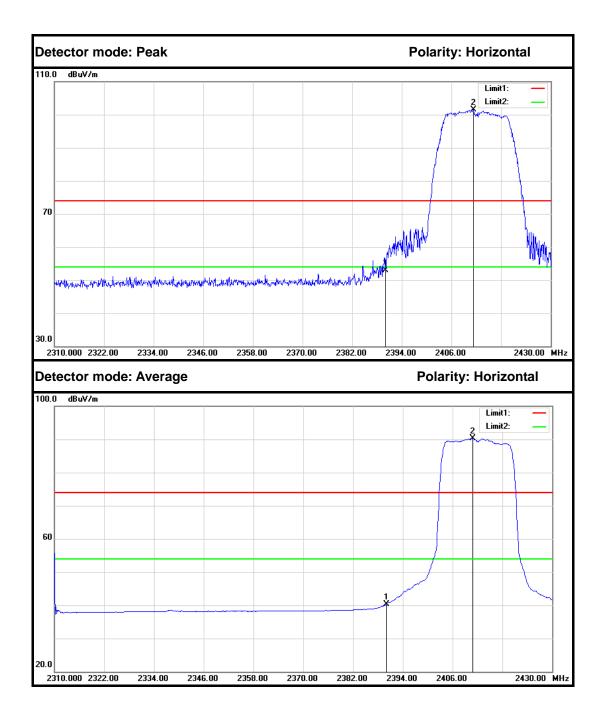


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	55.83	-2.86	52.97	74.00	-21.03	Peak	Horizontal
2.	2411.280	104.27	-2.75	101.52			Peak	Horizontal
1.	2390.000	43.09	-2.86	40.23	54.00	-13.77	Average	Horizontal
2.	2410.920	93.13	-2.75	90.38			Average	Horizontal

Band Edges (CH High)

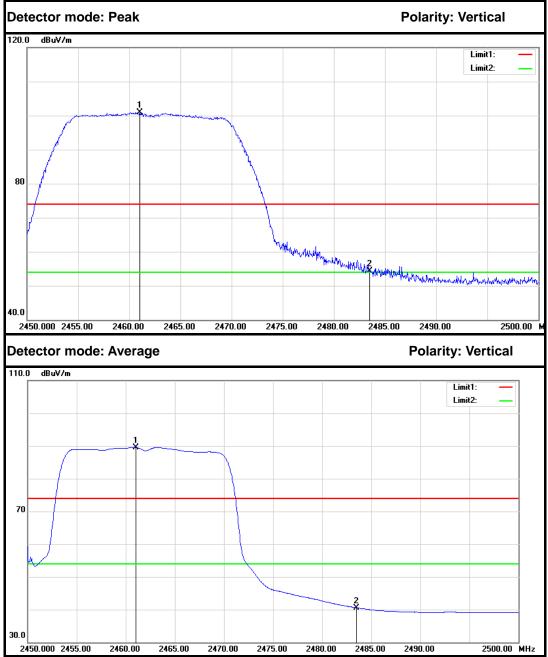


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2461.050	103.30	-2.47	100.83			Peak	Vertical
2.	2483.500	56.58	-2.35	54.23	74.00	-19.77	Peak	Vertical
1.	2461.000	92.04	-2.47	89.57			Average	Vertical
2.	2483.500	42.92	-2.35	40.57	54.00	-13.43	Average	Vertical

FCC ID: VW7SR570A Page 132 /172 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

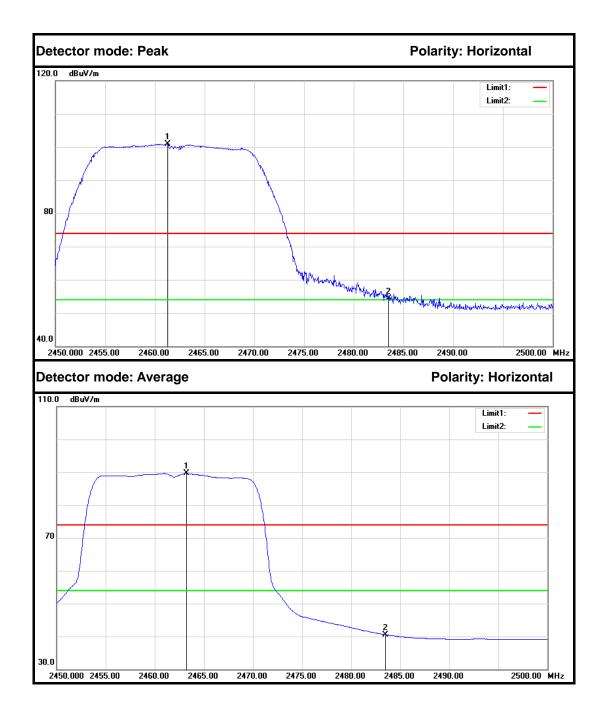


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2461.300	103.43	-2.47	100.96			Peak	Horizontal
2.	2483.500	56.55	-2.35	54.20	74.00	-19.80	Peak	Horizontal
1.	2463.200	92.07	-2.46	89.61			Average	Horizontal
2.	2483.500	42.92	-2.35	40.57	54.00	-13.43	Average	Horizontal

IEEE 802.11g mode (Antenna 1)

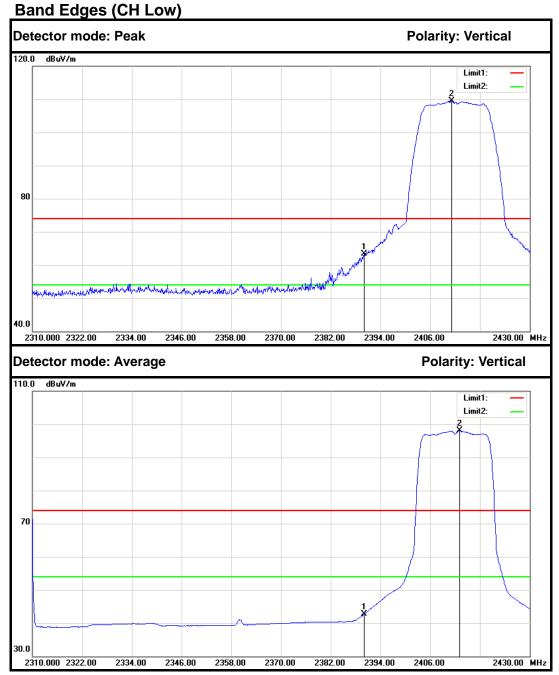


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	66.15	-2.86	63.29	74.00	-10.71	Peak	Vertical
2.	2411.160	112.26	-2.75	109.51			Peak	Vertical
1.	2390.000	45.51	-2.86	42.65	54.00	-11.35	Average	Vertical
2.	2413.080	100.79	-2.74	98.05			Average	Vertical

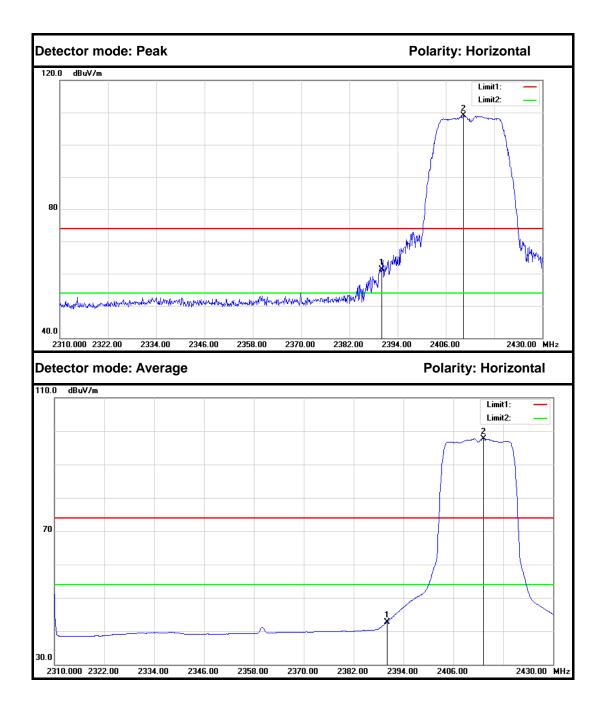


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	64.12	-2.86	61.26	74.00	-12.74	Peak	Horizontal
2.	2410.440	111.77	-2.75	109.02			Peak	Horizontal
1.	2390.000	45.62	-2.86	42.76	54.00	-11.24	Average	Horizontal
2.	2413.200	100.53	-2.74	97.79			Average	Horizontal

Band Edges (CH High)

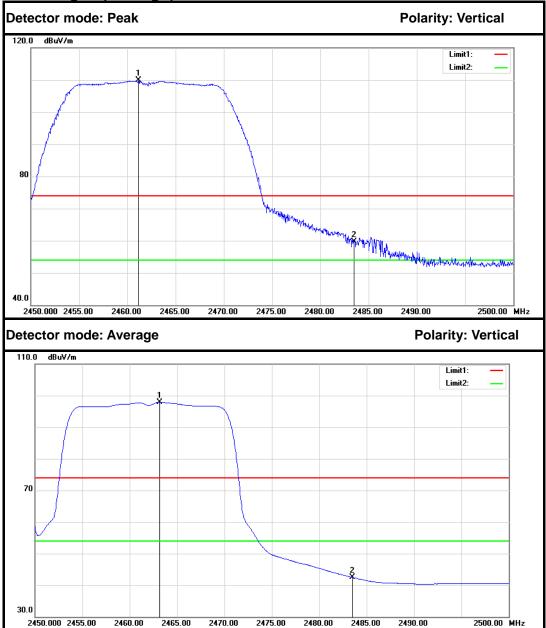


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2461.150	112.31	-2.47	109.84			Peak	Vertical
2.	2483.500	61.98	-2.35	59.63	74.00	-14.37	Peak	Vertical
1.	2463.150	100.40	-2.46	97.94			Average	Vertical
2.	2483.500	44.80	-2.35	42.45	54.00	-11.55	Average	Vertical

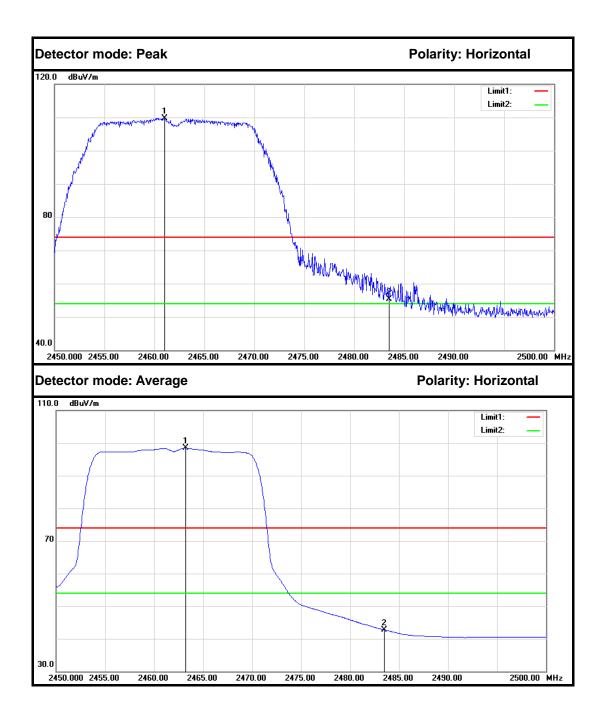


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2461.000	112.22	-2.47	109.75			Peak	Horizontal
2.	2483.500	57.64	-2.35	55.29	74.00	-18.71	Peak	Horizontal
1.	2463.200	100.88	-2.46	98.42			Average	Horizontal
2.	2483.500	45.07	-2.35	42.72	54.00	-11.28	Average	Horizontal

IEEE 802.11g mode (Antenna 2)

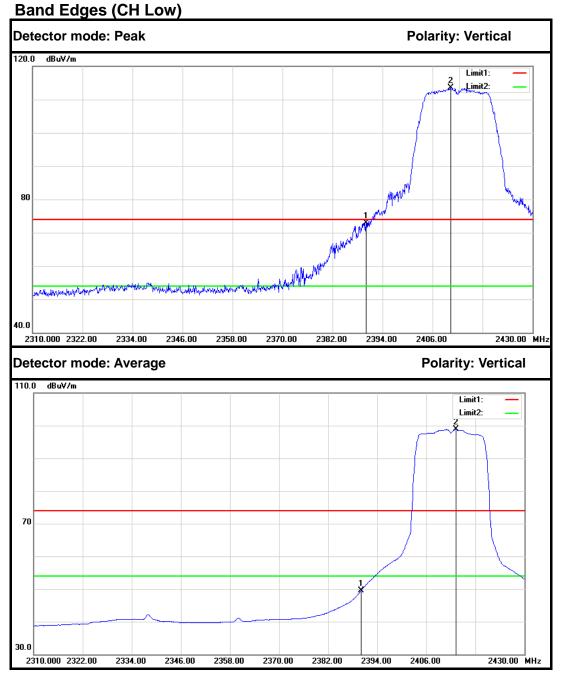


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	75.83	-2.86	72.97	74.00	-1.03	Peak	Vertical
2.	2410.320	116.22	-2.75	113.47			Peak	Vertical
1.	2390.000	52.41	-2.86	49.55	54.00	-4.45	Average	Vertical
2.	2413.200	101.59	-2.74	98.85			Average	Vertical

FCC ID: VW7SR570A Page 138 /172 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

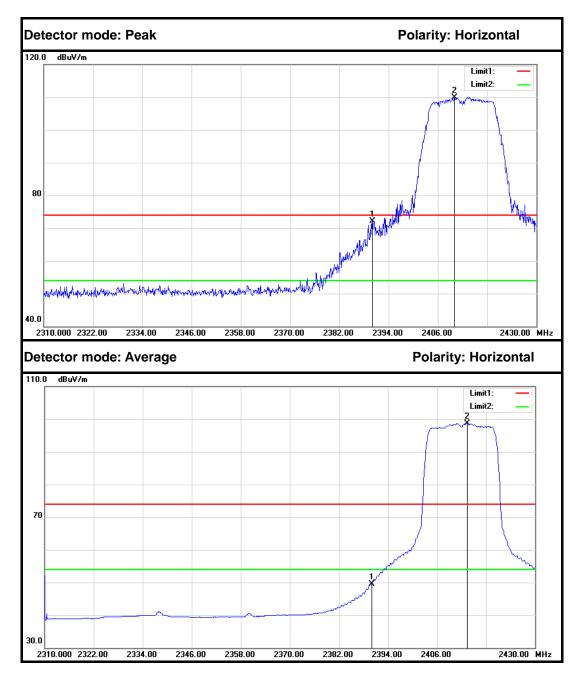


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	74.95	-2.86	72.09	74.00	-1.91	Peak	Horizontal
2.	2410.080	112.74	-2.75	109.99			Peak	Horizontal
1.	2390.000	52.32	-2.86	49.46	54.00	-4.54	Average	Horizontal
2.	2413.440	101.50	-2.73	98.77			Average	Horizontal

Band Edges (CH High)

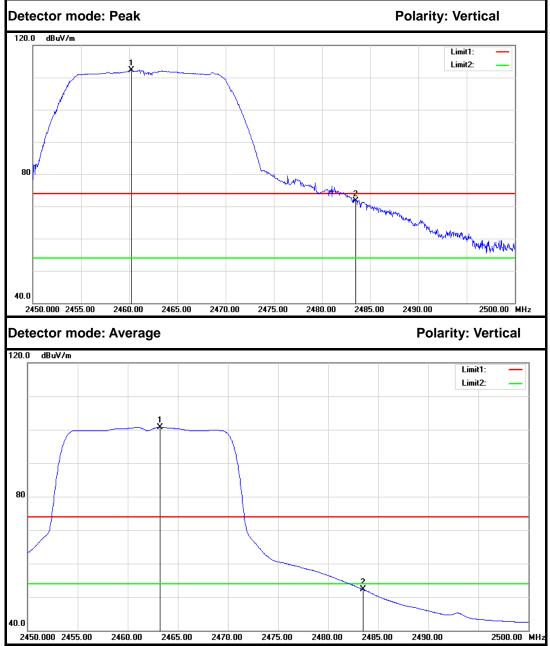


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2460.200	114.74	-2.48	112.26			Peak	Vertical
2.	2483.500	74.10	-2.35	71.75	74.00	-2.25	Peak	Vertical
1.	2463.200	103.26	-2.46	100.80			Average	Vertical
2.	2483.500	54.63	-2.35	52.28	54.00	-1.72	Average	Vertical

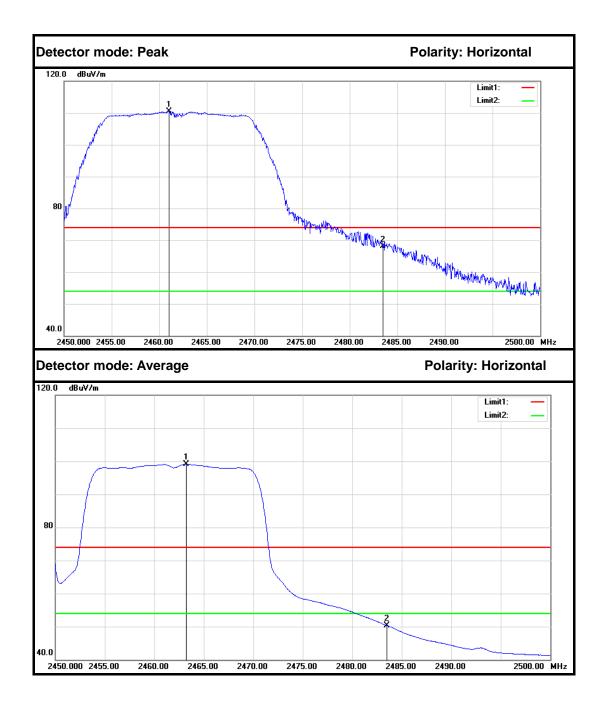


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2461.000	112.95	-2.47	110.48			Peak	Horizontal
2.	2483.500	70.45	-2.35	68.10	74.00	-5.90	Peak	Horizontal
1.	2463.200	101.59	-2.46	99.13			Average	Horizontal
2.	2483.500	52.69	-2.35	50.34	54.00	-3.66	Average	Horizontal



IEEE 802.11n HT20 MHz mode (Combine with Antenna 0 and Antenna 1 and Antenna 2) Band Edges (CH Low)

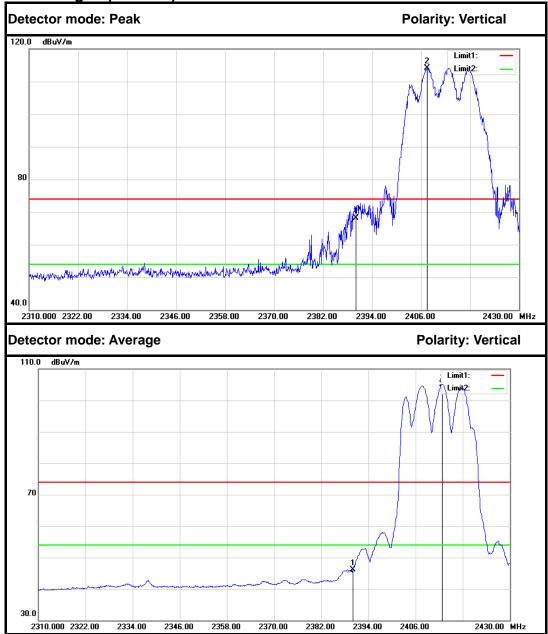


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	70.92	-2.86	68.06	74.00	-5.94	Peak	Vertical
2.	2407.440	116.96	-2.77	114.19			Peak	Vertical
1.	2390.000	48.94	-2.86	46.08	54.00	-7.92	Average	Vertical
2.	2412.840	107.85	-2.74	105.11			Average	Vertical

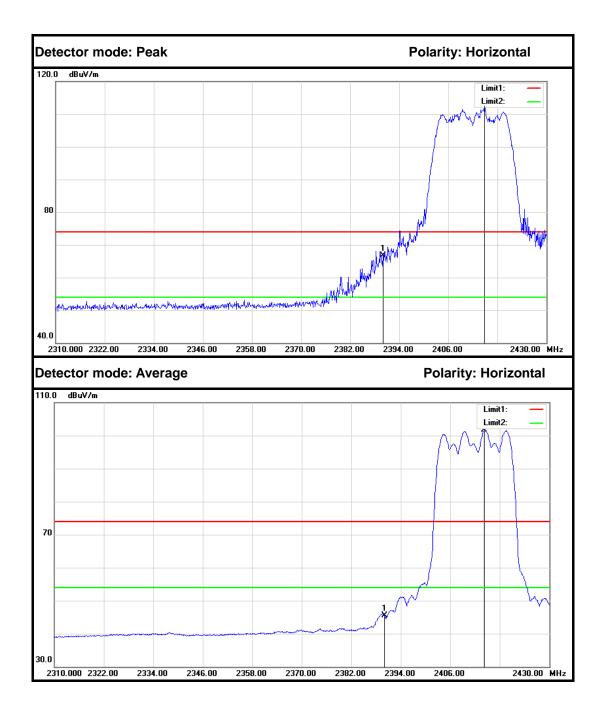


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	69.49	-2.86	66.63	74.00	-7.37	Peak	Horizontal
2.	2414.880	115.22	-2.73	112.49			Peak	Horizontal
1.	2390.000	48.45	-2.86	45.59	54.00	-8.41	Average	Horizontal
2.	2414.280	104.42	-2.73	101.69			Average	Horizontal

Band Edges (CH High)

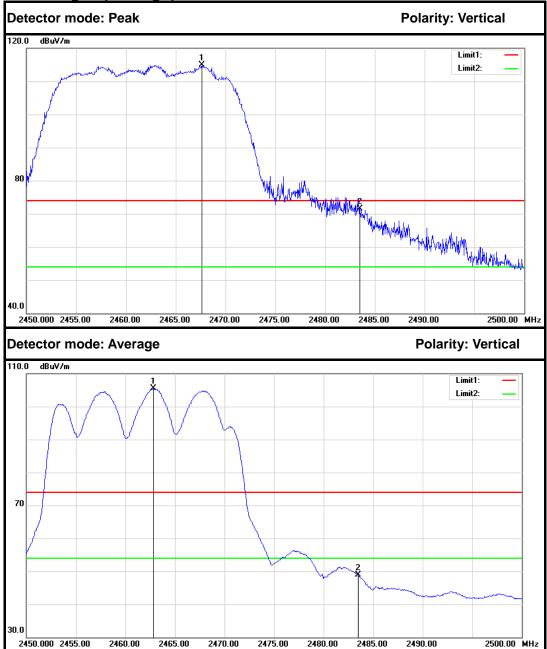


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2467.600	117.33	-2.44	114.89			Peak	Vertical
2.	2483.500	73.94	-2.35	71.59	74.00	-2.41	Peak	Vertical
1.	2462.850	107.94	-2.46	105.48			Average	Vertical
2.	2483.500	51.16	-2.35	48.81	54.00	-5.19	Average	Vertical

FCC ID: VW7SR570A Page 144 /172 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

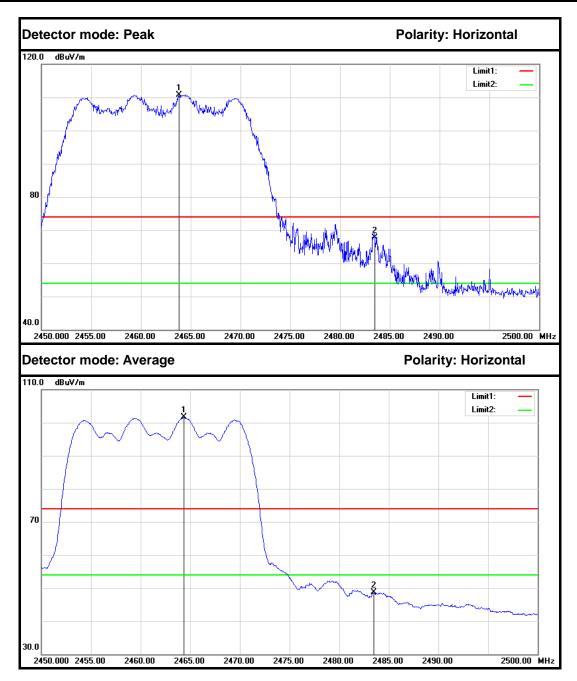


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2463.800	113.21	-2.46	110.75			Peak	Horizontal
2.	2483.500	69.98	-2.35	67.63	74.00	-6.37	Peak	Horizontal
1.	2464.350	104.08	-2.46	101.62			Average	Horizontal
2.	2483.500	50.96	-2.35	48.61	54.00	-5.39	Average	Horizontal

IEEE 802.11n HT40 MHz mode (Combine with Antenna 0 and Antenna 1 and Antenna 2) Band Edges (CH Low)

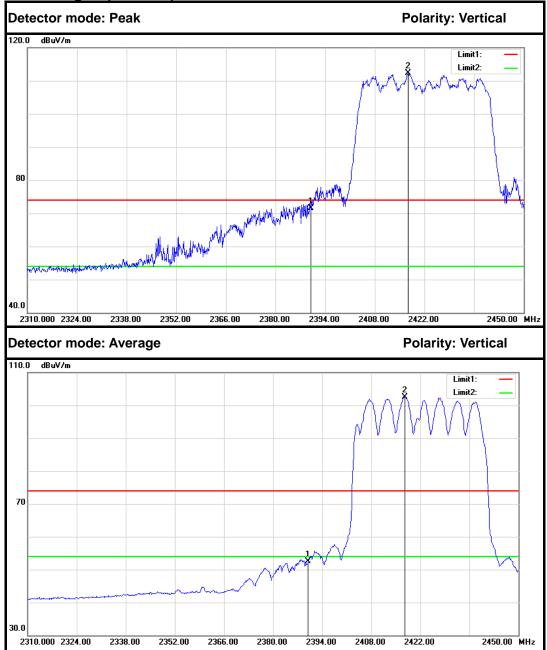


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	74.42	-2.86	71.56	74.00	-2.44	Peak	Vertical
2.	2417.380	115.05	-2.71	112.34			Peak	Vertical
1.	2390.000	55.39	-2.86	52.53	54.00	-1.47	Average	Vertical
2.	2417.660	105.30	-2.71	102.59			Average	Vertical

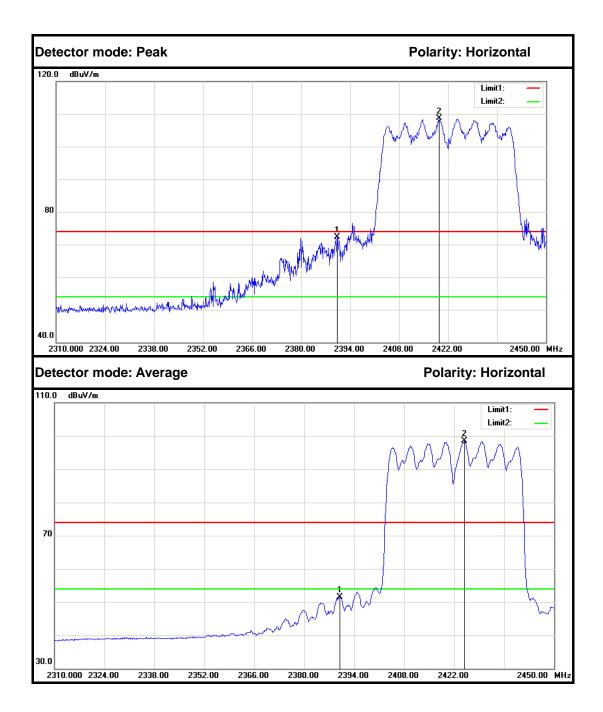

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.360	75.08	-2.86	72.22	74.00	-1.78	Peak	Horizontal
2.	2419.480	111.43	-2.70	108.73			Peak	Horizontal
1.	2390.000	54.34	-2.86	51.48	54.00	-2.52	Average	Horizontal
2.	2424.940	101.11	-2.67	98.44			Average	Horizontal




Band Edges (CH High)

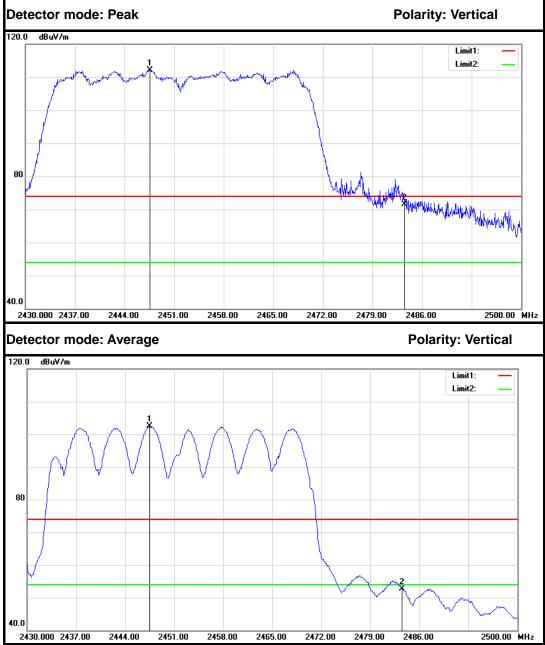

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2447.570	114.67	-2.55	112.12			Peak	Vertical
2.	2483.500	73.89	-2.35	71.54	74.00	-2.46	Peak	Vertical
1.	2447.500	104.98	-2.55	102.43			Average	Vertical
2.	2483.500	55.07	-2.35	52.72	54.00	-1.28	Average	Vertical

FCC ID: VW7SR570A Page 148 / 172 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.



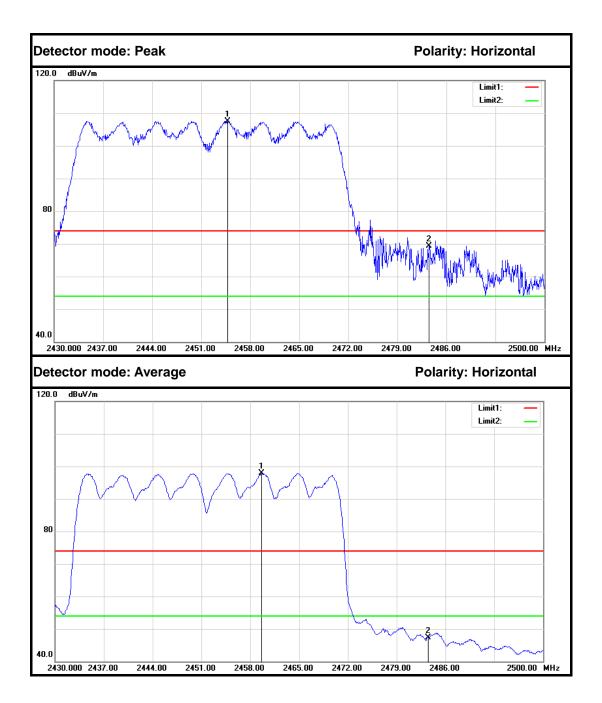

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2454.780	110.09	-2.51	107.58			Peak	Horizontal
2.	2483.500	71.63	-2.35	69.28	74.00	-4.72	Peak	Horizontal
1.	2459.610	100.39	-2.48	97.91			Average	Horizontal
2.	2483.500	49.67	-2.35	47.32	54.00	-6.68	Average	Horizontal



7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT

7.7.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

7.7.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018


7.7.3. TEST PROCEDURES (please refer to measurement standard)

§15.247(e)specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission. The same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e., if peak-detected fundamental power was measured then use the peak PSD procedure and if average fundamental power was measured then use the average PSD procedure).

10.2 Method PKPSD (peak PSD)

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 times the DTS bandwidth.
- 3. Set the RBW to: 3 kHz \leq RBW \leq 100 kHz.
- 4. Set the VBW \geq 3 x RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level within the RBW.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.7.4. TEST SETUP





7.7.5. TEST RESULTS

No non-compliance noted

<u>Test Data</u>

Test mode: IEEE 802.11b (Antenna 0)

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-4.68		PASS
Mid	2437	-3.60	8	PASS
High	2462	-4.33		PASS

Test mode: IEEE 802.11b (Antenna 1)

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-5.27		PASS
Mid	2437	-4.81	8	PASS
High	2462	-5.01		PASS

Test mode: IEEE 802.11b (Antenna 2)

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-4.24		PASS
Mid	2437	-4.91	8	PASS
High	2462	-4.37		PASS

Test mode: IEEE 802.11g (Antenna 0)

-	<u> </u>			
Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-6.82		PASS
Mid	2437	-7.03	8	PASS
High	2462	-6.31		PASS

Test mode: IEEE 802.11g (Antenna 1)

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-6.70		PASS
Mid	2437	-6.85	8	PASS
High	2462	-6.85		PASS



Test mode: IEEE 802.11g (Antenna 2)

	<u> </u>			
Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-7.13		PASS
Mid	2437	-6.87	8	PASS
High	2462	-6.71		PASS

Test mode: IEEE 802.11n HT20 MHz (Combine with Antenna 0 and Antenna 1 and Antenna 2)


Channel	Frequenc y	PPSD (dBm)				Limit (dBm)	Test Result
	(MHz)	Antenna 0	Antenna 1	Antenna 2	Total	(abiii)	
Low	2412	-8.28	-9.55	-8.77	-4.06		PASS
Mid	2437	-9.02	-9.20	-8.68	-5.83	6.23	PASS
High	2462	-9.69	-8.12	-9.14	-6.40		PASS

Test mode: IEEE 802.11n HT40 MHz (Combine with Antenna 0 and Antenna 1 and Antenna 2)


Channel	Frequenc y		PF (dl		Limit (dBm)	Test Result	
	(MHz)	Antenna 0	Antenna 1	Antenna 2	Total	(abiii)	
Low	2422	-11.20	-9.73	-10.46	-5.65		PASS
Mid	2437	-10.85	-10.60	-11.45	-7.71	6.23	PASS
High	2452	-10.42	-11.32	-9.68	-7.84		PASS




Test Plot

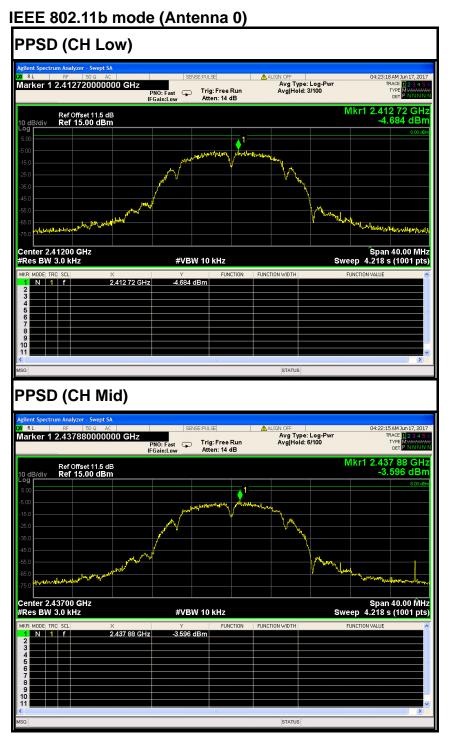




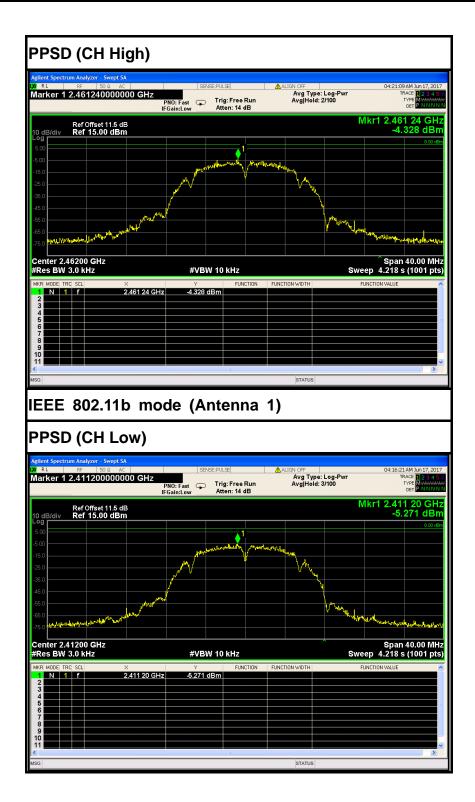




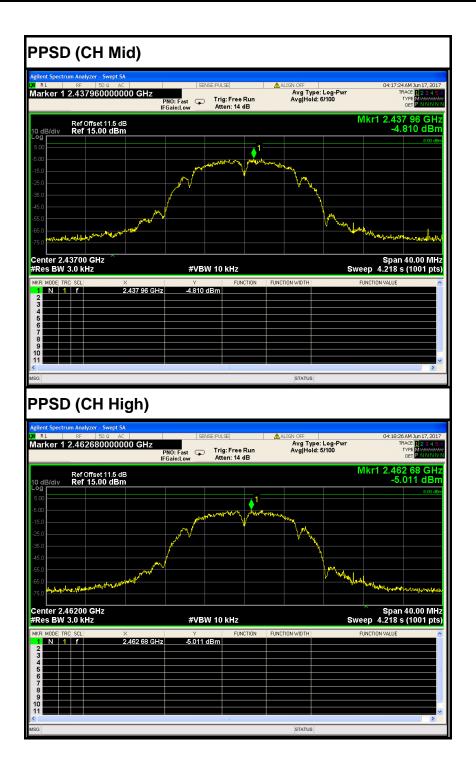




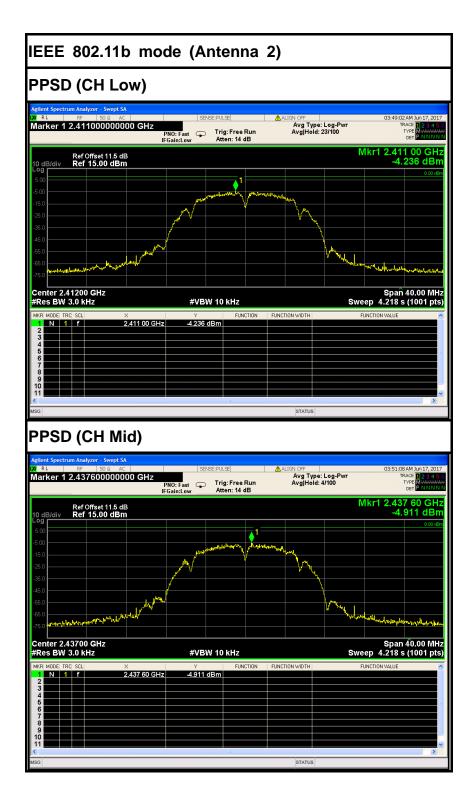




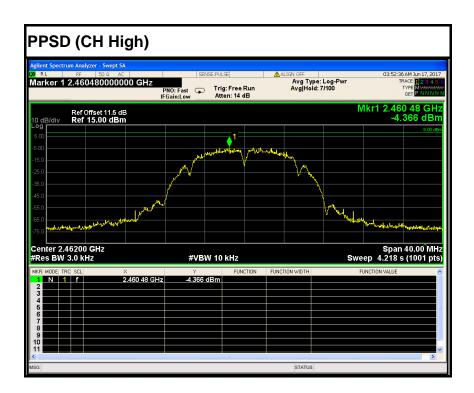




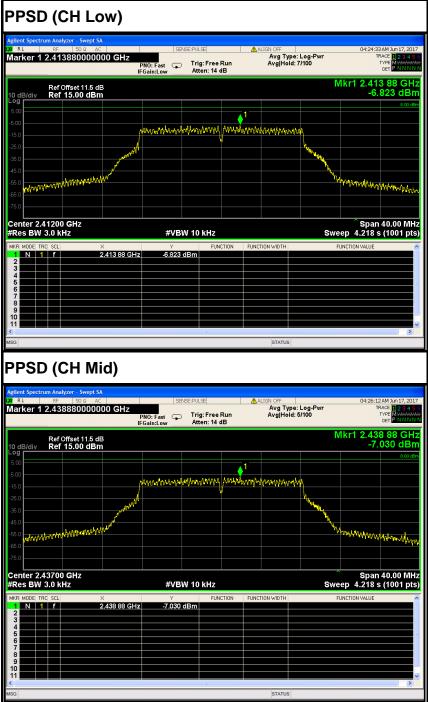




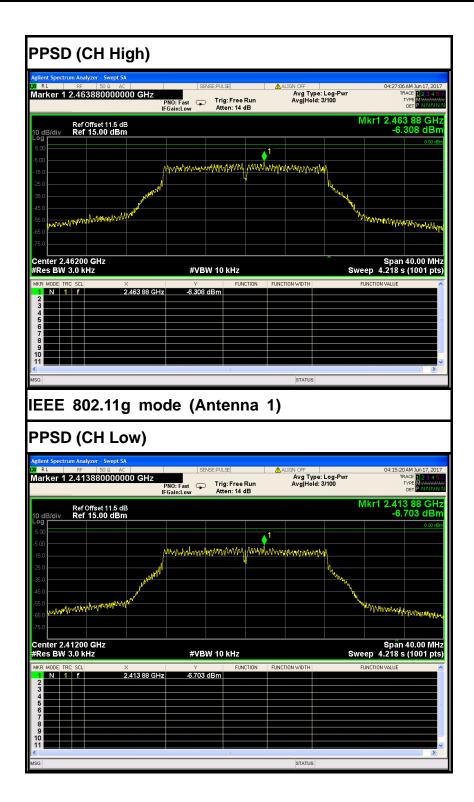




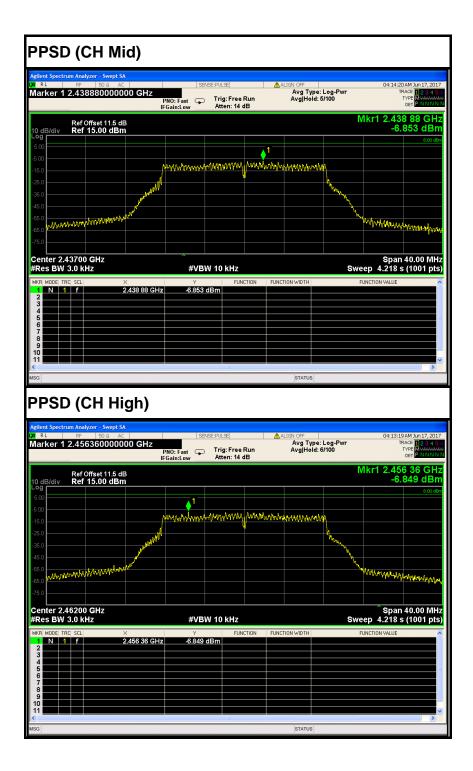




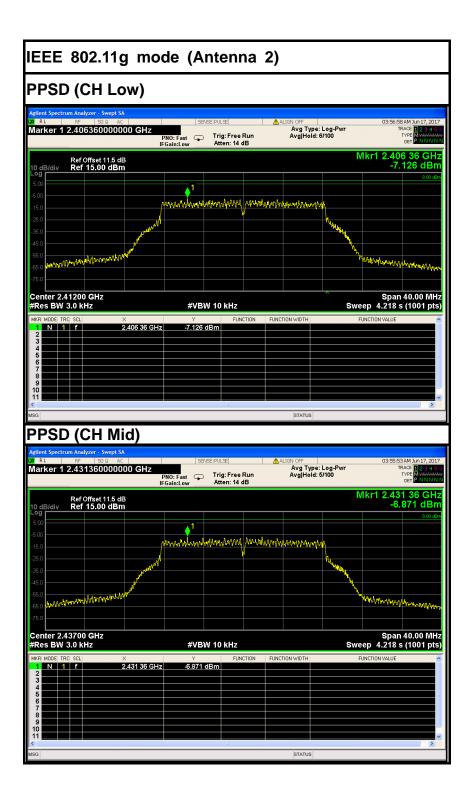



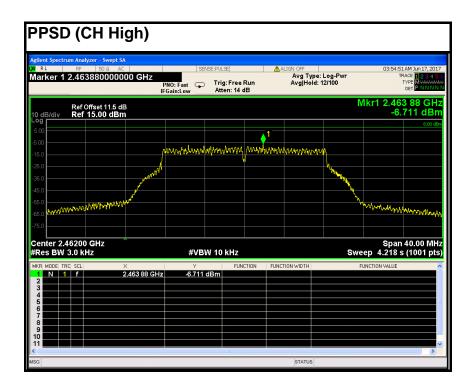




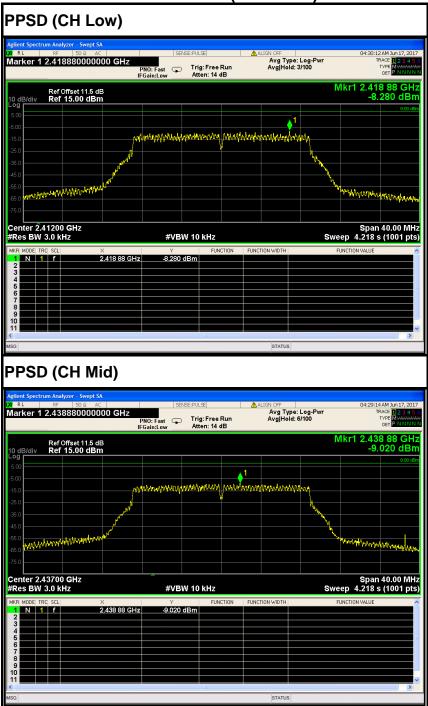


IEEE 802.11n HT20 MHz mode (Antenna 0)




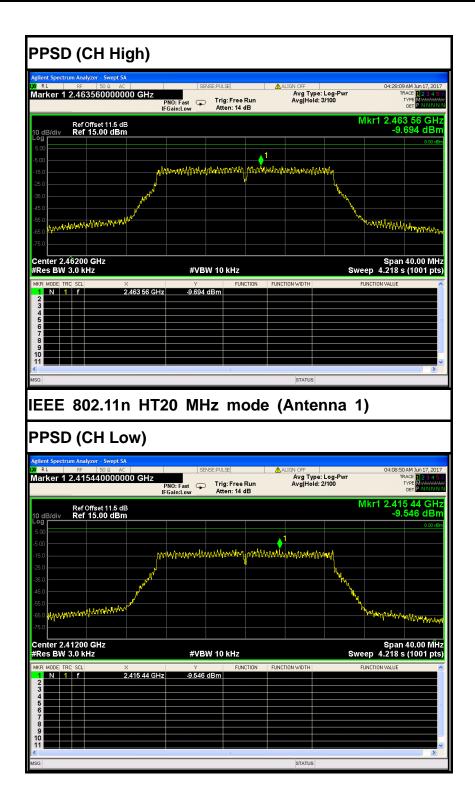




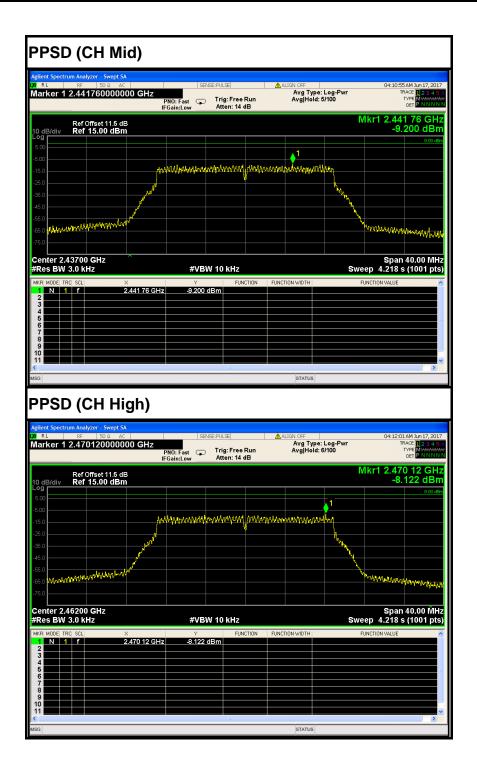




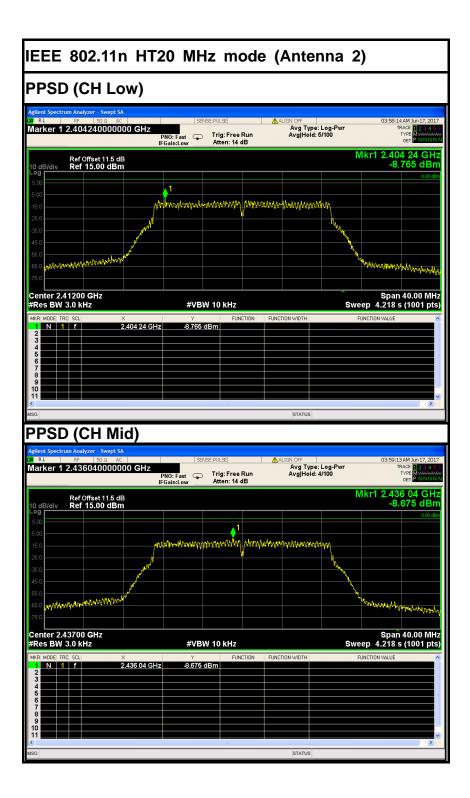



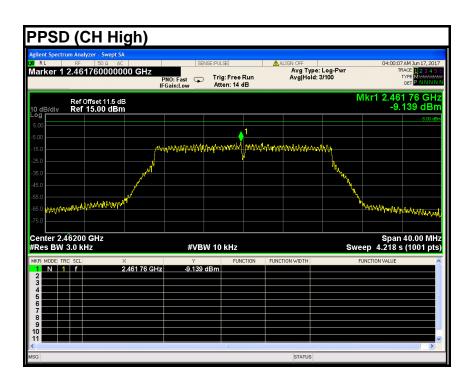




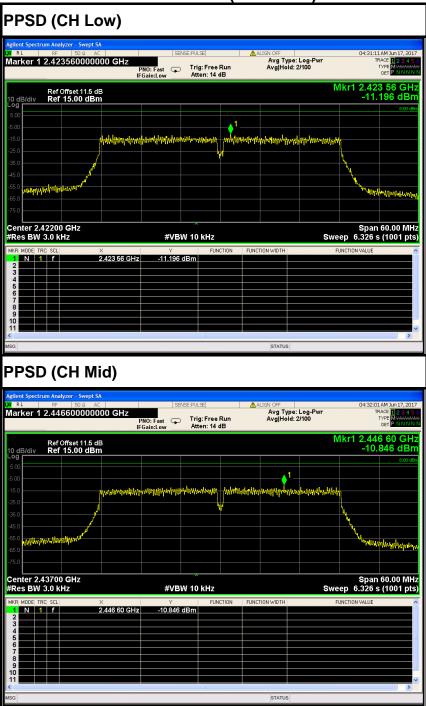

IEEE 802.11n HT40 MHz mode (Antenna 0)



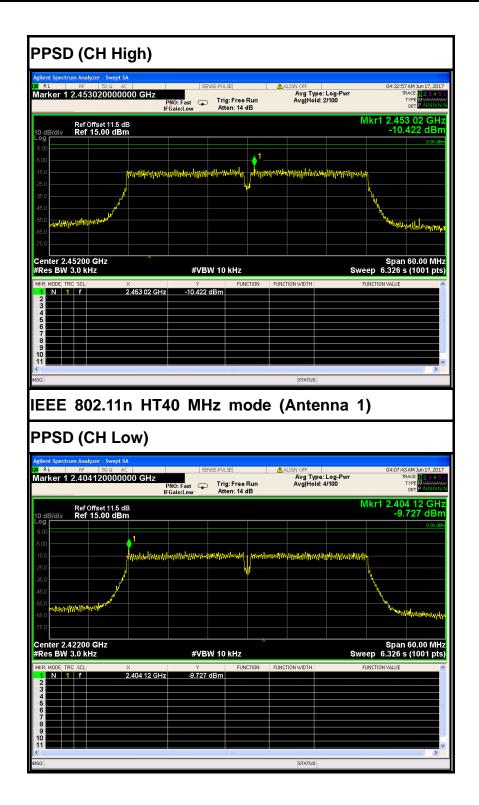



Ker 1 2.441680000000 GHz Mit 1 2.4 Biddin Ref 15.00 dBm Sweep 6.326 Mit 1 2.4 Sweep 6.326 Mit 1 2.4 Sweep 6.326 Mit 1 2.4 Sweep 6.326 Mit 1 2 Xit 1 2.4 Mit 1 2 Mit 1 2.4 Mit 1 2.4 Mit 1 2.4	83 AM Jun 17, TRACE 1, 2 3 TYPE MWW DET P NN 1 68 Q .598 d
Ref Offset 11.5 dB Ref Of	1 68 C .598 d
Alter 2.43700 GHz SPace 10.000 GHz SPECIAL SECOND STATUS SPECIAL	8.
Are 2.43700 GHz SBW 30 KHz SBW 30 KHz S	Artutetor
AND THE TRANSPORTER OF THE STORE FULSE SPECTRUM AND	And water by a place
Image: Sector Analyzer Source 11:5 cm <	lolutedog glas
Alter 2.43700 GHz the 2.43700 GHz the 2.43700 GHz the 2.43700 GHz the 2.441 68 GHz 1 1 2 2.441 68 GHz 10.599 dBm 1 1 2 2.441 68 GHz 1 2.449 1200000 GHz 1 2.449 12000000 GHz 1 2.449 120000000 GHz 1 2.449 120000000 GHz 1 2.449 120000000 GHz 1 2.440 Hz 1 2.440 Hz	rohunterapae
ALCON OFFICIAL SUBJECTION AND ALCON	a an the same the same
PS BW 3.0 KHz #VBW 10 KHz Sweep 6.326 MORE TRC SCI X F PUNCTION WIDTH PUNCTION WIDTH PUNCTION WALLE N 1 1 1 2.444168 GHz 10.599 dBm FUNCTION WIDTH PUNCTION WALLE STATUS PSD (CH High) MSD CH High SHEEPUSE Spectrum Analyzer - Swept 5A Spectrum Analyzer - Spectrum - Spectr	
MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE N 1 1 2 2441 68 GHz 10,598 dBm 1 2 2449 12 0000000 GHz 1 2 2449 12 0000000 GHz 1 2 2449 12 0000000 GHz 1 2 246 15.00 dBm 1 2 246 15.00 dBm 1 2 246 15.00 dBm 1 2 246 15.00 dBm 1 2 245 200 GHz 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	n 60.00 l
N 1 f 2.441 63 GHz -10.598 dBm Image: Stratus Stratus Stratus Sportnum Analyzer - Swept SA L RF 50.2 Acc OH Avg Type: Log-Pwr Avg Hold: 3/100 OH OH Ref 50.2 Acc C Septement Analyzer - Swept SA OH OH OH OH L Ref 50.2 Acc OH Trig: Free Run Atten: 14 dB Avg Type: Log-Pwr Avg Hold: 3/100 OH OH B/dui Ref offset 11.5 dB Mkr1 2.4 Stratus Stratus Stratus Stratus Stratus Stratus Stratus Avg Type: Log-Pwr Avg Hold: 3/100 Avg Type: Log-Pwr Avg Hold: 3/100 Avg Type: Log-Pwr Avg Hold: 3/100 Stratus S	s (1001
PSD (CH High)	
tt Spectrum Analyzer - Swept SA L BF 50 AC ISNEEPULSE ALLEN OFF 04:05 Ker 1 2:449120000000 GHz PNO: Fast IFG ain:Low Ref Offset 11:5 dB Ref Offset 11:5 dB Ref 15:00 dBm -17 Mkr1 2:4 -17 -17 -17 -17 -17 -17 -17 -17	
IFGain:Low Atten: 14 dB Ref Offset 115 dB -1' Ref 15.00 dBm -1' Image: State of the set of	25 AM Jun 17, TRACE 1 2 3 TYPE MWW DET P N N
Bridiv Ref 15.00 dBm - Image: Second Secon	
Image: space Image: space Space <td>.319 d</td>	.319 d
Image: state Image: state<	
With with with with with with with with w	
Wywyllwrtherter With an angel and angel and angel	
ter 2.45200 GHz Spa s BW 3.0 kHz #VBW 10 kHz Sweep 6.326 MODE TRC SCL X Y FUNCTION VEDTH FUNCTION VALUE	
Mrs. Work Spa nter 2.45200 GHz Spa rs BW 3.0 kHz #VEW 10 kHz Spa MODE_TRC_SCL X Y FUNCTION WIDTH FUNCTION VALUE	
Money Money Span Inter 2.45200 GHz Span SB W 3.0 kHz #VEW 10 kHz Sweep 6.326 MODE TRC SCL X Y Function vibitin Function value	
Iter 2.45200 GHz Spanner s BW 3.0 kHz #VBW 10 kHz Sweep 6.326 MODE TRC SCL X Y FUNCTION VEDTH FUNCTION VALUE	
Iter 2.45200 GHz Span s BW 3.0 kHz #VEW 10 kHz Sweep 6.326 MODE TRC SCL X Y FUNCTION VEDTH FUNCTION VALUE	
Spanner Spanner <t< td=""><td>and a Maria</td></t<>	and a Maria
Image: second	matalitera
MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE	nalajvlagas
	n 60.00
N 1 f 2.449 12 GHz -11.319 dBm	n 60.00
	n 60.00
	n 60.00
	n 60.00 l
	n 60.00 l
	n 60.00 l
	n 60.00
	n 60.00 l
	n 60.0



