

# TEST REPORT

**Applicant:** Thermor Ltd

**Address of Applicant:** 16975 Leslie St., Newmarket ON, L3Y 9A1 Canada

**Equipment Under Test (EUT)**

Product Name: JUMBO SCREEN WEATHER STATION

Model No.: 375BC, 375BU, 375NC, 375NU, 375RX,375TX

FCC ID: VX5-375RX

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart B:2013

**Date of sample receipt:** May 05, 2014

**Date of Test:** May 05-09, 2014

**Date of report issue:** May 12, 2014

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



**Robinson Lo**

**Laboratory Manager**

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## 3 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
5 GENERAL INFORMATION .....	5
5.1 CLIENT INFORMATION .....	5
5.2 GENERAL DESCRIPTION OF EUT .....	5
5.3 TEST MODE .....	5
5.4 TEST FACILITY .....	6
5.5 TEST LOCATION .....	6
5.6 DESCRIPTION OF SUPPORT UNITS .....	6
5.7 DEVIATION FROM STANDARDS .....	6
5.8 ABNORMALITIES FROM STANDARD CONDITIONS .....	6
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	6
6 TEST INSTRUMENTS LIST .....	7
7 TEST RESULTS AND MEASUREMENT DATA .....	8
7.1 RADIATED EMISSION .....	8
8 TEST SETUP PHOTO .....	14
9 EUT CONSTRUCTIONAL DETAILS .....	15

## 4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part15.107	N/A
Radiated Emissions	Part15.109	PASS

*PASS: The EUT complies with the essential requirements in the standard.*

*N/A: not applicable.*

## 5 General Information

### 5.1 Client Information

Applicant:	Thermor Ltd
Address of Applicant:	16975 Leslie St., Newmarket ON, L3Y 9A1 Canada
Manufacturer:	Thermor Ltd
Address of Manufacturer:	16975 Leslie St., Newmarket ON, L3Y 9A1 Canada

### 5.2 General Description of EUT

Product Name:	JUMBO SCREEN WEATHER STATION
Model No.:	375BC, 375BU, 375NC, 375NU, 375RX,375TX
Receiver frequency:	433.92MHz
Power supply:	DC 4.5V (3 * 1.5V C SIZE battery)

### 5.3 Test mode

Receiving mode	Keep the EUT in Receiving mode. (new battery is used during all test)
----------------	---

## 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS —Registration No.: CNAS L5775**

CNAS has accredited Global United Technology Services Co., Ltd. to ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

## 5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

Tel: 0755-27798480

Fax: 0755-27798960

## 5.6 Description of Support Units

None.

## 5.7 Deviation from Standards

None.

## 5.8 Abnormalities from Standard Conditions

None.

## 5.9 Other Information Requested by the Customer

None.

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 28 2014	Mar. 27 2015
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Dec. 05 2013	Dec. 04 2014
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 02 2013	Jul. 01 2014
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 23 2014	Feb. 22 2015
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2013	June 27 2014
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 28 2014	Mar. 27 2015
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 29 2014	Mar. 28 2015
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 29 2014	Mar. 28 2015
11	Coaxial cable	GTS	N/A	GTS210	Mar. 29 2014	Mar. 28 2015
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 29 2014	Mar. 28 2015
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 02 2013	Jul. 01 2014
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 02 2013	Jul. 01 2014
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2013	June 27 2014

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	Barometer	ChangChun	DYM3	GTS257	July 09 2013	July 08 2014

## 7 Test Results and Measurement Data

### 7.1 Radiated Emission

Test Requirement:	FCC Part15 B Section 15.109																							
Test Method:	ANSI C63.4:2003																							
Test Frequency Range:	30MHz to 2GHz																							
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																							
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120kHz</td> <td>300kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>AV</td> <td>1MHz</td> <td>3MHz</td> <td>Average Value</td> </tr> </tbody> </table>				Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																				
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value																				
Above 1GHz	Peak	1MHz	3MHz	Peak Value																				
	AV	1MHz	3MHz	Average Value																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.00</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.50</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.00</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.00</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>54.00</td> <td>Average Value</td> </tr> <tr> <td>74.00</td> <td>Peak Value</td> </tr> </tbody> </table>				Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.00	Quasi-peak Value	88MHz-216MHz	43.50	Quasi-peak Value	216MHz-960MHz	46.00	Quasi-peak Value	960MHz-1GHz	54.00	Quasi-peak Value	Above 1GHz	54.00	Average Value	74.00	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																						
30MHz-88MHz	40.00	Quasi-peak Value																						
88MHz-216MHz	43.50	Quasi-peak Value																						
216MHz-960MHz	46.00	Quasi-peak Value																						
960MHz-1GHz	54.00	Quasi-peak Value																						
Above 1GHz	54.00	Average Value																						
	74.00	Peak Value																						
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>																							
Test setup:	Below 1GHz																							

	<p>Above 1GHz</p>
Test environment:	Temp.: 25 °C    Humid.: 52%    Press.: 1 012mbar
Measurement Record:	Uncertainty: ± 4.5dB
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

**Note:**


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$Final\ Test\ Level = Receiver\ Reading + Antenna\ Factor + Cable\ Factor - Preamplifier\ Factor$$

## Measurement Data

Below 1GHz


Horizontal:

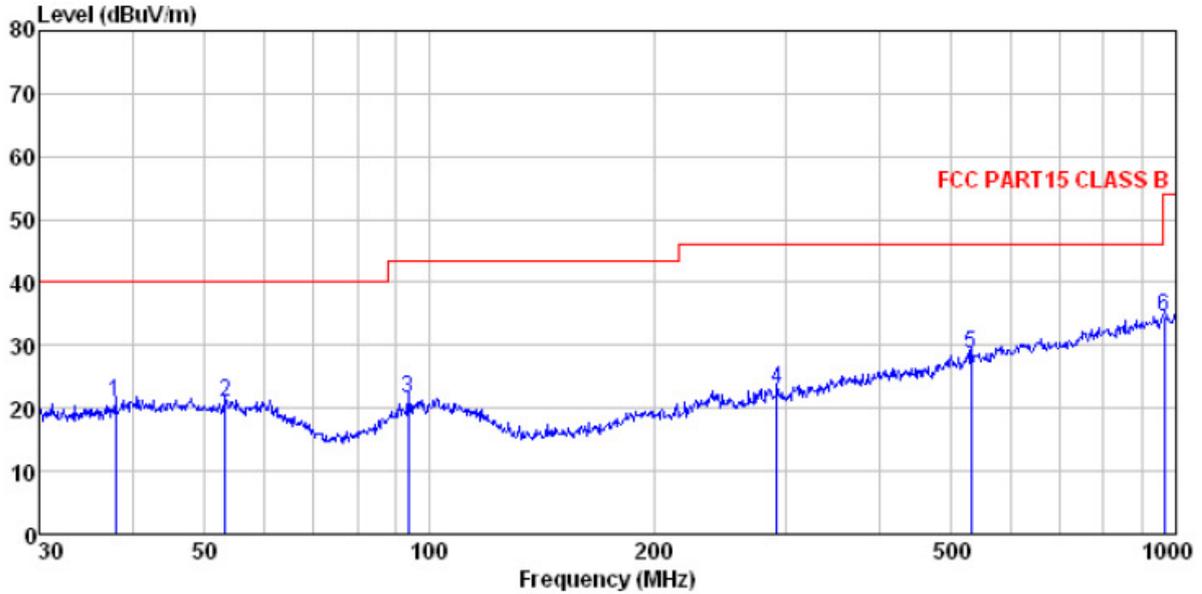

Site : 3m chamber  
 Condition : FCC PART15 CLASS B 3m VULB9163-2013M HORIZONTAL  
 Job No. : 0425RF  
 Test Mode : Receiving mode  
 Test Engineer: Yang

	Read	Antenna	Cable	Preamp	Level	Limit	Over	Remark
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	37.945	37.19	15.06	0.64	32.06	20.83	40.00	-19.17 QP
2	53.318	36.94	15.10	0.80	31.95	20.89	40.00	-19.11 QP
3	93.768	37.57	14.58	1.14	31.73	21.56	43.50	-21.94 QP
4	292.058	37.90	14.89	2.32	32.18	22.93	46.00	-23.07 QP
5	531.964	37.49	19.20	3.45	31.38	28.76	46.00	-17.24 QP
6	965.542	37.05	23.52	5.09	31.22	34.44	54.00	-19.56 QP

Vertical:

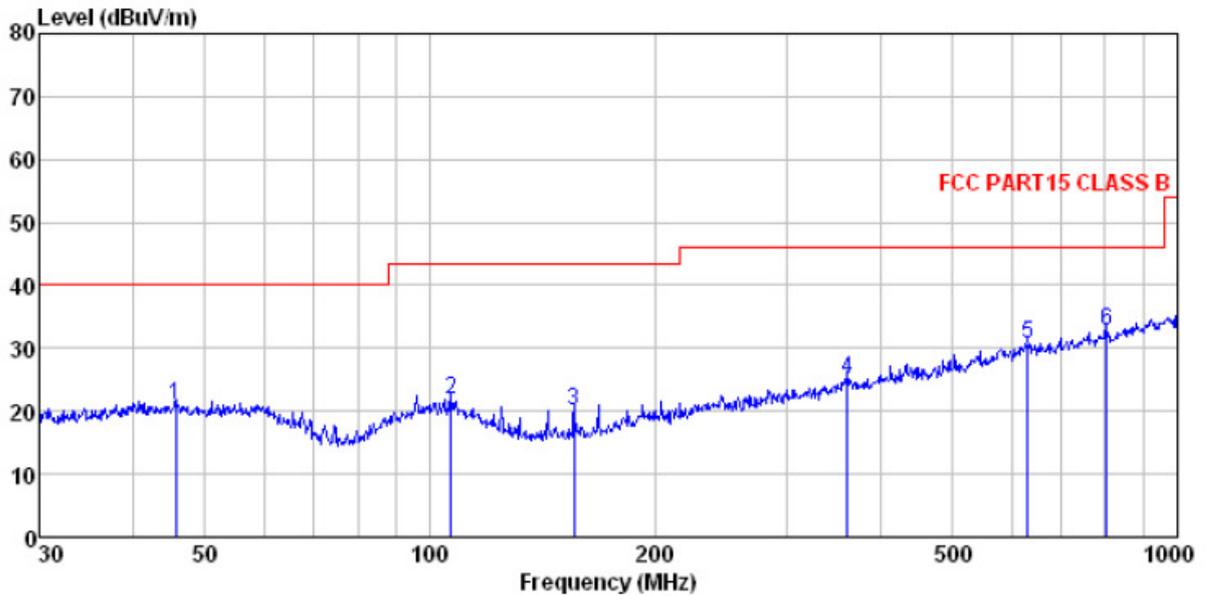


Site : 3m chamber  
 Condition : FCC PART15 CLASS B 3m VULB9163-2013M VERTICAL  
 Job No. : 0425RF  
 Test Mode : Receiving mode  
 Test Engineer: Yang

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	45.695	36.59	15.51	0.73	32.00	20.83	40.00	-19.17	QP
2	106.759	37.79	14.54	1.25	31.79	21.79	43.50	-21.71	QP
3	155.910	39.93	10.51	1.60	32.00	20.04	43.50	-23.46	QP
4	361.714	38.10	16.43	2.68	31.99	25.22	46.00	-20.78	QP
5	629.477	37.26	20.57	3.83	31.08	30.58	46.00	-15.42	QP
6	804.603	37.48	22.10	4.48	31.31	32.75	46.00	-13.25	QP

Above 1GHz


Horizontal:

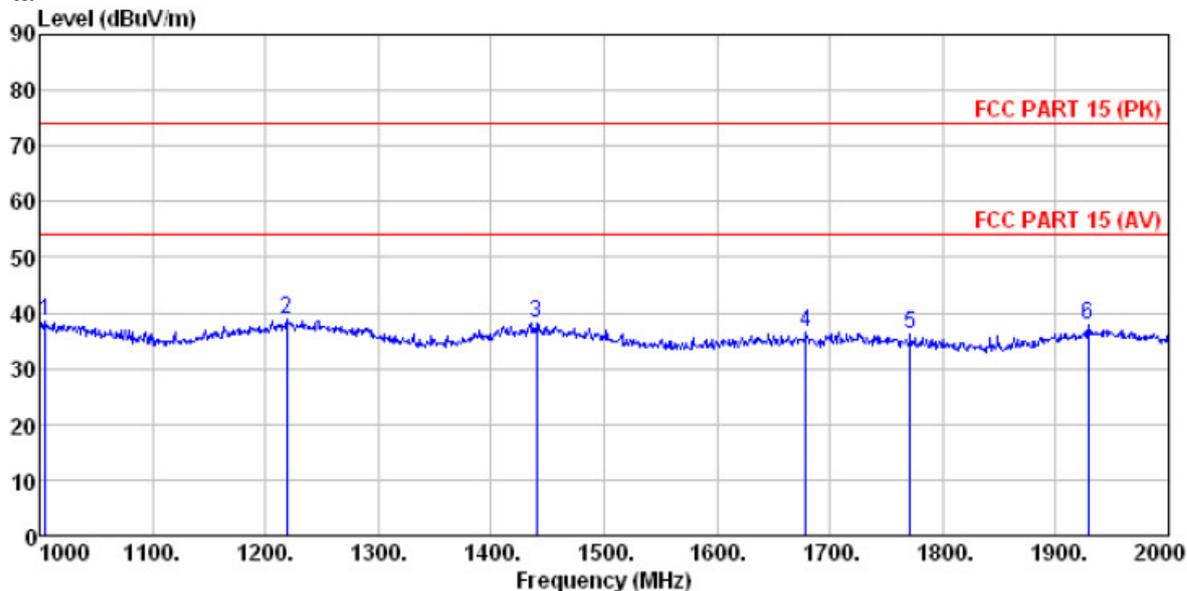

Site : 3m chamber  
 Condition : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) HORIZONTAL  
 Job No. : 0425RF  
 Test Mode : Receiving mode  
 Test Engineer: Yang

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1005.000	42.36	24.53	4.30	32.75	38.44	74.00	-35.56 Peak
2	1219.000	42.05	25.43	4.48	33.13	38.83	74.00	-35.17 Peak
3	1440.000	41.56	25.38	4.64	33.50	38.08	74.00	-35.92 Peak
4	1679.000	40.62	24.93	4.79	33.91	36.43	74.00	-37.57 Peak
5	1771.000	40.23	25.17	4.84	34.05	36.19	74.00	-37.81 Peak
6	1929.000	41.33	25.86	4.92	34.34	37.77	74.00	-36.23 Peak

Vertical:


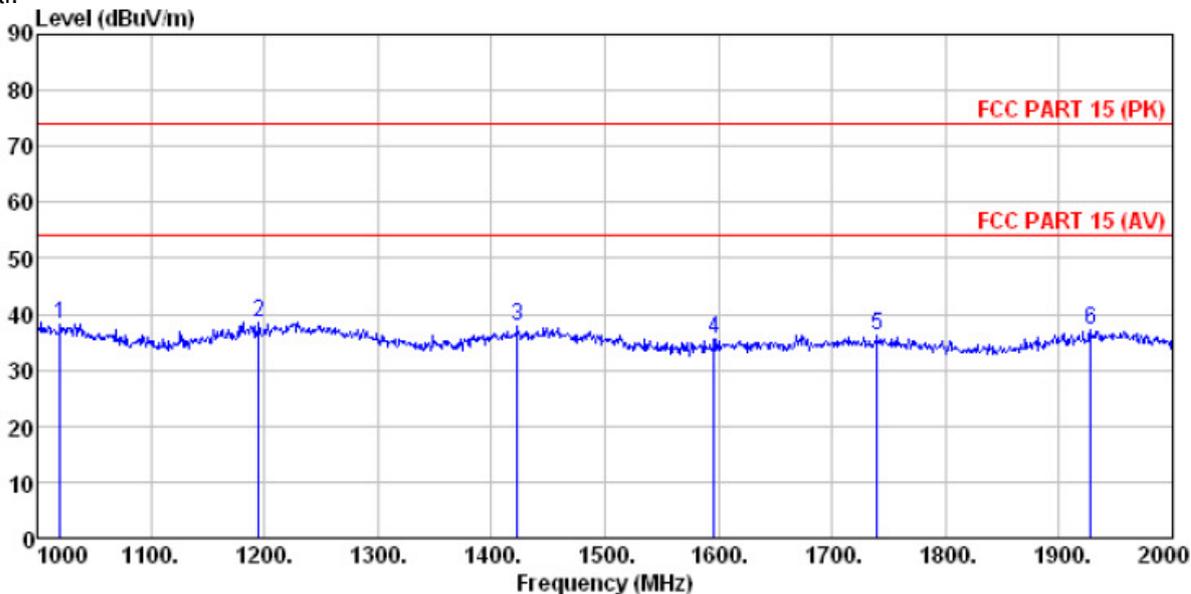


Site : 3m chamber  
 Condition : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) VERTICAL  
 Job No. : 0425RF  
 Test Mode : Receiving mode  
 Test Engineer: Yang

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1020.000	42.03	24.56	4.31	32.78	38.12	74.00	-35.88 Peak
2	1195.000	41.95	25.33	4.46	33.07	38.67	74.00	-35.33 Peak
3	1423.000	41.35	25.47	4.63	33.47	37.98	74.00	-36.02 Peak
4	1596.000	39.61	24.99	4.74	33.76	35.58	74.00	-38.42 Peak
5	1740.000	40.49	25.05	4.83	34.03	36.34	74.00	-37.66 Peak
6	1928.000	40.91	25.86	4.92	34.34	37.35	74.00	-36.65 Peak

## 8 Test Setup Photo



Radiated Emission

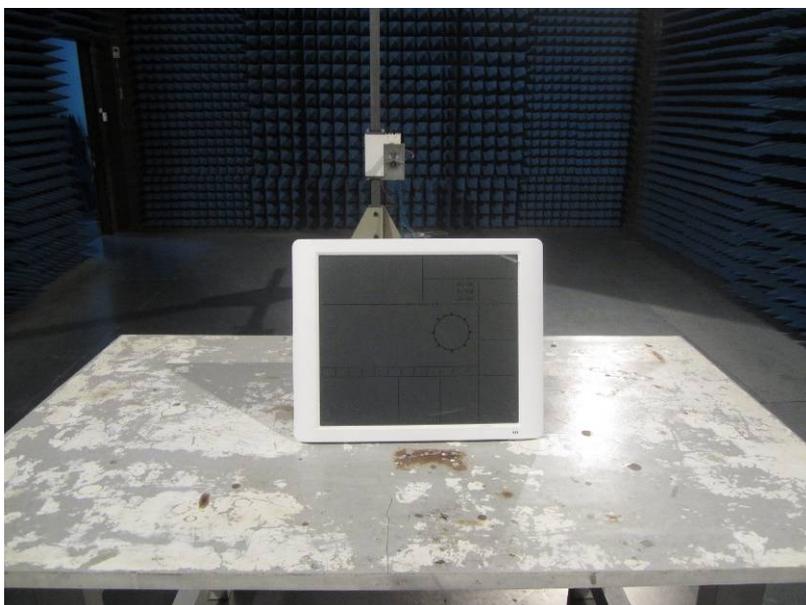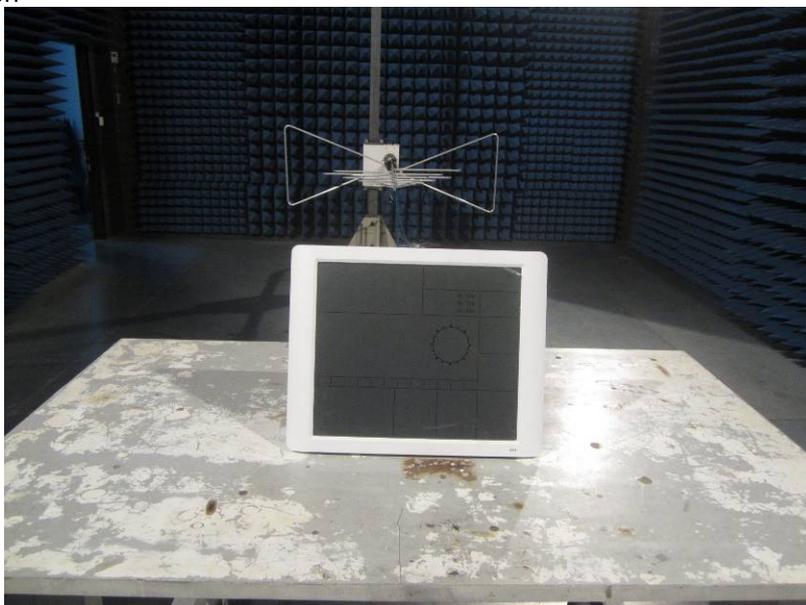



## 9 EUT Constructional Details









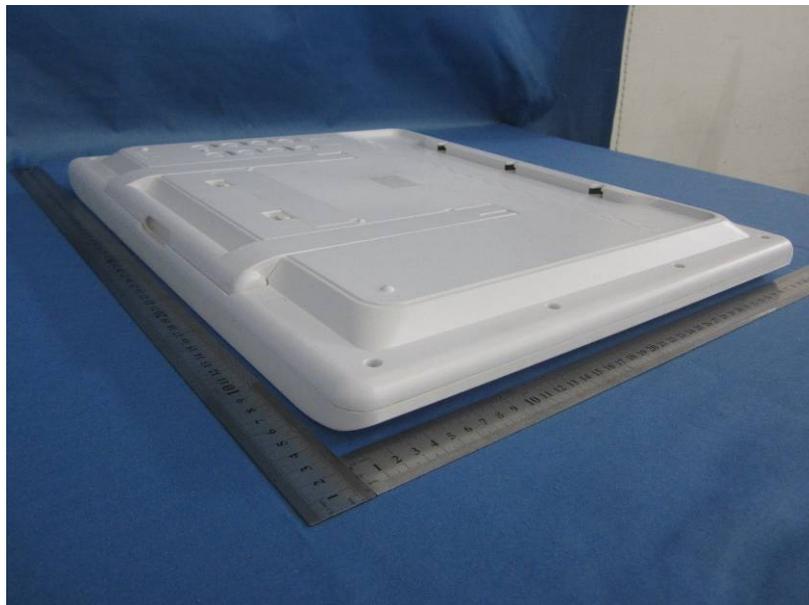
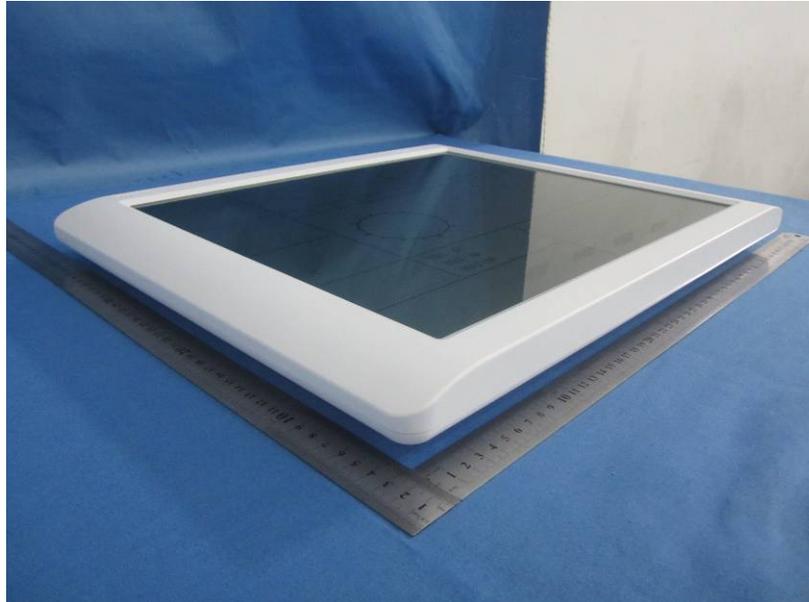



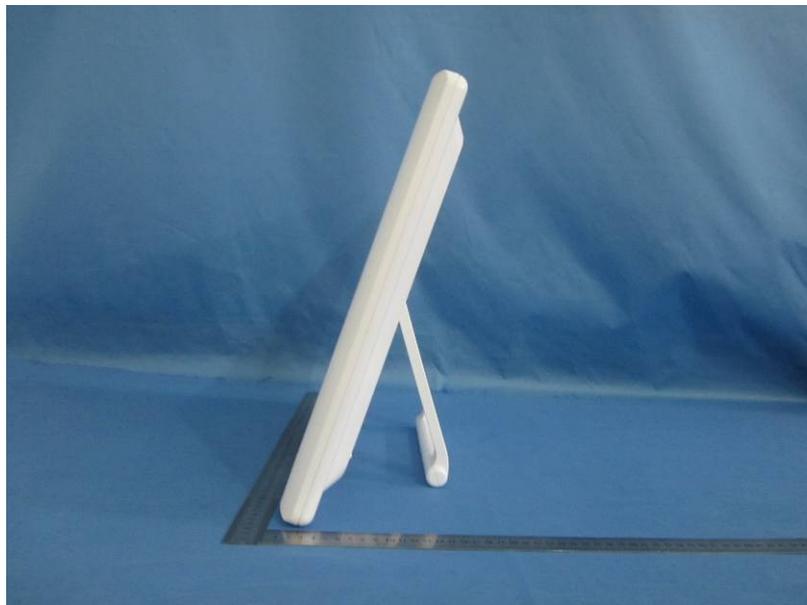


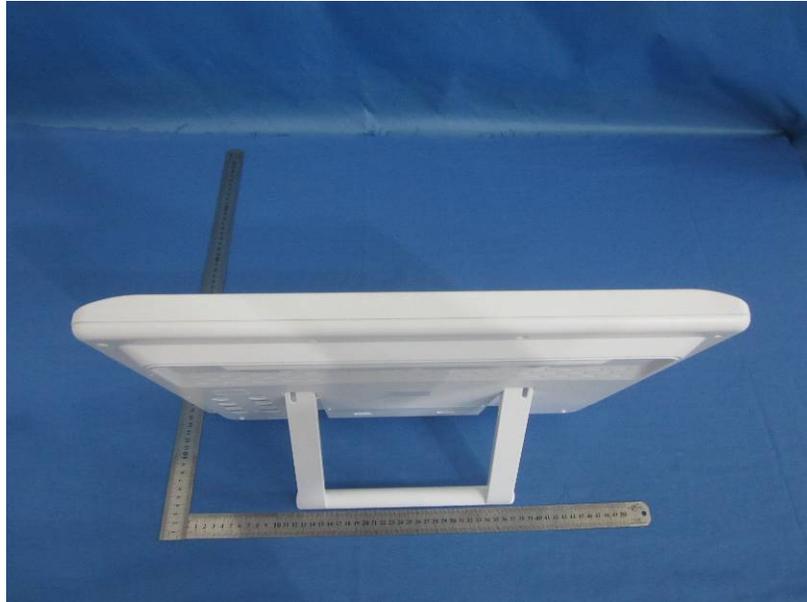


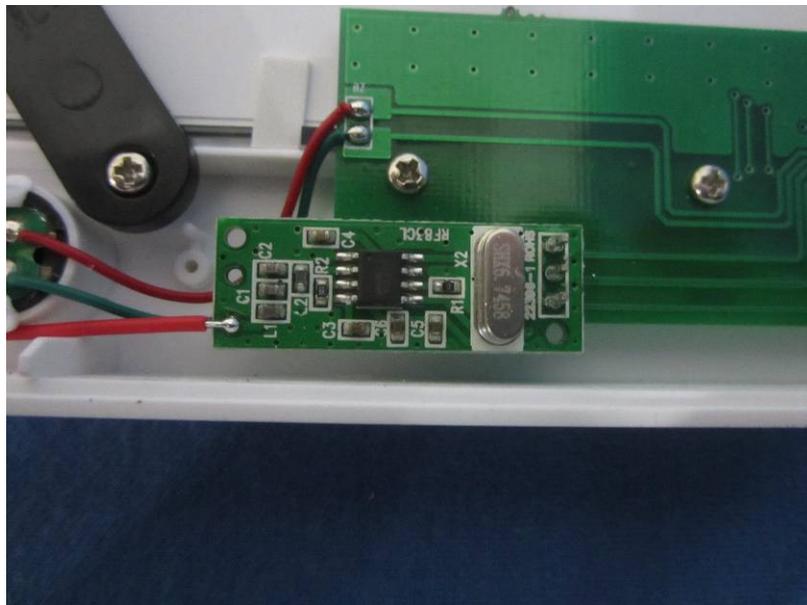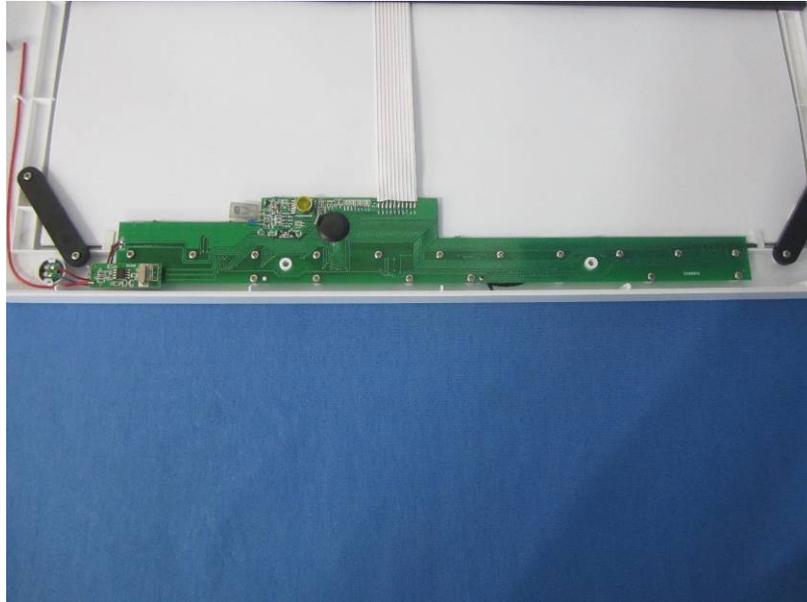

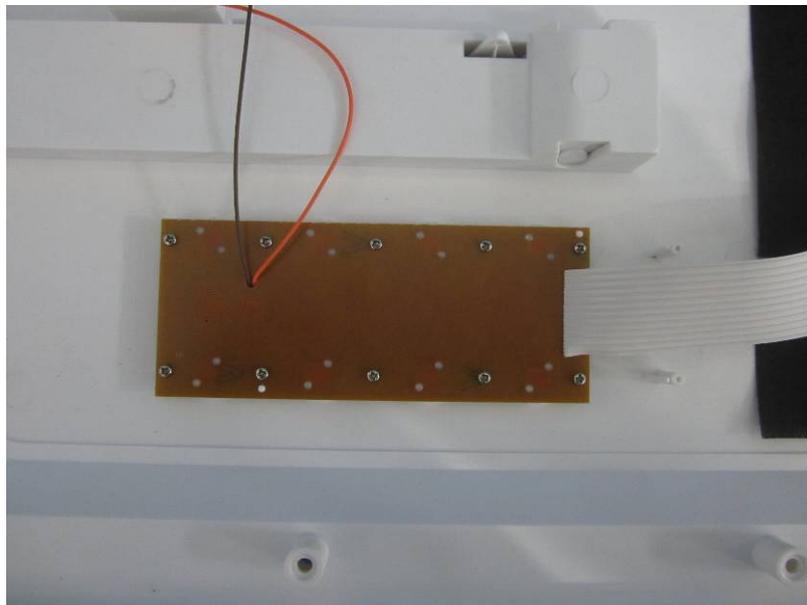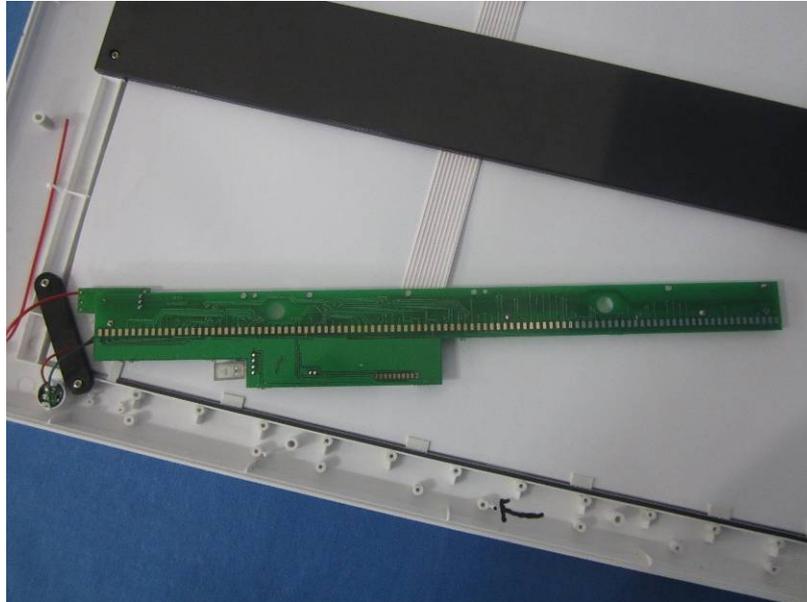

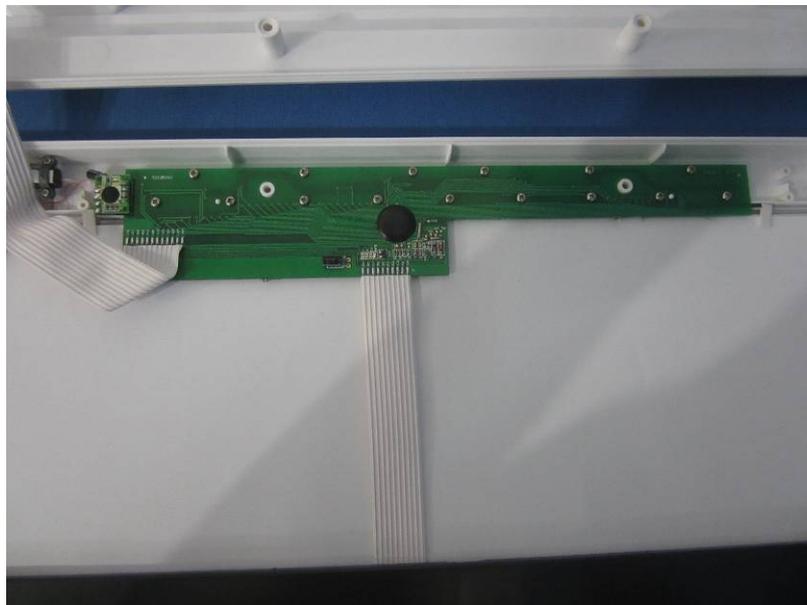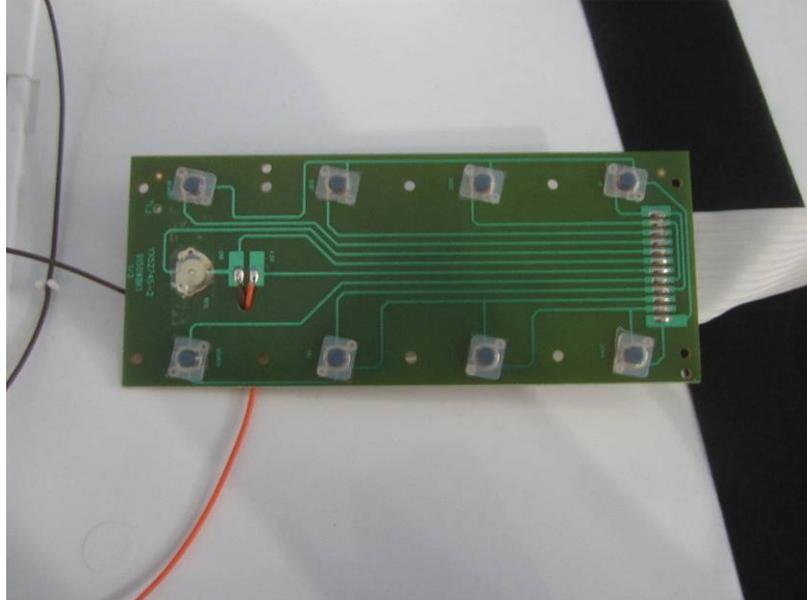

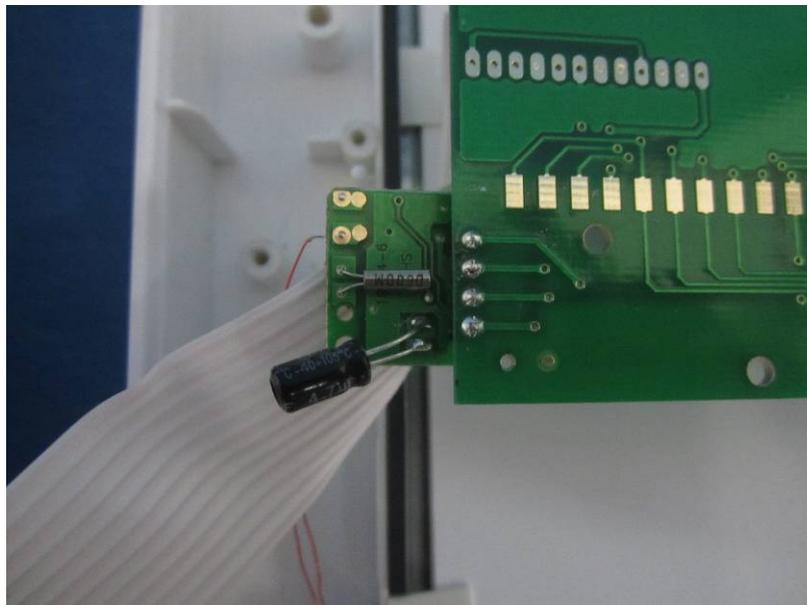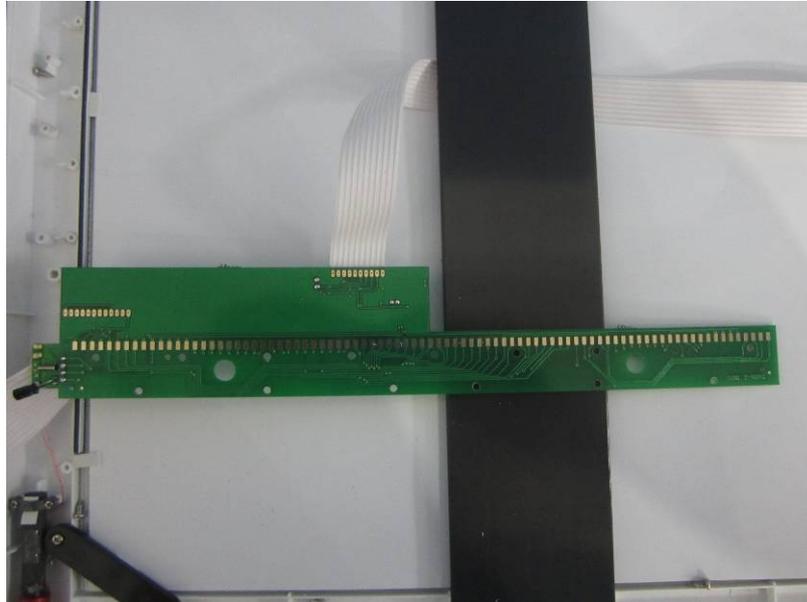

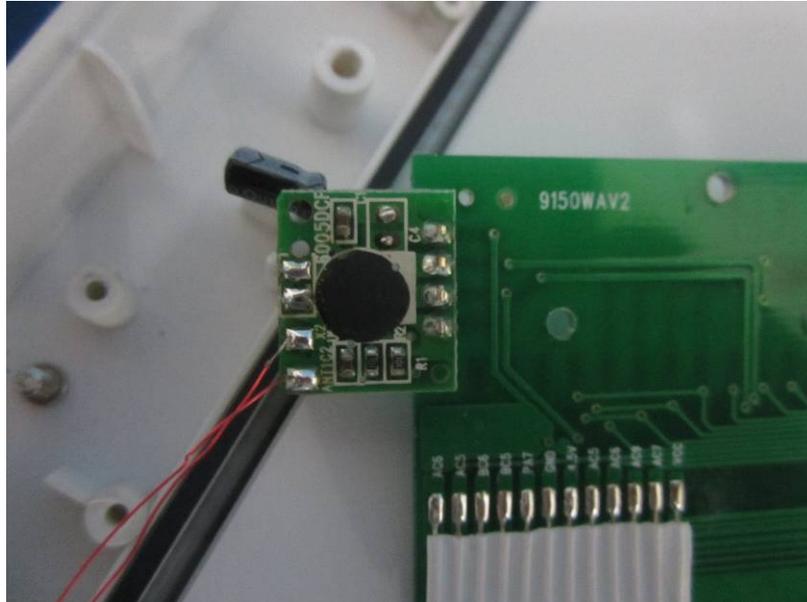

----- end-----