

Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 1 of 113

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

~ -

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF Wireless AP Router
wireless Ar Router
LOOPCOMM
LP-8616
N/A
VYTLP-8616
ER/2009/B0001
Dec. 18, 2009
§15.247,DTS
Loopcomm Technology, Ltd
1F,No.114,Lian Chen Rd.Chung-Ho City,Taipei Hsien,235 Taiwan
SGS Taiwan Ltd.
Electronics & Communication Laboratory
No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan.



Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company.除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/terms e-document htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/terms e-document htm</u>). Attention is drawn to the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488

台灣檢驗科技股份有限公司_



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 2 of 113

VERIFICATION OF COMPLIANCE

Applicant:	Loopcomm Technology, Ltd 1F,No.114,Lian Chen Rd.Chung-Ho City,Taipei Hsien,235 Taiwan
Product Name:	Wireless AP Router
Brand Name:	LOOPCOMM
FCC ID:	VYTLP-8616
Model Name:	LP-8616
Model Difference:	N/A
File Number:	ER/2009/B0001
Date of test:	Nov. 10, 2009 ~ Nov. 17, 2009
Date of EUT Received:	Nov. 10, 2009

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jazz Huang	Date:	Dec. 18, 2009	
Prepared By:	Jazz Huang/Engineer	Date:	Dec. 18, 2009	
Approved By:	Alex Chen / Engineer Project	Date:	Dec. 18, 2009	

v incent Su/Manager

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 3 of 113

Version

Version No.	Date	Description
00	Dec. 18, 2009	Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.osm/terms_endcom/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. **SGS Taiwan Ltd** No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488 t (886-2) 2299-3279



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 4 of 113

Table of Contents

1	GEN	ERAL INFORMATION	6
	1.1	Product Description	6
	1.2	Related Submittal(s) / Grant (s)	7
	1.3	Test Methodology	7
	1.4	Test Facility	7
	1.5	Special Accessories	7
	1.6	Equipment Modifications	7
2	SYS	FEM TEST CONFIGURATION	8
	2.1	EUT Configuration	8
	2.2	EUT Exercise	8
	2.3	Test Procedure	8
	2.4	Configuration of Tested System	9
3	SUM	IMARY OF TEST RESULTS	10
4	DES	CRIPTION OF TEST MODES	11
5	CON	DUCTED EMISSION TEST	12
	5.1	Standard Applicable:	12
	5.2	Measurement Equipment Used:	12
	5.3	EUT Setup:	12
	5.4	Measurement Procedure:	13
	5.5	Measurement Result:	13
6	PEA	K OUTPUT POWER MEASUREMENT	16
	6.1	Standard Applicable:	16
	6.2	Measurement Equipment Used:	17
	6.3	Measurement Procedure:	17
	6.4	Measurement Result:	18
7	6dB	Bandwidth	27
	7.1	Standard Applicable:	27
	7.2	Measurement Equipment Used:	27
	7.3	Test Set-up:	27
	7.4	Measurement Procedure:	27
	7.5	Measurement Result:	28
8	100K	KHz BANDWIDTH OF BAND EDGES MEASUREMENT	37
	8.1	Standard Applicable:	
	8.2	Measurement Equipment Used:	37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時比樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd.</u> No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工業區五工路 134 號



	8.3	Test SET-UP:	
	8.4	Measurement Procedure:	40
	8.5	Field Strength Calculation:	40
	8.6	Measurement Result:	40
9	SPUR	RIOUS RADIATED EMISSION TEST	53
	9.1	Standard Applicable	53
	9.2	Measurement Equipment Used:	53
	9.3	Test SET-UP:	53
	9.4	Measurement Procedure:	54
	9.5	Field Strength Calculation	54
	9.6	Measurement Result:	54
10	Peak 1	Power Spectral Density	103
10	Peak 10.1	Power Spectral Density Standard Applicable:	
10			
10	10.1	Standard Applicable:	
10	10.1 10.2	Standard Applicable:	
10	10.1 10.2 10.3	Standard Applicable:	103 103 103 103
10	10.1 10.2 10.3 10.4 10.5	Standard Applicable:	
	10.1 10.2 10.3 10.4 10.5	Standard Applicable:	
	10.1 10.2 10.3 10.4 10.5 ANTH	Standard Applicable:	
11	10.1 10.2 10.3 10.4 10.5 ANTH 11.1 11.2	Standard Applicable:	



1 GENERAL INFORMATION

1.1 Product Description

General:

Product Name:	Wireless Router
Brand Name:	LOOPCOMM
Model Name:	LP-8616
Model Difference:	N/A
Power Supply	Adaptor Model: DSA-12G-12FUS 120120, Supplier: DEV.

WLAN:

Frequency Range & Channel number:	802.11 b/g: 2412 – 2462 MHz, 11 channels 802.11 n_20MHz: 2412 – 2462 MHz, 11 channels 802.11 n_40MHz: 2422 – 2452 MHz, 9 channels
Rated Power:	802.11 b: 17.09 dBm 802.11 g: 14.95 dBm 802.11 n_20MHz: 13.99 dBm 802.11 n_40MHz: 13.96 dBm
Modulation type:	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Transmission Rate:	802.11 b: 1/2/5.5/11 Mbps; 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 - 72Mbps 802.11 n_40MHz: 13.5 - 150Mbps
Hardware version	V1.2
Software version	V1.3
Antenna Designation:	Dipole Antenna, The Max Peak Gain: 2dBi
Type of Emission:	36M0M7D

The EUT is compliance with IEEE 802.11 b/g/n Standard.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報台結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms a-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic documents is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document be a transaction from exercising all their rights and obligations under the transaction documents. **SGS Taiwan Ltd.** [No.134, Wu Kung Road, Wuku Industrial Zone, Taiwe 1/2 June 1/2 June

台灣檢驗科技股份有限公司__t

t (886-2) 2299-3279 f (886-2) 2298-0488



1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: <u>VYTLP-8616</u> filing to comply with Section 15.247 of the FCC Part 15, Subpart E Rules.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003): 2007. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-1.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.

t (886-2) 2299-3279



2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.


2.3.2 Radiated Emissions


The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 of ANSI C63.4-2003.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms - document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document. <u>INO 134</u>, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / d ±& & & £ x \$ 134 \$ ±.



2.4 Configuration of Tested System



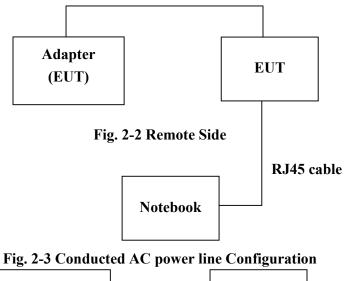

Adapter	EUT
(EUT)	

Table 2-1 Equipment Used in Tested System

Iten	n Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1.	Notebook	Compaq	Presarlo 2100	CNF354Q1R	Un-Shielding	Un-Shielding

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此難名結果僅對測試之樣品負責,同時比樣品僅保留的天。本報告未變本公司書面許可,不可當份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_edocument.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is dovised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document these not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SCS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taiwan /台北縣五段工業區五工路 134 號

t (886-2) 2299-3279

www.tw.sgs.com



SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b)	Peak Output Power	Compliant
§15.247(b)	6dB Bandwidth	Compliant
§15.247(c)	100 KHz Bandwidth of Frequency Band Edges	Compliant
§15.247(c)	TX Spurious Emission	Compliant
§15.247	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.thm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.hm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/terms e-document.hm</u>). Any holder of this docu-ment is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd</u>. No.134, Wu Kung Read, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司



4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting mode is programmed.

802.11 b mode: Channel low (2412MHz) \cdot mid (2437MHz) and high (2462MHz) with 1Mbps highest data rate are chosen for above testing.

802.11 g mode: Channel low (2412MHz) \cdot mid (2437MHz) and high (2462MHz) with 6Mbps highest data rate are chosen for above testing.

802.11 n_20MHz: Lowest (2412MHz), Mid (2437MHz) and high (2462MHz) with 6.5 Mbps highest data rate are chosen for above testing.

802.11 n_40MHz: Lowest (2422MHz), Mid(2437MHz) and high (2452MHz) with 13.5 Mbps highest data rate are chosen for above testing.

t (886-2) 2299-3279

www.tw.sgs.com



5 **CONDUCTED EMISSION TEST**

Standard Applicable: 5.1

According to §15.207, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range		Limits B(uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note		
1. The lower limit shall apply at the tr	ansition frequencies	

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

AC Power Line Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCS30	828985/004	09/16/2009	09/15/2010			
LISN	Rolf-Heine	NNB-2/16Z	99012	02/02/2009	02/01/2010			
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	02/02/2009	02/01/2010			
Coaxial Cables	N/A	WK CE Cable	N/A	10/30/2009	10/29/2010			

5.2 **Measurement Equipment Used:**

5.3 **EUT Setup:**

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 13 of 113

5.4 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

5.5 Measurement Result:


The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Note: Refer to next page for measurement data and plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditional issues</u> established therein. Even if printed this electronic Documents (<u>www.sgs.com/terms_and_conditional issues</u> established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document to a transaction from exercising all their rights and obligations under the transaction documents. SCS Taiwan Ltd. [No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台上縣五段工業區五工路 134 號



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 14 of 113

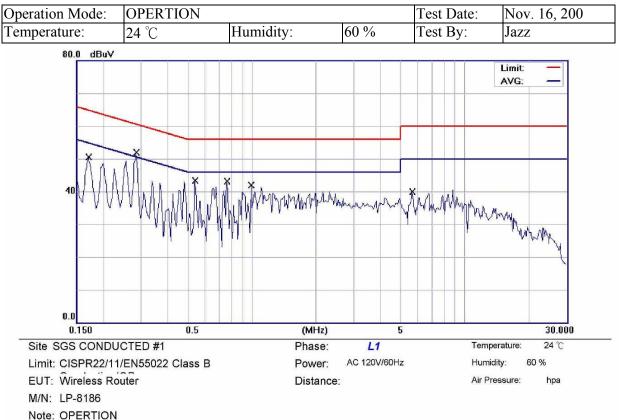


AC POWER LINE CONDUCTED EMISSION TEST DATA

No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1700	46.80	0.15	46.95	64.96	-18.01	QP	
2		0.1700	35.00	0.15	35.15	54.96	-19.81	AVG	
3	*	0.2850	45.50	0.10	45.60	60.67	-15.07	QP	
4		0.2850	35.10	0.10	35.20	50.67	-15.47	AVG	
5		0.5400	36.90	0.07	36.97	56.00	-19.03	QP	
6		0.5400	26.00	0.07	26.07	46.00	-19.93	AVG	
7		0.7600	40.00	0.08	40.08	56.00	-15.92	QP	
8		0.7600	29.80	0.08	29.88	46.00	-16.12	AVG	
9		0.9900	35.20	0.09	35.29	56.00	-20.71	QP	
10		0.9900	21.80	0.09	21.89	46.00	-24.11	AVG	
11		5.6600	32.50	0.19	32.69	60.00	-27.31	QP	
12		5.6600	21.10	0.19	21.29	50.00	-28.71	AVG	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_ad_conditions.htm</u>) and <u>printed</u> this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.om/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document be a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd.</u> No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台上縣五殿工業區五丁路 134 號



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 15 of 113

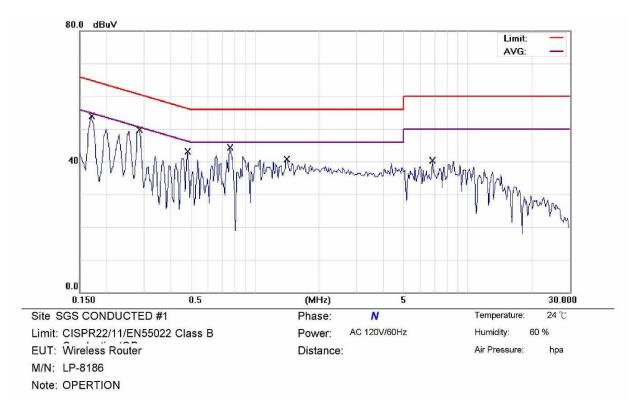

No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1700	51.90	0.17	52.07	64.96	-12.89	QP	
2		0.1700	41.10	0.17	41.27	54.96	-13.69	AVG	
3	*	0.2850	48.30	0.13	48.43	60.67	-12.24	QP	
4		0.2850	38.20	0.13	38.33	50.67	-12.34	AVG	
5		0.4800	40.80	0.10	40.90	56.34	-15.44	QP	
6		0.4800	30.00	0.10	30.10	46.34	-16.24	AVG	
7		0.7600	42.30	0.11	42.41	56.00	-13.59	QP	
8		0.7600	32.10	0.11	32.21	46.00	-13.79	AVG	
9		1.4100	36.10	0.13	36.23	56.00	-19.77	QP	
10		1.4100	24.40	0.13	24.53	46.00	-21.47	AVG	
11		6.8400	32.80	0.26	33.06	60.00	-26.94	QP	
12		6.8400	22.70	0.26	22.96	50.00	-27.04	AVG	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_ad_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_edocument.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.om/atterms_edocument.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區工路 134



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 16 of 113

6 PEAK OUTPUT POWER MEASUREMENT

6.1 Standard Applicable:

According to §15.247(a)(2), (b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode. (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for

fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for

fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

台灣檢驗科技股份有限公司___



Conducted Emission Test Site									
EQUIPMENT	MODEL	SERIAL	LAST	CAL DUE.					
ТҮРЕ		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010				
Spectrum Analyzer	Agilent	E4440A	MY45304525	01/23/2008	01/22/2010				
DC Block	Agilent	BLK-18	155452	07/05/2009	07/04/2010				
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2009	01/04/2010				
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2009	07/04/2010				
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2009	07/04/2010				
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2009	07/04/2010				
Splitter	Agilent	11636B	N/A	07/05/2009	07/04/2010				

6.2 Measurement Equipment Used:

6.3 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Channel power function, RBW=1MHz, VBW = 3MHz,Bandwidth=26dB occupied Bandwidth)
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 18 of 113

6.4 Measurement Result:

802.11b

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2412.00	16.94	0.00	16.94	0.049431	1
2437.00	16.92	0.00	16.92	0.049204	1
2462.00	17.09	0.00	17.09	0.051168	1

802.11g

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2412.00	14.95	0.00	14.95	0.031261	1
2437.00	14.92	0.00	14.92	0.031046	1
2462.00	14.83	0.00	14.83	0.030409	1

802.11n 20M

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2412.00	13.90	0.00	13.90	0.024547	1
2437.00	13.99	0.00	13.99	0.025061	1
2462.00	13.99	0.00	13.99	0.025061	1

802.11n 40M

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2422.00	13.96	0.00	13.96	0.024889	1
2437.00	13.96	0.00	13.96	0.024889	1
2452.00	13.84	0.00	13.84	0.024210	1


Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此業給結果僅對調达之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions full</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/terms is com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to is Client and this document. <u>SGS Taiwan Ltd</u>. No.134, Wu Kung Read, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工 業區五工路 134 號



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 19 of 113

802.11b, 1Mbps Power Output Plot (CH Low)

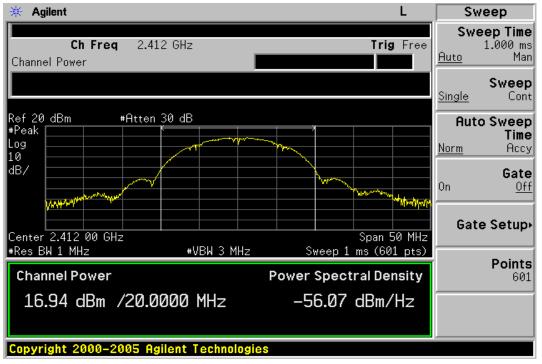

Power Output Plot (CH Mid)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions, htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms and conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.onsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SCS Taiwan Ltd. |No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 5 ± % Ea ± % 134 mg.


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 20 of 113

Power Output Plot (CH High)

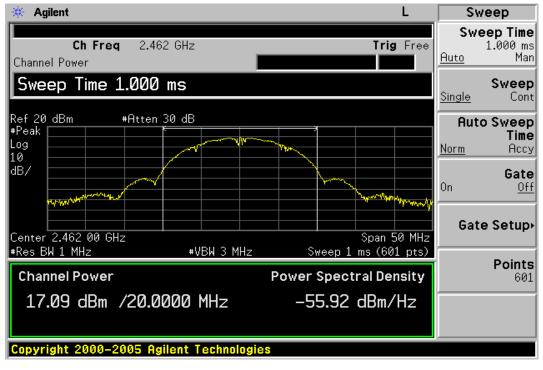


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此業格結果僅對調試之樣品負責,同時比樣品僅保留的天。本報告未總本公司書面許可,不可需扮複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document bes not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工業區五工路 134 號




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 21 of 113

802.11g, 6Mbps Power Output Plot (CH Low)

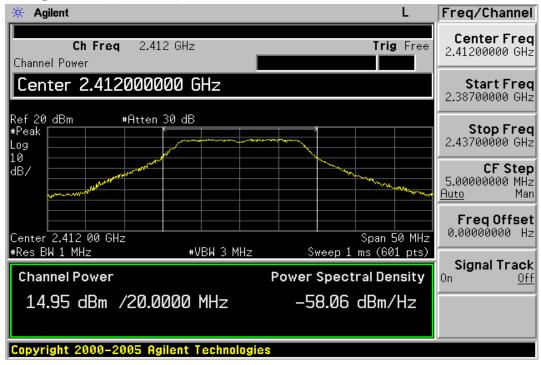

Power Output Plot (CH Mid)

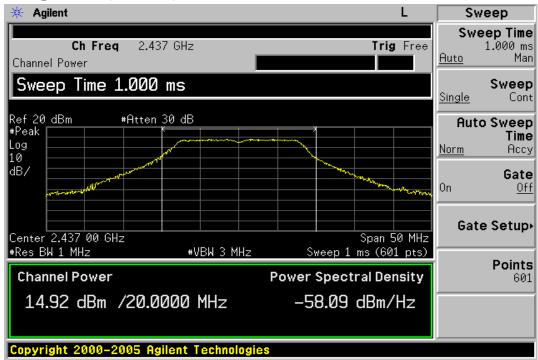

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms - document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.onsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document to exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SCS Taiwan Ltd. ______N K Mu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台上縣 五股工 案 區 五 珍 134 號.


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 22 of 113

Power Output Plot (CH High)

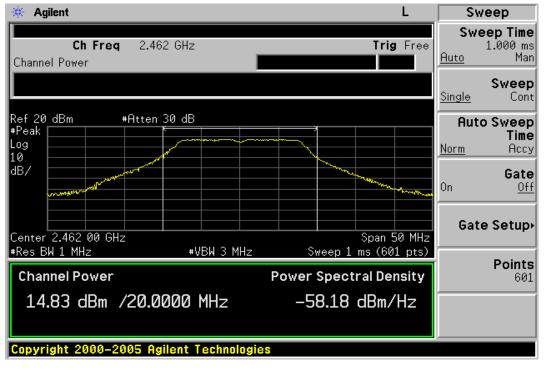


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,比難名結果僅對調試之樣品負責、同時比樣品僅保留90天。本報告未輕本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms - edocument.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document be a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣 无股工業區 无工路 134 號

www.tw.sgs.com




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 23 of 113

802.11n_20M, 6.5Mbps Power Output Plot (CH Low)

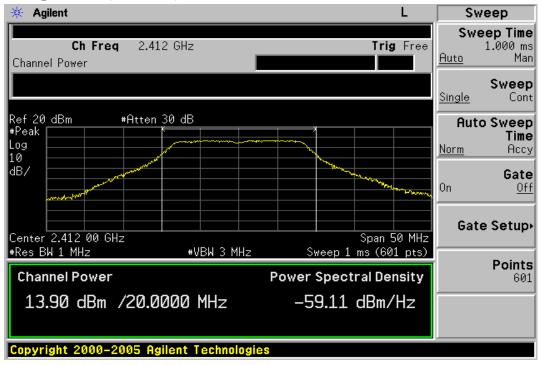

Power Output Plot (CH Mid)

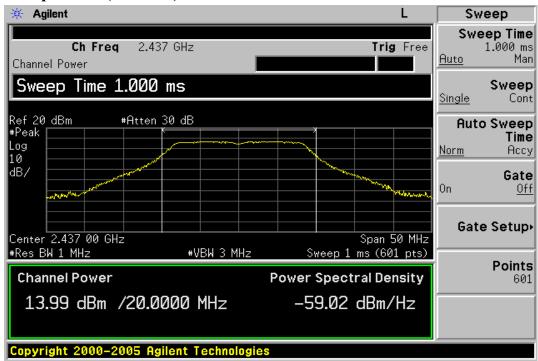

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測达之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. **SCS Taiwan Ltd.** [No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台上縣五殿工業區工路 134.


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 24 of 113

Power Output Plot (CH High)

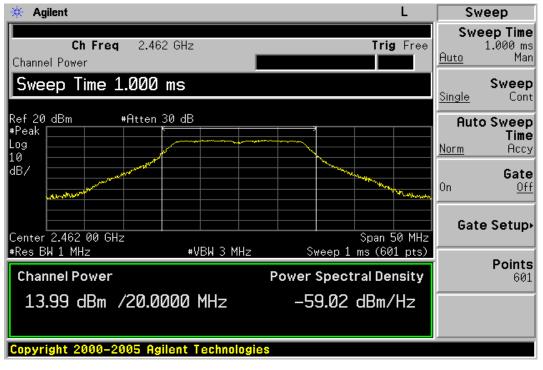


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此業格結果僅對調試之樣品負責,同時比樣品僅保留的天。本報告未總本公司書面許可,不可需扮複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document bes not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工業區五工路 134 號

www.tw.sgs.com




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 25 of 113

802.11n_40M, 13.5Mbps Power Output Plot (CH Low)

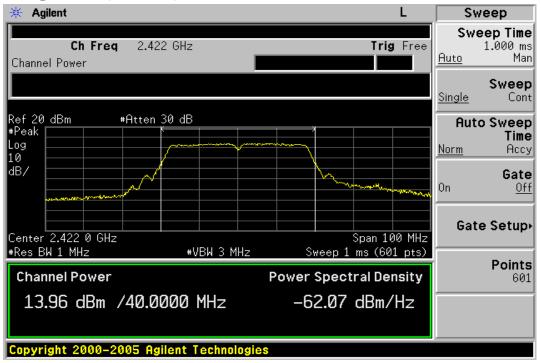

Power Output Plot (CH Mid)

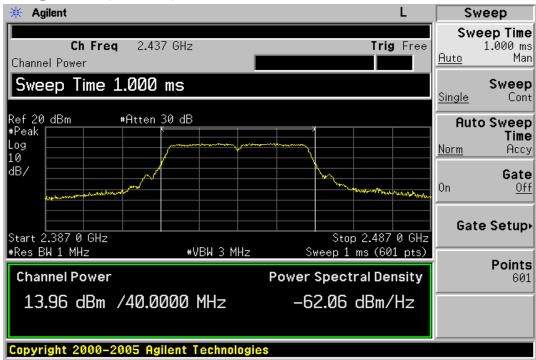

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測达之樣品負責,同時此樣品僅保留的天。本報告未絕本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. **SGS Taiwan Ltd.** [No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 分上縣 五股工業 區 五 邓 134 素.


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 26 of 113

Power Output Plot (CH High)

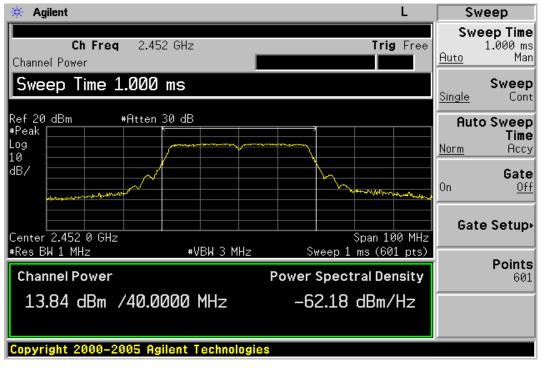

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,比難名結果僅對測試之樣品負責, 同時比樣品僅保留的天。本報告未總本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_edocument.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document test to a transaction from exercising all their rights and objection dugations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣 五殿工 業區 五工路 134 號



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 27 of 113

7 6dB Bandwidth

7.1 Standard Applicable:

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz,2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

7.2 Measurement Equipment Used:

Refer to section 6.2 for details.

7.3 Test Set-up:

Refer to section 6.3 for details.

7.4 Measurement Procedure:

1.Place the EUT on the table and set it in transmitting mode.

- 2.Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3.Set the spectrum analyzer as RBW=100KHz, VBW = RBW, Span= 50MHz, Sweep=auto
- 4. Mark the peak frequency and –6dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms - document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.onsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document be a transaction from exercising all their inghts and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



7.5 **Measurement Result:**

802.11b								
Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result					
2412	10.120	> 500	PASS					
2437	10.129	> 500	PASS					
2462	10.120	> 500	PASS					

802.11g

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	16.596	> 500	PASS
2437	16.611	> 500	PASS
2462	16.608	> 500	PASS

802.11n 20M

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	17.818	> 500	PASS
2437	17.804	> 500	PASS
2462	17.769	> 500	PASS

802.11n 40M

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2422	36.468	> 500	PASS
2437	36.469	> 500	PASS
2452	36.471	> 500	PASS

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅剝測試之樣品負貨,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/terms intentions</u>, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd</u>. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣 五股工 業區 五工路 134 號

台灣檢驗科技股份有限公司




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 29 of 113

802.11b 6dB Band Width Test Data CH-Low

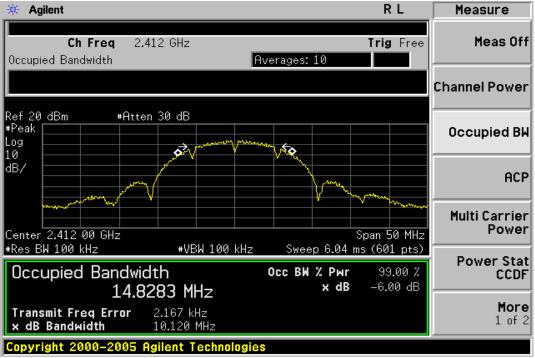

6dB Band Width Test Data CH-Mid

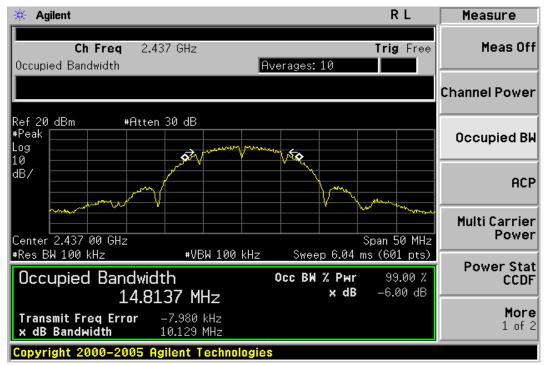

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此業指名結果僅對測試之樣品負責,同時比樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms - document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SCS Taiwan Ltd.</u> [No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台上縣 五段 工 業 0.34 號,



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 30 of 113

6dB Band Width Test Data CH-High




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此類名結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未屬本公司書面許可,不可當份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_edocument.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic documents to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document be a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工業區五工路 134 號




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 31 of 113

802.11g 6dB Band Width Test Data CH-Low

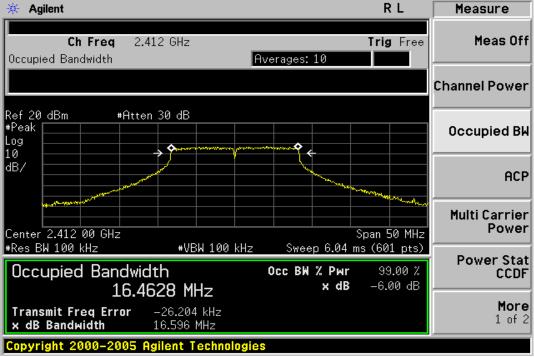

6dB Band Width Test Data CH-Mid

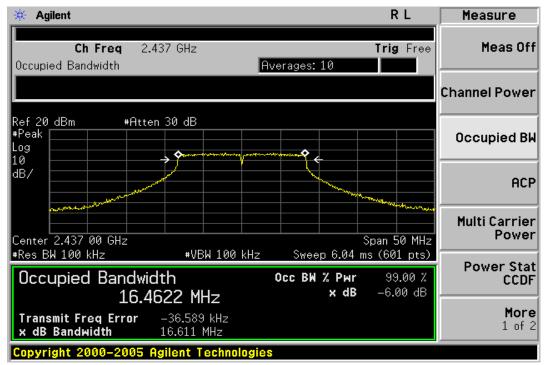

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此業指名結果僅對測試之樣品負責,同時比樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms - document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SCS Taiwan Ltd.</u> [No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台上縣 五段 工 業 0.34 號,



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 32 of 113

6dB Band Width Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此類名結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未屬本公司書面許可,不可當份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_edocument.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic documents to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document be a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工業區五工路 134 號


t (886-2) 2299-3279

www.tw.sgs.com




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 33 of 113

802.11n_20M 6dB Band Width Test Data CH-Low

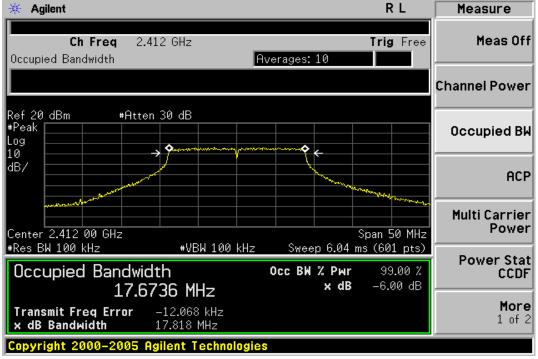

6dB Band Width Test Data CH-Mid

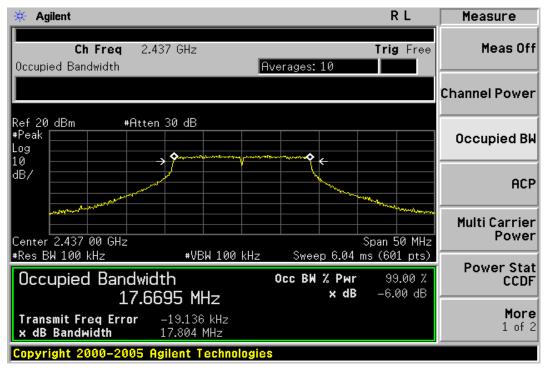


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測达之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. **SCS Taiwan Ltd.** [No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台上縣五殿工業區工路 134.

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 34 of 113

6dB Band Width Test Data CH-High

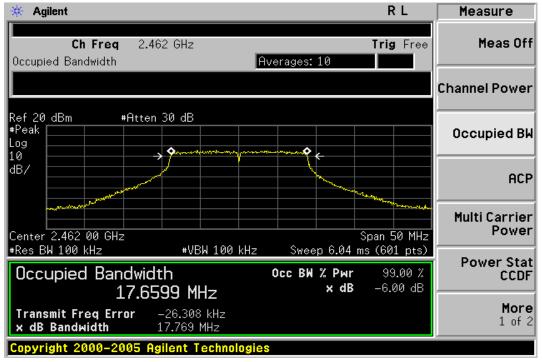


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此類名結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未屬本公司書面許可,不可當份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_edocument.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic documents to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document be a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工業區五工路 134 號




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 35 of 113

802.11n_40M 6dB Band Width Test Data CH-Low

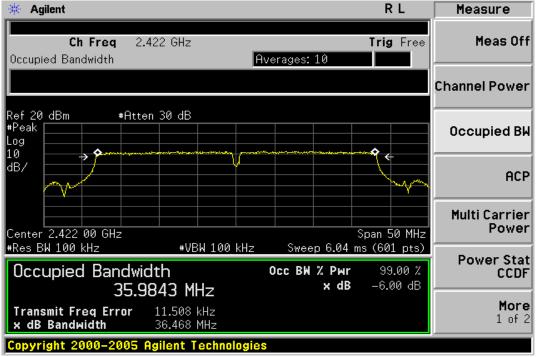

6dB Band Width Test Data CH-Mid

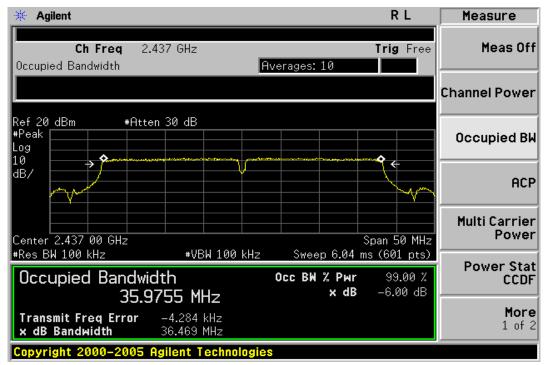


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測达之樣品負責,同時此樣品僅保留的天。本報告未絕本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. **SGS Taiwan Ltd.** [No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 分上縣 五股工業 區 五 邓 134 素.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 36 of 113

6dB Band Width Test Data CH-High

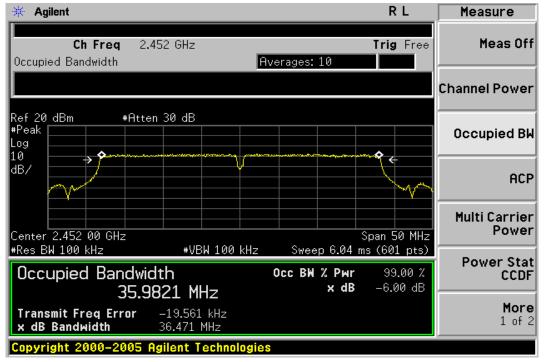

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此類名結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_ed-cument.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document to a normaria parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工業區五工路 134 號



8 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1 Standard Applicable:

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

8.2 Measurement Equipment Used:

8.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditional issues</u> established therein. Even if printed this electronic Documents (<u>www.sgs.com/terms_and_conditional issues</u> established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document to a transaction from exercising all their rights and obligations under the transaction documents. SCS Taiwan Ltd. [No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台 北縣 五殿工 素區 五工路 134 素



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 38 of 113

8.2.2 Radiated emission:

966 Chamber									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
ТҮРЕ		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2009	02/11/2010				
Spectrum Analyzer	A '1 /		MY43360126	04/19/2008	04/18/2010				
Bilog Antenna	SCHWAZBECK	VULB9160	9160-3136	11/15/2009	11/14/2010				
Horn antenna			9120D-673	05/09/2008	05/08/2010				
Pre-Amplifier	Agilent	8447D	1937A02834	11/30/2008	11/29/2009				
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2009	01/04/2010				
Turn Table	HD	DT420	N/A	N.C.R	N.C.R				
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R				
Controller	HD	HD100	N/A	N.C.R	N.C.R				
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2009	01/04/2010				
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2009	01/04/2010				
3m Site	SGS	966 chamber	N/A	11/08/2009	11/09/2010				

8.3 Test SET-UP:

8.3.1 Conducted Emission at antenna port:

Refer to section 6.3 for details.

t (886-2) 2299-3279


f (886-2) 2298-0488




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 39 of 113

8.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

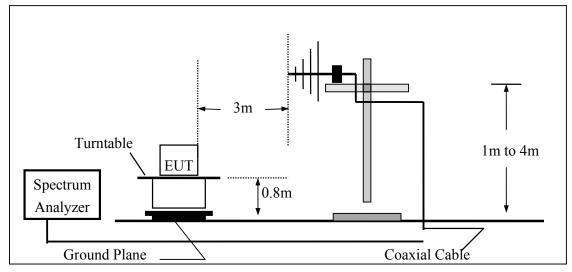

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

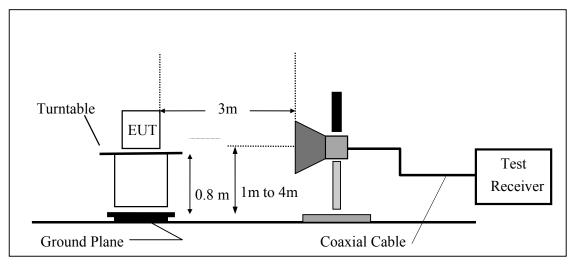

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對側試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions for Electronic Documents</u> (<u>www.sgs.com/terms and conditions for Electronic Documents</u> is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document to a transaction from exercising all their rights and obligations under the transaction documents. SCS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司_



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=50MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.

8.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


8.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 41 of 113

802.11b

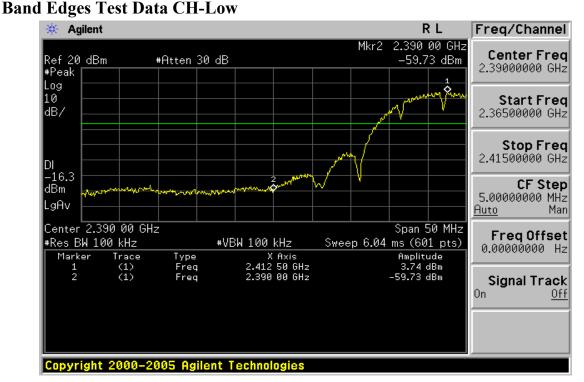

Band Edges Test Data CH-High

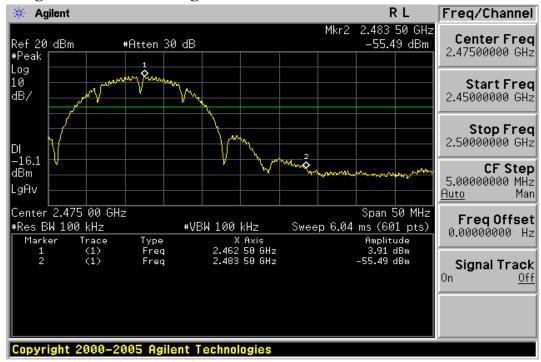



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 42 of 113

Radiated	Emission:	802.11	b mode
----------	------------------	--------	--------

Operation Fundamen Temperatu Humidity	tal Frequei		H Low MHz			Test Test Pol	Date By	Nov. 16, 2 Jazz Ver.	009
	Peak	AV		Actu	ial FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)			AV (dBuV/m	Limit) (dB uV/m)	Limit (dBuV/1	0	Remark
2390.00	50.88		-1.39	49.49		74.00	54.00	-4.51	Peak
Operation Fundamen Temperatu Humidity	tal Frequei					Test Test Pol	Date By	Nov. 16, 2 Jazz Hor.	009
Freq.	Peak Reading	AV Reading	Ant./CL	A ctu Pea k	al FS AV	Peak Limit	AV Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV))(dBuV/m)		8	
2390.00	47.62		-1.39	46.23		74.00	54.00	-7.77	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions</u>].htm] and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_acd_conditions</u>] issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_acd_conditions</u>] issued sublished therein. Even if printed this electronic documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this documents. **SCS Taiwan Ltd.** No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 43 of 113

Radiated	Emission:	802.11	b	mode
----------	------------------	--------	---	------

Fundamen	Operation ModeTX CH HighFundamental Frequency2462 MHzTemperature25 °CHumidity65 %				Test Test Pol	Date By	Nov. 16, 2 Jazz Ver.	009	
	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m	Limit) (dB uV/m)	Limit (dBuV/1	-	Remark
2483.56	52.91		-0.92	51.99		74.00	54.00	-2.01	Peak
Operation Fundament Temperatu Humidity	tal Frequei					Test Test Pol	Date By	Nov. 16, 2 Jazz Hor.	009
Freq. (MHz)	Peak Reading (dBuV)	AV Reading (dBuV)		Peak	al FS AV (dBuV/m)	Peak Limit) (dB uV/m)	AV Limit (dBuV/1	8	Remark
2483.56	47.67		-0.92	46.75		74.00	54.00	-7.25	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_acd_conditions.htm</u>) and Jurisdictional issues established therein. Even if printed this electronic document to be imitations of ilability, indemnification and jurisdictional issues established therein. Even if printed this electronic document to subject the limitations of ilability, indemnification and jurisdictional issues established therein. Even if printed this electronic document to subject the transaction from exercising all their ing has a noriginal within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document be not a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 44 of 113

802.11g Band Edges Test Data CH-Low

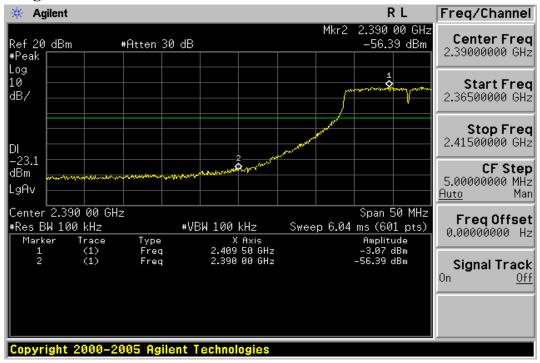

Band Edges Test Data CH-High

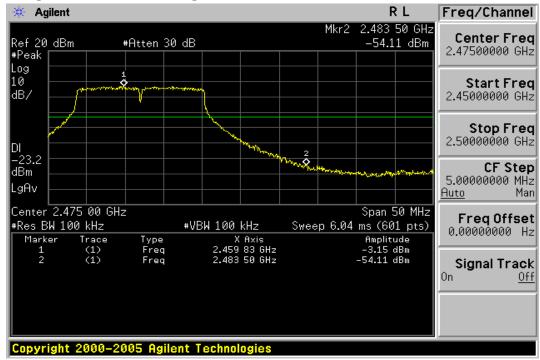

> **台灣檢驗科技股份有限公司** t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com Member of SGS Group



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 45 of 113

Radiated Emission: 802.11 g mode

Operation Mode Fundamental Frequency	TX CH Low 2412 MHz	Test Date Test By	Nov. 16, 2009 Jazz
Temperature	25 ℃	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	0	Reading		Peak	AV	Limit	Lim it	0	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	n) (dB)	
2390.00	57.79	44.35	-1.39	56.40	42.96	74.00	54.00	-11.04	AV
Operation 1	Mode	TX C	H Low			Test	Date	Nov.16, 20	09
Fundament	tal Frequer	ncy 2412	MHz			Test	By	Jazz	
Temperatu	re	25 °C				Pol		Hor.	
Humidity		65 %							
	Peak	AV		Actu	al FS	Peak	AV		
Freq.		Reading	Ant/CI	Peak	AV	Limit	Limit	Morgin	Remark
(MHz)	(dBuV)	(dBuV)		(dBuV/m)				0	IN UHIA I K
(miliz)	(ubuv)	(ubuv)	Cr (uD)					, , ,	
2390.00	49.53		-1.39	48.14		74.00	54.00	-5.86	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

台灣檢驗科技股份有限公司___



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 46 of 113

Radiated Emission	: 802.11	g mode
--------------------------	----------	--------

Operation Fundament Temperatu Humidity	tal Frequei					Test Test Pol	Date By	Nov.16, 20 Jazz Ver.	009
	Peak	AV		Actu	ial FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit) (dB uV/m)	Limit (dBuV/1	0	Remark
2483.56	59.18	44.34	-0.92	58.26	43.42	74.00	54.00	-10.58	AV
Operation	Mode	TX C	H High			Test	Date	Nov. 16, 2	009
Fundamen	tal Frequei	ncy 2462	MHz			Test	By	Jazz	
Temperatu	re	25 °C				Pol		Hor.	
Humidity		65 %							
	Peak	AV		Actu	ial FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)			AV (dBuV/m)	Limit) (dB uV/m)(Limit (dBuV/1	0	Remark
2483.56	48.75		-0.92	47.83		74.00	54.00	-6.17	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions</u>].htm] and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_acd_conditions</u>] issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_acd_conditions</u>] issued sublished therein. Even if printed this electronic documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this documents. **SCS Taiwan Ltd.** No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區工路 134 號

台灣檢驗科技股份有限公司____



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 47 of 113

802.11n_20M Band Edges Test Data CH-Low

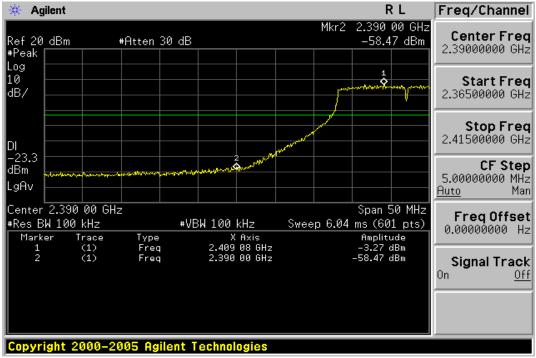

Band Edges Test Data CH-High



> **台灣檢驗科技股份有限公司** t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com Member of SGS Group



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 48 of 113

Radiated Emission: 802.11 n_20M mode

Operation Mode	TX CH Low	Test Date	Nov.16, 2009
Fundamental Frequency	2412 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	0	Reading		Peak	AV	Limit	Limit	0	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/r	n) (dB)	
2390.00	62.09	44.12	-1.39	60.70	42.73	74.00	54.00	-11.27	AV
Operation 1	Mode	TX C	H Low			Test	Date	Nov. 16, 2	009
Fundament	tal Frequer	ncy 2412	MHz			Test	By	Jazz	
Temperatu	re	25 °C				Pol		Hor.	
Humidity		65 %							
	Peak	AV		A ctu	al FS	Peak	AV		
Encor								Manaha	Damarda
Freq.	0	Reading		Peak	AV	Limit	Limit	0	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/r	n) (dB)	
2390.00	47.38		-1.39	45.99		74.00	54.00	-8.01	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

台灣檢驗科技股份有限公司____



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 49 of 113

Radiated	Emission:	802.11 n	1 20M	mode

Operation Mode	TX CH High	Test Date	Nov. 16, 2009
Fundamental Frequency	2462 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/n	0	Remark
2483.56	58.81	43.63	-0.92	57.89	42.71	74.00	54.00	-11.29	AV
Operation	Mode	TX C	H High			Test	Date	Nov. 16, 2	009
Fundament	tal Frequer	ncy 2462	MHz			Test	By	Jazz	
Temperatu	re	25 °C				Pol		Hor.	
Humidity		65 %							
	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	n) (dB)	
2483.56	47.58		-0.92	46.66		74.00	54.00	-7.34	Peak

Remark:


- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 50 of 113

802.11n_40M Band Edges Test Data CH-Low

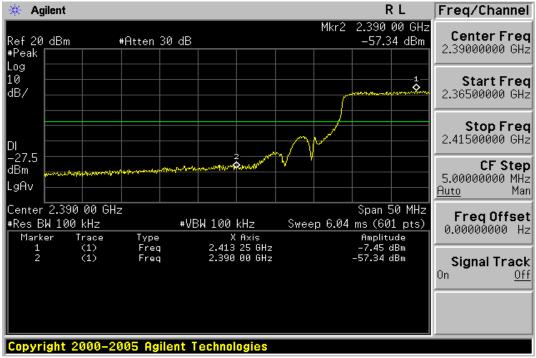

Band Edges Test Data CH-High





Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 51 of 113

Radiated	Emission:	802.11 n	40M	mode

Operation Mode	TX CH Low	Test Date	Nov. 16, 2009
Fundamental Frequency	2422 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/r	0	Remark
2390.00	60.06	47.27	-1.39	58.67	45.88	74.00	54.00	-8.12	AV
Operation	Mode	TX C	H Low			Test	Date	Nov. 16, 2	009
Fundament	tal Frequer	ncy 2442	MHz			Test	By	Jazz	
Temperatu	re	25 °C				Pol		Hor.	
Humidity		65 %							
	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Lim it	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/r	n) (dB)	
2390.00	47.74		-1.39	46.35		74.00	54.00	-7.65	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 52 of 113

Radiated	Emission:	802.11 n	40M	mode

Operation Mode	TX CH High	Test Date	Nov. 16, 2009
Fundamental Frequency	2452 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit) (dB uV/m)(Limit (dBuV/n	0	Remark
2483.56	59.27	47.44	-0.92	58.35	46.52	74.00	54.00	-7.48	AV
Operation	Mode	TX C	H High			Test	Date	Nov. 16, 2	009
Fundament	tal Frequer	ncy 2452	MHz			Test	By	Jazz	
Temperatu	re	25 °C				Pol		Hor.	
Humidity		65 %							
	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Lim it	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)) (dB uV/m)	(dBuV/n	n) (dB)	
2483.56	48.44		-0.92	47.52		74.00	54.00	-6.48	Peak

Remark:

- Data of measurement within this frequency range shown "-" in the table above means the (1)reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms. (3)
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

台灣檢驗科技股份有限公司



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 53 of 113

9 SPURIOUS RADIATED EMISSION TEST

9.1 Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

9.2 Measurement Equipment Used:

9.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

9.2.2. Radiated emission:

Refer to section 8.2 for details.

9.3 Test SET-UP:

9.3.1. Conducted Emission at antenna port:

Refer to section 6.3 for details.

9.3.2. Radiated emission:

Refer to section 8.3 for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms - document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document. <u>INO 134</u>, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / d ±& & & £ x \$ 134 \$ ±.



9.4 Measurement Procedure:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency measured were complete.

9.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


9.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

台灣檢驗科技股份有限公司




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 55 of 113

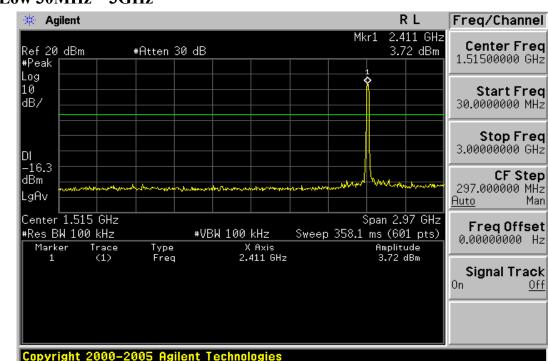

Conducted Spurious Emission Measurement Result (802.11b) Ch Low 30MHz – 3GHz



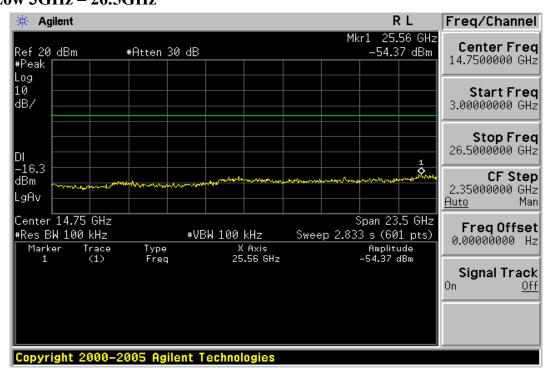


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions, htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms and conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.onsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SCS Taiwan Ltd. |No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 5 ± % Ea ± % 134 mg.




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 56 of 113

Ch Mid 30MHz – 3GHz

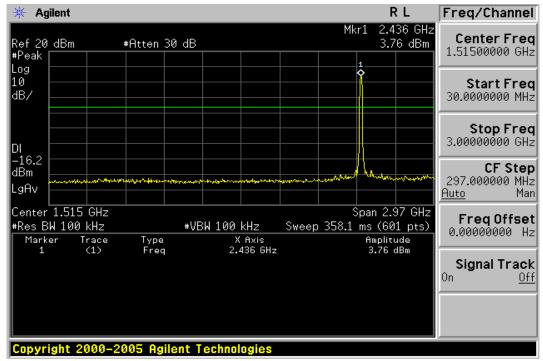



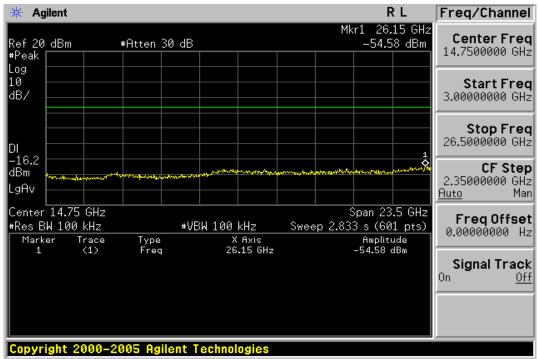


Member of SGS Group




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 57 of 113

Ch High 30MHz – 3GHz

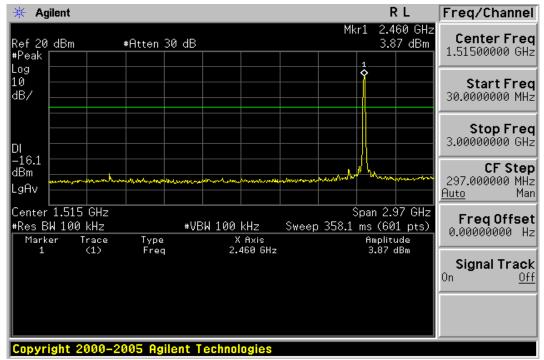



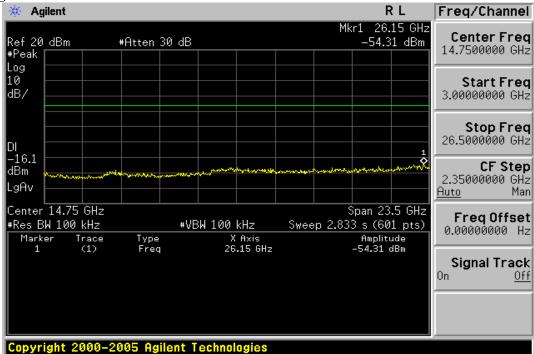

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions for Electronic Documents</u> (<u>www.sgs.com/terms and conditions for Electronic Documents</u> is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document to a transaction from exercising all their rights and obligations under the transaction documents. SCS Taiwan Ltd. [No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台上縣五股工 業區 五工路 134 g.


台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 58 of 113



Conducted Spurious Emission Measurement Result (802.11g) Ch Low 30MHz – 3GHz

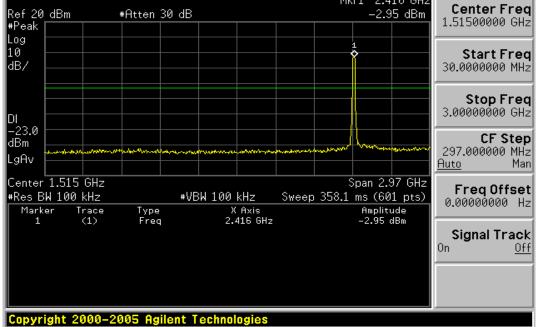



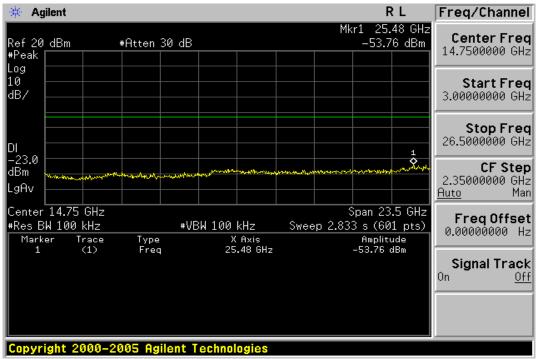


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgsonsite.com/authentication. Any holder of this docu-ment is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 GS Taiwan Ltd.




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 59 of 113

Ch Mid 30MHz – 3GHz

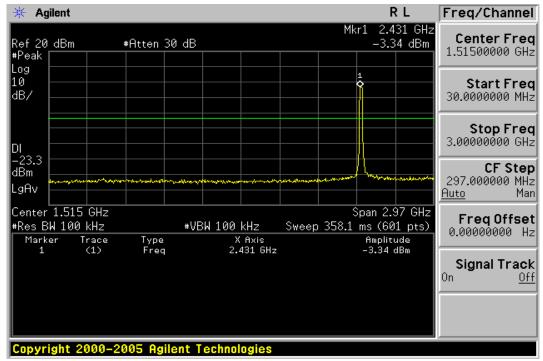



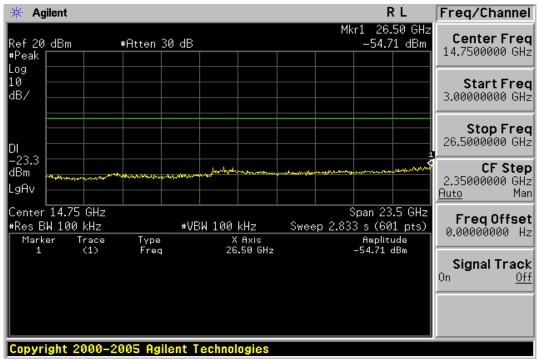


Member of SGS Group




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 60 of 113

Ch High 30MHz – 3GHz

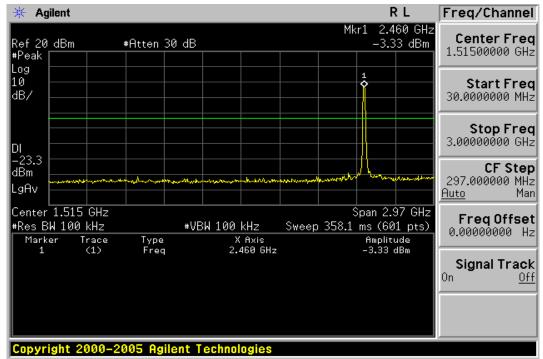




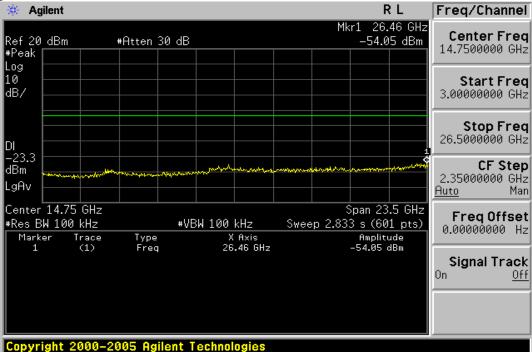


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions issue</u> stabilised therein. Even if printed this electronic documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document. [No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業 124, 136.]




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 61 of 113



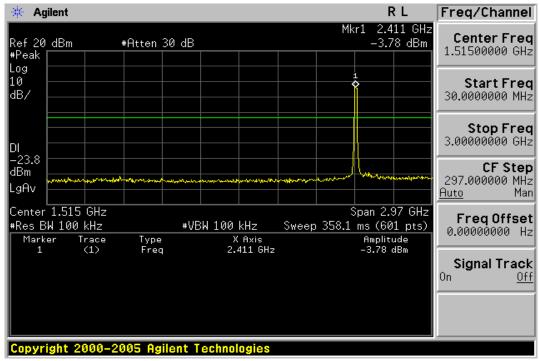



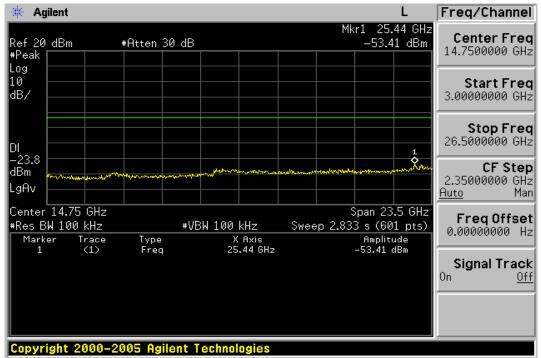


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions, htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms and conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.onsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SCS Taiwan Ltd. |No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 5 ± % Ea ± % 134 mg.




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 62 of 113

Ch Mid 30MHz – 3GHz

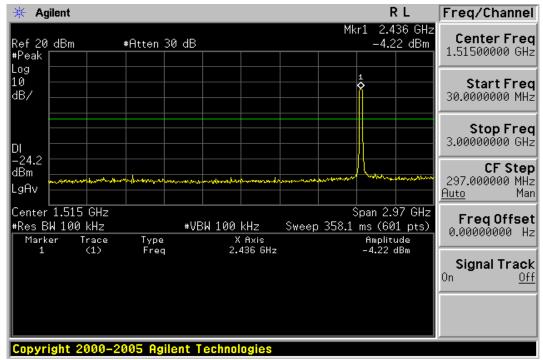




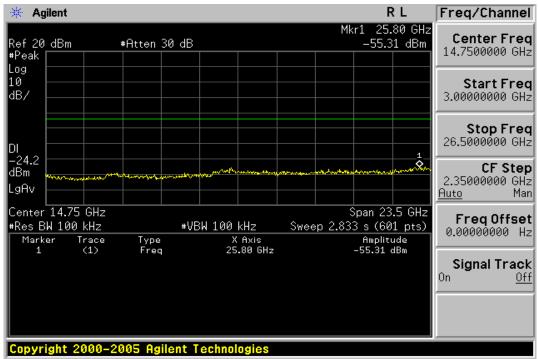




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 63 of 113

Ch High 30MHz – 3GHz

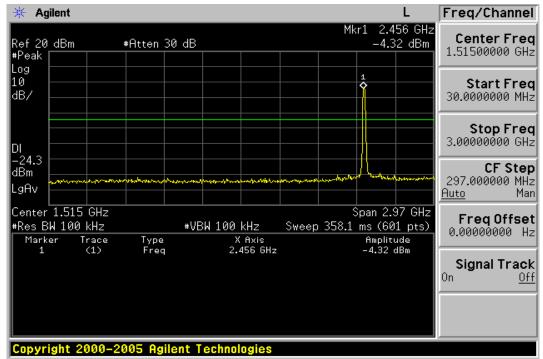




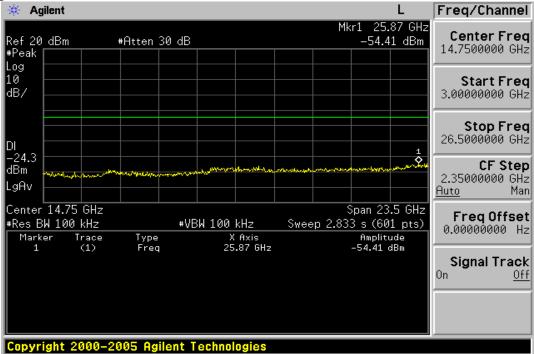


台湾檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 64 of 113



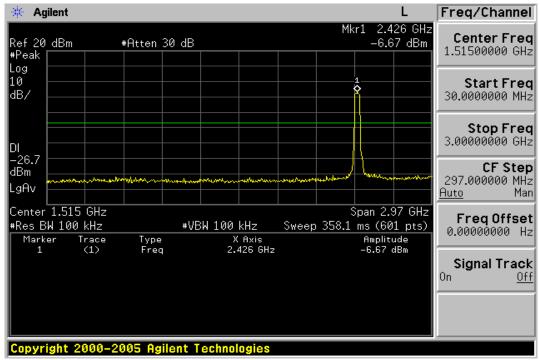



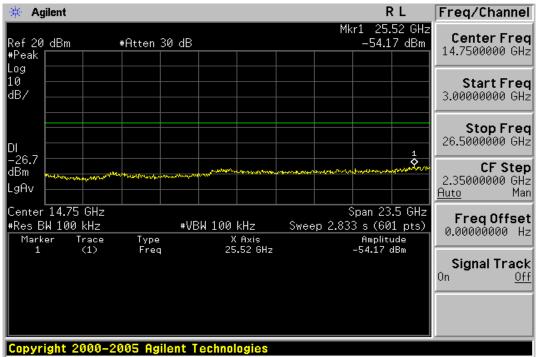


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions, htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms and conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.onsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SCS Taiwan Ltd. |No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 5 ± % Ea ± % 134 mg.




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 65 of 113

Ch Mid 30MHz – 3GHz

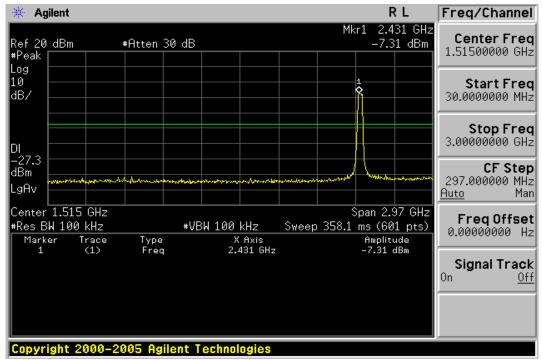



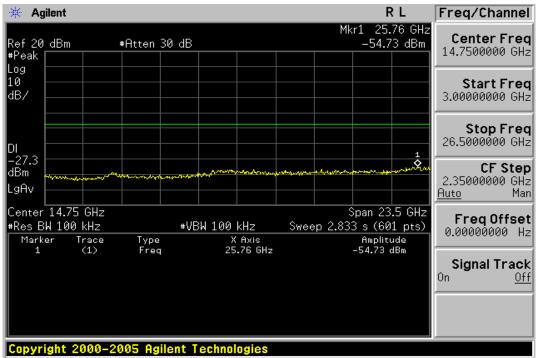


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions for Electronic Documents</u> (<u>www.sgs.com/terms and conditions for Electronic Documents</u> is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document to a transaction from exercising all their rights and obligations under the transaction documents. SCS Taiwan Ltd. [No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台上縣五股工 業區 五工路 134 g.




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 66 of 113

Ch High 30MHz – 3GHz

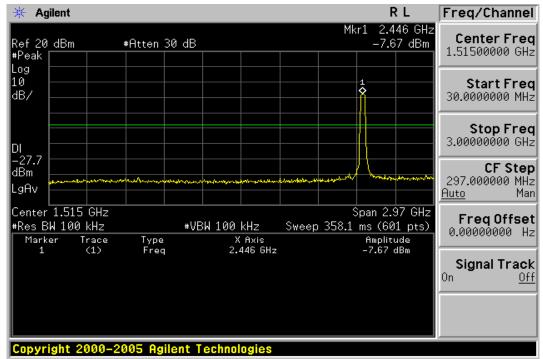



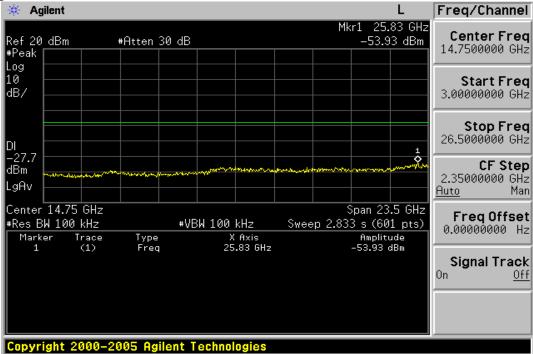

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 67 of 113

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode	802.11b TX CH Low	Test Date	Nov. 16, 2009
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
148.34	V	Peak	44.48	-12.90	31.58	43.50	-11.92
295.78	V	Peak	50.63	-13.17	37.46	46.00	-8.54
446.13	V	Peak	45.67	-8.67	37.00	46.00	-9.00
499.48	V	Peak	42.54	-8.51	34.03	46.00	-11.97
594.54	V	Peak	38.42	-6.18	32.24	46.00	-13.76
741.98	V	Peak	39.74	-4.39	35.35	46.00	-10.65
184.23	Н	Peak	42.09	-14.78	27.31	43.50	-16.19
295.78	Н	Peak	51.51	-13.17	38.34	46.00	-7.66
446.13	Н	Peak	46.22	-8.67	37.55	46.00	-8.45
499.48	Н	Peak	49.04	-8.51	40.53	46.00	-5.47
594.54	Н	Peak	40.90	-6.18	34.72	46.00	-11.28
741.98 Remark :	Н	Peak	41.05	-4.39	36.66	46.00	-9.34

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

台灣檢驗科技股份有限公司___



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 68 of 113

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode	802.11b TX CH Mid	Test Date	Nov. 16, 2009
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
148.34	V	Peak	44.65	-12.90	31.75	43.50	-11.75
182.29	V	Peak	46.15	-14.67	31.48	43.50	-12.02
295.78	V	Peak	49.90	-13.17	36.73	46.00	-9.27
446.13	V	Peak	45.23	-8.67	36.56	46.00	-9.44
594.54	V	Peak	40.74	-6.18	34.56	46.00	-11.44
741.90	V	Peak	38.90	-4.39	34.51	46.00	-11.49
295.78	Н	Peak	51.22	-13.17	38.05	46.00	-7.95
373.38	Н	Peak	41.76	-10.95	30.81	46.00	-15.19
446.13	Н	Peak	46.23	-8.67	37.56	46.00	-8.44
499.48	Н	Peak	48.52	-8.51	40.01	46.00	-5.99
594.54	Н	Peak	41.19	-6.18	35.01	46.00	-10.99
741.98	Н	Peak	40.96	-4.39	36.57	46.00	-9.43

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

台灣檢驗科技股份有限公司



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 69 of 113

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode	802.11b TX CH High	Test Date	Nov.16, 2009
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
148.34	V	Peak	44.35	-12.90	31.45	43.50	-12.05
295.78	V	Peak	50.04	-13.17	36.87	46.00	-9.13
446.13	V	Peak	45.42	-8.67	36.75	46.00	-9.25
499.48	V	Peak	43.75	-8.51	35.24	46.00	-10.76
594.54	V	Peak	40.85	-6.18	34.67	46.00	-11.33
741.98	V	Peak	39.90	-4.39	35.51	46.00	-10.49
179.38	Н	Peak	40.90	-14.49	26.41	43.50	-17.09
295.78	Н	Peak	51.43	-13.17	38.26	46.00	-7.74
446.13	Н	Peak	46.11	-8.67	37.44	46.00	-8.56
499.48	Н	Peak	49.20	-8.51	40.69	46.00	-5.31
594.54	Н	Peak	41.40	-6.18	35.22	46.00	-10.78
741.98 Remark :	Н	Peak	40.71	-4.39	36.32	46.00	-9.68

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

台灣檢驗科技股份有限公司___



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 70 of 113

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Operation Mode	802.11g TX CH Low	Test Date	Nov. 16, 2009
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
148.34	V	Peak	44.14	-12.90	31.24	43.50	-12.26
295.78	V	Peak	50.13	-13.17	36.96	46.00	-9.04
446.13	V	Peak	45.27	-8.67	36.60	46.00	-9.40
499.48	V	Peak	43.67	-8.51	35.16	46.00	-10.84
594.54	V	Peak	40.76	-6.18	34.58	46.00	-11.42
741.98	V	Peak	39.27	-4.39	34.88	46.00	-11.12
295.78	Н	Peak	51.39	-13.17	38.22	46.00	-7.78
446.13	Н	Peak	46.03	-8.67	37.36	46.00	-8.64
499.48	Н	Peak	48.87	-8.51	40.36	46.00	-5.64
594.54	Н	Peak	41.16	-6.18	34.98	46.00	-11.02
741.98	Н	Peak	40.74	-4.39	36.35	46.00	-9.65
890.39	Н	Peak	35.08	-1.20	33.88	46.00	-12.12

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

台灣檢驗科技股份有限公司



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 71 of 113

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Operation Mode	802.11g TX CH Mid	Test Date	Nov. 16, 2009
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
189.08	V	Peak	45.44	-15.06	30.38	43.50	-13.12
295.78	V	Peak	49.71	-13.17	36.54	46.00	-9.46
446.13	V	Peak	45.09	-8.67	36.42	46.00	-9.58
499.48	V	Peak	43.52	-8.51	35.01	46.00	-10.99
594.54	V	Peak	41.03	-6.18	34.85	46.00	-11.15
741.98	V	Peak	38.63	-4.39	34.24	46.00	-11.76
182.29	Н	Peak	41.52	-14.67	26.85	43.50	-16.65
295.78	Н	Peak	51.61	-13.17	38.44	46.00	-7.56
446.13	Н	Peak	45.95	-8.67	37.28	46.00	-8.72
499.48	Н	Peak	48.75	-8.51	40.24	46.00	-5.76
594.54	Н	Peak	40.59	-6.18	34.41	46.00	-11.59
741.98 Remark :	Н	Peak	40.74	-4.39	36.35	46.00	-9.65

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

台灣檢驗科技股份有限公司___



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 72 of 113

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

D 4

Operation Mode	802.11g TX CH High	Test Date	Nov. 16, 2009
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
 (MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
179.38	V	Peak	45.63	-14.49	31.14	43.50	-12.36
295.78	V	Peak	50.28	-13.17	37.11	46.00	-8.89
446.13	V	Peak	45.32	-8.67	36.65	46.00	-9.35
499.48	V	Peak	43.81	-8.51	35.30	46.00	-10.70
594.54	V	Peak	41.39	-6.18	35.21	46.00	-10.79
741.98	V	Peak	39.62	-4.39	35.23	46.00	-10.77
295.78	Н	Peak	52.01	-13.17	38.84	46.00	-7.16
446.13	Н	Peak	46.90	-8.67	38.23	46.00	-7.77
499.48	Н	Peak	48.59	-8.51	40.08	46.00	-5.92
594.54	Н	Peak	42.10	-6.18	35.92	46.00	-10.08
741.98	Н	Peak	40.80	-4.39	36.41	46.00	-9.59
890.39	Н	Peak	35.45	-1.20	34.25	46.00	-11.75

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

台灣檢驗科技股份有限公司



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 73 of 113

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n_20M)

Operation Mode	802.11n_20M TX CH Low	Test Date	Nov. 16, 2009
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
148.34	V	Peak	44.43	-12.90	31.53	43.50	-11.97
295.78	V	Peak	49.88	-13.17	36.71	46.00	-9.29
446.13	V	Peak	44.92	-8.67	36.25	46.00	-9.75
499.48	V	Peak	42.78	-8.51	34.27	46.00	-11.73
594.54	V	Peak	41.43	-6.18	35.25	46.00	-10.75
741.98	V	Peak	39.12	-4.39	34.73	46.00	-11.27
295.78	Н	Peak	50.30	-13.17	37.13	46.00	-8.87
446.13	Н	Peak	43.95	-8.67	35.28	46.00	-10.72
499.48	Н	Peak	47.19	-8.51	38.68	46.00	-7.32
594.54	Н	Peak	41.08	-6.18	34.90	46.00	-11.10
741.98	Н	Peak	38.18	-4.39	33.79	46.00	-12.21
890.39	Н	Peak	35.38	-1.20	34.18	46.00	-11.82

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 74 of 113

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n_20M)

Operation Mode	802.11n_20M TX CH Mid	Test Date	Nov. 16, 2009
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
148.34	V	Peak	44.25	-12.90	31.35	43.50	-12.15
182.29	V	Peak	44.69	-14.67	30.02	43.50	-13.48
295.78	V	Peak	49.89	-13.17	36.72	46.00	-9.28
446.13	V	Peak	45.27	-8.67	36.60	46.00	-9.40
594.54	V	Peak	41.70	-6.18	35.52	46.00	-10.48
741.98	V	Peak	38.76	-4.39	34.37	46.00	-11.63
182.29	Н	Peak	40.46	-14.67	25.79	43.50	-17.71
295.78	Н	Peak	50.41	-13.17	37.24	46.00	-8.76
446.13	Н	Peak	44.13	-8.67	35.46	46.00	-10.54
499.48	Н	Peak	46.81	-8.51	38.30	46.00	-7.70
594.54	Н	Peak	40.54	-6.18	34.36	46.00	-11.64
741.98	Н	Peak	38.80	-4.39	34.41	46.00	-11.59

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

台灣檢驗科技股份有限公司



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 75 of 113

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n_20M)

Operation Mode	802.11n_20M TX CH High	Test Date	Nov. 16, 2009
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
148.34	V	Peak	44.60	-12.90	31.70	43.50	-11.80
295.78	V	Peak	49.80	-13.17	36.63	46.00	-9.37
446.13	V	Peak	45.00	-8.67	36.33	46.00	-9.67
499.48	V	Peak	41.03	-8.51	32.52	46.00	-13.48
594.54	V	Peak	41.39	-6.18	35.21	46.00	-10.79
741.98	V	Peak	39.67	-4.39	35.28	46.00	-10.72
295.78	Н	Peak	50.08	-13.17	36.91	46.00	-9.09
446.13	Н	Peak	44.09	-8.67	35.42	46.00	-10.58
499.48	Н	Peak	46.50	-8.51	37.99	46.00	-8.01
594.54	Н	Peak	41.00	-6.18	34.82	46.00	-11.18
741.98	Н	Peak	38.51	-4.39	34.12	46.00	-11.88
890.39	Н	Peak	36.29	-1.20	35.09	46.00	-10.91

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

台灣檢驗科技股份有限公司



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 76 of 113

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n_40M)

Operation Mode	802.11n_40M TX CH Low	Test Date	Nov. 16, 2009
Fundamental Frequency	2422MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
295.78	V	Peak	49.94	-13.17	36.77	46.00	-9.23
446.13	V	Peak	45.07	-8.67	36.40	46.00	-9.60
499.48	V	Peak	41.45	-8.51	32.94	46.00	-13.06
594.54	V	Peak	41.20	-6.18	35.02	46.00	-10.98
741.98	V	Peak	39.12	-4.39	34.73	46.00	-11.27
890.39	V	Peak	33.83	-1.20	32.63	46.00	-13.37
295.78	Н	Peak	50.38	-13.17	37.21	46.00	-8.79
446.13	Н	Peak	44.09	-8.67	35.42	46.00	-10.58
499.48	Н	Peak	46.80	-8.51	38.29	46.00	-7.71
594.54	Н	Peak	40.80	-6.18	34.62	46.00	-11.38
741.98	Н	Peak	39.12	-4.39	34.73	46.00	-11.27
890.39	Н	Peak	34.48	-1.20	33.28	46.00	-12.72

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 77 of 113

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n_40M)

Operation Mode	802.11n_40M TX CH Mid	Test Date	Nov. 16, 2009
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
148.34	V	Peak	44.96	-12.90	32.06	43.50	-11.44
295.78	V	Peak	50.17	-13.17	37.00	46.00	-9.00
446.13	V	Peak	44.90	-8.67	36.23	46.00	-9.77
499.48	V	Peak	40.99	-8.51	32.48	46.00	-13.52
594.54	V	Peak	41.06	-6.18	34.88	46.00	-11.12
741.98	V	Peak	39.56	-4.39	35.17	46.00	-10.83
295.78	Н	Peak	50.45	-13.17	37.28	46.00	-8.72
446.13	Н	Peak	43.86	-8.67	35.19	46.00	-10.81
499.48	Н	Peak	47.09	-8.51	38.58	46.00	-7.42
594.54	Н	Peak	40.58	-6.18	34.40	46.00	-11.60
741.98	Н	Peak	38.77	-4.39	34.38	46.00	-11.62
890.39 Remark :	Н	Peak	35.49	-1.20	34.29	46.00	-11.71

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 78 of 113

Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n_40M)

Operation Mode	802.11n_40M TX CH High	Test Date	Nov. 16, 2009
Fundamental Frequency	2452MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
148.34	V	Peak	45.26	-12.90	32.36	43.50	-11.14
295.78	V	Peak	50.47	-13.17	37.30	46.00	-8.70
446.13	V	Peak	45.36	-8.67	36.69	46.00	-9.31
499.48	V	Peak	41.17	-8.51	32.66	46.00	-13.34
594.54	V	Peak	42.03	-6.18	35.85	46.00	-10.15
741.98	V	Peak	39.97	-4.39	35.58	46.00	-10.42
295.78	Н	Peak	50.81	-13.17	37.64	46.00	-8.36
446.13	Н	Peak	44.43	-8.67	35.76	46.00	-10.24
		Peak	44.43	-8.0/			-10.24
499.48	Н	Peak	47.37	-8.51	38.86	46.00	-7.14
594.54	Н	Peak	40.74	-6.18	34.56	46.00	-11.44
625.58	Н	Peak	33.70	-5.47	28.23	46.00	-17.77
741.98	Н	Peak	38.82	-4.39	34.43	46.00	-11.57

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

台灣檢驗科技股份有限公司



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 79 of 113

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH Low	Test Date	Nov.16, 2009
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4824.0	40.65		6.02	46.67		74.00	54.00	-7.33	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 80 of 113

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH Low	Test Date	Nov. 16, 2009
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4824.0	42.11		6.02	48.13		74.00	54.00	-5.87	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11b TX CH Mid	Test Date	Nov. 16, 2009
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.0	42.73		6.15	48.88		74.00	54.00	-5.12	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11b TX CH Mid	Test Date	Nov. 16, 2009
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.0	43.71		6.15	49.86		74.00	54.00	-4.14	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11b TX CH High	Test Date	Nov. 16, 2009
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4924.0	42.88		6.28	49.16		74.00	54.00	-4.84	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11b TX CH High	Test Date	Nov. 16, 2009
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4924.0	42.80		6.28	49.08		74.00	54.00	-4.92	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

台灣檢驗科技股份有限公司___

www.tw.sgs.com



Operation Mode	802.11g TX CH Low	Test Date	Nov. 16, 2009
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4824.0	40.25		6.02	46.27		74.00	54.00	-7.73	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11g TX CH Low	Test Date	Nov. 16, 2009
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4824.0	41.39		6.02	47.41		74.00	54.00	-6.59	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 87 of 113

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH Mid	Test Date	Nov. 16, 2009
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.0	39.56		6.15	45.71		74.00	54.00	-8.29	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11g TX CH Mid	Test Date	Nov. 16, 2009
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.0	41.25		6.15	47.40		74.00	54.00	-6.60	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 89 of 113

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH High	Test Date	Nov. 16, 2009
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4924.0	39.08		6.28	45.36		74.00	54.00	-8.64	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 90 of 113

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH High	Test Date	Nov. 16, 2009
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4924.0	39.71		6.28	45.99		74.00	54.00	-8.01	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 91 of 113

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n_20M)

Operation Mode	802.11n_20M TX CH Low	Test Date	Nov. 16, 2009
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4824.0	40.50		6.02	46.52		74.00	54.00	-7.48	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 92 of 113

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n_20M)

Operation Mode	802.11n_20M TX CH Low	Test Date	Nov. 16, 2009
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4824.0	41.66		6.02	47.68		74.00	54.00	-6.32	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 93 of 113

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n_20M)

Operation Mode	802.11n_20M TX CH Mid	Test Date	Nov. 16, 2009
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.0	40.41		6.15	46.56		74.00	54.00	-7.44	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 94 of 113

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n_20M)

Operation Mode	802.11n_20M TX CH Mid	Test Date	Nov. 16, 2009
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.0	42.46		6.15	48.61		74.00	54.00	-5.39	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 95 of 113

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n_20M)

Operation Mode	802.11n_20M TX CH High	Test Date	Nov. 16, 2009
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4924.0	40.34		6.28	46.62		74.00	54.00	-7.38	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 96 of 113

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n_20M)

Operation Mode	802.11n_20M TX CH High	Test Date	Nov. 16, 2009
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4924.0	39.27		6.28	45.55		74.00	54.00	-8.45	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 97 of 113

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n_40M)

Operation Mode	802.11n_40M TX CH Low	Test Date	Nov. 16, 2009
Fundamental Frequency	2422MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4844.0	39.42		6.10	45.52		74.00	54.00	-8.48	Peak
7266.0						74.00	54.00		
9688.0						74.00	54.00		
12110.0						74.00	54.00		
14532.0						74.00	54.00		
16954.0						74.00	54.00		
19376.0						74.00	54.00		
21798.0						74.00	54.00		
24220.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 98 of 113

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n_40M)

Operation Mode	802.11n_40M TX CH Low	Test Date	Nov. 16, 2009
Fundamental Frequency	2422MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4844.0	41.12		6.10	47.22		74.00	54.00	-6.78	Peak
7266.0						74.00	54.00		
9688.0						74.00	54.00		
12110.0						74.00	54.00		
14532.0						74.00	54.00		
16954.0						74.00	54.00		
19376.0						74.00	54.00		
21798.0						74.00	54.00		
24220.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 99 of 113

Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n_40M)

Operation Mode	802.11n_40M TX CH Mid	Test Date	Nov. 16, 2009
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.0	39.62		6.15	45.77		74.00	54.00	-8.23	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11n_40M TX CH Mid	Test Date	Nov. 16, 2009
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.0	41.27		6.15	47.42		74.00	54.00	-6.58	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11n_40M TX CH High	Test Date	Nov. 16, 2009
Fundamental Frequency	2452MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4904.0	39.09		6.24	45.33		74.00	54.00	-8.67	Peak
7356.0						74.00	54.00		
9808.0						74.00	54.00		
12260.0						74.00	54.00		
14712.0						74.00	54.00		
17164.0						74.00	54.00		
19616.0						74.00	54.00		
22068.0						74.00	54.00		
24520.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode	802.11n_40M TX CH High	Test Date	Nov. 16, 2009
Fundamental Frequency	2452MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4904.0	39.84		6.24	46.08		74.00	54.00	-7.92	Peak
7356.0						74.00	54.00		
9808.0						74.00	54.00		
12260.0						74.00	54.00		
14712.0						74.00	54.00		
17164.0						74.00	54.00		
19616.0						74.00	54.00		
22068.0						74.00	54.00		
24520.0						74.00	54.00		

Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 103 of 113

10 Peak Power Spectral Density

10.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

10.2 Measurement Equipment Used:

Refer to section 6.2 for details.

10.3 Test Set-up:

Refer to section 6.3 for details.

10.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 300KHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency measured were complete.

t (886-2) 2299-3279



10.5 Measurement Result:

802.11b

Frequency	RF Power Density	Cable loss	RF Power Density	Maximum Limit
MHz	Reading (dBm)	(dB)	Level (dBm)	(dBm)
2412	-15.67	0.00	-15.67	8
2437	-15.69	0.00	-15.69	8
2462	-15.60	0.00	-15.60	8

802.11g

Frequency MHz	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
2412	-17.14	0.00	-17.14	8
2437	-17.53	0.00	-17.53	8
2462	-17.69	0.00	-17.69	8

802.11n_20M

Frequency MHz	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
2412	-18.03	0.00	-18.03	8
2437	-16.73	0.00	-16.73	8
2462	-17.76	0.00	-17.76	8

802.11n_40M

Frequency MHz	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
2422	-18.42	0.00	-18.42	8
2437	-18.79	0.00	-18.79	8
2452	-19.13	0.00	-19.13	8

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅剝測試之樣品負貨,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/terms intentions</u>, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd</u>. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣 五股工 業區 五工路 134 號

台灣檢驗科技股份有限公司


f (886-2) 2298-0488 t (886-2) 2299-3279




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 105 of 113

802.11b

Power Spectral Density Test Plot (CH-Low)

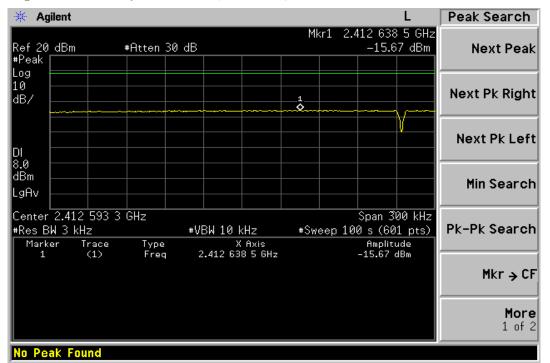

Power Spectral Density Test Plot (CH-Mid)

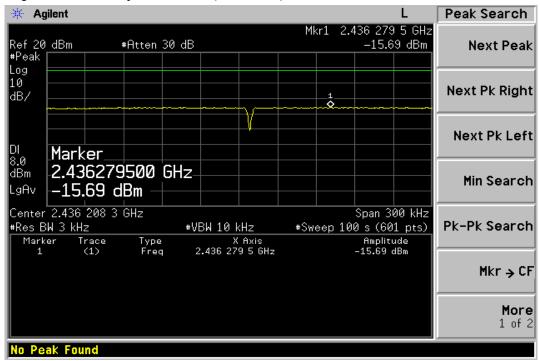

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms a-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. **SCS Taiwan Ltd.** [No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台上熊五股工業區工路 134



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 106 of 113

Power Spectral Density Test Plot (CH-High)


🔆 Agilent Peak Search L Mkr1 2.462 637 4 GHz Ref 20 dBm #Peak -15.60 dBm #Atten 30 dB Next Peak Log 10 Next Pk Right dB/ ٥ Next Pk Left DI Marker 8.0 2.462637400 GHz dBm Min Search -15.60 dBm LgAv Center 2.462 700 0 GHz Span 300 kHz #Res BW 3 kHz ∗VBW 10 kHz #Sweep 100 s (601 pts) Pk-Pk Search X Axis 2.462 637 4 GHz Trace (1) Type Freq Marker Amplitude -15.60 dBm Mkr → CF More 1 of 2 No Peak Found

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditional issues</u> established therein. Even if printed this electronic Documents (<u>www.sgs.com/terms_and_conditional issues</u> established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document texparies to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工 業區五工路 134 號




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 107 of 113

802.11g Power Spectral Density Test Plot (CH-Low)

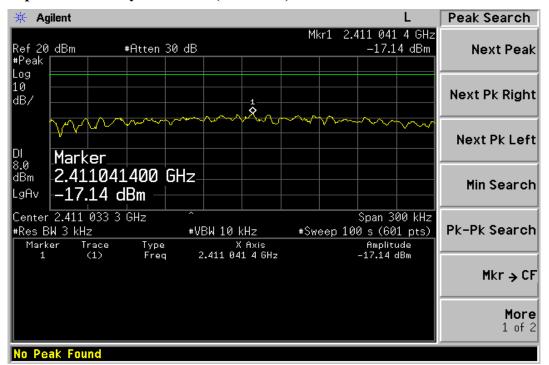

Power Spectral Density Test Plot (CH-Mid)

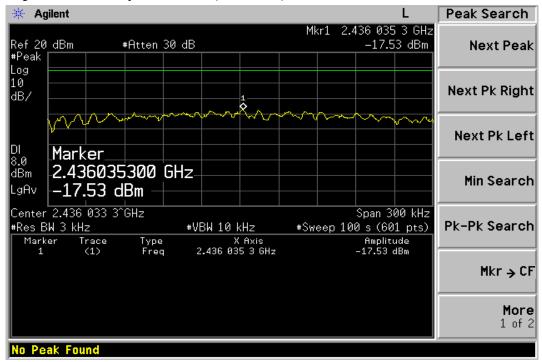


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written pernission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions,htm) and Terms and Conditions Teletronic Documents (www.sgs.com/terms a-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.onsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SCS Taiwan Ltd. INo.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台上縣 五股工業 富丘 五 路 134 號



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 108 of 113

Power Spectral Density Test Plot (CH-High)

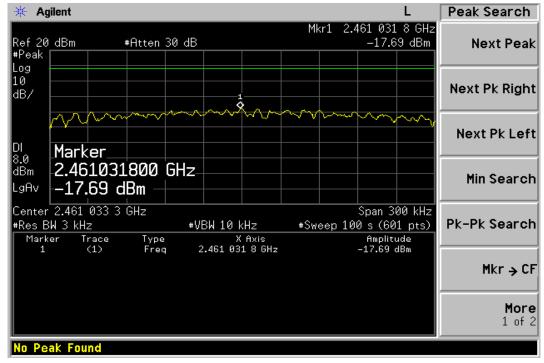

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditional issues</u> established therein. Even if printed this electronic Documents (<u>www.sgs.com/terms_and_conditional issues</u> established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document texparies to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工 業區五工路 134 號


台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 109 of 113

802.11n_20M Power Spectral Density Test Plot (CH-Low)

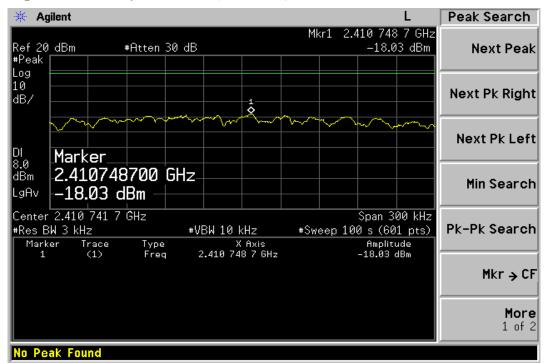

Power Spectral Density Test Plot (CH-Mid)

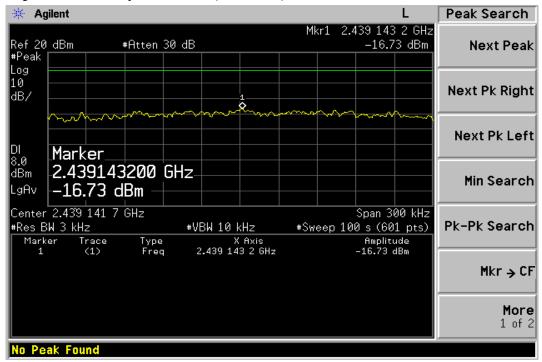

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written pernission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions,htm) and Terms and Conditions Teletronic Documents (www.sgs.com/terms a-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.onsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SCS Taiwan Ltd. INo.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台上縣 五股工業 富丘 五 路 134 號



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 110 of 113

Power Spectral Density Test Plot (CH-High)

🔆 Agilent Peak Search L Mkr1 2.459 745 0 GHz Ref 20 dBm #Peak #Atten 30 dB -17.76 dBm Next Peak Log 10 Next Pk Right dB/ \$ nm Next Pk Left DI Marker 8.0 2.459745000 GHz dBm Min Search -17.76 dBm LgAv Center 2.459 750 0 GHz Span 300 kHz #Res BW 3 kHz ∗VBW 10 kHz #Sweep 100 s (601 pts) Pk-Pk Search Trace (1) Type Freq X Axis 2.459 745 0 GHz Marker Amplitude -17.76 dBm Mkr → CF More 1 of 2 No Peak Found

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditional issues</u> established therein. Even if printed this electronic Documents (<u>www.sgs.com/terms_and_conditional issues</u> established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document texparies to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工 業區五工路 134 號


台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488




Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 111 of 113

802.11n_40M Power Spectral Density Test Plot (CH-Low)

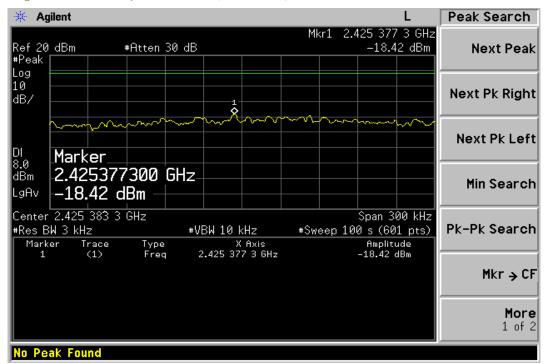

Power Spectral Density Test Plot (CH-Mid)

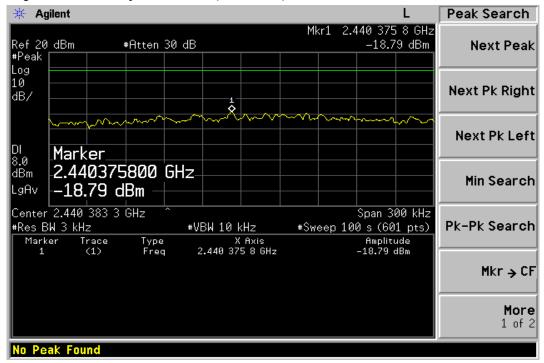


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms - document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.onsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document to exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SCS Taiwan Ltd. ______N K Mu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台上縣 五股工 案區 五 路 134 號.

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 112 of 113

Power Spectral Density Test Plot (CH-High)

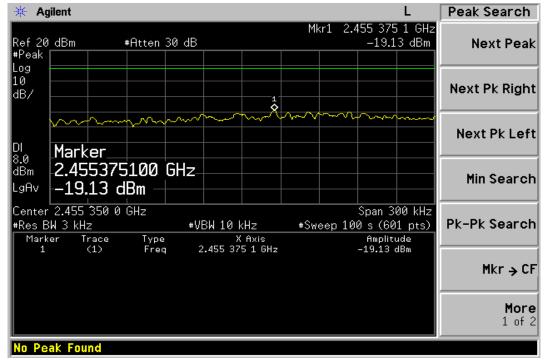

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms_and_conditional issues</u> established therein. Even if printed this electronic Documents (<u>www.sgs.com/terms_and_conditional issues</u> established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document texparies to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工 業區五工路 134 號



Report No.: ER/2009/B0001 Issue Date: Dec. 18, 2009 Page: 113 of 113

11 ANTENNA REQUIREMENT

11.1 Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be

replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some

field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the

proper antenna is employed so that the limits in this Part are not exceeded.

11.2 Antenna Connected Construction:

The directional gains of antenna used for transmitting is 2dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此業指名結果僅對測試之樣品負責,同時比樣品僅保留90天。本報告未輕本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms - document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document. [No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台上縣五段工 業區 五工路 134 s,

t (886-2) 2299-3279

www.tw.sgs.com