


[TestMode: TX b high channel]; [Polarity: Vertical]

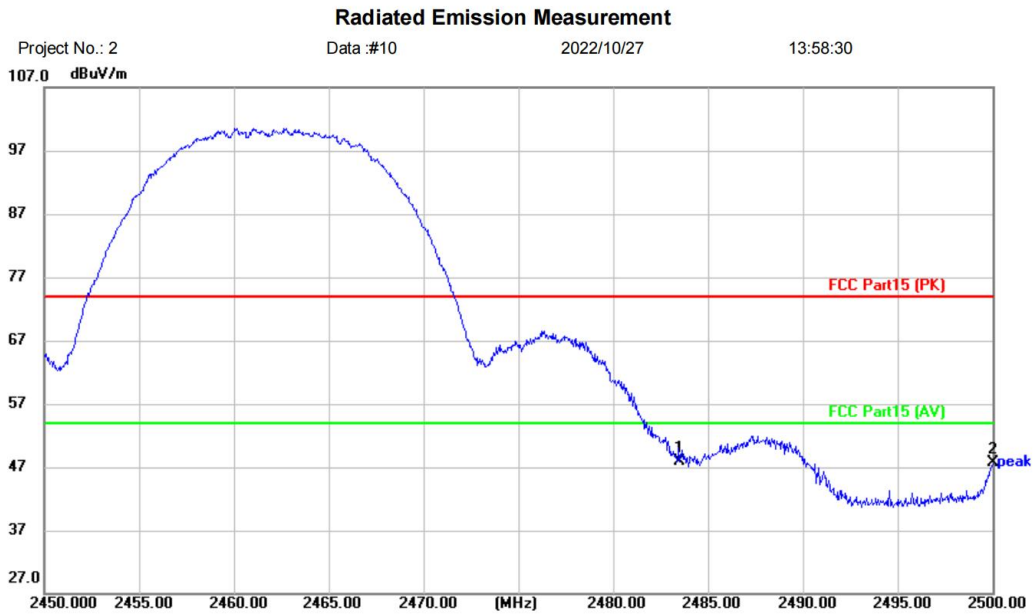


Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: wireless headphones		
M/N: Capsule3 Pro		
Mode: 2.4GWIFI-11B-TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	*	2483.500	51.84	-3.96	47.88	74.00	-26.12	peak	
2		2500.000	51.65	-4.00	47.65	74.00	-26.35	peak	

Test Result: Pass

[TestMode: TX g low channel]; [Polarity: Horizontal]

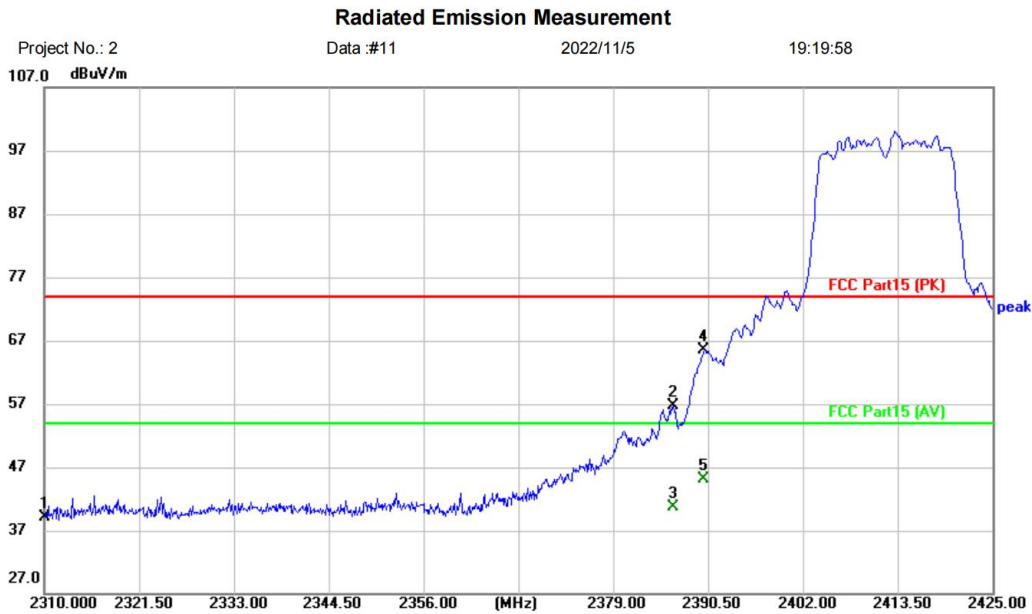


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: wireless headphones		
M/N: Capsule3 Pro		
Mode: 2.4GWIFI-11B-TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	43.30	-4.27	39.03	74.00	-34.97	peak	
2		2386.245	60.51	-3.85	56.66	74.00	-17.34	peak	
3		2386.245	44.51	-3.85	40.66	54.00	-13.34	AVG	
4	*	2390.000	69.25	-3.82	65.43	74.00	-8.57	peak	
5		2390.000	48.86	-3.82	45.04	54.00	-8.96	AVG	

Test Result: Pass

[TestMode: TX g low channel]; [Polarity: Vertical]

Radiated Emission Measurement

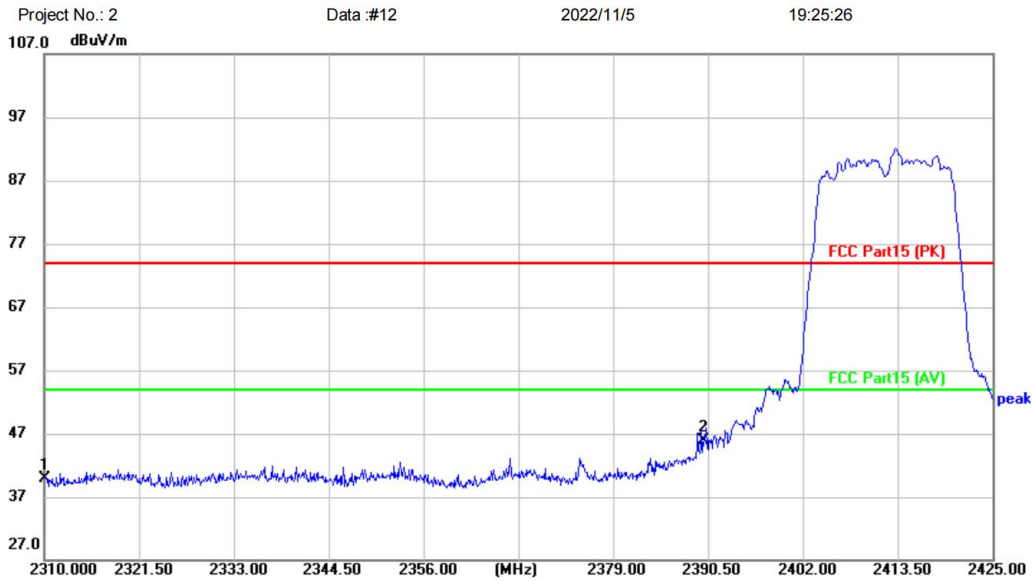


Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: wireless headphones
 M/N: Capsule3 Pro
 Mode: 2.4GWIFI-11B-TX-L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	44.23	-4.27	39.96	74.00	-34.04	peak	
2	*	2390.000	49.64	-3.82	45.82	74.00	-28.18	peak	

Test Result: Pass

[TestMode: TX g high channel]; [Polarity: Vertical]

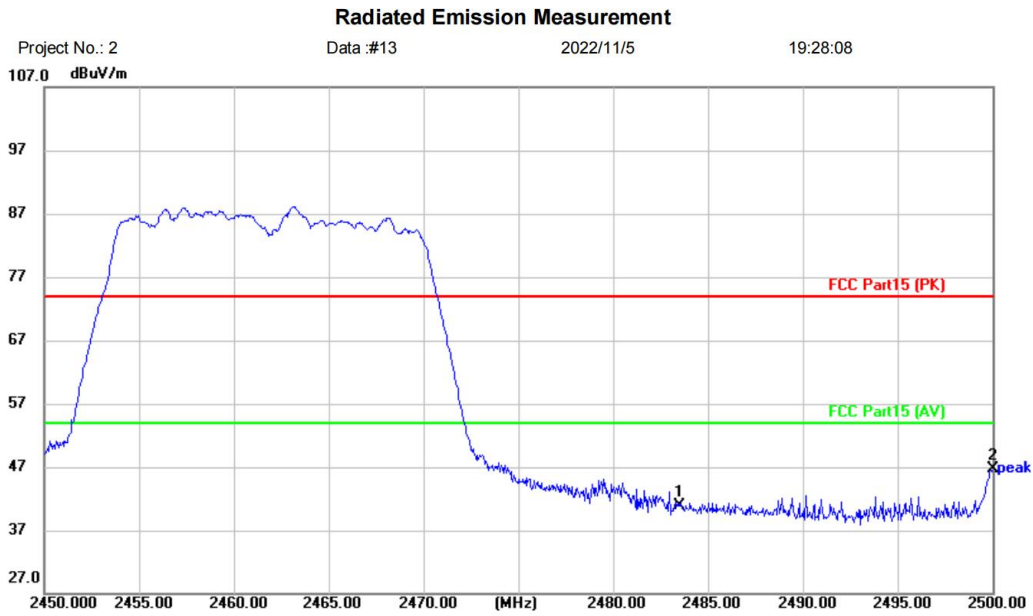


Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: wireless headphones		
M/N: Capsule3 Pro		
Mode: 2.4GWIFI-11B-TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2483.500	44.95	-3.96	40.99	74.00	-33.01	peak	
2	*	2500.000	50.64	-4.00	46.64	74.00	-27.36	peak	

Test Result: Pass

[TestMode: TX g high channel]; [Polarity: Horizontal]

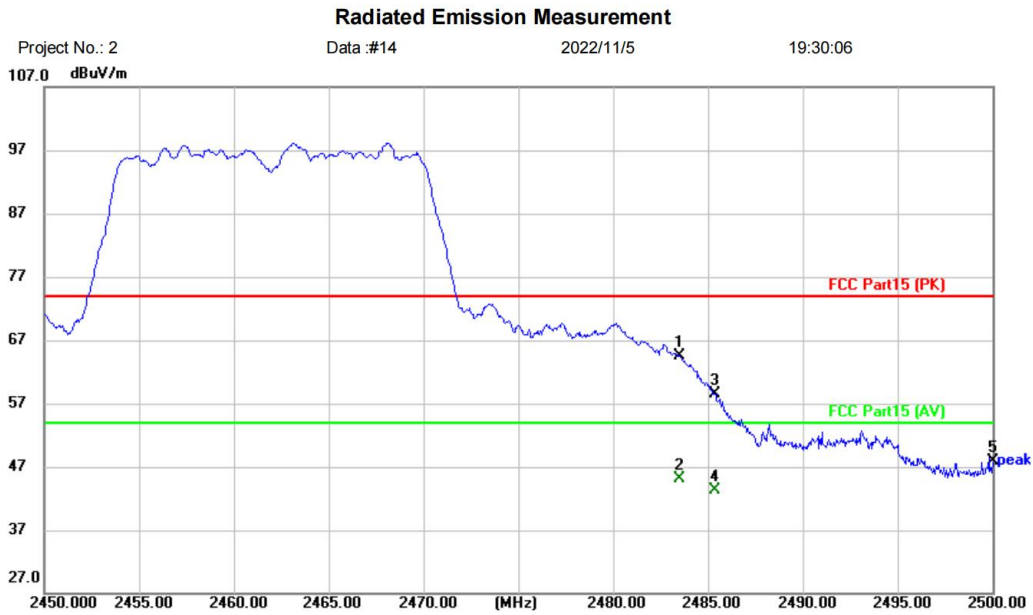


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: wireless headphones		
M/N: Capsule3 Pro		
Mode: 2.4GWIFI-11B-TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2483.500	68.43	-3.96	64.47	74.00	-9.53	peak	
2	*	2483.500	49.08	-3.96	45.12	54.00	-8.88	AVG	
3		2485.350	62.51	-3.97	58.54	74.00	-15.46	peak	
4		2485.350	47.18	-3.97	43.21	54.00	-10.79	AVG	
5		2500.000	51.88	-4.00	47.88	74.00	-26.12	peak	

Test Result: Pass

[TestMode: TX n20 low channel]; [Polarity: Horizontal]

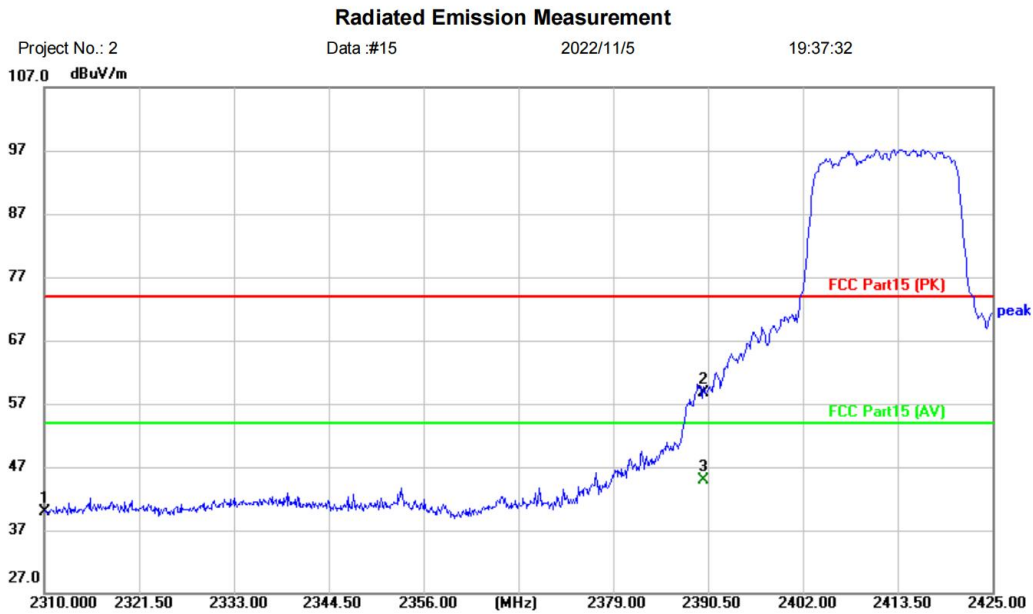


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: wireless headphones		
M/N: Capsule3 Pro		
Mode: 2.4GWIFI-11N20-TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	44.20	-4.27	39.93	74.00	-34.07	peak	
2		2390.000	62.59	-3.82	58.77	74.00	-15.23	peak	
3	*	2390.000	48.73	-3.82	44.91	54.00	-9.09	AVG	

Test Result: Pass

[TestMode: TX n20 low channel]; [Polarity: Vertical]

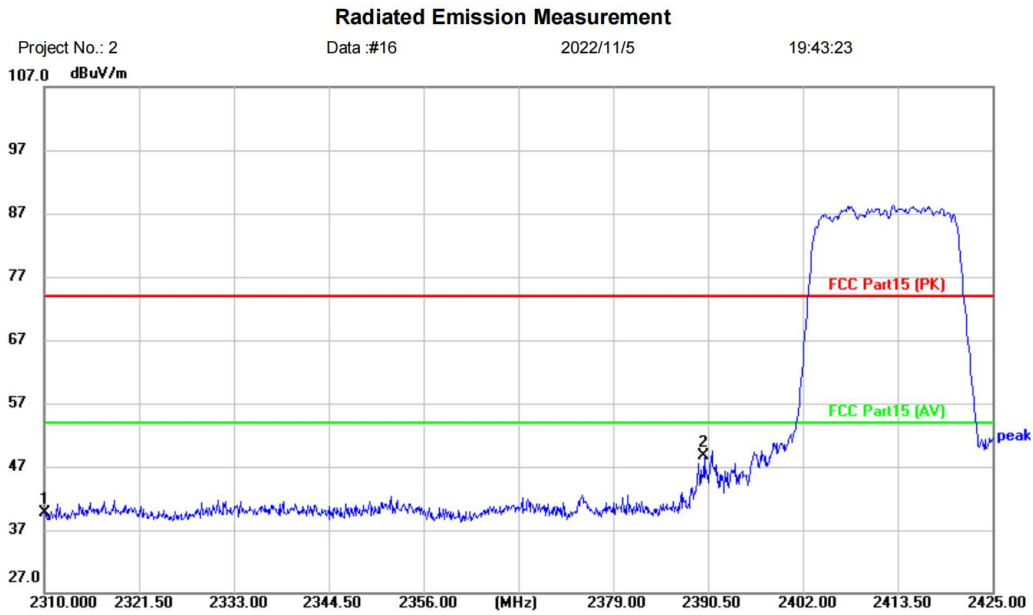


Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: wireless headphones		
M/N: Capsule3 Pro		
Mode: 2.4GWIFI-11N20-TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	43.89	-4.27	39.62	74.00	-34.38	peak	
2	*	2390.000	52.44	-3.82	48.62	74.00	-25.38	peak	

Test Result: Pass

[TestMode: TX n20 high channel]; [Polarity: Vertical]

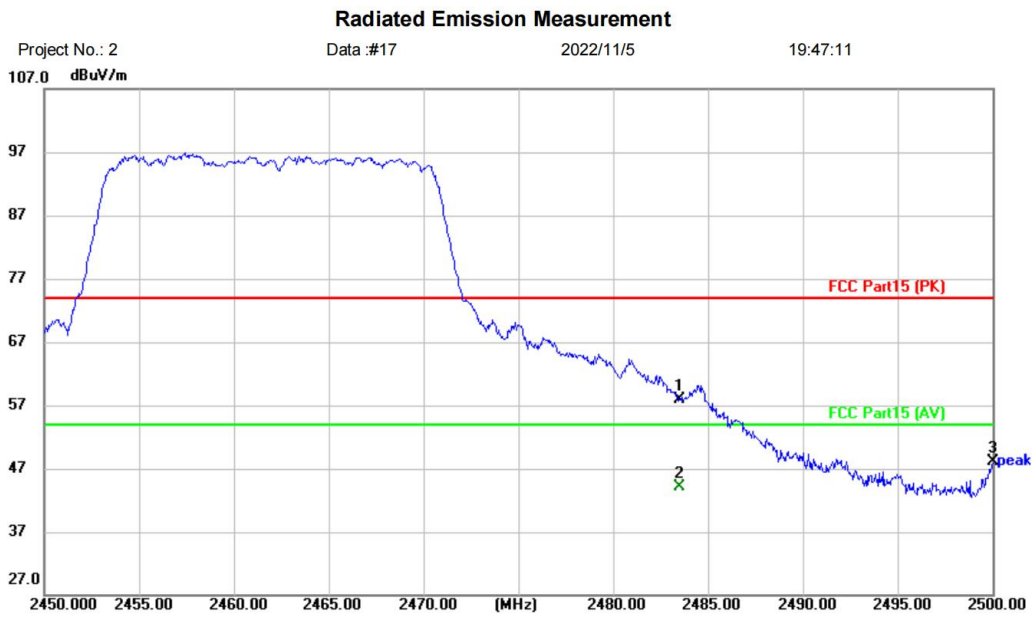


Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: wireless headphones		
M/N: Capsule3 Pro		
Mode: 2.4GWIFI-11N20-TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2483.500	61.82	-3.96	57.86	74.00	-16.14	peak	
2	*	2483.500	48.13	-3.96	44.17	54.00	-9.83	AVG	
3		2500.000	52.14	-4.00	48.14	74.00	-25.86	peak	

Test Result: Pass

[TestMode: TX n20 high channel]; [Polarity: Horizontal]

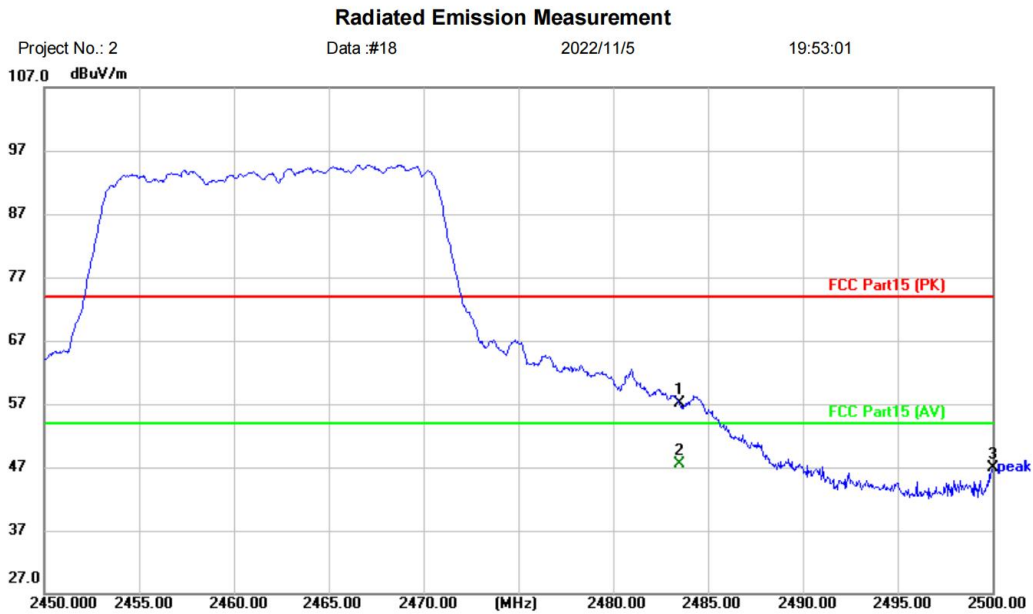


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: wireless headphones		
M/N: Capsule3 Pro		
Mode: 2.4GWIFI-11N20-TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2483.500	61.07	-3.96	57.11	74.00	-16.89	peak	
2	*	2483.500	51.39	-3.96	47.43	54.00	-6.57	AVG	
3		2500.000	50.85	-4.00	46.85	74.00	-27.15	peak	

Test Result: Pass

[TestMode: TX n40 low channel]; [Polarity: Horizontal]

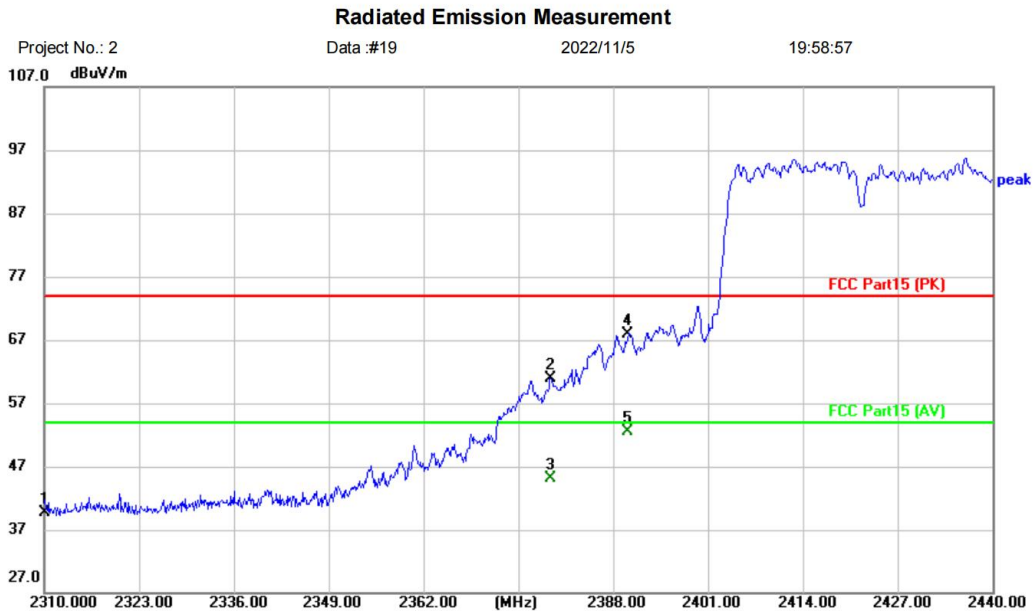


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: wireless headphones		
M/N: Capsule3 Pro		
Mode: 2.4GWIFI-11N40-TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	44.00	-4.27	39.73	74.00	-34.27	peak	
2		2379.420	64.87	-3.88	60.99	74.00	-13.01	peak	
3		2379.420	49.04	-3.88	45.16	54.00	-8.84	AVG	
4		2390.000	71.82	-3.82	68.00	74.00	-6.00	peak	
5	*	2390.000	56.38	-3.82	52.56	54.00	-1.44	AVG	

Test Result: Pass

[TestMode: TX n40 low channel]; [Polarity: Vertical]

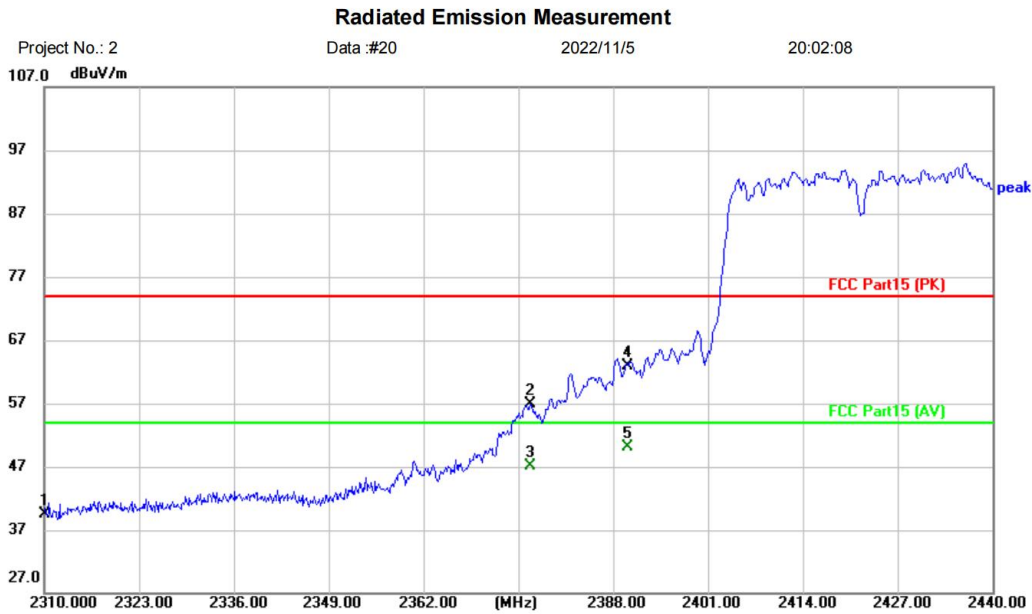


Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: wireless headphones
 M/N: Capsule3 Pro
 Mode: 2.4GWIFI-11N40-TX-L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	43.74	-4.27	39.47	74.00	-34.53	peak	
2		2376.690	60.75	-3.89	56.86	74.00	-17.14	peak	
3		2376.690	50.95	-3.89	47.06	54.00	-6.94	AVG	
4		2390.000	66.68	-3.82	62.86	74.00	-11.14	peak	
5	*	2390.000	53.85	-3.82	50.03	54.00	-3.97	AVG	

Test Result: Pass

[TestMode: TX n40 high channel]; [Polarity: Vertical]

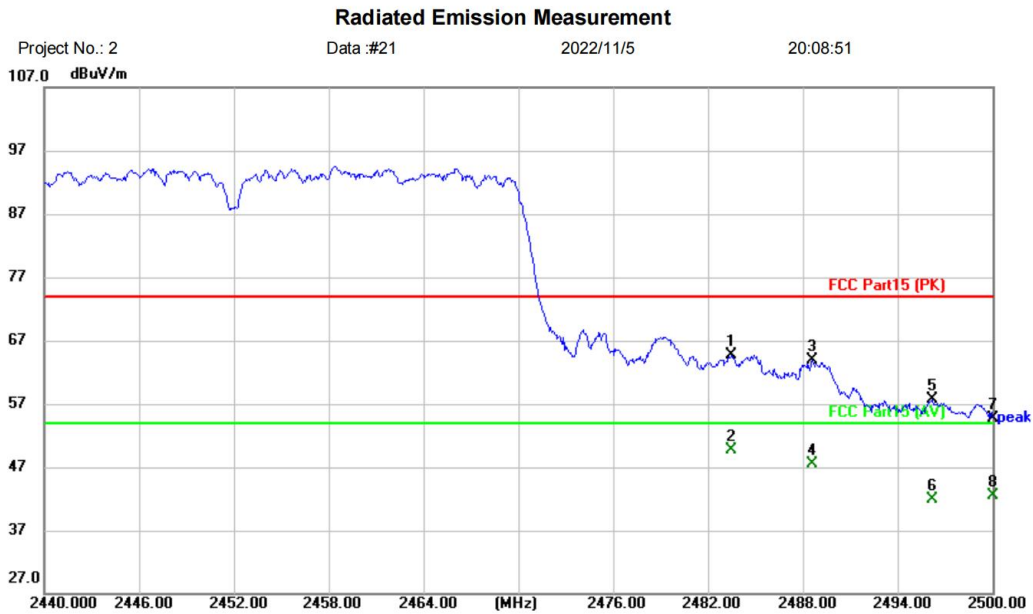


Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: wireless headphones		
M/N: Capsule3 Pro		
Mode: 2.4GWIFI-11N40-TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2483.500	68.61	-3.96	64.65	74.00	-9.35	peak	
2	*	2483.500	53.65	-3.96	49.69	54.00	-4.31	AVG	
3		2488.600	67.78	-3.97	63.81	74.00	-10.19	peak	
4		2488.600	51.42	-3.97	47.45	54.00	-6.55	AVG	
5		2496.220	61.73	-3.99	57.74	74.00	-16.26	peak	
6		2496.220	45.88	-3.99	41.89	54.00	-12.11	AVG	
7		2500.000	58.73	-4.00	54.73	74.00	-19.27	peak	
8		2500.000	46.59	-4.00	42.59	54.00	-11.41	AVG	

Test Result: Pass

[TestMode: TX n40 high channel]; [Polarity: Horizontal]

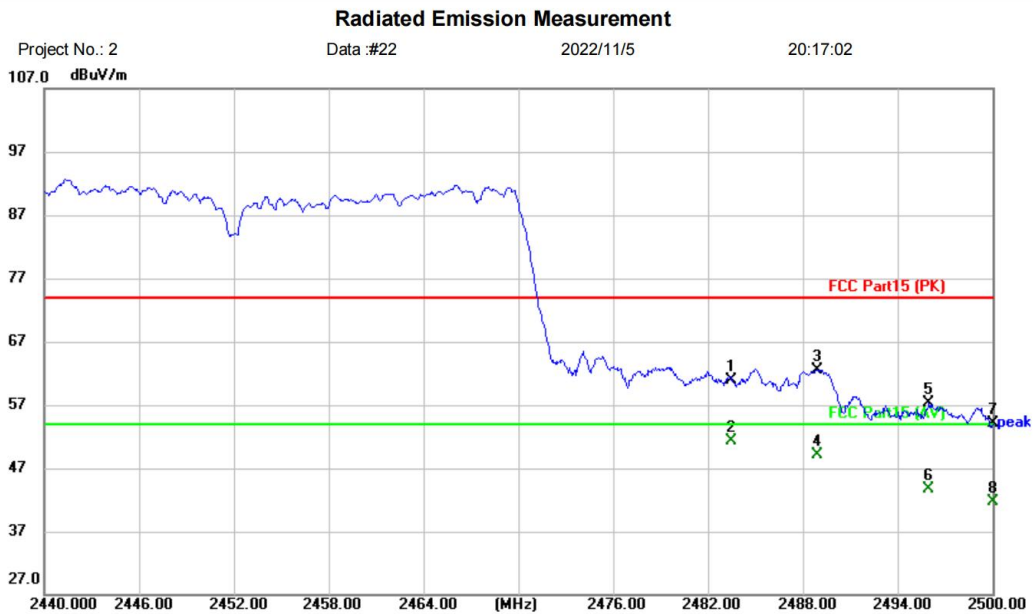

Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: wireless headphones		
M/N: Capsule3 Pro		
Mode: 2.4GWIFI-11N40-TX-H		
Note:		

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	2483.500	64.94	-3.96	60.98	74.00	-13.02	peak	
2 *	2483.500	55.20	-3.96	51.24	54.00	-2.76	AVG	
3	2488.900	66.57	-3.97	62.60	74.00	-11.40	peak	
4	2488.900	53.09	-3.97	49.12	54.00	-4.88	AVG	
5	2495.980	61.32	-3.99	57.33	74.00	-16.67	peak	
6	2495.980	47.63	-3.99	43.64	54.00	-10.36	AVG	
7	2500.000	58.16	-4.00	54.16	74.00	-19.84	peak	
8	2500.000	45.78	-4.00	41.78	54.00	-12.22	AVG	

Test Result: Pass


13 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

13.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

13.2 BLOCK DIAGRAM OF TEST SETUP

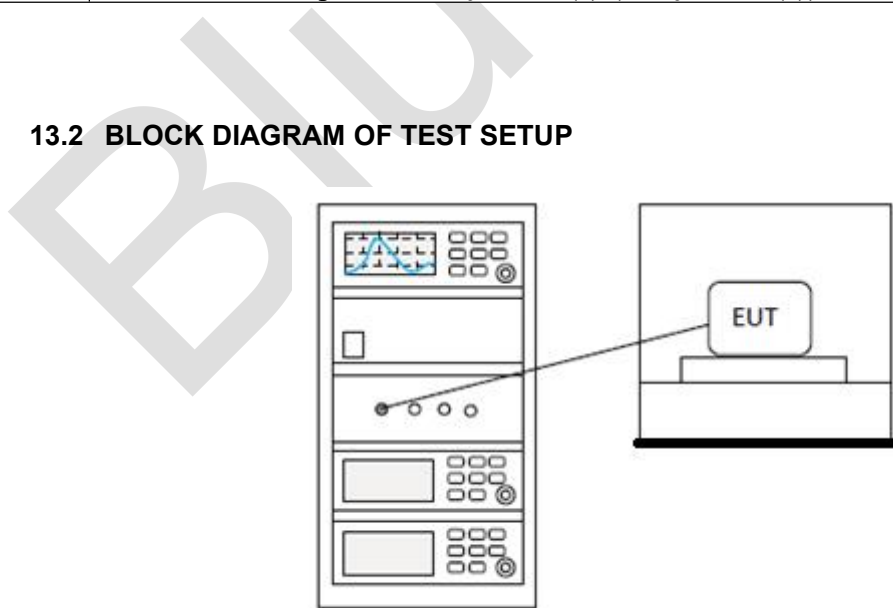

13.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


14 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

14.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

14.2 BLOCK DIAGRAM OF TEST SETUP

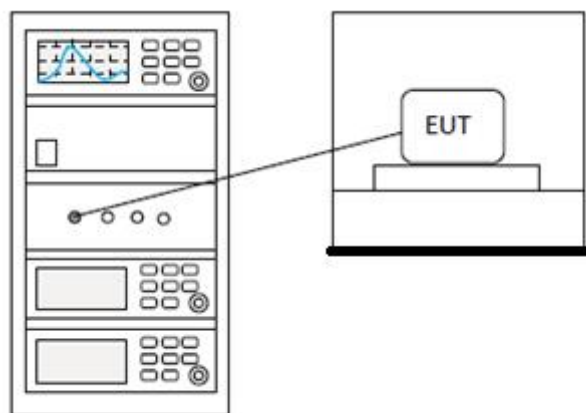

14.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


15 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

15.1 LIMITS

Limit:	≥ 500 kHz
--------	----------------

15.2 BLOCK DIAGRAM OF TEST SETUP

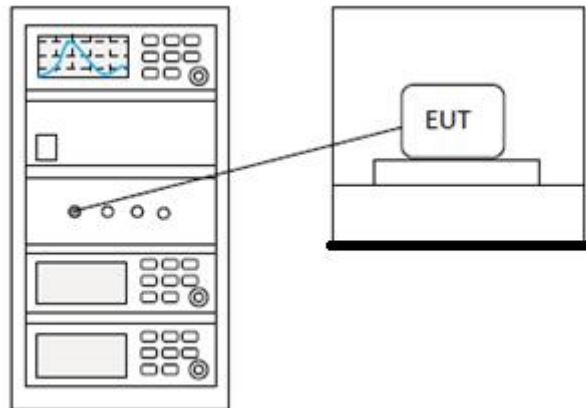

15.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


16 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

16.1 LIMITS

Limit: $\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

16.2 BLOCK DIAGRAM OF TEST SETUP

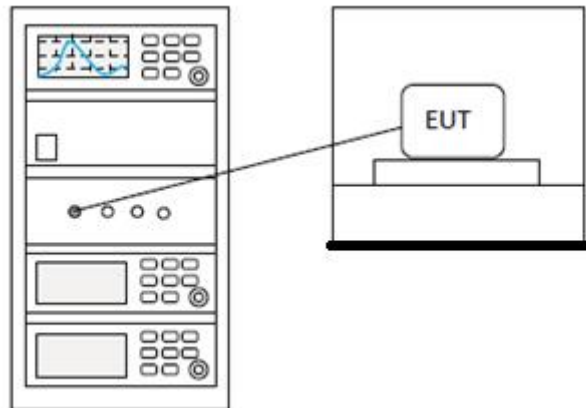

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


17 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5 & Section 11.9.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

17.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

17.2 BLOCK DIAGRAM OF TEST SETUP

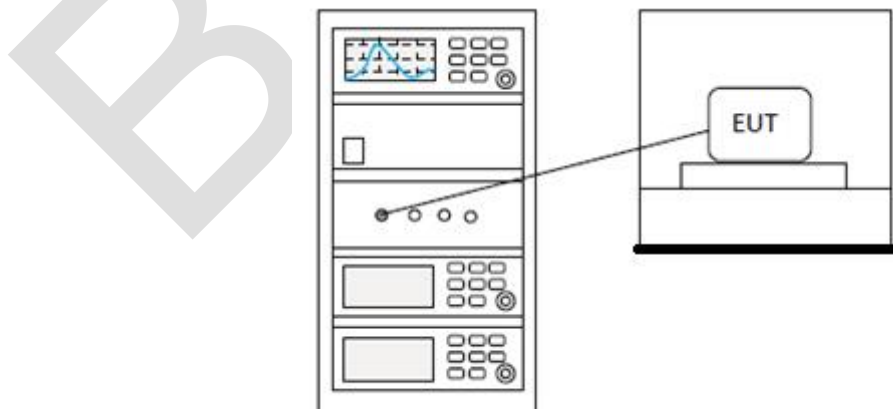

17.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

18 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

18.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

18.2 BLOCK DIAGRAM OF TEST SETUP

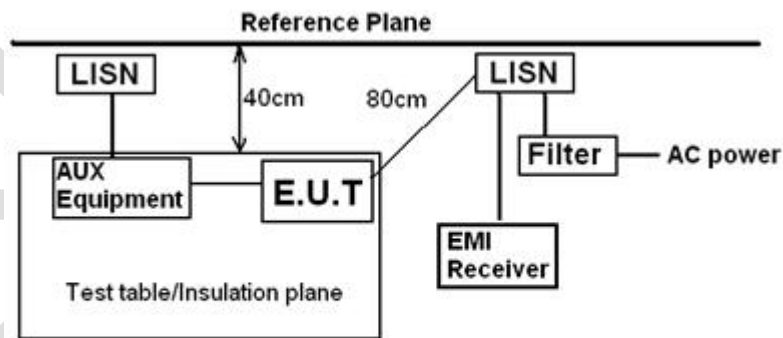

Remark:
 E.U.T: Equipment Under Test
 LISN: Line Impedance Stabilization Network
 Test table height=0.8m

18.3 PROCEDURE


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
 - 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
 - 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

18.1 TEST DATA

[TestMode: Transmitting mode]; [Line: Line]; [Power:AC120V/60Hz]

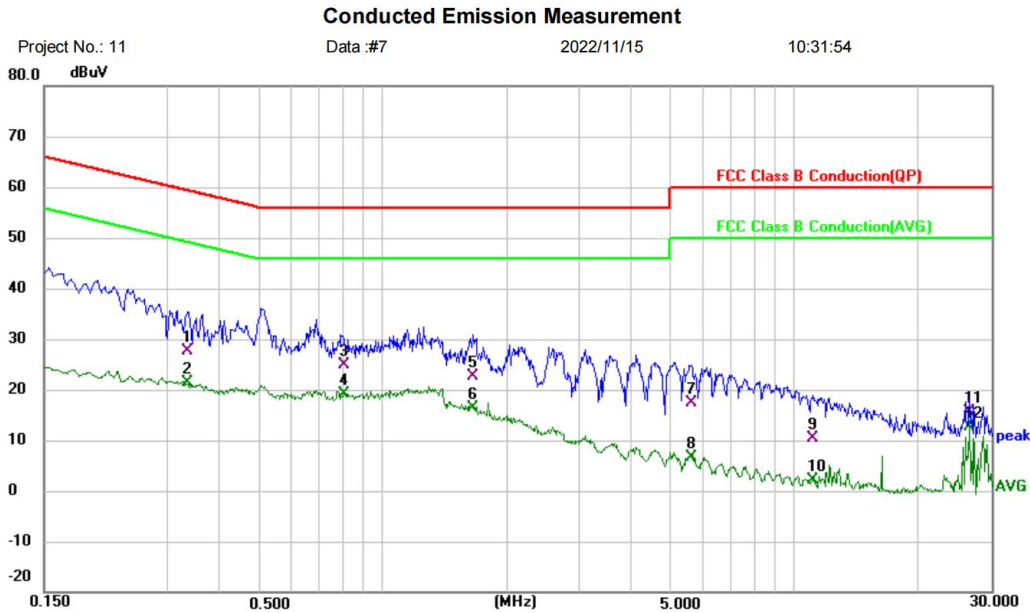

Site Phase: **L1** Temperature: (C)

Limit: FCC Class B Conduction(QP) Power: Humidity: %RH

EUT: WIFI Module

M/N: RW6852S-50B2

Mode: 2.4Gwifi mode

Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.3339	17.44	10.07	27.51	59.35	-31.84	QP	
2	0.3339	11.20	10.07	21.27	49.35	-28.08	AVG	
3	0.8020	14.70	10.10	24.80	56.00	-31.20	QP	
4 *	0.8020	9.11	10.10	19.21	46.00	-26.79	AVG	
5	1.6540	12.51	10.24	22.75	56.00	-33.25	QP	
6	1.6540	6.15	10.24	16.39	46.00	-29.61	AVG	
7	5.6180	7.39	10.03	17.42	60.00	-42.58	QP	
8	5.6180	-3.35	10.03	6.68	50.00	-43.32	AVG	
9	11.0540	0.22	10.10	10.32	60.00	-49.68	QP	
10	11.0540	-7.93	10.10	2.17	50.00	-47.83	AVG	
11	26.5500	5.74	10.00	15.74	60.00	-44.26	QP	peak
12	26.5500	2.62	10.00	12.62	50.00	-37.38	AVG	AVG


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: Transmitting mode]; [Line: Neutral] ;[Power:AC120V/60Hz]

Conducted Emission Measurement

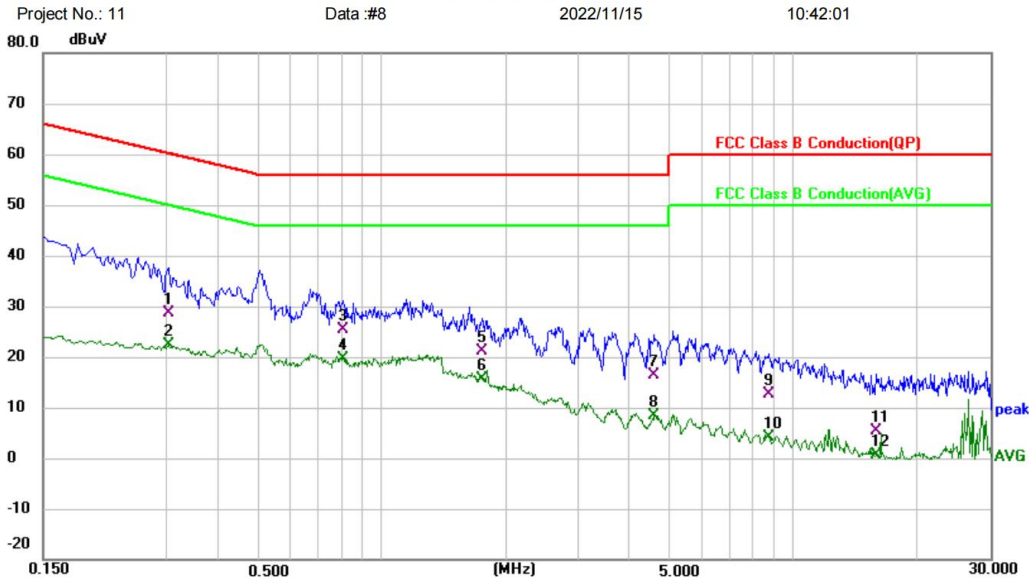

Project No.: 11 Data :#8 2022/11/15 10:42:01

Site Phase: **N** Temperature: (C)

Limit: FCC Class B Conduction(QP) Power: Humidity: %RH

EUT: WIFI Module

M/N: RW6852S-50B2

Mode: 2.4Gwifi mode

Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.3020	18.52	10.07	28.59	60.19	-31.60	QP	
2	0.3020	12.20	10.07	22.27	50.19	-27.92	AVG	
3	0.8059	15.30	10.03	25.33	56.00	-30.67	QP	
4 *	0.8059	9.58	10.03	19.61	46.00	-26.39	AVG	
5	1.7460	11.00	10.08	21.08	56.00	-34.92	QP	
6	1.7460	5.51	10.08	15.59	46.00	-30.41	AVG	
7	4.5900	6.65	9.85	16.50	56.00	-39.50	QP	
8	4.5900	-1.58	9.85	8.27	46.00	-37.73	AVG	
9	8.7020	2.81	9.90	12.71	60.00	-47.29	QP	
10	8.7020	-5.88	9.90	4.02	50.00	-45.98	AVG	
11	15.8540	-4.53	10.02	5.49	60.00	-54.51	QP	
12	15.8540	-9.43	10.02	0.59	50.00	-49.41	AVG	

*:Maximum data x:Over limit !:over margin < Reference Only

Test Result: Pass


19 APPENDIX

Appendix1


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Type	Conducted Power (dBm)		Limit (dBm)	Verdict	
NVNT	b	2412	Ant1	SISO	18.757		30	Pass	
NVNT	b	2437	Ant1	SISO	19.238		30	Pass	
NVNT	b	2462	Ant1	SISO	18.639		30	Pass	
NVNT	b	2412	Ant2	SISO	19.436		30	Pass	
NVNT	b	2437	Ant2	SISO	19.927		30	Pass	
NVNT	b	2462	Ant2	SISO	18.943		30	Pass	
NVNT	g	2412	Ant1	SISO	18.128		30	Pass	
NVNT	g	2437	Ant1	SISO	18.256		30	Pass	
NVNT	g	2462	Ant1	SISO	18.231		30	Pass	
NVNT	g	2412	Ant2	SISO	18.593		30	Pass	
NVNT	g	2437	Ant2	SISO	18.719		30	Pass	
NVNT	g	2462	Ant2	SISO	18.477		30	Pass	
NVNT	n20	2412	Ant1	SISO	17.965		30	Pass	
NVNT	n20	2437	Ant1	SISO	17.98		30	Pass	
NVNT	n20	2462	Ant1	SISO	17.966		30	Pass	
NVNT	n20	2412	Ant2	SISO	17.454		30	Pass	
NVNT	n20	2437	Ant2	SISO	17.612		30	Pass	
NVNT	n20	2462	Ant2	SISO	17.304		30	Pass	
NVNT	n20	2412	Sum	MIMO	Ant1	16.805	20.051	29.69	Pass
					Ant2	17.265			
NVNT	n20	2437	Sum	MIMO	Ant1	16.848	20.192	29.69	Pass
					Ant2	17.491			
NVNT	n20	2462	Sum	MIMO	Ant1	17.04	20.083	29.69	Pass
					Ant2	17.105			
NVNT	n40	2422	Ant1	SISO	17.261		30	Pass	
NVNT	n40	2437	Ant1	SISO	17.522		30	Pass	
NVNT	n40	2452	Ant1	SISO	17.68		30	Pass	
NVNT	n40	2422	Ant2	SISO	17.912		30	Pass	
NVNT	n40	2437	Ant2	SISO	17.937		30	Pass	
NVNT	n40	2452	Ant2	SISO	17.934		30	Pass	
NVNT	n40	2422	Sum	MIMO	Ant1	17.239	20.573	29.69	Pass
					Ant2	17.864			
NVNT	n40	2437	Sum	MIMO	Ant1	17.39	20.698	29.69	Pass
					Ant2	17.967			
NVNT	n40	2452	Sum	MIMO	Ant1	17.531	20.757	29.69	Pass
					Ant2	17.953			


Power NVNT b 2412MHz Ant1

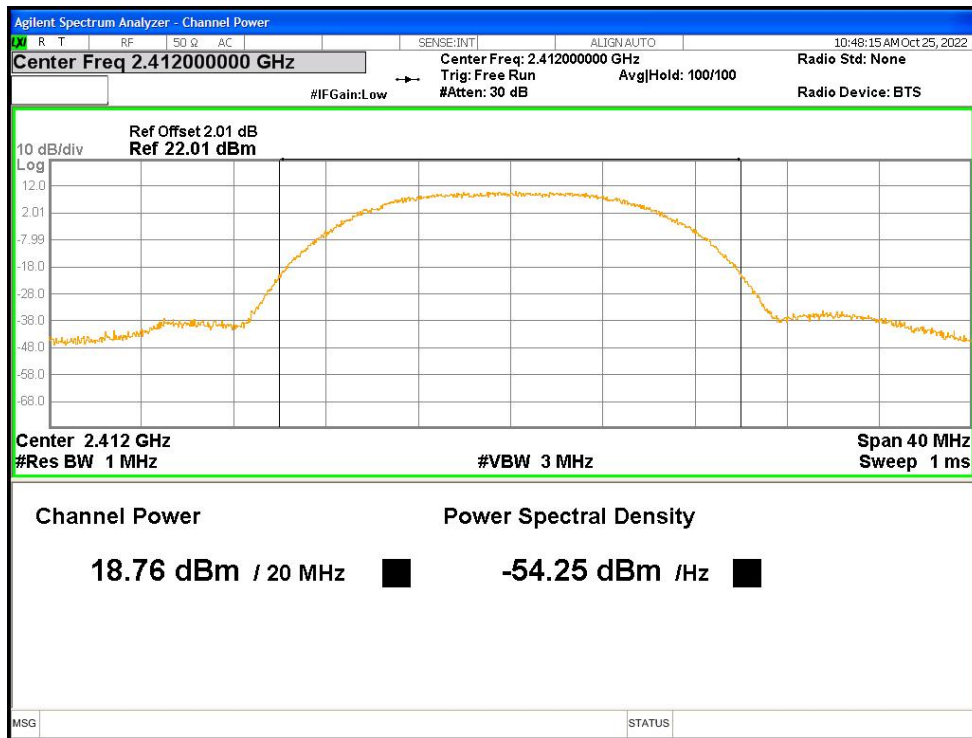


Power NVNT b 2437MHz Ant1

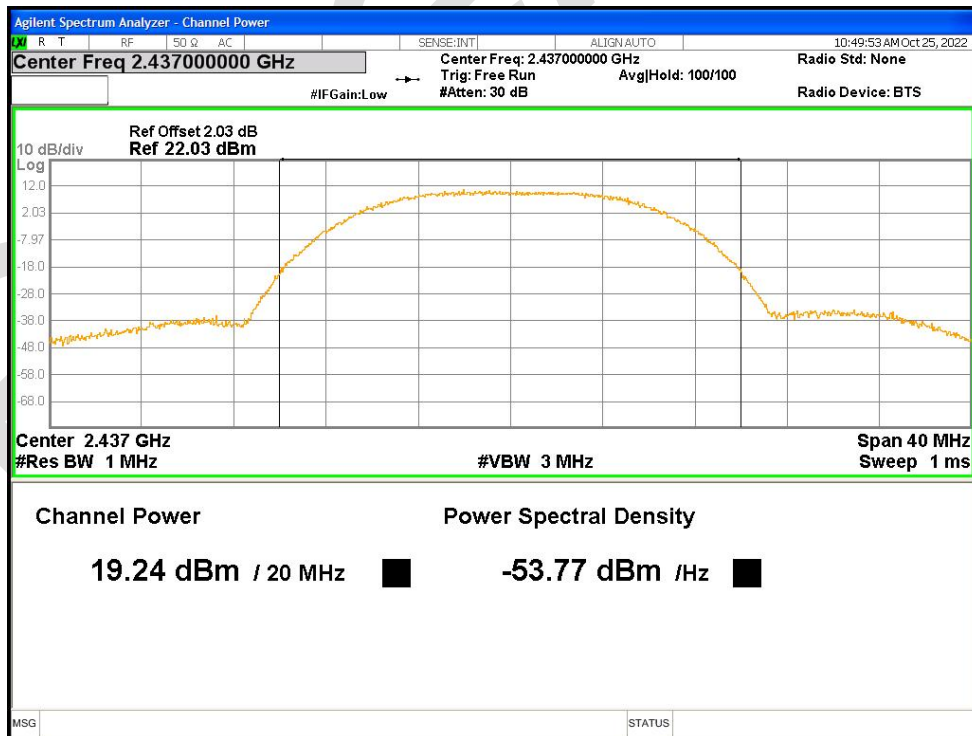


Power NVNT b 2462MHz Ant1

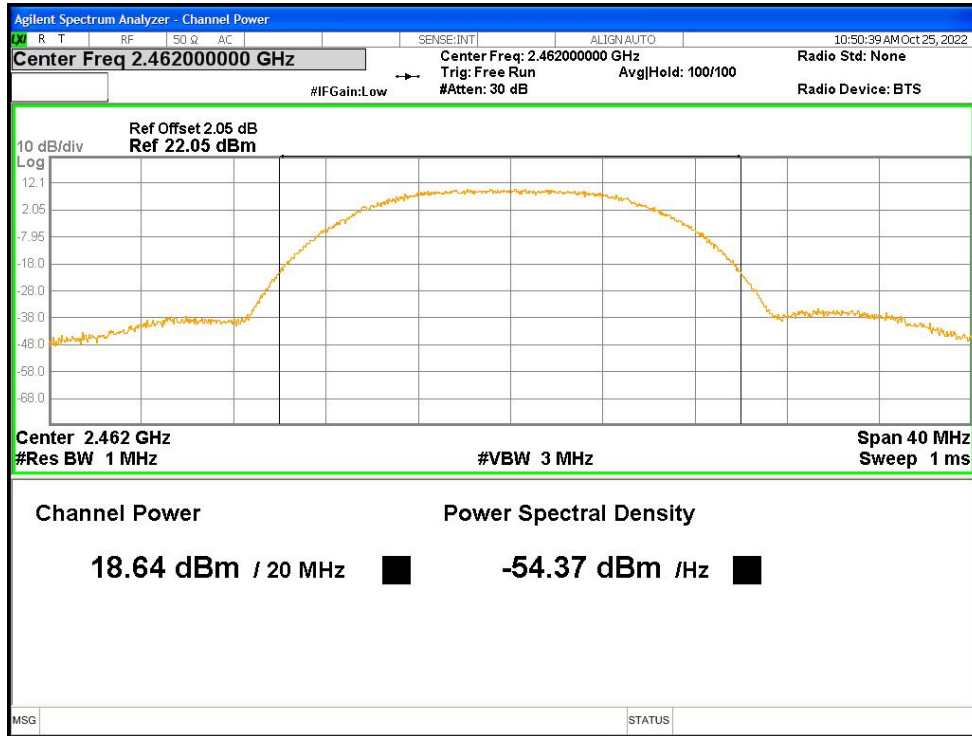


Power NVNT b 2412MHz Ant2

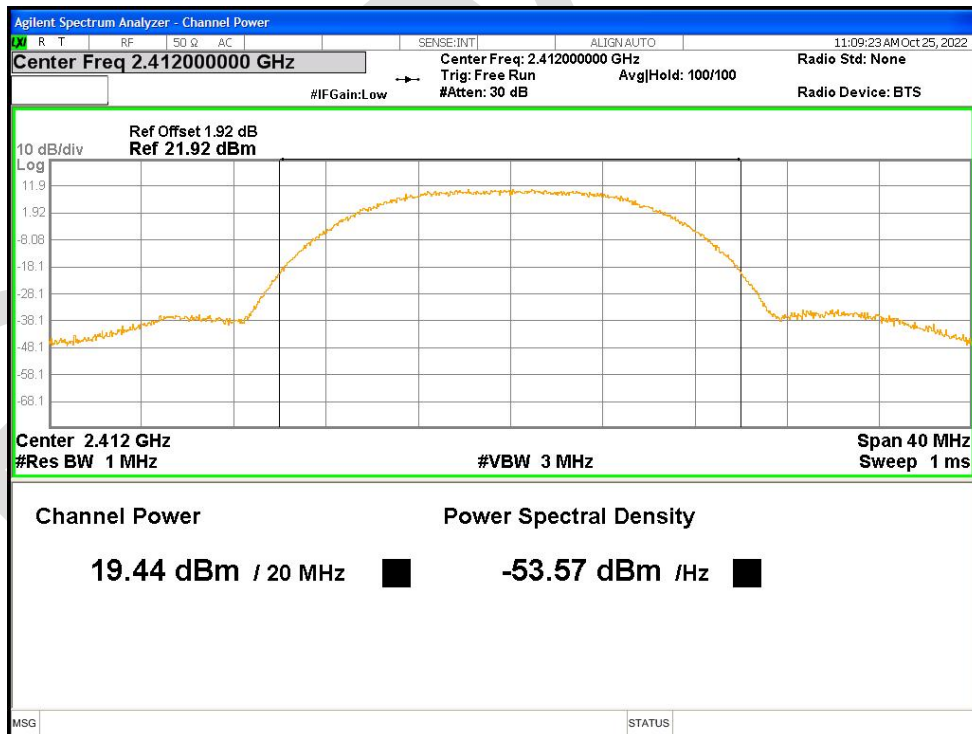


Power NVNT b 2437MHz Ant2

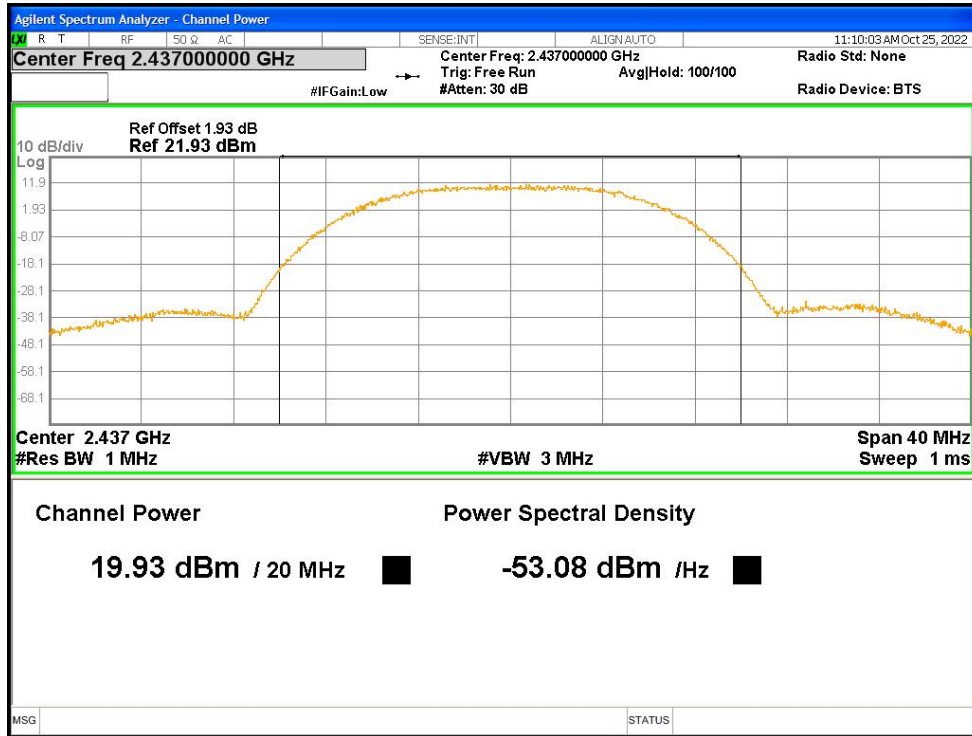

Power NVNT b 2462MHz Ant2

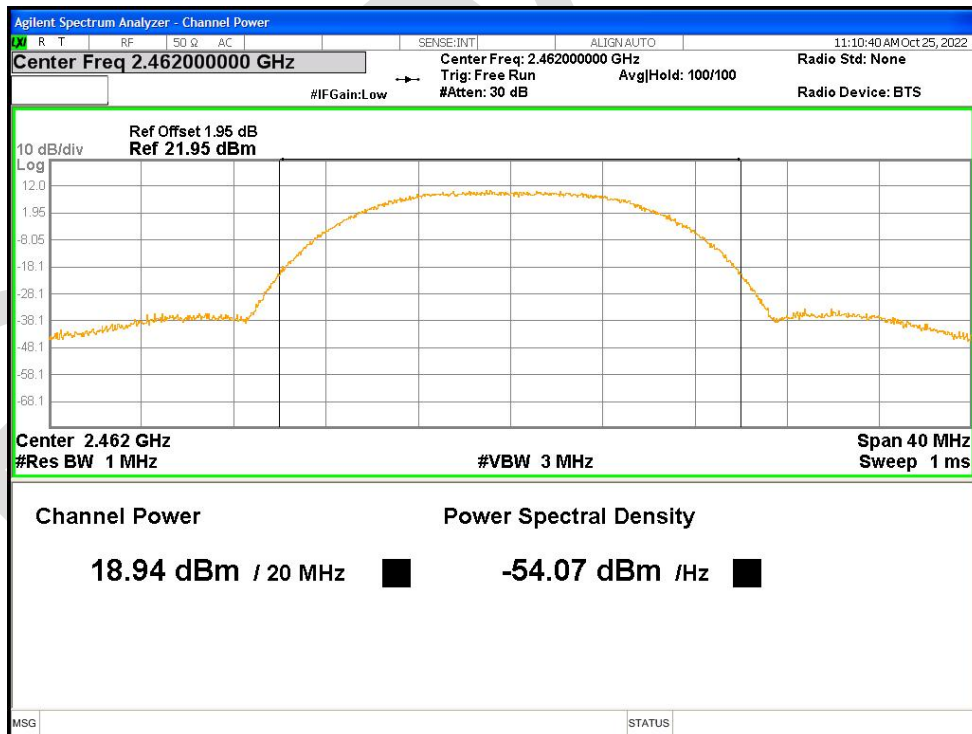

Power NVNT g 2412MHz Ant1

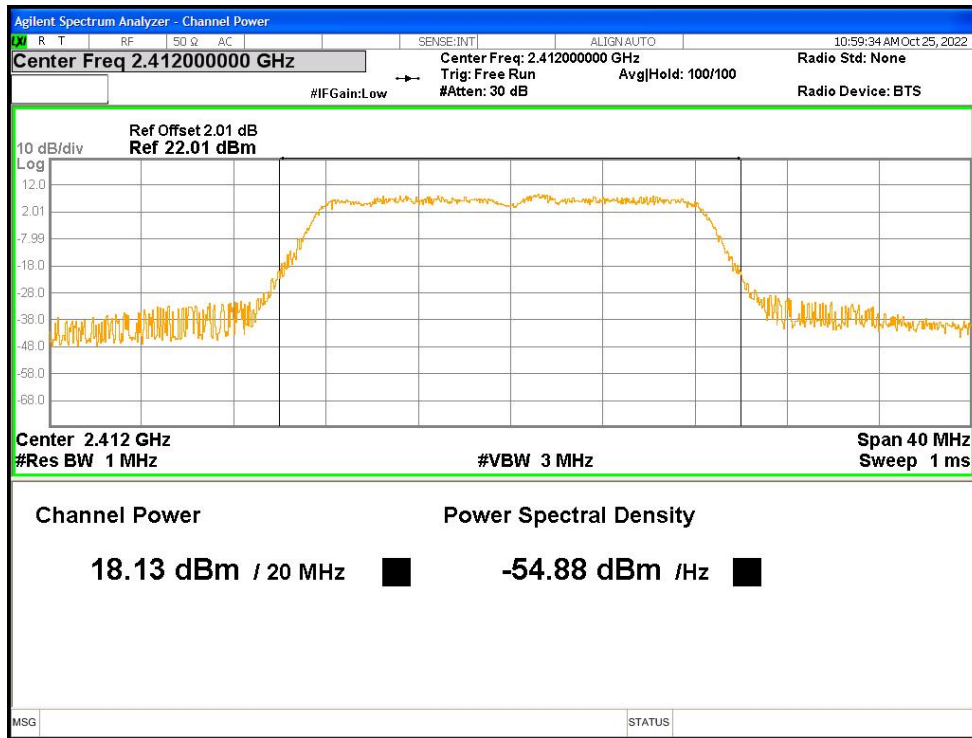

Power NVNT g 2437MHz Ant1

