



Emission Bandwidth&99% Occupied Bandwidth	UNII Band I
Test Model 802.11ac(VHT80) mode	Frequency(MHz) 5210
Ant0	




Ant1

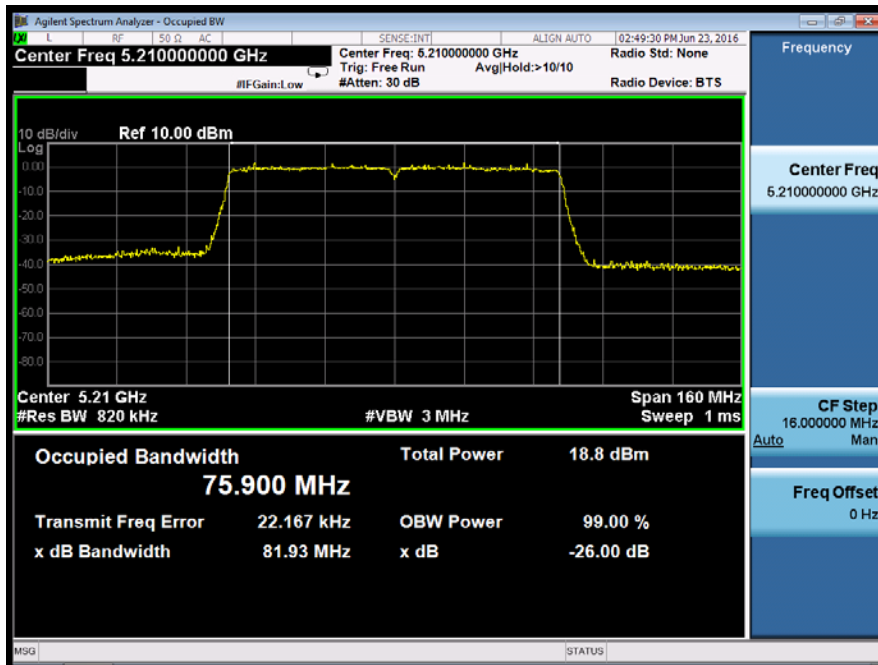

Emission Bandwidth&99% Occupied Bandwidth	UNII Band II-A	
Test Model	802.11ac(VHT80) mode	Frequency(MHz)
Ant0		5290

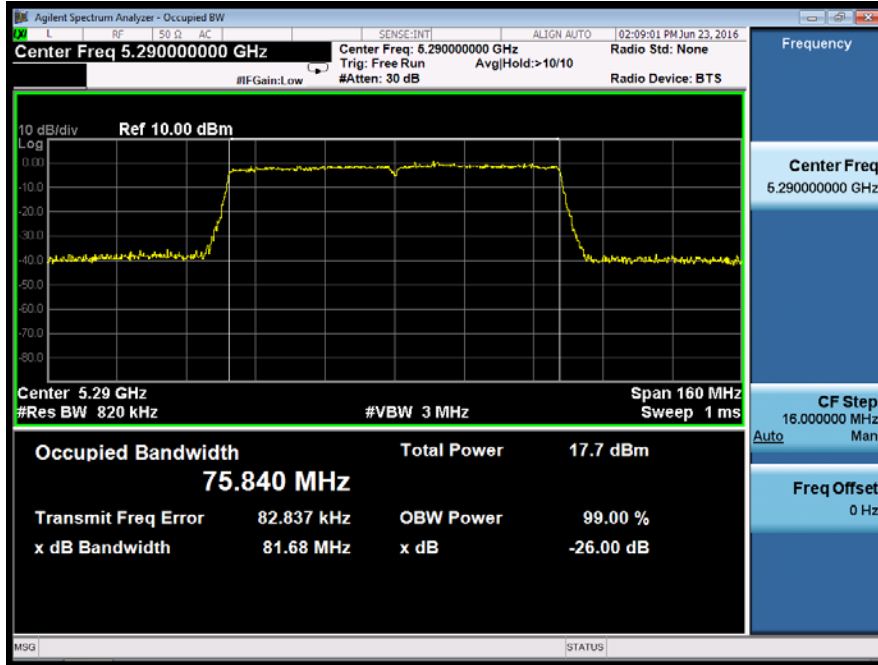


Ant1

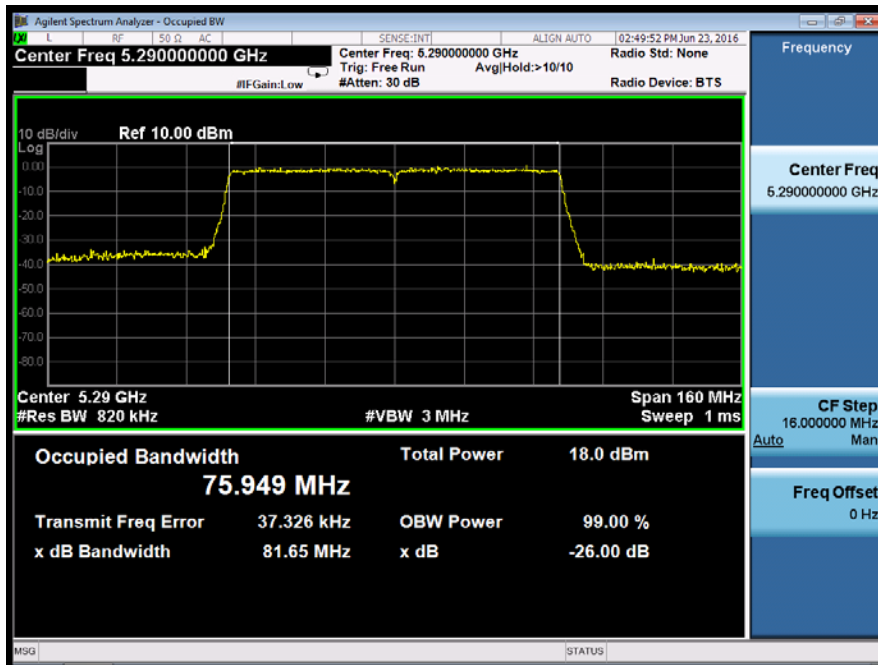


Emission Bandwidth&99% Occupied Bandwidth	UNII Band II-C	
Test Model	802.11ac(VHT80) mode	Frequency(MHz)
Ant0		5530




Ant1

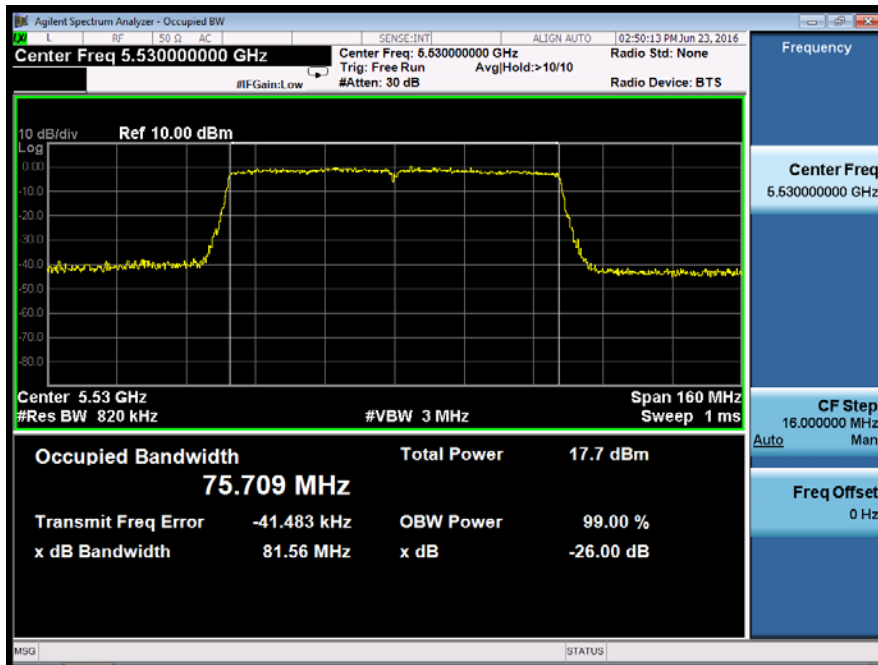

Emission Bandwidth&99% Occupied Bandwidth	UNII Band II-C	
Test Model	802.11ac(VHT80) mode	Frequency(MHz)
Ant0		5610

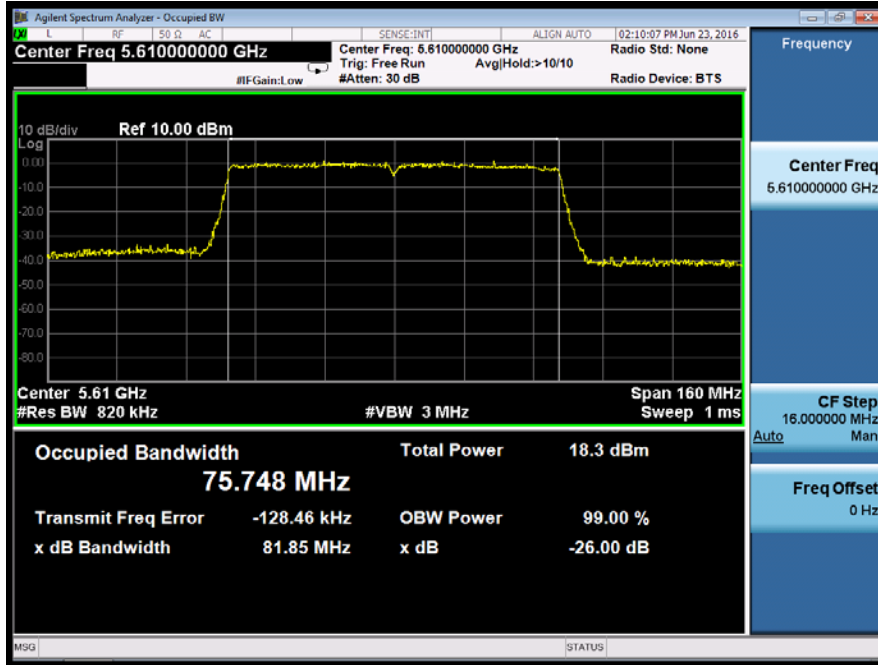


Ant1

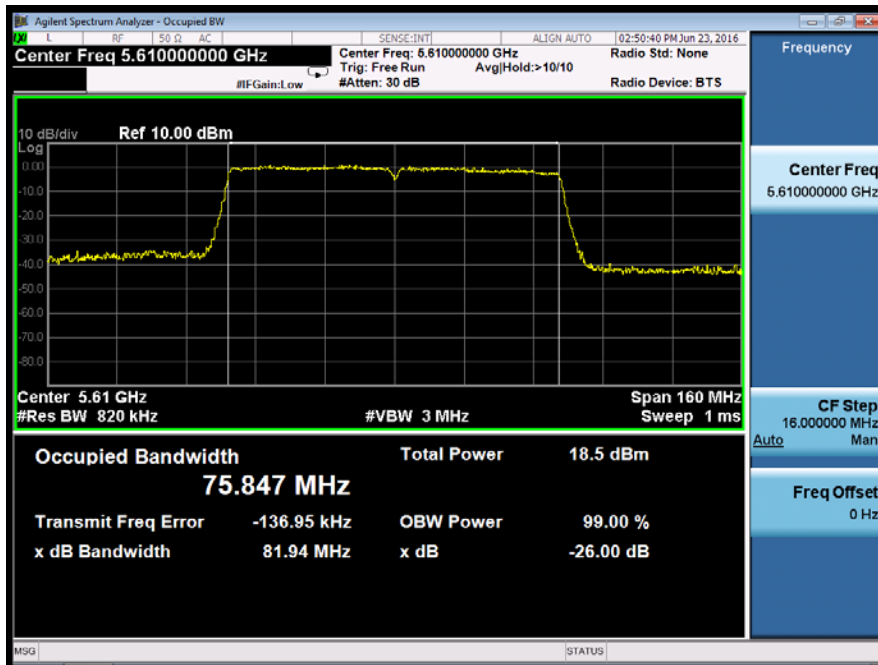


Emission Bandwidth&99% Occupied Bandwidth	UNII Band III	
Test Model	802.11ac(VHT80) mode	Frequency(MHz)
Ant0		5775




Ant1

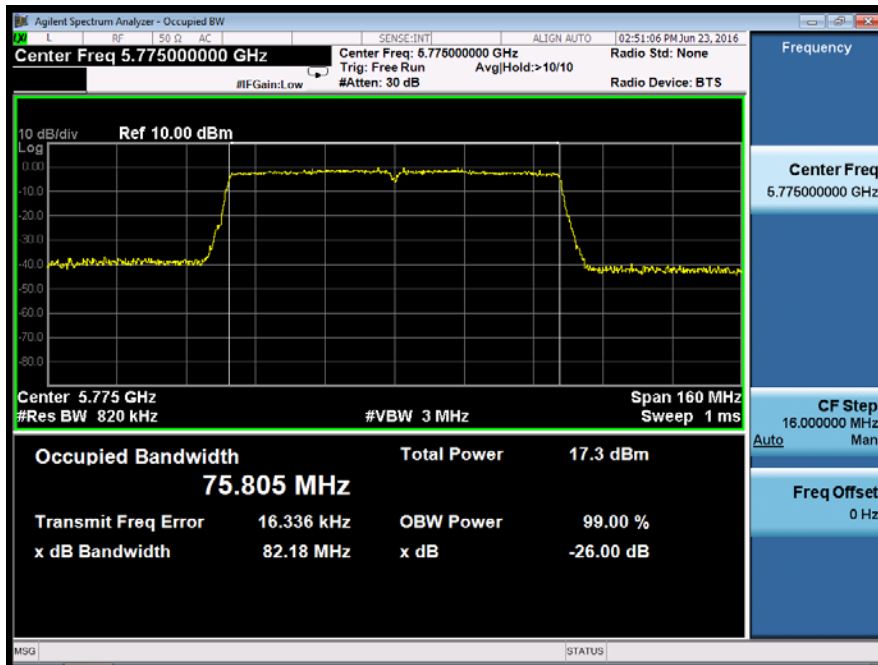


Minimum Emission Bandwidth	UNII Band III	
Test Model	802.11a mode	Frequency(MHz)
Ant0		5745

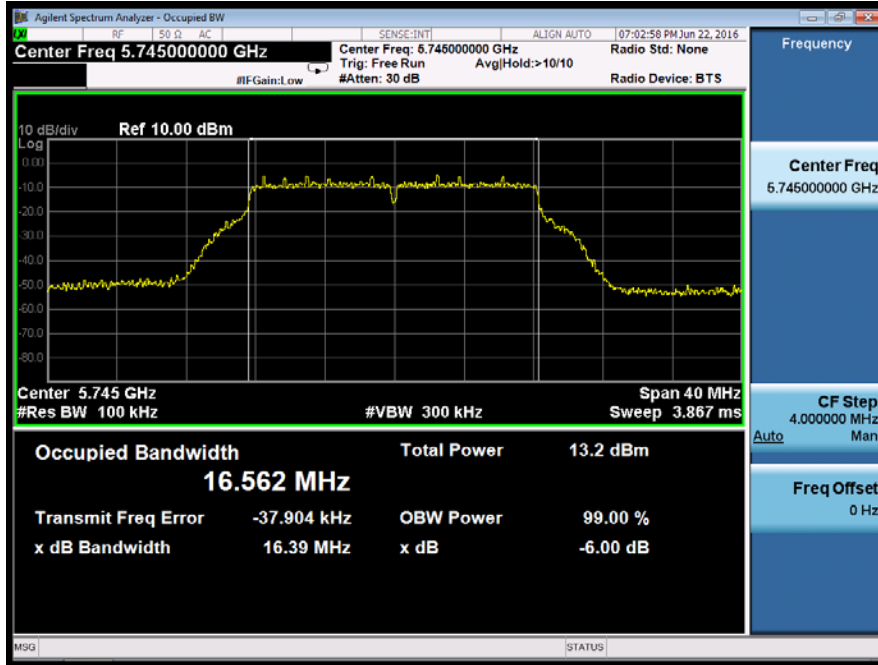


Ant1

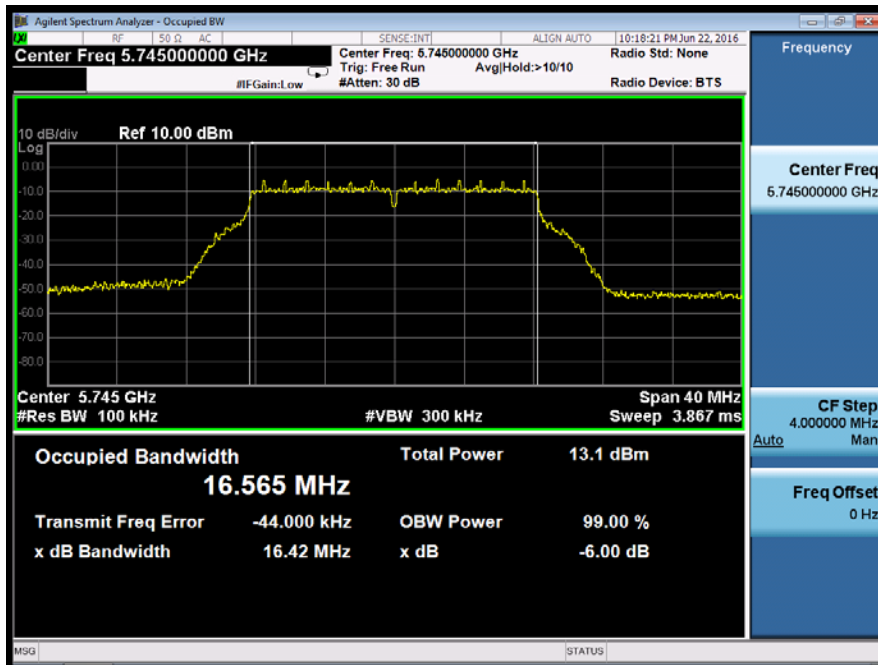


Minimum Emission Bandwidth	UNII Band III	
Test Model	802.11a mode	Frequency(MHz)
Ant0		5785

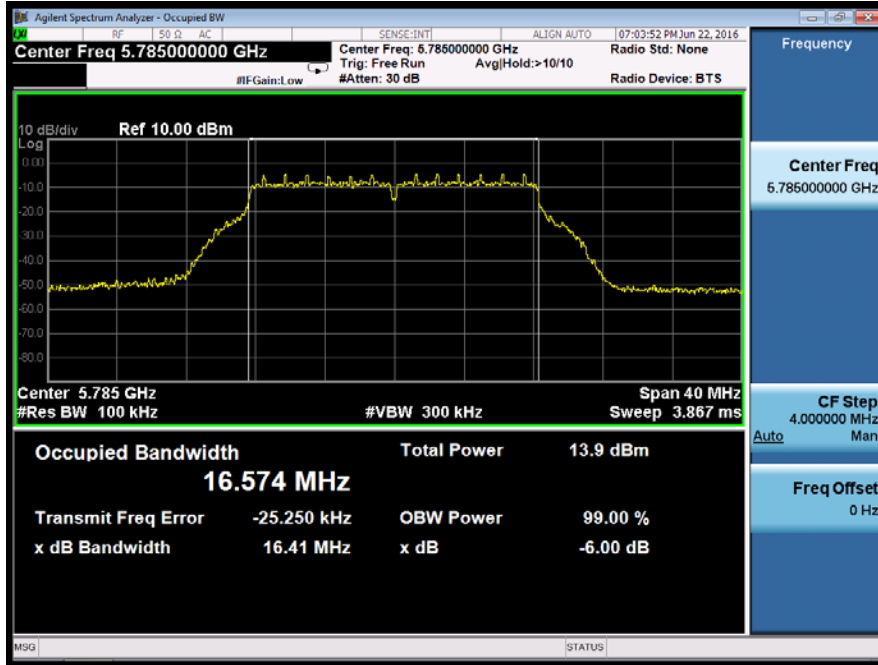


Ant1

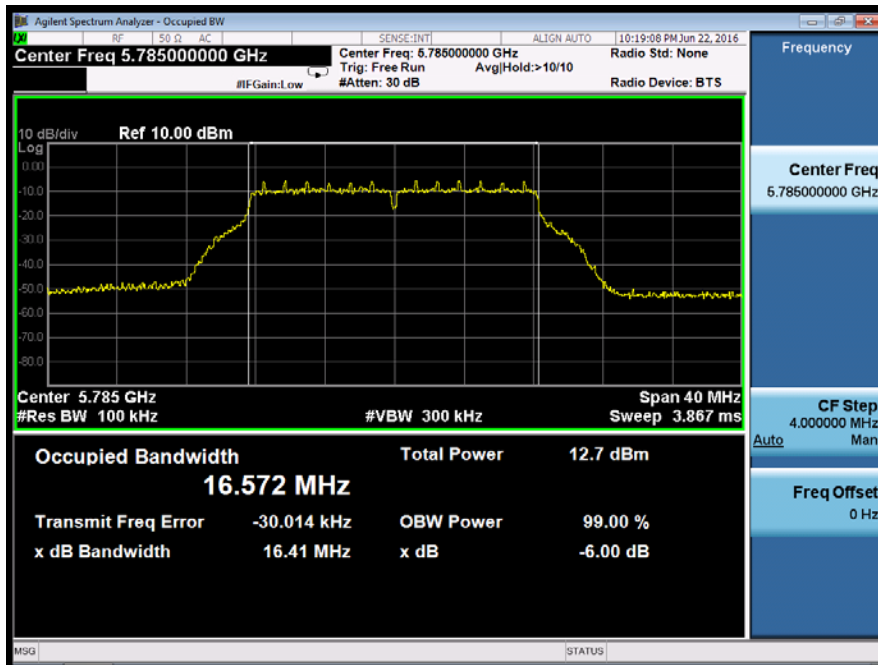


Minimum Emission Bandwidth	UNII Band III	
Test Model	802.11a mode	Frequency(MHz)
Ant0		5825

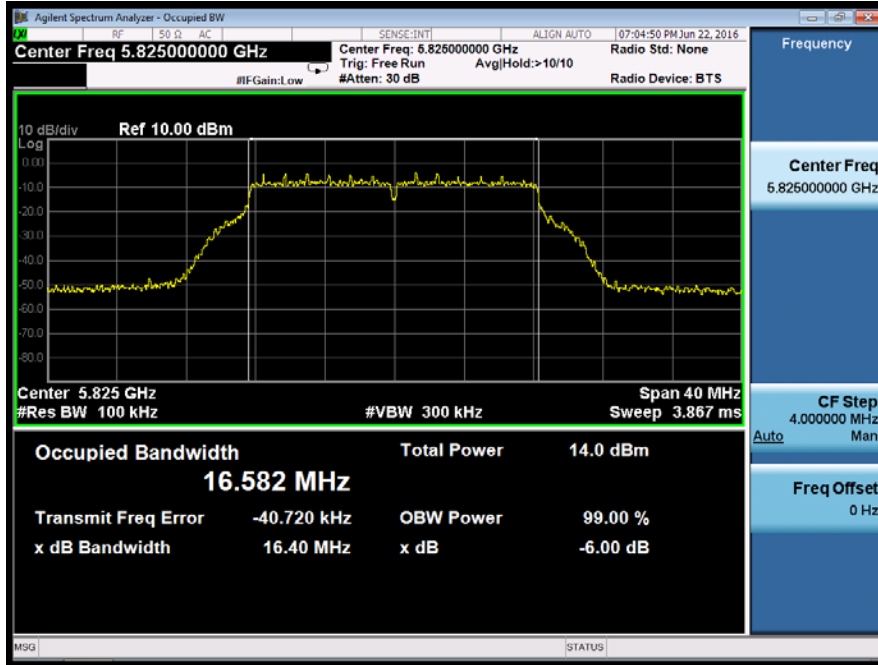


Ant1

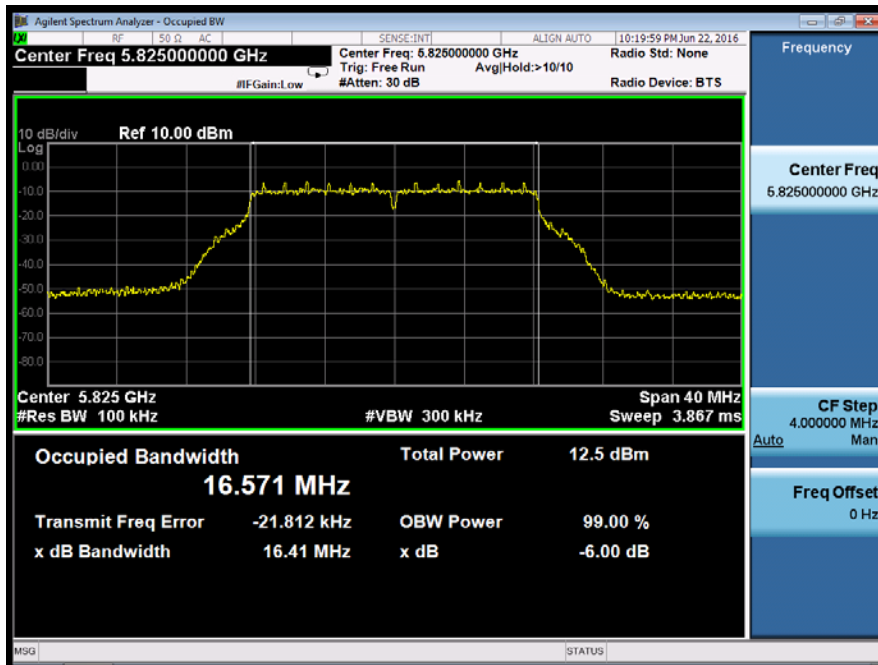


Minimum Emission Bandwidth	UNII Band III	
Test Model	802.11n(VHT20) mode	Frequency(MHz)
Ant0		5745

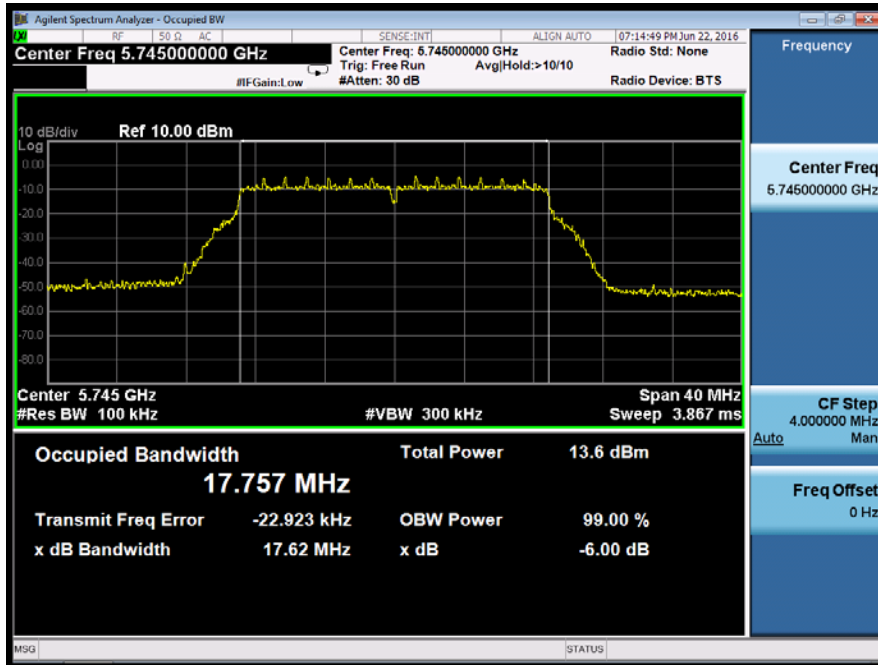


Ant1

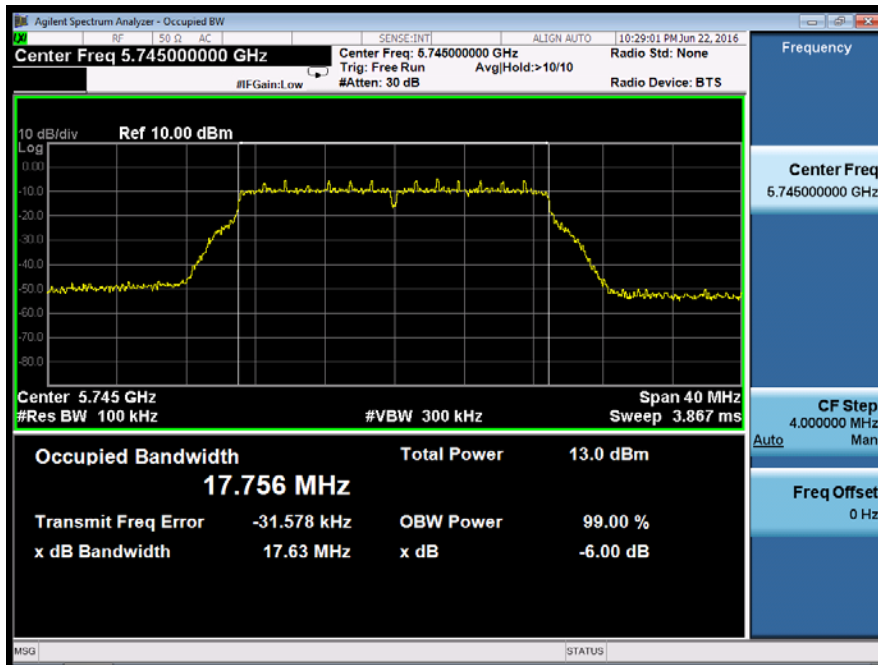


Minimum Emission Bandwidth		UNII Band III	
Test Model	802.11n(VHT20) mode	Frequency(MHz)	5785
Ant0			

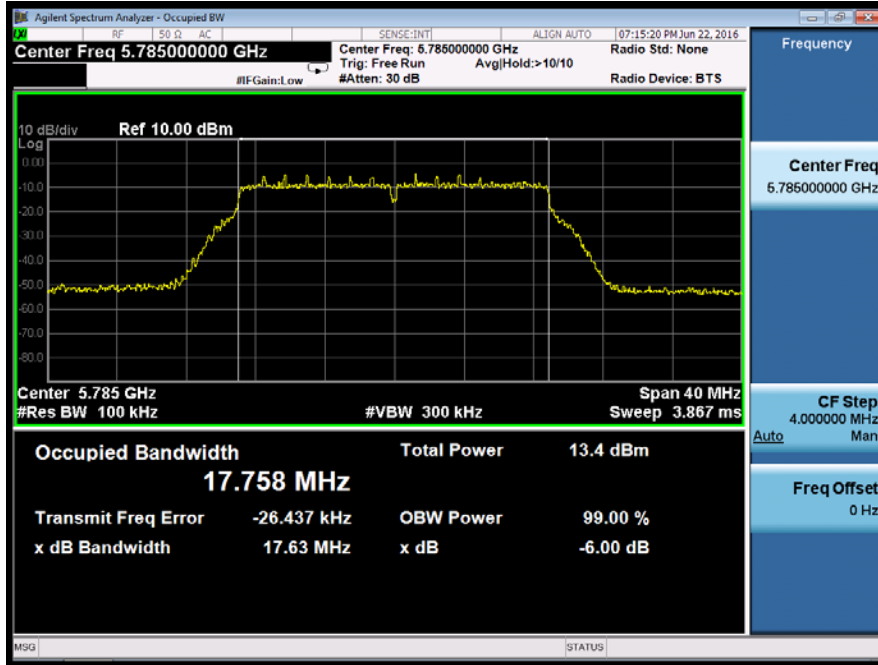


Ant1

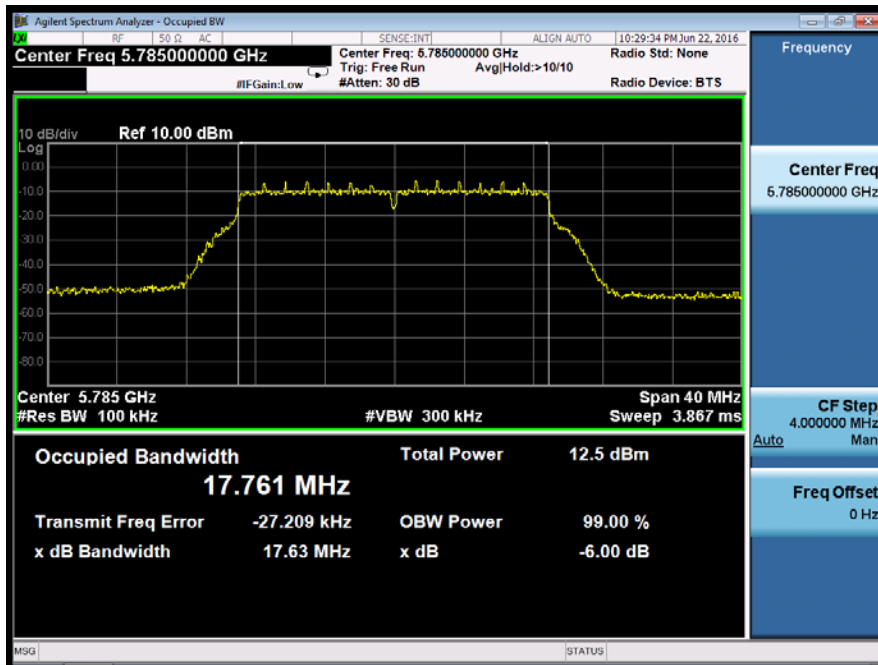


Minimum Emission Bandwidth	UNII Band III	
Test Model	802.11n(VHT20) mode	Frequency(MHz)
Ant0		5825

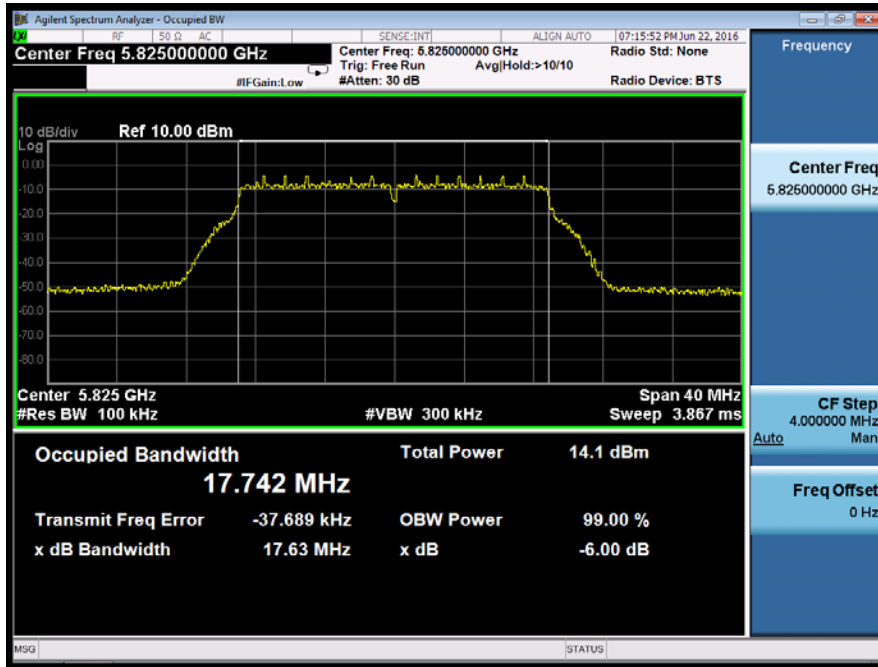


Ant1

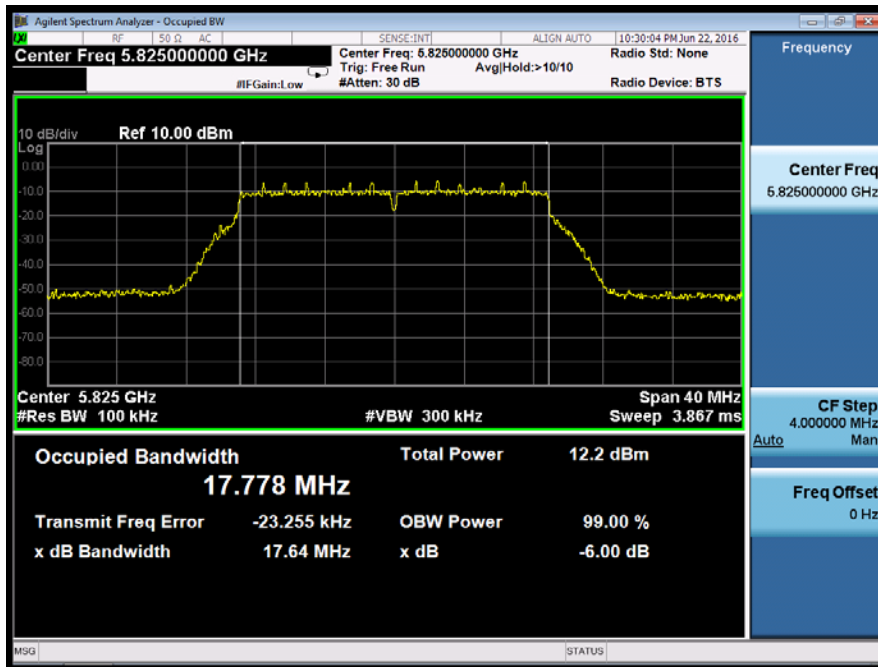


Minimum Emission Bandwidth	UNII Band III	
Test Model	802.11ac(VHT20) mode	Frequency(MHz)
Ant0		5745

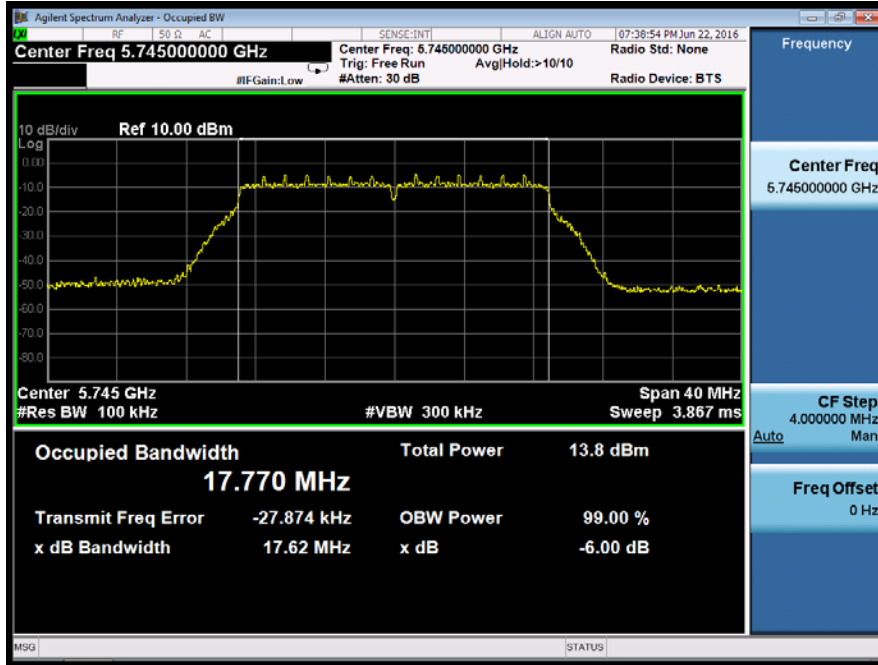


Ant1

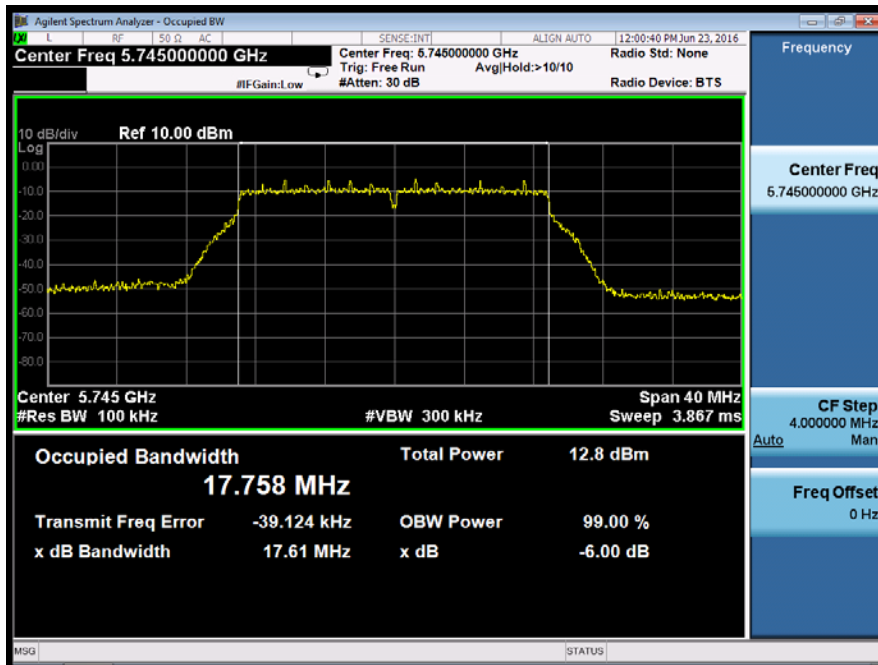


Minimum Emission Bandwidth	UNII Band III	
Test Model	802.11ac(VHT20) mode	Frequency(MHz)
Ant0		5785

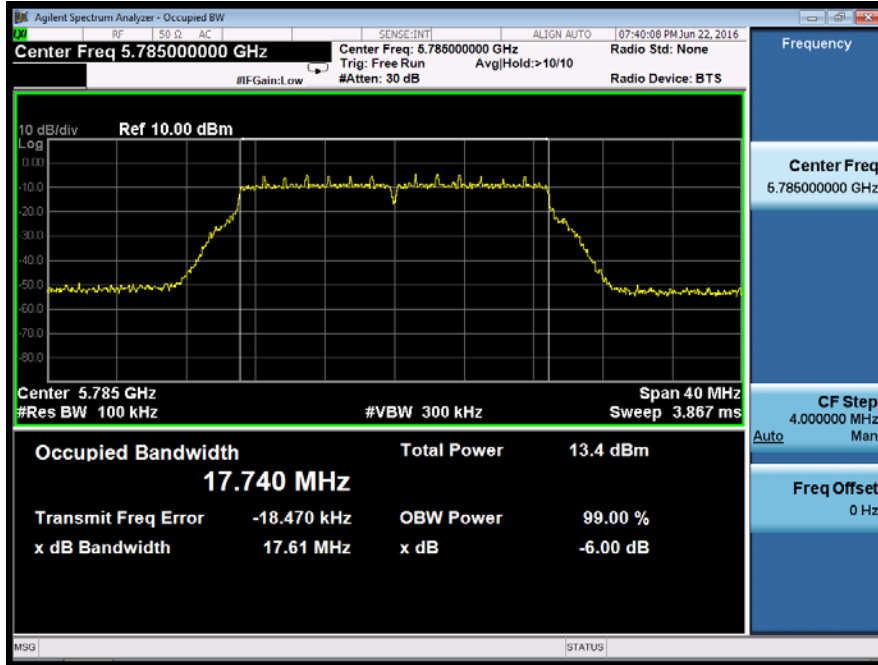


Ant1

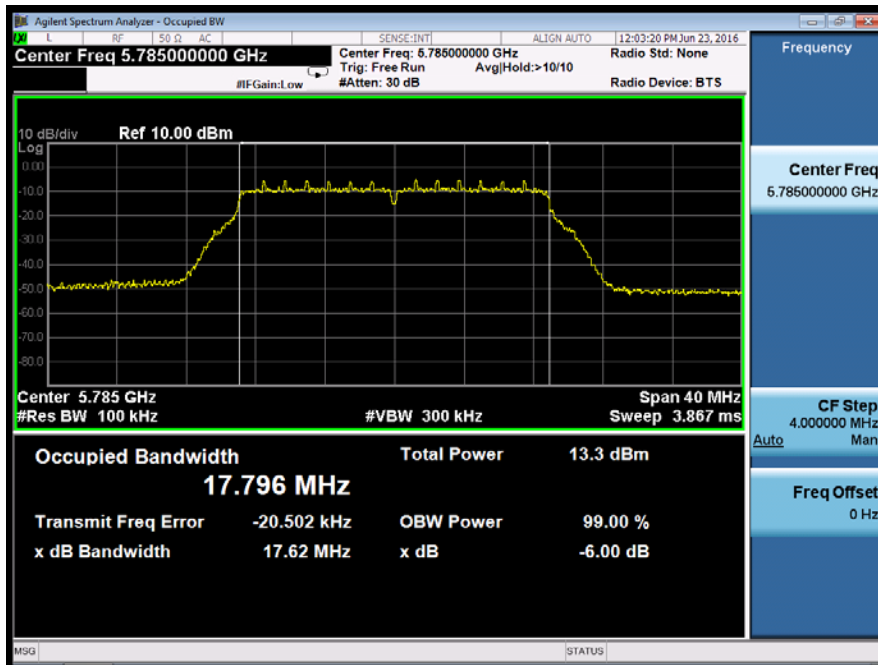


Minimum Emission Bandwidth	UNII Band III	
Test Model	802.11ac(VHT20) mode	Frequency(MHz)
Ant0		5825

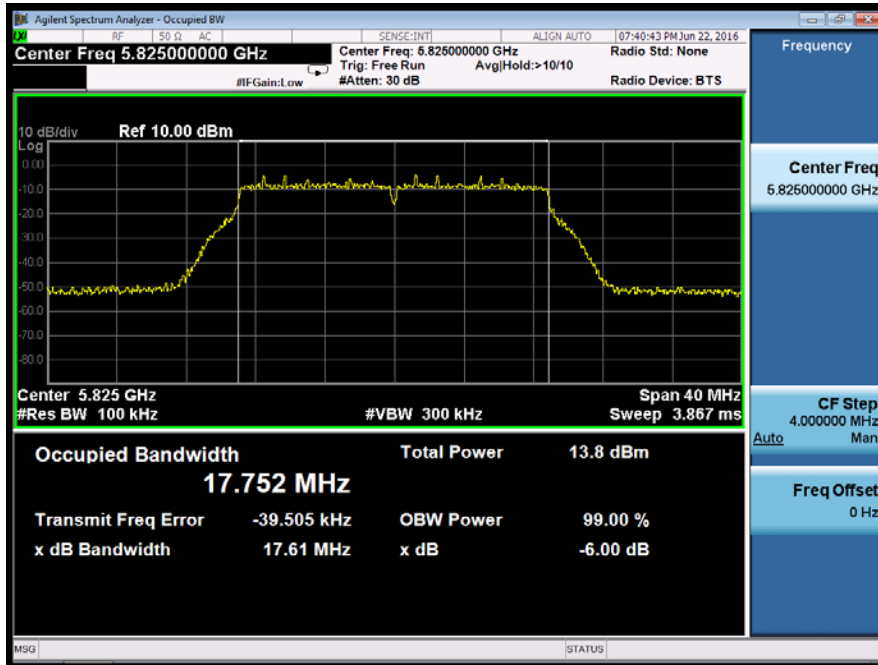


Ant1

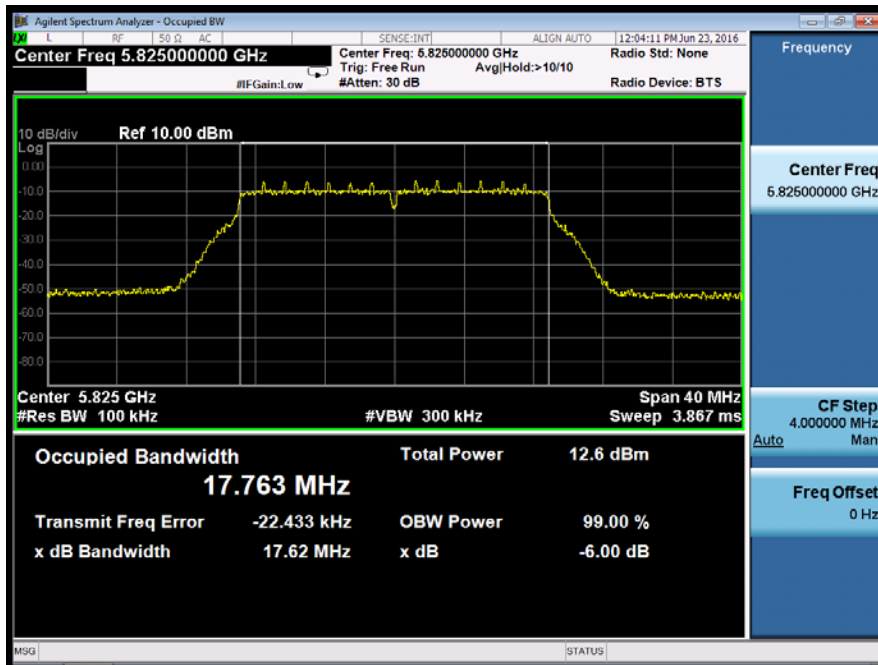


Minimum Emission Bandwidth	UNII Band III	
Test Model	802.11n(VHT40) mode	Frequency(MHz)
Ant0		5755

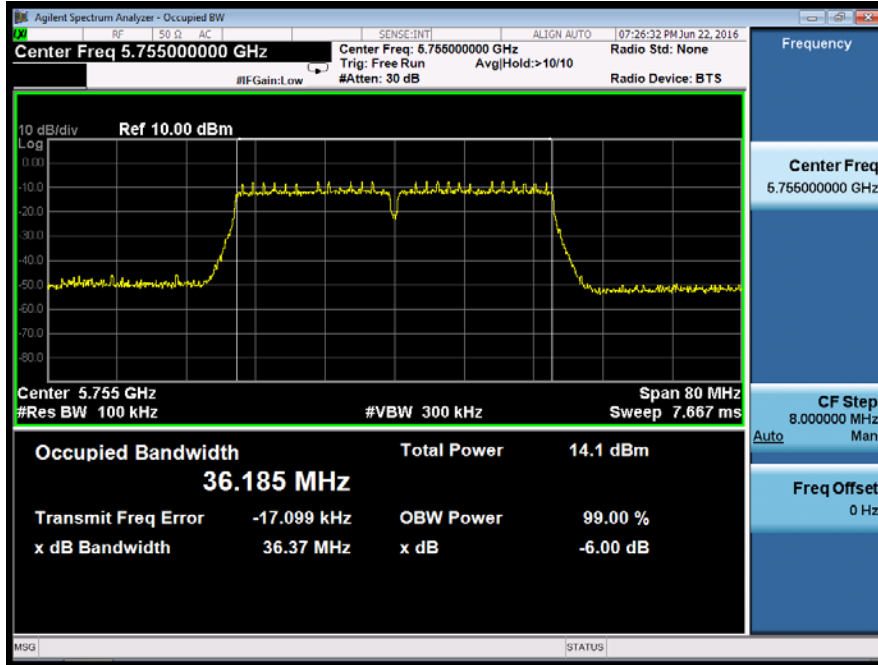


Ant1

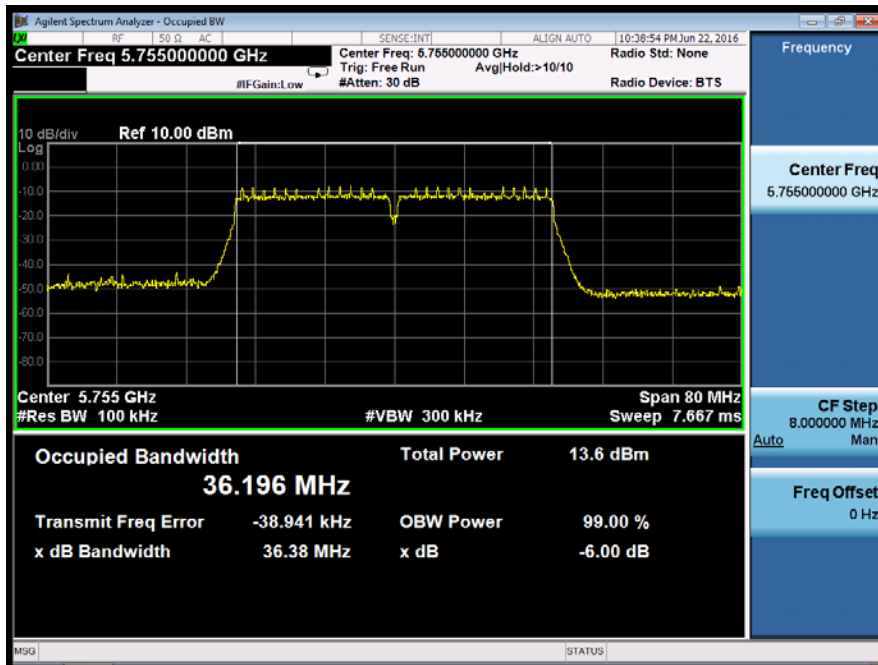


Minimum Emission Bandwidth	UNII Band III	
Test Model	802.11n(VHT40) mode	Frequency(MHz)
Ant0		5795

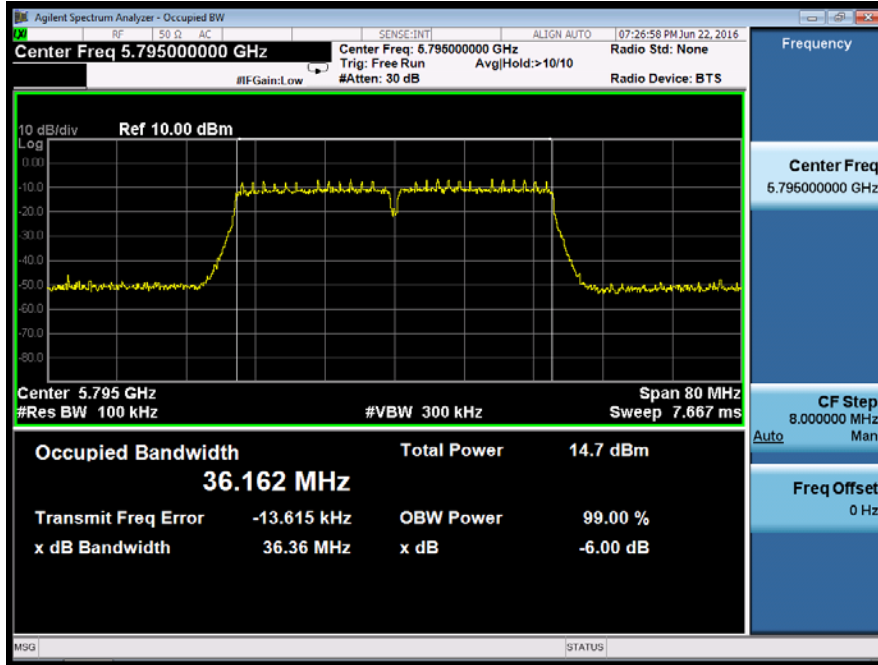


Ant1

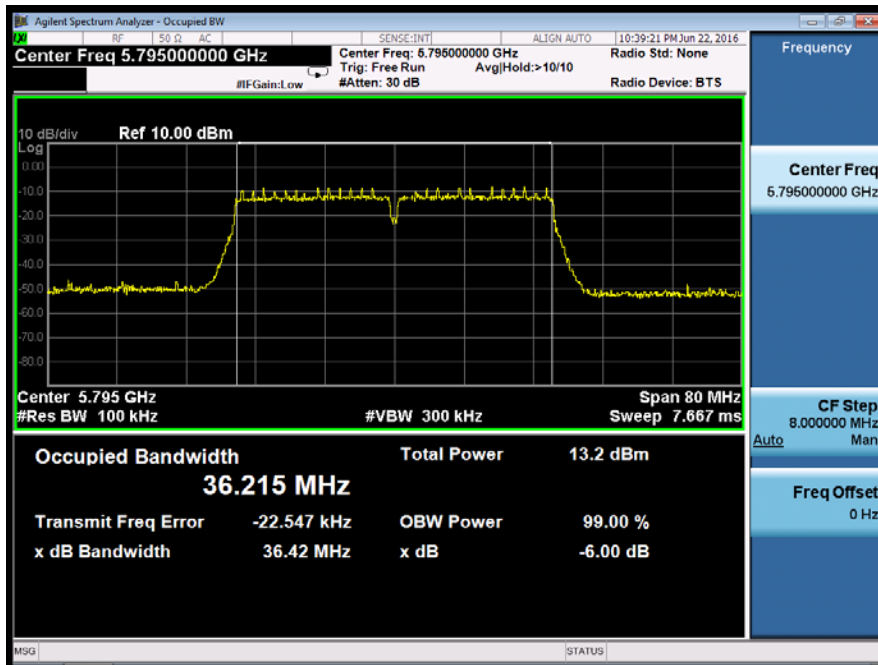


Minimum Emission Bandwidth	UNII Band III	
Test Model	802.11ac(VHT40) mode	Frequency(MHz)
Ant0		5755

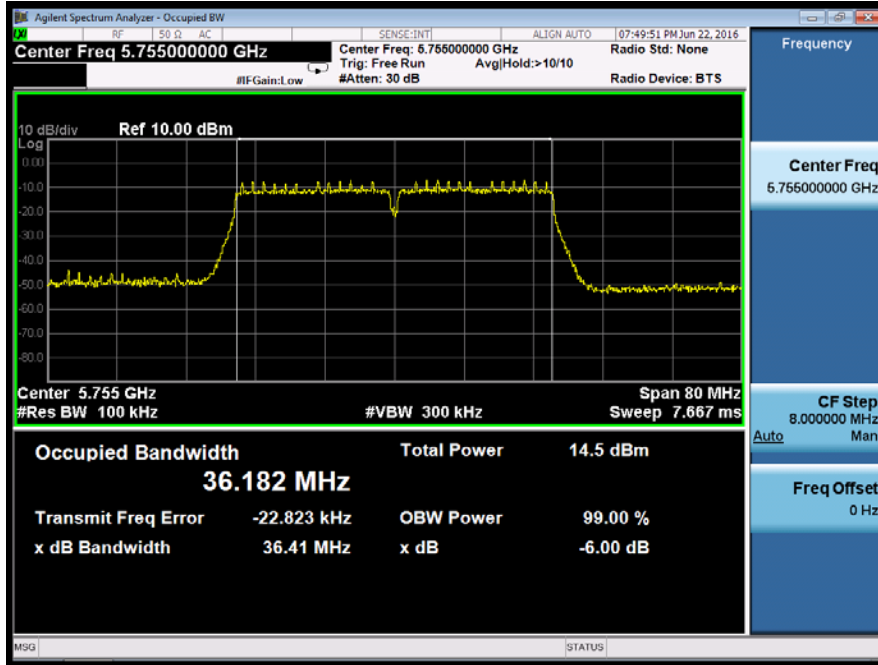


Ant1

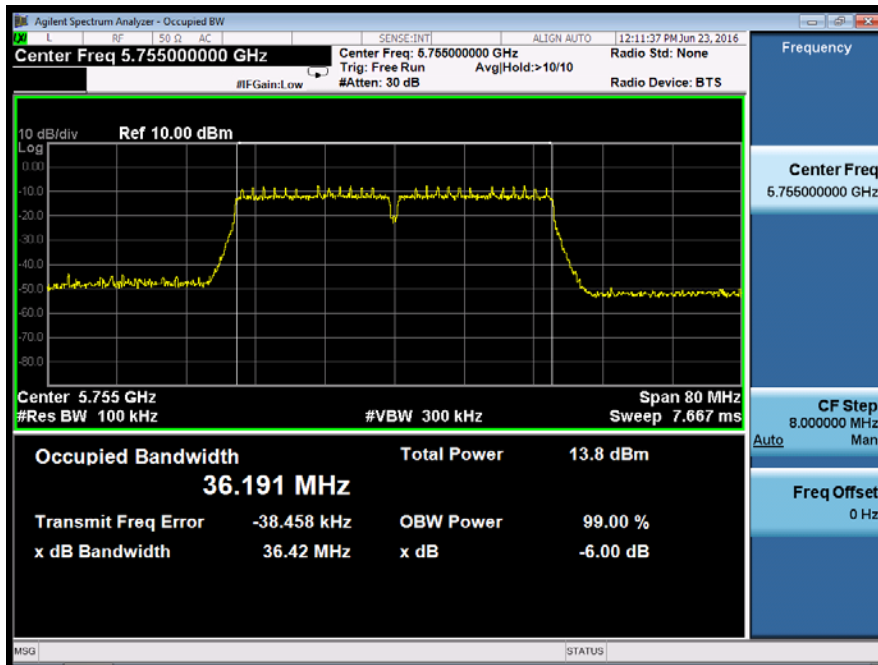


Minimum Emission Bandwidth	UNII Band III	
Test Model	802.11ac(VHT40) mode	Frequency(MHz)
Ant0		5795

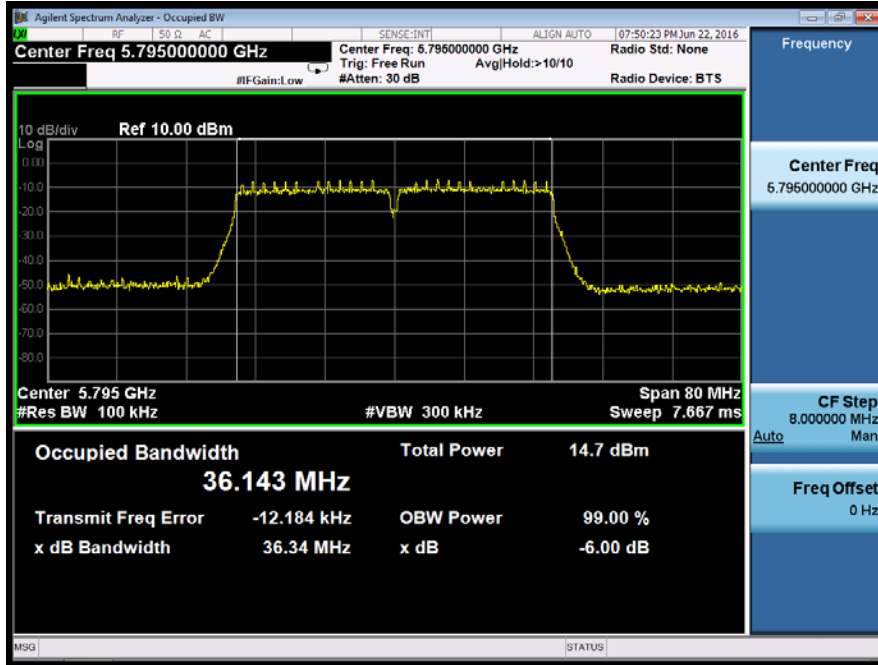


Ant1

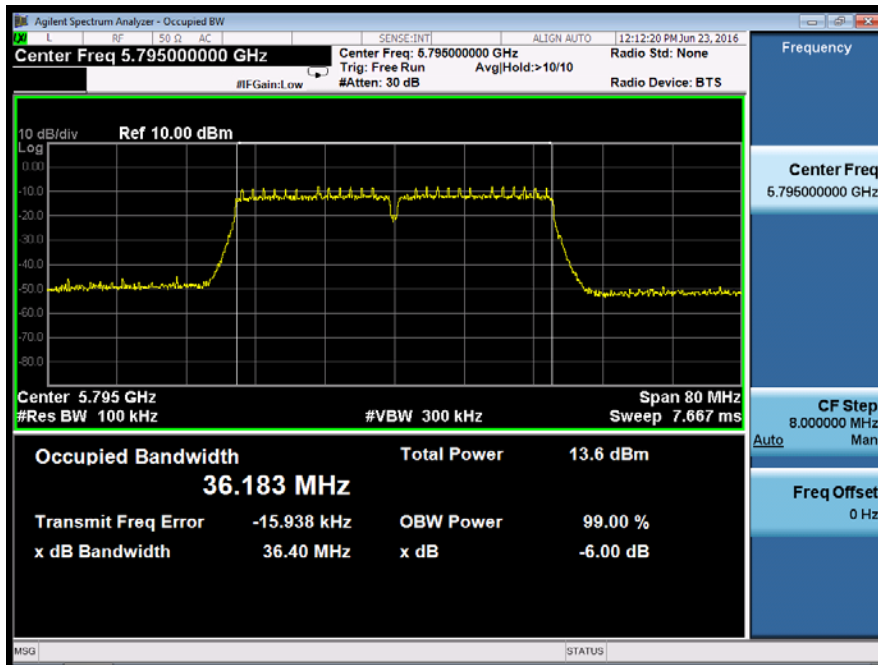

Minimum Emission Bandwidth	UNII Band III	
Test Model	802.11ac(VHT80) mode	Frequency(MHz)
Ant0		5775

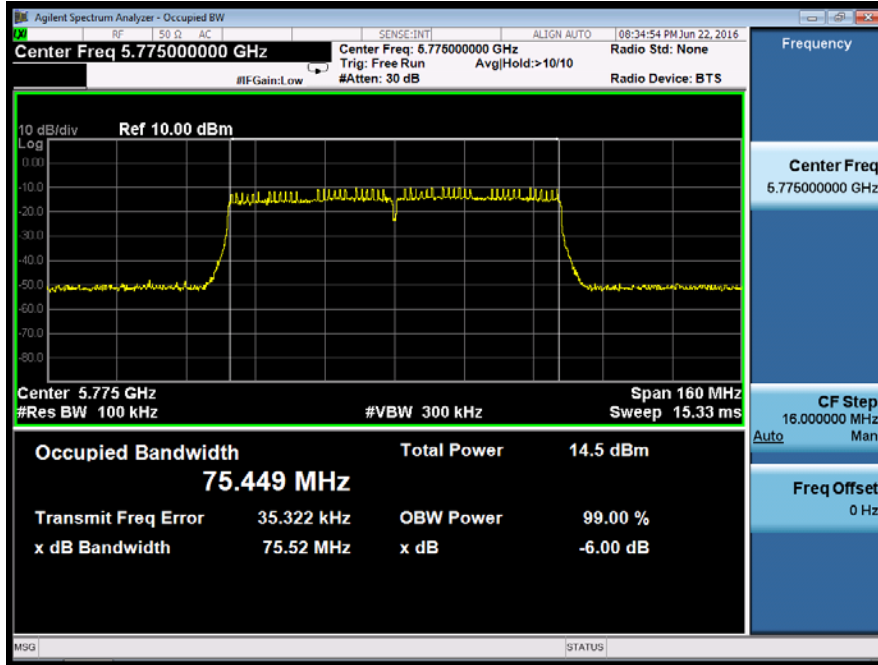

Ant1

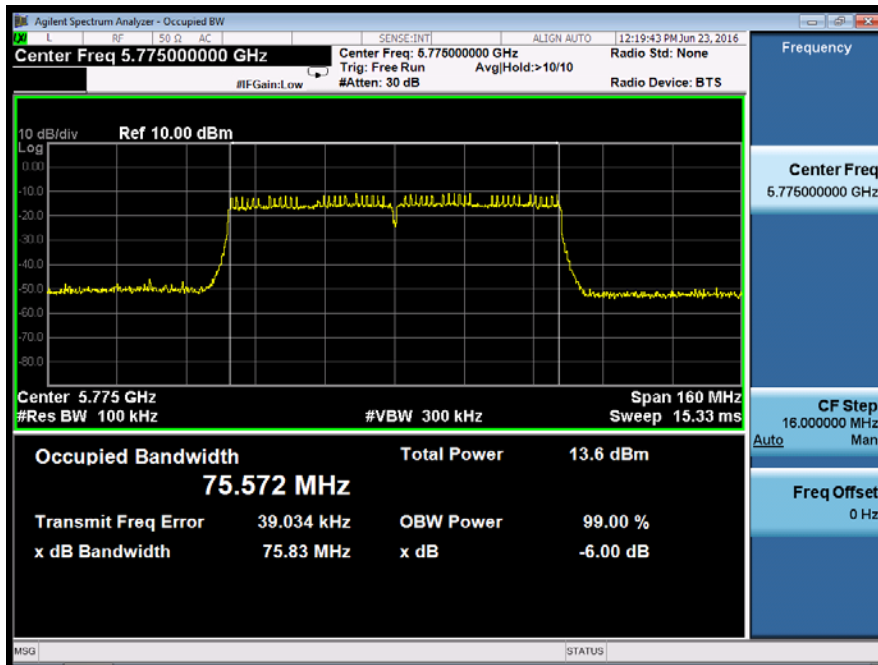

8.2 MAXIMUM CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I

According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C

According to FCC Part 15.407(a)(3) for UNII Band III

According to 789033 D02 Section II(E)

8.2.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(a) (2) the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.2.4 Test Procedure

The maximum average conducted output power can be measured using Method PM-G (Measurement using

a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

- a. The Transmitter output (antenna port) was connected to the power meter.
- b. Turn on the EUT and power meter and then record the power value.
- c. Repeat above procedures on all channels needed to be tested.

8.2.5 Test Results

<input checked="" type="checkbox"/> 802.11a mode							
Temperature :		28 °C	Test Date :		June 23, 2016		
Humidity :		65 %	Test By:		King Kong		
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (dBm)	Verdict
			Ant0	Ant1			
UNII Band I	CH36	5180	15.21	15.00	24	Pass	
	CH40	5200	15.31	14.34	24	Pass	
	CH48	5240	15.19	14.41	24	Pass	
UNII Band II-A	CH52	5260	16.01	14.90	24	Pass	
	CH56	5280	15.90	14.35	24	Pass	
	CH64	5320	15.84	14.62	24	Pass	
UNII Band II-C	CH100	5500	14.29	14.26	24	Pass	
	CH120	5600	12.96	12.34	24	Pass	
	CH140	5700	13.48	13.62	24	Pass	
UNII Band III	CH149	5745	10.77	10.99	30	Pass	
	CH157	5785	10.58	11.65	30	Pass	
	CH165	5825	10.69	11.01	30	Pass	
Note: N/A (Not Applicable)							

<input checked="" type="checkbox"/> 802.11n(VHT20) mode							
Temperature :		28 °C	Test Date :		June 23, 2016		
Humidity :		65 %	Test By:		King Kong		
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	15.60	15.63	18.63	24	Pass
	CH40	5200	15.82	15.10	18.49	24	Pass
	CH48	5240	16.31	15.87	19.11	24	Pass
UNII Band II-A	CH52	5260	16.66	15.80	19.26	24	Pass
	CH56	5280	14.56	13.92	17.26	24	Pass
	CH64	5320	13.99	13.60	16.81	24	Pass
UNII Band II-C	CH100	5500	13.53	12.81	16.20	24	Pass
	CH120	5600	13.34	13.25	16.31	24	Pass
	CH140	5700	11.20	11.16	14.19	24	Pass
UNII Band III	CH149	5745	11.14	10.63	13.90	30	Pass
	CH157	5785	11.75	10.23	14.07	30	Pass
	CH165	5825	11.23	11.10	14.18	30	Pass
Note: N/A (Not Applicable)							

<input checked="" type="checkbox"/> 802.11ac(VHT20) mode			
Temperature :	28 °C	Test Date :	June 23, 2016
Humidity :	65 %	Test By:	King Kong

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	15.32	15.05	18.20	24	Pass
	CH40	5200	15.31	15.16	18.25	24	Pass
	CH48	5240	14.99	14.06	17.56	24	Pass
UNII Band II-A	CH52	5260	15.73	14.80	18.30	24	Pass
	CH56	5280	16.05	15.23	18.67	24	Pass
	CH64	5320	15.02	13.70	17.42	24	Pass
UNII Band II-C	CH100	5500	12.35	11.53	14.97	24	Pass
	CH120	5600	12.58	11.42	15.05	24	Pass
	CH140	5700	13.35	12.55	15.98	24	Pass
UNII Band III	CH149	5745	10.22	9.60	12.93	30	Pass
	CH157	5785	10.35	9.94	13.16	30	Pass
	CH165	5825	10.34	9.98	13.17	30	Pass
Note: N/A (Not Applicable)							

<input checked="" type="checkbox"/> 802.11n(VHT40) mode			
Temperature :	28 °C	Test Date :	June 23, 2016
Humidity :	65 %	Test By:	King Kong

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH38	5190	12.58	11.15	14.93	24	Pass
	CH46	5230	12.46	11.58	15.05	24	Pass
UNII Band II-A	CH54	5270	13.36	12.97	16.18	24	Pass
	CH62	5310	13.16	12.95	16.07	24	Pass
UNII Band II-C	CH102	5510	10.10	9.94	13.03	24	Pass
	CH118	5590	10.63	9.71	13.20	24	Pass
	CH134	5670	11.09	9.62	13.43	24	Pass
UNII Band III	CH151	5670	8.78	7.33	11.13	30	Pass
	CH159	5795	8.12	7.85	11.00	30	Pass
Note: N/A (Not Applicable)							



<input checked="" type="checkbox"/> 802.11ac(VHT40) mode			
Temperature :	28 °C	Test Date :	June 23, 2016
Humidity :	65 %	Test By:	King Kong



Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (MHz)	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH38	5190	13.12	12.95	16.05	24	Pass
	CH46	5230	13.08	12.73	15.92	24	Pass
UNII Band II-A	CH54	5270	13.47	12.24	15.91	24	Pass
	CH62	5310	13.27	12.48	15.90	24	Pass
UNII Band II-C	CH102	5510	10.27	9.96	13.13	24	Pass
	CH118	5590	10.89	10.09	13.52	24	Pass
	CH134	5670	12.00	11.18	14.62	24	Pass
UNII Band III	CH151	5670	7.89	7.34	10.63	30	Pass
	CH159	5795	8.28	7.63	10.98	30	Pass
Note: N/A (Not Applicable)							



		<input checked="" type="checkbox"/> 802.11ac(VHT80) mode	
Temperature :	28℃	Test Date :	June 23, 2016
Humidity :	65 %	Test By:	King Kong

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH42	5210	10.69	10.19	13.46	24	Pass
UNII Band II-A	CH58	5290	10.94	10.37	13.67	24	Pass
UNII Band II-C	CH106	5530	9.07	8.37	11.74	24	Pass
	CH122	5610	9.01	8.42	11.74	24	Pass
UNII Band III	CH155	5775	8.81	8.63	11.73	30	Pass
Note: N/A (Not Applicable)							

Duty Cycle

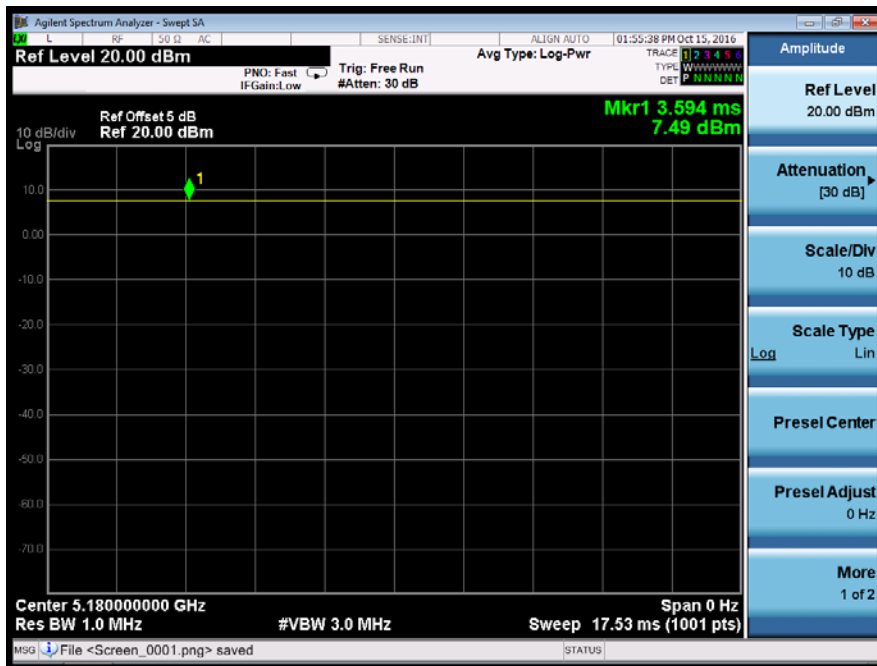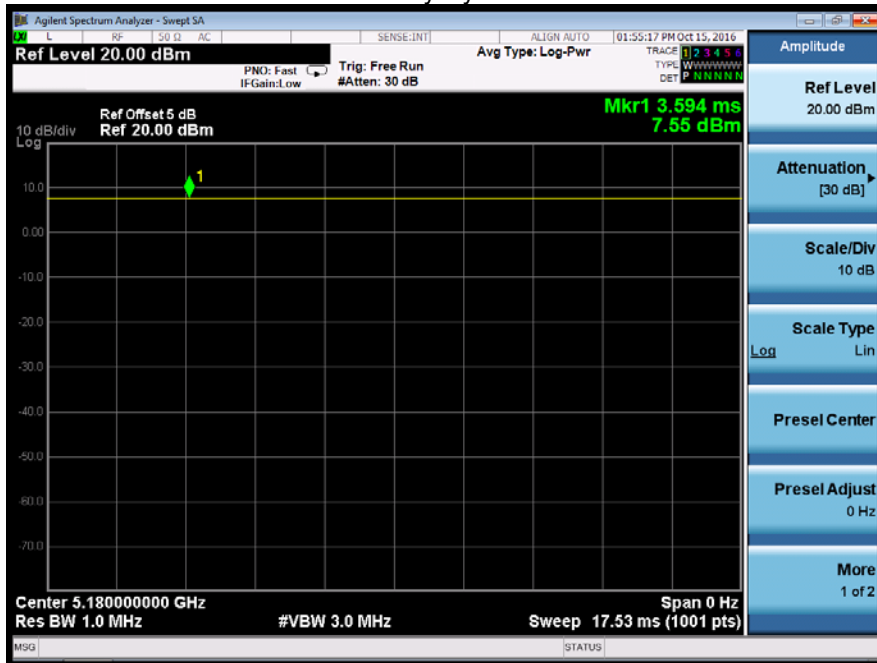

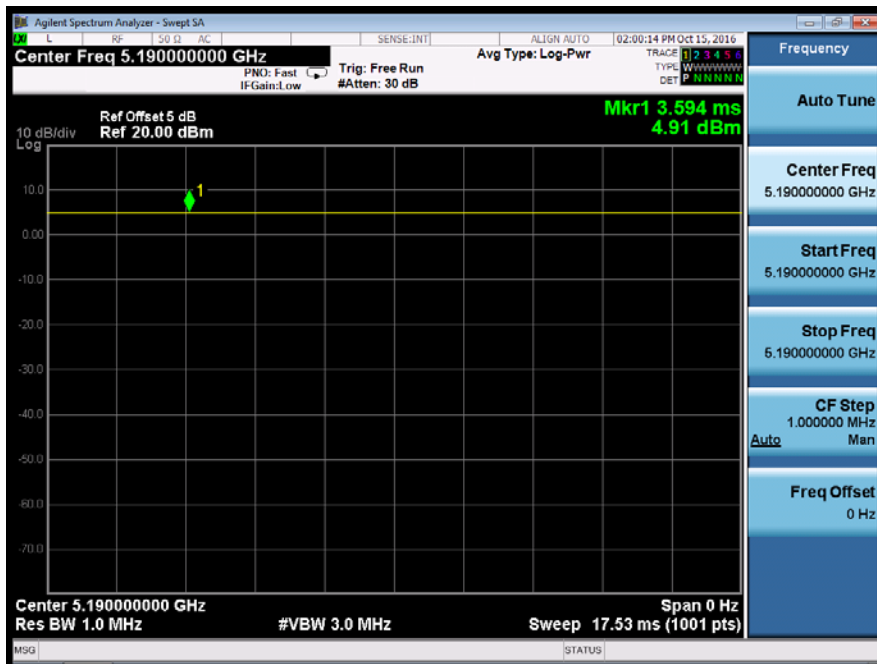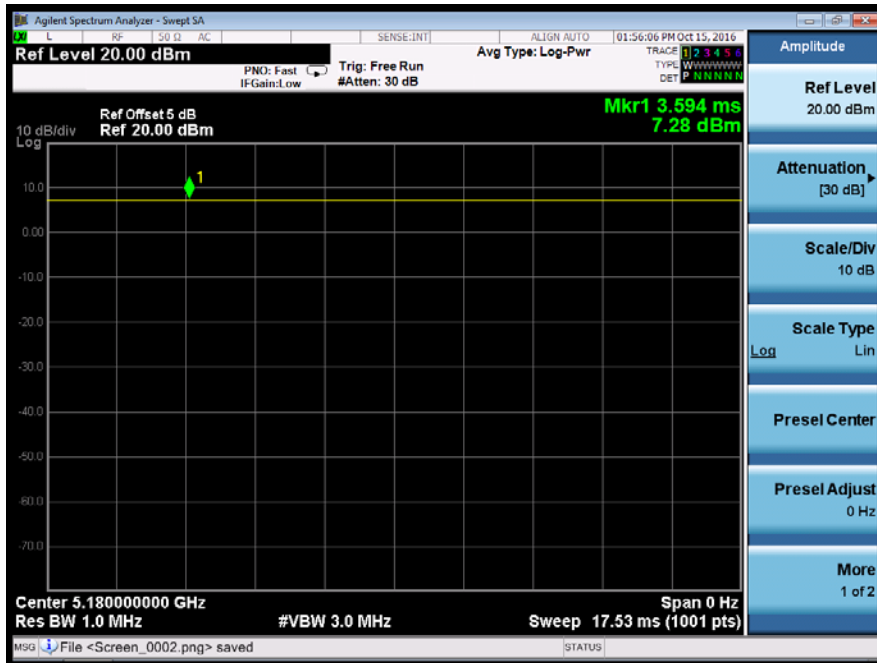

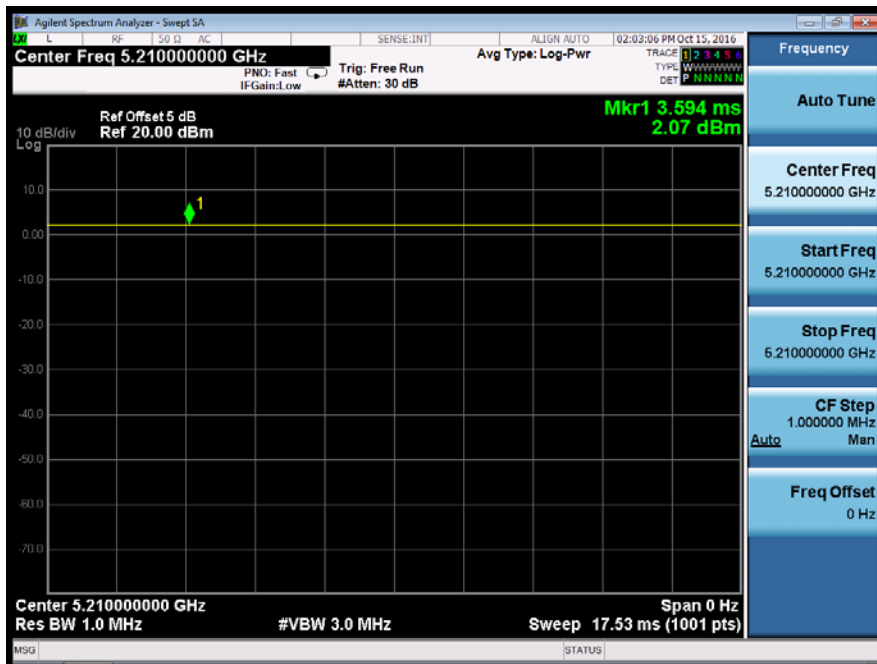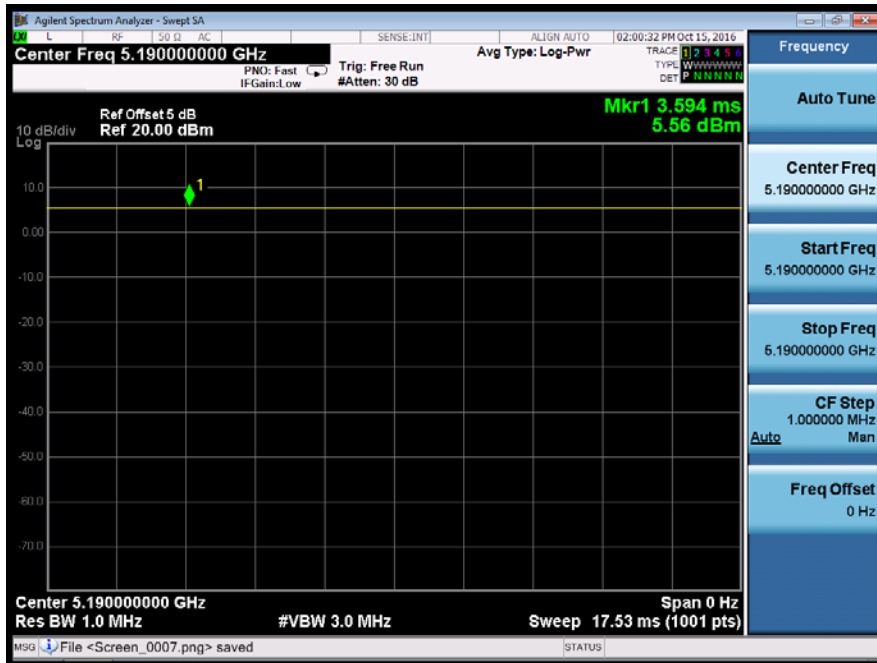

8.3 MAXIMUM PEAK POWER DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I

According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C

According to FCC Part 15.407(a)(3) for UNII Band III

According to 789033 D02 Section II(F)

8.3.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(b) (2) the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.3.4 Test Procedure

Methods refer to FCC KDB 789033

1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...".

2) Use the peak search function on the instrument to find the peak of the spectrum.

3) The result is the PPSD.

4) The above procedures make use of 500kHz resolution bandwidth to satisfy the 500kHz measurement bandwidth specified in the 15.407(a)(5). That rule section also permits use of resolution bandwidths less than 1 MHz "provided that the measured power is integrated to show the total power over the measurement bandwidth" (i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 500kHz bandwidth

Note: As a practical matter, it is recommended to use reduced RBW of 500 kHz for the sections 5.c) and 5.d) above, since RBW=500 kHz is available on nearly all spectrum analyzers.

8.3.5 Test Results

<input checked="" type="checkbox"/> 802.11a mode						
Temperature :		28 °C	Test Date :		June 23, 2016	
Humidity :		65 %	Test By:		King Kong	
Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density		Limit	Verdict
			Ant0	Ant1		
UNII Band I	CH36	5180	7.965	7.705	≤11dBm/1MHz	Pass
	CH40	5200	8.048	7.545	≤11dBm/1MHz	Pass
	CH48	5240	8.077	7.536	≤11dBm/1MHz	Pass
UNII Band II-A	CH52	5260	7.821	7.731	≤11dBm/1MHz	Pass
	CH56	5280	7.543	7.442	≤11dBm/1MHz	Pass
	CH64	5320	7.139	7.202	≤11dBm/1MHz	Pass
UNII Band II-C	CH100	5500	7.706	6.644	≤11dBm/1MHz	Pass
	CH120	5600	7.480	7.406	≤11dBm/1MHz	Pass
	CH140	5700	6.842	7.272	≤11dBm/1MHz	Pass
UNII Band III	CH149	5745	3.577	5.107	≤30dBm/1MHz	Pass
	CH157	5785	3.811	4.713	≤30dBm/1MHz	Pass
	CH165	5825	4.370	3.033	≤30dBm/1MHz	Pass
Note: N/A (Not Applicable)						

<input checked="" type="checkbox"/> 802.11n(VHT20) mode							
Temperature :		28 °C	Test Date :		June 23, 2016		
Humidity :		65 %	Test By:		King Kong		
Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	8.212	7.107	10.70	≤11dBm/1MHz	Pass
	CH40	5200	8.141	7.222	10.72	≤11dBm/1MHz	Pass
	CH48	5240	8.232	7.465	10.86	≤11dBm/1MHz	Pass
UNII Band II-A	CH52	5260	8.102	7.652	10.89	≤11dBm/1MHz	Pass
	CH56	5280	7.621	7.369	10.51	≤11dBm/1MHz	Pass
	CH64	5320	6.950	7.276	10.13	≤11dBm/1MHz	Pass
UNII Band II-C	CH100	5500	7.328	6.649	10.01	≤11dBm/1MHz	Pass
	CH120	5600	7.792	7.020	10.43	≤11dBm/1MHz	Pass
	CH140	5700	6.761	7.106	9.95	≤11dBm/1MHz	Pass
UNII Band III	CH149	5745	3.849	3.605	6.74	≤30dBm/1MHz	Pass
	CH157	5785	4.183	3.694	6.96	≤30dBm/1MHz	Pass
	CH165	5825	4.254	3.089	6.72	≤30dBm/1MHz	Pass
Note: N/A (Not Applicable)							

<input checked="" type="checkbox"/> 802.11ac(VHT20) mode			
Temperature :	28 °C	Test Date :	June 23, 2016
Humidity :	65 %	Test By:	King Kong

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	8.072	7.877	10.33	≤11dBm/1MHz	Pass
	CH40	5200	8.053	7.307	10.31	≤11dBm/1MHz	Pass
	CH48	5240	8.122	7.666	10.39	≤11dBm/1MHz	Pass
UNII Band II-A	CH52	5260	7.651	7.542	9.84	≤11dBm/1MHz	Pass
	CH56	5280	7.212	7.063	9.36	≤11dBm/1MHz	Pass
	CH64	5320	7.177	7.053	9.32	≤11dBm/1MHz	Pass
UNII Band II-C	CH100	5500	7.439	6.850	9.60	≤11dBm/1MHz	Pass
	CH120	5600	7.404	7.589	9.57	≤11dBm/1MHz	Pass
	CH140	5700	7.418	6.812	9.58	≤11dBm/1MHz	Pass
UNII Band III	CH149	5745	3.531	3.330	5.95	≤30dBm/1MHz	Pass
	CH157	5785	4.089	3.336	6.40	≤30dBm/1MHz	Pass
	CH165	5825	4.060	3.326	6.38	≤30dBm/1MHz	Pass

Note:
N/A (Not Applicable)

<input checked="" type="checkbox"/> 802.11n(VHT40) mode			
Temperature :	28 °C	Test Date :	June 23, 2016
Humidity :	65 %	Test By:	King Kong

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH38	5190	5.460	5.842	8.67	≤11dBm/1MHz	Pass
	CH46	5230	5.775	5.892	8.84	≤11dBm/1MHz	Pass
UNII Band II-A	CH54	5270	4.877	4.685	7.79	≤11dBm/1MHz	Pass
	CH62	5310	4.292	4.304	7.31	≤11dBm/1MHz	Pass
UNII Band II-C	CH102	5510	5.150	5.012	8.09	≤11dBm/1MHz	Pass
	CH118	5590	5.260	5.187	8.23	≤11dBm/1MHz	Pass
	CH134	5670	4.286	5.220	7.79	≤11dBm/1MHz	Pass
UNII Band III	CH151	5670	1.607	1.286	4.46	≤30dBm/1MHz	Pass
	CH159	5795	1.540	0.744	4.17	≤30dBm/1MHz	Pass

Note:
N/A (Not Applicable)

802.11ac(VHT40) mode

Temperature : 28°C Test Date : June 23, 2016
Humidity : 65 % Test By: King Kong

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH38	5190	5.514	5.006	7.66	≤11dBm/1MHz	Pass
	CH46	5230	5.938	5.794	8.06	≤11dBm/1MHz	Pass
UNII Band II-A	CH54	5270	5.862	4.193	7.98	≤11dBm/1MHz	Pass
	CH62	5310	5.269	4.650	7.43	≤11dBm/1MHz	Pass
UNII Band II-C	CH102	5510	5.884	4.430	8.01	≤11dBm/1MHz	Pass
	CH118	5590	5.342	4.902	7.50	≤11dBm/1MHz	Pass
	CH134	5670	4.494	4.941	6.75	≤11dBm/1MHz	Pass
UNII Band III	CH151	5670	1.369	2.089	4.38	≤30dBm/1MHz	Pass
	CH159	5795	2.133	0.575	4.90	≤30dBm/1MHz	Pass

Note:
N/A (Not Applicable)


802.11ac(VHT80) mode

Temperature : 28°C Test Date : June 23, 2016
Humidity : 65 % Test By: King Kong


Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH42	5210	2.649	1.985	5.34	≤11dBm/1MHz	Pass
UNII Band II-A	CH58	5290	1.686	1.543	4.63	≤11dBm/1MHz	Pass
UNII Band II-C	CH106	5530	2.694	1.130	4.99	≤11dBm/1MHz	Pass
	CH122	5610	2.244	2.212	5.24	≤11dBm/1MHz	Pass
UNII Band III	CH155	5775	-1.415	-2.402	1.13	≤30dBm/1MHz	Pass

Note:
N/A (Not Applicable)


Power Spectral Density	UNII Band I	
Test Model	802.11a	Frequency(MHz)
Ant0		5180

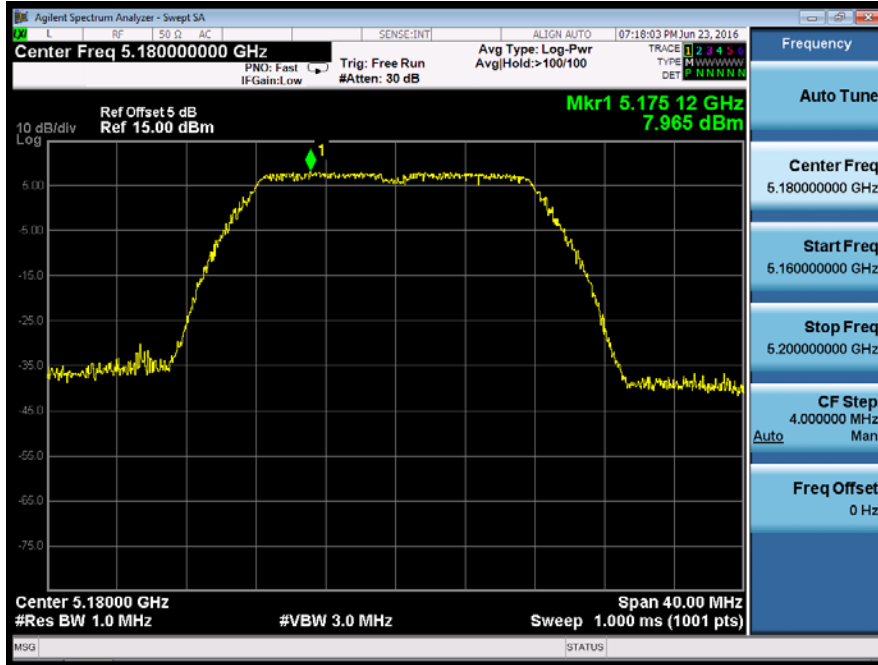


Ant1

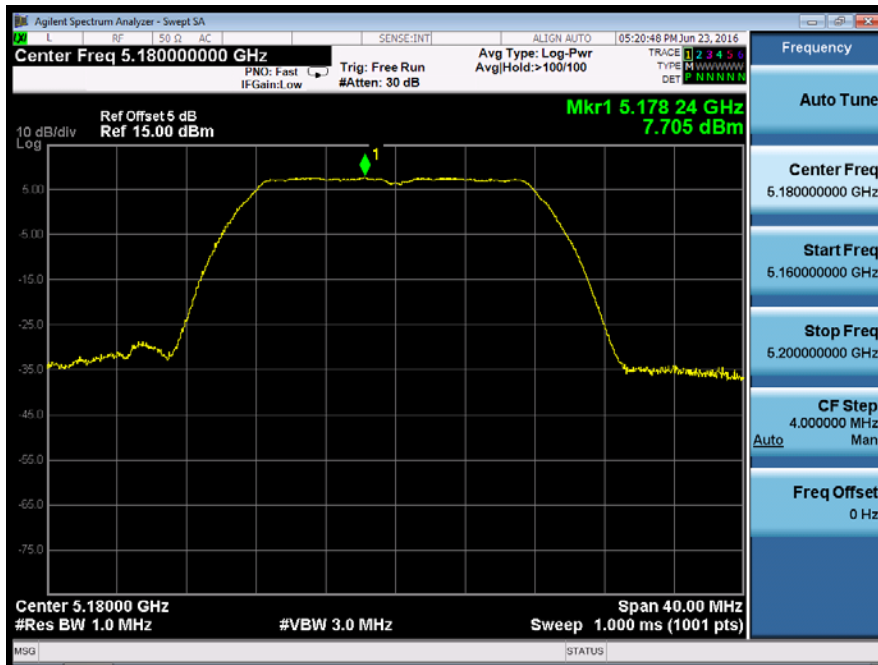


Power Spectral Density	UNII Band I	
Test Model	802.11a	Frequency(MHz)
Ant0		5200

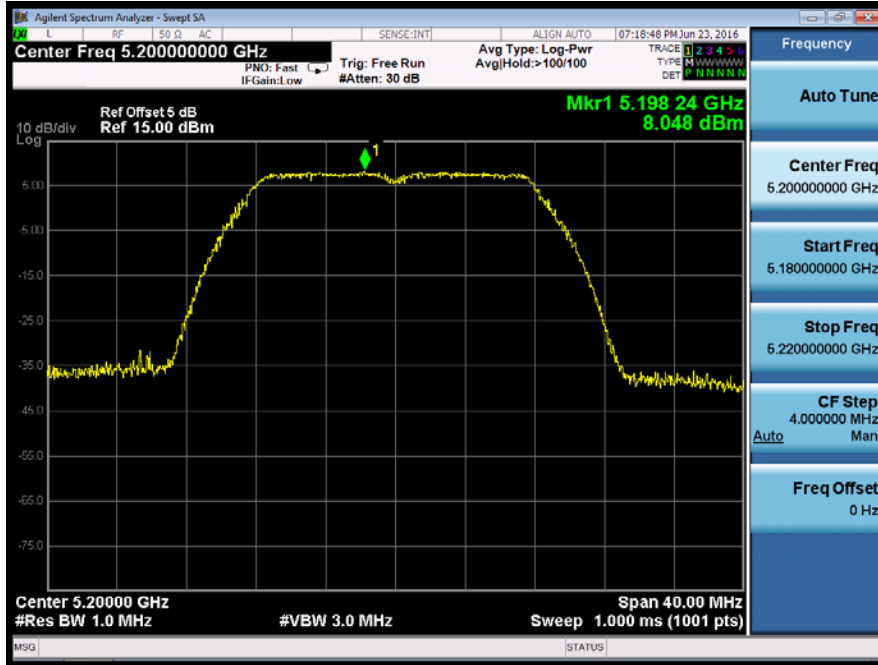

Ant1

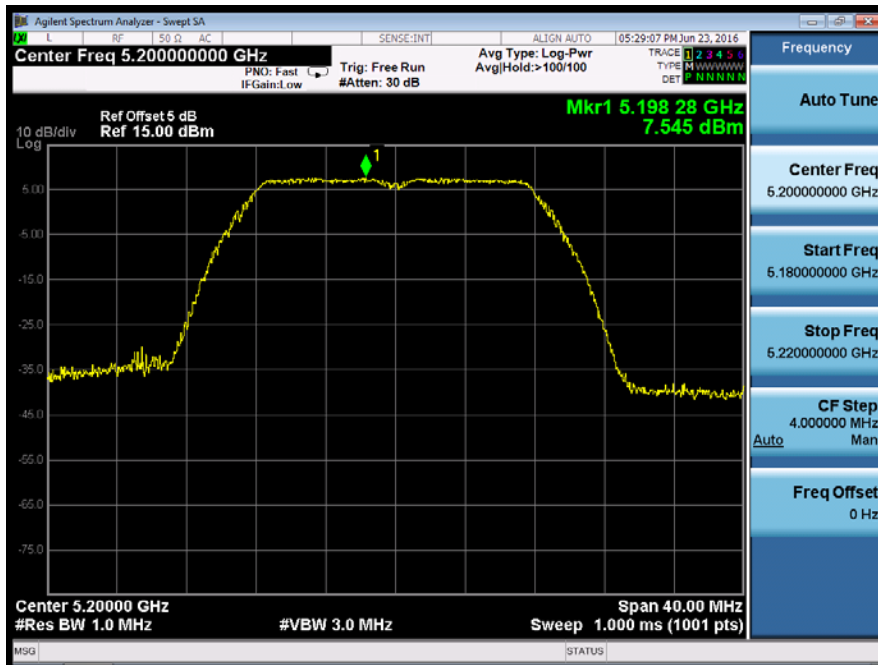

Power Spectral Density	UNII Band I	
Test Model	802.11a	Frequency(MHz)
Ant0		5240

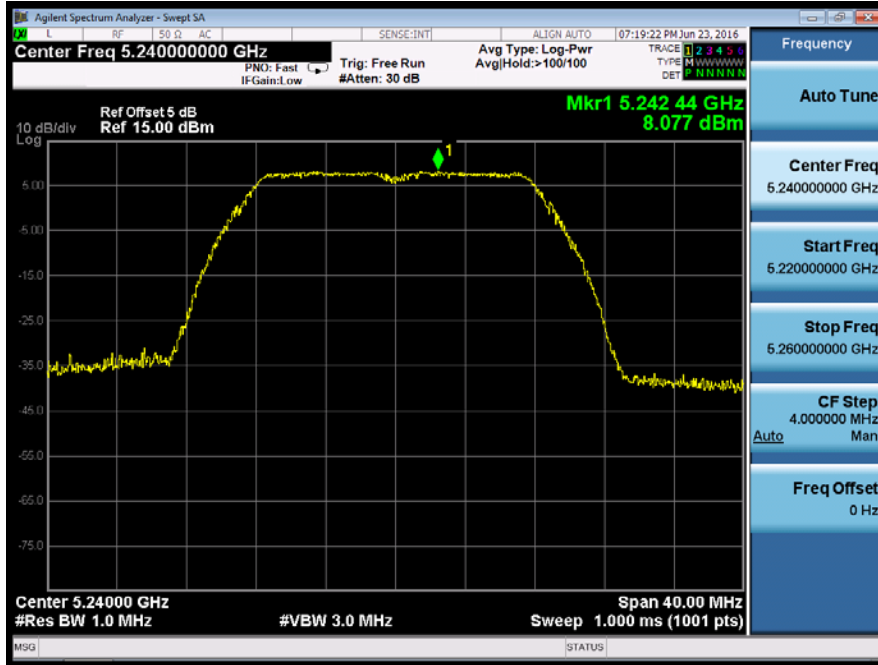


Ant1




Power Spectral Density	UNII Band II-A	
Test Model	802.11a	Frequency(MHz)
Ant0		5260



Ant1

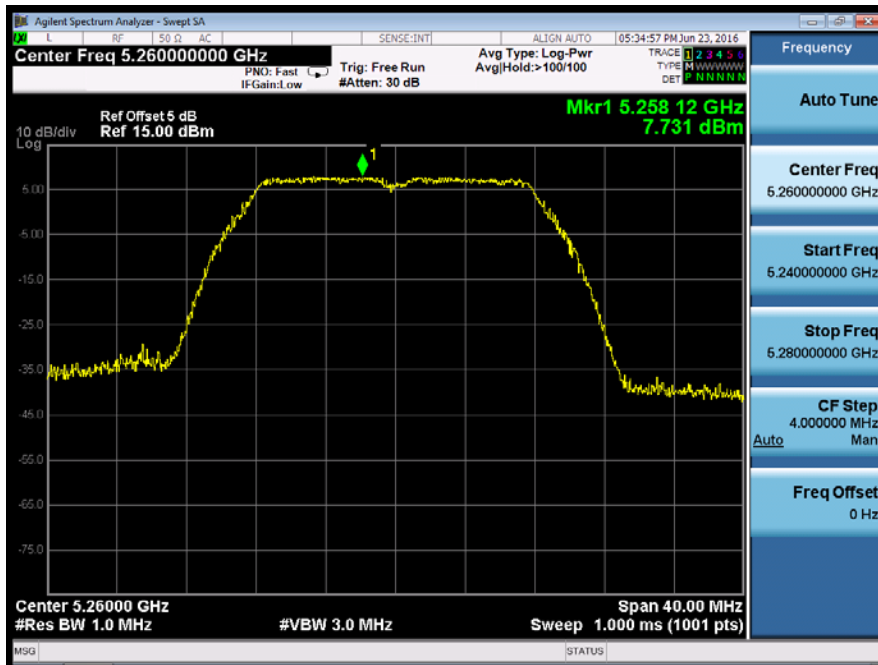

Power Spectral Density	UNII Band II-A	
Test Model	802.11a	Frequency(MHz)
Ant0		5280

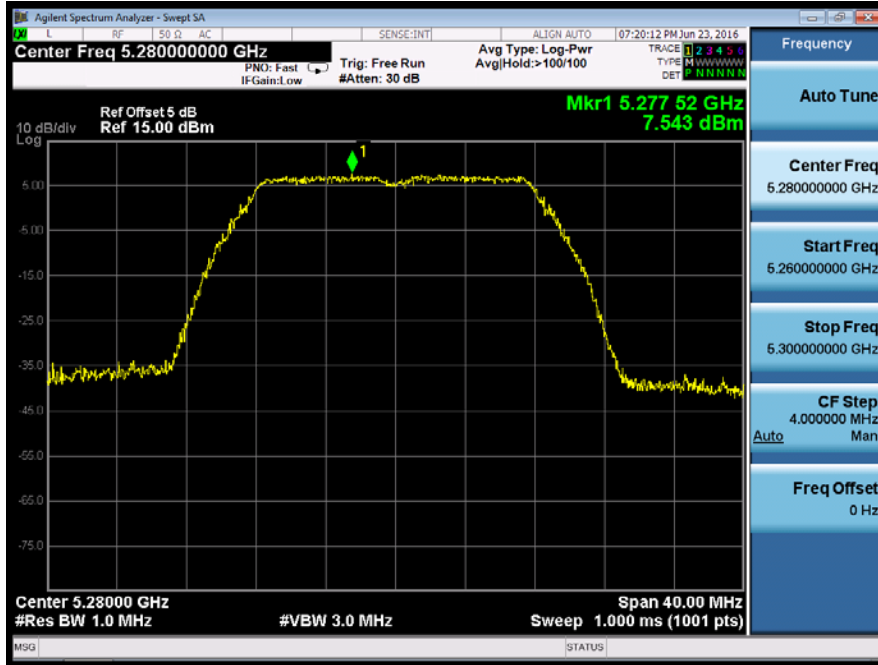

Ant1

