

DD2700H


Emitter Specification

Version NO.: A/01

T

Technical support

Type specification

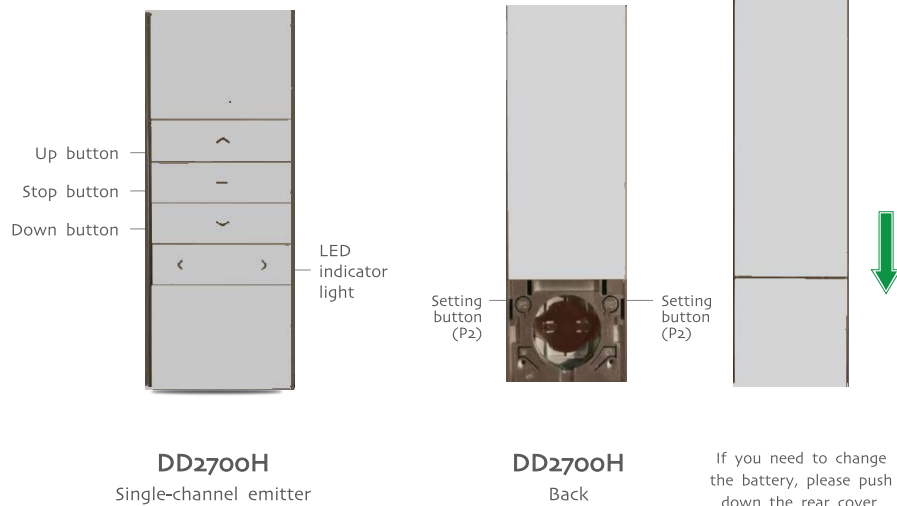

T

Technical support

Technical support


Technical specification	Function instruction
<ul style="list-style-type: none"> Input voltage: 3V (CR2450) Transmitting frequency: 433.925MHz Transmitting power: 10 Milliwatt Operating temperature: -5°C ~ 50°C Transmission distance: outside: 200 meters, inside (between two walls): 35 meters 	<p>DD2700H is single-channel emitter: with uplink, stop, downlink function;</p> <p style="text-align: center;">P</p> <p>Notice: Emitter couldn't be exposed to moisture and struck, so as not to affect life. When you use emitter, if found emission distance obviously short or less sensitive, please change another same new battery. Please have batteries for recycling.</p> <p>⚠ Caution: Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.</p>

A

Additional function

bidirectional

⚠ Factory default is bidirectional mode, repeated operation can be cyclical switching.

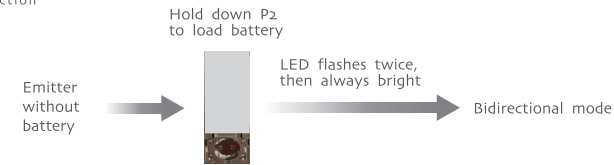


A

Additional function

Combination button lock / unlock status

⚠

①Factory default is the combination button unlock status, repeated operation can be cycle switching. ②The combination button is locked, the combination button is invalid, and the combination button is pressed without sending code. ③The button is locked and only affects the emitter code.

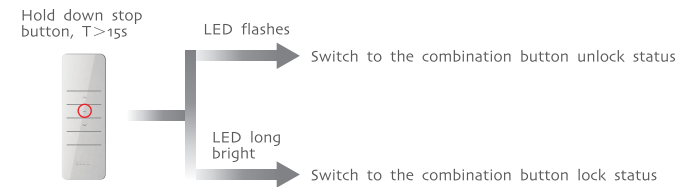

FCC Statement:

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.