

TEST REPORT

Reference No..... : WTN23X12271228W
FCC ID : VYYDD76007660
Applicant : Ningbo Dooya Mechanic&Electronic Technology Co.,Ltd
Address..... : NO.168 shengguang road Luotuo street Zhenhai district Ningbo, P.R.China
Manufacturer : The same as Applicant
Address..... : The same as Applicant
Product Name : Single-channel Emitter
Model No..... : DD7600H
Standards : FCC Part 15.231
Date of Receipt sample : 2023-12-20
Date of Test..... : 2023-12-20 to 2024-01-08
Date of Issue : 2024-01-08
Test Report Form No. : WTX_Part 15_231W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Gala Wang

Approved by:



Jason Su

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY.....	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS.....	11
3. ANTENNA REQUIREMENT	12
3.1 STANDARD APPLICABLE	12
3.2 TEST RESULT.....	12
4. RADIATED EMISSIONS	13
4.1 STANDARD APPLICABLE	13
4.2 TEST PROCEDURE	14
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	15
5. 20DB BANDWIDTH.....	29
5.1 STANDARD APPLICABLE	29
5.1 TEST PROCEDURE	29
5.2 SUMMARY OF TEST RESULTS/PLOTS.....	29
6. TRANSMISSION TIME.....	31
6.1 STANDARD APPLICABLE	31
6.2 TEST PROCEDURE	31
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	31
7. DUTY CYCLE	33
7.1 STANDARD APPLICABLE	33
7.2 TEST PROCEDURE	33
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	33
8. CONDUCTED EMISSIONS	35
8.1 TEST PROCEDURE	35
8.2 BASIC TEST SETUP BLOCK DIAGRAM	35
8.3 TEST RECEIVER SETUP	35
8.4 SUMMARY OF TEST RESULTS/PLOTS.....	35
APPENDIX PHOTOGRAPHS.....	36

Report version

Version No.	Date of issue	Description
Rev.00	2024-01-08	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Single-channel Emitter
Trade Name:	/
Model No.:	DD7600H
Adding Model(s):	DD7600Y, DD7660AH, DD7660H, DD7660Y
Rated Voltage:	DC 3V
Power Adaptor :	/
<p><i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model DD7600H, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Frequency Range:	433.92MHz
Max. Field Strength:	433.92MHz: 82.17dBuV/m(3m)
Data Rate:	/
Modulation:	FSK
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi
<p><i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i></p>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.231: Periodic operation in the band 40.66-40.70MHz and above 70MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, the equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.5 EUT Setup and Test Mode

The EUT was operated at continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting	433.92MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Occupied Bandwidth	Conducted	±1.5%
Conducted Spurious Emission	Conducted	±2.17dB
Transmission Time	Conducted	±5%
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-18GHz ±3.92dB

1.7 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2023-02-25	2024-02-24
WTXE1022A 1002	GSM Tester	Rohde & Schwarz	CMU200	114403	2023-02-25	2024-02-24
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2023-02-25	2024-02-24
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2023-02-25	2024-02-24
WTXE1044A 1001	Signal Generator	Agilent	83752A	3610A014 53	2023-02-25	2024-02-24
WTXE1045A 1001	Vector Signal Generator	Agilent	N5182A	MY470702 02	2023-02-25	2024-02-24
WTXE1018A 1001	Power Divider	Weinschel	1506A	PM204	2023-02-25	2024-02-24
WTXE1045A 1001	Power Divider	RF-Lambda	RFLT4W5M18G	14110400 027	2023-02-25	2024-02-24
<input type="checkbox"/> Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2023-02-25	2024-02-24
WTXE1007A 1001	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2023-02-25	2024-02-24
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2023-02-25	2024-02-24
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-20	2026-03-19
<input type="checkbox"/> Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2023-02-25	2024-02-24
WTXE1007A 1001	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2023-02-25	2024-02-24
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	14918	2023-02-25	2024-02-24
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2021-03-19	2024-03-18
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2021-03-19	2024-03-18
WTXE1003A	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2023-02-25	2024-02-24

1001						
<input type="checkbox"/> Chamber B: Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2024-04-08
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2023-02-25	2024-02-24
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2023-02-25	2024-02-24
<input checked="" type="checkbox"/> Chamber C: Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2024-05-27
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2023-02-25	2024-02-24
<input checked="" type="checkbox"/> Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2023-02-25	2024-02-24
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2021-03-19	2024-03-18
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2023-02-25	2024-02-24
<input checked="" type="checkbox"/> Conducted Room 1#						
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2023-02-25	2024-02-24
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2023-02-25	2024-02-24
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2023-02-25	2024-02-24
<input type="checkbox"/> Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2023-02-25	2024-02-24
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2023-02-25	2024-02-24

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 1#)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 2#)*	SKET	EMC-I	V2.0

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.209	Radiated Spurious Emissions	Compliant
§15.231(a)	Deactivation Testing	Compliant
§15.231(b)	Radiated Emissions	Compliant
§15.231(c)	20dB Bandwidth Testing	Compliant
§15.207(a)	Conducted Emission	N/A

N/A: not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a PCB antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Standard Applicable

According to §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

** linear interpolations

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

Compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.


4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.231(b) and FCC Part 15.209 Limit.


The test setup for emission measurement below 30MHz.

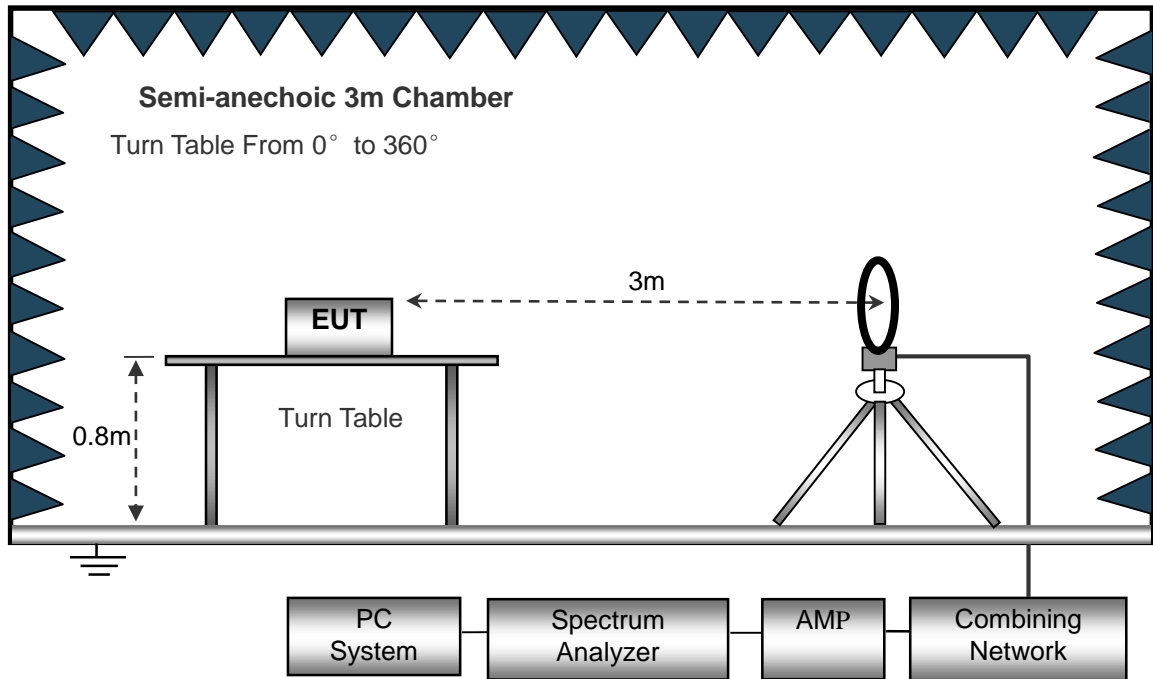

The test setup for emission measurement from 30MHz to 1GHz.

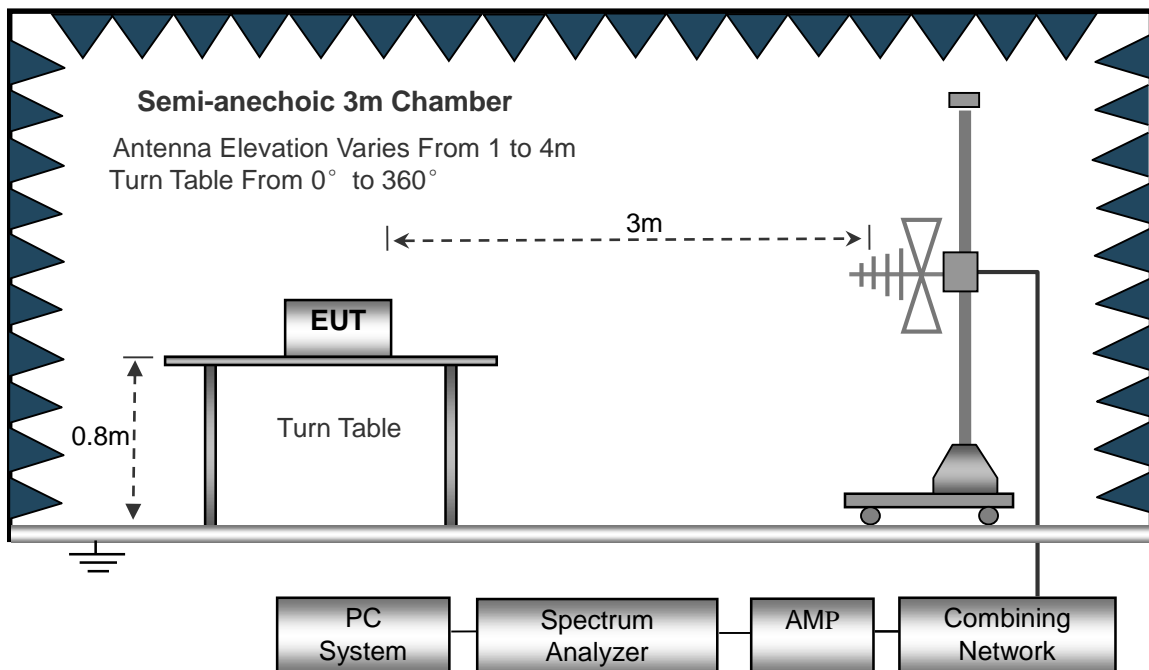

The test setup for emission measurement above 1GHz.

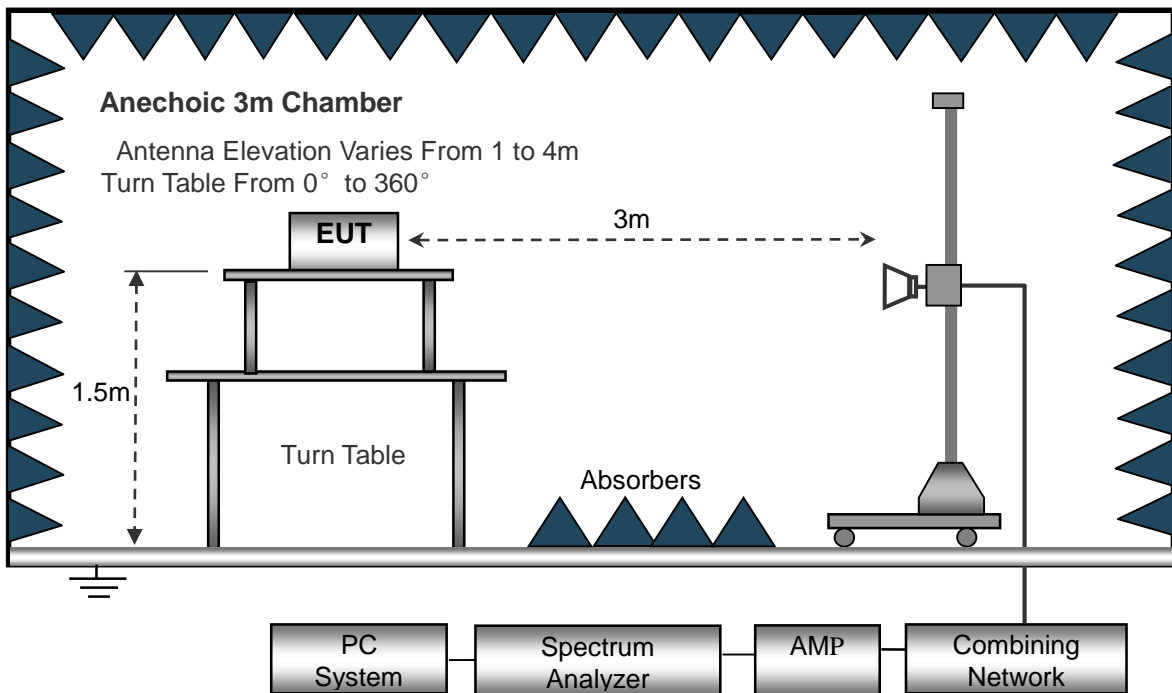

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Loss} + \text{Cab. Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

4.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

DD7600H

Test Mode	TM1	Polarity:	Horizontal
-----------	-----	-----------	------------

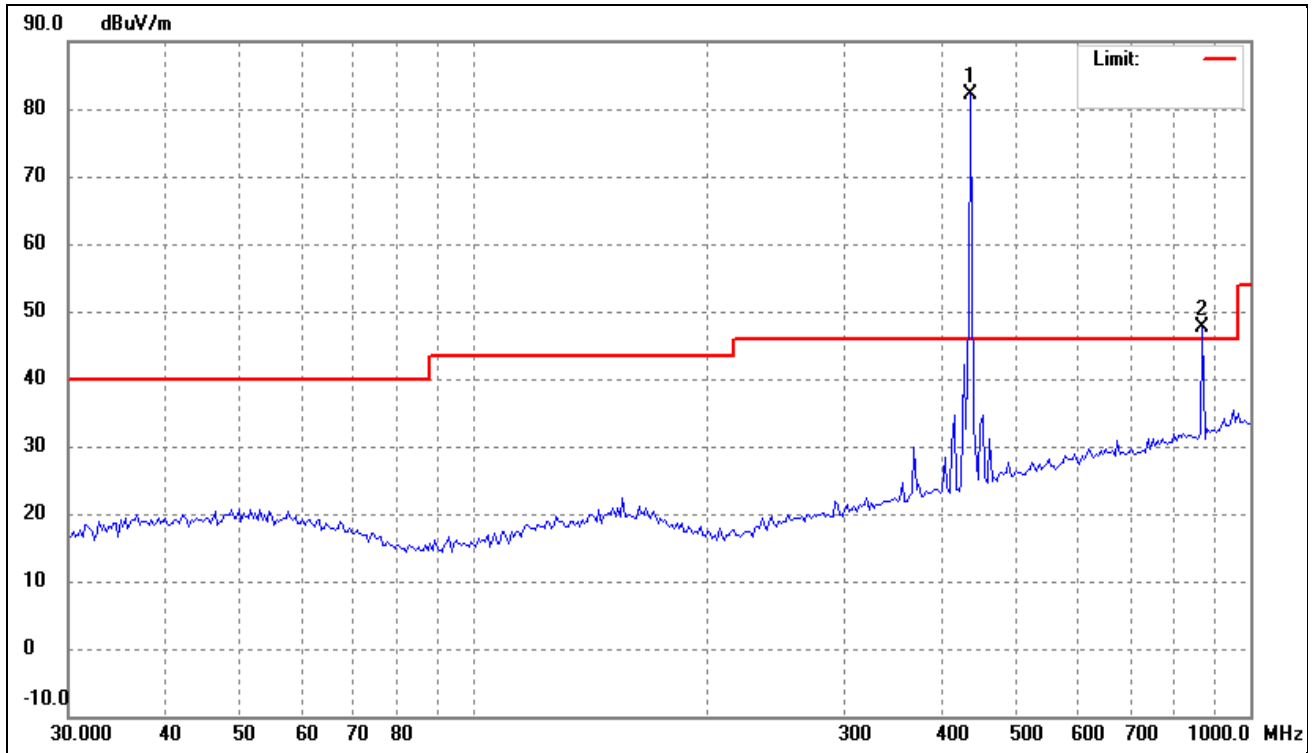


No.	Frequency	Reading	Corr.	Duty cycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor (dB)	Factor (dB)	dBuV/m	dBuV/m	(dB)	(°)	(cm)	
1	436.3956	87.13	-4.96	N/A	82.17	100.82	-18.65	-	-	peak
/	/	/	/	-15.92	66.25	80.82	-14.57	-	-	Ave
2	868.8860	46.72	0.91	N/A	47.63	100.82	-53.19	-	-	peak
/	/	/	/	-15.92	31.71	80.82	-49.11	-	-	Ave

Above 1GHz

No.	Frequency	Reading	Corr.	Duty cycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor (dB)	Factor (dB)	dBuV/m	dBuV/m	dB	(°)	(cm)	
1	1301.760	53.00	-23.32	N/A	29.68	74.00	-44.32	-	-	Peak
/	/	/	/	-15.92	13.76	54.00	-40.24	-	-	Ave
2	2436.332	53.29	-18.77	N/A	34.52	74.00	-39.48	-	-	Peak
/	/	/	/	-15.92	18.60	54.00	-35.40	-	-	Ave
3	3476.316	63.27	-14.36	N/A	48.91	74.00	-25.09	-	-	Peak
/	/	/	/	-15.92	32.99	54.00	-21.01	-	-	Ave

Test Mode	TM1	Polarity:	Vertical
-----------	-----	-----------	----------

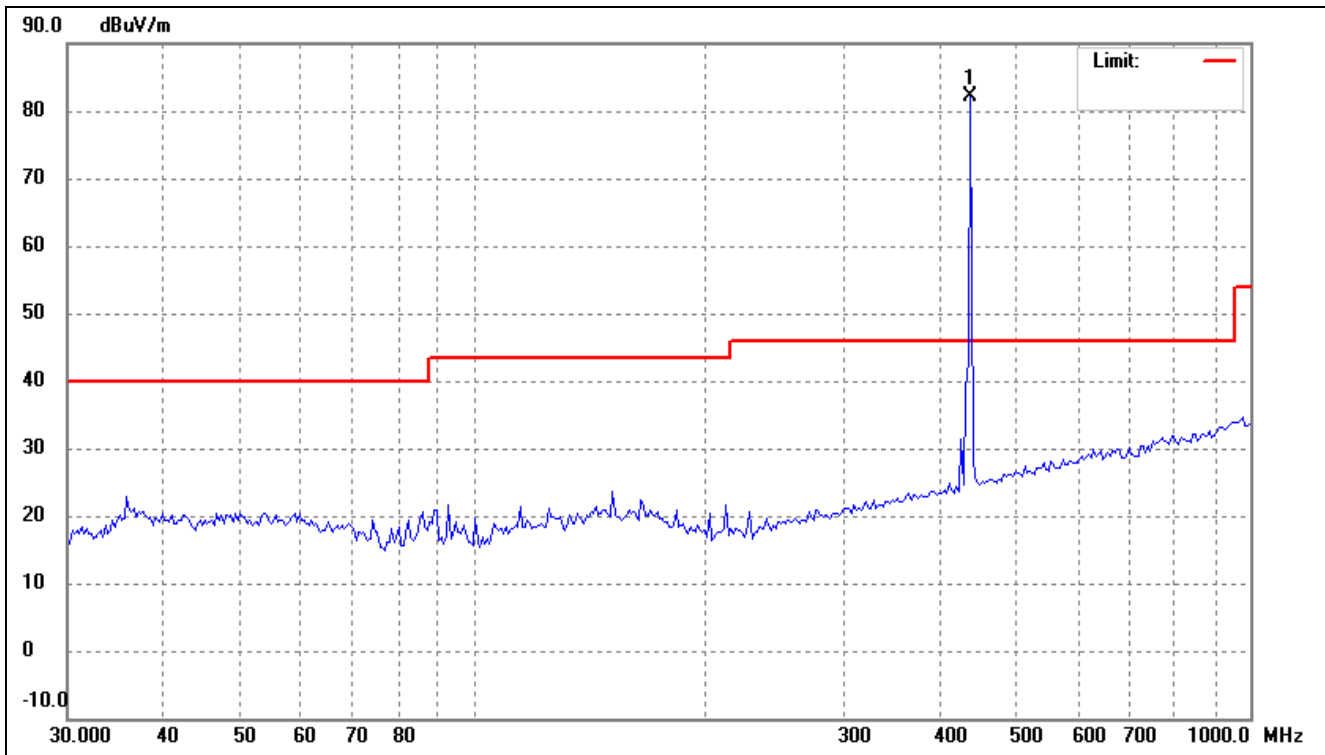


No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Deg. (°)	Height (cm)	Remark
1	436.3956	87.13	-4.96	N/A	82.17	100.82	-18.65	-	-	peak
/	/	/	/	-15.92	66.25	80.82	-14.57	-	-	Ave

Above 1GHz

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Deg. (°)	Height (cm)	Remark
1	1301.760	53.17	-23.32	N/A	29.85	74.00	-44.15	-	-	Peak
/	/	/	/	-15.92	13.93	54.00	-40.07	-	-	Ave
2	2436.332	53.42	-18.77	N/A	34.65	74.00	-39.35	-	-	Peak
/	/	/	/	-15.92	18.73	54.00	-35.27	-	-	Ave
3	3913.633	62.61	-14.69	N/A	47.92	74.00	-26.08	-	-	Peak
/	/	/	/	-15.92	32.00	54.00	-22.00	-	-	Ave

DD7660AH

Test Mode	TM1	Polarity:	Horizontal
-----------	-----	-----------	------------

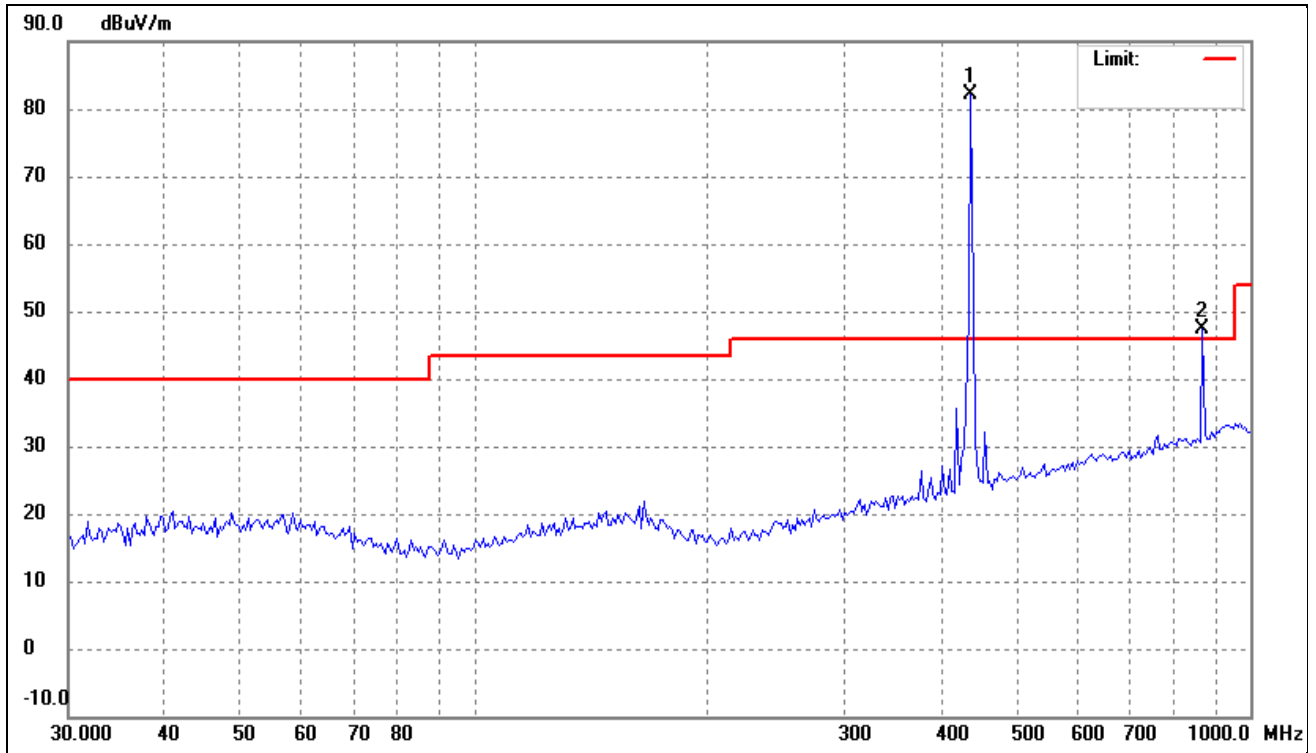


No.	Frequency	Reading	Corr.	Duty cycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor (dB)	Factor (dB)	dBuV/m	dBuV/m	(dB)	(°)	(cm)	
1	436.3956	87.12	-4.96	N/A	82.16	100.82	-18.66	-	-	peak
/	/	/	/	-15.92	66.24	80.82	-14.58	-	-	Ave
2	868.8859	46.58	0.91	N/A	47.49	100.82	-53.33	-	-	peak
/	/	/	/	-15.92	31.57	80.82	-49.25	-	-	Ave

Above 1GHz

No.	Frequency	Reading	Corr.	Duty cycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor (dB)	Factor (dB)	dBuV/m	dBuV/m	dB	(°)	(cm)	
1	1301.760	54.03	-23.32	N/A	30.71	74.00	-43.29	-	-	Peak
/	/	/	/	-15.92	14.79	54.00	-39.21	-	-	Ave
2	2300.307	55.64	-19.04	N/A	36.60	74.00	-37.40	-	-	Peak
/	/	/	/	-15.92	20.68	54.00	-33.32	-	-	Ave
3	3913.633	66.00	-14.69	N/A	51.31	74.00	-22.69	-	-	Peak
/	/	/	/	-15.92	35.39	54.00	-18.61	-	-	Ave

Test Mode	TM1	Polarity:	Vertical
-----------	-----	-----------	----------

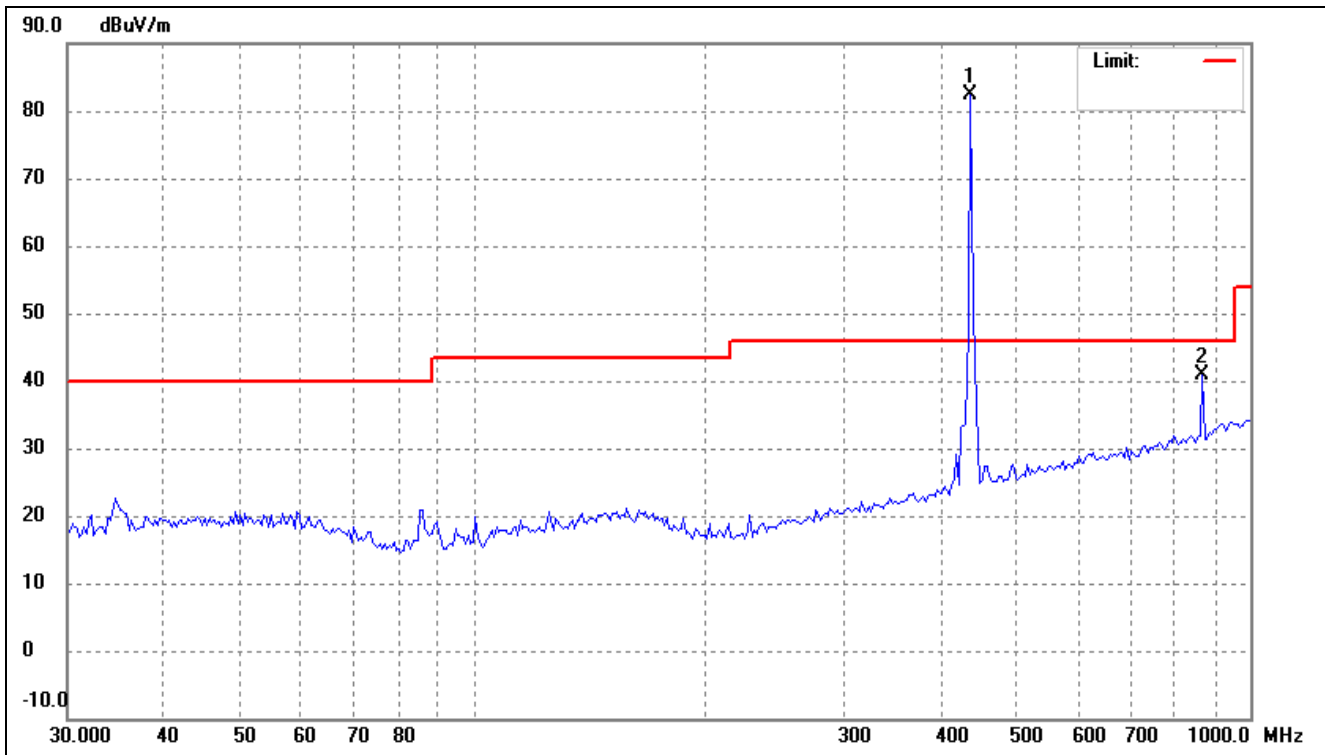


No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Deg. (°)	Height (cm)	Remark
1	436.3956	87.25	-4.96	N/A	82.29	100.82	-18.53	-	-	peak
/	/	/	/	-15.92	66.37	80.82	-14.45	-	-	Ave
2	868.8859	39.88	0.91	N/A	40.79	100.82	-60.03	-	-	peak
/	/	/	/	-15.92	24.87	80.82	-55.95	-	-	Ave

Above 1GHz

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Deg. (°)	Height (cm)	Remark
1	1301.760	52.97	-23.32	N/A	29.65	74.00	-44.35	-	-	Peak
/	/	/	/	-15.92	13.73	54.00	-40.27	-	-	Ave
2	2267.504	56.14	-19.11	N/A	37.03	74.00	-36.97	-	-	Peak
/	/	/	/	-15.92	21.11	54.00	-32.89	-	-	Ave
3	3913.633	66.21	-14.69	N/A	51.52	74.00	-22.48	-	-	Peak
/	/	/	/	-15.92	35.60	54.00	-18.40	-	-	Ave

DD7660H

Test Mode	TM1	Polarity:	Horizontal
-----------	-----	-----------	------------

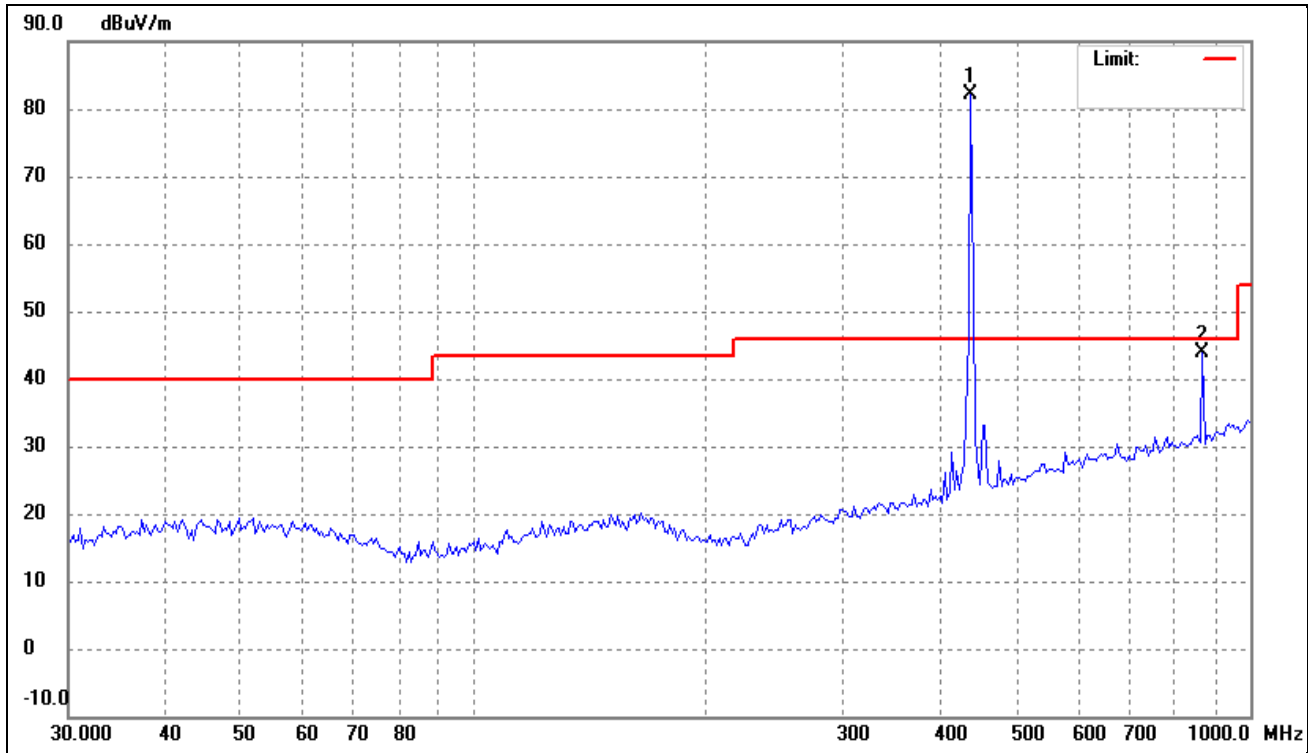


No.	Frequency	Reading	Corr.	Duty cycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor (dB)	Factor (dB)	dBuV/m	dBuV/m	(dB)	(°)	(cm)	
1	436.3956	87.12	-4.96	N/A	82.16	100.82	-18.66	-	-	peak
/	/	/	/	-15.92	66.24	80.82	-14.48	-	-	Ave
2	868.8859	42.93	0.91	N/A	43.84	100.82	-56.98	-	-	peak
/	/	/	/	-15.92	27.92	80.82	52.90	-	-	Ave

Above 1GHz

No.	Frequency	Reading	Corr.	Duty cycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor (dB)	Factor (dB)	dBuV/m	dBuV/m	dB	(°)	(cm)	
1	1301.760	53.76	-23.32	N/A	30.44	74.00	-43.56	-	-	Peak
/	/	/	/	-15.92	14.52	54.00	-39.48	-	-	Ave
2	2694.017	55.80	-18.26	N/A	37.54	74.00	-36.46	-	-	Peak
/	/	/	/	-15.92	21.62	54.00	-32.38	-	-	Ave
3	3913.633	65.22	-14.69	N/A	50.53	74.00	-23.47	-	-	Peak
/	/	/	/	-15.92	-34.61	54.00	-19.39	-	-	Ave

Test Mode	TM1	Polarity:	Vertical
-----------	-----	-----------	----------

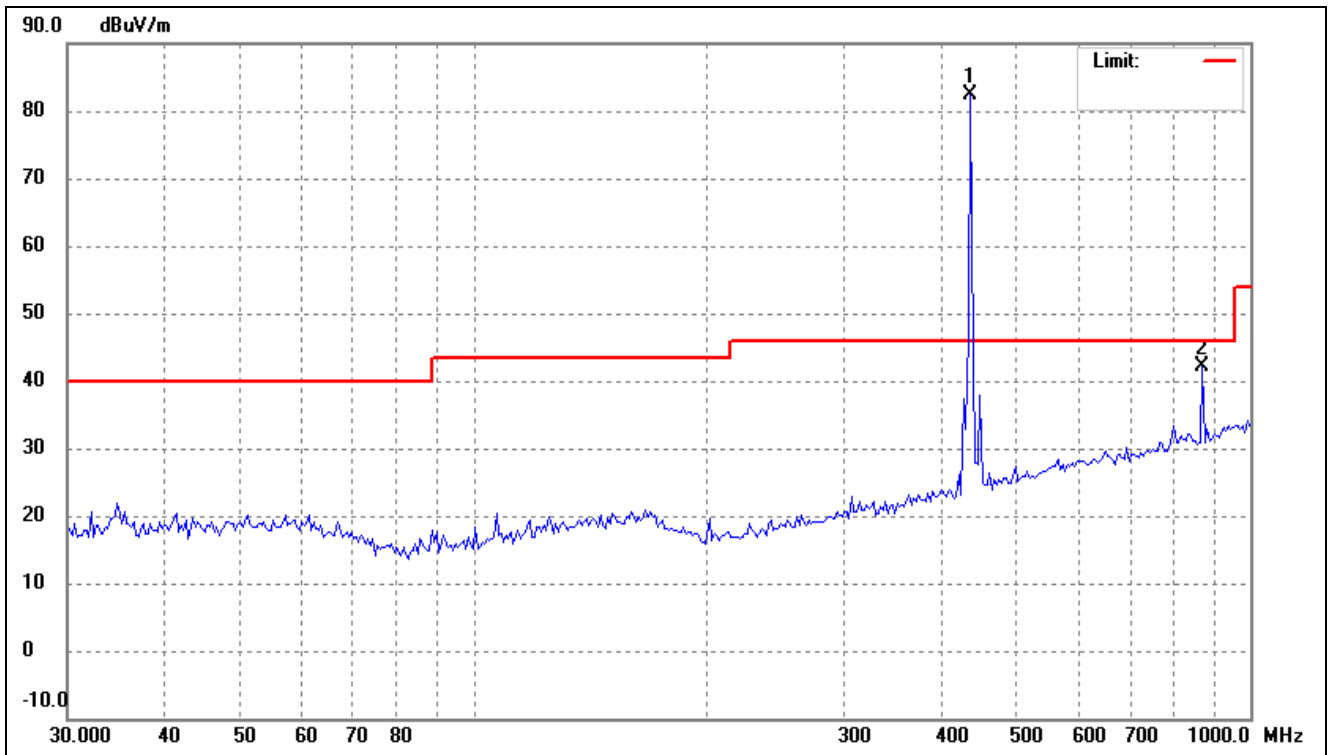


No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Deg. (°)	Height (cm)	Remark
1	436.3956	87.34	-4.96	N/A	82.38	100.82	-18.44	-	-	peak
/	/	/	/	-15.92	66.46	80.82	-14.36	-	-	Ave
2	868.8859	41.15	0.91	N/A	42.06	100.82	-58.76	-	-	peak
/	/	/	/	-15.92	26.16	80.82	-54.68	-	-	Ave

Above 1GHz

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Deg. (°)	Height (cm)	Remark
1	1301.760	53.90	-23.32	N/A	30.58	74.00	-43.42	-	-	Peak
/	/	/	/	-15.92	14.66	54.00	-39.34	-	-	Ave
2	2283.846	55.54	-19.07	N/A	36.47	74.00	-37.53	-	-	Peak
/	/	/	/	-15.92	20.55	54.00	-33.45	-	-	Ave
3	3913.633	63.21	-14.69	N/A	48.52	74.00	-25.48	-	-	Peak
/	/	/	/	-15.92	32.60	54.00	-21.40	-	-	Ave

D7600H-00

Test Mode	TM1	Polarity:	Horizontal
-----------	-----	-----------	------------

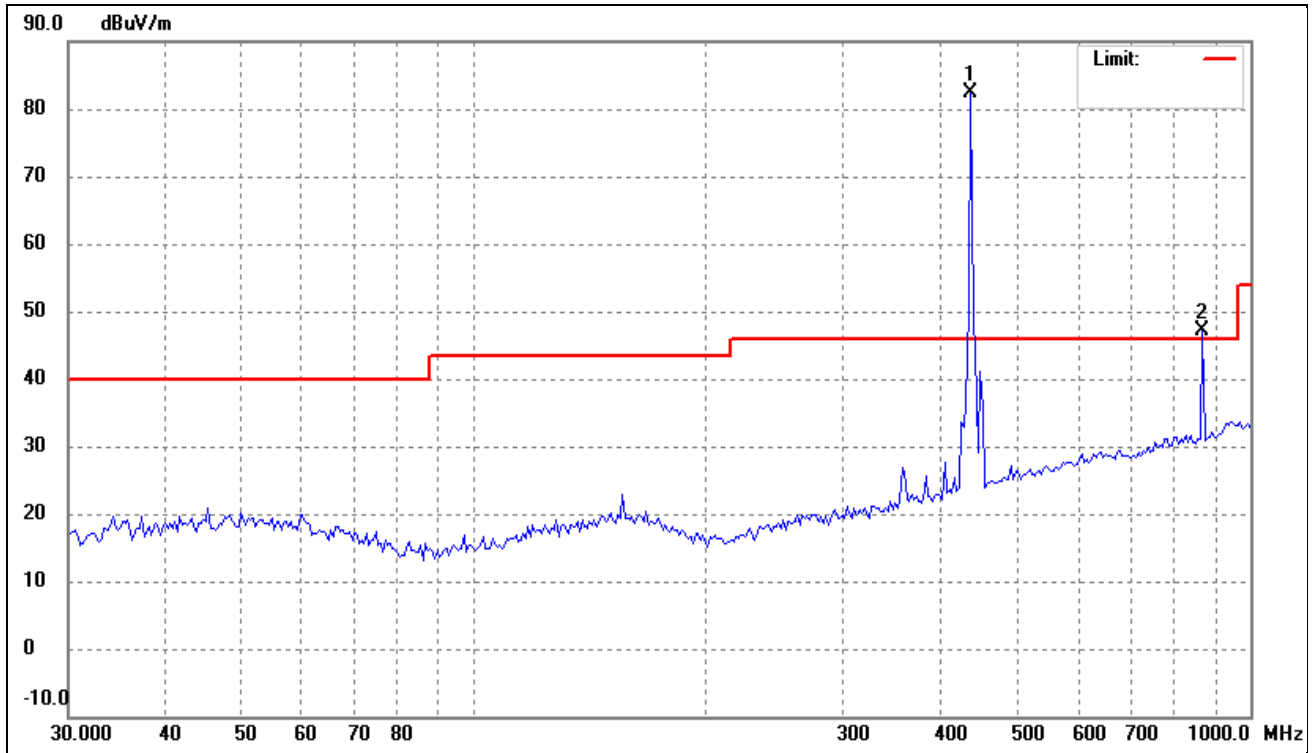


No.	Frequency	Reading	Corr.	Duty cycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor (dB)	Factor (dB)	dBuV/m	dBuV/m	(dB)	(°)	(cm)	
1	436.3956	87.27	-4.96	N/A	82.31	100.82	-18.51	-	-	peak
/	/	/	/	-15.92	66.39	80.82	-14.43	-	-	Ave
2	868.8859	46.28	0.91	N/A	47.19	100.82	-53.63	-	-	peak
/	/	/	/	-15.92	31.27	80.82	-49.55	-	-	Ave

Above 1GHz

No.	Frequency	Reading	Corr.	Duty cycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor (dB)	Factor (dB)	dBuV/m	dBuV/m	dB	(°)	(cm)	
1	1301.760	53.31	-23.32	N/A	29.99	74.00	-44.01	-	-	Peak
/	/	/	/	-15.92	14.07	54.00	39.93	-	-	Ave
2	2251.278	55.51	-19.14	N/A	36.37	74.00	-37.63	-	-	Peak
/	/	/	/	-15.92	20.45	54.00	-33.55	-	-	Ave
3	3913.633	67.32	-14.69	N/A	52.63	74.00	-21.37	-	-	Peak
/	/	/	/	-15.92	36.71	54.00	-17.29	-	-	Ave

Test Mode	TM1	Polarity:	Vertical
-----------	-----	-----------	----------

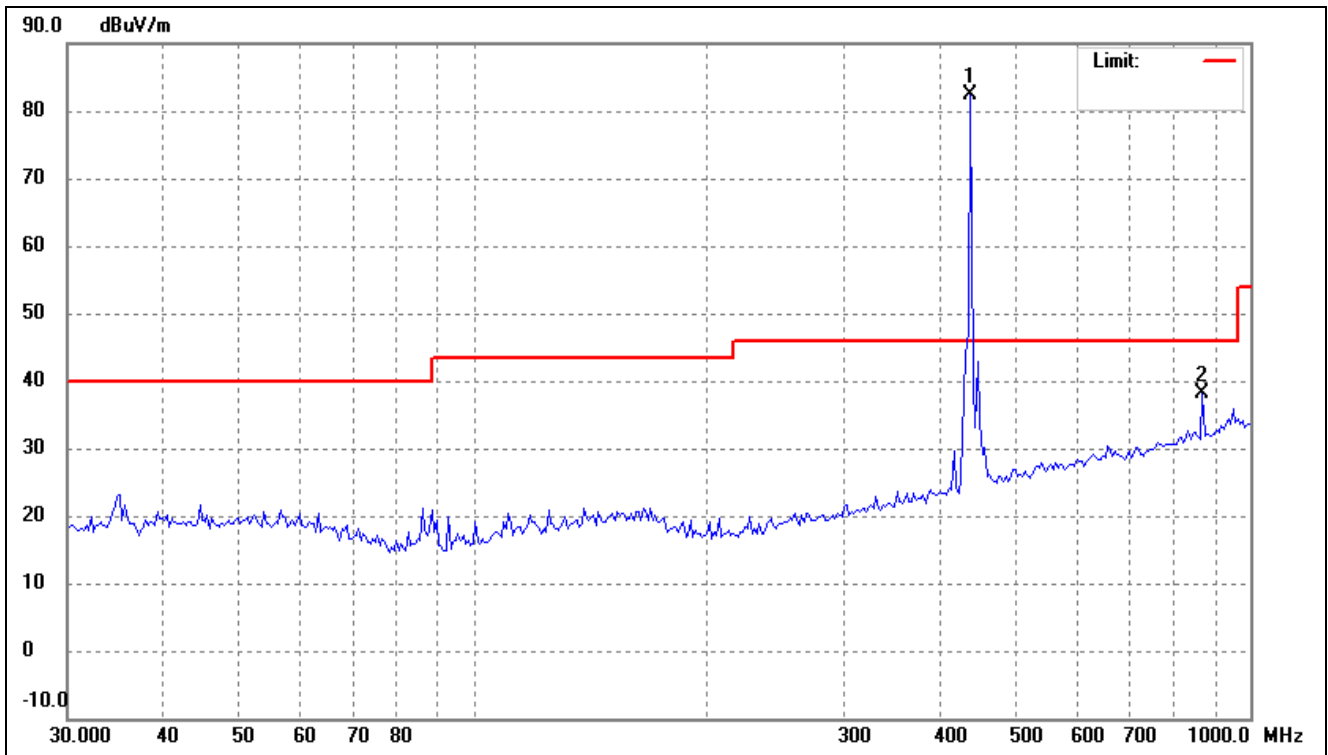


No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Deg. (°)	Height (cm)	Remark
1	436.3956	87.28	-4.96	N/A	82.32	100.82	-18.50	-	-	peak
/	/	/	/	-15.92	66.40	80.82	-14.42	-	-	Ave
2	868.8859	37.29	0.91	N/A	38.20	100.82	-62.62	-	-	peak
/	/	/	/	-15.92	22.28	80.82	-58.54	-	-	Ave

Above 1GHz

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Deg. (°)	Height (cm)	Remark
1	1301.760	52.39	-23.32	N/A	29.07	74.00	-44.93	-	-	Peak
/	/	/	/	-15.92	13.15	54.00	-40.85	-	-	Ave
2	1922.271	56.77	-20.09	N/A	36.68	74.00	-37.32	-	-	Peak
/	/	/	/	-15.92	20.76	54.00	-33.24	-	-	Ave
3	3476.316	59.65	-14.36	N/A	45.29	74.00	-28.71	-	-	Peak
/	/	/	/	-15.92	29.37	54.00	-24.63	-	-	Ave

DD7660AH-00

Test Mode	TM1	Polarity:	Horizontal
-----------	-----	-----------	------------

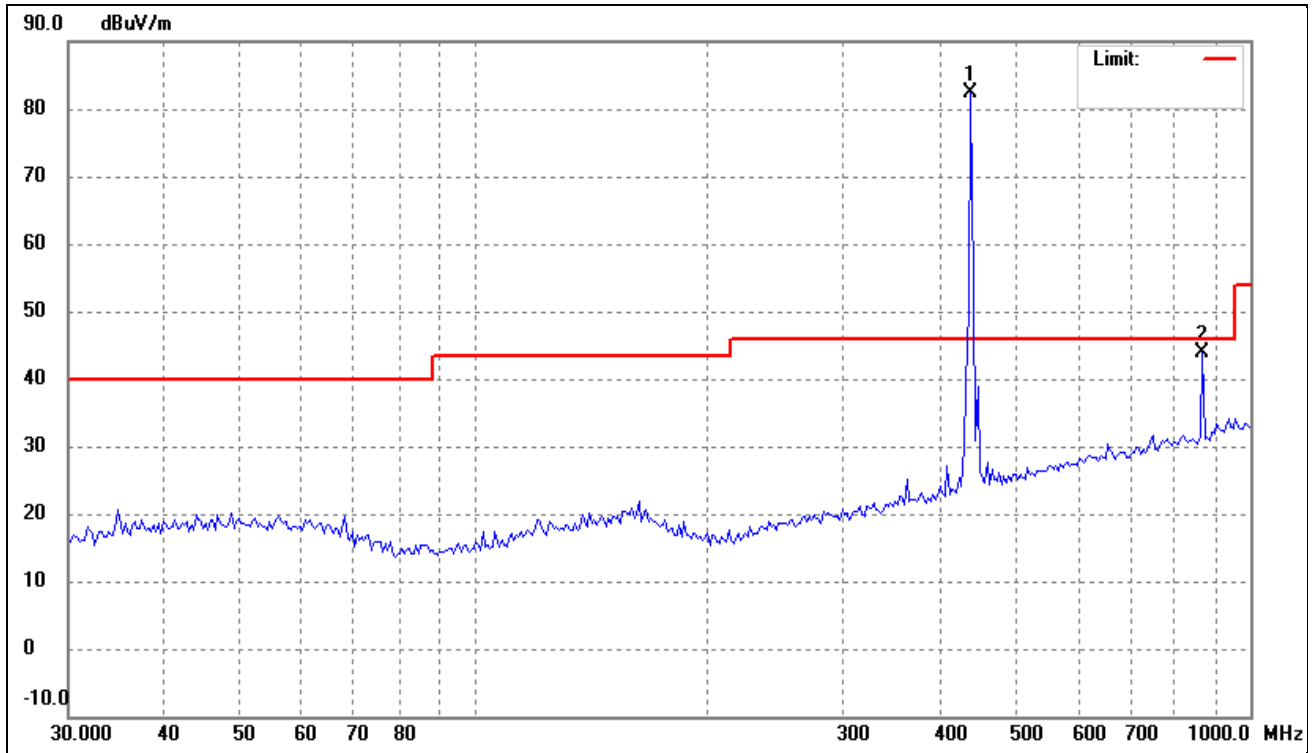


No.	Frequency	Reading	Corr.	Duty cycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor (dB)	Factor (dB)	dBuV/m	dBuV/m	(dB)	(°)	(cm)	
1	436.3956	87.25	-4.96	N/A	82.29	100.82	-18.53	-	-	peak
/	/	/	/	-15.92	66.37	80.82	-14.45	-	-	Ave
2	868.8859	43.00	0.91	N/A	43.91	100.82	-56.91	-	-	peak
/	/	/	/	-15.92	27.99	80.82	-52.83	-	-	Ave

Above 1GHz

No.	Frequency	Reading	Corr.	Duty cycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor (dB)	Factor (dB)	dBuV/m	dBuV/m	dB	(°)	(cm)	
1	1301.760	53.17	-23.32	N/A	29.85	74.00	-44.15	-	-	Peak
/	/	/	/	-15.92	13.93	54.00	-40.07	-	-	Ave
2	2316.886	56.05	-19.01	N/A	37.04	74.00	-36.96	-	-	Peak
/	/	/	/	-15.92	21.12	54.00	-32.88	-	-	Ave
3	3913.633	65.40	-14.69	N/A	50.71	74.00	-23.29	-	-	Peak
/	/	/	/	-15.92	34.79	54.00	19.21	-	-	Ave

Test Mode	TM1	Polarity:	Vertical
-----------	-----	-----------	----------

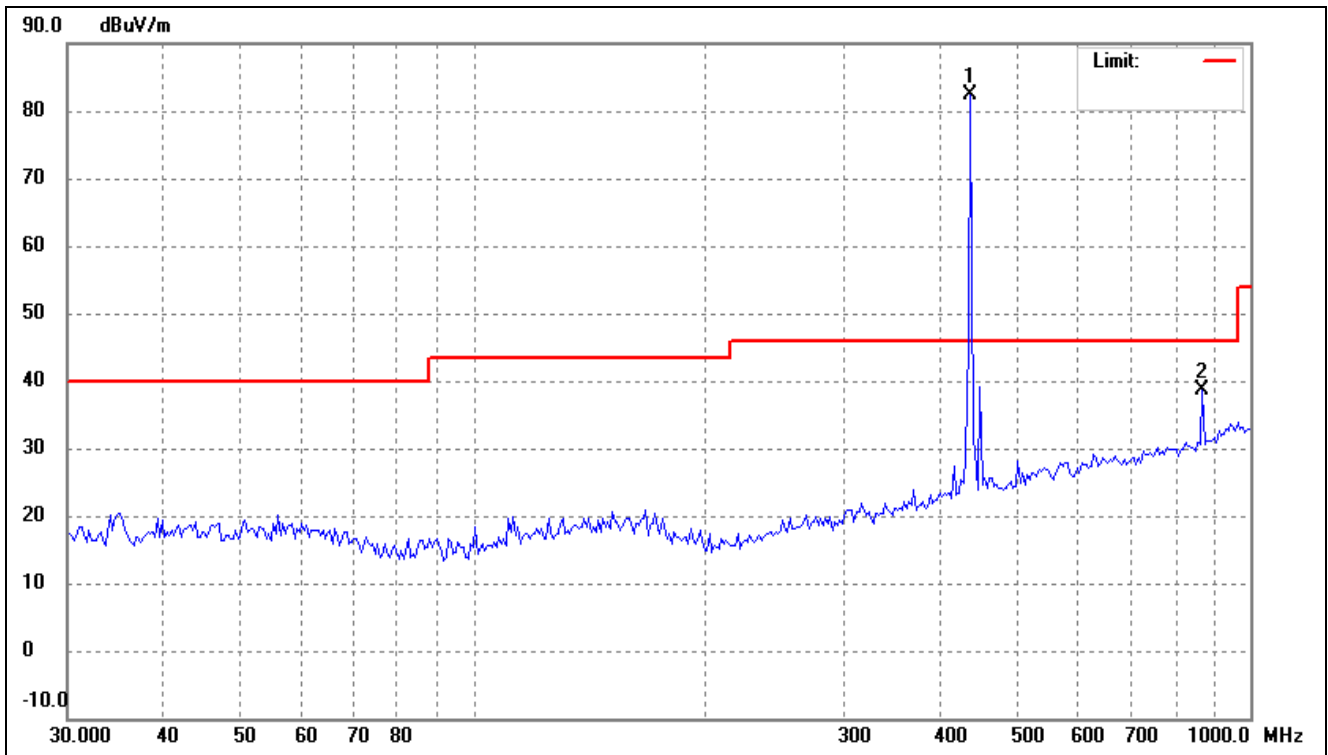


No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Deg. (°)	Height (cm)	Remark
1	436.3956	87.30	-4.96	N/A	82.34	100.82	-18.48	-	-	peak
/	/	/	/	-15.92	66.42	80.82	-14.40	-	-	Ave
2	868.8859	37.78	0.91	N/A	38.69	100.82	-62.13	-	-	peak
/	/	/	/	-15.92	22.77	80.82	-58.05	-	-	Ave

Above 1GHz

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Deg. (°)	Height (cm)	Remark
1	1301.760	53.01	-23.32	N/A	29.69	74.00	-44.31	-	-	Peak
/	/	/	/	-15.92	13.77	54.00	-40.23	-	-	Ave
2	2235.169	55.53	-19.16	N/A	36.37	74.00	-37.63	-	-	Peak
/	/	/	/	-15.92	20.45	54.00	-33.55	-	-	Ave
3	3913.633	61.65	-14.69	N/A	46.96	74.00	-27.04	-	-	Peak
/	/	/	/	-15.92	31.04	54.00	-22.96	-	-	Ave

DD7660H-00

Test Mode	TM1	Polarity:	Horizontal
-----------	-----	-----------	------------

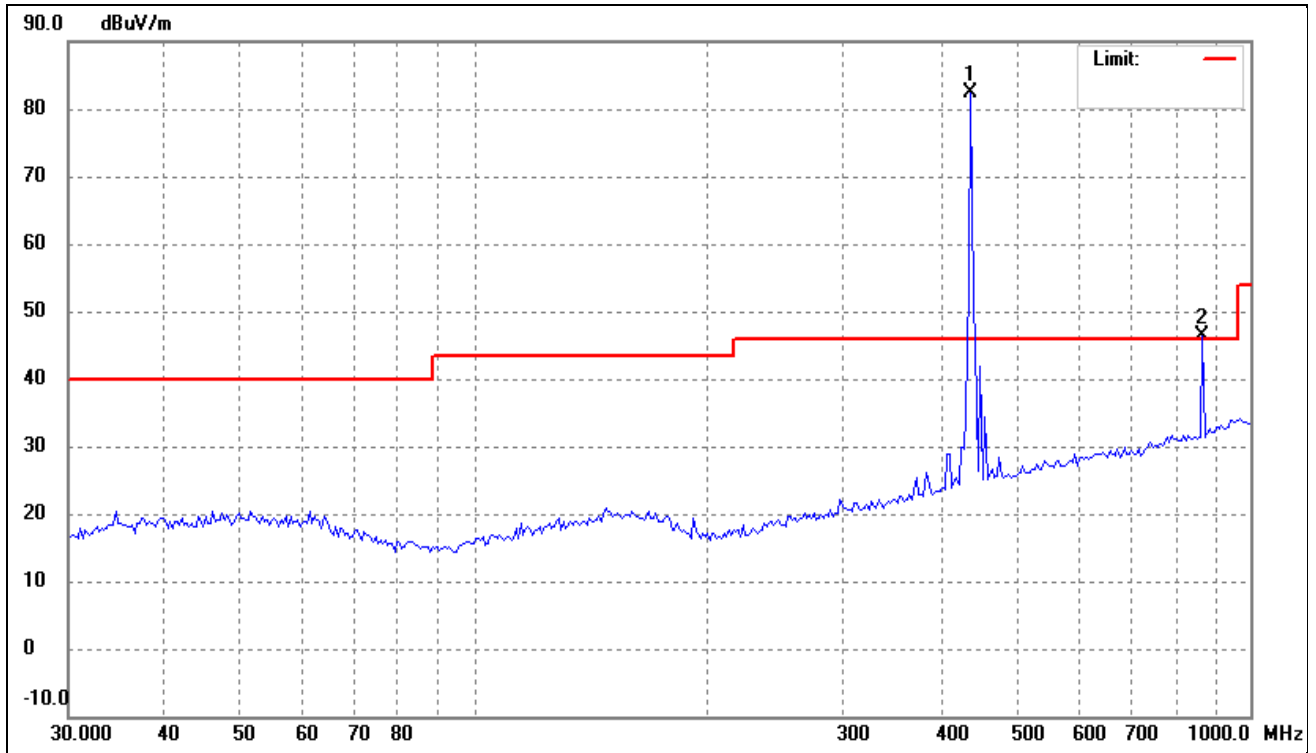


No.	Frequency	Reading	Corr.	Duty cycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor (dB)	Factor (dB)	dBuV/m	dBuV/m	(dB)	(°)	(cm)	
1	436.3956	87.32	-4.96	N/A	82.36	100.82	-18.46	-	-	peak
/	/	/	/	-15.92	66.44	80.82	14.38	-	-	Ave
2	868.8859	45.50	0.91	N/A	46.41	100.82	-54.41	-	-	peak
/	/	/	/	-15.92	30.49	80.82	-50.33	-	-	Ave

Above 1GHz

No.	Frequency	Reading	Corr.	Duty cycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor (dB)	Factor (dB)	dBuV/m	dBuV/m	dB	(°)	(cm)	
1	1301.760	53.22	-23.32	N/A	29.90	74.00	-44.10	-	-	Peak
/	/	/	/	-15.92	13.98	54.00	40.02	-	-	Ave
2	2292.062	55.43	-19.06	N/A	36.37	74.00	-37.63	-	-	Peak
/	/	/	/	-15.92	20.45	54.00	-33.55	-	-	Ave
3	3913.633	64.21	-14.69	N/A	49.52	74.00	-24.48	-	-	Peak
/	/	/	/	-15.92	33.60	54.00	-20.40	-	-	Ave

Test Mode	TM1	Polarity:	Vertical
-----------	-----	-----------	----------

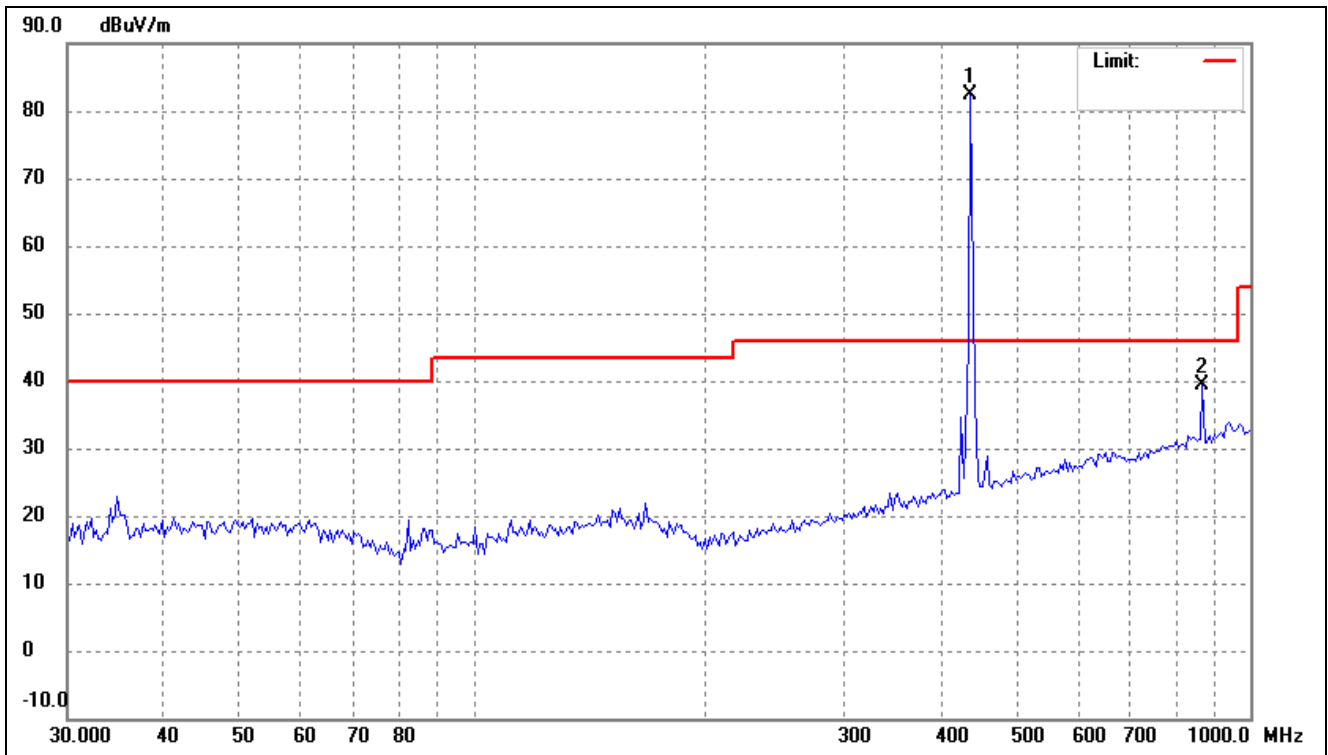

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Deg. (°)	Height (cm)	Remark
1	436.3956	87.27	-4.96	N/A	82.31	100.82	-18.51	-	-	peak
/	/	/	/	-15.92	66.39	80.82	-14.43	-	-	Ave
2	868.8859	38.59	0.91	N/A	39.50	100.82	-61.32	-	-	peak
/	/	/	/	-15.92	23.58	80.82	-57.24	-	-	Ave

Above 1GHz

No.	Frequency	Reading	Corr.	Dutycycle	Result	Limit	Margin	Deg.	Height	Remark
	MHz	dBuV/m	Factor (dB)	Factor (dB)	dBuV/m	dBuV/m	dB	(°)	(cm)	
1	1301.760	53.35	-23.32	N/A	30.03	74.00	-43.97	-	-	Peak
/	/	/	/	-15.92	14.11	54.00	-39.89	-	-	Ave
2	2235.169	56.14	-19.16	N/A	36.98	74.00	-37.02	-	-	Peak
/	/	/	/	-15.92	21.06	54.00	-32.94	-	-	Ave
3	3913.633	62.81	-14.69	N/A	48.12	74.00	-25.88	-	-	Peak
/	/	/	/	-15.92	32.20	54.00	-21.80	-	-	Ave

Remark: '-Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5. 20dB Bandwidth

5.1 Standard Applicable

According to FCC Part 15.231(c), the bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

5.1 Test Procedure


With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna, which was connected to the spectrum analyzer with the START, and STOP frequencies set to the EUT's operation band.

5.2 Summary of Test Results/Plots

Test Frequency MHz	20dB Bandwidth kHz	Limit kHz	Result
433.92	64.80	1084.8	Pass

Limit = Fundamental Frequency * 0.25% = 433.92MHz * 0.25% = 1084.8 kHz

Please refer to the attached plots.

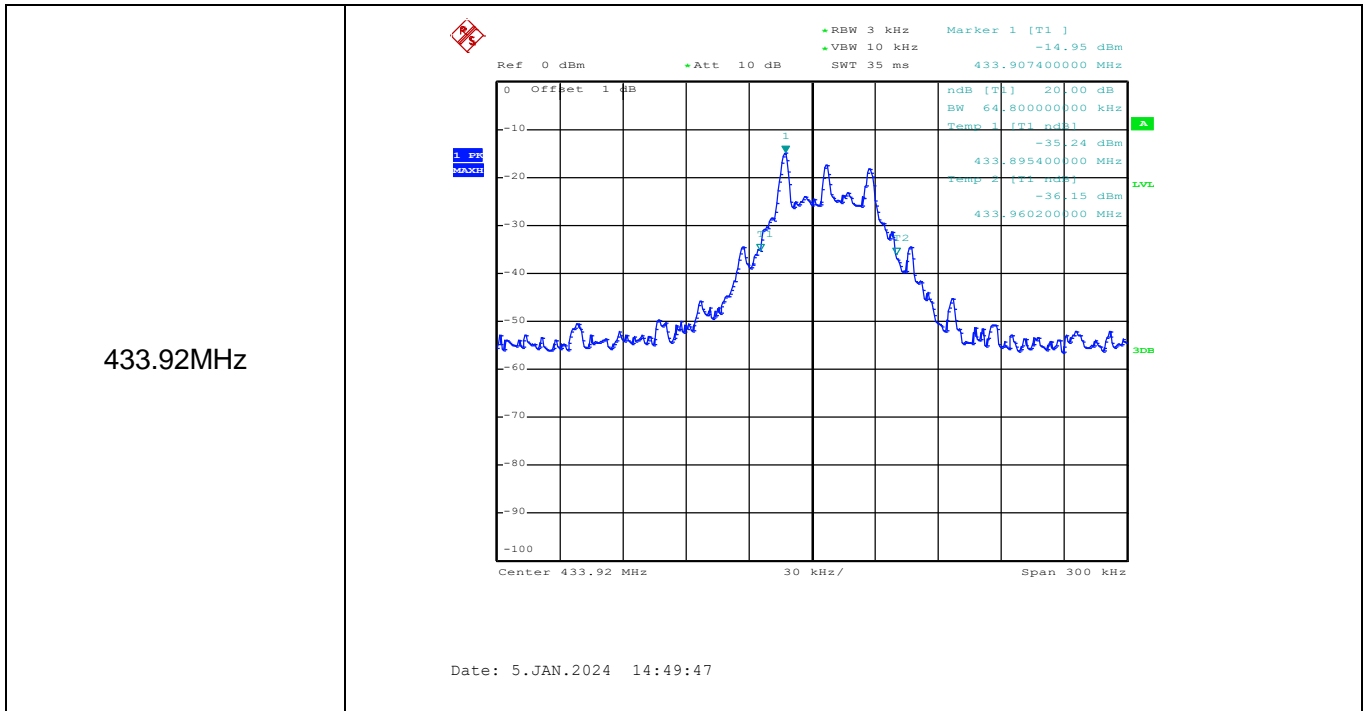

6. Transmission Time

6.1 Standard Applicable

According to FCC Part 15.231(a), the transmitter shall be complied the following requirements:

- 1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.


6.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

6.3 Summary of Test Results/Plots

Transmission Type	Test Frequency(MHz)	Transmission Time(s)	Limit(s)	Result
Manually	433.92	0.640	5	Pass

Please refer to the attached plots.

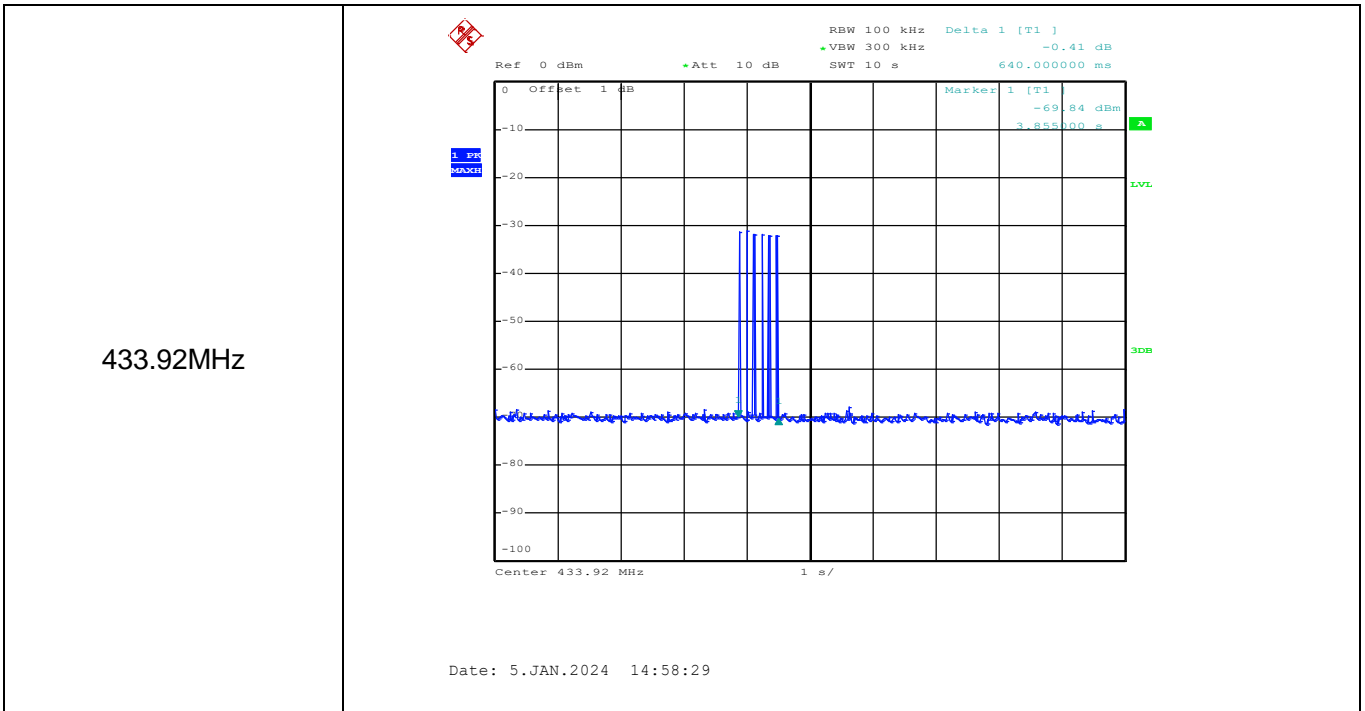

7. Duty Cycle

7.1 Standard Applicable

According to FCC Part 15.231 (b)(2) and 15.35 (c), for pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

7.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.


7.3 Summary of Test Results/Plots

Type of Pulse	Width of Pulse (ms)	Quantity of Pulse	Transmission Time (ms)	Total Time (T _{on}) (ms)
Pulse 1	16	1	16	16

Test Period (T _p)	Total Time (T _{on})	Duty Cycle	Duty Cycle Factor
ms	ms	%	dB
100	16	16.00	-15.92

Remark: Duty Cycle Factor=20*log(Duty Cycle)

Please refer to the attached test plots:

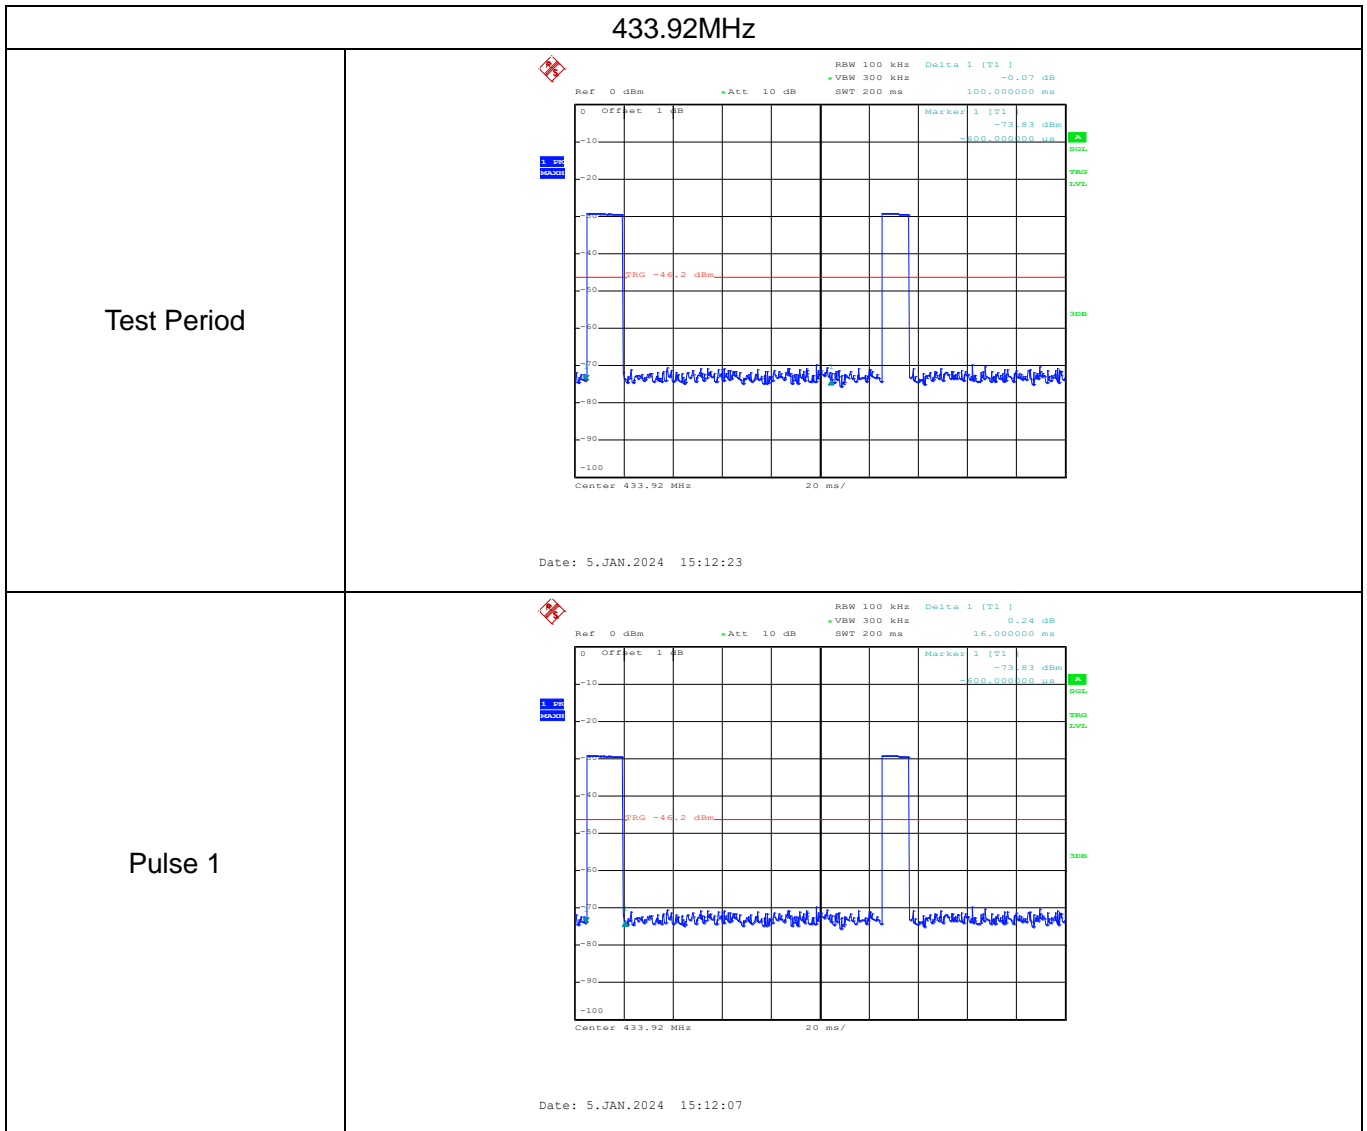


8. Conducted Emissions

8.1 Test Procedure

The setup of EUT is according with per ANSI C63.10:2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

8.2 Basic Test Setup Block Diagram

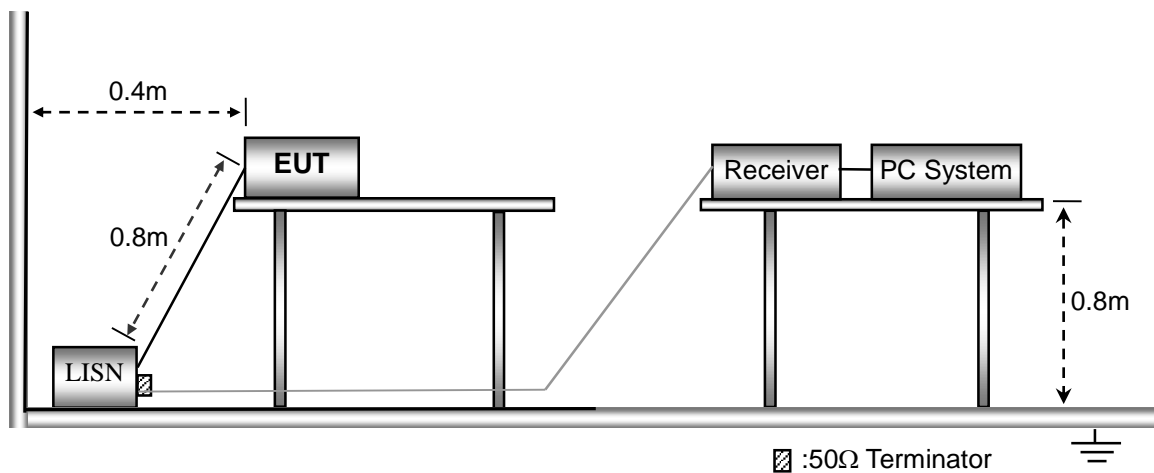

8.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal

8.4 Summary of Test Results/Plots

Not applicable

APPENDIX PHOTOGRAPHS

Please refer to "ANNEX"

**** END OF REPORT ****