

## FCC/IC - TEST REPORT

Report Number : **68.910.16.040.01** Date of Issue: September 07, 2016Model : **DV24CE/S-0.6/50**Product Type : DC Venetian Blinds DriveApplicant : Ningbo Dooya Mechanic & Electronic Technology Co., Ltd.Address : No.168 Shengguang Road, Luotuo, Zhenhai, Ningbo,Zhejiang province, P.R.China 315202Production Facility : Ningbo Dooya Mechanic & Electronic Technology Co., Ltd.Address : No.168 Shengguang Road, Luotuo, Zhenhai, Ningbo,Zhejiang province, P.R.China 315202Test Result :  **Positive**  **Negative**Total pages including  
Appendices : 18

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval

# 1 Table of Contents

1	Table of Contents .....	2
2	Details about the Test Laboratory .....	3
3	Description of the Equipment Under Test .....	4
4	Summary of Test Standards .....	5
5	Summary of Test Results .....	6
6	General Remarks.....	7
7	Systems test configuration .....	8
8	Test Setups.....	9
9	Test Methodology .....	10
9.1	Conducted Emission.....	10
9.2	Radiated Emission.....	13
9.3	Bandwidth Measurement .....	15
9.4	Deactivation Time .....	16
10	Test Equipment List.....	17
11	System Measurement Uncertainty .....	18

## 2 Details about the Test Laboratory

### Details about the Test Laboratory

#### Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch  
Building 12&13, Zhiheng Wisdomland Business Park,  
Nantou Checkpoint Road 2, Nanshan District,  
Shenzhen City, 518052,  
P. R. China

FCC Registration Number: 502708

IC Registration Number: 10320A-1

Telephone: 86 755 8828 6998  
Fax: 86 755 8828 5299

### 3 Description of the Equipment Under Test

Product:	DC Venetian Blinds Drive
Model no.:	DV24CE/S-0.6/50
FCC ID:	VYYDV240650
IC:	21396-DV240650
Options and accessories:	AC Adapter (Supplied by Dooya) Model: DC264 Input: 100 – 240VAC, 50/60Hz, 0.4A Output: 12.0VDC, 1000mA
Rating:	12.0VDC, 1A (Supplied by external adapter)
RF Transmission Frequency:	433.925MHz
Modulation:	GFSK
Antenna Type:	Integrated Antenna
Antenna Gain:	0.5dBi
Description of the EUT:	The Equipment Under Test (EUT) is a DC Venetian Blinds Drive operated at 433.92MHz

## 4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2015 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-210 Issue 9, August 2016	Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

All the test methods were according to ANSI C63.10.

## 5 Summary of Test Results

Technical Requirements					
FCC Part 15 Subpart C, RSS-210 Issue 9					
Test Condition			Pages	Test Site	Test Result
§15.207	RSS-GEN A8.8	Conducted emission AC power port	10	Site 1	Pass
§15.205, §15.209, 15.35 (c)§15.231 (b)	RSS-210 A.1.2	Radiated Emission, 30MHz to 4.5GHz	13	Site 1	Pass
§15.231(c)	RSS-210 A.1.3	Bandwidth Measurement	15	Site 1	Pass
§15.231 (a) (1)	RSS-210 A.1.1 (a)	Deactivation Time	16	Site 1	Pass

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an Integrated Antenna, which gain is 0.5dBi. In accordance to §15.203, It is considered sufficiently to comply with the provisions of this section.

## 6 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: VYYDV240650, IC: 21396-DV240650 complies with Section 15.207, 15.209, 15.231 of the FCC Part 15, Subpart C Rules, Section A.1.1 (a), A.1.3, A.1.2 of the RSS-210 and RSS-GEN.

### SUMMARY:

All tests according to the regulations cited on page 5 were

- Performed

- **Not** Performed

The Equipment Under Test

- **Fulfills** the general approval requirements.

- **Does not** fulfill the general approval requirements.


Sample Received Date: July 1, 2016

Testing Start Date: July 1, 2016

Testing End Date: July 14, 2016

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch

Reviewed by:



Phoebe Hu  
EMC Project Manager

Prepared by:



Aaron Lai  
EMC Project Engineer

## 7 Systems test configuration

Auxiliary Equipment Used during Test:


DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
--	--	--	--




## 8 Test Setups

### 7.1 Radiated test setups


#### Below 1GHz

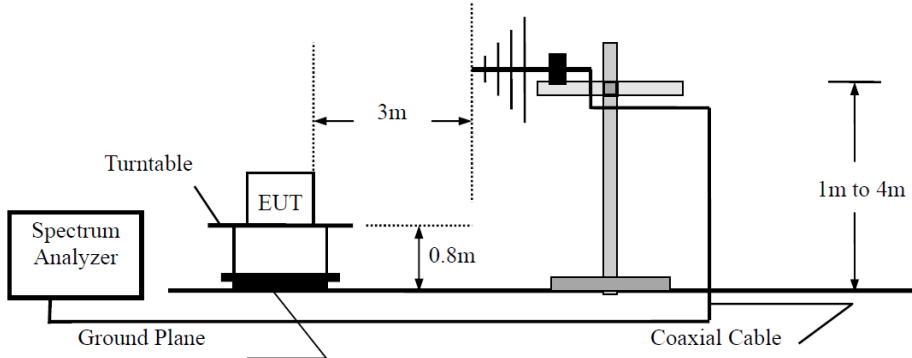


#### Above 1GHz

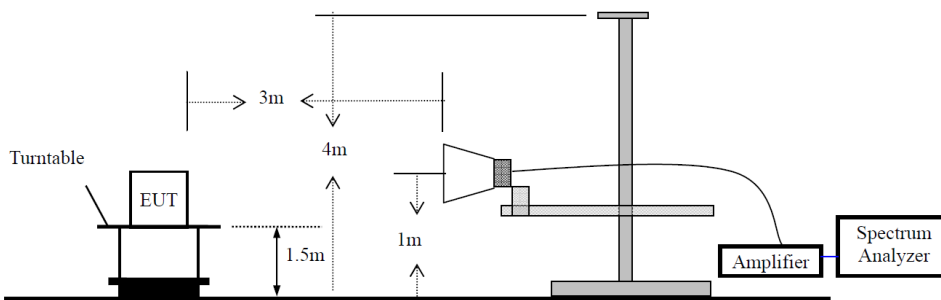

### 7.2 Conducted RF test setups



### 7.3 AC Power Line Conducted Emission test setups

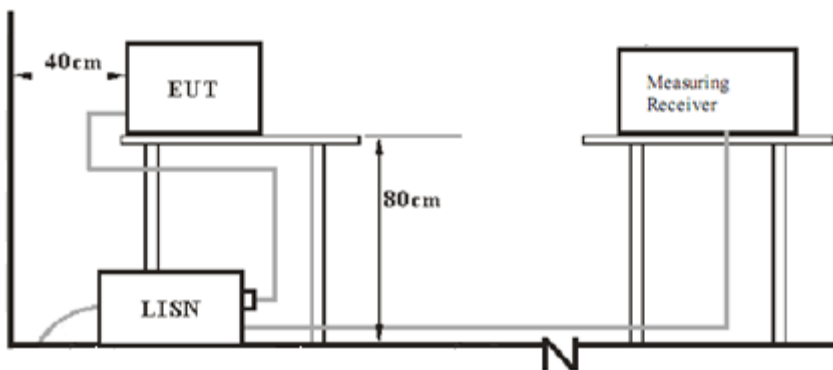

## 9 Test Methodology

### 9.1 Conducted Emission

#### Test Method


1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

#### Limit

Frequency MHz	QP Limit dB $\mu$ V	AV Limit dB $\mu$ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

### Conducted Emission Test 0.15MHz – 30MHz


EUT: DC Venetian Blinds Drive  
 M/N: DV24CE/S-0.6/50  
 Operating Condition: TX  
 Test Specification: Power Line, Live  
 Comment: AC120V/60Hz  
 Test Standard: FCC Part 15 Subpart B  
 Temperature (°C): 24.5 Relative Humidity (%): 63.2 Atmospheric Pressure(mbar) : 1012

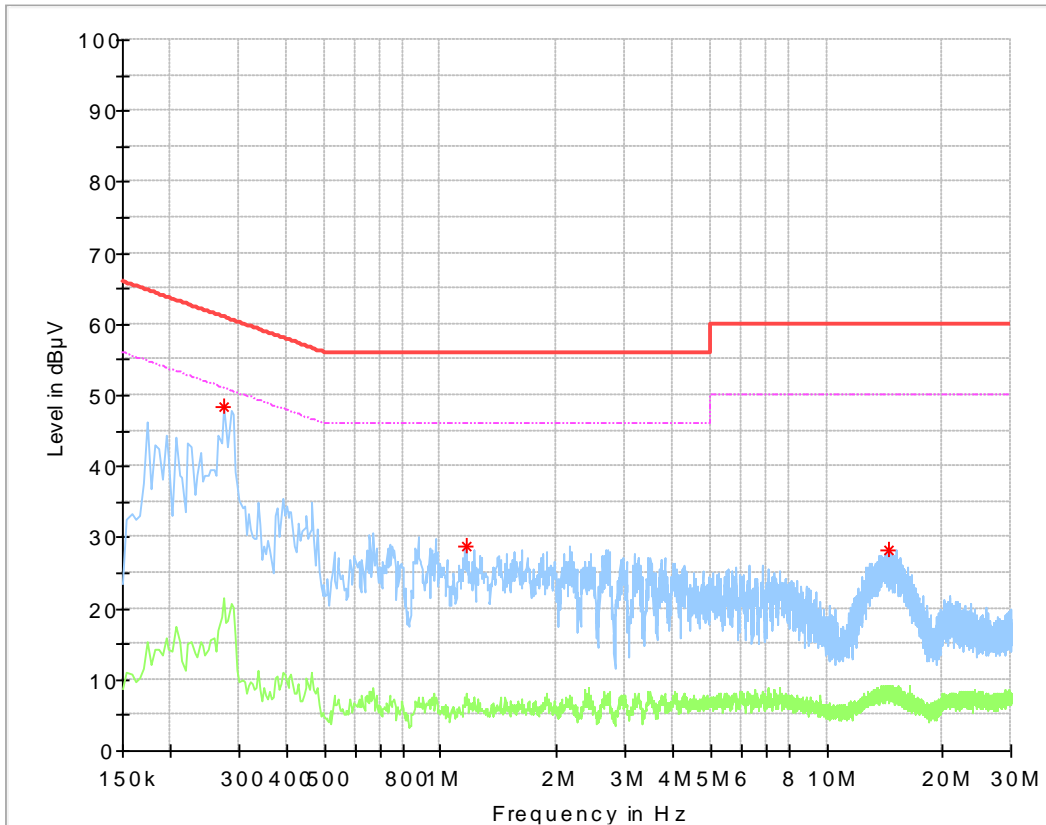

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line
0.274000	48.33	---	61.00	12.67	L1
1.166000	28.81	---	56.00	27.19	L1
14.390000	28.19	---	60.00	31.81	L1

### Conducted Emission Test 0.15MHz – 30MHz

EUT: DC Venetian Blinds Drive  
 M/N: DV24CE/S-0.6/50  
 Operating Condition: TX  
 Test Specification: Power Line, Neutral  
 Comment: AC120V/60Hz  
 Test Standard: FCC Part 15 Subpart B  
 Temperature (°C): 24.5 Relative Humidity (%): 63.2 Atmospheric Pressure(mbar) : 1012

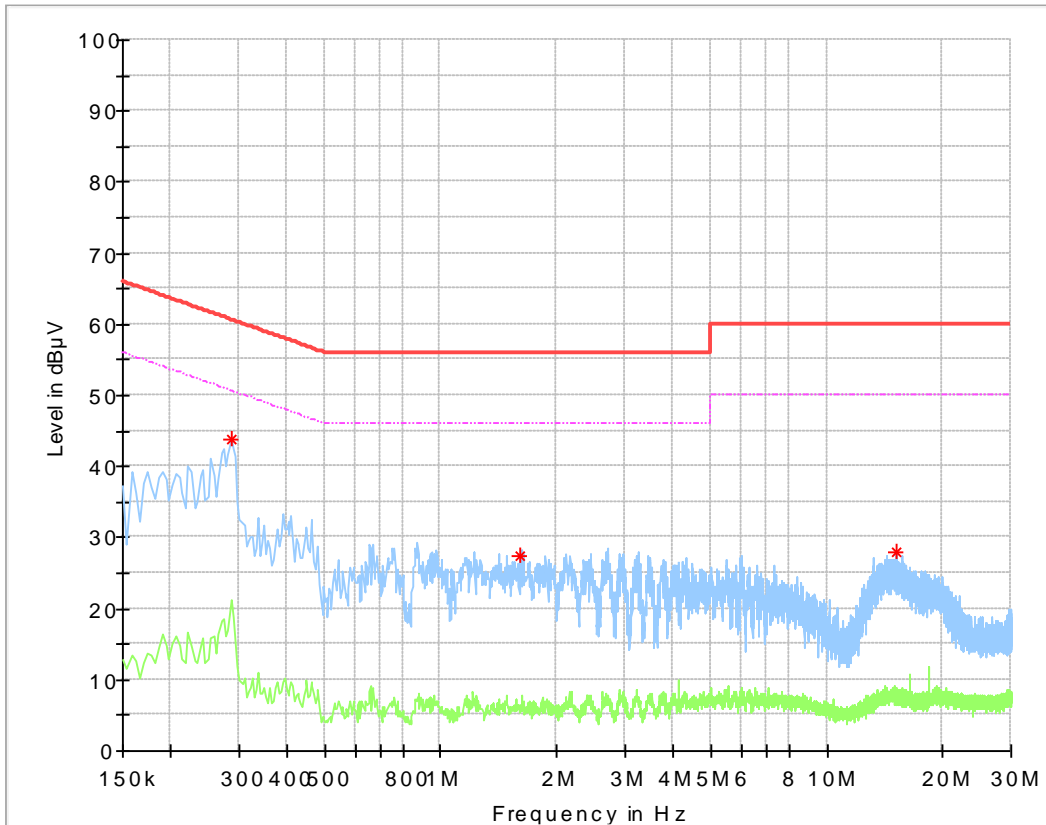

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line
0.286000	43.84	---	60.64	16.80	N
1.610000	27.31	---	56.00	28.69	N
15.198000	27.84	---	60.00	32.16	N

## 9.2 Radiated Emission

### Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

For Above 1GHz

Span = wide enough to capture the peak level of the in-band emission and all spurious  
 RBW = 1MHz, VBW  $\geq$  RBW for peak measurement and VBW = 10Hz for average measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
 RBW = 100 KHz, VBW  $\geq$  RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

### Limit

According to §15.231 (b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field Strength of Fundamental (Microvolts /meter)	Field Strength of spurious emissions ((Microvolts /meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	1,250 to 3,370 *	125 to 375 *
174-260	3,750	375
260-470 $\checkmark$	3,750 to 12,500*	375 to 1,250*
Above 470	12,500	1,250

### Spurious radiated emissions for transmitter


According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Radiated Emissions								
Value	Emissions Frequency MHz	E-Field Polarity	Field at 3m dBµV/m	Average Factor dB	Net Field at 3m dBµV/m	Limit dBµV/m	Margin	Emission Type
Below 1GHz								
PK	433.925	H	90.18	0.00	90.18	100.83	10.65	Fundamental
AV	433.925	H	90.18	-23.52	66.66	80.83	14.17	Fundamental
PK	433.925	V	83.70	0.00	83.70	100.83	17.13	Fundamental
AV	433.925	V	83.70	-23.52	60.18	80.83	20.65	Fundamental
PK	867.910	H	36.49	0.00	36.49	80.83	44.34	Spurious
AV	867.910	H	36.49	-23.52	12.97	60.83	47.86	Spurious
PK	867.910	V	39.04	0.00	39.04	80.83	41.79	Spurious
AV	867.910	V	39.04	-23.52	15.52	60.83	45.31	Spurious
Above 1GHz								
PK	1239.3	H	35.57	0.00	35.57	74	38.43	Spurious
AV	1239.3	H	35.57	-23.52	12.05	54	41.95	Spurious
PK	1752.9	V	29.85	0.00	29.85	74	44.15	Spurious
AV	1752.9	V	29.85	-23.52	6.33	54	47.67	Spurious

Remark:

- 1: AV Emission Level= PK Emission Level+20log(dutycycle)
- 2: Data of measurement within this frequency range shown "f" in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- 3: "\*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.

Duty Cycle =6.667(ms)/100 (ms) =6.667%  
 Duty Cycle Factor =20log (Duty Cycle) =-23.52

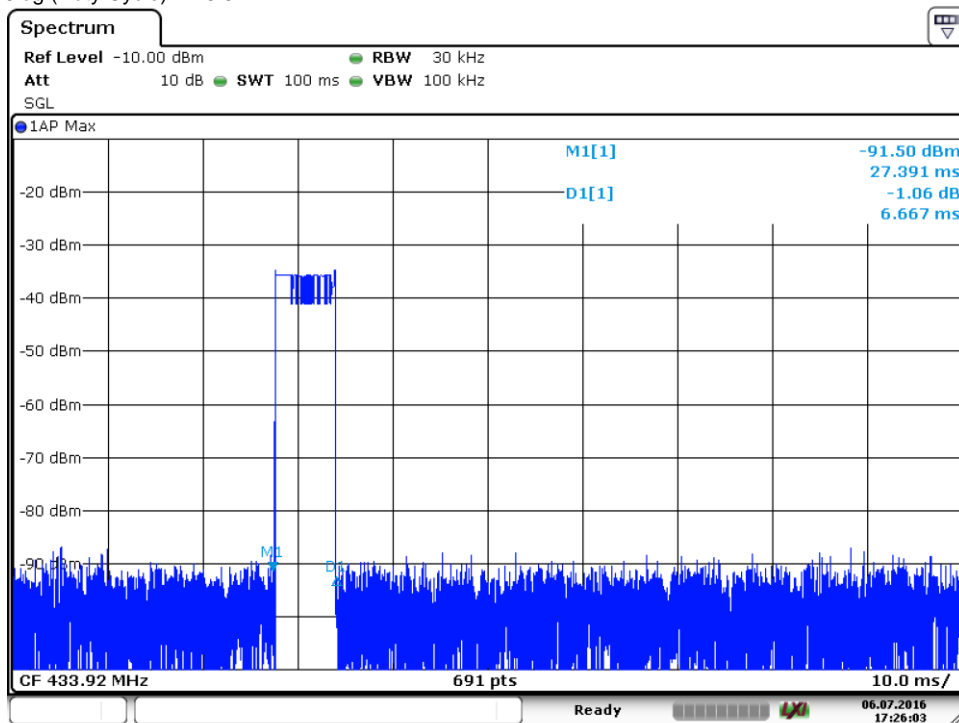

### 9.3 Bandwidth Measurement

#### Test Method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.


#### Limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. For devices operating above 900MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

The limit for the EUT = 0.25% \* 433.925 MHz = 1084 kHz

#### Test Result

Channel	20dB Bandwidth (KHz)	99% bandwidth (KHz)	Limit (KHz)
1	123.00KHz	101.302KHz	1085KHz

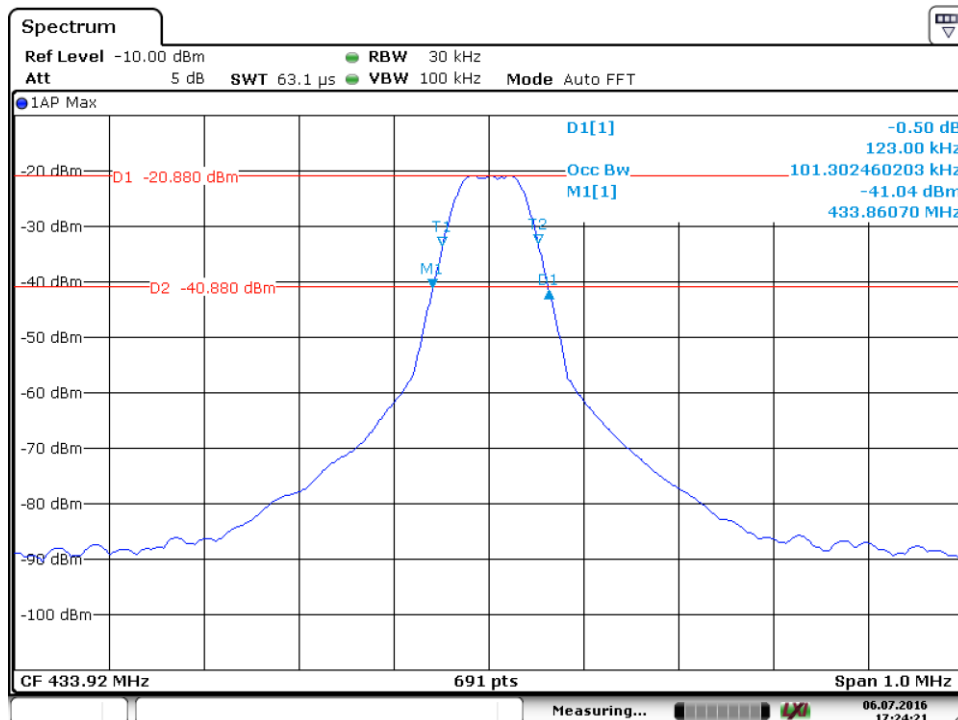

## 9.4 Deactivation Time

### Test Method

1. Place the EUT in the chamber and set it in transmitting mode.
2. Set center frequency of spectrum analyzer=operating frequency.
3. Set the spectrum analyzer as RBW=120 KHz, VBW=1MHz, Span=0Hz.
4. Repeat above procedures until all frequency measured was complete.

### Limit


According to FCC Part 15.231 (a), the transmitter shall be complied the following requirements:  
 (√) (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

### Test Result

Channel	Frequency	Deactivation Time	Result
1	433.925MHz	433.73ms	Pass

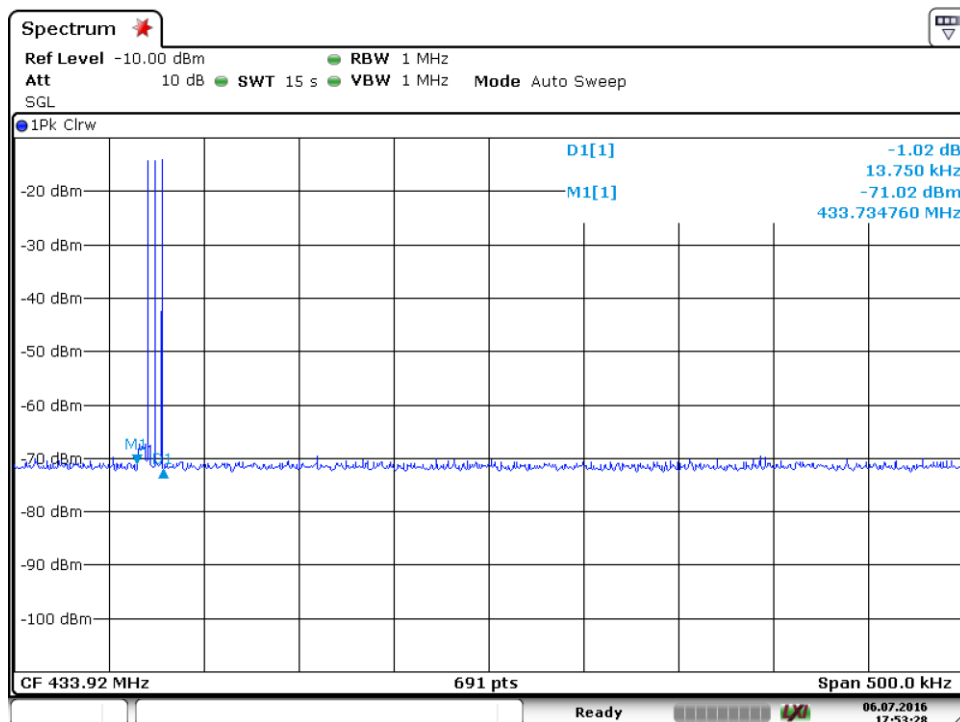



## 10 Test Equipment List

### List of Test Instruments

	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
C	Signal Analyzer	Rohde & Schwarz	FSV40	101031	2017-7-15
RE	EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2017-7-15
	Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2017-8-3
	Horn Antenna	Rohde & Schwarz	HF907	102294	2017-7-15
	Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2017-7-15
	3m Semi-anechoic chamber	TDK	9X6X6	----	2019-5-29
CE	EMI Test Receiver	Rohde & Schwarz	ESR 3	101782	2017-7-15
	LISN	Rohde & Schwarz	ENV216	100326	2017-7-15

#### C - Conducted RF tests

- 20dB bandwidth and 99% bandwidth
- Deactivation Time

## 11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

### System Measurement Uncertainty

Items	Extended Uncertainty
Radiated spurious emission	Horizontal: $U=\pm 4.83\text{dB}$ (30MHz~1GHz ) Vertical: $U=\pm 4.91\text{dB}$ (30MHz~1GHz ) Horizontal: $U=\pm 4.89\text{dB}$ (1GHz~18GHz ) Vertical: $U=\pm 4.88\text{dB}$ (1GHz~18GHz )
Uncertainty for Conducted Emission 150kHz-30MHz (for test using AMN ENV216 or ENV4200)	3.50dB
Uncertainty for Conducted RF test with TS 8997	2.04dB