



FCC TEST REPORT(15.407)

REPORT NO.: RF120921C21-1

MODEL NO.: WM-MB92M

FCC ID: VZ9120002

RECEIVED: Sep. 21, 2012

TESTED: Nov. 29 to Dec. 27, 2012

ISSUED: Jan. 24, 2014

APPLICANT: 4IPNET, INC.

ADDRESS: 3F-3, No. 369, Fusing N. Rd., Taipei 105,
Taiwan,R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
3.4 DUTY CYCLE OF TEST SIGNAL	14
3.5 DESCRIPTION OF SUPPORT UNITS.....	17
3.6 CONFIGURATION OF SYSTEM UNDER TEST	17
4. TEST TYPES AND RESULTS	18
4.1 CONDUCTED EMISSION MEASUREMENT	18
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	18
4.1.2 TEST INSTRUMENTS.....	18
4.1.3 TEST PROCEDURES	19
4.1.4 DEVIATION FROM TEST STANDARD	19
4.1.5 TEST SETUP	20
4.1.6 EUT OPERATING CONDITIONS	20
4.1.7 TEST RESULTS	21
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	23
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	23
4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....	24
4.2.3 TEST INSTRUMENTS.....	25
4.2.4 TEST PROCEDURES	26
4.2.5 DEVIATION FROM TEST STANDARD	26
4.2.6 TEST SETUP	27
4.2.7 EUT OPERATING CONDITION.....	27
4.2.8 TEST RESULTS (MODE 1, PIFA ANTENNA)	28
4.2.9 TEST RESULTS (MODE 2, DIPOLE ANTENNA).....	37
4.3 TRANSMIT POWER MEASUREMENT	46
4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT	46
4.3.2 TEST INSTRUMENTS.....	46
4.3.3 TEST PROCEDURE.....	47
4.3.4 DEVIATION FROM TEST STANDARD	47
4.3.5 TEST SETUP	47
4.3.6 EUT OPERATING CONDITIONS	48



A D T

4.3.7	TEST RESULTS	49
4.4	PEAK POWER SPECTRAL DENSITY MEASUREMENT	52
4.4.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	52
4.4.2	TEST INSTRUMENTS.....	52
4.4.3	TEST PROCEDURES	52
4.4.4	DEVIATION FROM TEST STANDARD	52
4.4.5	TEST SETUP	53
4.4.6	EUT OPERATING CONDITIONS	53
4.4.7	TEST RESULTS(MODE 1, PIFA ANTENNA)	54
4.4.8	TEST RESULTS(MODE 2, DIPOLE ANTENNA).....	55
4.5	PEAK POWER EXCURSION MEASUREMENT	56
4.5.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	56
4.5.2	TEST INSTRUMENTS.....	56
4.5.3	TEST PROCEDURE.....	56
4.5.4	DEVIATION FROM TEST STANDARD	56
4.5.5	TEST SETUP	56
4.5.6	EUT OPERATING CONDITIONS	56
4.5.7	TEST RESULTS	57
4.6	FREQUENCY STABILITY.....	58
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	58
4.6.2	TEST INSTRUMENTS.....	58
4.6.3	TEST PROCEDURE.....	58
4.6.4	DEVIATION FROM TEST STANDARD	59
4.6.5	TEST SETUP	59
4.6.6	EUT OPERATING CONDITION.....	59
4.6.7	TEST RESULTS	60
4.7	20dBc BANDWIDTH MEASUREMENT	61
4.7.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	61
4.7.2	TEST INSTRUMENTS.....	61
4.7.3	TEST PROCEDURE.....	61
4.7.4	TEST RESULTS	62
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	63
6.	INFORMATION ON THE TESTING LABORATORIES	64
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	65



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120921C21-1	Original release	Jan. 24, 2014



A D T

1. CERTIFICATION

PRODUCT: 802.11a/b/g/n Wireless Module
BRAND NAME: 4ipnet
MODEL NO.: WM-MB92M
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: 4IPNET, INC.
TESTED: Nov. 29 to Dec. 27, 2012
STANDARDS: **FCC Part 15, Subpart E (Section 15.407)**
ANSI C63.10-2009

The above equipment (Model: WM-MB92M) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :

(Midoli Peng, Specialist)

DATE: Jan. 24, 2014

APPROVED BY :

(May Chen, Manager)

DATE: Jan. 24, 2014

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 5GHz, 5150~5250MHz

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.74dB at 0.17344MHz
15.407(b/1/2/3) (b)(6)	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.6dB at 5150.0MHz
15.407(a/1/2)	Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is Re-SMA(M) or MMCX plug not a standard connector.

NOTE: The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 5.15~5.25GHz. For the 2400 ~ 2483.5MHz and 5.725~5.850GHz RF parameters was recorded in another test report.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.69 dB
Radiated emissions (1GHz -6GHz)	3.84 dB
Radiated emissions (6GHz -18GHz)	4.09 dB
Radiated emissions (18GHz -40GHz)	4.24 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11a/b/g/n Wireless Module
MODEL NO.	WM-MB92M
POWER SUPPLY	DC 3.3V from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps
OPERATING FREQUENCY	For 15.407 802.11a: 5.18 ~ 5.24GHz
	For 15.247 802.11b & 802.11g: 2.412 ~ 2.462GHz 802.11a: 5.745 ~ 5.825GHz
NUMBER OF CHANNEL	For 15.407 4 for 802.11a, 802.11n (HT20) 2 for 802.11n (HT40)
	For 15.247(2.4GHz) 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
	For 15.247(5GHz) 5 for 802.11a, 802.11n (HT20) 2 for 802.11n (HT40)
MAXIMUM OUTPUT POWER	For 15.407 802.11a: 44.771mW 802.11n (HT20): 43.767mW 802.11n (HT40): 48.561mW For 15.247 (2.4GHz) 802.11b: 186.209mW 802.11g: 446.684mW 802.11n (HT20): 751.724mW 802.11n (HT40): 409.322mW For 15.247 (5GHz) 802.11a: 288.403mW 802.11n (HT20): 538.450mW 802.11n (HT40): 566.070mW



A D T

ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	NA

NOTE:

1. There are 2.4GHz and 5GHz WLAN technology used for the EUT.
2. The EUT is 2 * 2 MIMO without 802.11n beam forming function.

MODULATION MODE	Tx/Rx FUNCTION
802.11a	1Tx/1Rx
802.11b	1Tx/1Rx
802.11g	1Tx/1Rx
802.11n (HT20)	2Tx/2Rx
802.11n (HT40)	2Tx/2Rx

3. The antennas provided to the EUT, please refer to the following table:

No.	Brand	Part No.	Antenna Type	Gain (dBi)	Connector Type
1	UNI LINK	MCS-304-01	Dipole	2.4GHz: 2.7	Re-SMA(M)
				5GHz :4	
2	UNI LINK	UT-700-04	PIFA	2.4GHz: 3.7	MMCX plug
				5GHz :4.5	

Note: The dipole antenna has two different colors (black and white) and the dipole antenna (white) was chosen for final test.

4. 2.4GHz and 5GHz technology cannot transmit at same time.
5. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15.
6. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Operated in 5150MHz ~ 5250MHz bands:

Four channels are provided for 802.11a and 802.11n (HT20):

CHANNEL	FREQUENCY
36	5180 MHz
40	5200 MHz
44	5220 MHz
48	5240 MHz

Two channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY
38	5190 MHz
46	5230 MHz



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
Mode 1	√	√	√	√	With PIFA antenna
Mode 2	-	√	√	-	With Dipole antenna

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement

NOTE: 1. "-" means no effect.

NOTE: 2. The EUT's antenna (PIFA) had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (MBPS)
802.11a	36 to 48	48	OFDM	BPSK	6

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	48	OFDM	BPSK	6



A D T

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
For 5 GHz 802.11n (HT20)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
For 5 GHz 802.11n (HT40)	38 to 46	38, 46	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
For 5 GHz 802.11n (HT20)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
For 5 GHz 802.11n (HT40)	38 to 46	38, 46	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER(SYSTEM)	TESTED BY
PLC	20deg. C, 70%RH	120Vac, 60Hz	Timmy Hu
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Nelson Teng
RE ³ 1G	27deg. C, 69%RH	120Vac, 60Hz	Robert Cheng
APCM	25deg. C, 60%RH	120Vac, 60Hz	James Chan

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D01 General UNII Test Procedures v01 r03

662911 D01 Multiple Transmitter Output v01 r02

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DUTY CYCLE OF TEST SIGNAL

If duty cycle of test signal is > 98 %, duty factor is not required.

If duty cycle of test signal is < 98%, duty factor shall be considered.


802.11a

BPSK: Duty cycle = 3.1325 ms/3.15 ms = 0.994

QPSK: Duty cycle = 1.576 ms/1.595 ms = 0.988

16QAM: Duty cycle = 0.799 ms/0.815 ms = 0.98

64QAM: Duty cycle = 0.409 ms/0.424 ms = 0.965, Duty factor = $10 * \log(1/0.965) = 0.16$

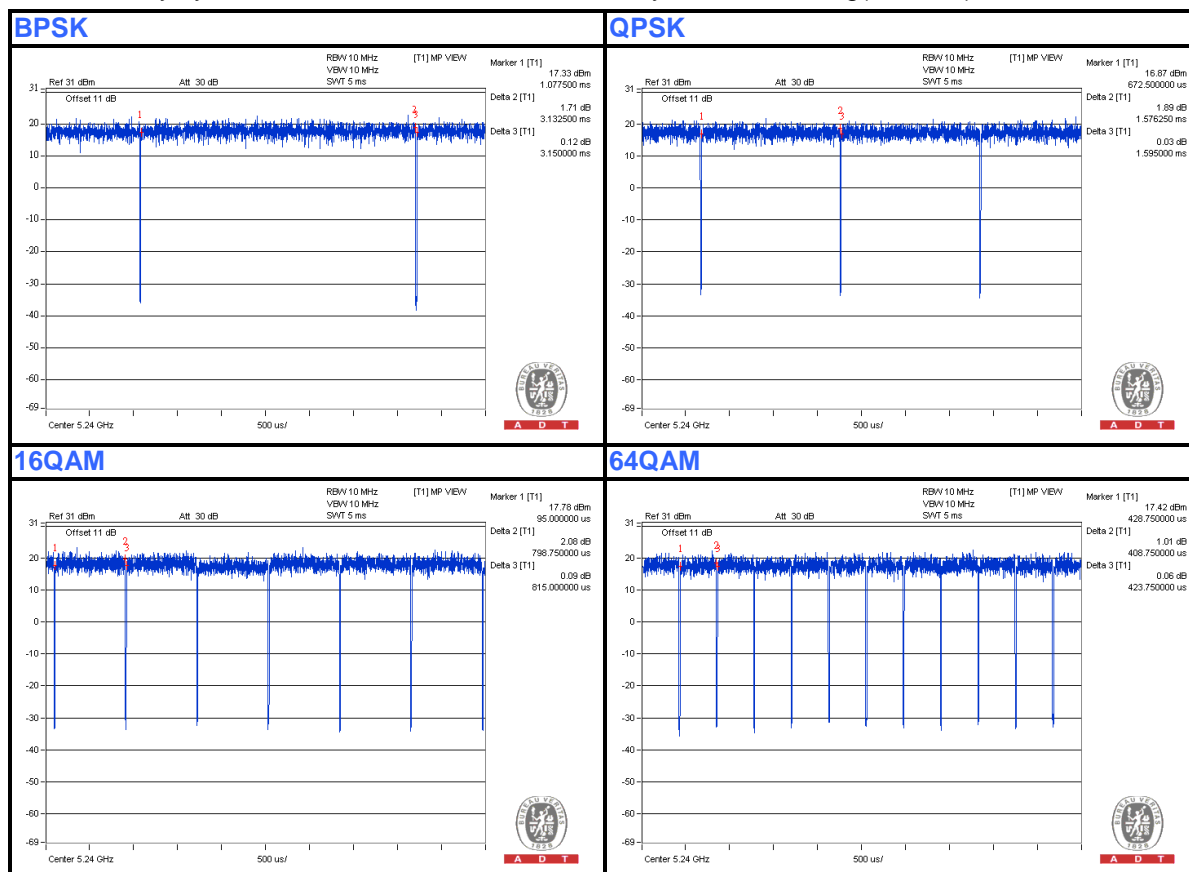



A D T


802.11n (HT20)

BPSK: Duty cycle = 2.91 ms/2.926 ms = 0.995

QPSK: Duty cycle = 1.474 ms/1.49 ms = 0.989

16QAM: Duty cycle = 0.751 ms/0.774 ms = 0.97, Duty factor = $10 * \log(1/0.97) = 0.13$

64QAM: Duty cycle = 0.394 ms/0.41 ms = 0.961, Duty factor = $10 * \log(1/0.961) = 0.17$

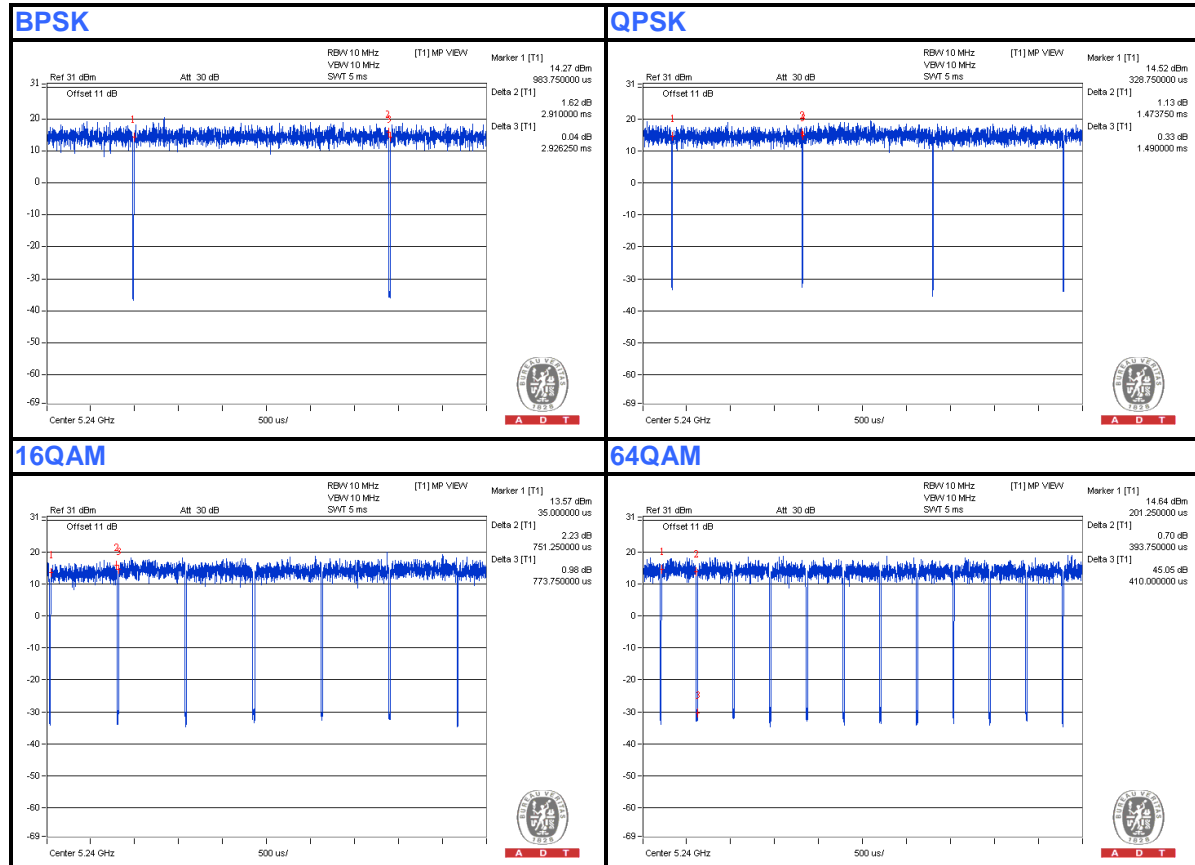



A D T


802.11n (HT40)

BPSK: Duty cycle = 1.423 ms/1.439 ms = 0.989

QPSK: Duty cycle = 0.729 ms/0.745 ms = 0.979, Duty factor = $10 * \log(1/0.979) = 0.09$

16QAM: Duty cycle = 0.381 ms/0.399 ms = 0.955, Duty factor = $10 * \log(1/0.955) = 0.2$

64QAM: Duty cycle = 0.209 ms/0.231 ms = 0.905, Duty factor = $10 * \log(1/0.905) = 0.43$

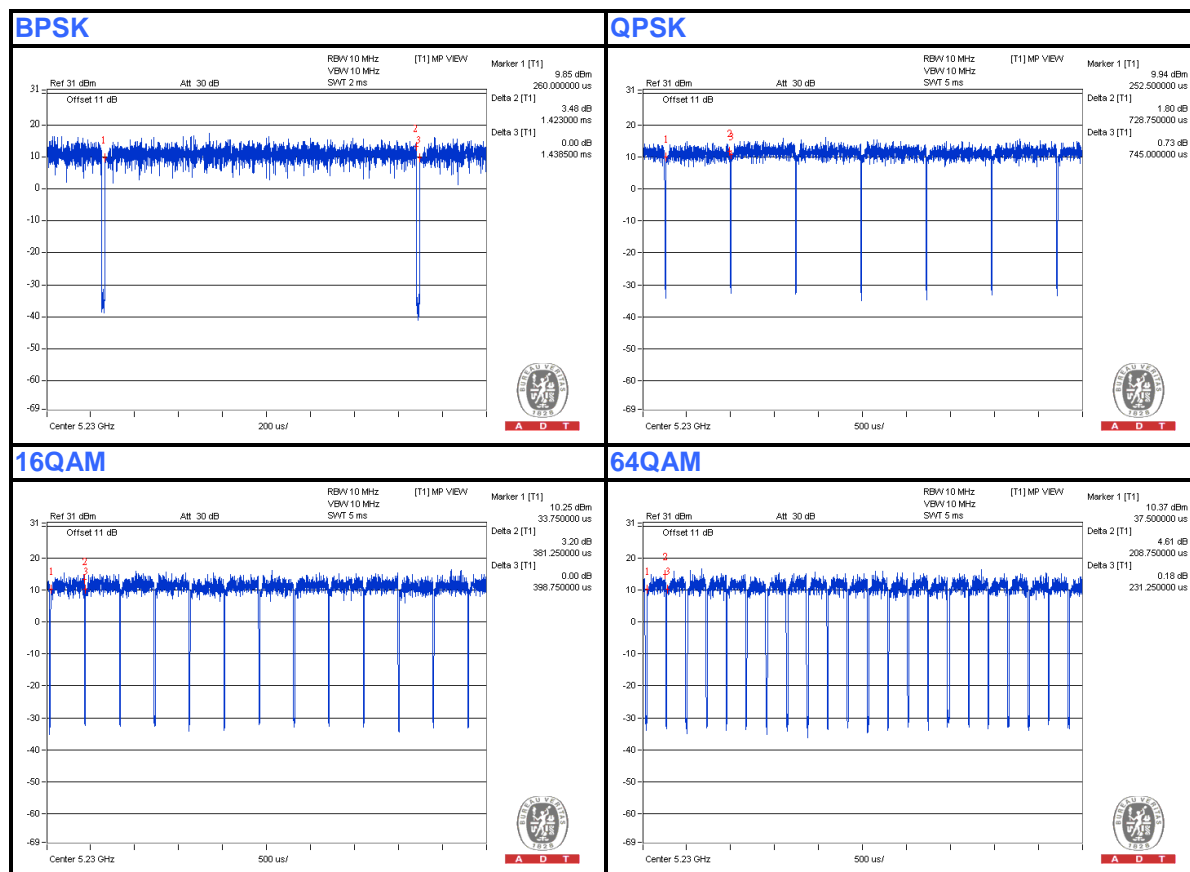



A D T


3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	Fujitsu	FMVLT70G	NA	FCC DoC
2	EXTENSION CARD	4ipnet	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

3.6 CONFIGURATION OF SYSTEM UNDER TEST

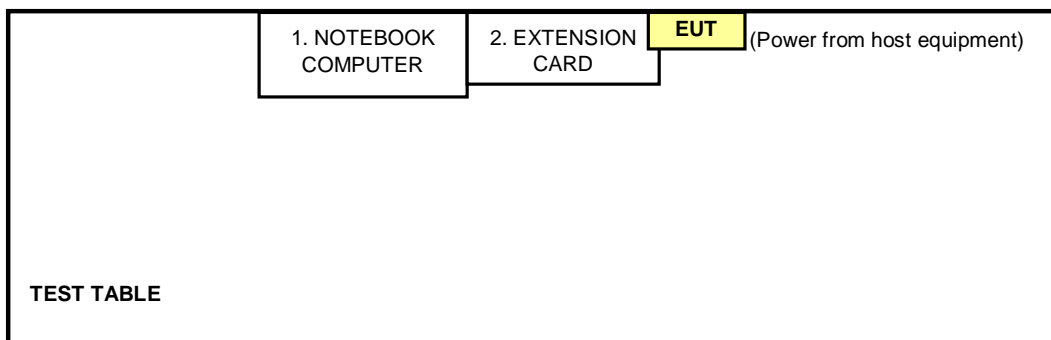



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 12, 2012	Mar. 11, 2013
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 06, 2012	Sep. 05, 2013
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100072	June 08, 2012	June 07, 2013
RF Cable (JYEBAO)	5DFB	COCCAB-001	Aug. 28, 2012	Aug. 27, 2013
50 ohms Terminator	50	EMC-3	Sep. 25, 2012	Sep. 24, 2013
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
- 3 The VCCI Con C Registration No. is C-3611.
- 4 Tested Date: Dec. 20, 2012

4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit – 20dB) was not recorded.

NOTE: The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

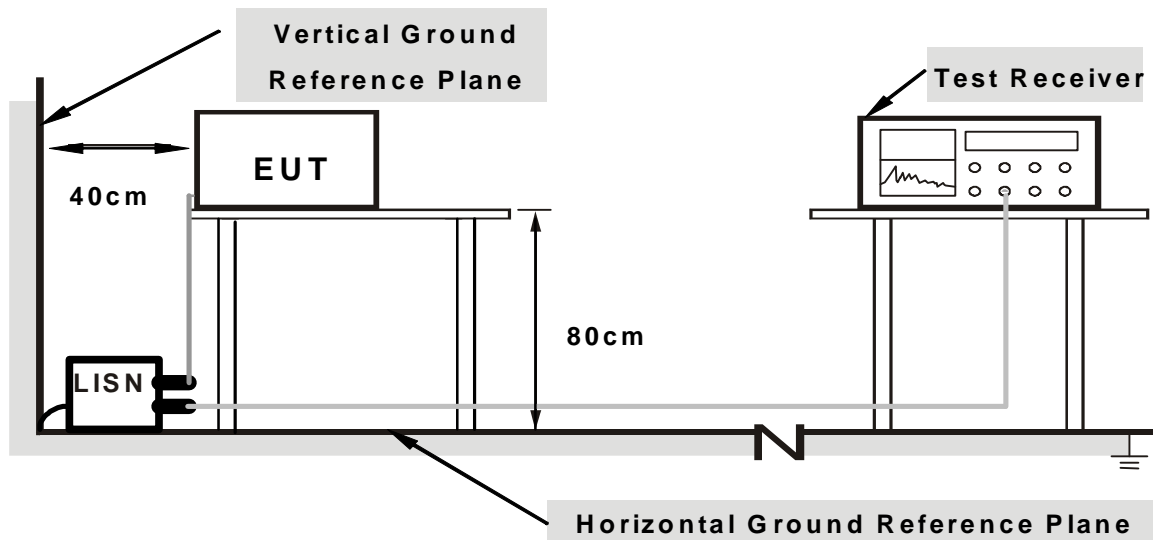

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit 1 (Notebook Computer) which is placed on a testing table.
2. The communication partner run test program “Art 0.9 Build#7” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


4.1.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	0.11	39.79	31.71	39.90	31.82	66.00
2	0.21641	0.12	40.75	29.59	40.87	29.71	62.96	52.96	-22.08	-23.24
3	0.42734	0.16	31.39	19.89	31.55	20.05	57.30	47.30	-25.75	-27.25
4	0.92734	0.19	28.05	21.66	28.24	21.85	56.00	46.00	-27.76	-24.15
5	15.80859	0.77	28.75	24.05	29.52	24.82	60.00	50.00	-30.48	-25.18
6	22.71875	0.99	30.23	24.46	31.22	25.45	60.00	50.00	-28.78	-24.55

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

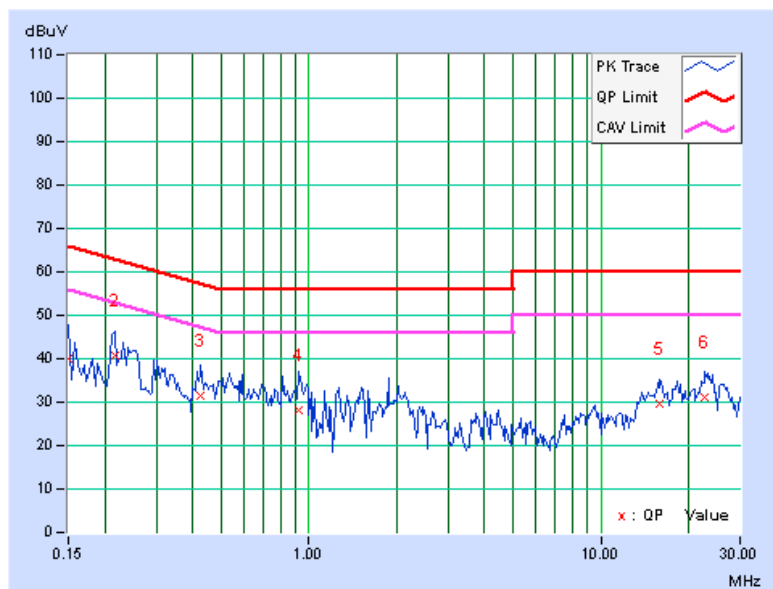




A D T

PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17344	0.09	50.96	27.07	51.05	27.16	64.79	54.79	-13.74	-27.63
2	0.25547	0.11	34.52	25.38	34.63	25.49	61.58	51.58	-26.94	-26.08
3	0.83750	0.16	30.38	24.83	30.54	24.99	56.00	46.00	-25.46	-21.01
4	2.79688	0.22	29.98	24.39	30.20	24.61	56.00	46.00	-25.80	-21.39
5	18.76563	0.58	28.58	23.26	29.16	23.84	60.00	50.00	-30.84	-26.16
6	23.13672	0.68	30.41	24.24	31.09	24.92	60.00	50.00	-28.91	-25.08

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

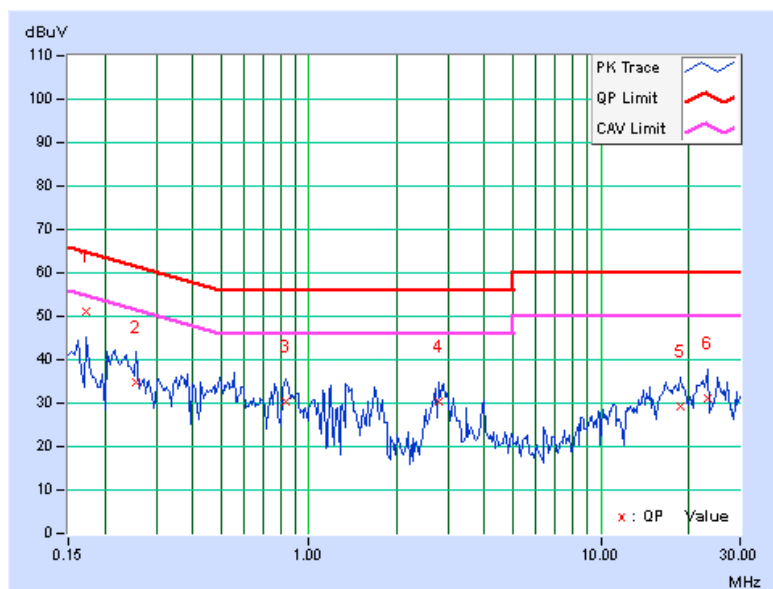

4.2 RADIATED EMISSION AND BANDEGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB.



4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
	FIELD STRENGTH AT 3m (dBµV/m)	
	PK	AV
	74	54
√	EIRP LIMIT (dBm)	EQUIVALENT FIELD STRENGTH AT 3m (dBµV/m)
	PK	PK
	-27	68.3

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$



A D T

4.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Sep. 03, 2012	Sep. 02, 2013
Pre-Selector Agilent	N9039A	MY46520310	Sep. 03, 2012	Sep. 02, 2013
Signal Generator Agilent	N5181A	MY49060347	July 24, 2012	July 23, 2013
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A02465	Feb. 27, 2012	Feb. 26, 2013
SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Apr. 06, 2012	Apr. 05, 2013
Horn_Antenna AISI	AIH.8018	0000220091110	Nov. 27, 2012	Nov. 26, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 27, 2011	Dec. 26, 2012
RF Cable	NA	CHHCAB_001	Oct. 07, 2012	Oct. 06, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Tested Date: Nov. 29 to Dec. 19, 2012

4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 TEST SETUP

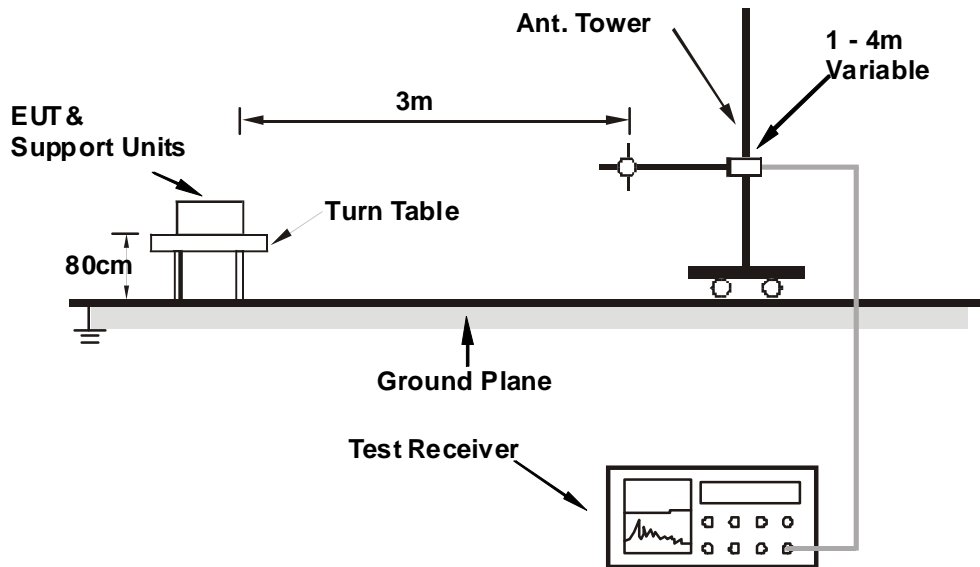

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.7 EUT OPERATING CONDITION

Same as 4.1.6

4.2.8 TEST RESULTS (MODE 1, PIFA ANTENNA)

BELOW 1GHz WORST-CASE DATA

802.11a

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	133.34	36.8 QP	43.5	-6.7	1.50 H	0	23.22	13.54
2	166.83	42.6 QP	43.5	-0.9	1.70 H	333	28.76	13.87
3	268.96	40.8 QP	46.0	-5.2	1.30 H	180	26.72	14.06
4	433.52	34.8 QP	46.0	-11.2	2.00 H	243	16.32	18.51
5	566.86	38.0 QP	46.0	-8.0	1.30 H	305	16.44	21.53
6	833.78	35.6 QP	46.0	-10.4	1.50 H	294	9.48	26.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	166.29	38.5 QP	43.5	-5.0	1.50 V	250	24.62	13.90
2	200.20	35.7 QP	43.5	-7.8	1.50 V	333	24.65	11.05
3	300.09	33.7 QP	46.0	-12.3	1.50 V	250	18.38	15.31
4	500.47	34.6 QP	46.0	-11.5	1.00 V	350	14.44	20.11
5	566.98	33.6 QP	46.0	-12.4	1.00 V	250	12.08	21.54
6	657.74	36.1 QP	46.0	-9.9	1.25 V	115	12.99	23.07

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz DATA

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.7 PK	74.0	-2.3	1.16 H	304	31.15	40.55
2	5150.00	51.6 AV	54.0	-2.4	1.16 H	304	11.05	40.55
3	*5180.00	105.9 PK			1.16 H	304	65.22	40.68
4	*5180.00	96.4 AV			1.16 H	304	55.72	40.68
5	#10360.00	56.3 PK	68.3	-12.0	1.00 H	28	8.48	47.82
6	15540.00	59.3 PK	74.0	-14.7	1.00 H	181	6.03	53.27
7	15540.00	50.1 AV	54.0	-3.9	1.00 H	181	-3.17	53.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	73.4 PK	74.0	-0.6	1.06 V	153	32.85	40.55
2	5150.00	52.3 AV	54.0	-1.7	1.06 V	153	11.75	40.55
3	*5180.00	108.6 PK			1.06 V	153	67.92	40.68
4	*5180.00	98.9 AV			1.06 V	153	58.22	40.68
5	#10360.00	56.6 PK	68.3	-11.7	1.00 V	98	8.78	47.82
6	15540.00	61.0 PK	74.0	-13.0	1.00 V	162	7.73	53.27
7	15540.00	50.8 AV	54.0	-3.2	1.00 V	162	-2.47	53.27

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	105.9 PK			1.18 H	303	65.13	40.77
2	*5200.00	96.1 AV			1.18 H	303	55.33	40.77
3	#10400.00	56.9 PK	68.3	-11.4	1.00 H	25	9.54	47.36
4	15600.00	61.1 PK	74.0	-12.9	1.00 H	183	8.11	52.99
5	15600.00	50.6 AV	54.0	-3.4	1.00 H	183	-2.39	52.99

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	108.8 PK			1.05 V	158	68.03	40.77
2	*5200.00	99.1 AV			1.05 V	158	58.33	40.77
3	#10400.00	56.3 PK	68.3	-12.0	1.00 V	101	8.94	47.36
4	15600.00	60.8 PK	74.0	-13.2	1.00 V	161	7.81	52.99
5	15600.00	50.7 AV	54.0	-3.3	1.00 V	161	-2.29	52.99

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	107.3 PK			1.20 H	305	66.41	40.89
2	*5240.00	96.8 AV			1.20 H	305	55.91	40.89
3	5350.00	60.7 PK	74.0	-13.3	1.02 H	305	19.55	41.15
4	5350.00	48.9 AV	54.0	-5.1	1.02 H	305	7.75	41.15
5	#10480.00	56.3 PK	68.3	-12.0	1.00 H	29	8.65	47.65
6	15720.00	61.1 PK	74.0	-12.9	1.00 H	189	8.51	52.59
7	15720.00	50.4 AV	54.0	-3.6	1.00 H	189	-2.19	52.59

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	109.1 PK			1.05 V	154	68.21	40.89
2	*5240.00	99.3 AV			1.05 V	154	58.41	40.89
3	5350.00	61.3 PK	74.0	-12.7	1.05 V	154	20.15	41.15
4	5350.00	48.8 AV	54.0	-5.2	1.05 V	154	7.65	41.15
5	#10480.00	56.7 PK	68.3	-11.6	1.00 V	99	9.05	47.65
6	15720.00	60.7 PK	74.0	-13.3	1.00 V	159	8.11	52.59
7	15720.00	50.6 AV	54.0	-3.4	1.00 V	159	-1.99	52.59

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.3 PK	74.0	-13.7	1.21 H	50	19.75	40.55
2	5150.00	49.5 AV	54.0	-4.5	1.21 H	50	8.95	40.55
3	*5180.00	108.1 PK			1.21 H	50	67.42	40.68
4	*5180.00	96.4 AV			1.21 H	50	55.72	40.68
5	#10360.00	55.1 PK	68.3	-13.2	1.00 H	159	7.28	47.82
6	15540.00	60.8 PK	74.0	-13.2	1.00 H	232	7.53	53.27
7	15540.00	50.6 AV	54.0	-3.4	1.00 H	232	-2.67	53.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.6 PK	74.0	-14.4	1.06 V	188	19.05	40.55
2	5150.00	49.8 AV	54.0	-4.2	1.06 V	188	9.25	40.55
3	*5180.00	108.3 PK			1.06 V	188	67.62	40.68
4	*5180.00	98.2 AV			1.06 V	188	57.52	40.68
5	#10360.00	55.3 PK	68.3	-13.0	1.00 V	63	7.48	47.82
6	15540.00	60.1 PK	74.0	-13.9	1.00 V	123	6.83	53.27
7	15540.00	50.5 AV	54.0	-3.5	1.00 V	123	-2.77	53.27

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	107.6 PK			1.22 H	53	66.83	40.77
2	*5200.00	96.2 AV			1.22 H	53	55.43	40.77
3	#10400.00	55.3 PK	68.3	-13.0	1.00 H	151	7.94	47.36
4	15600.00	60.7 PK	74.0	-13.3	1.00 H	231	7.71	52.99
5	15600.00	50.3 AV	54.0	-3.7	1.00 H	231	-2.69	52.99
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	108.5 PK			1.05 V	183	67.73	40.77
2	*5200.00	98.4 AV			1.05 V	183	57.63	40.77
3	#10400.00	55.5 PK	68.3	-12.8	1.00 V	59	8.14	47.36
4	15600.00	60.3 PK	74.0	-13.7	1.00 V	125	7.31	52.99
5	15600.00	50.3 AV	54.0	-3.7	1.00 V	125	-2.69	52.99

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	107.2 PK			1.19 H	51	66.31	40.89
2	*5240.00	96.3 AV			1.19 H	51	55.41	40.89
3	5350.00	61.6 PK	74.0	-12.4	1.19 H	51	20.45	41.15
4	5350.00	48.5 AV	54.0	-5.5	1.19 H	51	7.35	41.15
5	#10480.00	53.2 PK	68.3	-15.1	1.00 H	153	5.55	47.65
6	15720.00	60.5 PK	74.0	-13.5	1.00 H	233	7.91	52.59
7	15720.00	50.3 AV	54.0	-3.7	1.00 H	233	-2.29	52.59

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	108.5 PK			1.05 V	183	67.61	40.89
2	*5240.00	98.6 AV			1.05 V	183	57.71	40.89
3	5350.00	59.6 PK	74.0	-14.4	1.05 V	183	18.45	41.15
4	5350.00	49.3 AV	54.0	-4.7	1.05 V	183	8.15	41.15
5	#10480.00	55.4 PK	68.3	-12.9	1.00 V	61	7.75	47.65
6	15720.00	60.5 PK	74.0	-13.5	1.00 V	121	7.91	52.59
7	15720.00	50.1 AV	54.0	-3.9	1.00 V	121	-2.49	52.59

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.5 PK	74.0	-13.5	1.25 H	57	19.95	40.55
2	5150.00	49.3 AV	54.0	-4.7	1.25 H	57	8.75	40.55
3	*5190.00	99.6 PK			1.25 H	57	58.87	40.73
4	*5190.00	88.7 AV			1.25 H	57	47.97	40.73
5	#10380.00	54.7 PK	68.3	-13.6	1.00 H	153	7.11	47.59
6	15570.00	60.5 PK	74.0	-13.5	1.00 H	234	7.37	53.13
7	15570.00	50.6 AV	54.0	-3.4	1.00 H	234	-2.53	53.13

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.8 PK	74.0	-11.2	1.08 V	189	22.25	40.55
2	5150.00	50.3 AV	54.0	-3.7	1.08 V	189	9.75	40.55
3	*5190.00	101.1 PK			1.08 V	189	60.37	40.73
4	*5190.00	90.1 AV			1.08 V	189	49.37	40.73
5	#10380.00	56.4 PK	68.3	-11.9	1.00 V	59	8.81	47.59
6	15570.00	60.5 PK	74.0	-13.5	1.00 V	121	7.37	53.13
7	15570.00	50.1 AV	54.0	-3.9	1.00 V	121	-3.03	53.13

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	105.3 PK			1.26 H	60	64.44	40.86
2	*5230.00	92.1 AV			1.26 H	60	51.24	40.86
3	5350.00	60.9 PK	74.0	-13.1	1.26 H	60	19.75	41.15
4	5350.00	48.6 AV	54.0	-5.4	1.26 H	60	7.45	41.15
5	#10460.00	54.8 PK	68.3	-13.5	1.00 H	152	7.22	47.58
6	15690.00	60.3 PK	74.0	-13.7	1.00 H	235	7.66	52.64
7	15690.00	50.3 AV	54.0	-3.7	1.00 H	235	-2.34	52.64

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	106.1 PK			1.09 V	192	65.24	40.86
2	*5230.00	94.9 AV			1.09 V	192	54.04	40.86
3	5350.00	61.3 PK	74.0	-12.7	1.08 V	192	20.15	41.15
4	5350.00	49.5 AV	54.0	-4.5	1.08 V	192	8.35	41.15
5	#10460.00	56.3 PK	68.3	-12.0	1.00 V	60	8.72	47.58
6	15690.00	60.3 PK	74.0	-13.7	1.00 V	123	7.66	52.64
7	15690.00	50.3 AV	54.0	-3.7	1.00 V	123	-2.34	52.64

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

4.2.9 TEST RESULTS (MODE 2, DIPOLE ANTENNA)

BELOW 1GHz WORST-CASE DATA

802.11a

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	165.87	41.5 QP	43.5	-2.0	1.77 H	347	27.61	13.93
2	266.87	42.8 QP	46.0	-3.2	1.30 H	182	28.86	13.98
3	433.67	34.2 QP	46.0	-11.8	1.80 H	188	15.66	18.52
4	567.45	33.7 QP	46.0	-12.4	1.50 H	211	12.10	21.55
5	633.54	37.0 QP	46.0	-9.0	1.30 H	300	14.25	22.73
6	800.80	36.7 QP	46.0	-9.3	1.25 H	125	10.98	25.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	166.87	38.6 QP	43.5	-5.0	1.50 V	289	24.68	13.87
2	267.07	36.5 QP	46.0	-9.5	1.51 V	283	22.54	13.99
3	300.20	38.7 QP	46.0	-7.3	1.75 V	121	23.43	15.31
4	401.59	32.1 QP	46.0	-13.9	1.50 V	0	14.32	17.80
5	500.59	34.0 QP	46.0	-12.1	1.00 V	328	13.84	20.11
6	566.96	36.3 QP	46.0	-9.7	1.25 V	225	14.78	21.54

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz DATA

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.2 PK	74.0	-14.8	1.73 H	219	18.65	40.55
2	5150.00	46.9 AV	54.0	-7.1	1.73 H	219	6.35	40.55
3	*5180.00	97.7 PK			1.73 H	219	57.02	40.68
4	*5180.00	88.9 AV			1.73 H	219	48.22	40.68
5	#10360.00	55.9 PK	68.3	-12.4	1.00 H	281	8.08	47.82
6	15540.00	62.1 PK	74.0	-11.9	1.00 H	53	8.83	53.27
7	15540.00	51.7 AV	54.0	-2.3	1.00 H	53	-1.57	53.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.1 PK	74.0	-9.9	1.00 V	96	23.55	40.55
2	5150.00	50.6 AV	54.0	-3.4	1.00 V	96	10.05	40.55
3	*5180.00	109.1 PK			1.00 V	96	68.42	40.68
4	*5180.00	99.6 AV			1.00 V	96	58.92	40.68
5	#10360.00	55.9 PK	68.3	-12.4	1.00 V	153	8.08	47.82
6	15540.00	62.9 PK	74.0	-11.1	1.00 V	253	9.63	53.27
7	15540.00	51.8 AV	54.0	-2.2	1.00 V	253	-1.47	53.27

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	97.5 PK			1.66 H	222	56.73	40.77
2	*5200.00	88.7 AV			1.66 H	222	47.93	40.77
3	#10400.00	55.8 PK	68.3	-12.5	1.00 H	283	8.44	47.36
4	15600.00	62.5 PK	74.0	-11.5	1.00 H	58	9.51	52.99
5	15600.00	51.5 AV	54.0	-2.5	1.00 H	58	-1.49	52.99

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	108.9 PK			1.00 V	100	68.13	40.77
2	*5200.00	99.5 AV			1.00 V	100	58.73	40.77
3	#10400.00	56.2 PK	68.3	-12.1	1.00 V	155	8.84	47.36
4	15600.00	63.1 PK	74.0	-10.9	1.00 V	255	10.11	52.99
5	15600.00	51.7 AV	54.0	-2.3	1.00 V	255	-1.29	52.99

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	97.6 PK			1.65 H	221	56.71	40.89
2	*5240.00	88.6 AV			1.65 H	221	47.71	40.89
3	5350.00	59.1 PK	74.0	-14.9	1.65 H	221	17.95	41.15
4	5350.00	47.8 AV	54.0	-6.2	1.65 H	221	6.65	41.15
5	#10480.00	56.1 PK	68.3	-12.2	1.00 H	284	8.45	47.65
6	15720.00	62.3 PK	74.0	-11.7	1.00 H	56	9.71	52.59
7	15720.00	51.6 AV	54.0	-2.4	1.00 H	56	-0.99	52.59

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	108.9 PK			1.00 V	96	68.01	40.89
2	*5240.00	99.3 AV			1.00 V	96	58.41	40.89
3	5350.00	60.3 PK	74.0	-13.7	1.00 V	96	19.15	41.15
4	5350.00	48.5 AV	54.0	-5.5	1.00 V	96	7.35	41.15
5	#10480.00	55.9 PK	68.3	-12.4	1.00 V	153	8.25	47.65
6	15720.00	63.2 PK	74.0	-10.8	1.00 V	259	10.61	52.59
7	15720.00	51.9 AV	54.0	-2.1	1.00 V	259	-0.69	52.59

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



802.11n (HT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.3 PK	74.0	-15.7	1.00 H	159	17.75	40.55
2	5150.00	46.4 AV	54.0	-7.6	1.00 H	159	5.85	40.55
3	*5180.00	97.3 PK			1.00 H	159	56.62	40.68
4	*5180.00	88.1 AV			1.00 H	159	47.42	40.68
5	#10360.00	54.7 PK	68.3	-13.6	1.02 H	254	6.88	47.82
6	15540.00	61.5 PK	74.0	-12.5	1.00 H	254	8.23	53.27
7	15540.00	48.2 AV	54.0	-5.8	1.00 H	254	-5.07	53.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.5 PK	74.0	-4.5	1.00 V	121	28.95	40.55
2	5150.00	52.8 AV	54.0	-1.2	1.00 V	121	12.25	40.55
3	*5180.00	110.8 PK			1.00 V	121	70.12	40.68
4	*5180.00	99.3 AV			1.00 V	121	58.58	40.68
5	#10360.00	56.5 PK	68.3	-11.8	1.00 V	354	8.68	47.82
6	15540.00	60.9 PK	74.0	-13.1	1.00 V	212	7.63	53.27
7	15540.00	50.8 AV	54.0	-3.2	1.00 V	212	-2.47	53.27

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	95.5 PK			1.00 H	154	54.73	40.77
2	*5200.00	87.1 AV			1.00 H	154	46.33	40.77
3	#10400.00	54.5 PK	68.3	-13.8	1.05 H	255	7.14	47.36
4	15600.00	61.3 PK	74.0	-12.7	1.00 H	235	8.31	52.99
5	15600.00	47.9 AV	54.0	-6.1	1.00 H	235	-5.09	52.99

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	109.3 PK			1.00 V	121	68.53	40.77
2	*5200.00	98.1 AV			1.00 V	121	57.33	40.77
3	#10400.00	55.9 PK	68.3	-12.4	1.00 V	355	8.54	47.36
4	15600.00	61.6 PK	74.0	-12.4	1.00 V	199	8.61	52.99
5	15600.00	51.3 AV	54.0	-2.7	1.00 V	199	-1.69	52.99

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	100.4 PK			1.00 H	153	59.51	40.89
2	*5240.00	91.6 AV			1.00 H	153	50.71	40.89
3	5350.00	59.1 PK	74.0	-14.9	1.00 H	153	17.95	41.15
4	5350.00	47.7 AV	54.0	-6.3	1.00 H	153	6.55	41.15
5	#10480.00	53.8 PK	68.3	-14.5	1.04 H	266	6.15	47.65
6	15720.00	61.7 PK	74.0	-12.3	1.00 H	246	9.11	52.59
7	15720.00	48.3 AV	54.0	-5.7	1.00 H	246	-4.29	52.59

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	115.4 PK			1.00 V	360	74.51	40.89
2	*5240.00	104.7 AV			1.00 V	360	63.81	40.89
3	5350.00	64.0 PK	74.0	-10.0	1.00 V	360	22.85	41.15
4	5350.00	52.2 AV	54.0	-1.8	1.00 V	360	11.05	41.15
5	#10480.00	56.3 PK	68.3	-12.0	1.00 V	351	8.65	47.65
6	15720.00	60.7 PK	74.0	-13.3	1.00 V	203	8.11	52.59
7	15720.00	51.2 AV	54.0	-2.8	1.00 V	203	-1.39	52.59

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

802.11n (HT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.3 PK	74.0	-15.7	1.00 H	159	17.75	40.55
2	5150.00	46.6 AV	54.0	-7.4	1.00 H	159	6.05	40.55
3	*5190.00	89.5 PK			1.00 H	159	48.77	40.73
4	*5190.00	81.2 AV			1.00 H	159	40.47	40.73
5	#10380.00	55.1 PK	68.3	-13.2	1.00 H	259	7.51	47.59
6	15570.00	62.3 PK	74.0	-11.7	1.00 H	249	9.17	53.13
7	15570.00	49.5 AV	54.0	-4.5	1.00 H	249	-3.63	53.13

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.9 PK	74.0	-9.1	1.00 V	16	24.35	40.55
2	5150.00	53.1 AV	54.0	-0.9	1.00 V	16	12.55	40.55
3	*5190.00	104.8 PK			1.00 V	78	64.07	40.73
4	*5190.00	94.1 AV			1.00 V	78	53.37	40.73
5	#10380.00	56.1 PK	68.3	-12.2	1.00 V	355	8.51	47.59

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.8 PK	74.0	-15.2	1.00 H	155	18.25	40.55
2	5150.00	47.6 AV	54.0	-6.4	1.00 H	155	7.05	40.55
3	*5230.00	95.4 PK			1.00 H	155	54.54	40.86
4	*5230.00	87.6 AV			1.00 H	155	46.74	40.86
5	#10460.00	55.3 PK	68.3	-13.0	1.00 H	265	7.72	47.58
6	15690.00	61.5 PK	74.0	-12.5	1.00 H	241	8.86	52.64
7	15690.00	49.3 AV	54.0	-4.7	1.00 H	241	-3.34	52.64

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.9 PK	74.0	-8.1	1.37 V	89	25.35	40.55
2	5150.00	52.6 AV	54.0	-1.4	1.37 V	89	12.05	40.55
3	*5230.00	112.2 PK			1.37 V	89	71.34	40.86
4	*5230.00	102.4 AV			1.37 V	89	61.54	40.86
5	#10460.00	56.3 PK	68.3	-12.0	1.00 V	351	8.72	47.58
6	15690.00	60.5 PK	74.0	-13.5	1.00 V	203	7.86	52.64
7	15690.00	51.1 AV	54.0	-2.9	1.00 V	203	-1.54	52.64

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

4.3 TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.47 – 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,

- Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4;
- Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;
- Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT ≥ 5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

4.3.2 TEST INSTRUMENTS

FOR POWER OUTPUT MEASUREMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 10, 2012	May 09, 2013
Power Sensor	MA2411B	0738172	May 10, 2012	May 09, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Dec. 27, 2012

FOR 26dB OCCUPIED BANDWIDTH

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Dec. 27, 2012

4.3.3 TEST PROCEDURE

FOR POWER OUTPUT MEASUREMENT

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

FOR 26dB OCCUPIED BANDWIDTH


- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.4 DEVIATION FROM TEST STANDARD


No deviation

4.3.5 TEST SETUP

FOR POWER OUTPUT MEASUREMENT

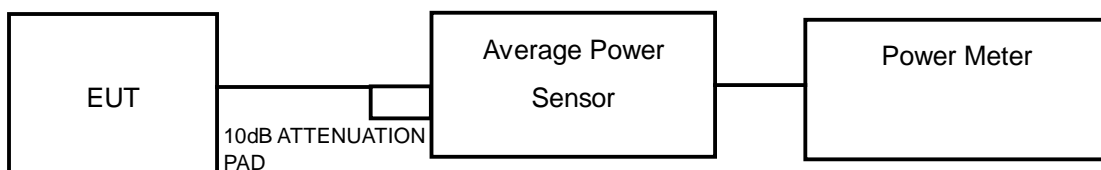

FOR 26dB OCCUPIED BANDWIDTH





A D T

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

4.3.7 TEST RESULTS

802.11a

POWER OUTPUT

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	43.752	16.41	17	PASS
40	5200	43.752	16.41	17	PASS
48	5240	44.771	16.51	17	PASS

26dB BANDWIDTH

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)
36	5180	20.69
40	5200	21.37
48	5240	21.07

Note: For FCC output power limitation is determined based on 26dBc bandwidth.

Power Limit = $4\text{dBm} + 10\log B$ < UNII Band 1 >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
36	5180	20.69	17.15 > 17
40	5200	21.37	17.29 > 17
48	5240	21.07	17.23 > 17



A D T

802.11n (HT20)

POWER OUTPUT

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	12.90	13.30	40.878	16.11	17	PASS
40	5200	13.30	13.50	43.767	16.41	17	PASS
48	5240	13.10	13.30	41.797	16.21	17	PASS

26dB BANDWIDTH

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	
		CHAIN 0	CHAIN 1
36	5180	21.88	22.70
40	5200	21.52	21.61
48	5240	21.75	22.88

Note: For FCC output power limitation is determined based on 26dBc bandwidth.

Power Limit = $4\text{dBm} + 10\log B$ < UNII Band 1 >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
36	5180	21.88	17.4 > 17
40	5200	21.52	17.32 > 17
48	5240	21.75	17.37 > 17



A D T

802.11n (HT40)

POWER OUTPUT

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
38	5190	9.20	9.70	17.651	12.47	17	PASS
46	5230	13.70	14.00	48.561	16.86	17	PASS

26dB BANDWIDTH

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	
		CHAIN 0	CHAIN 1
38	5190	53.33	54.81
46	5230	52.04	51.11

Note: For FCC output power limitation is determined based on 26dBc bandwidth.

Power Limit = 4dBm + 10logB < UNII Band 1 >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
38	5190	53.33	21.26 > 17
46	5230	51.11	21.08 > 17

4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.47 – 5.725GHz	11dBm
5.725 ~ 5.825GHz	17dBm

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Dec. 27, 2012

4.4.3 TEST PROCEDURES


Using method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- 3) Sweep time = auto, trigger set to “free run”.
- 4) Trace average at least 100 traces in power averaging mode.
- 5) Record the max value

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

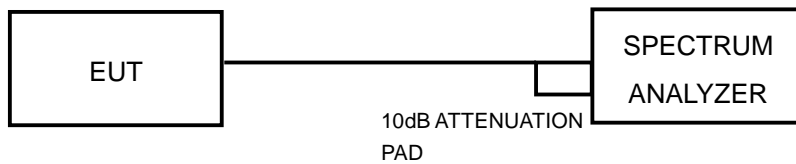

4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6



4.4.7 TEST RESULTS(MODE 1, PIFA ANTENNA)

802.11a

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
36	5180	1.89	4	PASS
40	5200	1.91	4	PASS
48	5240	1.98	4	PASS

802.11n (HT20)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
36	5180	-1.38	-1.50	1.57	2.49	PASS
40	5200	-1.27	-1.95	1.41	2.49	PASS
48	5240	-1.12	-1.17	1.87	2.49	PASS

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $4.5\text{dBi} + 10\log(2) = 7.51\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4-(7.51-6) = 2.49\text{dBm}$.

802.11n (HT40)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
38	5190	-7.78	-7.95	-4.85	2.49	PASS
46	5230	-3.45	-3.62	-0.52	2.49	PASS

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $4.5\text{dBi} + 10\log(2) = 7.51\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4-(7.51-6) = 2.49\text{dBm}$.

4.4.8 TEST RESULTS(MODE 2, DIPOLE ANTENNA)

802.11a

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
36	5180	1.89	4	PASS
40	5200	1.91	4	PASS
48	5240	1.98	4	PASS

802.11n (HT20)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
36	5180	-1.38	-1.50	1.57	2.99	PASS
40	5200	-1.27	-1.95	1.41	2.99	PASS
48	5240	-1.12	-1.17	1.87	2.99	PASS

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $4.0\text{dBi} + 10\log(2) = 7.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4-(7.01-6) = 2.99\text{dBm}$.

802.11n (HT40)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
38	5190	-7.78	-7.95	-4.85	2.99	PASS
46	5230	-3.45	-3.62	-0.52	2.99	PASS

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $4.0\text{dBi} + 10\log(2) = 7.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4-(7.01-6) = 2.99\text{dBm}$.

4.5 PEAK POWER EXCURSION MEASUREMENT

4.5.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Shall not exceed 13 dB

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Dec. 27, 2012

4.5.3 TEST PROCEDURE

1. Set RBW = 1 MHz, VBW \geq 3 MHz, Detector = peak.
2. Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
3. Use the peak search function to find the peak of the spectrum.
4. Measure the PPSD.
5. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

4.5.7 TEST RESULTS

MODULATION MODE	MODULATION TYPE	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)	PPSD WITHOUT DUTY FACTOR (dBm)	PPSD WITH DUTY FACTOR (dBm)	PEAK EXCURSION (dB)	LIMIT (dB)	PASS /FAIL
802.11a	BPSK	5240	11	1.98	1.98	9.02	13	PASS
	QPSK		12.56	2.15	2.15	10.41	13	PASS
	16QAM		12.98	2.17	2.17	10.81	13	PASS
	64QAM		13.18	2.19	2.35	10.83	13	PASS
802.11n (HT20)	BPSK	5240	8.2	-1.12	-1.12	9.32	13	PASS
	QPSK		9.76	-0.72	-0.72	10.48	13	PASS
	16QAM		9.16	-1.32	-1.19	10.35	13	PASS
	64QAM		9.31	-1.35	-1.18	10.49	13	PASS
802.11n (HT40)	BPSK	5230	5.93	-3.44	-3.44	9.37	13	PASS
	QPSK		6.43	-3.85	-3.76	10.19	13	PASS
	16QAM		6.6	-3.86	-3.66	10.26	13	PASS
	64QAM		7.05	-3.81	-3.38	10.43	13	PASS

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Dec. 27, 2012


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

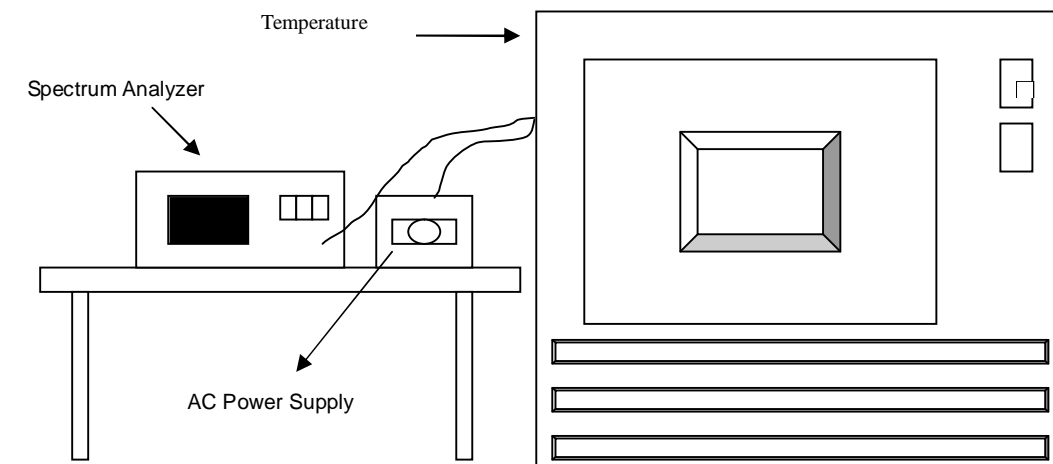

4.6.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



A D T

4.6.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	ppm	(MHz)	ppm	(MHz)	ppm	(MHz)	ppm
50	120	5240.0198	3.7786	5240.0185	3.5305	5240.0167	3.1870	5240.0249	4.7519
40	120	5239.9983	-0.3244	5239.9987	-0.2481	5239.9982	-0.3435	5240.0059	1.1260
30	120	5239.9994	-0.1145	5239.9998	-0.0382	5239.9974	-0.4962	5239.9979	-0.4008
20	120	5239.9941	-1.1260	5240.0006	0.1145	5239.9985	-0.2863	5239.9952	-0.9160
10	120	5239.9949	-0.9733	5239.993	-1.3359	5239.9868	-2.5191	5239.9906	-1.7939
0	120	5239.9828	-3.2824	5239.9831	-3.2252	5239.984	-3.0534	5239.9849	-2.8817
-10	120	5239.9778	-4.2366	5239.9808	-3.6641	5239.9832	-3.2061	5239.9746	-4.8473
-20	120	5240.0241	4.5992	5240.0243	4.6374	5240.0198	3.7786	5240.0206	3.9313
-30	120	5239.9863	-2.6145	5239.9896	-1.9847	5239.9898	-1.9466	5239.9823	-3.3779

FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	ppm	(MHz)	ppm	(MHz)	ppm	(MHz)	ppm
20	138	5239.9931	-1.3168	5239.9986	-0.2672	5239.9984	-0.3053	5239.9953	-0.8969
	120	5239.9941	-1.1260	5240.0006	0.1145	5239.9985	-0.2863	5239.9952	-0.9160
	102	5239.9944	-1.0687	5240	0.0000	5239.9991	-0.1718	5239.9952	-0.9160



A D T

4.7 20dBc BANDWIDTH MEASUREMENT

4.7.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

20dBc point shall not overlap in 5150~5250MHz

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Dec. 27, 2012

4.7.3 TEST PROCEDURE

789033 D01 General UNII Test Procedures v01r03


Emission bandwidth

1. Set RBW = approximately 1% of the emission bandwidth
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
5. Measure the maximum width of the emission that is 20dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as need until the RBW/EBW ratio is approximately 1 %.

4.7.4 TEST RESULTS

802.11a


CH 48

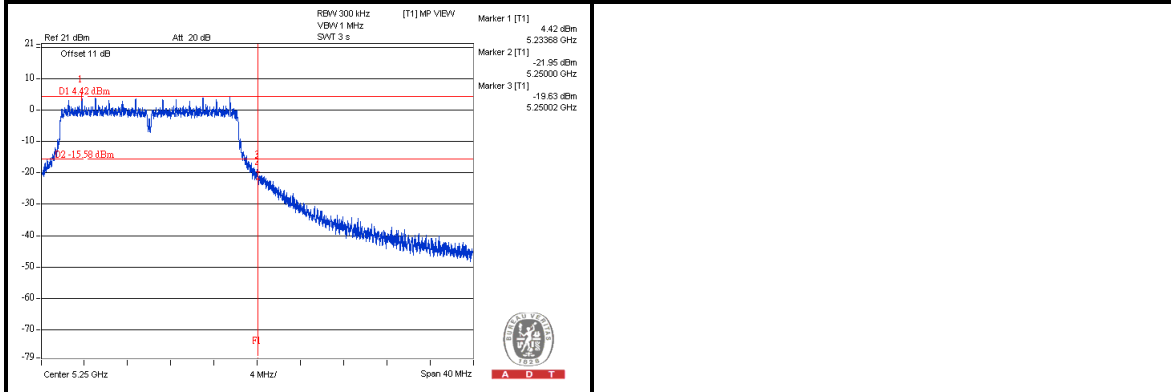

802.11n (HT20)


For Chain(0)

CH 48

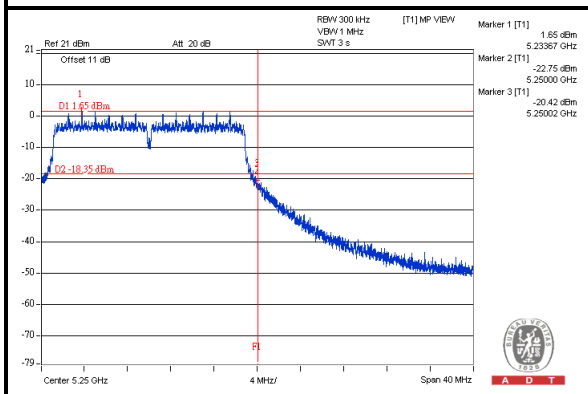

For Chain(1)


CH 48

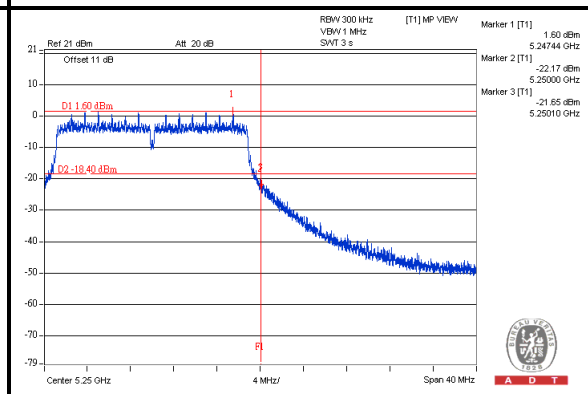

802.11n (HT40)


For Chain(0)

CH 46

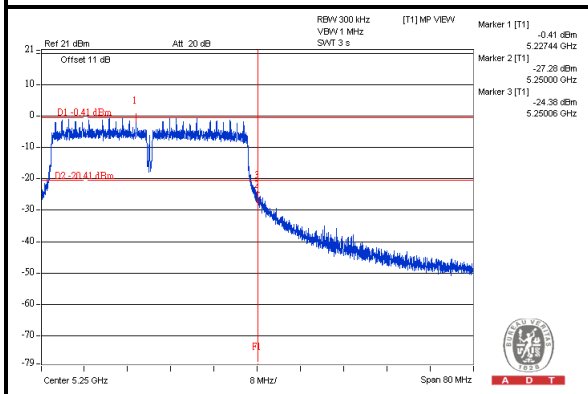

For Chain(1)

CH 46

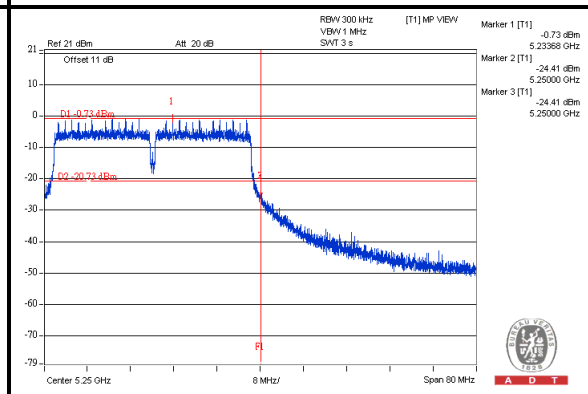



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---