


Appendix C. Radiated Emission Co-location Report


1. Results of Radiated Emissions for Co-located

Temperature	25.1°C	Humidity	50%
Test Engineer	YC Chen	Configurations	2.4G + 5G

Horizontal

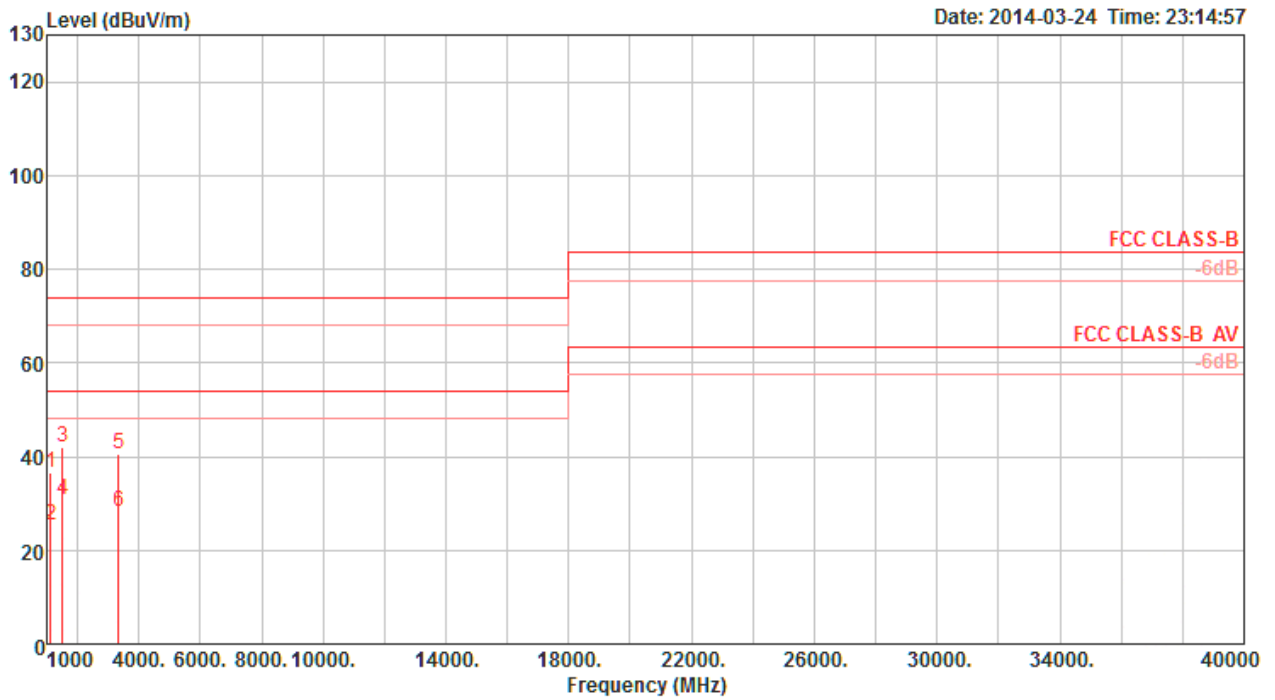

Vertical

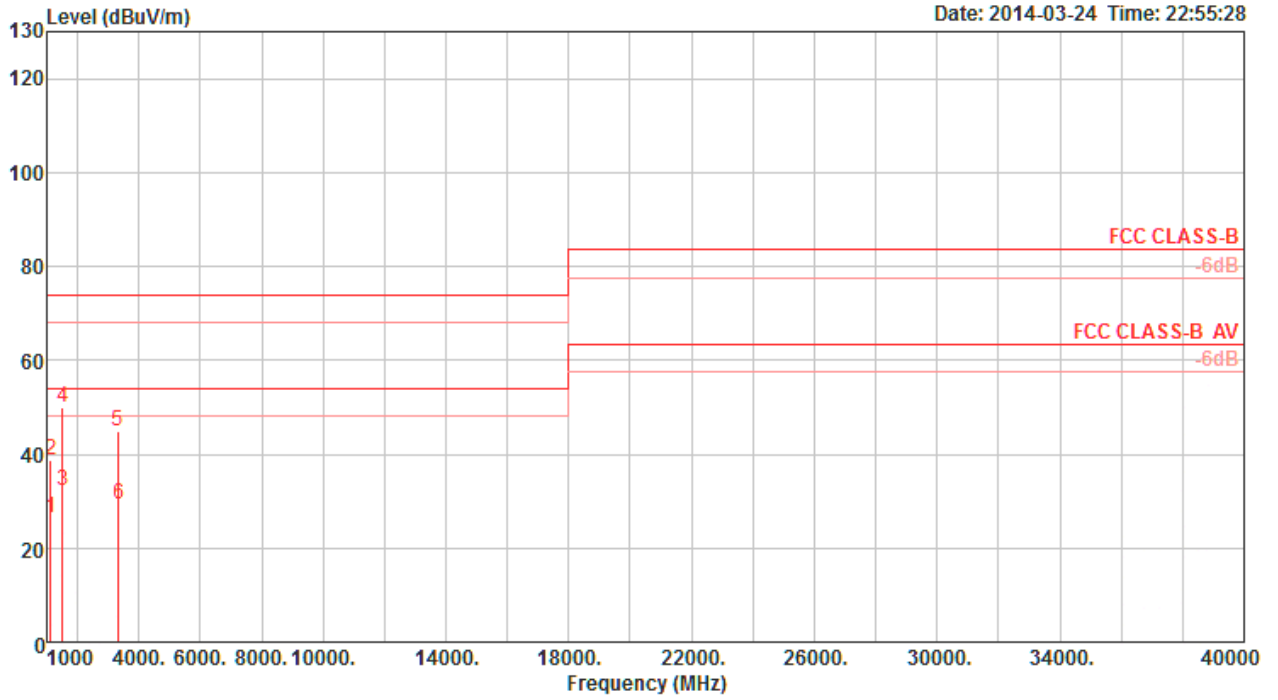

	Freq	Level	Limit	Over	Read	Cable	Preamp		Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	1124.75	26.51	54.00	-27.49	36.17	1.93	35.72	-9.66	Average	245	100	VERTICAL
2	1124.92	38.69	74.00	-35.31	48.35	1.93	35.72	-9.66	Peak	285	100	VERTICAL
3	1499.88	32.13	54.00	-21.87	39.43	2.25	35.05	-7.30	Average	285	100	VERTICAL
4	1499.97	50.01	74.00	-23.99	57.31	2.25	35.05	-7.30	Peak	266	100	VERTICAL
5	3308.99	44.73	74.00	-29.27	46.16	3.46	34.77	-1.43	Peak	46	100	VERTICAL
6	3326.06	29.23	54.00	-24.77	30.61	3.47	34.77	-1.38	Average	46	100	VERTICAL