



FCC 47 CFR PART 15 SUBPART C: 2013 AND ANSI C63.10: 2009

TEST REPORT

For

Product name	Model
Enterprise Access Point	EAP706; EAP705
Wireless Hotspot Gateway	HSG326; HSG325
Cluster Access Point	CAP326; CAP325

Brand: 4ipnet

Issued for

4IPNET, INC.

5F, No. 367, Fusing N. Rd., Songshan Dist., Taipei 105, Taiwan(R.O.C.)

Issued by

Compliance Certification Services Inc.

Tainan Lab.

No.8,Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

TEL: 886-6-580-2201

FAX: 886-6-580-2202

Date of Issue: May 15, 2015



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document



REVISION HISTORY

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	May 15, 2015	Initial Issue	ALL	Sunny Chang



TABLE OF CONTENTS.

1. TEST REPORT CERTIFICATION 4

2. EUT DESCRIPTION 5

3. DESCRIPTION OF TEST MODES 7

4. TEST METHODOLOGY 8

5. FACILITIES AND ACCREDITATIONS..... 8

 5.1 FACILITIES8

 5.2 EQUIPMENT8

 5.3 LABORATORY ACCREDITATIONS LISTINGS8

 5.4 TABLE OF ACCREDITATIONS AND LISTINGS9

6. CALIBRATION AND UNCERTAINTY 9

 6.1 MEASURING INSTRUMENT CALIBRATION9

 6.2 MEASUREMENT UNCERTAINTY9

7. SETUP OF EQUIPMENT UNDER TEST 10

 7.1 SETUP CONFIGURATION OF EUT10

 7.2 SUPPORT EQUIPMENT11

 7.3 EUT OPERATING CONDITION12

8. APPLICABLE LIMITS AND TEST RESULTS..... 13

 8.1 6DB BANDWIDTH.....13

 8.2 MAXIMUM PEAK OUTPUT POWER28

 8.3 DUTY CYCLE45

 8.4 POWER SPECTRAL DENSITY58

 8.5 CONDUCTED SPURIOUS EMISSION.....72

 8.6 RADIATED EMISSIONS83

 8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS 83

 8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHZ 88

 8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHZ 92

 8.6.4 RESTRICTED BAND EDGES..... 104

 8.7 POWERLINE CONDUCTED EMISSIONS120

9. ANTENNA REQUIREMENT 126

 9.1 STANDARD APPLICABLE126

 9.2 ANTENNA CONNECTED CONSTRUCTION126

APPENDIX II PHOTOGRAPHS OF EU..... A1



1. TEST REPORT CERTIFICATION

Applicant : 4IPNET, INC.
5F, No. 367, Fusing N. Rd., Songshan Dist., Taipei 105, Taiwan(R.O.C.)

Manufacturer : Advance Multimedia Internet Technology Inc.
No.28, Lane 31 , Sec. 1 , Huandong Rd. , Sinshih District , Tainan City 74146 , Taiwan

Table with 2 columns: Product name, Model. Rows include Enterprise Access Point, Wireless Hotspot Gateway, and Cluster Access Point.

Brand : 4ipnet

Date of Test : March 25, 2015 ~ May 07, 2015

Table with 2 columns: STANDARD, TEST RESULT. Row 1: FCC Part 15 Subpart C: 2013 AND ANSI C63.10: 2009, No non-compliance noted.

Approved by:

Reviewed by:

Handwritten signature of Jeter Wu

Handwritten signature of Eric Huang

Jeter Wu
Assistant Manager

Eric Huang
Assistant Section Manager



2. EUT DESCRIPTION

Product Name	Product name	Model
	Enterprise Access Point	EAP706; EAP705
Model	Wireless Hotspot Gateway	HSG326; HSG325
	Cluster Access Point	CAP326; CAP325
Brand	4ipnet	
Received Date	February 25, 2015	
Frequency Range	IEEE 802.11b/g, 802.11n HT20 (DTS Band):2412MHz~2462MHz IEEE 802.11n HT40 (DTS Band):2422MHz~2452MHz	
Transmit Power	IEEE 802.11b Mode : 17.27dBm (DTS Band) (53.3335mW) IEEE 802.11g Mode : 20.50dBm (DTS Band) (112.202mW) IEEE 802.11n HT20 Mode : 17.73dBm (DTS Band) (59.2254mW) IEEE 802.11n HT40 Mode : 15.15dBm (DTS Band) (32.7264mW)	
Channel Spacing	IEEE 802.11b/g, 802.11n HT20/HT40: 5MHz	
Channel Number	IEEE 802.11b/g, 802.11n HT20:11 Channels IEEE 802.11n HT40 :7 Channels	
Transmit Data Rate	IEEE 802.11b :11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps IEEE 802.11n (HT20) : 130, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6.5Mbps IEEE 802.11n (HT40) : 300, 270, 243, 216, 162, 150, 135, 121.5, 108, 81, 54, 40.5, 27, 13.5 Mbps	
Type of Modulation	IEEE 802.11b : DSSS (CCK, DQPSK, DBPSK)	
	IEEE 802.11g : OFDM (64QAM, 16QAM, QPSK, BPSK)	
	IEEE 802.11n HT20/HT40 : OFDM (64QAM, 16QAM, QPSK, BPSK)	
Frequency Selection	By software / firmware	
Antenna Type	Antenna (2TX2RX) For model: EAP706 Manufacture: Cortec Technology Inc. Type: Dipole (SMA Male Reverse) Mode: AN2450-3901BRS Gain : 2.7 dBi For model: EAP705 Manufacture: GainForce Technology Co., Ltd. Type: Chip Mode: AN3216-T2R4PAAT/LF Gain : 1.5 dBi	
Temperature Range	0 ~ +40°C	

Power Adapter :

No.	Manufacturer	Model No.	Power Input	Power Output
1	APD	WA-30B12	100-240Vac, 50-60Hz, 0.8A	12Vdc, 2.5A



REMARK:

1. The sample (**EAP706**) selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **VZ9150001** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. For more details, please refer to the User's manual of the EUT.
4. The different of the each model is shown as bellows:

Model	EAP706	EAP705	HSG326	HSG325	CAP326	CAP325
Antenna	Dipole*4	Chip*3, PIFA*1	Dipole*4	Chip*3, PIFA*1	Dipole*4	Chip*3, PIFA*1
External Case	Case 1 (Dipole antenna)	Case 2 (Build-in antenna)	Case 1 (Dipole antenna)	Case 2 (Build-in antenna)	Case 1 (Dipole antenna)	Case 2 (Build-in antenna)



3. DESCRIPTION OF TEST MODES

The EUT is a 11n router. It has two transmitter chains and two receive chains (2x2 configurations). The 2x2 configuration is implemented with two outside chains (Chain 0 and Chain 1).

The RF chipset is manufactured by MediaTek Inc.

The antenna peak gain 2.7dBi (highest gain) were chosen for full testing.

IEEE 802.11 b ,802.11g ,802.11n HT20 mode (DTS Band)

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps long data rate (worst case) were chosen for full testing.

IEEE 802.11g mode: 6Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT20 mode: 13Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT40 mode (DTS Band)

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n HT40 mode: 27Mbps data rate (worst case) were chosen for full testing.

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD, peak power and average power across all the data rates, bandwidths, modulations and spatial stream modes.



4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 1109 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW-1037 and 455173).



5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan	TAF
---------------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	Industry Canada
Germany	TUV NORD
Taiwan	BSMI
USA	FCC

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

6. CALIBRATION AND UNCERTAINTY

6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer’s recommendations, and is traceable to recognized national standards.

6.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz Test Site : OATS-6	±3.59dB
Radiated Emission, 200 to 1000 MHz Test Site : OATS-6	±3.27dB
Radiated Emission, 1 to 26.5 GHz	± 3.20dB
Power Line Conducted Emission	± 2.90dB


Uncertainty figures are valid to a confidence level of 95%, K=2



7. SETUP OF EQUIPMENT UNDER TEST


7.1 SETUP CONFIGURATION OF EUT

For RF test

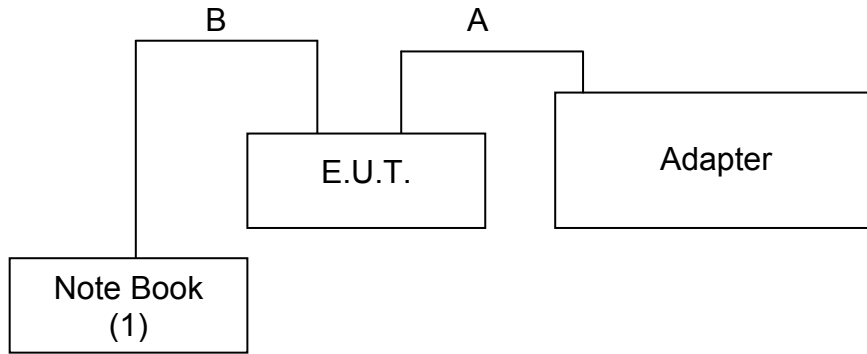


For EMI test

TEST MODE: NORMAL OPERATION

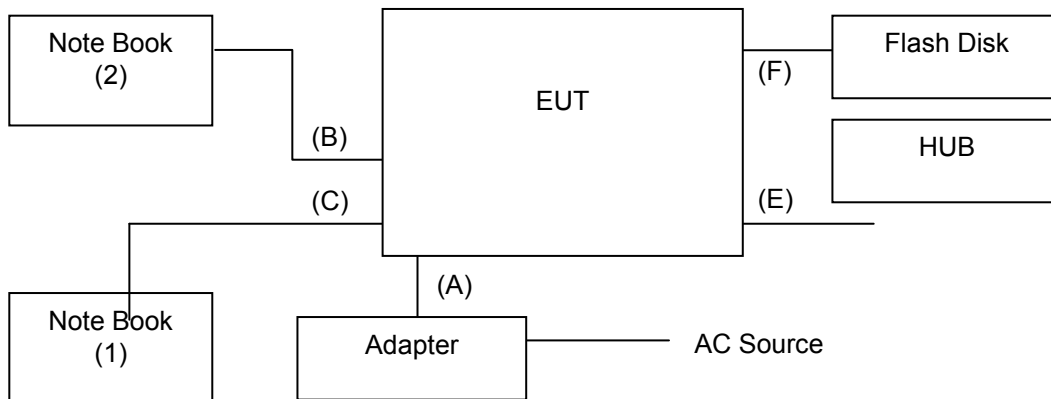

TEST MODE: POE MODE

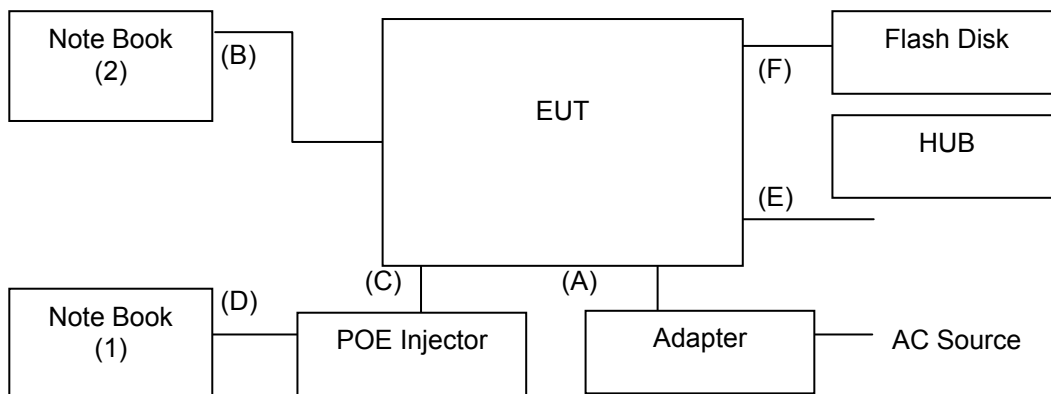



7.2 SUPPORT EQUIPMENT

RF test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1.	Note Book	Acer	AS 3830TG	DOC	Power cable, unshd, 1.6m

No.	Signal cable description	
A	DC Power	Unshielded, 18m, 1pcs
B	LAN	Unshielded, 10m, 1pcs.

EMI test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	Notebook	IBM	T43	DOC	Power cable, unshd, 1.6m
2	Notebook	MSI	MS-1452	DOC	Power cable, unshd, 1.6m
3	Flash Disk	Kingston	DTIG3/8GB	DOC	N/A
4	HUB	BARRICAD	SMC7008BR	DOC	Power cable, unshd, 1.6m
5	POE Injector	Gigabit	PSE301GA	N/A	Power cable, unshd, 1.4m

No.	Signal cable description	
A	DC Output	Unshielded, 1.8m, 1pcs.
B	RJ 45	Unshielded, 10m, 1pcs.
C	RJ 45	Unshielded, 10m, 1pcs.
D	RJ 45	Unshielded, 1.0m, 1pcs.
E	RJ 45	Unshielded, 1.6m, 2pcs.
F	USB	Unshielded, 0.2m, 1pcs.

REMARK:

1. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.
2. Grounding was established in accordance with the manufacturer’s requirements and conditions for the intended use.



7.3 EUT OPERATING CONDITION

RF Setup

1. Set up all computers like the setup diagram.
2. The “Ralink QA Test Program for “QA Tool_Dbg” software was used for testing
The EUT driver software installed in the host support equipment during testing was Ralink QA Test Program for “QA Tool_Dbg” Drive

TX Mode:

- ⇒ **Tx Mode:**CCK 、 OFDM、 HT MixMode (Bandwidth: 20、 40)
- ⇒ **Tx Data Rate:** 1Mbps long (IEEE 802.11b mode ,chain 0 TX)
6Mbps (IEEE 802.11g mode ,chain 0 TX)
13Mbps (IEEE 802.11n HT20 mode ,chain 0, chain 1 TX)
27Mbps (IEEE 802.11n HT40 mode, chain 0, chain 1 TX)

Power control mode

- Target Power:** IEEE 802.11b Channel Low (2412MHz) =1A (**Chain 0**)
IEEE 802.11b Channel Middle (2437MHz) =1B (**Chain 0**)
IEEE 802.11b Channel High (2462MHz) = 1B (**Chain 0**)
- Target Power:** IEEE 802.11g Channel Low (2412MHz) = 15 (**Chain 0**)
IEEE 802.11g Channel Middle (2437MHz) = 16 (**Chain 0**)
IEEE 802.11g Channel High (2462MHz) = 16 (**Chain 0**)
- Target Power:** IEEE 802.11n HT20 Channel Low (2412MHz) = 11 (**Chain 0**)
IEEE 802.11n HT20 Channel Middle (2437MHz) =10 (**Chain 0**)
IEEE 802.11n HT20 Channel High (2462MHz) = 0F (**Chain 0**)
IEEE 802.11n HT20 Channel Low (2412MHz) = 11 (**Chain 1**)
IEEE 802.11n HT20 Channel Middle (2437MHz) = 10 (**Chain 1**)
IEEE 802.11n HT20 Channel High (2462MHz) = 0F (**Chain 1**)
- Target Power:** IEEE 802.11n HT40 Channel Low (2422MHz) = 04 (**Chain 0**)
IEEE 802.11n HT40 Channel Middle (2437MHz) = 02 (**Chain 0**)
IEEE 802.11n HT40 Channel High (2452MHz) = 00 (**Chain 0**)
IEEE 802.11n HT40 Channel Low (2422MHz) = 04 (**Chain 1**)
IEEE 802.11n HT40 Channel Middle (2437MHz) = 02(**Chain 1**)
IEEE 802.11n HT40 Channel High (2452MHz) = 00 (**Chain 1**)

RX Mode :

Start RX

3. All of the function are under run.
4. Start test.

Normal Link Setup

1. Setup a whole system for test as shown on setup diagram.
2. Turn on power and check function.
3. Start to test.



8. APPLICABLE LIMITS AND TEST RESULTS

8.1 6DB BANDWIDTH


LIMIT

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	JAN. 23, 2016

TEST SETUP



TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 1-5 % of the emission bandwidth (EBW).
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is 1-5 %.



TEST RESULTS

No non-compliance noted.

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	10.05	500	PASS
Middle	2437	10.05	500	PASS
High	2462	10.05	500	PASS

NOTE :

1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16.35	500	PASS
Middle	2437	16.32	500	PASS
High	2462	16.32	500	PASS

NOTE :

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.



IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain1		
Low	2412	17.55	17.58	500	PASS
Middle	2437	17.55	17.58	500	PASS
High	2462	17.58	17.52	500	PASS

NOTE :

1. At final test to get the worst-case emission at 13Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 mode



Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain1		
Low	2422	36.00	36.24	500	PASS
Middle	2437	35.82	35.10	500	PASS
High	2452	35.94	34.80	500	PASS


NOTE :

1. At final test to get the worst-case emission at 27Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.



6dB BANDWIDTH (802.11b MODE)

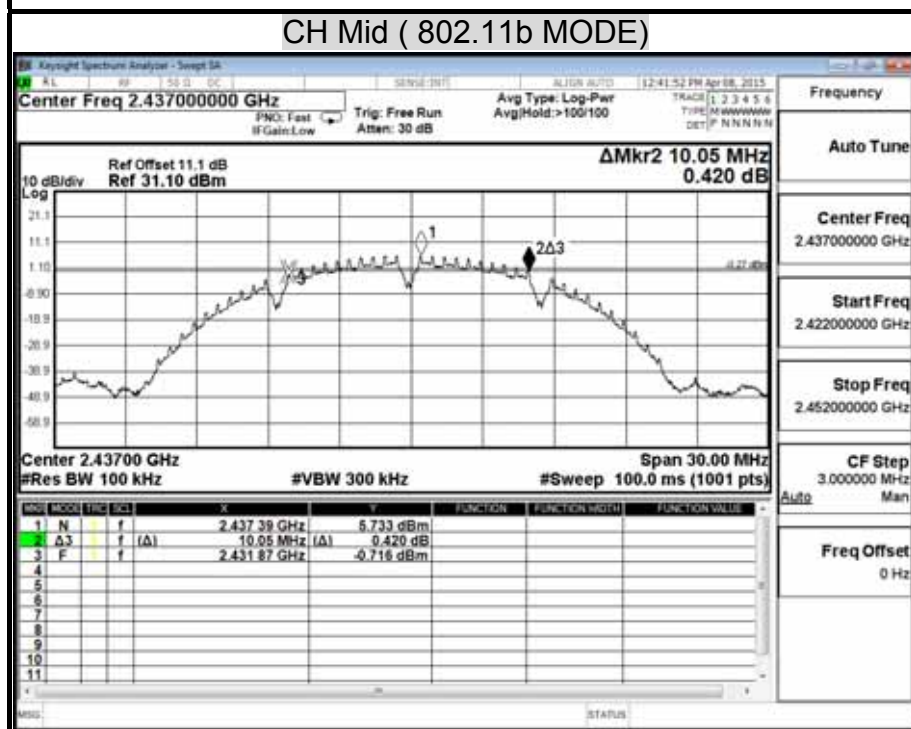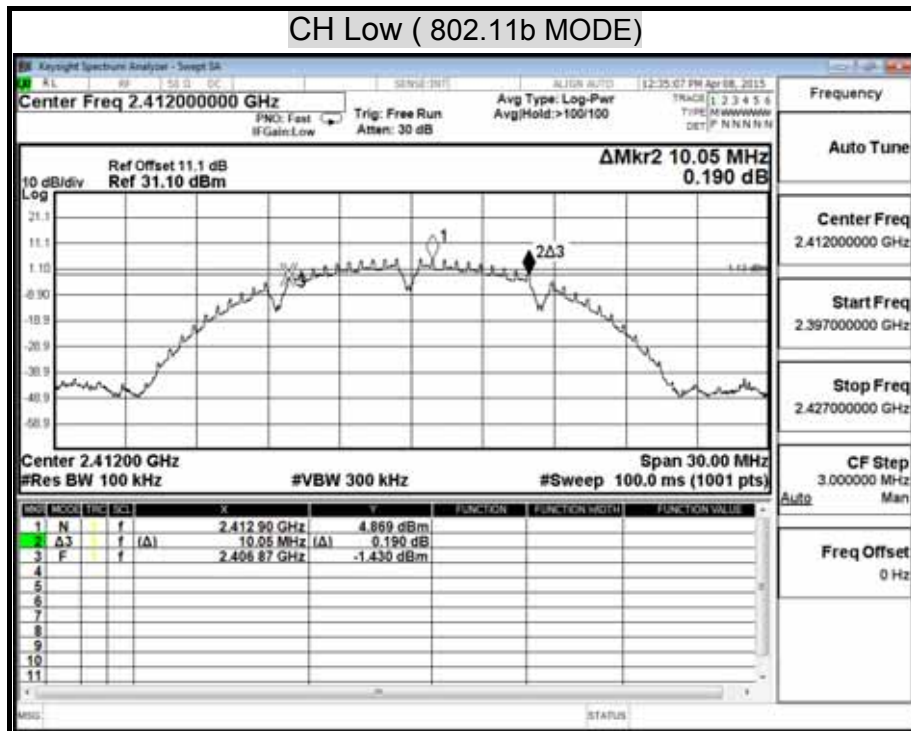


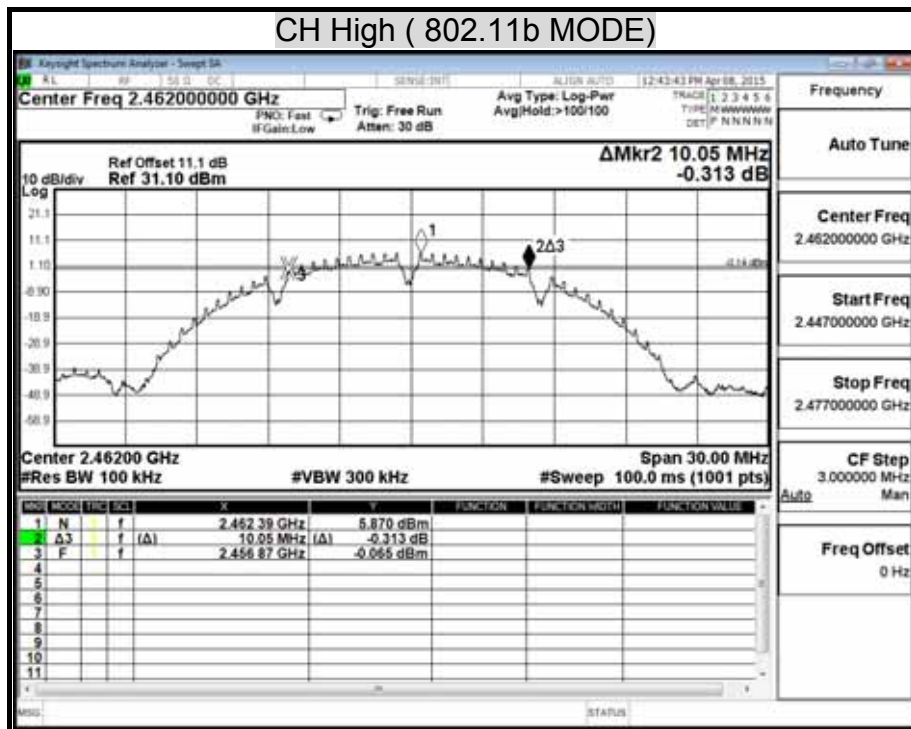





6dB BANDWIDTH (802.11g MODE)

CH Low (802.11g MODE)

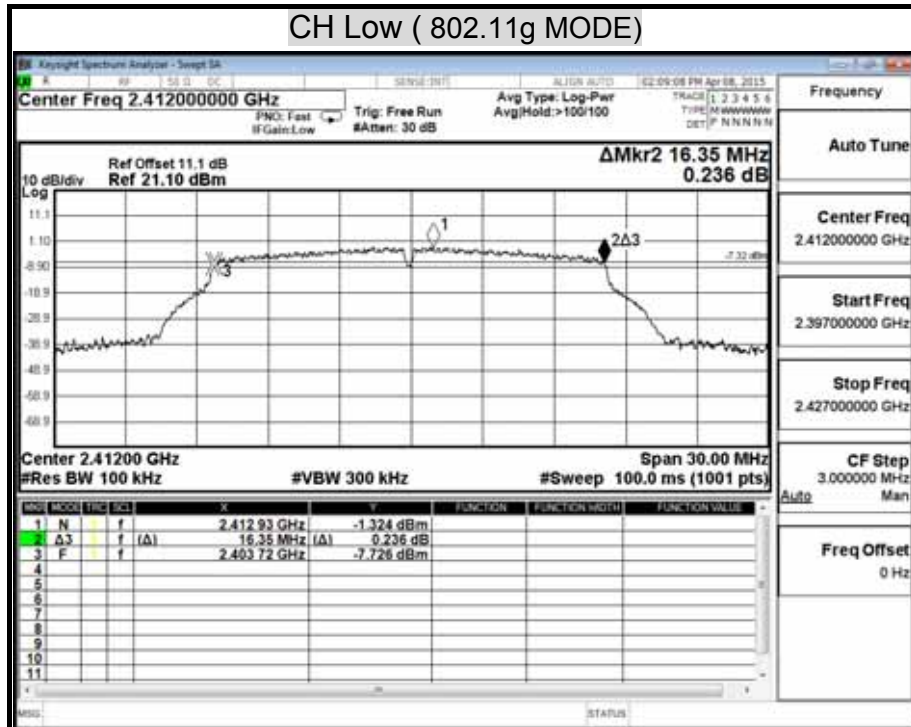

CH Mid (802.11g MODE)

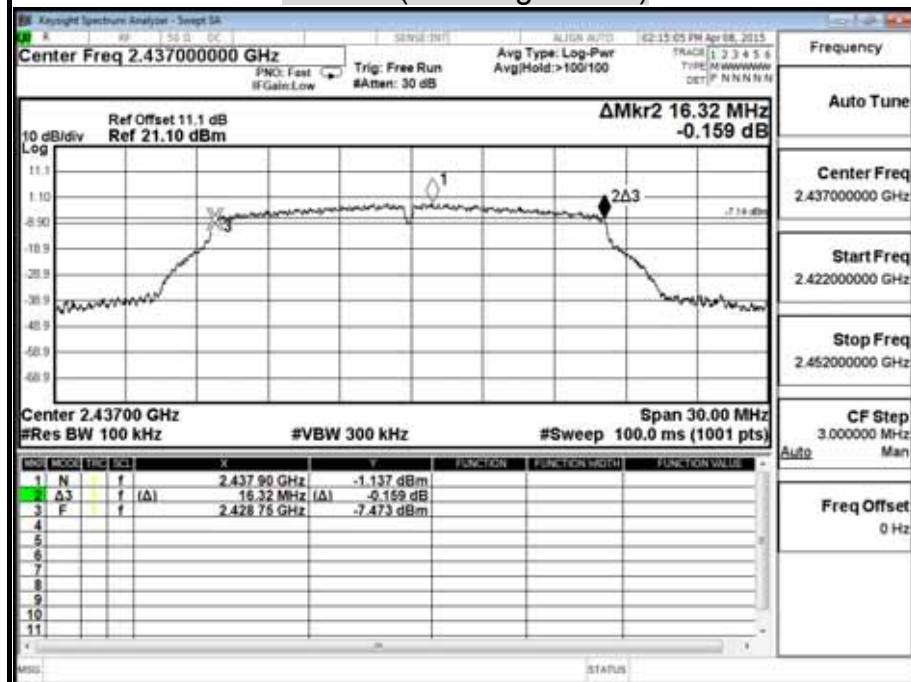


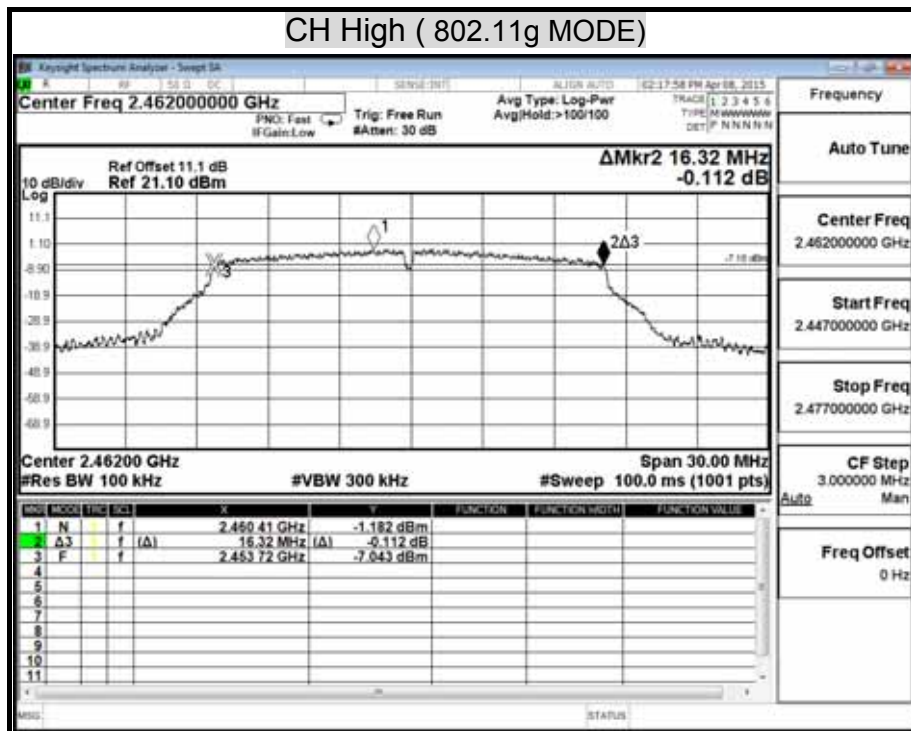





6dB BANDWIDTH (802.11n HT20 MODE) Chain 0

CH Low (802.11n HT20 MODE)-Chain 0

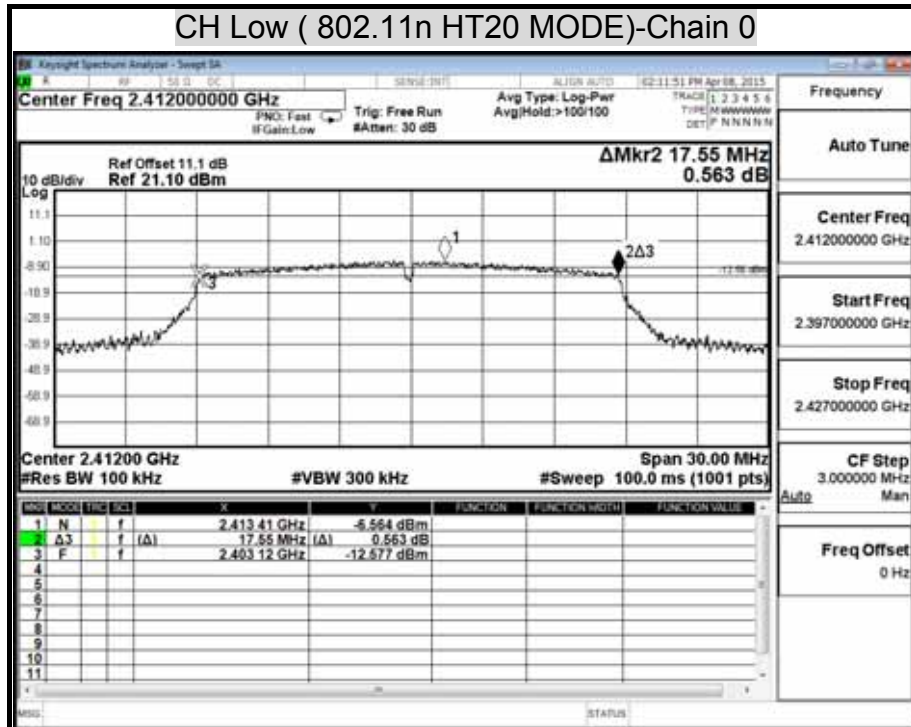



CH Mid (802.11n HT20 MODE)-Chain 0

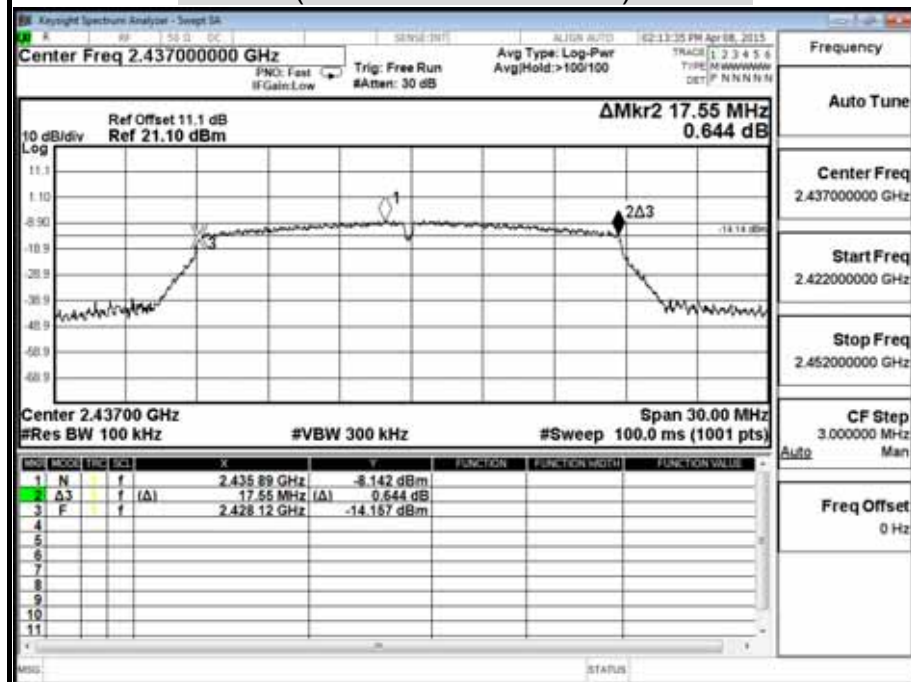


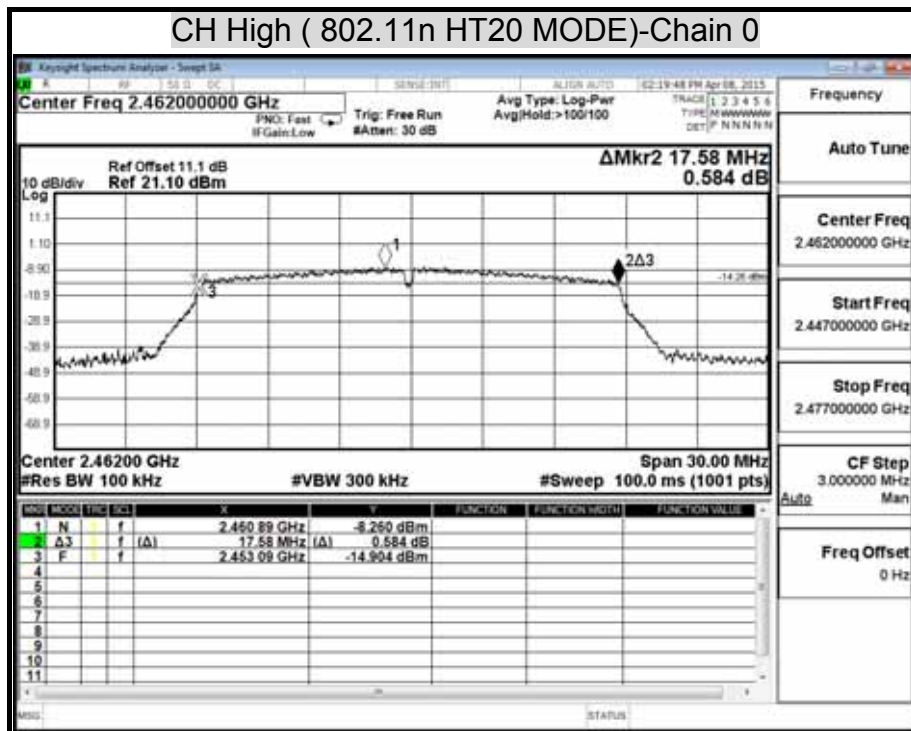



6dB BANDWIDTH (802.11n HT20 MODE) Chain 1

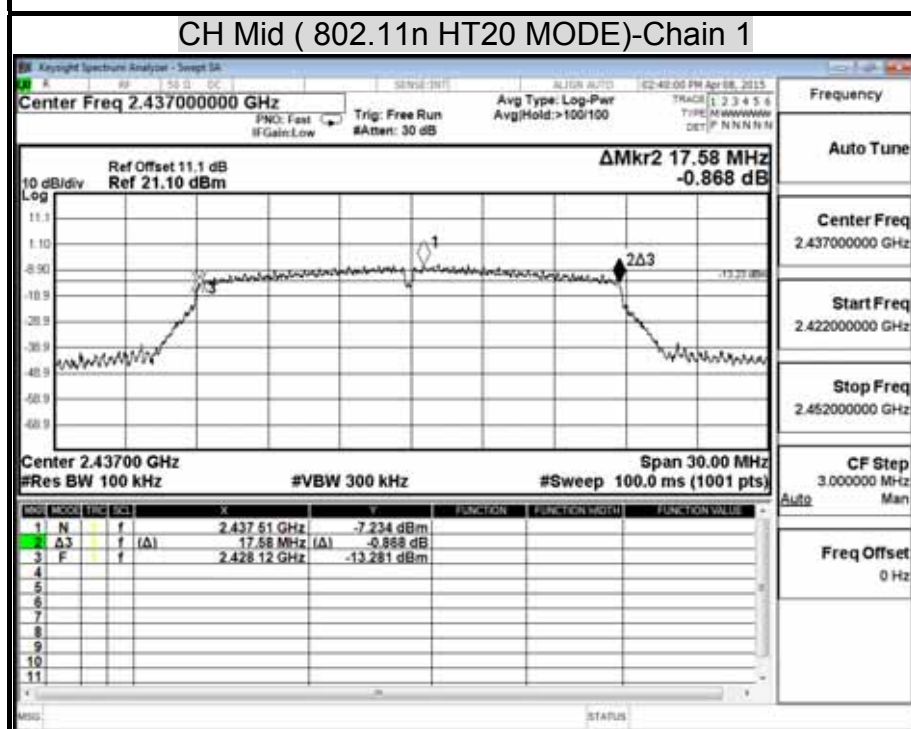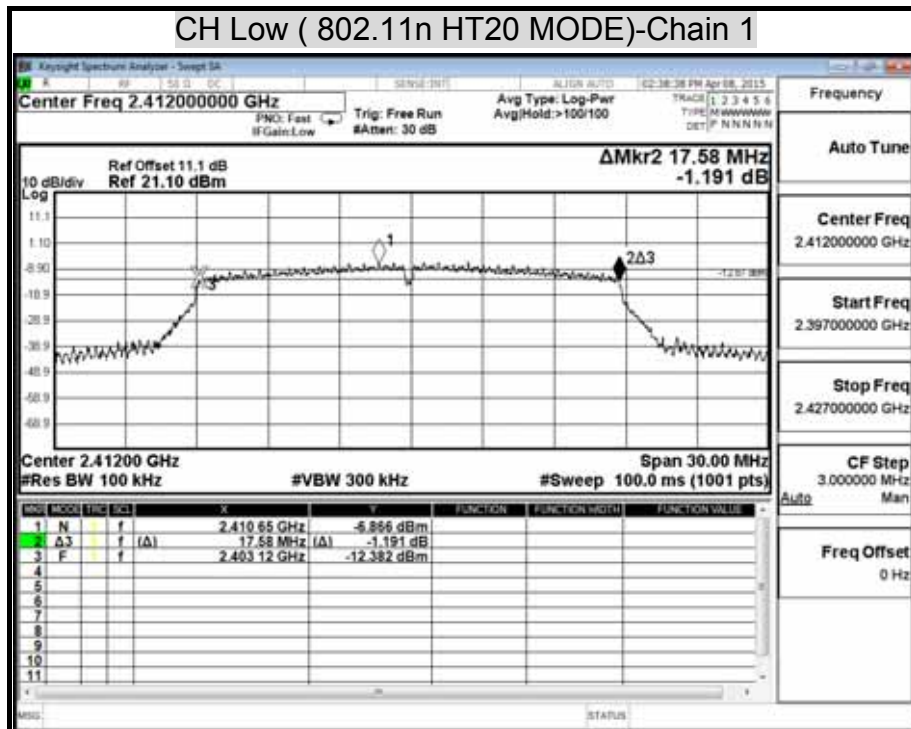


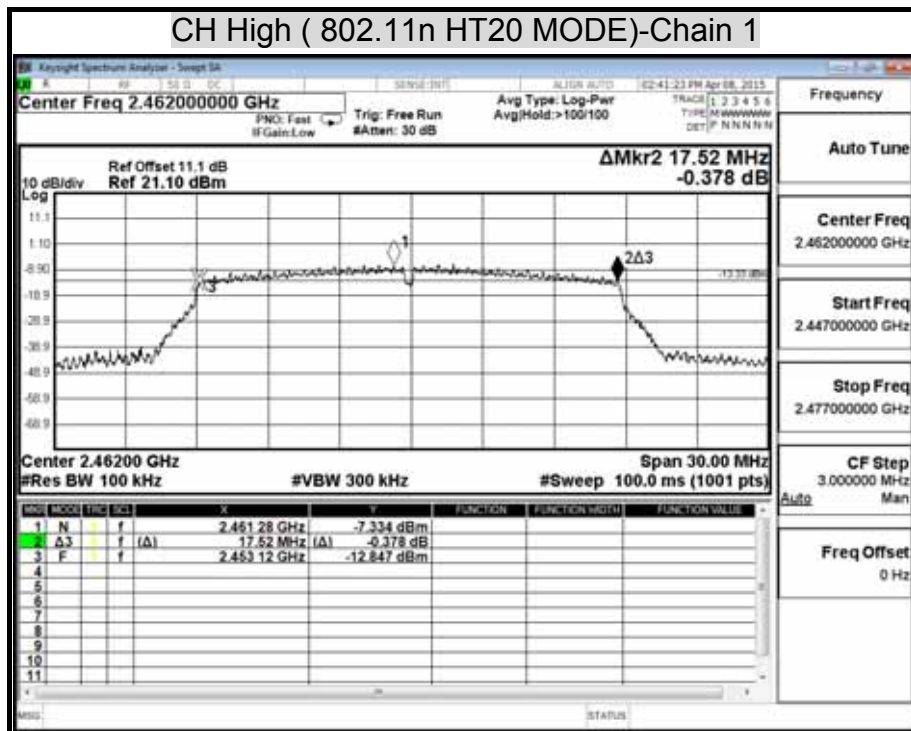





6dB BANDWIDTH (802.11n HT40 MODE) Chain 0

CH Low (802.11n HT40 MODE)-Chain 0

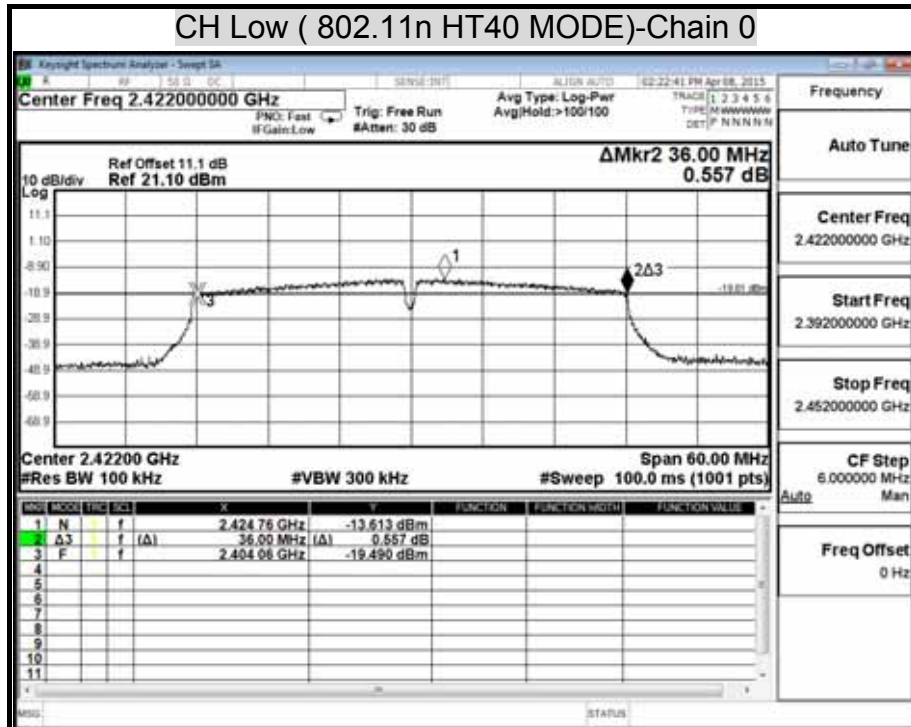



CH Mid (802.11n HT40 MODE)-Chain 0

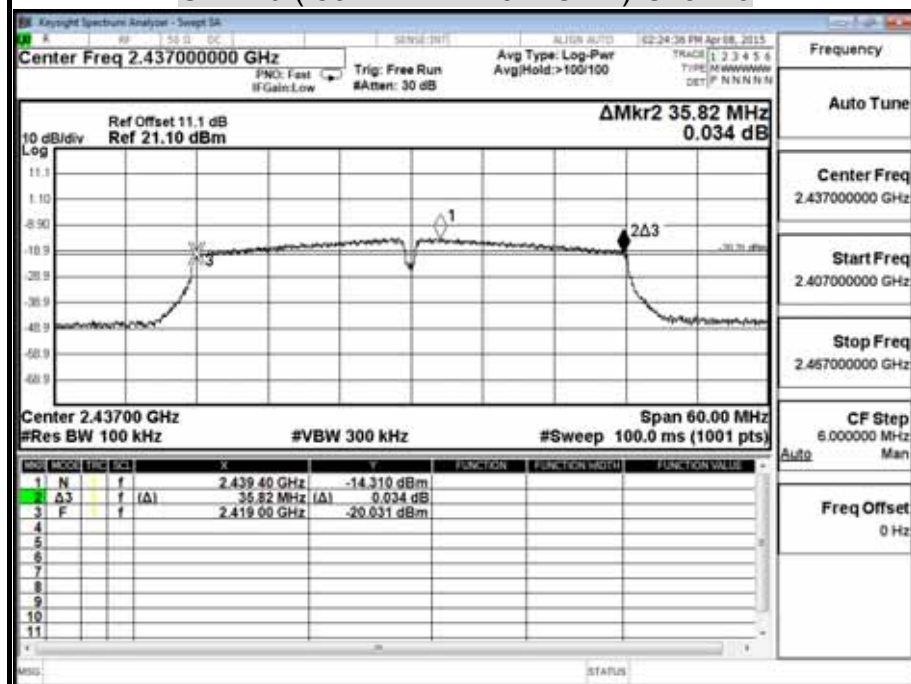


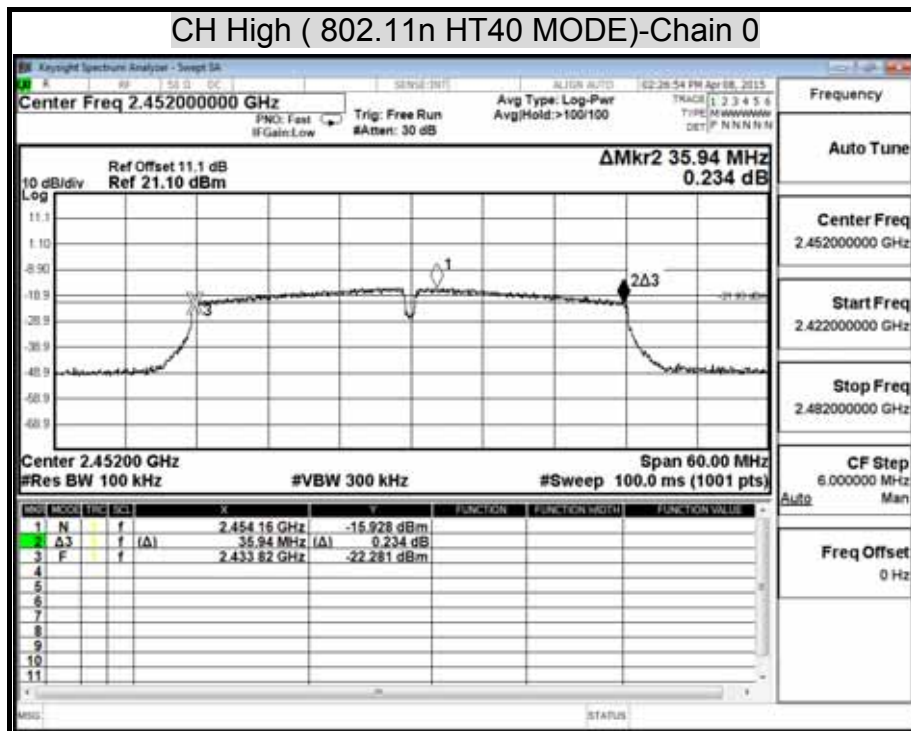



6dB BANDWIDTH (802.11n HT40 MODE) Chain 1

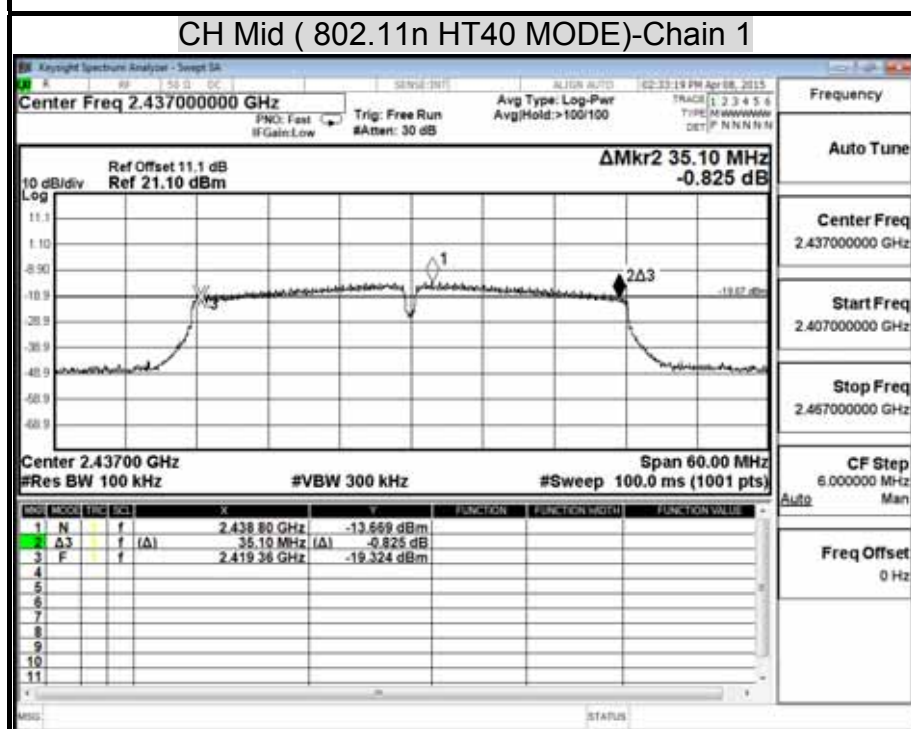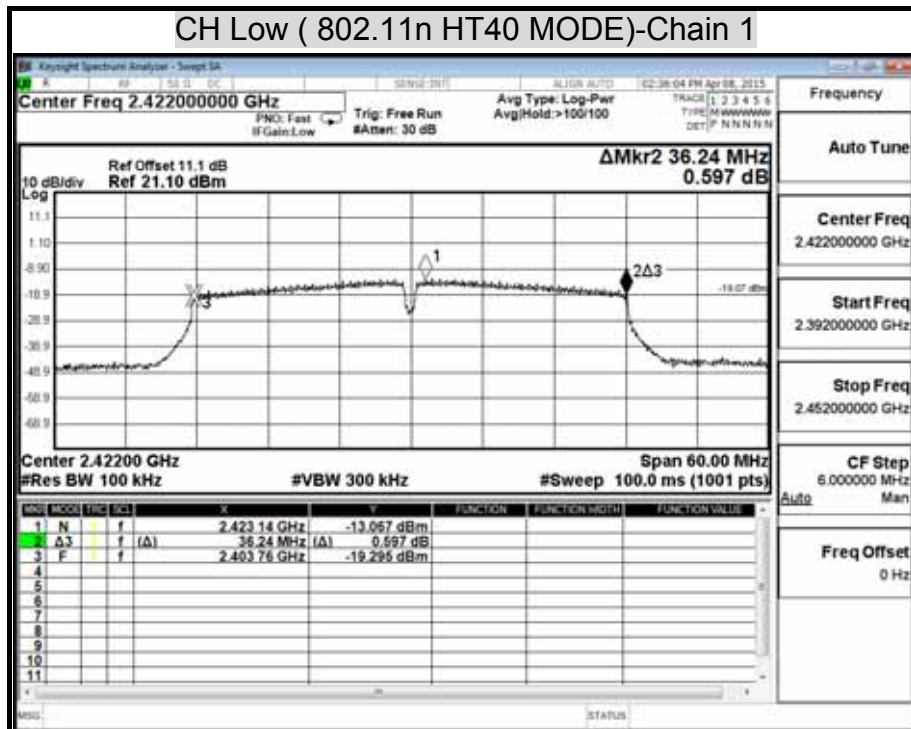

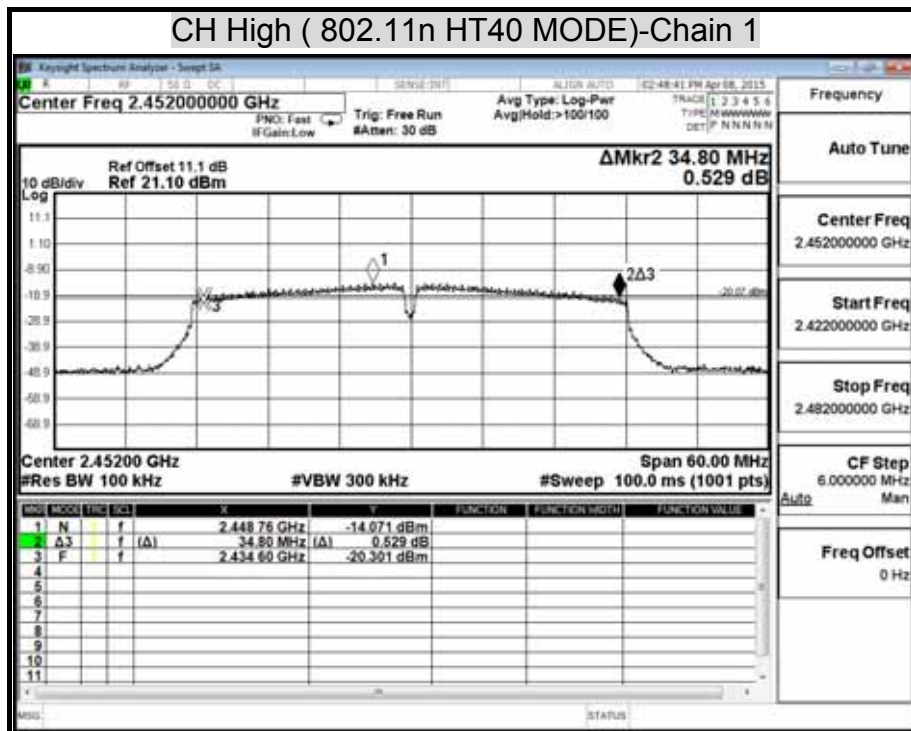



8.2 MAXIMUM PEAK OUTPUT POWER

LIMIT

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.


§ 15.247(b) (4) Except as shown in paragraphs (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST EQUIPMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	JAN. 23, 2016
Power Meter	Anritsu	ML2487A	6K00003888	JUN. 24, 2015

TEST SETUP

For Peak Power



For Average Power





TEST PROCEDURE

The tests were performed in accordance with KDB 558074 5.2.1.2 and 5.2.2.1.

5.2.1.2 Measurement Procedure PK2:

1. Set the RBW = 1 MHz.
2. Set the VBW ≥ 3 RBW
3. Set the span ≥ 1.5 x DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function,
9. Sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

Average Power

Connect the EUT to power meter, set the center frequency of the power meter to the channel center frequency.

TEST RESULTS

No non-compliance noted



IEEE 802.11b mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	16.65	30.00	PASS
Middle	2437	17.18	30.00	PASS
High	2462	17.27	30.00	PASS

NOTE : 1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	20.01	30.00	PASS
Middle	2437	20.50	30.00	PASS
High	2462	20.28	30.00	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.



IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total (dBm)	Peak Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2412	13.80	15.47	17.73	30.00	PASS
Middle	2437	12.80	14.98	17.04	30.00	PASS
High	2462	13.27	14.53	16.96	30.00	PASS

NOTE : 1. At final test to get the worst-case emission at 13Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total (dBm)	Peak Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2422	11.78	12.47	15.15	30.00	PASS
Middle	2437	10.28	10.70	13.51	30.00	PASS
High	2452	9.88	10.78	13.36	30.00	PASS

NOTE : 1. At final test to get the worst-case emission at 27Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.



Average Power Data

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	14.63
Middle	2437	15.03
High	2462	15.11

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	12.13
Middle	2437	12.33
High	2462	12.56

IEEE 802.11n HT20 mode



Channel	Channel Frequency (MHz)	Average Power (dBm)	Average Power (dBm)	Average Power (dBm)
		Chain 0	Chain 1	Total
Low	2412	7.21	6.49	9.88
Middle	2437	6.43	5.70	9.09
High	2462	5.83	5.10	8.49


IEEE 802.11n HT40 mode

Channel	Channel Frequency (MHz)	Average Power (dBm)	Average Power (dBm)	Average Power (dBm)
		Chain 0	Chain 1	Total
Low	2422	3.82	3.32	6.59
Middle	2437	2.34	2.67	5.52
High	2452	1.46	1.95	4.72





MAXIMUM PEAK OUTPUT POWER (802.11b MODE)

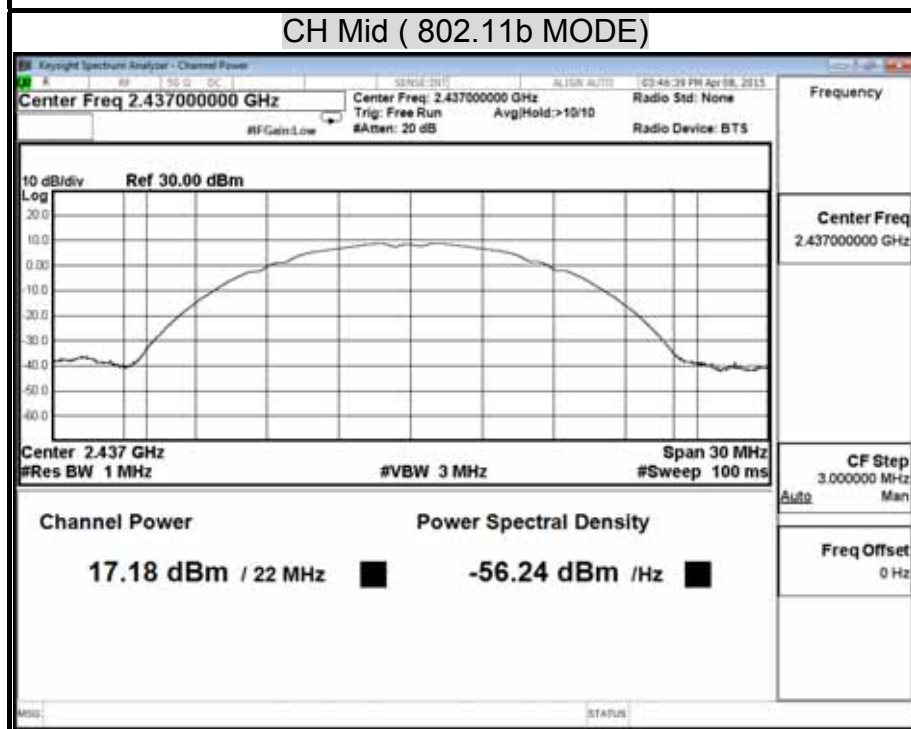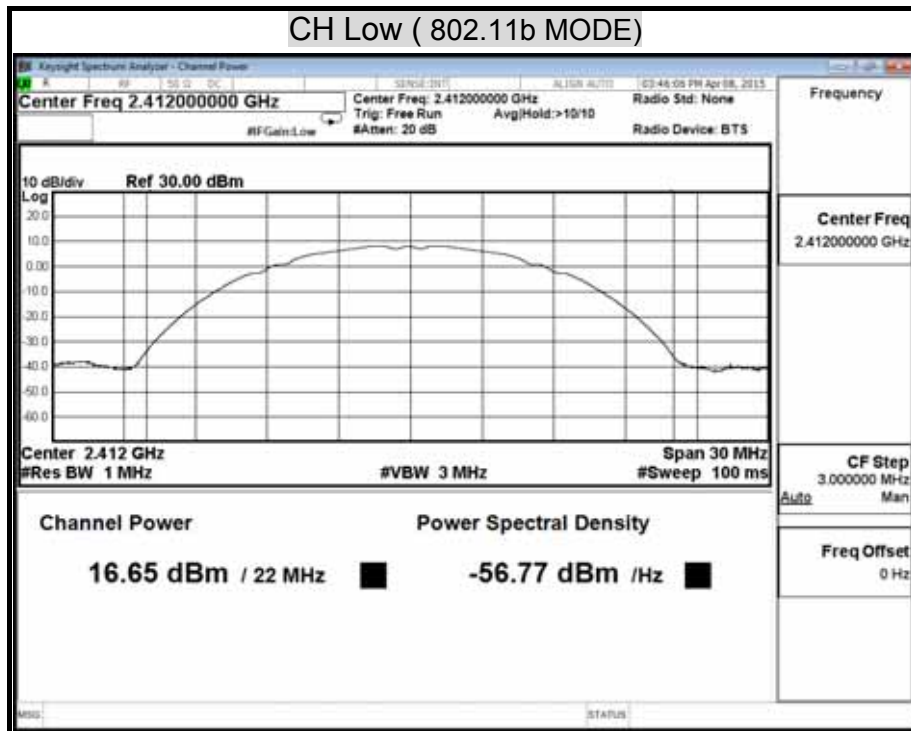


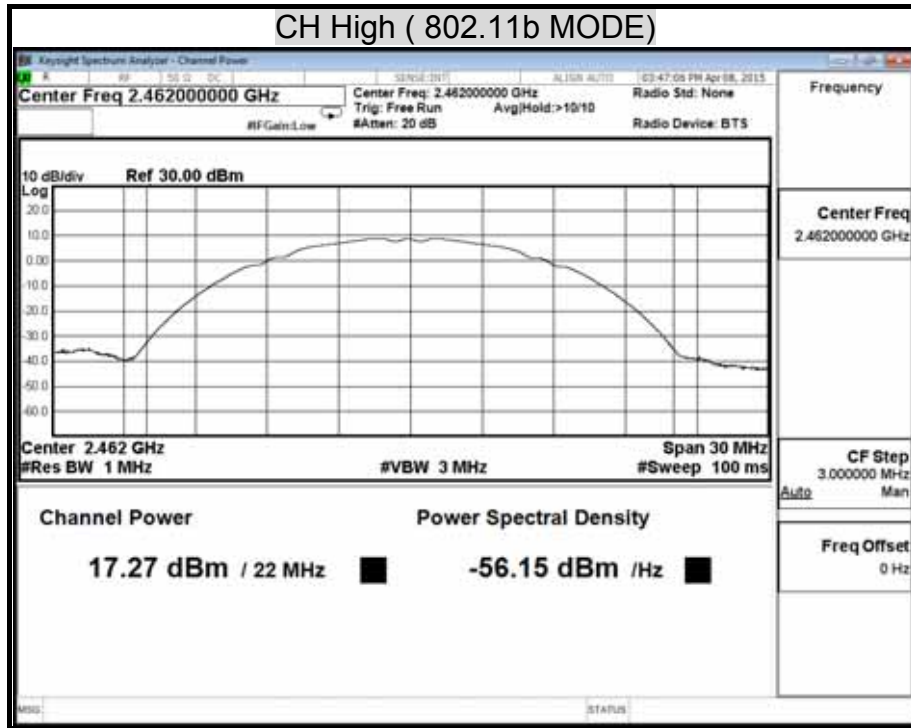





MAXIMUM PEAK OUTPUT POWER (802.11g MODE)

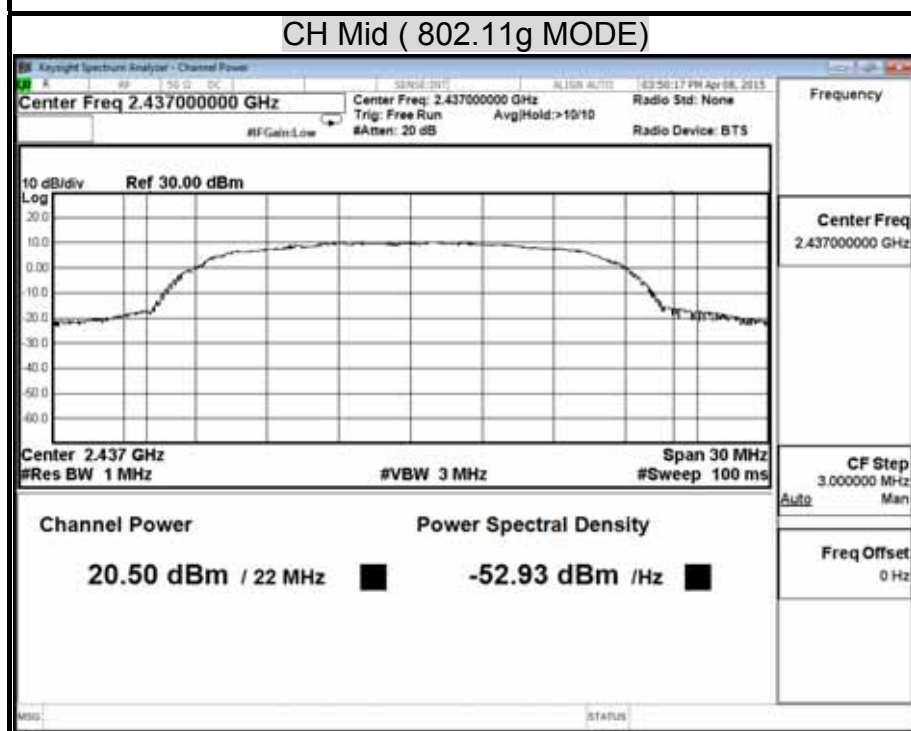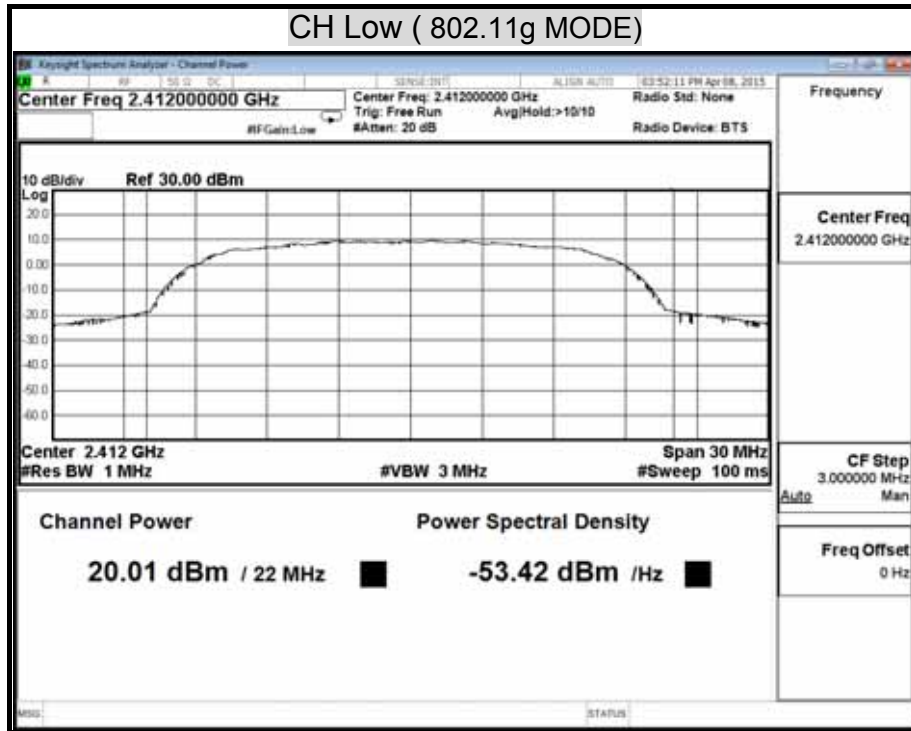


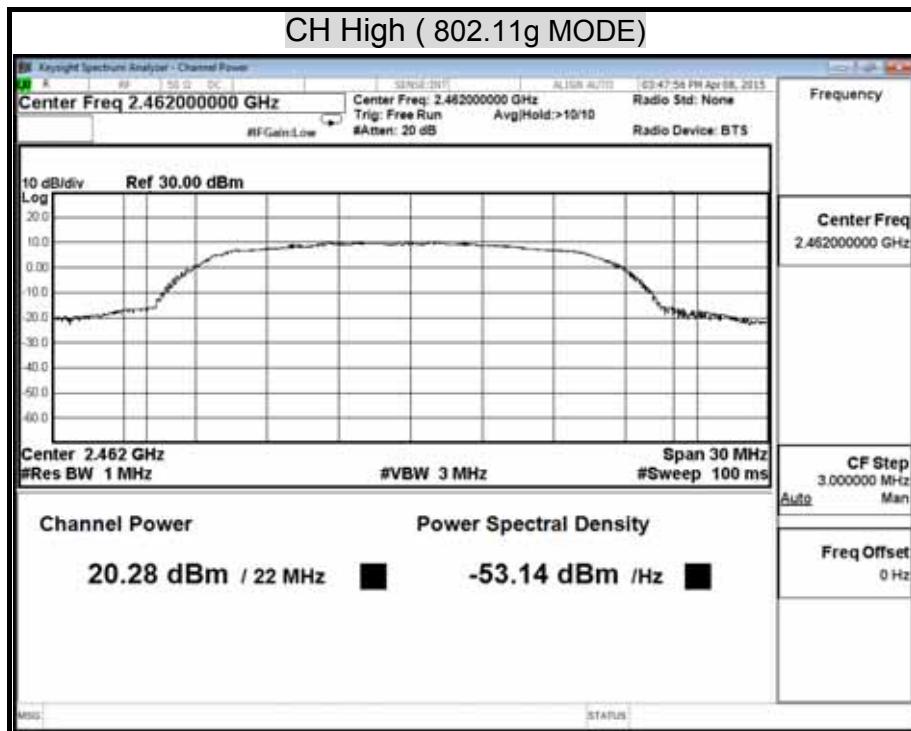





MAXIMUM PEAK OUTPUT POWER (802.11n HT20 MODE) Chain 0

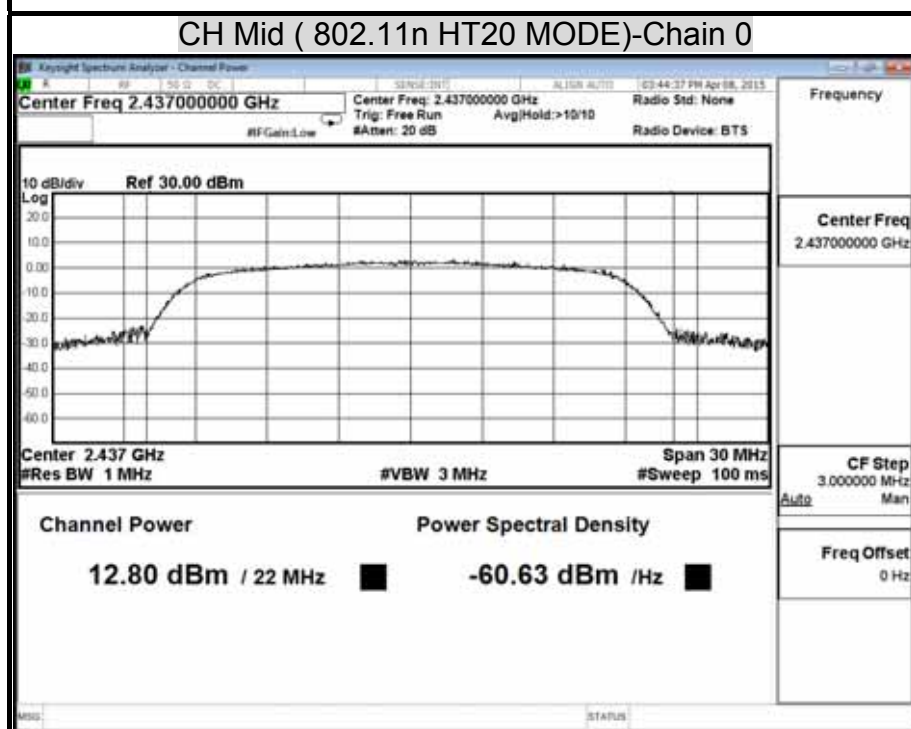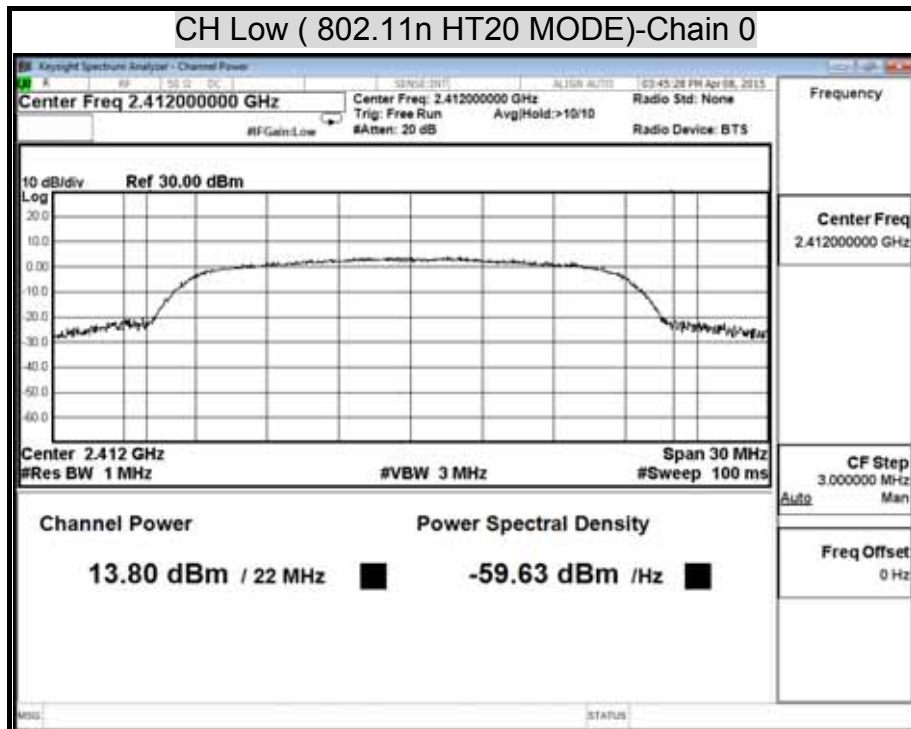


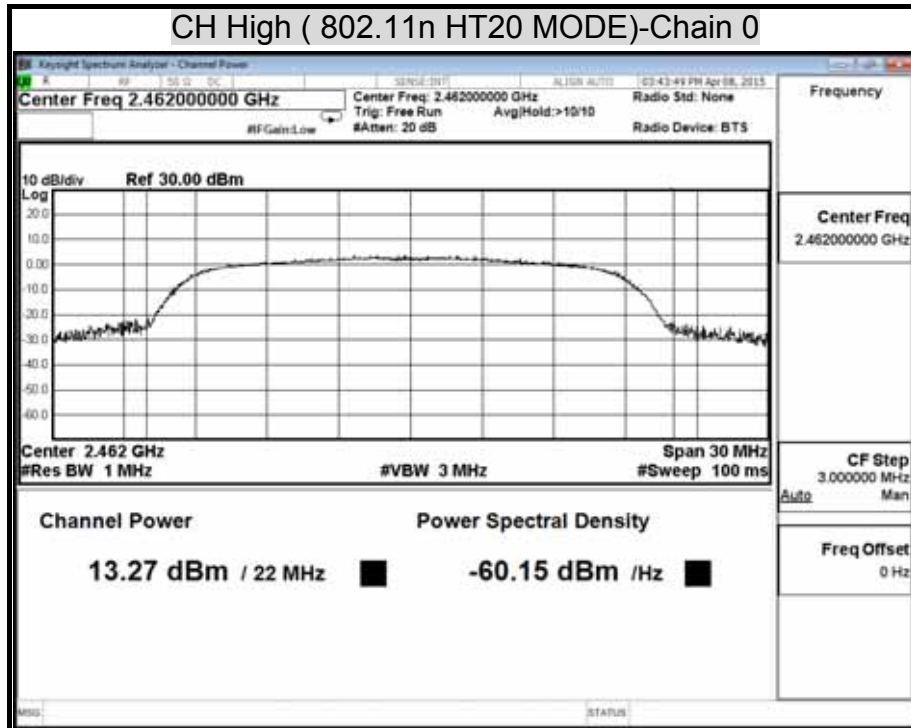





MAXIMUM PEAK OUTPUT POWER (802.11n HT20 MODE) Chain 1

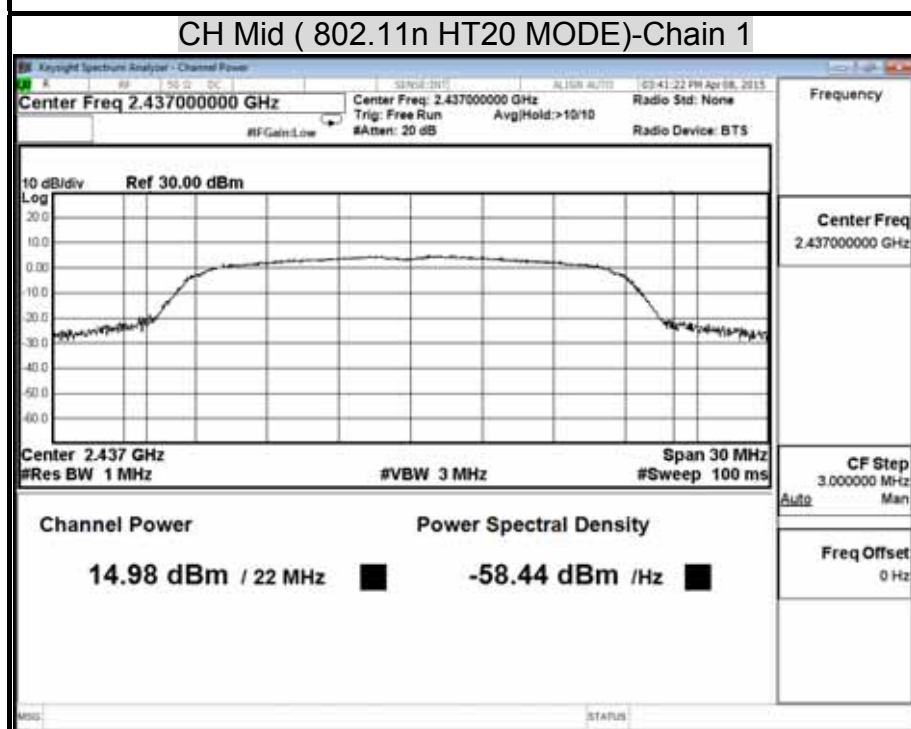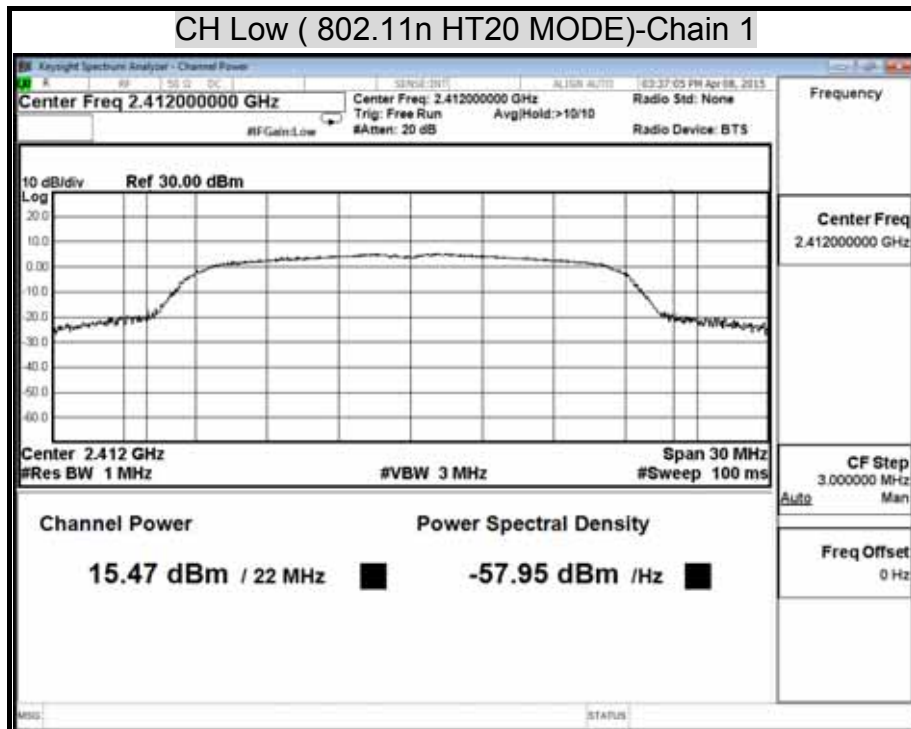


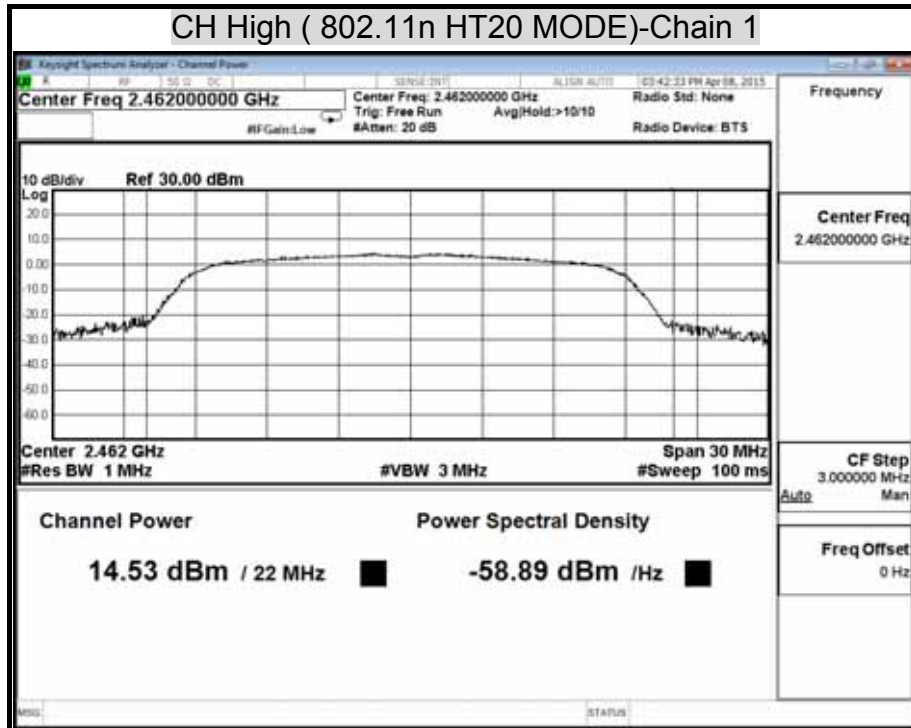





MAXIMUM PEAK OUTPUT POWER (802.11n HT40 MODE) Chain 0

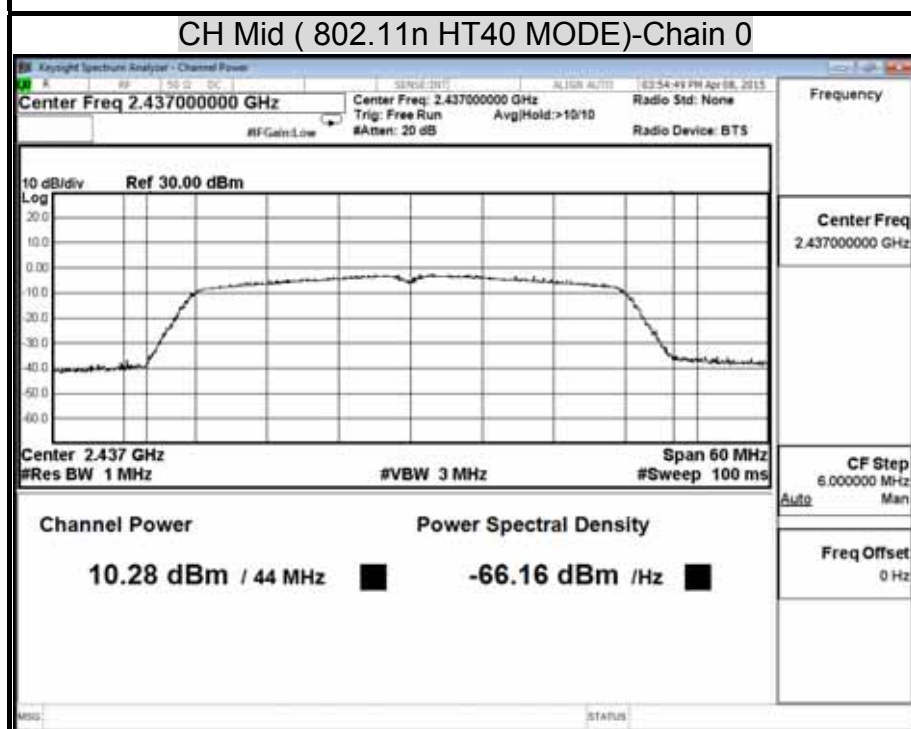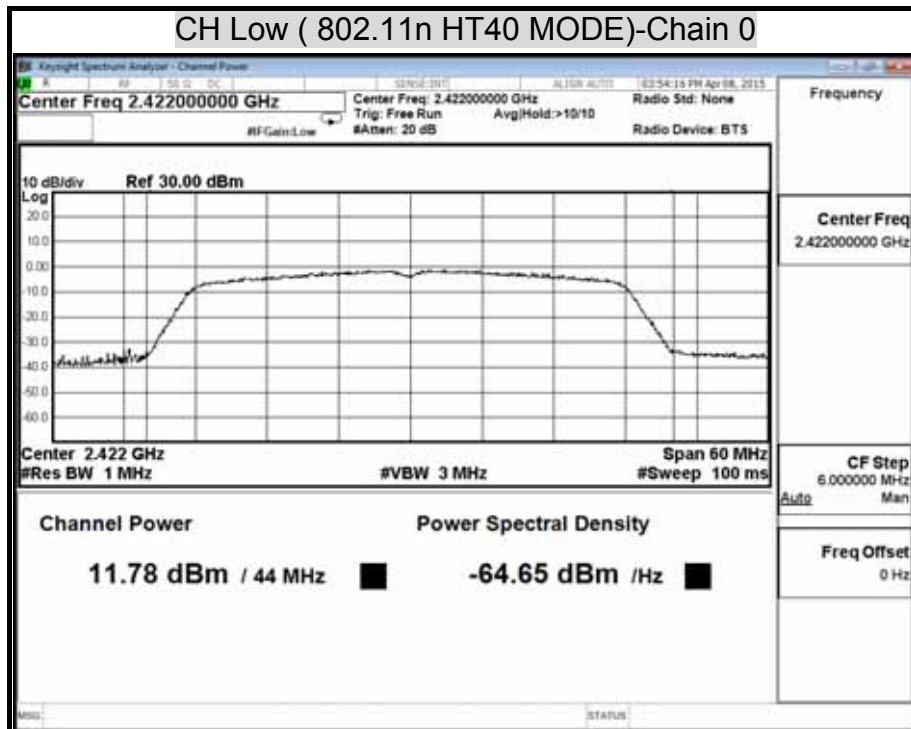


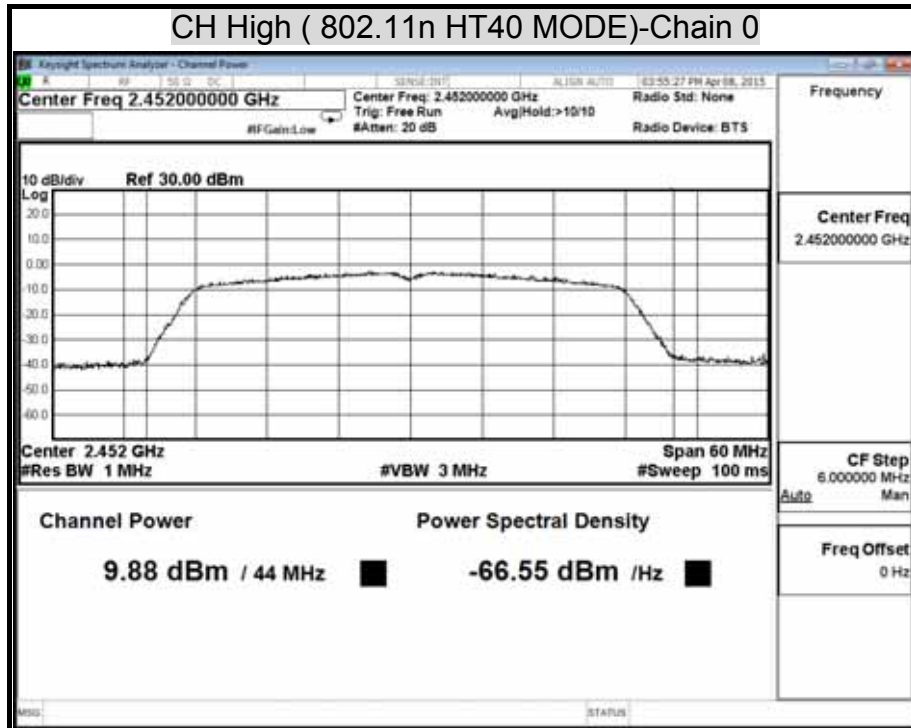



MAXIMUM PEAK OUTPUT POWER (802.11n HT40 MODE) Chain 1

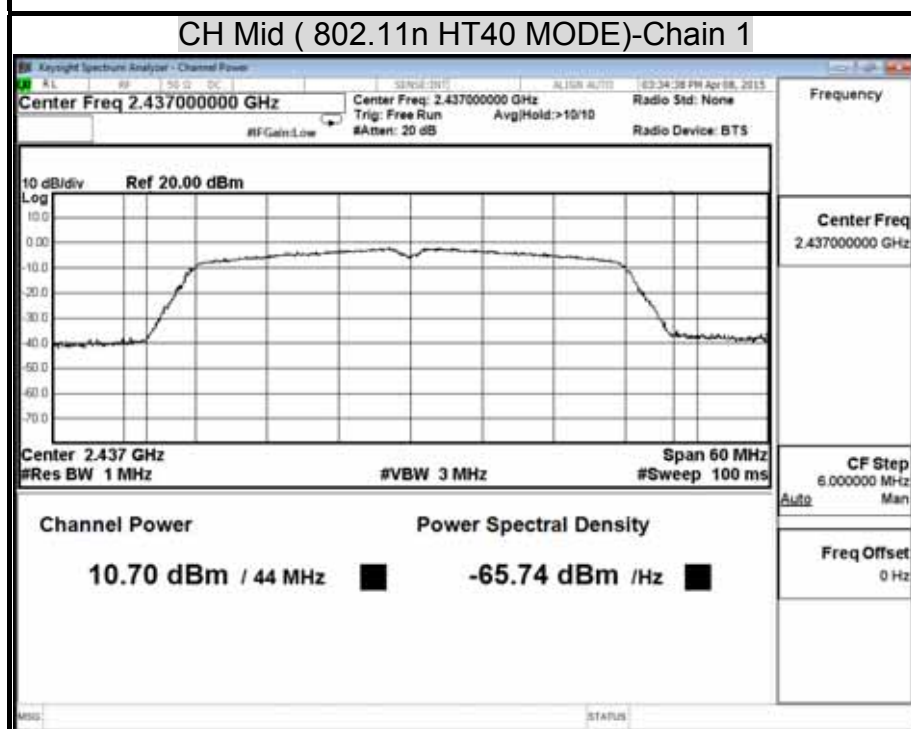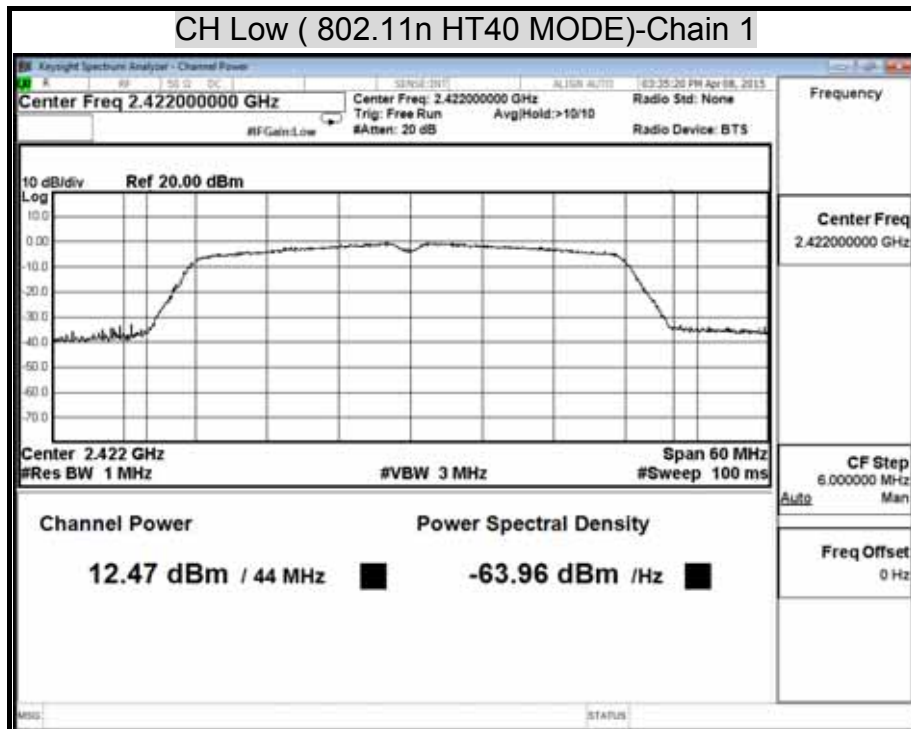

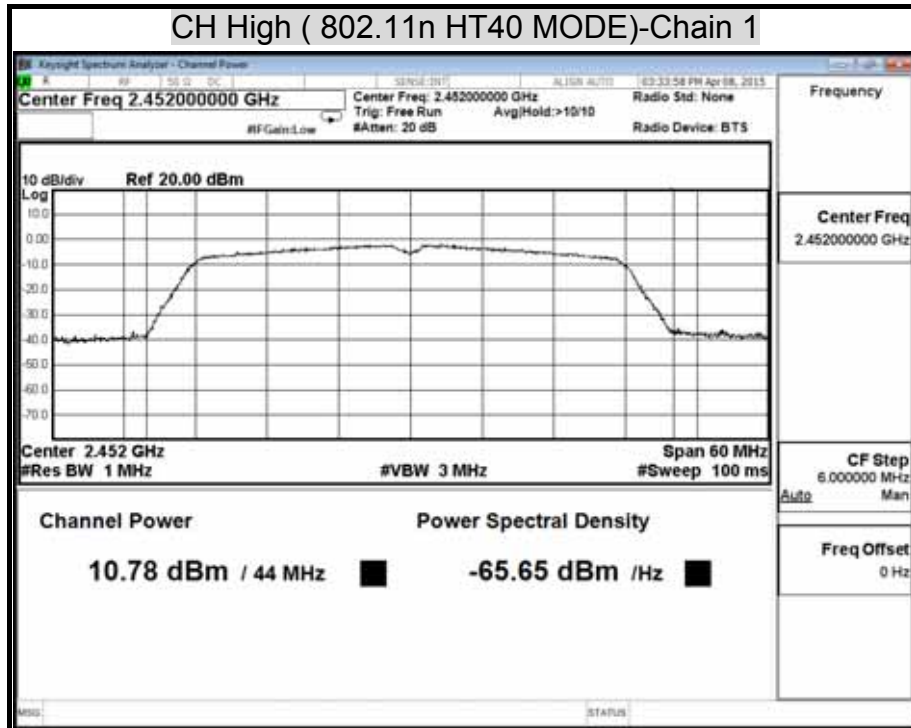



8.3 DUTY CYCLE

LIMIT


Nil (No dedicated limit specified in the Rules)

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	JAN. 23, 2016

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP

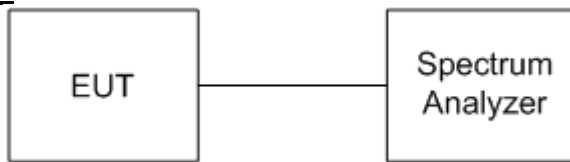

TEST PROCEDURE

- Place the EUT on the table and set it in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value. Set VBW \geq RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST RESULTS

No non-compliance noted.

TEST DATA

	us	Times	Ton	Total Ton time(ms)
Ton1	100000.000	1	100000.000	100.000
Ton2		0	0.000	
Ton3		0	0.000	
Tp				100.000



Ton	100.000
Tp(Ton+Toff)	100.000
Duty Cycle	1.000
Duty Factor	0.000


100 %



TEST PLOT



Duty Cycle (IEEE 802.11b MODE)

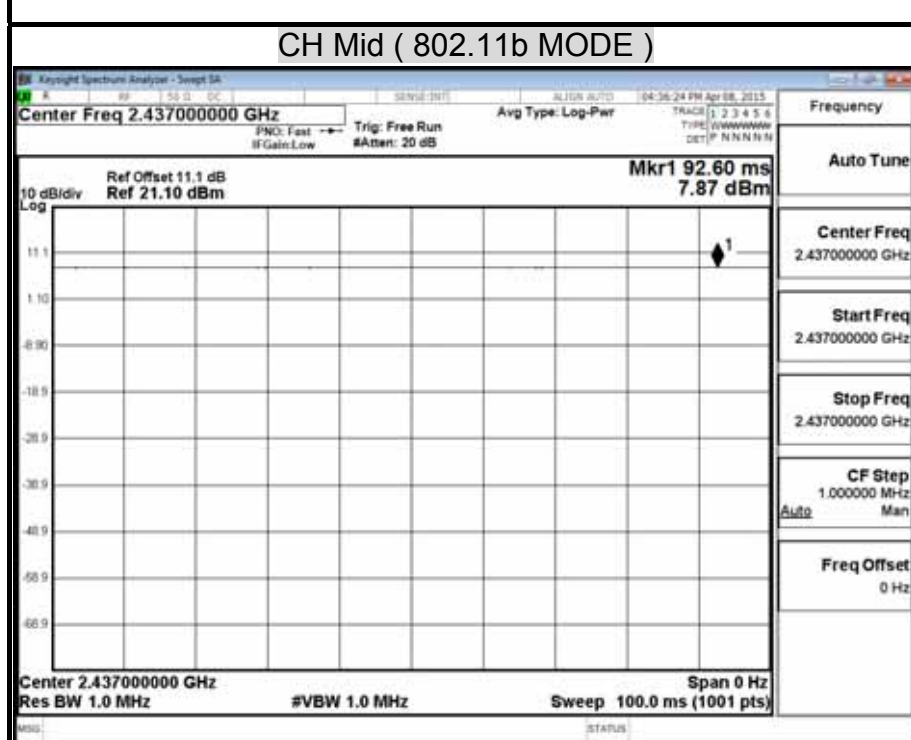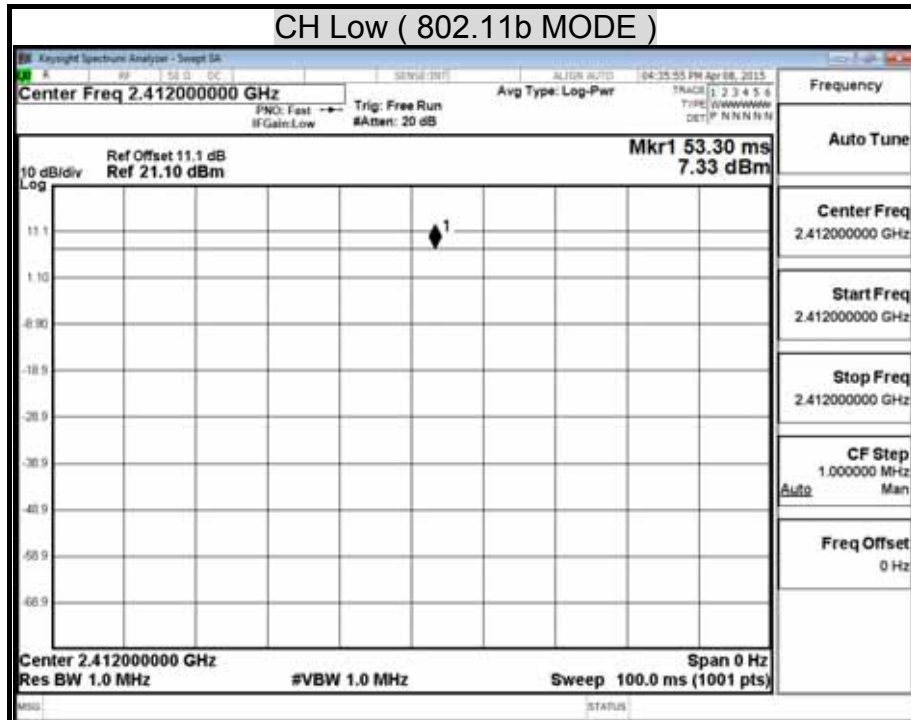


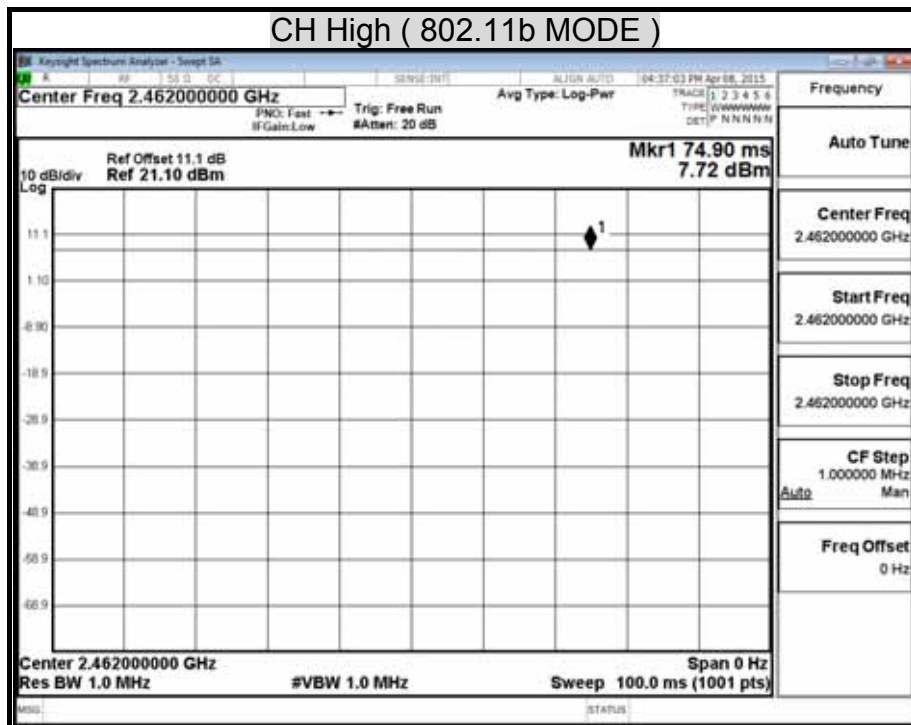





Duty Cycle (IEEE 802.11g MODE)

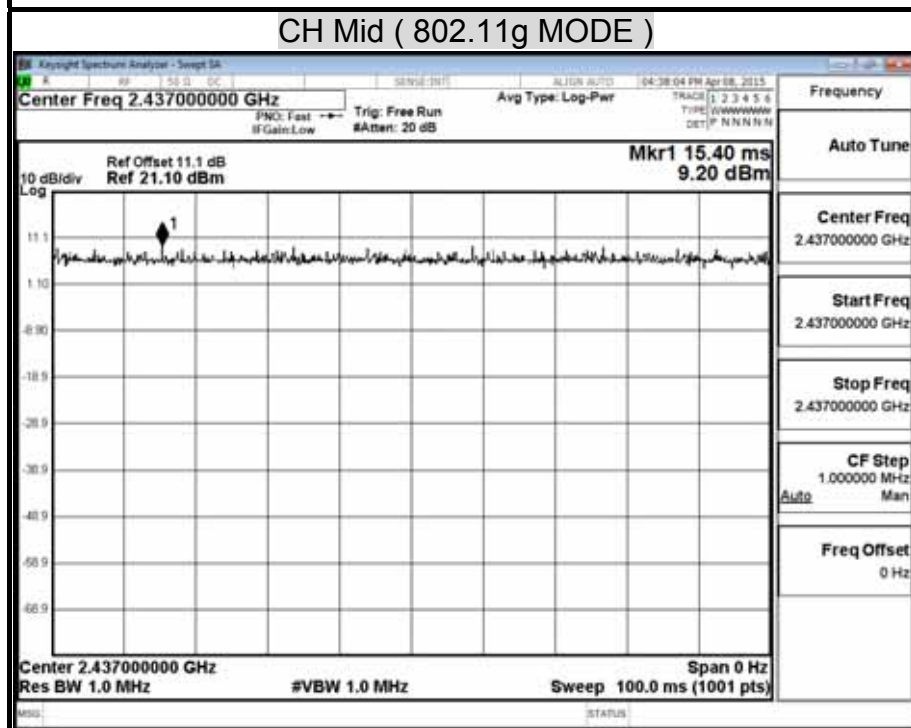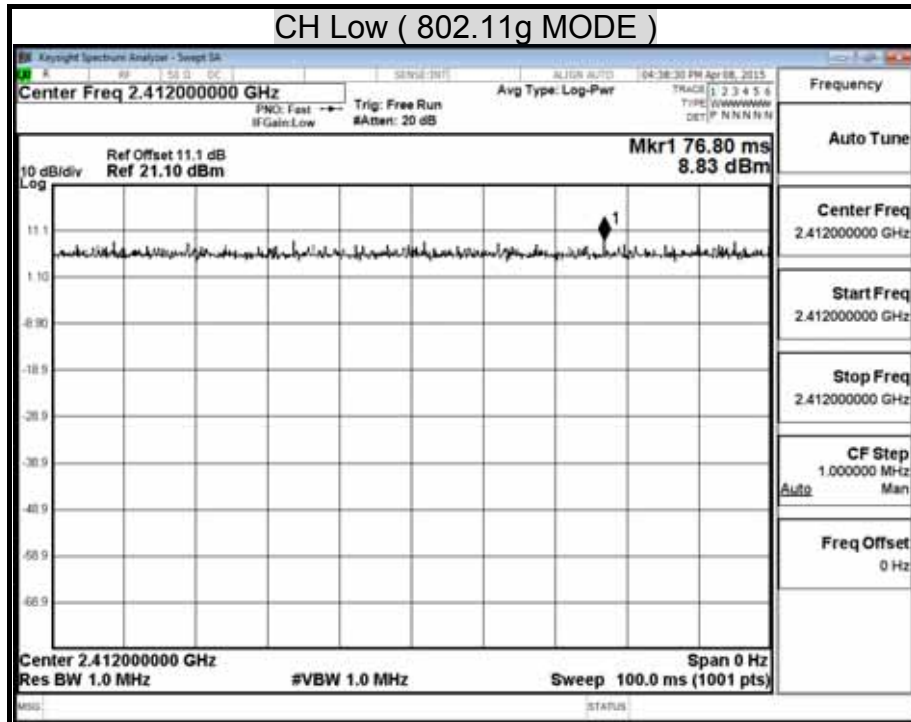

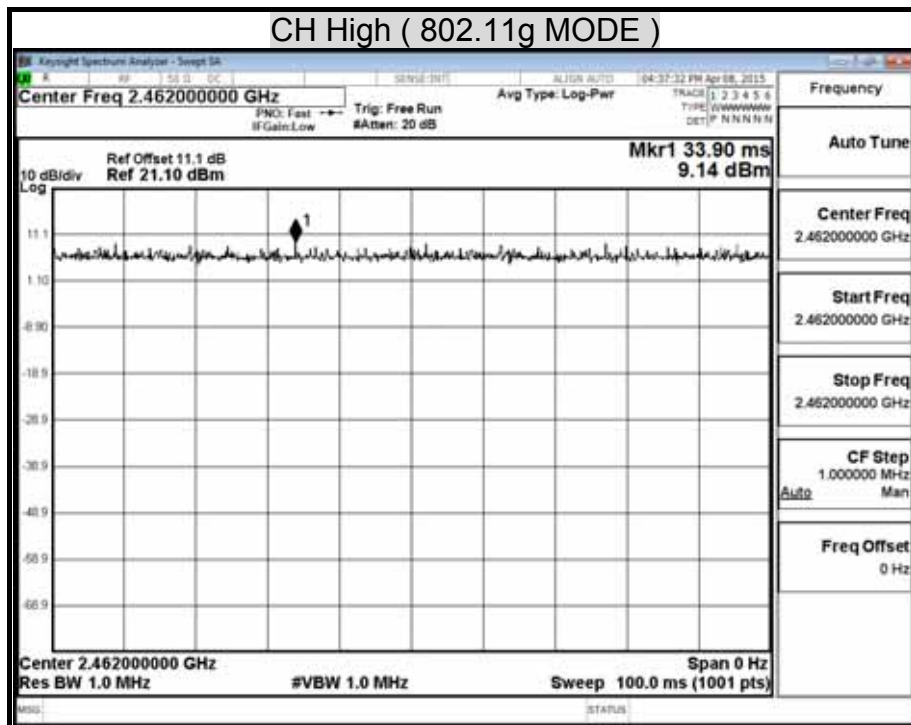




Duty Cycle (802.11n HT20 MODE)

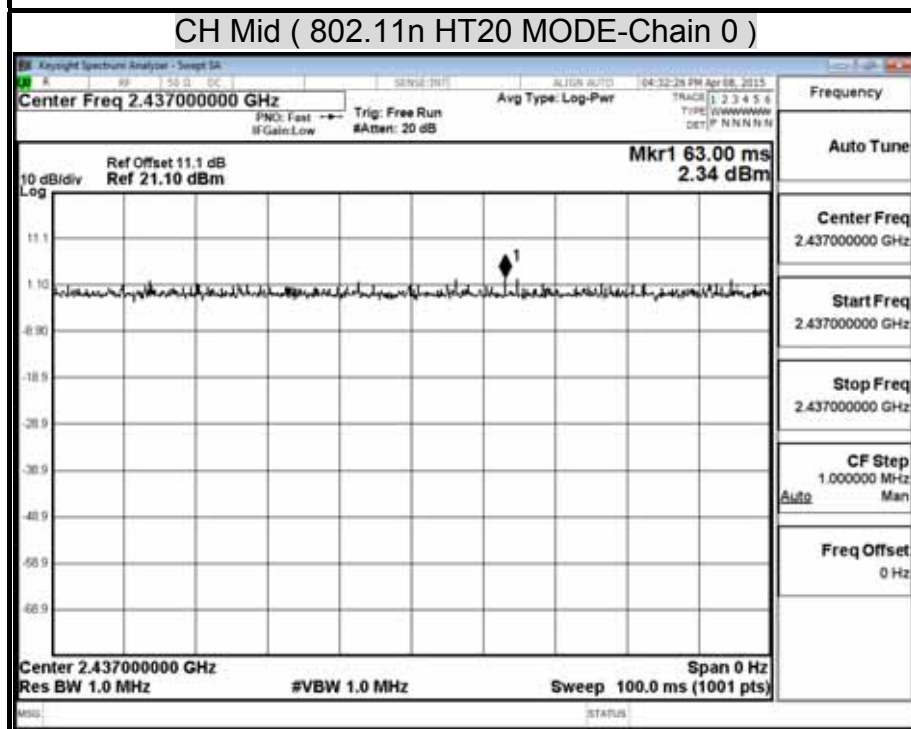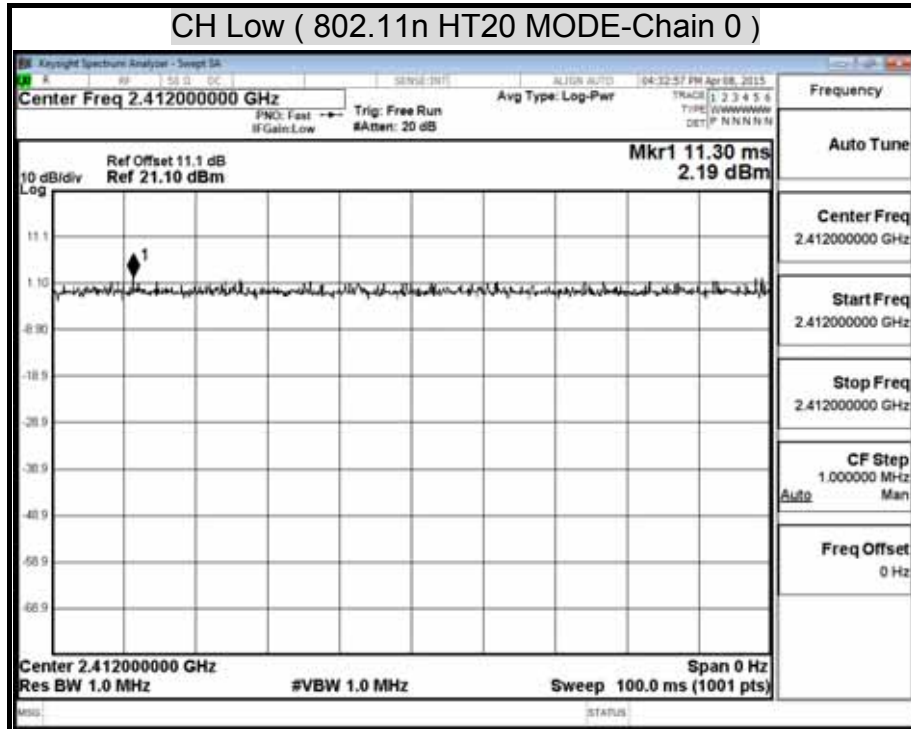





CH High (802.11n HT20 MODE-Chain 0)

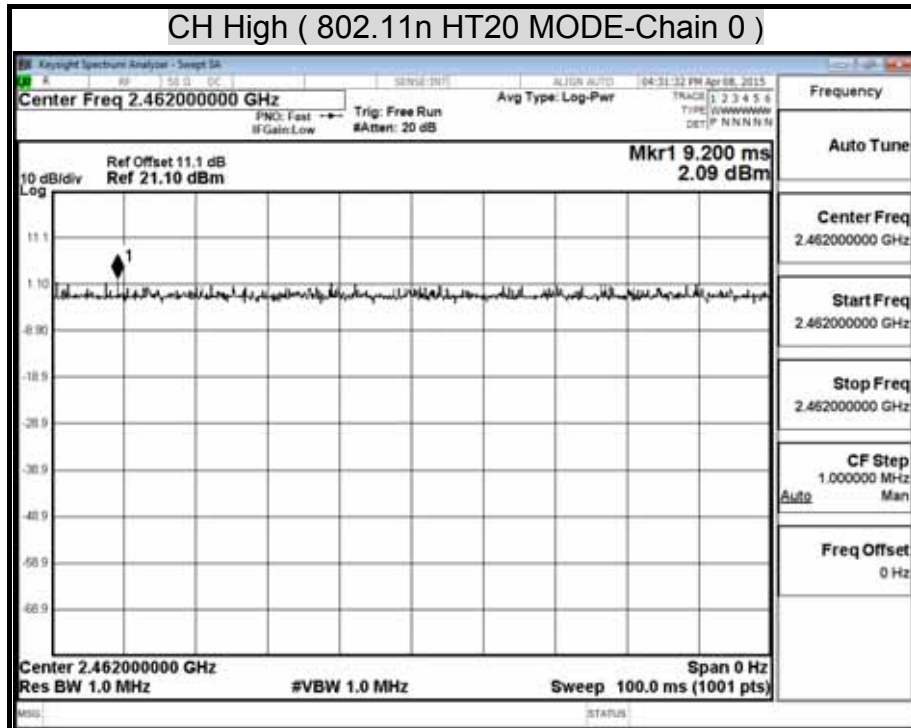




Duty Cycle (802.11n HT20 MODE)

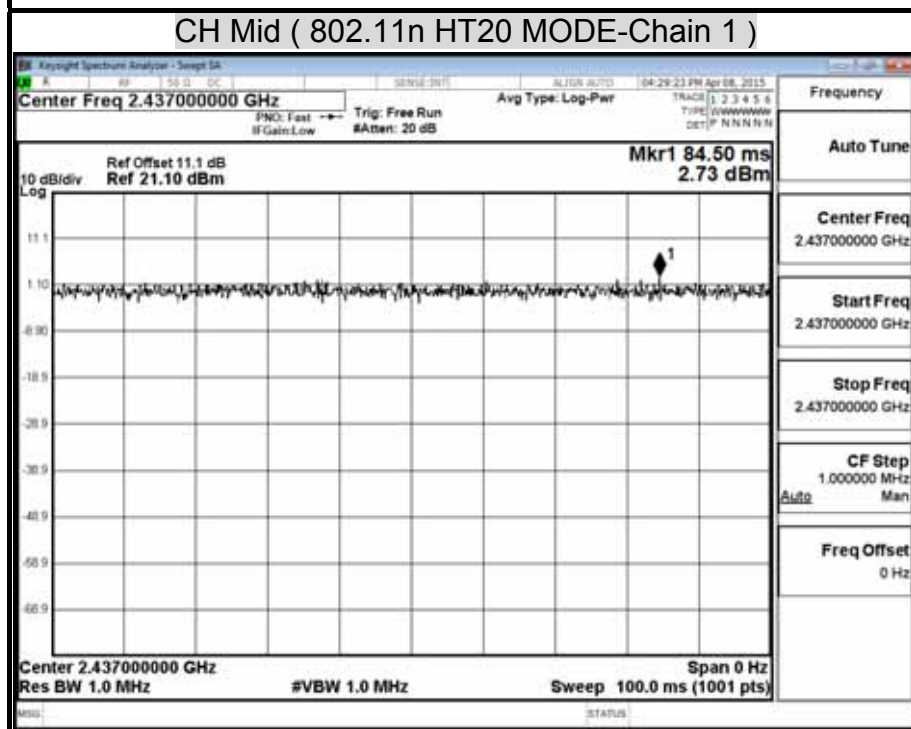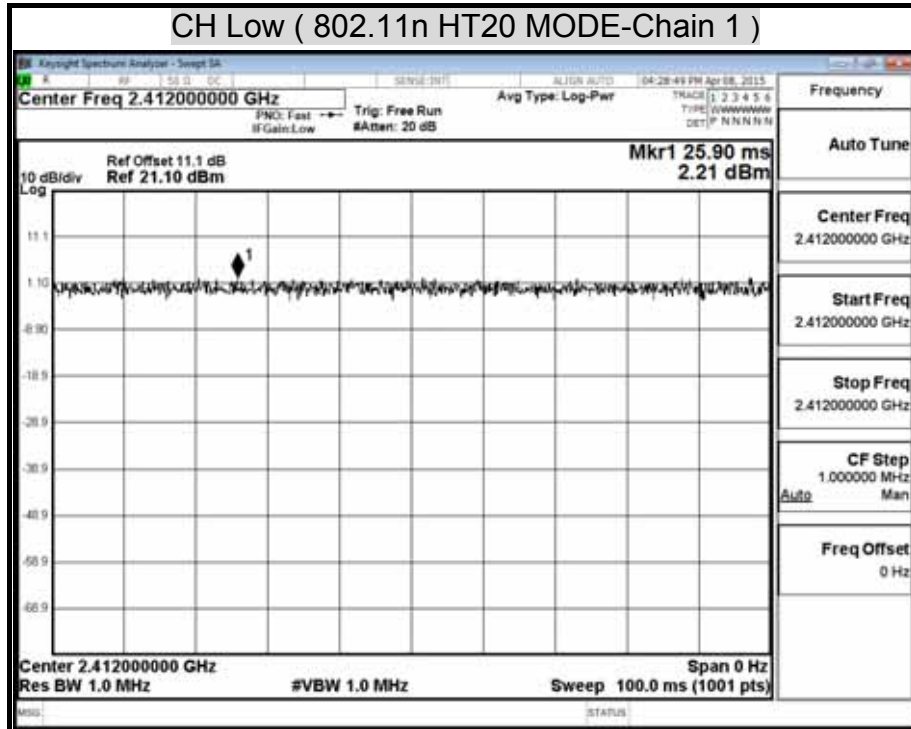





CH High (802.11n HT20 MODE-Chain 1)

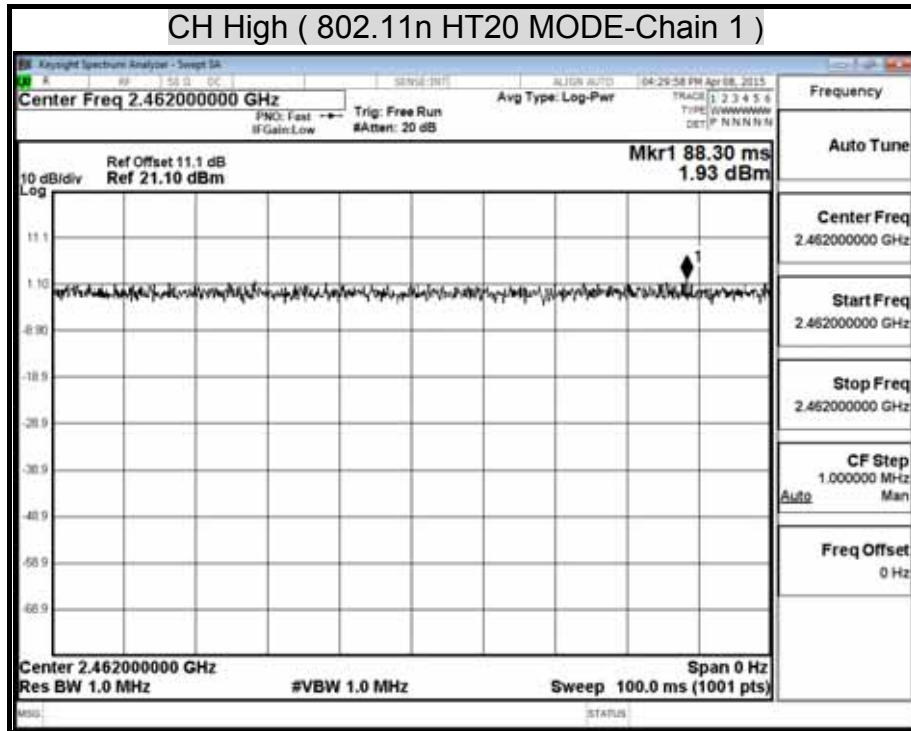




Duty Cycle (802.11n HT40 MODE)

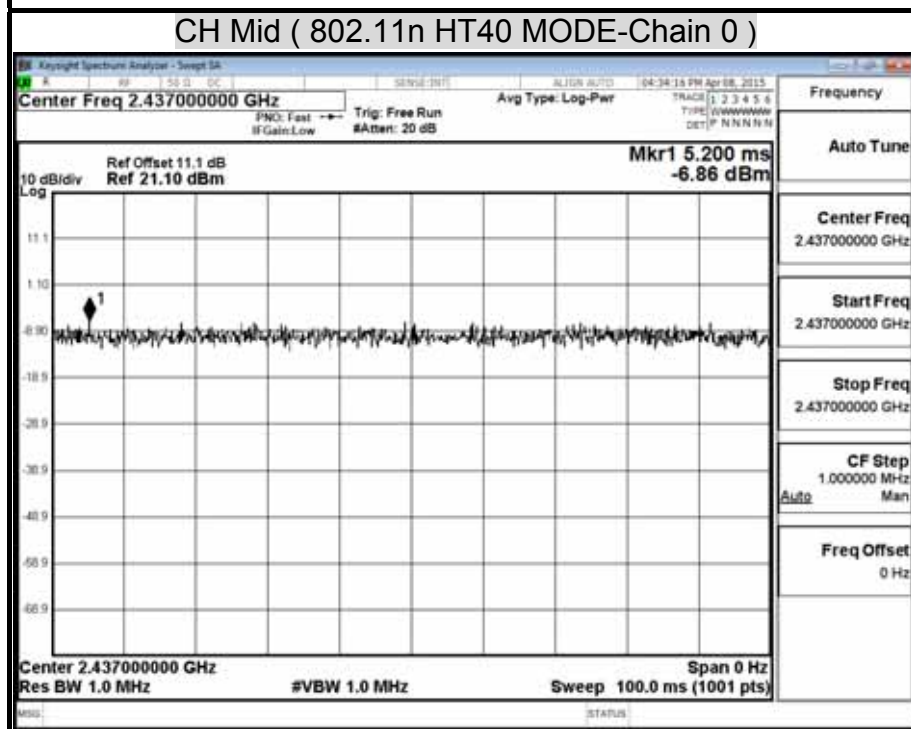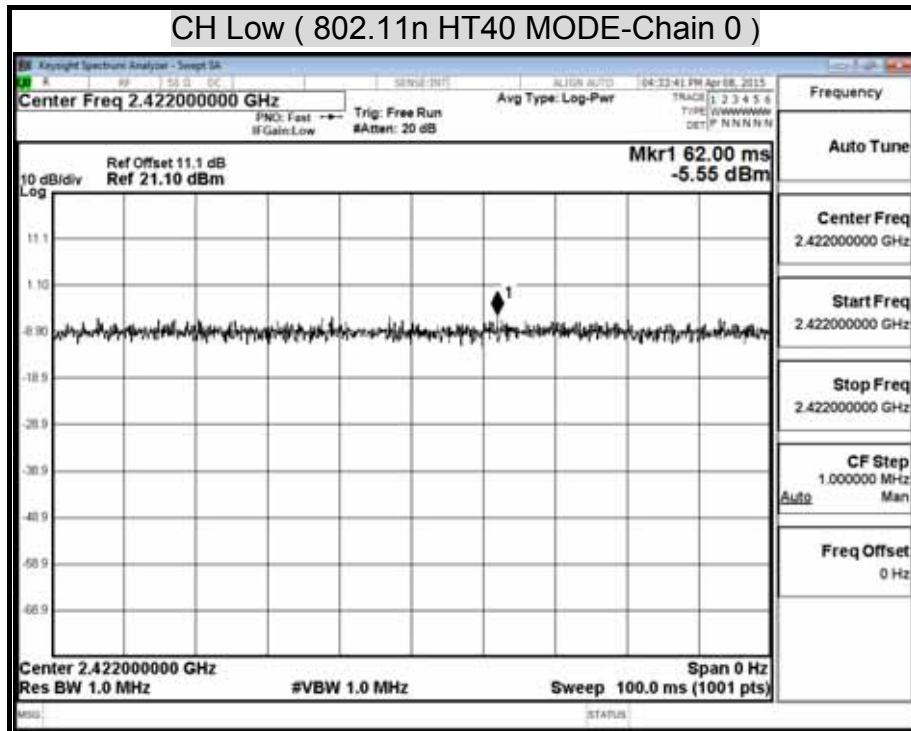




CH High (802.11n HT40 MODE-Chain 0)

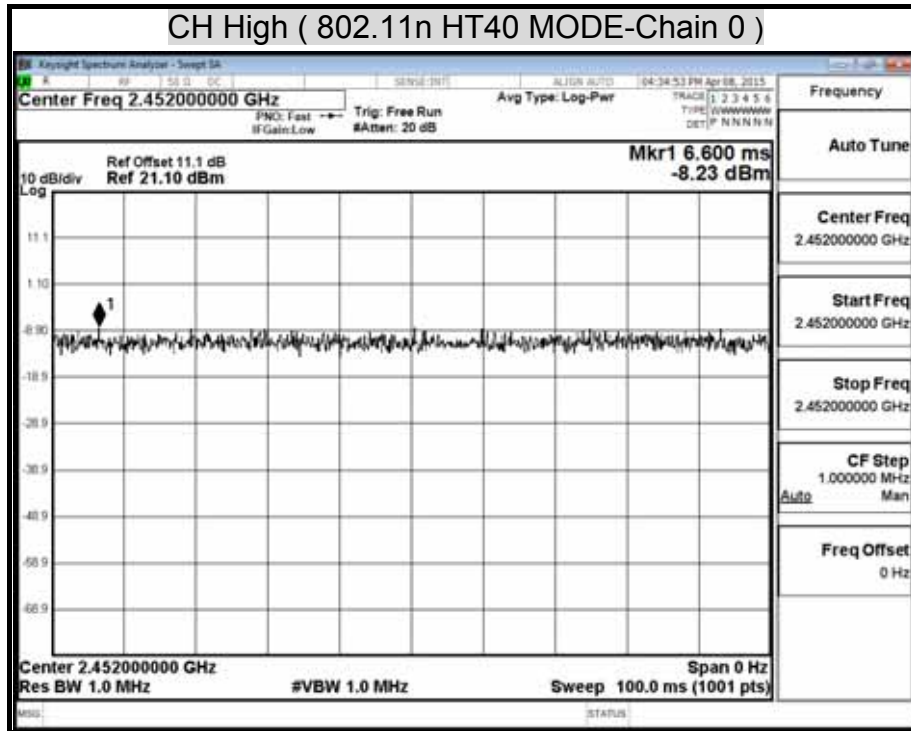





Duty Cycle (802.11n HT40 MODE)

CH Low (802.11n HT40 MODE-Chain 1)

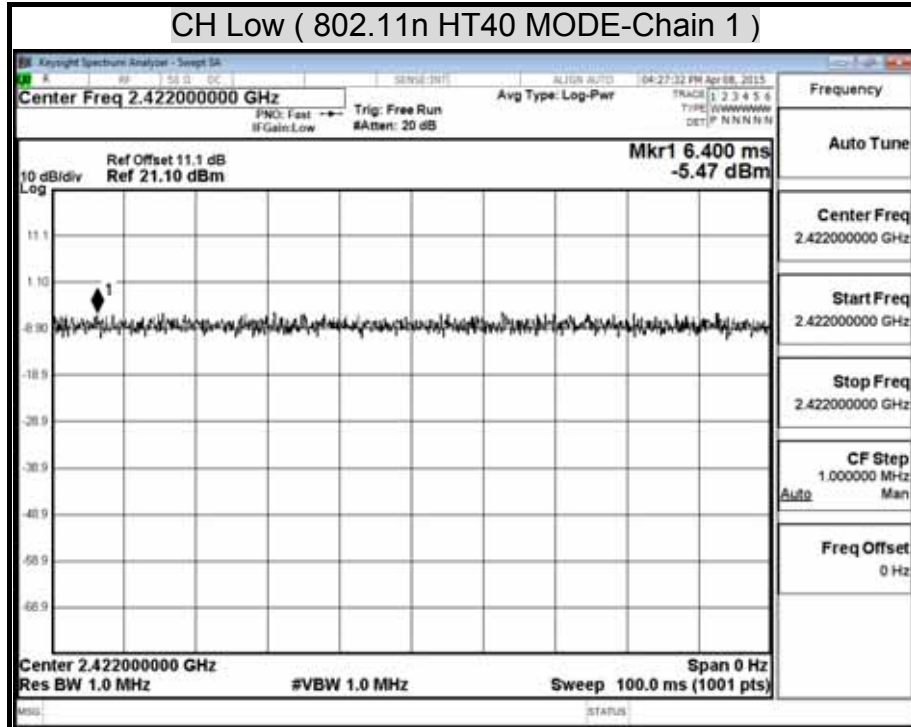

CH Mid (802.11n HT40 MODE-Chain 1)

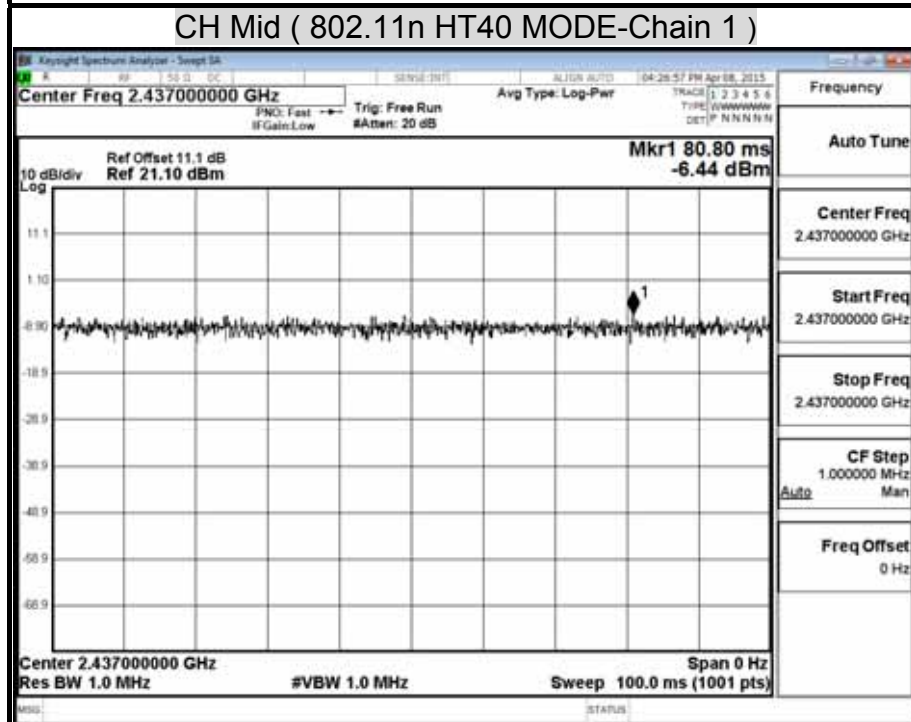

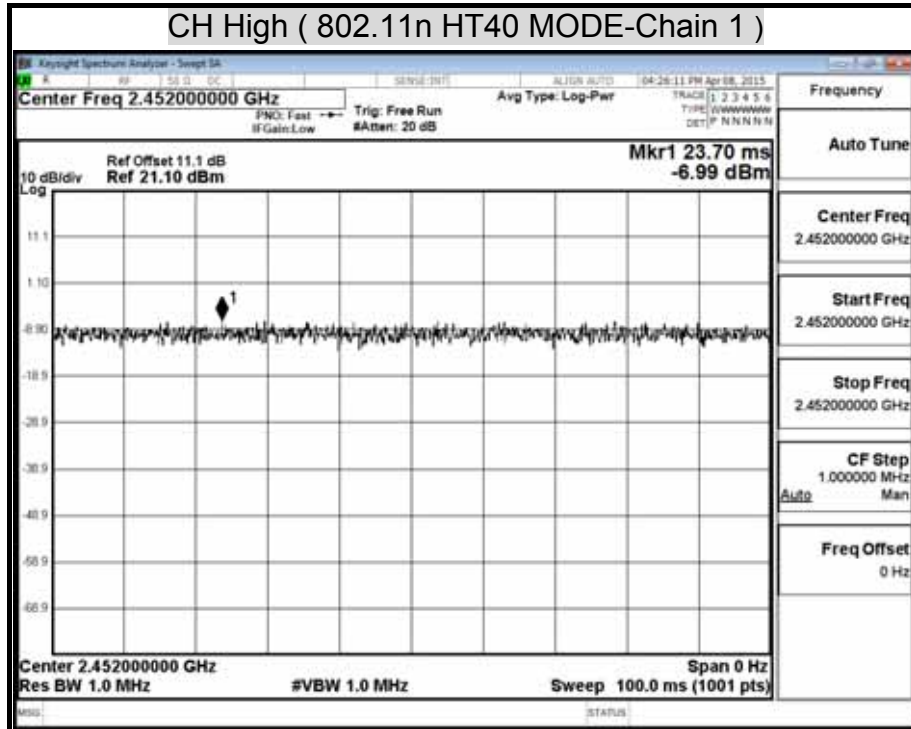



8.4 POWER SPECTRAL DENSITY


LIMIT

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	JAN. 23, 2016

TEST SETUP



TEST PROCEDURE

The tests were performed in accordance with KDB 558074 5.3.1.

5.3.1 Measurement Procedure PKPSD:

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the *DTS bandwidth*.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



TEST RESULTS

IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2412	4.87	8.00	-3.13	PASS
Middle	2437	5.73	8.00	-2.27	PASS
High	2462	5.87	8.00	-2.13	PASS

NOTE : 1. At final test to get the worst-case emission at 11Mbps long.
 2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2412	-1.32	8.00	-9.32	PASS
Middle	2437	-1.14	8.00	-9.14	PASS
High	2462	-1.18	8.00	-9.18	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps long.
 2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	PPSD Chain0 (dBm)	PPSD Chain1 (dBm)	PPSD Total (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2412	-6.56	-6.87	-3.70	8.00	-11.70	PASS
Middle	2437	-8.14	-7.23	-4.65	8.00	-12.65	PASS
High	2462	-8.26	-7.33	-4.76	8.00	-12.76	PASS

NOTE : 1. At final test to get the worst-case emission at 13Mbps long.
 2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.



IEEE 802.11n HT40 mode


Channel	Frequency (MHz)	PPSD Chain0 (dBm)	PPSD Chain1 (dBm)	PPSD Total (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2422	-13.61	-13.07	-10.32	8.00	-18.32	PASS
Middle	2437	-14.31	-13.67	-10.97	8.00	-18.97	PASS
High	2452	-15.93	-14.07	-11.89	8.00	-19.89	PASS

NOTE : 1. At final test to get the worst-case emission at 27Mbps long.
 2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.





POWER SPECTRAL DENSITY (IEEE 802.11b MODE)

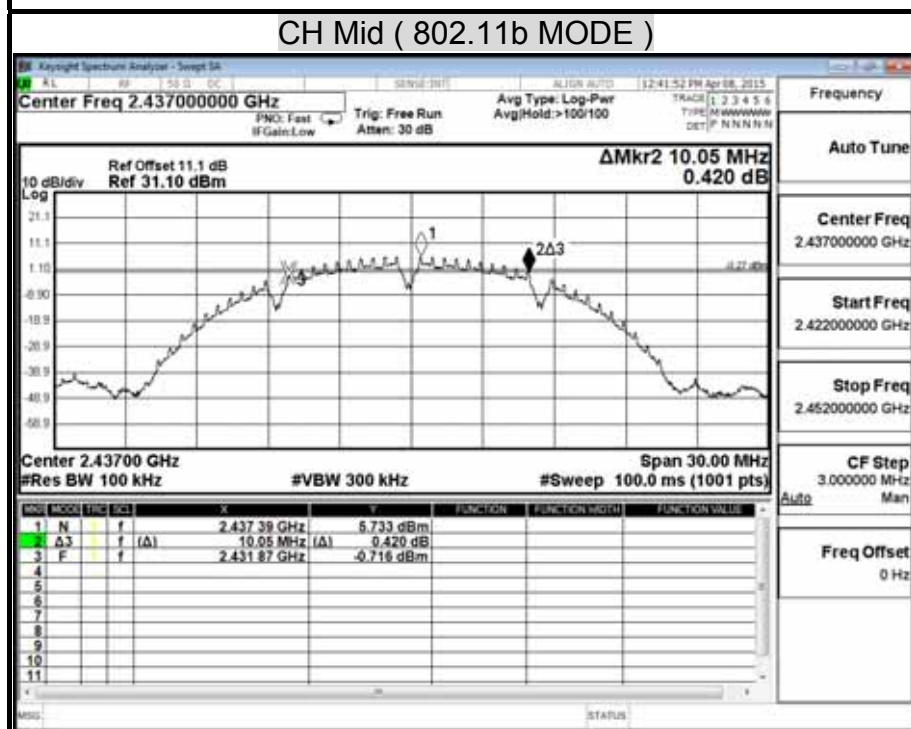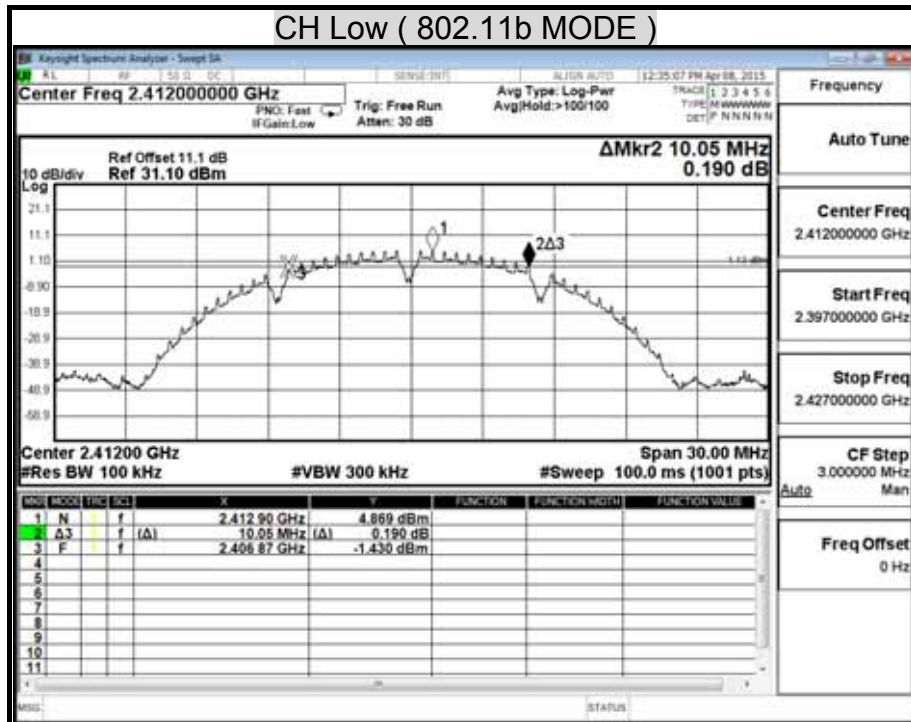


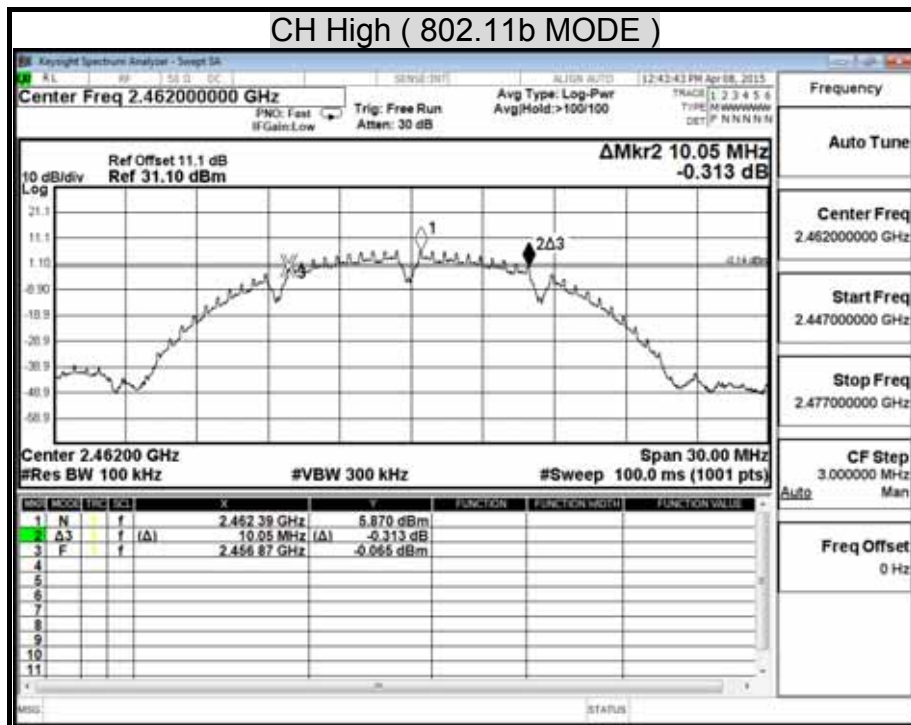



POWER SPECTRAL DENSITY (IEEE 802.11g MODE)

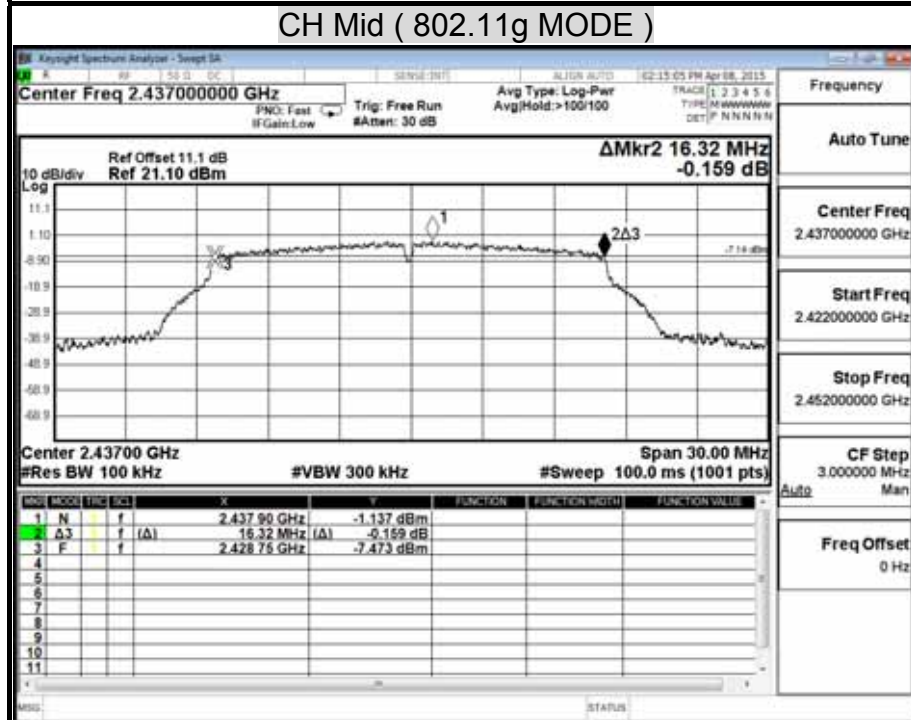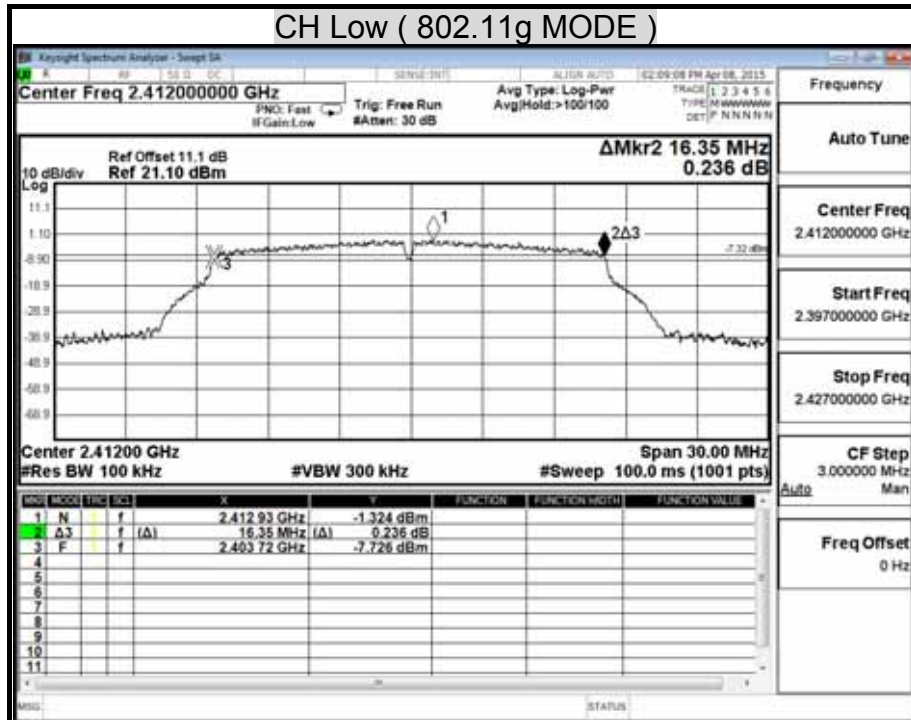


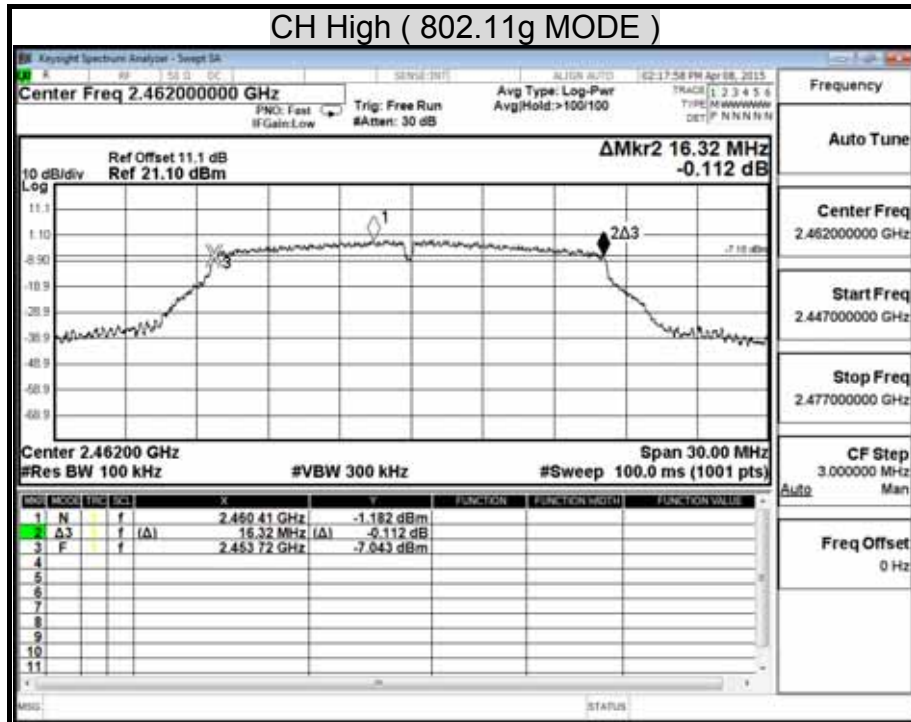




POWER SPECTRAL DENSITY (802.11n HT20 MODE)

CH Low (802.11n HT20 MODE-Chain 0)

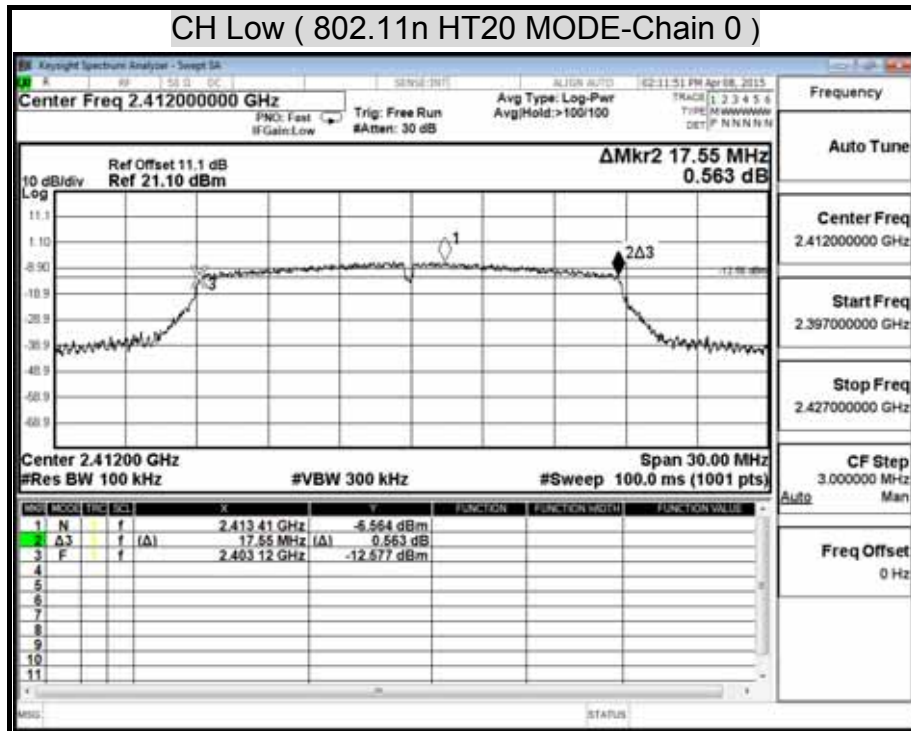


CH Mid (802.11n HT20 MODE-Chain 0)

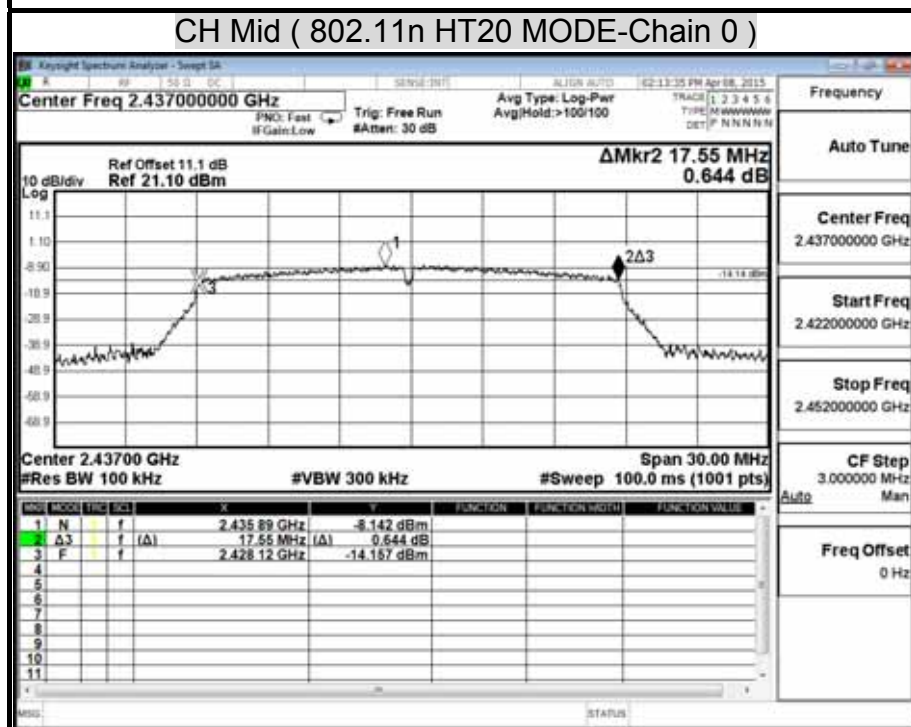




CH High (802.11n HT20 MODE-Chain 0)

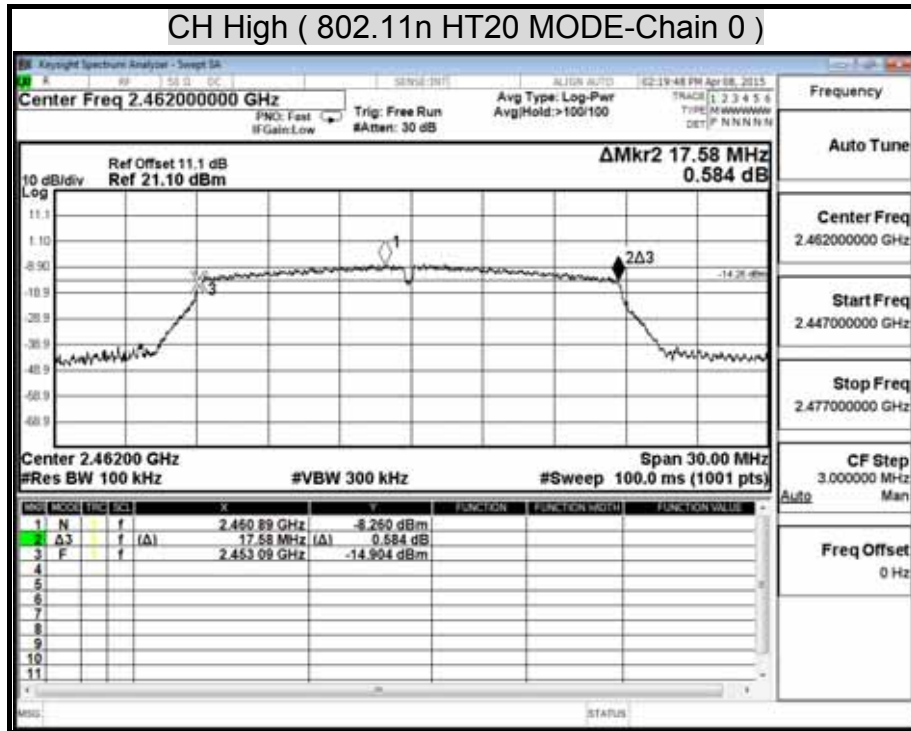




POWER SPECTRAL DENSITY (802.11n HT20 MODE)

CH Low (802.11n HT20 MODE-Chain 1)

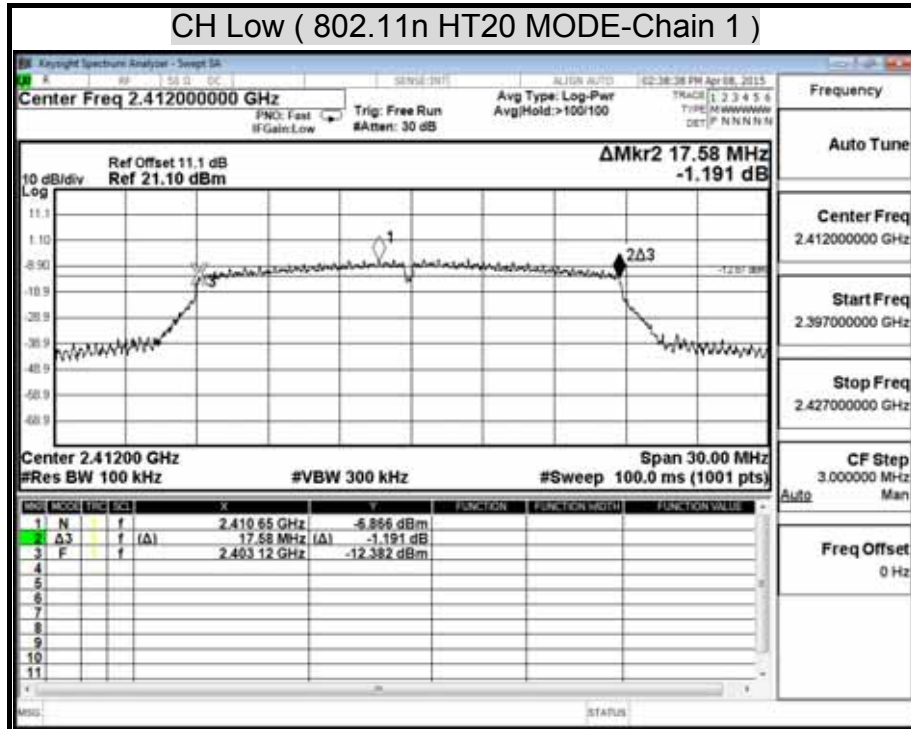


CH Mid (802.11n HT20 MODE-Chain 1)

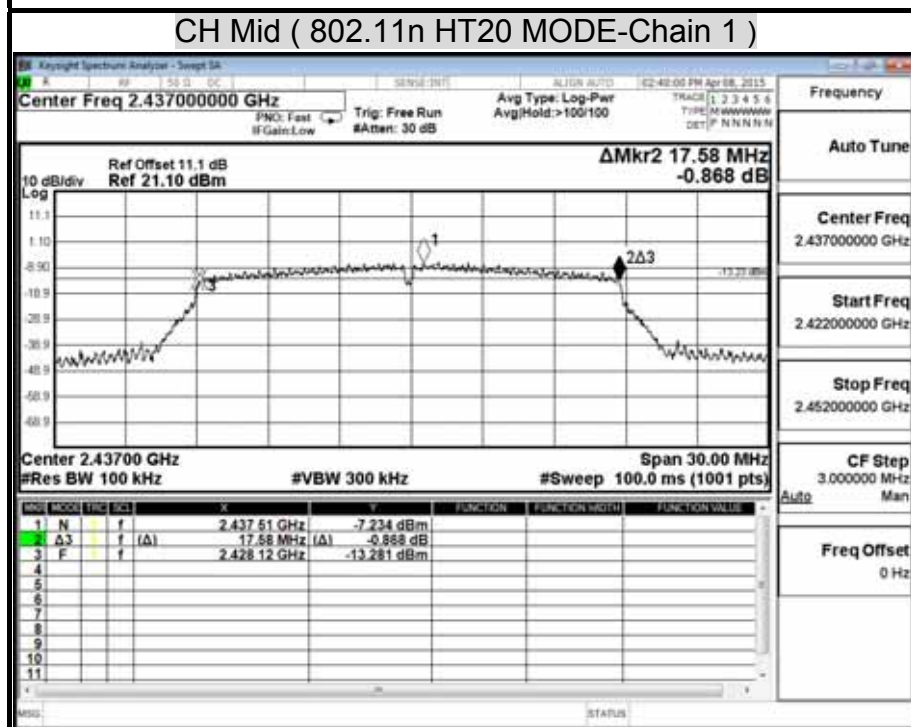




CH High (802.11n HT20 MODE-Chain 1)

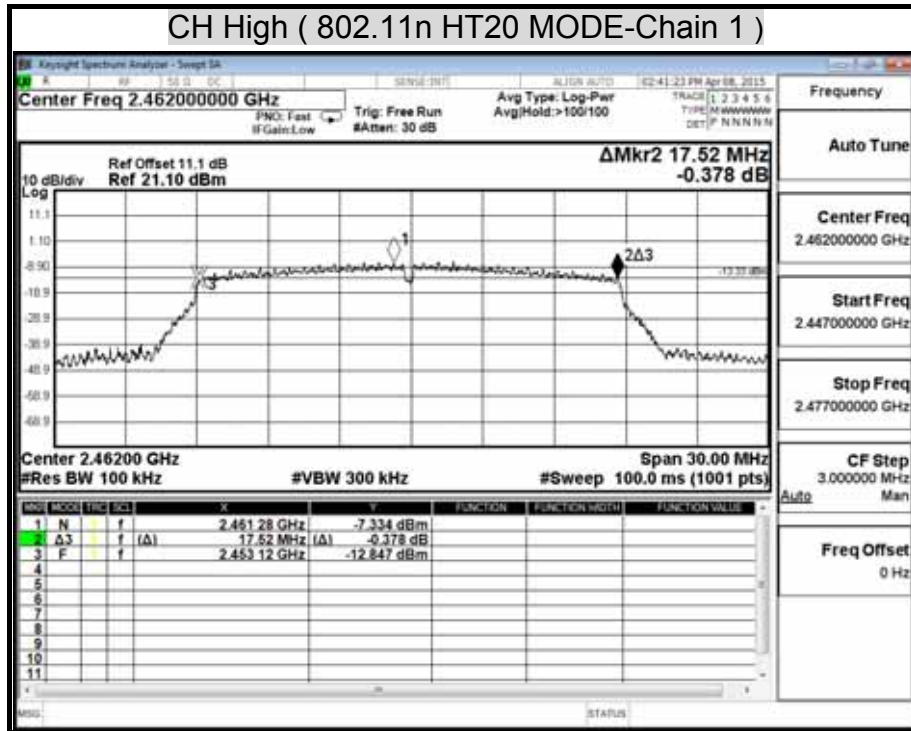




POWER SPECTRAL DENSITY (802.11n HT40 MODE)

CH Low (802.11n HT40 MODE-Chain 0)

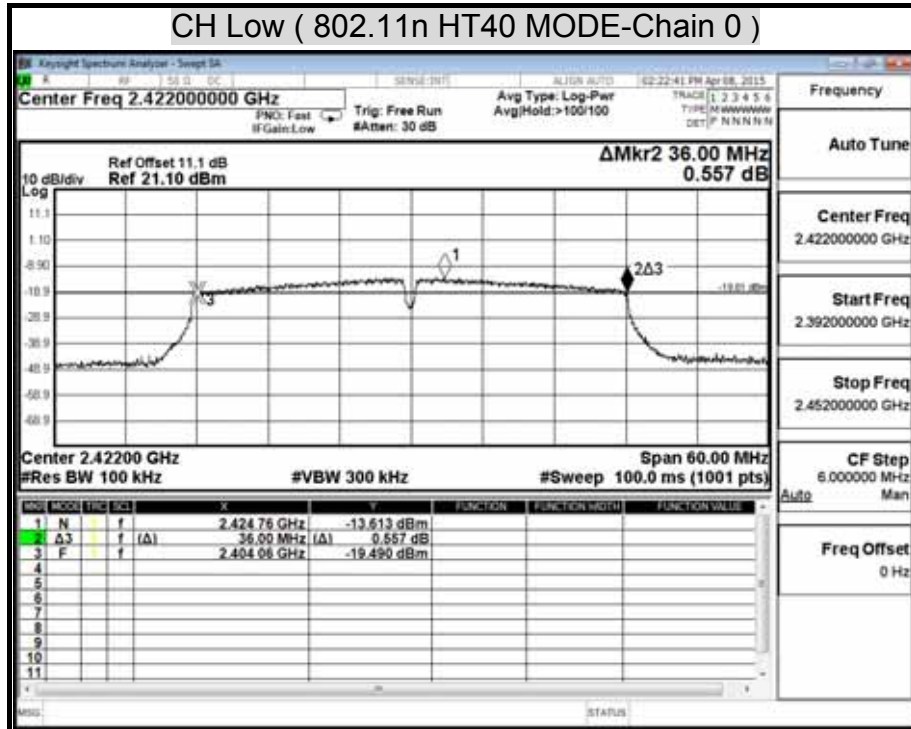


CH Mid (802.11n HT40 MODE-Chain 0)

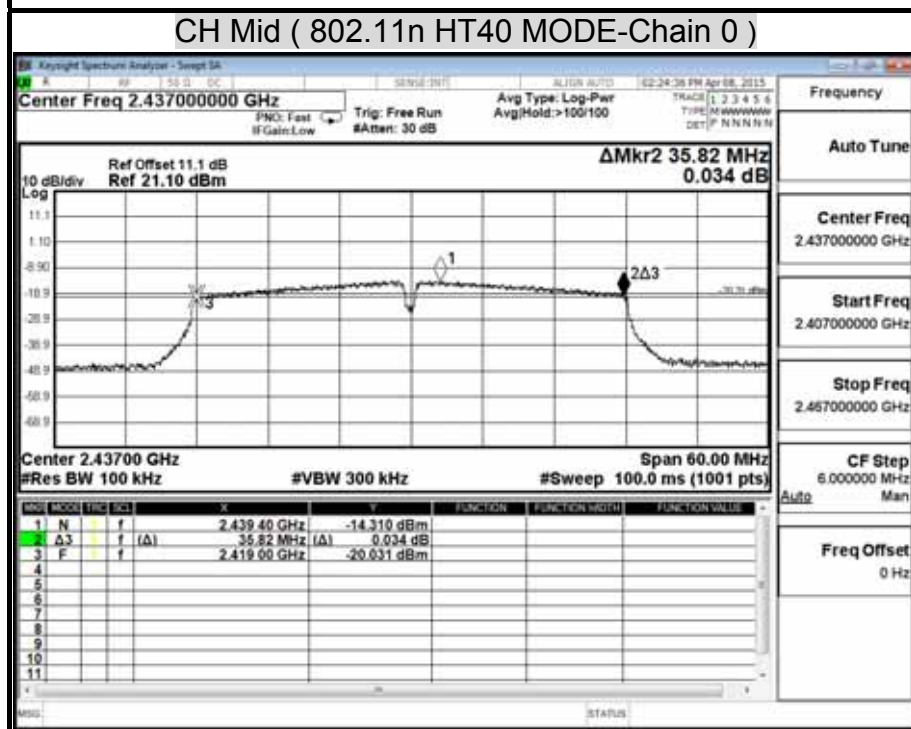




CH High (802.11n HT40 MODE-Chain 0)

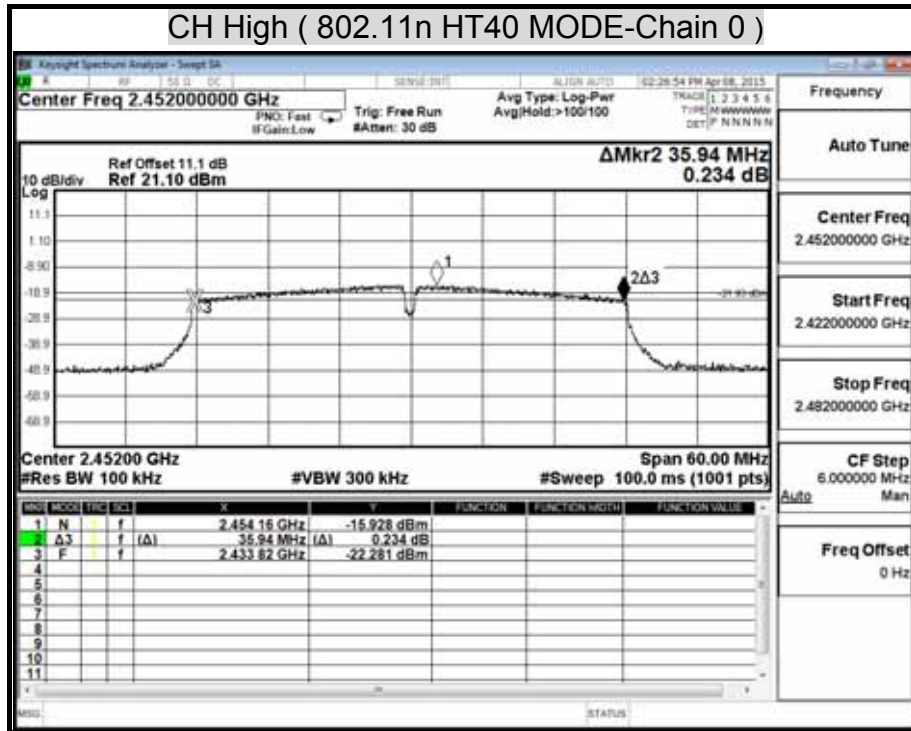





POWER SPECTRAL DENSITY (802.11n HT40 MODE)

CH Low (802.11n HT40 MODE-Chain 1)

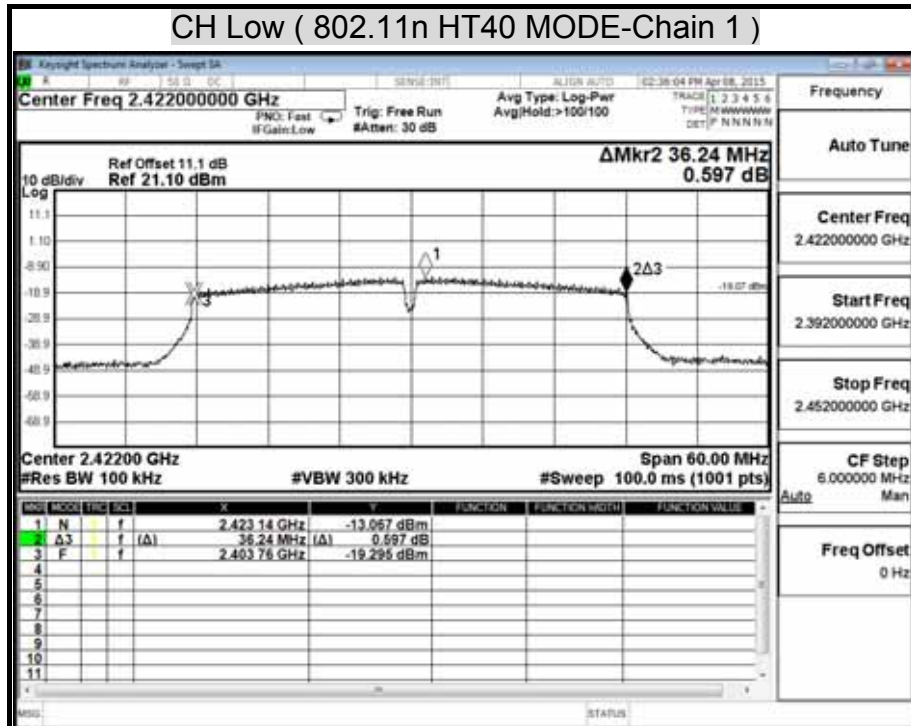

CH Mid (802.11n HT40 MODE-Chain 1)

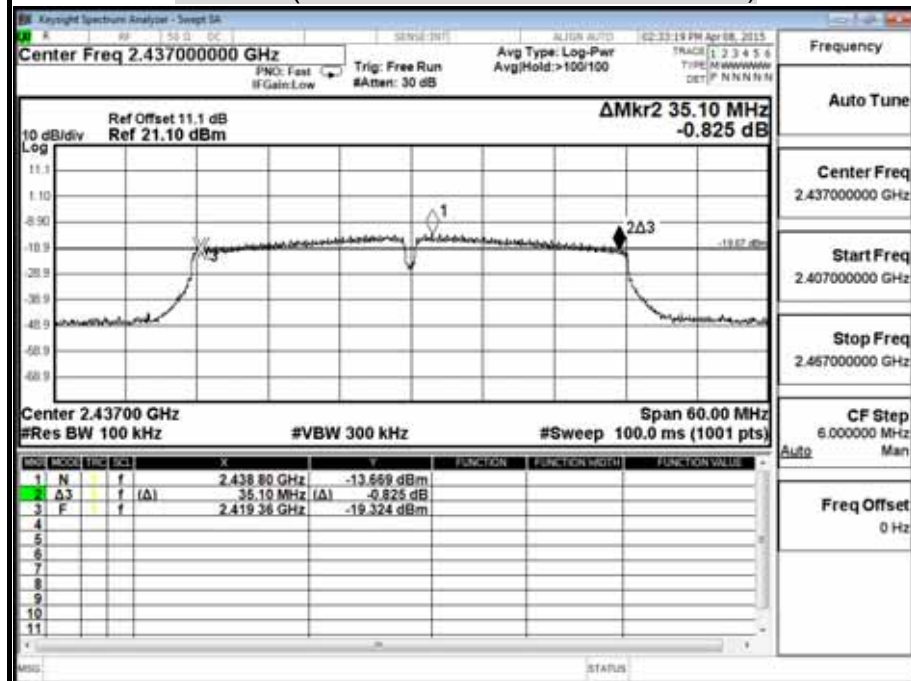

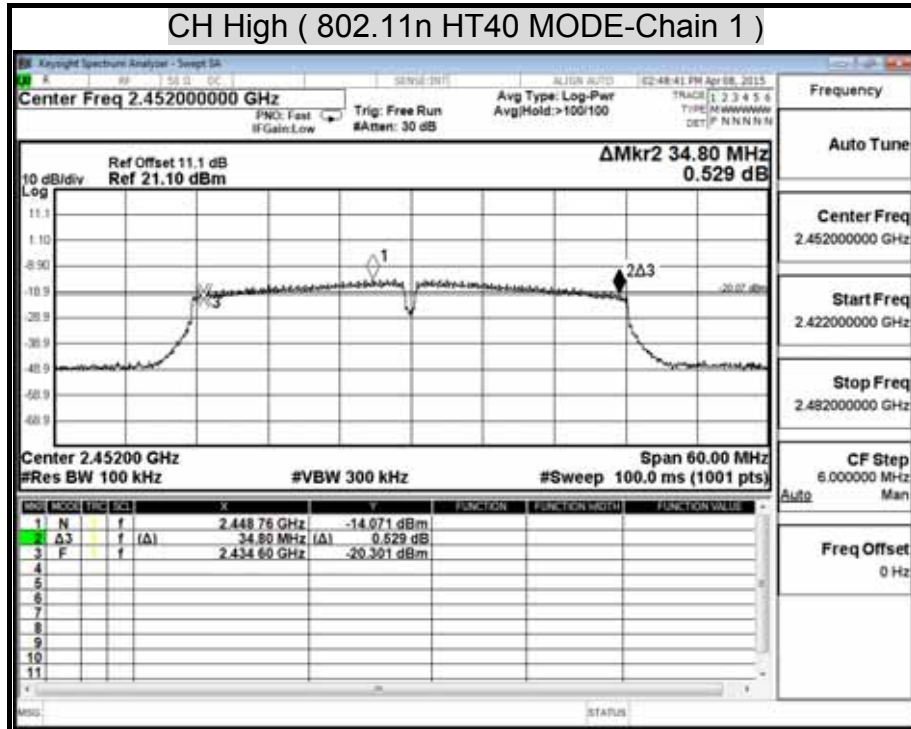



8.5 CONDUCTED SPURIOUS EMISSION

LIMITS


§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	JAN. 23, 2016

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.




TEST RESULTS

OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

(IEEE 802.11b MODE)

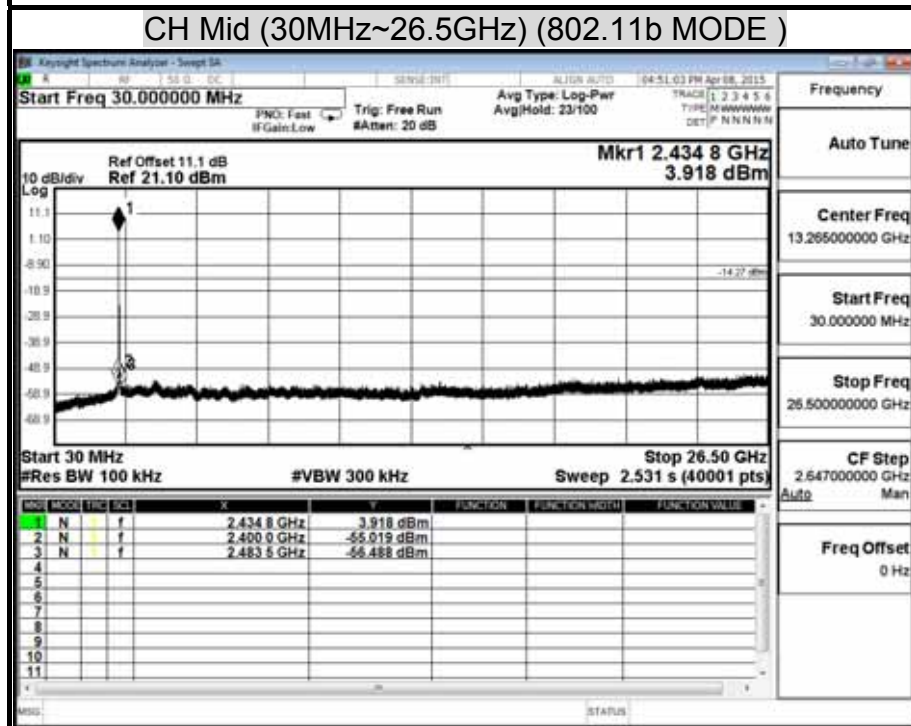
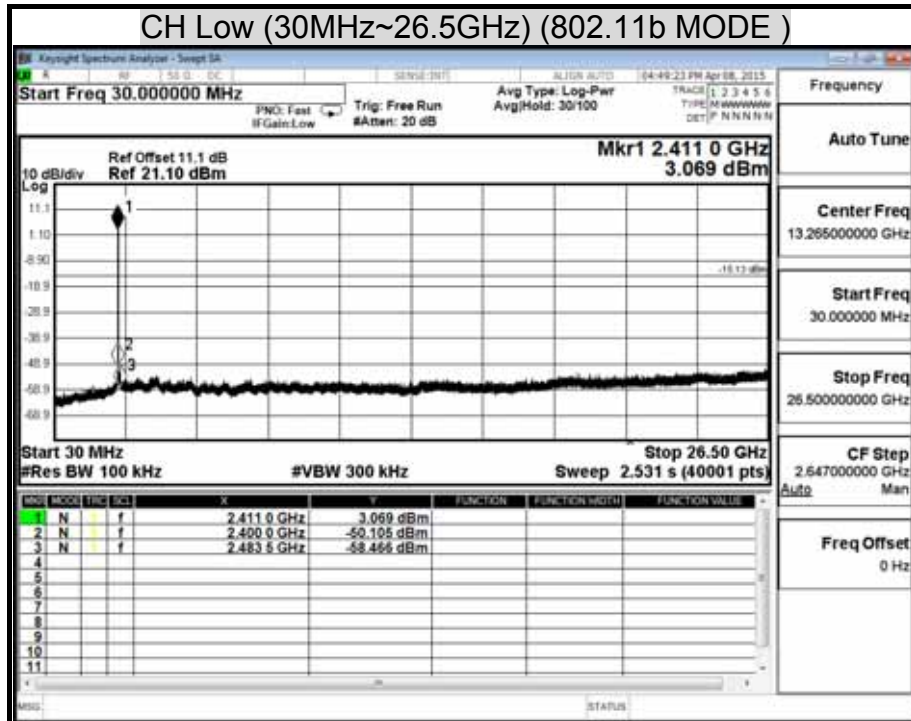


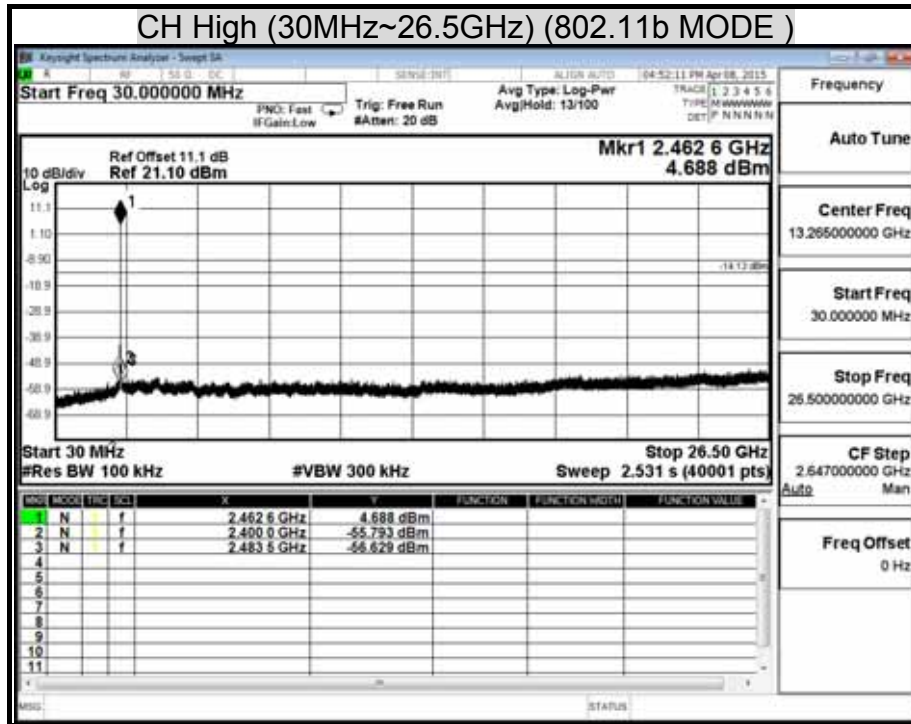




OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT



(802.11g MODE)

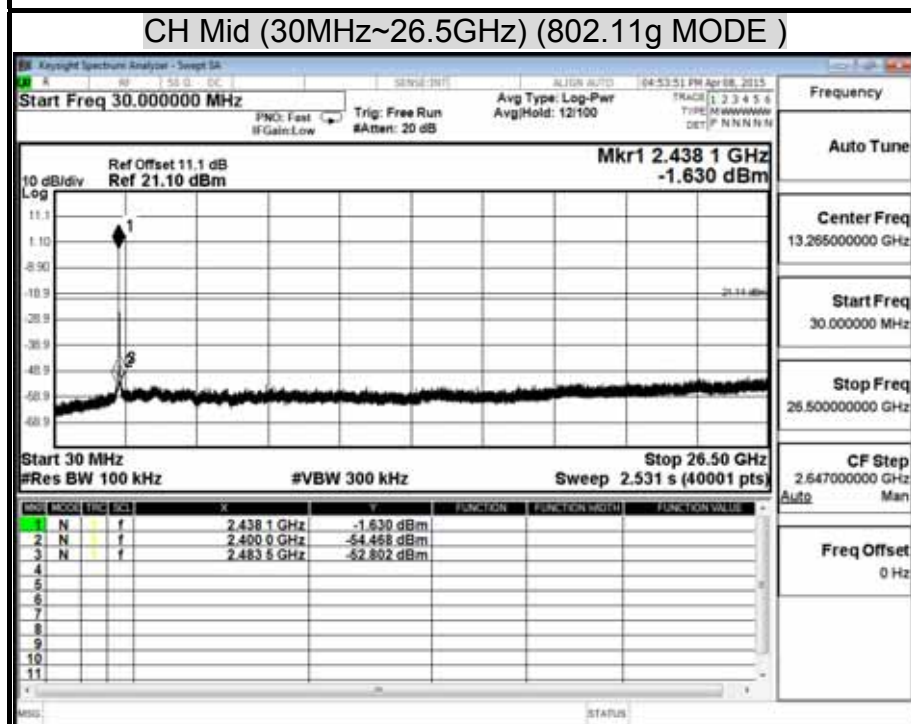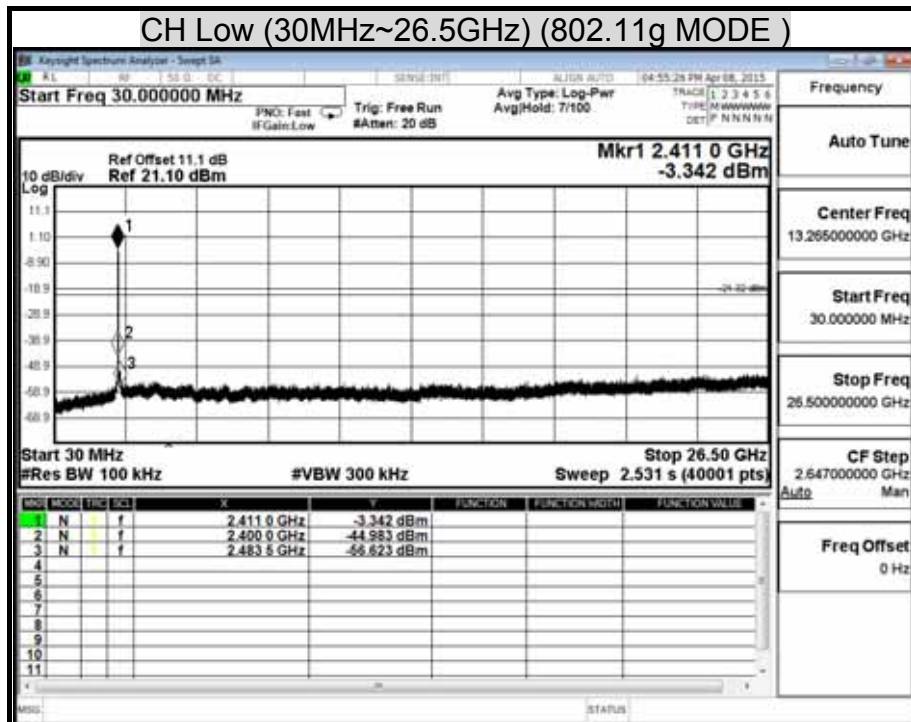

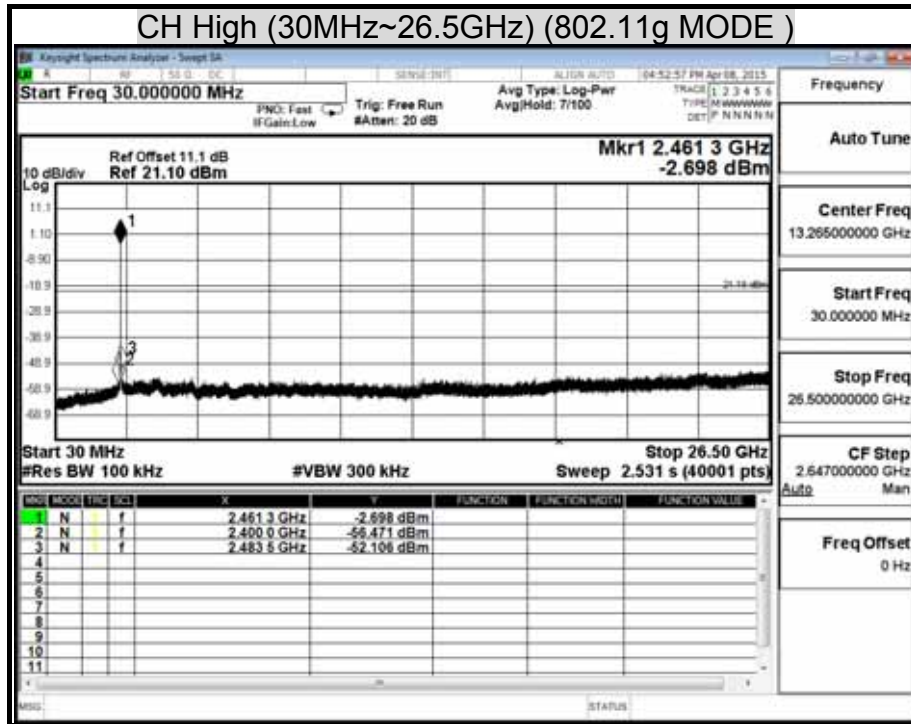




OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT (802.11n HT20 MODE)

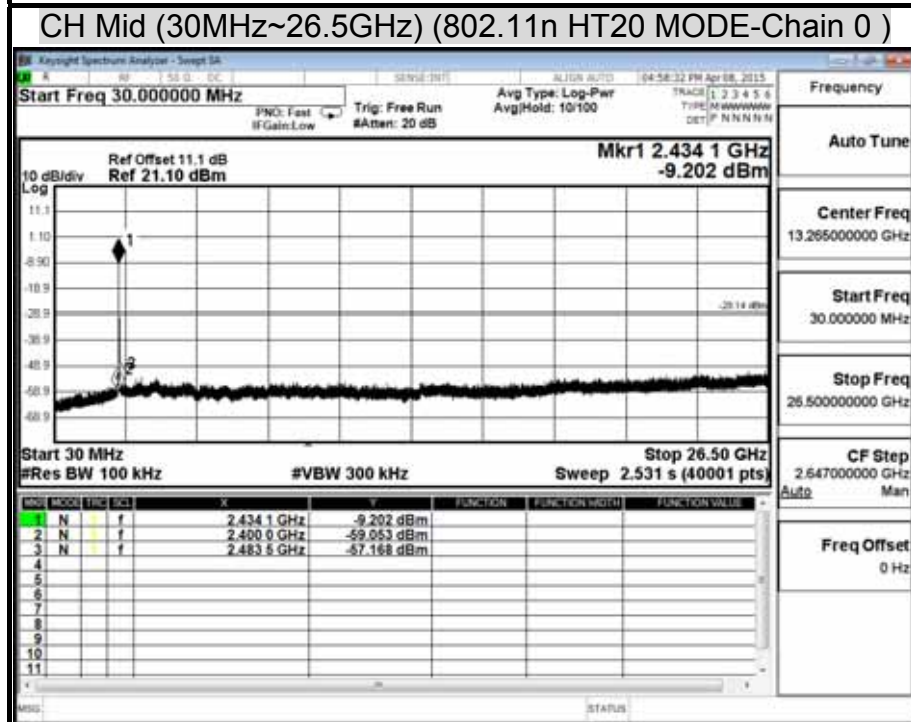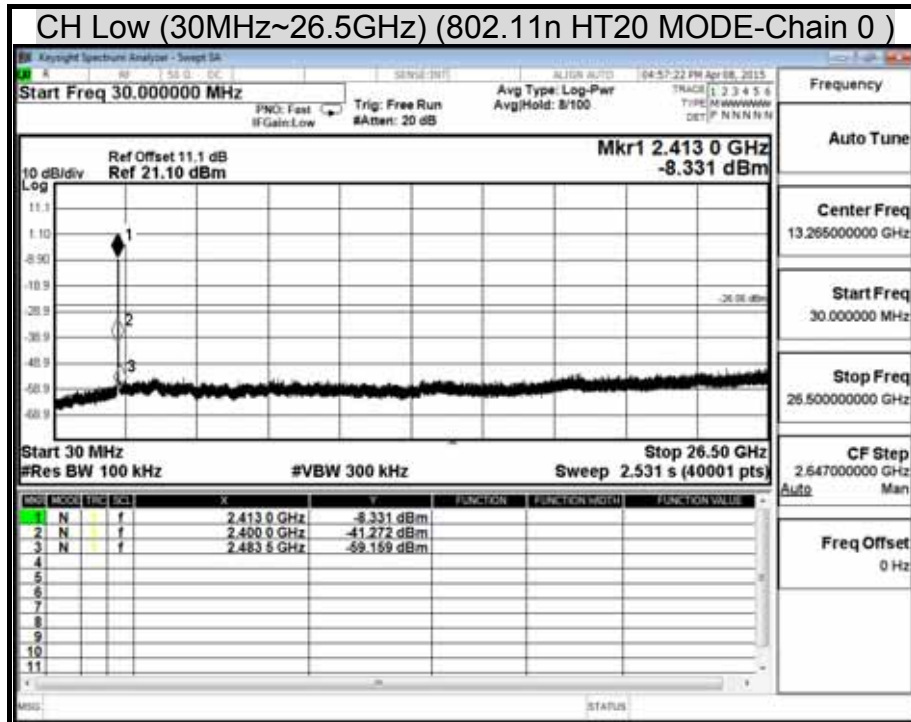




CH High (30MHz~26.5GHz) (802.11n HT20 MODE-Chain 0)

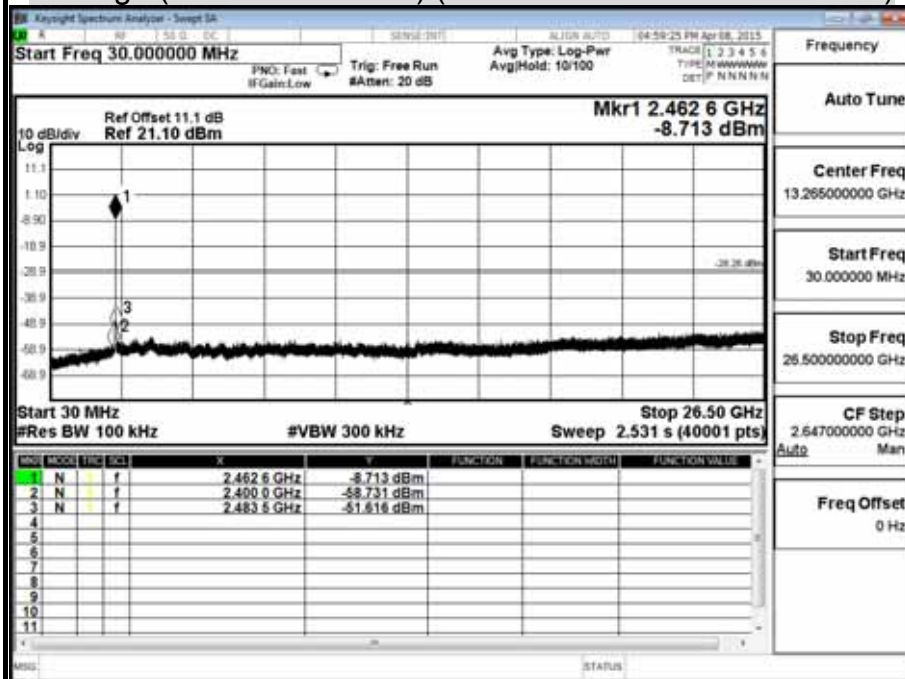


CH Low (30MHz~26.5GHz) (802.11n HT20 MODE-Chain 1)

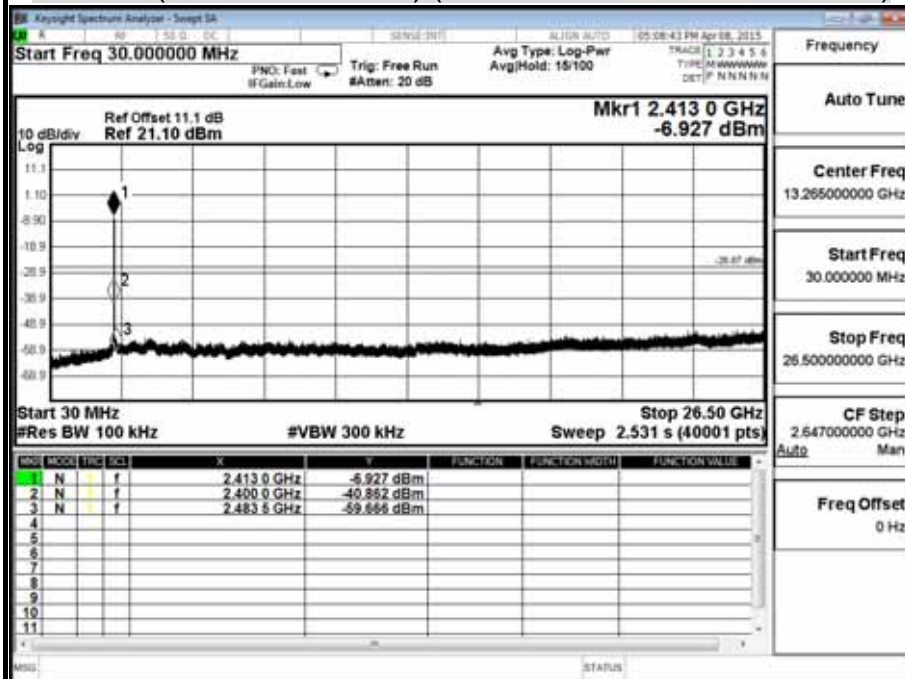




CH Mid (30MHz~26.5GHz) (802.11n HT20 MODE-Chain 1)


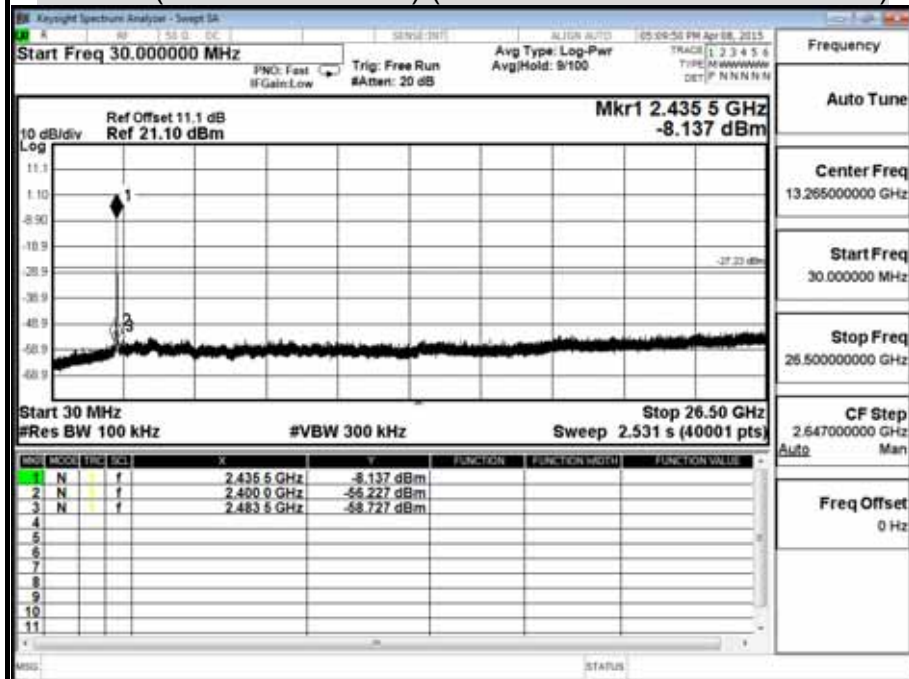


CH High (30~26.5GHz) (802.11n HT20 MODE-Chain 1)

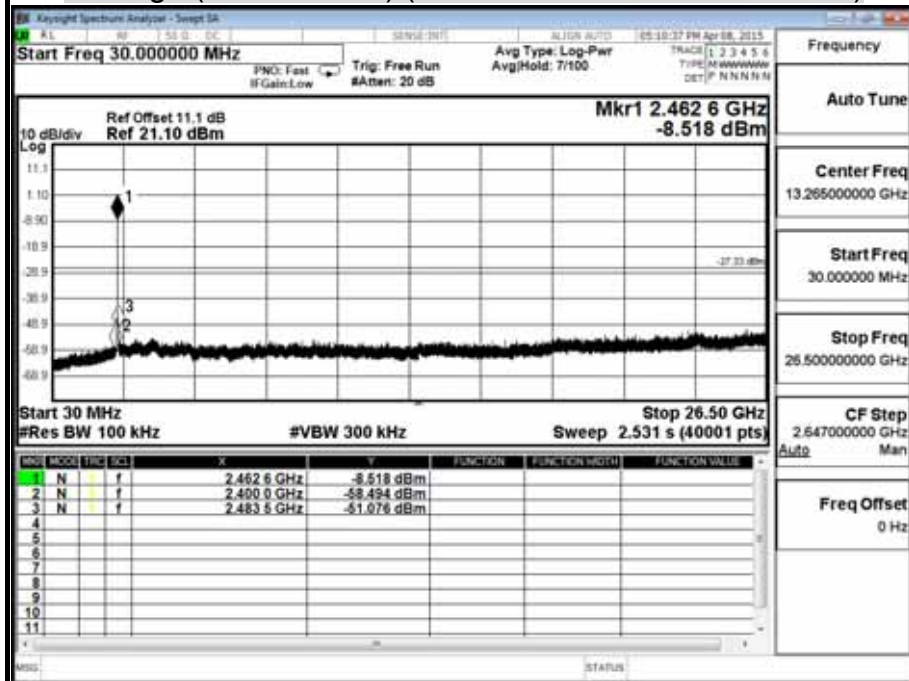




OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT (802.11n HT40 MODE)

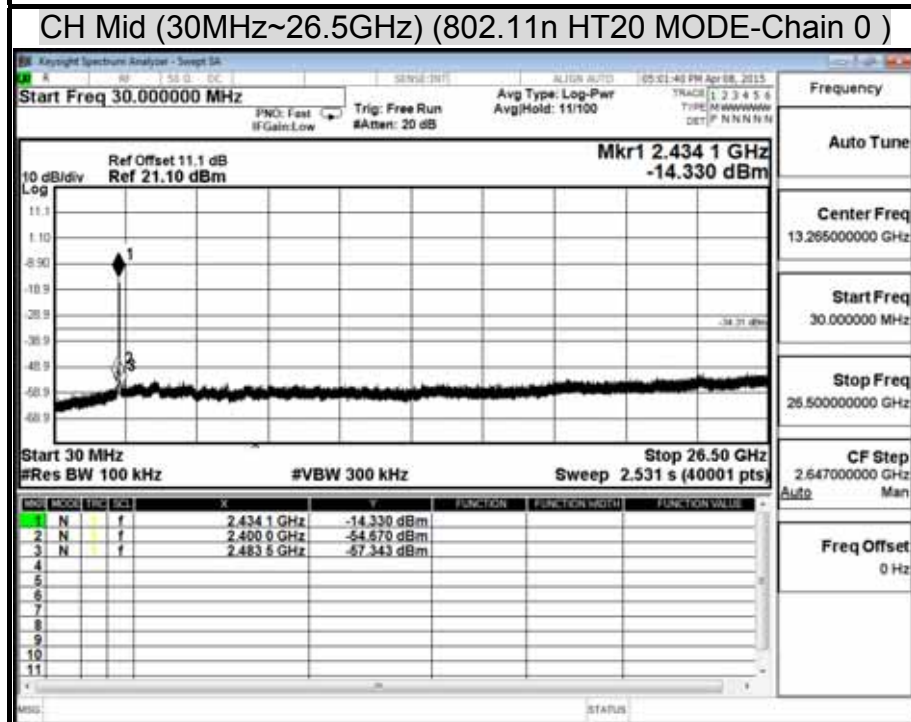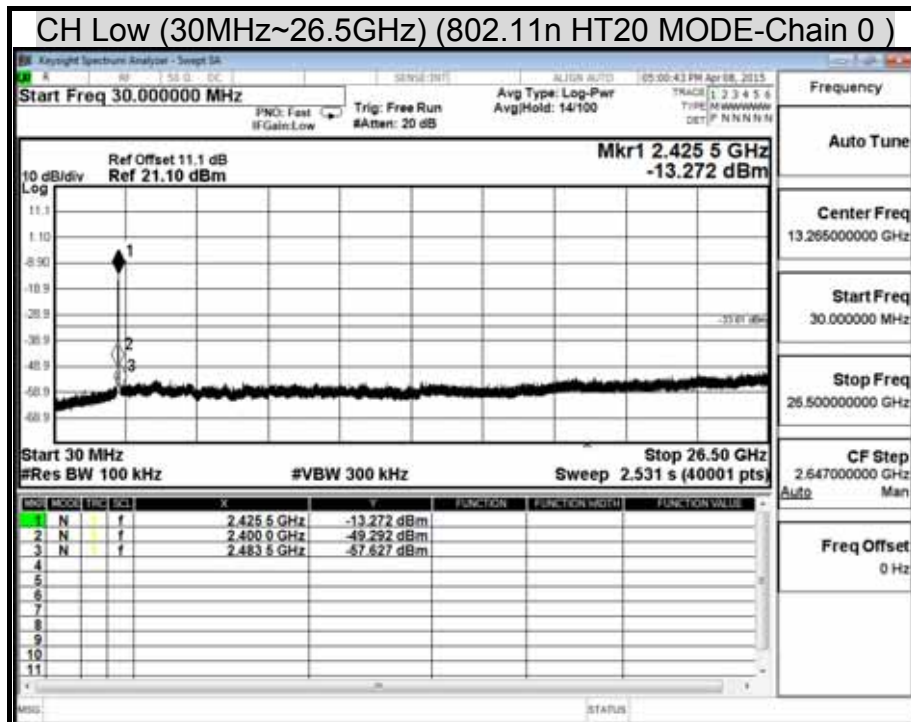




CH High (30MHz~26.5GHz) (802.11n HT20 MODE-Chain 0)

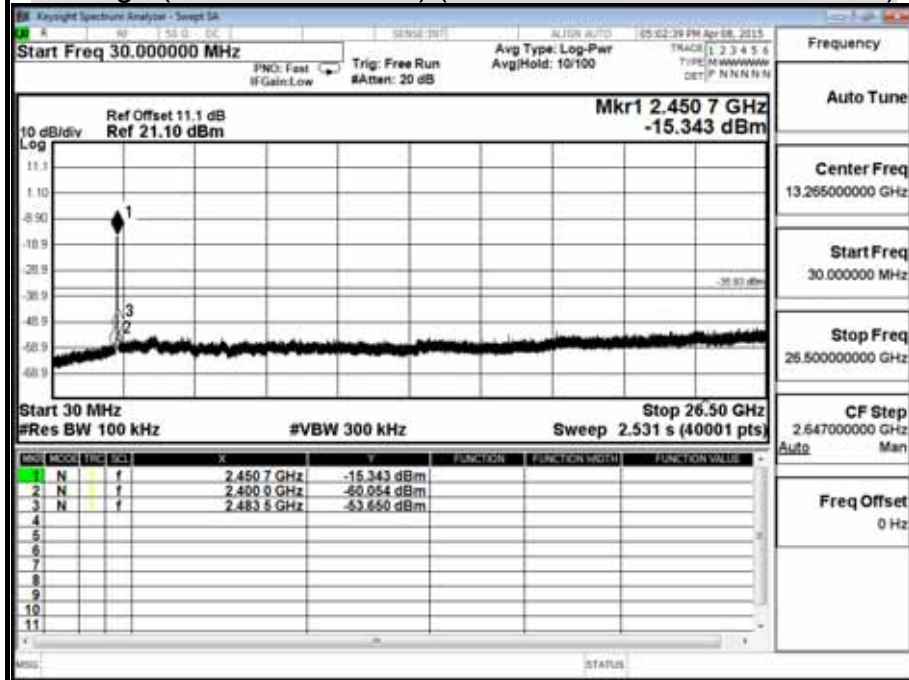


CH Low (30MHz~26.5GHz) (802.11n HT20 MODE-Chain 1)

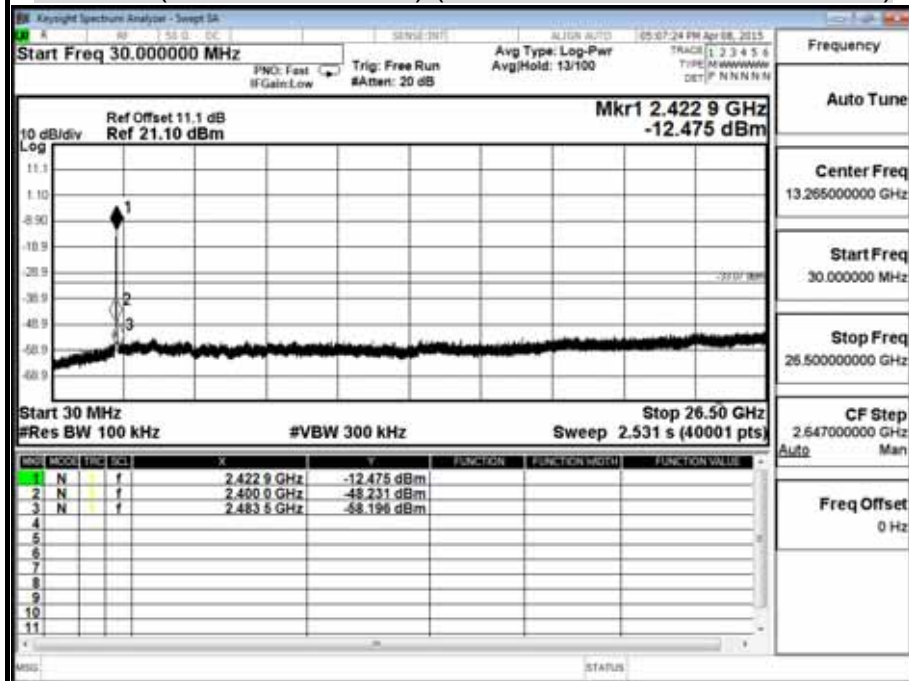




CH Mid (30MHz~26.5GHz) (802.11n HT20 MODE-Chain 1)

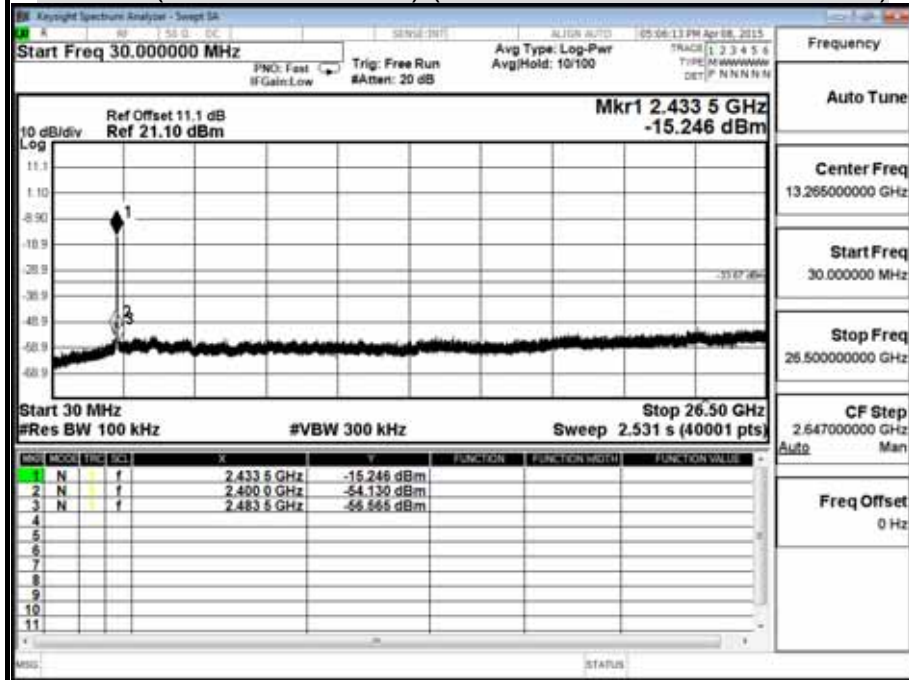

CH High (30~26.5GHz) (802.11n HT20 MODE-Chain 1)

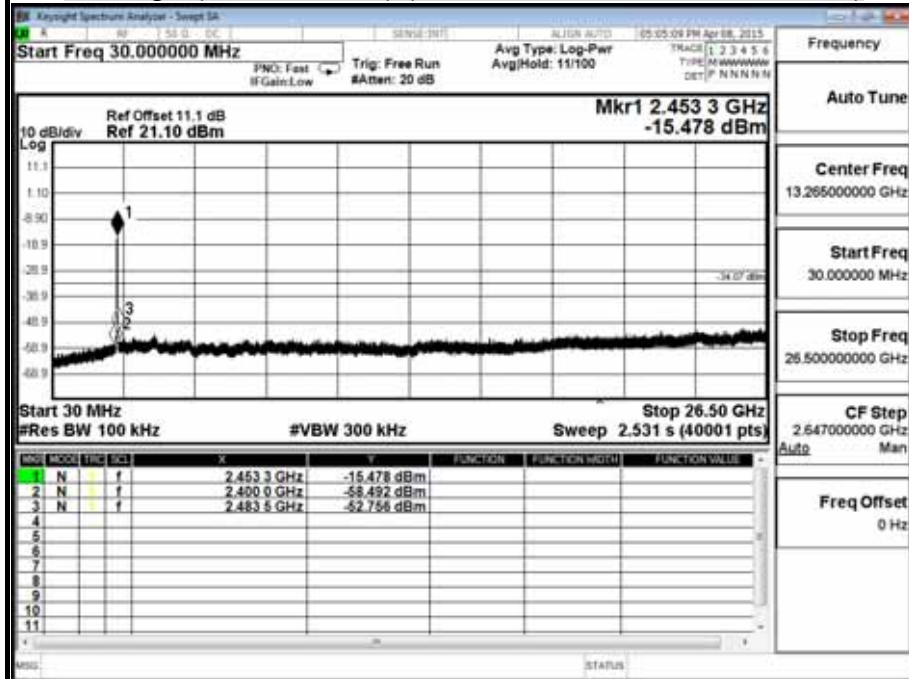



8.6 RADIATED EMISSIONS

8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS

LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 -1710	10.6 -12.7
6.26775 - 6.26825	108 -121.94	1718.8 - 1722.2	13.25 -13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 – 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 -16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 -335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.



TEST EQUIPMENTS


The following test equipments are utilized in making the measurements contained in this report.

Open Area Test Site # 6				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TYPE N COAXIAL CABLE	SUHNER	CHA9513	6	JAN. 20, 2016
BI-LOG Antenna	Sunol	JB1	A070506-2	AUG. 17, 2015
LOOP ANTENNA	EMCO	6502	8905-2356	JUN. 10, 2015
Pre-Amplifier	HP	8447F	2944A03817	JAN. 20, 2016
Pre-Amplifier	EMCI	EMC 012645	980098	DEC. 04,2015
EMI Receiver	R&S	ESVS10	833206/012	JUN. 29, 2015
Horn Antenna	Com-Power	AH-118	071032	JAN. 09, 2016
3116 Double Ridge Antenna (40G)	ETS-LINDGREN	3116	00078900	MAR. 04, 2016
Turn Table	Yo Chen	001	-----	N.C.R.
Antenna Tower	AR	TP1000A	309874	N.C.R.
Controller	CT	SC101	-----	N.C.R.
RF Swicth	E-INSTRUMENT TELH LTD	ERS-180A	EC1204141	N.C.R
Spectrum Analyzer	R&S	FSU	200789	JUL. 01, 2015
Spectrum Analyzer	R&S	FSEM	830270/015	NCR
Spectrum Analyzer	R&S	FSEK 30	100264	JAN. 26, 2016
Signal Analyzer	ROHDE&SCHWAR Z	FSV 40	101073	APR. 25, 2016
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	JAN. 23, 2016




TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

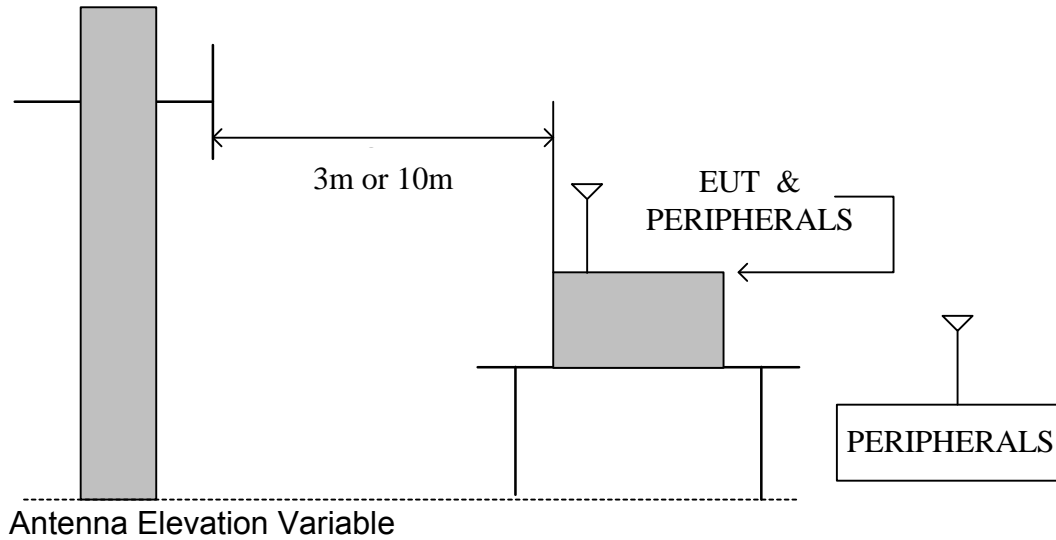

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

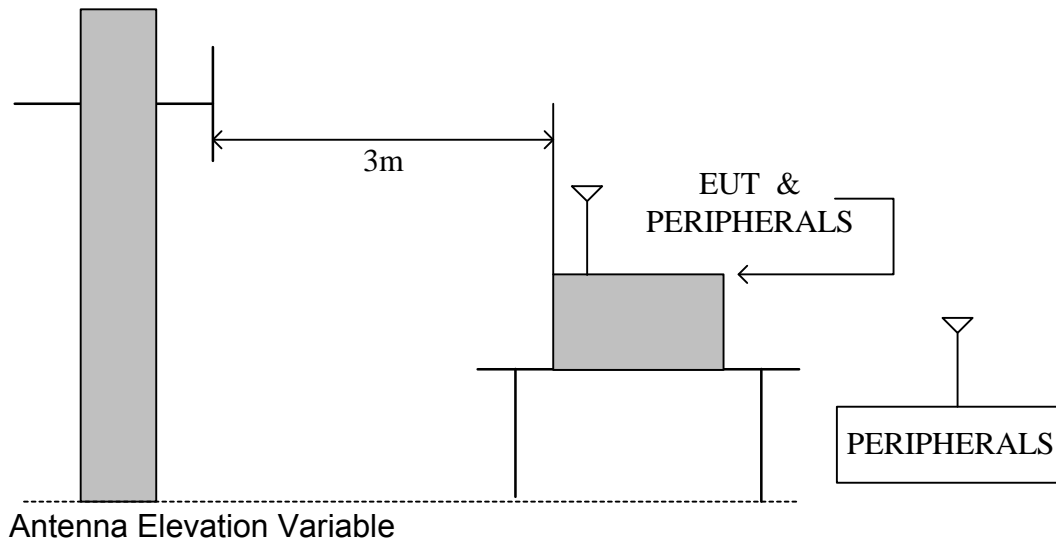



TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. While measuring the radiated emission below 1GHz, the EUT was set 3/10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The tests were performed in accordance with KDB 558074 5.4 .

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. No emission is found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)

TEST RESULTS


No non-compliance noted.



8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz

Model No.	EAP706	Test Mode	Normal Operation
Environmental Conditions	24 , 45% RH	Resolution Bandwidth	120 kHz
Antenna Pole	Vertical	Antenna Distance	10m
Detector Function:	Quasi-peak.	Tested By	Taiyu Cyu
Test Site	OATS 5		

(The chart below shows the highest readings taken from the final data.)

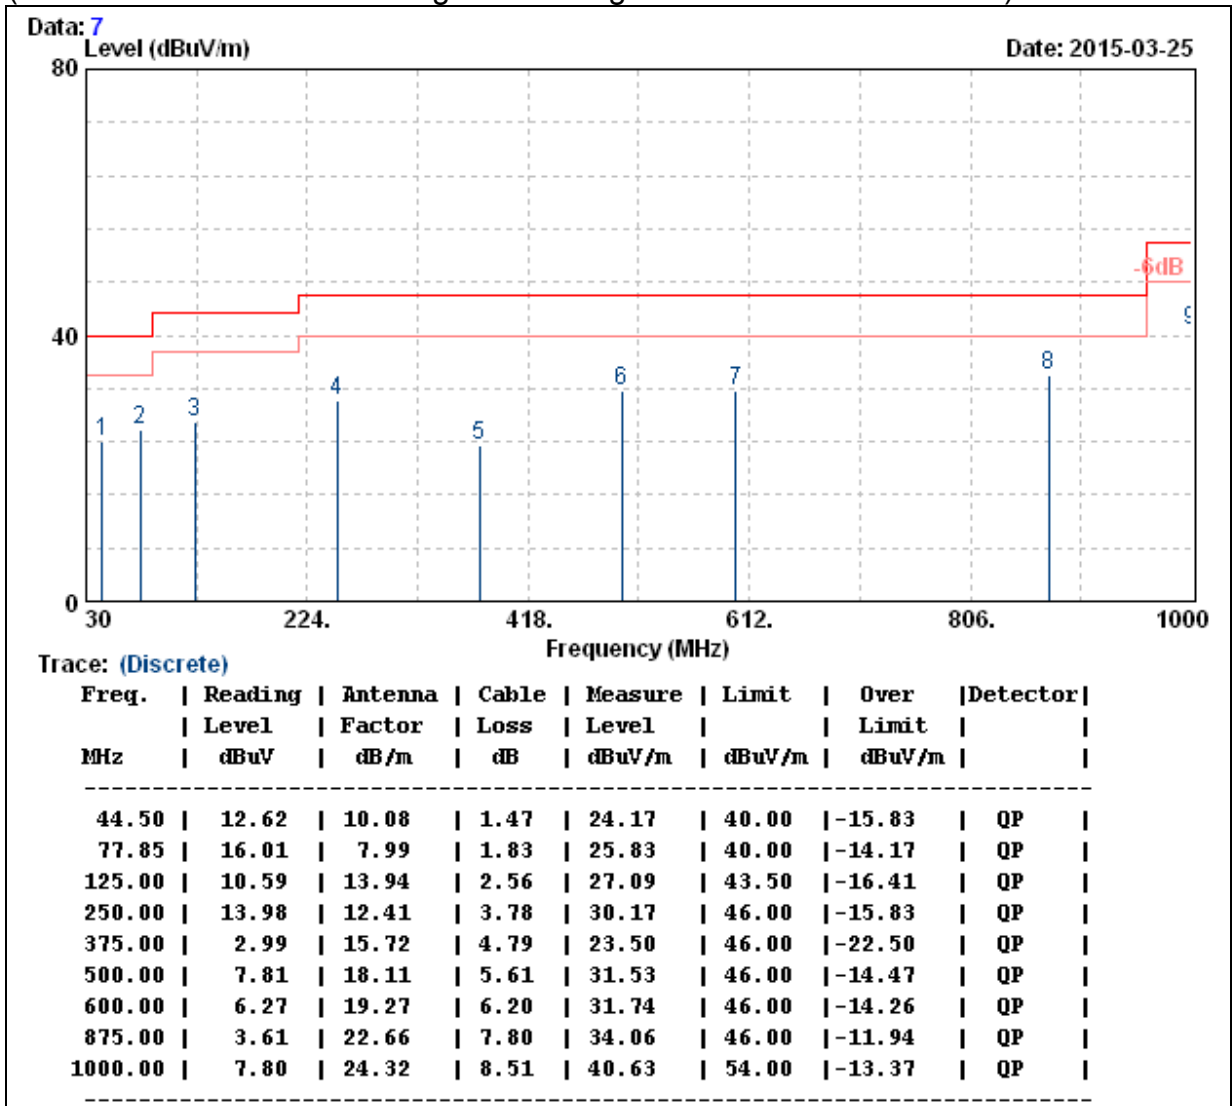


- Note: 1. QP= Quasi-peak Reading.
- 2. The other emission levels were very low against the limit



Model No.	EAP706	Test Mode	Normal Operation
Environmental Conditions	24 , 45% RH	Resolution Bandwidth	120 kHz
Antenna Pole	Horizontal	Antenna Distance	10m
Detector Function	Quasi-peak.	Tested By	Taiyu Cyu
Test Site	OATS 5		

(The chart below shows the highest readings taken from the final data.)

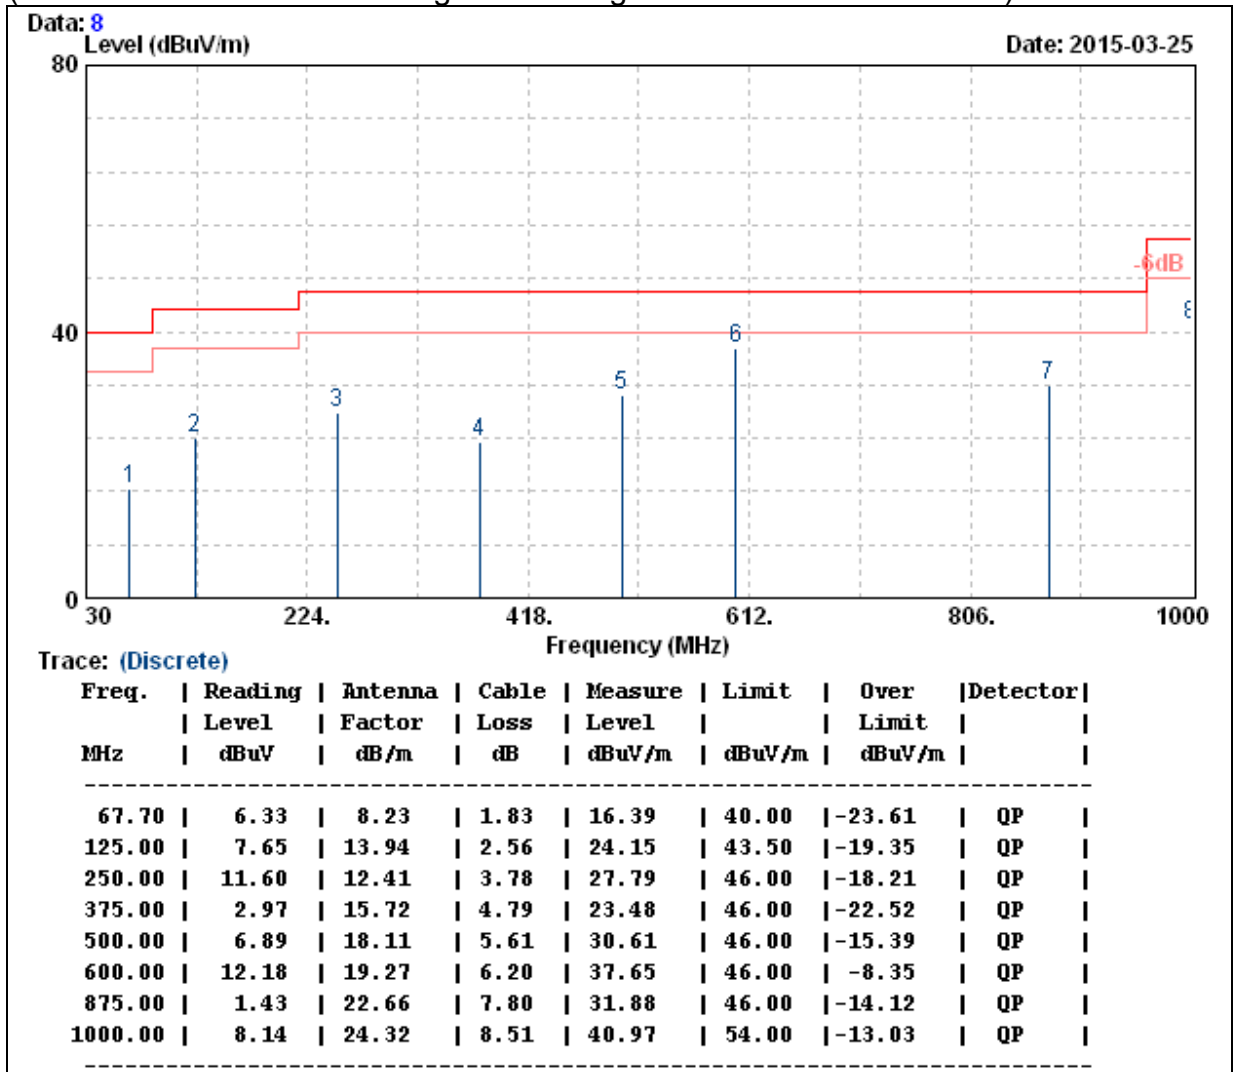


- Note: 1. QP= Quasi-peak Reading.
- 2. The other emission levels were very low against the limit



Model No.	EAP706	Test Mode	POE Mode
Environmental Conditions	24 , 45% RH	Resolution Bandwidth	120 kHz
Antenna Pole	Vertical	Antenna Distance	10m
Detector Function:	Quasi-peak.	Tested By	Taiyu Cyu
Test Site	OATS 5		

(The chart below shows the highest readings taken from the final data.)

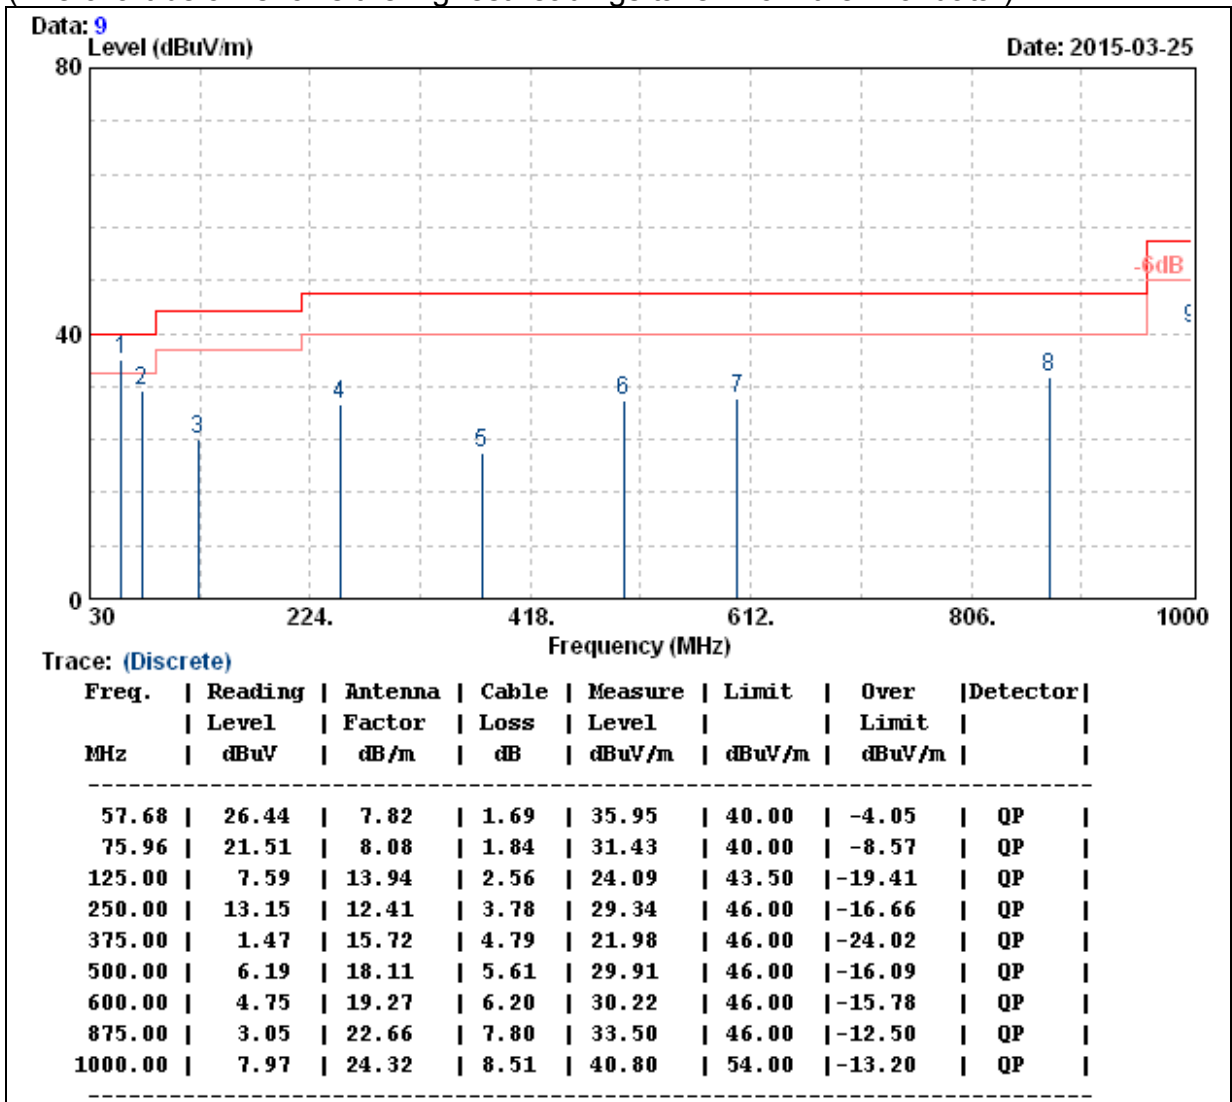


- Note: 1. QP= Quasi-peak Reading.
2. The other emission levels were very low against the limit



Model No.	EAP706	Test Mode	POE Mode
Environmental Conditions	24 , 45% RH	Resolution Bandwidth	120 kHz
Antenna Pole	Horizontal	Antenna Distance	10m
Detector Function	Quasi-peak.	Tested By	Taiyu Cyu
Test Site	OATS 5		

(The chart below shows the highest readings taken from the final data.)

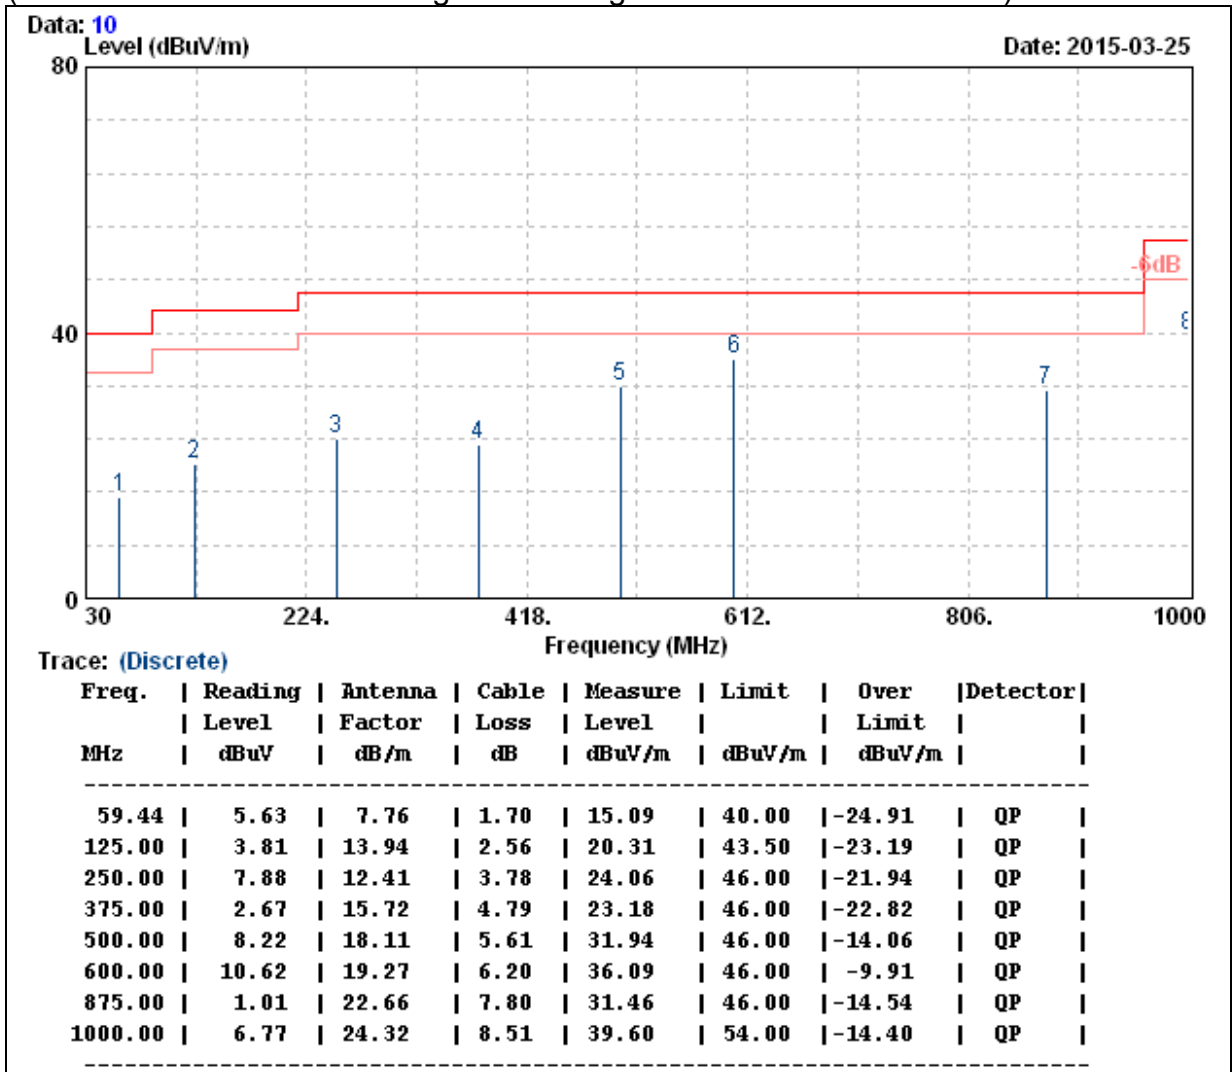

- Note: 1. QP= Quasi-peak Reading.
- 2. The other emission levels were very low against the limit



8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

Product Name	Enterprise Access Point	Test Date	2015/04/06
Model	EAP706	Test By	Ted Huang
Test Mode	IEEE 802.11b TX (CH Low)	TEMP& Humidity	28.4 , 54%

TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)
* 1200.06	66.49	25.60	1.76	48.95	0.30	45.20	74.00	-28.80	P
* 1200.06	62.45	25.60	1.76	48.95	0.30	41.16	54.00	-12.84	A
3600.00	62.76	30.98	3.22	47.58	0.30	49.68	74.00	-24.32	P
3600.00	58.17	30.98	3.22	47.58	0.30	45.09	54.00	-8.91	A
* 4823.90	61.00	33.87	3.78	48.29	0.40	50.76	74.00	-23.24	P
* 4823.90	58.44	33.87	3.78	48.29	0.40	48.19	54.00	-5.81	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)
* 3600.05	63.51	30.98	3.22	47.58	0.30	50.43	74.00	-23.57	P
* 3600.05	58.77	30.98	3.22	47.58	0.30	45.69	54.00	-8.31	A
* 4199.98	63.25	32.18	3.48	48.01	0.34	51.24	74.00	-22.76	P
* 4199.98	57.68	32.18	3.48	48.01	0.34	45.67	54.00	-8.33	A
* 4823.74	59.73	33.87	3.78	48.29	0.40	49.48	74.00	-24.52	P
* 4823.74	55.14	33.87	3.78	48.29	0.40	44.89	54.00	-9.11	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	Enterprise Access Point	Test Date	2015/04/06
Model	EAP706	Test By	Ted Huang
Test Mode	IEEE 802.11b TX (CH Middle)	TEMP& Humidity	28.4 , 54%

TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1200.00	65.70	25.60	1.76	48.95	0.30	44.41	74.00	-29.59	P
* 1200.00	62.34	25.60	1.76	48.95	0.30	41.04	54.00	-12.96	A
* 3600.03	62.15	30.98	3.22	47.58	0.30	49.07	74.00	-24.93	P
* 3600.03	57.24	30.98	3.22	47.58	0.30	44.15	54.00	-9.85	A
* 4873.80	60.63	34.02	3.80	48.29	0.40	50.55	74.00	-23.45	P
* 4873.80	56.76	34.02	3.80	48.29	0.40	46.68	54.00	-7.32	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
3599.96	63.30	30.98	3.22	47.58	0.30	50.21	74.00	-23.79	P
3599.96	58.97	30.98	3.22	47.58	0.30	45.88	54.00	-8.12	A
* 4199.98	62.38	32.18	3.48	48.01	0.34	50.37	74.00	-23.63	P
* 4199.98	57.91	32.18	3.48	48.01	0.34	45.90	54.00	-8.10	A
* 4873.82	63.92	34.02	3.80	48.29	0.40	53.84	74.00	-20.16	P
* 4873.82	59.05	34.02	3.80	48.29	0.40	48.97	54.00	-5.03	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	Enterprise Access Point	Test Date	2015/04/06
Model	EAP706	Test By	Ted Huang
Test Mode	IEEE 802.11b TX (CH High)	TEMP& Humidity	28.4 , 54%

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)
* 1199.94	65.62	25.60	1.76	48.95	0.30	44.33	74.00	-29.67	P
* 1199.94	62.44	25.60	1.76	48.95	0.30	41.15	54.00	-12.85	A
3599.96	61.33	30.98	3.22	47.58	0.30	48.25	74.00	-25.75	P
3599.96	56.10	30.98	3.22	47.58	0.30	43.02	54.00	-10.98	A
* 4923.85	59.58	34.17	3.82	48.30	0.40	49.67	74.00	-24.33	P
* 4923.85	54.74	34.17	3.82	48.30	0.40	44.83	54.00	-9.17	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)
* 3600.00	64.07	30.98	3.22	47.58	0.30	50.99	74.00	-23.01	P
* 3600.00	60.02	30.98	3.22	47.58	0.30	46.94	54.00	-7.07	A
* 4200.03	61.82	32.18	3.48	48.01	0.34	49.82	74.00	-24.18	P
* 4200.03	57.52	32.18	3.48	48.01	0.34	45.52	54.00	-8.48	A
* 4923.81	60.28	34.17	3.82	48.30	0.40	50.37	74.00	-23.63	P
* 4923.81	56.65	34.17	3.82	48.30	0.40	46.74	54.00	-7.26	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	Enterprise Access Point	Test Date	2015/04/06
Model	EAP706	Test By	Ted Huang
Test Mode	IEEE 802.11g TX (CH Low)	TEMP& Humidity	28.4 , 54%

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
3599.97	63.24	30.98	3.22	47.58	0.30	50.16	74.00	-23.84	P
3599.97	59.22	30.98	3.22	47.58	0.30	46.14	54.00	-7.86	A
* 4200.03	63.34	32.18	3.48	48.01	0.34	51.33	74.00	-22.67	P
* 4200.00	57.62	32.18	3.48	48.01	0.34	45.61	54.00	-8.39	A
* 4824.32	58.85	33.87	3.78	48.29	0.40	48.60	74.00	-25.40	P
* 4824.32	48.62	33.87	3.78	48.29	0.40	38.37	54.00	-15.63	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 3600.03	64.44	30.98	3.22	47.58	0.30	51.36	74.00	-22.64	P
* 3600.03	60.64	30.98	3.22	47.58	0.30	47.56	54.00	-6.44	A
* 4199.94	62.97	32.18	3.48	48.01	0.34	50.96	74.00	-23.04	P
* 4199.94	58.40	32.18	3.48	48.01	0.34	46.40	54.00	-7.60	A
* 4823.82	57.37	33.87	3.78	48.29	0.40	47.12	74.00	-26.88	P
* 4823.82	47.00	33.87	3.78	48.29	0.40	36.76	54.00	-17.24	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	Enterprise Access Point	Test Date	2015/04/06
Model	EAP706	Test By	Ted Huang
Test Mode	IEEE 802.11g TX (CH Middle)	TEMP& Humidity	28.4 , 54%

TX / IEEE 802.11g mode / CH Middle				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 3600.54	62.84	30.98	3.22	47.58	0.30	49.76	74.00	-24.24	P
* 3600.54	58.72	30.98	3.22	47.58	0.30	45.64	54.00	-8.36	A
* 4200.00	63.15	32.18	3.48	48.01	0.34	51.14	74.00	-22.86	P
* 4200.00	57.58	32.18	3.48	48.01	0.34	45.57	54.00	-8.43	A
* 4875.96	57.54	34.03	3.80	48.30	0.40	47.47	74.00	-26.53	P
* 4875.96	47.04	34.03	3.80	48.30	0.40	36.97	54.00	-17.03	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11g mode / CH Middle				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
3599.98	64.82	30.98	3.22	47.58	0.30	51.74	74.00	-22.26	P
3599.98	60.19	30.98	3.22	47.58	0.30	47.11	54.00	-6.89	A
* 4200.05	63.54	32.18	3.48	48.01	0.34	51.53	74.00	-22.47	P
* 4200.05	58.76	32.18	3.48	48.01	0.34	46.75	54.00	-7.25	A
* 4877.76	59.73	34.03	3.80	48.30	0.40	49.66	74.00	-24.34	P
* 4877.76	48.72	34.03	3.80	48.30	0.40	38.65	54.00	-15.35	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	Enterprise Access Point	Test Date	2015/04/06
Model	EAP706	Test By	Ted Huang
Test Mode	IEEE 802.11g TX (CH High)	TEMP& Humidity	28.4 , 54%

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 3600.04	61.36	30.98	3.22	47.58	0.30	48.28	74.00	-25.72	P
* 3600.04	56.36	30.98	3.22	47.58	0.30	43.28	54.00	-10.72	A
* 4199.96	58.87	32.18	3.48	48.01	0.34	46.86	74.00	-27.14	P
* 4199.96	51.80	32.18	3.48	48.01	0.34	39.80	54.00	-14.20	A
* 4925.70	57.83	34.18	3.82	48.30	0.40	47.93	74.00	-26.07	P
4925.70	47.52	34.18	3.82	48.30	0.40	37.61	54.00	-16.39	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 3600.03	64.68	30.98	3.22	47.58	0.30	51.60	74.00	-22.40	P
* 3600.03	59.87	30.98	3.22	47.58	0.30	46.79	54.00	-7.21	A
* 4199.96	64.15	32.18	3.48	48.01	0.34	52.14	74.00	-21.86	P
* 4199.96	58.82	32.18	3.48	48.01	0.34	46.81	54.00	-7.19	A
* 4920.35	58.47	34.16	3.82	48.30	0.40	48.55	74.00	-25.45	P
* 4920.35	47.93	34.16	3.82	48.30	0.40	38.01	54.00	-15.99	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	Enterprise Access Point	Test Date	2015/04/06
Model	EAP706	Test By	Ted Huang
Test Mode	IEEE 802.11n HT20 TX (CH Low)	TEMP& Humidity	28.4 , 54%

TX / IEEE 802.11n HT20 mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)
* 3600.02	64.50	30.98	3.22	47.58	0.30	51.42	74.00	-22.58	P
* 3600.02	60.15	30.98	3.22	47.58	0.30	47.07	54.00	-6.93	A
* 4199.98	63.67	32.18	3.48	48.01	0.34	51.66	74.00	-22.34	P
* 4199.98	57.86	32.18	3.48	48.01	0.34	45.85	54.00	-8.15	A
* 4824.32	58.85	33.87	3.78	48.29	0.40	48.60	74.00	-25.40	P
* 4824.32	48.62	33.87	3.78	48.29	0.40	38.37	54.00	-15.63	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11n HT20 mode / CH Low				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(P/Q/A)
3599.97	64.28	30.98	3.22	47.58	0.30	51.20	74.00	-22.80	P
3599.97	60.28	30.98	3.22	47.58	0.30	47.20	54.00	-6.80	A
* 4199.97	63.54	32.18	3.48	48.01	0.34	51.53	74.00	-22.47	P
* 4199.97	59.16	32.18	3.48	48.01	0.34	47.15	54.00	-6.85	A
* 4823.60	58.37	33.87	3.78	48.29	0.40	48.12	74.00	-25.88	P
* 4823.60	48.55	33.87	3.78	48.29	0.40	38.31	54.00	-15.69	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	Enterprise Access Point	Test Date	2015/04/06
Model	EAP706	Test By	Ted Huang
Test Mode	IEEE 802.11n HT20 TX (CH Middle)	TEMP& Humidity	28.4 , 54%

TX / IEEE 802.11n HT20 mode / CH Middle				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 3600.54	62.68	30.98	3.22	47.58	0.30	49.60	74.00	-24.40	P
* 3600.54	58.33	30.98	3.22	47.58	0.30	45.25	54.00	-8.75	A
* 4200.05	63.49	32.18	3.48	48.01	0.34	51.48	74.00	-22.52	P
* 4200.00	57.82	32.18	3.48	48.01	0.34	45.81	54.00	-8.19	A
* 4875.63	58.26	34.03	3.80	48.30	0.40	48.19	74.00	-25.81	P
* 4875.63	47.38	34.03	3.80	48.30	0.40	37.31	54.00	-16.69	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11n HT20 mode / CH Middle				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
3599.96	64.57	30.98	3.22	47.58	0.30	51.49	74.00	-22.51	P
3599.96	60.09	30.98	3.22	47.58	0.30	47.01	54.00	-6.99	A
* 4200.04	64.27	32.18	3.48	48.01	0.34	52.26	74.00	-21.74	P
* 4200.04	58.62	32.18	3.48	48.01	0.34	46.61	54.00	-7.39	A
* 4873.80	57.91	34.02	3.80	48.29	0.40	47.83	74.00	-26.17	P
* 4873.80	48.08	34.02	3.80	48.29	0.40	38.00	54.00	-16.00	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	Enterprise Access Point	Test Date	2015/04/06
Model	EAP706	Test By	Ted Huang
Test Mode	IEEE 802.11n HT20 TX (CH High)	TEMP& Humidity	28.4 , 54%

TX / IEEE 802.11n HT20 mode / CH High				Measurement Distance at 3m				Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
3599.98	61.85	30.98	3.22	47.58	0.30	48.77	74.00	-25.23	P	
3599.98	56.73	30.98	3.22	47.58	0.30	43.65	54.00	-10.35	A	
* 4200.02	58.92	32.18	3.48	48.01	0.34	46.91	74.00	-27.09	P	
* 4199.96	51.84	32.18	3.48	48.01	0.34	39.83	54.00	-14.17	A	
* 4925.53	57.69	34.18	3.82	48.30	0.40	47.79	74.00	-26.21	P	
* 4925.53	47.65	34.18	3.82	48.30	0.40	37.75	54.00	-16.25	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

TX / IEEE 802.11n HT20 mode / CH High				Measurement Distance at 3m				Vertical polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 3600.03	64.52	30.98	3.22	47.58	0.30	51.44	74.00	-22.56	P	
* 3600.03	59.64	30.98	3.22	47.58	0.30	46.56	54.00	-7.44	A	
* 4199.97	64.37	32.18	3.48	48.01	0.34	52.36	74.00	-21.64	P	
* 4199.97	58.62	32.18	3.48	48.01	0.34	46.61	54.00	-7.39	A	
4923.97	57.29	34.17	3.82	48.30	0.40	47.38	74.00	-26.62	P	
* 4923.97	48.46	34.17	3.82	48.30	0.40	38.55	54.00	-15.45	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	Enterprise Access Point	Test Date	2015/04/06
Model	EAP706	Test By	Ted Huang
Test Mode	IEEE 802.11n HT40 TX (CH Low)	TEMP& Humidity	28.4 , 54%

TX / IEEE 802.11n HT40 mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
3599.97	63.13	30.98	3.22	47.58	0.30	50.05	74.00	-23.95	P
3599.97	58.62	30.98	3.22	47.58	0.30	45.54	54.00	-8.46	A
* 4200.05	60.37	32.18	3.48	48.01	0.34	48.36	74.00	-25.64	P
* 4200.05	53.68	32.18	3.48	48.01	0.34	41.67	54.00	-12.33	A
* 4844.28	57.64	33.93	3.78	48.29	0.40	47.46	74.00	-26.54	P
* 4844.28	47.36	33.93	3.78	48.29	0.40	37.18	54.00	-16.82	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11n HT40 mode / CH Low				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 3600.00	63.96	30.98	3.22	47.58	0.30	50.88	74.00	-23.12	P
* 3600.00	60.75	30.98	3.22	47.58	0.30	47.67	54.00	-6.34	A
* 4200.01	61.35	32.18	3.48	48.01	0.34	49.35	74.00	-24.65	P
* 4200.01	55.84	32.18	3.48	48.01	0.34	43.84	54.00	-10.16	A
* 4844.56	58.24	33.93	3.78	48.29	0.40	48.06	74.00	-25.94	P
* 4844.56	48.68	33.93	3.78	48.29	0.40	38.50	54.00	-15.50	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	Enterprise Access Point	Test Date	2015/04/06
Model	EAP706	Test By	Ted Huang
Test Mode	IEEE 802.11n HT40 TX (CH Middle)	TEMP& Humidity	28.4 , 54%

TX / IEEE 802.11n HT40 mode / CH Middle				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 3600.03	62.43	30.98	3.22	47.58	0.30	49.35	74.00	-24.65	P
* 3600.03	58.62	30.98	3.22	47.58	0.30	45.54	54.00	-8.46	A
* 4199.96	60.48	32.18	3.48	48.01	0.34	48.47	74.00	-25.53	P
* 4199.96	53.76	32.18	3.48	48.01	0.34	41.75	54.00	-12.25	A
* 4875.38	57.82	34.03	3.80	48.30	0.40	47.75	74.00	-26.25	P
* 4875.38	47.63	34.03	3.80	48.30	0.40	37.56	54.00	-16.44	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11n HT40 mode / CH Middle				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 3600.02	64.38	30.98	3.22	47.58	0.30	51.30	74.00	-22.70	P
* 3600.02	61.27	30.98	3.22	47.58	0.30	48.19	54.00	-5.81	A
* 4199.96	62.48	32.18	3.48	48.01	0.34	50.47	74.00	-23.53	P
* 4199.96	55.97	32.18	3.48	48.01	0.34	43.96	54.00	-10.04	A
* 4874.25	57.82	34.02	3.80	48.29	0.40	47.74	74.00	-26.26	P
* 4874.25	48.64	34.02	3.80	48.29	0.40	38.56	54.00	-15.44	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	Enterprise Access Point	Test Date	2015/04/06
Model	EAP706	Test By	Ted Huang
Test Mode	IEEE 802.11n HT40 TX (CH High)	TEMP& Humidity	28.4 , 54%

TX / IEEE 802.11n HT40 mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
3599.98	63.22	30.98	3.22	47.58	0.30	50.14	74.00	-23.86	P
3599.98	58.49	30.98	3.22	47.58	0.30	45.41	54.00	-8.59	A
* 4200.03	61.28	32.18	3.48	48.01	0.34	49.27	74.00	-24.73	P
* 4200.03	54.22	32.18	3.48	48.01	0.34	42.21	54.00	-11.79	A
* 4904.28	57.63	34.11	3.81	48.30	0.40	47.66	74.00	-26.34	P
* 4904.28	47.58	34.11	3.81	48.30	0.40	37.61	54.00	-16.39	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11n HT40 mode / CH High				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 3600.00	63.96	30.98	3.22	47.58	0.30	50.88	74.00	-23.12	P
* 3600.00	60.75	30.98	3.22	47.58	0.30	47.67	54.00	-6.34	A
* 4200.01	61.35	32.18	3.48	48.01	0.34	49.35	74.00	-24.65	P
* 4200.01	55.84	32.18	3.48	48.01	0.34	43.84	54.00	-10.16	A
* 4904.34	58.61	34.11	3.81	48.30	0.40	48.64	74.00	-25.36	P
* 4904.34	48.52	34.11	3.81	48.30	0.40	38.55	54.00	-15.45	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:


1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



8.6.4 RESTRICTED BAND EDGES


Detector mode : Peak

Polarity : Horizontal

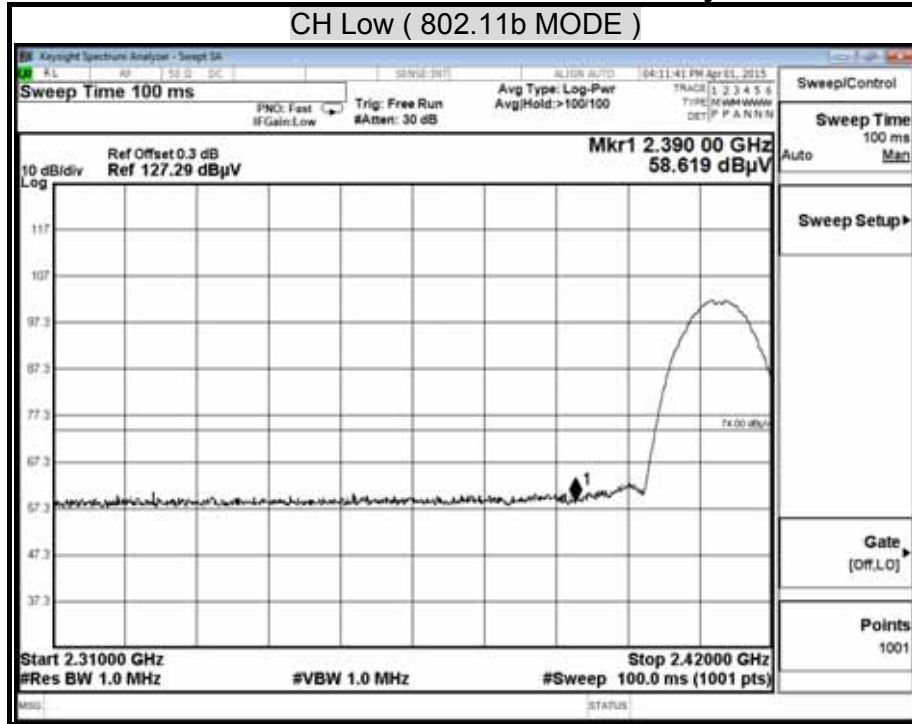

Detector mode : Average


Polarity : Horizontal

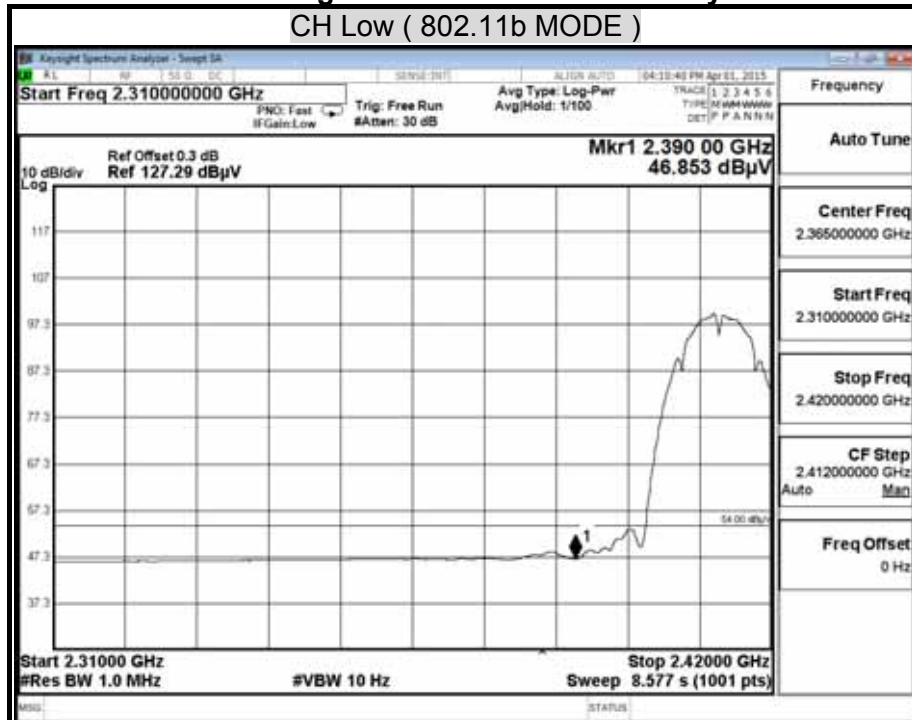




Detector mode : Peak

Polarity : Vertical

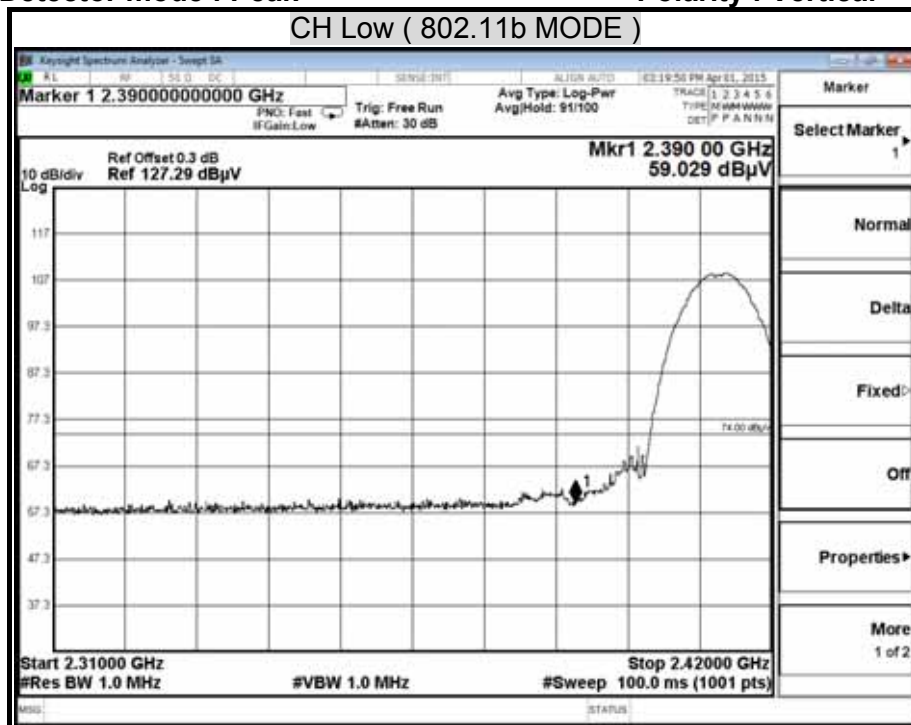

Detector mode : Average


Polarity : Vertical

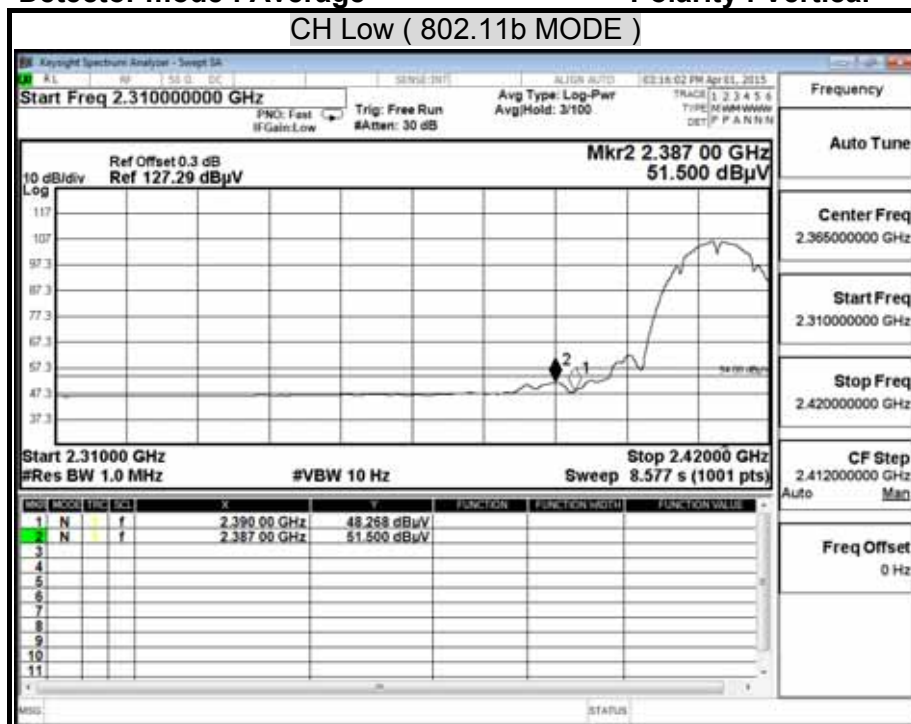




Detector mode : Peak

Polarity : Horizontal

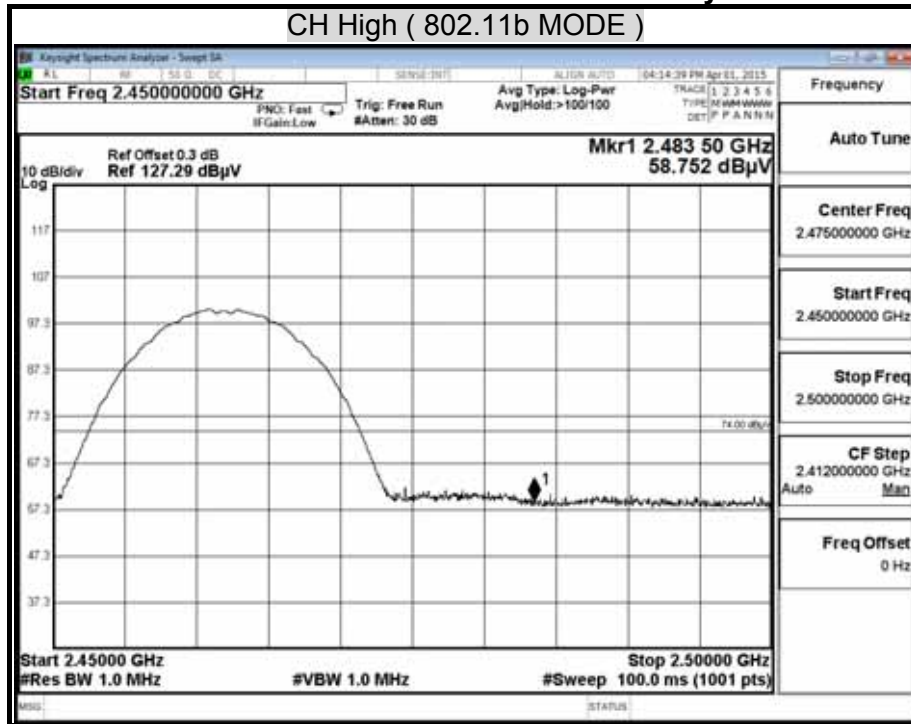

Detector mode : Average


Polarity : Horizontal

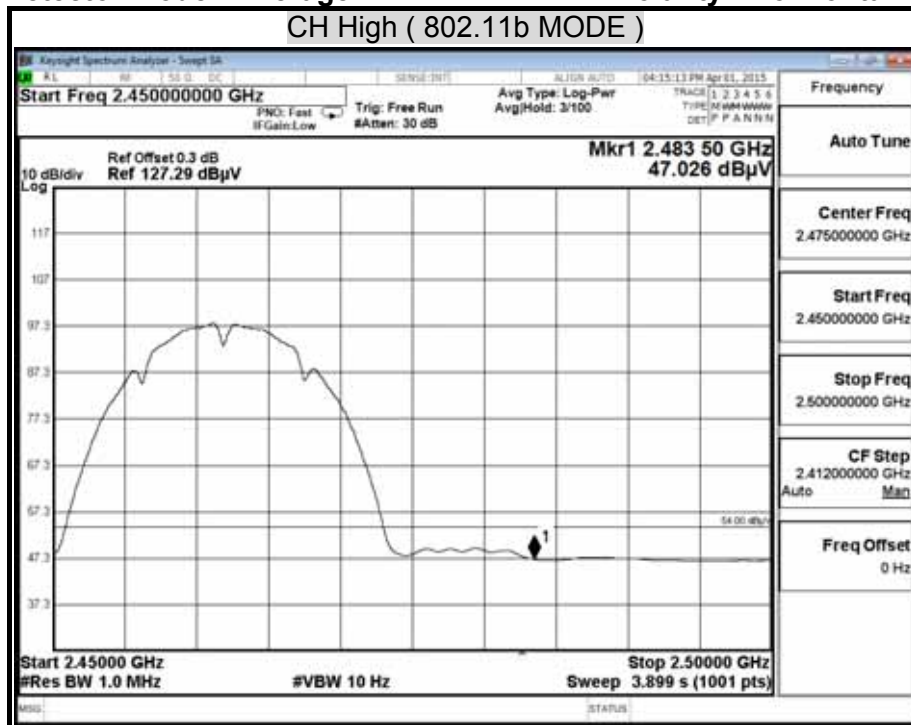




Detector mode : Peak

Polarity : Vertical

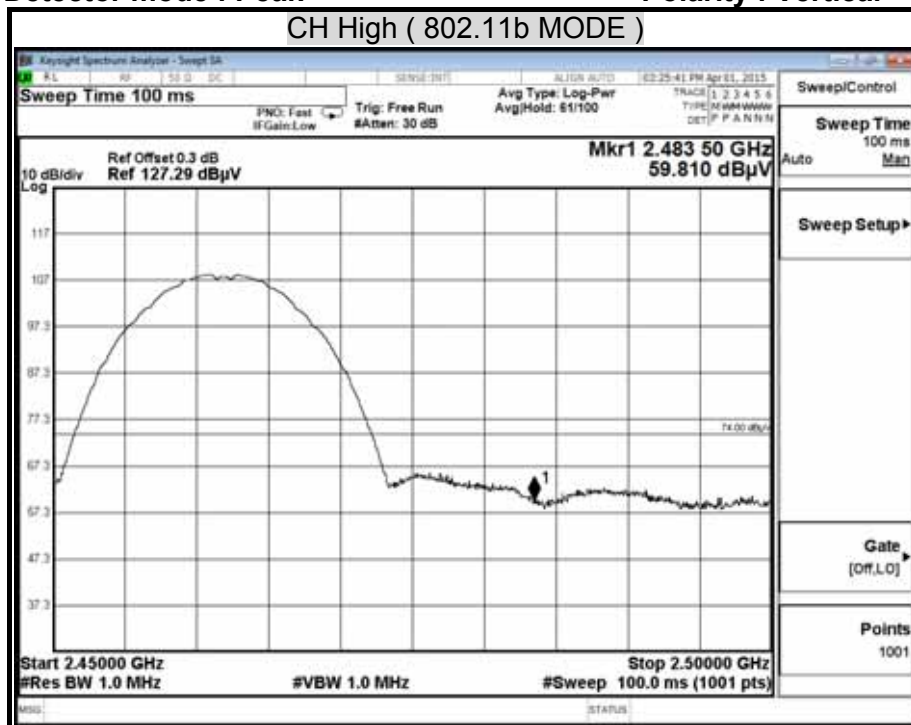

Detector mode : Average


Polarity : Vertical

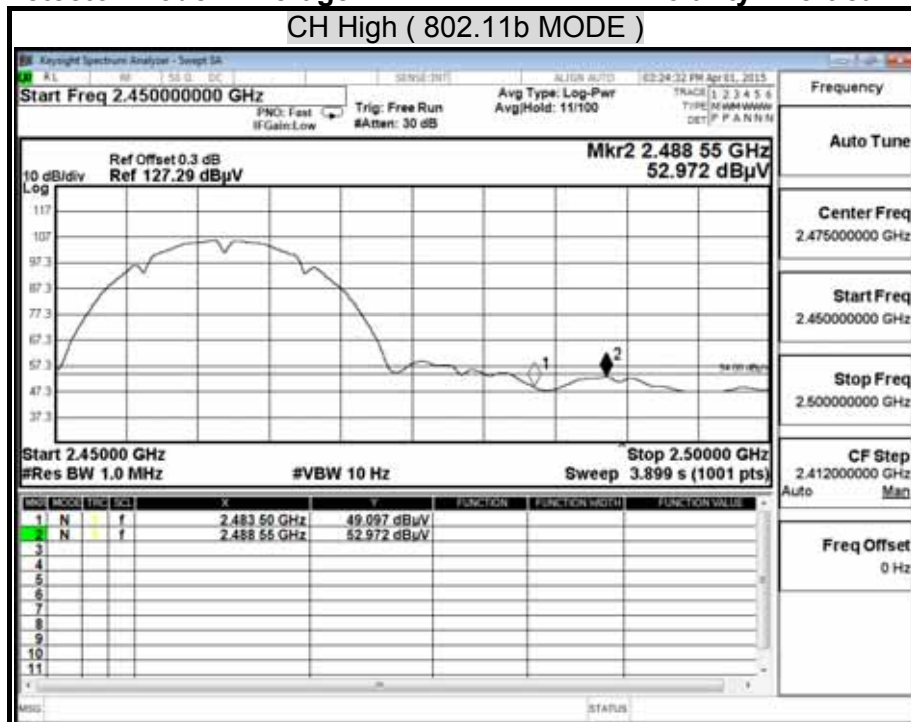




Detector mode : Peak

Polarity : Horizontal

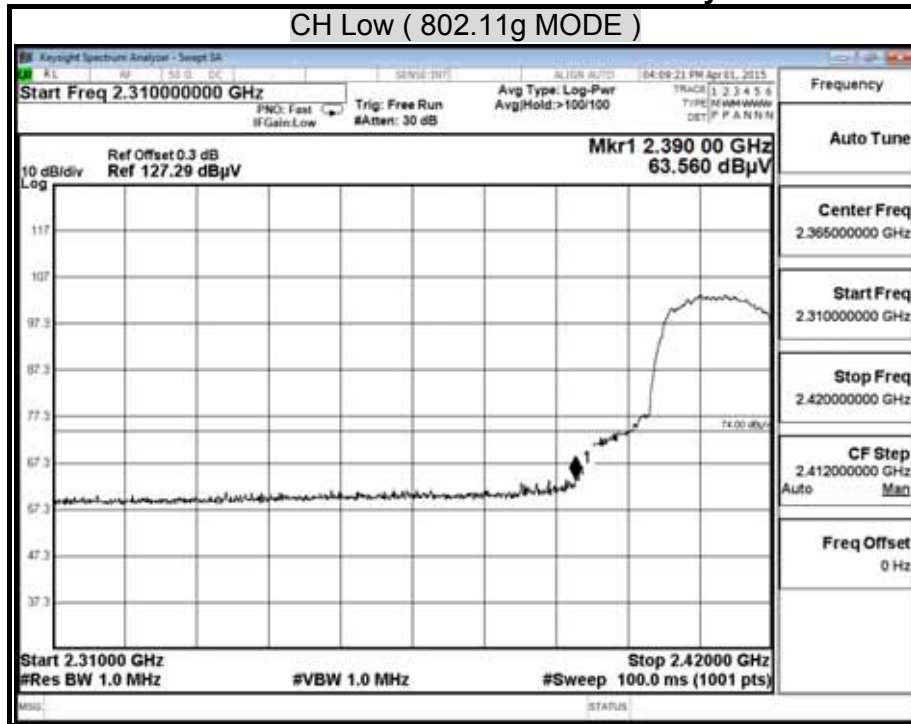

Detector mode : Average


Polarity : Horizontal

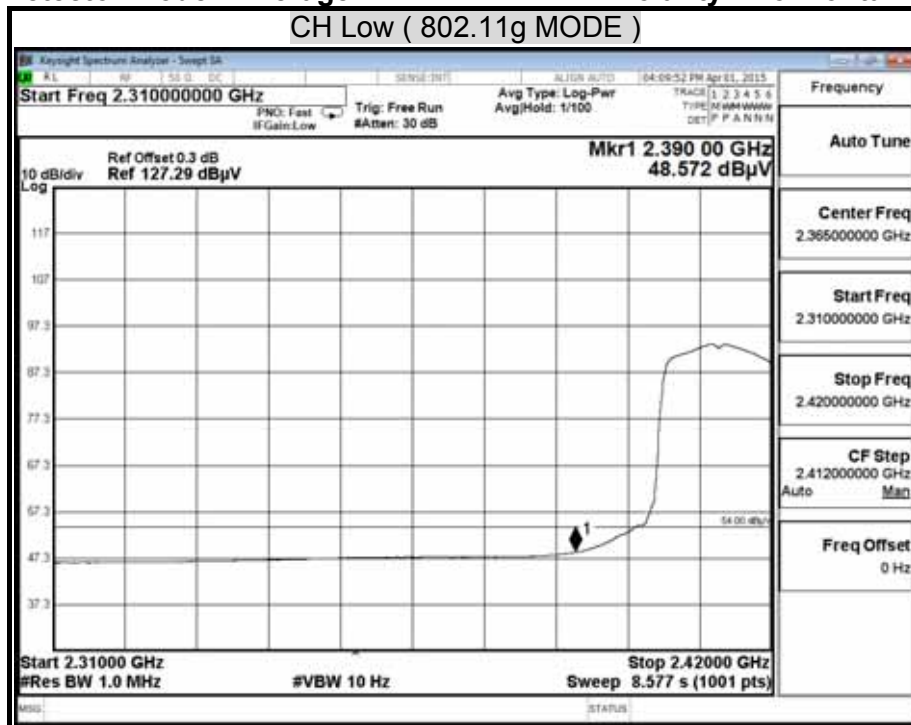




Detector mode : Peak

Polarity : Vertical

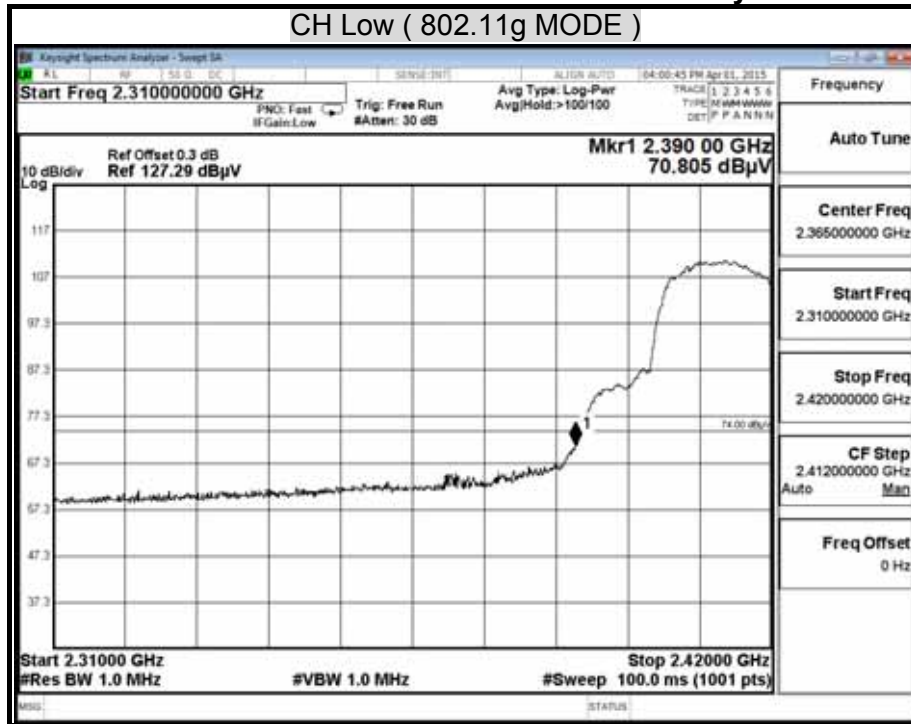

Detector mode : Average


Polarity : Vertical

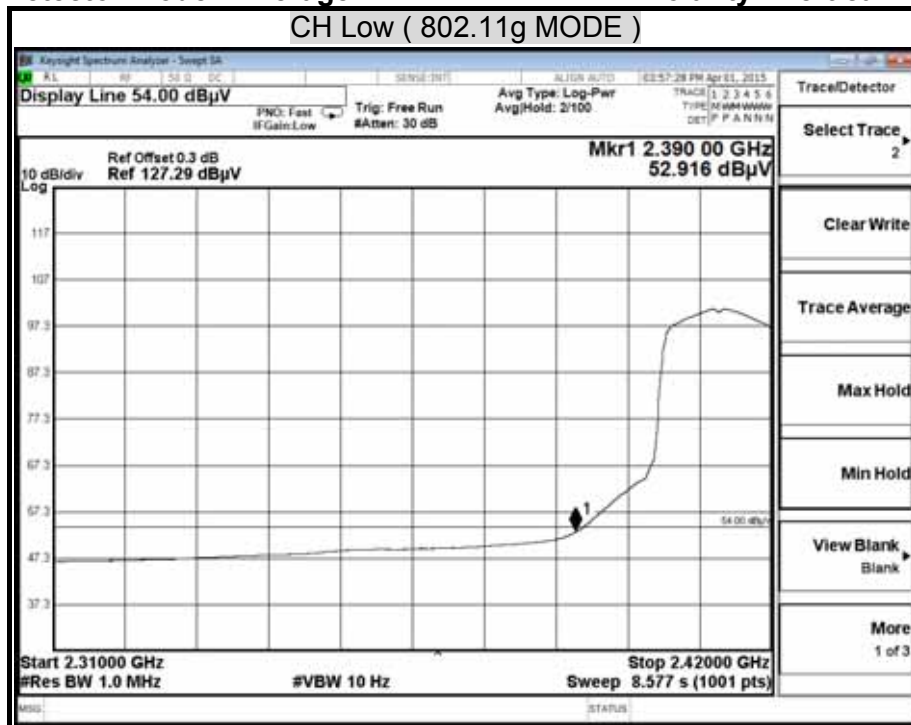




Detector mode : Peak

Polarity : Horizontal

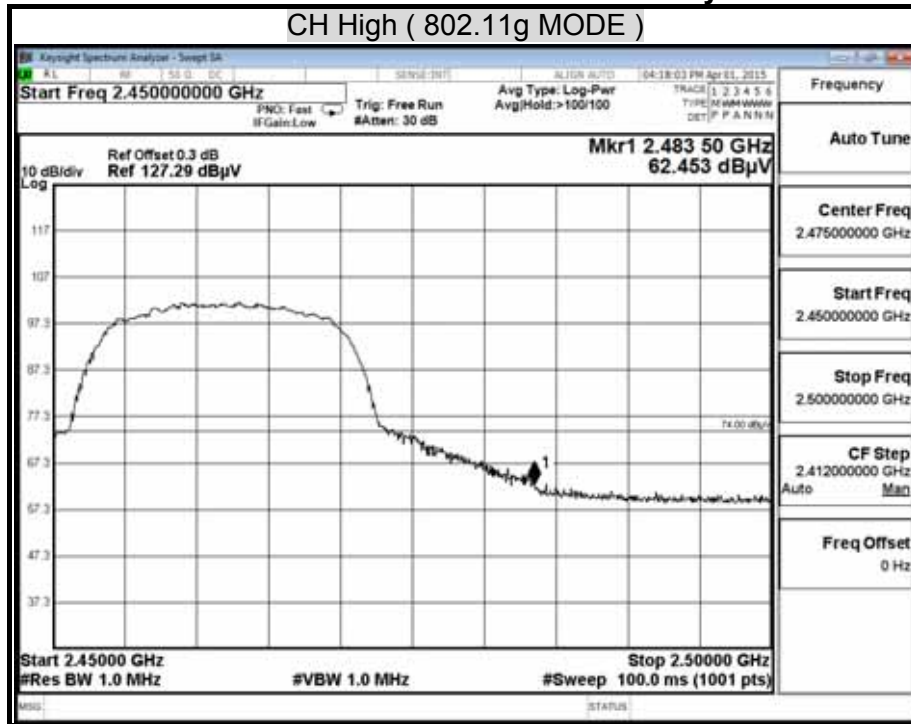

Detector mode : Average


Polarity : Horizontal

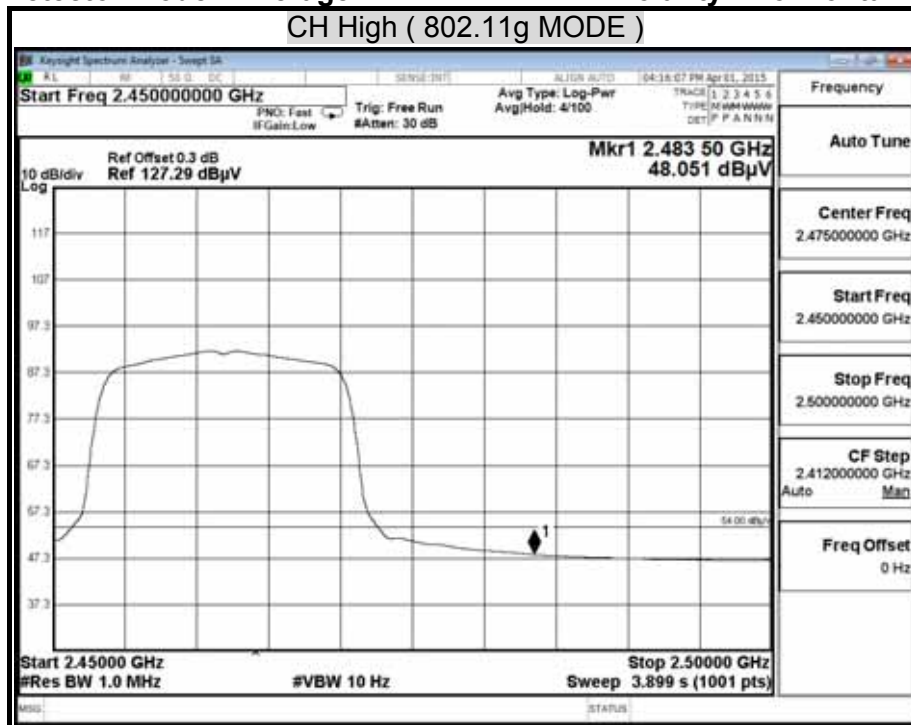




Detector mode : Peak

Polarity : Vertical

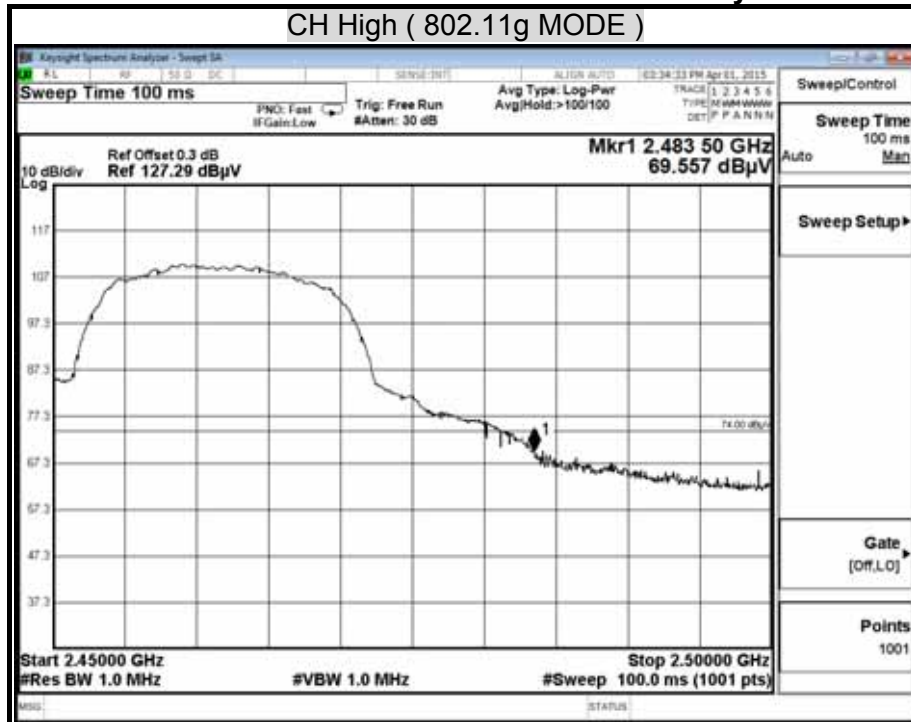

Detector mode : Average


Polarity : Vertical

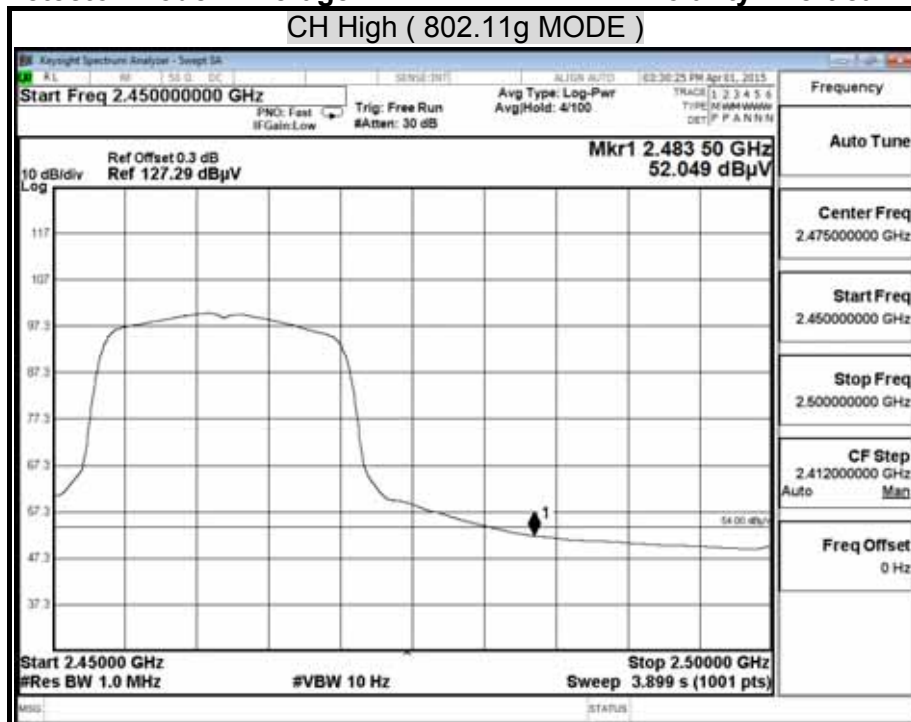




Detector mode : Peak

Polarity : Horizontal

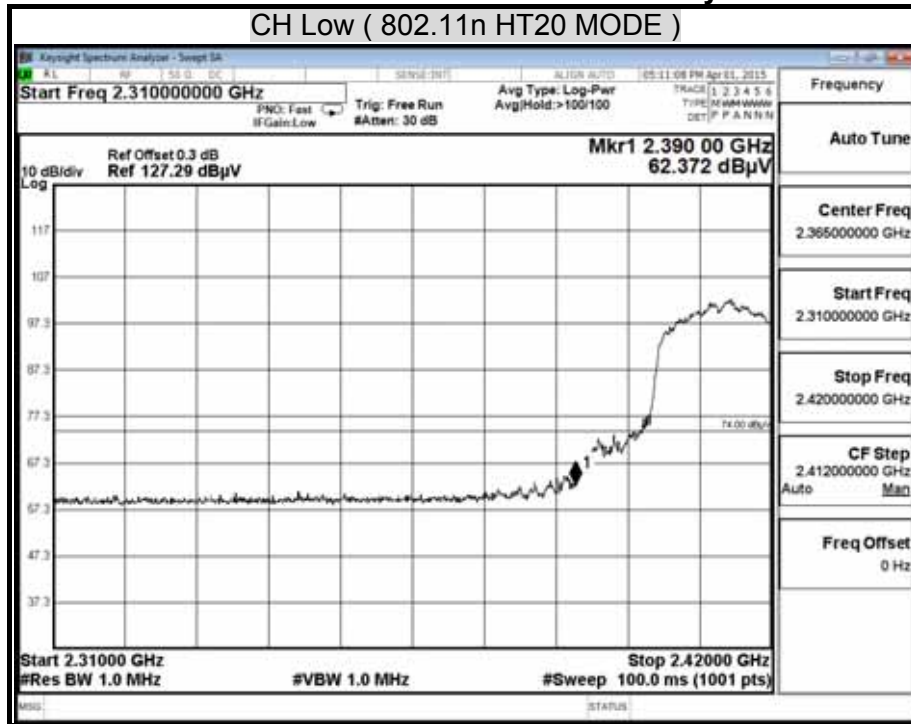

Detector mode : Average


Polarity : Horizontal

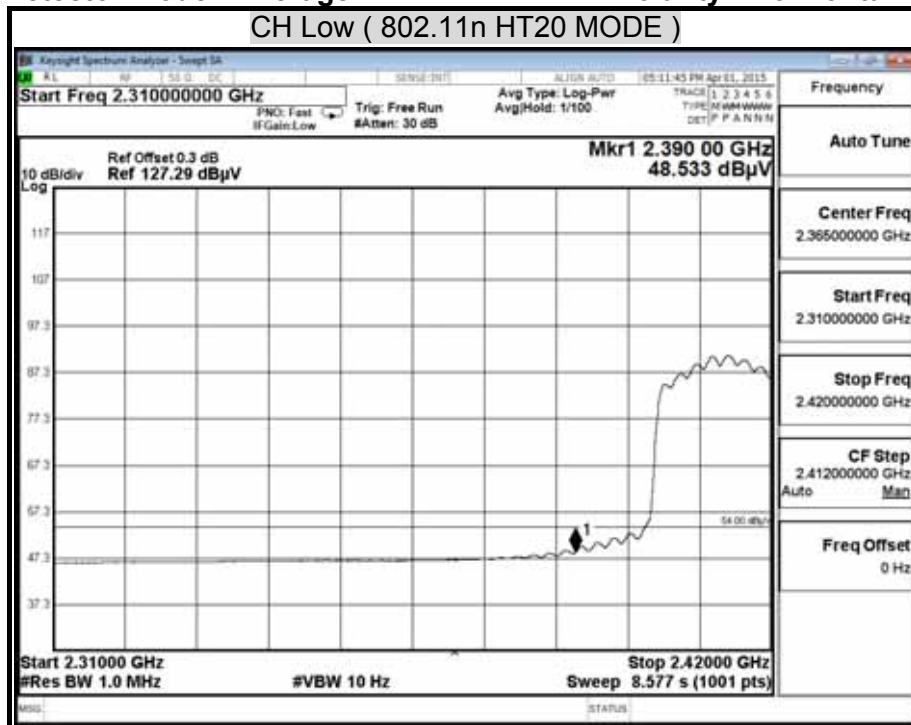




Detector mode : Peak

Polarity : Vertical

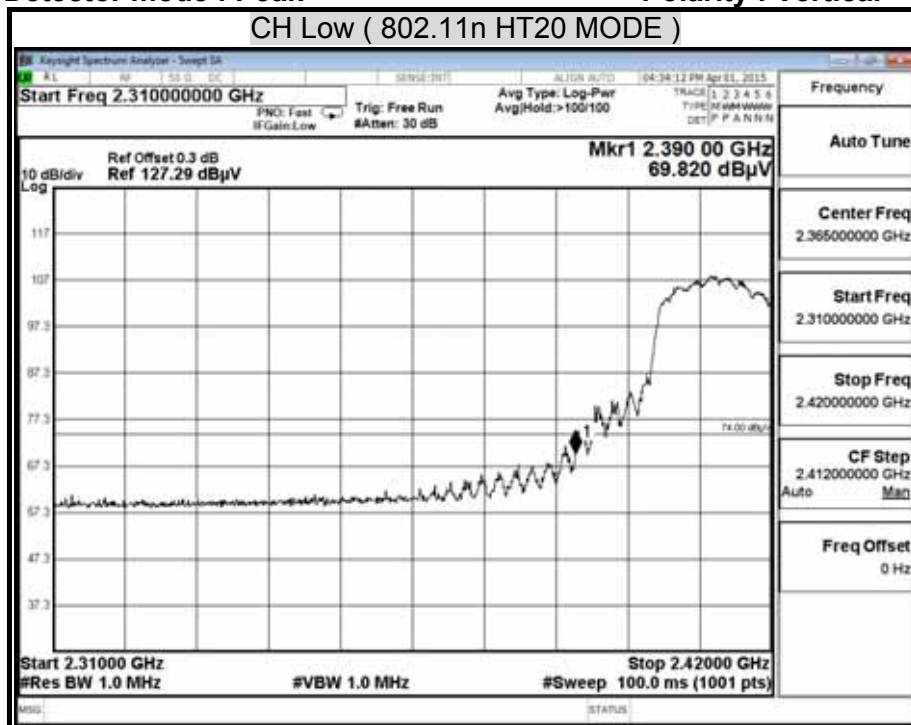

Detector mode : Average


Polarity : Vertical

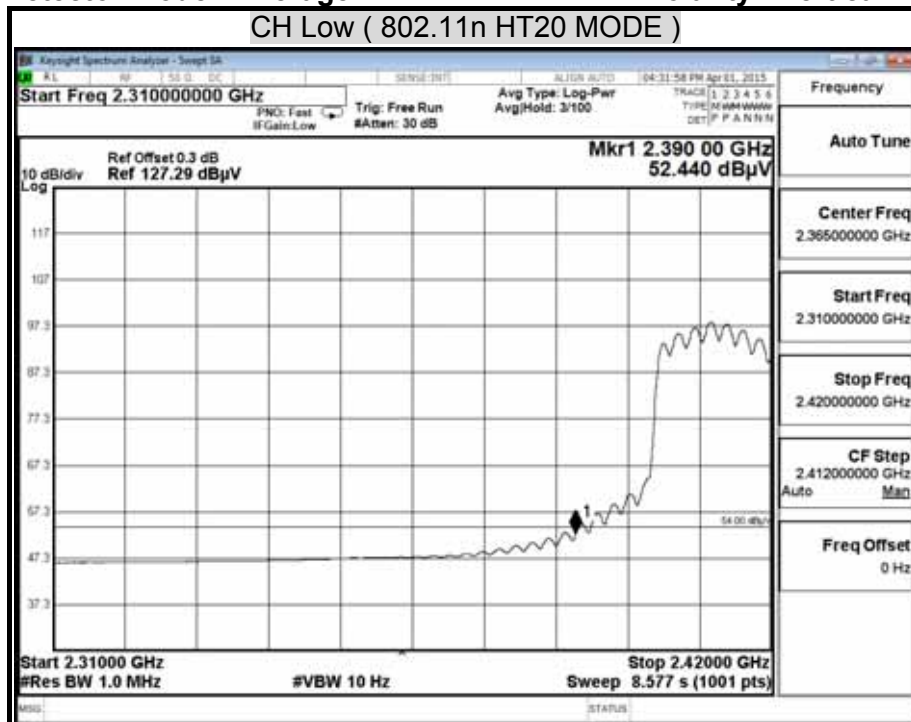




Detector mode : Peak

Polarity : Horizontal

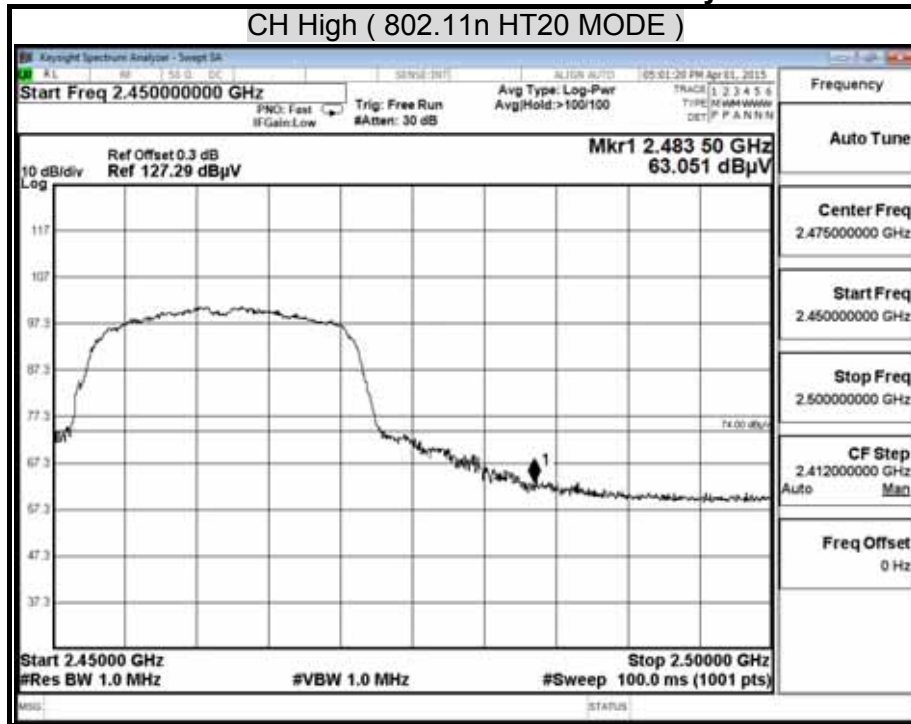

Detector mode : Average


Polarity : Horizontal

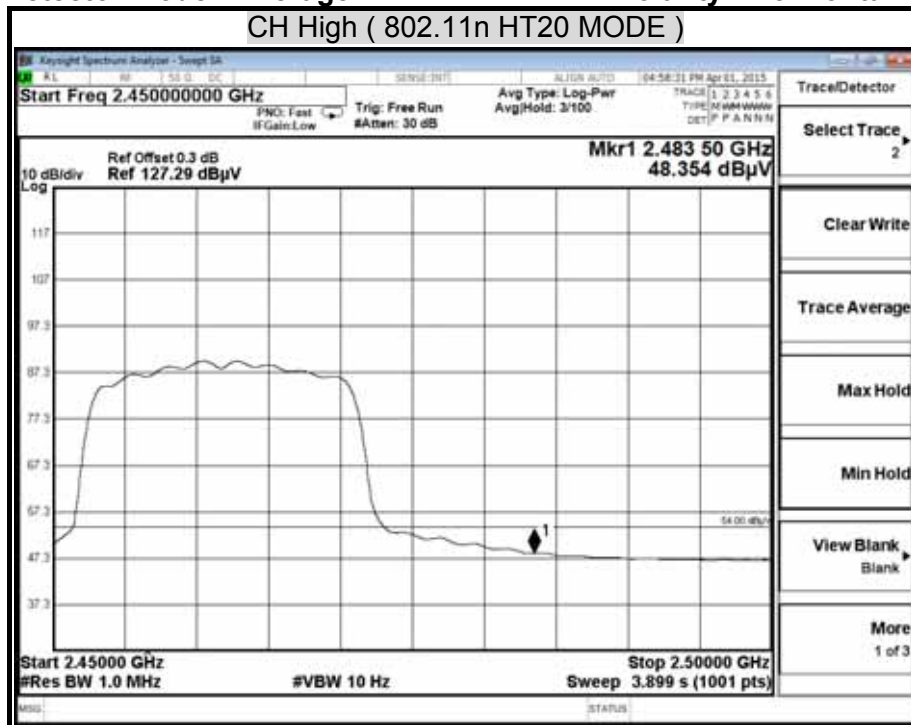




Detector mode : Peak

Polarity : Vertical

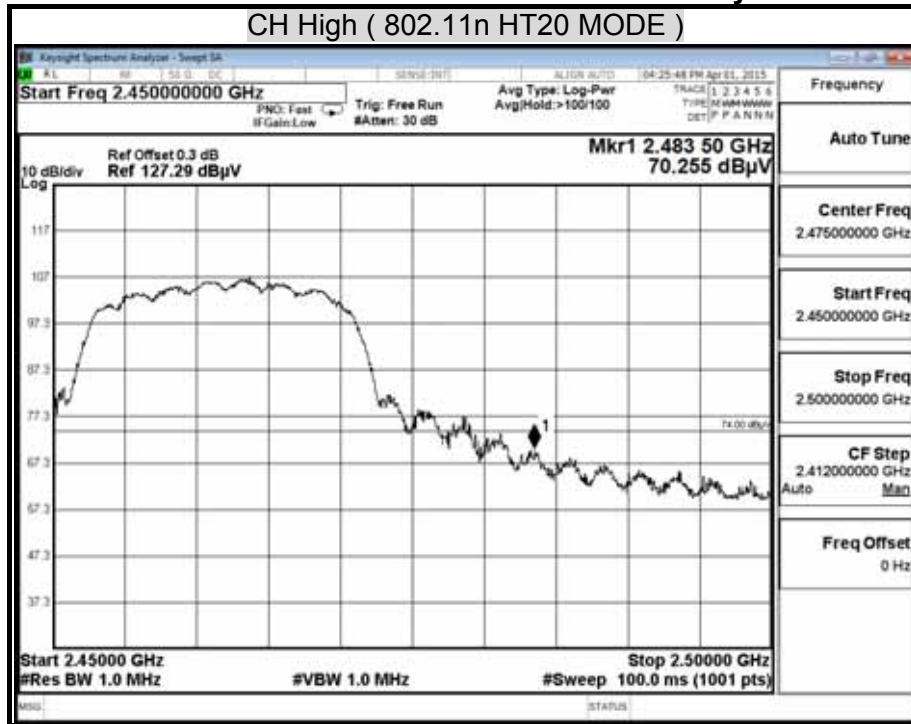

Detector mode : Average


Polarity : Vertical

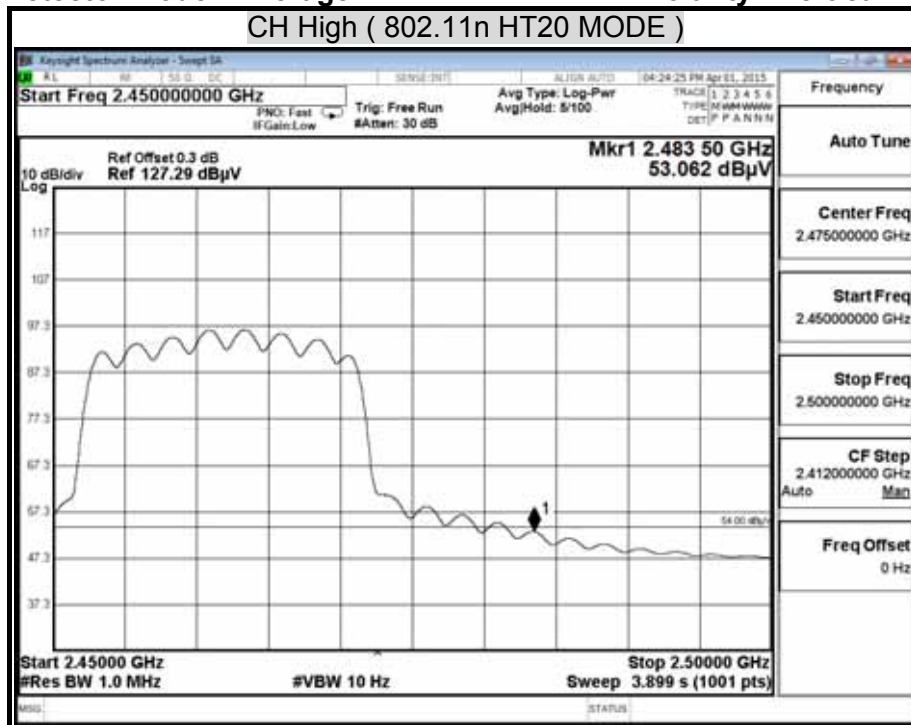




Detector mode : Peak

Polarity : Horizontal

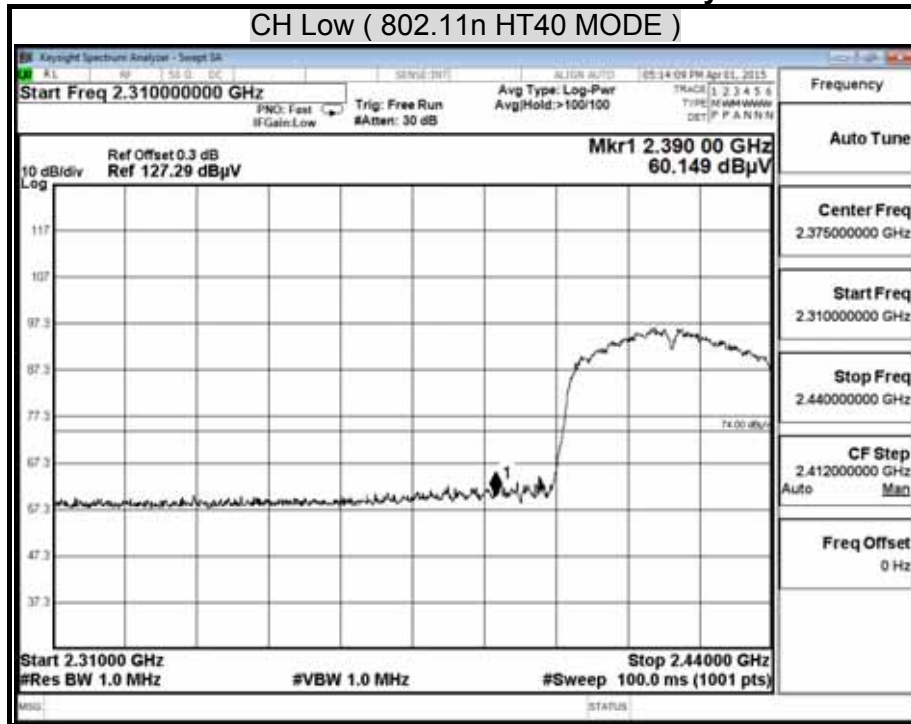

Detector mode : Average


Polarity : Horizontal

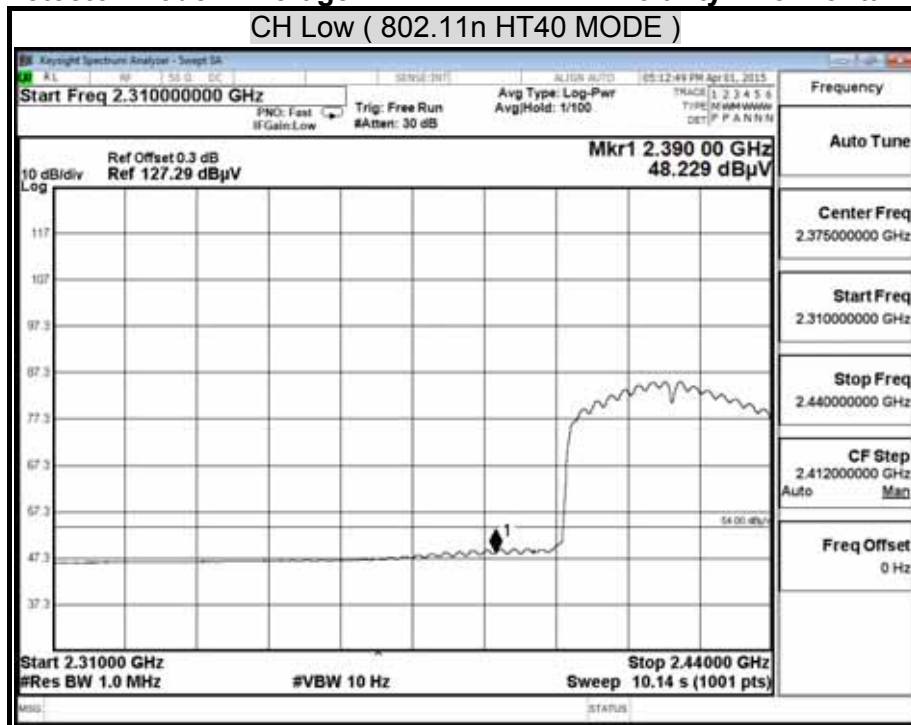




Detector mode : Peak

Polarity : Vertical

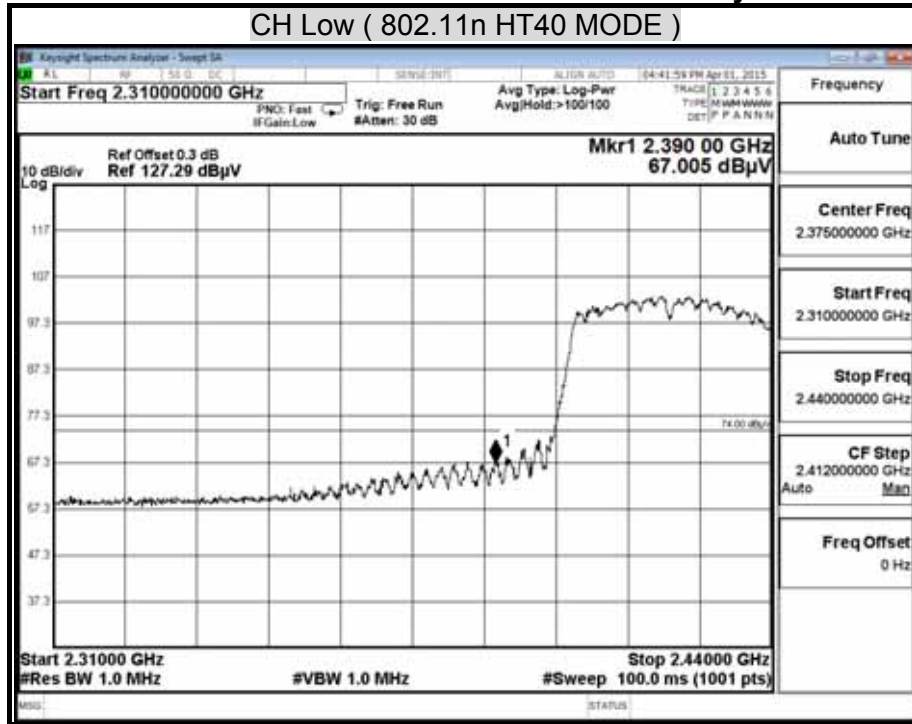

Detector mode : Average


Polarity : Vertical

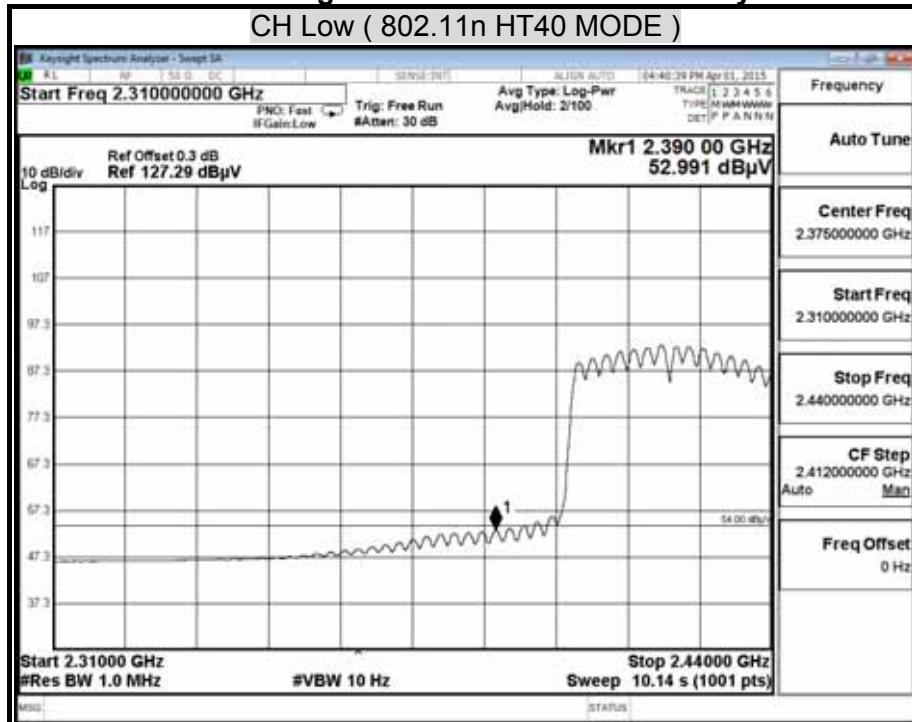




Detector mode : Peak

Polarity : Horizontal

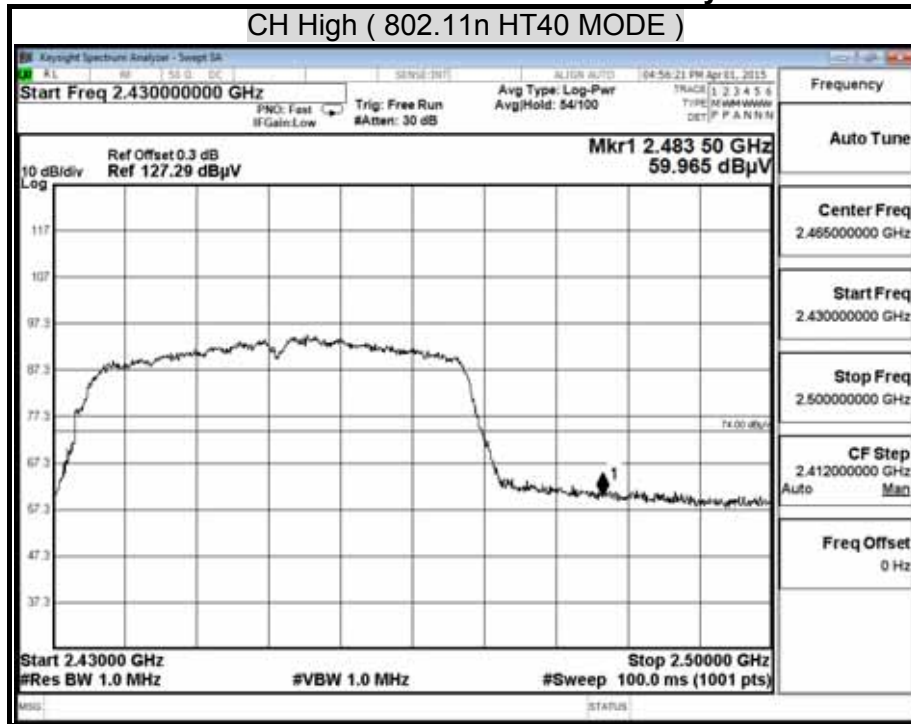

Detector mode : Average


Polarity : Horizontal

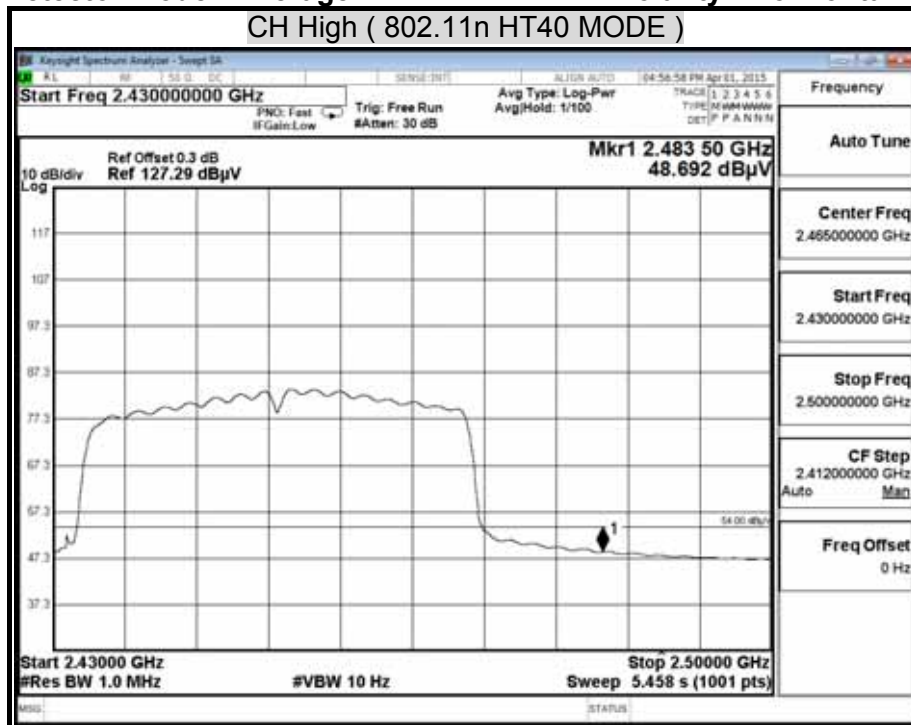




Detector mode : Peak

Polarity : Vertical

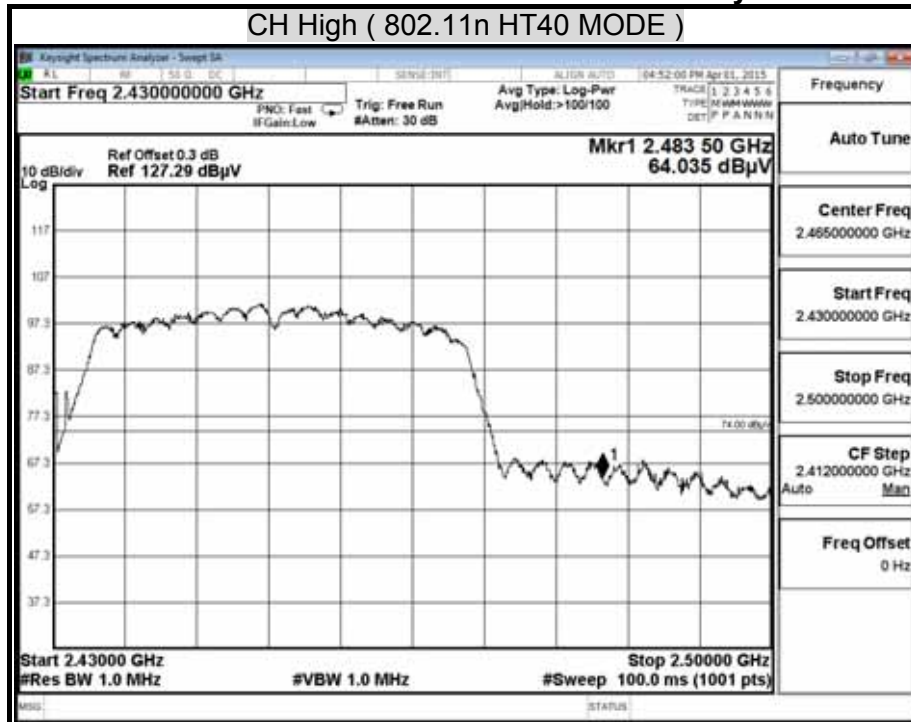

Detector mode : Average

Polarity : Vertical

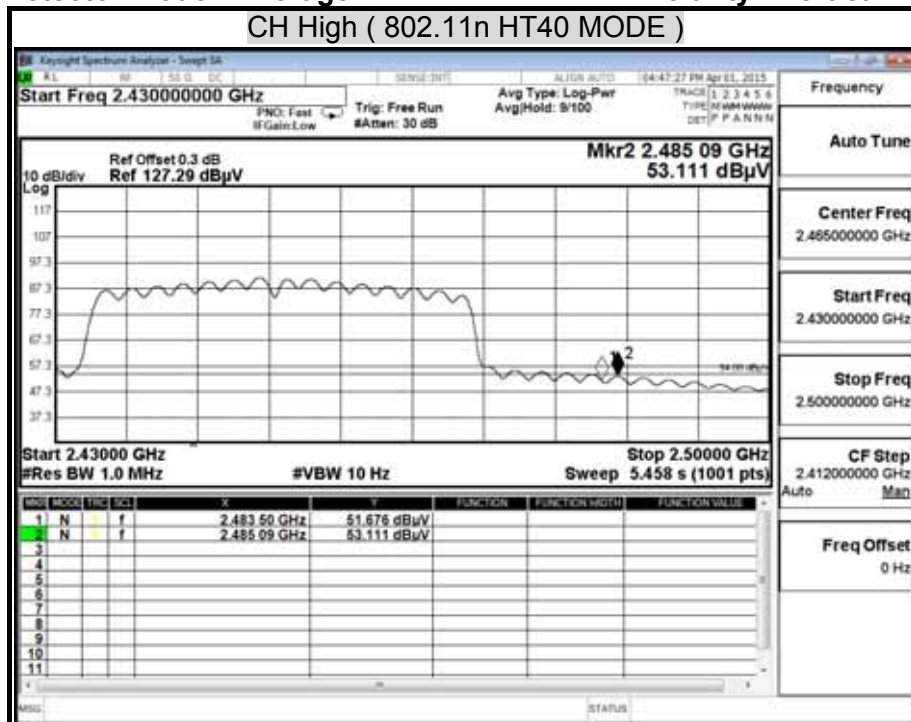



8.7 POWERLINE CONDUCTED EMISSIONS

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dBμv)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50


TEST EQUIPMENTS

The following test equipments are used during the conducted power line tests :

Conducted Emission room #1				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N.	SCHWARZBECK	NNLK 8130	8130124	OCT. 19, 2015
	Rohde & Schwarz	ESH 3-Z5	893540/015	APR. 13, 2016
	Rohde & Schwarz	ESCS 30	100348	DEC. 08, 2015
TEST RECEIVER	CCS	BNC50	11	DEC. 04, 2015
TYPE N COAXIAL CABLE	SOLAR	9208-1	041037	APR. 01, 2016
R.F.Current Probe	SCHAFFNER	CVP 2200	15984	APR. 01, 2016
Capacitive Voltage Probe	SCHWARZBECK	NNLK 8130	8130124	OCT. 19, 2015
Test S/W	e-3 (5.04211c) R&S (2.27)			



TEST SETUP

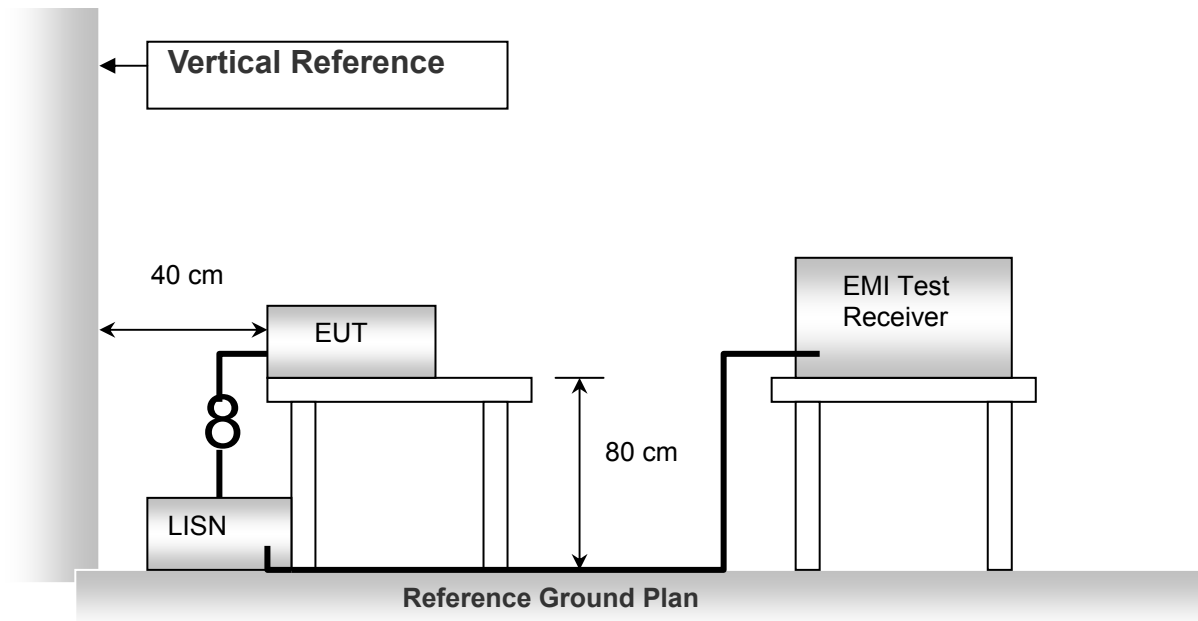

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80cm above the horizontal ground plane. The EUT IS CONFIGURED IN ACCORDANCE WITH ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both quasi-peak detection and average detection measurements.

Line conducted data is recorded for both NEUTRAL and LINE.




TEST RESULTS

No non-compliance noted.

Model No.	EAP706	Test Mode	Normal Operation
Environmental Conditions	26 , 56% RH	Resolution Bandwidth	9 kHz
Tested by	Vis Liang		

LINE

(The chart below shows the highest readings taken from the final data.)

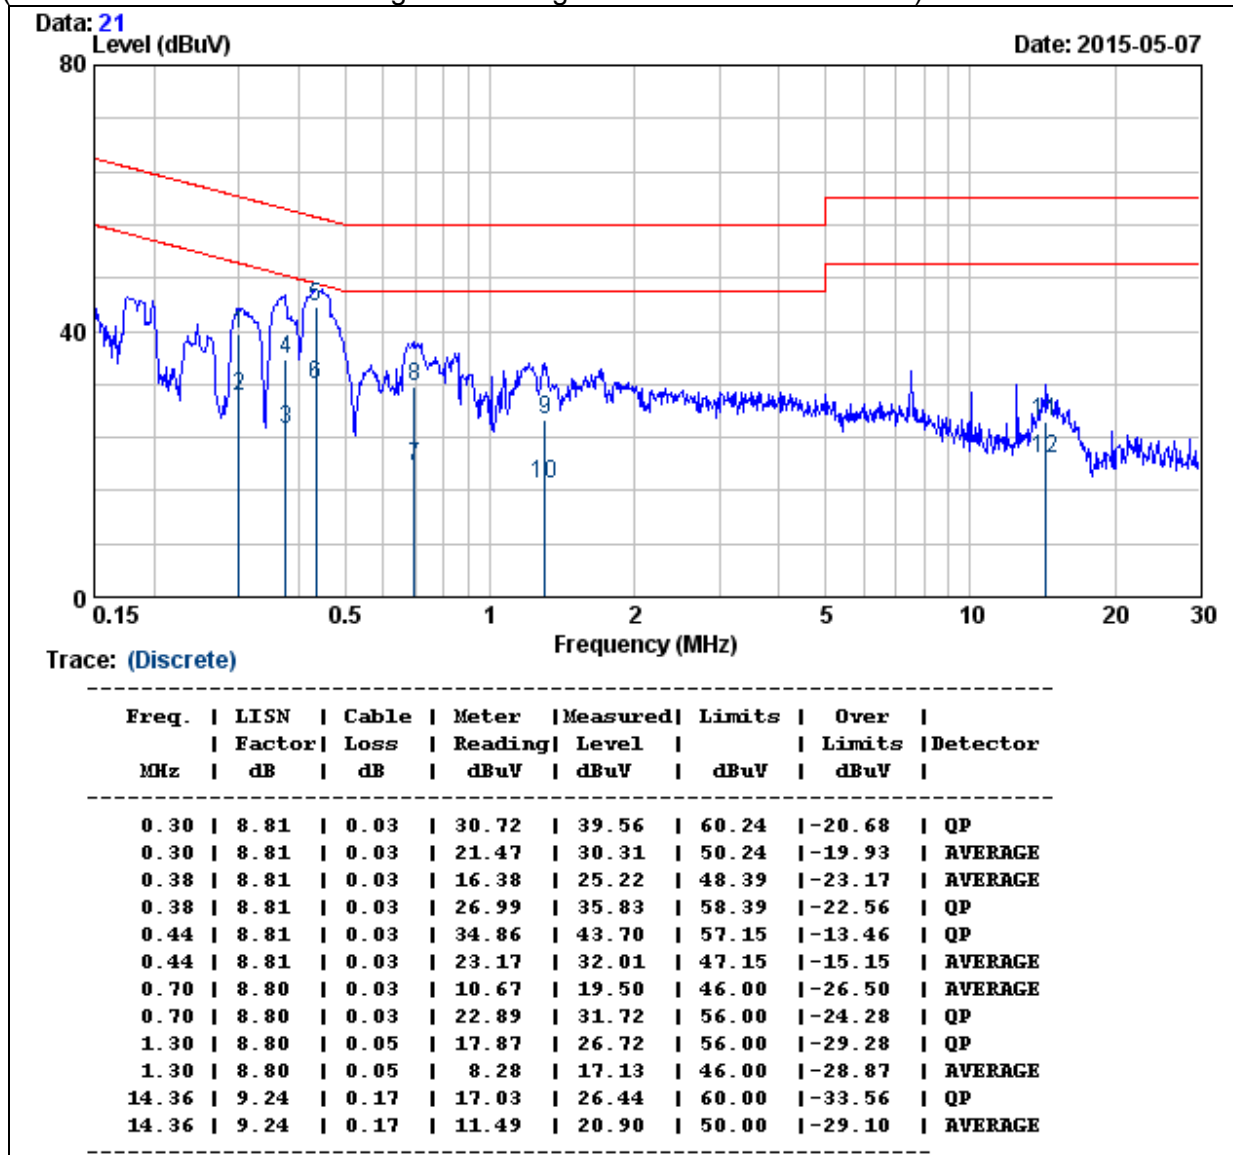


REMARKS : 1. Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB)
 2. Over Limit (dBUV) = Measured Level (dBUV) – Limits (dBUV)



Model No.	EAP706	Test Mode	Normal Operation
Environmental Conditions	26 , 56% RH	Resolution Bandwidth	9 kHz
Tested by	Vis Liang		

LINE

(The chart below shows the highest readings taken from the final data.)

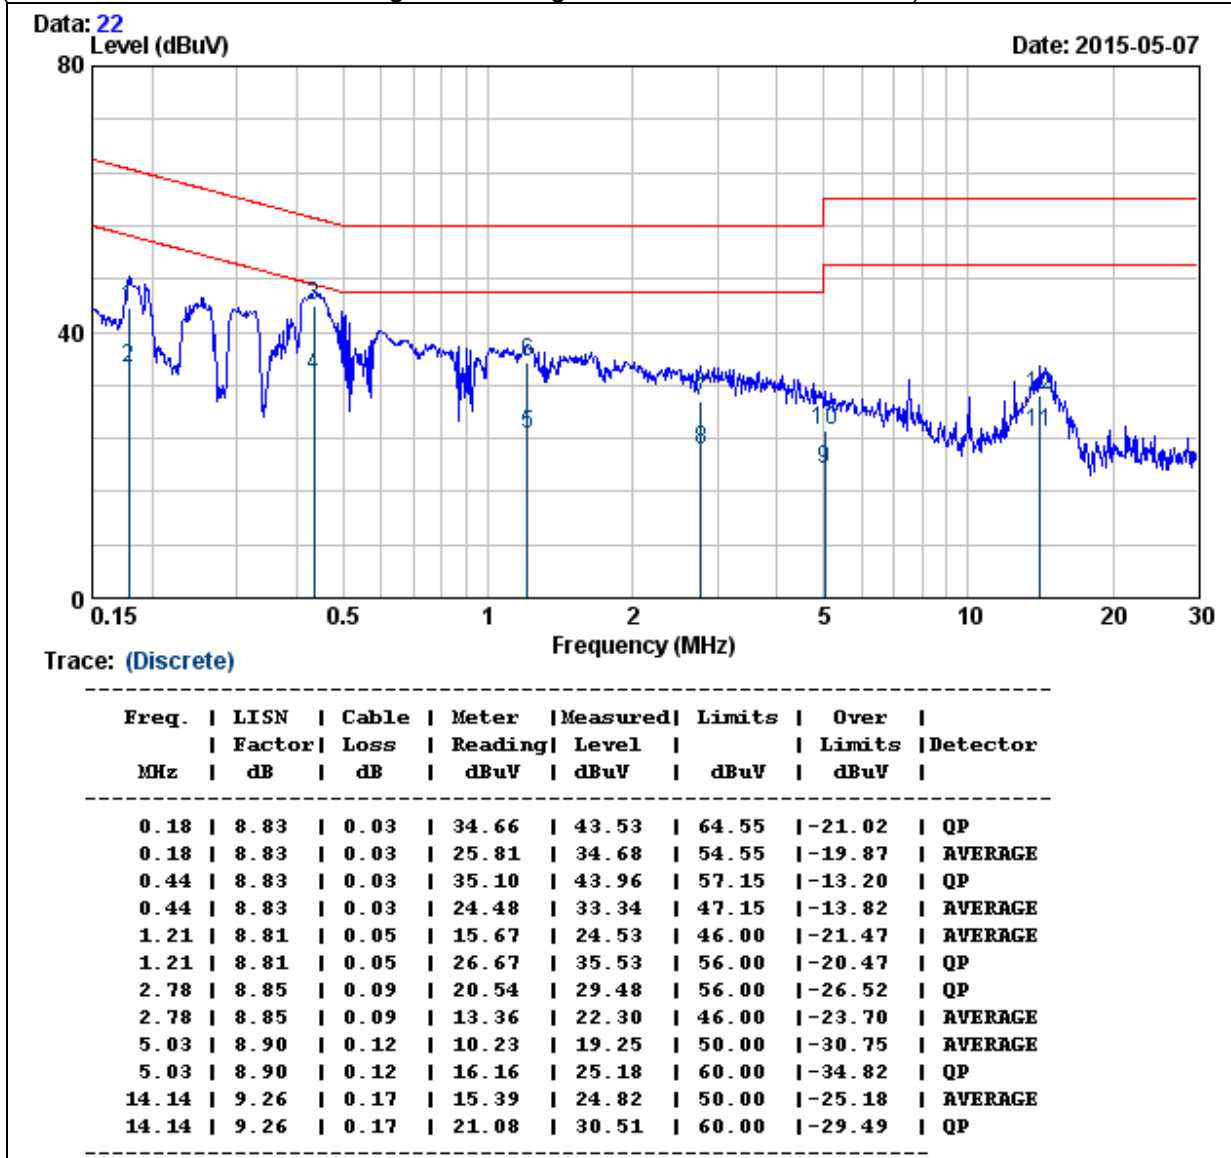


REMARKS : 1. Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB)
2. Over Limit (dBUV) = Measured Level (dBUV) – Limits (dBUV)



Model No.	EAP706	Test Mode	POE Mode
Environmental Conditions	26 , 56% RH	Resolution Bandwidth	9 kHz
Tested by	Vis Liang		

LINE

(The chart below shows the highest readings taken from the final data.)

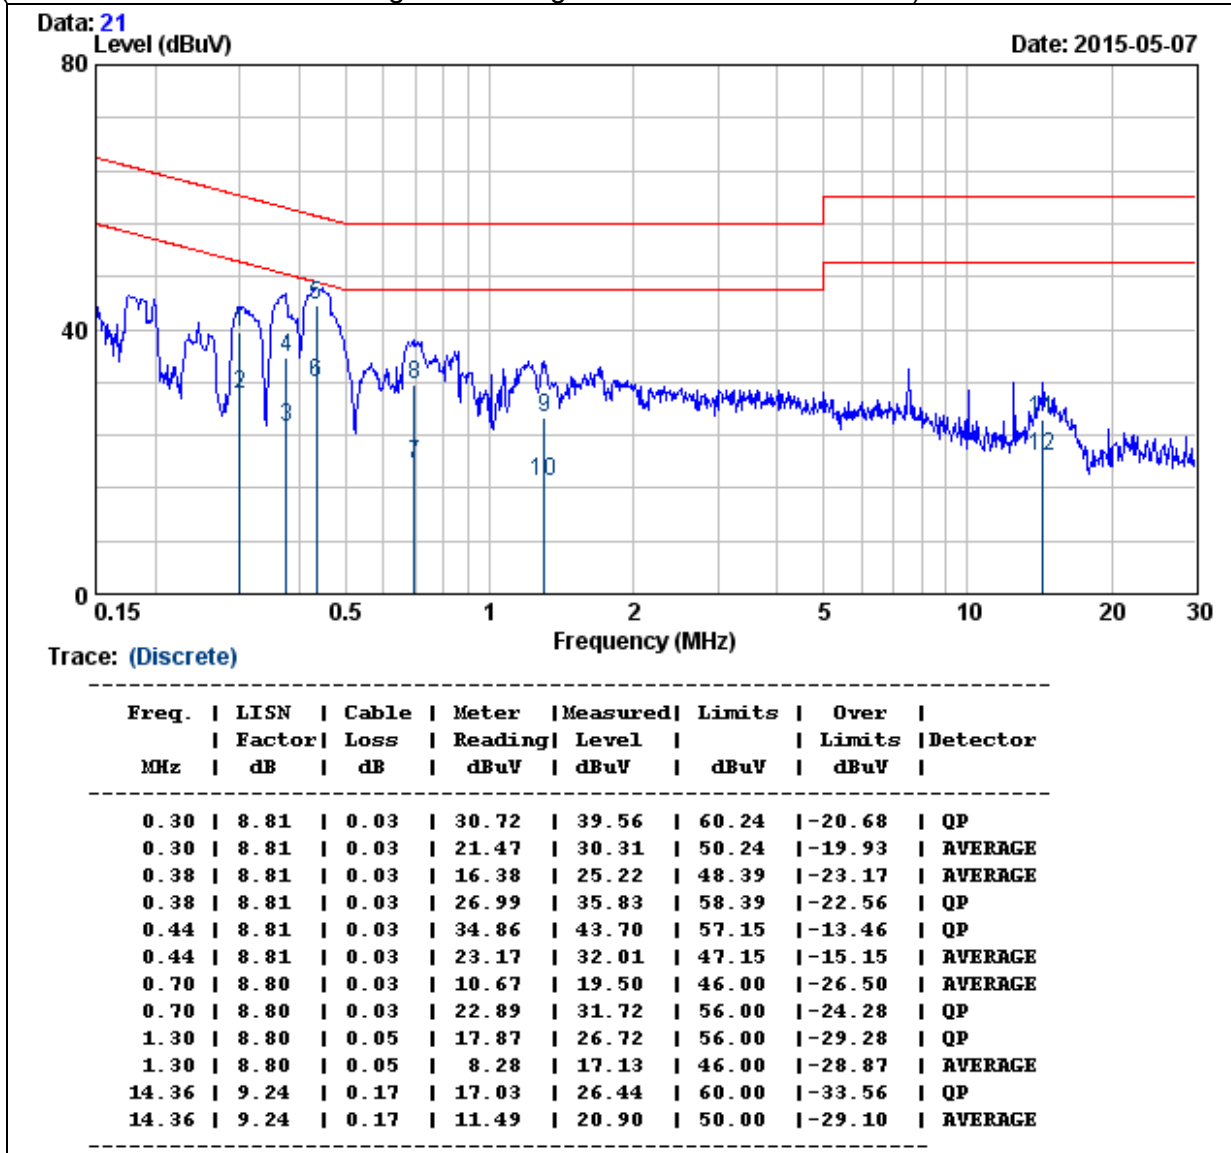


REMARKS : 1. Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB)
2. Over Limit (dBuV) = Measured Level (dBuV) – Limits (dBuV)



Model No.	EAP706	Test Mode	POE Mode
Environmental Conditions	26 , 56% RH	Resolution Bandwidth	9 kHz
Tested by	Vis Liang		

LINE

(The chart below shows the highest readings taken from the final data.)

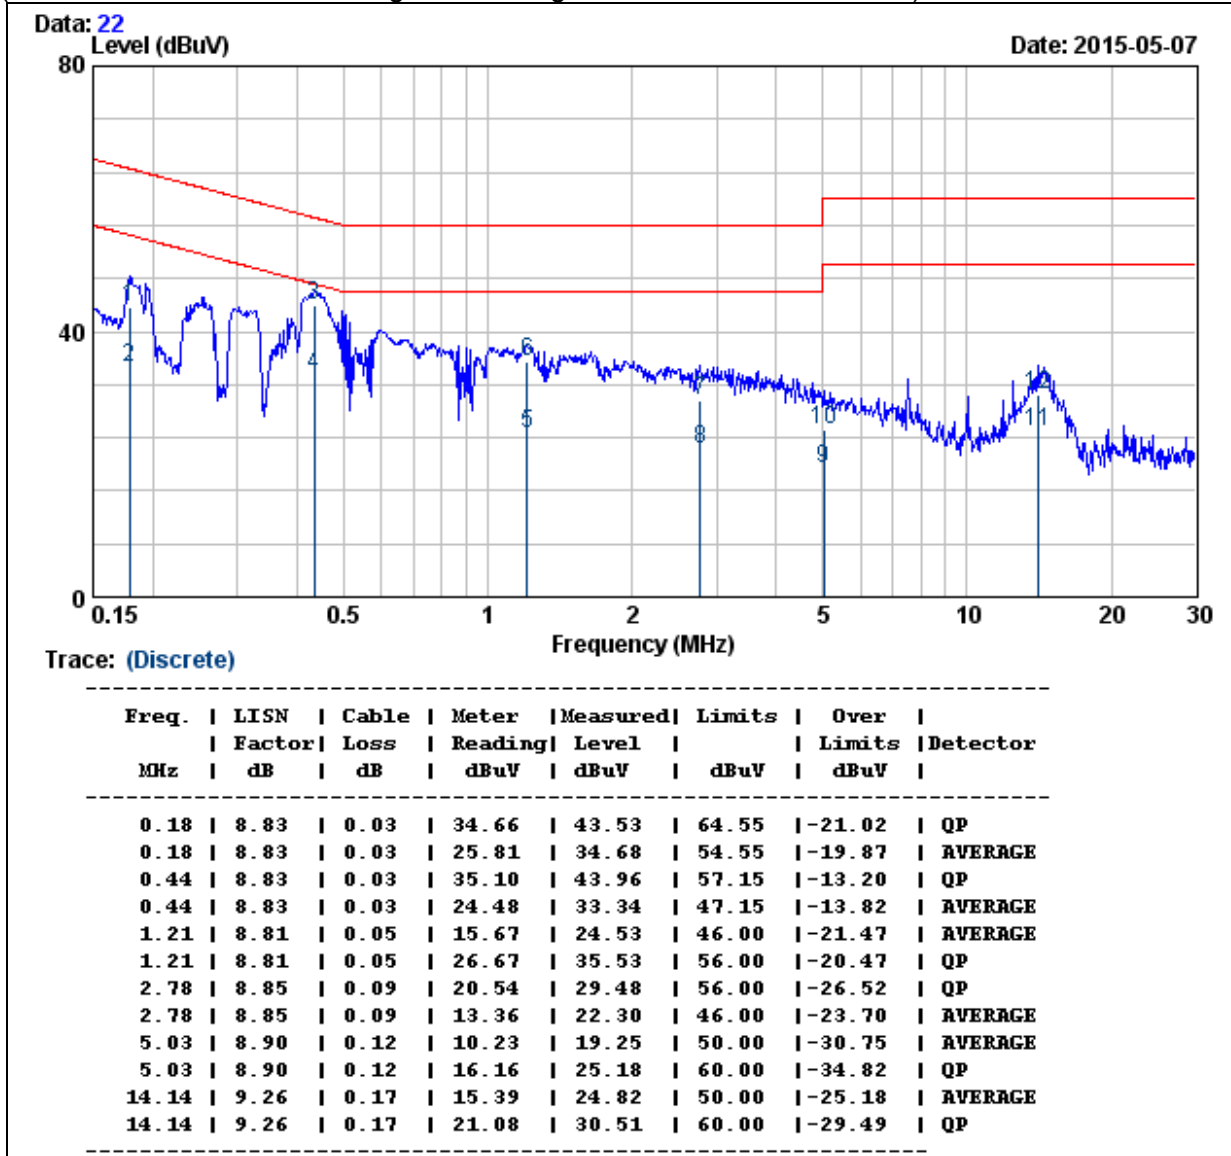

REMARKS : 1. Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB)
2. Over Limit (dBuV) = Measured Level (dBuV) – Limits (dBuV)



9. ANTENNA REQUIREMENT

9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 ANTENNA CONNECTED CONSTRUCTION

Antenna*2pcs (2TX2RX)

For model: EAP706

Manufacture: Cortec Technology Inc.

Type: Dipole (SMA Male Reverse)

Mode: AN2450-3901BRS

Gain : 2.7 dBi

For model: EAP705

Manufacture: GainForce Technology Co., Ltd.

Type: Chip

Mode: AN3216-T2R4PAAT/LF

Gain : 1.5 dBi