

FCC PART 15.247

TEST REPORT

For

Suga Electronics Limited

22/F., Tower B, Billion Centre, 1 Wang Kwong Road, Kowloon Bay, Kowloon, Hong Kong

FCC ID: VZFSWN24EA0

Report Type: Original Report	Product Type: Wifi module 802.11 b/g/n with AP (Access Point) / Router function
Test Engineer: Rocky Kang	<i>Rocky Kang</i>
Report Number: RSZ151106002-00	
Report Date: 2015-11-24	
Reviewed By: RF Engineer	<i>Bell Hu</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION.....	5
EQUIPMENT MODIFICATIONS.....	5
EUT EXERCISE SOFTWARE.....	6
SUPPORT EQUIPMENT LIST AND DETAILS.....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP.....	7
SUMMARY OF TEST RESULTS.....	8
FCC§15.247 (I), §1.1307 (B) (1) & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
APPLICABLE STANDARD.....	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD.....	10
ANTENNA CONNECTOR CONSTRUCTION.....	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS.....	11
APPLICABLE STANDARD.....	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED FACTOR & MARGIN CALCULATION.....	13
TEST RESULTS SUMMARY.....	13
TEST DATA.....	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD.....	16
MEASUREMENT UNCERTAINTY.....	16
EUT SETUP.....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	17
TEST PROCEDURE.....	17
TEST EQUIPMENT LIST AND DETAILS.....	18
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	18
TEST RESULTS SUMMARY.....	18
TEST DATA.....	19
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	39
APPLICABLE STANDARD.....	39
TEST PROCEDURE.....	39
TEST EQUIPMENT LIST AND DETAILS.....	39
TEST DATA.....	39

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....53
APPLICABLE STANDARD53
TEST PROCEDURE53
TEST EQUIPMENT LIST AND DETAILS.....53
TEST DATA54

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....55
APPLICABLE STANDARD55
TEST PROCEDURE55
TEST EQUIPMENT LIST AND DETAILS.....55
TEST DATA56

FCC §15.247(e) - POWER SPECTRAL DENSITY65
APPLICABLE STANDARD65
TEST PROCEDURE65
TEST EQUIPMENT LIST AND DETAILS.....65
TEST DATA66

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Suga Electronics Limited's* product, model number: *SWN24EA-0 (FCC ID: VZFSWN24EA0)* or the "EUT" in this report was a *Wifi module 802.11 b/g/n with AP (Access Point) / Router function*, which was measured approximately: 3.0 cm (L) x 2.7 cm (W) x 0.3 cm (H), rated with input voltage: DC 5.0 V from PC.

**All measurement and test data in this report was gathered from production sample serial number: 1507038 (Assigned by Shenzhen BACL). The EUT supplied by the applicant was received on 2015-11-06.*

Objective

This report is prepared on behalf of *Suga Electronics Limited* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with RF radiated emission is 5.91 dB for 30MHz-1GHz.and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2013. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10-2013.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40 mode, 9 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	8	2447
4	2427	9	2452
5	2432	/	/
6	2437	/	/
7	2442	/	/

EUT was tested with Channel 3, 6 and 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

Exercise Software: MT7603E QA Tool

The test was performed under:

For Chain 0:

802.11b: Data rate: 1 Mbps, power level: 23
 802.11g: Data rate: 6 Mbps, power level: 23
 802.11n-HT20: Data rate: MCS0 (20M), power level: 1B
 802.11n-HT40: Data rate: MCS0 (40M), power level: 1B

For Chain 1:

802.11b: Data rate: 1 Mbps, power level: 22
 802.11g: Data rate: 6 Mbps, power level: 22
 802.11n-HT20: Data rate: MCS0 (20M), power level: 1A
 802.11n-HT40: Data rate: MCS0 (40M), power level: 1A

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
IBM	System PC	1#	N/A
TCL	Monitor	2#	N/A
Microsoft	Keyboard	X823093-002	0200706128743
Microsoft	Mouse	2SJ-00004	0204608267209

External I/O Cable

Cable Description	Length (m)	From / Port	To
shielding detachable VGA cable	1.5	Computer	Monitor
Shielding un-detachable USB cable	1.5	Keyboard	Computer
Shielding un-detachable USB cable	1.5	Mouse	Computer
Un-shielding detachable AC cable	1.2	Monitor	LISN 2
Un-shielding detachable AC cable	1.2	Computer	LISN 1

Block Diagram of Test Setup

For conducted emission

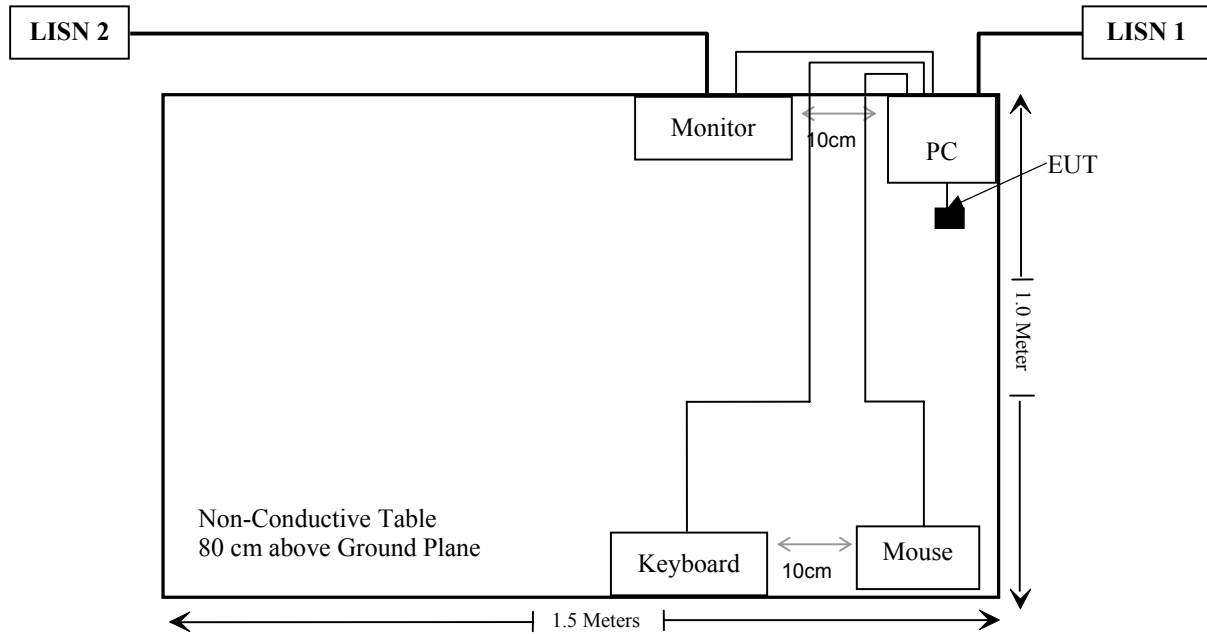

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC§15.247 (I), §1.1307 (B) (1) & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Antenna Gain (dBi)	Max tune-up Conducted power (dBm)	Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
802.11b	4.0	2			

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has MIMO antenna arrangement, there are permanently attached through I-PEX connector and the maximum antenna gain is 4.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Port	Expanded Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup

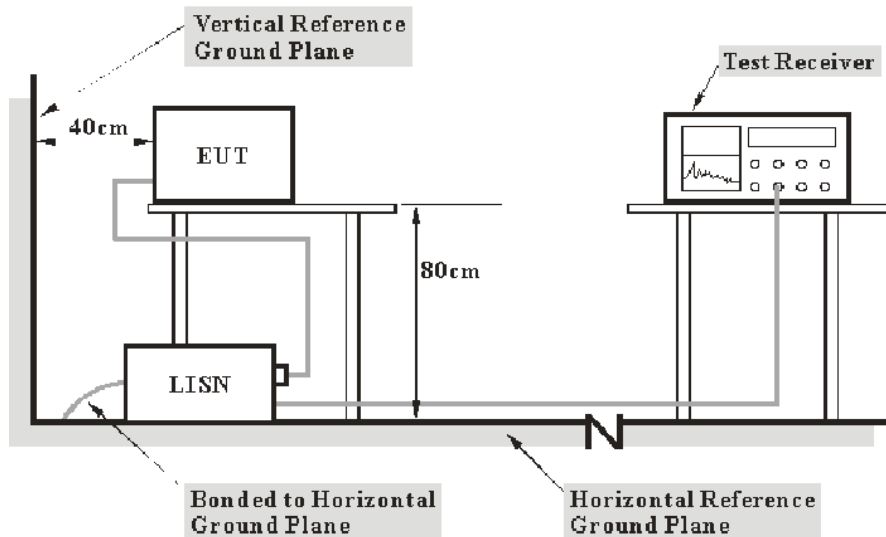

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The PC was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2015-06-03	2016-06-02
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2014-12-01	2015-12-01
Rohde & Schwarz	LISN	ESH2-Z5	892107/021	2015-06-09	2016-06-09
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2015-05-14	2016-05-13
Rohde & Schwarz	CE Test software	EMC 32	V8.53	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, the worst margin reading as below:

5.8 dB at 0.801970 MHz in the **Neutral** conducted mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Rocky Kang on 2015-11-23.

EUT operation mode: Transmitting

AC 120V/60 Hz, Line


EMI Auto Test L

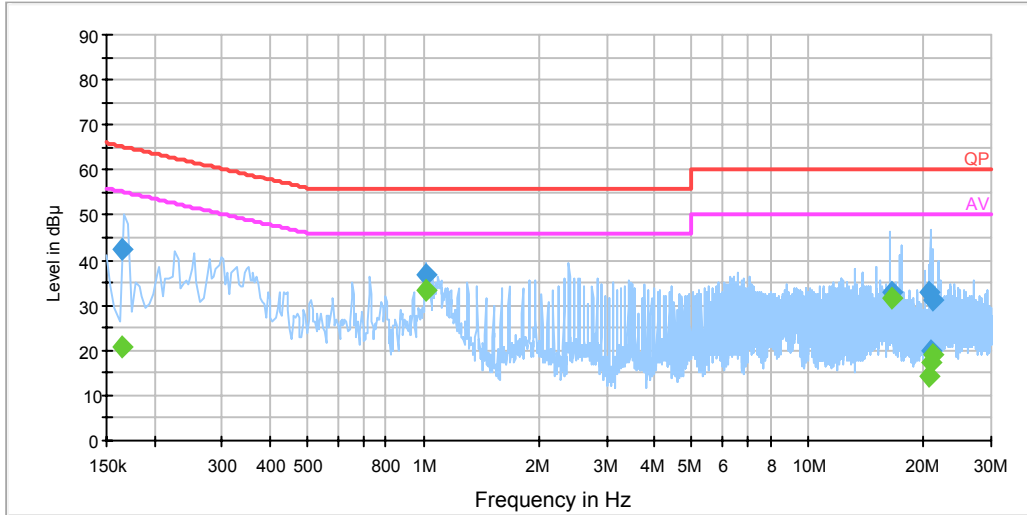

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.165500	42.4	20.0	65.2	22.8	QP
0.165500	20.9	20.0	55.2	34.3	Ave.
1.018730	36.6	20.0	56.0	19.4	QP
1.018730	33.4	20.0	46.0	12.6	Ave.
16.503670	32.8	20.1	60.0	27.2	QP
16.503670	31.4	20.1	50.0	18.6	Ave.
20.697610	33.1	20.1	60.0	26.9	QP
20.697610	14.2	20.1	50.0	35.8	Ave.
20.810390	19.8	20.1	60.0	40.2	QP
20.810390	17.1	20.1	50.0	32.9	Ave.
21.097850	31.4	20.1	60.0	28.6	QP
21.097850	19.0	20.1	50.0	31.0	Ave.

AC 120V/60 Hz, Neutral

EMI Auto Test N

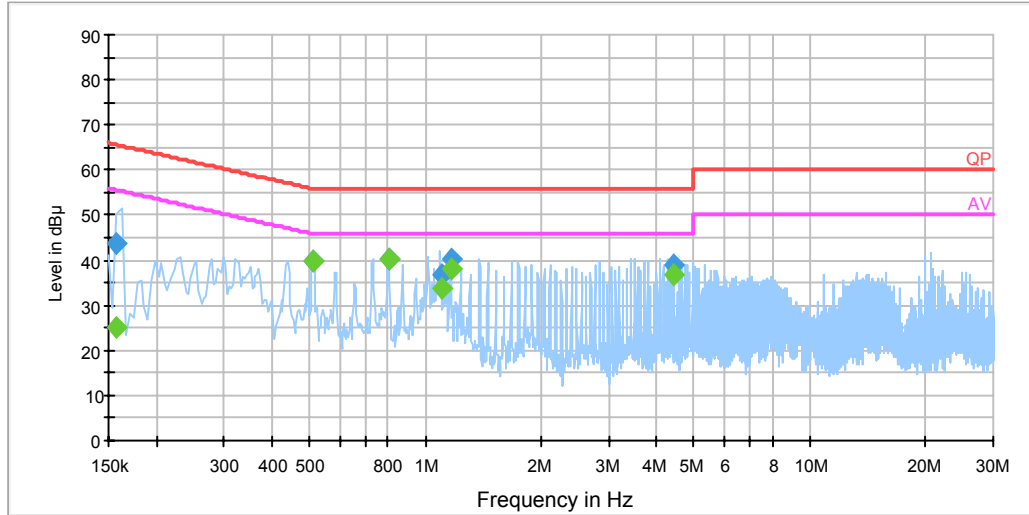

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.157500	43.9	20.0	65.6	21.7	QP
0.157500	24.9	20.0	55.6	30.6	Ave.
0.510350	39.7	19.9	56.0	16.3	QP
0.510350	39.6	19.9	46.0	6.4	Ave.
0.801970	40.1	19.9	56.0	15.9	QP
0.801970	40.2	19.9	46.0	5.8	Ave.
1.097650	36.8	20.0	56.0	19.2	QP
1.097650	33.8	20.0	46.0	12.2	Ave.
1.164510	40.1	20.0	56.0	15.9	QP
1.164510	38.2	20.0	46.0	7.8	Ave.
4.443370	38.8	20.0	56.0	17.2	QP
4.443370	36.6	20.0	46.0	9.4	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement at antenna port. And the uncertainty will not be taken into consideration for the test data recorded in the report

EUT Setup

Below 1 GHz:

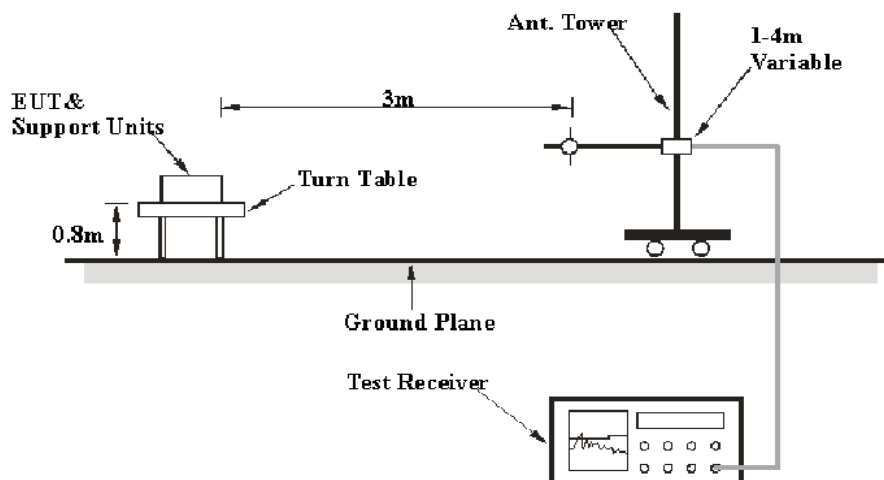

Above 1GHz:

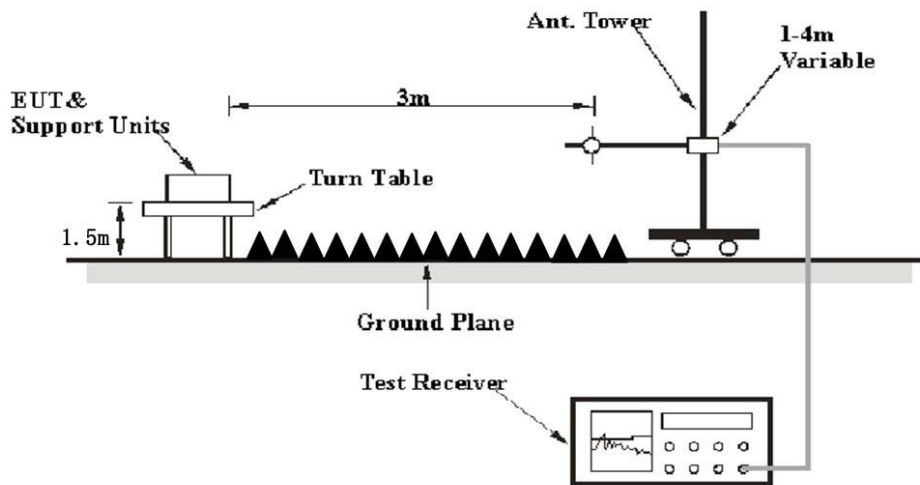

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.247 & Part 15.209 limits.

The PC was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447E	1937A01046	2015-05-06	2016-05-06
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-11-03	2016-11-03
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Mini	Amplifier	ZVA-183-S+	5969001149	2015-04-23	2016-04-23
A.H. System	Horn Antenna	SAS-200/571	135	2013-02-11	2016-02-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
TDK	Chamber	Chamber A	2#	2015-10-15	2018-10-15
TDK	Chamber	Chamber B	1#	2015-07-22	2016-07-22
DUCOMMUN	Pre-amplifier	ALN-22093530-01	991373-01	2015-08-03	2016-08-03
R&S	Auto test Software	EMC32	V9.10	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

2.65 dB at 2485.96 MHz in the Horizontal polarization for 802.11n-HT40 simultaneous transmission Mode High channel

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Rocky Kang on 2015-11-23.

EUT operation mode: Transmitting

30 MHz-25 GHz:

For Chain 0:

802.11b Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel (2412 MHz)									
206.57	49.86	QP	156	1.2	H	-15.6	34.26	43.5	9.24
2412.00	74.91	PK	288	1.4	H	32.61	107.52	/	/
2412.00	70.60	Ave.	288	1.4	H	32.61	103.21	/	/
2412.00	73.55	PK	7	2.4	V	32.61	106.16	/	/
2412.00	63.60	Ave.	7	2.4	V	32.61	96.21	/	/
2383.76	46.28	PK	190	1.7	H	4.97	51.25	74	22.75
2383.76	20.52	Ave.	190	1.7	H	4.97	25.49	54	28.51
2384.07	47.36	PK	271	2.1	H	4.97	52.33	74	21.67
2384.07	20.71	Ave.	271	2.1	H	4.97	25.68	54	28.32
2483.80	42.71	PK	323	1.6	H	6.29	49.00	74	25.00
2483.80	26.15	Ave.	323	1.6	H	6.29	32.44	54	21.56
4824.00	38.55	PK	300	2.4	H	16.92	55.47	74	18.53
4824.00	30.06	Ave.	300	2.4	H	16.92	46.98	54	7.02
7236.00	35.10	PK	18	2.2	V	19.08	54.18	74	19.82
7236.00	21.09	Ave.	18	2.2	V	19.08	40.17	54	13.83
9648.00	35.22	PK	164	1.1	V	22.72	57.94	74	16.06
9648.00	20.33	Ave.	164	1.1	V	22.72	43.05	54	10.95

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Middle Channel (2437 MHz)									
206.57	48.92	QP	107	1.2	H	-15.6	33.32	43.5	10.18
2437.00	75.01	PK	16	1.7	H	32.61	107.62	/	/
2437.00	70.80	Ave.	16	1.7	H	32.61	103.41	/	/
2437.00	73.57	PK	48	1.4	V	32.61	106.18	/	/
2437.00	63.68	Ave.	48	1.4	V	32.61	96.29	/	/
2386.32	40.78	PK	34	2.0	H	4.97	45.75	74	28.25
2386.32	21.39	Ave.	34	2.0	H	4.97	26.36	54	27.64
2484.75	42.56	PK	128	2.3	H	6.29	48.85	74	25.15
2484.75	28.63	Ave.	128	2.3	H	6.29	34.92	54	19.08
2488.87	41.16	PK	158	2.0	H	6.29	47.45	74	26.55
2488.87	27.51	Ave.	158	2.0	H	6.29	33.80	54	20.20
4874.00	37.69	PK	110	2.3	H	16.91	54.60	74	19.40
4874.00	28.67	Ave.	110	2.3	H	16.91	45.58	54	8.42
7311.00	35.76	PK	278	1.8	V	19.40	55.16	74	18.84
7311.00	20.94	Ave.	278	1.8	V	19.40	40.34	54	13.66
9748.00	34.40	PK	263	2.1	V	22.72	57.12	74	16.88
9748.00	19.30	Ave.	263	2.1	V	22.72	42.02	54	11.98
High Channel (2462 MHz)									
206.57	48.83	QP	89	1.4	H	-15.6	33.23	43.5	10.27
2462.00	75.83	PK	294	1.9	H	34.21	110.04	/	/
2462.00	71.23	Ave.	294	1.9	H	34.21	105.44	/	/
2462.00	65.40	PK	277	1.4	V	34.21	99.61	/	/
2462.00	60.34	Ave.	277	1.4	V	34.21	94.55	/	/
2388.89	38.56	PK	279	1.7	H	4.97	43.53	74	30.47
2388.89	22.91	Ave.	279	1.7	H	4.97	27.88	54	26.12
2484.16	55.36	PK	244	2.0	H	6.29	61.65	74	12.35
2484.16	27.21	Ave.	244	2.0	H	6.29	33.50	54	20.50
2485.46	54.12	PK	268	2.0	H	6.29	60.41	74	13.59
2485.46	26.33	Ave.	268	2.0	H	6.29	32.62	54	21.38
4924.00	36.27	PK	306	1.3	H	16.91	53.18	74	20.82
4924.00	22.34	Ave.	306	1.3	H	16.91	39.25	54	14.75
7386.00	34.69	PK	319	1.5	V	18.34	53.03	74	20.97
7386.00	21.54	Ave.	319	1.5	V	18.34	39.88	54	14.12
9848.00	35.82	PK	54	1.0	H	23.79	59.61	74	14.39
9848.00	20.51	Ave.	54	1.0	H	23.79	44.30	54	9.70

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel (2412 MHz)									
206.57	47.98	QP	131	1.5	H	-15.6	32.38	43.5	11.12
2412.00	75.12	PK	41	1.8	H	32.61	107.73	/	/
2412.00	58.69	Ave.	41	1.8	H	32.61	91.30	/	/
2412.00	73.02	PK	254	1.1	V	32.61	105.63	/	/
2412.00	61.80	Ave.	254	1.1	V	32.61	94.41	/	/
2385.76	51.03	PK	247	1.3	H	4.97	56.00	74	18.00
2385.76	32.18	Ave.	247	1.3	H	4.97	37.15	54	16.85
2389.51	52.63	PK	8	1.8	H	4.97	57.60	74	16.40
2389.51	33.52	Ave.	8	1.8	H	4.97	38.49	54	15.51
2484.73	50.34	PK	326	1.6	H	6.29	56.63	74	17.37
2484.73	30.23	Ave.	326	1.6	H	6.29	36.52	54	17.48
4824.00	38.13	PK	283	1.5	H	16.92	55.05	74	18.95
4824.00	19.50	Ave.	283	1.5	H	16.92	36.42	54	17.58
7236.00	34.58	PK	180	1.3	V	19.08	53.66	74	20.34
7236.00	21.27	Ave.	180	1.3	V	19.08	40.35	54	13.65
9648.00	34.49	PK	41	1.9	H	22.72	57.21	74	16.79
9648.00	20.78	Ave.	41	1.9	H	22.72	43.50	54	10.50
Middle Channel (2437 MHz)									
206.57	48.55	QP	117	1.5	H	-15.6	32.95	43.5	10.55
2437.00	75.36	PK	77	1.2	H	32.61	107.97	/	/
2437.00	58.70	Ave.	77	1.2	H	32.61	91.31	/	/
2437.00	72.23	PK	310	1.3	V	32.61	104.84	/	/
2437.00	60.67	Ave.	310	1.3	V	32.61	93.28	/	/
2387.51	45.33	PK	101	1.0	H	4.97	50.30	74	23.70
2387.51	20.25	Ave.	101	1.0	H	4.97	25.22	54	28.78
2490.83	48.52	PK	58	1.4	H	6.29	54.81	74	19.19
2490.83	32.39	Ave.	58	1.4	H	6.29	38.68	54	15.32
2492.54	47.35	PK	39	1.1	H	6.29	53.64	74	20.36
2492.54	31.82	Ave.	39	1.1	H	6.29	38.11	54	15.89
4874.00	36.87	PK	69	1.5	H	16.91	53.78	74	20.22
4874.00	18.43	Ave.	69	1.5	H	16.91	35.34	54	18.66
7311.00	34.51	PK	232	2.4	V	19.40	53.91	74	20.09
7311.00	20.55	Ave.	232	2.4	V	19.40	39.95	54	14.05
9748.00	35.65	PK	336	1.1	V	22.72	58.37	74	15.63
9748.00	19.22	Ave.	336	1.1	V	22.72	41.94	54	12.06

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
High Channel (2462 MHz)									
206.57	49.45	QP	109	1.6	H	-15.6	33.85	43.5	9.65
2462.00	75.84	PK	316	1.3	H	34.21	110.05	/	/
2462.00	65.73	Ave.	316	1.3	H	34.21	99.94	/	/
2462.00	71.10	PK	111	2.0	V	34.21	105.31	/	/
2462.00	60.59	Ave.	111	2.0	V	34.21	94.80	/	/
2389.53	43.56	PK	268	1.4	H	4.97	48.53	74	25.47
2389.53	23.32	Ave.	268	1.4	H	4.97	28.29	54	25.71
2486.42	63.51	PK	175	2.2	H	6.29	69.80	74	4.20
2486.42	39.56	Ave.	175	2.2	H	6.29	45.85	54	8.15
2488.97	62.17	PK	234	1.6	H	6.29	68.46	74	5.54
2488.97	38.95	Ave.	234	1.6	H	6.29	45.24	54	8.76
4924.00	34.90	PK	124	1.6	H	16.91	51.81	74	22.19
4924.00	18.34	Ave.	124	1.6	H	16.91	35.25	54	18.75
7386.00	35.68	PK	130	2.5	V	18.34	54.02	74	19.98
7386.00	20.34	Ave.	130	2.5	V	18.34	38.68	54	15.32
9848.00	35.21	PK	359	1.8	H	23.79	59.00	74	15.00
9848.00	19.66	Ave.	359	1.8	H	23.79	43.45	54	10.55

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel (2412 MHz)									
206.57	49.36	QP	57	1.5	H	-15.6	33.76	43.5	9.74
2412.00	70.16	PK	342	2.5	H	32.61	102.77	/	/
2412.00	58.89	Ave.	342	2.5	H	32.61	91.50	/	/
2412.00	68.53	PK	223	2.4	V	32.61	101.14	/	/
2412.00	56.52	Ave.	223	2.4	V	32.61	89.13	/	/
2388.45	47.36	PK	269	1.8	H	4.97	52.33	74	21.67
2388.45	27.49	Ave.	269	1.8	H	4.97	32.46	54	21.54
2389.04	48.08	PK	354	1.8	H	4.97	53.05	74	20.95
2389.04	28.28	Ave.	354	1.8	H	4.97	33.25	54	20.75
2484.37	43.60	PK	128	1.1	H	6.29	49.89	74	24.11
2484.37	29.39	Ave.	128	1.1	H	6.29	35.68	54	18.32
4824.00	35.99	PK	211	2.4	H	16.92	52.91	74	21.09
4824.00	18.34	Ave.	211	2.4	H	16.92	35.26	54	18.74
7236.00	35.40	PK	19	1.5	V	19.08	54.48	74	19.52
7236.00	21.29	Ave.	19	1.5	V	19.08	40.37	54	13.63
9648.00	34.72	PK	204	1.5	V	22.72	57.44	74	16.56
9648.00	20.39	Ave.	204	1.5	V	22.72	43.11	54	10.89
Middle Channel (2437 MHz)									
206.57	48.68	QP	231	1.5	H	-15.6	33.08	43.5	10.42
2437.00	70.16	PK	235	1.5	H	32.61	102.77	/	/
2437.00	58.89	Ave.	235	1.5	H	32.61	91.50	/	/
2437.00	69.15	PK	268	1.7	V	32.61	101.76	/	/
2437.00	58.77	Ave.	268	1.7	V	32.61	91.38	/	/
2386.15	35.59	PK	247	2.1	H	4.97	40.56	74	33.44
2386.15	19.50	Ave.	247	2.1	H	4.97	24.47	54	29.53
2488.97	43.25	PK	7	1.8	H	6.29	49.54	74	24.46
2488.97	32.32	Ave.	7	1.8	H	6.29	38.61	54	15.39
2489.62	42.37	PK	21	1.8	H	6.29	48.66	74	25.34
2489.62	31.82	Ave.	21	1.8	H	6.29	38.11	54	15.89
4874.00	35.50	PK	174	2.0	H	16.91	52.41	74	21.59
4874.00	18.52	Ave.	174	2.0	H	16.91	35.43	54	18.57
7311.00	35.65	PK	164	1.6	V	19.40	55.05	74	18.95
7311.00	20.10	Ave.	164	1.6	V	19.40	39.50	54	14.50
9748.00	35.16	PK	99	2.2	H	22.72	57.88	74	16.12
9748.00	19.32	Ave.	99	2.2	H	22.72	42.04	54	11.96

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
High Channel (2462 MHz)									
206.57	47.98	QP	107	1.5	H	-15.6	32.38	43.5	11.12
2462.00	69.11	PK	129	2.1	H	34.21	103.32	/	/
2462.00	58.92	Ave.	129	2.1	H	34.21	93.13	/	/
2462.00	68.33	PK	128	2.4	V	34.21	102.54	/	/
2462.00	58.86	Ave.	128	2.4	V	34.21	93.07	/	/
2389.52	36.54	PK	188	2.2	H	4.97	41.51	74	32.49
2389.52	19.50	Ave.	188	2.2	H	4.97	24.47	54	29.53
2484.59	62.31	PK	247	1.1	H	6.29	68.60	74	5.40
2484.59	38.08	Ave.	247	1.1	H	6.29	44.37	54	9.63
2485.38	61.49	PK	5	1.6	H	6.29	67.78	74	6.22
2485.38	37.56	Ave.	5	1.6	H	6.29	43.85	54	10.15
4924.00	35.10	PK	173	2.3	H	16.91	52.01	74	21.99
4924.00	18.34	Ave.	173	2.3	H	16.91	35.25	54	18.75
7386.00	35.21	PK	106	1.7	V	18.34	53.55	74	20.45
7386.00	20.47	Ave.	106	1.7	V	18.34	38.81	54	15.19
9848.00	34.21	PK	239	1.4	V	23.79	58.00	74	16.00
9848.00	20.51	Ave.	239	1.4	V	23.79	44.30	54	9.70

802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel(2422MHz)									
206.57	48.36	QP	119	1.3	H	-15.6	32.76	43.5	10.74
2422.00	66.54	PK	145	1.8	H	32.61	99.15	/	/
2422.00	54.65	Ave.	145	1.8	H	32.61	87.26	/	/
2422.00	65.51	PK	105	1.8	V	32.61	98.12	/	/
2422.00	53.65	Ave.	105	1.8	V	32.61	86.26	/	/
2386.34	49.79	PK	42	2.2	H	4.97	54.76	74	19.24
2386.34	29.73	Ave.	42	2.2	H	4.97	34.70	54	19.30
2389.18	51.89	PK	29	1.6	H	4.97	56.86	74	17.14
2389.18	30.26	Ave.	29	1.6	H	4.97	35.23	54	18.77
2485.41	45.56	PK	204	2.0	H	6.29	51.85	74	22.15
2485.41	28.28	Ave.	204	2.0	H	6.29	34.57	54	19.43
4844.00	35.74	PK	37	1.3	H	16.92	52.66	74	21.34
4844.00	18.34	Ave.	37	1.3	H	16.92	35.26	54	18.74
7266.00	35.18	PK	4	2.3	V	19.40	54.58	74	19.42
7266.00	20.59	Ave.	4	2.3	V	19.40	39.99	54	14.01
9688.00	34.11	PK	27	2.1	H	22.72	56.83	74	17.17
9688.00	19.27	Ave.	27	2.1	H	22.72	41.99	54	12.01
Middle Channel(2437MHz)									
206.57	47.65	QP	302	1.3	H	-15.6	32.05	43.5	11.45
2437.00	67.35	PK	107	1.1	H	32.61	99.96	/	/
2437.00	54.36	Ave.	107	1.1	H	32.61	86.97	/	/
2437.00	64.98	PK	145	1.2	V	32.61	97.59	/	/
2437.00	52.49	Ave.	145	1.2	V	32.61	85.10	/	/
2377.01	36.17	PK	63	1.3	H	4.97	41.14	74	32.86
2377.01	19.50	Ave.	63	1.3	H	4.97	24.47	54	29.53
2484.06	47.09	PK	123	1.2	H	6.29	53.38	74	20.62
2484.06	29.73	Ave.	123	1.2	H	6.29	36.02	54	17.98
2486.51	46.87	PK	58	2.3	H	6.29	53.16	74	20.84
2486.51	28.69	Ave.	58	2.3	H	6.29	34.98	54	19.02
4874.00	36.03	PK	245	1.8	H	16.91	52.94	74	21.06
4874.00	18.52	Ave.	245	1.8	H	16.91	35.43	54	18.57
7311.00	36.15	PK	201	2.1	V	19.40	55.55	74	18.45
7311.00	21.76	Ave.	201	2.1	V	19.40	41.16	54	12.84
9748.00	34.02	PK	318	1.1	V	22.72	56.74	74	17.26
9748.00	19.33	Ave.	318	1.1	V	22.72	42.05	54	11.95

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
High Channel(2452 MHz)									
206.57	46.97	QP	158	1.5	H	-15.6	31.37	43.5	12.13
2452.00	66.22	PK	178	1.0	H	34.21	100.43	/	/
2452.00	53.73	Ave.	178	1.0	H	34.21	87.94	/	/
2452.00	65.77	PK	242	1.1	V	34.21	99.98	/	/
2452.00	53.23	Ave.	242	1.1	V	34.21	87.44	/	/
2388.96	36.13	PK	350	2.4	H	4.97	41.10	74	32.90
2388.96	20.52	Ave.	350	2.4	H	4.97	25.49	54	28.51
2484.53	65.21	PK	179	1.6	H	6.29	71.50	74	2.50
2484.53	40.71	Ave.	179	1.6	H	6.29	47.00	54	7.00
2486.19	64.58	PK	187	1.7	H	6.29	70.87	74	3.13
2486.19	39.68	Ave.	187	1.7	H	6.29	45.97	54	8.03
4904.00	37.59	PK	301	2.4	H	16.91	54.50	74	19.50
4904.00	18.89	Ave.	301	2.4	H	16.91	35.80	54	18.20
7356.00	34.66	PK	335	1.1	V	18.34	53.00	74	21.00
7356.00	20.08	Ave.	335	1.1	V	18.34	38.42	54	15.58
9808.00	35.12	PK	238	1.6	V	23.79	58.91	74	15.09
9808.00	20.33	Ave.	238	1.6	V	23.79	44.12	54	9.88

Note:

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) + Cable loss – Amplifier Factor

Margin = Limit - Corrected Amplitude

For Chain 1:

802.11b Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel (2412 MHz)									
206.57	48.67	QP	117	1.3	H	-15.6	33.07	43.5	10.43
2412.00	72.94	PK	266	1.1	H	32.61	105.55	/	/
2412.00	68.16	Ave.	266	1.1	H	32.61	100.77	/	/
2412.00	71.11	PK	347	1.3	V	32.61	103.72	/	/
2412.00	66.52	Ave.	347	1.3	V	32.61	99.13	/	/
2386.31	46.61	PK	180	2.2	H	4.97	51.58	74	22.42
2386.31	27.96	Ave.	180	2.2	H	4.97	32.93	54	21.07
2387.32	47.35	PK	311	1.3	H	4.97	52.32	74	21.68
2387.32	29.27	Ave.	311	1.3	H	4.97	34.24	54	19.76
2484.55	44.38	PK	309	1.9	H	6.29	50.67	74	23.33
2484.55	30.21	Ave.	309	1.9	H	6.29	36.50	54	17.50
4824.00	40.38	PK	181	1.1	H	16.92	57.30	74	16.70
4824.00	25.12	Ave.	330	2.3	H	16.92	42.04	54	11.96
7236.00	35.63	PK	193	1.9	V	19.08	54.71	74	19.29
7236.00	20.63	Ave.	193	1.9	V	19.08	39.71	54	14.29
9648.00	34.43	PK	257	1.2	V	22.72	57.15	74	16.85
9648.00	19.27	Ave.	257	1.2	V	22.72	41.99	54	12.01

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Middle Channel (2437 MHz)									
206.57	49.04	QP	107	1.2	H	-15.6	33.44	43.5	10.06
2437.00	73.57	PK	77	1.8	H	32.61	106.18	/	/
2437.00	68.95	Ave.	77	1.8	H	32.61	101.56	/	/
2437.00	72.20	PK	300	1.5	V	32.61	104.81	/	/
2437.00	67.53	Ave.	300	1.5	V	32.61	100.14	/	/
2388.32	38.79	PK	12	2.0	H	4.97	43.76	74	30.24
2388.32	21.45	Ave.	12	2.0	H	4.97	26.42	54	27.58
2485.37	53.71	PK	3	1.6	H	6.29	60.00	74	14.00
2485.37	31.23	Ave.	3	1.6	H	6.29	37.52	54	16.48
2487.65	51.98	PK	166	1.4	H	6.29	58.27	74	15.73
2487.65	29.77	Ave.	166	1.4	H	6.29	36.06	54	17.94
4874.00	38.37	PK	61	1.3	H	16.91	55.28	74	18.72
4874.00	26.65	Ave.	61	1.3	H	16.91	43.56	54	10.44
7311.00	36.17	PK	334	1.6	V	19.40	55.57	74	18.43
7311.00	21.35	Ave.	334	1.6	V	19.40	40.75	54	13.25
9748.00	34.73	PK	276	2.0	H	22.72	57.45	74	16.55
9748.00	19.24	Ave.	276	2.0	H	22.72	41.96	54	12.04
High Channel (2462 MHz)									
206.57	49.67	QP	167	1.5	H	-15.6	34.07	43.5	9.43
2462.00	72.70	PK	167	2.5	H	34.21	106.91	/	/
2462.00	68.53	Ave.	167	2.5	H	34.21	102.74	/	/
2462.00	66.25	PK	38	2.2	V	34.21	100.46	/	/
2462.00	61.80	Ave.	38	2.2	V	34.21	96.01	/	/
2387.03	37.16	PK	270	1.8	H	4.97	42.13	74	31.87
2387.03	19.50	Ave.	270	1.8	H	4.97	24.47	54	29.53
2483.73	60.09	PK	102	2.1	H	6.29	66.38	74	7.62
2483.73	34.30	Ave.	102	2.1	H	6.29	40.59	54	13.41
2485.13	58.45	PK	22	2.3	H	6.29	64.74	74	9.26
2485.13	33.78	Ave.	22	2.3	H	6.29	40.07	54	13.93
4924.00	39.43	PK	134	1.7	H	16.91	56.34	74	17.66
4924.00	25.13	Ave.	134	1.7	H	16.91	42.04	54	11.96
7386.00	34.51	PK	89	1.7	V	18.34	52.85	74	21.15
7386.00	21.66	Ave.	89	1.7	V	18.34	40.00	54	14.00
9848.00	35.86	PK	193	1.9	H	23.79	59.65	74	14.35
9848.00	19.64	Ave.	193	1.9	H	23.79	43.43	54	10.57

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel (2412 MHz)									
206.57	47.95	QP	117	1.5	H	-15.6	32.35	43.5	11.15
2412.00	73.78	PK	216	1.6	H	32.61	106.39	/	/
2412.00	63.79	Ave.	216	1.6	H	32.61	96.40	/	/
2412.00	71.85	PK	27	1.4	V	32.61	104.46	/	/
2412.00	61.85	Ave.	27	1.4	V	32.61	94.46	/	/
2385.23	51.23	PK	208	2.5	H	4.97	56.20	74	17.80
2385.23	31.60	Ave.	208	2.5	H	4.97	36.57	54	17.43
2388.51	52.56	PK	199	1.1	H	4.97	57.53	74	16.47
2388.51	32.16	Ave.	199	1.1	H	4.97	37.13	54	16.87
2488.83	45.36	PK	349	2.0	H	6.29	51.65	74	22.35
2488.83	28.32	Ave.	349	2.0	H	6.29	34.61	54	19.39
4824.00	37.94	PK	81	1.4	H	16.92	54.86	74	19.14
4824.00	18.34	Ave.	81	1.4	H	16.92	35.26	54	18.74
7236.00	34.78	PK	251	1.7	V	19.08	53.86	74	20.14
7236.00	21.75	Ave.	251	1.7	V	19.08	40.83	54	13.17
9648.00	35.91	PK	14	2.5	H	22.72	58.63	74	15.37
9648.00	19.81	Ave.	14	2.5	H	22.72	42.53	54	11.47
Middle Channel (2437 MHz)									
206.57	48.91	QP	226	1.6	H	-15.6	33.31	43.5	10.19
2437.00	74.44	PK	274	2.0	H	32.61	107.05	/	/
2437.00	64.14	Ave.	274	2.0	H	32.61	96.75	/	/
2437.00	71.20	PK	171	1.5	V	32.61	103.81	/	/
2437.00	61.18	Ave.	171	1.5	V	32.61	93.79	/	/
2389.63	41.32	PK	214	1.6	H	4.97	46.29	74	27.71
2389.63	24.76	Ave.	214	1.6	H	4.97	29.73	54	24.27
2485.37	51.29	PK	182	2.5	H	6.29	57.58	74	16.42
2485.37	34.21	Ave.	182	2.5	H	6.29	40.50	54	13.50
2485.37	50.64	PK	17	2.2	H	6.29	56.93	74	17.07
2485.37	32.88	Ave.	17	2.2	H	6.29	39.17	54	14.83
4874.00	38.37	PK	318	2.4	H	16.91	55.28	74	18.72
4874.00	19.02	Ave.	318	2.4	H	16.91	35.93	54	18.07
7311.00	36.45	PK	263	1.0	V	19.40	55.85	74	18.15
7311.00	20.98	Ave.	263	1.0	V	19.40	40.38	54	13.62
9748.00	35.00	PK	51	1.0	V	22.72	57.72	74	16.28
9748.00	19.92	Ave.	51	1.0	V	22.72	42.64	54	11.36

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
High Channel (2462 MHz)									
206.57	48.71	QP	194	1.5	H	-15.6	33.11	43.5	10.39
2462.00	74.59	PK	307	2.0	H	34.21	108.80	/	/
2462.00	63.34	Ave.	307	2.0	H	34.21	97.55	/	/
2462.00	72.58	PK	182	2.1	V	34.21	106.79	/	/
2462.00	61.96	Ave.	182	2.1	V	34.21	96.17	/	/
2389.93	39.01	PK	209	2.2	H	4.97	43.98	74	30.02
2389.93	21.38	Ave.	209	2.2	H	4.97	26.35	54	27.65
2486.42	58.39	PK	333	1.8	H	6.29	64.68	74	9.32
2486.42	37.94	Ave.	333	1.8	H	6.29	44.23	54	9.77
2487.30	57.31	PK	117	1.8	H	6.29	63.60	74	10.40
2487.30	37.16	Ave.	117	1.8	H	6.29	43.45	54	10.55
4924.00	39.56	PK	51	1.4	H	16.91	56.47	74	17.53
4924.00	19.50	Ave.	51	1.4	H	16.91	36.41	54	17.59
7386.00	36.27	PK	294	1.9	V	18.34	54.61	74	19.39
7386.00	21.98	Ave.	294	1.9	V	18.34	40.32	54	13.68
9848.00	35.22	PK	21	1.4	H	23.79	59.01	74	14.99
9848.00	19.69	Ave.	21	1.4	H	23.79	43.48	54	10.52

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel (2412 MHz)									
206.57	47.95	QP	115	1.5	H	-15.6	32.35	43.5	11.15
2412.00	74.12	PK	139	2.5	H	32.61	106.73	/	/
2412.00	63.23	Ave.	139	2.5	H	32.61	95.84	/	/
2412.00	73.91	PK	104	1.1	V	32.61	106.52	/	/
2412.00	62.83	Ave.	104	1.1	V	32.61	95.44	/	/
2386.44	57.89	PK	81	1.0	H	4.97	62.86	74	11.14
2386.44	34.97	Ave.	81	1.0	H	4.97	39.94	54	14.06
2389.84	59.36	PK	149	2.0	H	4.97	64.33	74	9.67
2389.84	36.55	Ave.	149	2.0	H	4.97	41.52	54	12.48
2484.53	47.14	PK	133	2.1	H	6.29	53.43	74	20.57
2484.53	31.54	Ave.	133	2.1	H	6.29	37.83	54	16.17
4824.00	37.89	PK	210	1.2	H	16.92	54.81	74	19.19
4824.00	18.73	Ave.	210	1.2	H	16.92	35.65	54	18.35
7236.00	36.42	PK	334	1.0	V	19.08	55.50	74	18.50
7236.00	20.71	Ave.	334	1.0	V	19.08	39.79	54	14.21
9648.00	34.39	PK	354	2.0	H	22.72	57.11	74	16.89
9648.00	19.42	Ave.	354	2.0	H	22.72	42.14	54	11.86
Middle Channel (2437 MHz)									
206.57	48.65	QP	229	1.5	H	-15.6	33.05	43.5	10.45
2437.00	73.50	PK	126	2.4	H	32.61	106.11	/	/
2437.00	62.93	Ave.	126	2.4	H	32.61	95.54	/	/
2437.00	72.86	PK	3	1.9	V	32.61	105.47	/	/
2437.00	61.58	Ave.	3	1.9	V	32.61	94.19	/	/
2389.28	43.61	PK	360	1.4	H	4.97	48.58	74	25.42
2389.28	26.54	Ave.	360	1.4	H	4.97	31.51	54	22.49
2484.53	46.58	PK	246	1.1	H	6.29	52.87	74	21.13
2484.53	32.32	Ave.	246	1.1	H	6.29	38.61	54	15.39
2486.39	45.61	PK	279	1.5	H	6.29	51.90	74	22.10
2486.39	31.89	Ave.	279	1.5	H	6.29	38.18	54	15.82
4874.00	39.35	PK	46	1.2	H	16.91	56.26	74	17.74
4874.00	19.68	Ave.	46	1.2	H	16.91	36.59	54	17.41
7311.00	34.52	PK	126	2.4	V	19.40	53.92	74	20.08
7311.00	21.39	Ave.	126	2.4	V	19.40	40.79	54	13.21
9748.00	35.97	PK	307	1.4	H	22.72	58.69	74	15.31
9748.00	19.43	Ave.	307	1.4	H	22.72	42.15	54	11.85

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
High Channel (2462 MHz)									
206.57	48.15	QP	107	1.5	H	-15.6	32.55	43.5	10.95
2462.00	73.95	PK	67	1.2	H	34.21	108.16	/	/
2462.00	62.92	Ave.	67	1.2	H	34.21	97.13	/	/
2462.00	73.79	PK	86	1.0	V	34.21	108.00	/	/
2462.00	62.88	Ave.	86	1.0	V	34.21	97.09	/	/
2389.92	40.22	PK	358	1.3	H	4.97	45.19	74	28.81
2389.92	23.02	Ave.	358	1.3	H	4.97	27.99	54	26.01
2485.19	59.81	PK	211	1.4	H	6.29	66.10	74	7.90
2485.19	38.06	Ave.	211	1.4	H	6.29	44.35	54	9.65
2487.13	58.34	PK	349	2.2	H	6.29	64.63	74	9.37
2487.13	36.99	Ave.	349	2.2	H	6.29	43.28	54	10.72
4924.00	38.31	PK	253	1.1	H	16.91	55.22	74	18.78
4924.00	19.52	Ave.	253	1.1	H	16.91	36.43	54	17.57
7386.00	34.87	PK	343	2.0	V	18.34	53.21	74	20.79
7386.00	20.04	Ave.	343	2.0	V	18.34	38.38	54	15.62
9848.00	34.24	PK	159	1.7	V	23.79	58.03	74	15.97
9848.00	19.27	Ave.	159	1.7	V	23.79	43.06	54	10.94

802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel(2422MHz)									
206.57	48.75	QP	119	1.3	H	-15.6	33.15	43.5	10.35
2422.00	71.48	PK	138	1.5	H	32.61	104.09	/	/
2422.00	58.01	Ave.	138	1.5	H	32.61	90.62	/	/
2422.00	69.48	PK	154	2.0	V	32.61	102.09	/	/
2422.00	55.90	Ave.	154	2.0	V	32.61	88.51	/	/
2388.18	58.17	PK	328	2.5	H	4.97	63.14	74	10.86
2388.18	38.65	Ave.	328	2.5	H	4.97	43.62	54	10.38
2389.92	59.97	PK	248	1.9	H	4.97	64.94	74	9.06
2389.92	39.71	Ave.	248	1.9	H	4.97	44.68	54	9.32
2486.47	48.97	PK	191	1.9	H	6.29	55.26	74	18.74
2486.47	31.54	Ave.	191	1.9	H	6.29	37.83	54	16.17
4844.00	39.13	PK	177	1.4	H	16.92	56.05	74	17.95
4844.00	20.32	Ave.	177	1.4	H	16.92	37.24	54	16.76
7266.00	35.44	PK	170	1.9	V	19.40	54.84	74	19.16
7266.00	21.69	Ave.	170	1.9	V	19.40	41.09	54	12.91
9688.00	34.86	PK	102	2.4	H	22.72	57.58	74	16.42
9688.00	20.98	Ave.	102	2.4	H	22.72	43.70	54	10.30
Middle Channel(2437MHz)									
206.57	47.83	QP	302	1.3	H	-15.6	32.23	43.5	11.27
2437.00	70.92	PK	158	1.3	H	32.61	103.53	/	/
2437.00	58.64	Ave.	158	1.3	H	32.61	91.25	/	/
2437.00	70.46	PK	143	1.6	V	32.61	103.07	/	/
2437.00	57.88	Ave.	143	1.6	V	32.61	90.49	/	/
2389.76	45.01	PK	279	2.4	H	4.97	49.98	74	24.02
2389.76	26.04	Ave.	279	2.4	H	4.97	31.01	54	22.99
2483.50	51.07	PK	63	1.7	H	6.29	57.36	74	16.64
2483.50	32.56	Ave.	63	1.7	H	6.29	38.85	54	15.15
2485.52	50.89	PK	292	1.8	H	6.29	57.18	74	16.82
2485.52	31.23	Ave.	292	1.8	H	6.29	37.52	54	16.48
4874.00	38.97	PK	34	2.0	H	16.91	55.88	74	18.12
4874.00	19.52	Ave.	34	2.0	H	16.91	36.43	54	17.57
7311.00	35.55	PK	199	2.2	V	19.40	54.95	74	19.05
7311.00	20.15	Ave.	199	2.2	V	19.40	39.55	54	14.45
9748.00	34.05	PK	69	1.4	V	22.72	56.77	74	17.23
9748.00	20.18	Ave.	69	1.4	V	22.72	42.90	54	11.10

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
High Channel(2452 MHz)									
206.57	47.18	QP	158	1.5	H	-15.6	31.58	43.5	11.92
2452.00	72.30	PK	47	1.1	H	34.21	106.51	/	/
2452.00	60.12	Ave.	47	1.1	H	34.21	94.33	/	/
2452.00	71.26	PK	258	2.4	V	34.21	105.47	/	/
2452.00	59.93	Ave.	258	2.4	V	34.21	94.14	/	/
2389.60	39.75	PK	228	1.6	H	4.97	44.72	74	29.28
2389.60	23.71	Ave.	228	1.6	H	4.97	28.68	54	25.32
2483.53	63.91	PK	200	1.2	H	6.29	70.20	74	3.80
2483.53	42.10	Ave.	200	1.2	H	6.29	48.39	54	5.61
2485.29	62.19	PK	12	2.0	H	6.29	68.48	74	5.52
2485.29	41.62	Ave.	12	2.0	H	6.29	47.91	54	6.09
4904.00	38.68	PK	46	2.1	H	16.91	55.59	74	18.41
4904.00	19.23	Ave.	46	2.1	H	16.91	36.14	54	17.86
7356.00	35.82	PK	236	2.1	V	18.34	54.16	74	19.84
7356.00	21.91	Ave.	236	2.1	V	18.34	40.25	54	13.75
9808.00	35.13	PK	158	2.3	V	23.79	58.92	74	15.08
9808.00	19.13	Ave.	158	2.3	V	23.79	42.92	54	11.08

Note:

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) + Cable loss – Amplifier Factor

Margin = Limit - Corrected Amplitude

Simultaneous transmission for chain 0 & chain 1 in 802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel (2412 MHz)									
206.57	49.36	QP	235	1.1	H	-15.64	33.72	43.5	9.78
2412	72.16	PK	137	1.3	H	32.61	104.77	/	/
2412	60.89	Ave.	137	1.3	H	32.61	93.5	/	/
2412	70.53	PK	105	1.1	V	32.61	103.14	/	/
2412	58.52	Ave.	105	1.1	V	32.61	91.13	/	/
2388.3	48.02	PK	196	2.5	H	4.97	52.99	74	21.01
2388.3	28.31	Ave.	196	2.5	H	4.97	33.28	54	20.72
2389.1	49.12	PK	64	1.2	H	4.97	54.09	74	19.91
2389.1	28.94	Ave.	64	1.2	H	4.97	33.91	54	20.09
4824	40.63	PK	166	2.1	H	16.92	57.55	74	16.45
4824	20.11	Ave.	166	2.1	H	16.92	37.03	54	16.97
7236	36.75	PK	262	1.5	V	19.08	55.83	74	18.17
7236	22.11	Ave.	262	1.5	V	19.08	41.19	54	12.81
9648	33.96	PK	270	1.5	V	22.72	56.68	74	17.32
9648	20.14	Ave.	270	1.5	V	22.72	42.86	54	11.14
Middle Channel (2437 MHz)									
206.57	47.52	QP	241	1.5	H	-15.6	31.92	43.5	11.58
2437	71.33	PK	124	1.5	H	32.61	103.94	/	/
2437	59.12	Ave.	124	1.5	H	32.61	91.73	/	/
2437	69.86	PK	116	1.6	V	32.61	102.47	/	/
2437	59.23	Ave.	116	1.6	V	32.61	91.84	/	/
4874	36.12	PK	165	2.0	H	16.91	53.03	74	20.97
4874	19.44	Ave.	165	2.0	H	16.91	36.35	54	17.65
7311	34.98	PK	263	1.6	V	19.4	54.38	74	19.62
7311	20.43	Ave.	263	1.6	V	19.4	39.83	54	14.17
9748	36.59	PK	87	2.1	H	22.72	59.31	74	14.69
9748	20.13	Ave.	87	2.1	H	22.72	42.85	54	11.15

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
High Channel (2462 MHz)									
206.57	48.12	QP	145	1.5	H	-15.6	32.52	43.5	10.98
2462	71.12	PK	196	2.1	H	34.21	105.33	/	/
2462	59.68	Ave.	196	2.1	H	34.21	93.89	/	/
2462	69.94	PK	175	2.4	V	34.21	104.15	/	/
2462	59.12	Ave.	175	2.4	V	34.21	93.33	/	/
2483.98	63.75	PK	288	1.1	H	6.29	70.04	74	3.96
2483.98	38.96	Ave.	288	1.1	H	6.29	45.25	54	8.75
2484.75	62.33	PK	59	1.6	H	6.29	68.62	74	5.38
2484.75	37.86	Ave.	59	1.6	H	6.29	44.15	54	9.85
4924	35.77	PK	333	2.3	V	16.91	52.68	74	21.32
4924	18.76	Ave.	333	2.3	V	16.91	35.67	54	18.33
7386	35.67	PK	196	1.7	V	18.34	54.01	74	19.99
7386	20.76	Ave.	196	1.7	V	18.34	39.1	54	14.90
9848	34.96	PK	279	1.6	V	23.79	58.75	74	15.25
9848	21.05	Ave.	279	1.6	V	23.79	44.84	54	9.16

Simultaneous transmission for chain 0&1 in 802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel(2422MHz)									
206.57	47.65	QP	119	1.3	H	-15.6	32.05	43.5	11.45
2422	68.12	PK	141	2.2	H	32.61	100.73	/	/
2422	55.02	Ave.	141	2.2	H	32.61	87.63	/	/
2422	66.32	PK	122	1.5	V	32.61	98.93	/	/
2422	54.01	Ave.	122	1.5	V	32.61	86.62	/	/
2384.9	50.45	PK	69	1.3	H	4.97	55.42	74	18.58
2384.9	30.42	Ave.	69	1.3	H	4.97	35.39	54	18.61
2388.6	52.03	PK	300	1.2	H	4.97	57.00	74	17.00
2388.6	29.88	Ave.	300	1.2	H	4.97	34.85	54	19.15
4844	36.41	PK	61	2.3	H	16.92	53.33	74	20.67
4844	19.12	Ave.	61	2.3	H	16.92	36.04	54	17.96
7266	34.85	PK	256	1.4	V	19.4	54.25	74	19.75
7266	21.02	Ave.	256	1.4	V	19.4	40.42	54	13.58
9688	35.14	PK	342	1.3	H	22.72	57.86	74	16.14
9688	19.87	Ave.	342	1.3	H	22.72	42.59	54	11.41
Middle Channel(2437MHz)									
206.57	48.12	QP	119	1.3	H	-15.6	32.52	43.5	10.98
2437	68.44	PK	340	2	H	32.61	101.05	/	/
2437	55.32	Ave.	340	2	H	32.61	87.93	/	/
2437	65.37	PK	145	1.8	V	32.61	97.98	/	/
2437	52.98	Ave.	145	1.8	V	32.61	85.59	/	/
4874	36.78	PK	231	2.1	H	16.91	53.69	74	20.31
4874	19.22	Ave.	231	2.1	H	16.91	36.13	54	17.87
7311	35.78	PK	99	1.7	V	19.4	55.18	74	18.82
7311	22.03	Ave.	99	1.7	V	19.4	41.43	54	12.57
9748	35.46	PK	94	2.4	V	22.72	58.18	74	15.82
9748	20.14	Ave.	94	2.4	V	22.72	42.86	54	11.14

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
High Channel(2452 MHz)									
206.57	48.33	QP	119	1.3	H	-15.6	32.73	43.5	10.77
2452	66.02	PK	302	1.2	H	34.21	100.23	/	/
2452	54.13	Ave.	302	1.2	H	34.21	88.34	/	/
2452	65.47	PK	230	1.4	V	34.21	99.68	/	/
2452	53.61	Ave.	230	1.4	V	34.21	87.82	/	/
2484.77	62.03	PK	244	2.3	H	6.29	68.32	74	5.68
2484.77	40.32	Ave.	244	2.3	H	6.29	46.61	54	7.39
2485.96	65.06	PK	169	2.4	H	6.29	71.35	74	2.65
2485.96	40.13	Ave.	169	2.4	H	6.29	46.42	54	7.58
4904	38.77	PK	230	1.3	H	16.91	55.68	74	18.32
4904	19.65	Ave.	230	1.3	H	16.91	36.56	54	17.44
7356	33.76	PK	79	2.7	V	18.34	52.1	74	21.9
7356	21.05	Ave.	79	2.7	V	18.34	39.39	54	14.61
9808	35.64	PK	238	1.6	V	23.79	59.43	74	14.57
9808	21.03	Ave.	238	1.6	V	23.79	44.82	54	9.18

Note:

Corrected Amplitude = Corrected Factor + Reading
 Corrected Factor=Antenna factor (RX) + Cable loss – Amplifier Factor
 Margin = Limit - Corrected Amplitude
 Only 802.11n support simultaneous transmission.


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2015-06-13	2016-06-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23~25 °C
Relative Humidity:	48~50 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Rocky Kang on 2015-11-10 and 2015-11-23.

Test Result: Pass.


Please refer to the following tables and plots.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)		Limit (kHz)
		Chain 0	Chain 1	
802.11b mode				
Low	2412	10.02	10.1	≥500
Middle	2437	10.02	9.78	≥500
High	2462	10.02	10.1	≥500
802.11g mode				
Low	2412	15.23	15.15	≥500
Middle	2437	15.15	15.23	≥500
High	2462	15.23	15.31	≥500
802.11n-HT20 mode				
Low	2412	15.15	15.15	≥500
Middle	2437	15.15	15.15	≥500
High	2462	15.15	15.15	≥500
802.11n-HT40 mode				
Low	2422	35.11	35.43	≥500
Middle	2437	35.11	35.43	≥500
High	2452	35.11	35.43	≥500

For Chain 0:


802.11b Low Channel

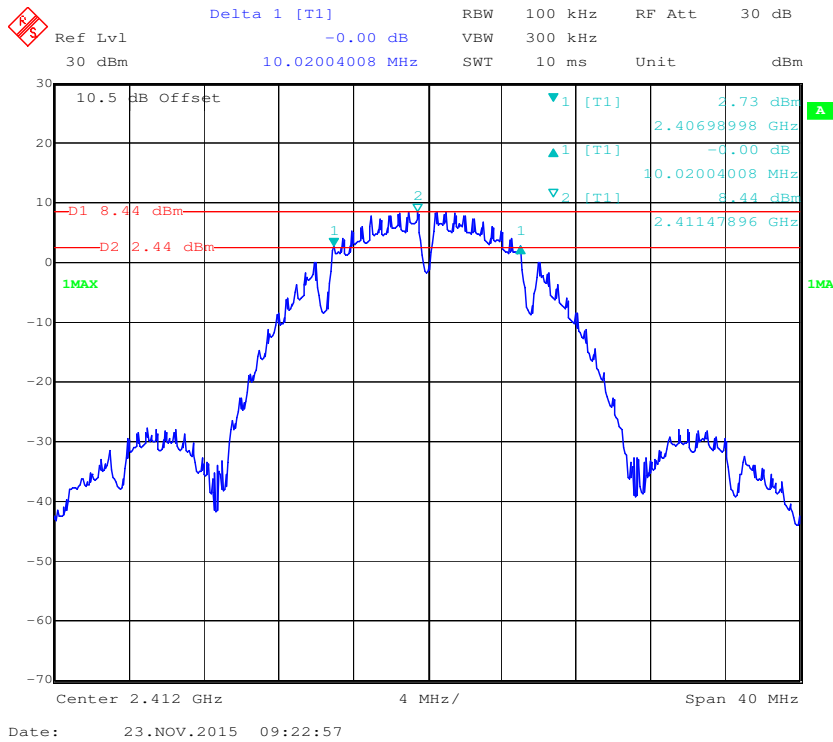


802.11b Middle Channel

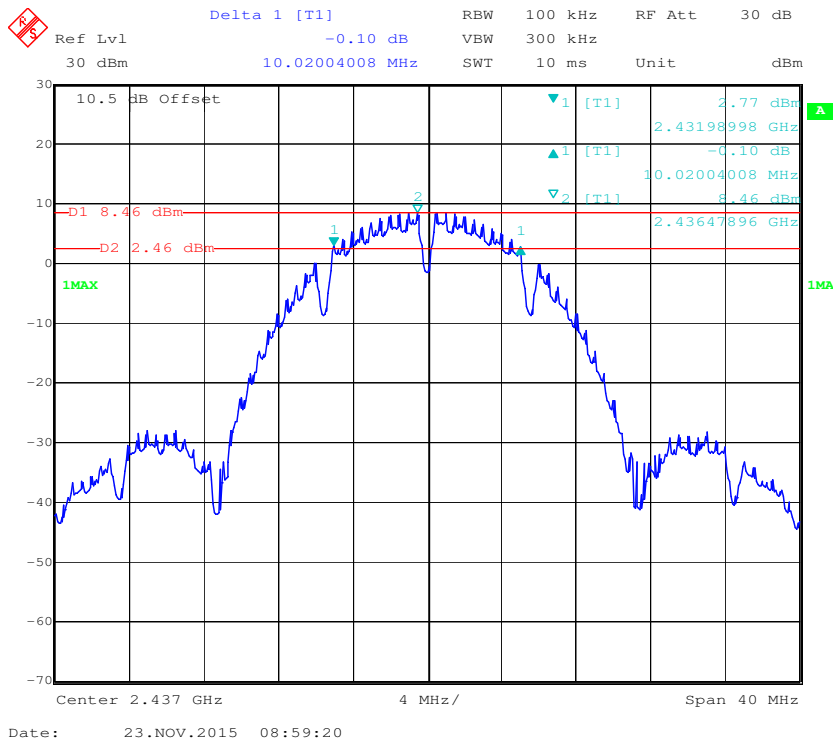


802.11b High Channel

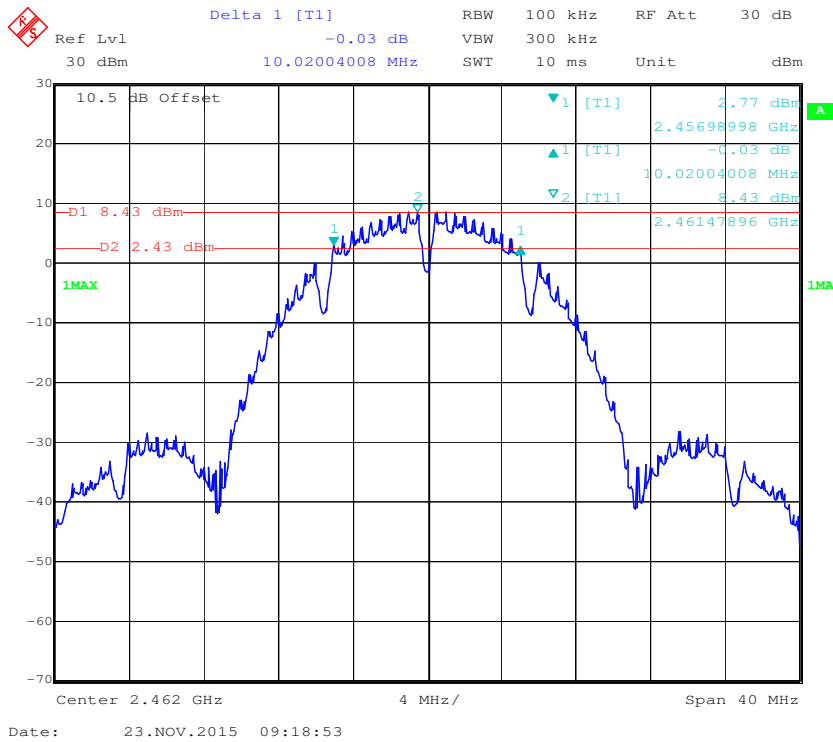


802.11g Low Channel

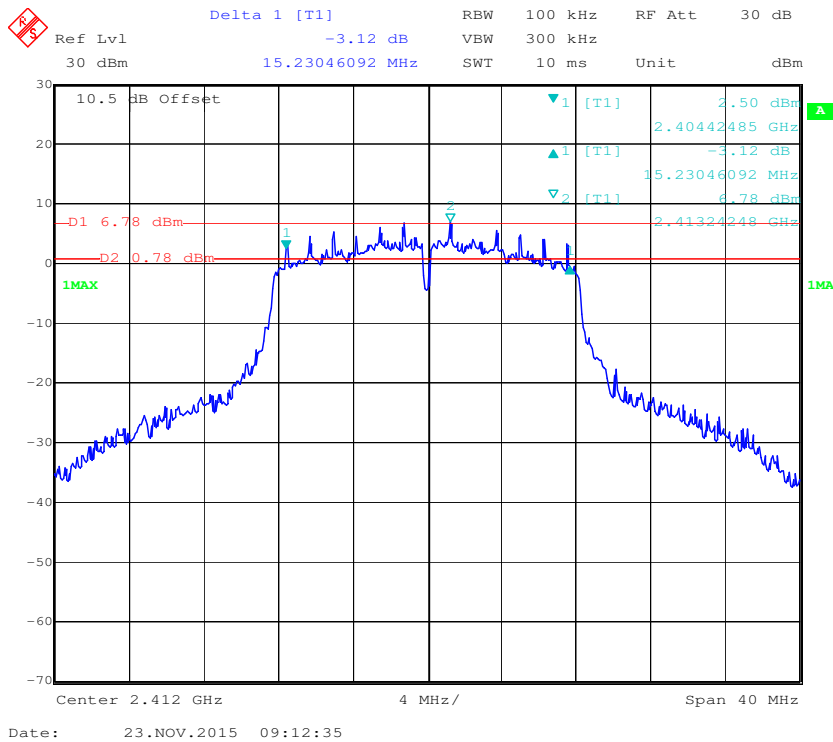


802.11g Middle Channel

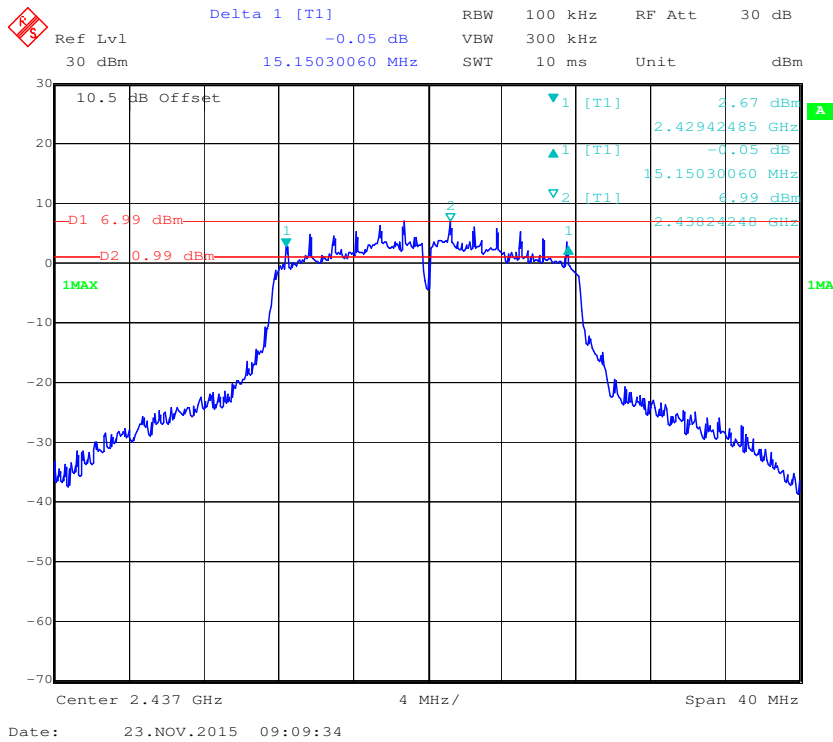


802.11g High Channel

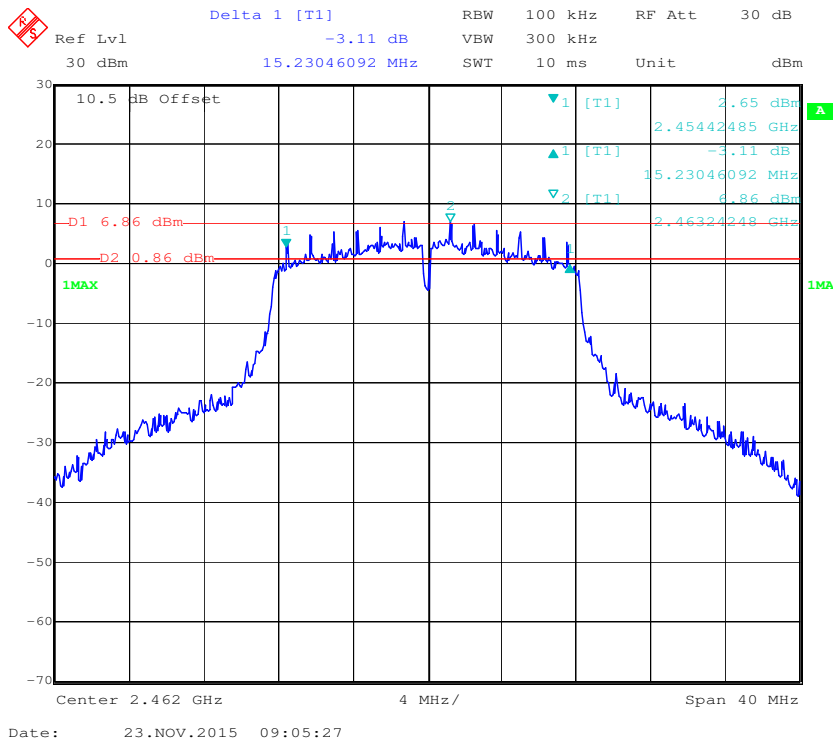


802.11n-HT20 Low Channel

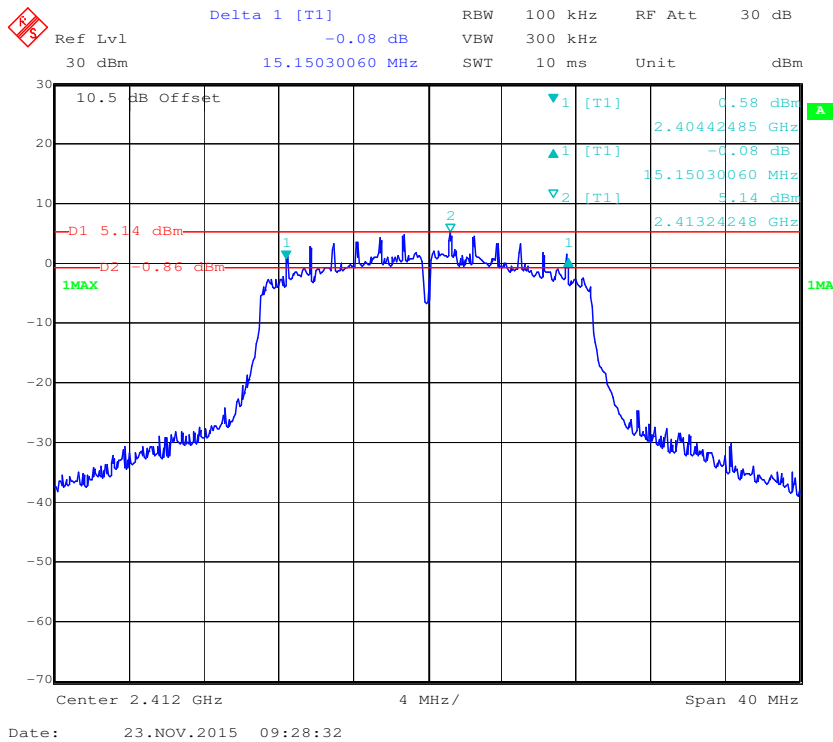


802.11n-HT20 Middle Channel

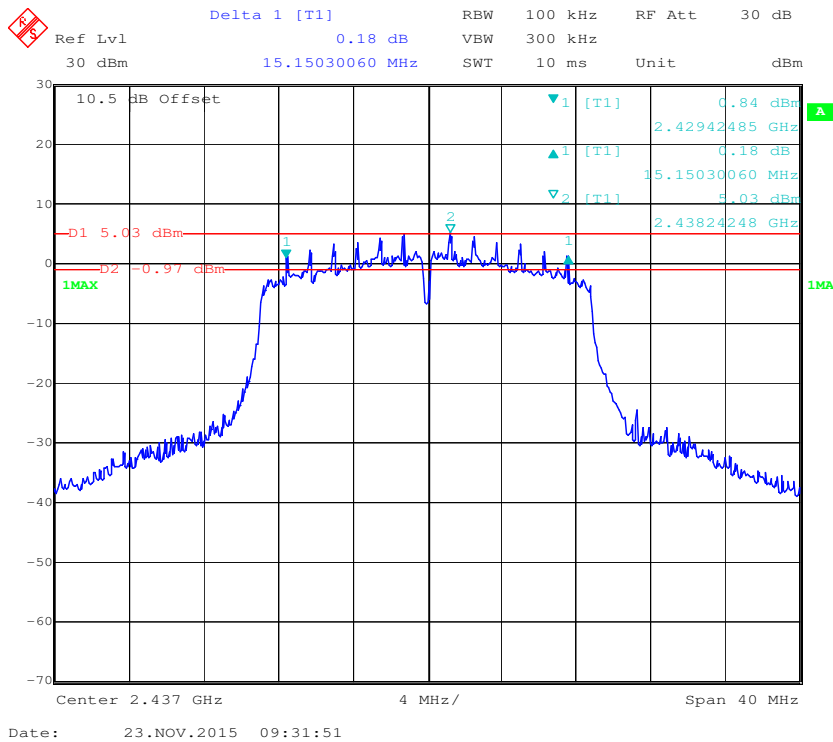


802.11n-HT20 High Channel

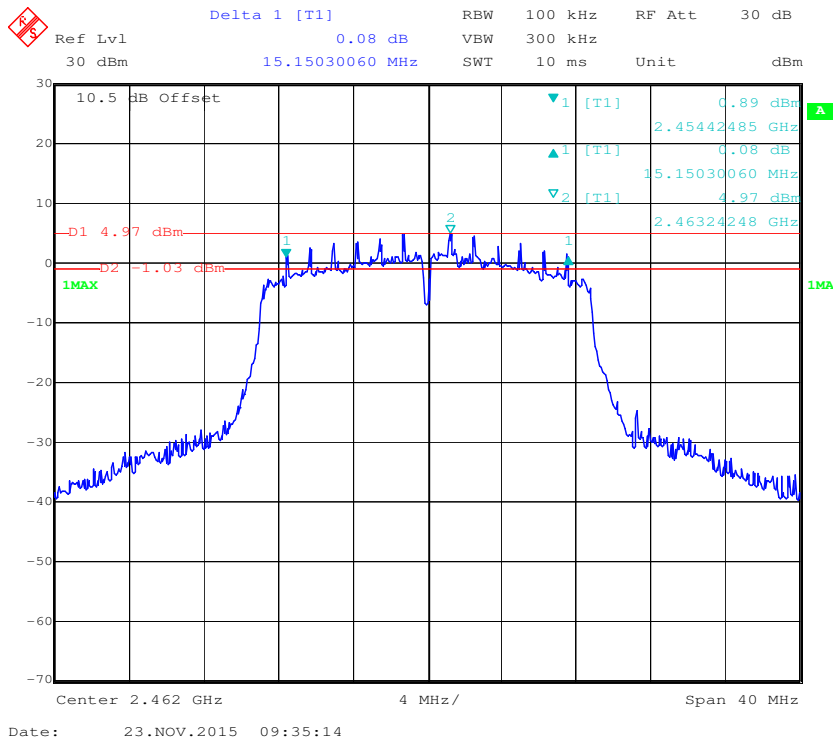


802.11n-HT40 Low Channel

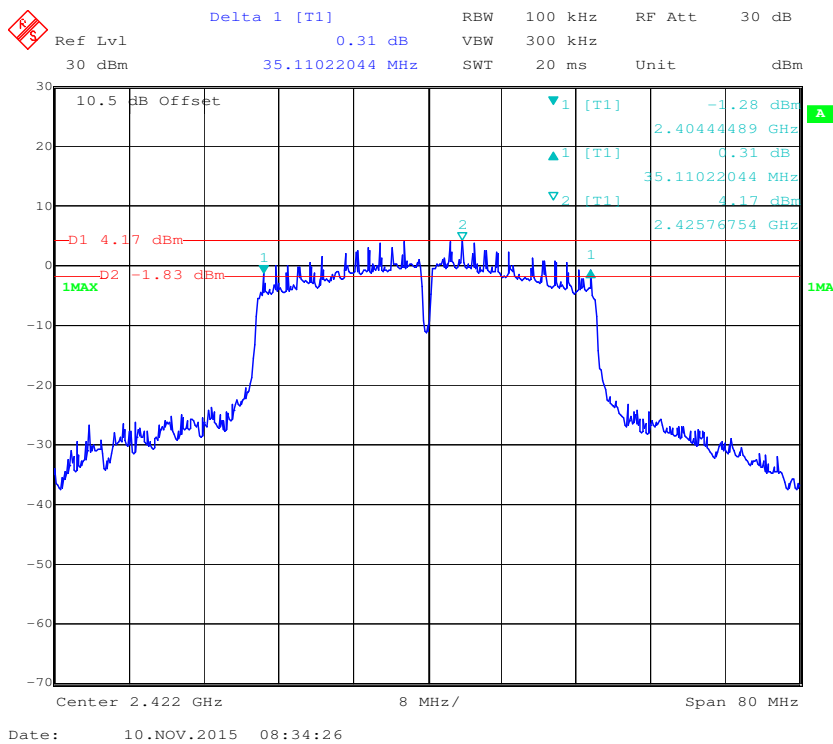

802.11n-HT40 Middle Channel

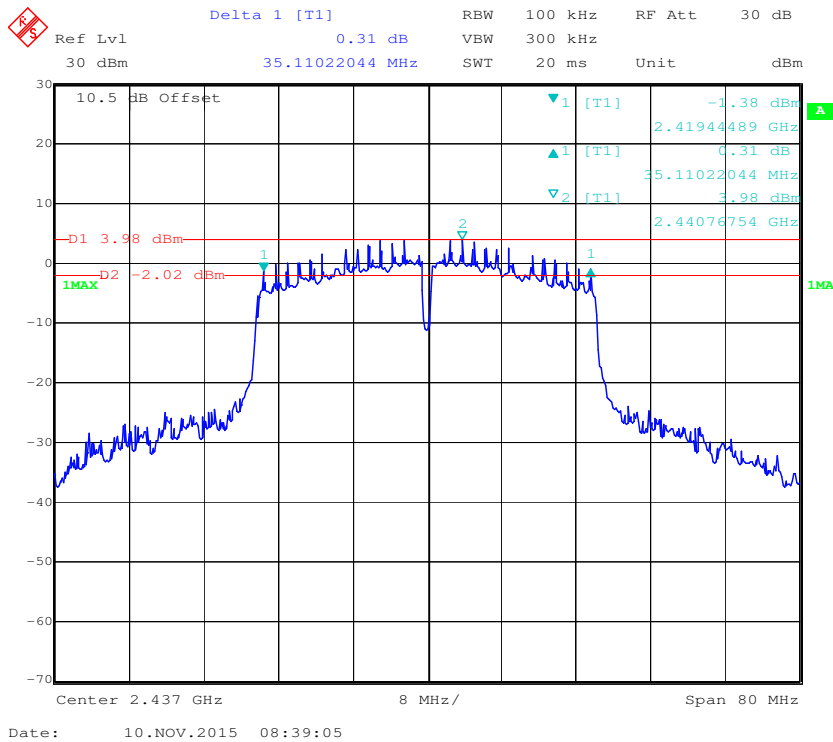


802.11n-HT40 High Channel

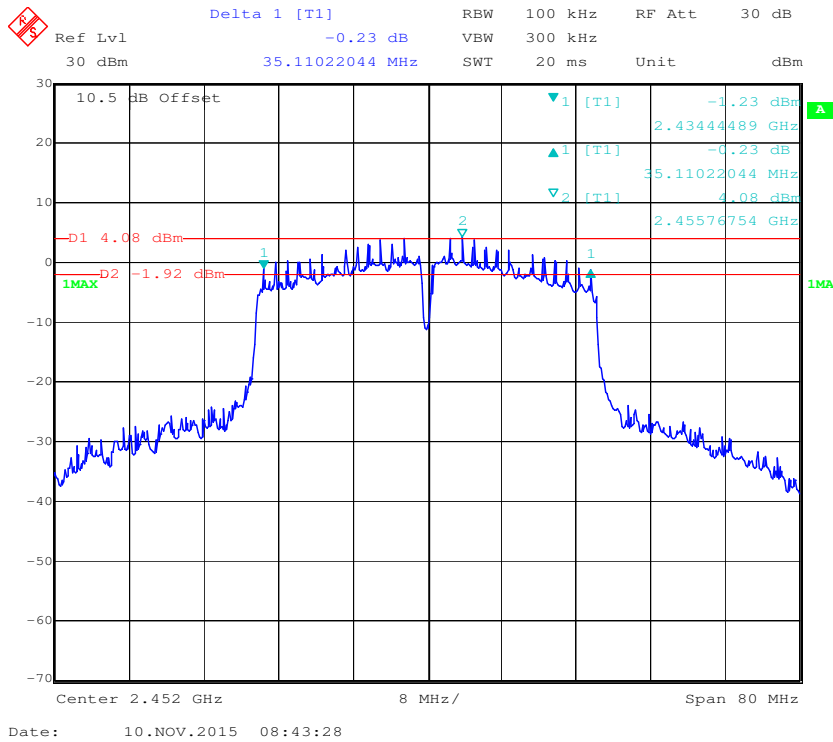


For Chain 1:


802.11b Low Channel

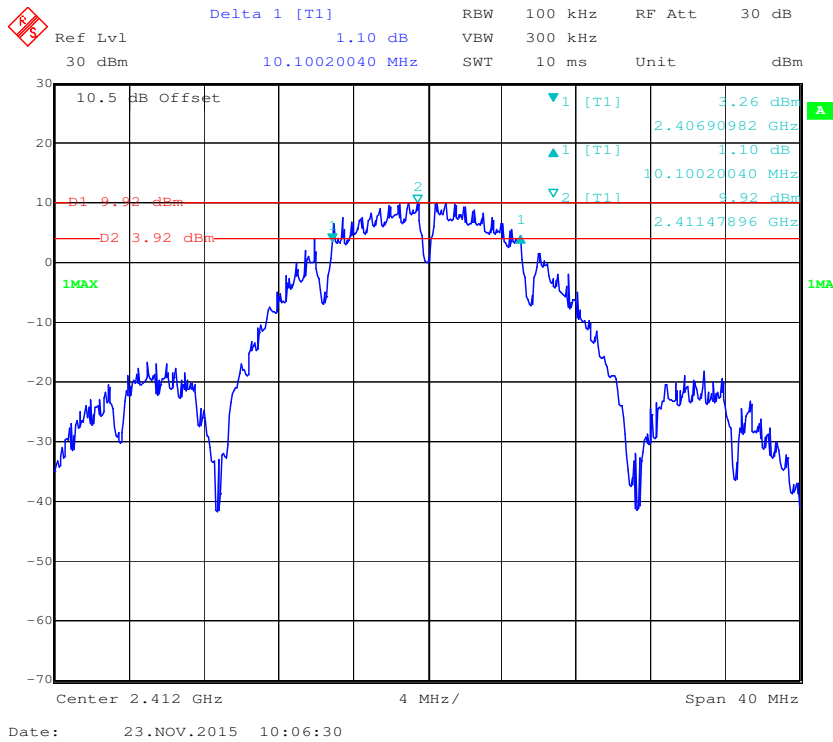


802.11b Middle Channel

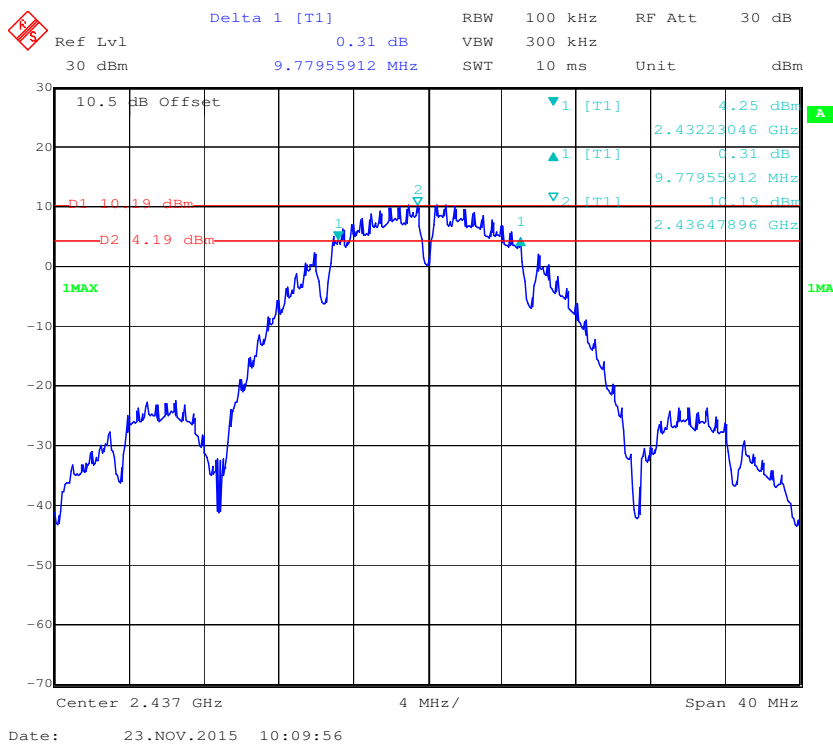


802.11b High Channel

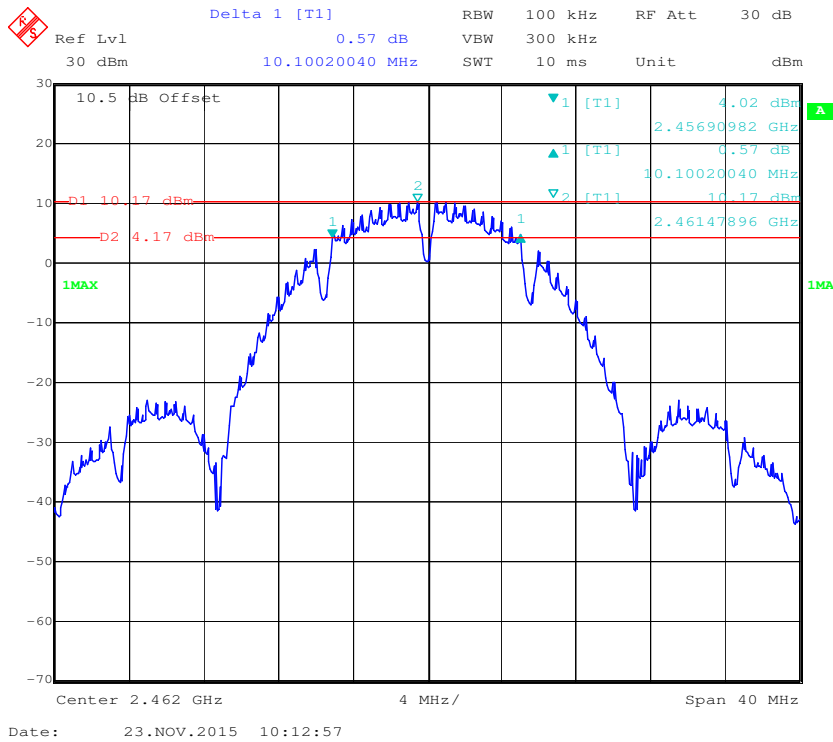


802.11g Low Channel

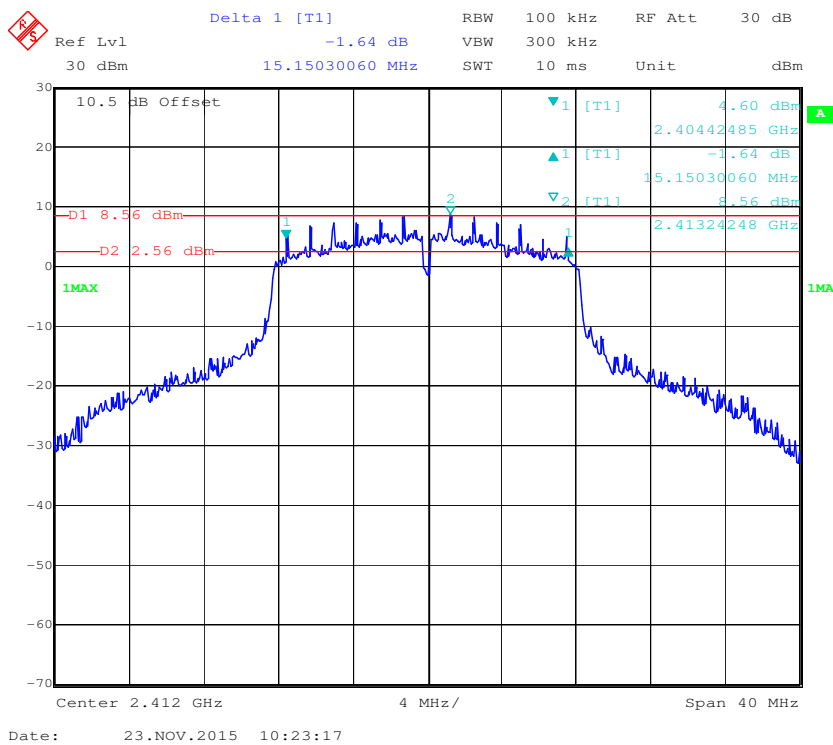


802.11g Middle Channel

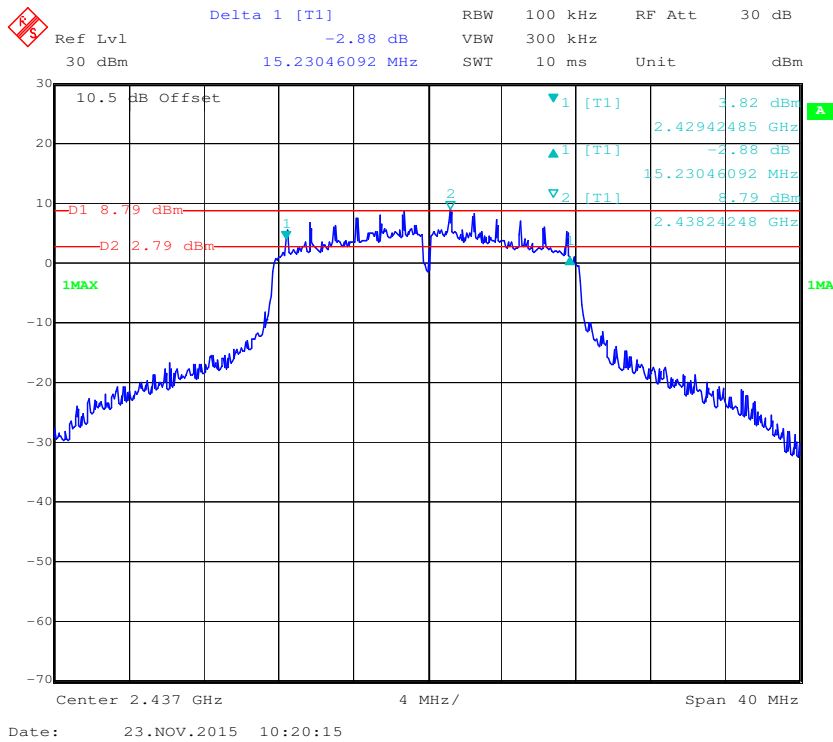


802.11g High Channel

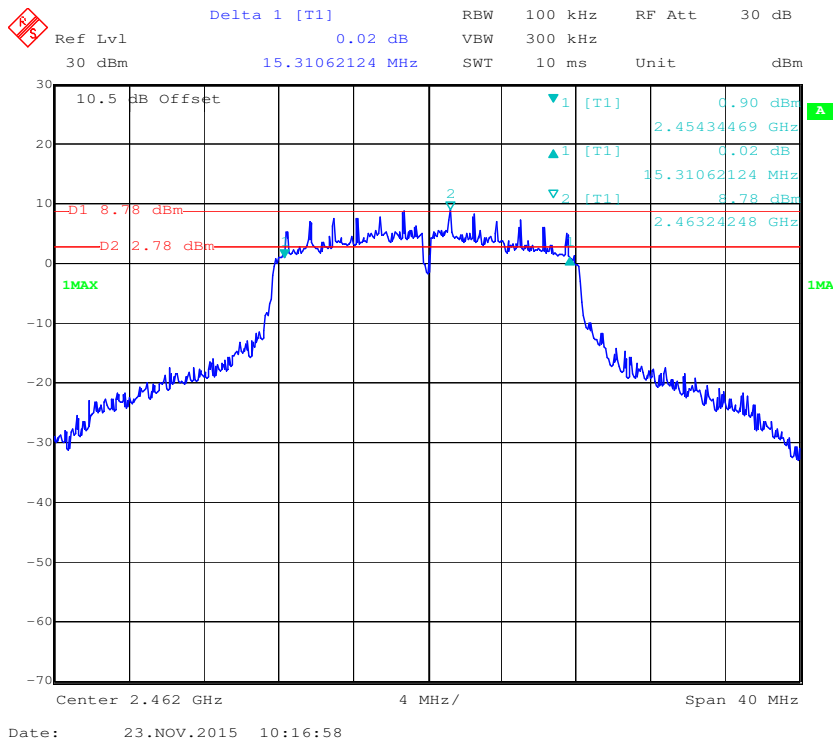


802.11n-HT20 Low Channel

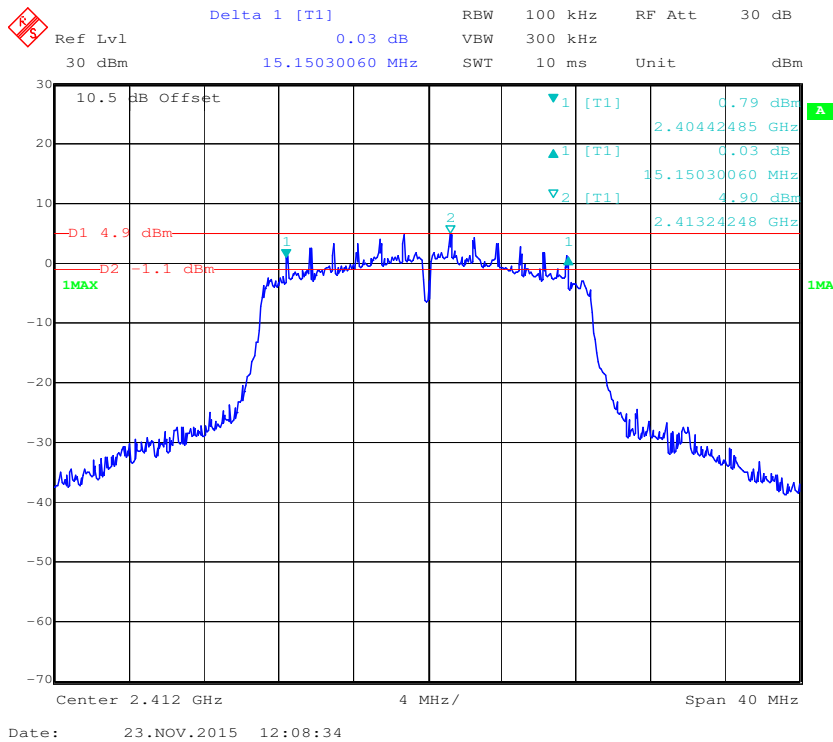


802.11n-HT20 Middle Channel

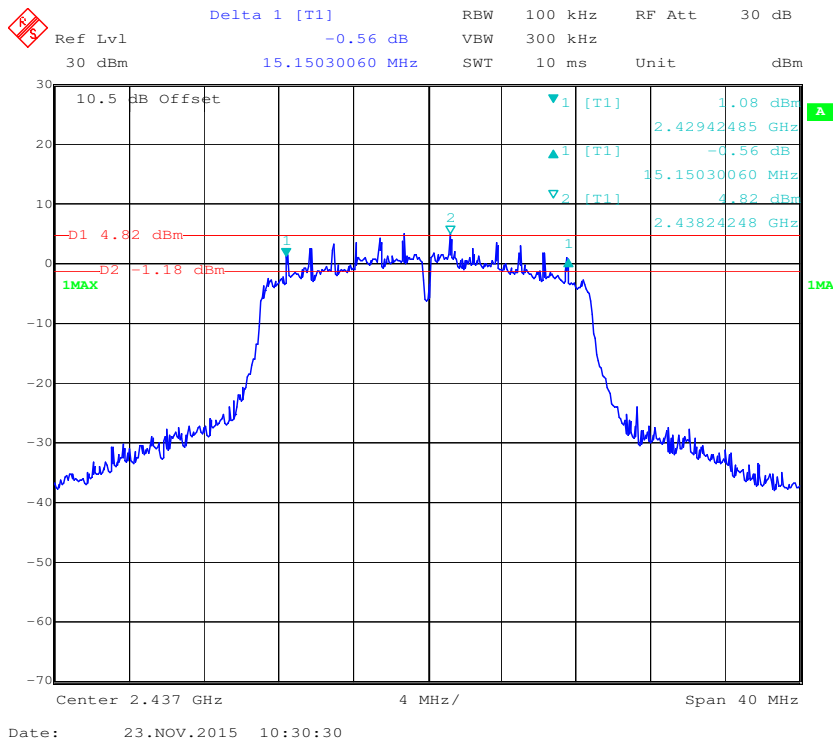


802.11n-HT20 High Channel

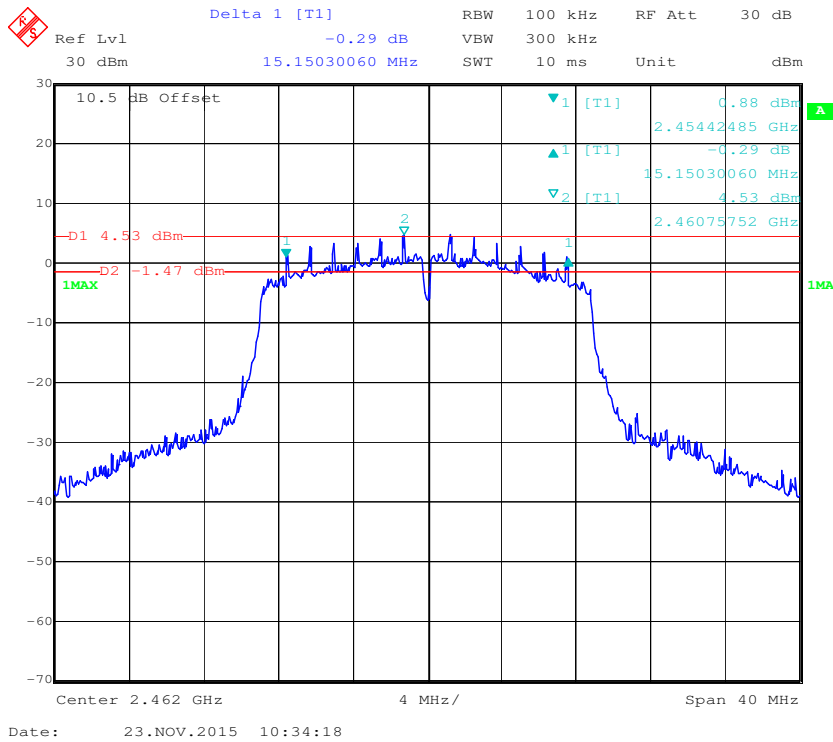


802.11n-HT40 Low Channel

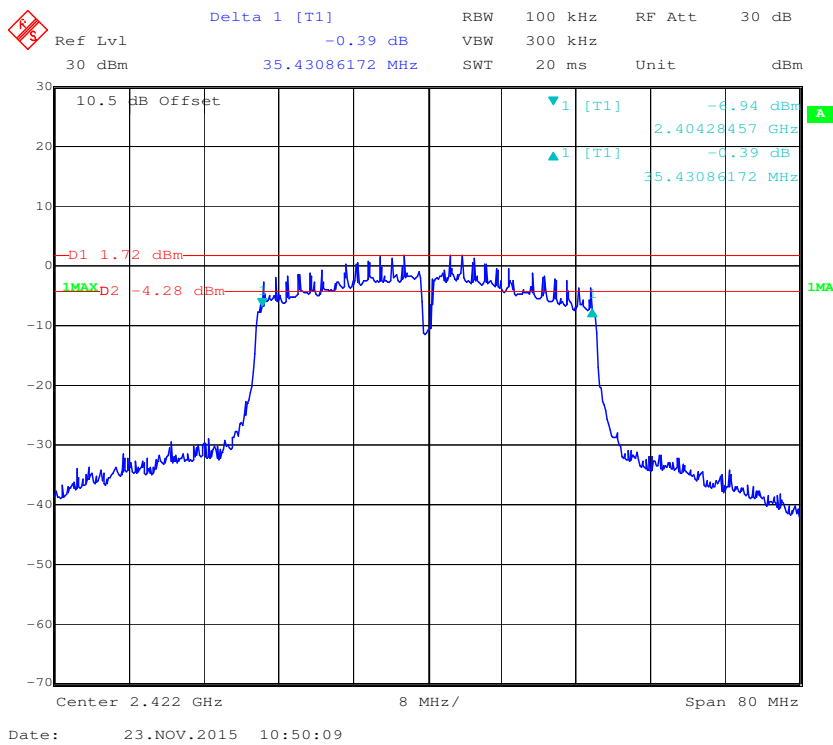

802.11n-HT40 Middle Channel

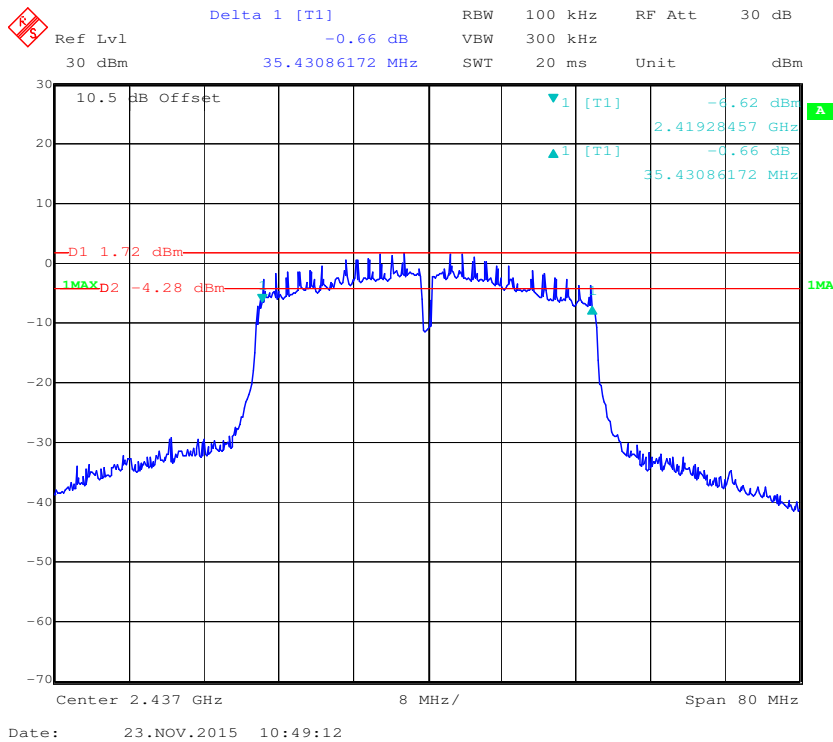

802.11n-HT40 High Channel

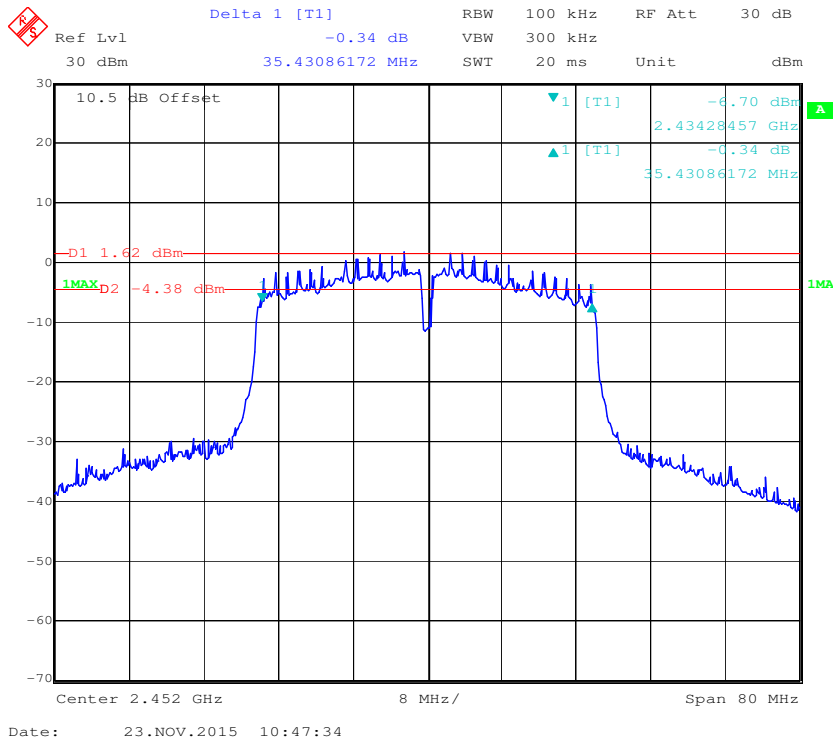


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Power Meter	N1912A	MY5000448	2015-11-03	2016-11-03
HP	Power Sensor	N1921A	MY54210016	2015-11-03	2016-11-03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Rocky Kang on 2015-11-23.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)		Max Conducted Average Output Power (dBm)		Total Output Power (dBm)	Limit (dBm)
		Chain 0	Chain 1	Chain 0	Chain 1		
802.11b							
Low	2412	21.87	23.6	20.18	21.88	/	30
Middle	2437	21.86	23.62	20.24	21.98	/	30
High	2462	21.84	23.7	20.18	22.11	/	30
802.11g							
Low	2412	23.46	25.14	18.79	20.65	/	30
Middle	2437	23.37	25.18	18.72	20.54	/	30
High	2462	23.33	25.15	18.71	20.51	/	30
802.11n-HT20							
Low	2412	21.35	21.14	16.70	16.52	24.26	30
Middle	2437	21.43	21.26	16.82	16.67	24.36	30
High	2462	21.41	21.14	16.71	16.53	24.29	30
802.11n HT40							
Low	2422	22.08	21.97	15.05	14.95	25.04	30
Middle	2437	22.02	21.94	15.01	14.89	24.99	30
High	2452	22.16	21.94	15.07	14.83	25.06	30


FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Rocky Kang on 2015-11-23.

Test Result: Compliance


Please refer to the following plots.

For Chain 0:


802.11b: Band Edge, Left Side

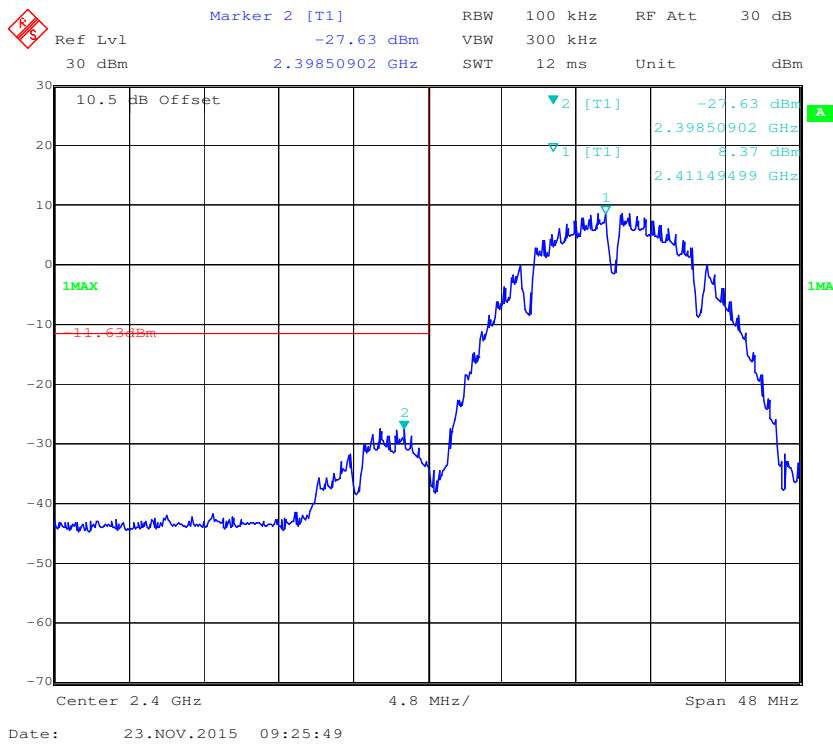


802.11b: Band Edge, Right Side

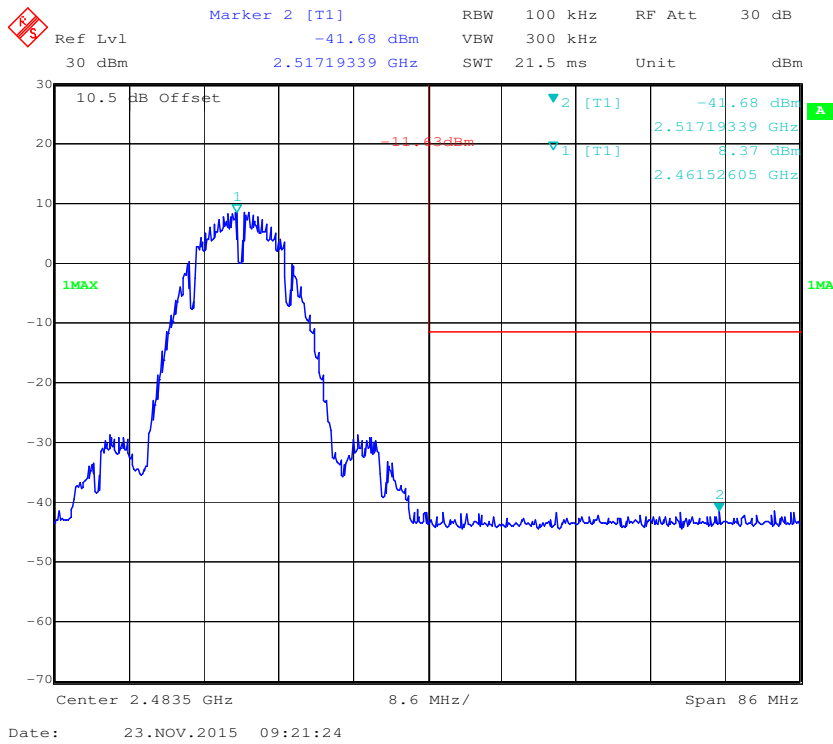


802.11g: Band Edge, Left Side

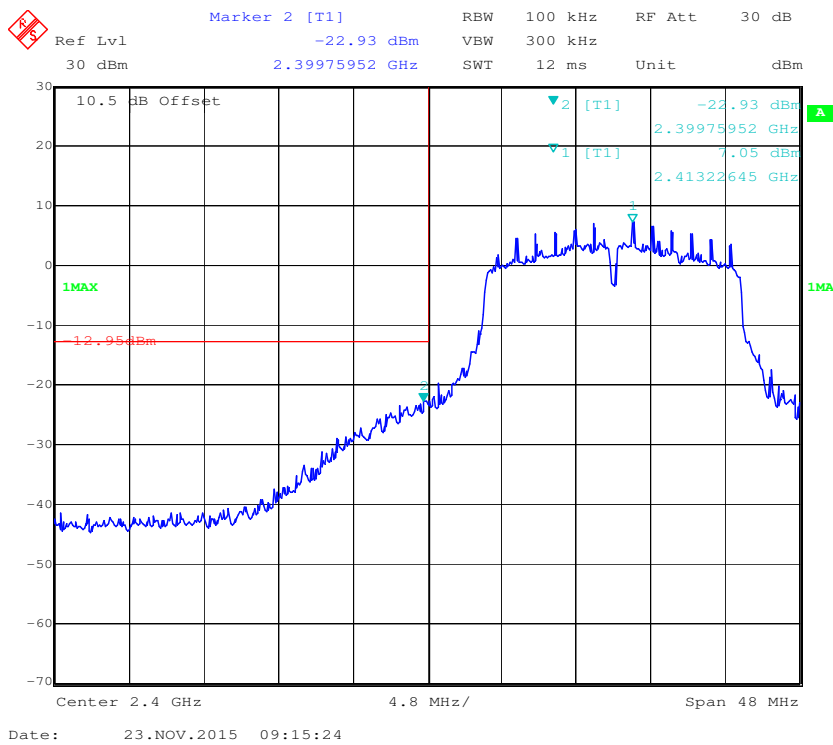


802.11g: Band Edge, Right Side

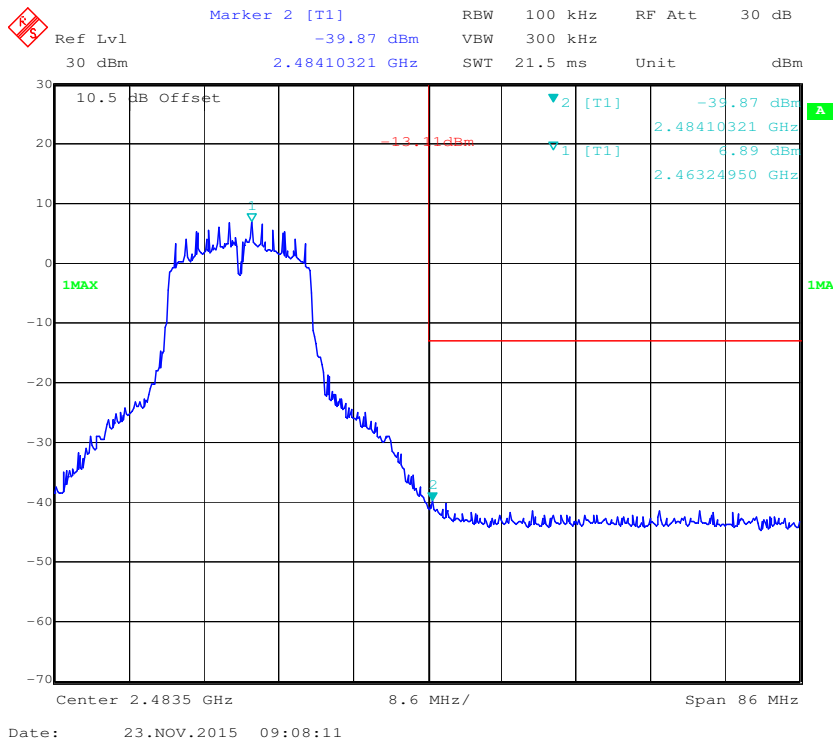


802.11n-HT20: Band Edge, Left Side

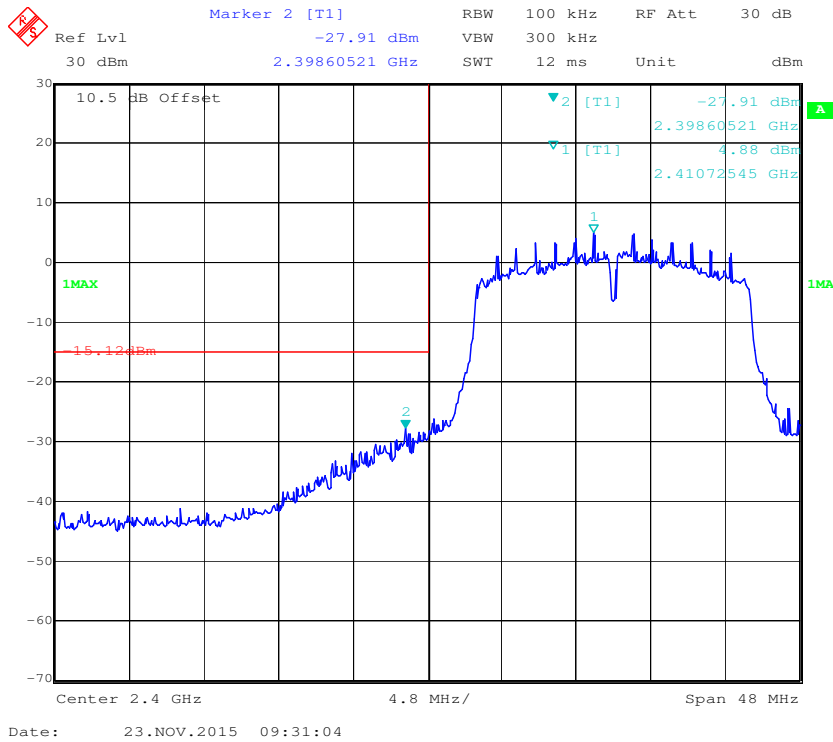


802.11n-HT20: Band Edge, Right Side

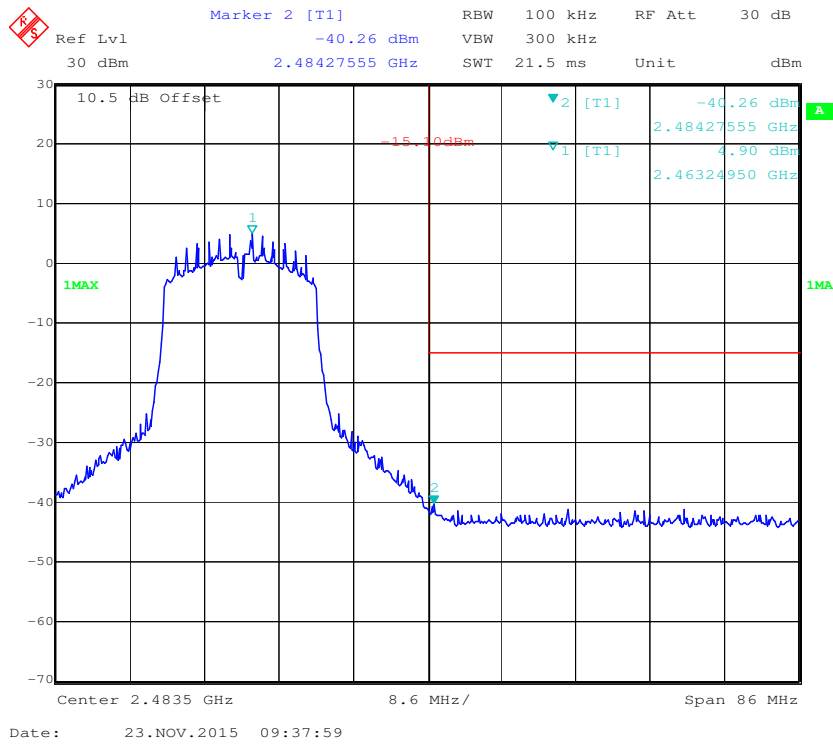

802.11n-HT40: Band Edge, Left Side

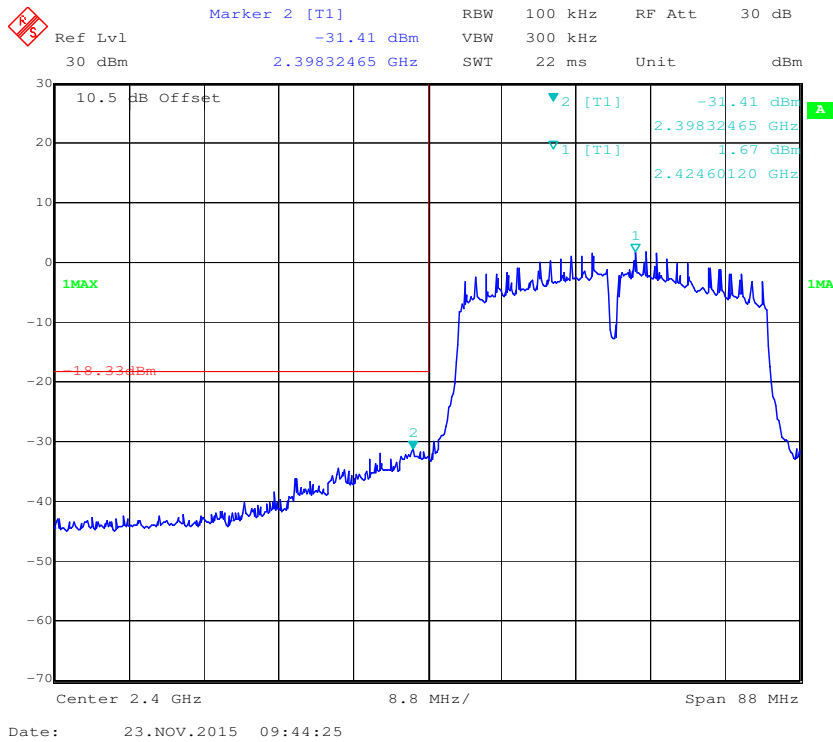


802.11n-HT40: Band Edge, Right Side

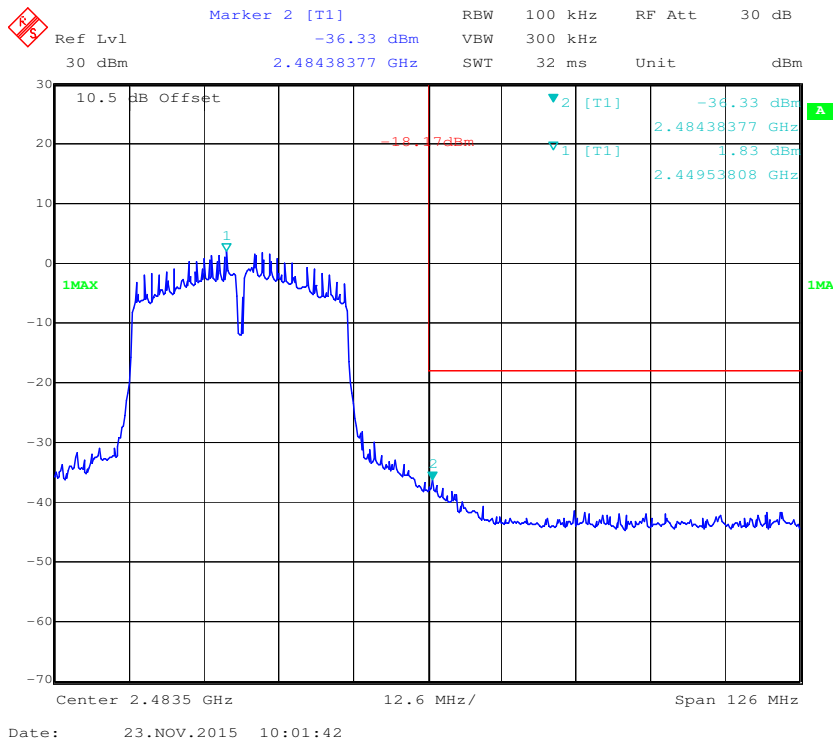


For Chain 1:


802.11b: Band Edge, Left Side

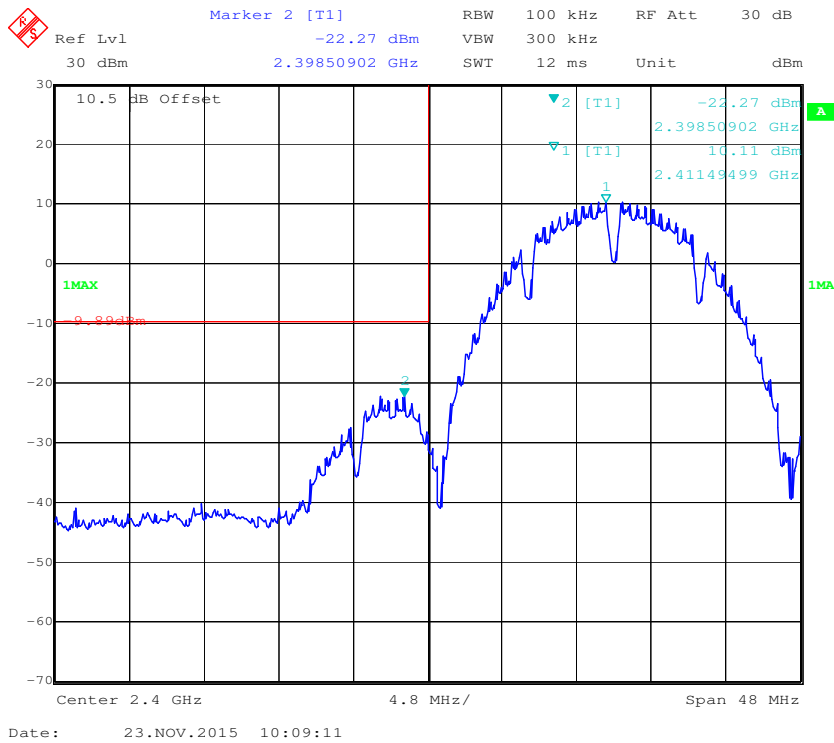


802.11b: Band Edge, Right Side

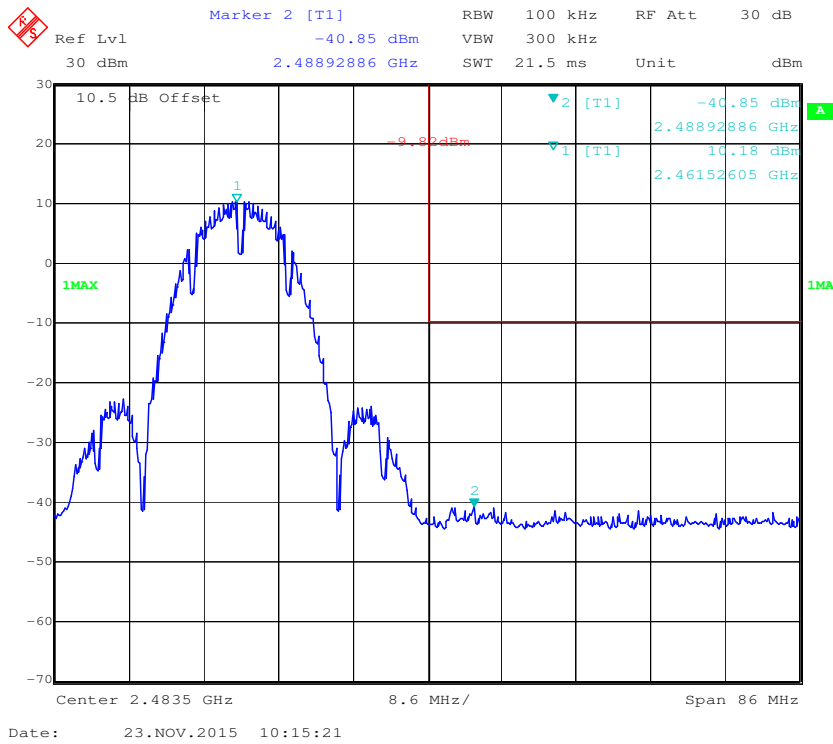


802.11g: Band Edge, Left Side

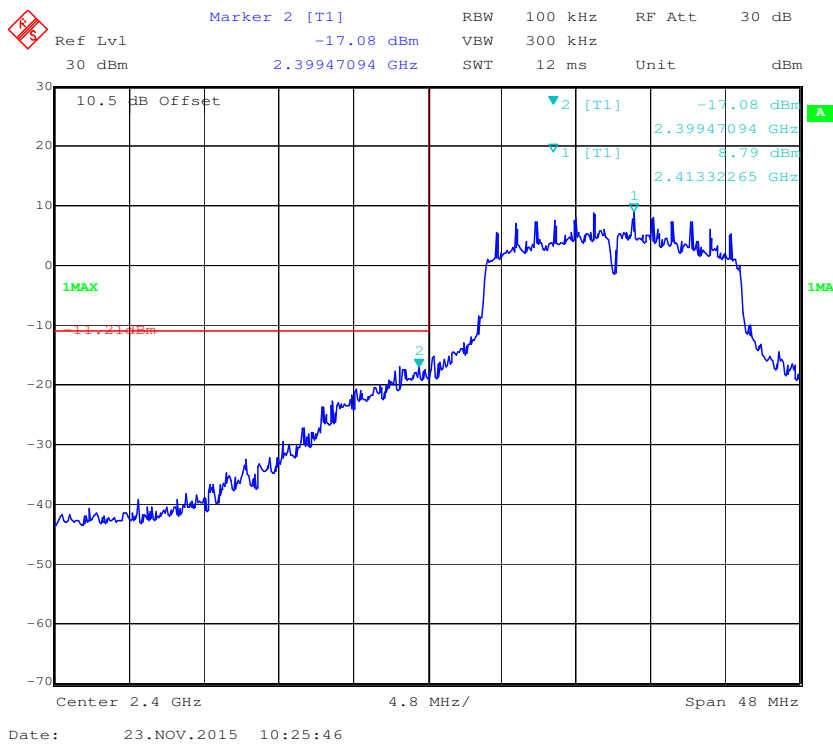


802.11g: Band Edge, Right Side

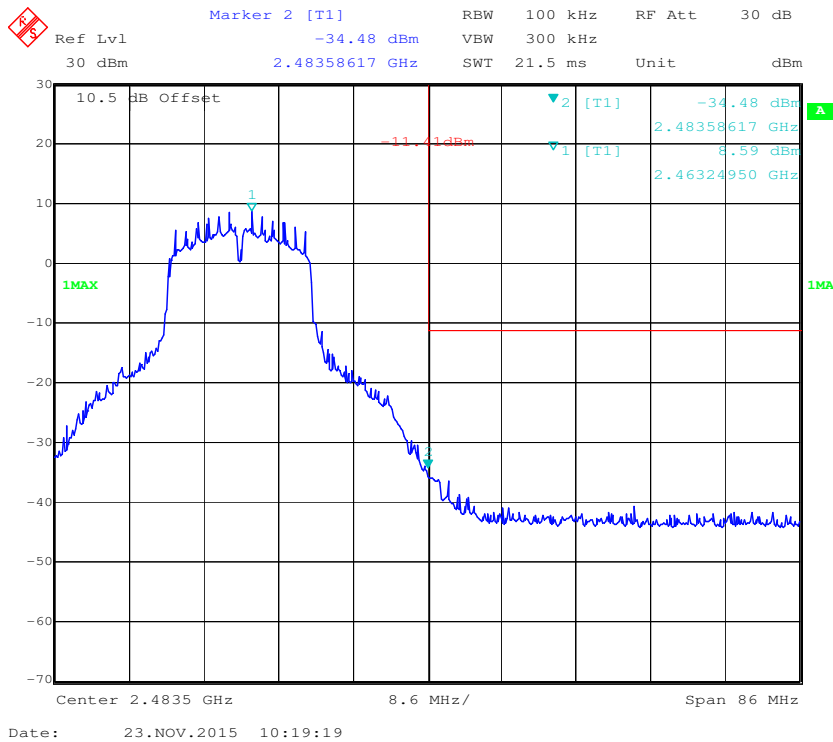


802.11n-HT20: Band Edge, Left Side

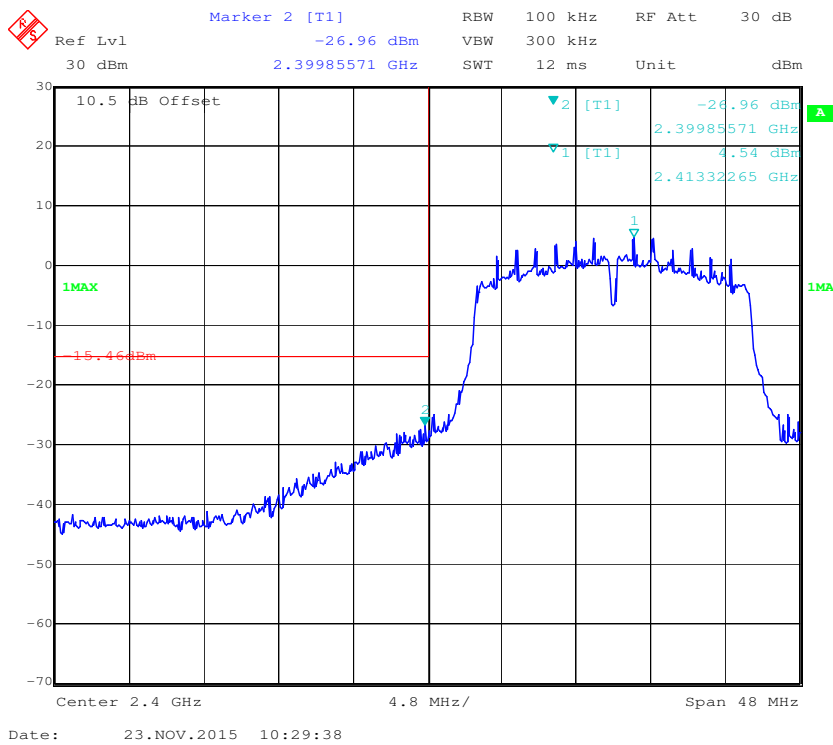


802.11n-HT20: Band Edge, Right Side

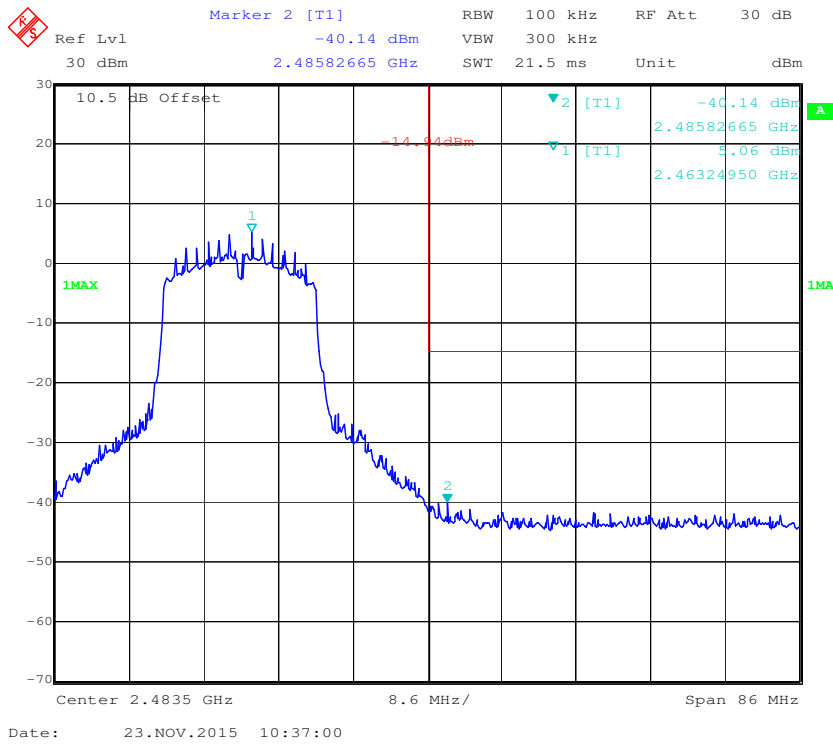

802.11n-HT40: Band Edge, Left Side

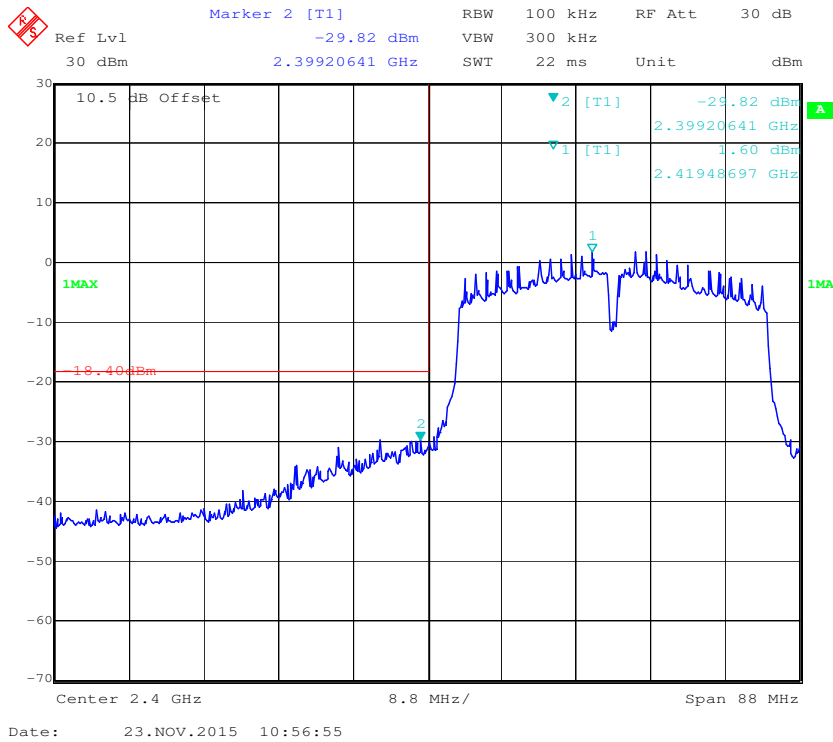

802.11n-HT40: Band Edge, Right Side

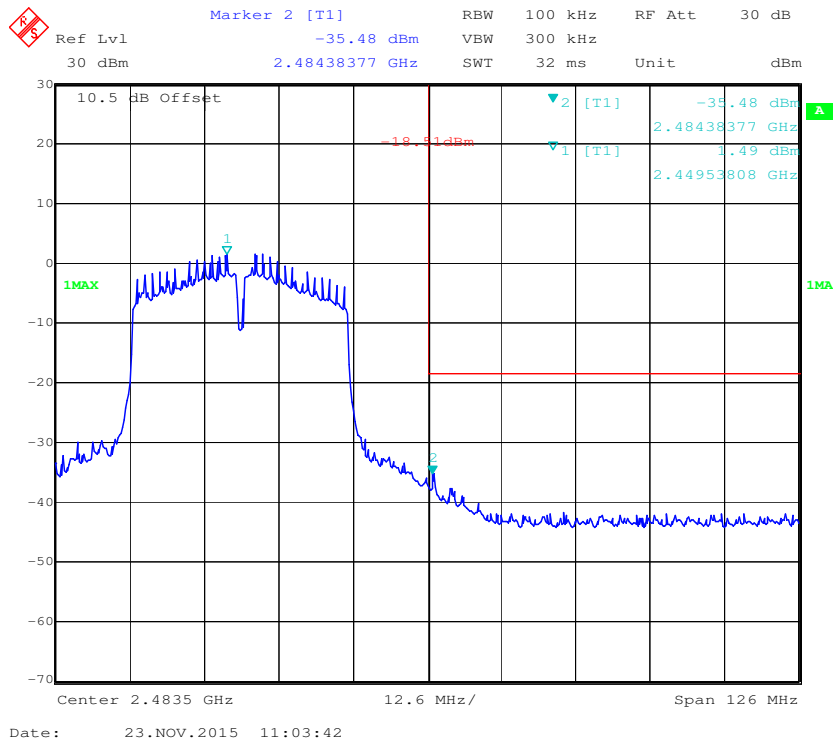

FCC §15.247(e) - POWER SPECTRAL DENSITY


Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v03r02 sub-clause 10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Rocky Kang on 2015-11-23.


EUT operation mode: Transmitting

Test Result: Pass


Channel	Frequency (MHz)	PSD (dBm/3kHz)		Sum (chain0+chain1) (dBm/3kHz)	Limit (dBm/3kHz)
		Chain 0	Chain 1		
802.11b mode					
Low	2412	-9.92	-5.69	/	≤8
Middle	2437	-8.27	-6.81	/	≤8
High	2462	-7.62	-6.6	/	≤8
802.11g mode					
Low	2412	-9.77	-9.15	/	≤8
Middle	2437	-11	-7.94	/	≤8
High	2462	-9.61	-7.95	/	≤8
802.11n-HT20 mode					
Low	2412	-12.54	-11.39	-8.92	≤8
Middle	2437	-12.37	-11.69	-9.01	≤8
High	2462	-12.17	-10.71	-8.37	≤8
802.11n-HT40 mode					
Low	2422	-14.31	-14.97	-11.62	≤8
Middle	2437	-14.13	-15.31	-11.67	≤8
High	2452	-13.95	-13.55	-10.74	≤8

For Chain 0:


Power Spectral Density, 802.11b Low Channel

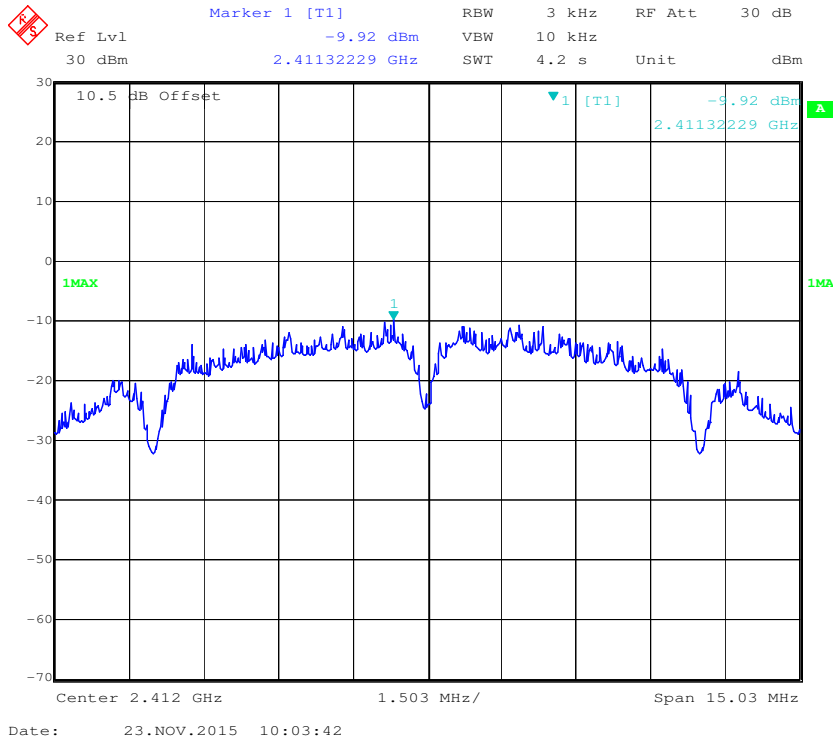


Power Spectral Density, 802.11b Middle Channel

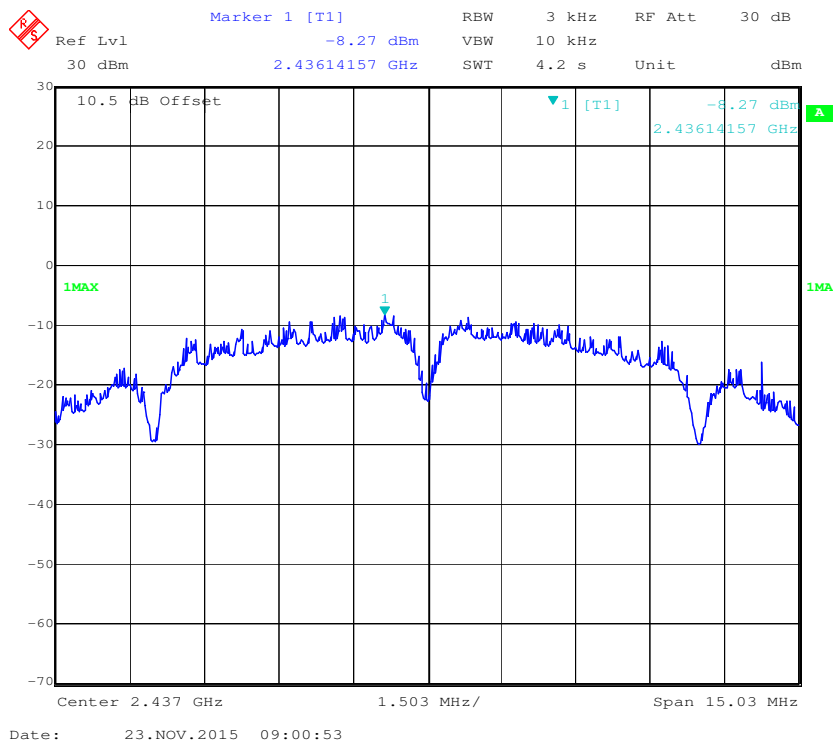


Power Spectral Density, 802.11b High Channel

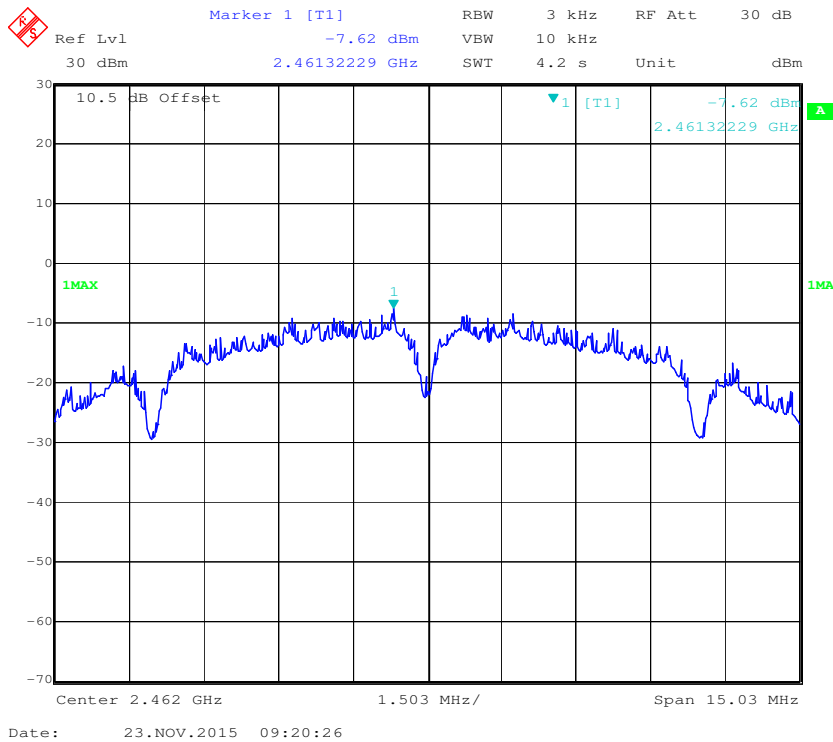


Power Spectral Density, 802.11g Low Channel

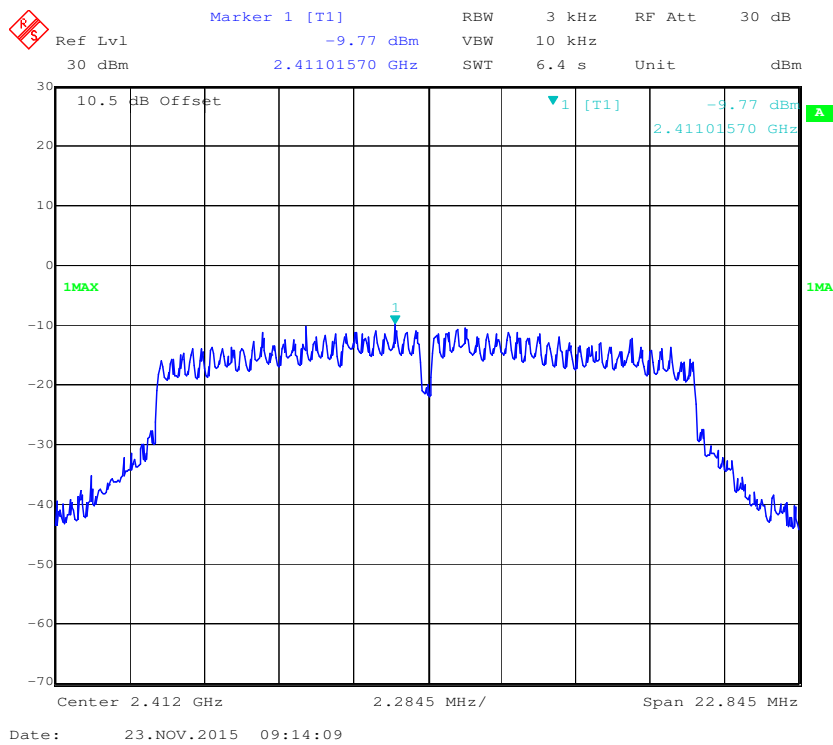


Power Spectral Density, 802.11g Middle Channel

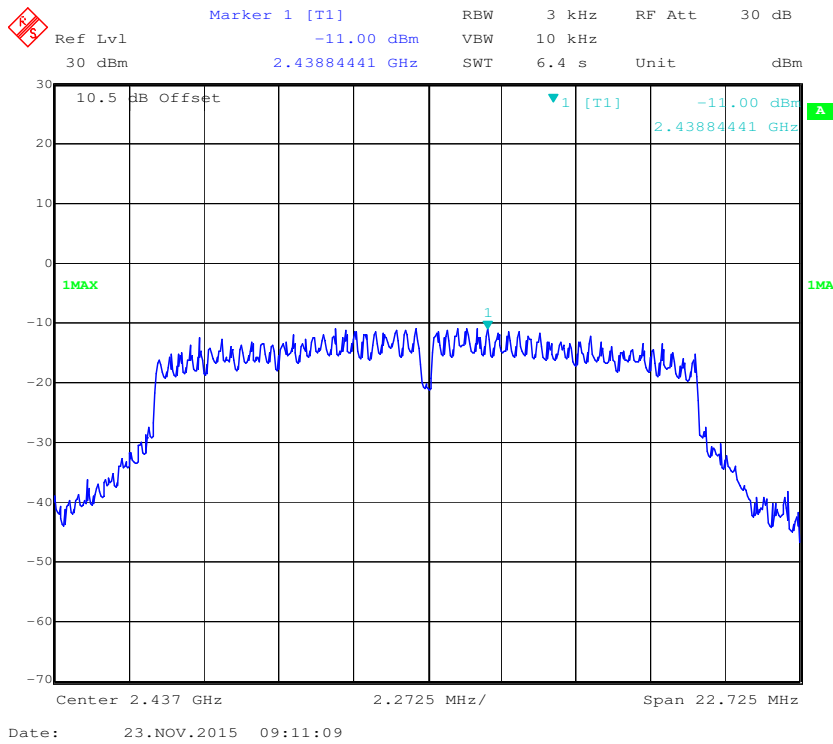


Power Spectral Density, 802.11g High Channel

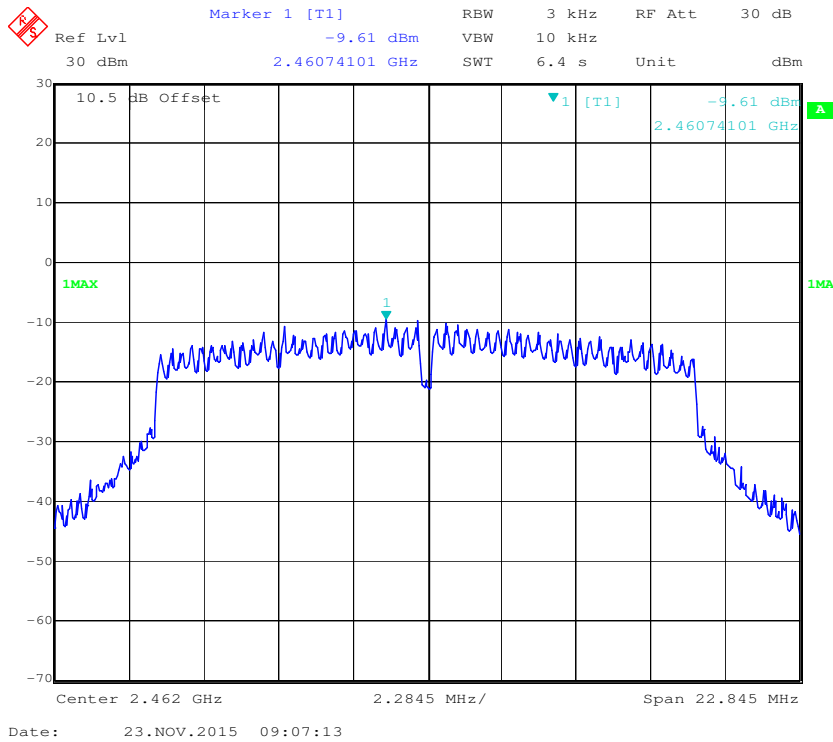


Power Spectral Density, 802.11n-HT20 Low Channel

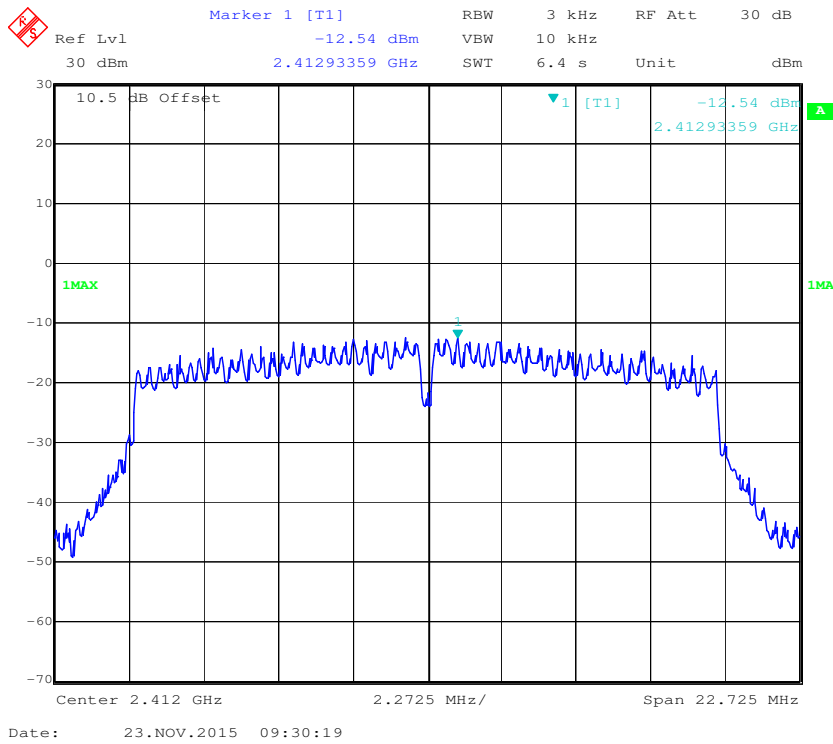


Power Spectral Density, 802.11n-HT20 Middle Channel

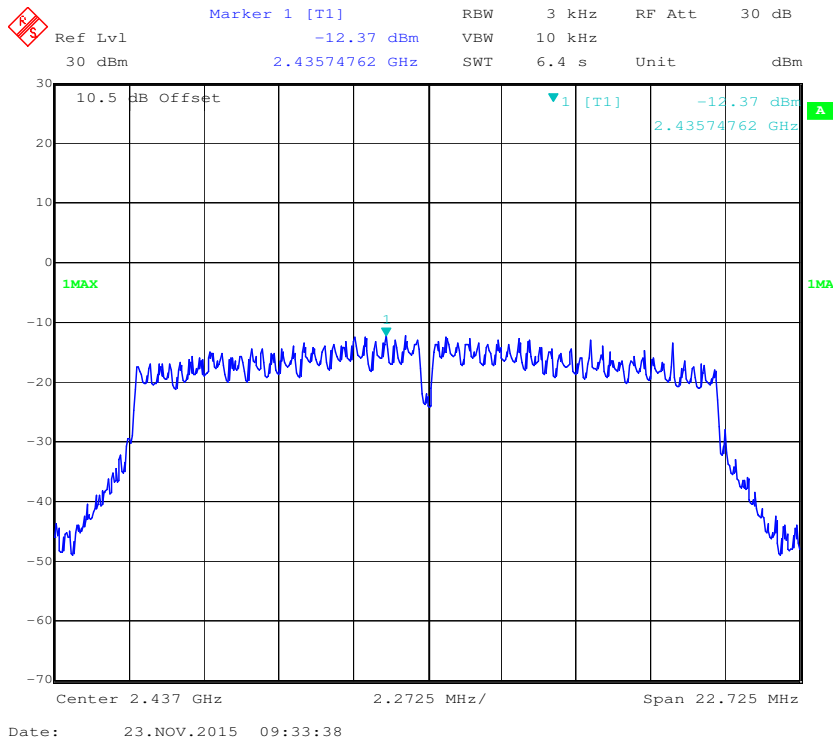


Power Spectral Density, 802.11n-HT20 High Channel

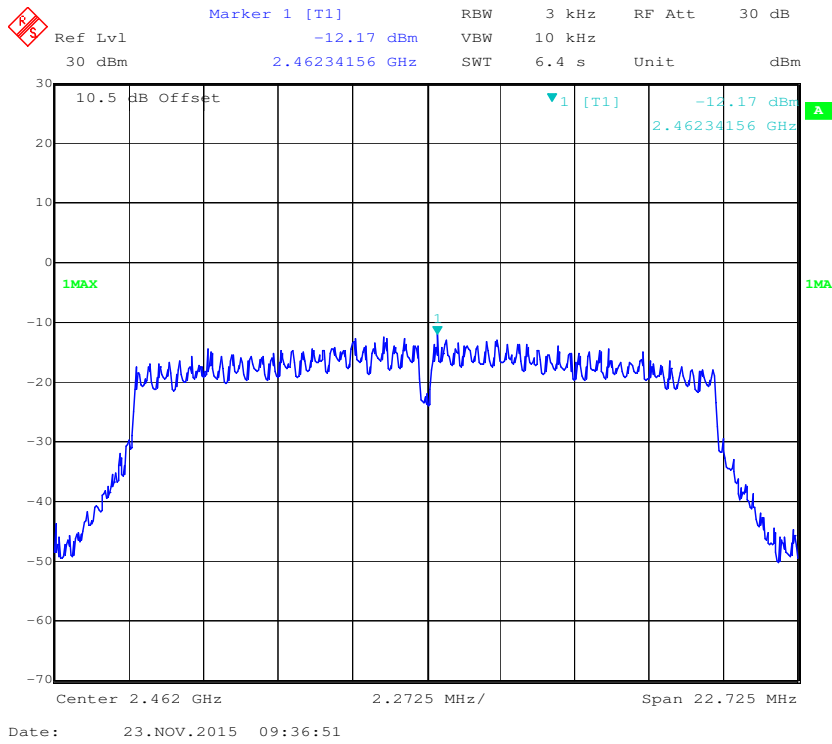


Power Spectral Density, 802.11n-HT40 Low Channel

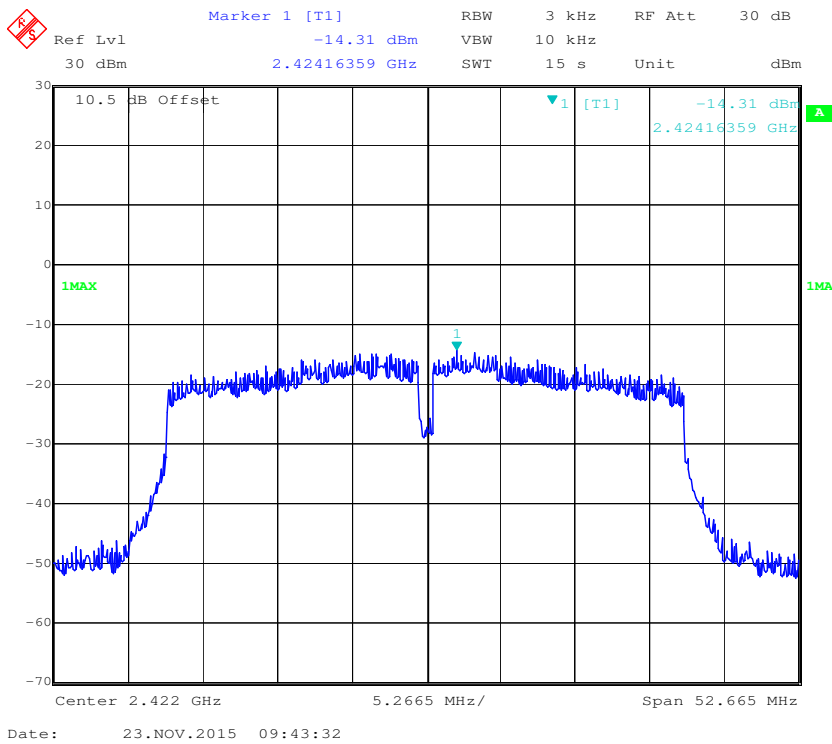

Power Spectral Density, 802.11n-HT40 Middle Channel

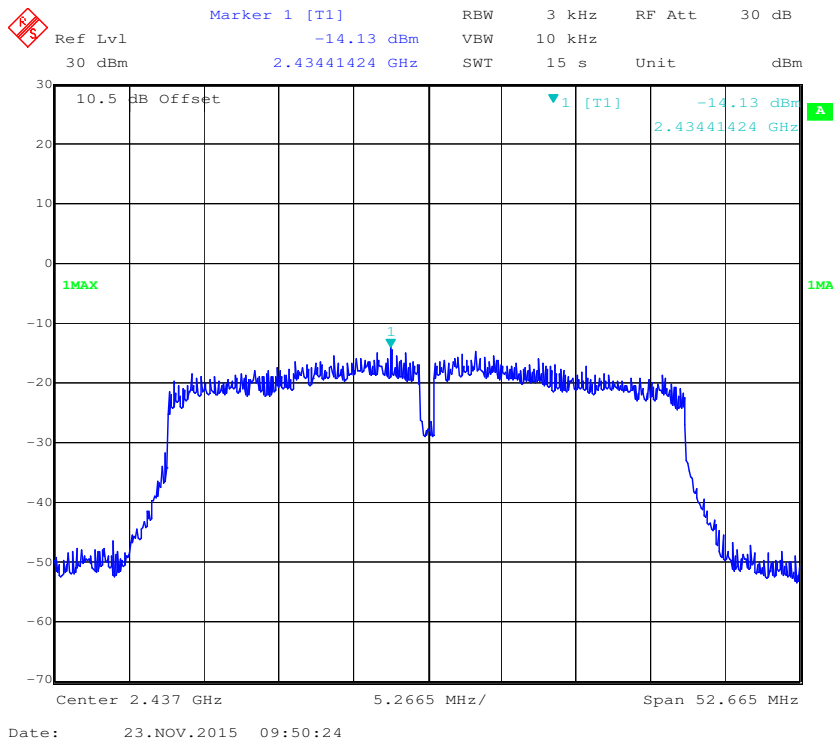


Power Spectral Density, 802.11n-HT40 High Channel

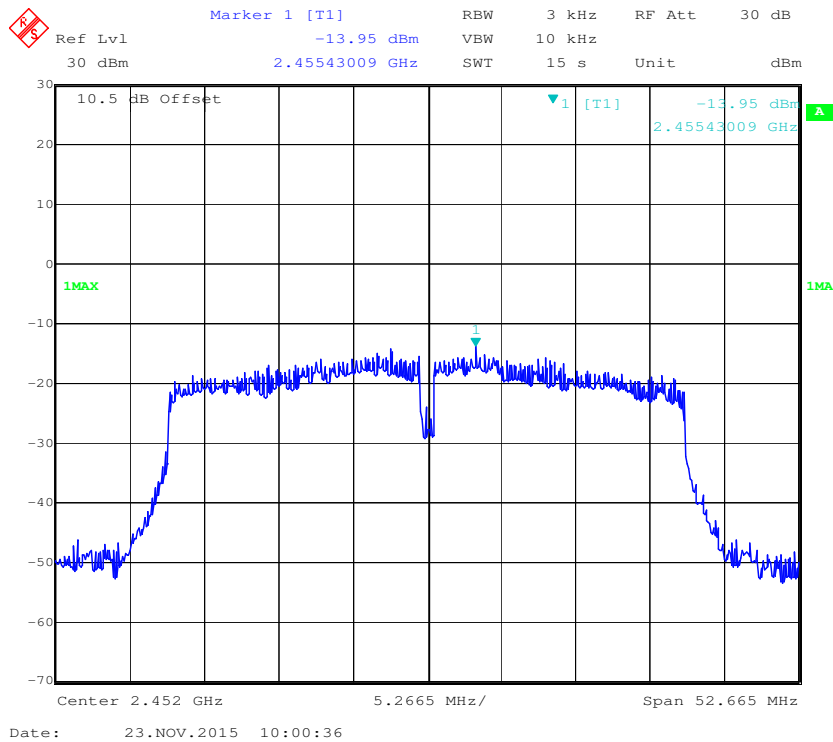


For Chain 1:


Power Spectral Density, 802.11b Low Channel

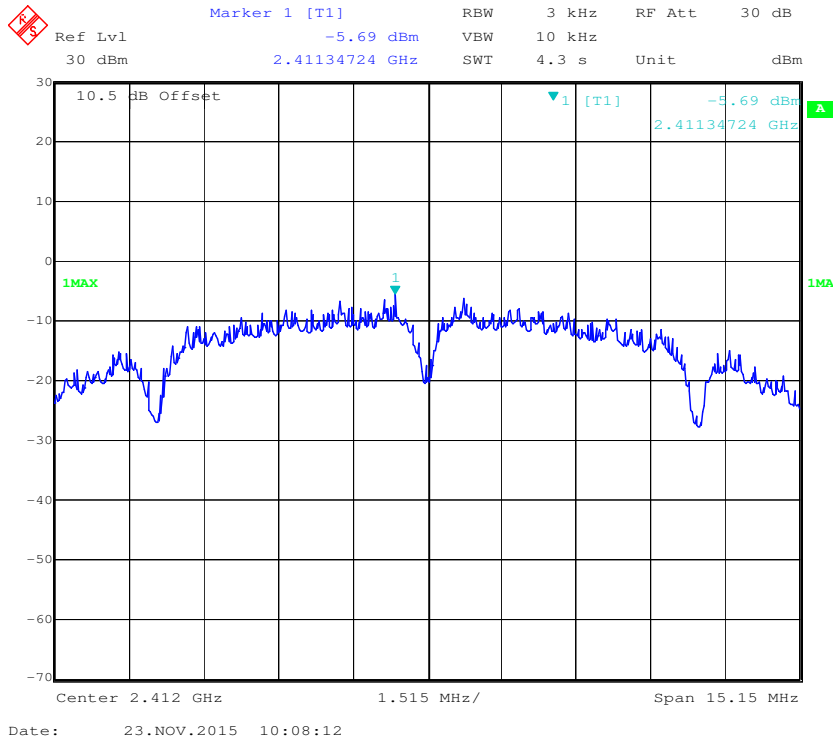


Power Spectral Density, 802.11b Middle Channel

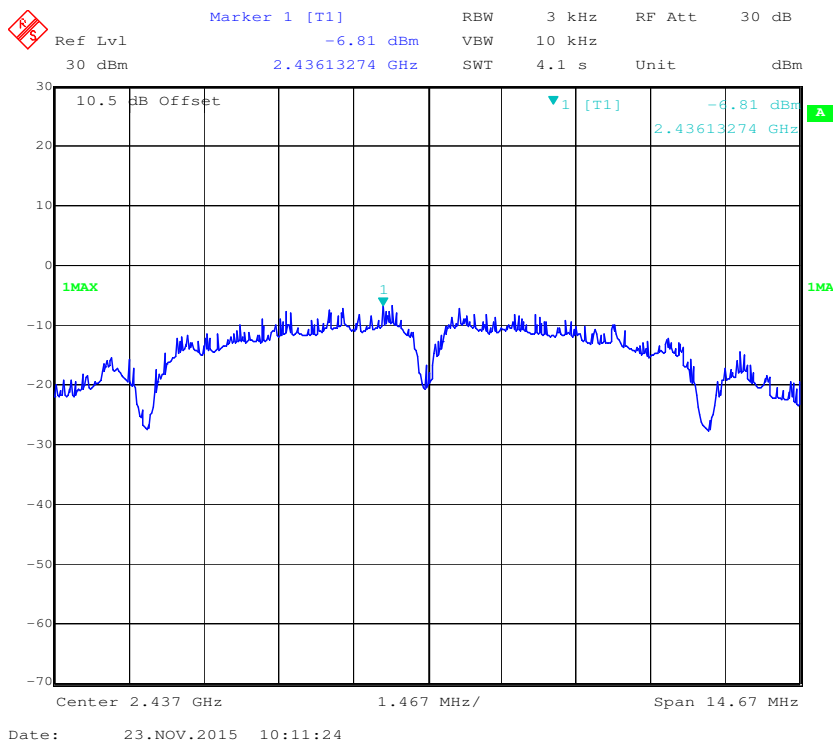


Power Spectral Density, 802.11b High Channel

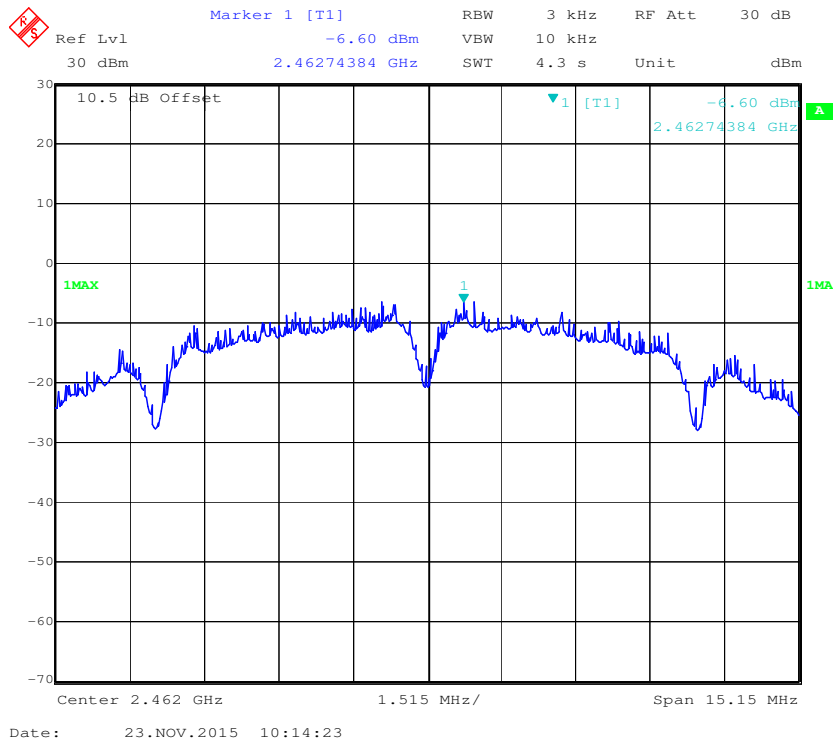


Power Spectral Density, 802.11g Low Channel

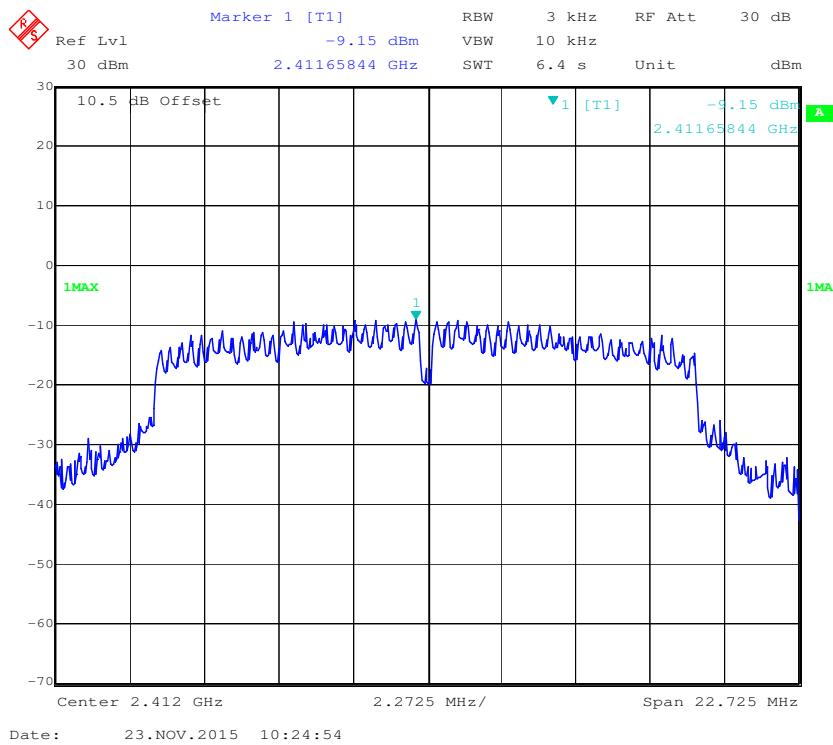


Power Spectral Density, 802.11g Middle Channel

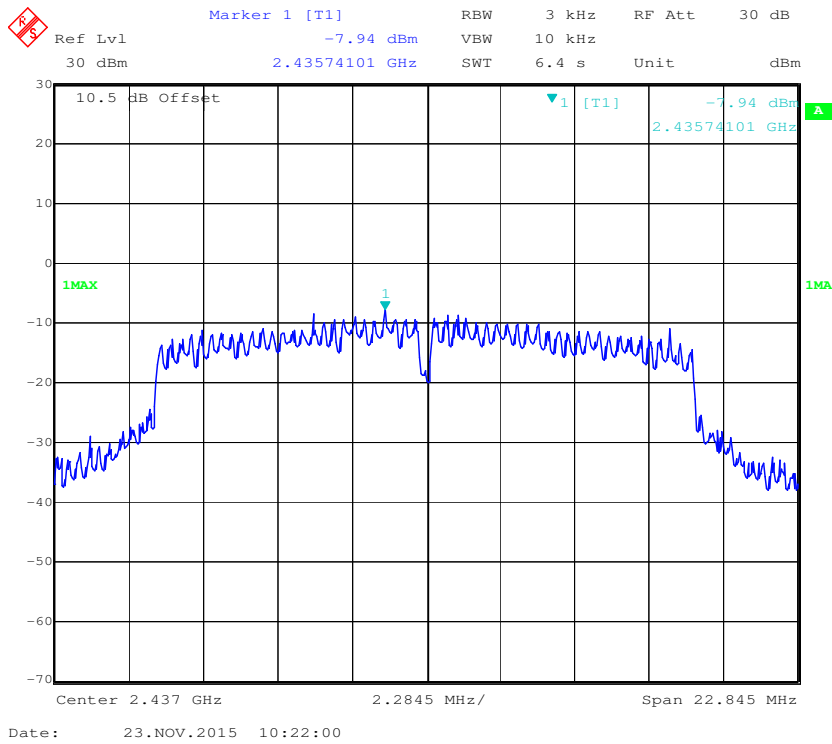


Power Spectral Density, 802.11g High Channel

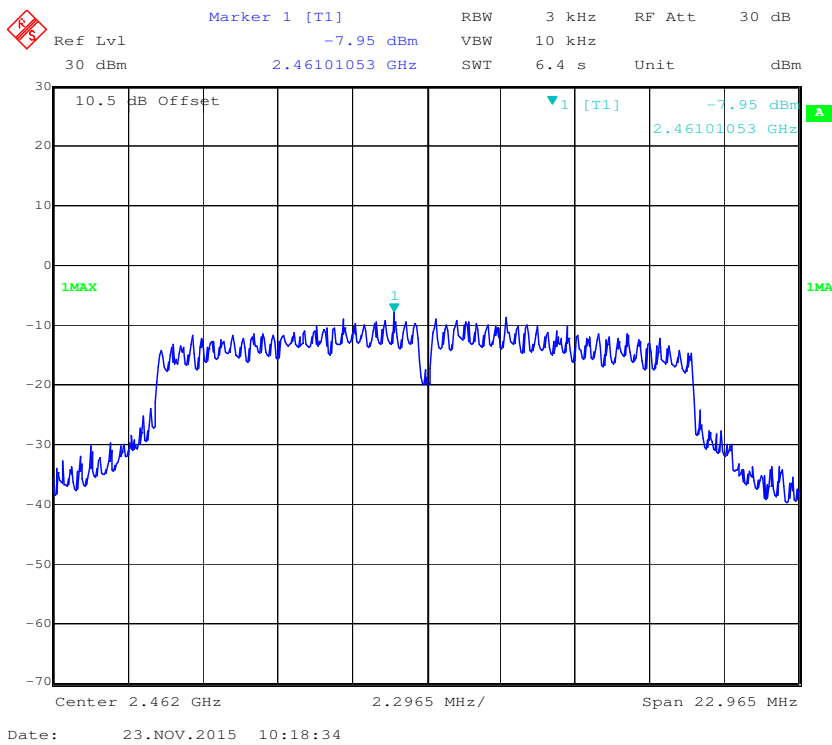


Power Spectral Density, 802.11n-HT20 Low Channel

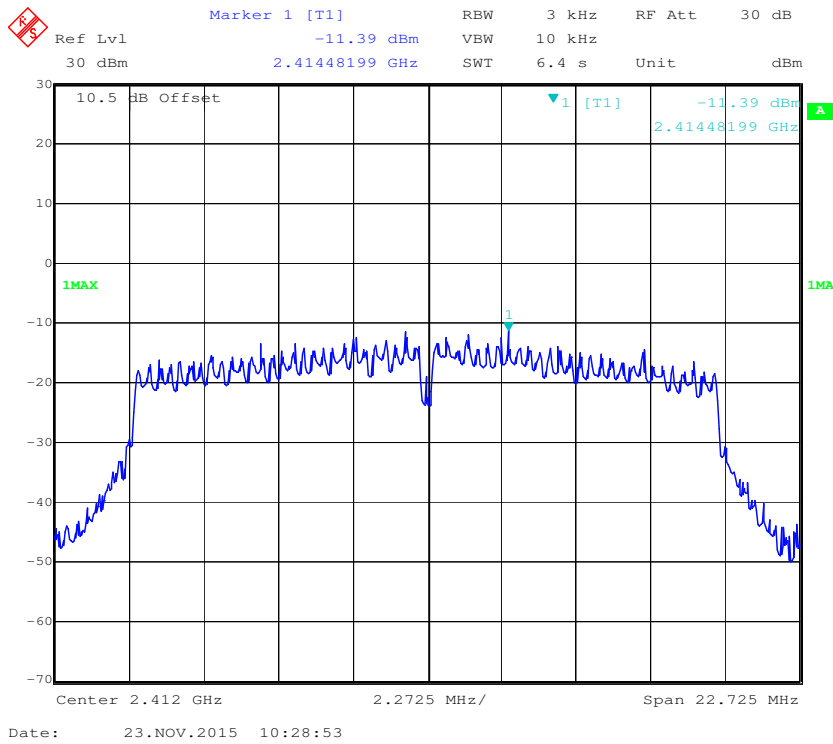


Power Spectral Density, 802.11n-HT20 Middle Channel

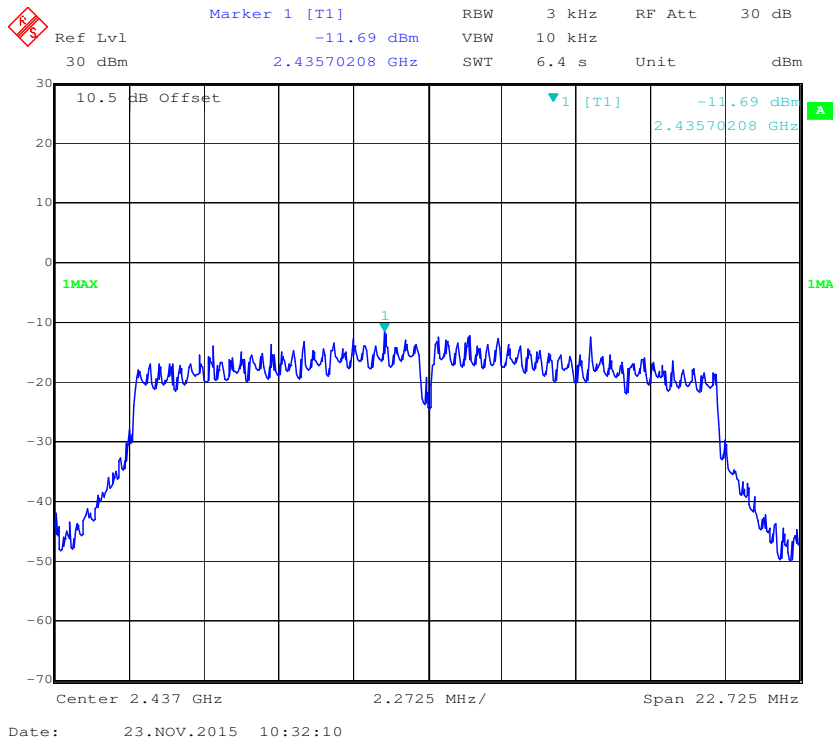


Power Spectral Density, 802.11n-HT20 High Channel

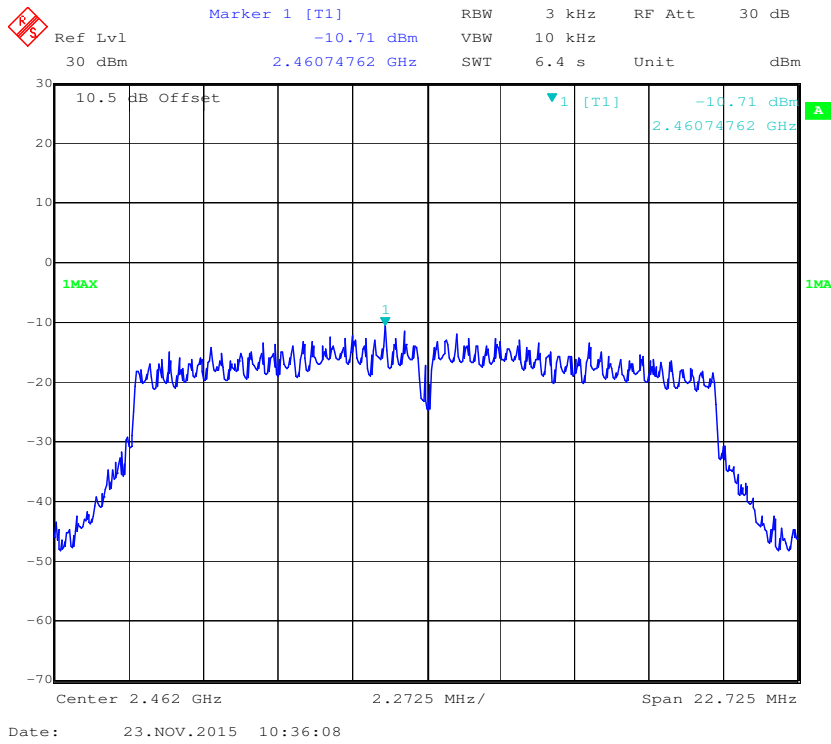


Power Spectral Density, 802.11n-HT40 Low Channel

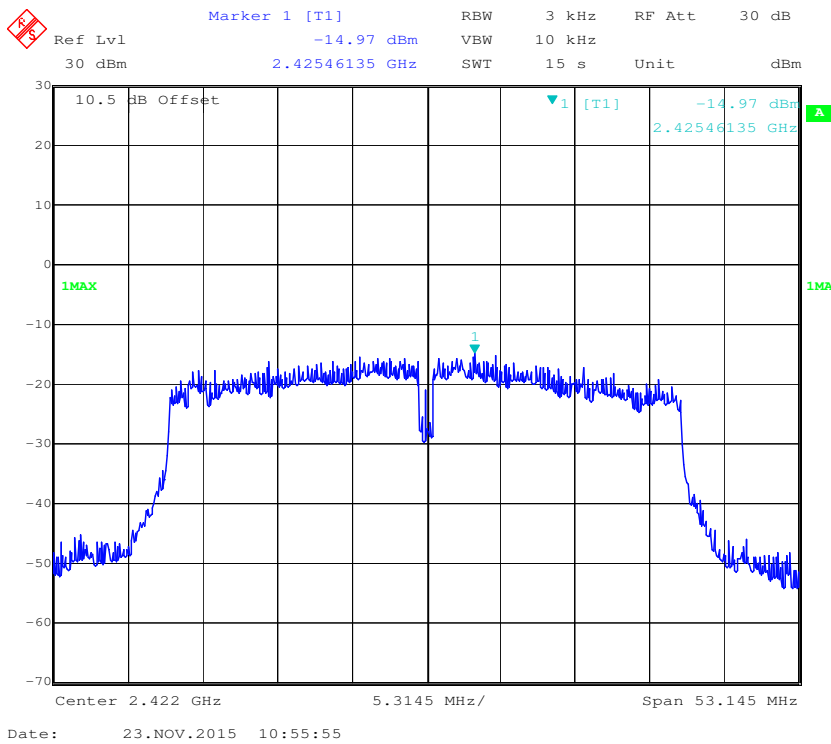

Power Spectral Density, 802.11n-HT40 Middle Channel

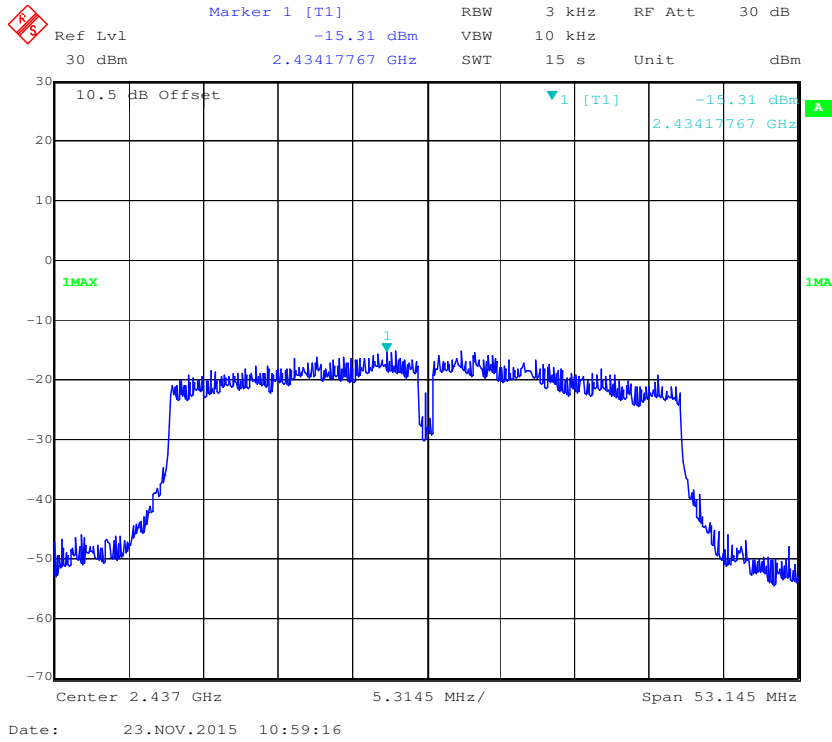

Power Spectral Density, 802.11n-HT40 High Channel

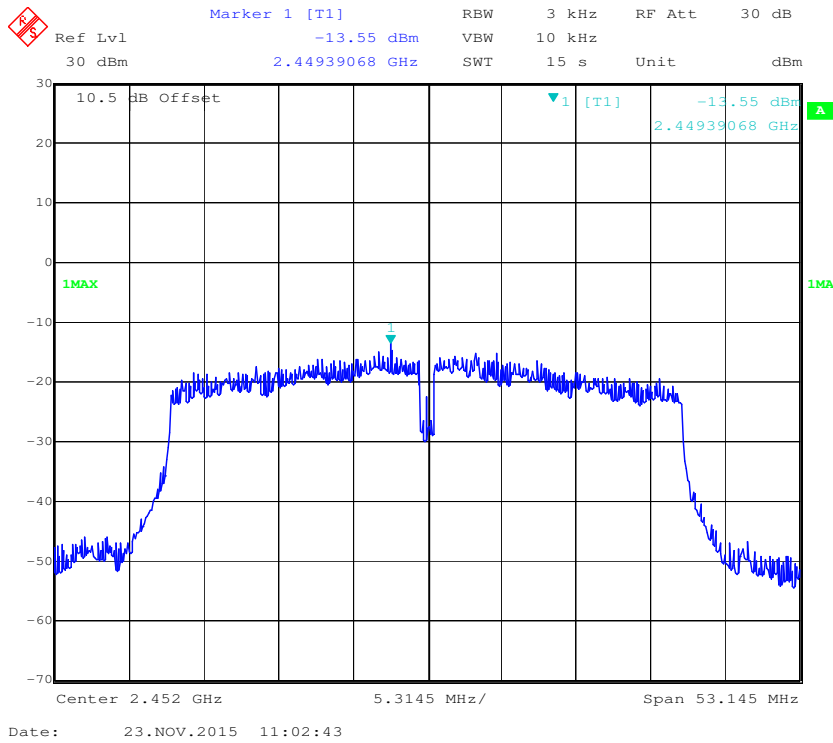

***** END OF REPORT *****