



FCC CFR47 PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 7

**CERTIFICATION TEST REPORT**

**FOR**

**ACCESS POINT 2.4GHZ FHSS**

**MODEL NUMBER: AAP400**

**FCC ID: W22-AAP400  
IC: 9005A-AAP400**

**REPORT NUMBER: 10U13308-1, Revision B**

**ISSUE DATE: JULY 22, 2010**

*Prepared for*  
**ALTIERRE CORPORATION  
1980 CONDOURSE DRIVE  
SAN JOSE, CA95131, U.S.A.**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**

**NVLAP**<sup>®</sup>

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	07/15/2010	Initial Issue	T. Chan
A	07/20/2010	Revised Section 7.1.5 Average Time Of Occupancy ; Updated Section 5.6 Support Equipment	T. Chan
B	07/22/2010	Updated Section 5.6 Setup Diagram and Re-tested AC Line	Tom Chen

## TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS.....	4
2.	TEST METHODOLOGY.....	5
3.	FACILITIES AND ACCREDITATION .....	5
4.	CALIBRATION AND UNCERTAINTY .....	5
4.1.	<i>MEASURING INSTRUMENT CALIBRATION</i> .....	5
4.2.	<i>SAMPLE CALCULATION</i> .....	5
4.3.	<i>MEASUREMENT UNCERTAINTY</i> .....	5
5.	EQUIPMENT UNDER TEST.....	6
5.1.	<i>DESCRIPTION OF EUT</i> .....	6
5.2.	<i>MAXIMUM OUTPUT POWER</i> .....	6
5.3.	<i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	6
5.4.	<i>SOFTWARE AND FIRMWARE</i> .....	6
5.5.	<i>WORST-CASE CONFIGURATION AND MODE</i> .....	6
5.6.	<i>DESCRIPTION OF TEST SETUP</i> .....	7
6.	TEST AND MEASUREMENT EQUIPMENT .....	9
7.	ANTENNA PORT TEST RESULTS .....	10
7.1.	<i>BINARY FSK MODULATION</i> .....	10
7.1.1.	20 dB AND 99% BANDWIDTH.....	10
7.1.2.	HOPPING FREQUENCY SEPARATION .....	15
7.1.3.	NUMBER OF HOPPING CHANNELS.....	17
7.1.4.	DUTY CYCLE.....	20
7.1.5.	AVERAGE TIME OF OCCUPANCY.....	21
7.1.6.	OUTPUT POWER .....	23
7.1.7.	AVERAGE POWER .....	26
7.1.8.	CONDUCTED SPURIOUS EMISSIONS.....	27
8.	RADIATED TEST RESULTS .....	32
8.1.	<i>LIMITS AND PROCEDURE</i> .....	32
8.2.	<i>TRANSMITTER ABOVE 1 GHz</i> .....	33
8.2.1.	TRANSMITTER ABOVE 1 GHz IN THE 2.4 GHz BAND .....	33
8.2.2.	RECEIVER ABOVE 1 GHz IN THE 2.4 GHz BAND.....	38
8.3.	<i>WORST-CASE BELOW 1 GHz</i> .....	39
8.4	AC POWER LINE CONDUCTED EMISSIONS.....	42
9.	MAXIMUM PERMISSIBLE EXPOSURE .....	45
10.	SETUP PHOTOS .....	48

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** ALTIERRE CORPORATION  
1980 CONDOURSE DRIVE  
SAN JOSE, CA95131, USA

**EUT DESCRIPTION:** ACCESS POINT 2.4GHz FHSS

**MODEL:** AAP400

**SERIAL NUMBER:** 0031

**DATE TESTED:** JULY 06 – 08, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 7 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 2	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For CCS By:



---

THU CHAN  
EMC MANAGER  
COMPLIANCE CERTIFICATION SERVICES

Tested By:



---

WILLIAM ZHUANG  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is an Access Point operates at 2.4GHz FHSS.

The radio module is manufactured by Altierre Corp.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2401.5 - 2475.5	Binary FSK	25.42	348.34

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an external antenna, with a maximum gain of 7 dBi.

### 5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was revision 2.25.

The test utility software used during testing was FPGA image: ap4-p1\_rev1.1\_35.xsvf.

Test FPGA Image: special FCC RX only built (FPGA only): FCC\_RX\_ONLY.xsvf.

### 5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	IBM	Thinkpad	1S236668U99VPGV4	Doc
AC Adapter	IBM	AA21131	11S02K6963Z2UF2763P3M4	Doc
PoE	Korenix	JN2008060081	N/A	Doc


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US115V	Unshielded	1.5m	
2	Ethernet	1	RJ45	shielded	.80m	
3	Ethernet	1	RJ45	shielded	10m	
4	Ethernet	1	RJ45	shielded	5m	

### TEST SETUP

The EUT is a stand alone device and all support equipments should be in the shielded box during the test

**SETUP DIAGRAM**

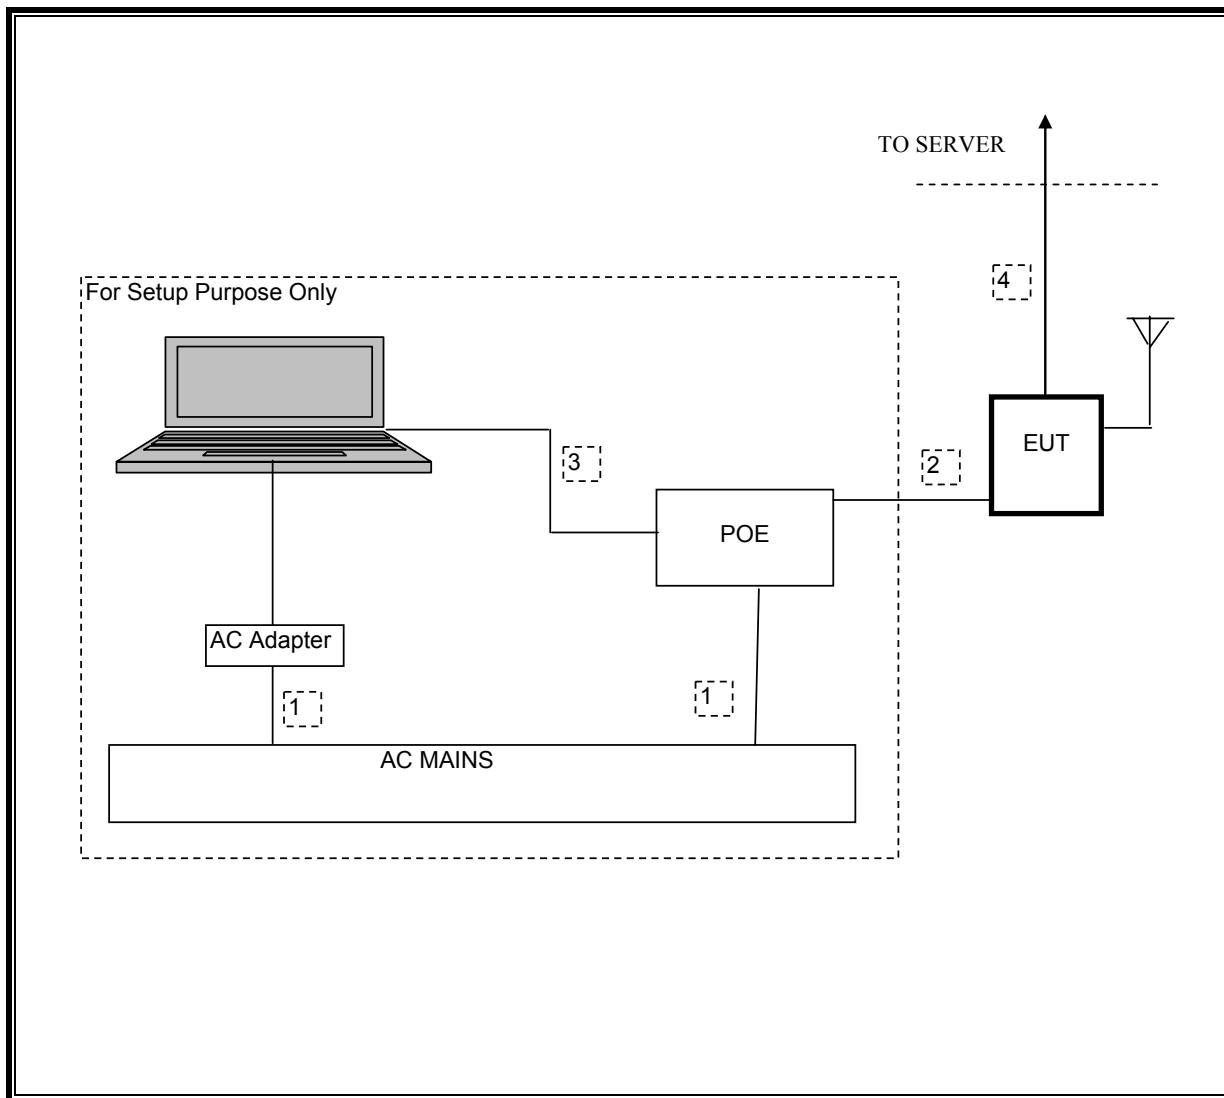

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01159	05/08/11
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01178	08/31/10
Antenna, Horn, 18 GHz	EMCO	3115	C00783	07/29/10
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	08/04/10
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01016	07/14/11
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	07/06/11
Peak Power Meter	Agilent / HP	E4416A	C00963	12/04/11
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/04/11
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	05/06/11
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/06/10
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	N02481	11/05/10

## 7. ANTENNA PORT TEST RESULTS

### 7.1. BINARY FSK MODULATION

#### 7.1.1. 20 dB AND 99% BANDWIDTH

##### LIMIT

None; for reporting purposes only.



##### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

##### RESULTS



Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2401.5	820.522	785.843
Middle	2440.5	811.679	796.103
High	2475.5	820.278	782.322


## 20 dB BANDWIDTH

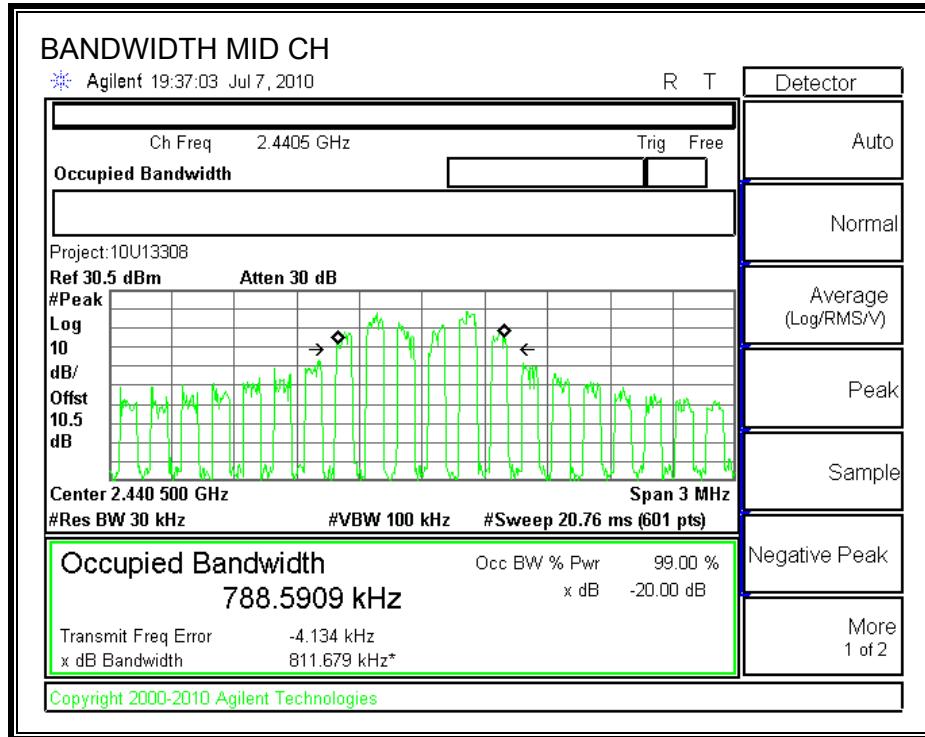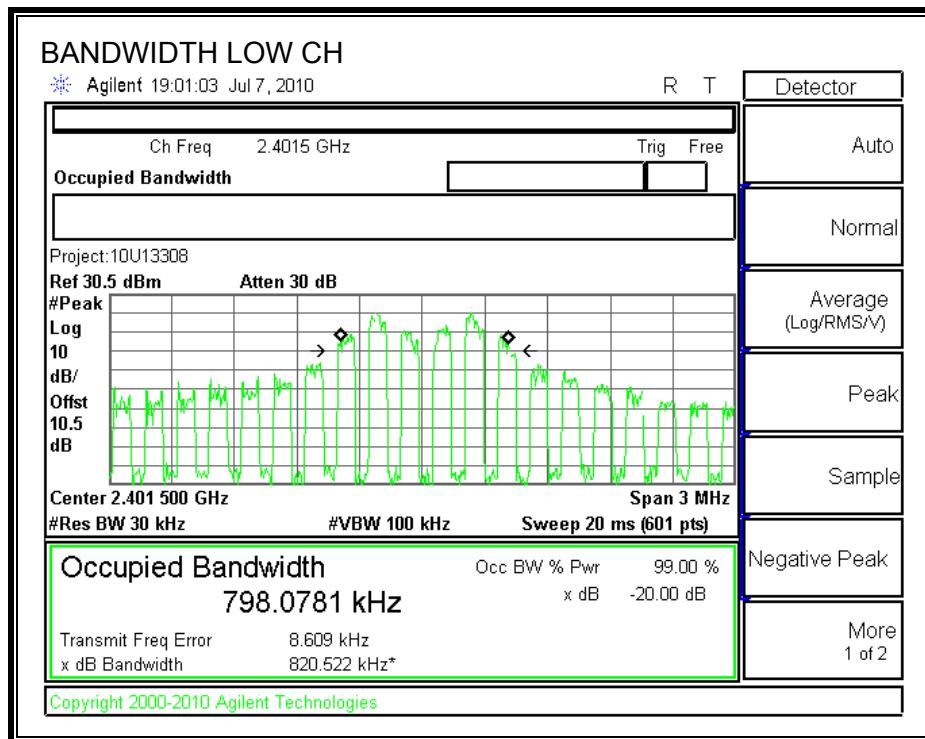

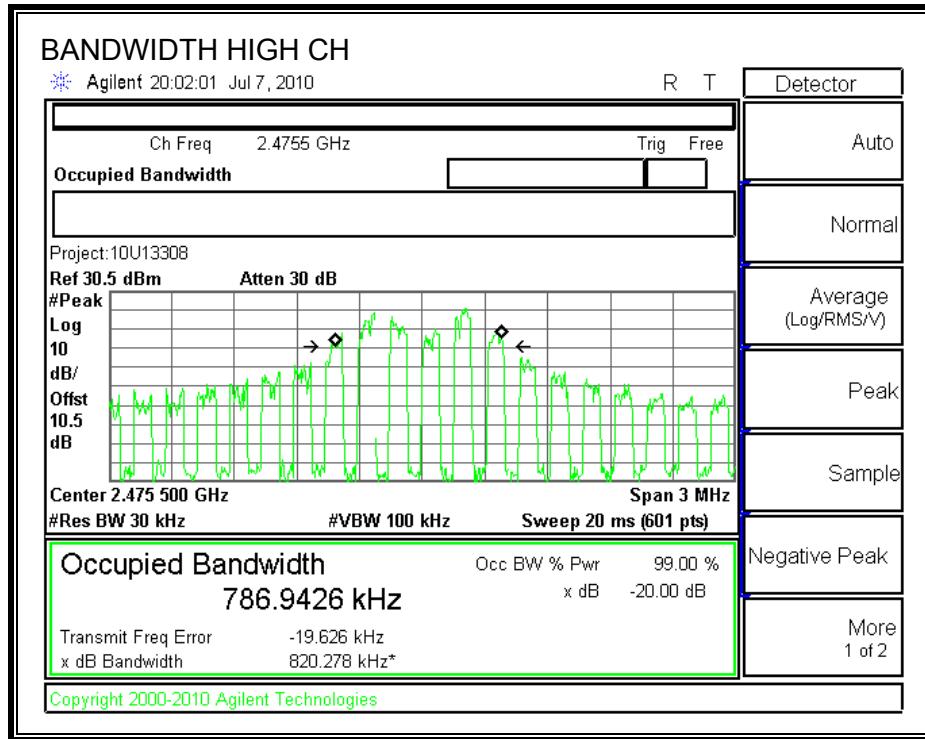

**99% BANDWIDTH**

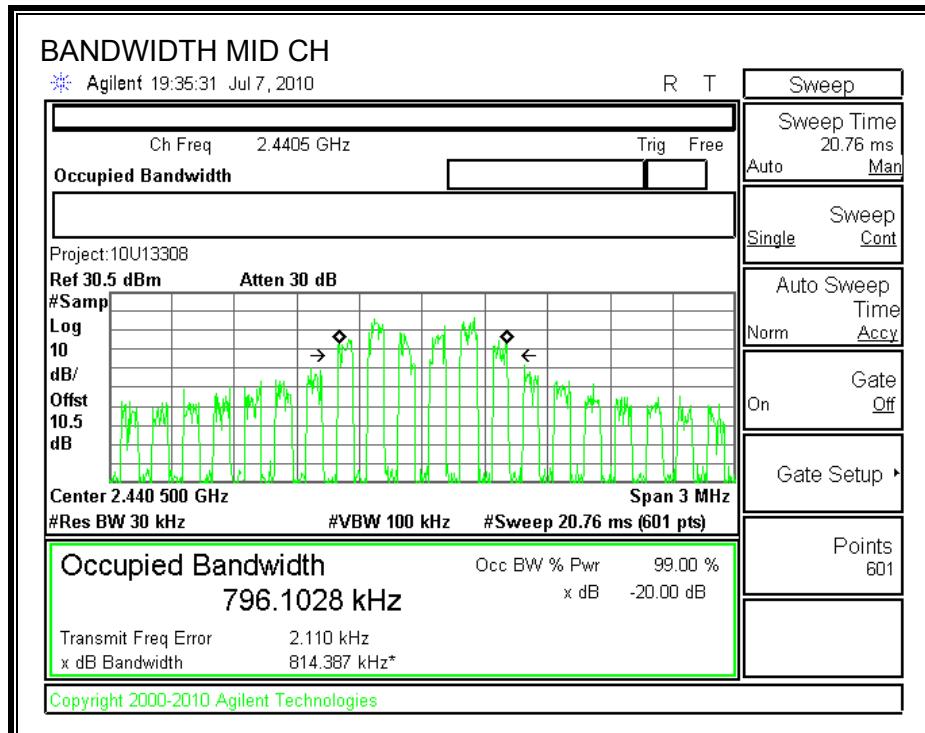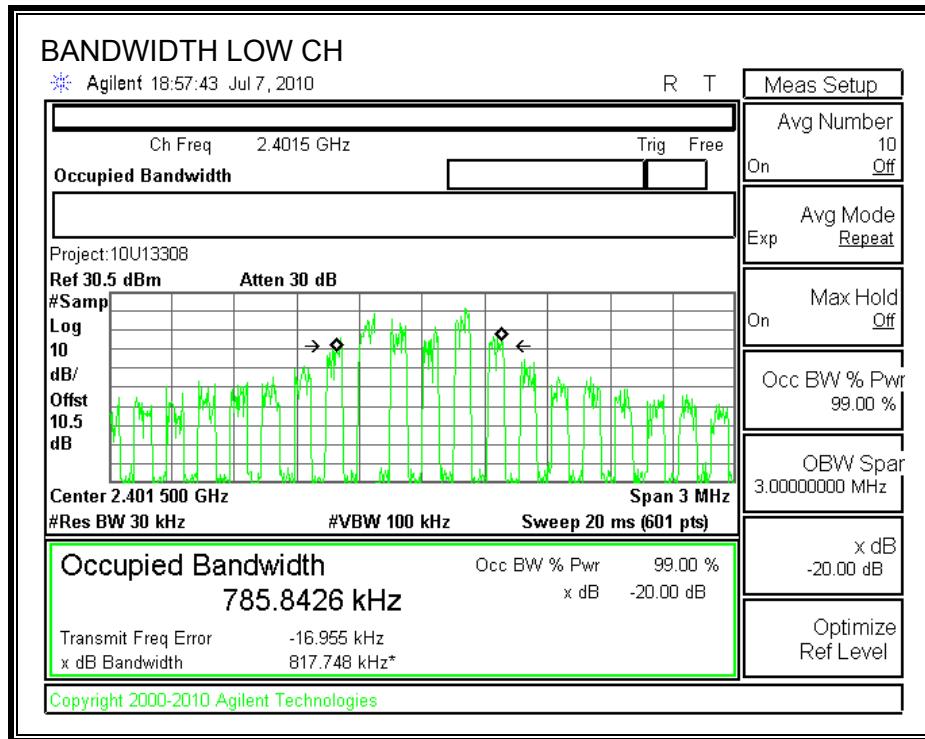

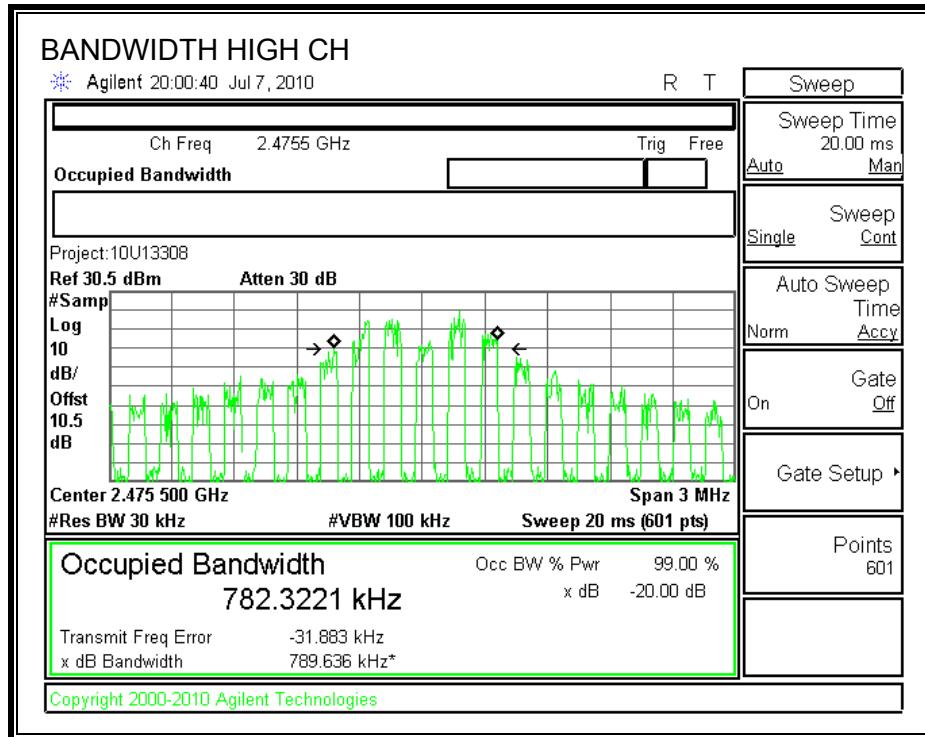

### 7.1.2. HOPPING FREQUENCY SEPARATION

#### LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

#### RESULTS

## HOPPING FREQUENCY SEPARATION

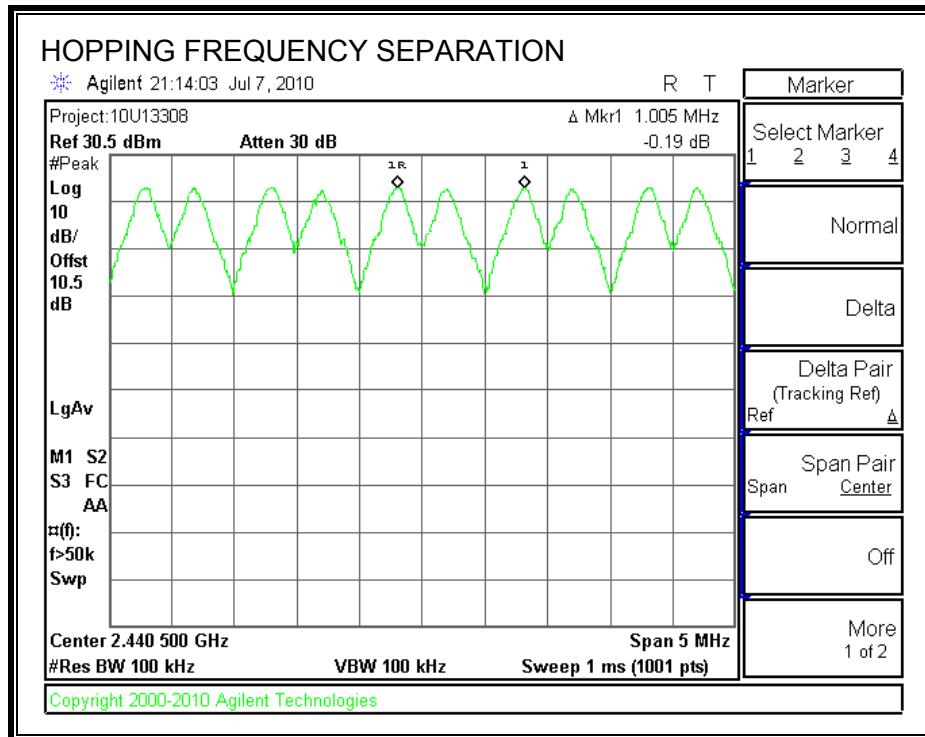

### 7.1.3. NUMBER OF HOPPING CHANNELS

#### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



#### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

#### RESULTS

75 Channels observed.

## NUMBER OF HOPPING CHANNELS

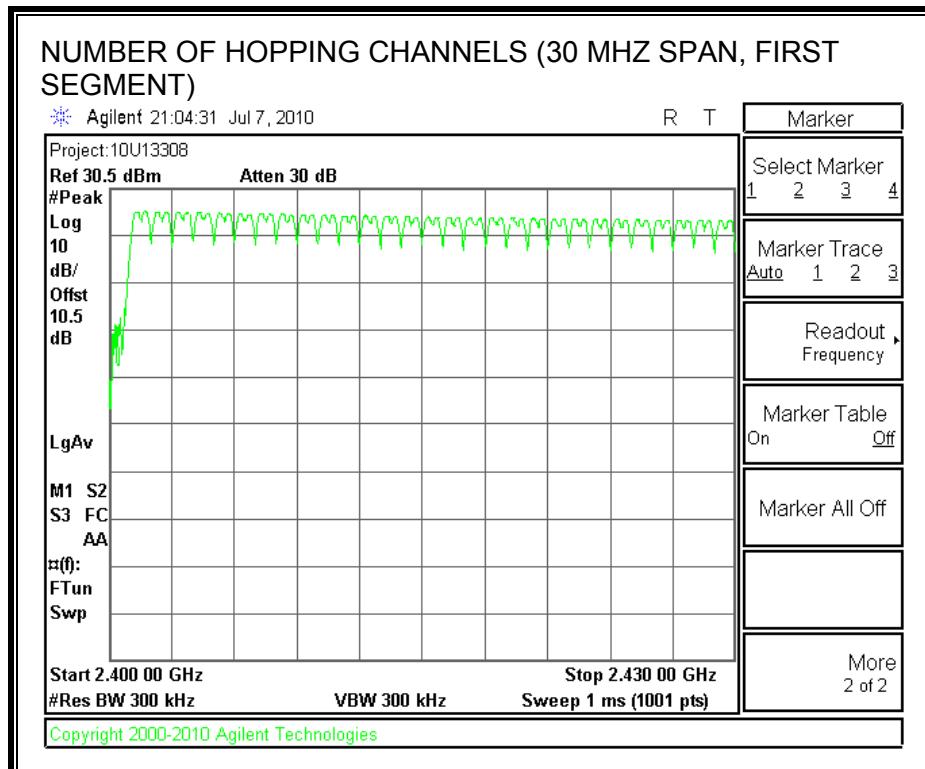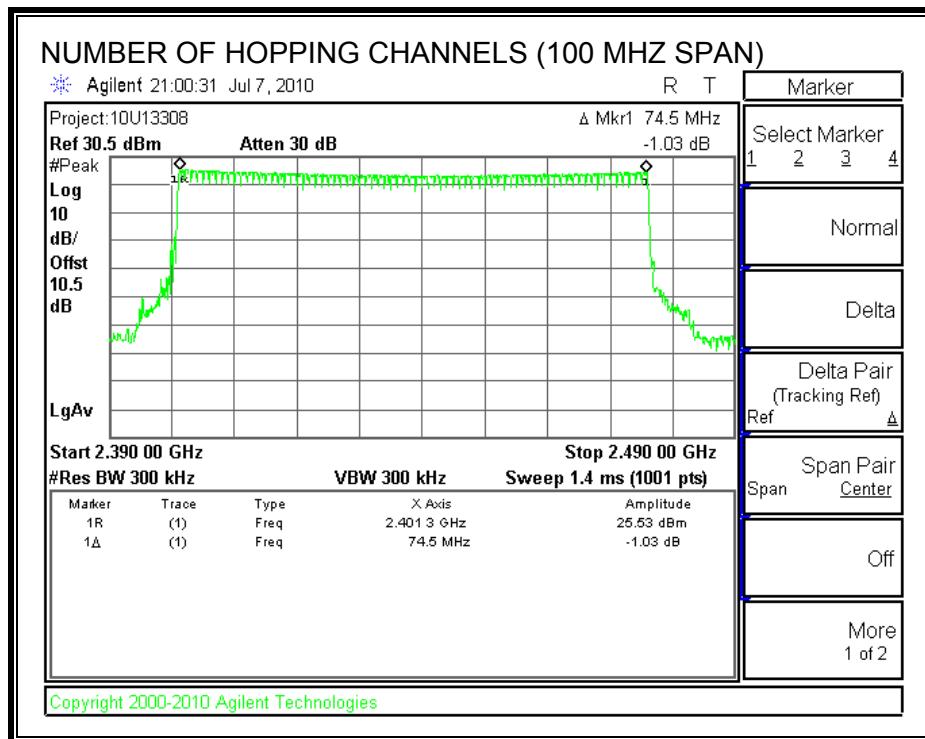

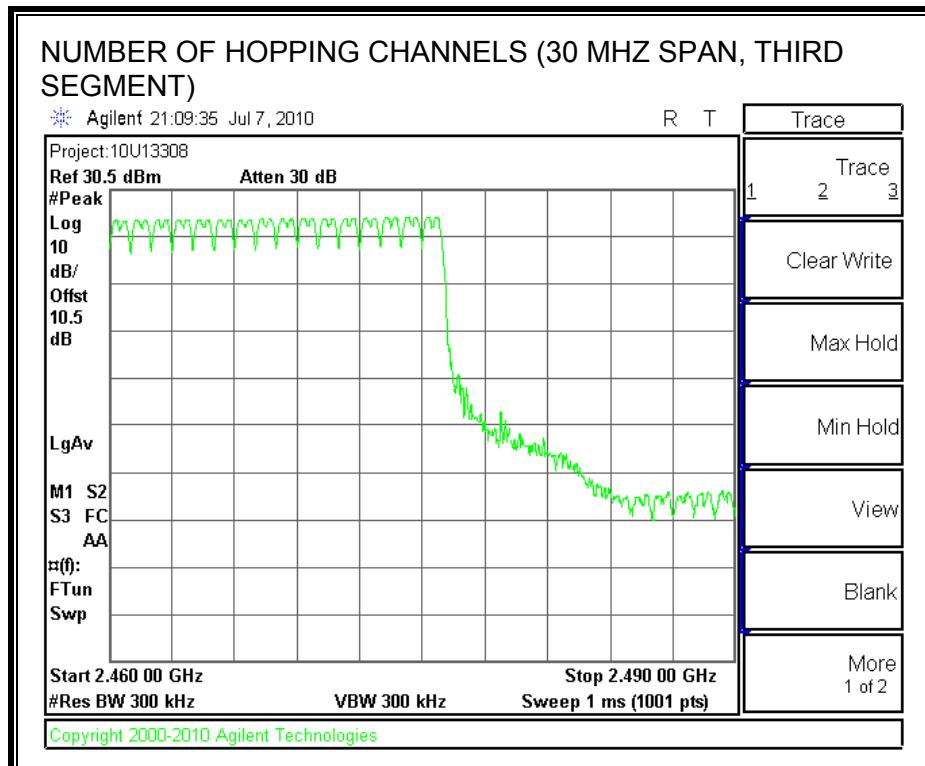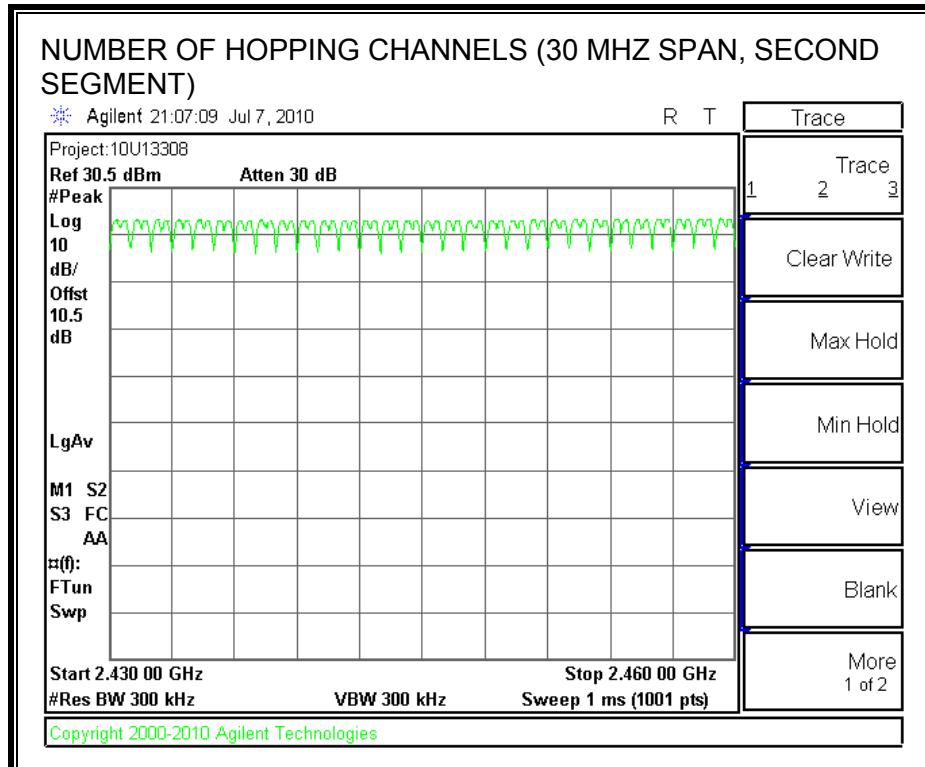

### 7.1.4. DUTY CYCLE

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Mode	Tx on (msec)	Tx on + Tx off (msec)	Duty Cycle (%)	Correction Factor (dB)
Binary FSK	0.5033	1.027	49.01	3.10

### 7.1.5. AVERAGE TIME OF OCCUPANCY

#### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in 3 second at 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 30second period (75 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in 3 s}) * \text{pulse width}$ .


#### RESULTS

Pulse Width (msec)	Number of Pulses in 3 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
0.5086	38	0.193	0.4	0.207

## PULSE WIDTH

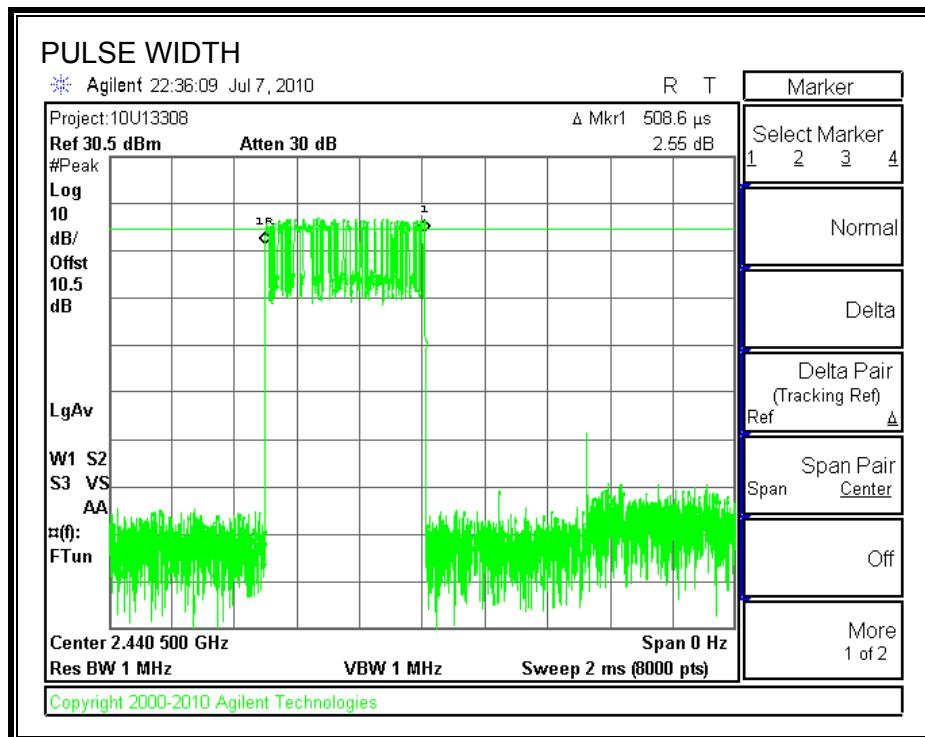

## NUMBER OF PULSES ONLY IN 3 SECOND PERIOD AT 3.16 SECOND PLOT

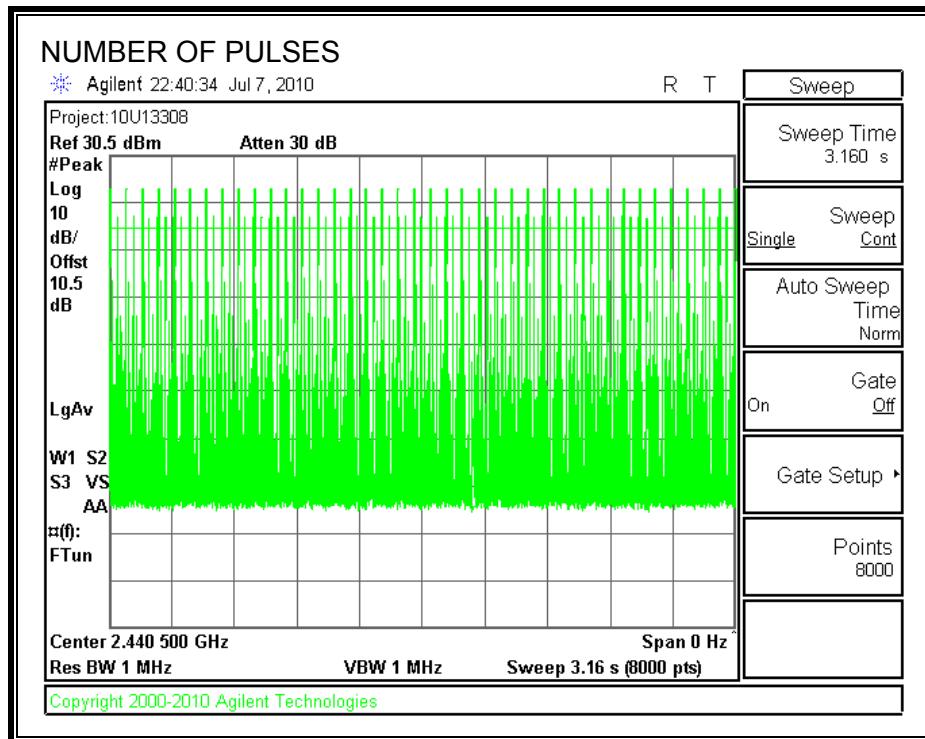

### 7.1.6. OUTPUT POWER

#### LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is 7dBi; therefore the limit is 29 dBm.



#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

#### RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2401.5	25.42	29	-3.58
Middle	2440.5	23.45	29	-5.55
High	2475.5	24.61	29	-4.39

## OUTPUT POWER

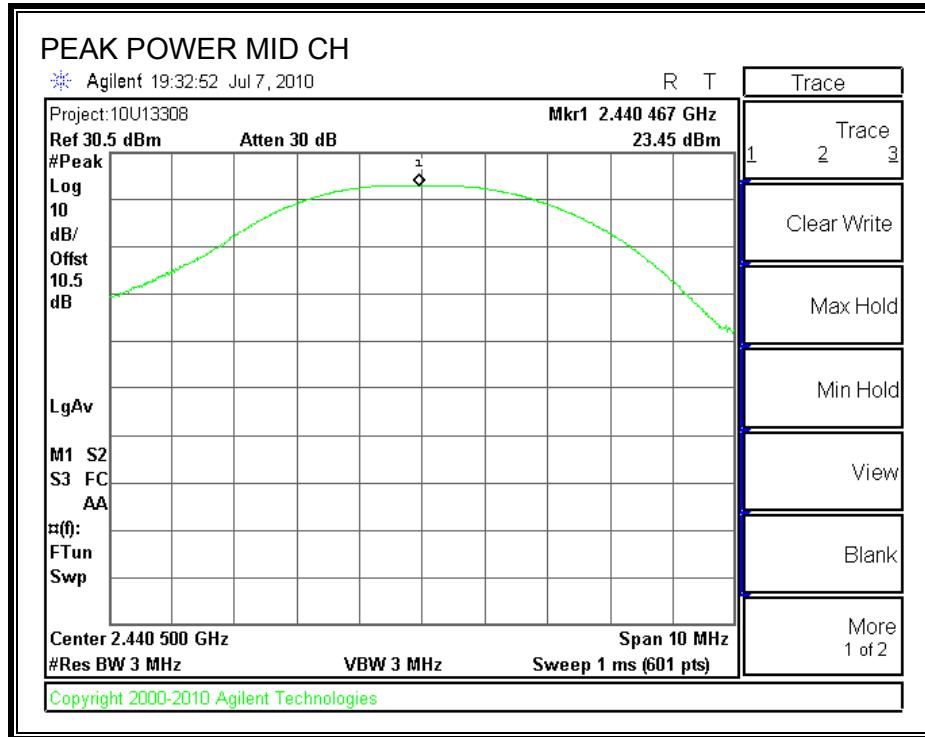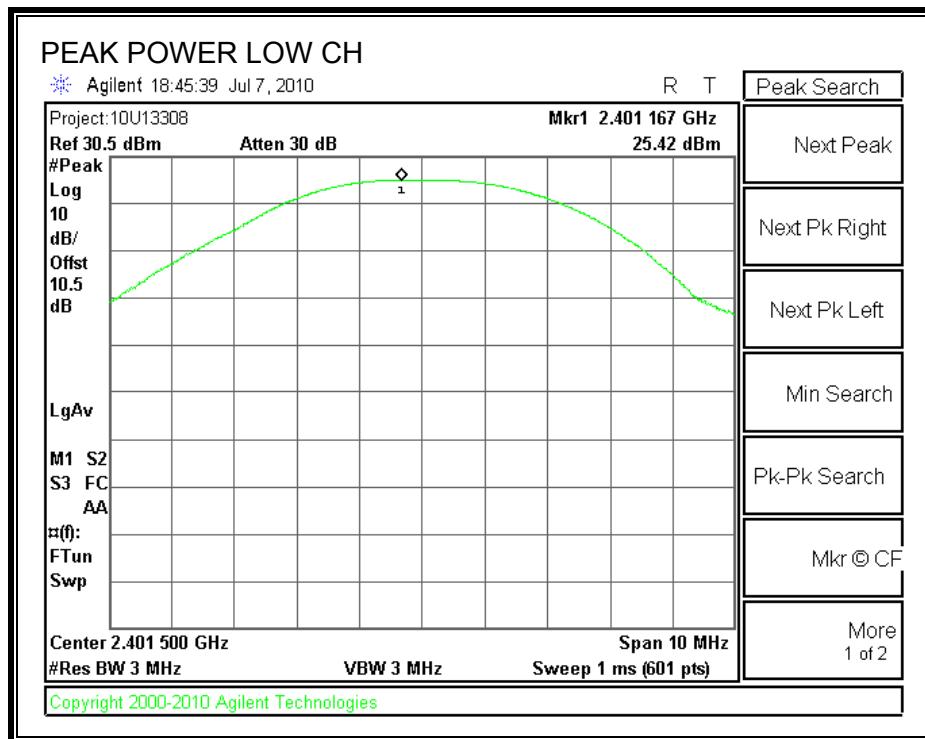

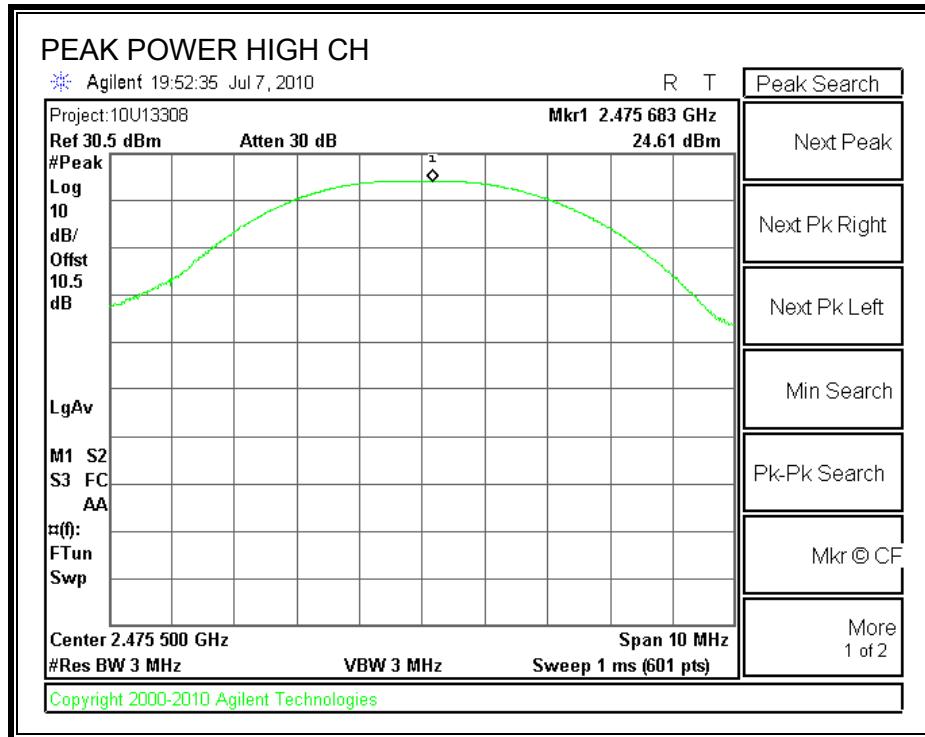

### 7.1.7. AVERAGE POWER

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2401.5	22.16
Middle	2440.5	20.35
High	2475.5	21.56

### 7.1.8. CONDUCTED SPURIOUS EMISSIONS

#### LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

#### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The band edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

#### RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

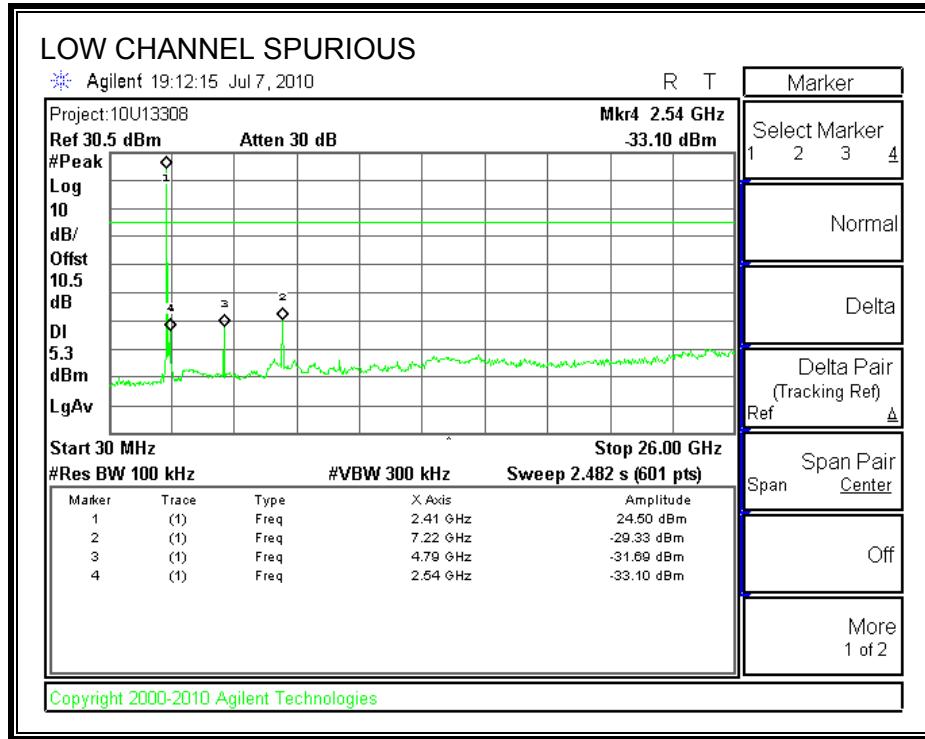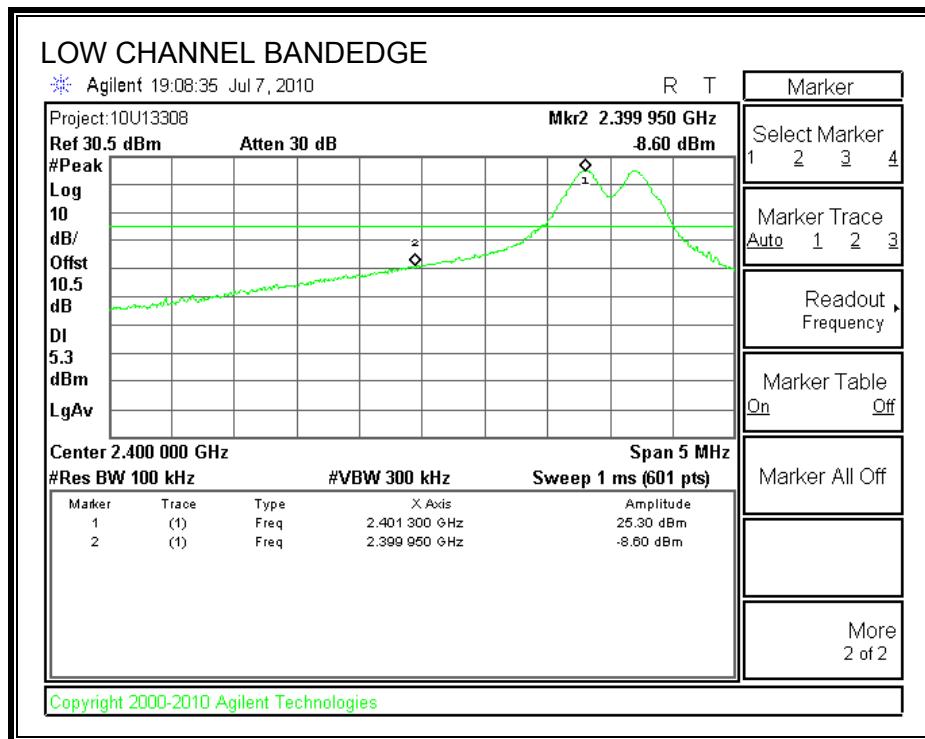



## SPURIOUS EMISSIONS, MID CHANNEL

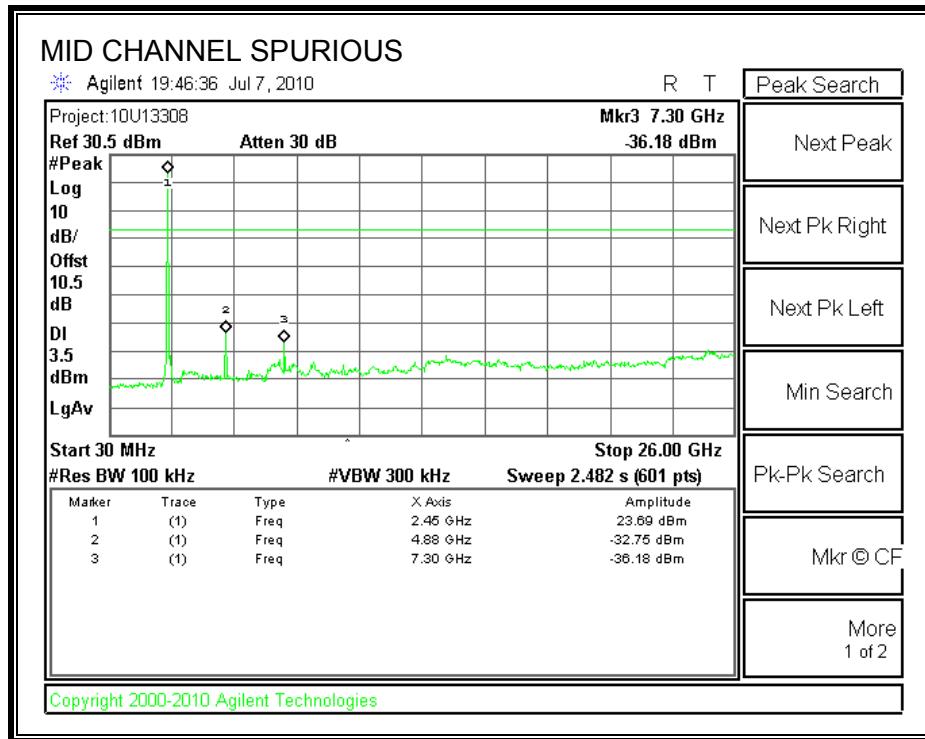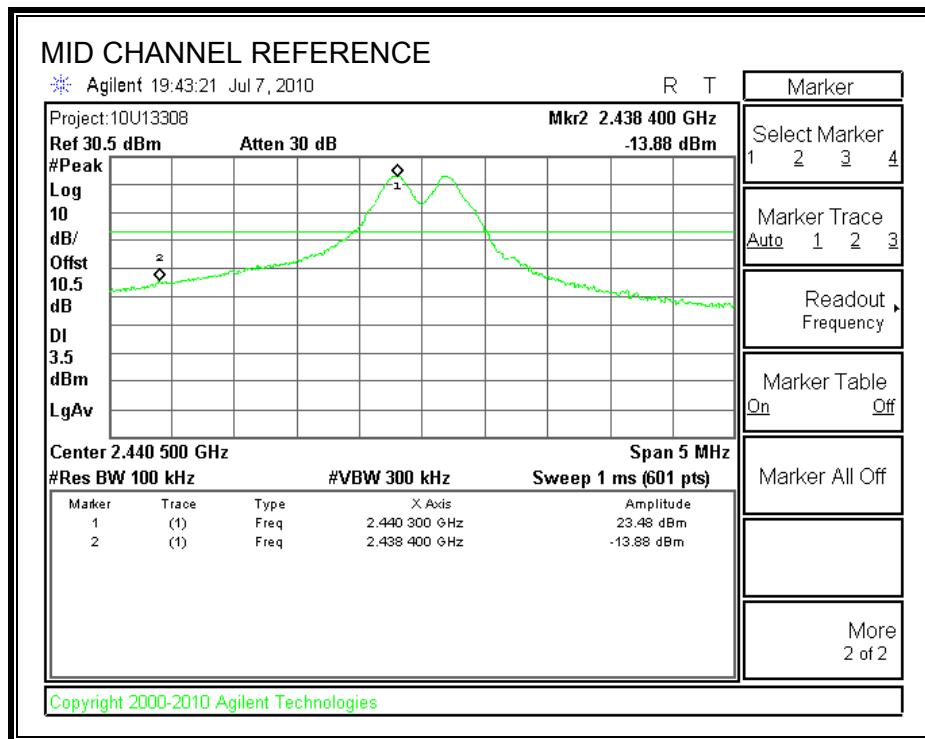

**SPURIOUS EMISSIONS, HIGH CHANNEL**

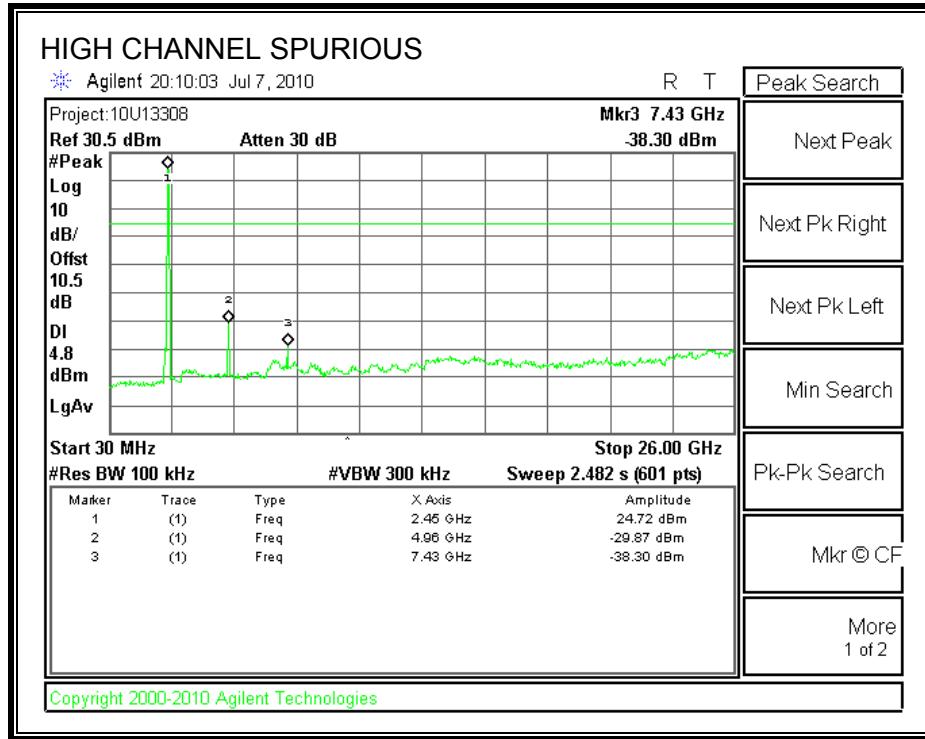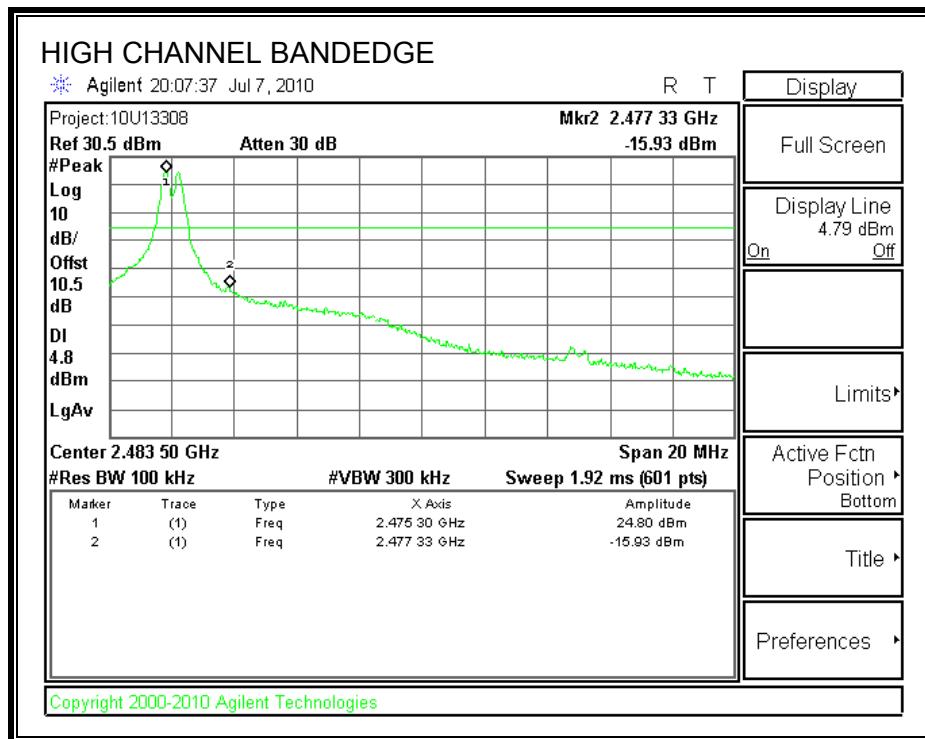

**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

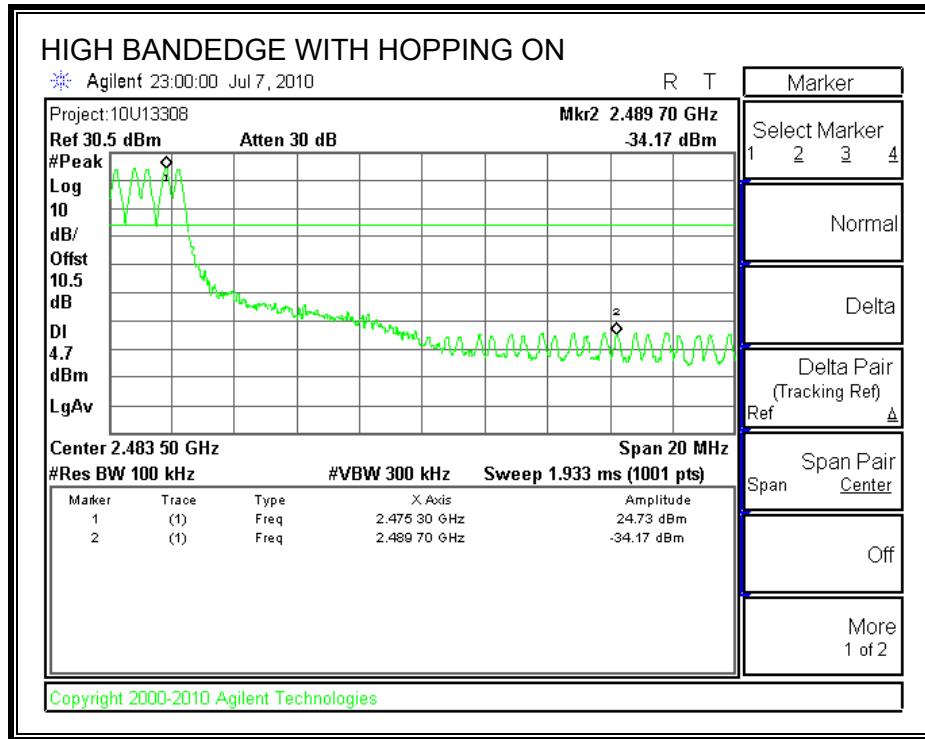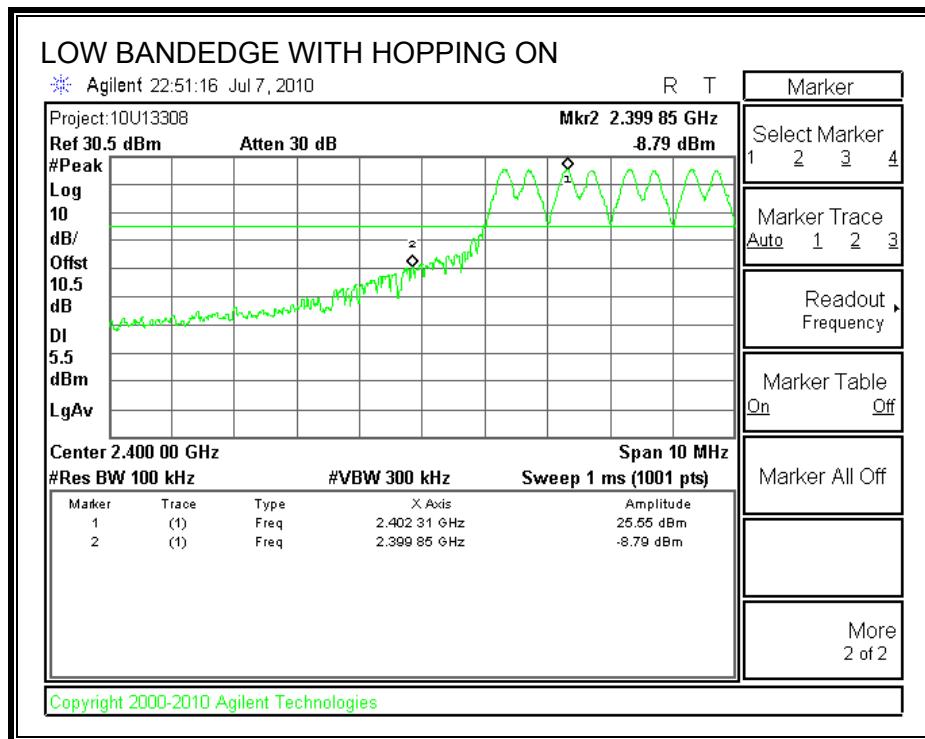

## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



## 8.2. TRANSMITTER ABOVE 1 GHz

### 8.2.1. TRANSMITTER ABOVE 1 GHz IN THE 2.4 GHz BAND



#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

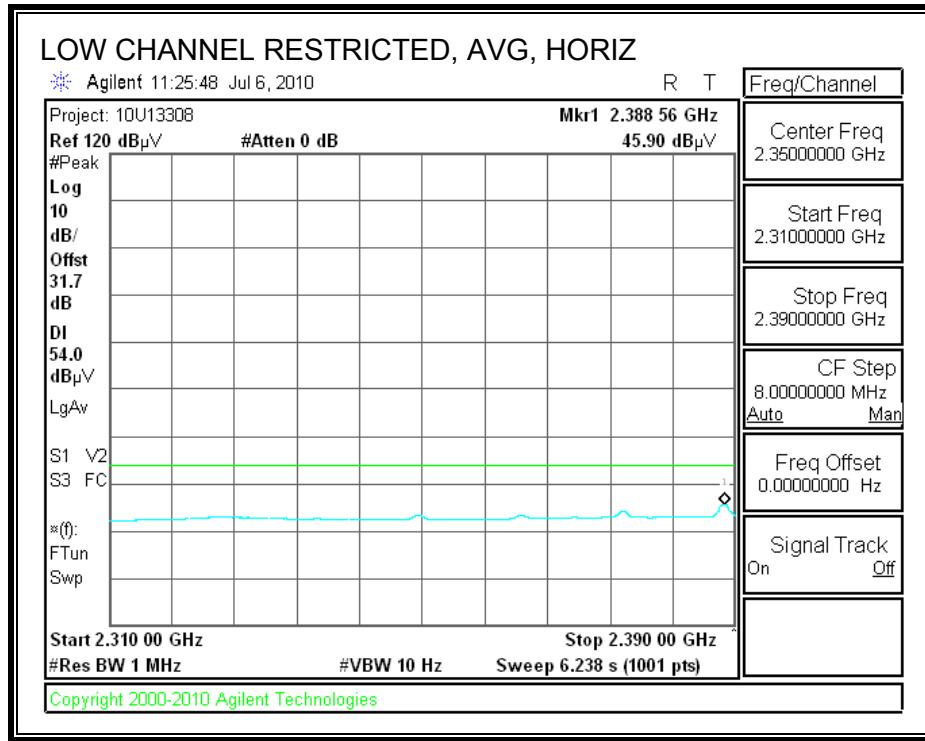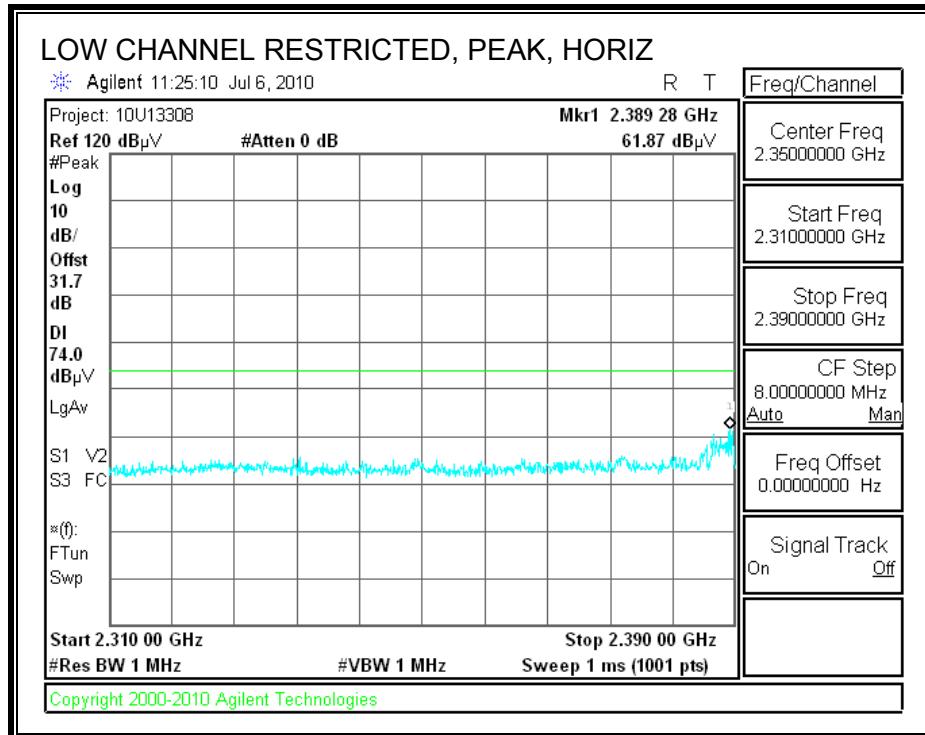



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

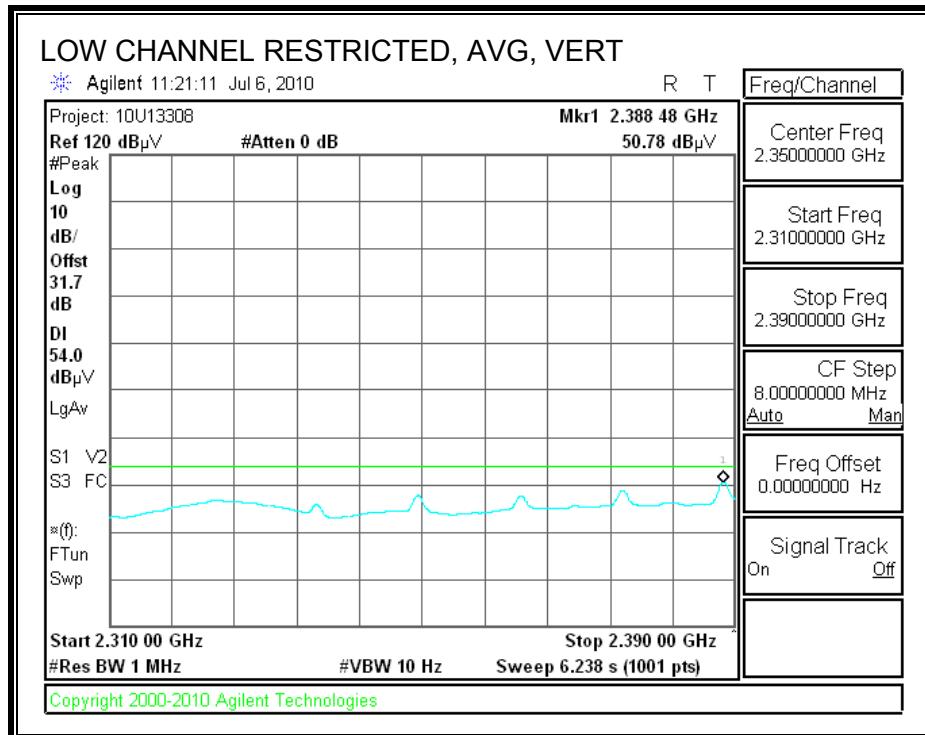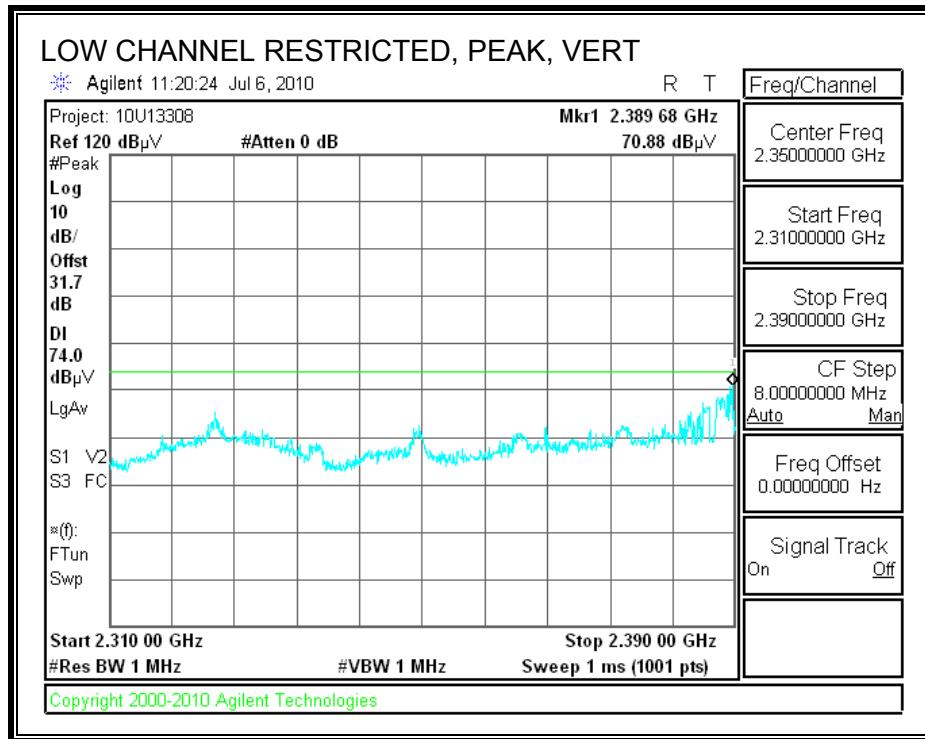

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

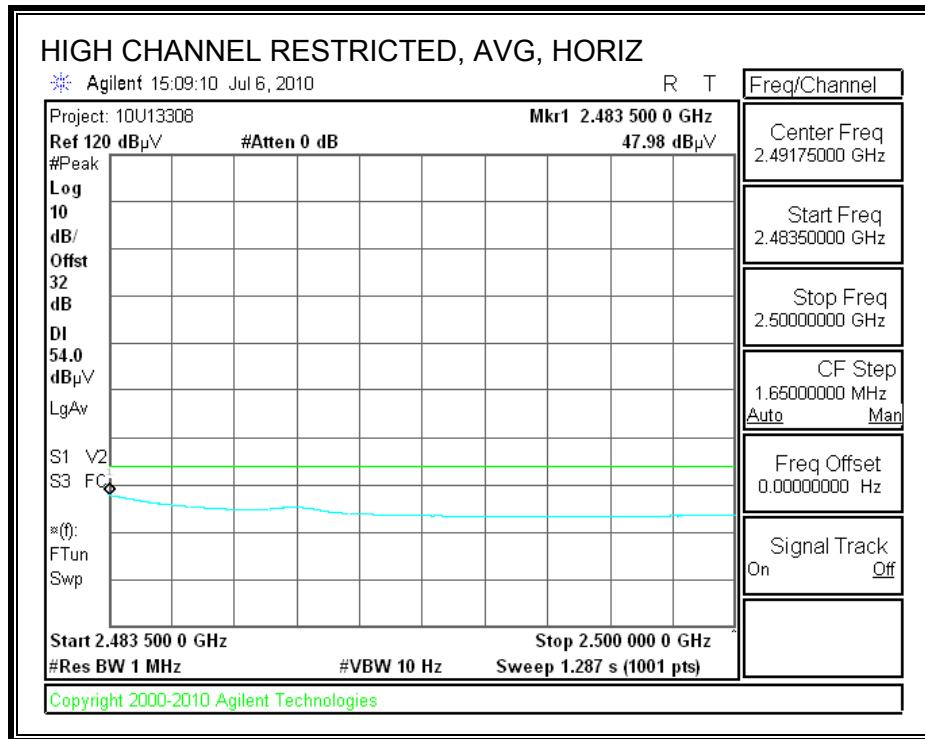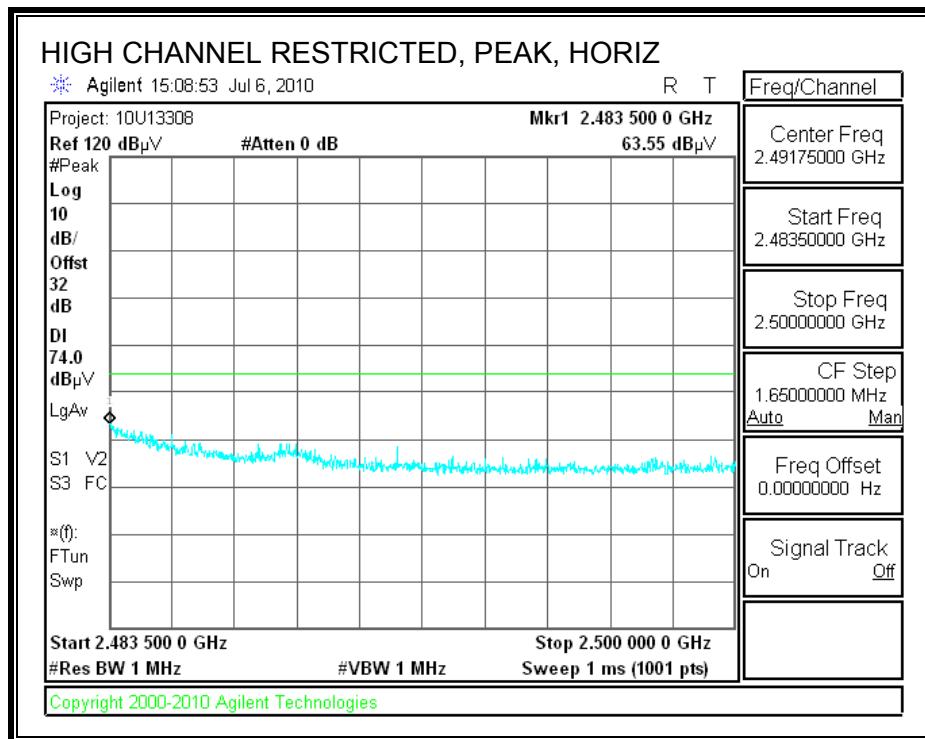

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

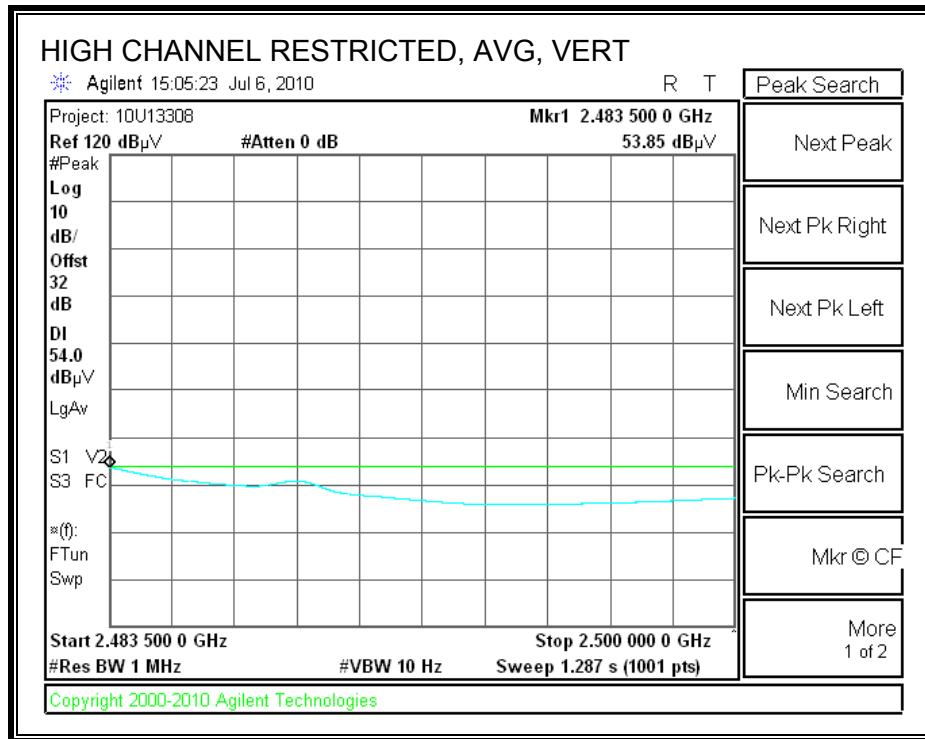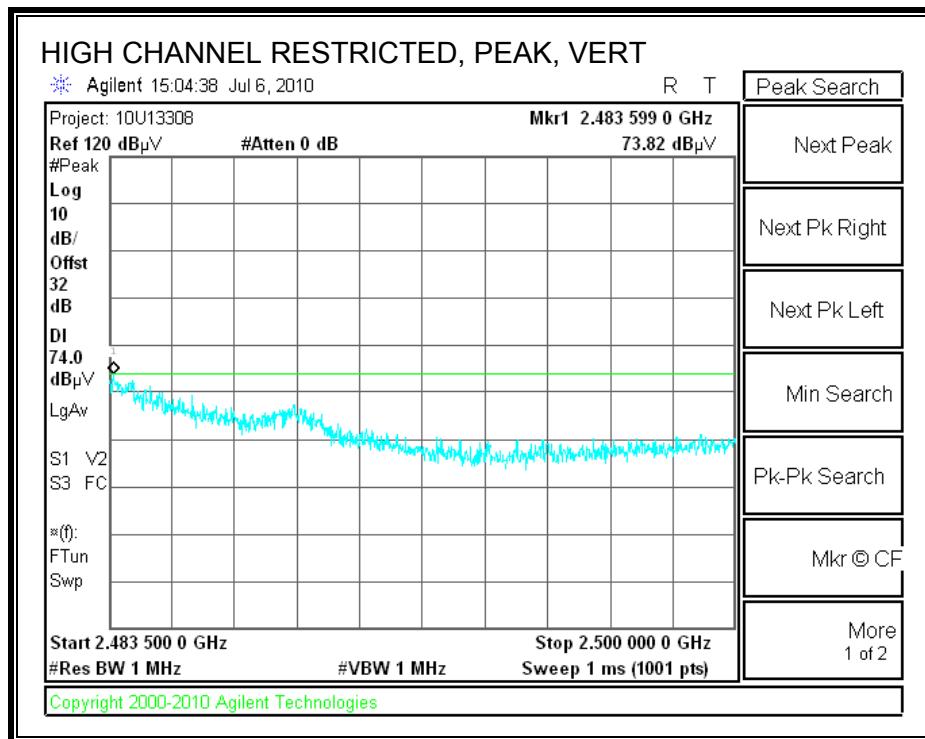

## HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber															
Test Engr:		William Zhuang													
Date:		07/06/10													
Project #:		10U13308													
Company:		Altierre													
EUT Description: Access Point at 2.4 GHz FHSS															
EUT M/N:		AP4													
Test Target:		FCC-IC													
Mode Oper:		Tx													
f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit											
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit											
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit											
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit											
CL	Cable Loss	HPF	High Pass Filter												
f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/AQP	Ant.High cm	Table Angle Degree	Notes
<b>High Ch. 2475.5 MHz</b>															
4.951	3.0	65.0	33.2	5.9	-36.5	0.0	0.0	67.6	74.0	-6.4	V	P	100.0	38.3	
4.951	3.0	44.4	33.2	5.9	-36.5	0.0	0.0	47.0	54.0	-7.0	V	A	100.0	38.3	
4.951	3.0	57.7	33.2	5.9	-36.5	0.0	0.0	60.3	74.0	-13.7	H	P	101.2	331.1	
4.951	3.0	40.6	33.2	5.9	-36.5	0.0	0.0	43.2	54.0	-10.8	H	A	101.2	331.1	
7.426	3.0	57.3	35.5	7.3	-36.2	0.0	0.0	63.9	74.0	-10.1	H	P	137.7	277.0	
7.426	3.0	38.0	35.5	7.3	-36.2	0.0	0.0	44.6	54.0	-9.4	H	A	137.7	277.0	
7.426	3.0	62.7	35.5	7.3	-36.2	0.0	0.0	69.3	74.0	-4.7	V	P	100.9	209.0	
7.426	3.0	40.8	35.5	7.3	-36.2	0.0	0.0	47.4	54.0	-6.6	V	A	100.9	209.0	
12.377	3.0	41.6	39.0	9.9	-35.4	0.0	0.0	55.1	74.0	-18.9	V	P	105.5	332.7	
12.377	3.0	26.4	39.0	9.9	-35.4	0.0	0.0	39.9	54.0	-14.1	V	A	105.5	332.7	
12.377	3.0	41.9	39.0	9.9	-35.4	0.0	0.0	55.4	74.0	-18.6	H	P	134.5	183.8	
12.377	3.0	26.2	39.0	9.9	-35.4	0.0	0.0	39.7	54.0	-14.3	H	A	134.5	183.8	
19.804	3.0	34.2	42.8	13.3	-34.8	0.0	0.0	55.5	74.0	-18.5	H	P	180.8	122.7	
19.804	3.0	33.7	42.8	13.3	-34.8	0.0	0.0	55.0	74.0	-19.0	V	P	199.9	162.4	
19.804	3.0	21.3	42.8	13.3	-34.8	0.0	0.0	42.6	54.0	-11.4	V	A	199.9	162.4	
<b>Low Ch. 2401.5 MHz</b>															
4.803	3.0	61.4	33.0	5.8	-36.5	0.0	0.0	63.8	74.0	-10.2	V	P	100.0	74.1	
4.803	3.0	42.4	33.0	5.8	-36.5	0.0	0.0	44.7	54.0	-9.3	V	A	100.0	74.1	
4.803	3.0	55.8	33.0	5.8	-36.5	0.0	0.0	58.1	74.0	-15.9	H	P	100.8	343.4	
4.803	3.0	39.4	33.0	5.8	-36.5	0.0	0.0	41.7	54.0	-12.3	H	A	100.8	343.4	
12.008	3.0	52.7	39.0	9.7	-35.4	0.0	0.0	66.0	74.0	-8.0	H	P	144.1	269.9	
12.008	3.0	31.2	39.0	9.7	-35.4	0.0	0.0	44.5	54.0	-9.5	H	A	144.1	269.9	
12.008	3.0	55.6	39.0	9.7	-35.4	0.0	0.0	68.9	74.0	-5.1	V	P	145.0	212.1	
12.008	3.0	31.7	39.0	9.7	-35.4	0.0	0.0	45.0	54.0	-9.0	V	A	145.0	212.1	
19.212	3.0	33.2	44.0	13.0	-34.5	0.0	0.0	55.7	74.0	-18.3	V	P	180.3	23.5	
19.212	3.0	21.2	44.0	13.0	-34.5	0.0	0.0	43.8	54.0	-10.2	V	A	180.3	23.5	
19.212	3.0	33.9	44.0	13.0	-34.5	0.0	0.0	56.4	74.0	-17.6	H	P	141.8	31.3	
19.212	3.0	21.9	44.0	13.0	-34.5	0.0	0.0	44.4	54.0	-9.6	H	A	141.8	31.3	
<b>Mid Ch. 2440.5 MHz</b>															
4.881	3.0	60.1	33.1	5.8	-36.5	0.0	0.0	62.6	74.0	-11.4	V	P	100.0	258.2	
4.881	3.0	41.8	33.1	5.8	-36.5	0.0	0.0	44.3	54.0	-9.7	V	A	100.0	258.2	
4.881	3.0	54.7	33.1	5.8	-36.5	0.0	0.0	57.1	74.0	-16.9	H	P	101.2	341.6	
4.881	3.0	38.7	33.1	5.8	-36.5	0.0	0.0	41.1	54.0	-12.9	H	A	101.2	341.6	
7.322	3.0	65.3	35.3	7.3	-36.2	0.0	0.0	71.6	74.0	-2.4	H	P	150.8	270.5	
7.322	3.0	42.5	35.3	7.3	-36.2	0.0	0.0	48.8	54.0	-5.2	H	A	150.8	270.5	
7.322	3.0	67.0	35.3	7.3	-36.2	0.0	0.0	73.4	74.0	-0.6	V	P	100.8	218.7	
7.322	3.0	43.7	35.3	7.3	-36.2	0.0	0.0	50.1	54.0	-3.9	V	A	100.8	218.7	
12.203	3.0	47.8	39.0	9.8	-35.4	0.0	0.0	61.2	74.0	-12.8	V	P	102.5	227.3	
12.203	3.0	29.5	39.0	9.8	-35.4	0.0	0.0	42.9	54.0	-11.1	V	A	102.5	227.3	
12.203	3.0	51.5	39.0	9.8	-35.4	0.0	0.0	64.9	74.0	-9.1	H	P	122.5	285.9	
12.203	3.0	31.2	39.0	9.8	-35.4	0.0	0.0	44.6	54.0	-9.4	H	A	122.5	285.9	
19.524	3.0	33.7	43.4	13.2	-34.7	0.0	0.0	55.6	74.0	-18.4	H	P	171.1	337.4	
19.524	3.0	21.9	43.4	13.2	-34.7	0.0	0.0	43.8	54.0	-10.2	H	A	171.1	337.4	
19.524	3.0	34.6	43.4	13.2	-34.7	0.0	0.0	56.5	74.0	-17.5	V	P	198.9	39.0	
19.524	3.0	21.8	43.4	13.2	-34.7	0.0	0.0	43.7	54.0	-10.3	V	A	198.9	39.0	

Rev. 4.1.2.7


Note: No other emissions were detected above the system noise floor.

## 8.2.2. RECEIVER ABOVE 1 GHz IN THE 2.4 GHz BAND


High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																																									
<p>Company: Altierre Project #: 10U13308 Date: 07/06/10 Test Engineer: William Zhuang Configuration: EUT with support equipment in shield box Mode: Rx Mode</p>																																																																									
<p><b>Test Equipment:</b></p> <table border="1"><tr><td>Horn 1-18GHz</td><td>Pre-amplifier 1-26GHz</td><td>Pre-amplifier 26-40GHz</td><td colspan="4">Horn &gt; 18GHz</td><td>Limit</td></tr><tr><td>T73; S/N: 6717 @3m</td><td>T144 Miteq 3008A00931</td><td></td><td colspan="4"></td><td>RX RSS 210</td></tr><tr><td colspan="15">Hi Frequency Cables</td></tr><tr><td>3' cable 22807700</td><td>12' cable 22807600</td><td>20' cable 22807500</td><td colspan="4"></td><td>HPF</td><td>Reject Filter</td><td colspan="5">Peak Measurements RBW=VBW=1MHz</td></tr><tr><td>3' cable 22807700</td><td>12' cable 22807600</td><td>20' cable 22807500</td><td colspan="4"></td><td></td><td></td><td colspan="5">Average Measurements RBW=1MHz, VBW=10Hz</td></tr></table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T73; S/N: 6717 @3m	T144 Miteq 3008A00931						RX RSS 210	Hi Frequency Cables															3' cable 22807700	12' cable 22807600	20' cable 22807500					HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz					3' cable 22807700	12' cable 22807600	20' cable 22807500							Average Measurements RBW=1MHz, VBW=10Hz				
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																		
T73; S/N: 6717 @3m	T144 Miteq 3008A00931						RX RSS 210																																																																		
Hi Frequency Cables																																																																									
3' cable 22807700	12' cable 22807600	20' cable 22807500					HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz																																																																
3' cable 22807700	12' cable 22807600	20' cable 22807500							Average Measurements RBW=1MHz, VBW=10Hz																																																																
<table border="1"><thead><tr><th>f GHz</th><th>Dist (m)</th><th>Read Pk dBuV</th><th>Read Avg. dBuV</th><th>AF dB/m</th><th>CL dB</th><th>Amp dB</th><th>D Corr dB</th><th>Fltr dB</th><th>Peak dBuV/m</th><th>Avg dBuV/m</th><th>Pk Lim dBuV/m</th><th>Avg Lim dBuV/m</th><th>Pk Mar dB</th><th>Avg Mar dB</th><th>Notes (V/H)</th></tr></thead><tbody><tr><td>1.066</td><td>3.0</td><td>53.6</td><td>49.7</td><td>24.1</td><td>2.4</td><td>-39.4</td><td>0.0</td><td>0.0</td><td>40.7</td><td>36.9</td><td>74</td><td>54</td><td>-33.3</td><td>-17.1</td><td>H</td></tr><tr><td>1.066</td><td>3.0</td><td>51.7</td><td>45.0</td><td>24.1</td><td>2.4</td><td>-39.4</td><td>0.0</td><td>0.0</td><td>38.8</td><td>32.1</td><td>74</td><td>54</td><td>-35.2</td><td>-21.9</td><td>V</td></tr></tbody></table>															f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	1.066	3.0	53.6	49.7	24.1	2.4	-39.4	0.0	0.0	40.7	36.9	74	54	-33.3	-17.1	H	1.066	3.0	51.7	45.0	24.1	2.4	-39.4	0.0	0.0	38.8	32.1	74	54	-35.2	-21.9	V											
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																										
1.066	3.0	53.6	49.7	24.1	2.4	-39.4	0.0	0.0	40.7	36.9	74	54	-33.3	-17.1	H																																																										
1.066	3.0	51.7	45.0	24.1	2.4	-39.4	0.0	0.0	38.8	32.1	74	54	-35.2	-21.9	V																																																										
<p>No other emissions were detected above system noise floor</p>																																																																									
<p>Rev. 07.22.09</p>																																																																									
<table><tr><td>f</td><td>Measurement Frequency</td><td>Amp</td><td>Preamp Gain</td><td>Avg Lim</td><td>Average Field Strength Limit</td></tr><tr><td>Dist</td><td>Distance to Antenna</td><td>D Corr</td><td>Distance Correct to 3 meters</td><td>Pk Lim</td><td>Peak Field Strength Limit</td></tr><tr><td>Read</td><td>Analyzer Reading</td><td>Avg</td><td>Average Field Strength @ 3 m</td><td>Avg Mar</td><td>Margin vs. Average Limit</td></tr><tr><td>AF</td><td>Antenna Factor</td><td>Peak</td><td>Calculated Peak Field Strength</td><td>Pk Mar</td><td>Margin vs. Peak Limit</td></tr><tr><td>CL</td><td>Cable Loss</td><td>HPF</td><td>High Pass Filter</td><td></td><td></td></tr></table>															f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter																															
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																																																				
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																																																				
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																																																				
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																																																				
CL	Cable Loss	HPF	High Pass Filter																																																																						

### 8.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

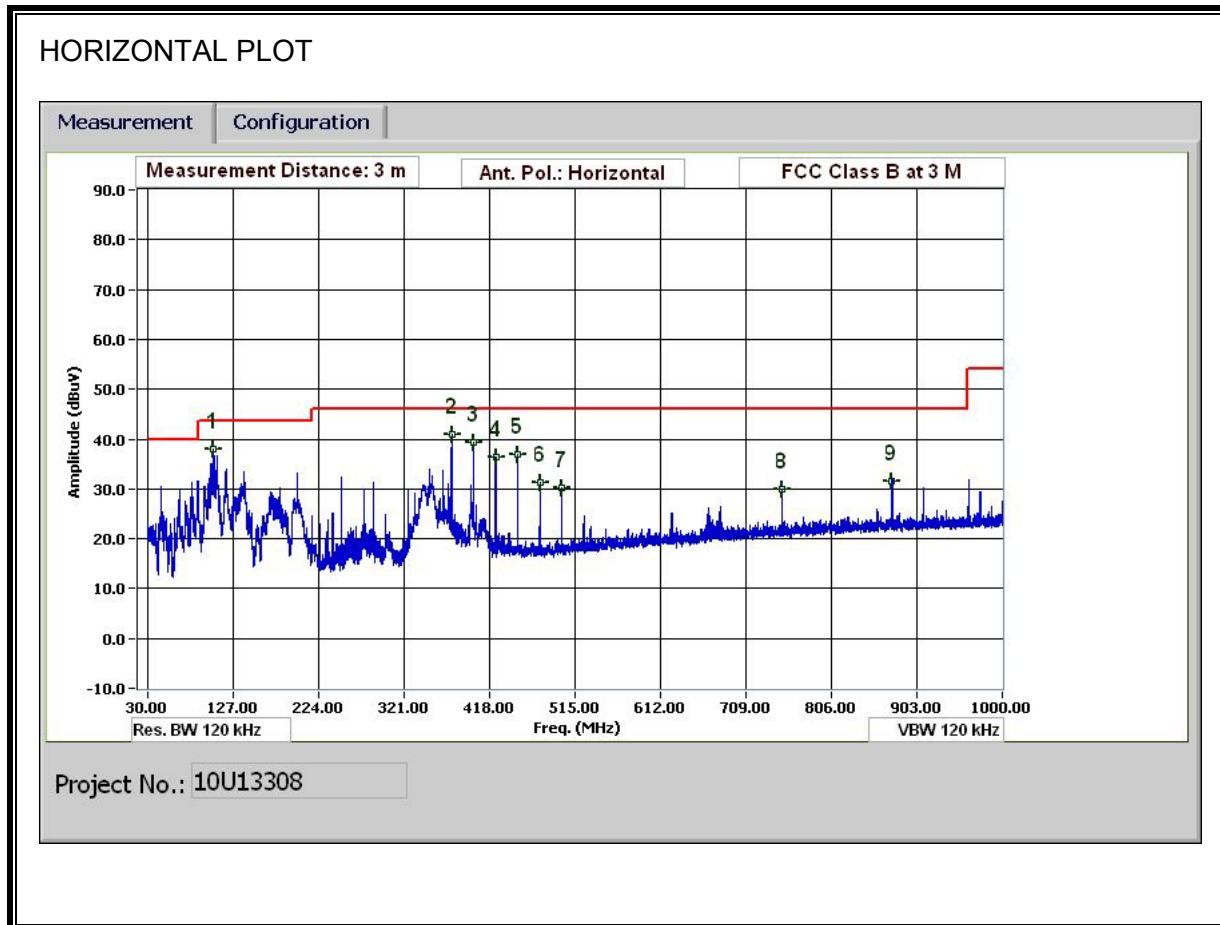

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

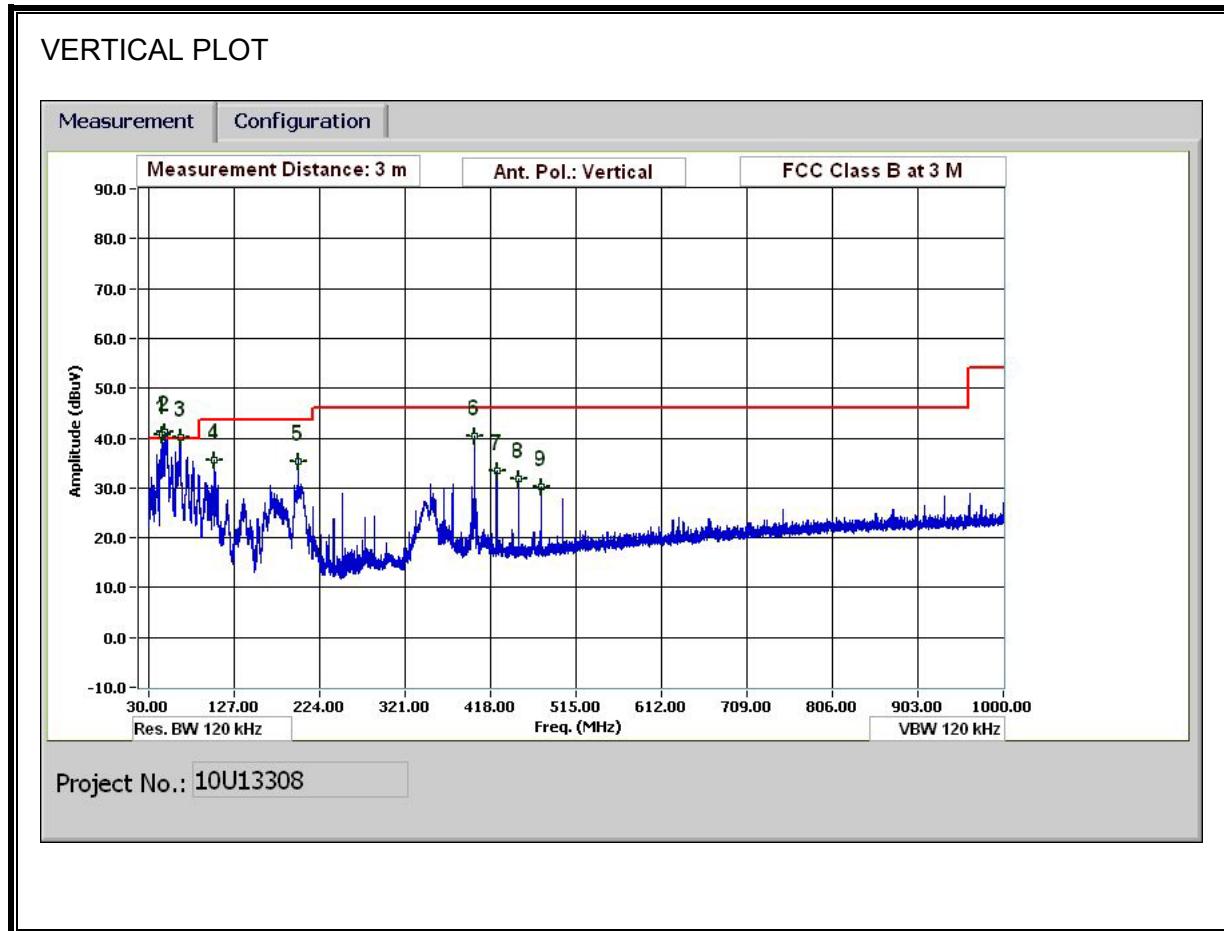

## HORIZONTAL & VERTICAL DATA

### 30-1000MHz Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Test Engr: William Zhuang

Date: 07/06/10

Project #: 10U13308

Company: Altierre

EUT Description: Access Point at 2.4 GHz FHSS

EUT M/N: AP4

Test Target: FCC Class B

Mode Oper: Normal

f	Measurement Frequency	Amp	Preamp Gain	Margin	Margin vs. Limit
Dist	Distance to Antenna	D	Corr	Distance Correct to 3 meters	
Read	Analyzer Reading	Filter		Filter Insert Loss	
AF	Antenna Factor	Corr.		Calculated Field Strength	
CL	Cable Loss	Limit		Field Strength Limit	

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filter dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
104.643	3.0	54.6	10.8	0.9	28.3	0.0	0.0	38.1	43.5	-5.4	H	P	
375.014	3.0	52.9	14.5	1.7	28.1	0.0	0.0	41.0	46.0	-5.0	H	P	
399.975	3.0	50.7	14.9	1.8	28.1	0.0	0.0	39.3	46.0	-6.7	H	P	
425.056	3.0	47.2	15.4	1.9	28.0	0.0	0.0	36.4	46.0	-9.6	H	P	
450.017	3.0	47.0	15.8	1.9	28.0	0.0	0.0	36.8	46.0	-9.2	H	P	
474.978	3.0	41.0	16.3	2.0	27.9	0.0	0.0	31.4	46.0	-14.6	H	P	
499.939	3.0	39.1	16.7	2.0	27.8	0.0	0.0	30.1	46.0	-15.9	H	P	
750.030	3.0	34.3	20.3	2.5	27.3	0.0	0.0	29.8	46.0	-16.2	H	P	
874.955	3.0	34.9	21.6	2.8	27.7	0.0	0.0	31.6	46.0	-14.4	H	P	
45.721	3.0	57.9	10.4	0.6	28.4	0.0	0.0	40.6	40.0	0.6	V	P	
45.721	3.0	55.1	10.4	0.6	28.4	0.0	0.0	37.8	40.0	-2.2	V	QP	
47.761	3.0	59.4	9.5	0.6	28.4	0.0	0.0	41.1	40.0	1.1	V	P	
47.761	3.0	56.6	9.5	0.6	28.4	0.0	0.0	38.3	40.0	-1.7	V	QP	
66.361	3.0	59.7	8.0	0.7	28.4	0.0	0.0	40.1	40.0	0.1	V	P	
66.361	3.0	56.9	8.0	0.7	28.4	0.0	0.0	37.3	40.0	-2.7	V	QP	
104.763	3.0	52.2	10.8	0.9	28.3	0.0	0.0	35.7	43.5	-7.8	V	P	
199.927	3.0	50.2	12.0	1.3	28.2	0.0	0.0	35.2	43.5	-8.3	V	P	
399.975	3.0	51.7	14.9	1.8	28.1	0.0	0.0	40.3	46.0	-5.7	V	P	
425.056	3.0	44.2	15.4	1.9	28.0	0.0	0.0	33.4	46.0	-12.6	V	P	
450.017	3.0	42.1	15.8	1.9	28.0	0.0	0.0	31.8	46.0	-14.2	V	P	
474.978	3.0	39.8	16.3	2.0	27.9	0.0	0.0	30.1	46.0	-15.9	V	P	

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

## 8.4 AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
	66 to 56 <sup>*</sup>	56 to 46 <sup>*</sup>
0.15-0.5		
0.5-5	56	46
5-30	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

### TEST PROCEDURE


ANSI C63.4

### RESULTS


#### 6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)										
Freq. (MHz)	Reading			Class	Limit	EN_B		Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)			(dB)	QP	AV	QP (dB)	
0.49	42.83	--	40.92	0.00	56.10	46.10	-13.27	-5.18	L1	
7.21	53.99	--	44.90	0.00	60.00	50.00	-6.01	-5.10	L1	
16.05	50.08	--	34.10	0.00	60.00	50.00	-9.92	-15.90	L1	
0.49	40.33	--	38.15	0.00	56.15	46.15	-15.82	-8.00	L2	
7.21	52.87	--	39.38	0.00	60.00	50.00	-7.13	-10.62	L2	
15.63	48.58	--	33.38	0.00	60.00	50.00	-11.42	-16.62	L2	
6 Worst Data										

## **LINE 1 RESULTS**

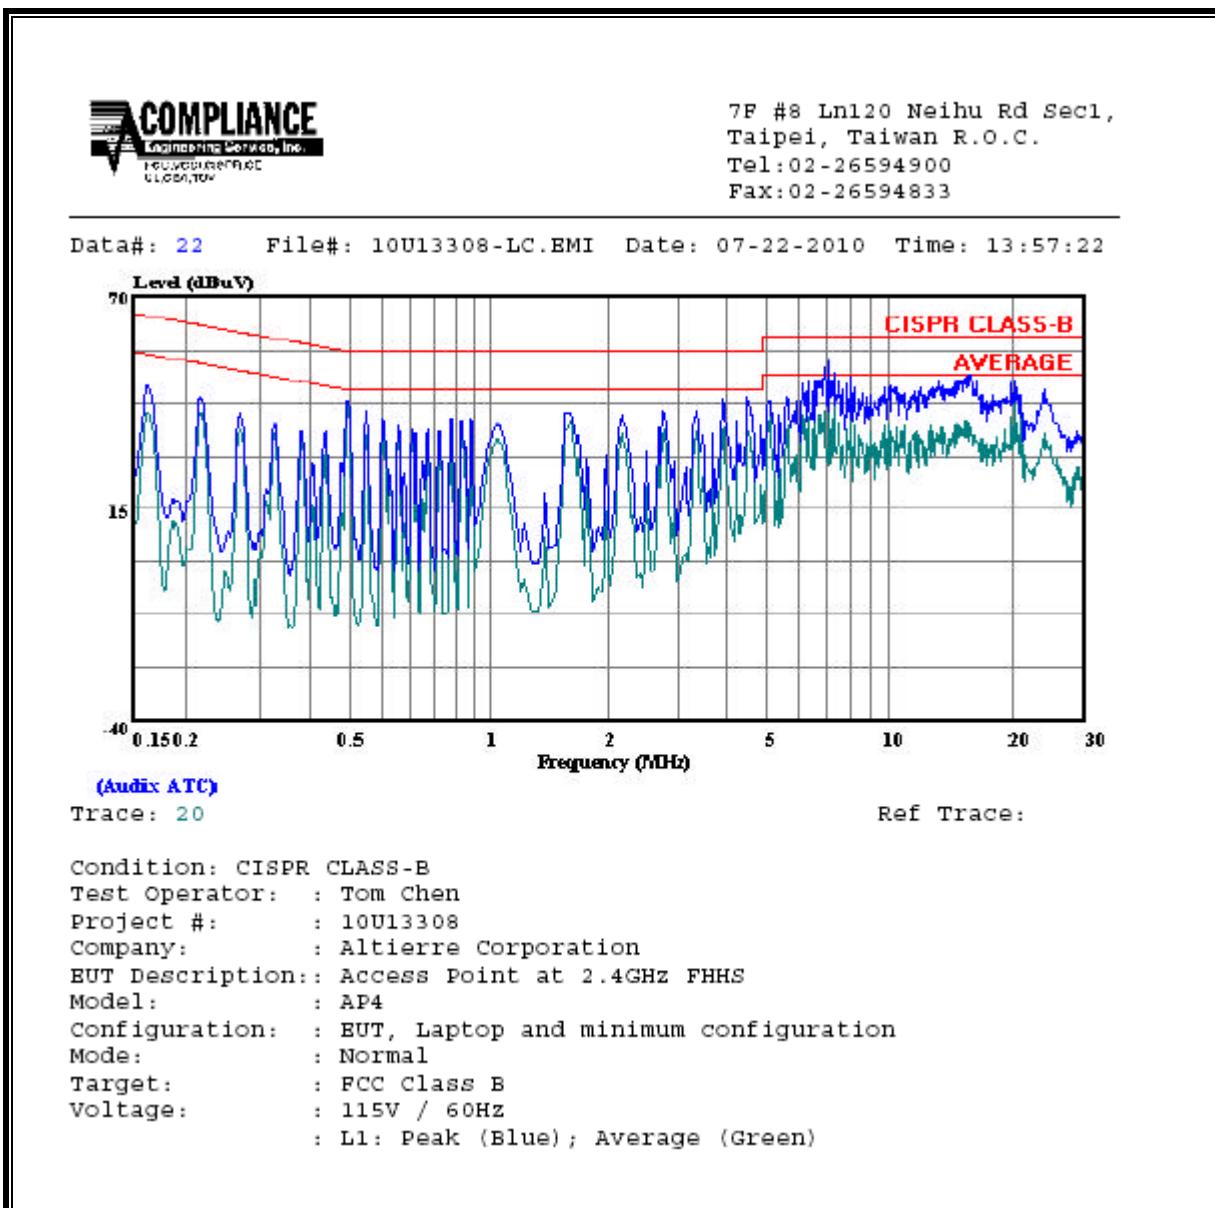

**LINE 2 RESULTS**

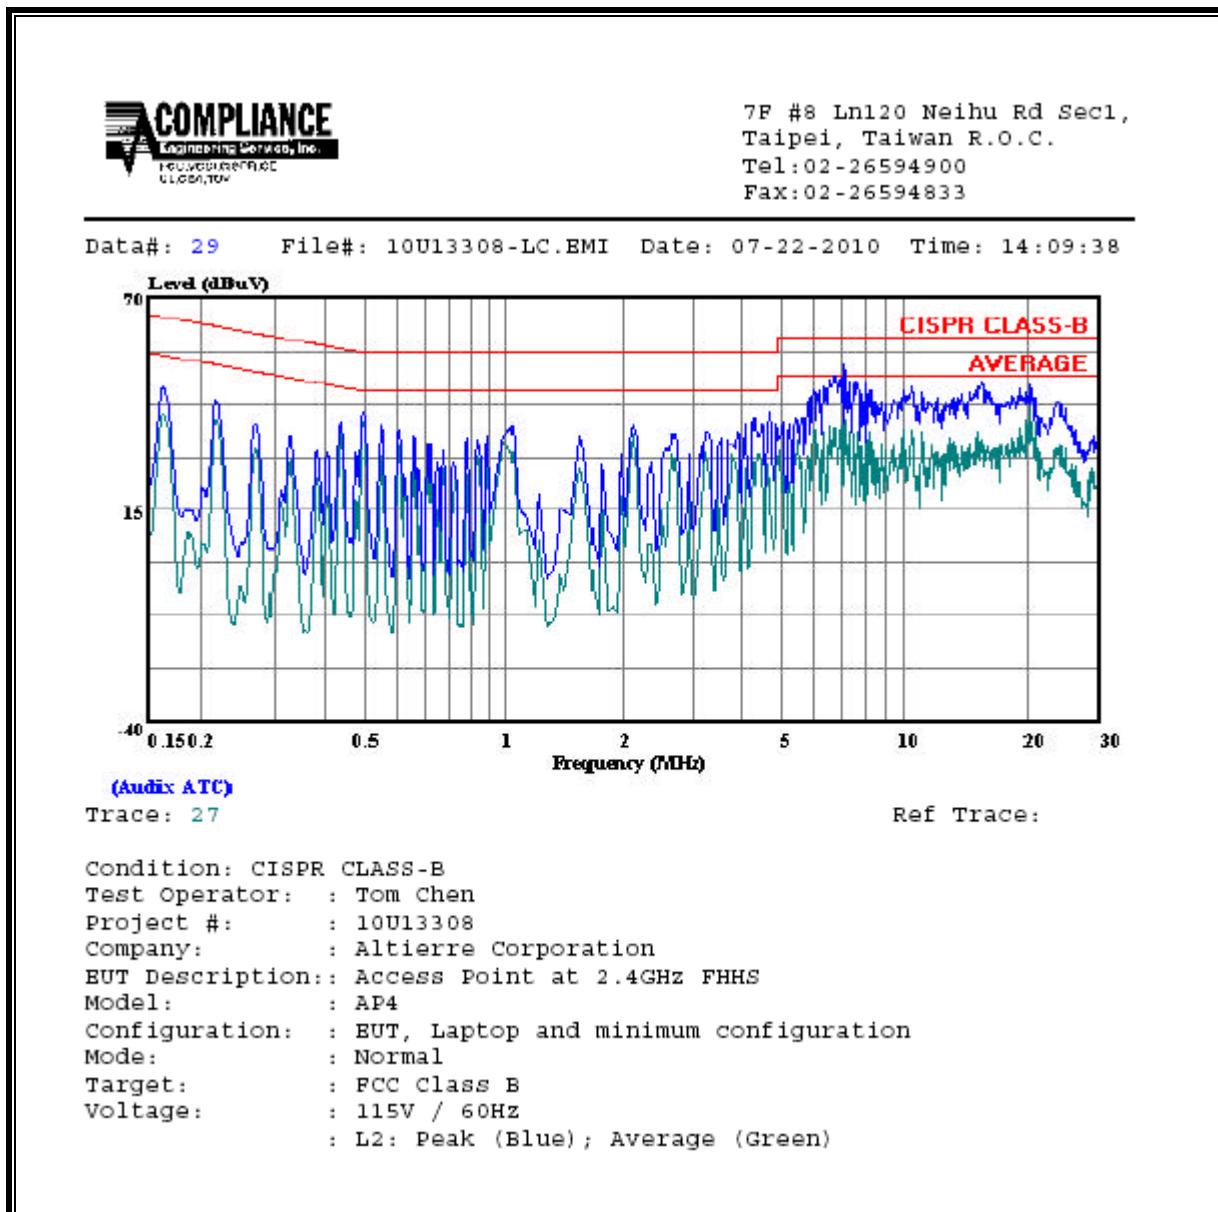

## 9. MAXIMUM PERMISSIBLE EXPOSURE

### FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842f	4.89/f	*(900f <sup>2</sup> )	6
30–300	61.4	0.163	1.0	6
300–1500	.....	.....	f/300	6
1500–100,000	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824f	2.19/f	*(180f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	.....	.....	f/1500	30
1500–100,000	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

### **IC RULES**

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

**Table 5**  
**Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)**

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m <sup>2</sup> )	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> <sup>0.5</sup>	0.0042 <i>f</i> <sup>0.5</sup>	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / <i>f</i> <sup>1.2</sup>
150 000–300 000	0.158 <i>f</i> <sup>0.5</sup>	4.21 × 10 <sup>-4</sup> <i>f</i> <sup>0.5</sup>	6.67 × 10 <sup>-5</sup> <i>f</i>	616 000 / <i>f</i> <sup>1.2</sup>

\* Power density limit is applicable at frequencies greater than 100 MHz.

**Notes:** 1. Frequency, *f*, is in MHz.  
2. A power density of 10 W/m<sup>2</sup> is equivalent to 1 mW/cm<sup>2</sup>.  
3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

## EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \pi * D^2)$$

where

S = Power density in W/m<sup>2</sup>

EIRP = Equivalent Isotropic Radiated Power in W

D = Separation distance in m

Power density in units of W/m<sup>2</sup> is converted to units of mW/cm<sup>2</sup> by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \pi * S))$$

where

D = Separation distance in m

EIRP = Equivalent Isotropic Radiated Power in W

S = Power density in W/m<sup>2</sup>

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

## LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm<sup>2</sup>

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m<sup>2</sup>

## RESULTS

Band	Mode	Separation Distance (m)	Output Power (dBm)	Antenna Gain (dBi)	IC Power Density (W/m <sup>2</sup> )	FCC Power Density (mW/cm <sup>2</sup> )
2.4 GHz	Binary FSK	0.20	25.42	7.00	3.47	0.347