

RFA-25-T27


Specifications

Frequency range	2400 MHz – 2483 MHz	5150 MHz – 5875 MHz
Peak gain with cable loss	4.5 dBi	6.0 dBi
Average gain with cable loss	2.5 dBi	5.0 dBi
VSWR	2.0 : 1 Max.	
Polarization	Linear, vertical	
Power handling	2W (cw)	
Impedance	50	
Temperature	-40 to +70	

Part Number	Connector
RFA-25-T27	RP N PLUG PCB connector



H-plane Co-polarization Pattern

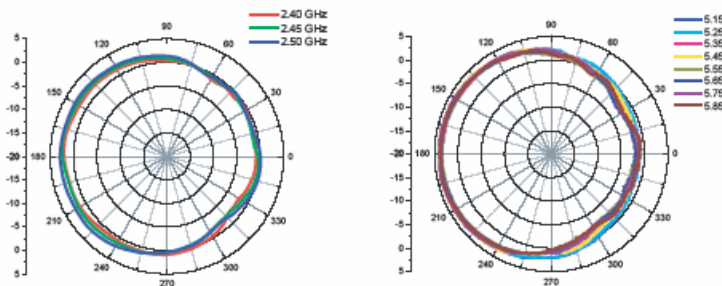

V-plane Co-polarization Pattern

