

FCC TEST REPORT

Product Name : R/C Toys
Trade Name : XQ
Model Name : 1:18
Serial Number : N/A
Technical Data : DC 6V
FCC ID : W2MXQJ02RX49
Report Number : EESZE05090005-2
Date : May 15, 2012
Regulations : See below

| Test Standards | Results |
|---|---------|
| <input checked="" type="checkbox"/> 47 CFR FCC Part 15 Subpart B:2010 | PASS |

Prepared for:
XQ ARTS TOYS CO.LTD.
North of Xing Ye Road, Lai Mei Industrial District, Cheng Hai,
Shan Tou Guang Dong, China

Prepared by:
Centre Testing International (Shenzhen) Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested by: Yaping Shen

Reviewed by: Louisa Lu

Approved by: Jimmy Li
Jimmy Li

Date: May 15, 2012

Lab manager

Check No: 30001475

TABLE OF CONTENTS

| Description | Page |
|---|-----------|
| 1. GENERAL INFORMATION | 3 |
| 2. TEST SUMMARY | 3 |
| 3. MEASUREMENT UNCERTAINTY | 3 |
| 4. PRODUCT INFORMATION AND TEST SETUP | 4 |
| 4.1. PRODUCT INFORMATION | 4 |
| 4.2. TEST SETUP CONFIGURATION | 4 |
| 5. FACILITIES AND ACCREDITATIONS | 4 |
| 5.1. TEST FACILITY | 4 |
| 5.2. TEST EQUIPMENT LIST | 4 |
| 6. SYSTEM TEST CONFIGURATION..... | 5 |
| 6.1. JUSTIFICATION | 5 |
| 6.2. EUT EXERCISING SOFTWARE..... | 5 |
| 7. RADIATED EMISSION TEST | 6 |
| 7.1. LIMITS | 6 |
| 7.2. BLOCK DIAGRAM OF TEST SETUP | 6 |
| 7.3. PROCEDURE OF RADIATED EMISSION TEST..... | 6 |
| 7.4. GRAPHS AND DATA | 8 |
| APPENDIX 1 PHOTOGRAPHS OF TEST SETUP..... | 12 |
| APPENDIX 2 EXTERNAL PHOTOGRAPHS OF EUT | 13 |
| APPENDIX 3 INTERNAL PHOTOGRAPHS OF EUT | 14 |

(Note: N/A means not applicable)

1. GENERAL INFORMATION

Applicant: XQ ARTS TOYS CO.LTD.
North of Xing Ye Road, Lai Mei Industrial District, Cheng Hai,
Shan Tou, Guang Dong, China

Manufacturer: XQ ARTS TOYS CO.LTD.
North of Xing Ye Road, Lai Mei Industrial District, Cheng Hai,
Shan Tou, Guang Dong, China

Equipment Authorization: FCC Part 15 Certification

FCC ID: W2MXQJ02RX49

Product Name: R/C TOYS

Trade Name: XQ

Model Name: 1:18

Serial Number: Not Applicable

Report Number: EESZE05090005-2

Date of Test: May 15, 2012

2. TEST SUMMARY

The EUT has been tested according to the following specifications:

| Standard | Test Item | Test |
|------------|-------------------|------|
| FCC 15.109 | Radiated Emission | Yes |

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

| Test item | Value (dB) |
|-------------------|------------|
| Radiated Emission | 4.5 |

4. PRODUCT INFORMATION AND TEST SETUP

4.1. PRODUCT INFORMATION

Technical Data: DC 6V

Product Description: The equipment under test (EUT) is a receiver for a RC Car operating at 49.86 MHz. The EUT is powered by 6V DC (1.5V*4AA battery). The EUT has a power switch. When the power switch is "ON", the EUT can be controlled to run forward, backward, turning left and right directions by the corresponding controller.

Related Submittal(s) Grants: This is a single application for certification of a receiver. The transmitter for this receiver is authorized by Certification procedure with FCC ID: W2MXQJ02TX49.

4.2. TEST SETUP CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5. FACILITIES AND ACCREDITATIONS

5.1. TEST FACILITY

All test facilities used to collect the test data are located at Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4, CISPR 16-1-1 and other equivalent standards.

5.2. TEST EQUIPMENT LIST

Instrumentation: The following list contains equipments used at CTI for testing.

The calibrations of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors applied in accordance with instructions contained in the manual for the measuring instrument.

Equipment used during the tests:

| 3M Semi-anechoic Chamber - Radiated Emission Test | | | | |
|---|--------------|----------|------------|------------|
| Equipment | Manufacturer | Model | Serial No. | Due Date |
| 3M Chamber & Accessory Equipment | ETS-LINDGREN | FACT-3 | 3510 | 07/09/2012 |
| Spectrum Analyzer | Agilent | E4440A | MY46185649 | 03/07/2013 |
| Biconilog Antenna | schwarzbeck | VULB9136 | 401 | 07/06/2012 |
| Multi device Controller | ETS-LINGREN | 2090 | 00057230 | N/A |

Support Equipment List:

| 3M Semi-anechoic Chamber - Radiated Emission Test | | | | |
|---|--------------|-------|------------|------------|
| Equipment | Manufacturer | Model | Serial No. | Due Date |
| Signal Generator | IFR | 2023B | 202307/883 | 03/07/2013 |

6. SYSTEM TEST CONFIGURATION**6.1. JUSTIFICATION**

The system was configured for testing in a typical fashion (as a customer would normally use it), The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes in receiving mode and in the confines as outlined in ANSI C63.4 (2009).

The EUT was powered by 6V DC (1.5V*4AA battery) during test.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed.

The unit was operated standalone and placed in the center of the turntable when it works in receiving mode

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

6.2. EUT EXERCISING SOFTWARE

No Software was used during testing.

7. RADIATED EMISSION TEST

7.1. LIMITS


Limits for Class B digital devices

| Frequency (MHz) | limits at 3m dB(μV/m) |
|-----------------|--------------------------|
| 30-88 | 40.0 |
| 88-216 | 43.5 |
| 216-960 | 46.0 |
| Above 960 | 54.0 |

- NOTE:**
1. The lower limit shall apply at the transition frequency.
 2. The limits shown above are based on measuring equipment employing a CISPR quasi-peak detector function for frequencies below or equal to 1000MHz.
 3. The limits shown above are based on measuring equipment employing an average detector function for frequencies above 1000MHz.

7.2. BLOCK DIAGRAM OF TEST SETUP .

30MHz ~ 1GHz:

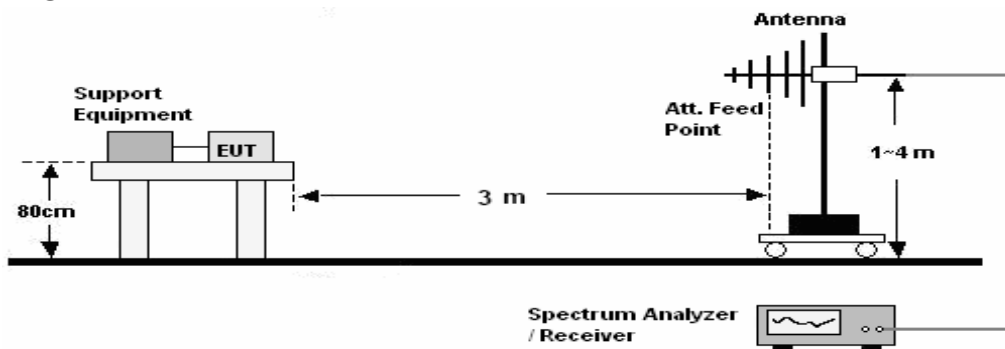


7.3. PROCEDURE OF RADIATED EMISSION TEST

FOR RECEIVING MODE:

- a. The EUT was placed on the non-conductive turntable 0.8m above the ground at a chamber.
- b. Use a signal Generator to generate a 49.86MHz un-modulated CW signal to the super-regenerative receiver. And the signal level is from low signal about -80dBm up to -10dBm to sure the emission level which observed on the test receiver is not increased any more. Then begin testing.
- c. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 100 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.


d. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where EUT radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

7.4. GRAPHS AND DATA

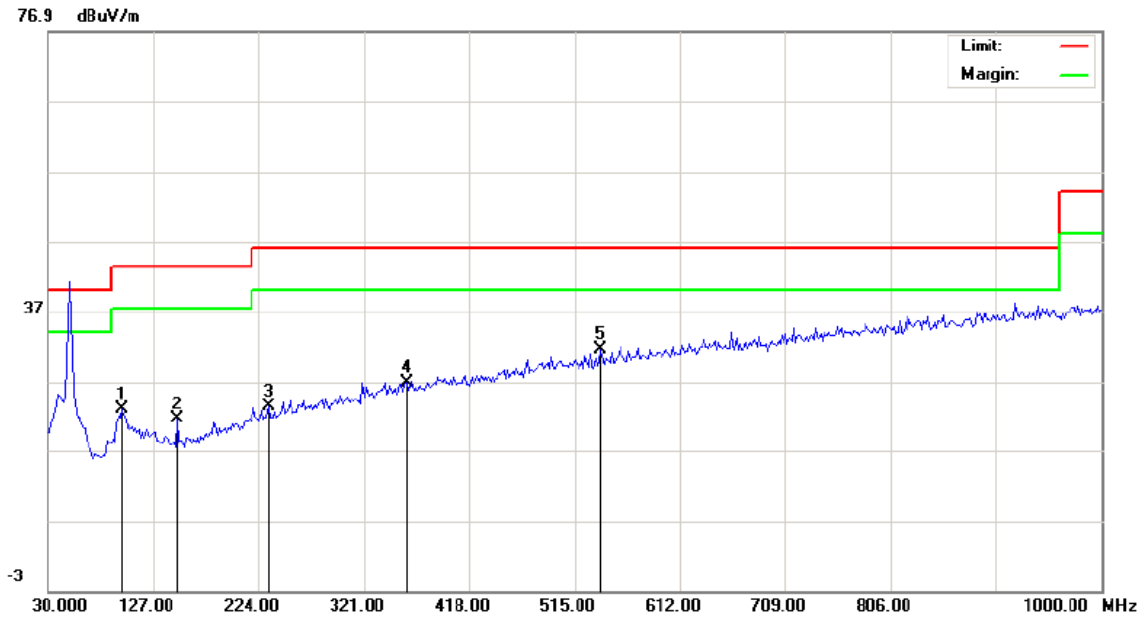


Site site #1 Polarization: **Horizontal** Temperature: 23
 Limit: FCC PART15 B Power: DC 6V Humidity: 58 %
 EUT: R/C Toys
 M/N: 1:18
 Mode: RX
 Note:

| No. | Freq. MHz | Reading_Level (dBuV) | | | Correct Factor dB | Measurement (dBuV/m) | | | Limit (dBuV/m) | | Margin (dB) | | P/F | Comment |
|-----|--------------|-------------------------|----|-----|-------------------------|-------------------------|----|-----|-------------------|-----|----------------|-----|-----|---------|
| | | Peak | QP | AVG | | peak | QP | AVG | QP | AVG | QP | AVG | | |
| 1 | 97.9000 | 10.40 | | | 12.60 | 23.00 | | | 43.50 | | -20.50 | | P | |
| 2 | 149.6333 | 11.48 | | | 10.03 | 21.51 | | | 43.50 | | -21.99 | | P | |
| 3 | 233.7000 | 9.15 | | | 14.25 | 23.40 | | | 46.00 | | -22.60 | | P | |
| 4 | 359.8000 | 8.83 | | | 17.95 | 26.78 | | | 46.00 | | -19.22 | | P | |
| 5 | 539.2500 | 9.88 | | | 21.72 | 31.60 | | | 46.00 | | -14.40 | | P | |

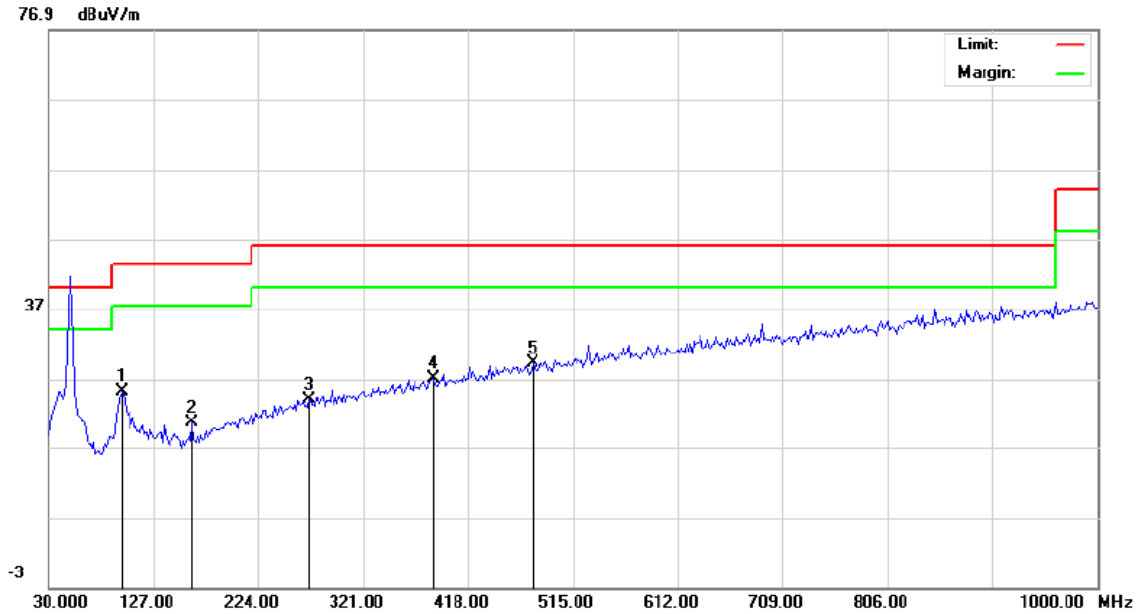


Site site #1 Polarization: *Vertical* Temperature: 23
 Limit: FCC PART15 B Power: DC 6V Humidity: 58 %
 EUT: R/C Toys
 M/N: 1:18
 Mode: RX
 Note:

| No. | Freq. MHz | Reading_Level (dBuV) | | | Correct Factor dB | Measurement (dBuV/m) | | | Limit (dBuV/m) | | Margin (dB) | | P/F | Comment |
|-----|--------------|-------------------------|----|-----|-------------------------|-------------------------|----|-----|-------------------|-----|----------------|--------|-----|---------|
| | | Peak | QP | AVG | | peak | QP | AVG | QP | AVG | QP | AVG | | |
| 1 | 97.9000 | 12.66 | | | 12.60 | 25.26 | | | 43.50 | | | -18.24 | | P |
| 2 | 162.5667 | 9.95 | | | 10.70 | 20.65 | | | 43.50 | | | -22.85 | | P |
| 3 | 270.8833 | 8.50 | | | 15.50 | 24.00 | | | 46.00 | | | -22.00 | | P |
| 4 | 385.6667 | 8.60 | | | 18.49 | 27.09 | | | 46.00 | | | -18.91 | | P |
| 5 | 477.8167 | 8.76 | | | 20.54 | 29.30 | | | 46.00 | | | -16.70 | | P |

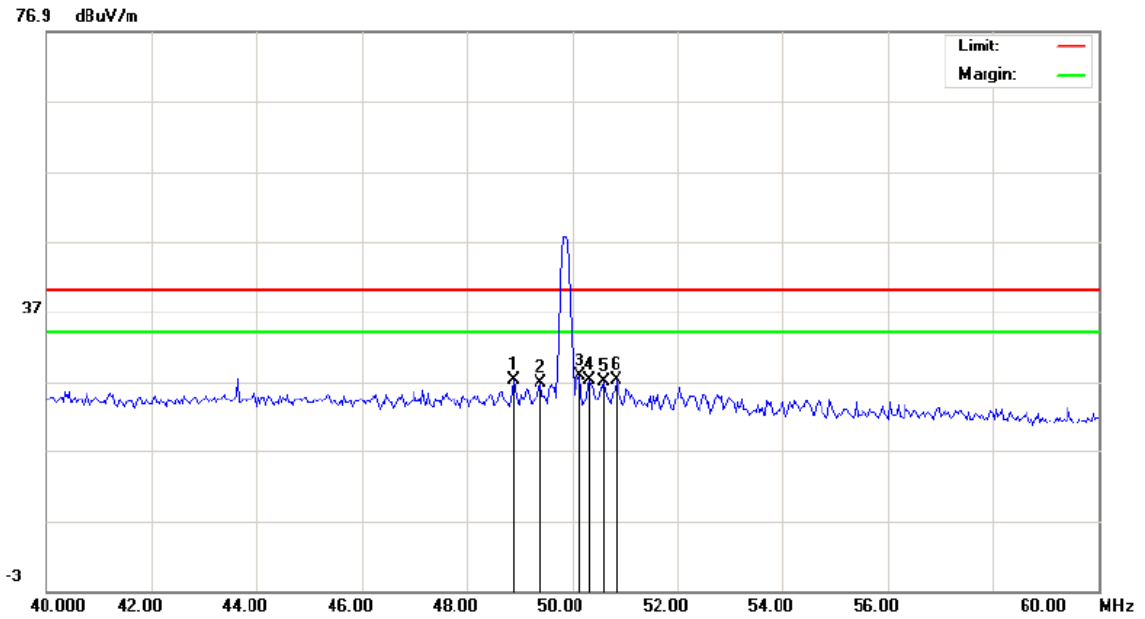

Site site #1 Polarization: **Horizontal** Temperature: 23
 Limit: FCC PART15 B Power: DC 6V Humidity: 58 %
 EUT: R/C Toys
 M/N: 1:18
 Mode: RX
 Note:

| No. | Freq. MHz | Reading_Level (dBuV) | | | Correct Factor dB | Measurement (dBuV/m) | | | Limit (dBuV/m) | | Margin (dB) | | P/F | Comment |
|-----|--------------|-------------------------|----|-----|-------------------------|-------------------------|----|-----|-------------------|-----|----------------|-----|-----|---------|
| | | Peak | QP | AVG | | peak | QP | AVG | QP | AVG | QP | AVG | | |
| 1 | 48.9000 | 10.66 | | | 16.45 | 27.11 | | | 40.00 | | -12.89 | | P | |
| 2 | 49.4000 | 10.32 | | | 16.41 | 26.73 | | | 40.00 | | -13.27 | | P | |
| 3 | 50.1333 | 11.53 | | | 16.32 | 27.85 | | | 40.00 | | -12.15 | | P | |
| 4 | 50.3333 | 10.90 | | | 16.28 | 27.18 | | | 40.00 | | -12.82 | | P | |
| 5 | 50.6000 | 10.84 | | | 16.22 | 27.06 | | | 40.00 | | -12.94 | | P | |
| 6 | 50.8333 | 11.06 | | | 16.16 | 27.22 | | | 40.00 | | -12.78 | | P | |

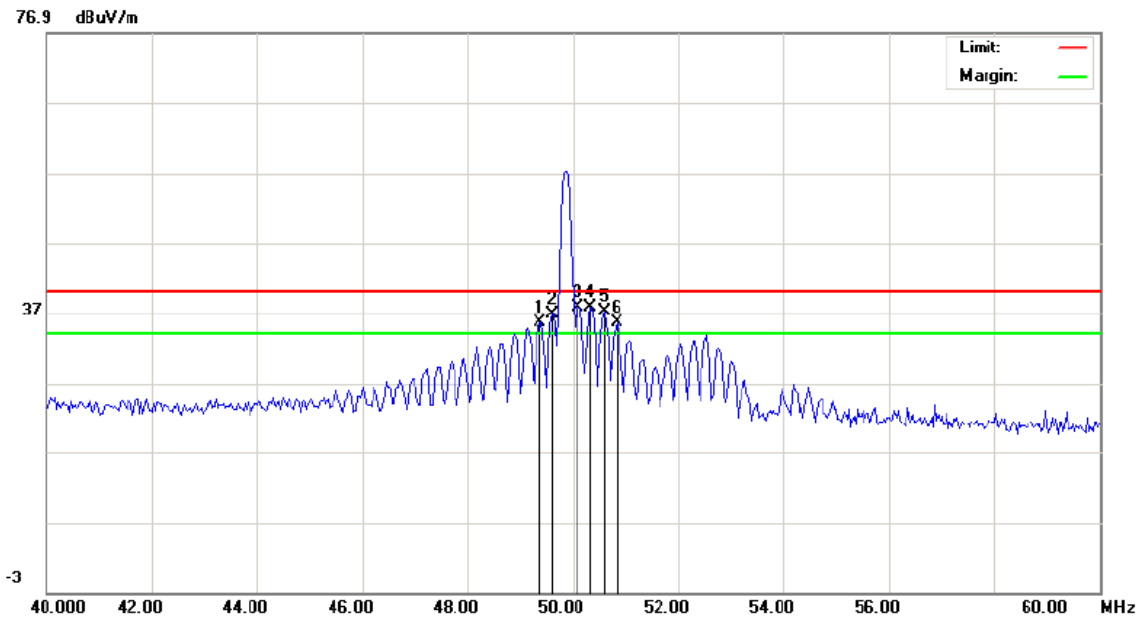

Site site #1 Polarization: *Vertical* Temperature: 23
 Limit: FCC PART15 B Power: DC 6V Humidity: 58 %
 EUT: R/C Toys
 M/N: 1:18
 Mode: RX
 Note:

| No. | Freq. MHz | Reading_Level (dBuV) | | | Correct Factor dB | Measurement (dBuV/m) | | | Limit (dBuV/m) | | Margin (dB) | | P/F | Comment |
|-----|--------------|-------------------------|----|-----|-------------------------|-------------------------|----|-----|-------------------|-----|----------------|-----|-----|---------|
| | | Peak | QP | AVG | | peak | QP | AVG | QP | AVG | QP | AVG | | |
| 1 | 49.3667 | 19.28 | | | 16.41 | 35.69 | | | 40.00 | | -4.31 | | P | |
| 2 | 49.6000 | 20.51 | | | 16.39 | 36.90 | | | 40.00 | | -3.10 | | P | |
| 3 | 50.1000 | 21.52 | | | 16.33 | 37.85 | | | 40.00 | | -2.15 | | P | |
| 4 | 50.3333 | 21.50 | | | 16.28 | 37.78 | | | 40.00 | | -2.22 | | P | |
| 5 | 50.6000 | 21.00 | | | 16.22 | 37.22 | | | 40.00 | | -2.78 | | P | |
| 6 | 50.8333 | 19.45 | | | 16.16 | 35.61 | | | 40.00 | | -4.39 | | P | |

Note 1: The peak data of the fundamental frequency is below the average limit (please refer to the test graph as above), so the average data is deemed to fulfill the average limits and not reported.

Note 2: The total factor = cable loss+ antenna factor.
 Final Emission _PK = Reading Level_ PK+ total factor.
 For example: The cable loss of 49.36MHz is 1.1dB and the antenna factor is 15.31dB, So, the Total factor=1.1+15.31=16.41dB

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP




RADIATED EMISSION TEST SETUP

APPENDIX 2 EXTERNAL PHOTOGRAPHS OF EUT




View of EUT-1

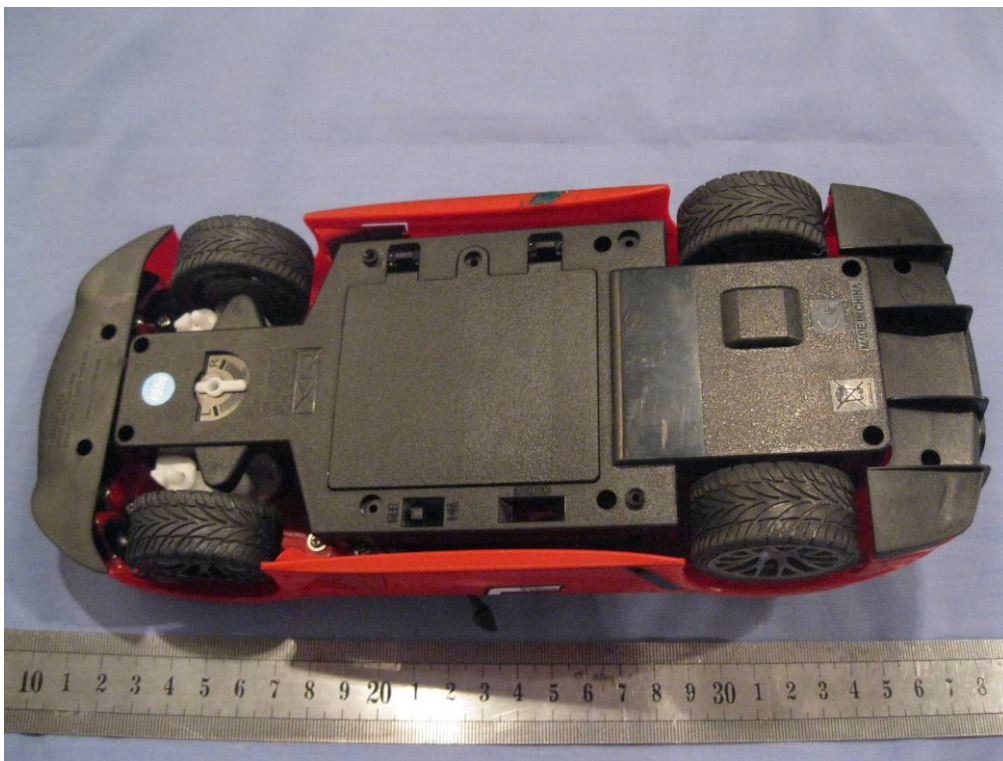


View of EUT-2


APPENDIX 3 INTERNAL PHOTOGRAPHS OF EUT

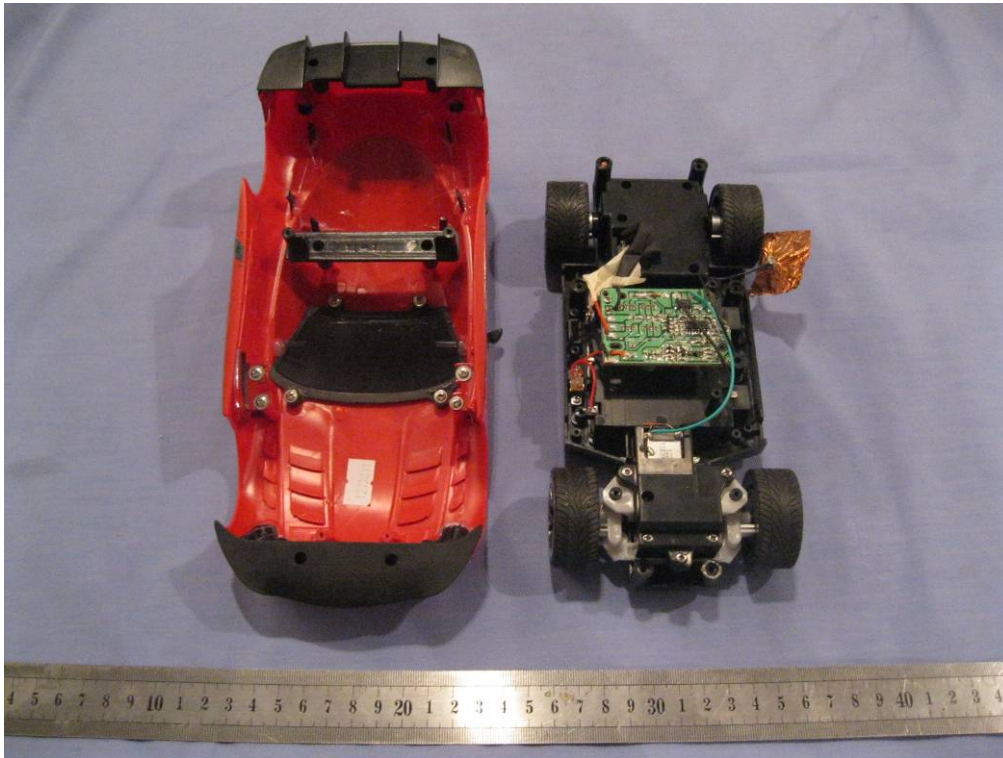

View of EUT-1

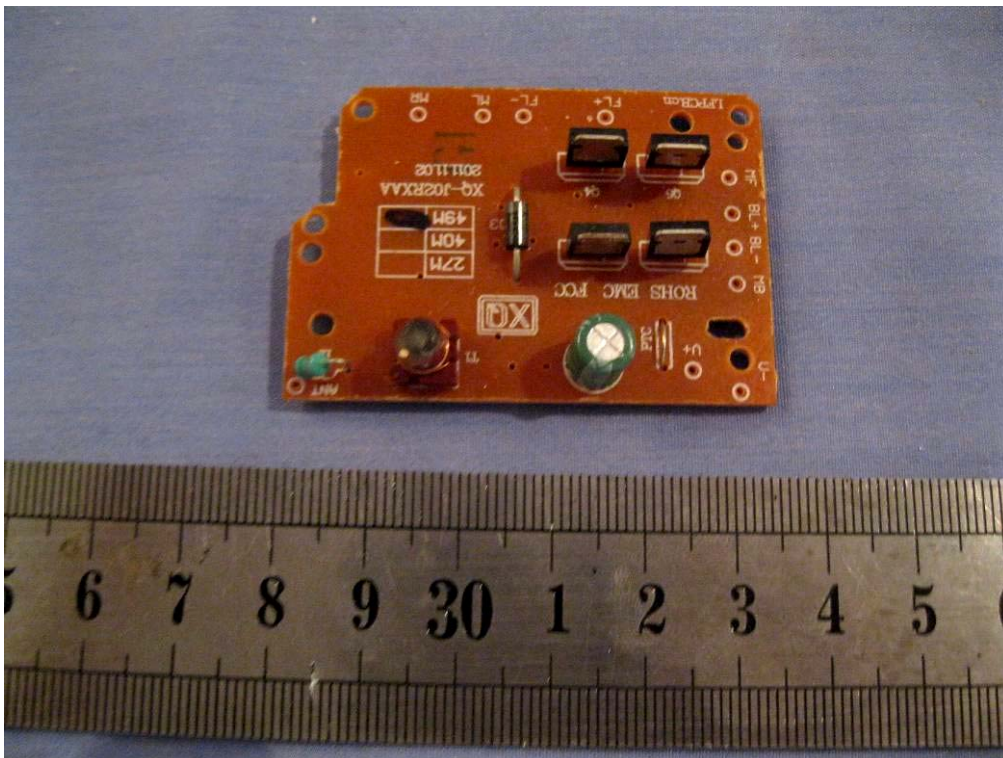

View of EUT-2

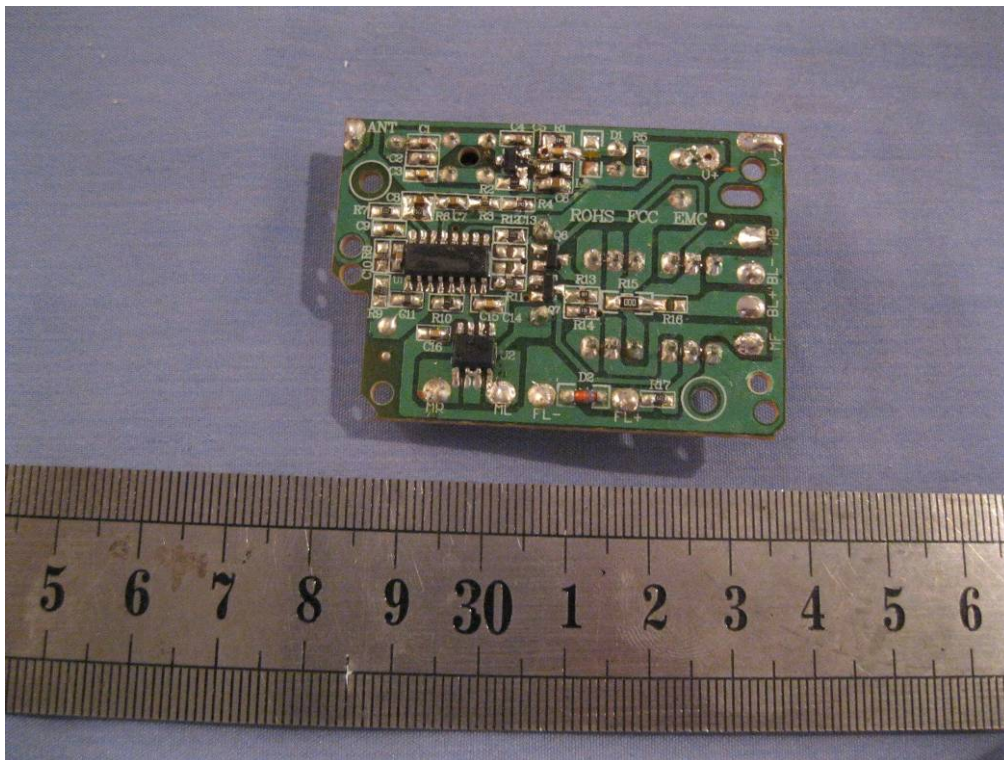

View of EUT-3

*** End of report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.