



FCC TEST REPORT

Product Name : R/C TOYS
Trade Name : XQ
Model Name : 27MHz TX
Serial Number : N/A
Technical Data : DC 9V
Report Number : EESZD04210004
Date : April 29, 2011
Regulations : See below

Standards	Results
<input checked="" type="checkbox"/> 47 CFR FCC Part 15 Subpart C 15.227:2009	PASS

Prepared for:
XQ ARTS TOYS CO.LTD.
North of Xing Ye Road, Lai Mei Industrial District, Cheng Hai,
Shan Tou Guang Dong, China

Prepared by:
CENTRE TESTING INTERNATIONAL CORPORATION
Building C, Hongwei Industrial Zone, Baoan 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Check No.: 30002463

This report shall not be reproduced, except in full, without the written approval of
CENTRE TESTING INTERNATIONAL (SHENZHEN) CORPORATION

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	3
1. TEST SUMMARY	4
2. MEASUREMENT UNCERTAINTY	4
3. PRODUCT INFORMATION	4
4. TEST EQUIPMENT LIST.....	4
5. SYSTEM TEST CONFIGURATION.....	5
5.1. JUSTIFICATION.....	5
5.2. EUT EXERCISING SOFTWARE	5
6. RADIATED EMISSIONS MEASUREMENT	6
6.1. LIMITS	6
6.2. BLOCK DIAGRAM OF TEST SETUP	6
6.3. TEST PROCEDURE.....	7
6.4. TEST RESULT AND GRAPHS.....	8
7. OUT OF BAND EMISSION MEASUREMENT.....	14
7.1. LIMITS	14
7.2. BLOCK DIAGRAM OF TEST SETUP	14
7.3. TEST PROCEDURE.....	14
7.4. TEST RESULT	14
7.5. TEST GRAPH	14
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	15
APPENDIX 2 EXTERNAL PHOTOGRAPHS OF EUT	16
APPENDIX 3 INTERNAL PHOTOGRAPHS OF EUT	17

N/A means not applicable.

1. GENERAL INFORMATION

Applicant & Address: XQ ARTS TOYS CO.LTD.
North of Xing Ye Road, Lai Mei Industrial District, Cheng Hai,
Shan Tou, Guang Dong, China

Manufacturer & Address: XQ ARTS TOYS CO.LTD.
North of Xing Ye Road, Lai Mei Industrial District, Cheng Hai,
Shan Tou, Guang Dong, China

Type of Test: FCC Part 15 (Certification)

Equipment Under Test: R/C TOYS

Test Model: 27MHz TX

Trade Name: XQ

Serial Number: Not Applicable

Technical Data: DC 9V


Date of test: April 21, 2011 to April 27, 2011

Condition of Test Sample: Normal


The above equipment was tested by Centre Testing International for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, Subpart C and the measurement procedure according to ANSI C63.4:2003.

The test results of this report relate only to the tested sample identified in this report.

Prepared by :


Gavin Song

Reviewed by :


Louisa Lu

Approved by :


Lily Yan

Supervisor



Date : April 29, 2011

1. TEST SUMMARY

Clause	Test Item	Rule	Result
1	Radiated Emission	FCC 15.209	PASS
2	Out of Band Emission	FCC 15.227(b)	PASS
3	Antenna Requirements	FCC 15.203	PASS*

* Telescope-type antenna with unique antenna connector.

2. MEASUREMENT UNCERTAINTY

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement items	Uncertainty
Radiated Emissions / Out of Band Emission	4.4 dB

3. PRODUCT INFORMATION

Items	Description
Rating	DC 9V
EUT type	Intentional Transmitter
Modulation	FSK
Operated Frequency	27.145MHz

4. TEST EQUIPMENT LIST

Equipment	Manufacturer	Model Number	Serial Number	Due Date
3M Chamber & Accessory Equipment	ETS-LINDGREN	FACT-3	3510	07/09/2012
Spectrum Analyzer	Agilent	E4440A	MY46185649	03/29/2012
Biconilog Antenna	ETS-LINDGREN	3142C	920250	07/31/2012
Loop Antenna	ETS-LINDGREN	6502	71730	07/19/2011
Multi device Controller	ETS-LINDGREN	2090	00057230	N/A
Receiver	R&S	ESCI	100009	07/10/2012

5. SYSTEM TEST CONFIGURATION

5.1. Justification

For emission testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables were manipulated to produce worst case emissions. It was powered by 9 V DC of battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 200Hz from 9kHz to 150kHz, 9kHz from 150kHz to 30MHz and 100kHz or greater for frequencies between 30MHz to 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

The unit was operated standalone and placed in the center of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, and the Antenna of EUT was fully extended, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

For simplicity of testing, the unit was wired to transmit continuously.

5.2.EUT Exercising Software

No Software was used during testing.

6. Radiated Emissions Measurement

6.1. LIMITS


- (1) The field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.
- (2) The field strength of any emissions, which appear outside of operating frequency band specified in 15.227, shall not exceed the general radiated emission limits as below.

Frequency (MHz)	Field strength (mV/m)	Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Note: the tighter limit applies at the band edges.

6.2. BLOCK DIAGRAM OF TEST SETUP

For radiated emissions from 9kHz to 30MHz

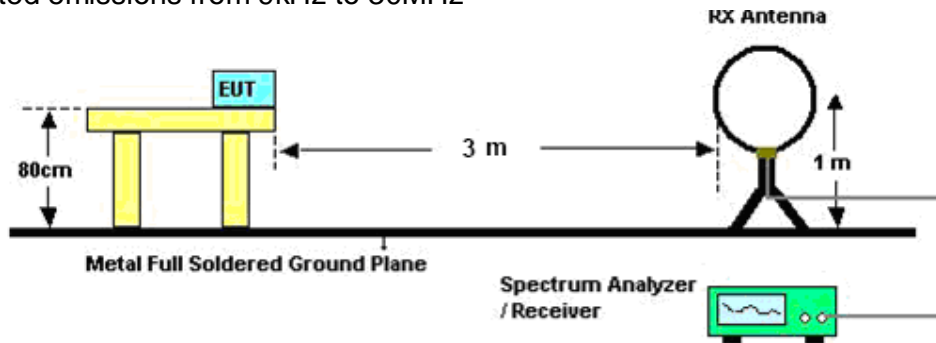

For radiated emissions from 30 - 1000MHz

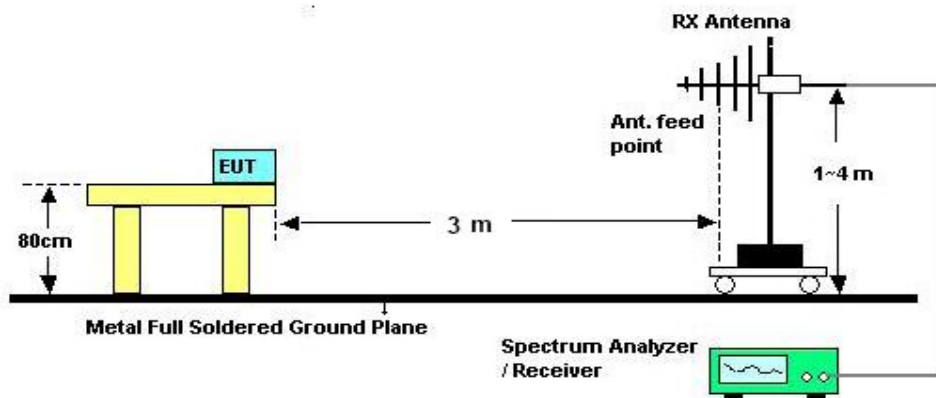

6.3. TEST PROCEDURE

A. Above 30MHz


- a. The EUT was placed on the top of a turntable 0.8 meters above the ground in the chamber, 3 meters away from the antenna (wideband antenna), which was mounted on the top of a variable-height antenna tower. The maximum values of the field strength are recorded by adjusting the polarizations of the test antenna and rotating the turntable.
- b. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- c. The test frequency analyzer system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

B. Below 30MHz

- a. The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.
- b. For each suspected emission, the EUT was arranged to its worst case and then turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- c. The test frequency analyzer system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

(150kHz-30MHz)


H:

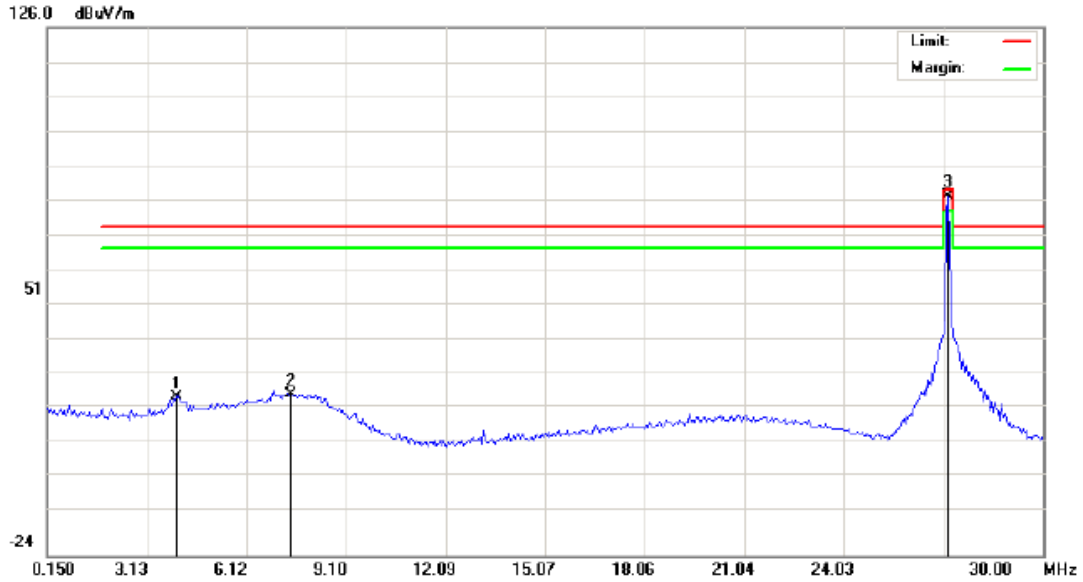

Site site #1 Polarization: *Horizontal* Temperature: 25
 Limit: FCC PART 15C Power: DC 9V Humidity: 51 %
 EUT: R/C TOYS
 M/N: 27MHz TX
 Mode: Normal
 Note:

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	4.0305	10.09			11.10	21.19			69.50					P
2	7.4633	11.27			10.75	22.02			69.50					P
3	27.1643	69.28			8.97	78.25			80.00					P

V:

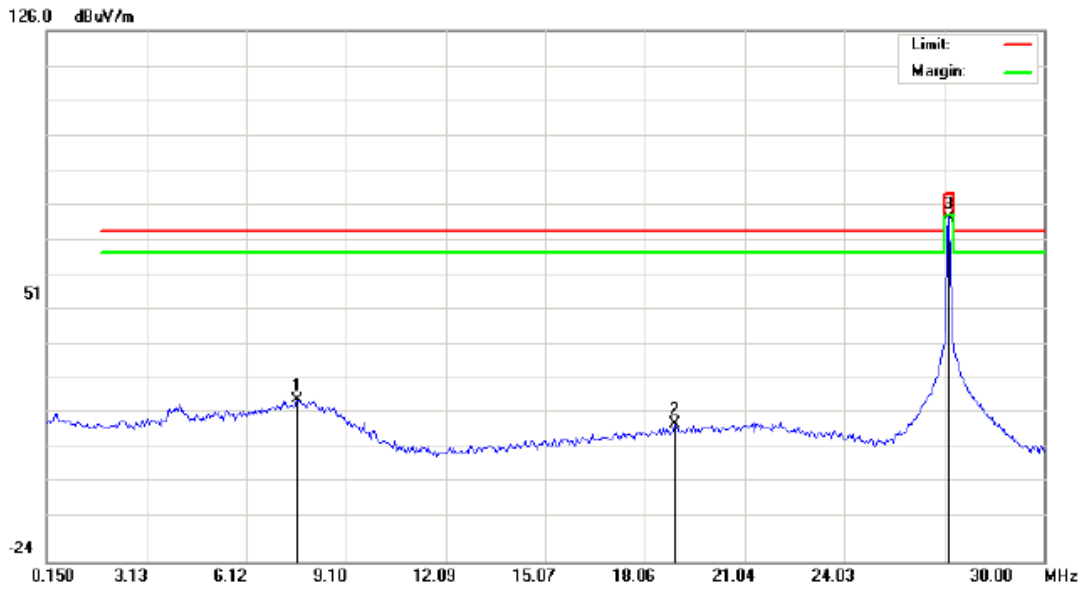

Site site #1
 Limit: FCC PART 15C
 EUT: R/C TOYS
 M/N: 27MHz TX
 Mode: Normal
 Note:


Polarization: *Vertical*
 Power: DC 9V

Temperature: 25
 Humidity: 51 %

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	7.6623	11.31			10.73	22.04			69.50			-47.46		P
2	18.9555	4.61			10.06	14.67			69.50			-54.83		P
3	27.1643	64.46			8.97	73.43			80.00			-6.57		P

(30MHz-1000MHz)


H:

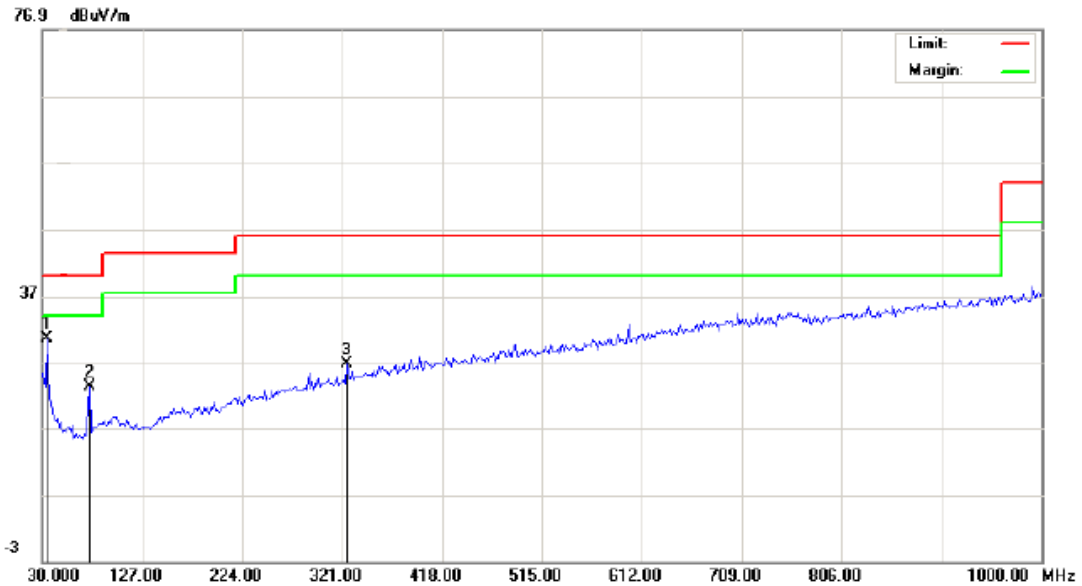

Site site #1 Polarization: *Horizontal* Temperature: 25
 Limit: FCC PART 15C Power: DC 9V Humidity: 51 %
 EUT: R/C TOYS
 M/N: 27MHz TX
 Mode: Normal
 Note:

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	34.8500	15.93			14.74	30.67			40.00			-9.33		P
2	75.2667	15.01			8.49	23.50			40.00			-16.50		P
3	325.8500	10.28			16.49	26.77			46.00			-19.23		P

V:

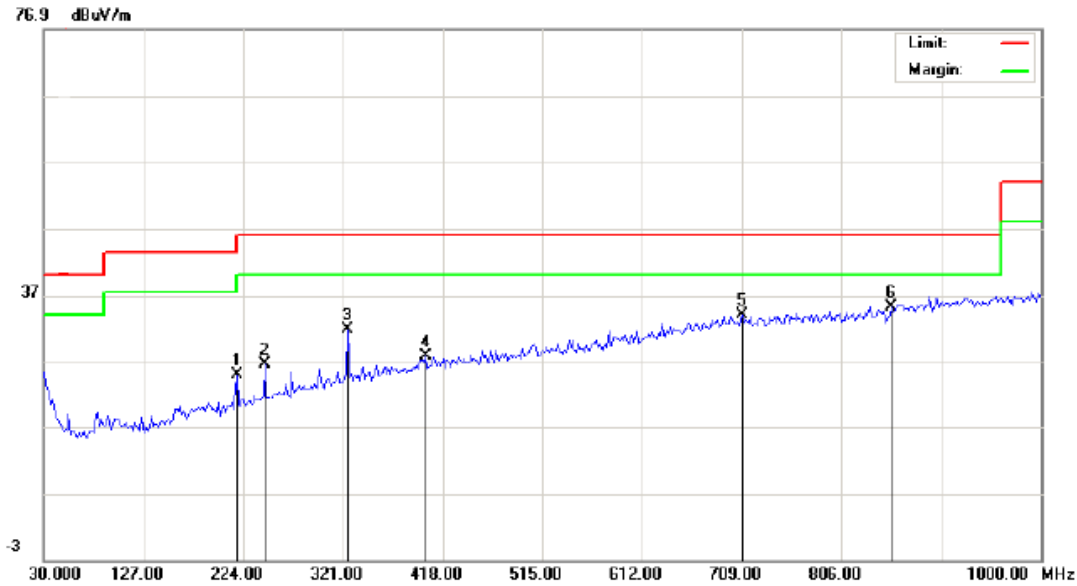

Site site #1 Polarization: **Vertical** Temperature: 25
 Limit: FCC PART 15C Power: DC 9V Humidity: 51 %
 EUT: R/C TOYS
 M/N: 27MHz TX
 Mode: Normal
 Note:

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	217.5333	12.52			12.54	25.06			46.00		-20.94		P	
2	245.0167	13.00			13.64	26.64			46.00		-19.36		P	
3	325.8500	15.36			16.49	31.85			46.00		-14.15		P	
4	401.8333	9.32			18.42	27.74			46.00		-18.26		P	
5	709.0000	9.29			24.77	34.06			46.00		-11.94		P	
6	854.5000	9.17			25.94	35.11			46.00		-10.89		P	

Note 1: The peak data of the fundamental frequency is below the average limit (please refer to the test graph as above), so the average data is deemed to fulfill the average limits and not reported.


Note 2: The total factor = cable loss+ antenna factor.
 Final Emission_PK = Reading Level_PK+ total factor.
 For example: The cable loss of 49MHz is 0.9dB and the antenna factor is 8.36dB, So, the Total factor=0.9+8.36.

7. OUT OF BAND EMISSION MEASUREMENT

7.1. LIMITS

Please refer to the rules 15.227(b): The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.

7.2. BLOCK DIAGRAM OF TEST SETUP

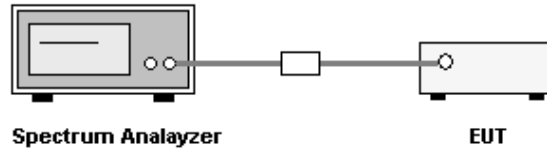


7.3. TEST PROCEDURE

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set spectrum analyzer's RBW and VBW to applicable value with Peak in Max Hold.
3. Record the emission drops at the frequency 26.96MHz & 27.28MHz respectively.
4. Use the marker method to determine the frequency 26.96MHz & 27.28MHz compliance as required.

7.4. TEST RESULT

Freq. (MHz)	Fundamental Emission (dB μ V/m)	Delta (dB)	Final Emission (dB μ V/m)	Limit (dB μ V/m)	Result
26.96	78.25	39.64	38.61	69.54	Pass
27.28	78.25	34.39	43.86	69.54	Pass

7.5. TEST GRAPH

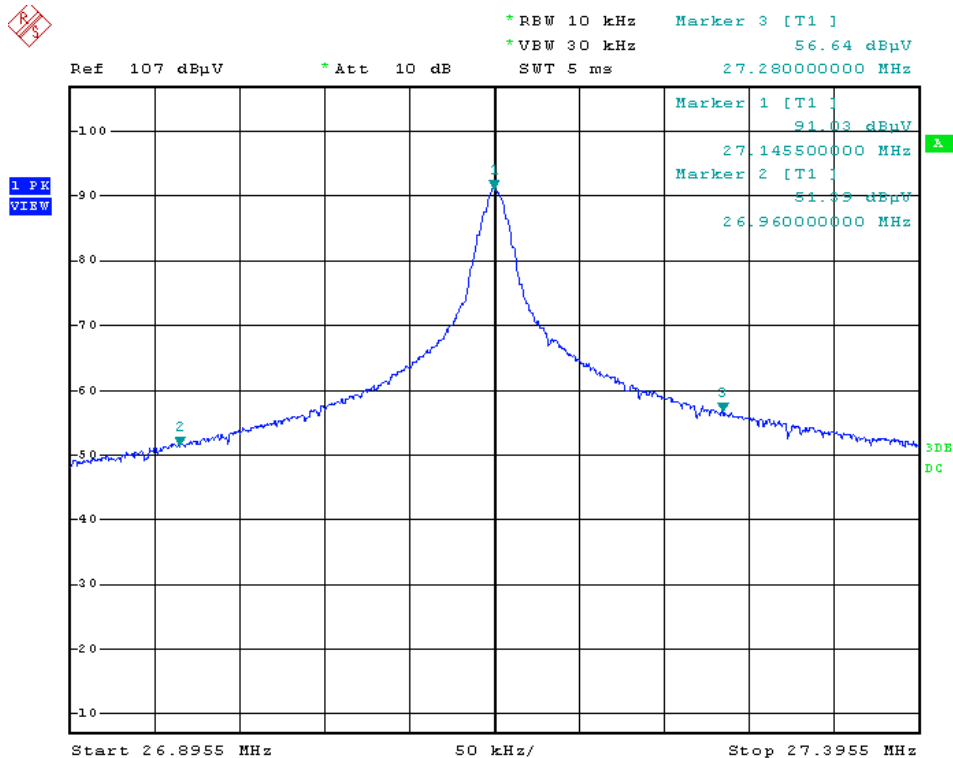


APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

TEST SETUP OF RADIATED EMISSION (9kHz-30MHz)



TEST SETUP OF RADIATED EMISSION (30MHz-1GHz)

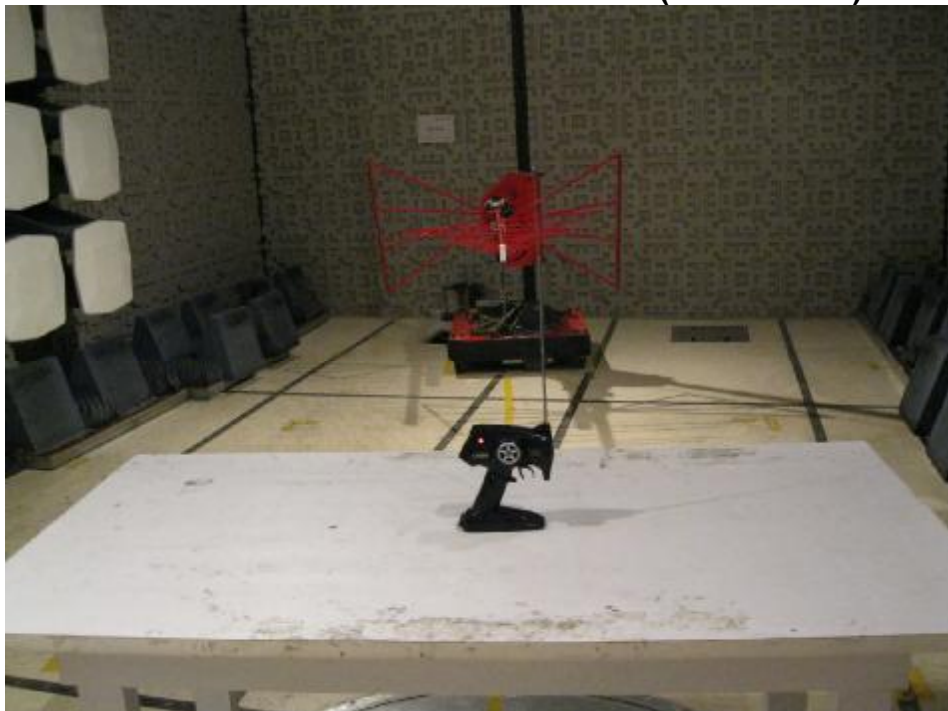

APPENDIX 2 EXTERNAL PHOTOGRAPHS OF EUT



Front View of EUT



Rear View of EUT


APPENDIX 3 INTERNAL PHOTOGRAPHS OF EUT



Internal View of EUT



Front View of PCB

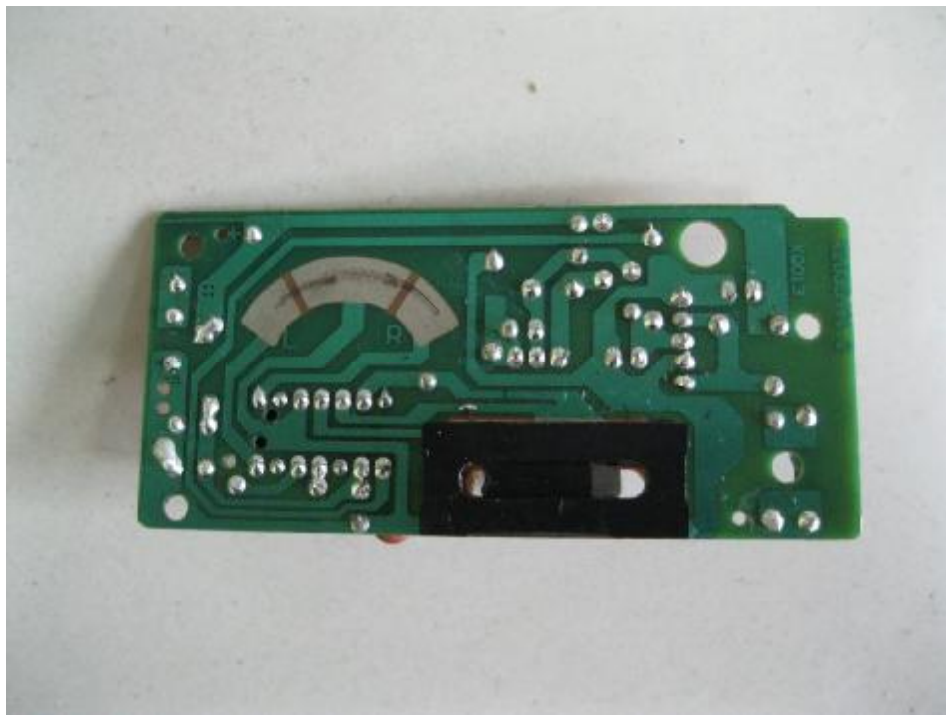

Rear View of PCB

----- End of Report -----