

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF **Product Name:** WPS NFC READER/WRITER **Brand Name: FUJIFILM Imaging Systems** Model No.: **ICT-3153 Model Difference:** N/A FCC ID: W2Z-03000001 **Report No.:** ER/2014/80032 **Issue Date:** Aug 18, 2014 **FUJIFILM Corporation Prepared for:** 7-3, Akasaka 9-Chome Minato-Ku, Tokyo 107-0052,Japan SGS Taiwan Ltd. **Electronics & Communication Laboratory Prepared by:** No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803



Testing Laboratory 0513

Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



VERIFICATION OF COMPLIANCE

Applicant:	FUJIFILM Corporation 7-3,Akasaka 9-Chome Minato-Ku,Tokyo 107-0052,Japan
Product Name:	WPS NFC READER/WRITER
Brand Name:	FUJIFILM Imaging Systems
Model No.:	ICT-3153
Model Difference:	N/A
FCC ID:	W2Z-03000001
Report No.:	ER/2014/80032
Date of test:	Aug. 06, 2014 ~ Aug 13, 2014
Date of EUT Received:	Aug. 06, 2014

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.225.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Nick Lin	Date:	Aug. 18, 2014
Prepared By:	Nick Lin / Engineer Tiffany Kao	Date:	Aug. 18, 2014
Approved By	Tiffany Kao / Clerk Jim Chang	Date:	Aug. 18, 2014

Jim Chang / Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Version

Version No.	Date	Description
00	Aug 18, 2014	Initial creation of document



Table of Contents

1	G	GENERAL INFORMATION	6
	1.1	PRODUCT DESCRIPTION	6
	1.2	RELATED SUBMITTAL(S) / GRANT (S)	7
	1.3	Test Methodology	7
	1.4	TEST FACILITY	7
	1.5	SPECIAL ACCESSORIES	7
	1.6	EQUIPMENT MODIFICATIONS	7
2	S	SYSTEM TEST CONFIGURATION	8
	2.1	EUT CONFIGURATION	8
	2.2	EUT Exercise	
	2.3	TEST PROCEDURE	
	2.4	LIMITATION	9
	2.5	CONFIGURATION OF TESTED SYSTEM	11
3	S	SUMMARY OF TEST RESULTS	12
4	D	DESCRIPTION OF TEST MODES	12
5	Ν	MEASUREMENT UNCERTAINTY	
6		CONDUCTED EMISSIONS TEST	
	6.1	STANDARD APPLICABLE:	14
	6.2	Measurement Equipment Used:	
	6.3	EUT SETUP:	14
	6.4	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
	6.5	Measurement Procedure:	
	6.6	MEASUREMENT RESULT:	
7	R	RADIATED EMISSION TEST	16
	7.1	Measurement Procedure	16
	7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	16
	7.3	Measurement Equipment Used:	17
	7.4	FIELD STRENGTH CALCULATION	
	7.5	FIELD STRENGTH OF FUNDAMENTAL EMISSION	
8	F	FREQUENCY TOLERANCE	
	8.1	Measurement Procedure	
	8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
	8.3	Measurement Equipment Used:	
	8.4	MEASUREMENT RESULTS	



9 20	DB OCCUPIED BANDWIDTH MEASUREMENT	
9.1	STANDARD APPLICABLE:	
9.2	LIMIT:	
9.3	Test Set-up	
9.4	MEASUREMENT PROCEDURE	
9.5	MEASUREMENT EQUIPMENT USED:	
10 Al	NTENNA REQUIREMENT	
10.1.	STANDARD APPLICABLE:	
10.2.	ANTENNA CONNECTED CONSTRUCTION:	



GENERAL INFORMATION 1

Product Description 1.1

General:

Product Name:	WPS NFC READER/WRITER
Brand Name:	FUJIFILM Imaging Systems
Model No.:	ICT-3153
Model difference:	N/A
Data Cable:	Model No.:AIC-NE-5052-1000, Supplier: SPACE SHUTTLE
Hardware Version:	1
Software Version:	N/A
Power Supply:	5Vdc from Micro USB port

NFC:

Operating Frequency:	13.56MHz	
Transmit Power:	< 123dBuV/m at 3m.	
Number of Channels:	1	
Antenna Type:	Loop Antenna	
Modulation Type:	AM	

This report complies with FCC regulatory radio rule with respect to RFID that operates on 13.56MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the mark of the stated in the instant of the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: <u>W2Z-03000001</u> filing to comply with Section 15.225 of the FCC Part 15, Subpart C Rules.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4:2009. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009. FCC Registration Number are: 990257, Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan 333, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

1.5 Special Accessories

There is no special accessory used while test was conducted.

1.6 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



System Test Configuration 2

EUT Configuration 2.1

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 **EUT Exercise**

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

Test Procedure 2.3

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the general criterion in Section 7.1 of ANSI C63.4:2009& 6.2 ANSI 63.10:2009 and RSS-Gen:2010. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, and the measurement procedure 7.3 in ANSI 63.4:2009 is followed to carry out the test. The CISPR Quasi-Peak and Average detector mode is employed according to §15.107

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna according to the requirements in Section 8 and 13 and of ANSI C63.4:2009.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Limitation 2.4

(1) Conducted Emission

According to section 15.207(a) and Conducted Emission Limits is as following.

Frequency range		Limits IB (uV)	
MHz	Quasi-peak	Average	
0.15 to 0.50	66 to 56	56 to 46	
0.50 to 5	56	46	
5 to 30	60	50	
Note			
1. The lower limit shall apply at the transition frequencies			
2. The limit decreases line	2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

(2) Radiated Emission

- a. The field strength of any emission within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- b. Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- c. Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- d. The field strength of any emissions appearing outside of the 13.110-14.010 MHz shall not exceed the general radiated emission limits in section 15.209 and RSS-210 7.2.5 Table 5 and Table 6 (Intentional Radiators general limit).as below.

Frequency (MHz)	Field strength $\mu V/m$	Distance (m)	Field strength at 3m dBµV/m
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Remark: 1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Distance extrapolation factor = $40 \log$ (required distance/ test distance) (dB);
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement. Ex.20*log(30)+40*log(30/3) = 69.54dBuV/m
- 5. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205 and RSS-Gen 7.2.5 Table 3.
- 6. The general radiated emission limits in ξ 15.209 and RSS-Gen 7.2.5 Table 5 and Table 6 apply for the spurious emission generate from UE, except for the fundamental emission where the respective section specifies otherwise.

(3) Frequency Tolerance

The frequency tolerance of the carrier signal shall be maintained within +/-0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2.5 **Configuration of Tested System**

Fig. 2-1 Radiated Emission




Fig. 2-2 Conducted (Antenna Port) Configuration




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Notebook	Lenovo	L420	LR-957X7	Shield	Un-shield

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the mark of the stated in the instant of the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



FCC Rules	Description Of Test	Result	
§ 15.207	AC Power Line Conducted		
915.207	Emission	Compliant	
§15.225 (a)-(d)	Radiated Emission	Compliant	
015 000	Radiated Emission Limits,		
§15.209	general requirement	Compliant	
§15.225 (e)	Frequency Stability	Compliant	
§ 2.1049	20 dB OCCUPIED		
§15.215 (c)	BANDWIDTH	Compliant	
§15.203	Antenna Requirement	Compliant	

Summary of Test Results 3

4 **Description of test modes**

The EUT stay in continuous transmitting mode. The frequency 13.56 MHz is the default channel to test, where it is the only manipulative channel as this application supports.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth Transmitter for channel Low, Mid and High the worst case E2 position was reported.

The data rate as the lowest supported is selected while tests are conducted.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Frequency Stability	+/- 123.36 Hz
20 dB OCCUPIED BANDWIDTH	+/- 123.36 Hz
Temperature	+/- 0.8 °C
Humidity	+/- 4.7 %
DC / AC Power Source	DC=+/- 1%, AC=+/- 0.2%

Radiated Spurious Emission:

	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB

	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the mark of the stated in the instant of the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6 Conducted Emissions Test

6.1 Standard Applicable:

According to §15.207, frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range		mits (uV)							
MHz	Quasi-peak	Average							
0.15 to 0.50	66 to 56	56 to 46							
0.50 to 5	56	46							
5 to 30	60	50							
Note									
1. The lower limit shall apply at the transition frequencies									

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
ТҮРЕ		NUMBER	NUMBER	CAL.						
EMI Test Receiver	R&S	ESCI7	100760	05/26/2014	05/25/2015					
LISN	Rolf-Heine	NNB-2/16Z	99012	03/26/2014	03/25/2015					
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	03/19/2014	03/18/2015					
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2013	11/25/2014					

6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2009.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and invisited included therein, any bolder of this document is at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation on a provide the time of this document is at the time of this document is at the time of the intervention on the limit of

electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路134號



6.4 Test SET-UP (Block Diagram of Configuration)

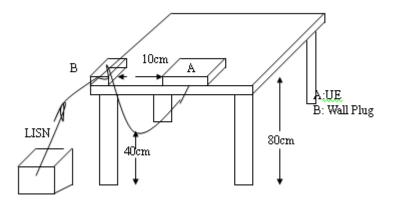

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6 Measurement Result:

N/A, EUT powered from USB cable.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Radiated Emission Test 7

7.1 **Measurement Procedure**


- The EUT was placed on a turn table which is 0.8m above ground plane. 1.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

7.2 **Test SET-UP (Block Diagram of Configuration)**

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

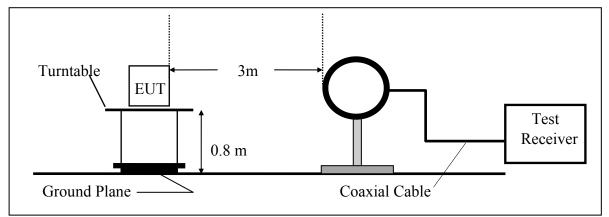

Radiated Emission Test Set-Up, Frequency Below 1000MHz **(B)**

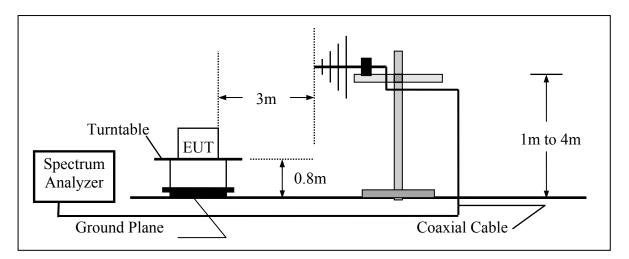

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<mark>SGS Taiwan Ltd.</mark> No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號

966 Chamber MODEL LAST CAL DUE. EQUIPMENT MFR SERIAL TYPE NUMBER **NUMBER** CAL. 05/25/2015 **EMI Test Receiver** R&S ESCI7 100760 05/26/2014 Agilent 05/19/2014 05/18/2015 Spectrum Analyzer E4446A MY51100003 EXA Spectrum Analyzer Agilent N9010A MY50420195 01/20/2014 01/19/2015 **VULB9168** 01/02/2014 01/01/2015 378 **Bilog** Antenna **SCHWAZBECK** 07/02/2015 00148045 07/03/2014 ETS.LINDGREN Loop Antenna 6502 Pre-Amplifier 8447D 2944A07676 Agilent 01/03/2014 01/02/2015 Turn Table HD DT420 N/A N.C.R N.C.R Antenna Tower HD MA240-N 240/657 N.C.R N.C.R Controller HD100 HD N/A N.C.R N.C.R Low Loss Cable Huber Suhner 966 Rx 9 01/03/2014 01/02/2015 3m Site NSA SGS 966 chamber N/A 07/15/2014 07/14/2015

7.3 **Measurement Equipment Used:**

7.4 **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



7.5 **Field Strength of Fundamental Emission**

7.5.1 Limit

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 micorvolts/meter at 30 meters. The Limit is converted to 123.90dBuV/m by offsetting the distance extrapolation factor as measurement distance is taken place at 3 meters.

Distance extrapolation = $40 \times \log(30/3) = 40 \text{ dB}$

Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 40 = 124.00 dBuV/m

Note:

Actual FS($dB\mu V/m$) = Spectrum. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.


The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No: ER/2014/80032 Issue Date: Aug. 18, 2014 Page: 19 of 32


Operation Band Fundamental Frequency Operation Mode EUT Pol.		:NFC :13.56 MHz :MAIN :E2 Plane	6 MHz Temp./Humi. N Engineer		:2014-08-12 :24.1 deg_C/62 RH :Curry :VERTICAL		
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	F/H/E/S	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV∕m	@3m dBµV/m	dB
13.56	F	Peak	51.87	11.72	63.59	123.90	-60.31

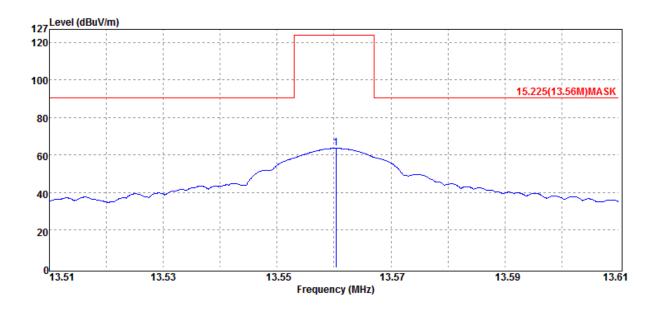



Report No: ER/2014/80032 Issue Date: Aug. 18, 2014 Page: 20 of 32

Operation Band Fundamental Frequency Operation Mode		:13.56 MHz T		Test Date Temp./Humi. Engineer		:2014-08-12 :24.1 deg_0 :Curry	_	
EUT Pol.	Jue	:E2 Plane		0		Measurement Antenna Pol. :HORIZONTAL		TAL
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
13.56	F	Peak	48.92	11.72	60.64	123.90	-63.26	

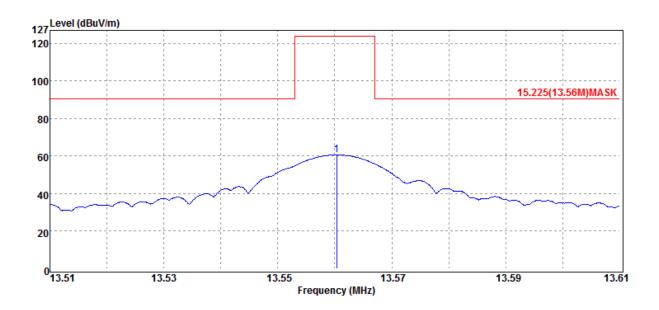



7.5.2 Radiated Mask


- (a) 15.848 millivolts/m (84 dB μ V/m) at 30 m, within the band 13.553-13.567 MHz.
- (b) 334 microvolts/m (50.5 dB μ V/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz.
- (c) 106 microvolts/m (40.5 dB μ V/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz.


Distance extrapolation = $40 * \log (30/3) = 40 \text{ dB}$

Limit is re-adjusted in terms of limit taken in 3m for the following frequency segment of the interest:

- a) $20 * \log (15848 \text{uV/m}) + 40 \text{dB} = 124.00 \text{dBuV/m}$
- b) $20 * \log(334 uV/m) + 40 dB = 90.47 dB uV/m$
- c) $20*\log(106uV/m) + 40dB = 80.50dBuV/m$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

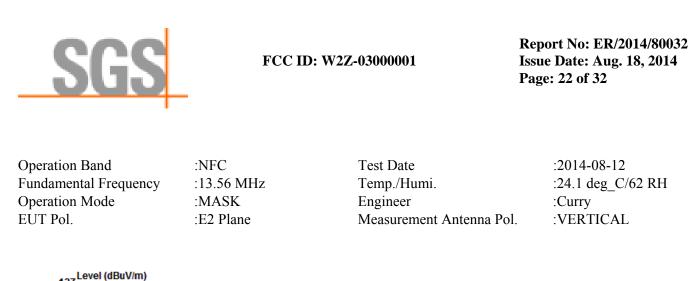

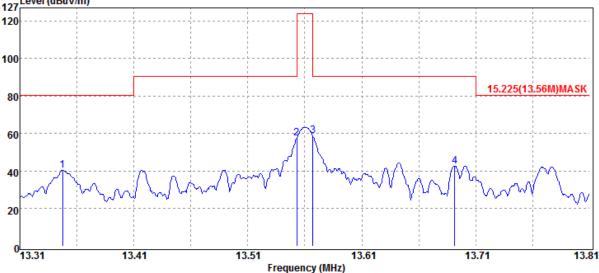


Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.35	S	Peak	28.89	11.74	40.63	80.50	-39.87
13.55	S	Peak	46.01	11.72	57.73	90.47	-32.74
13.57	S	Peak	47.18	11.72	58.90	90.47	-31.57
13.69	S	Peak	31.12	11.71	42.83	90.47	-47.64

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No: ER/2014/80032 Issue Date: Aug. 18, 2014 Page: 23 of 32

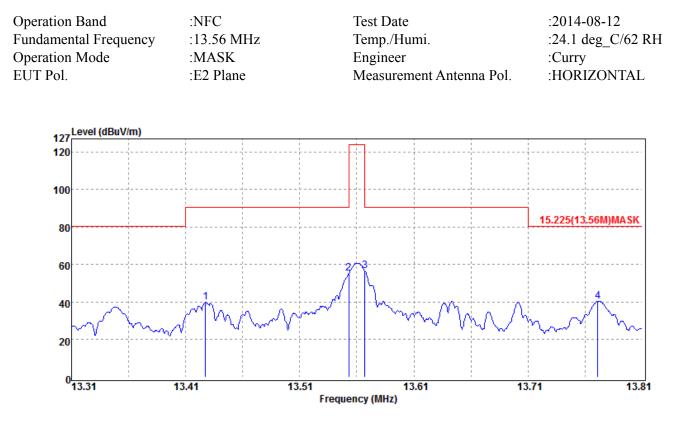

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
 MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.43	S	Peak	28.13	11.73	39.86	90.47	-50.61
13.55	S	Peak	43.59	11.72	55.31	90.47	-35.16
13.57	S	Peak	45.09	11.72	56.81	90.47	-33.66
13.77	S	Peak	28.83	11.70	40.53	80.50	-39.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.5.3 Radiated Emission –

Limit:

- § 15.225
 - (d) 30 microvolts/m (29.4 dB μ V/m) at 30 m, outside the band 13.110-14.010 MHz.

Limit is converted by adding the distance extrapolation factor as the measurement distance was taken place at 3m.

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:NFC :13.56 MHz :TX :E2 Plane	Test Date Temp./Humi. Engineer Measurement Antenna Pol.		:2014-08-12 :24.1 deg_C/62 RH :Curry :VERTICAL		
Freq.	Note	Detector Mode	Spectrum Reading Leve	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
10.74	S	Peak	19.36	11.95	31.31	69.54	-38.23
14.76	S	Peak	16.60	11.63	28.23	69.54	-41.31
17.90	S	Peak	30.90	11.45	42.35	69.54	-27.19
19.26	S	Peak	11.36	11.37	22.73	69.54	-46.81
21.98	S	Peak	11.80	10.78	22.58	69.54	-46.96
25.06	S	Peak	23.40	10.00	33.40	69.54	-36.14
27.12	Н	Peak	13.99	9.53	23.52	69.54	-46.02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No: ER/2014/80032 Issue Date: Aug. 18, 2014 Page: 25 of 32

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:NFC :13.56 MHz :TX :E2 Plane	Test Date Temp./Humi. Engineer Measurement Antenna Pol.		:2014-08-12 :24.1 deg_C/62 RH :Curry :HORIZONTAL		
Freq.	Note	Detector Mode	Spectrum Reading Leve	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
10.74	S	Peak	13.02	11.95	24.97	69.54	-44.57
16.00	S	Peak	12.35	11.56	23.91	69.54	-45.63
17.90	S	Peak	23.32	11.45	34.77	69.54	-34.77
20.06	S	Peak	11.17	11.32	22.49	69.54	-47.05
22.52	S	Peak	12.01	10.64	22.65	69.54	-46.89
25.06	S	Peak	13.15	10.00	23.15	69.54	-46.39
27.12	Н	Peak	11.82	9.53	21.35	69.54	-48.19



Report No: ER/2014/80032 Issue Date: Aug. 18, 2014 Page: 26 of 32

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:NFC :13.56 MHz :TX :E2 Plane	T E	est Date emp./Humi. ngineer Ieasurement An	tenna Pol.	:2014-08-12 :24.1 deg_C/6 :Curry :VERTICAL	52 RH
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
54.24	Н	Peak	30.65	-13.13	17.52	40.00	-22.48
67.80	Н	Peak	37.71	-14.83	22.88	40.00	-17.12
135.60	Н	Peak	35.35	-13.59	21.76	43.50	-21.74
227.88	S	Peak	44.48	-14.07	30.41	46.00	-15.59
259.89	S	Peak	47.70	-12.66	35.04	46.00	-10.96
292.87	S	Peak	49.94	-11.35	38.59	46.00	-7.41
324.88	S	Peak	45.58	-10.82	34.76	46.00	-11.24
357.86	S	Peak	43.85	-9.96	33.89	46.00	-12.11
422.85	S	Peak	40.12	-8.79	31.33	46.00	-14.67



Report No: ER/2014/80032 Issue Date: Aug. 18, 2014 Page: 27 of 32

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:NFC :13.56 MHz :TX :E2 Plane	Engineer		tenna Pol.	:2014-08-12 :24.1 deg_C/62 RH :Curry :HORIZONTAL	
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
54.24	Н	Peak	30.58	-13.13	17.45	40.00	-22.55
67.80	Н	Peak	39.18	-14.83	24.35	40.00	-15.65
135.60	Н	Peak	44.00	-13.59	30.41	43.50	-13.09
190.05	S	Peak	51.93	-14.82	37.11	43.50	-6.39
271.53	S	Peak	53.89	-11.99	41.90	46.00	-4.10
298.69	S	Peak	53.85	-11.17	42.68	46.00	-3.32
325.85	S	Peak	50.18	-10.81	39.37	46.00	-6.63
542.16	S	Peak	43.96	-7.39	36.57	46.00	-9.43
569.32	S	Peak	42.46	-5.78	36.68	46.00	-9.32





Frequency Tolerance 8

8.1 **Measurement Procedure**

- The EUT was placed on a turn table which is 0.8m above ground plane. 1
- 2. Set EUT as normal operation
- 3. Set SPA Center Frequency = fundamental frequency, RBW, VBW= 10kHz, Span = 100kHz.
- 4. Set SPA Max hold. Mark peak.

8.2 **Test SET-UP (Block Diagram of Configuration)**



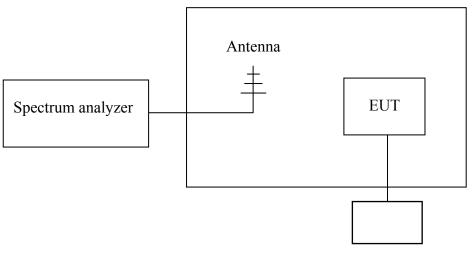

Variable AC Power Supply

Measurement Equipment Used: 8.3

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ	1 111, IX	NUMBER	NUMBER	CAL.	CAL DUE.		
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/19/2014	05/18/2015		
Temperature Chamber	TERCHY	MHG-120LF	911009	05/07/2014	05/06/2015		
AC Power Supply	APW-105N	887592	All Power	N/A	N/A		

Measurement Results 8.4

Refer to attached data chart.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



A. Temperature Variation

Power Supply	Environment	Frequency	Delta (Hz)	Limit (KHz)	
Vdc	Temperature ()	(MHz)	Denta (112)		
5	-20	13.5598	400.00	+/- 1.356	
5	-10	13.5596	600.00	+/- 1.356	
5	0	13.5595	700.00	+/- 1.356	
5	10	13.5599	300.00	+/- 1.356	
5	20	13.5602	0.00	+/- 1.356	
5	30	13.5605	-300.00	+/- 1.356	
5	40	13.5604	-200.00	+/- 1.356	
5	50	13.5609	-700.00	+/- 1.356	

B. Supply Voltage Variation

Power Supply	Environment	Frequency	Delta (Hz)	Limit (KHz)	
Vdc	Vdc Temperature ()		Delta (IIZ)	Linnt (KIIZ)	
5.25	20	13.5611	-900.00	+/- 1.356	
5	20	13.5602	0.00	+/- 1.356	
4.75	20	13.5601	100.00	+/- 1.356	

9 20 dB OCCUPIED BANDWIDTH MEASUREMENT

9.1 Standard Applicable:

§2.1049 & §15.215 (c)

9.2 Limit:

None

9.3 Test Set-up

Refer to section 6.2 in this report

9.4 Measurement Procedure

20dB bandwidth

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak mode.
- 2. 20dB Bandwidth the resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.


9.5 Measurement Equipment Used:

Refer to section 6.3 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



-20dB Bandwidth

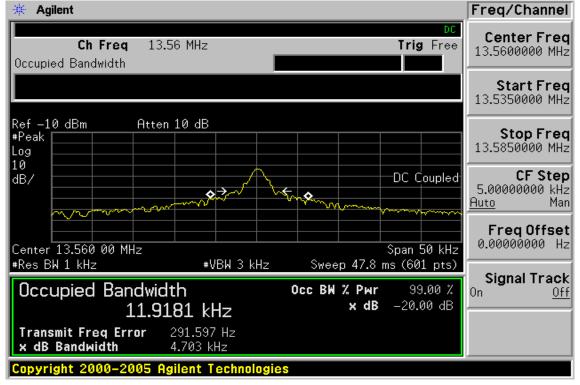

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10 ANTENNA REQUIREMENT

10.1. Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.

For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power limits.

10.2. Antenna Connected Construction:

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.