



**FCC PART 15, SUBPART C
ISED RSS-247, ISSUE 2, FEBRUARY 2017**



TEST REPORT

For

ChargePoint, Inc.

253 E. Hacienda Ave.,
Campbell, CA 95008, USA

**FCC ID: W38-241083S
IC: 8854A-241083S**

Report Type: Permissive Change Report	Product Type: WLAN Module
Prepared By: Allen Huang Test Technician	
Report Number: R2012091-247	
Report Date: 2021-02-25	
Reviewed By: Simon Ma RF Supervisor	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: +1 (408) 732-9162, Fax: +1 (408) 732-9164	



Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”

TABLE OF CONTENTS

1 General Description.....	4
1.1 Product Description for Equipment Under Test (EUT)	4
1.2 Objective.....	4
1.3 Related Submittal(s)/Grant(s)	4
1.4 Test Methodology	4
1.5 Measurement Uncertainty	5
1.6 Test Facility Registrations	5
1.7 Test Facility Accreditations	5
2 System Test Configuration.....	8
2.1 Justification.....	8
2.2 EUT Exercise Software.....	8
2.3 Local Support Equipment	8
2.4 Remote Support Equipment.....	8
2.5 Interface Ports and Cabling.....	8
3 Summary of Test Results	9
4 FCC §2.1091, §15.247(i) & ISEDC RSS-102 - RF Exposure.....	10
4.1 Applicable Standards	10
4.2 MPE Prediction.....	11
4.3 MPE Results	11
5 FCC §15.207 & ISEDC RSS-Gen §8.8 - AC Line Conducted Emissions.....	13
5.1 Applicable Standards	13
5.2 Test Setup	13
5.3 Test Procedure	13
5.4 Corrected Amplitude & Margin Calculation.....	14
5.5 Test Setup Block Diagram	14
5.6 Test Equipment List and Details.....	15
5.7 Test Environmental Conditions	15
5.8 Summary of Test Results	15
5.9 Conducted Emissions Test Plots and Data.....	16
6 FCC §15.209, §15.247(d) & ISEDC RSS-247 §5.5, RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions.....	18
6.1 Applicable Standards	18
6.2 Test Setup	19
6.3 Test Procedure	19
6.4 Corrected Amplitude & Margin Calculation.....	20
6.5 Test Equipment List and Details.....	21
6.6 Test Environmental Conditions	21
6.7 Summary of Test Results	22
6.8 Radiated Emissions Test Results	23
7 Annex A (Normative) – EUT Test Setup Photos.....	26
8 Annex B (Normative) - A2LA Electrical Testing Certificate	27

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R2012091-247	Initial	2021-02-25

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test report was prepared on behalf of *ChargePoint, Inc.*, and their product model: 241083S (FCC ID: W38-241083S, IC: 8854A-241083S) or the “EUT” as referred to in this report. The EUT is installed in host Gateway model: CPGW.

Along with the EUT, the CPGW gateway also contains a cellular modem utilizes pre-certified cellular module, FCC ID: RI7LE910NAV2; IC: 5131A-LE910NAV2.

1.2 Objective

This report was prepared on behalf of *ChargePoint, Inc.*, in accordance with Part 2, Subpart J, and Part 15, Subparts C of the Federal Communication Commission’s rules and IC RSS-247 Issue 2, February 2017.

The objective is to determine compliance with FCC Part 15.247 and IC RSS-247 rules to allow the Wi-Fi module colocation with cellular modem in a final product platform.

1.3 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart E, Equipment Class: NII with FCC ID: W38-241083S, IC: 8854A-241083S

1.4 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01v04 Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating under Section 15.247.

1.5 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

1.6 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.7 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3297.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report.

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment

[including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.03) to certify

- For the USA (Federal Communications Commission):
 - 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
 - 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
 - 3- All Telephone Terminal Equipment within FCC Scope C.
- For the Canada (Industry Canada):
 - 1. All Scope 1-Licence-Exempt Radio Frequency Devices;
 - 2. All Scope 2-Licensed Personal Mobile Radio Services;
 - 3. All Scope 3-Licensed General Mobile & Fixed Radio Services;
 - 4. All Scope 4-Licensed Maritime & Aviation Radio Services;
 - 5. All Scope 5-Licensed Fixed Microwave Radio Services
 - 6. All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.
- For Singapore (Info-Communications Development Authority (IDA)):
 - 1. All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
 - 2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2
- For the Hong Kong Special Administrative Region:
 - 1 All Radio Equipment, per KHCA 10XX-series Specifications;
 - 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
 - 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.
- For Japan:
 - 1. MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
 - 2. Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes & Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)
 - for Imaging Equipment (ver. 2.0)
 - for Computer Servers (ver. 2.0)

- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminares (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Innovation, Science and Economic development Canada - ISED) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Media Development Authority - IMDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
 - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013, FCC KDB 558074 D01 DTS Meas Guidance v04.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

2.2 EUT Exercise Software

The test software used was iPerf provided by *Chargepoint, Inc.*

2.3 Local Support Equipment

Manufacturer	Description	Model	Serial Number
Linksys	Wi-Fi Router	EA6350	14Y30J03806633
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	120503

2.4 Remote Support Equipment

Manufacturer	Description	Model
Apple	Laptop	MacBook Pro

2.5 Interface Ports and Cabling

Cable Description	Length (m)	Qty.	To	From
Ethernet-to-USB Cable	> 1 m	1	Laptop	Wi-Fi Router

3 Summary of Test Results

Results reported relate only to the product tested.

FCC & IC Rules	Description of Test	Results
FCC §2.1091 IC RSS-102	RF Exposure	Compliant
FCC §15.207 IC RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
FCC §2.1053, §15.205, §15.209 IC RSS-Gen §8.9 & §8.10	Radiated Spurious Emissions	Compliant

4 FCC §2.1091, §15.247(i) & ISED RSS-102 - RF Exposure

4.1 Applicable Standards

According to §2.1091 (Mobile Devices) RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

Note: f = frequency in MHz

* = Plane-wave equivalent power density

According to ISED RSS-102 Issue 5:

2.5.2 Exemption Limits for Routine Evaluation – RF Exposure Evaluation

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz⁶ and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

4.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

4.3 MPE Results

2.4 GHz Wi-Fi

Maximum peak output power at antenna input terminal (dBm): 17.9

Maximum peak output power at antenna input terminal (mW): 61.66

Prediction distance (cm): 20

Predication frequency (MHz): 2437

Maximum Antenna Gain, typical (dBi): 2.5

Maximum Antenna Gain (numeric): 1.78

Power density of prediction frequency at prediction distance (mW/cm²): 0.0218

FCC limit (mW/cm²): 1.00

LE910-NAV2 Cellular Radio

Band	Frequency (MHz)	Max Conducted Power (dBm)	Evaluated Distance (cm)	Antenna Gain (dBi)	MPE (mW/cm ²)	MPE Limit (mW/cm ²)	MPE Ratio
FDD 12	699.0	24.00	20	3.0	0.0997	0.466	0.2139
FDD 17	704.0	24.00	20	3.0	0.0997	0.469	0.2126
FDD 13	777.0	24.00	20	3.0	0.0997	0.518	0.0192
FDD 5	824.7	24.00	20	3.0	0.0997	0.5498	0.1813
FDD V	826.4	24.50	20	3.0	0.112	0.551	0.2033
FDD 4	1710.7	24.00	20	3.0	0.0997	1.0	0.0997
FDD 2	1850.7	24.00	20	3.0	0.0997	1.0	0.0997
FDD II	1852.4	24.50	20	3.0	0.112	1.0	0.112

Note: antenna gain information provided by the applicant.

Radio Co-location**Worst Case Co-location 2.4 GHz Wi-Fi and LTE Band FDD 12:**

Frequency Band	Max EIRP Power(dBm)	Evaluated Distance (cm)	Worst-Case MPE (mW/cm ²)	MPE Limit (mW/cm ²)	Worst-Case MPE Ratios	Sum of MPE Ratios	Limit
Worst Case							
2.4 GHz Wi-Fi	20.4	20	0.0218	1.0	2.18%	23.57%	100%
LTE Band FDD 12	24.00	20	0.0997	0.466	21.39%		

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum MPE ratio at the distance of 20 cm is 23.57%. Limit is 100%.

IC RF Exposure Evaluation:**2.4 GHz Wi-Fi:**

$$17.9 \text{ dBm} + 2.5 \text{ dBi} = 20.4 \text{ dBm} < 1.31 \times 10^{-2} f^{0.6834} = 2.703 \text{ W} = 34.318 \text{ dBm}$$

Conclusion

In order to meet the multi-transmitter RF Exposure requirement, all transceiver modules must be installed with a separation distance of no less than **20** cm from all persons.

5 FCC §15.207 & ISEDC RSS-Gen §8.8 - AC Line Conducted Emissions

5.1 Applicable Standards

As per FCC §15.207 and IC RSS-Gen §8.8 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note1}	56 to 46 ^{Note2}
0.5-5	56	46
5-30	60	50

Note1: Decreases with the logarithm of the frequency.

Note2: A linear average detector is required

5.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.10-2013 measurement procedure. The specification used were FCC §15.207 and IC RSS-Gen §8.8 limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.

5.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-1 and the power cords of support equipment were connected to LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data were recorded in the peak, quasi-peak, and average detection mode. Quasi-Peak readings are distinguished with a "QP." Average readings are distinguished with an "Ave".

5.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:


$$CA = A_i + CL + \text{Atten}$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.7 dB) + Attenuator (10 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

5.5 Test Setup Block Diagram

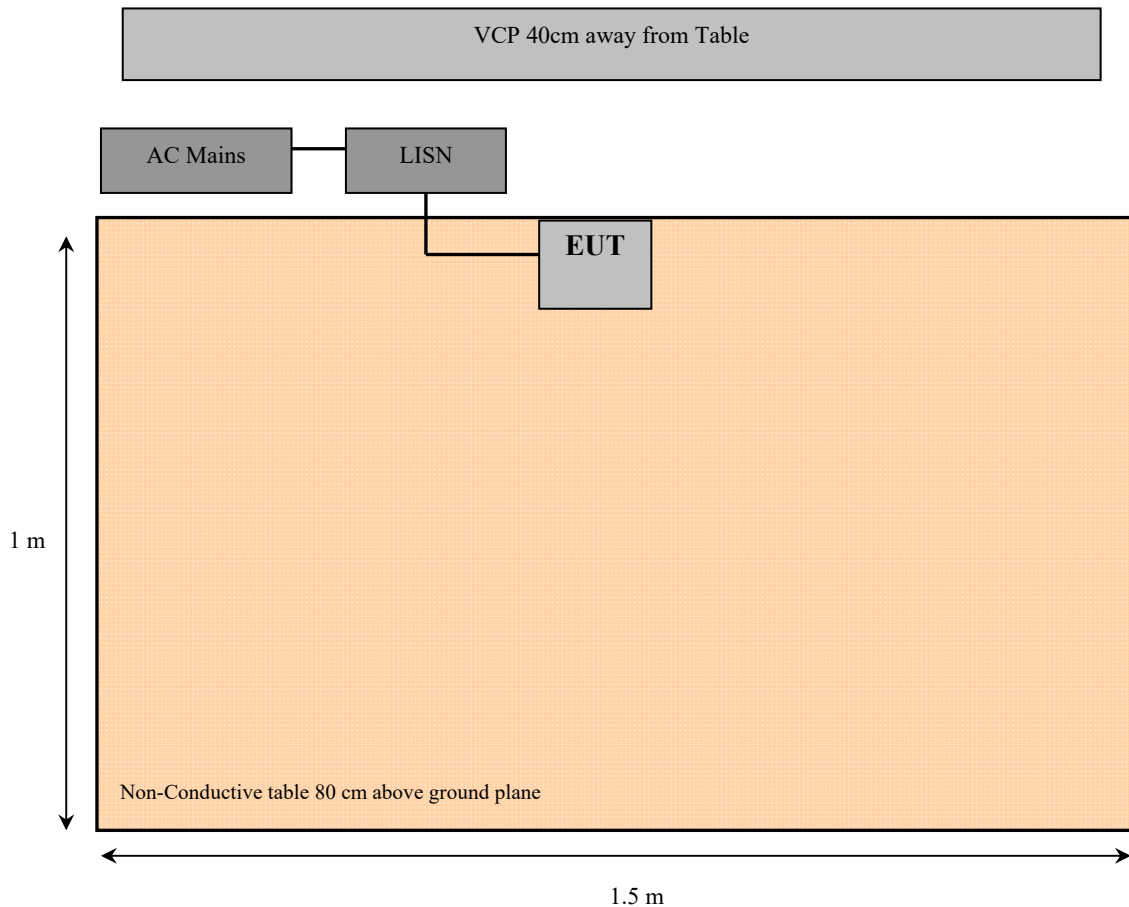

5.6 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100044	2018-10-26	2.5 years
Rohde & Schwarz	Impulse Limiter	ESH3-Z2	101962	2020-11-12	1 year
Solar Electronics Company	High Pass Filter	Type 7930-100	7930150204	2020-11-12	1 Year
Suirong	30 ft conductive emission cable	LMR 400	-	N/R	N/A
FCC	LISN	FCC-LISN-50-25-2-10-CISPR16	160130	2020-10-13	1 year
-	RF Cable	-	-	Each time ¹	N/A
-	Dipole Antenna	-	-	N/R	N/R
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Note¹: cable included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

5.7 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	101.31 kPa

The testing was performed by Allen Huang on 2020-12-16 at 5m chamber 3.

5.8 Summary of Test Results


According to the recorded data in following table, the EUT complied with the FCC 15C and IC RSS-Gen standard's conducted emissions limits, with the margin reading of:

Connection: AC/DC adapter connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Line/Neutral)	Range (MHz)
-23.3	0.244706	Neutral	0.15-30

5.9 Conducted Emissions Test Plots and Data

2.4 GHz Wi-Fi (802.11b, 2437 MHz) & LE910-NAV2 (LTE QPSK, 1880 MHz) Colocation


120 V, 60 Hz – Line

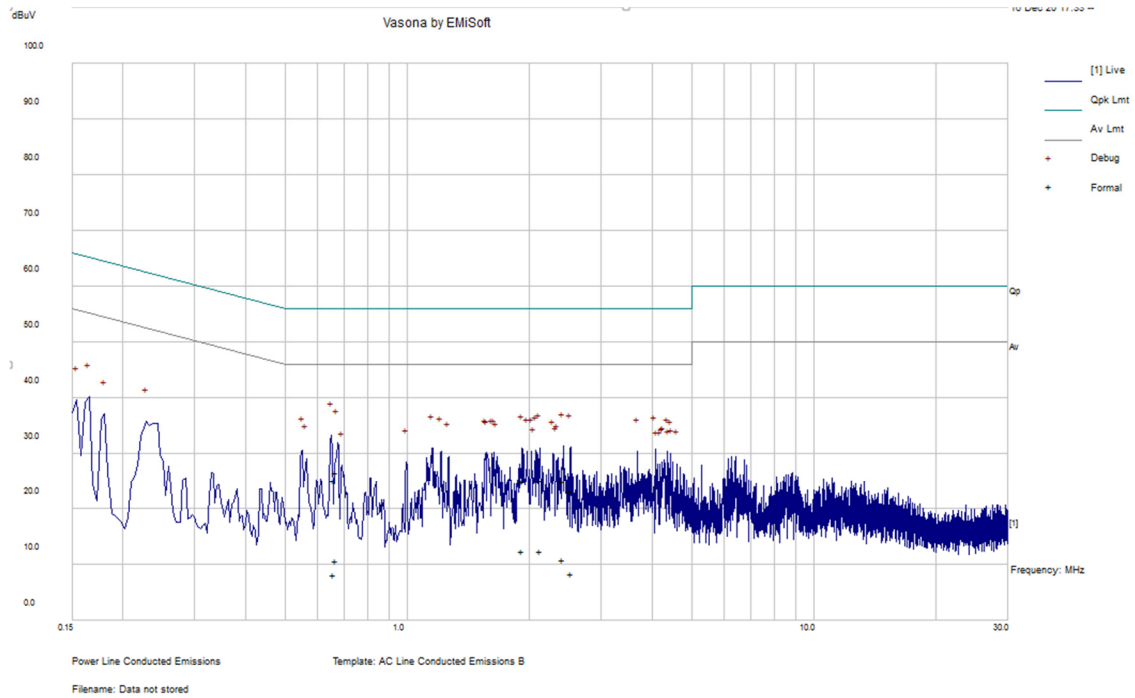

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.657545	25.06	Line	56	-30.94	QP
0.669206	26.74	Line	56	-29.26	QP
2.409338	24.93	Line	56	-31.07	QP
2.526379	23.22	Line	56	-32.78	QP
2.124379	25.1	Line	56	-30.9	QP
1.917412	25.03	Line	56	-30.97	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.657545	8.17	Line	46	-37.83	Ave.
0.669206	10.77	Line	46	-35.23	Ave.
2.409338	10.84	Line	46	-35.16	Ave.
2.526379	8.36	Line	46	-37.64	Ave.
2.124379	12.38	Line	46	-33.62	Ave.
1.917412	12.46	Line	46	-33.54	Ave.

120 V, 60 Hz – Neutral

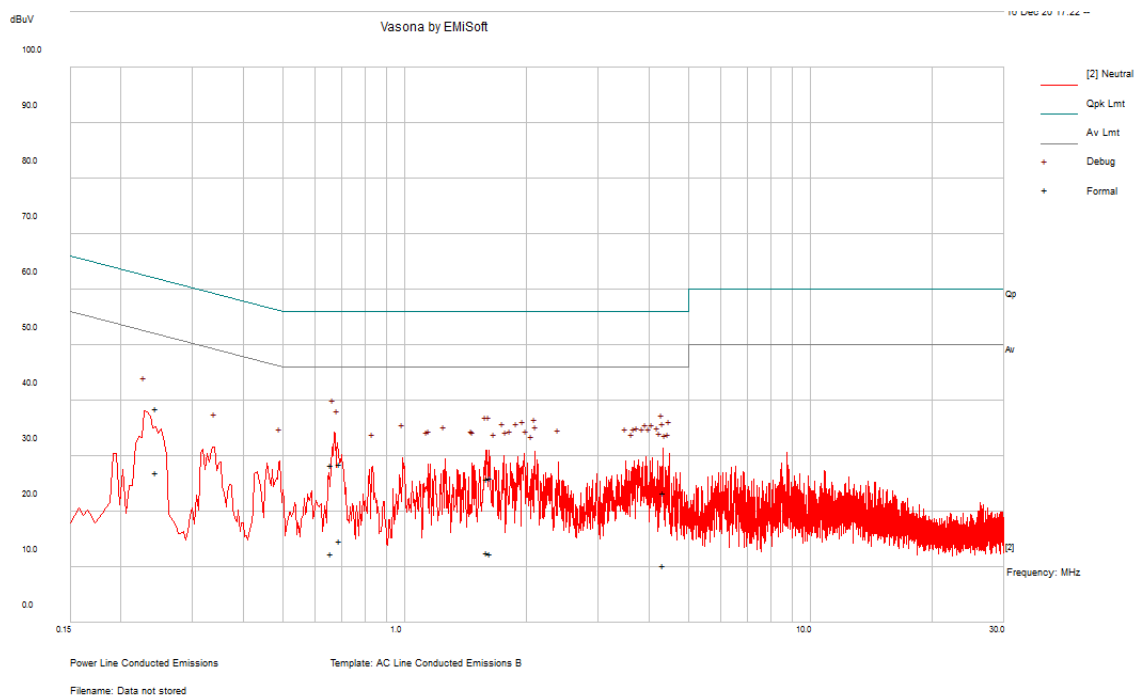

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.660111	28.44	Neutral	56	-27.56	QP
0.691255	28.59	Neutral	56	-27.41	QP
0.244706	38.64	Neutral	61.93	-23.3	QP
4.329107	23.45	Neutral	56	-32.55	QP
1.629632	26.09	Neutral	56	-29.91	QP
1.595723	25.92	Neutral	56	-30.08	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.660111	12.5	Neutral	46	-33.5	Ave.
0.691255	14.7	Neutral	46	-31.3	Ave.
0.244706	27.07	Neutral	51.93	-24.87	Ave.
4.329107	10.29	Neutral	46	-35.71	Ave.
1.629632	12.53	Neutral	46	-33.47	Ave.
1.595723	12.59	Neutral	46	-33.41	Ave.

6 FCC §15.209, §15.247(d) & ISEDC RSS-247 §5.5, RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions

6.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) and RSS-Gen except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC Part 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISED RSS-247 §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

6.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart C and IC RSS-247 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

6.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meter, and the EUT was placed on a turntable, which was 0.8 meter and 1.5 meter above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna's polarity should be changed between horizontal and vertical.

The spectrum analyzer or receiver was set as:

Below 1000 MHz:

RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

6.4 Corrected Amplitude & Margin Calculation

For emissions below 1 GHz,

The Corrected Amplitude (CA) is calculated by adding the Correction Factor to the S.A. Reading. The basic equation is as follows:

$$CA = \text{S.A. Reading} + \text{Correction Factor}$$

For example, a corrected amplitude of 40.3 dBuV/m = S.A. Reading (32.5 dBuV) + Correction Factor (7.8 dB/m)

The Correction Factor is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) together. This calculation is done in the measurement software, and reported in the test result section. The basic equation is as follows:

$$\text{Correction Factor} = AF + CL + \text{Atten} - Ga$$

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

For emission above 1 GHz,

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + \text{Atten} - Ga$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

6.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100044	2018-10-26	2.5 years
Agilent	Spectrum Analyzer	E4446A	US44300386	2019-08-24	2 years
Sunol Science Corp	System Controller	SC99V	011003-1	N/R	N/R
Sunol Sciences	Biconi-Log Antenna	JB3	A020106-2	2019-11-20	2 years
ETS Lindgren	Horn Antenna	3115	00218973	2019-02-13	2.5 years
Wisewave	Horn Antenna, 18 – 26.5 GHz	ARH-4223-02	10555-02	2020-02-05	2 years
HP	Pre Amplifier	8447D	2944A07030	2020-08-17	1 year
BACL	5m3 Sensitivity Box	1	2	2020-10-27	1 year
AH Systems	Pre Amplifier	PAM 1840 VH	170	2020-11-09	1 year
-	RF Cable	-	-	Each time ¹	N/A
-	Dipole Antenna	-	-	N/R	N/R
MDP Digital	Times Microwave LMR 400 UltraFex Coaxial Cable 35'	LMR400UF	BACL1904161	2020-05-20	1 year
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Note¹: cable included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.*

6.6 Test Environmental Conditions

Temperature:	22 °C
Relative Humidity:	42 %
ATM Pressure:	102.7 kPa

The testing was performed by Allen Huang on 2020-12-09 and 2020-12-16 in 5m chamber 3.

6.7 Summary of Test Results

According to the data hereinafter, the EUT complied with FCC Title 47, Part 15.247 and ISEDC RSS-247 standard's radiated emissions limits, and had the worst margin of:


Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Mode, channel
-3.21	560.0668	Horizontal	Co-location

Please refer to the following table and plots for specific test result details.

6.8 Radiated Emissions Test Results


2.4 GHz Wi-Fi (802.11b, 2437 MHz) & LE910-NAV2 (LTE QPSK, 1880 MHz) Colocation

30 MHz – 1 GHz, Measured at 3 meters

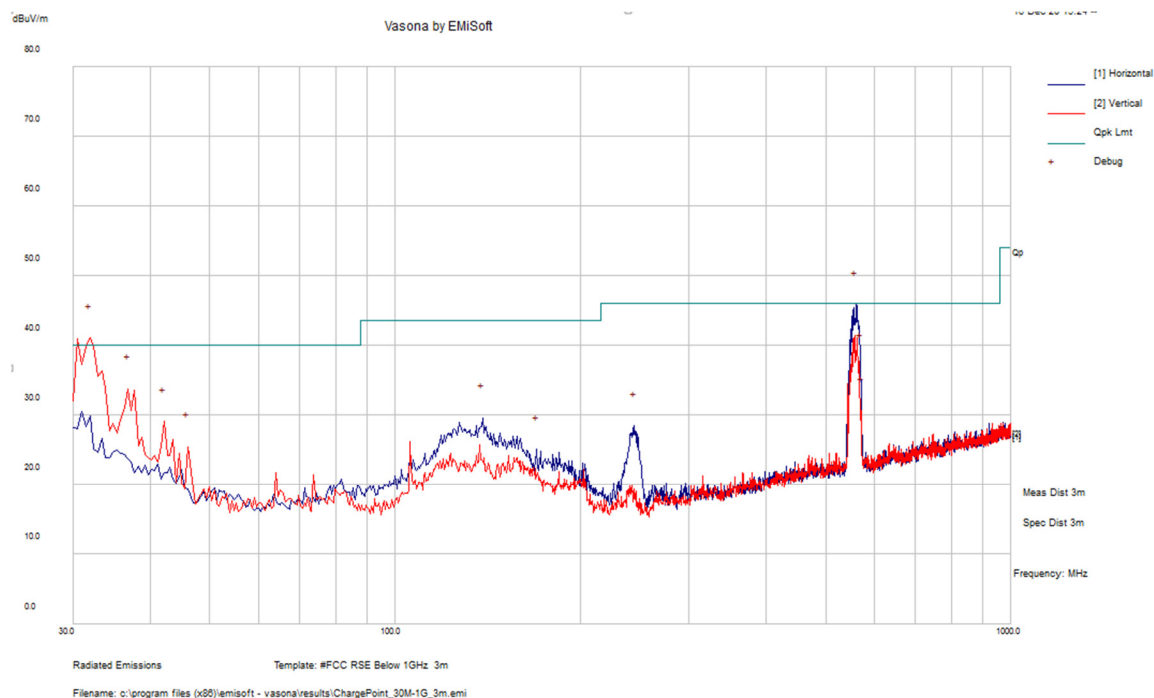

Frequency (MHz)	S.A. Reading (dBμV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Comment
32.04575	28.78	-3.76	25.01	134	V	185	40	-14.99	QP
560.0668	47.83	-5.04	42.79	190	H	109	46	-3.21	QP
36.6205	32.72	-7.26	25.46	103	V	37	40	-14.54	QP
570.3255	40.63	-4.74	35.89	189	H	133	46	-10.11	QP
42.31	27.23	-11.58	15.64	165	H	108	40	-24.36	QP
139.0813	32.06	-10.43	21.63	239	H	236	43.5	-21.87	QP


1–18 GHz Measured at 1 meter

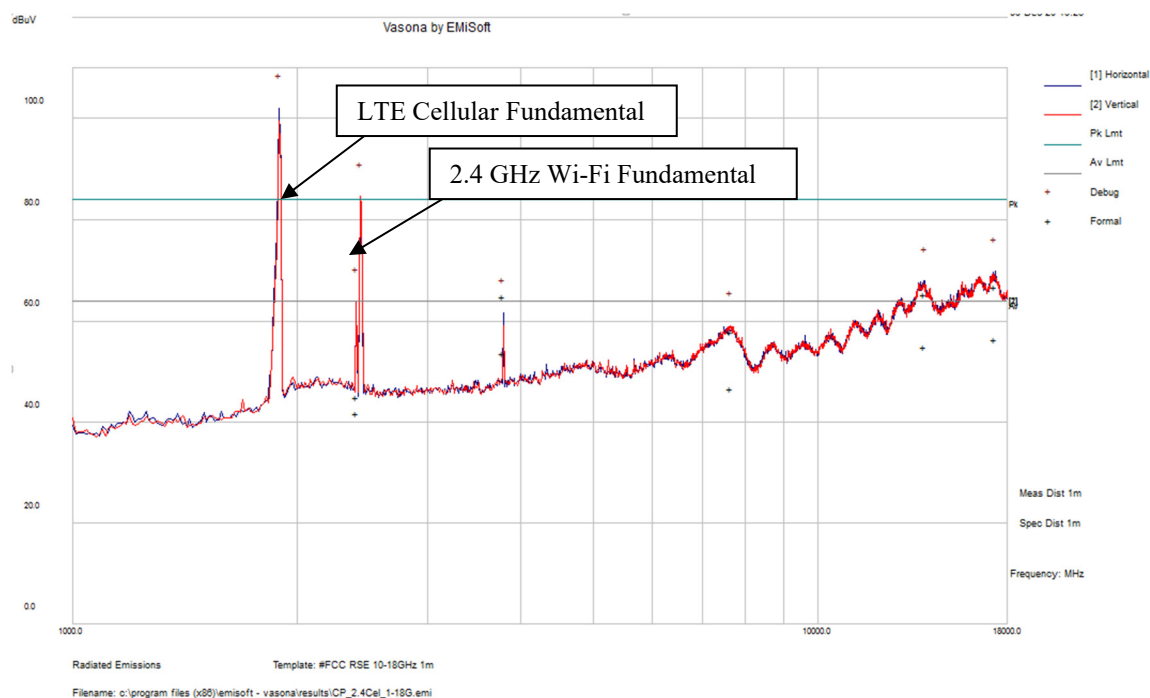

Frequency (MHz)	S.A. Reading (dBμV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Polarity (H/V)	Height (cm)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector (Peak /Ave.)
17305.96	42.67	24.1	66.76	H	232	116	84	-17.24	Peak
13928.22	42.31	23.04	65.35	H	261	87	84	-18.65	Peak
2400.258	42.75	2.34	45.08	H	211	223	84	-38.92	Peak
3784.513	59.97	4.84	64.81	H	142	325	84	-19.19	Peak
7641.72	41.13	16.79	57.93	V	265	200	84	-26.07	Peak

Frequency (MHz)	S.A. Reading (dBμV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Polarity (H/V)	Height (cm)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector (Peak /Ave.)
17305.96	32.4	24.1	56.5	H	232	116	64	-7.5	Ave.
13928.22	31.88	23.04	54.91	H	261	87	64	-9.09	Ave.
2400.258	39.42	2.34	41.75	H	211	223	64	-22.25	Ave.
3784.513	48.82	4.84	53.66	H	142	325	64	-10.34	Ave.
7641.72	29.8	16.79	46.59	V	265	200	64	-17.41	Ave.

18-26.5 GHz Measured at 1 meter

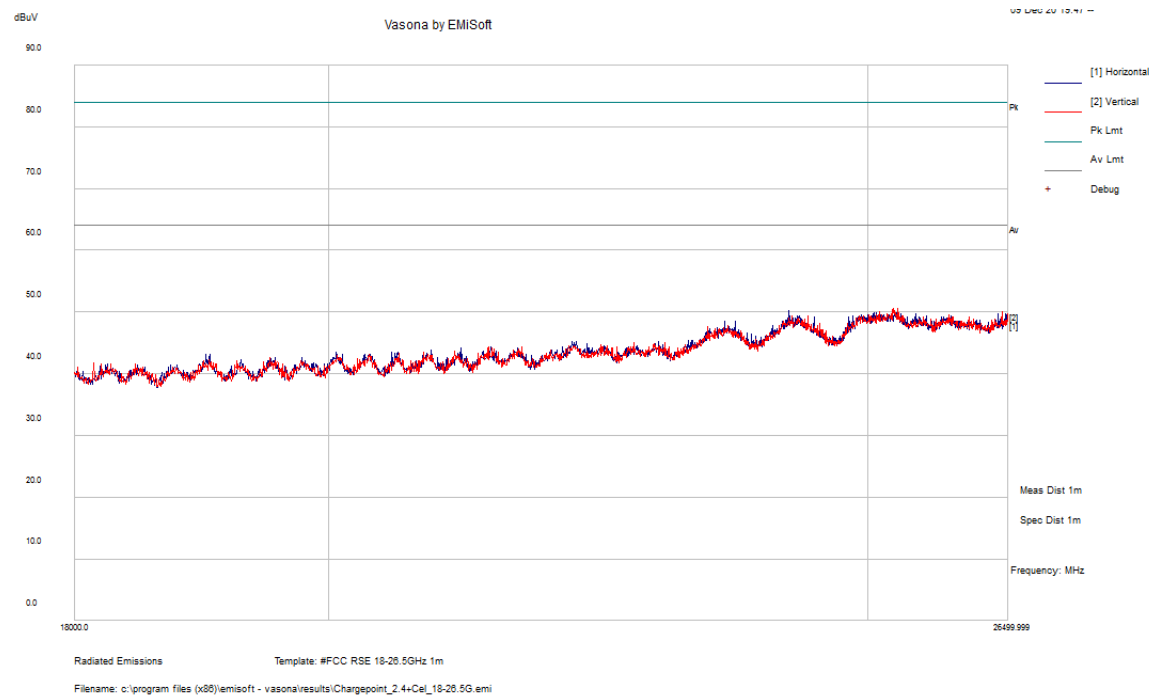

7 Annex A (Normative) – EUT Test Setup Photos

Please refer to the attachment.

8 Annex B (Normative) - A2LA Electrical Testing Certificate



Accredited Laboratory

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This laboratory also meets A2LA R222 - Specific Requirements EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 2nd day of October 2018.

A blue ink signature of the Vice President, Accreditation Services.

Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3297.02
Valid to March 31, 2021
Revised February 19, 2021

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

Please follow the web link below for a full ISO 17025 scope

<https://www.a2la.org/scopepdf/3297-02.pdf>

--- END OF REPORT ---