

# RF TEST REPORT



**Report No.:** FCC-IC\_RF\_SL15081101-CPC-009-BLE\_Rev1.2  
**Supersede Report No.:** FCC-IC\_RF\_SL15081101-CPC-009-BLE\_Rev1.1

Applicant	:	ChargePoint, Inc
Product Name	:	Network Communication / RFID Reader
Model No.	:	28010077/ 28010087
Host Model No.	:	CPF12 & CPF25
Test Standard	:	47 CFR 15.247 RSS-247 Issue 1.0, May 2015
Test Method	:	ANSI C63.10: 2013 RSS-Gen Issue 4, Nov 2014 558074 D01 DTS Meas Guidance v03r02
FCC ID	:	W38-28010077/ W38-28010087
IC ID	:	8854A-28010077/ 8854A-28010087
Dates of test	:	September 16 <sup>th</sup> , 22 <sup>nd</sup> - 23 <sup>rd</sup> of 2015
Issue Date	:	11/4/2015
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification <input checked="" type="checkbox"/> [X]		
Equipment did not comply with the specification <input type="checkbox"/> [ ]		

This Test Report is Issued Under the Authority of:	
<b>Osvaldo Casorla</b>	<b>Chen Ge</b>
Test Engineer	Engineer Reviewer

**Issued By:**  
**SIEMIC Laboratories**  
**775 Montague Expressway, Milpitas, 95035 CA**



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: [www.siemic.com](http://www.siemic.com); Follow us at:

## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRR, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

### Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

**CONTENTS**

**1 REPORT REVISION HISTORY .....4**

**2 EXECUTIVE SUMMARY .....5**

**3 CUSTOMER INFORMATION .....5**

**4 TEST SITE INFORMATION .....5**

**5 MODIFICATION .....5**

**6 EUT INFORMATION .....6**

6.1 EUT Description .....6

6.2 Radio Description.....6

6.3 EUT test modes/configuration Description.....7

6.4 EUT Photos .....8

6.5 Host External Photos.....9

6.6 Host Internal Photos .....10

6.7 EUT Test Setup Photos .....12

**7 SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....13**

7.1 Supporting Equipment .....13

7.2 Cabling Description .....13

7.3 Test Software Description .....13

**8 TEST SUMMARY .....14**

**9 MEASUREMENT UNCERTAINTY .....15**

**10 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....16**

10.1 Radiated Measurements.....16

10.2 Output Power (Bluetooth LE).....24

**ANNEX A. TEST INSTRUMENT .....26**

**ANNEX B. SIEMIC ACCREDITATION .....27**

## 1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC-IC_RF_SL15081101-CPC-009-BLE	None	Original	09/31/2015
FCC-IC_RF_SL15081101-CPC-009-BLE_Rev1.0	Rev 1.0	Updated EUT information.	10/01/2015
FCC-IC_RF_SL15081101-CPC-009-BLE_Rev1.1	Rev 1.1	Included enclosure photos	10/27/2015
FCC-IC_RF_SL15081101-CPC-009-BLE_Rev1.2	Rev 1.2	Updated page 24.	11/4/2015

## 2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: ChargePoint, Inc.  
Product: Network Communication / RFID Reader  
Model: 28010077/ 28010087  
Host Model No. CPF12 & CPF25

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1<sup>st</sup> page.

## 3 Customer information

Applicant Name	ChargePoint, Inc.
Applicant Address	254 E. Hacienda Ave Campbell, CA 95148
Manufacturer Name	ChargePoint, Inc.
Manufacturer Address	254 E. Hacienda Ave Campbell, CA 95148

## 4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

## 5 Modification

Index	Item	Description	Note
-	-	-	-

## 6 EUT Information

### 6.1 EUT Description

Product Name	Network Communication / RFID Reader
Model No.	28010077/ 28010087
Serial No.	Prototype 1
Trade Name	ChargePoint, Inc.
Host Model No.	CPF12 & CPF25
Input Power	100-240VDC, 50/60Hz
Product Hardware version	28-010087
Product Software version	4.0.1.100
Radio Hardware version	28-010087
Radio Software version	4.0.1.100
Date of EUT received	08/21/2015
Equipment Class/ Category	DTS
Operating Frequencies	13.56MHz, 2402MHz-2480MHz
Port/Connectors	N/A

### 6.2 Radio Description

#### Specifications for Radio:

Radio Type	Bluetooth (Ver4.0+EDR)
Operating Frequency	2402MHz-2480MHz
Modulation	FHSS (BDR, EDR), DSSS (LE)
Channel Spacing	1MHz (BDR, EDR), 2MHz (LE)
Antenna Type	Prestta Embedded Antenna
Antenna Gain	2.5dBi (2.4GHz)
Antenna Connector Type	On Board

Radio Type	RFID
Operating Frequency	13.56MHz
Modulation	ASK
Channel Spacing	None
Antenna Type	PCB loop antenna
Antenna Gain	0.5dBi
Antenna Connector Type	N/A

#### Channel List:


Type	Channel No.	Frequency (MHz)	Available (Y/N)
Bluetooth LE	0	2402	Y
	...	...	Y
	19	2440	Y
	...	...	Y
	39	2480	Y

Type	Mode	Channel No.	Frequency (MHz)	Available (Y/N)
RFID	13.56MHz	1	13.56	Y


### **6.3 EUT test modes/configuration Description**

Mode	Note
Bluetooth LE	LE (GFSK)
RF test	EUT is set to continuously transmit at 13.56MHz when powered on.

**6.4 EUT Photos**

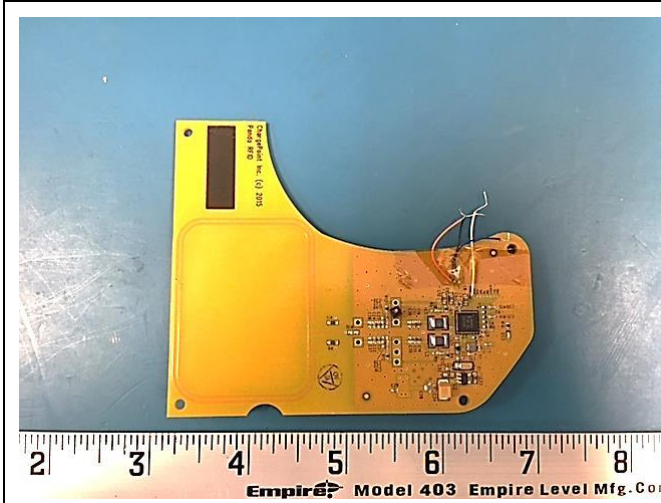

PCBA1 RFID - View 1

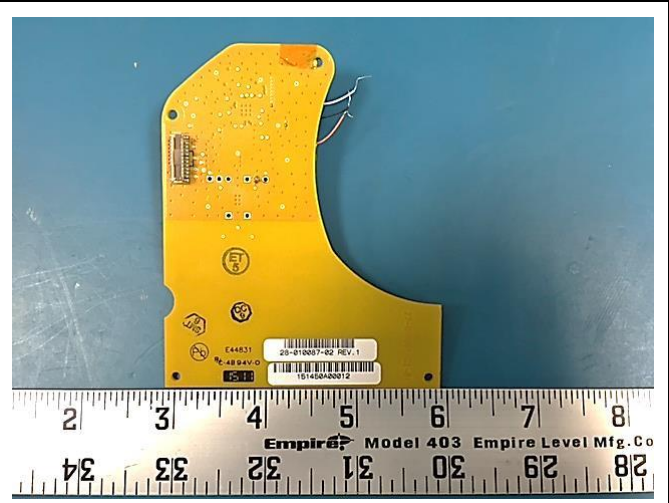

PCBA1 RFID - View 2




### 6.5 Host External Photos



**EUT – Front View**




**EUT – Rear View**

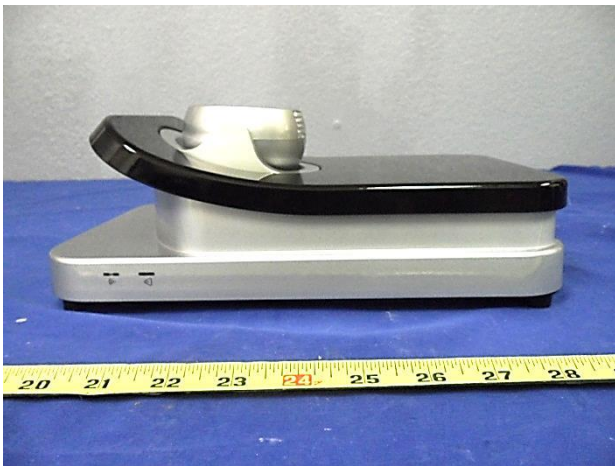


**EUT – Left View**



**EUT – Right View**

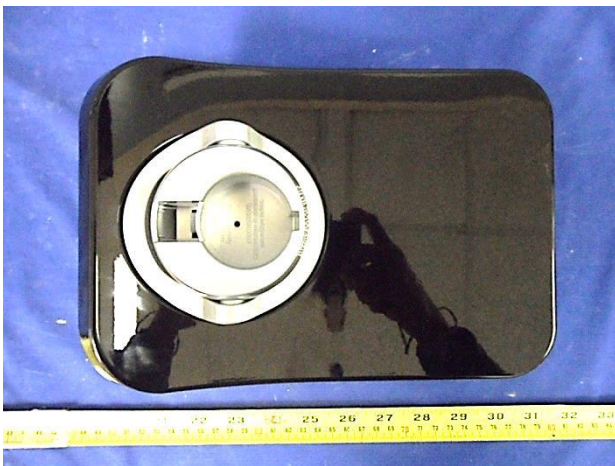

**EUT – Top View**

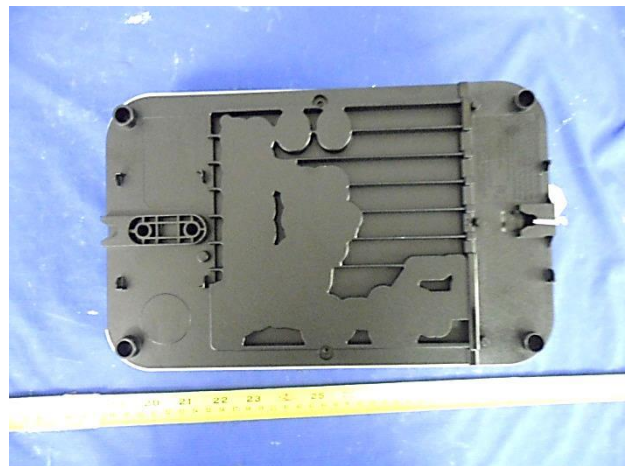


**EUT – Bottom View**


### 6.6 Host Internal Photos




PCB Main Board- Top View

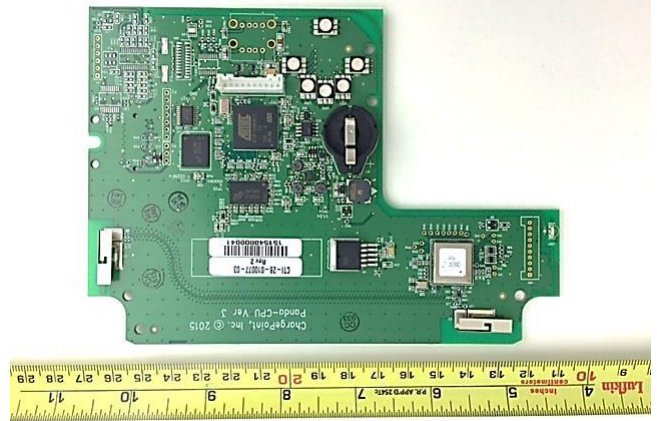


PCB Main Board- Bottom View

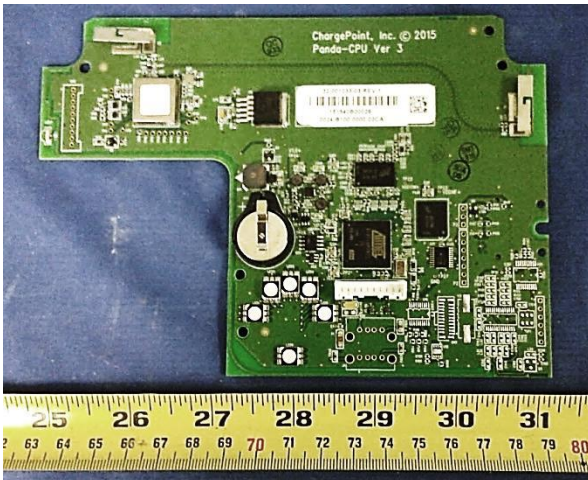


PCBA1 -Top View

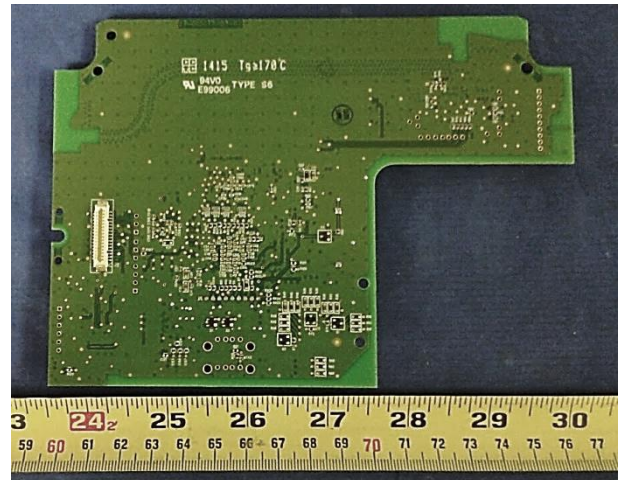


PCBA1 -Bottom View

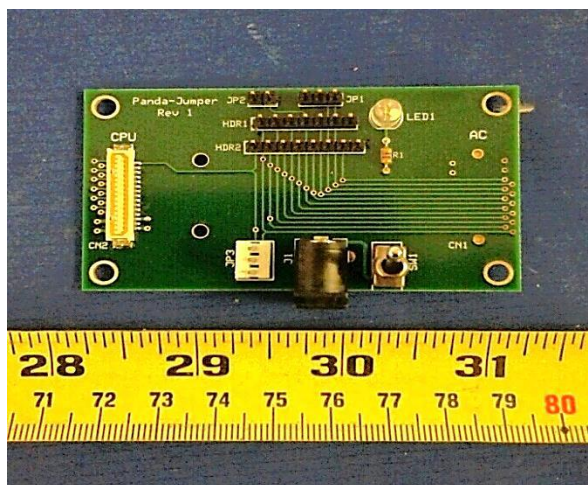

PCBA2 -Top View

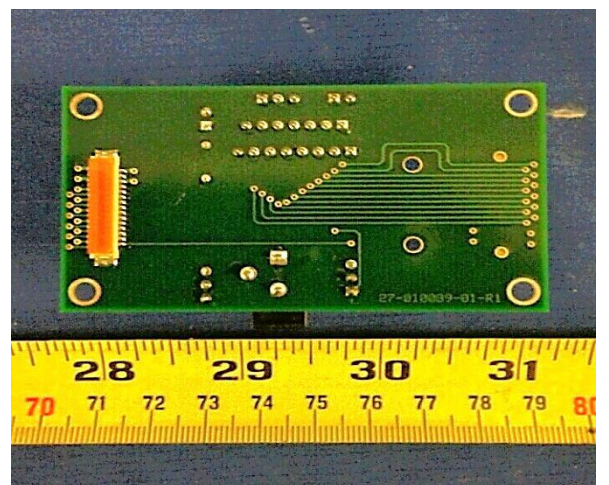

PCBA2 -Bottom View

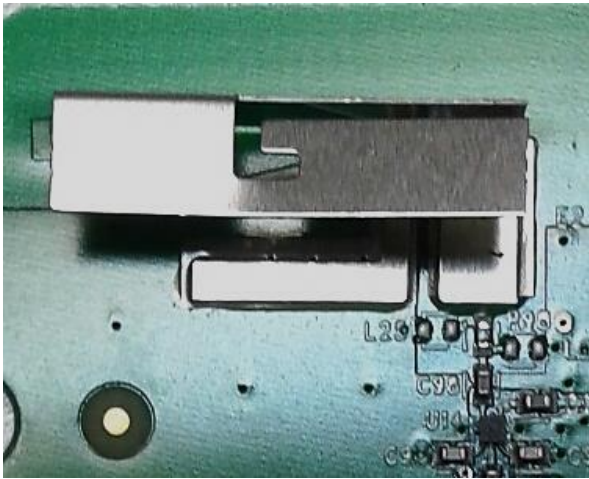


**Antenna 1**



**Antenna 2**



**EUT Radio with shielding**

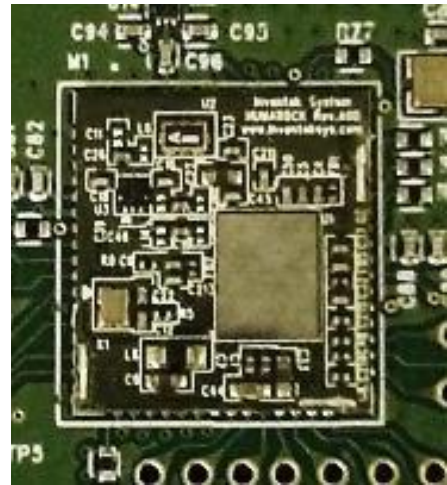


**EUT Radio without shielding**

## 6.7 EUT Test Setup Photos




Radiated Emissions (<30MHz) – Front View

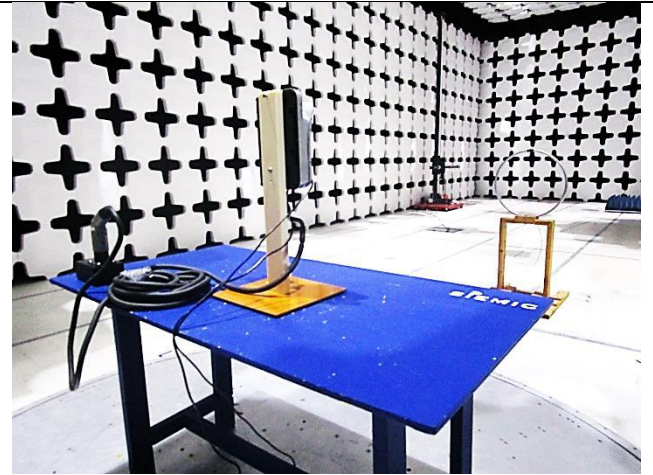

Radiated Emissions (<30MHz) – Rear View



Radiated Emissions (<1GHz) – Front View

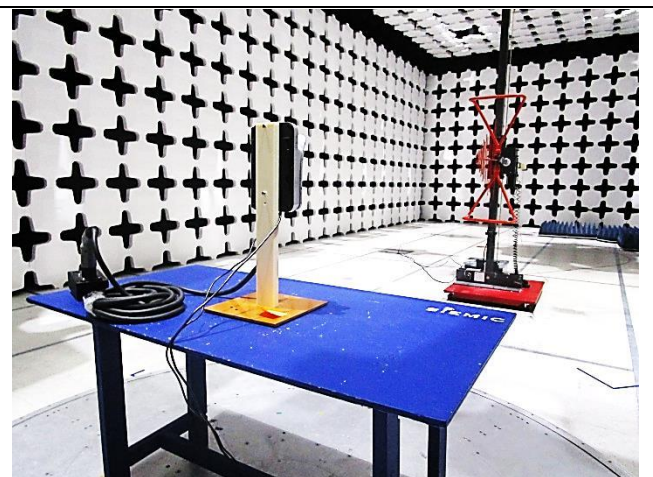

Radiated Emissions (<1GHz) – Rear View



Radiated Emissions (>1GHz) – Front View



Radiated Emissions (>1GHz) – Rear View

## 7 Supporting Equipment/Software and cabling Description

### 7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	P05F Latitude E5510	N/A	Dell	-

### 7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
USB	EUT	I/O Port	Laptop	USB	1	Unshielded	-

### 7.3 Test Software Description

Test Item	Software	Description
RF Testing	Tera Term	Set the EUT to transmit continuously in diferent test mode

## 8 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Restricted Band of Operation	FCC	15.205	FCC	ANSI C63.10: 2013 558074 D01 DTS Meas Guidance v03r02	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS Gen 8.10		RSS Gen Issue 4: 2014	
AC Conducted Emissions Voltage	FCC	15.207(a)	FCC	ANSI C63.10: 2013	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS Gen 8.8		RSS Gen Issue 4: 2014	

### DTS band Requirement

Test Item	Test standard		Test Method/Procedure		Pass / Fail
99% Occupied Bandwidth	FCC	15.247(a)(1)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS Gen (6.6)	IC	RSS Gen Issue 4: 2014	
6db Bandwidth	FCC	15.247(a)(2)	FCC	558074 D01 DTS Meas Guidance v03r02	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.2.1)	IC		
Band Edge and Radiated Spurious Emissions	FCC	15.247(d)	FCC	ANSI C63.10: 2013 558074 D01 DTS Meas Guidance v03r02	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS247 (5.5)	IC		
Output Power	FCC	15.247(b)	FCC	558074 D01 DTS Meas Guidance v03r02	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS247 (5.4.4)	IC		
Receiver Spurious Emissions	IC	RSS Gen (4.8)	IC	RSS Gen Issue 4: 2014	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Antenna Gain > 6 dBi	FCC	15.247(e)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	-	IC	-	
Power Spectral Density	FCC	15.247(e)	FCC	558074 D01 DTS Meas Guidance v03r02	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.2.2)	IC		
RF Exposure requirement	FCC	15.247(i)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS Gen(5.5)	IC	RSS Gen Issue 4: 2014	
Remark	<ol style="list-style-type: none"> <li>All measurement uncertainties do not take into consideration for all presented test results.</li> <li>The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.</li> <li>Reference report FCC_RF_SL15060501-CPC-006-DTS for more information.</li> </ol>				

## 9 Measurement Uncertainty

Emissions			
Test Item	Frequency Range	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	30MHz – 1GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
Band Edge and Radiated Spurious Emissions	1GHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+4.3dB/-4.1dB

## 10 Measurements, Examination and Derived Results

### 10.1 Radiated Measurements

#### 10.1.1 Radiated Measurements below 30MHz

**Requirement(s):**

Specification(s)	Requirement	Applicable									
47 CFR §15.225 RSS-210 (A2.6)	<p>Operation within the band 13.110–14.010 MHz</p> <p>(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.</p> <p>(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.</p> <p>(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.</p> <p>(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.</p>	☒									
Test Setup	<ol style="list-style-type: none"> <li>The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.</li> <li>The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.</li> <li>The relevant loop antenna was set at the required test distance away from the EUT and supporting equipment boundary.</li> </ol>										
Procedure	<p>For &lt; 30MHz, Radiated emissions were measured according to ANSI C63.10. The EUT was set to transmit at the highest output power.</p> <p>The EUT was set 3 meter away from the measuring antenna. The loop antenna was positioned 1 meter above the ground from the centre of the loop. The measuring bandwidth was set to 10 kHz.</p> <p>The limit is converted from microvolt/meter to decibel microvolt/meter.</p>										
Test Date	08/28/2015	<table border="1"> <tr> <td>Environmental conditions</td> <td>Temperature</td> <td>22°C</td> </tr> <tr> <td></td> <td>Relative Humidity</td> <td>40%</td> </tr> <tr> <td></td> <td>Atmospheric Pressure</td> <td>1026mbar</td> </tr> </table>	Environmental conditions	Temperature	22°C		Relative Humidity	40%		Atmospheric Pressure	1026mbar
Environmental conditions	Temperature	22°C									
	Relative Humidity	40%									
	Atmospheric Pressure	1026mbar									
Remark	EDR/BDR worst case scenario.										
Result	☒ Pass      ☐ Fail										


**Test Data**    ☒ Yes (See below)      ☐ N/A

**Test Plot**    ☒ Yes (See below)      ☐ N/A



**Test Plots for LMA Module/s and CPF12 & CPF25 below 30MHz**


**f= 100kHz – 30MHz plot, and loop antenna at 0 degree at 3m distance**

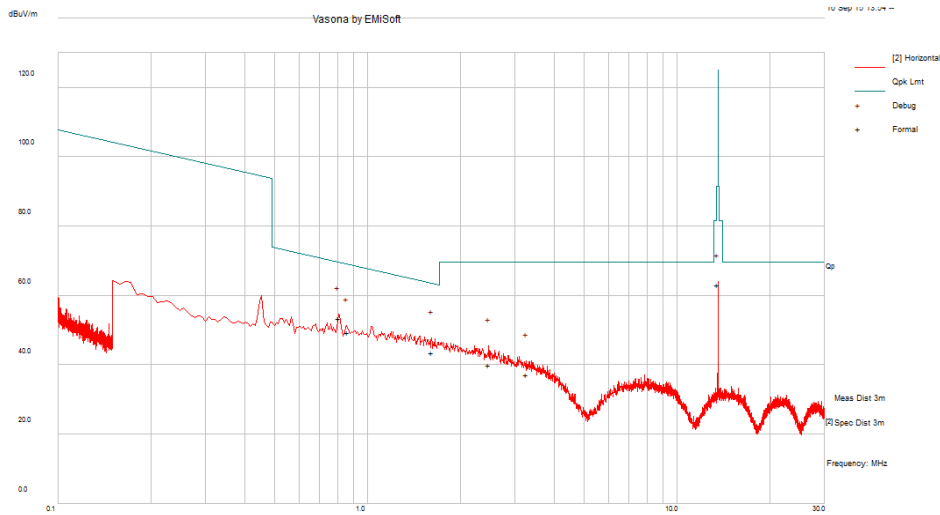

**f= 100kHz – 30MHz Measurements**

Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Degree	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
0.81	39.23	-0.20	14.28	53.31	Quasi Max	0.00	100.00	341.00	69.43	-16.12	Pass
1.61	34.81	-0.25	8.99	43.55	Quasi Max	0.00	100.00	227.00	63.47	-19.92	Pass
0.86	35.72	-0.21	13.81	49.32	Quasi Max	0.00	100.00	45.00	68.89	-19.57	Pass
2.46	34.43	-0.30	5.90	40.03	Quasi Max	0.00	100.00	352.00	69.54	-29.52	Pass
3.27	33.39	-0.31	4.01	37.09	Quasi Max	0.00	100.00	127.00	69.54	-32.45	Pass
13.56	63.83	-0.62	-0.16	63.06	Quasi Max	0.00	100.00	6.00	123.99	-60.93	Pass

**f= 100kHz – 30MHz plot, and loop antenna at 90 degree at 3m distance**

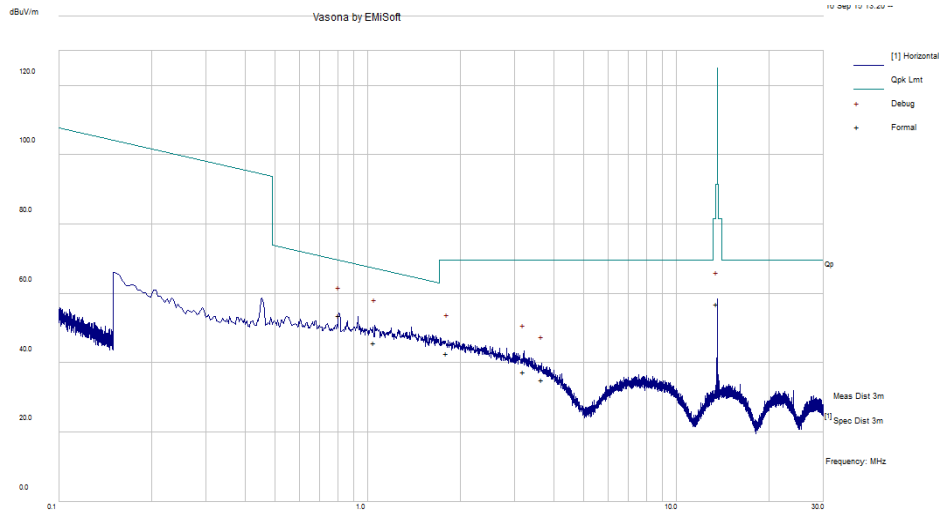


**f= 100kHz – 30MHz Measurements**

Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Degree	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
0.81	39.54	-0.20	14.28	53.62	Quasi Max	90.00	100.00	275.00	69.43	-15.81	Pass
1.05	33.93	-0.22	12.21	45.93	Quasi Max	90.00	100.00	105.00	67.18	-21.25	Pass
1.81	34.81	-0.27	8.13	42.68	Quasi Max	90.00	100.00	250.00	69.54	-26.86	Pass
3.20	33.58	-0.31	4.14	37.41	Quasi Max	90.00	100.00	267.00	69.54	-32.13	Pass
3.66	32.16	-0.31	3.36	35.21	Quasi Max	90.00	100.00	36.00	69.54	-34.33	Pass
13.56	57.65	-0.62	-0.15	56.87	Quasi Max	90.00	100.00	279.00	123.99	-67.12	Pass

### 10.1.2 Transmitter Radiated Spurious Emissions Below 1GHz

**Requirement(s):**

Specification(s)	Item	Requirement	Applicable										
47CFR§15.247(d), RSS210(A8.5)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	☒
Frequency range (MHz)	Field Strength (uV/m)												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												

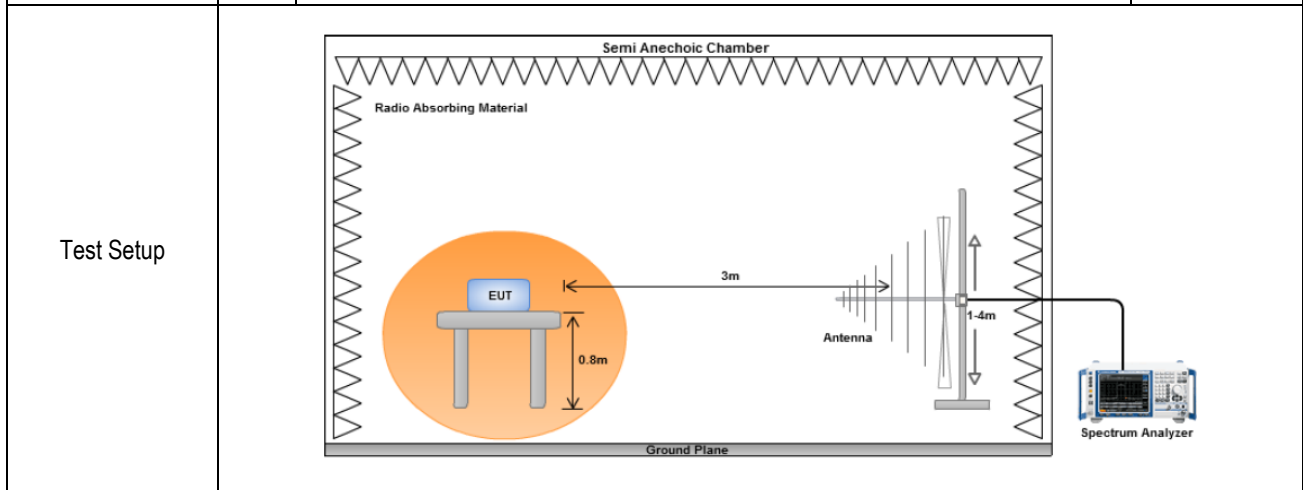

Procedure	Requirement
	<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> <li>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>A Quasi-peak measurement was then made for that frequency point.</li> <li>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>

**Remark** The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.

Result	☒ Pass	☐ Fail
	☒ Pass	☐ Fail


**Test Data** ☒ Yes (See below) ☐ N/A

**Test Plot** ☒ Yes (See below) ☐ N/A

## Radiated Emission Test Results (Below 1GHz)

Test specification:	Radiated Spurious Emissions			Result:	<input checked="" type="checkbox"/> Pass  <input type="checkbox"/> Fail
Environmental Conditions:	Temp(°C):	25.5 °C			
	Humidity (%):	44.4 %			
	Atmospheric(mbar):	1016 mbar			
Mains Power:	208V <sub>AC</sub> , 60Hz				
Tested by:	Osvaldo Casorla				
Test Date:	09/16/2015				
Remarks:	BLE 2402MHz, Low Channel				

**f=30MHz – 1000MHz plot at V= 208V<sub>AC</sub>, 60Hz and 3 meter distance**

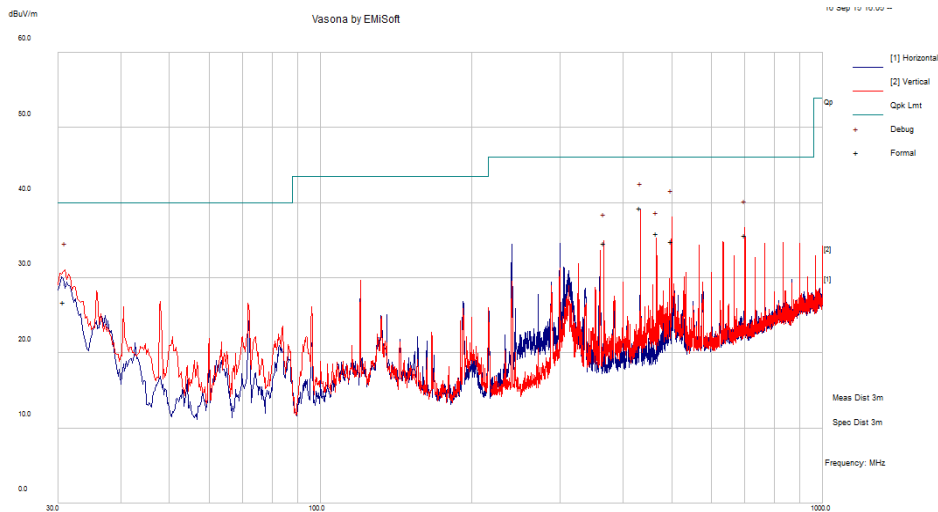

**f=30MHz – 1000MHz Measurements**

Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
30.78	41.08	0.81	-15.11	26.77	Quasi Max	V	136.00	292.00	40.00	-13.23	Pass
366.65	54.74	3.41	-23.51	34.64	Quasi Max	V	100.00	278.00	46.02	-11.38	Pass
433.32	57.74	3.67	-22.09	39.32	Quasi Max	V	175.00	214.00	46.02	-6.70	Pass
466.64	53.90	3.75	-21.69	35.96	Quasi Max	V	154.00	205.00	46.02	-10.06	Pass
500.00	51.91	4.01	-21.08	34.84	Quasi Max	V	132.00	343.00	46.02	-11.18	Pass
699.98	49.45	4.68	-18.42	35.70	Quasi Max	V	100.00	356.00	46.02	-10.32	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

### 10.1.3 Transmitter Radiated Spurious Emissions > 1GHz & Restricted band

**Requirement(s):**

Specification(s)	Item	Requirement	Applicable
47CFR§15.247(d), RSS210(A8.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required  <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
	b)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> <li>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>An average measurement was then made for that frequency point.</li> <li>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>		
Remark	The EUT was scanned up to 25GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

**Test Data**     Yes (See below)     N/A

**Test Plot**     Yes (See below)     N/A

Test specification:	Radiated Spurious Emissions (above 1GHz)			
Environmental Conditions:	Temp(°C):	20	Result:	<input checked="" type="checkbox"/> Pass  <input type="checkbox"/> Fail
	Humidity (%):	36		
	Atmospheric(mbar):	1021		
Mains Power:	208V <sub>AC</sub> , 60Hz			
Tested by:	Oswaldo Casorla			
Test Date:	09/21/2015 - 9/23/2015			
Remarks:	<b>Bluetooth LE</b>			

### Bluetooth LE – 2402MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
4152.33	35.97	5.96	11.56	53.49	Peak Max	V	179.00	45.00	74.00	-20.51	Pass
4798.63	34.94	6.24	9.73	50.92	Peak Max	H	152.00	57.00	74.00	-23.08	Pass
14711.68	39.01	13.48	7.85	60.34	Peak Max	H	232.00	146.00	74.00	-13.66	Pass
4152.33	23.11	5.96	11.56	40.63	Average Max	V	179.00	45.00	54.00	-13.37	Pass
4798.63	21.87	6.24	9.73	37.84	Average Max	H	152.00	57.00	54.00	-16.16	Pass
14711.68	26.34	13.48	7.85	47.67	Average Max	H	232.00	146.00	54.00	-6.33	Pass

### Bluetooth LE – 2440MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
4885.03	34.96	6.24	9.62	50.82	Peak Max	H	148.00	242.00	74.00	-23.18	Pass
6262.42	40.45	7.68	10.44	58.56	Peak Max	H	242.00	193.00	74.00	-15.44	Pass
17727.56	37.06	13.00	10.63	60.70	Peak Max	H	224.00	137.00	74.00	-13.30	Pass
4885.03	22.25	6.24	9.62	38.12	Average Max	H	148.00	242.00	54.00	-15.88	Pass
6262.42	27.82	7.68	10.44	45.93	Average Max	H	242.00	193.00	54.00	-8.07	Pass
17727.56	24.55	13.00	10.63	48.18	Average Max	H	224.00	137.00	54.00	-5.82	Pass


Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

### Bluetooth LE – 2480MHz


Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
4117.71	34.95	5.93	11.71	52.59	Peak Max	H	148.00	156.00	74.00	-21.41	Pass
14779.15	39.66	13.59	7.68	60.93	Peak Max	H	178.00	174.00	74.00	-13.07	Pass
17930.23	36.90	13.00	10.84	60.74	Peak Max	H	152.00	292.00	74.00	-13.26	Pass
4117.71	22.52	5.93	11.71	40.16	Average Max	H	148.00	156.00	54.00	-13.84	Pass
14779.15	26.62	13.59	7.68	47.89	Average Max	H	178.00	174.00	54.00	-6.11	Pass
17930.23	24.13	13.00	10.84	47.97	Average Max	H	152.00	292.00	54.00	-6.03	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

**Restricted Band Test plot (Bluetooth BLE)**

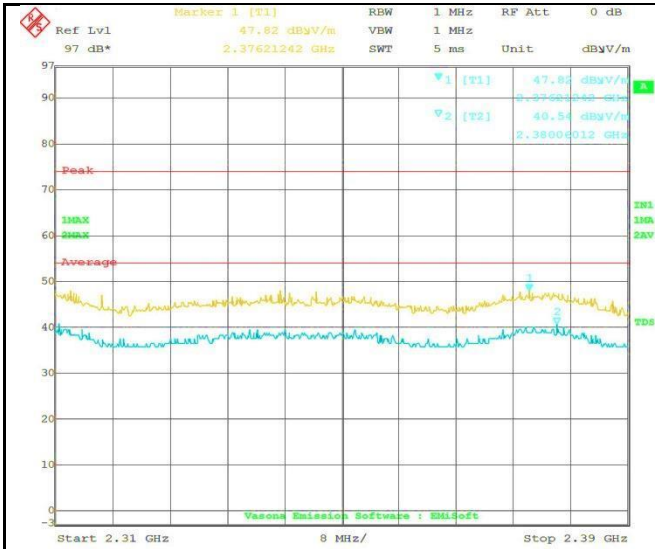


**Restricted Band Low BLE**

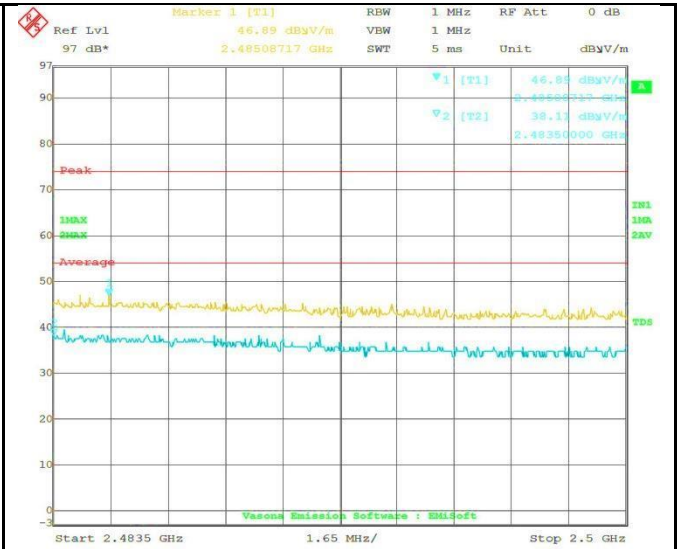

**Restricted Band High BLE**

## 10.2 Output Power (Bluetooth LE)

### Requirement(s):

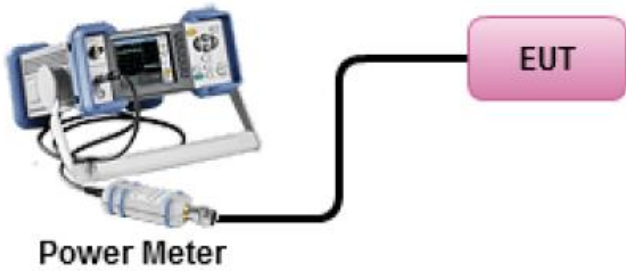Spec	Item	Requirement	Applicable
§ 15.247	a)	FHSS in 2400-2483.5MHz with $\geq 75$ channels: $\leq 1$ Watt	<input type="checkbox"/>
	b)	FHSS in 5725-5850MHz: $\leq 1$ Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: $\leq 0.125$ Watt.	<input type="checkbox"/>
	d)	FHSS in 902-928MHz with $\geq 50$ channels: $\leq 1$ Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with $\geq 25$ & $< 50$ channels: $\leq 0.25$ Watt	<input type="checkbox"/>
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: $\leq 1$ Watt	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram shows a blue power meter with a probe connected to a pink box labeled 'EUT'. The power meter is labeled 'Power Meter'.</p>		
Test Procedure	<p><u>Measurement using a Power Meter (PM)</u></p> <p>Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.</p> <ul style="list-style-type: none"> <li>- Connect EUT's RF output power to power meter</li> <li>- Set EUT to be continuous transmission mode</li> <li>- Measurement the average output power using power meter and record the result</li> <li>- Repeat above steps for different test channel and other modulation type.</li> </ul>		
Test Date	09/21/2015 - 9/23/2015	Environmental condition	Temperature 23°C Relative Humidity 26% Atmospheric Pressure 1021mbar
Remark	-		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

**Test Data**     Yes (See below)       N/A

**Test Plot**     Yes (See below)       N/A


















**Output Power measurement result (Bluetooth)**








Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)	Limit (dBm)	Result
Output power	Bluetooth LE	2402	Low	1.9	30	Pass
Output power	Bluetooth LE	2440	Mid	1.6	30	Pass
Output power	Bluetooth LE	2480	High	1.2	30	Pass

## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Cycle	Cal Due	In use
<b>Conducted Emissions</b>					
R & S Receiver	ESHS10	830223/0009	1 Year	06/24/2016	<input type="checkbox"/>
Spectrum Analyzer	FSIQ7	825555/013	1 Year	08/04/2016	<input type="checkbox"/>
Schwarzbeck LISN	NNLK 8129	8129-190	1 Year	08/21/2016	<input type="checkbox"/>
CHASE LISN	MN2050B	1018	1 Year	08/07/2016	<input type="checkbox"/>
<b>Radiated Emissions</b>					
EMI Test Receiver	ESL6	100178	1 Year	05/27/2016	<input checked="" type="checkbox"/>
ETS-Lingren Loop Antenna	6512	00049120	1 Year	08/20/2016	<input checked="" type="checkbox"/>
Antenna - Biconlog (30 MHz – 2 GHz)	JB1	A030702	1 Year	08/15/2016	<input type="checkbox"/>
DoubleRidged Waveguide Horn Antenna (1-18 GHz)	3115	10SL0059	1 Year	08/25/2016	<input checked="" type="checkbox"/>
Horn Antenna (18 GHz - 40 GHz)	AH-840	101013	1 Year	08/28/2016	<input checked="" type="checkbox"/>
RF Pre-Amplifier	LPA-6-30	11140711	1 Year	02/19/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (18 GHz - 40 GHz)	PA-840	181251	1 Year	02/19/2016	<input checked="" type="checkbox"/>
3 Meters SAC	3M	N/A	1 Year	10/30/2016	<input checked="" type="checkbox"/>
10 Meters SAC	10M	N/A	1 Year	05/06/2016	<input type="checkbox"/>
<b>RF Conducted Measurement</b>					
Spectrum Analyzer	N9010A	MY50210206	1 Year	08/20/2016	<input checked="" type="checkbox"/>
Power Sensor	EMPower7002-006	159814	1 Year	09/03/2016	<input checked="" type="checkbox"/>

## Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		<a href="#">A1</a> , <a href="#">A2</a> , <a href="#">A3</a> , <a href="#">A4</a> , <a href="#">B1</a> , <a href="#">B2</a> , <a href="#">B3</a> , <a href="#">B4</a> , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		<b>Radio &amp; Telecommunications Terminal Equipment:</b> EN45001 – EN ISO/IEC 17025
		<b>Electromagnetic Compatibility:</b> EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)		<a href="#">Phase I</a> , <a href="#">Phase II</a>
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		<b>(Phase II)</b> OFCA Foreign Certification Body for Radio and Telecom
		<b>(Phase I)</b> Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		<b>Radio:</b> Scope A – All Radio Standard Specification in Category I
		<b>Telecom:</b> CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p><b>Radio:</b> A1. Terminal equipment for purpose of calling</p> <p><b>Telecom:</b> B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p><b>EMI:</b> KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p><b>EMS:</b> KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p><b>Radio:</b> RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p><b>Telecom:</b> President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		<p>R-3083: Radiation 3 meter site</p> <p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measurement</p>
Australia CAB Recognition		<p><b>EMC:</b> AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p><b>Radio communications:</b> AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p> <p><b>Telecommunications:</b> AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2