

TEST REPORT

Applicant: nFore Technology Co., Ltd.
Address: 5F., No.31, Ln. 258, Ruiguang Rd. Neihu Dist.,
Taipei City 114, Taiwan
Equipment Type: NF3510PQ
Model Name: NF3510PQ (refer section 2.4)
Brand Name: nFore
FCC ID: W3GNF3510PQ
Test Standard: 47 CFR Part 15 Subpart C
(refer section 3.1)
Test Date: Sep. 01, 2022 - Sep. 22, 2022
Date of Issue: Oct. 31, 2022

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie Zhu

Checked by: Ye Hongji

Approved by: Liao Jianming
(Technical Director)

Julie Zhu

Ye Hongji

Jm Liao

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Oct. 31, 2022</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	Factory Information	5
2.4	General Description for Equipment under Test (EUT)	5
2.5	Technical Information	6
3	SUMMARY OF TEST RESULTS	9
3.1	Test Standards	9
3.2	Test Verdict	9
4	GENERAL TEST CONFIGURATIONS	10
4.1	Test Environments	10
4.2	Test Equipment List	10
4.3	Test Software List	10
4.4	Measurement Uncertainty	11
4.5	Description of Test Setup	11
4.6	Measurement Results Explanation Example	14
5	TEST ITEMS	15
5.1	Antenna Requirements	15
5.2	Output Power	16
5.3	6dB Bandwidth	18
5.4	Conducted Spurious Emission	19

5.5	Band Edge (Authorized-band band-edge).....	21
5.6	Conducted Emission	23
5.7	Radiated Spurious Emission	24
5.8	Band Edge (Restricted-band band-edge).....	29
5.9	Power Spectral density (PSD).....	30
ANNEX A	TEST RESULT	31
A.1	Output Power	31
A.2	Bandwidth.....	34
A.3	Conducted Spurious Emissions	42
A.4	Band Edge (Authorized-band band-edge).....	56
A.5	Conducted Emissions.....	62
A.6	Radiated Emission	64
A.7	Band Edge (Restricted-band band-edge).....	84
A.8	Power Spectral Density (PSD)	96
ANNEX B	TEST SETUP PHOTOS	101
ANNEX C	EUT EXTERNAL PHOTOS	101
ANNEX D	EUT INTERNAL PHOTOS	101

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	nFore Technology Co., Ltd.
Address	5F., No.31, Ln. 258, Ruiguang Rd. Neihu Dist., Taipei City 114, Taiwan

2.2 Manufacturer Information

Manufacturer	nFore Technology Co., Ltd.
Address	5F., No.31, Ln. 258, Ruiguang Rd. Neihu Dist., Taipei City 114, Taiwan

2.3 Factory Information

Factory	nFore Technology Co., Ltd.
Address	No.9, Dapumeiyuanqu 9th Rd., Dalin Township, Chiayi County 622, Taiwan

2.4 General Description for Equipment under Test (EUT)

EUT Name	NF3510PQ
Model Name Under Test	NF3510PQ
Series Model Name	NF3507TPQ, NF3509PQ, NF3512PQ, NF3513TPQ, NF3514PQ, NF3515PQ, NF3516PQ
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in model name. (this information provided by the customer)
Hardware Version	1.2
Software Version	1.0
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n, 802.11ac and 802.11ax U-NII-1/3
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	802.11b/g/n/ax(20 MHz): 2.412 GHz - 2.462 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11. 802.11n/ax(40 MHz): 2.422 GHz - 2.452 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 3 to 9.
Modulation Type	DSSS, OFDM, OFDMA
Product Type	☒ Mobile ☐ Portable ☐ Fix Location
Antenna System (eg., MIMO, Smart Antenna)	N/A
Categorization as Correlated or Completely Uncorrelated	N/A
Antenna Type	External Antenna
Antenna Gain	1.91 dBi
About the Product	Only the WIFI 802.11b, 802.11g, 802.11n (HT20/40) and 802.11ax (HE20/40) was tested in this report.

Modulation technology	Modulation Type	Transfer Rate (Mbps)(Single RF path)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/11
OFDM (802.11g)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48/54
OFDM (802.11n-20 MHz)	BPSK	6.5/7.2
	QPSK	13/19.5/14.4/21.7
	16QAM	26/39/28.9/43.3
	64QAM	52/58.5/65/57.8/65/72.2
OFDM (802.11n-40 MHz)	BPSK	13.5/15
	QPSK	27/40.5/30/45
	16QAM	54/81/60/90
	64QAM	108/121.5/135/120/150
OFDMA (802.11ax-20 MHz)	BPSK	4
	QPSK	16/24/17/26
	16QAM	33/49/34/52
	64QAM	65/73/81/69/77/86
	256QAM	98/108/103/115
	1024QAM	122/135/129/143
OFDMA (802.11ax-40 MHz)	BPSK	8/9
	QPSK	33/49/34/52
	16QAM	65/98/69/103
	64QAM	130/146/163/138/155/172
	256QAM	195/217/207/229
	1024QAM	244/271/258/287

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	
Output Power	11b/11g/11n20/11n40 /ax20/ax40	1/6/6.5/13.5 /4/8 Mbps	1/6/11	3/6/9
6dB Bandwidth	11b/11g/11n20/11n40 /ax20/ax40	1/6/6.5/13.5 /4/8 Mbps	1/6/11	3/6/9
Conducted Spurious Emission	11b/11g/11n20/11n40 /ax20/ax40	1/6/6.5/13.5 /4/8 Mbps	1/6/11	3/6/9
Conducted Emission	11b/11g/11n20/11n40 /ax20/ax40	1/6/6.5/13.5 /4/8 Mbps	1/6/11	3/6/9
Radiated Spurious Emission	11b/11g/11n20/11n40 /ax20/ax40	1/6/6.5/13.5 /4/8 Mbps	1/6/11	3/6/9
Band Edge	11b/11g/11n20/11n40 /ax20/ax40	1/6/6.5/13.5 /4/8 Mbps	1/6/11	3/6/9
Power spectral density (PSD)	11b/11g/11n20/11n40 /ax20/ax40	1/6/6.5/13.5 /4/8 Mbps	1/6/11	3/6/9

Note: The above EUT information in section 2.4 were declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
3	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

3.2 Test Verdict

No.	Description	FCC PART No.	Test Result	Verdict
1	Antenna Requirement	15.203	N/A	Pass ^{Note 1}
2	Output Power	15.247 (b)	ANNEX A.1	Pass
3	6dB Bandwidth	15.247 (a)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247 (d)	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247 (d)	ANNEX A.4	Pass
6	Conducted Emission	15.207	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247 (d)	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247 (d)	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247 (e)	ANNEX A.8	Pass
10	Receiver Spurious Emissions	N/A	N/A	N/A ^{Note 2}

Note ¹: Please refer to section 5.1.

Note ²: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	51% to 64%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+21.5°C to +25.0°C
Working Voltage of the EUT	NV (Normal Voltage)	3.3 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY46471071	2022.07.26	2023.07.25
Power Sensor	ROHDE&SCHWARZ	NRP18S	102521	2022.03.09	2023.03.08
Spectrum Analyzer	KEYSIGHT	N9020A	MY50531259	2021.09.08	2022.09.07
Spectrum Analyzer	KEYSIGHT	N9020A	MY50531259	2022.09.06	2023.09.05
Signaling Unit	ROHDE&SCHWARZ	CMW500	171150	2022.06.29	2023.06.28
Test Antenna-Horn (1-18 GHz)	SCHWARZBECK	BBHA 9120D	02460	2021.05.19	2024.05.08
Test Antenna-Horn (18-40 GHz)	A-INFO	LB- 180400KF	J211060273	2021.07.02	2024.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2021.08.16	2024.08.15
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2021.10.10	2022.10.09
Test Antenna-Loop (9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2021.04.16	2024.04.15
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60 *7.35m	N/A	2021.08.15	2024.08.14
Test Antenna-Bi-Log (30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2021.08.20	2024.08.19
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2021.09.13	2022.09.12
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2020.03.16	2023.03.15
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2021.10.10	2022.10.09
LISN	SCHWARZBECK	NSLK 8127	8127-687	2022.06.01	2023.05.31
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m* 2.8m	N/A	2022.02.19	2025.02.18

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V19.8.28.435	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.82°C
Humidity	4.1%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)

For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

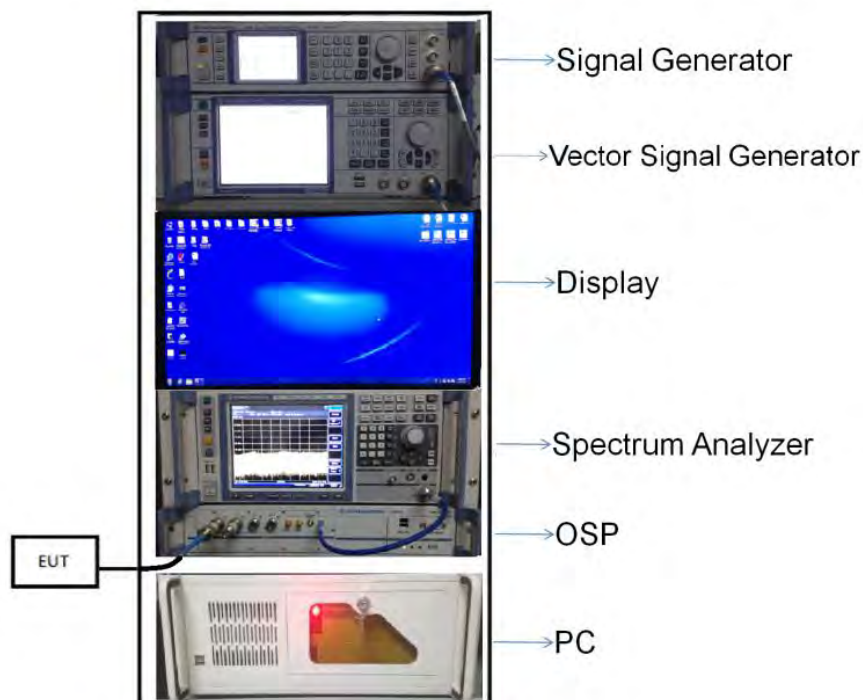


(Diagram 1)

4.5.2 For AC Power Supply Port Test




(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

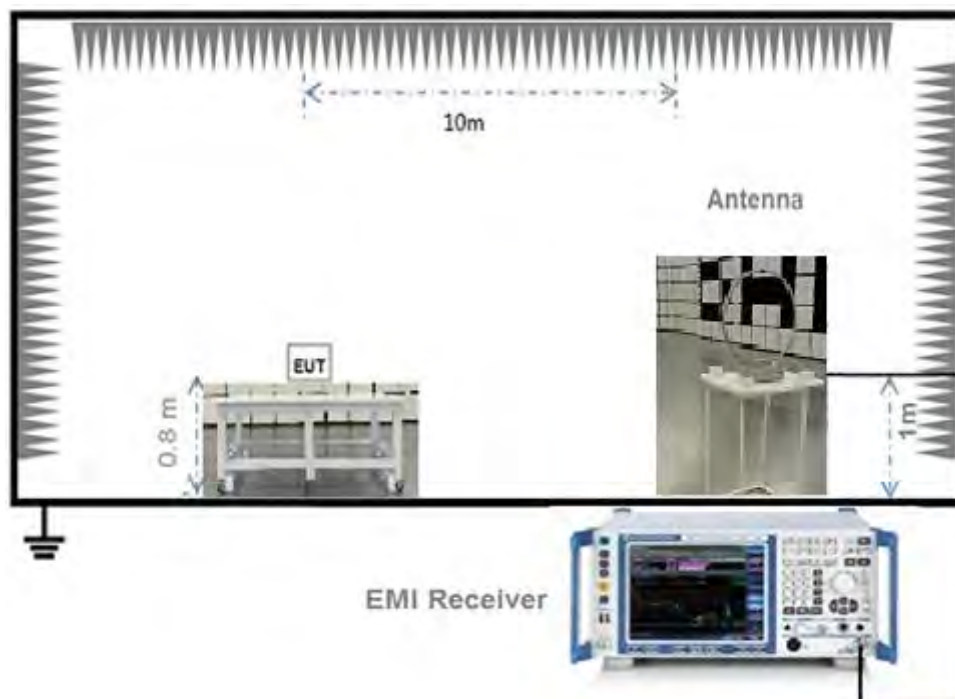


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

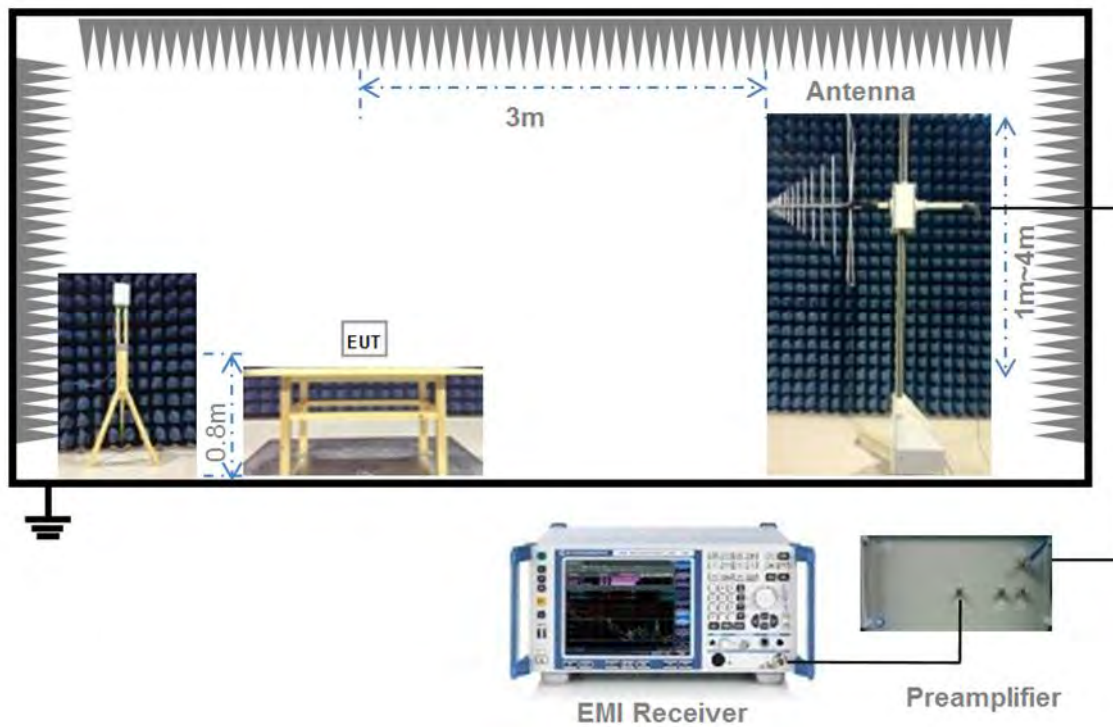

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

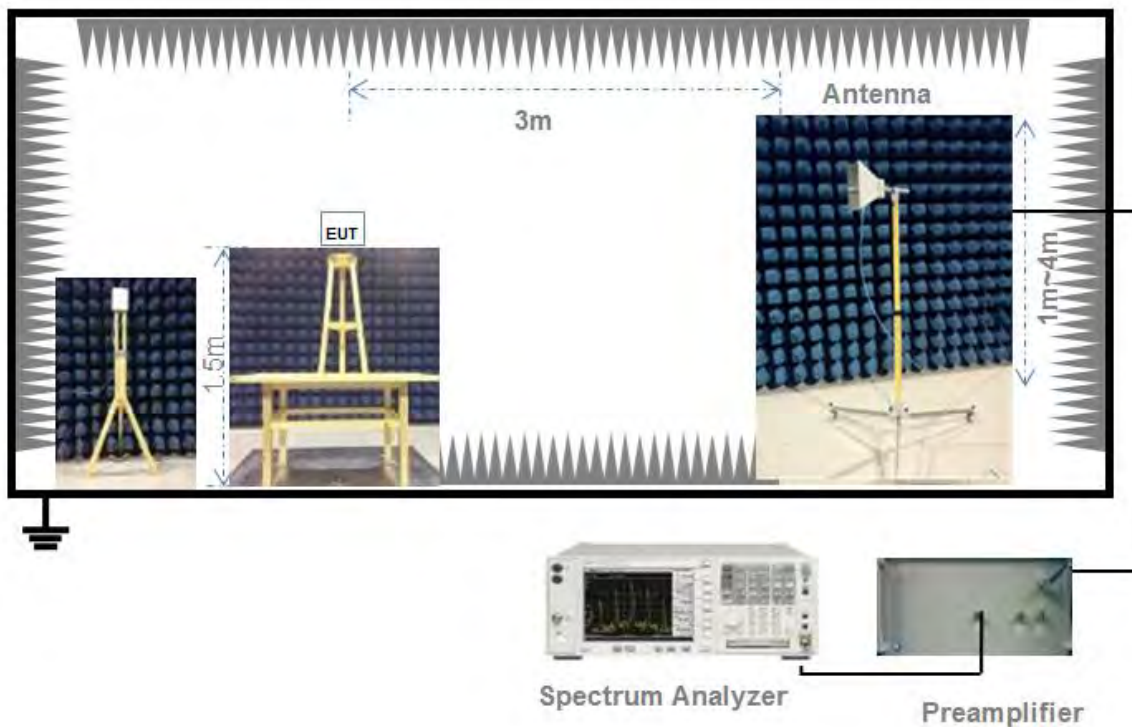

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP = Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
Compliance with 15.203, use of a standard antenna jack or electrical connector is prohibited.	The antenna is the unique connector with a wire antenna.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

5.2.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed

using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as

described in Section 6.0.

c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

d) Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

Set $VBW \geq RBW$. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 6dB Bandwidth

5.3.1 Limit

FCC §15.247(a)

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW/RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be

longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) $VBW \geq 3 \times RBW$.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (RBW/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

5.9.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power

Note: All the configurations were pre tested, only the worst configuration has been reported in this report.

Duty Cycle

Test Mode	On Time (ms)	On+Off time (ms)	Duty Cycle
802.11b	8.62	8.64	99.77%
802.11g	1.43	1.45	98.76%
802.11n-20 MHz	1.34	1.36	98.75%
802.11n-40 MHz	0.66	0.68	96.92%
802.11ax-20 MHz	1.04	1.06	98.49%
802.11ax-40 MHz	0.55	0.57	96.75%

Peak Power Test Data

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.52	44.87	30	1000	Pass
Middle	19.40	87.10			Pass
High	18.34	68.23			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.55	22.65	30	1000	Pass
Middle	22.69	185.78			Pass
High	15.68	36.98			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.97	24.95	30	1000	Pass
Middle	22.60	181.97			Pass
High	15.60	36.31			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.01	15.89	30	1000	Pass
Middle	22.89	194.54			Pass
High	14.05	25.41			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	23.79	239.33	30	1000	Pass
Middle	24.25	266.07			Pass
High	15.97	39.54			Pass

802.11ax-40 MHz(SU) Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	23.64	231.21	30	1000	Pass
Middle	24.29	268.53			Pass
High	15.81	38.11			Pass

Average Power Test Data

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.57	22.75	30	1000	Pass
Middle	16.53	44.98			Pass
High	15.43	34.91			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	7.63	5.79	30	1000	Pass
Middle	16.80	47.86			Pass
High	9.83	9.62			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	7.95	6.24	30	1000	Pass
Middle	16.66	46.34			Pass
High	9.66	9.25			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	5.91	3.90	30	1000	Pass
Middle	16.82	48.08			Pass
High	7.94	6.22			Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.34	43.05	30	1000	Pass
Middle	16.87	48.64			Pass
High	8.35	6.84			Pass

802.11ax-40 MHz(SU) Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.05	40.27	30	1000	Pass
Middle	16.59	45.60			Pass
High	8.11	6.47			Pass

A.2 Bandwidth

Note: All the configurations were pre tested, only the worst configuration has been reported in this report.

Test Data

802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	10.150000	13.220000	≥ 500
Middle	10.150000	13.063000	≥ 500
High	10.150000	13.223000	≥ 500

802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	16.450000	17.198000	≥ 500
Middle	16.400000	18.310000	≥ 500
High	16.400000	17.134000	≥ 500

802.11n-20MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	17.600000	18.011000	≥ 500
Middle	17.100000	18.807000	≥ 500
High	17.600000	17.962000	≥ 500

802.11n-40MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	35.600000	36.327000	≥ 500
Middle	35.700000	37.249000	≥ 500
High	35.800000	36.283000	≥ 500

802.11ax-20 MHz(SU) Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	18.350000	19.137000	≥ 500
Middle	18.250000	19.209000	≥ 500
High	18.450000	18.887000	≥ 500

802.11ax-40 MHz(SU) Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	37.000000	37.797000	≥ 500
Middle	36.350000	37.861000	≥ 500
High	37.100000	37.640000	≥ 500

Test Plots

6 dB Bandwidth

802.11b LOW CHANNEL



802.11b MIDDLE CHANNEL



802.11b HIGH CHANNEL



802.11g LOW CHANNEL



802.11g MIDDLE CHANNEL




802.11g HIGH CHANNEL




802.11n-20 MHz LOW CHANNEL




802.11n-20 MHz MIDDLE CHANNEL

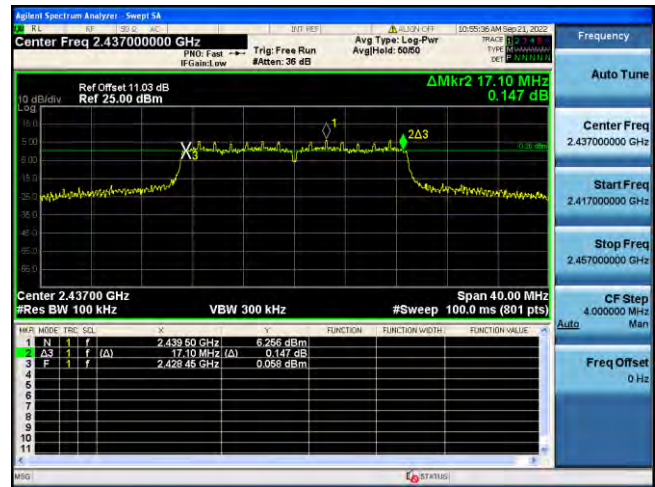


802.11n-20 MHz HIGH CHANNEL

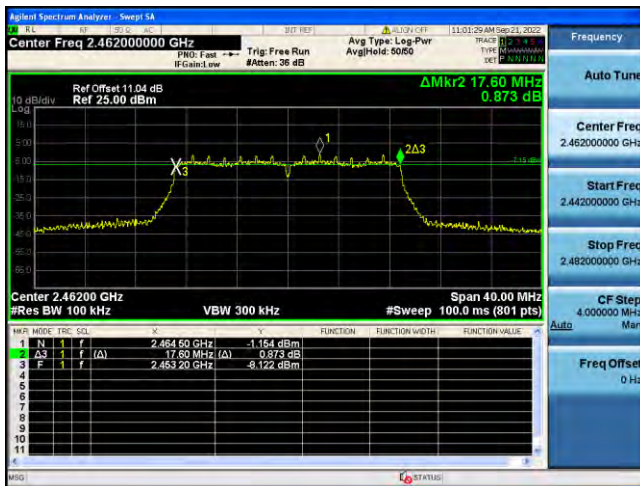


802.11n-40 MHz LOW CHANNEL

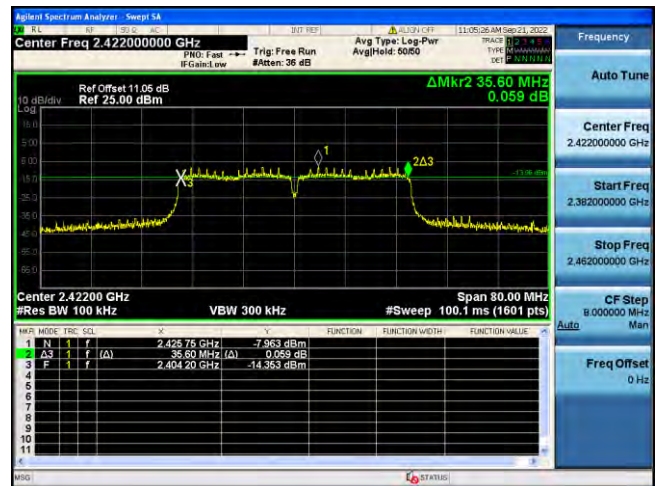

802.11n-40 MHz MIDDLE CHANNEL

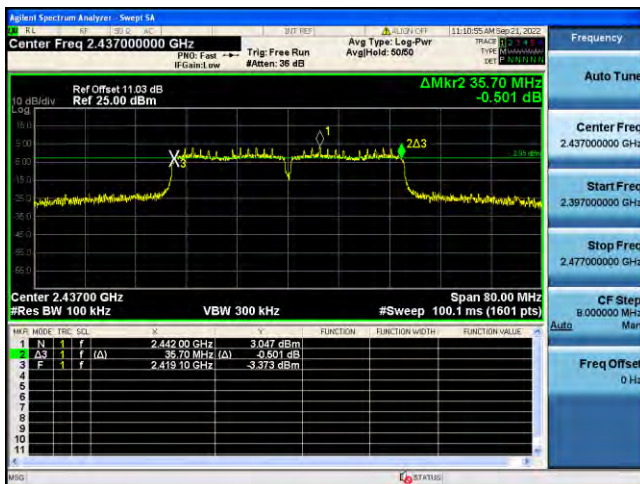


802.11n-40 MHz HIGH CHANNEL

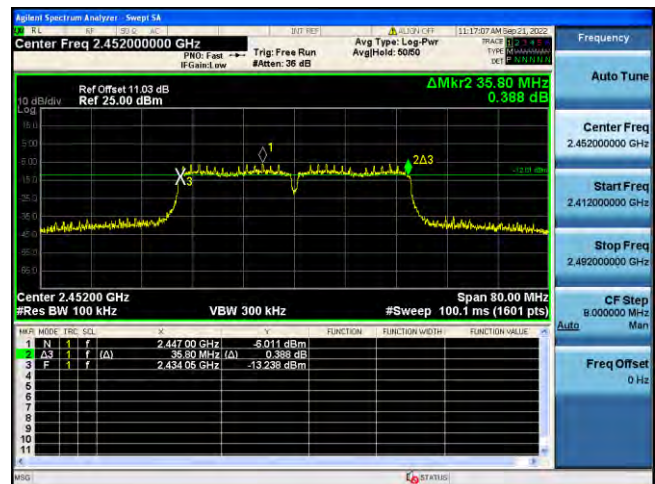


802.11ax-20 MHz(SU) LOW CHANNEL




802.11ax-20 MHz(SU) MIDDLE CHANNEL

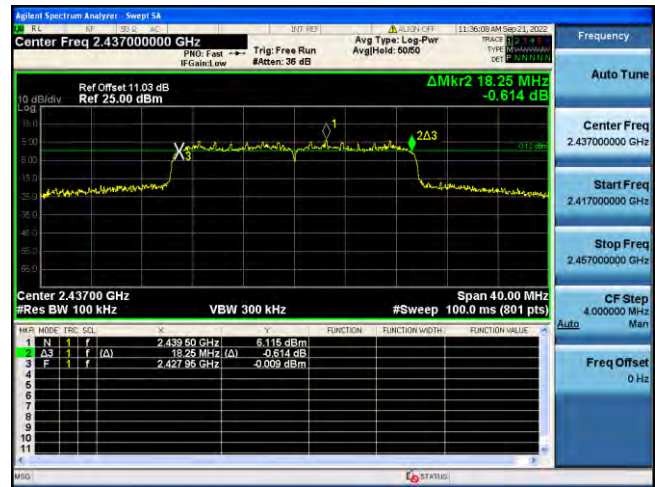


802.11ax-20 MHz(SU) HIGH CHANNEL

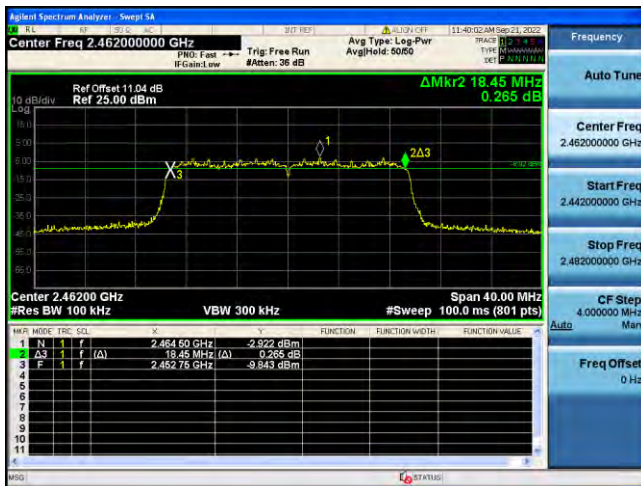


802.11ax-40 MHz(SU) LOW CHANNEL

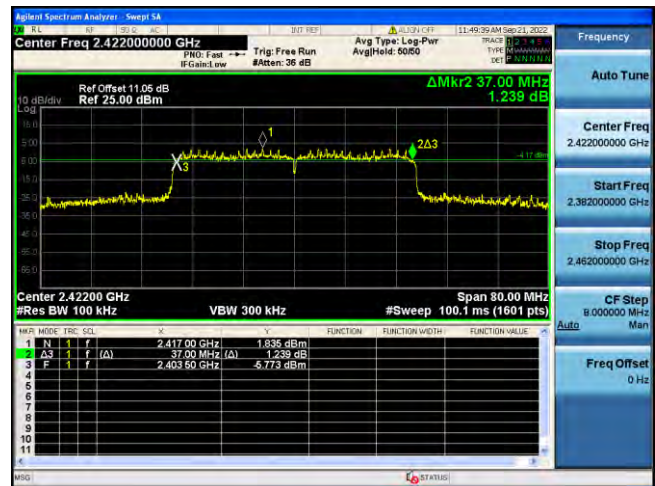

802.11ax-40 MHz(SU) MIDDLE CHANNEL

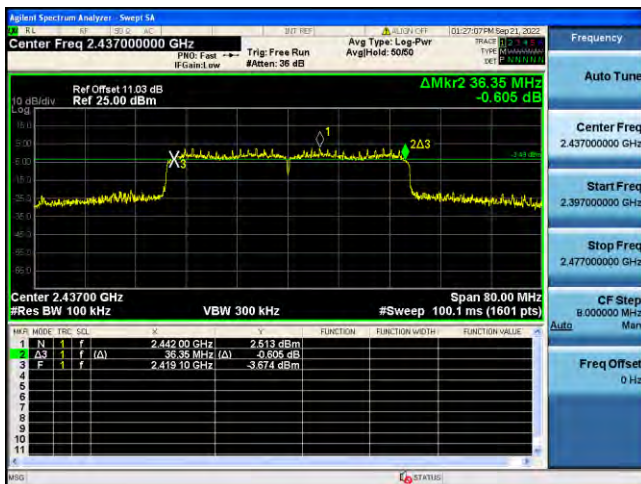


802.11ax-40 MHz(SU) HIGH CHANNEL

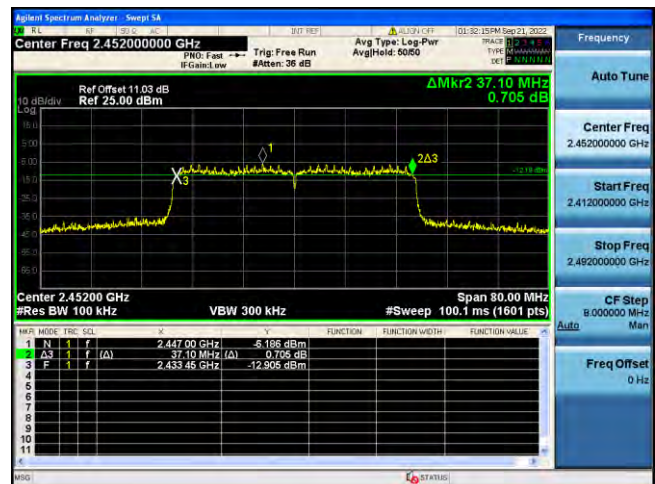

99% Bandwidth


802.11b LOW CHANNEL

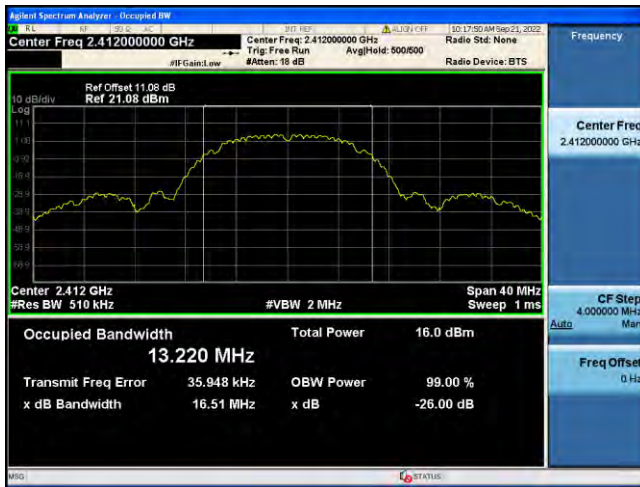

802.11b MIDDLE CHANNEL



802.11b HIGH CHANNEL

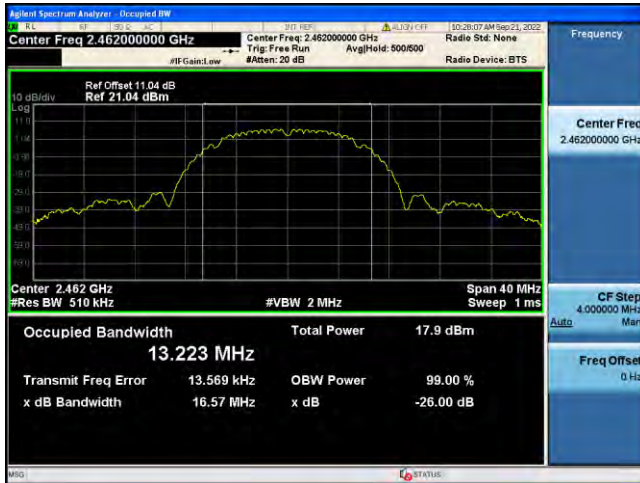

802.11g LOW CHANNEL




802.11g MIDDLE CHANNEL




802.11g HIGH CHANNEL



802.11n-20 MHz LOW CHANNEL

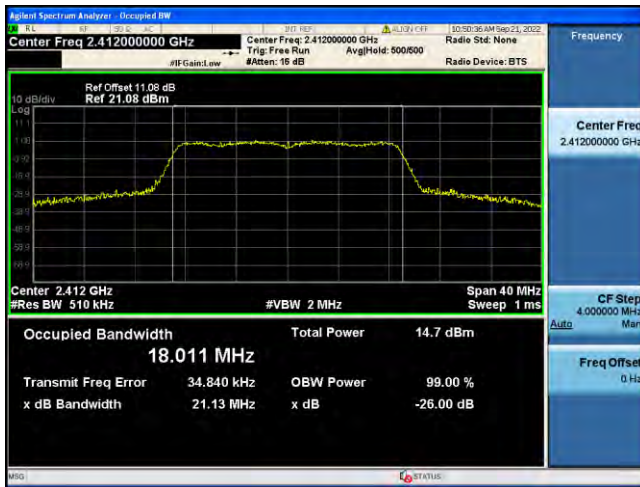

802.11n-20 MHz MIDDLE CHANNEL

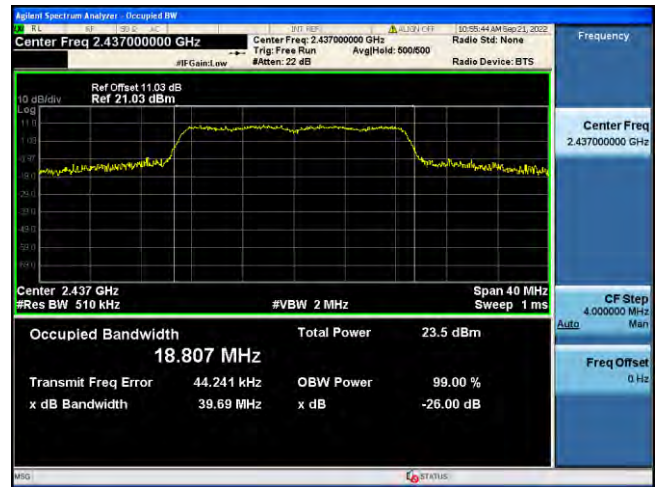


802.11n-20 MHz HIGH CHANNEL



802.11n-40 MHz LOW CHANNEL




802.11n-40 MHz MIDDLE CHANNEL

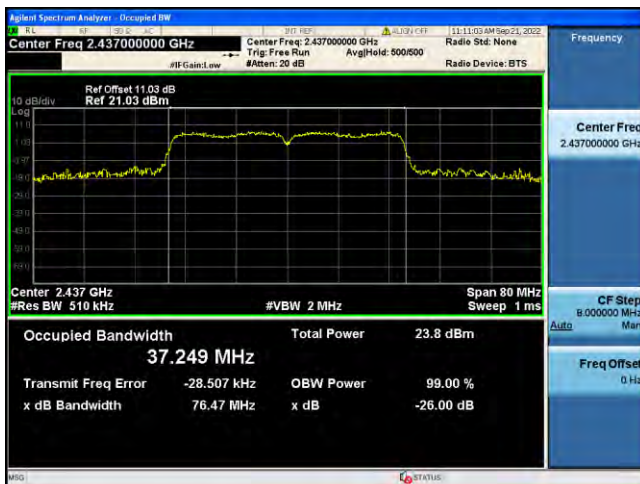


802.11n-40 MHz HIGH CHANNEL



802.11ax-20 MHz(SU) LOW CHANNEL

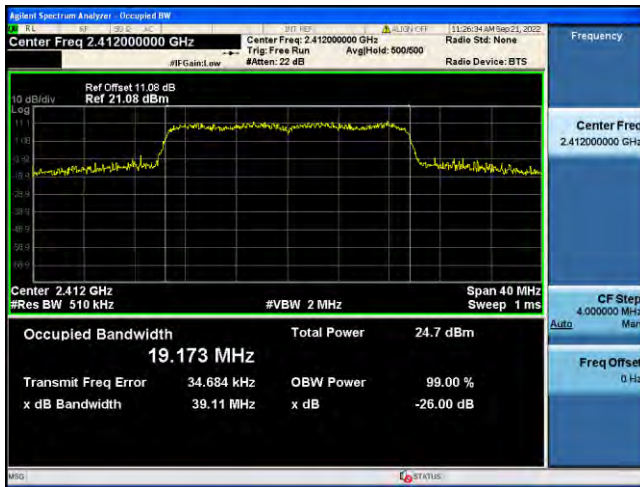


802.11ax-20 MHz(SU) MIDDLE CHANNEL

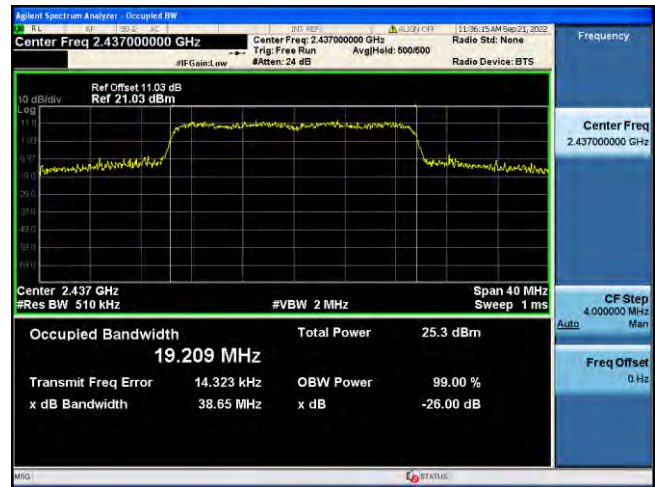


802.11ax-20 MHz(SU) HIGH CHANNEL



802.11ax-40 MHz(SU) LOW CHANNEL

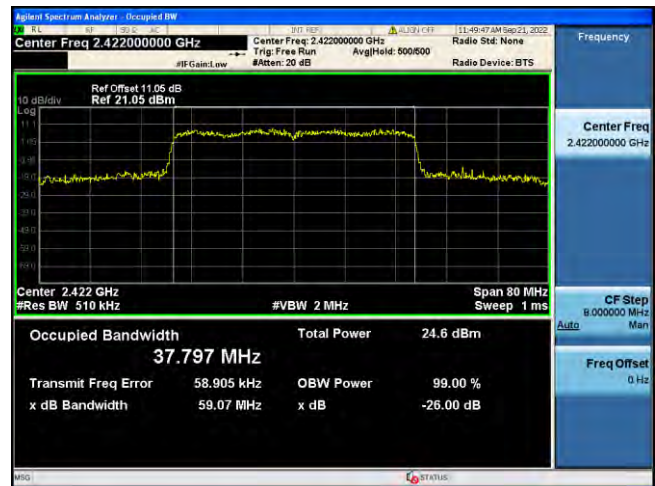

802.11ax-40 MHz(SU) MIDDLE CHANNEL

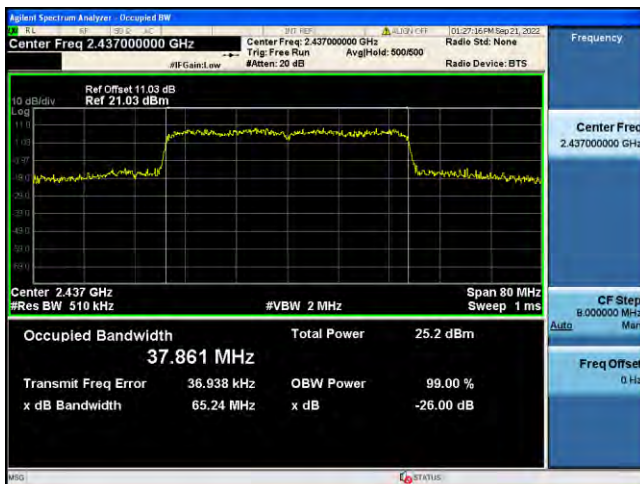

802.11ax-40 MHz(SU) HIGH CHANNEL



A.3 Conducted Spurious Emissions

Note: All the configurations were pre tested, only the worst configuration has been reported in this report.

Test Data

802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-39.76	3.87	-16.13	Pass
Middle	-38.31	7.05	-12.95	Pass
High	-39.55	6.16	-13.84	Pass

802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-38.96	-3.20	-23.20	Pass
Middle	-39.44	6.54	-13.46	Pass
High	-39.32	-1.01	-21.01	Pass

802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-39.00	-2.72	-22.72	Pass
Middle	-39.17	6.42	-13.58	Pass
High	-39.59	-1.03	-21.03	Pass

802.11n-40MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-39.81	-7.87	-27.87	Pass
Middle	-39.18	3.22	-16.78	Pass
High	-39.78	-5.78	-25.78	Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-40.26	5.68	-14.33	Pass
Middle	-40.20	6.04	-13.96	Pass
High	-39.65	-2.70	-22.70	Pass

802.11ax-40 MHz(SU) Mode:


Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-39.84	2.03	-17.97	Pass
Middle	-39.44	2.73	-17.27	Pass
High	-39.94	-5.98	-25.98	Pass

Test Plots


802.11b LOW CHANNEL CARRIER LEVEL



802.11b LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

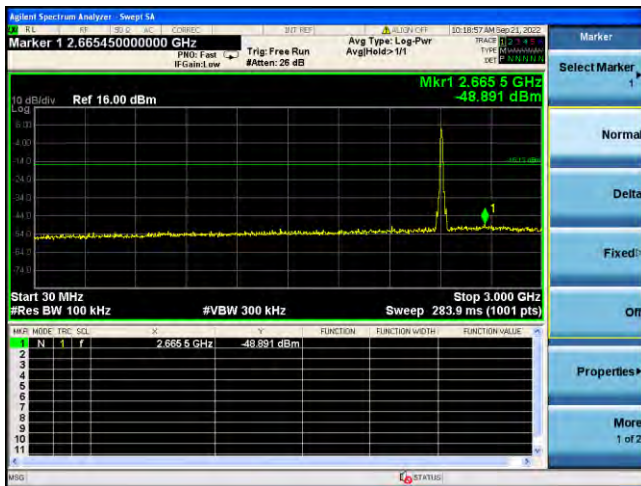


802.11b LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

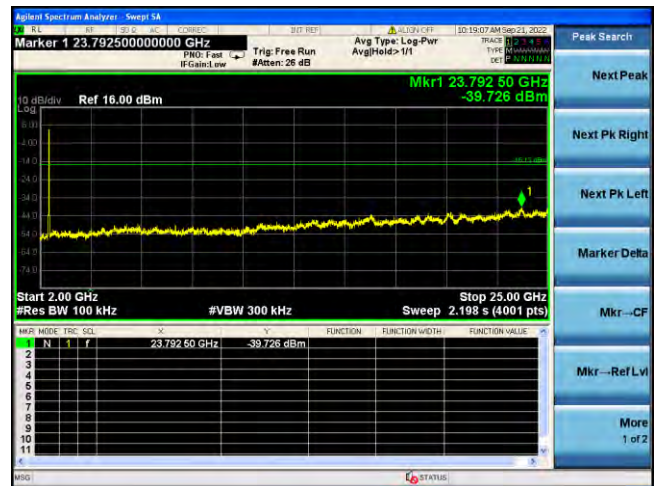


802.11b MIDDLE CHANNEL CARRIER LEVEL



802.11b MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

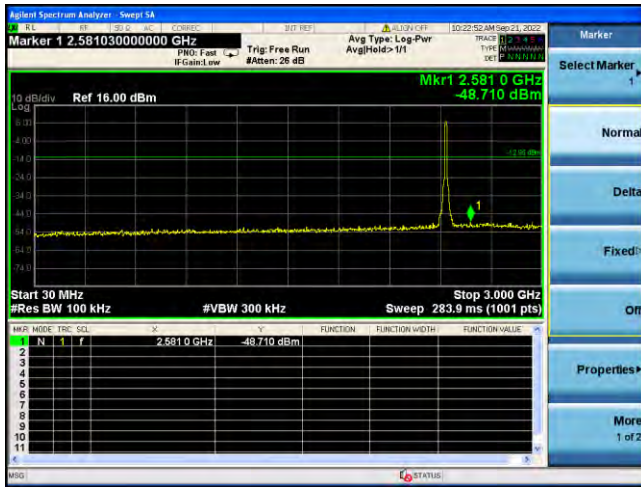


802.11b MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

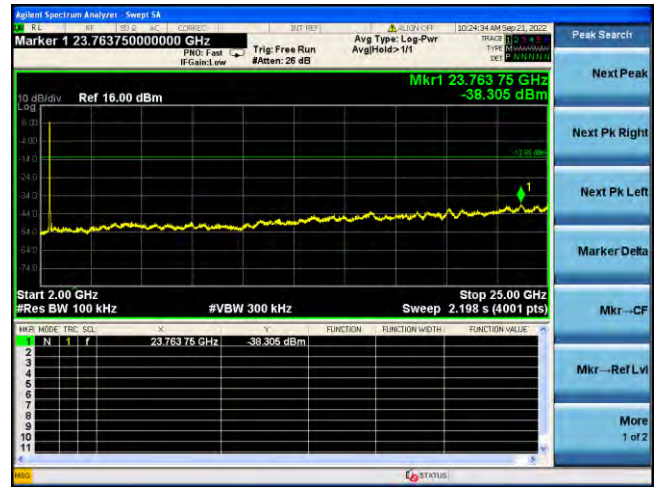


802.11b HIGH CHANNEL CARRIER LEVEL



802.11b HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

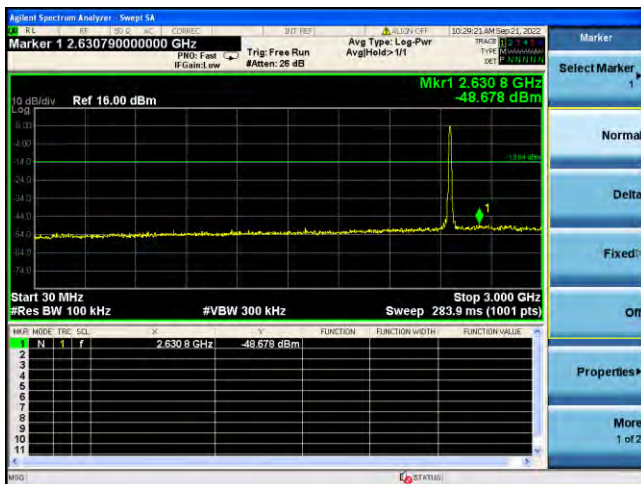


802.11b HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

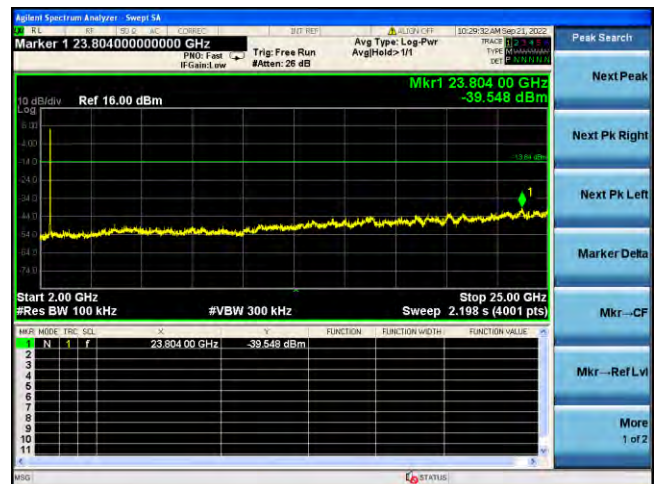


802.11g LOW CHANNEL CARRIER LEVEL




802.11g LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

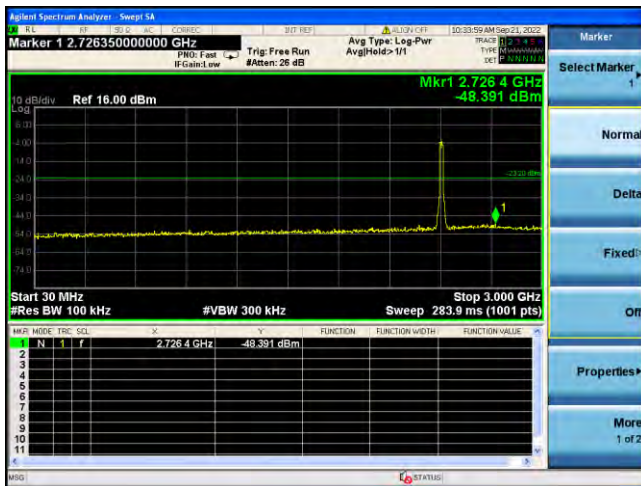


802.11g LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

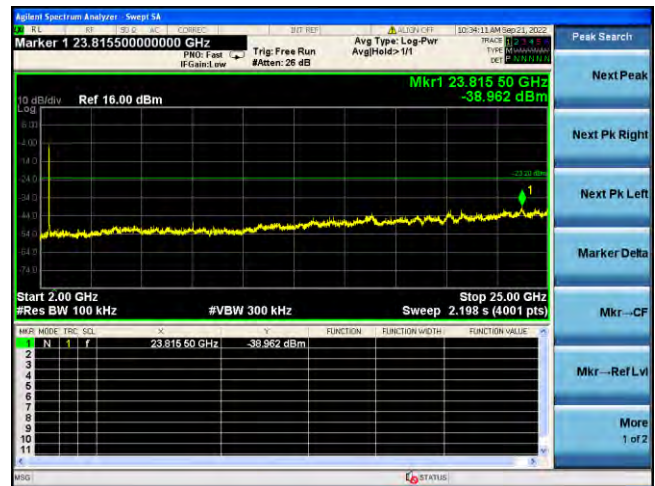


802.11g MIDDLE CHANNEL CARRIER LEVEL

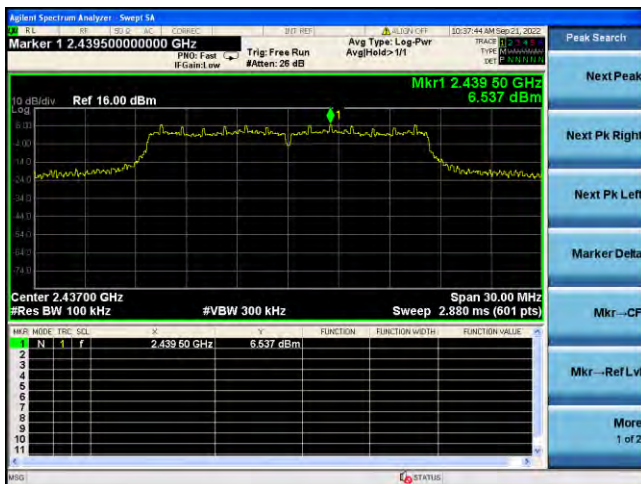


802.11g MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

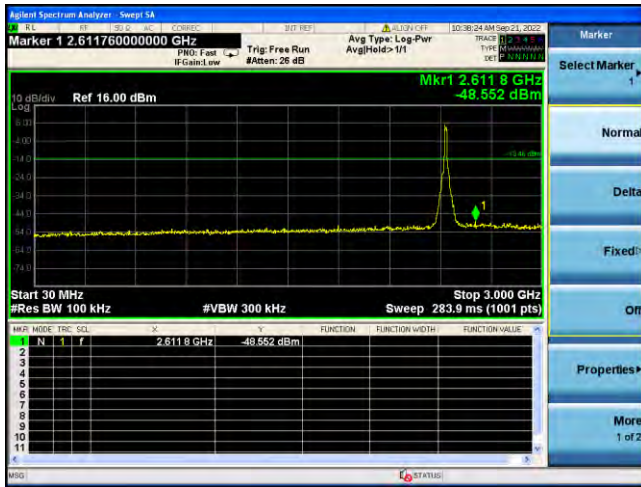


802.11g MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

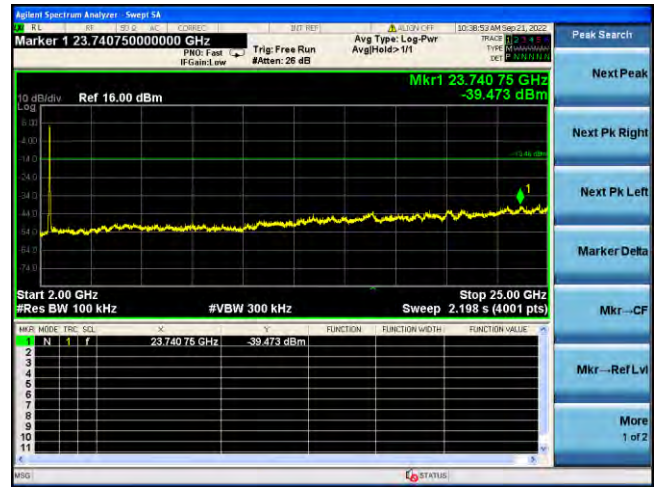


802.11g HIGH CHANNEL CARRIER LEVEL

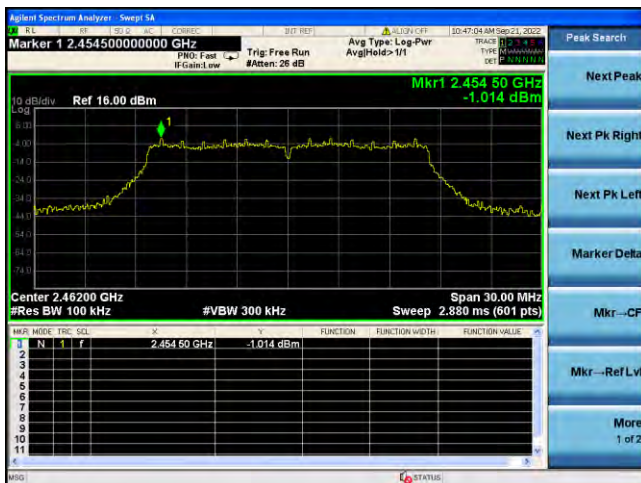




802.11g HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

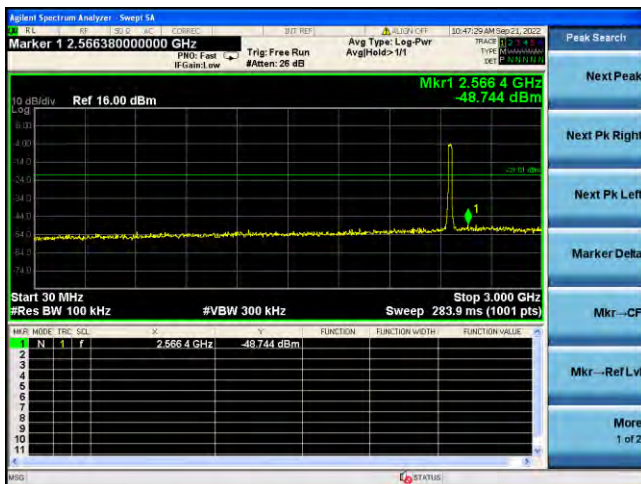


802.11g HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

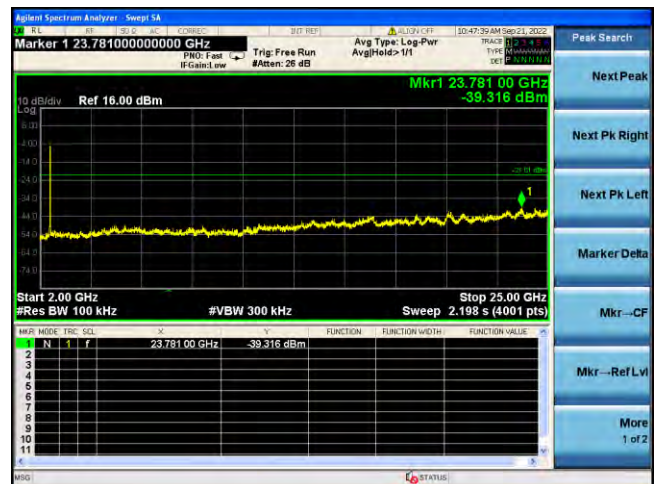


802.11n-20 MHz LOW CHANNEL CARRIER LEVEL

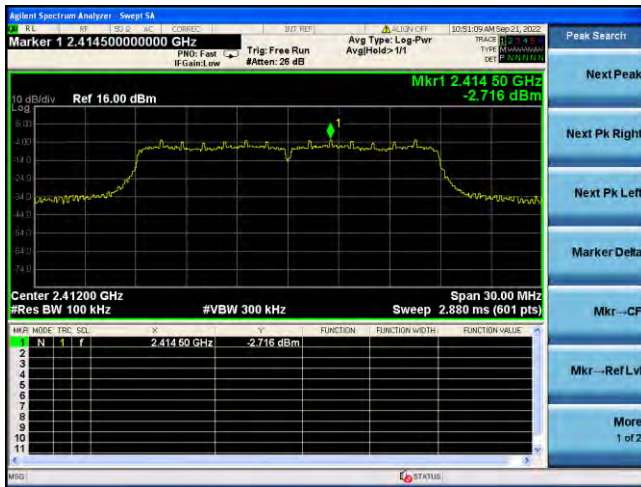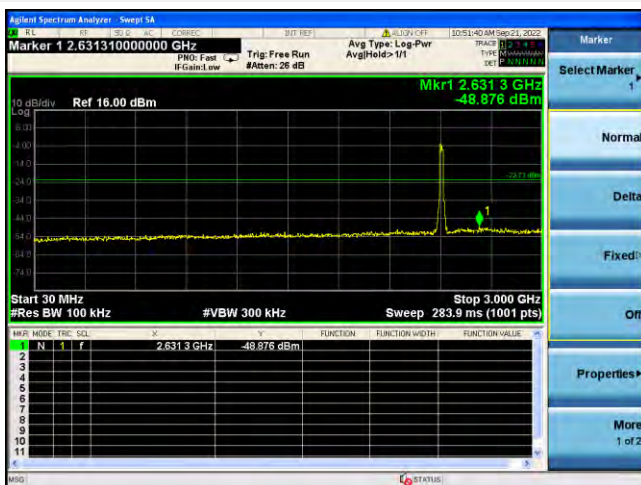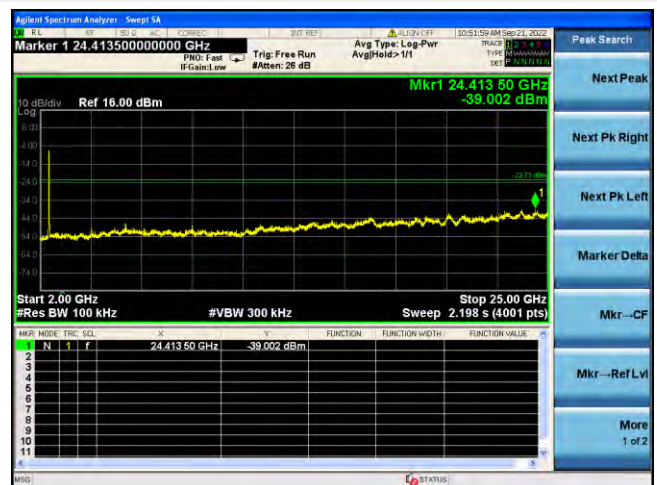802.11n-20 MHz LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11n-20 MHz LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz


802.11n-20 MHz MIDDLE CHANNEL CARRIER LEVEL

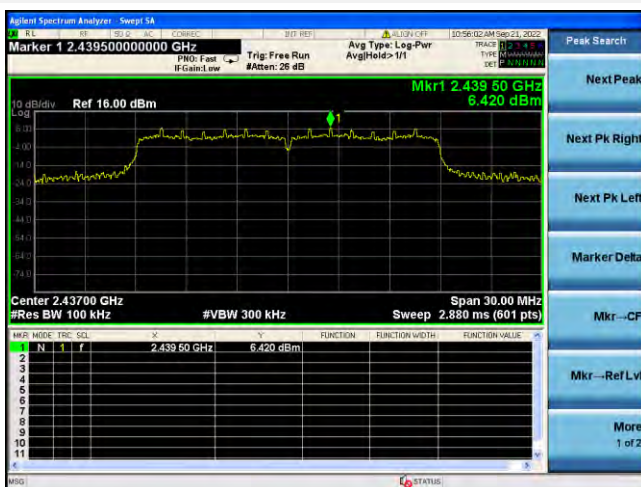


802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

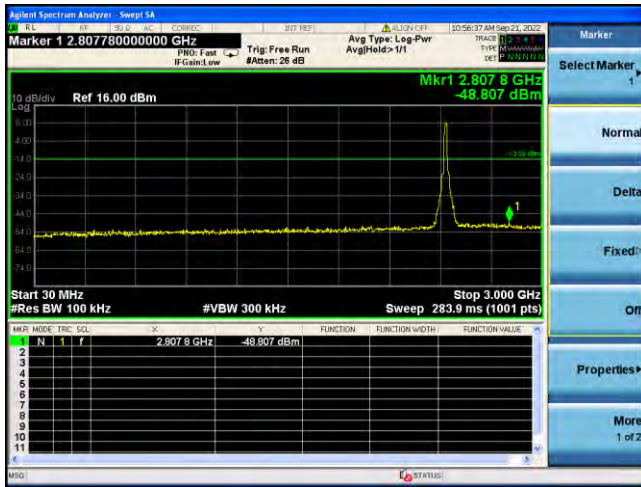


802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

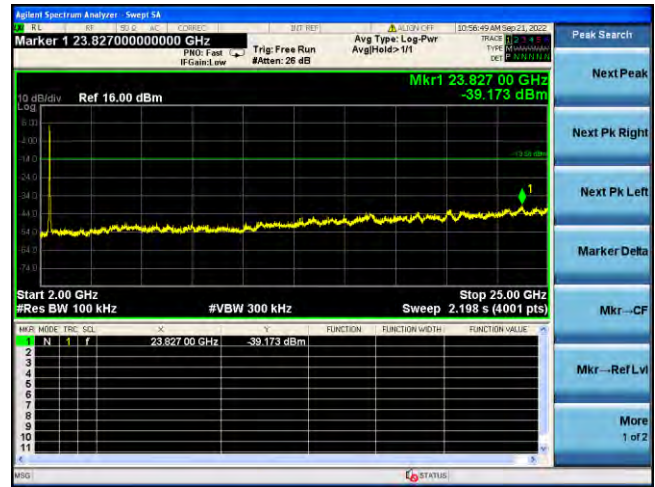


802.11n-20 MHz HIGH CHANNEL CARRIER LEVEL

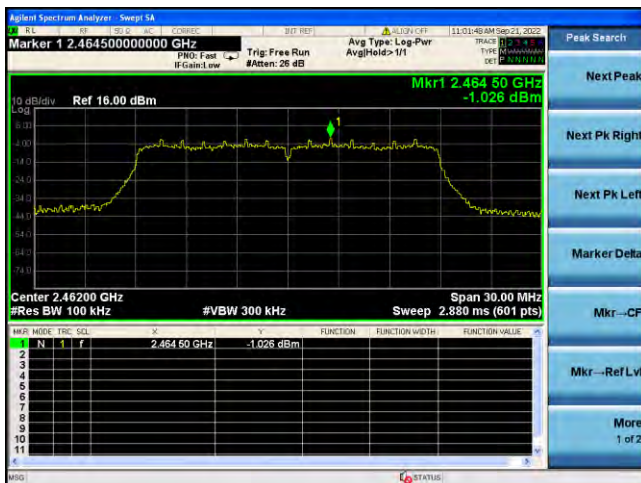



802.11n-20 MHz HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

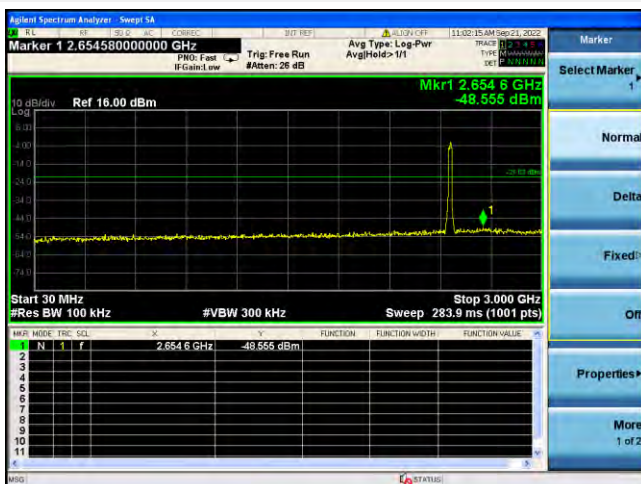


802.11n-20 MHz HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

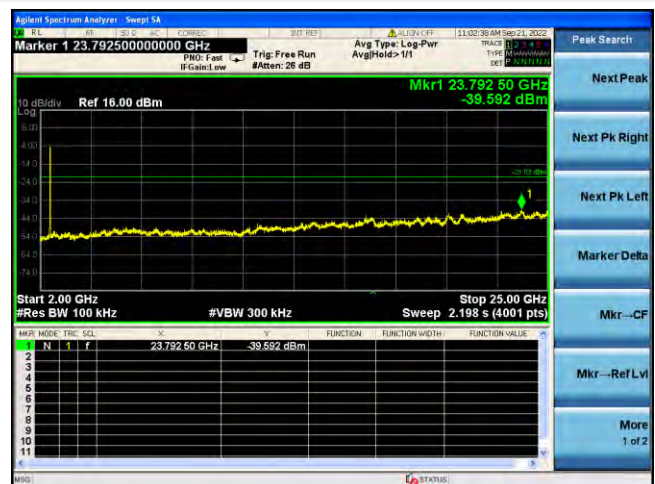


802.11n-40 MHz LOW CHANNEL CARRIER LEVEL

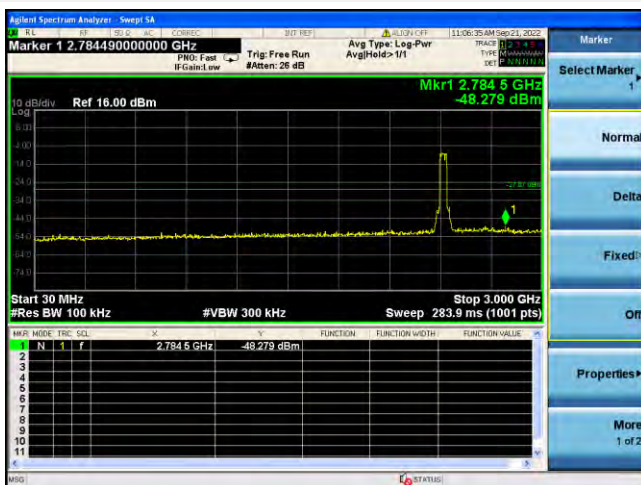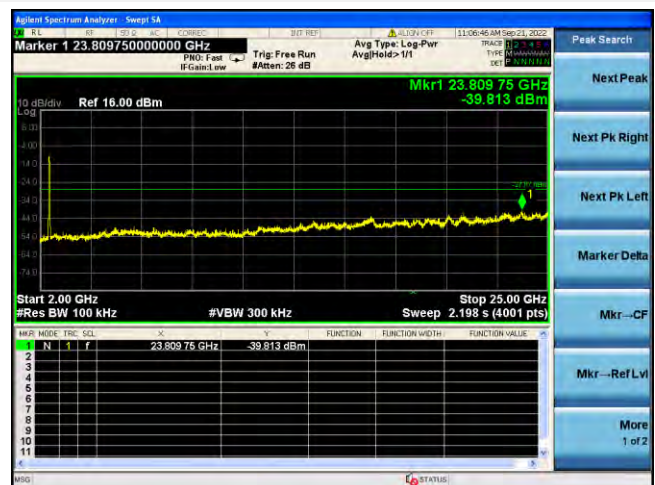802.11n-40 MHz LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11n-40 MHz LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz


802.11n-40 MHz MIDDLE CHANNEL CARRIER LEVEL

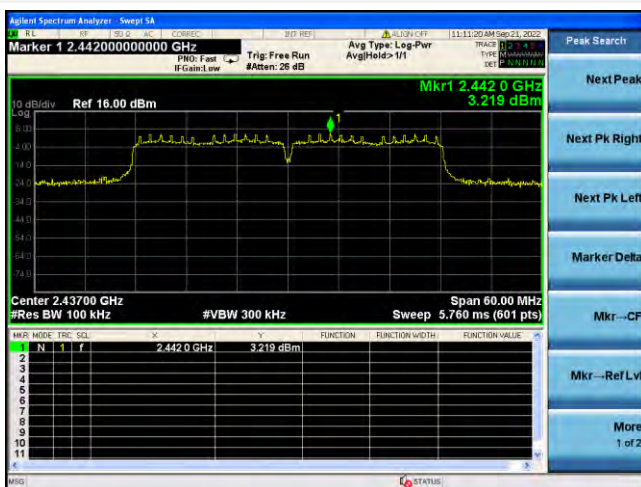


802.11n-40 MHz MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

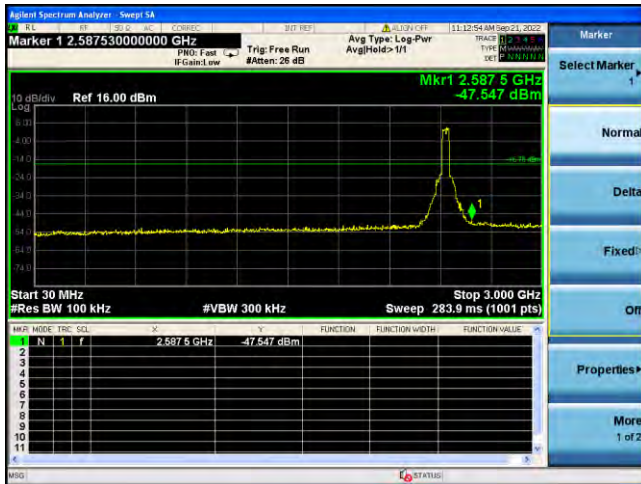


802.11n-40 MHz MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

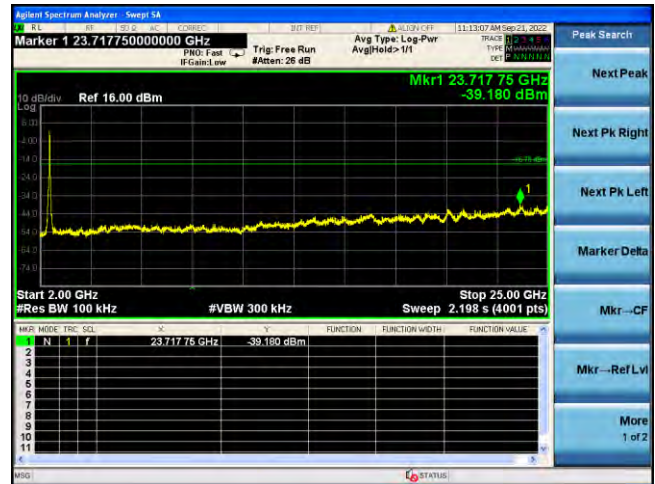


802.11n-40 MHz HIGH CHANNEL CARRIER LEVEL

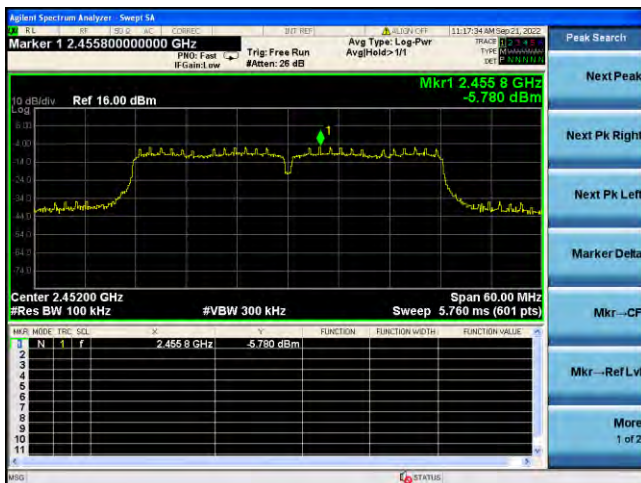





802.11n-40 MHz HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

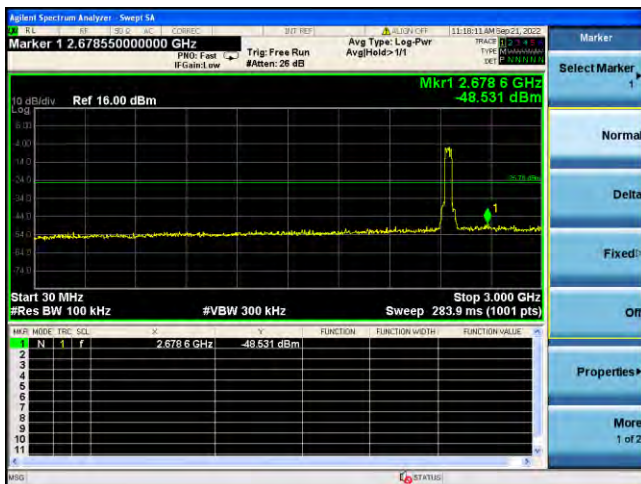


802.11n-40 MHz HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

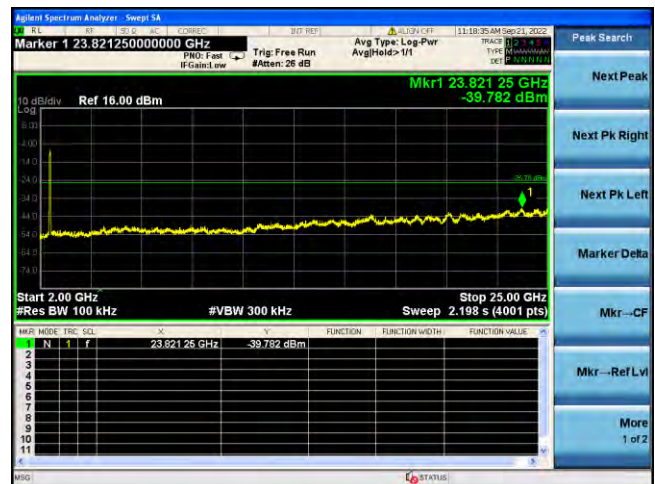


802.11ax-20 MHz(SU) LOW CHANNEL CARRIER LEVEL

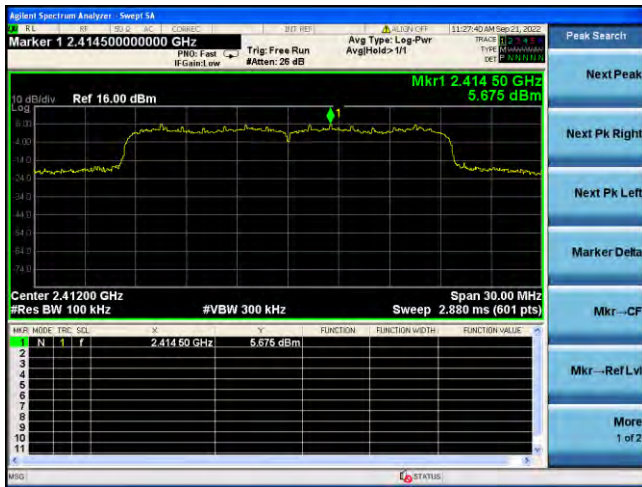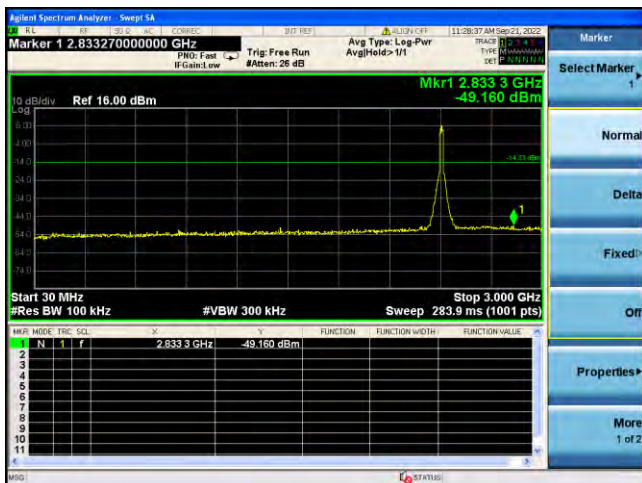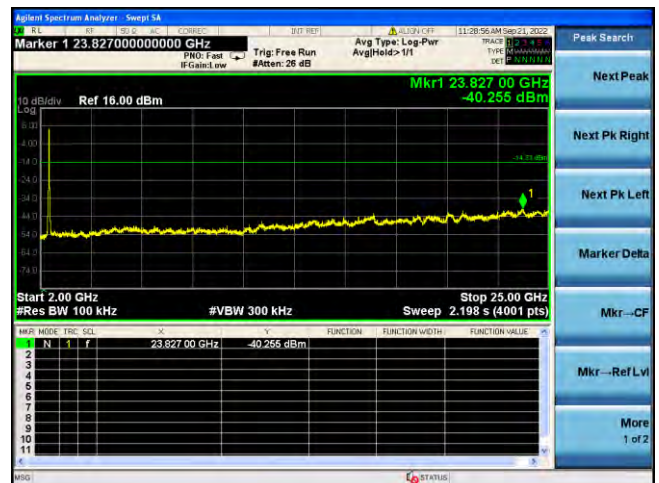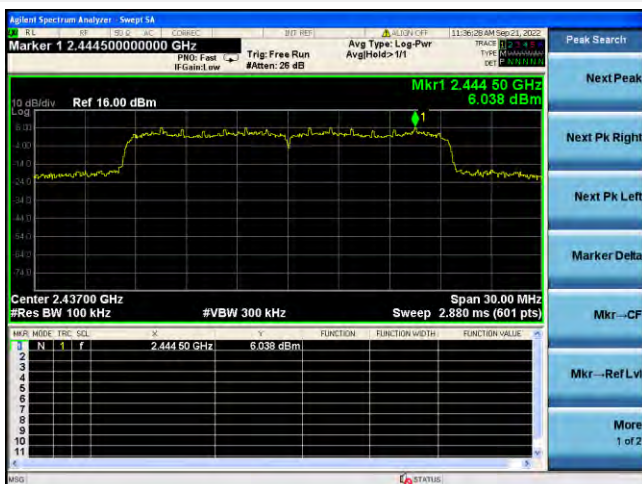802.11ax-20 MHz(SU) LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11ax-20 MHz(SU) LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz802.11ax-20 MHz(SU) MIDDLE CHANNEL CARRIER
LEVEL


802.11ax-20 MHz(SU) MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

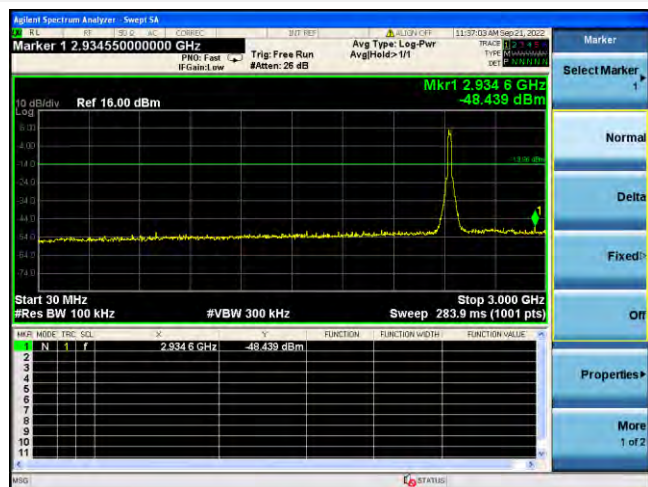


802.11ax-20 MHz(SU) MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

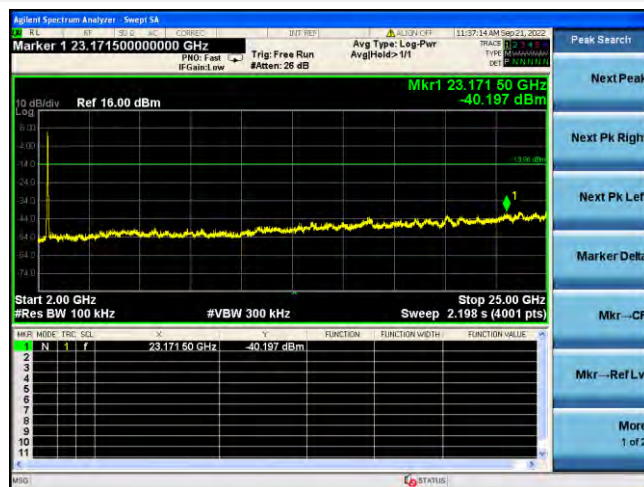


802.11ax-20 MHz(SU) HIGH CHANNEL CARRIER LEVEL

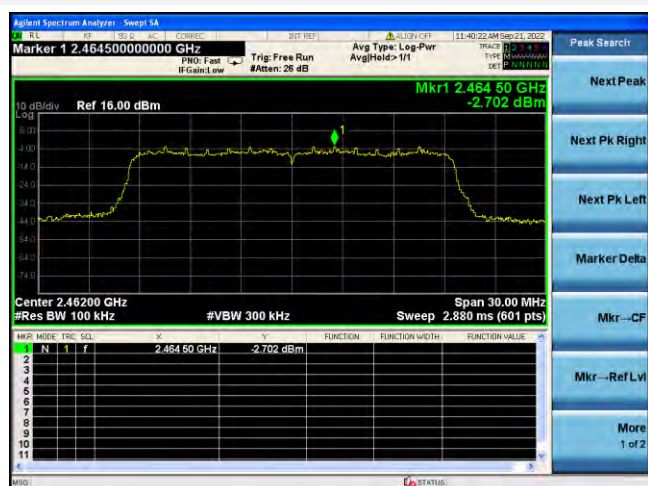





802.11ax-20 MHz(SU) HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

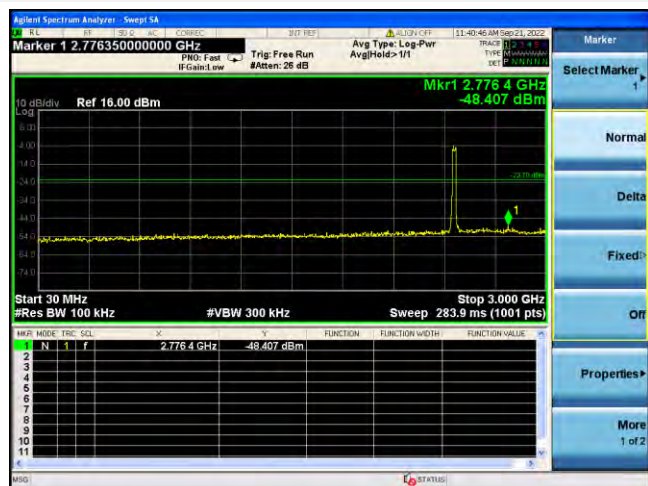


802.11ax-20 MHz(SU) HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

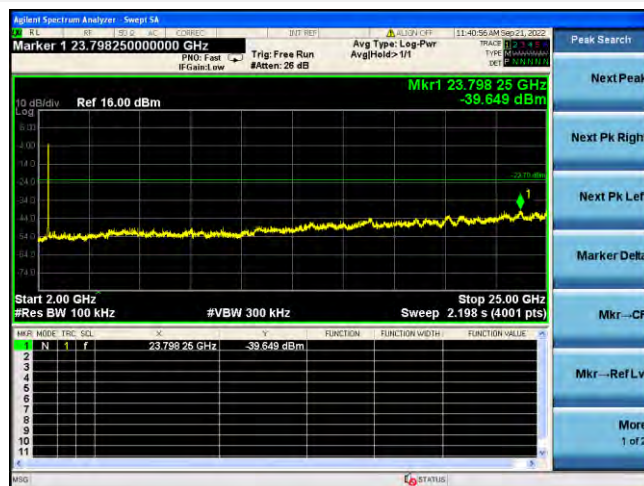


802.11ax-40 MHz(SU) LOW CHANNEL CARRIER LEVEL

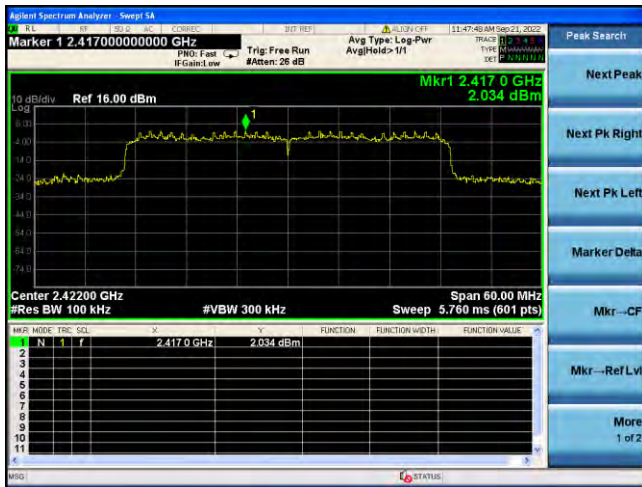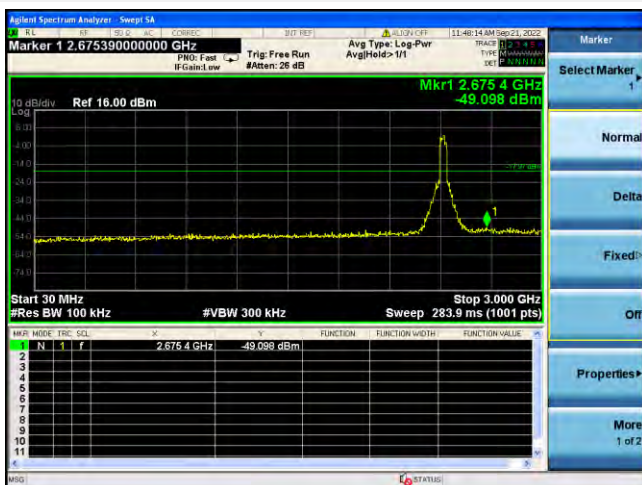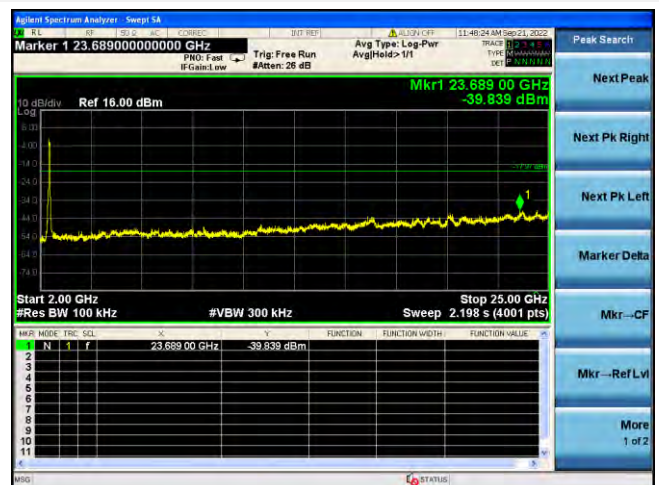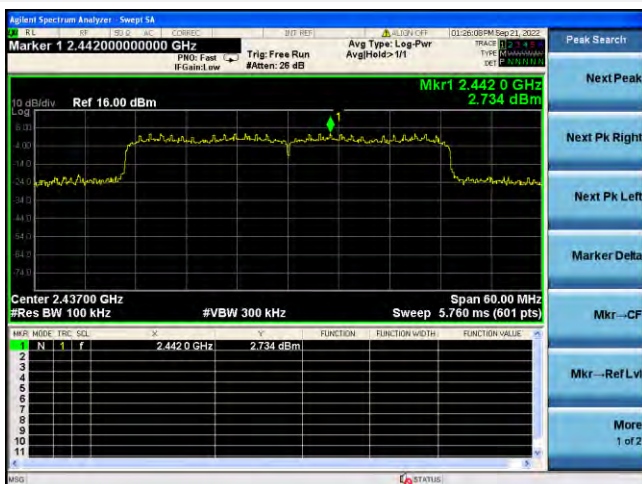802.11ax-40 MHz(SU) LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11ax-40 MHz(SU) LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz802.11ax-40 MHz(SU) MIDDLE CHANNEL CARRIER
LEVEL


802.11ax-40 MHz(SU) MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

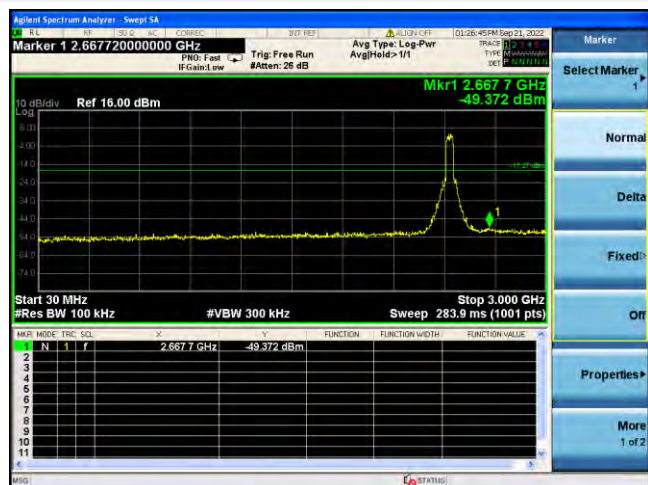


802.11ax-40 MHz(SU) MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

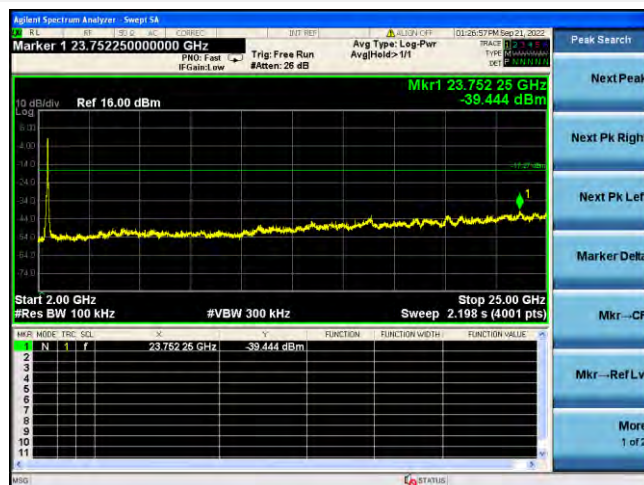


802.11ax-40 MHz(SU) HIGH CHANNEL CARRIER LEVEL

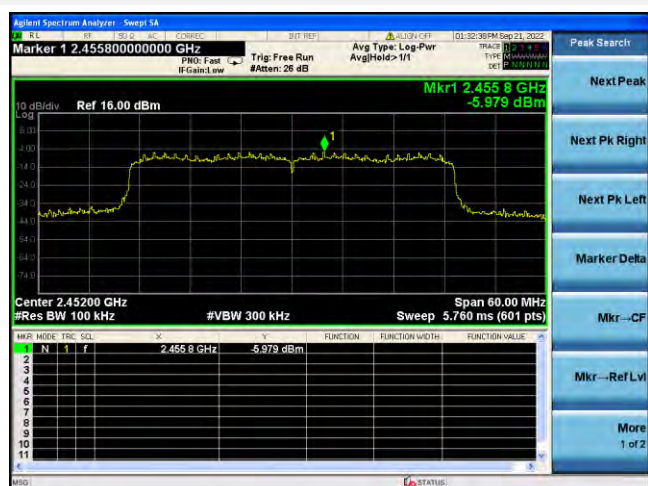

802.11ax-40 MHz(SU) HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

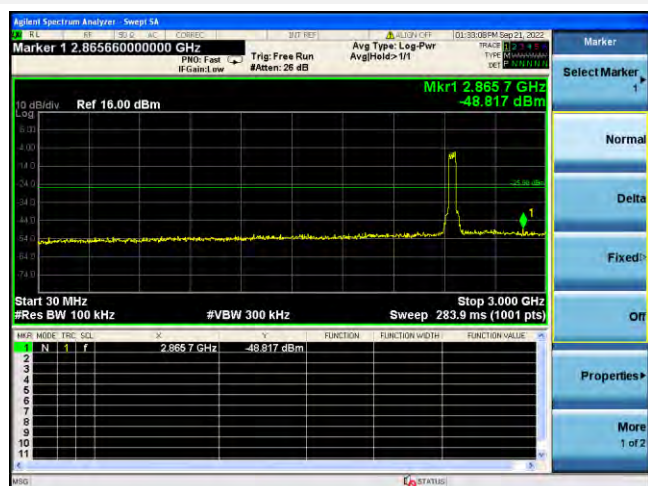

802.11ax-40 MHz(SU) HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

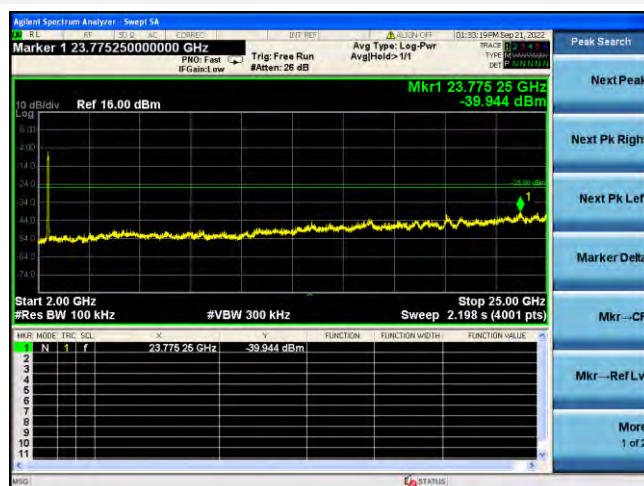

A.4 Band Edge (Authorized-band band-edge)

Note 1: The 99% OBW of the fundamental emission is without 2 MHz of the authorized band.

Note 2: All the configurations were pre tested, only the worst configuration has been reported in this report.

Test Data

802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-28.86	3.87	-16.13	Pass
High Channel	-45.57	6.16	-13.84	Pass

802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-33.33	-3.20	-23.20	Pass
High Channel	-45.68	-1.01	-21.01	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-33.39	-2.72	-22.72	Pass
High Channel	-44.64	-1.03	-21.03	Pass

802.11n-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-35.60	-7.87	-27.87	Pass
High Channel	-37.66	-5.78	-25.78	Pass

802.11ax-20 MHz(SU) Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-18.85	5.68	-14.33	Pass
High Channel	-46.45	-2.70	-22.70	Pass

802.11ax-40 MHz(SU) Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-21.59	2.03	-17.97	Pass
High Channel	-38.63	-5.98	-25.98	Pass

Test Plots

802.11b LOW CHANNEL, CARRIER LEVEL



802.11b LOW CHANNEL, BAND EDGE




802.11b HIGH CHANNEL, CARRIER LEVEL



802.11b HIGH CHANNEL, BAND EDGE




802.11g LOW CHANNEL, CARRIER LEVEL

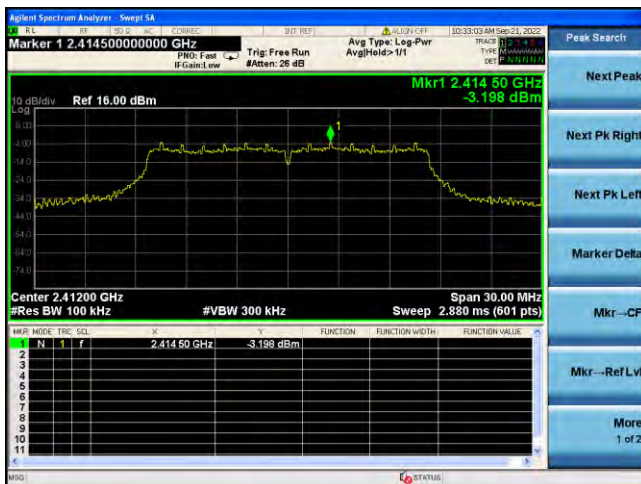


802.11g LOW CHANNEL, BAND EDGE




802.11g HIGH CHANNEL, CARRIER LEVEL

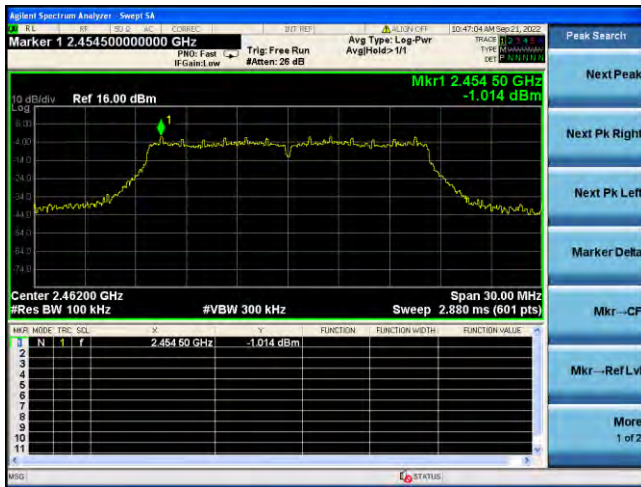

802.11g HIGH CHANNEL, BAND EDGE

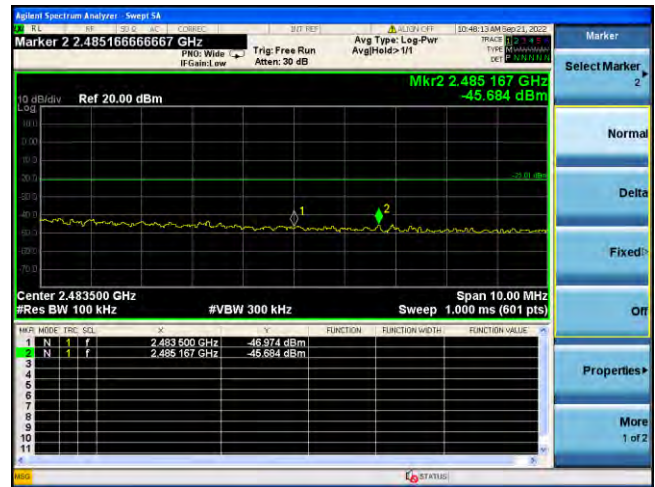


802.11n-20 MHz LOW CHANNEL, CARRIER LEVEL

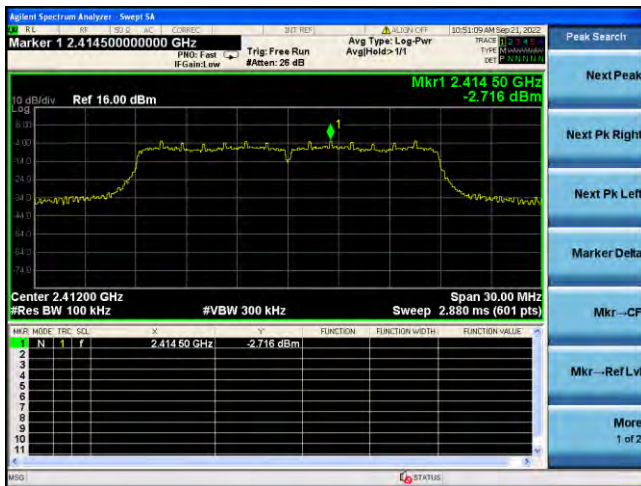


802.11n-20 MHz LOW CHANNEL, BAND EDGE



802.11n-20 MHz HIGH CHANNEL, CARRIER LEVEL

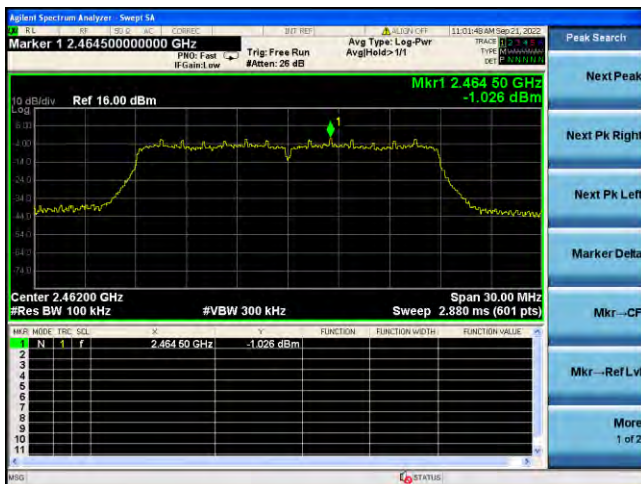

802.11n-20 MHz HIGH CHANNEL, BAND EDGE

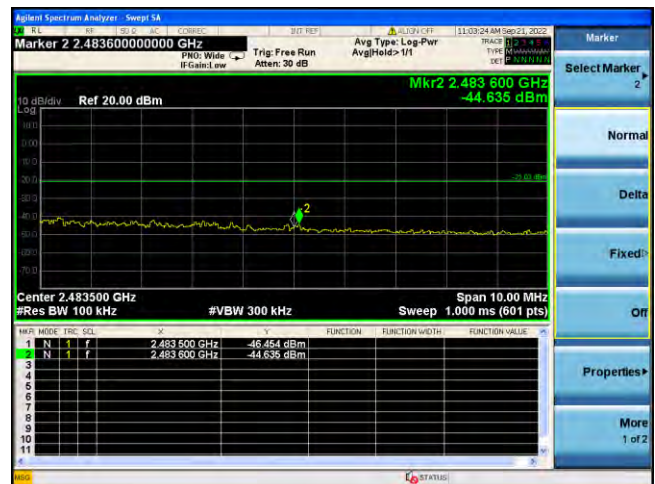


802.11n-40 MHz LOW CHANNEL, CARRIER LEVEL




802.11n-40 MHz LOW CHANNEL, BAND EDGE




802.11n-40 MHz HIGH CHANNEL, CARRIER LEVEL

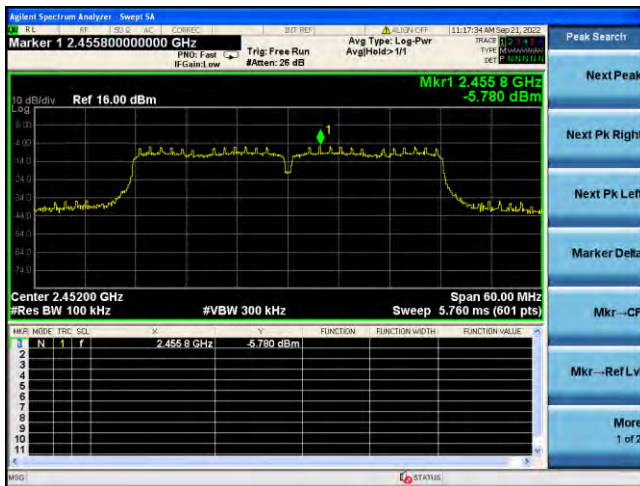

802.11n-40 MHz HIGH CHANNEL, BAND EDGE

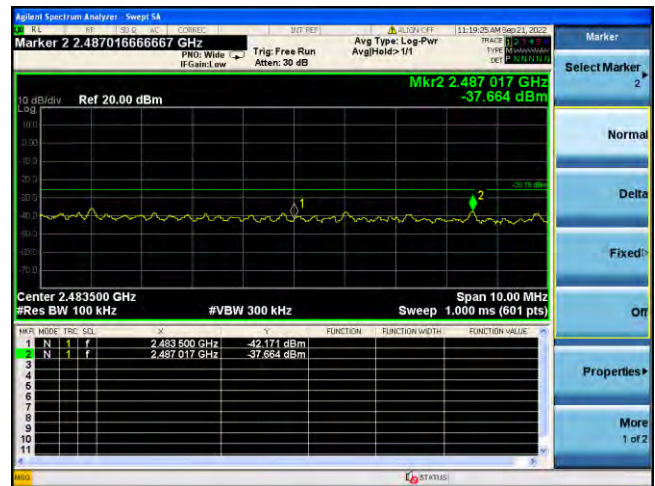


802.11ax-20 MHz(SU) LOW CHANNEL, CARRIER LEVEL

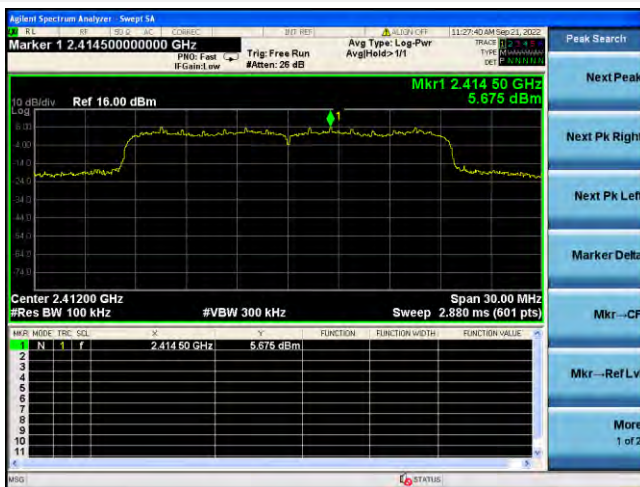


802.11ax-20 MHz(SU) LOW CHANNEL, BAND EDGE




802.11ax-20 MHz(SU) HIGH CHANNEL, CARRIER LEVEL

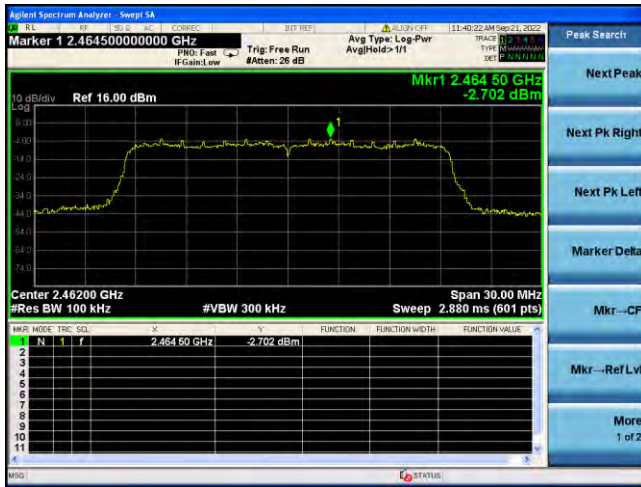

802.11ax-20 MHz(SU) HIGH CHANNEL, BAND EDGE

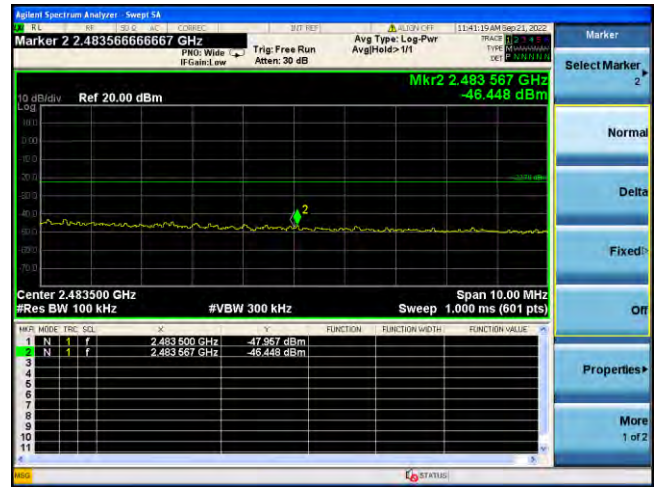


802.11ax-40 MHz(SU) LOW CHANNEL, CARRIER LEVEL

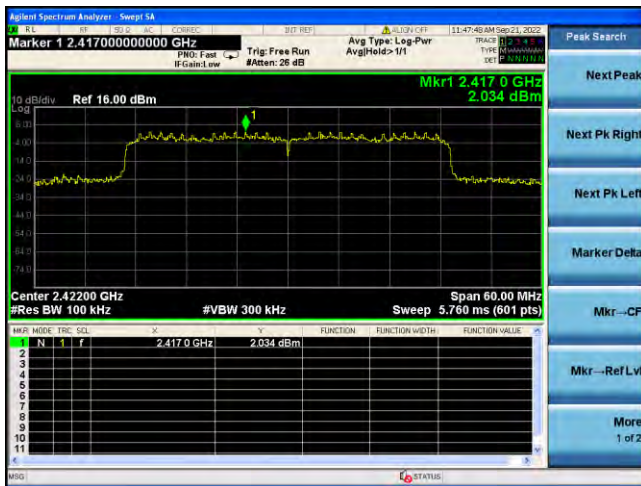


802.11ax-40 MHz(SU) LOW CHANNEL, BAND EDGE



802.11ax-40 MHz(SU) HIGH CHANNEL, CARRIER LEVEL

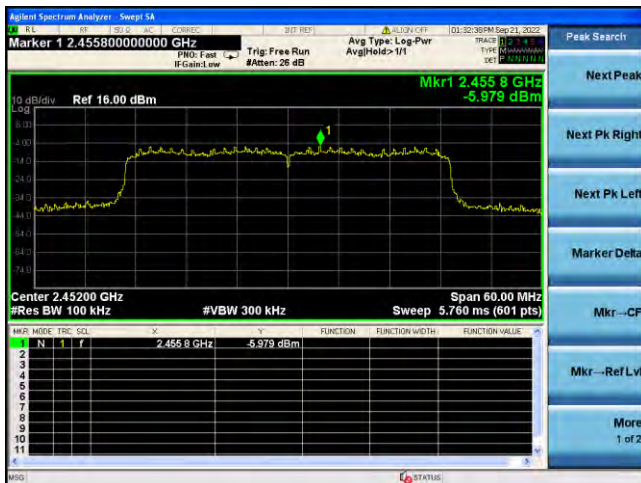

802.11ax-40 MHz(SU) HIGH CHANNEL, BAND EDGE

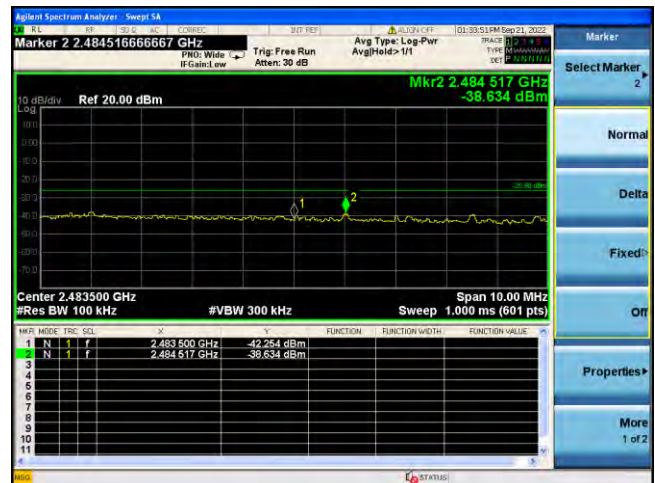

A.5 Conducted Emissions


Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

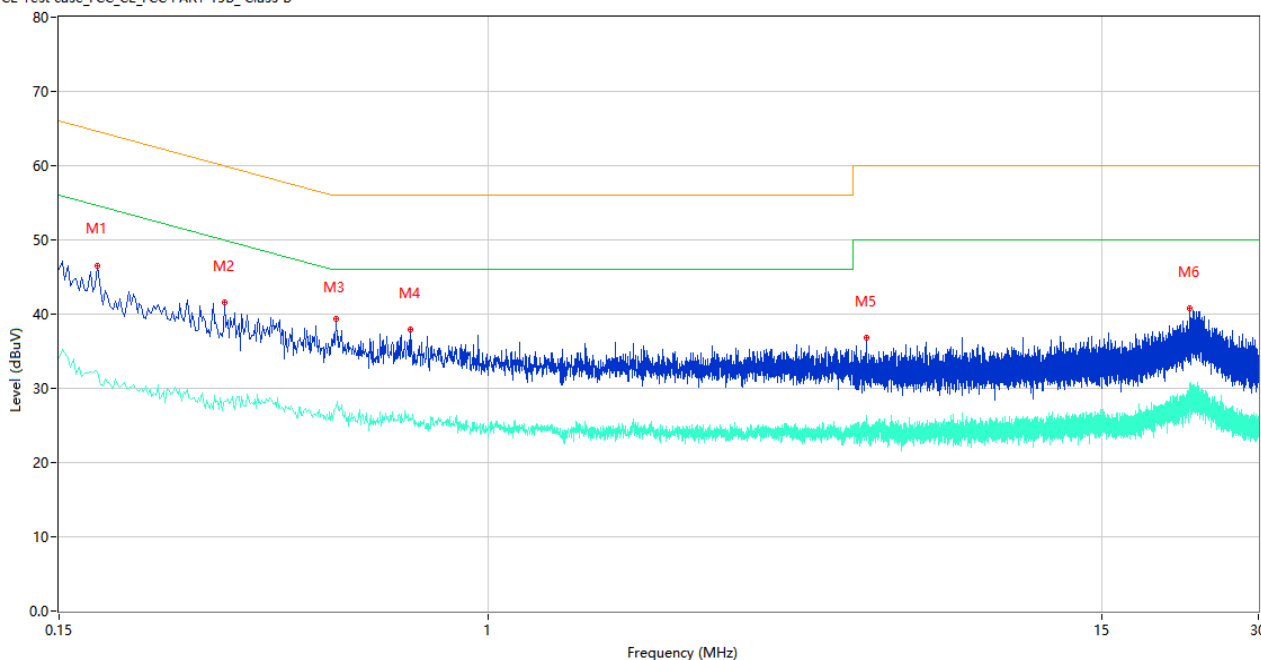

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.178	46.51	10.07	64.58	-18.07	Peak	L	Pass
1**	0.178	32.19	10.07	54.58	-22.39	AV	L	Pass
2	0.312	41.58	10.22	59.92	-18.34	Peak	L	Pass
2**	0.312	28.30	10.22	49.92	-21.62	AV	L	Pass
3	0.510	39.33	10.18	56.00	-16.67	Peak	L	Pass
3**	0.510	27.47	10.18	46.00	-18.53	AV	L	Pass
4	0.710	37.87	10.71	56.00	-18.13	Peak	L	Pass
4**	0.710	26.06	10.71	46.00	-19.94	AV	L	Pass
5	5.314	36.80	10.28	60.00	-23.20	Peak	L	Pass
5**	5.314	25.11	10.28	50.00	-24.89	AV	L	Pass
6	22.188	40.73	10.40	60.00	-19.27	Peak	L	Pass
6**	22.188	27.56	10.40	50.00	-22.44	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

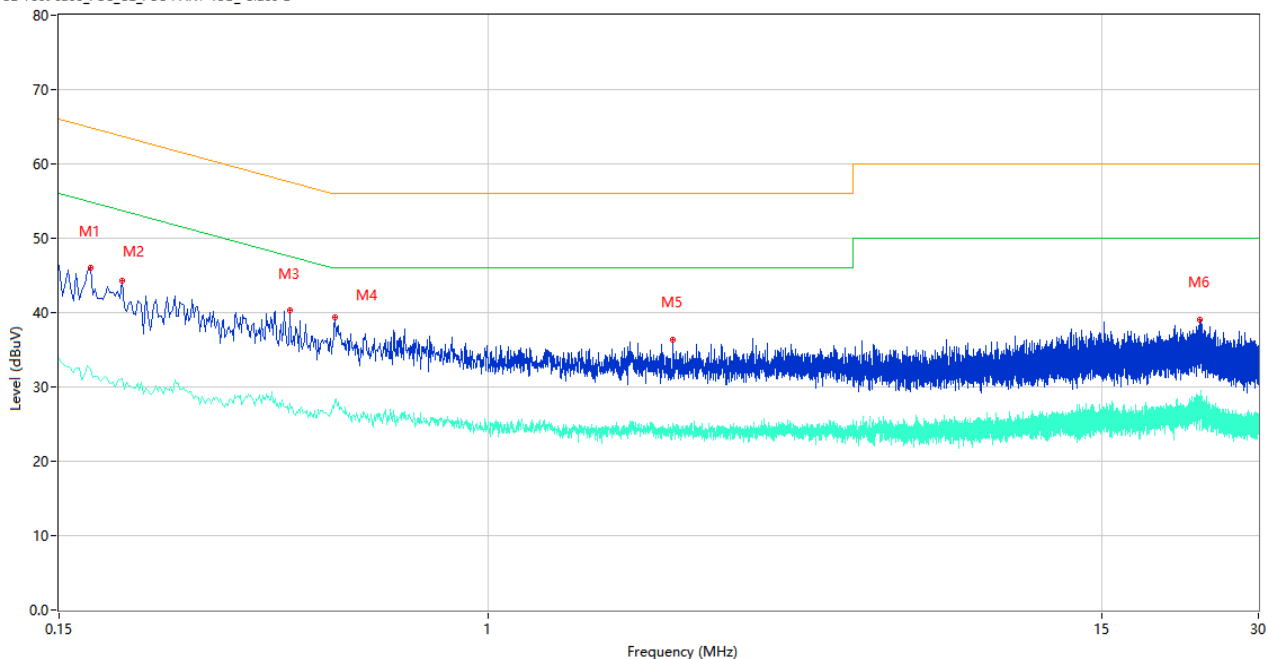

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.172	46.00	10.07	64.86	-18.86	Peak	N	Pass
1**	0.172	32.46	10.07	54.86	-22.40	AV	N	Pass
2	0.198	44.35	10.06	63.69	-19.34	Peak	N	Pass
2**	0.198	31.11	10.06	53.69	-22.58	AV	N	Pass
3	0.416	40.30	10.59	57.53	-17.23	Peak	N	Pass
3**	0.416	27.79	10.59	47.53	-19.74	AV	N	Pass
4	0.508	39.43	10.18	56.00	-16.57	Peak	N	Pass
4**	0.508	28.03	10.18	46.00	-17.97	AV	N	Pass
5	2.256	36.36	10.22	56.00	-19.64	Peak	N	Pass
5**	2.256	24.16	10.22	46.00	-21.84	AV	N	Pass
6	23.140	39.06	10.27	60.00	-20.94	Peak	N	Pass
6**	23.140	27.48	10.27	50.00	-22.52	AV	N	Pass

A.6 Radiated Emission

Note ¹: The symbol of “--” in the table which means not application.

Note ²: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note ³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note ⁴: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Test Data and Plots

30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

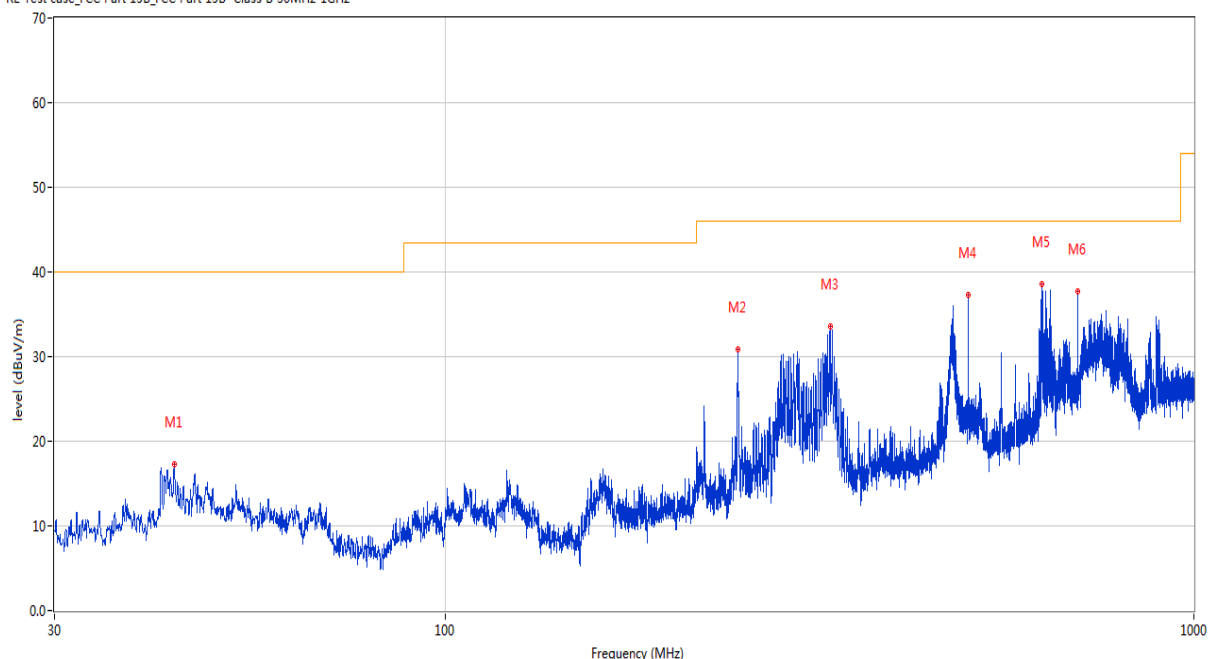

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	43.385	17.26	-23.35	40.0	-22.74	Peak	86.40	200	Horizontal	Pass
2	245.717	30.92	-23.04	46.0	-15.08	Peak	64.80	100	Horizontal	Pass
3	326.369	33.59	-20.77	46.0	-12.41	Peak	277.40	100	Horizontal	Pass
4	499.942	37.31	-16.91	46.0	-8.69	Peak	90.80	200	Horizontal	Pass
5	626.326	38.59	-13.85	46.0	-7.41	Peak	0.00	200	Horizontal	Pass
6	699.946	37.68	-13.67	46.0	-8.32	Peak	0.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

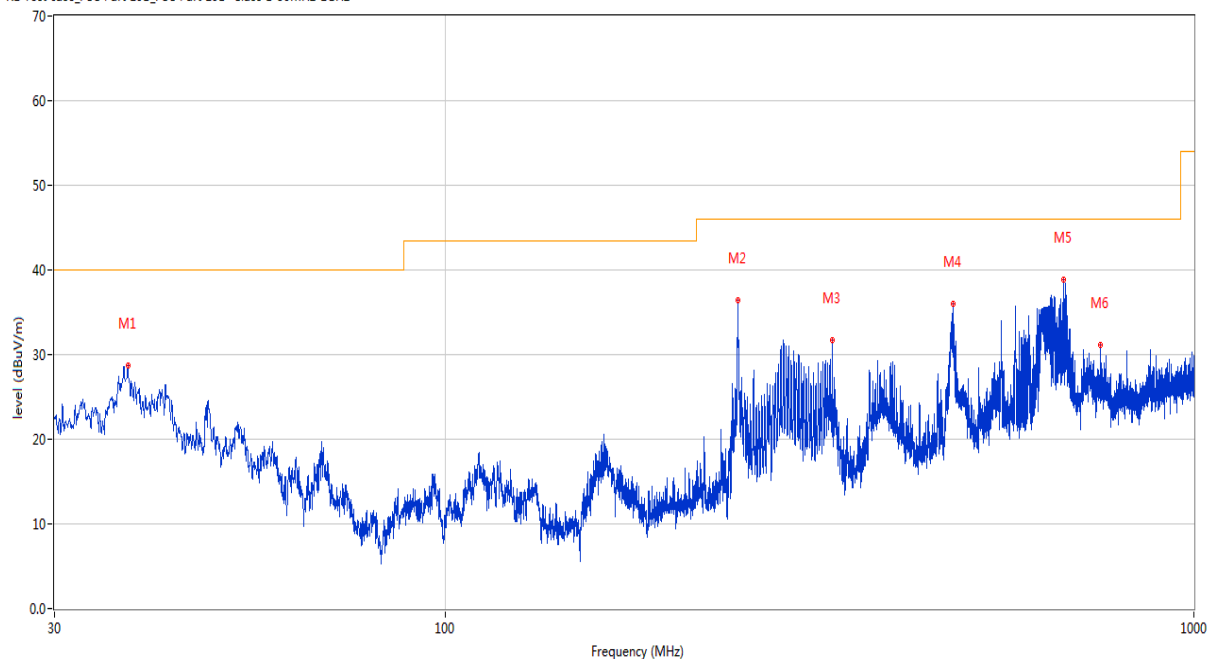

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	37.614	28.69	-24.54	40.0	-11.31	Peak	88.10	100	Vertical	Pass
2	245.717	36.47	-23.04	46.0	-9.53	Peak	0.00	200	Vertical	Pass
3	328.406	31.71	-20.84	46.0	-14.29	Peak	0.00	200	Vertical	Pass
4	476.081	35.95	-17.18	46.0	-10.05	Peak	273.50	100	Vertical	Pass
5	669.247	38.88	-13.26	46.0	-7.12	Peak	0.00	200	Vertical	Pass
6	749.995	31.12	-12.37	46.0	-14.88	Peak	161.60	100	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

Note 3: All the configurations were pre tested, only the worst configuration has been reported in this report.

1 GHz to 18 GHz, ANT H 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1196.400	45.59	-17.99	74.0	-28.41	Peak	237.00	400	Horizontal	Pass
1**	1196.400	33.23	-17.99	54.0	-20.77	AV	237.00	400	Horizontal	Pass
2	2410.600	104.71	-13.49	74.0	30.71	Peak	332.00	150	Horizontal	N/A
2**	2410.600	101.91	-13.49	54.0	47.91	AV	332.00	150	Horizontal	N/A
3	2996.600	49.53	-10.52	74.0	-24.47	Peak	109.00	150	Horizontal	Pass
3**	2996.600	41.09	-10.52	54.0	-12.91	AV	109.00	150	Horizontal	Pass
4	7852.250	53.16	0.92	74.0	-20.84	Peak	192.00	400	Horizontal	Pass
4**	7852.250	44.69	0.92	54.0	-9.31	AV	192.00	400	Horizontal	Pass
5	12526.987	49.83	-2.29	74.0	-24.17	Peak	163.00	200	Horizontal	Pass
5**	12526.987	39.75	-2.29	54.0	-14.25	AV	163.00	200	Horizontal	Pass
6	16791.450	53.33	0.43	74.0	-20.67	Peak	59.00	400	Horizontal	Pass
6**	16791.450	43.15	0.43	54.0	-10.85	AV	59.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.600	45.07	-17.89	74.0	-28.93	Peak	292.00	300	Vertical	Pass
1**	1197.600	35.15	-17.89	54.0	-18.85	AV	292.00	300	Vertical	Pass
2	2413.500	103.52	-13.42	74.0	29.52	Peak	189.00	100	Vertical	N/A
2**	2413.500	100.60	-13.42	54.0	46.60	AV	189.00	100	Vertical	N/A
3	2663.900	51.71	-12.46	74.0	-22.29	Peak	171.00	200	Vertical	Pass
3**	2663.900	39.32	-12.46	54.0	-14.68	AV	171.00	200	Vertical	Pass
4	7506.500	53.44	0.05	74.0	-20.56	Peak	184.00	400	Vertical	Pass
4**	7506.500	43.91	0.05	54.0	-10.09	AV	184.00	400	Vertical	Pass
5	11803.325	49.63	-3.51	74.0	-24.37	Peak	212.00	300	Vertical	Pass
5**	11803.325	41.37	-3.51	54.0	-12.63	AV	212.00	300	Vertical	Pass
6	16835.025	53.59	0.88	74.0	-20.41	Peak	236.00	300	Vertical	Pass
6**	16835.025	44.48	0.88	54.0	-9.52	AV	236.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.700	45.32	-17.88	74.0	-28.68	Peak	237.00	300	Horizontal	Pass
1**	1197.700	34.96	-17.88	54.0	-19.04	AV	237.00	300	Horizontal	Pass
2	2435.400	105.37	-12.08	74.0	31.37	Peak	284.00	150	Horizontal	N/A
2**	2435.400	102.49	-12.08	54.0	48.49	AV	284.00	150	Horizontal	N/A
3	2996.300	49.65	-10.52	74.0	-24.35	Peak	351.00	200	Horizontal	Pass
3**	2996.300	41.37	-10.52	54.0	-12.63	AV	351.00	200	Horizontal	Pass
4	7819.750	53.83	1.95	74.0	-20.17	Peak	323.00	200	Horizontal	Pass
4**	7819.750	45.16	1.95	54.0	-8.84	AV	323.00	200	Horizontal	Pass
5	12928.238	49.55	-1.75	74.0	-24.45	Peak	207.00	300	Horizontal	Pass
5**	12928.238	40.44	-1.75	54.0	-13.56	AV	207.00	300	Horizontal	Pass
6	16875.187	53.57	1.30	74.0	-20.43	Peak	317.00	200	Horizontal	Pass
6**	16875.187	43.91	1.30	54.0	-10.09	AV	317.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1202.000	45.13	-17.87	74.0	-28.87	Peak	360.00	200	Vertical	Pass
1**	1202.000	36.84	-17.87	54.0	-17.16	AV	360.00	200	Vertical	Pass
2	2435.400	104.29	-12.08	74.0	30.29	Peak	247.00	200	Vertical	N/A
2**	2435.400	101.34	-12.08	54.0	47.34	AV	247.00	200	Vertical	N/A
3	2794.100	50.31	-11.19	74.0	-23.69	Peak	134.00	100	Vertical	Pass
3**	2794.100	39.95	-11.19	54.0	-14.05	AV	134.00	100	Vertical	Pass
4	7860.750	53.30	1.30	74.0	-20.70	Peak	356.00	100	Vertical	Pass
4**	7860.750	44.45	1.30	54.0	-9.55	AV	356.00	100	Vertical	Pass
5	12679.700	49.34	-2.32	74.0	-24.66	Peak	188.00	400	Vertical	Pass
5**	12679.700	40.59	-2.32	54.0	-13.41	AV	188.00	400	Vertical	Pass
6	16831.613	53.84	0.84	74.0	-20.16	Peak	143.00	300	Vertical	Pass
6**	16831.613	43.66	0.84	54.0	-10.34	AV	143.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.700	46.38	-17.83	74.0	-27.62	Peak	235.00	100	Horizontal	Pass
1**	1198.700	34.59	-17.83	54.0	-19.41	AV	235.00	100	Horizontal	Pass
2	2460.600	105.23	-12.62	74.0	31.23	Peak	272.00	100	Horizontal	N/A
2**	2460.600	102.32	-12.62	54.0	48.32	AV	272.00	100	Horizontal	N/A
3	2892.800	50.18	-9.98	74.0	-23.82	Peak	244.00	300	Horizontal	Pass
3**	2892.800	40.36	-9.98	54.0	-13.64	AV	244.00	300	Horizontal	Pass
4	7833.000	53.22	2.28	74.0	-20.78	Peak	288.00	300	Horizontal	Pass
4**	7833.000	44.67	2.28	54.0	-9.33	AV	288.00	300	Horizontal	Pass
5	12957.638	49.59	-1.67	74.0	-24.41	Peak	70.00	300	Horizontal	Pass
5**	12957.638	39.90	-1.67	54.0	-14.10	AV	70.00	300	Horizontal	Pass
6	17285.474	53.28	1.99	74.0	-20.72	Peak	351.00	300	Horizontal	Pass
6**	17285.474	44.57	1.99	54.0	-9.43	AV	351.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.700	47.00	-17.91	74.0	-27.00	Peak	9.00	400	Vertical	Pass
1**	1199.700	37.66	-17.91	54.0	-16.34	AV	9.00	400	Vertical	Pass
2	2460.600	103.26	-12.62	74.0	29.26	Peak	249.00	100	Vertical	N/A
2**	2460.600	100.29	-12.62	54.0	46.29	AV	249.00	100	Vertical	N/A
3	4486.750	49.15	-3.89	74.0	-24.85	Peak	316.00	300	Vertical	Pass
3**	4486.750	38.96	-3.89	54.0	-15.04	AV	316.00	300	Vertical	Pass
4	7839.750	53.21	1.91	74.0	-20.79	Peak	333.00	300	Vertical	Pass
4**	7839.750	45.58	1.91	54.0	-8.42	AV	333.00	300	Vertical	Pass
5	12296.375	49.48	-2.47	74.0	-24.52	Peak	212.00	400	Vertical	Pass
5**	12296.375	40.64	-2.47	54.0	-13.36	AV	212.00	400	Vertical	Pass
6	16906.162	54.33	1.41	74.0	-19.67	Peak	48.00	200	Vertical	Pass
6**	16906.162	44.12	1.41	54.0	-9.88	AV	48.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.800	45.85	-17.84	74.0	-28.15	Peak	212.00	400	Horizontal	Pass
1**	1198.800	34.39	-17.84	54.0	-19.61	AV	212.00	400	Horizontal	Pass
2	2405.300	107.94	-13.13	74.0	33.94	Peak	264.00	100	Horizontal	N/A
2**	2405.300	99.79	-13.13	54.0	45.79	AV	264.00	100	Horizontal	N/A
3	2886.600	49.33	-10.10	74.0	-24.67	Peak	168.00	100	Horizontal	Pass
3**	2886.600	40.39	-10.10	54.0	-13.61	AV	168.00	100	Horizontal	Pass
4	7833.750	53.76	2.25	74.0	-20.24	Peak	209.00	300	Horizontal	Pass
4**	7833.750	44.79	2.25	54.0	-9.21	AV	209.00	300	Horizontal	Pass
5	12675.900	50.06	-2.32	74.0	-23.94	Peak	199.00	200	Horizontal	Pass
5**	12675.900	40.47	-2.32	54.0	-13.53	AV	199.00	200	Horizontal	Pass
6	17275.501	53.46	1.97	74.0	-20.54	Peak	96.00	200	Horizontal	Pass
6**	17275.501	45.05	1.97	54.0	-8.95	AV	96.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.200	45.24	-17.87	74.0	-28.76	Peak	299.00	400	Vertical	Pass
1**	1199.200	36.52	-17.87	54.0	-17.48	AV	299.00	400	Vertical	Pass
2	2404.400	105.27	-13.20	74.0	31.27	Peak	247.00	150	Vertical	N/A
2**	2404.400	97.32	-13.20	54.0	43.32	AV	247.00	150	Vertical	N/A
3	2877.100	50.28	-10.08	74.0	-23.72	Peak	313.00	100	Vertical	Pass
3**	2877.100	40.56	-10.08	54.0	-13.44	AV	313.00	100	Vertical	Pass
4	7810.750	54.44	0.65	74.0	-19.56	Peak	40.00	100	Vertical	Pass
4**	7810.750	44.02	0.65	54.0	-9.98	AV	40.00	100	Vertical	Pass
5	12453.125	49.05	-2.17	74.0	-24.95	Peak	235.00	300	Vertical	Pass
5**	12453.125	39.99	-2.17	54.0	-14.01	AV	235.00	300	Vertical	Pass
6	17488.650	53.07	3.08	74.0	-20.93	Peak	219.00	300	Vertical	Pass
6**	17488.650	43.90	3.08	54.0	-10.10	AV	219.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.400	45.86	-17.83	74.0	-28.14	Peak	235.00	200	Horizontal	Pass
1**	1198.400	35.56	-17.83	54.0	-18.44	AV	235.00	200	Horizontal	Pass
2	2435.200	107.92	-12.07	74.0	33.92	Peak	314.00	200	Horizontal	N/A
2**	2435.200	100.61	-12.07	54.0	46.61	AV	314.00	200	Horizontal	N/A
3	2878.700	49.80	-10.31	74.0	-24.20	Peak	19.00	100	Horizontal	Pass
3**	2878.700	40.44	-10.31	54.0	-13.56	AV	19.00	100	Horizontal	Pass
4	7833.250	53.49	2.27	74.0	-20.51	Peak	105.00	300	Horizontal	Pass
4**	7833.250	44.94	2.27	54.0	-9.06	AV	105.00	300	Horizontal	Pass
5	12863.138	49.53	-2.04	74.0	-24.47	Peak	329.00	100	Horizontal	Pass
5**	12863.138	41.05	-2.04	54.0	-12.95	AV	329.00	100	Horizontal	Pass
6	17280.487	53.33	1.98	74.0	-20.67	Peak	192.00	400	Horizontal	Pass
6**	17280.487	44.22	1.98	54.0	-9.78	AV	192.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1180.100	46.11	-17.97	74.0	-27.89	Peak	19.00	100	Vertical	Pass
1**	1180.100	37.36	-17.97	54.0	-16.64	AV	19.00	100	Vertical	Pass
2	2434.700	106.10	-12.12	74.0	32.10	Peak	248.00	150	Vertical	N/A
2**	2434.700	99.19	-12.12	54.0	45.19	AV	248.00	150	Vertical	N/A
3	3600.250	48.51	-7.42	74.0	-25.49	Peak	108.00	100	Vertical	Pass
3**	3600.250	40.20	-7.42	54.0	-13.80	AV	108.00	100	Vertical	Pass
4	7860.750	54.07	1.30	74.0	-19.93	Peak	168.00	200	Vertical	Pass
4**	7860.750	44.48	1.30	54.0	-9.52	AV	168.00	200	Vertical	Pass
5	12946.350	49.11	-1.66	74.0	-24.89	Peak	108.00	400	Vertical	Pass
5**	12946.350	40.38	-1.66	54.0	-13.62	AV	108.00	400	Vertical	Pass
6	16915.350	53.49	1.26	74.0	-20.51	Peak	0.00	200	Vertical	Pass
6**	16915.350	43.70	1.26	54.0	-10.30	AV	0.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.300	47.29	-17.83	74.0	-26.71	Peak	232.00	400	Horizontal	Pass
1**	1198.300	34.50	-17.83	54.0	-19.50	AV	232.00	400	Horizontal	Pass
2	2459.300	107.85	-12.64	74.0	33.85	Peak	271.00	200	Horizontal	N/A
2**	2459.300	100.64	-12.64	54.0	46.64	AV	271.00	200	Horizontal	N/A
3	2995.700	50.55	-10.51	74.0	-23.45	Peak	4.00	100	Horizontal	Pass
3**	2995.700	39.88	-10.51	54.0	-14.12	AV	4.00	100	Horizontal	Pass
4	7836.750	54.34	2.09	74.0	-19.66	Peak	194.00	200	Horizontal	Pass
4**	7836.750	45.38	2.09	54.0	-8.62	AV	194.00	200	Horizontal	Pass
5	12295.663	49.58	-2.48	74.0	-24.42	Peak	257.00	200	Horizontal	Pass
5**	12295.663	41.13	-2.48	54.0	-12.87	AV	257.00	200	Horizontal	Pass
6	17387.063	53.54	2.54	74.0	-20.46	Peak	253.00	400	Horizontal	Pass
6**	17387.063	44.20	2.54	54.0	-9.80	AV	253.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1193.400	45.50	-17.91	74.0	-28.50	Peak	9.00	400	Vertical	Pass
1**	1193.400	35.56	-17.91	54.0	-18.44	AV	9.00	400	Vertical	Pass
2	2463.900	105.40	-12.70	74.0	31.40	Peak	191.00	100	Vertical	N/A
2**	2463.900	97.89	-12.70	54.0	43.89	AV	191.00	100	Vertical	N/A
3	2990.300	49.42	-10.59	74.0	-24.58	Peak	158.00	200	Vertical	Pass
3**	2990.300	39.57	-10.59	54.0	-14.43	AV	158.00	200	Vertical	Pass
4	7856.000	53.33	1.10	74.0	-20.67	Peak	75.00	100	Vertical	Pass
4**	7856.000	44.13	1.10	54.0	-9.87	AV	75.00	100	Vertical	Pass
5	12289.250	49.49	-2.54	74.0	-24.51	Peak	257.00	100	Vertical	Pass
5**	12289.250	40.10	-2.54	54.0	-13.90	AV	257.00	100	Vertical	Pass
6	17493.375	53.19	3.08	74.0	-20.81	Peak	0.00	100	Vertical	Pass
6**	17493.375	43.67	3.08	54.0	-10.33	AV	0.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.200	43.23	-17.84	74.0	-30.77	Peak	231.00	400	Horizontal	Pass
1**	1198.200	32.51	-17.84	54.0	-21.49	AV	231.00	400	Horizontal	Pass
2	2408.100	106.78	-13.49	74.0	32.78	Peak	279.00	100	Horizontal	N/A
2**	2408.100	98.43	-13.49	54.0	44.43	AV	279.00	100	Horizontal	N/A
3	4467.000	49.61	-4.05	74.0	-24.39	Peak	31.00	200	Horizontal	Pass
3**	4467.000	38.82	-4.05	54.0	-15.18	AV	31.00	200	Horizontal	Pass
4	7836.250	54.46	2.12	74.0	-19.54	Peak	118.00	300	Horizontal	Pass
4**	7836.250	44.25	2.12	54.0	-9.75	AV	118.00	300	Horizontal	Pass
5	11386.988	49.38	-4.28	74.0	-24.62	Peak	125.00	400	Horizontal	Pass
5**	11386.988	39.26	-4.28	54.0	-14.74	AV	125.00	400	Horizontal	Pass
6	17856.412	54.97	2.77	74.0	-19.03	Peak	217.00	200	Horizontal	Pass
6**	17856.412	43.54	2.77	54.0	-10.46	AV	217.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.900	46.20	-17.93	74.0	-27.80	Peak	4.00	100	Vertical	Pass
1**	1199.900	35.59	-17.93	54.0	-18.41	AV	4.00	100	Vertical	Pass
2	2408.000	105.40	-13.49	74.0	31.40	Peak	252.00	100	Vertical	N/A
2**	2408.000	97.28	-13.49	54.0	43.28	AV	252.00	100	Vertical	N/A
3	5181.750	50.87	-2.14	74.0	-23.13	Peak	75.00	200	Vertical	Pass
3**	5181.750	42.37	-2.14	54.0	-11.63	AV	75.00	200	Vertical	Pass
4	7833.250	53.80	2.27	74.0	-20.20	Peak	84.00	200	Vertical	Pass
4**	7833.250	45.36	2.27	54.0	-8.64	AV	84.00	200	Vertical	Pass
5	12665.213	49.48	-2.31	74.0	-24.52	Peak	184.00	100	Vertical	Pass
5**	12665.213	40.60	-2.31	54.0	-13.40	AV	184.00	100	Vertical	Pass
6	16899.338	53.96	1.51	74.0	-20.04	Peak	266.00	400	Vertical	Pass
6**	16899.338	44.59	1.51	54.0	-9.41	AV	266.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.300	45.63	-17.83	74.0	-28.37	Peak	236.00	100	Horizontal	Pass
1**	1198.300	32.87	-17.83	54.0	-21.13	AV	236.00	100	Horizontal	Pass
2	2434.000	107.53	-12.18	74.0	33.53	Peak	278.00	200	Horizontal	N/A
2**	2434.000	100.99	-12.18	54.0	46.99	AV	278.00	200	Horizontal	N/A
3	2994.100	49.83	-10.49	74.0	-24.17	Peak	239.00	0	Horizontal	Pass
3**	2994.100	40.64	-10.49	54.0	-13.36	AV	239.00	0	Horizontal	Pass
4	7832.750	53.95	2.28	74.0	-20.05	Peak	165.00	100	Horizontal	Pass
4**	7832.750	44.73	2.28	54.0	-9.27	AV	165.00	100	Horizontal	Pass
5	12682.313	49.47	-2.32	74.0	-24.53	Peak	149.00	200	Horizontal	Pass
5**	12682.313	40.03	-2.32	54.0	-13.97	AV	149.00	200	Horizontal	Pass
6	17358.186	53.88	2.02	74.0	-20.12	Peak	300.00	100	Horizontal	Pass
6**	17358.186	44.29	2.02	54.0	-9.71	AV	300.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.200	44.02	-17.84	74.0	-29.98	Peak	360.00	400	Vertical	Pass
1**	1198.200	34.47	-17.84	54.0	-19.53	AV	360.00	400	Vertical	Pass
2	2435.500	104.65	-12.09	74.0	30.65	Peak	250.00	200	Vertical	N/A
2**	2435.500	97.83	-12.09	54.0	43.83	AV	250.00	200	Vertical	N/A
3	2976.100	49.26	-10.47	74.0	-24.74	Peak	305.00	200	Vertical	Pass
3**	2976.100	40.65	-10.47	54.0	-13.35	AV	305.00	200	Vertical	Pass
4	7456.750	54.00	1.13	74.0	-20.00	Peak	263.00	100	Vertical	Pass
4**	7456.750	44.42	1.13	54.0	-9.58	AV	263.00	100	Vertical	Pass
5	9994.287	49.57	-4.70	74.0	-24.43	Peak	9.00	400	Vertical	Pass
5**	9994.287	39.49	-4.70	54.0	-14.51	AV	9.00	400	Vertical	Pass
6	16880.437	53.12	1.34	74.0	-20.88	Peak	67.00	300	Vertical	Pass
6**	16880.437	43.82	1.34	54.0	-10.18	AV	67.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1202.400	45.75	-17.83	74.0	-28.25	Peak	235.00	200	Horizontal	Pass
1**	1202.400	34.64	-17.83	54.0	-19.36	AV	235.00	200	Horizontal	Pass
2	2464.200	107.62	-12.71	74.0	33.62	Peak	335.00	150	Horizontal	N/A
2**	2464.200	99.88	-12.71	54.0	45.88	AV	335.00	150	Horizontal	N/A
3	5179.250	50.47	-2.24	74.0	-23.53	Peak	116.00	200	Horizontal	Pass
3**	5179.250	41.88	-2.24	54.0	-12.12	AV	116.00	200	Horizontal	Pass
4	7827.250	54.13	1.79	74.0	-19.87	Peak	227.00	400	Horizontal	Pass
4**	7827.250	44.79	1.79	54.0	-9.21	AV	227.00	400	Horizontal	Pass
5	11338.063	49.40	-4.37	74.0	-24.60	Peak	338.00	400	Horizontal	Pass
5**	11338.063	38.91	-4.37	54.0	-15.09	AV	338.00	400	Horizontal	Pass
6	17318.025	52.97	1.96	74.0	-21.03	Peak	297.00	400	Horizontal	Pass
6**	17318.025	43.66	1.96	54.0	-10.34	AV	297.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.800	45.80	-17.92	74.0	-28.20	Peak	3.00	400	Vertical	Pass
1**	1199.800	37.27	-17.92	54.0	-16.73	AV	3.00	400	Vertical	Pass
2	2454.500	105.67	-13.15	74.0	31.67	Peak	171.00	100	Vertical	N/A
2**	2454.500	97.73	-13.15	54.0	43.73	AV	171.00	100	Vertical	N/A
3	4007.000	48.01	-5.71	74.0	-25.99	Peak	66.00	200	Vertical	Pass
3**	4007.000	36.77	-5.71	54.0	-17.23	AV	66.00	200	Vertical	Pass
4	7842.500	54.23	1.60	74.0	-19.77	Peak	347.00	300	Vertical	Pass
4**	7842.500	44.82	1.60	54.0	-9.18	AV	347.00	300	Vertical	Pass
5	12671.863	50.15	-2.32	74.0	-23.85	Peak	106.00	300	Vertical	Pass
5**	12671.863	40.16	-2.32	54.0	-13.84	AV	106.00	300	Vertical	Pass
6	16897.500	54.09	1.49	74.0	-19.91	Peak	183.00	100	Vertical	Pass
6**	16897.500	44.28	1.49	54.0	-9.72	AV	183.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.300	43.77	-17.92	74.0	-30.23	Peak	210.00	200	Horizontal	Pass
1**	1197.300	33.24	-17.92	54.0	-20.76	AV	210.00	200	Horizontal	Pass
2	2416.500	104.68	-13.28	74.0	30.68	Peak	330.00	100	Horizontal	N/A
2**	2416.500	96.37	-13.28	54.0	42.37	AV	330.00	100	Horizontal	N/A
3	4900.750	49.79	-3.52	74.0	-24.21	Peak	199.00	150	Horizontal	Pass
3**	4900.750	39.90	-3.52	54.0	-14.10	AV	199.00	150	Horizontal	Pass
4	7837.750	52.72	2.04	74.0	-21.28	Peak	94.00	200	Horizontal	Pass
4**	7837.750	43.26	2.04	54.0	-10.74	AV	94.00	200	Horizontal	Pass
5	12451.937	48.73	-2.16	74.0	-25.27	Peak	56.00	300	Horizontal	Pass
5**	12451.937	39.69	-2.16	54.0	-14.31	AV	56.00	300	Horizontal	Pass
6	16875.187	52.87	1.30	74.0	-21.13	Peak	13.00	100	Horizontal	Pass
6**	16875.187	43.07	1.30	54.0	-10.93	AV	13.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.400	44.26	-17.30	74.0	-29.74	Peak	50.00	400	Vertical	Pass
1**	1440.400	35.08	-17.30	54.0	-18.92	AV	50.00	400	Vertical	Pass
2	2407.000	102.51	-13.35	74.0	28.51	Peak	248.00	100	Vertical	N/A
2**	2407.000	94.57	-13.35	54.0	40.57	AV	248.00	100	Vertical	N/A
3	5316.750	50.46	-3.30	74.0	-23.54	Peak	339.00	200	Vertical	Pass
3**	5316.750	41.16	-3.30	54.0	-12.84	AV	339.00	200	Vertical	Pass
4	7818.500	52.55	1.79	74.0	-21.45	Peak	279.00	200	Vertical	Pass
4**	7818.500	43.89	1.79	54.0	-10.11	AV	279.00	200	Vertical	Pass
5	12053.650	50.10	-3.35	74.0	-23.90	Peak	71.00	300	Vertical	Pass
5**	12053.650	39.31	-3.35	54.0	-14.69	AV	71.00	300	Vertical	Pass
6	17477.100	53.16	3.09	74.0	-20.84	Peak	250.00	100	Vertical	Pass
6**	17477.100	43.50	3.09	54.0	-10.50	AV	250.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1194.600	44.68	-17.93	74.0	-29.32	Peak	89.00	300	Horizontal	Pass
1**	1194.600	33.60	-17.93	54.0	-20.40	AV	89.00	300	Horizontal	Pass
2	2422.900	104.49	-12.79	74.0	30.49	Peak	332.00	200	Horizontal	N/A
2**	2422.900	96.76	-12.79	54.0	42.76	AV	332.00	200	Horizontal	N/A
3	5272.750	49.92	-3.20	74.0	-24.08	Peak	111.00	150	Horizontal	Pass
3**	5272.750	41.71	-3.20	54.0	-12.29	AV	111.00	150	Horizontal	Pass
4	7814.000	53.29	0.97	74.0	-20.71	Peak	243.00	100	Horizontal	Pass
4**	7814.000	43.48	0.97	54.0	-10.52	AV	243.00	100	Horizontal	Pass
5	12527.225	48.98	-2.29	74.0	-25.02	Peak	31.00	300	Horizontal	Pass
5**	12527.225	39.32	-2.29	54.0	-14.68	AV	31.00	300	Horizontal	Pass
6	16905.375	52.97	1.43	74.0	-21.03	Peak	263.00	100	Horizontal	Pass
6**	16905.375	43.58	1.43	54.0	-10.42	AV	263.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1201.600	45.72	-17.91	74.0	-28.28	Peak	359.00	200	Vertical	Pass
1**	1201.600	36.67	-17.91	54.0	-17.33	AV	359.00	200	Vertical	Pass
2	2432.700	102.12	-12.30	74.0	28.12	Peak	247.00	100	Vertical	N/A
2**	2432.700	94.86	-12.30	54.0	40.86	AV	247.00	100	Vertical	N/A
3	5163.000	50.66	-3.40	74.0	-23.34	Peak	47.00	150	Vertical	Pass
3**	5163.000	40.51	-3.40	54.0	-13.49	AV	47.00	150	Vertical	Pass
4	7862.750	52.77	1.39	74.0	-21.23	Peak	329.00	100	Vertical	Pass
4**	7862.750	43.27	1.39	54.0	-10.73	AV	329.00	100	Vertical	Pass
5	11797.151	49.23	-3.56	74.0	-24.77	Peak	360.00	400	Vertical	Pass
5**	11797.151	38.73	-3.56	54.0	-15.27	AV	360.00	400	Vertical	Pass
6	17143.725	53.00	1.58	74.0	-21.00	Peak	263.00	300	Vertical	Pass
6**	17143.725	43.57	1.58	54.0	-10.43	AV	263.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1196.000	44.74	-17.98	74.0	-29.26	Peak	94.00	200	Horizontal	Pass
1**	1196.000	34.37	-17.98	54.0	-19.63	AV	94.00	200	Horizontal	Pass
2	2457.400	104.83	-12.66	74.0	30.83	Peak	326.00	100	Horizontal	N/A
2**	2457.400	96.49	-12.66	54.0	42.49	AV	326.00	100	Horizontal	N/A
3	5361.000	50.59	-3.17	74.0	-23.41	Peak	319.00	150	Horizontal	Pass
3**	5361.000	40.23	-3.17	54.0	-13.77	AV	319.00	150	Horizontal	Pass
4	7842.500	53.00	1.60	74.0	-21.00	Peak	267.00	200	Horizontal	Pass
4**	7842.500	44.25	1.60	54.0	-9.75	AV	267.00	200	Horizontal	Pass
5	12614.150	48.82	-2.53	74.0	-25.18	Peak	278.00	400	Horizontal	Pass
5**	12614.150	39.37	-2.53	54.0	-14.63	AV	278.00	400	Horizontal	Pass
6	17302.800	53.21	2.01	74.0	-20.79	Peak	65.00	150	Horizontal	Pass
6**	17302.800	45.19	2.01	54.0	-8.81	AV	65.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1196.100	43.49	-17.98	74.0	-30.51	Peak	11.00	100	Vertical	Pass
1**	1196.100	33.15	-17.98	54.0	-20.85	AV	11.00	100	Vertical	Pass
2	2467.100	100.40	-12.71	74.0	26.40	Peak	240.00	200	Vertical	N/A
2**	2467.100	93.93	-12.71	54.0	39.93	AV	240.00	200	Vertical	N/A
3	5099.500	49.93	-2.91	74.0	-24.07	Peak	28.00	150	Vertical	Pass
3**	5099.500	40.23	-2.91	54.0	-13.77	AV	28.00	150	Vertical	Pass
4	7856.750	53.03	1.12	74.0	-20.97	Peak	209.00	400	Vertical	Pass
4**	7856.750	44.10	1.12	54.0	-9.90	AV	209.00	400	Vertical	Pass
5	12929.549	49.27	-1.74	74.0	-24.73	Peak	277.00	400	Vertical	Pass
5**	12929.549	39.32	-1.74	54.0	-14.68	AV	277.00	400	Vertical	Pass
6	16907.475	53.15	1.39	74.0	-20.85	Peak	6.00	100	Vertical	Pass
6**	16907.475	43.24	1.39	54.0	-10.76	AV	6.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11ax20(SU) Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.800	44.78	-17.87	74.0	-29.22	Peak	215.00	300	Horizontal	Pass
1**	1197.800	33.54	-17.87	54.0	-20.46	AV	215.00	300	Horizontal	Pass
2	2403.900	107.84	-13.24	74.0	33.84	Peak	283.00	100	Horizontal	N/A
2**	2403.900	99.46	-13.24	54.0	45.46	AV	283.00	100	Horizontal	N/A
3	5198.250	50.25	-3.30	74.0	-23.75	Peak	106.00	150	Horizontal	Pass
3**	5198.250	40.85	-3.30	54.0	-13.15	AV	106.00	150	Horizontal	Pass
4	7870.250	52.72	1.97	74.0	-21.28	Peak	336.00	300	Horizontal	Pass
4**	7870.250	44.60	1.97	54.0	-9.40	AV	336.00	300	Horizontal	Pass
5	12688.725	48.86	-2.33	74.0	-25.14	Peak	9.00	100	Horizontal	Pass
5**	12688.725	39.22	-2.33	54.0	-14.78	AV	9.00	100	Horizontal	Pass
6	17046.863	52.92	0.90	74.0	-21.08	Peak	46.00	100	Horizontal	Pass
6**	17046.863	42.92	0.90	54.0	-11.08	AV	46.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V802.11ax20(SU) Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1530.100	43.35	-17.63	74.0	-30.65	Peak	0.00	400	Vertical	Pass
1**	1530.100	36.33	-17.63	54.0	-17.67	AV	0.00	400	Vertical	Pass
2	2418.500	105.59	-12.91	74.0	31.59	Peak	249.00	150	Vertical	N/A
2**	2418.500	96.66	-12.91	54.0	42.66	AV	249.00	150	Vertical	N/A
3	5185.500	50.51	-2.36	74.0	-23.49	Peak	223.00	150	Vertical	Pass
3**	5185.500	41.37	-2.36	54.0	-12.63	AV	223.00	150	Vertical	Pass
4	7877.250	53.07	2.13	74.0	-20.93	Peak	14.00	400	Vertical	Pass
4**	7877.250	43.68	2.13	54.0	-10.32	AV	14.00	400	Vertical	Pass
5	12438.400	49.76	-2.33	74.0	-24.24	Peak	152.00	200	Vertical	Pass
5**	12438.400	40.84	-2.33	54.0	-13.16	AV	152.00	200	Vertical	Pass
6	16829.512	52.76	0.81	74.0	-21.24	Peak	336.00	200	Vertical	Pass
6**	16829.512	42.77	0.81	54.0	-11.23	AV	336.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11ax20(SU) Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.300	43.50	-17.92	74.0	-30.50	Peak	94.00	300	Horizontal	Pass
1**	1197.300	32.14	-17.92	54.0	-21.86	AV	94.00	300	Horizontal	Pass
2	2434.900	107.48	-12.10	74.0	33.48	Peak	303.00	150	Horizontal	N/A
2**	2434.900	100.21	-12.10	54.0	46.21	AV	303.00	150	Horizontal	N/A
3	5168.750	50.67	-3.08	74.0	-23.33	Peak	67.00	150	Horizontal	Pass
3**	5168.750	41.07	-3.08	54.0	-12.93	AV	67.00	150	Horizontal	Pass
4	7459.000	53.11	1.15	74.0	-20.89	Peak	87.00	300	Horizontal	Pass
4**	7459.000	43.68	1.15	54.0	-10.32	AV	87.00	300	Horizontal	Pass
5	12444.812	49.25	-2.23	74.0	-24.75	Peak	340.00	400	Horizontal	Pass
5**	12444.812	39.97	-2.23	54.0	-14.03	AV	340.00	400	Horizontal	Pass
6	17279.699	53.59	1.98	74.0	-20.41	Peak	0.00	200	Horizontal	Pass
6**	17279.699	43.56	1.98	54.0	-10.44	AV	0.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11ax20(SU) Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1194.100	46.44	-17.93	74.0	-27.56	Peak	16.00	400	Vertical	Pass
1**	1194.100	35.01	-17.93	54.0	-18.99	AV	16.00	400	Vertical	Pass
2	2434.100	106.96	-12.17	74.0	32.96	Peak	253.00	100	Vertical	N/A
2**	2434.100	98.69	-12.17	54.0	44.69	AV	253.00	100	Vertical	N/A
3	5193.250	50.35	-2.88	74.0	-23.65	Peak	131.00	150	Vertical	Pass
3**	5193.250	40.76	-2.88	54.0	-13.24	AV	131.00	150	Vertical	Pass
4	7828.250	52.88	1.89	74.0	-21.12	Peak	234.00	400	Vertical	Pass
4**	7828.250	45.09	1.89	54.0	-8.91	AV	234.00	400	Vertical	Pass
5	12540.049	48.86	-2.20	74.0	-25.14	Peak	360.00	100	Vertical	Pass
5**	12540.049	39.30	-2.20	54.0	-14.70	AV	360.00	100	Vertical	Pass
6	17324.849	52.42	1.95	74.0	-21.58	Peak	268.00	300	Vertical	Pass
6**	17324.849	43.39	1.95	54.0	-10.61	AV	268.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H802.11ax20(SU) High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1193.900	45.20	-17.92	74.0	-28.80	Peak	89.00	100	Horizontal	Pass
1**	1193.900	35.17	-17.92	54.0	-18.83	AV	89.00	100	Horizontal	Pass
2	2465.200	108.46	-12.75	74.0	34.46	Peak	330.00	150	Horizontal	N/A
2**	2465.200	100.34	-12.75	54.0	46.34	AV	330.00	150	Horizontal	N/A
3	5185.500	50.93	-2.36	74.0	-23.07	Peak	167.00	150	Horizontal	Pass
3**	5185.500	41.30	-2.36	54.0	-12.70	AV	167.00	150	Horizontal	Pass
4	7502.250	52.95	-0.46	74.0	-21.05	Peak	243.00	100	Horizontal	Pass
4**	7502.250	42.73	-0.46	54.0	-11.27	AV	243.00	100	Horizontal	Pass
5	12682.787	49.43	-2.32	74.0	-24.57	Peak	75.00	100	Horizontal	Pass
5**	12682.787	40.19	-2.32	54.0	-13.81	AV	75.00	100	Horizontal	Pass
6	17318.025	52.91	1.96	74.0	-21.09	Peak	21.00	100	Horizontal	Pass
6**	17318.025	43.24	1.96	54.0	-10.76	AV	21.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11ax20(SU) High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1203.600	46.18	-17.83	74.0	-27.82	Peak	6.00	100	Vertical	Pass
1**	1203.600	36.54	-17.83	54.0	-17.46	AV	6.00	100	Vertical	Pass
2	2465.600	106.42	-12.74	74.0	32.42	Peak	190.00	200	Vertical	N/A
2**	2465.600	97.01	-12.74	54.0	43.01	AV	190.00	200	Vertical	N/A
3	5178.250	50.20	-2.33	74.0	-23.80	Peak	243.00	150	Vertical	Pass
3**	5178.250	42.19	-2.33	54.0	-11.81	AV	243.00	150	Vertical	Pass
4	7467.250	52.89	0.91	74.0	-21.11	Peak	297.00	300	Vertical	Pass
4**	7467.250	42.98	0.91	54.0	-11.02	AV	297.00	300	Vertical	Pass
5	11162.075	49.94	-4.33	74.0	-24.06	Peak	129.00	300	Vertical	Pass
5**	11162.075	39.90	-4.33	54.0	-14.10	AV	129.00	300	Vertical	Pass
6	16758.901	52.86	0.42	74.0	-21.14	Peak	297.00	400	Vertical	Pass
6**	16758.901	42.58	0.42	54.0	-11.42	AV	297.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11ax40(SU) Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.400	45.84	-17.83	74.0	-28.16	Peak	215.00	400	Horizontal	Pass
1**	1198.400	33.74	-17.83	54.0	-20.26	AV	215.00	400	Horizontal	Pass
2	2418.600	106.82	-12.92	74.0	32.82	Peak	315.00	150	Horizontal	N/A
2**	2418.600	96.38	-12.92	54.0	42.38	AV	315.00	150	Horizontal	N/A
3	5191.000	50.64	-2.69	74.0	-23.36	Peak	360.00	150	Horizontal	Pass
3**	5191.000	41.18	-2.69	54.0	-12.82	AV	360.00	150	Horizontal	Pass
4	7132.000	53.48	0.70	74.0	-20.52	Peak	0.00	100	Horizontal	Pass
4**	7132.000	43.77	0.70	54.0	-10.23	AV	0.00	100	Horizontal	Pass
5	11787.175	49.33	-3.65	74.0	-24.67	Peak	333.00	100	Horizontal	Pass
5**	11787.175	40.13	-3.65	54.0	-13.87	AV	333.00	100	Horizontal	Pass
6	16515.300	52.49	0.01	74.0	-21.51	Peak	278.00	200	Horizontal	Pass
6**	16515.300	43.06	0.01	54.0	-10.94	AV	278.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11ax40(SU) Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1200.000	43.45	-17.94	74.0	-30.55	Peak	0.00	100	Vertical	Pass
1**	1200.000	33.83	-17.94	54.0	-20.17	AV	0.00	100	Vertical	Pass
2	2427.200	102.42	-12.49	74.0	28.42	Peak	171.00	150	Vertical	N/A
2**	2427.200	92.83	-12.49	54.0	38.83	AV	171.00	150	Vertical	N/A
3	5353.750	51.33	-3.10	74.0	-22.67	Peak	0.00	150	Vertical	Pass
3**	5353.750	41.58	-3.10		-12.42	AV	0.00	150	Vertical	Pass
4	7532.250	53.05	0.59	74.0	-20.95	Peak	243.00	300	Vertical	Pass
4**	7532.250	42.43	0.59	54.0	-11.57	AV	243.00	300	Vertical	Pass
5	12409.187	49.01	-2.77	74.0	-24.99	Peak	205.00	200	Vertical	Pass
5**	12409.187	39.02	-2.77	54.0	-14.98	AV	205.00	200	Vertical	Pass
6	17799.188	53.84	3.21	74.0	-20.16	Peak	73.00	150	Vertical	Pass
6**	17799.188	44.89	3.21	54.0	-9.11	AV	73.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11ax40(SU) Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.400	44.84	-17.91	74.0	-29.16	Peak	256.00	100	Horizontal	Pass
1**	1197.400	34.37	-17.91	54.0	-19.63	AV	256.00	100	Horizontal	Pass
2	2453.400	105.58	-13.00	74.0	31.58	Peak	261.00	200	Horizontal	N/A
2**	2453.400	96.54	-13.00	54.0	42.54	AV	261.00	200	Horizontal	N/A
3	4467.250	49.41	-4.03	74.0	-24.59	Peak	149.00	150	Horizontal	Pass
3**	4467.250	39.96	-4.03	54.0	-14.04	AV	149.00	150	Horizontal	Pass
4	7842.500	53.05	1.60	74.0	-20.95	Peak	360.00	400	Horizontal	Pass
4**	7842.500	43.38	1.60	54.0	-10.62	AV	360.00	400	Horizontal	Pass
5	12705.588	49.66	-2.35	74.0	-24.34	Peak	9.00	100	Horizontal	Pass
5**	12705.588	40.48	-2.35	54.0	-13.52	AV	9.00	100	Horizontal	Pass
6	17315.926	53.14	1.97	74.0	-20.86	Peak	154.00	300	Horizontal	Pass
6**	17315.926	44.26	1.97	54.0	-9.74	AV	154.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11ax40(SU) Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.900	43.32	-17.84	74.0	-30.68	Peak	322.00	100	Vertical	Pass
1**	1198.900	34.87	-17.84	54.0	-19.13	AV	322.00	100	Vertical	Pass
2	2423.100	102.27	-12.80	74.0	28.27	Peak	241.00	200	Vertical	N/A
2**	2423.100	93.75	-12.80	54.0	39.75	AV	241.00	200	Vertical	N/A
3	5124.500	50.04	-2.88	74.0	-23.96	Peak	253.00	150	Vertical	Pass
3**	5124.500	40.93	-2.88	54.0	-13.07	AV	253.00	150	Vertical	Pass
4	7841.000	52.84	1.76	74.0	-21.16	Peak	158.00	400	Vertical	Pass
4**	7841.000	43.34	1.76	54.0	-10.66	AV	158.00	400	Vertical	Pass
5	12605.362	48.84	-2.58	74.0	-25.16	Peak	246.00	300	Vertical	Pass
5**	12605.362	38.56	-2.58	54.0	-15.44	AV	246.00	300	Vertical	Pass
6	17079.676	52.97	1.15	74.0	-21.03	Peak	129.00	400	Vertical	Pass
6**	17079.676	43.26	1.15	54.0	-10.74	AV	129.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11ax40(SU) High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.000	43.12	-17.86	74.0	-30.88	Peak	211.00	300	Horizontal	Pass
1**	1198.000	33.43	-17.86	54.0	-20.57	AV	211.00	300	Horizontal	Pass
2	2455.000	105.15	-13.04	74.0	31.15	Peak	145.00	200	Horizontal	N/A
2**	2455.000	95.62	-13.04	54.0	41.62	AV	145.00	200	Horizontal	N/A
3	5172.750	50.28	-2.78	74.0	-23.72	Peak	336.00	150	Horizontal	Pass
3**	5172.750	41.63	-2.78	54.0	-12.37	AV	336.00	150	Horizontal	Pass
4	7845.500	52.78	1.36	74.0	-21.22	Peak	121.00	300	Horizontal	Pass
4**	7845.500	43.57	1.36	54.0	-10.43	AV	121.00	300	Horizontal	Pass
5	12429.612	49.09	-2.46	74.0	-24.91	Peak	209.00	100	Horizontal	Pass
5**	12429.612	39.67	-2.46	54.0	-14.33	AV	209.00	100	Horizontal	Pass
6	17313.300	53.06	1.98	74.0	-20.94	Peak	310.00	400	Horizontal	Pass
6**	17313.300	44.30	1.98	54.0	-9.70	AV	310.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11ax40(SU) High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1205.100	45.90	-17.91	74.0	-28.10	Peak	349.00	400	Vertical	Pass
1**	1205.100	36.49	-17.91	54.0	-17.51	AV	349.00	400	Vertical	Pass
2	2436.100	104.04	-12.18	74.0	30.04	Peak	244.00	100	Vertical	N/A
2**	2436.100	94.93	-12.18	54.0	40.93	AV	244.00	100	Vertical	N/A
3	5002.750	49.55	-3.03	74.0	-24.45	Peak	360.00	150	Vertical	Pass
3**	5002.750	39.55	-3.03	54.0	-14.45	AV	360.00	150	Vertical	Pass
4	7449.250	52.95	0.57	74.0	-21.05	Peak	92.00	100	Vertical	Pass
4**	7449.250	42.93	0.57	54.0	-11.07	AV	92.00	100	Vertical	Pass
5	12926.137	49.47	-1.76	74.0	-24.53	Peak	6.00	400	Vertical	Pass
5**	12926.137	39.39	-1.76	54.0	-14.61	AV	6.00	400	Vertical	Pass
6	17023.500	53.00	0.72	74.0	-21.00	Peak	48.00	400	Vertical	Pass
6**	17023.500	43.75	0.72	54.0	-10.25	AV	48.00	400	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: All the configurations were pre tested, only the worst configuration has been reported in this report.


Test Data and Plots

802.11b LOW CHANNEL

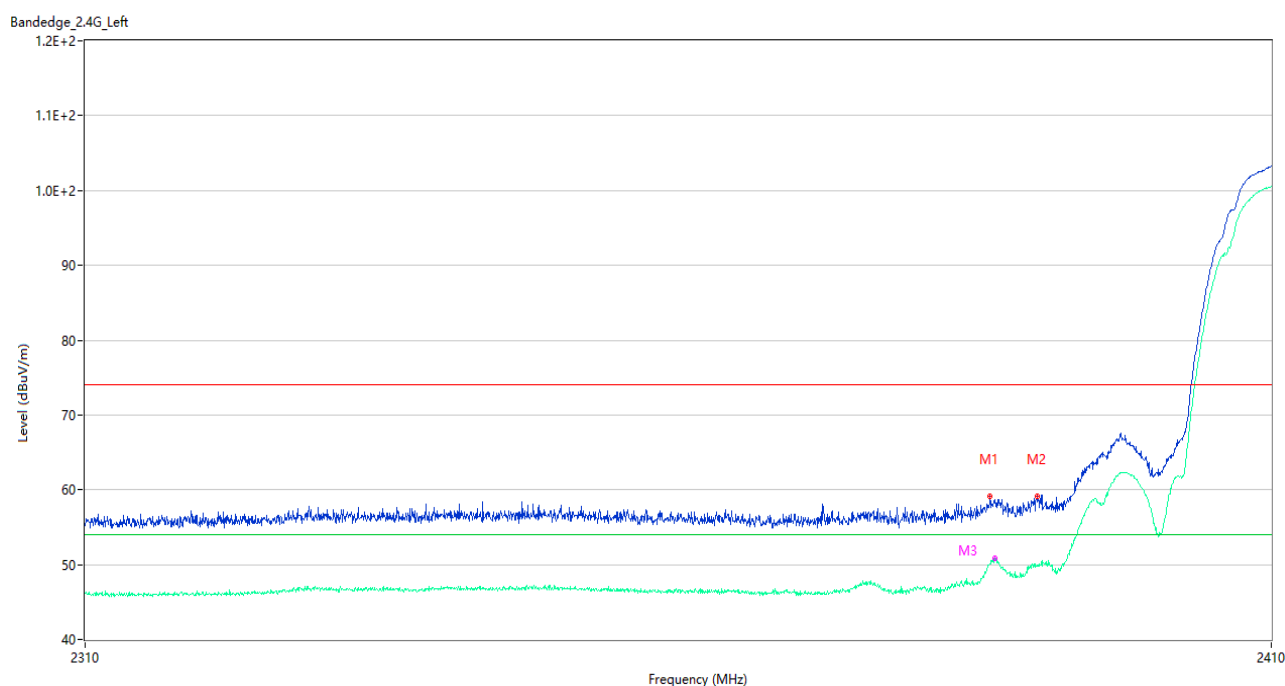


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2385.900	59.17	1.84	74.0	-14.83	Peak	257.00	150	Horizontal	Pass
1**	2385.900	50.17	1.84	54.0	-3.83	AV	257.00	150	Horizontal	Pass
2	2389.950	59.14	1.63	74.0	-14.86	Peak	267.00	150	Horizontal	Pass
2**	2389.950	50.01	1.63	54.0	-3.99	AV	267.00	150	Horizontal	Pass
3	2386.300	58.26	1.83	74.0	-15.74	Peak	263.00	150	Horizontal	Pass
3**	2386.300	50.92	1.83	54.0	-3.08	AV	263.00	150	Horizontal	Pass

802.11b HIGH CHANNEL

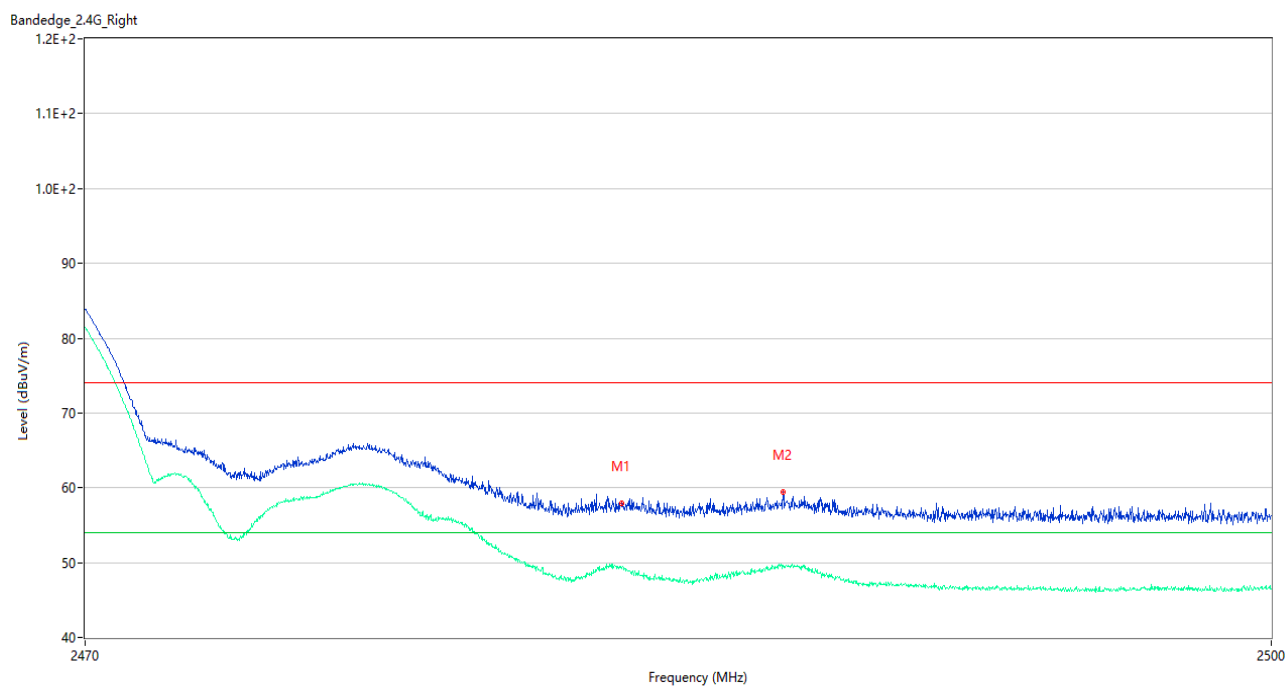


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.530	57.91	1.98	74.0	-16.09	Peak	290.00	100	Horizontal	
1**	2483.530	49.21	1.98	54.0	-4.79	AV	290.00	100	Horizontal	
2	2487.610	59.47	1.74	74.0	-14.53	Peak	319.00	100	Horizontal	
2**	2487.610	49.66	1.74	54.0	-4.34	AV	319.00	100	Horizontal	

802.11g LOW CHANNEL

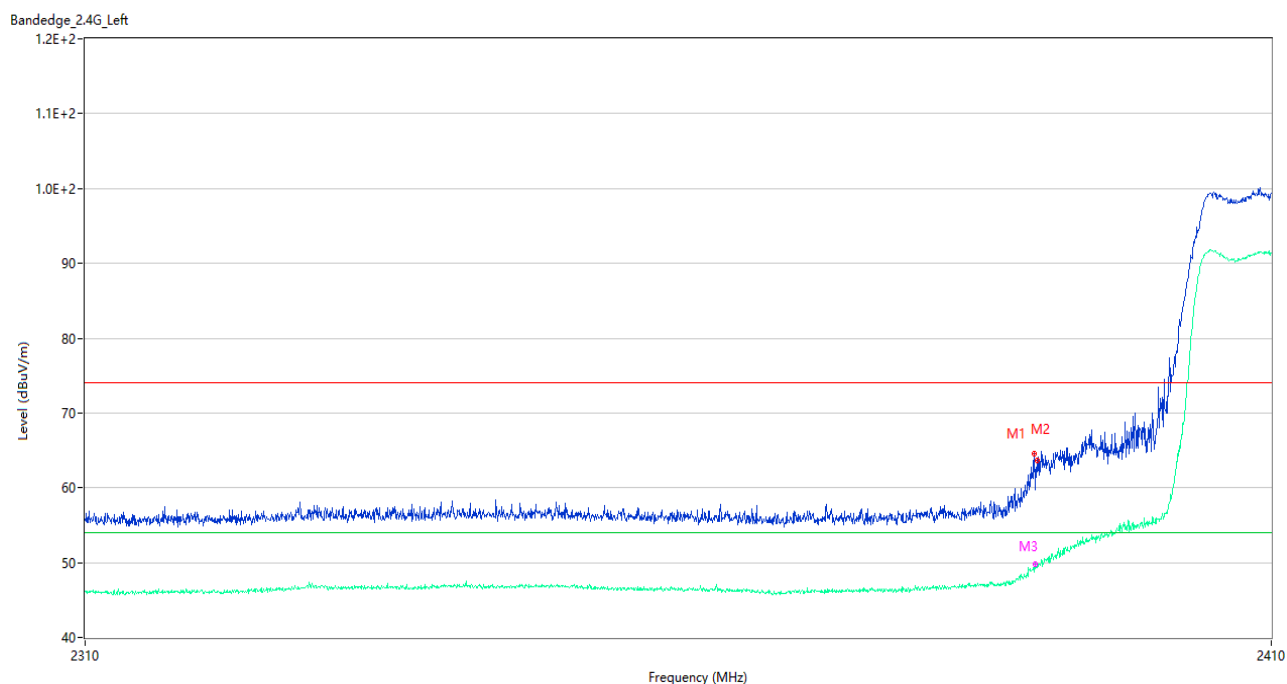


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.650	64.55	1.65	74.0	-9.45	Peak	298.00	150	Horizontal	Pass
1**	2389.650	48.81	1.65	54.0	-5.19	AV	298.00	150	Horizontal	Pass
2	2389.950	63.59	1.63	74.0	-10.41	Peak	286.00	100	Horizontal	Pass
2**	2389.950	49.30	1.63	54.0	-4.70	AV	286.00	100	Horizontal	Pass
3	2389.800	59.68	1.64	74.0	-14.32	Peak	298.00	150	Horizontal	Pass
3**	2389.800	49.73	1.64	54.0	-4.27	AV	298.00	150	Horizontal	Pass

802.11g HIGH CHANNEL

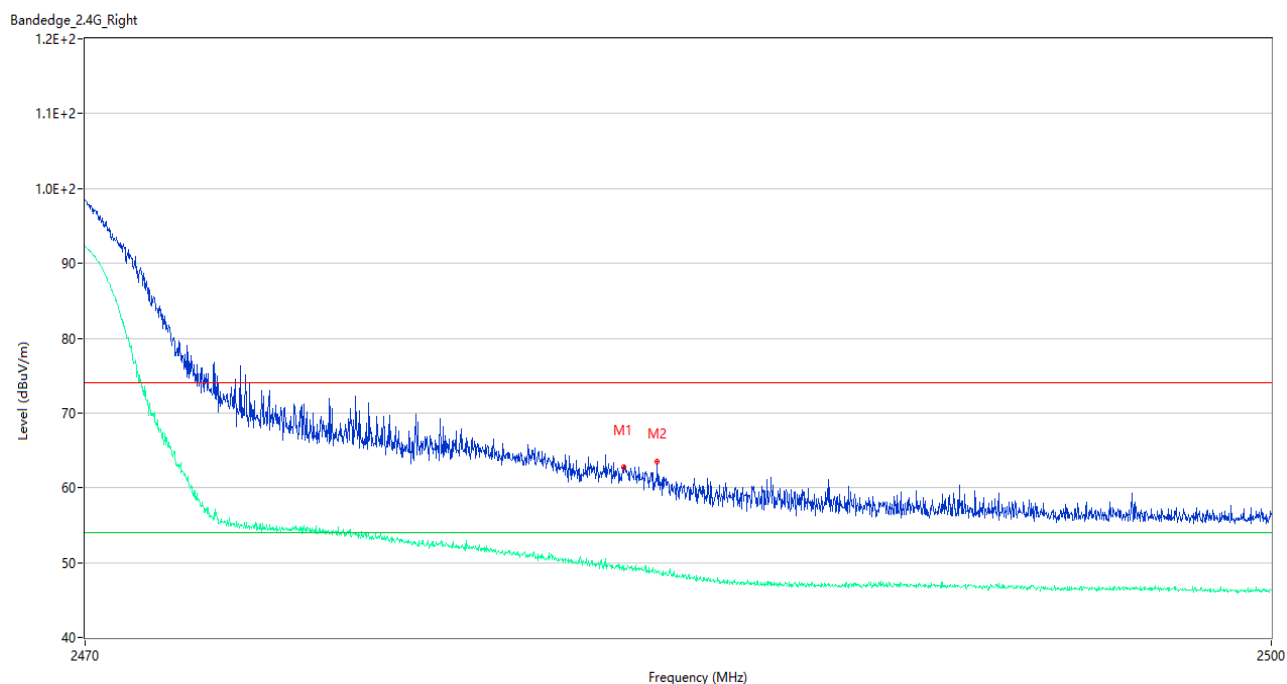


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.575	62.78	1.98	74.0	-11.22	Peak	311.00	150	Horizontal	Pass
1**	2483.575	49.85	1.98	54.0	-4.15	AV	311.00	150	Horizontal	Pass
2	2484.430	63.43	1.98	74.0	-10.57	Peak	319.00	100	Horizontal	Pass
2**	2484.430	48.77	1.98	54.0	-5.23	AV	319.00	100	Horizontal	Pass

802.11n20 LOW CHANNEL

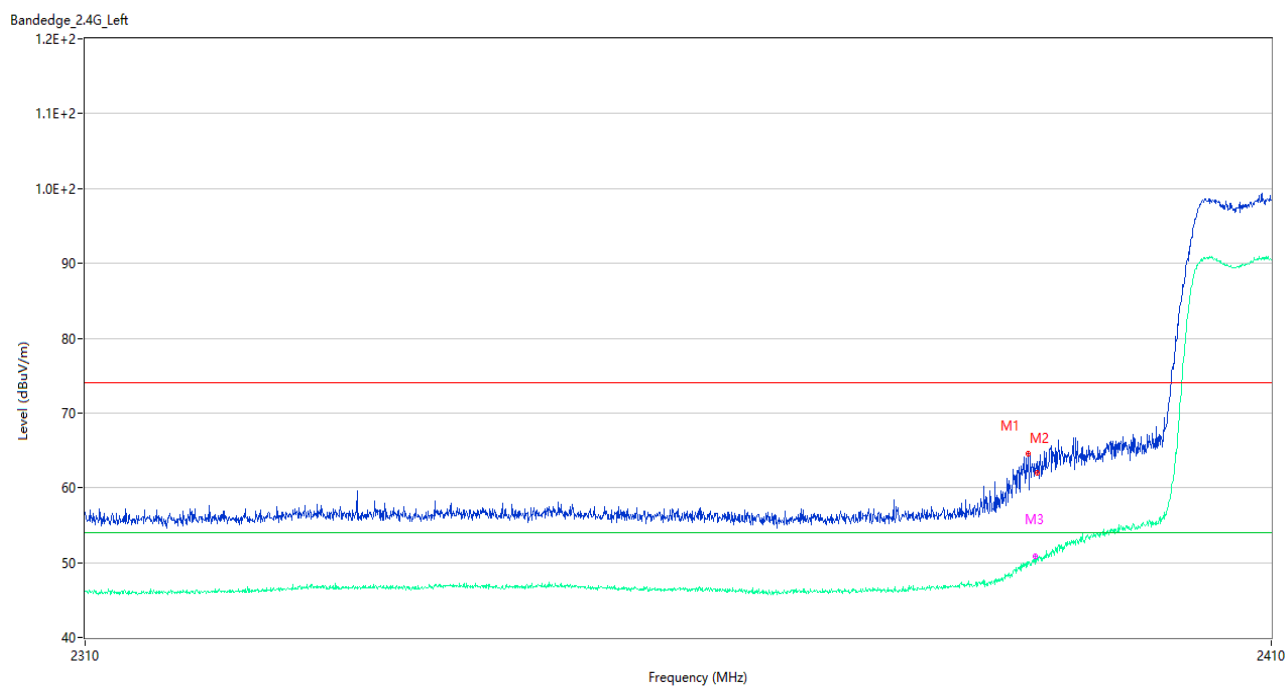


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.200	64.50	1.68	74.0	-9.50	Peak	320.00	150	Horizontal	Pass
1**	2389.200	50.07	1.68	54.0	-3.93	AV	320.00	150	Horizontal	Pass
2	2389.950	61.96	1.63	74.0	-12.04	Peak	261.00	150	Horizontal	Pass
2**	2389.950	50.54	1.63	54.0	-3.46	AV	261.00	150	Horizontal	Pass
3	2389.750	62.25	1.64	74.0	-11.75	Peak	290.00	150	Horizontal	Pass
3**	2389.750	50.87	1.64	54.0	-3.13	AV	290.00	150	Horizontal	Pass

802.11n20 HIGH CHANNEL

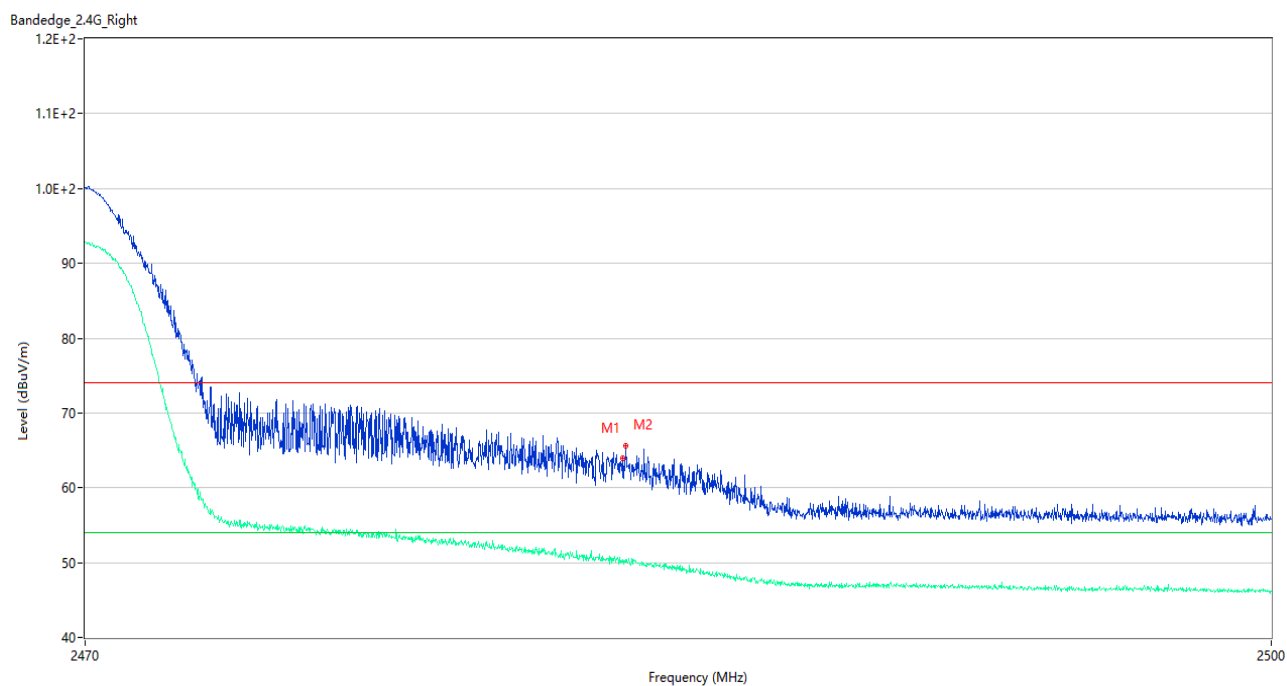


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.545	64.02	1.98	74.0	-9.98	Peak	275.00	200	Horizontal	Pass
1**	2483.545	50.12	1.98	54.0	-3.88	AV	275.00	200	Horizontal	Pass
2	2483.635	65.62	1.99	74.0	-8.38	Peak	256.00	150	Horizontal	Pass
2**	2483.635	50.04	1.99	54.0	-3.96	AV	256.00	150	Horizontal	Pass

802.11n40 LOW CHANNEL

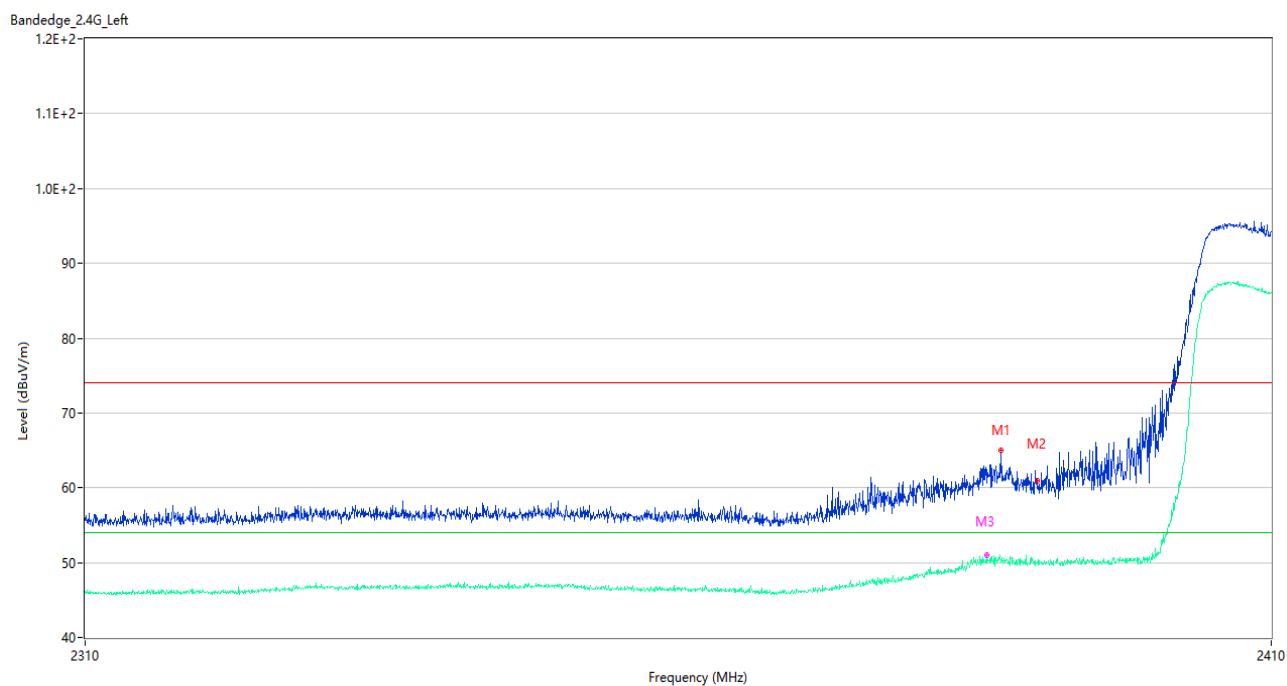


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2386.800	65.04	1.82	74.0	-8.96	Peak	331.00	100	Horizontal	Pass
1**	2386.800	50.06	1.82	54.0	-3.94	AV	331.00	100	Horizontal	Pass
2	2389.950	60.93	1.63	74.0	-13.07	Peak	103.00	200	Horizontal	Pass
2**	2389.950	50.10	1.63	54.0	-3.90	AV	103.00	200	Horizontal	Pass
3	2385.600	60.59	1.84	74.0	-13.41	Peak	292.00	150	Horizontal	Pass
3**	2385.600	50.98	1.84	54.0	-3.02	AV	292.00	150	Horizontal	Pass

802.11n40 HIGH CHANNEL

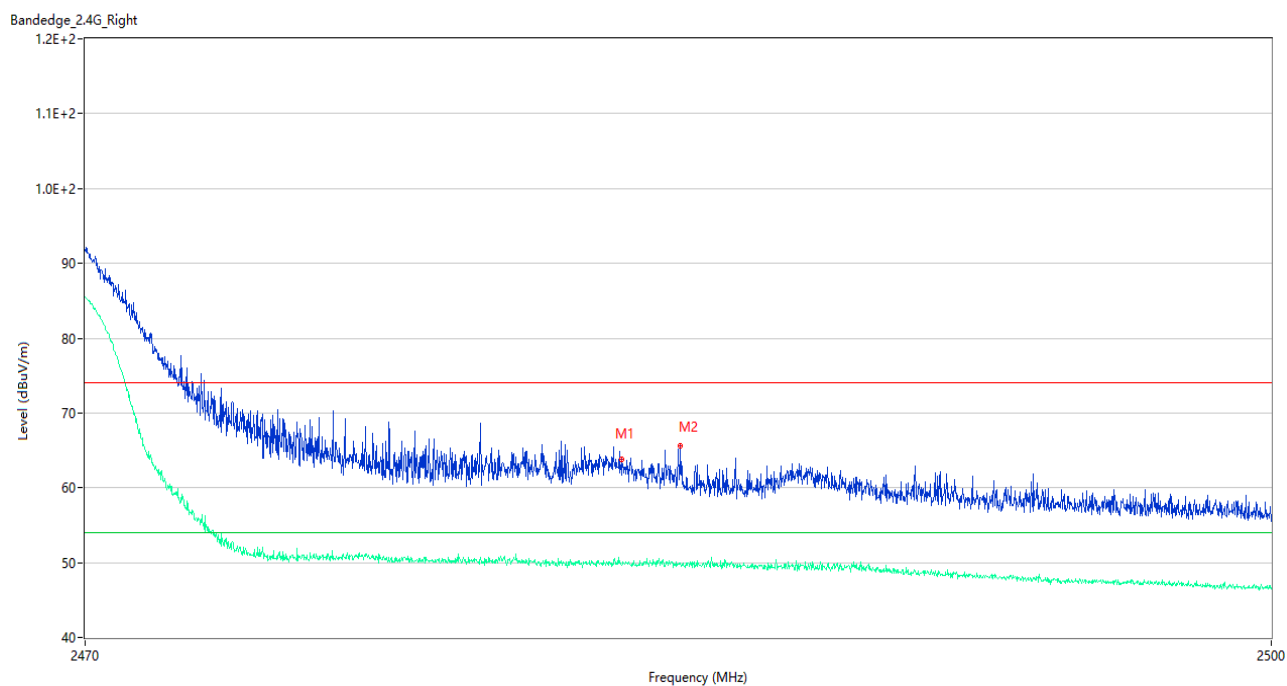


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.530	63.79	1.98	74.0	-10.21	Peak	308.00	100	Horizontal	Pass
1**	2483.530	49.64	1.98	54.0	-4.36	AV	308.00	100	Horizontal	Pass
2	2485.015	65.67	1.92	74.0	-8.33	Peak	121.00	100	Horizontal	Pass
2**	2485.015	49.91	1.92	54.0	-4.09	AV	121.00	100	Horizontal	Pass

802.11ax20(SU) LOW CHANNEL

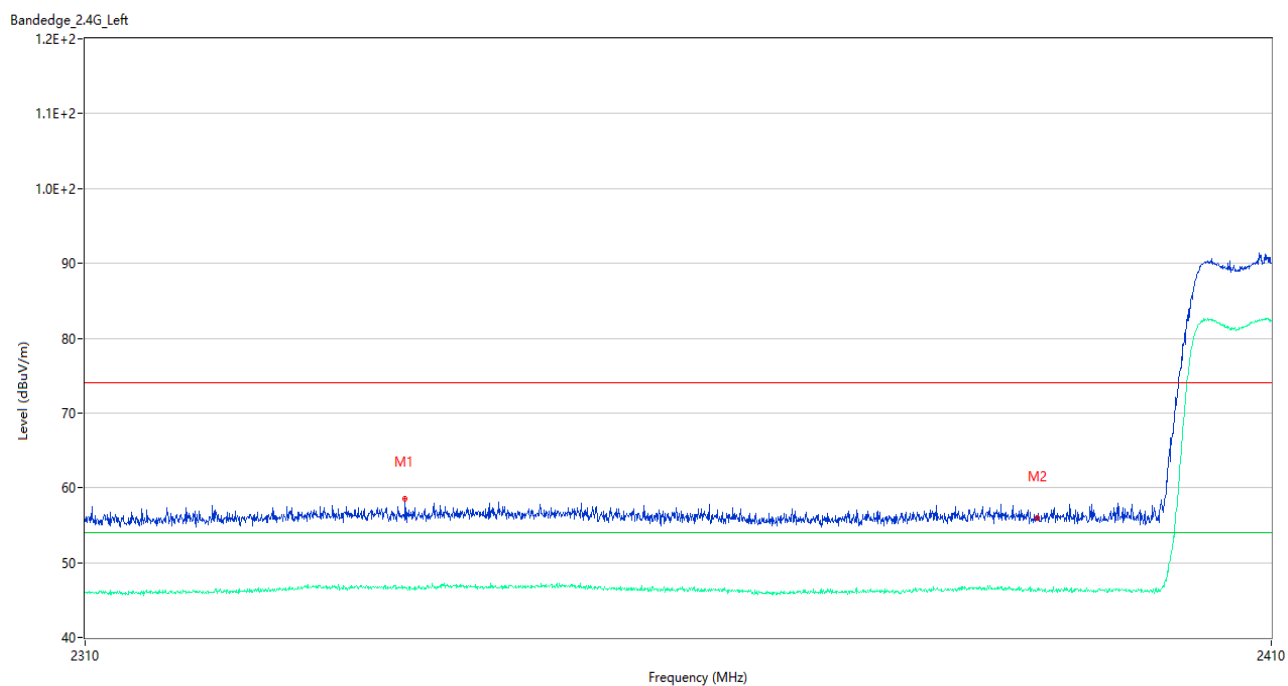


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2336.550	58.58	2.30	74.0	-15.42	Peak	82.00	200	Horizontal	Pass
1**	2336.550	46.68	2.30	54.0	-7.32	AV	82.00	200	Horizontal	Pass
2	2389.950	55.91	1.63	74.0	-18.09	Peak	108.00	150	Horizontal	Pass
2**	2389.950	46.28	1.63	54.0	-7.72	AV	108.00	150	Horizontal	Pass

802.11 ax20(SU) HIGH CHANNEL

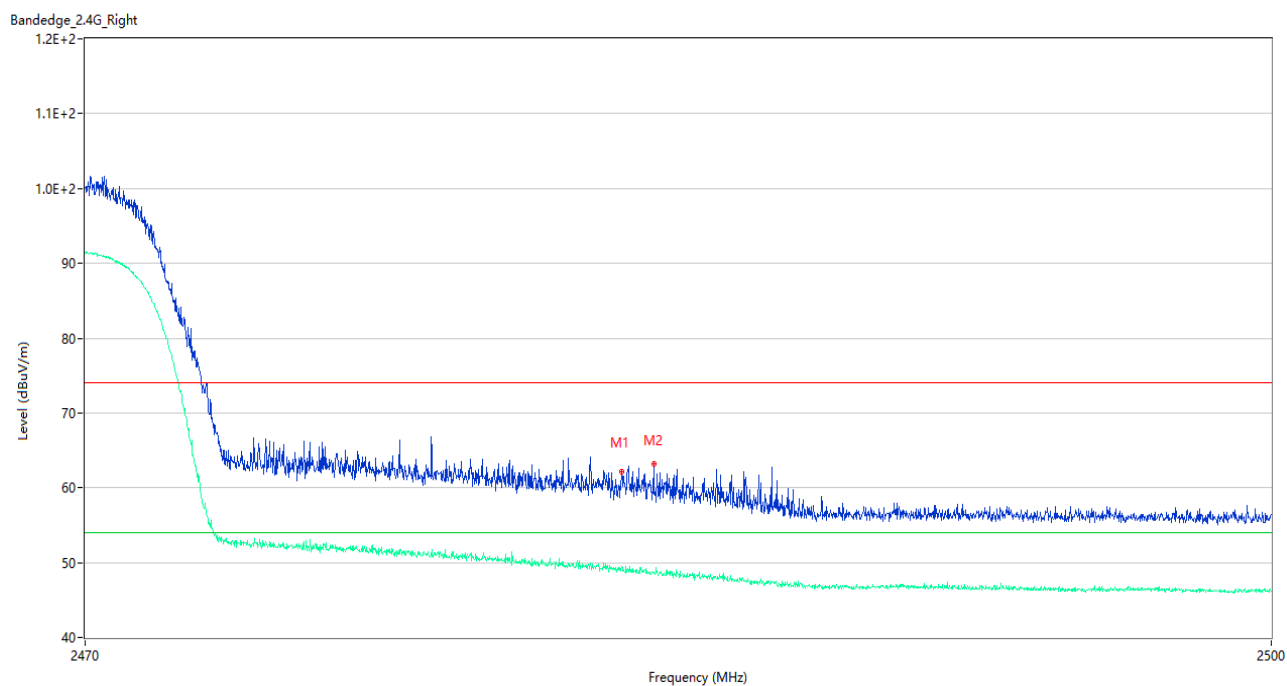


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.530	62.09	1.98	74.0	-11.91	Peak	318.00	150	Horizontal	Pass
1**	2483.530	49.38	1.98	54.0	-4.62	AV	318.00	150	Horizontal	Pass
2	2484.340	63.16	1.98	74.0	-10.84	Peak	259.00	200	Horizontal	Pass
2**	2484.340	48.57	1.98	54.0	-5.43	AV	259.00	200	Horizontal	Pass

802.11ax40(SU) LOW CHANNEL

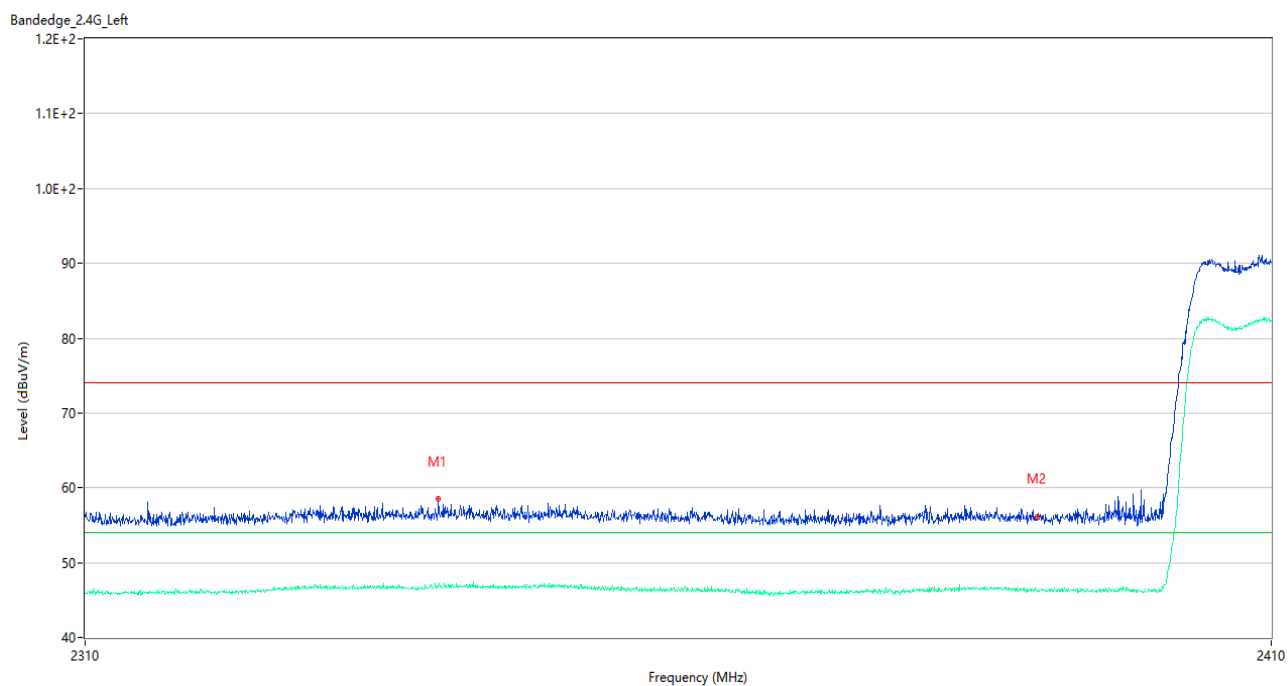

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2339.350	58.55	2.51	74.0	-15.45	Peak	346.00	150	Horizontal	Pass
1**	2339.350	46.72	2.51	54.0	-7.28	AV	346.00	150	Horizontal	Pass
2	2389.950	56.18	1.63	74.0	-17.82	Peak	0.00	150	Horizontal	Pass
2**	2389.950	46.32	1.63	54.0	-7.68	AV	0.00	150	Horizontal	Pass

802.11 ax40(SU) HIGH CHANNEL

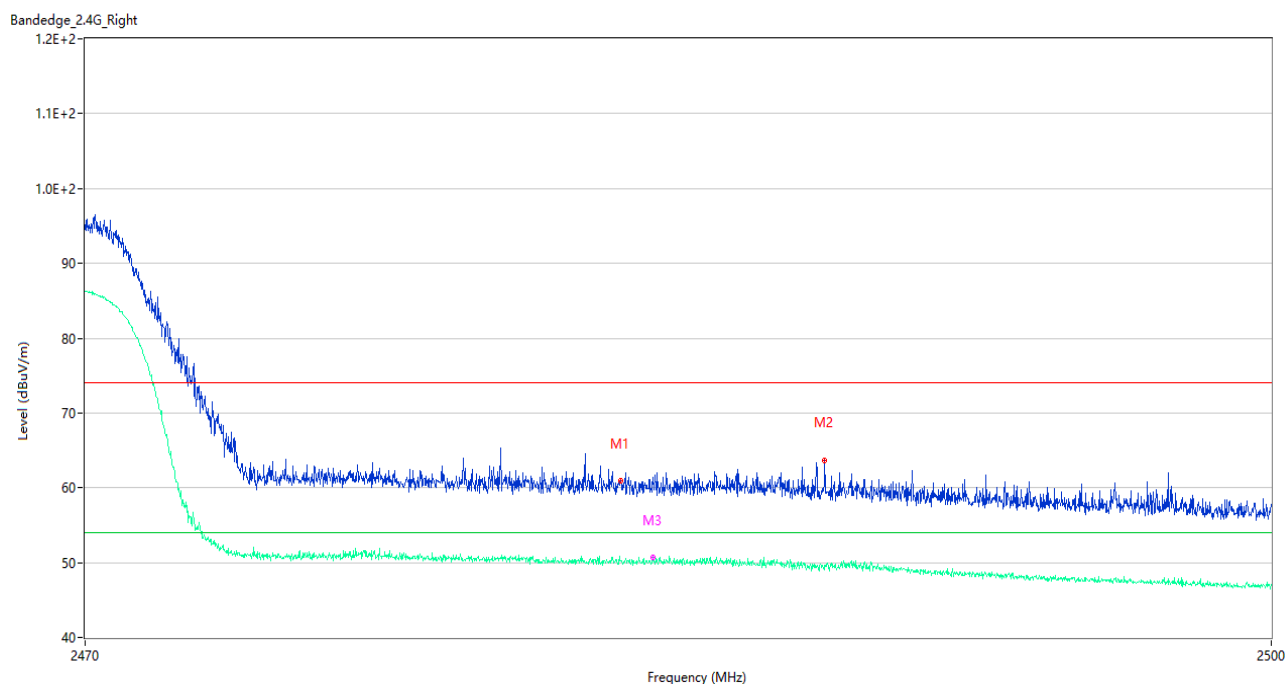

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	60.94	1.98	74.0	-13.06	Peak	256.00	100	Horizontal	Pass
1**	2483.500	50.21	1.98	54.0	-3.79	AV	256.00	100	Horizontal	Pass
2	2488.660	63.71	1.73	74.0	-10.29	Peak	267.00	100	Horizontal	Pass
2**	2488.660	49.67	1.73	54.0	-4.33	AV	267.00	100	Horizontal	Pass
3	2484.310	61.41	1.99	74.0	-12.59	Peak	290.00	150	Horizontal	Pass
3**	2484.310	50.69	1.99	54.0	-3.31	AV	290.00	150	Horizontal	Pass

A.8 Power Spectral Density (PSD)

Note: All the configurations were pre tested, only the worst configuration has been reported in this report.

Test Data

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-19.08	8
Middle	-15.85	8
High	-17.43	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-27.15	8
Middle	-17.95	8
High	-24.76	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-26.87	8
Middle	-18.60	8
High	-25.21	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-31.99	8
Middle	-21.21	8
High	-29.75	8

802.11ax-20 MHz(SU) Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-19.25	8
Middle	-18.99	8
High	-27.06	8

802.11ax-40 MHz(SU) Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-23.83	8
Middle	-22.32	8
High	-30.70	8

Test Plots

802.11b LOW CHANNEL




802.11b MIDDLE CHANNEL




802.11b HIGH CHANNEL



802.11g LOW CHANNEL

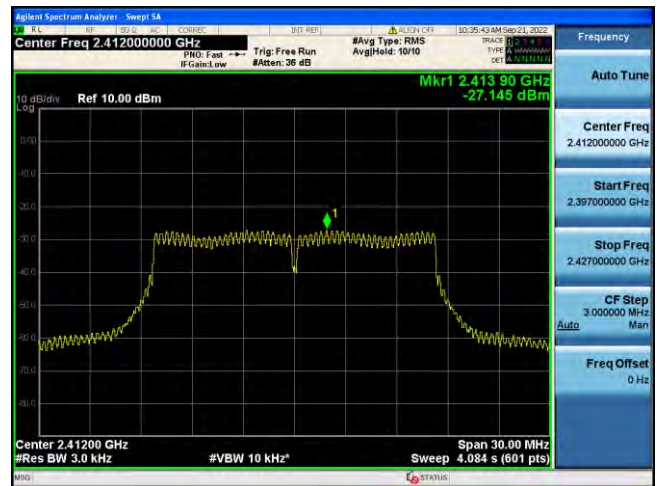

802.11g MIDDLE CHANNEL

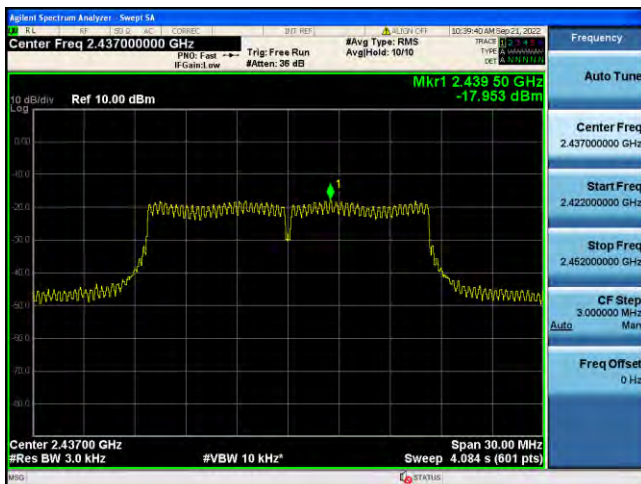


802.11g HIGH CHANNEL



802.11n-20 MHz LOW CHANNEL




802.11n-20 MHz MIDDLE CHANNEL

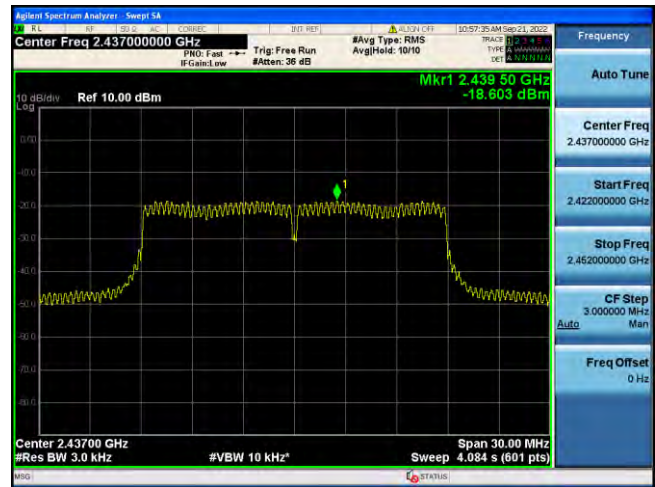

802.11n-20 MHz HIGH CHANNEL




802.11n-40 MHz LOW CHANNEL

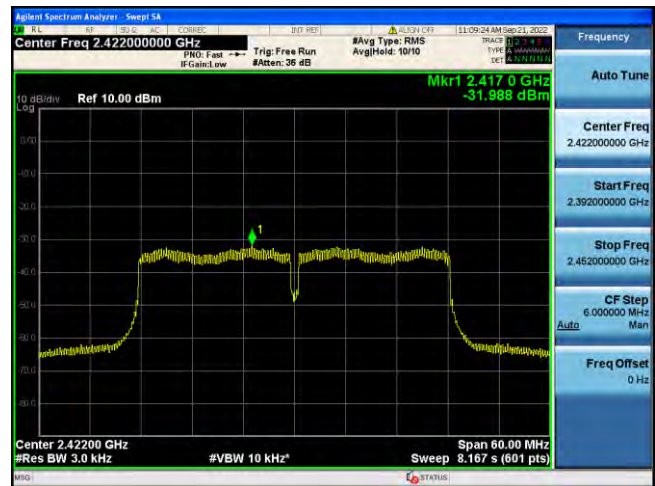

802.11n-40 MHz MIDDLE CHANNEL



802.11n-40 MHz HIGH CHANNEL

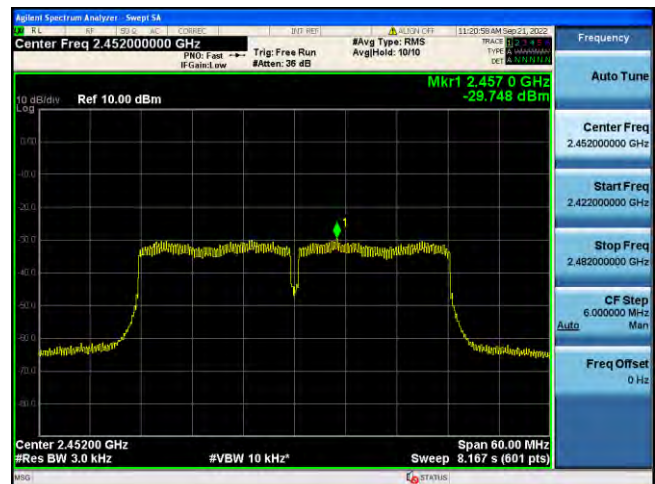

802.11ax-20 MHz(SU) LOW CHANNEL



802.11ax-20 MHz(SU) MIDDLE CHANNEL



802.11ax-20 MHz(SU) HIGH CHANNEL



802.11ax-40 MHz(SU) LOW CHANNEL



802.11ax-40 MHz(SU) MIDDLE CHANNEL



802.11ax-40 MHz(SU) HIGH CHANNEL



ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2280883-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2280883-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2280883-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--