



MET Laboratories, Inc.

Safety Certification - EMI - Telecom Environmental Simulation

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

**Electromagnetic Compatibility
MPE Calculation**

For the

**Bug Labs, Inc
Model BUG WiFi
FCC ID: W3J-BUGWIFI
IC: 8268A-BUGWIFI**

Tested under

**Title 47 of the Code of Federal Regulations (CFR),
Part 15 Subpart C**

MET Report: EMC27141-MPE

August 18, 2009

Prepared For:

**Bug Labs, Inc
598 Broadway 4th Fl
New York, NY 10012**

**Prepared By:
MET Laboratories, Inc.
914 W. Patapsco Ave
Baltimore, MD 21230**

Electromagnetic Compatibility MPE Calculation


For the

**Bug Labs, Inc
Model BUG WiFi
FCC ID: W3J-BUGWIFI
IC: 8268A-BUGWIFI**

Tested under

**Title 47 of the Code of Federal Regulations (CFR),
Part 15 Subpart C**

MET Report: EMC27141-MPE

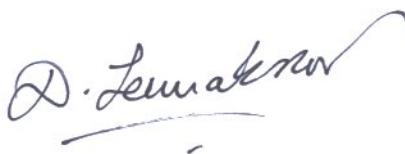

Dusmantha Tennakoon,
Manager, Electromagnetic Compatibility Lab



Jennifer Sanchez
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the applicable limits. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Title 47 of the CFR, Part 15, Subpart C under normal use and maintenance.

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output and RF Exposure

Test Purpose: Co-location of two modules, Wi2Wi, Inc, FCC ID: U9R-W2CBW003 (3dBi) and LS Research, LLC, FCC ID: TFB-MATRIXHP (2dBi).

RF Exposure Requirements: **§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Calculation – Wi2Wi, Inc. Module: 2.4GHz, FCC ID: U9R-W2CBW003

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

MPE Limit Calculation: EUT's operating frequencies @ **2412 - 2462MHz**; highest conducted power = 15.24dBm (peak) therefore, Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²

EUT maximum antenna gain = **3 dBi**.

where, S = Power Density (mW/cm²)
P = Power Input to antenna (33.42mW)
G = Antenna Gain (1.99 numeric)

$$S = (33.42 * 1.99 / 4 * 3.14 * 20.0^2) = (66.68068 / 5024) = \mathbf{0.013 \text{mW/cm}^2} \text{ @ 20cm separation}$$

MPE Calculation – LS Research, LLC Module: 2.4GHz FCC ID: TFB-MATRIXHP

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

MPE Limit Calculation: EUT's operating frequencies @ **2405 - 2480MHz**; highest conducted power = 19.36dBm (peak) therefore, Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²

EUT maximum antenna gain = **2 dBi**.

where, S = Power Density (mW/cm²)
P = Power Input to antenna (86.29mW)
G = Antenna Gain (1.58 numeric)

$$S = (86.29 * 1.58 / 4 * 3.14 * 20.0^2) = (136.7729 / 5024) = \mathbf{0.027 \text{mW/cm}^2} \text{ @ 20cm separation}$$

MPE Calculation – Co-Location of Wi2Wi, Inc. Module, FCC ID: U9R-W2CBW003 & LS Research, LLC Module, FCC ID: TFB-MATRIXHP, IC: 5969A-MATRIXHP

MPE Summary:

Frequency Range	MPE Result (mW/cm ²)	Limit (mW/cm ²)
2.4GHz	0.013	1
2.4GHz	0.027	1

Test Requirements: [MPE(f1) + MPE(f2) / limit(f1) + / limit(f2)] < 1

Test Results:

MPE(f1)	MPE(f2)	Calculation	MPE Result (mW/cm ²)
Frequency (MHZ)	Frequency (MHZ)	[MPE(f1) + MPE(f2) / limit(f1) + / limit(f2)]	
2412 - 2462	2405 - 2480	0.013 / 1 + 0.027 / 1 = (0.013+ 0.027)	0.04