

Date : 2015-08-06 No. : HM169934		Page 1 of 33		
Applicant:		n (HK) Ltd. 23, Tower 2, Metroplaza, No. 223 Hing Fong N.T., Hong Kong		
Manufacturer:		n (HK) Ltd. 23, Tower 2, Metroplaza, No. 223 Hing Fong N.T., Hong Kong		
Description of Sample(s):	Product: Brand Name: Model Number: FCC ID:	PermissionManager Gatekeeper Systems D-9670 W3Z-D9670		
Date Sample(s) Received:	2015-07-08			
Date Tested:	2015-07-31 to 201	5-11-06		
Investigation Requested:	with FCC 47CFR	agnetic Interference measurement in accordance [Codes of Federal Regulations] Part 15: 2014 and 3 for FCC Certification.		
Conclusion(s):	The submitted product <u>COMPLIED</u> with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.			
Remark(s):				

Dr. LEE Kam Chuen Authorized Signatory ElectroMagnetic Compatibility Department For and on behalf of The Hong Kong Standards and Testing Centre Ltd.



Page 2 of 33

CON	TENT:	
	Cover Content	Page 1 of 33 Page 2 of 33
<u>1.0</u>	General Details	
1.1	Equipment Under Test [EUT] Description of EUT operation	Page 3 of 33
1.2	Description of EUT Operation	
1.3	Date of Order	Page 3 of 33
1.4	Submitted Sample	Page 3 of 33
1.5	Test Duration	Page 3 of 33
1.6	Country of Origin	Page 3 of 33
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 4 of 33
2.2	Test Standards and Results Summary	Page 4 of 33
<u>3.0</u>	Test Results	
3.1	Emission	Page 5-29 of 33
	Appendix A	
	List of Measurement Equipment	Page 30 of 33
	Appendix B	
	Photographs	Page 31-33 of 33

The Hong Kong Standards and Testing Centre Limited



Date : 2015-08-06

No. : HM169934

Page 3 of 33

<u>1.0</u> General Details

1.1 Equipment Under Test [EUT] Description of Sample(s)

Product:	PermissionManager
Manufacturer:	Gatekeeper System (HK) Ltd.
	Unit 2305, Level 23, Tower 2, Metroplaza, No. 223 Hing Fong Road,
	Kwai Fong, N.T., Hong Kong
Brand Name:	Gatekeeper Systems
Model Number:	D-9670
Rating:	3.3Vd.c. (Powered by DC power supply at connector block pin 1)
	The AC/DC Adaptor used for the tests was a "Winstar" adaptor: Two pins
	(Live / Neutral) only adaptor, Model Number: NA-12, Input: 100-120/220-
	240Va.c., Output: 3-15Vd.c. 1200mA max.

1.2 Description of EUT Operation

The Equipment Under Test (EUT) is a PermissionManager of Gatekeeper System (HK) Ltd.., it is two 2.4GHz transceivers and it is used to send commands to and receive data from the Gatekeeper Systems wheels, The RF signal was modulated by IC.

The Announce mode transmissions were modulated with 500K MSK (Minimum Shift Keying), the Data mode transmissions (data request and data acknowledge) were modulated with 500K MSK (Minimum Shift Keying) while data received from the wheel was modulated with 20K FSK (Frequency Shift Keying).

Antenna 1 (The announce radio) and Antenna 2 (The data radio) will not send out the announce radio commends with the same channel at the same time.

1.3 Date of Order

2015-07-08

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2015-07-31 to 2015-11-06

1.6 Country of Origin

China

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Date : 2015-08-06

No. : HM169934

Page 4 of 33

2.0 <u>Technical Details</u>

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2014 Regulations and ANSI C63.10:2013 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary									
Test ConditionTest RequirementTest MethodClass /Test Result									
			Severity	Pass	Fail				
Field Strength of Fundamental & Harmonics Emissions	FCC 47CFR 15.249	ANSI C63.10:2013	N/A						
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.10:2013	N/A						
Conducted Emissions	FCC 47CFR 15.207	ANSI C63.10:2013	N/A	\square					

Note: N/A - Not Applicable



Date : 2015-08-06

No. : HM169934

Page 5 of 33

- 3.0 Test Results
- 3.1 Emission

3.1.1 Field Strength of Fundamental & Harmonics Emissions

Test Requirement:	FCC 47CFR 15.249
Test Method:	ANSI C63.10:2013
Test Date:	2015-07-31
Mode of Operation:	On Mode

Test Method:

The sample was placed 0.8m above the ground plane on a standard radiated emission test site. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. In the frequency range of 9kHz to 30MHz, The center of the loop antenna shall be 1 meter above the ground and rotated loop axis for maximum reading. The emissions worst-case are shown in Test Results of the following pages.

Remark: 3 orthogonal axis apply to hand-held device only.

*: Semi-anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.


¹⁰ Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong



No. : HM169934 **Spectrum Analyzer Setting:** 9KHz - 30MHz (Pk & Av) **RBW**: 10kHz VBW: 30kHz Sweep: Auto Span: Fully capture the emissions being measured Trace: Max. hold 30MHz - 1GHz (QP) **RBW**: 120kHz VBW: 120kHz Sweep: Auto Span: Fully capture the emissions being measured Trace: Max. hold RBW: 3MHz Above 1GHz (Pk & Av) VBW: 3MHz Sweep: Auto Span: Fully capture the emissions being measured Trace: Max. hold

Test Setup:

Date : 2015-08-06

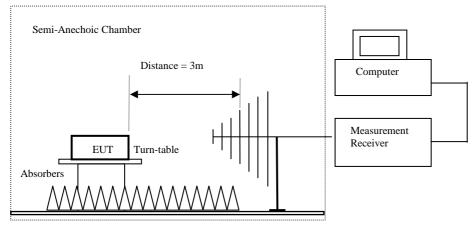

Ground Plane

Absorbers placed on top of the ground plane are for measurements above 1000MHz only.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Page 6 of 33



Page 7 of 33

Limits for Field Strength of Fundamental & Harmonics Emissions [FCC 47CFR 15.249]:

Fundamental frequency [MHz]	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

Result of On mode (Antenna 1 - Channel 7), (Above 1GHz): Pass

	Field Strength of Fundamental and Harmonics Emissions							
	Peak Value							
Free	quency	Measured	Correction	Field	Field	Limit @3m	E-Field	
		Level @3m	Factor	Strength	Strength		Polarity	
Ν	MHz	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$	$\mu V/m$	μV/m		
2	2403.2	56.6	29.7	86.3	20,653.8	500,000	Horizontal	
* ∠	4806.9	13.2	32.1	45.3	184.1	5,000	Horizontal	
	7209.7	5.3	34.8	40.1	101.2	5,000	Horizontal	
9	9612.8					5,000	Horizontal	
* 1	2016.0					5,000	Horizontal	
1	4419.2					5,000	Horizontal	
1	6822.4	E	missions dete	5,000	Horizontal			
* 1	9225.6		20 dB below	5,000	Horizontal			
2	21628.8					5,000	Horizontal	
2	24032.0					5,000	Horizontal	

	Field Strength of Fundamental and Harmonics Emissions							
	Average Value							
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	dBµV/m	$dB\mu V/m$	$dB\mu V/m$	$\mu V/m$	$\mu V/m$			
2403.2	42.4	29.7	72.1	4,027.2	50,000	Horizontal		
* 4806.9	-2.0	32.1	30.1	32.0	500	Horizontal		
7209.7	0.8	34.8	35.6	60.3	500	Horizontal		
9612.8					500	Horizontal		
* 12016.0					500	Horizontal		
14419.2					500	Horizontal		
16822.4	5822.4 Emissions detected are more than					Horizontal		
* 19225.6		20 dB below	500	Horizontal				
21628.8				500	Horizontal			
24032.0					500	Horizontal		

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Page 8 of 33

Result of On mode (Antenna 1 - Channel 128), (Above 1GHz): Pass

Field Strength of Fundamental and Harmonics Emissions							
Peak Value							
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field	
	Level @3m	Factor	Strength	Strength		Polarity	
MHz	dBµV/m	dBµV/m	dBµV/m	μV/m	μV/m		
2441.2	56.6	29.7	86.3	20,653.8	500,000	Horizontal	
* 4882.5	0.9	32.4	33.3	46.2	5,000	Horizontal	
* 7323.7	7.0	35.1	42.1	127.4	5,000	Horizontal	
9764.9					5,000	Horizontal	
* 12206.1					5,000	Horizontal	
14647.3					5,000	Horizontal	
17088.5	Emissions detected are more than					Horizontal	
* 19529.8		20 dB below	5,000	Horizontal			
21971.0				5,000	Horizontal		
24412.2					5,000	Horizontal	

Field Strength of Fundamental and Harmonics Emissions								
	Average Value							
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	dBµV/m	dBµV/m	$dB\mu V/m$	$\mu V/m$	$\mu V/m$			
2441.2	39.4	29.7	69.1	2,851.0	50,000	Horizontal		
* 4882.5	-0.2	32.4	32.2	40.7	500	Horizontal		
* 7323.7	-0.2	35.1	34.9	55.6	500	Horizontal		
9764.9					500	Horizontal		
* 12206.1					500	Horizontal		
14647.3					500	Horizontal		
17088.5	17088.5 Emissions detected are more than					Horizontal		
* 19529.8]	20 dB below	500	Horizontal				
21971.0]				500	Horizontal		
24412.2					500	Horizontal		

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Page 9 of 33

Result of On mode (Antenna 1 - Channel 239), (Above 1GHz): Pass

Field Strength of Fundamental and Harmonics Emissions								
	Peak Value							
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	$dB\mu V/m$	dBµV/m	$dB\mu V/m$	μV/m	μV/m			
2476.1	57.4	29.7	87.1	22,646.4	500,000	Horizontal		
* 4952.8	14.1	32.5	46.6	213.8	5,000	Horizontal		
* 7429.1	6.2	35.5	41.7	121.6	5,000	Horizontal		
9904.4					5,000	Horizontal		
* 12380.5					5,000	Horizontal		
14856.5					5,000	Horizontal		
17332.6	17332.6 Emissions detected are more than					Horizontal		
* 19808.7]	20 dB below	5,000	Horizontal				
22284.8]			5,000	Horizontal			
24760.9					5,000	Horizontal		

Field Strength of Fundamental and Harmonics Emissions									
	Average Value								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBµV/m	dBµV/m	$dB\mu V/m$	$\mu V/m$	$\mu V/m$				
2476.1	43.6	29.7	73.3	4,623.8	50,000	Horizontal			
* 4952.8	0.4	32.5	32.9	44.2	500	Horizontal			
* 7429.1	-2.4	35.5	33.1	45.2	500	Horizontal			
9904.4					500	Horizontal			
* 12380.5					500	Horizontal			
14856.5					500	Horizontal			
17332.6	Emissions detected are more than					Horizontal			
* 19808.7]	20 dB below	500	Horizontal					
22284.8]				500	Horizontal			
24760.9					500	Horizontal			

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Page 10 of 33

Result of On mode (Antenna 2 - Channel 7), (Above 1GHz): Pass

	Field Strength of Fundamental and Harmonics Emissions								
	Peak Value								
F	requency	Measured	Correction	Field	Field	Limit @3m	E-Field		
		Level @3m	Factor	Strength	Strength		Polarity		
	MHz	$dB\mu V/m$	$dB\mu V/m$	dBµV/m	μV/m	$\mu V/m$			
	2403.2	60.6	29.7	90.3	32,734.1	500,000	Horizontal		
*	4806.1	18.2	32.1	50.3	327.3	5,000	Horizontal		
	7209.3	7.3	34.8	42.1	127.4	5,000	Horizontal		
	9612.8					5,000	Horizontal		
*	12016.0					5,000	Horizontal		
	14419.2					5,000	Horizontal		
	16822.4	Emissions detected are more than 5,000 Horizontal							
*	19225.6	20 dB below the FCC Limits 5,000 Horizontal							
	21628.8					5,000	Horizontal		
	24032.0					5,000	Horizontal		

	Field Strength of Fundamental and Harmonics Emissions								
	Average Value								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBµV/m	dBµV/m	$dB\mu V/m$	$\mu V/m$	$\mu V/m$				
2403.2	43.2	29.7	72.9	4,415.7	50,000	Horizontal			
* 4806.1	6.5	32.1	38.6	85.1	500	Horizontal			
7209.3	-2.2	34.8	32.6	42.7	500	Horizontal			
9612.8					500	Horizontal			
* 12016.0					500	Horizontal			
14419.2					500	Horizontal			
16822.4	Emissions detected are more than 500 Horizontal								
* 19225.6	20 dB below the FCC Limits 500 Horizontal								
21628.8	500 Horizontal								
24032.0					500	Horizontal			

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Result of On mode (Antenna 2 - Channel 128), (Above 1GHz): Pass

	Field Strength of Fundamental and Harmonics Emissions								
	Peak Value								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBµV/m	$dB\mu V/m$	dBµV/m	μV/m	μV/m				
2441.2	60.9	29.7	90.6	33,884.4	500,000	Horizontal			
* 4882.5	19.8	32.4	52.2	407.4	5,000	Horizontal			
* 7323.7	6.6	35.1	41.7	121.6	5,000	Horizontal			
9764.9					5,000	Horizontal			
* 12206.1					5,000	Horizontal			
14647.3					5,000	Horizontal			
17088.5	Emissions detected are more than 5,000 Horizontal								
* 19529.8	20 dB below the FCC Limits 5,000 Horizontal								
21971.0					5,000	Horizontal			
24412.2					5,000	Horizontal			

	Field Strength of Fundamental and Harmonics Emissions								
	Average Value								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBµV/m	dBµV/m	$dB\mu V/m$	$\mu V/m$	$\mu V/m$				
2441.2	43.0	29.7	72.7	4,315.2	50,000	Horizontal			
* 4882.5	8.9	32.4	41.3	116.1	500	Horizontal			
* 7323.7	-3.2	35.1	31.9	39.4	500	Horizontal			
9764.9					500	Horizontal			
* 12206.1]				500	Horizontal			
14647.3]				500	Horizontal			
17088.5	Emissions detected are more than 500 Horizontal								
* 19529.8	20 dB below the FCC Limits 500 Horizontal								
21971.0	500 Horizontal								
24412.2					500	Horizontal			

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Result of On mode (Antenna 2 - Channel 239), (Above 1GHz): Pass

	Field Strength of Fundamental and Harmonics Emissions								
	Peak Value								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	$dB\mu V/m$	dBµV/m	dBµV/m	μV/m	μV/m				
2476.1	60.4	29.7	90.1	31,989.0	500,000	Horizontal			
* 4952.2	18.7	32.5	51.2	363.1	5,000	Horizontal			
* 7428.3	6.6	35.5	42.1	127.4	5,000	Horizontal			
9904.4					5,000	Horizontal			
* 12380.5					5,000	Horizontal			
14856.5					5,000	Horizontal			
17332.6	E	Emissions detected are more than 5,000 Horizontal							
* 19808.7	20 dB below the FCC Limits 5,000 Horizontal								
22284.8]				5,000	Horizontal			
24760.9					5,000	Horizontal			

	Field Strength of Fundamental and Harmonics Emissions								
	Average Value								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBµV/m	dBµV/m	$dB\mu V/m$	$\mu V/m$	$\mu V/m$				
2476.1	43.4	29.7	73.1	4,518.6	50,000	Horizontal			
* 4952.2	7.2	32.5	39.7	96.6	500	Horizontal			
* 7428.3	-1.2	35.5	34.3	51.9	500	Horizontal			
9904.4					500	Horizontal			
* 12380.5					500	Horizontal			
14856.5					500	Horizontal			
17332.6	Emissions detected are more than 500 Horizontal								
* 19808.7	20 dB below the FCC Limits 500 Horizontal								
22284.8	500 Horizontal								
24760.9					500	Horizontal			

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

*: Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000 MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Calculated measurement uncertainty	:	9kHz to 30MHz	2.4dB
		30MHz to 1GHz	4.9dB
		1GHz to 6GHz	4.02dB
		6GHz to 18GHz	4.03dB



Page 13 of 33

Limits for 20dB Bandwidth of Fundamental Emission:

Frequency Range	20dB Bandwidth
[MHz]	[MHz]
2403.2	1.456

Antenna 1 - Channel 7

		200B Bai	ndwidth of Fun	damental Emis	sion		
Agilent Spectrum Anal	yzer - Occupied BW						
IXI RF	50Ω AC		SENSE:INT	ALIGN AUTO			9 PM Jul 30, 2019
Center Freq 2	2.403143000	GHz	Center Free Trig: Free F	q: 2.403143000 GHz Run AvalHo	old: 10/10	Radio Std: N	one
		#IFGain:Lo				Radio Device	: BTS
	ef -20.00 dBm				М	kr1 2.403 -36.4	143 GHz 544 dBm
Log				4			
-30.0)'			
-40.0							
-50.0				- Nor of			
-60.0		har we wanted		- 100-1	U munul		
	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	~			° V~1	m Mun	<u> </u>
-70.0 v~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~						0 0000	᠃᠃᠂᠁ᢉ
-80.0							
-90.0							
-100							
-110							
Center 2.403 G #Res BW 100 k		l	VBW	/ 1 MHz			pan 3 MHz /eep 1 ms
Occupied	Bandwidth		Total Po	wer -29.5	i dBm		
-	1.2	371 MH	Z				
Transmit Fr	eq Error	17.964 kH	Iz OBW Po	ower 99	9.00 %		
x dB Bandw	ridth	1.456 MH	lz xdB	-20.	00 dB		
MSG				STATUS			

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



## Page 14 of 33

Frequency Range	20dB Bandwidth
[MHz]	[MHz]
2441.22	1.414

	1	ntal Emission	of Fundan	20dB Bandwidt		allant Count
05:01:23 PM Jul 30, 201 Radio Std: None Radio Device: BTS	10/10 Rad	ALIGN AUTO 154000 GHz Avg Hold:>10.	:INT enter Freq: 2.44 rig: Free Run Atten: 6 dB	SE #IFGain:Low	Analyzer     - Occupied BW       RF     50 Ω     AC       -20.00 dBm	u I
kr1 2.441154 GH: -43.372 dBn	Mkr1				Ref -20.00 dBm	10 dB/div
						- <b>0g</b> 30.0
			1			40.0
						50.0
	www			m		60.0
					mont	70.0
~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~					man man	80.0 <mark>\}}}</mark>
						90.0
						-100
						-110
Span 3 MH Sweep 1 m		Hz	VBW 1	l l		Center 2.4 #Res BW 1
	ßm	-36.5 dBn	otal Power		ed Bandwidth	Occupi
				03 MHz		
	1%	99.00 %	BW Power	14.765 kHz	Freq Error	Transmi
		-20.00 dl	dB	1.414 MHz	ndwidth	

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Page 15 of 33

Frequency Range	20dB Bandwidth
[MHz]	[MHz]
2476.09	1.178

Antenna 1 - Channel 239

	20dB Bandwi	idth of Fundament	al Emission	
gilent Spectrum Analyzer - Occupied B	W			
center Freq 2.476030000		Center Freq: 2.4760300 → Trig: Free Run	ALIGN AUTO 000 GHz Avg Hold:>10/10	04:58:07 PM Jul 30, 20: Radio Std: None
	#IFGain:Low	#Atten: 6 dB		Radio Device: BTS
0 dB/div Ref -20.00 dBr	n			Mkr1 2.47606 GH -42.589 dBn
og				
30.0		 1		
10.0		mmmm		
i0.0			~h	
0.0	hanness and a second		White and a start of the start	
0.0	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~		2 N N N	
- no mon				- man harden
0.0				
00				
10				
enter 2.476 GHz Res BW 100 kHz		VBW 1 MHz		Span 3 MH Sweep 1 m
Occupied Bandwidt	h	Total Power	-35.9 dBm	
1.1	1319 MHz			
Transmit Freq Error	51.596 kHz	OBW Power	99.00 %	
x dB Bandwidth	1.178 MHz	x dB	-20.00 dB	
G			STATUS	

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Page 16 of 33

Frequency Range	20dB Bandwidth
[MHz]	[MHz]
2403.2	1.46

Antenna 2 - Channel 7

	20dB Bandwi	idth of Fundament	al Emission		
gilent Spectrum Analyzer - Occupied BW					
RF 50 Ω AC larker 1 2.4032 GHz	+IFGain:Low	SENSE:INT Center Freq: 2.4031650 ⊢ Trig: Free Run #Atten: 6 dB	ALIGNAUTO 000 GHz Avg Hold: 10/10		04:45:59 PM Jul 30, 201 dio Std: None dio Device: BTS
0 dB/div Ref -20.00 dBm				Mkr1	2.403165 GH: -40.901 dBn
og 30.0					
		1 1			
40.0		- many	~~		
50.0	- www		- man		
60.0 Solo			when the second s	~	
10.0 more man and the second s				~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	mummum
30.0					
90.0					
100					
110					
enter 2.403 GHz Res BW 100 kHz		VBW 1 MHz			Span 3 MH: Sweep 1 ms
Occupied Bandwidth		Total Power	-34.0 dBm		
1.25	72 MHz				
Transmit Freq Error -	16.043 kHz	OBW Power	99.00 %		
x dB Bandwidth	1.460 MHz	x dB	-20.00 dB		
			20.00 48		
SG			STATUS		

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Frequency Range	20dB Bandwidth
[MHz]	[MHz]
2441.22	1.272

Antenna 2 - Channel 128

	20dB Bandw	vidth of Fundament	al Emission		
gilent Spectrum Analyzer - Occupied B	w				
Center Freq 2.441182000		SENSE:INT Center Freq: 2.4411820 June	ALIGNAUTO 000 GHz Avg Hold: 10/10		04:48:29 PM Jul 30, 20: dio Std: None dio Device: BTS
0 dB/div Ref -20.00 dB	m			Mkr1	2.441182 GH -43.503 dBr
og					
30.0					
40.0					
0.0		and the second s	~~		
	~~~~~ [~]	n ^{er}	when		
0.0	man and the		- www.	~	
0.0				- Martine	
0.0 marchanthe 0.0					
0.0					
100					
100					
110					
renter 2.441 GHz Res BW 100 kHz	L.	VBW 1 MHz			Span 3 MH Sweep 1 m
Occupied Bandwidt	h	Total Power	-36.4 dBm		
1.	2433 MHz				
Transmit Freq Error	40.216 kHz	OBW Power	99.00 %		
x dB Bandwidth	1.272 MHz	x dB	-20.00 dB		
G			STATUS		
3			STATUS		

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



## Page 18 of 33

Frequency Range	20dB Bandwidth
[MHz]	[MHz]
2476.06	1.434

## Antenna 2 - Channel 239

20dB Bandwi	dth of Fundament	al Emission	
w			
	Center Freq: 2.476030	000 GHz	04:51:17 PM Jul 30, 20: Radio Std: None
#IFGain:Low	#Atten: 6 dB		Radio Device: BTS
n			Mkr1 2.47606 GH -47.050 dBr
	↓ ↓ 1 · · · ·		
~~			Weber www.w. w. warded
	VBW 1 MHz		Span 3 MH Sweep 1 m
h	Total Power	-39.7 dBm	
3213 MHz			
21.743 kHz	OBW Power	99.00 %	
1.434 MHz	x dB	-20.00 dB	
		STATUS	
	m m h 3213 MHz 21.743 kHz	w SENSE:INT Center Freq: 2.4760300 TIFGain:Low #Atten: 6 dB m TOTAL Power 3213 MHz 21.743 kHz OBW Power	SENSE:INT   ALIGNAUTO     Center Freq: 2.476030000 GHz   Avg Hold: 10/10     #IFGain:Low   #Atten: 6 dB     m   1     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0     0   0 <

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Page 19 of 33

#### **Band Edge Measurement:**

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
Antenna 1 – Lowest Fundamental	41.1

41.1dB Level Reduction at Lower Band Edge

				<u>1 ut 1000 c</u>					
<b>x</b>	Marker	1 [T1]		RBW	100 ]	κHz	RF Att	0 dB	
Ref Lvl		72.0	3 dbyv	VBW	300 ]	κHz			
87 db <b>y</b> v	2	.403386	77 GHz	SWT	28 r	ns	Unit	db <b>n</b>	7
87					▼1	[T1]	72	.03 dbyv	]
80								677 GHz	A
					<b>^</b> 1	[T1]		1.14 dB	
								144 MHz	
70									
60									
									IN
1VIEW									11
50									
40								+11	
								$ _1 / \langle \rangle$	
30									
							کر	~	1
			اللاحم م		ليمانيهم	Klum	when the way		
20 mm mm	Mymmum	www.www		4					
10									
0									
10									
Start 2.3 (	GHz		11 1	MHz/			Stop 3	2.41 GHz	-
ce: 23.N	017 2015 17								
.e. 23.N	UV.ZUIS 1/								

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org


This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Page 20 of 33

#### **Band Edge Measurement:**

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
Antenna 1 – Highest Fundamental	45.0

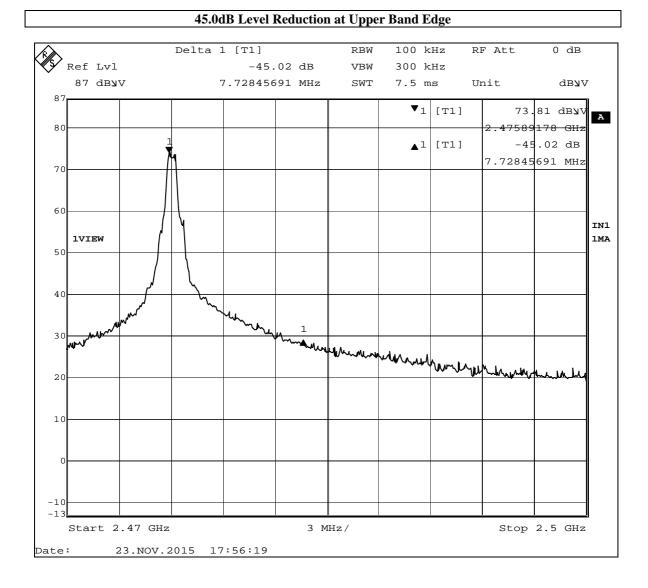

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited. For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Page 21 of 33

#### **Band Edge Measurement:**

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
Antenna 2 – Lowest Fundamental	35.5

35.5dB Level Reduction at Lower Band Edge

•									
$\sim$	Marker 1 [T1]		RBW			RF Att	0	dB	
Y Ref Lvl		7 dbyv			kHz				
87 dbvv	2.403166	33 GHz	SWT	28	ms	Unit		dBAA	7
87				<b>v</b> ₁	[T1]	59	9.37	dbav	A
80						2.4031	6633	GHz	
				<b>Δ</b> ¹	[T1]	- 3	35.52	dB	
70						-3.8276	5531	MHz	
/0									
							1		
60							1		
lVIEW									IN 1M
50									
4.0							$\parallel \parallel$		
40									
30									
							₽, <b>N</b>	Y,	
20 mm Mulum Mr.	ALLIA . MAMININ MACAN	~~~~~~	muhune	lenkan		munun	N M	Her	
		•••							
10									
0							_		
10									
-10									
Start 2.3 GHz		11 1	MHz/			Stop	2.41	GHz	
te: 23.NOV.	2015 17.40.14								

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org


This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Page 22 of 33

#### **Band Edge Measurement:**

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
Antenna 2 – Highest Fundamental	45.1

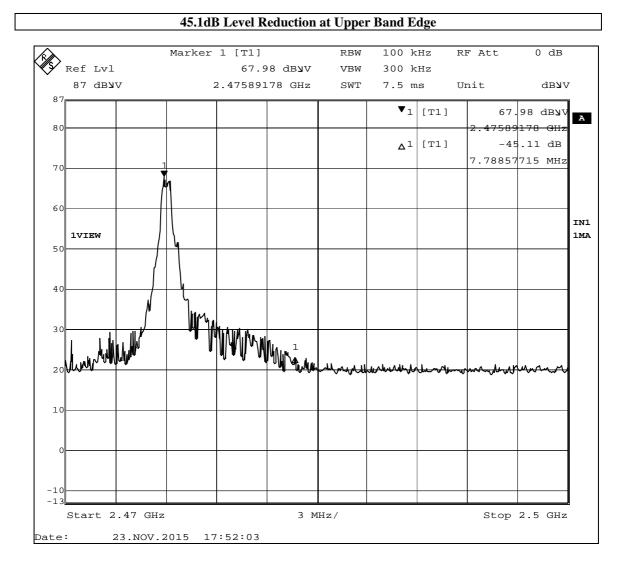

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Page 23 of 33

## Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [µV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Result of On mode (Antenna 1), (9kHz - 30MHz): PASS

Emissions detected are more than 20 dB below the FCC Limits

#### Result of On mode (Antenna 1), (30MHz - 1GHz): PASS

Field Strength of Spurious Emissions										
			Quasi-Peak							
Frequency	Frequency Measured Correction Field Limit Margin E-Fie									
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m					
61.3	0.5	8.6	9.1	40.0	30.9	Horizontal				
133.5	0.3	10.2	10.5	43.5	33.0	Horizontal				
243.5	0.2	15.5	15.7	46.0	30.3	Horizontal				
337.9	0.8	18.6	19.4	46.0	26.6	Horizontal				
481.3	0.6	22.6	23.2	46.0	22.8	Horizontal				
613.8	0.7	26.0	26.7	46.0	19.3	Horizontal				

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Page 24 of 33

#### **Result of On mode (Antenna 2), (9kHz – 30MHz): PASS** Emissions detected are more than 20 dB below the FCC Limits

#### Result of On mode (Antenna 2), (30MHz - 1GHz): PASS

Field Strength of Spurious Emissions							
			Quasi-Peak				
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m		
64.3	0.4	8.6	9.0	40.0	31.0	Horizontal	
143.5	0.8	10.5	11.3	43.5	32.2	Horizontal	
228.4	0.6	14.8	15.4	46.0	30.6	Horizontal	
343.2	0.5	18.7	19.2	46.0	26.8	Horizontal	
477.6	0.3	22.5	22.8	46.0	23.2	Horizontal	
651.2	0.5	26.7	27.2	46.0	18.8	Horizontal	

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty	:	30MHz to 1GHz	4.9dB
		1GHz to 6GHz	4.02dB
		6GHz to 18GHz	4.03dB



Page 25 of 33


## 3.1.3 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement:	FCC 47CFR 15.207
Test Method:	ANSI C63.4:2009
Test Date:	2015-11-05
Mode of Operation:	On mode
Test Voltage:	120Va.c., 60Hz

## **Test Method:**

The test was performed in accordance with ANSI C63.4: 2009, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

## **Test Setup:**

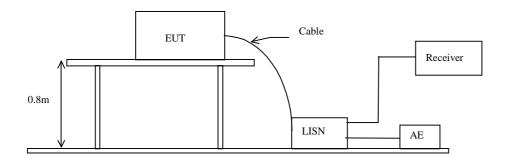



Page 26 of 33

## Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

## **Results of On mode: PASS**

Please refer to the following diagram for individual results.

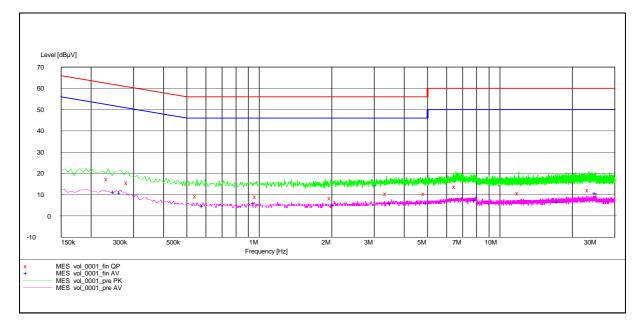

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Page 27 of 33

#### **Results of On mode - Live: PASS**

		Quasi	i-peak	Average	
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dBµV	dBµV	dBµV	dBµV
Live	0.235	17.3	62.0	_*_	_*_
Live	0.250	_*_	_*_	11.4	52.0
Live	0.265	_*_	_*_	11.0	51.0
Live	0.285	15.7	61.0	_*_	_*_
Live	0.550	9.3	56.0	_*_	_*_
Live	0.585	_*_	_*_	4.6	46.0
Live	0.955	_*_	_*_	5.9	46.0
Live	0.975	8.9	56.0	_*_	_*_
Live	1.990	8.3	56.0	_*_	_*_
Live	2.045	_*_	_*_	5.1	46.0
Live	3.385	10.3	56.0	_*_	_*_
Live	3.525	_*_	_*_	6.0	10.3
Live	4.890	10.4	56.0	_*_	_*_
Live	5.000	_*_	_*_	6.1	46.0
Live	6.550	13.8	60.0	_*_	_*_
Live	7.935	_*_	_*_	7.5	50.0
Live	11.985	10.6	60.0	_*_	_*_
Live	17.465	_*_	_*_	6.6	50.0
Live	23.475	12.1	60.0	_*_	_*_
Live	25.060	_*_	_*_	10.7	50.0

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong


Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



#### **Results of On mode - Neutral: PASS**

Please refer to the following diagram for individual results.

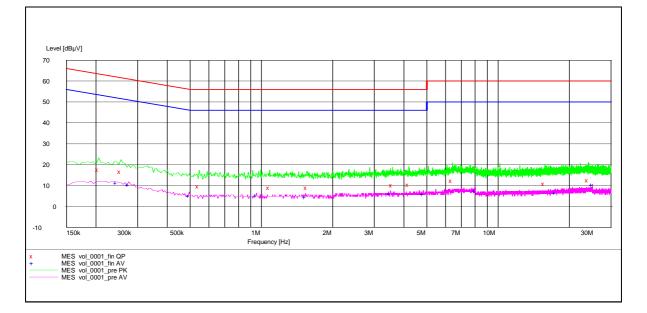

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Page 28 of 33



Page 29 of 33

## **Results of On mode - Neutral: PASS**

		Quasi	i-peak	Average		
Conductor	Frequency	Level	Limit	Level	Limit	
Live or Neutral	MHz	dBµV	dBµV	dBµV	dBµV	
Neutral	0.205	17.6	63.0	_*_	_*_	
Neutral	0.245	_*_	_*_	11.4	52.0	
Neutral	0.255	16.6	62.0	_*_	_*_	
Neutral	0.275	_*_	_*_	10.6	51.0	
Neutral	0.495	_*_	_*_	5.2	46.0	
Neutral	0.545	9.8	56.0	_*_	_*_	
Neutral	0.955	_*_	_*_	5.3	46.0	
Neutral	1.085	8.9	56.0	_*_	_*_	
Neutral	1.535	_*_	_*_	4.4	46.0	
Neutral	1.560	8.9	56.0	_*_	_*_	
Neutral	3.510	_*_	_*_	6.0	46.0	
Neutral	3.580	10.3	56.0	_*_	_*_	
Neutral	4.200	10.4	56.0	_*_	_*_	
Neutral	4.830	_*_	_*_	5.9	46.0	
Neutral	6.415	12.4	60.0	_*_	_*_	
Neutral	8.010	_*_	_*_	7.6	50.0	
Neutral	15.745	10.9	60.0	_*_	_*_	
Neutral	17.490	_*_	_*_	6.7	50.0	
Neutral	24.045	12.5	60.0	_*_	_*_	
Neutral	25.060	_*_	_*_	10.6	50.0	

#### Remarks:

Calculated measurement uncertainty (0.15MHz – 30MHz): 3.2dB

-*- Emission(s) that is far below the corresponding limit line.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Page 30 of 33

## Appendix A

## LIST OF MEASUREMENT EQUIPMENT

		Radiated I	Emission			
EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM299	DOUBLE-RIDGED WAVEGUIDE HORN ANTENNA	ETS-LINDGREN	3115	00114120	2014/01/15	2016/01/25
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-LINDGREN	FACT-3		2014/09/29	2015/09/29
EM320	BICONILOG ANTENNA	ETS-LINDGREN	3142D	00094856	2014/08/06	2016/08/06
EM229	EMI TEST RECEIVER	R&S	ESIB40	100248	2015/06/01	2016/06/01
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2014/01/15	2016/01/15
EM527	MICROWAVE FREQUENCY CABLE	SUHNER	SUCOFLEX 102	24514	2013/08/26	2016/08/26
EM528	MICROWAVE FREQUENCY CABLE	SUHNER	SUCOFLEX 102	24515	2013/08/26	2016/08/26
EM529	MICROWAVE FREQUENCY CABLE	SUHNER	SUCOFLEX 104	238296	2014/07/24	2016/07/24
EM530	MICROWAVE FREQUENCY CABLE	SUHNER	SUCOFLEX 102	24970	2013/08/26	2016/08/26

## Line Conducted

	Line Conducted						
EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL	
EM232	LISN	SCHAFFNER	NNB41	04/100082	2014/12/08	2015/12/08	
EM179	IMPULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	357- 8810.52/54	2015/01/14	2016/01/14	
EM154	SHIELDING ROOM	SIEMENS MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	2012/02/03	2017/02/03	

Remarks:

CM Corrective Maintenance

N/A Not Applicable or Not Available

TBD To Be Determined

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Page 31 of 33

Appendix B

**Photographs of EUT** 



**Inner Circuit Top View** 



**Rear View of the product** 

**Inner Circuit Bottom View** 







Photographs of EUT

Page 32 of 33

Measurement of Radiated Emission Test Set Up



Measurement of Radiated Emission Test Set Up





Page 33 of 33

**Photographs of EUT** 



Measurement of Conducted Emission Test Set Up

***** End of Test Report *****



# **Conditions of Issuance of Test Reports**

- 1. All samples and goods are accepted by The Hong Kong Standards & Testing Centre Limited (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The Company provides its services on the basis that such terms and conditions constitute express agreement between the Company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by the Company as a result of this application for testing service (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to his customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. The Report refers only to the sample tested and does not apply to the bulk, unless the sampling has been carried out by the Company and is stated as such in the Report.
- 5. In the event of the improper use the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Sample submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage howsoever arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as to otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of this test report for a period of three years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after the retention period. Under no circumstances shall we be liable for damages of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.
- 10. Issuance records of the Report are available on the internet at www.stc-group.org. Further enquiry of validity or verification of the Reports should be addressed to the Company.