


NOTES : UNLESS OTHERWISE SPECIFIED

- 1. INDICATES A DIMENSION OR FEATURE IDENTIFIED AS " GATEKEEPER SYSTEMS AND DESIGNATED AS AN
- 2. INDICATES A DIMENSION OR FEATURE IDENTIFIED AS A " REQUIREMENT " BY GATEKEEPER SYSTEMS.
- 3. ALL DIMENSIONS ARE IN MILLIMETERS.
- 4. PARTS ARE TO BE CLEAN AND FREE OF OIL, GREASE, DIRT, AND LOOSE PARTICLES.
- 5. GATEKEEPER SYSTEMS TO BE NOTIFIED, IN WRITING, PRIOR TO ANY TOOLING, MATERIALS, OR PROCESS CHANGES OR MODIFICATIONS.
- 6. TOOLING REQUIRED TO PRODUCE THIS PART TO BE THE PROPERTY OF GATEKEEPER SYSTEMS, INC. AND SHALL BE PERMANENTLY MARKED WITH THE GATEKEEPER SYSTEM NAME AND PART NUMBER.

CRITICAL " BY
INSPECTION REQUIREMENT
PROCESS CONTROL

REVISIONS

REV.	E.O. TYPE & NO.	DRAWN BY	DATE	APPROVED	DATE
A0X	ECNXXXXXXXX	X,XXXX	XX/XX/XX	X,XXXX	XX/XX/XX

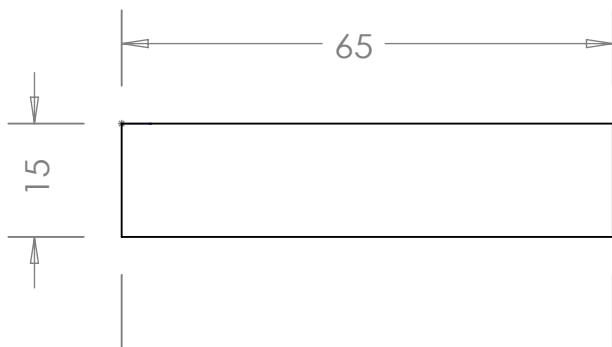

Gatekeeper Systems
Model E65500
FCC ID: W32-E65500
IC: 6817C - E65500

This Device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference and
(2) this device must accept any interference received, including interference that may cause undesired operation.

Volts: 12VDC (PIN 5)
Amps: 150mA

CE 0700

Materials: gloss white sticker

<small>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES: DECIMALS: .X &.3 .XX &.1 ANGLES: ±1 SURFACE ROUGHNESS: 6.3 ALL DIAMETERS: .010 T1.R. REMOVE ALL BURRS AND BREAK SHARP EDGES TO MAX. DIMENSIONS & TOLERANCES PER ANSI Y14.5M THREADS PER FED-STD-H2B</small>	ORIGINAL DATE OF DRAWING XX/XX/XX	GATEKEEPER SYSTEMS, INC.			
	DRAWN X,XXXX				Label FCC for Mobility Manager
	CHECKED	REVISED	SIZE A	NEXT ASSY.	
	MATERIAL MAT-XXX	ENGINEER X,XXXX	USED ON		
FINISH/COLOR XXX	PART VOL./WT. 0.00 cm ³ / 0.00 g	SCALE: FULL	SHEET 1 OF 1		