



## Test Report

Date : 2018-03-15  
No. : HM18010023

Page 1 of 37

**Applicant:** Gatekeeper Systems (HK) Ltd.  
36/F, Tower 2, Times Square, 1 Matheson Street, Causeway Bay,  
Hong Kong

**Manufacturer:** Gatekeeper Systems (HK) Ltd.  
36/F, Tower 2, Times Square, 1 Matheson Street, Causeway Bay,  
Hong Kong

**Description of Sample(s):** Product: SmartWheel  
Brand Name: Gatekeeper Systems  
Model Number: W-9490  
FCC ID: W3Z-W9490

**Date Sample(s) Received:** 2018-01-11

**Date Tested:** 2018-02-28 to 2018-03-05

**Investigation Requested:** Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2017 and ANSI C63.10:2013 for FCC Certification.

**Conclusion(s):** The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

**Remark(s):** ---

  
CHEUNG Chi, Kenneth  
Authorized Signatory  
ElectroMagnetic Compatibility Department  
For and on behalf of  
The Hong Kong Standards and Testing Centre Ltd.





## Test Report

Date : 2018-03-15  
No. : HM18010023

Page 2 of 37

### CONTENT:

Cover	Page 1 of 37	
Content	Page 2 of 37	
<b><u>1.0</u></b>	<b><u>General Details</u></b>	
1.1	Equipment Under Test [EUT] Description of EUT operation	Page 3 of 37
1.2	Description of EUT Operation	
1.3	Date of Order	Page 3 of 37
1.4	Submitted Sample	Page 3 of 37
1.5	Test Duration	Page 3 of 37
1.6	Country of Origin	Page 3 of 37
<b><u>2.0</u></b>	<b><u>Technical Details</u></b>	
2.1	Investigations Requested	Page 4 of 37
2.2	Test Standards and Results Summary	Page 4 of 37
<b><u>3.0</u></b>	<b><u>Test Results</u></b>	
3.1	Emission	Page 5-31 of 37
<b><u>Appendix A</u></b>		
	List of Measurement Equipment	Page 32 of 37
<b><u>Appendix B</u></b>		
	Photographs	Page 33-37 of 37

The Hong Kong Standards and Testing Centre Limited  
Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong  
Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.  
For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2018-03-15  
No. : HM18010023

Page 3 of 37

### **1.0 General Details**

#### **1.1 Equipment Under Test [EUT] Description of Sample(s)**

Product: SmartWheel  
Manufacturer: Gatekeeper Systems (HK) Ltd.  
36/F, Tower 2, Times Square, 1 Matheson Street, Causeway Bay, Hong Kong  
Brand Name: Gatekeeper Systems  
Model Number: W-9490  
Rating: CR17450 x 1=3.0Vd.c  
(User is not able to recharge and replace the battery)

#### **1.2 Description of EUT Operation**

The Equipment Under Test (EUT) is SmartWheel (Wheel with remote control lock function) of Gatekeeper Systems (HK) Ltd., which is 2.4GHz transceiver.  
The W-9490 Operational mode transmissions are modulated at FSK (Frequency Shift Keying), with a deviation of 19 kHz (Carson's rule bandwidth about 80 kHz) and MSK (Minimum Shift Keying).  
The EUT was tested under test mode which was set in maximum output power (RF output Power = 0.0 dBm) and transmit continuously.

#### **1.3 Date of Order**

2018-01-11

#### **1.4 Submitted Sample(s):**

2 Samples

#### **1.5 Test Duration**

2018-02-28 to 2018-03-05

#### **1.6 Country of Origin**

China



## Test Report

Date : 2018-03-15  
No. : HM18010023

Page 4 of 37

### 2.0 Technical Details

#### 2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2017 Regulations and ANSI C63.10:2013 for FCC Certification.

#### 2.2 Test Standards and Results Summary Tables

EMISSION Results Summary					
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result	
				Pass	Fail
Field Strength of Fundamental & Harmonics Emissions	FCC 47CFR 15.249	ANSI C63.10:2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>
AC power-line conducted emissions	FCC 47CFR 15.207	ANSI C63.10:2013	N/A	N/A	
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.10:2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Note: N/A - Not Applicable



## Test Report

Date : 2018-03-15  
No. : HM18010023

Page 5 of 37

### 3.0 Test Results

#### **3.1 Emission**

##### **3.1.1 Field Strength of Fundamental & Harmonics Emissions**

Test Requirement:	FCC 47CFR 15.249
Test Method:	ANSI C63.10:2013
Test Date:	2018-02-28
Mode of Operation:	1. Tx Mode (FSK) 2. Tx Mode (MSK)

#### **Test Method:**

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber\*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. In the frequency range of 9kHz to 30MHz, The center of the loop antenna shall be 1 meter above the ground and rotated loop axis for maximum reading. The emissions worst-case are shown in Test Results of the following pages.

Remark: 3 orthogonal axis apply to hand-held device only.

\*: Semi-anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd.  
FCC Test Firm Registration Number 723883  
Designation Number HK0001

## Test Report


Date : 2018-03-15  
No. : HM18010023

Page 6 of 37

### Spectrum Analyzer Setting:

9KHz – 30MHz (Pk & Av)	RBW: 10kHz
	VBW: 30kHz
	Sweep: Auto
	Span: Fully capture the emissions being measured
	Trace: Max. hold
30MHz – 1GHz (QP)	RBW: 120kHz
	VBW: 120kHz
	Sweep: Auto
	Span: Fully capture the emissions being measured
	Trace: Max. hold
Above 1GHz (Pk & Av)	RBW: 3MHz
	VBW: 3MHz
	Sweep: Auto
	Span: Fully capture the emissions being measured
	Trace: Max. hold

### Test Setup:

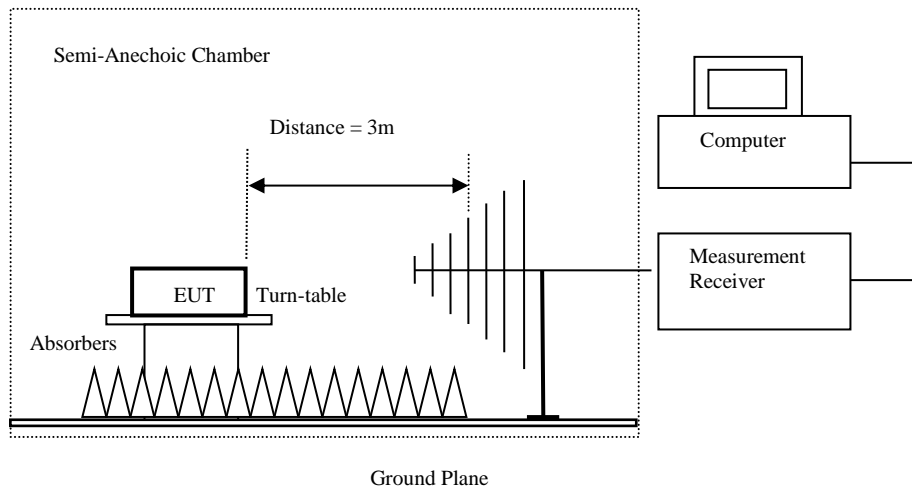

Absorbers placed on top of the ground plane are for measurements above 1000MHz only.



## Test Report

Date : 2018-03-15  
 No. : HM18010023


Page 7 of 37

**Limits for Field Strength of Fundamental & Harmonics Emissions [FCC 47CFR 15.249]:**

Fundamental frequency [MHz]	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

**Result of TX mode (FSK) (Lowest Channel), (Above 1GHz): Pass**

	Att 0 dB AUTO	Marker 1 [T1] 30.25 dBV/m	Det ResBW	MA/CA Trd 1 MHz	HORN
	INPUT 1	1.00000000 GHz	Meas T	100 ms Unit	dBV/m

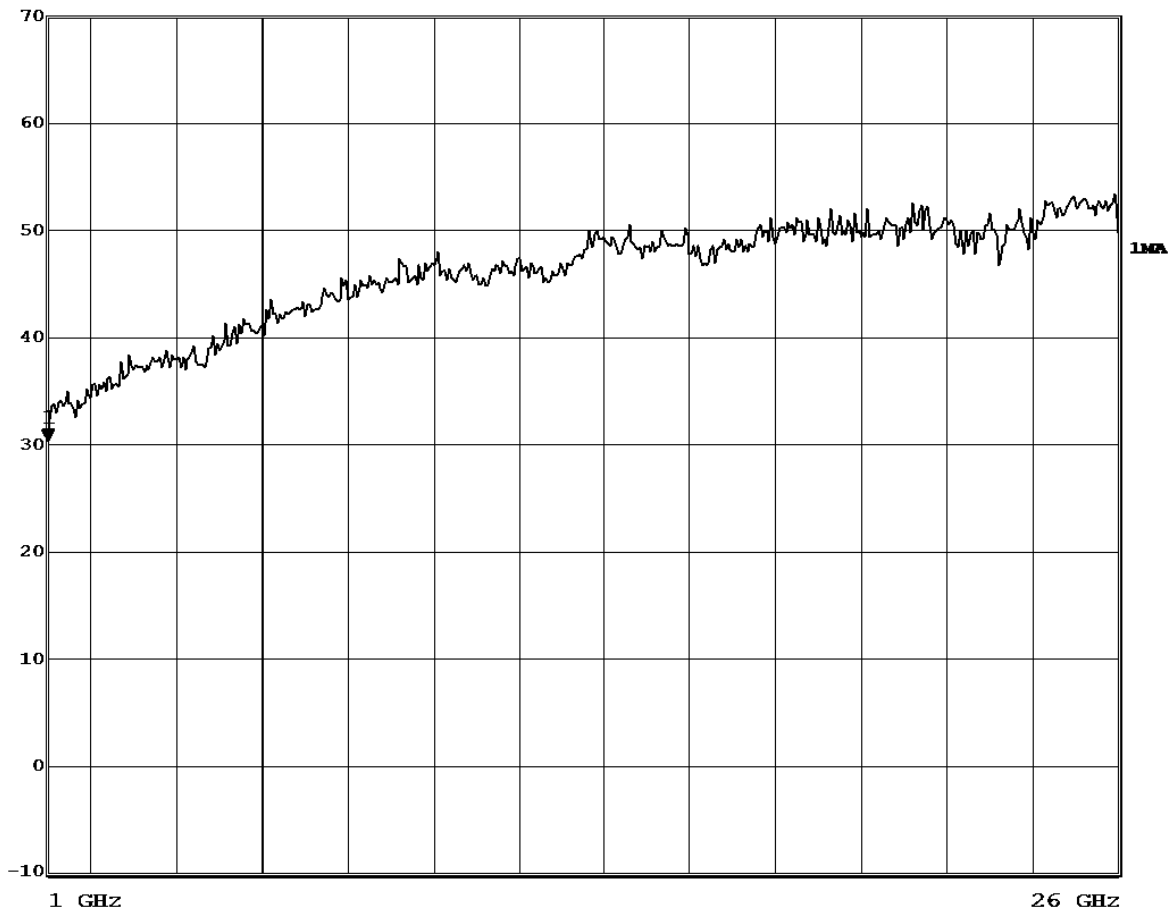

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2018-03-15  
 No. : HM18010023

Page 8 of 37

**Result of TX mode (FSK) (Lowest Channel), (Above 1GHz): Pass**

<b>Field Strength of Fundamental and Harmonics Emissions</b>						
<b>Peak Value</b>						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2402.0	56.7	27.9	84.6	16,982.4	500,000	Vertical
* 4804.0	12.4	32.1	44.5	167.9	5,000	Vertical
7206.0	2.7	38.6	41.3	116.1	5,000	Vertical
9608.0	Emissions detected are more than 20 dB below the FCC Limits				5,000	Vertical
* 12010.0					5,000	Vertical
14412.0					5,000	Vertical
16814.0					5,000	Vertical
* 19216.0					5,000	Vertical
21618.0					5,000	Vertical
24020.0					5,000	Vertical

<b>Field Strength of Fundamental and Harmonics Emissions</b>						
<b>Average Value</b>						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2402.0	45.2	27.9	73.1	4,518.6	50,000	Vertical
* 4804.0	1.9	32.1	34.0	50.1	500	Vertical
7206.0	-1.7	38.6	36.9	70.0	500	Vertical
9608.0	Emissions detected are more than 20 dB below the FCC Limits				500	Vertical
* 12010.0					500	Vertical
14412.0					500	Vertical
16814.0					500	Vertical
* 19216.0					500	Vertical
21618.0					500	Vertical
24020.0					500	Vertical

Remarks: The fundamental frequency was not included in the pre-scan plot, a 2.4G notch filter was added prior to the Receiver, please refer the band-edge plot for the level of fundamental frequency.





## Test Report


Date : 2018-03-15  
No. : HM18010023

Page 9 of 37

Result of TX mode (FSK) (Middle Channel), (Above 1GHz): Pass



Att 0 dB AUTO	Marker 1 [T1]	Det	MA/CA Trd	HORN
INPUT 1	31.37 dBV/m	ResBW	1 MHz	
	1.00000000 GHz	Meas T	100 ms Unit	dBV/m

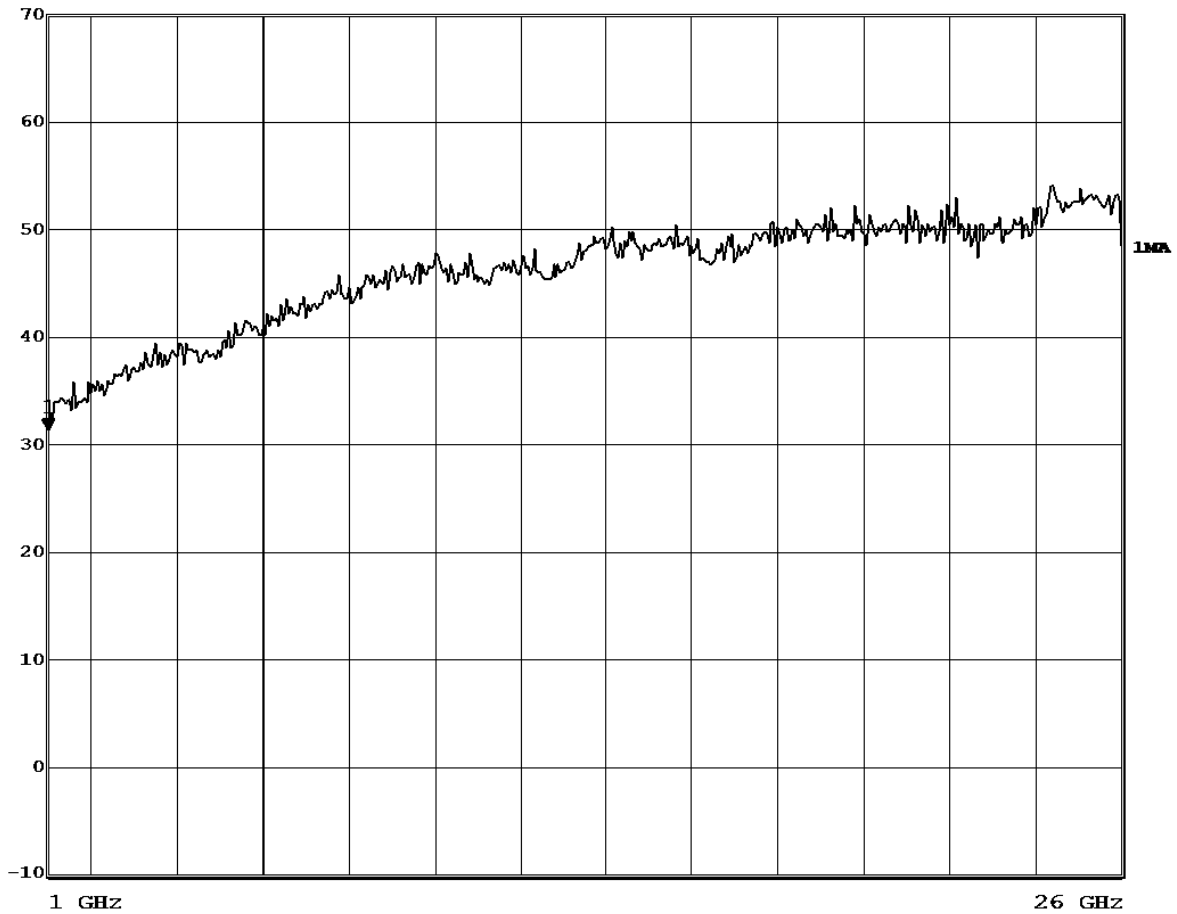



## Test Report

Date : 2018-03-15  
 No. : HM18010023

Page 10 of 37

**Result of TX mode (FSK) (Middle Channel), (Above 1GHz): Pass**

<b>Field Strength of Fundamental and Harmonics Emissions</b>						
<b>Peak Value</b>						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2440.0	56.1	27.9	84.0	15,848.9	500,000	Vertical
* 4880.0	8.7	32.1	40.8	109.6	5,000	Vertical
* 7320.0	2.3	38.6	40.9	110.9	5,000	Vertical
9760.0	Emissions detected are more than 20 dB below the FCC Limits				5,000	Vertical
* 12200.0					5,000	Vertical
14640.0					5,000	Vertical
17080.0					5,000	Vertical
* 19520.0					5,000	Vertical
21960.0					5,000	Vertical
24400.0					5,000	Vertical

<b>Field Strength of Fundamental and Harmonics Emissions</b>						
<b>Average Value</b>						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2440.0	45.1	27.9	73.0	4,466.8	50,000	Vertical
* 4880.0	1.9	32.1	34.0	50.1	500	Vertical
* 7320.0	-0.7	38.6	37.9	78.5	500	Vertical
9760.0	Emissions detected are more than 20 dB below the FCC Limits				500	Vertical
* 12200.0					500	Vertical
14640.0					500	Vertical
17080.0					500	Vertical
* 19520.0					500	Vertical
21960.0					500	Vertical
24400.0					500	Vertical

Remarks: The fundamental frequency was not included in the pre-scan plot, a 2.4G notch filter was added prior to the Receiver, please refer the band-edge plot for the level of fundamental frequency.



## Test Report


Date : 2018-03-15  
No. : HM18010023

Page 11 of 37

Result of TX mode (FSK) (Highest Channel), (Above 1GHz): Pass



Att 0 dB AUTO	Marker 1 [T1]	Det	MA/CA Trd	HORN
INPUT 1	31.37 dBV/m	ResBW	1 MHz	
	1.00000000 GHz	Meas T	100 ms Unit	dBV/m

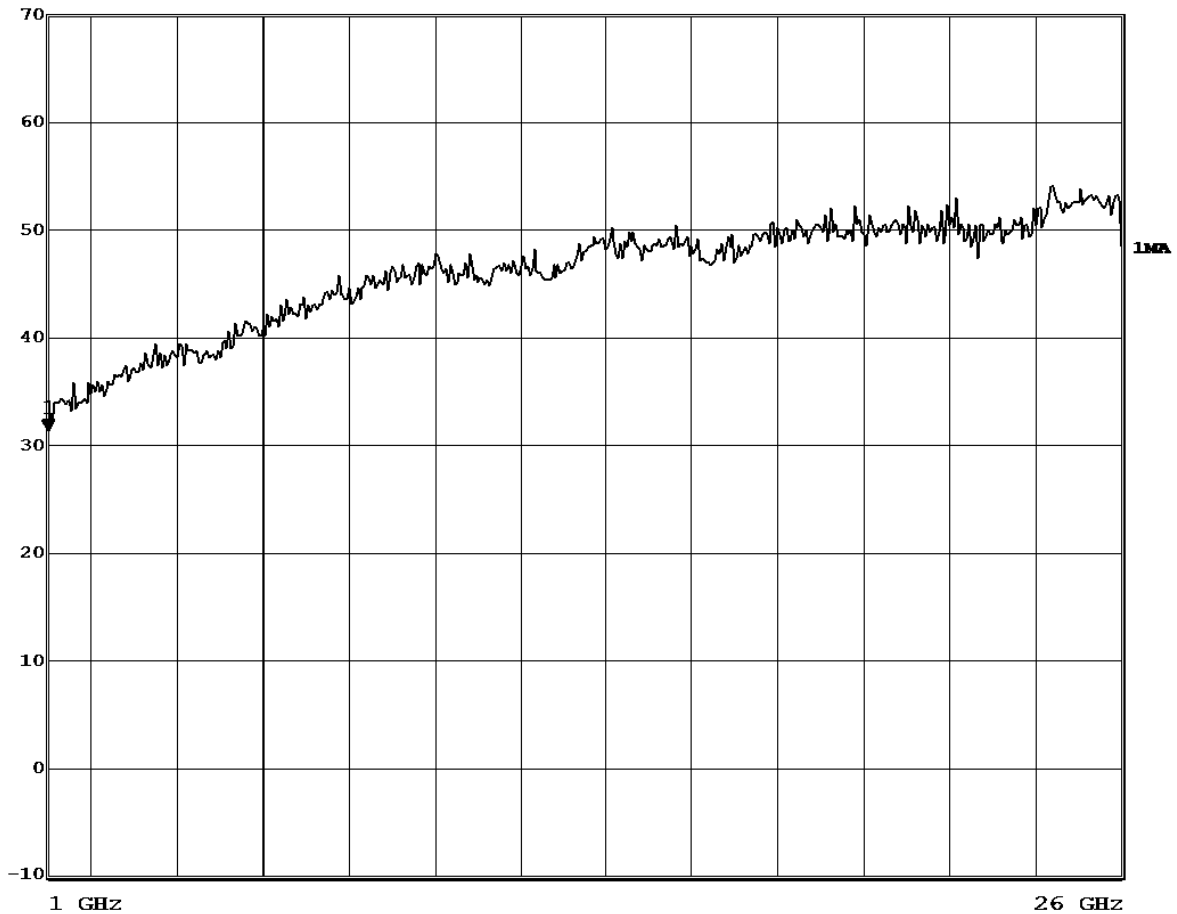

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2018-03-15  
 No. : HM18010023

Page 12 of 37

**Result of TX mode (FSK) (Highest Channel), (Above 1GHz): Pass**

<b>Field Strength of Fundamental and Harmonics Emissions</b>						
<b>Peak Value</b>						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2480.0	55.8	27.9	83.7	15,310.9	500,000	Vertical
* 4960.0	10.8	32.1	42.9	139.6	5,000	Vertical
* 7440.0	2.4	38.6	41.0	112.2	5,000	Vertical
9920.0	Emissions detected are more than 20 dB below the FCC Limits				5,000	Vertical
* 12400.0					5,000	Vertical
14880.0					5,000	Vertical
17360.0					5,000	Vertical
* 19840.0					5,000	Vertical
22320.0					5,000	Vertical
24800.0					5,000	Vertical

<b>Field Strength of Fundamental and Harmonics Emissions</b>						
<b>Average Value</b>						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2480.0	35.4	27.9	63.3	1,462.2	50,000	Vertical
* 4960.0	1.1	32.1	33.2	45.7	500	Vertical
* 7440.0	-0.4	38.6	38.2	81.3	500	Vertical
9920.0	Emissions detected are more than 20 dB below the FCC Limits				500	Vertical
* 12400.0					500	Vertical
14880.0					500	Vertical
17360.0					500	Vertical
* 19840.0					500	Vertical
22320.0					500	Vertical
24800.0					500	Vertical

Remarks: The fundamental frequency was not included in the pre-scan plot, a 2.4G notch filter was added prior to the Receiver, please refer the band-edge plot for the level of fundamental frequency.



## Test Report

Date : 2018-03-15  
No. : HM18010023


Page 13 of 37

Result of TX mode (MSK) (Lowest Channel), (Above 1GHz): Pass



Att 0 dB AUTO  
INPUT 1

Det	MA/CA Trd	HORN
ResBW	1 MHz	
Meas T	100 ms Unit	dB $\mu$ V/m

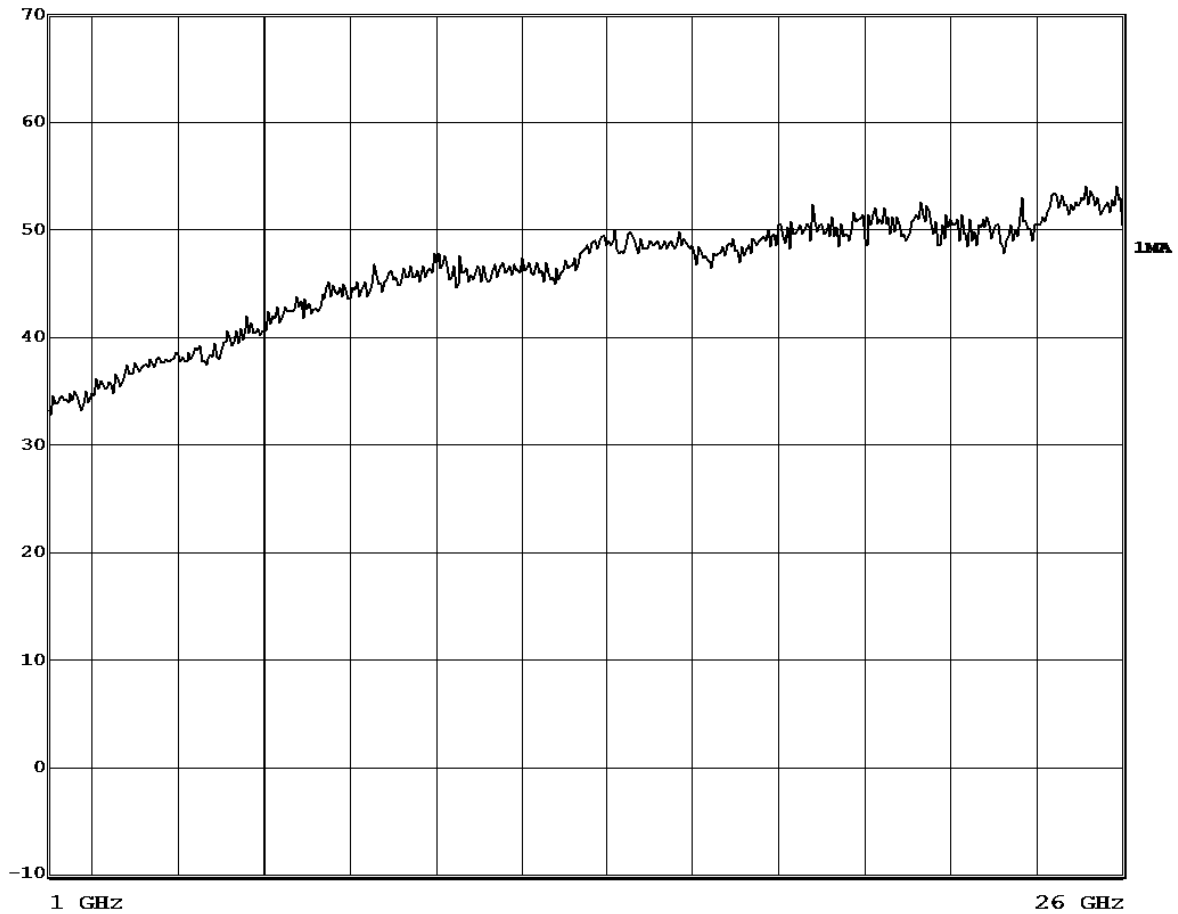

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2018-03-15  
 No. : HM18010023

Page 14 of 37

**Result of TX mode (MSK) (Lowest Channel), (Above 1GHz): Pass**

<b>Field Strength of Fundamental and Harmonics Emissions</b>						
<b>Peak Value</b>						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2401.0	57.9	27.9	85.8	19,498.4	500,000	Vertical
* 4802.0	11.2	32.1	43.3	146.2	5,000	Vertical
7203.0	2.7	38.6	41.3	116.1	5,000	Vertical
9604.0	Emissions detected are more than 20 dB below the FCC Limits				5,000	Vertical
* 12005.0					5,000	Vertical
14406.0					5,000	Vertical
16807.0					5,000	Vertical
* 19208.0					5,000	Vertical
21609.0					5,000	Vertical
24010.0					5,000	Vertical

<b>Field Strength of Fundamental and Harmonics Emissions</b>						
<b>Average Value</b>						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2401.0	45.8	27.9	73.7	4,841.7	50,000	Vertical
* 4802.0	1.9	32.1	34.0	50.1	500	Vertical
7203.0	-1.3	38.6	37.3	73.3	500	Vertical
9604.0	Emissions detected are more than 20 dB below the FCC Limits				500	Vertical
* 12005.0					500	Vertical
14406.0					500	Vertical
16807.0					500	Vertical
* 19208.0					500	Vertical
21609.0					500	Vertical
24010.0					500	Vertical

Remarks: The fundamental frequency was not included in the pre-scan plot, a 2.4G notch filter was added prior to the Receiver, please refer the band-edge plot for the level of fundamental frequency.



## Test Report

Date : 2018-03-15  
No. : HM18010023

Page 15 of 37


Result of TX mode (MSK) (Middle Channel), (Above 1GHz): Pass



Att 0 dB AUTO

INPUT 1

Det	MA/CA Trd	HORN
ResBW	1 MHz	
Meas T	100 ms Unit	dB $\mu$ V/m

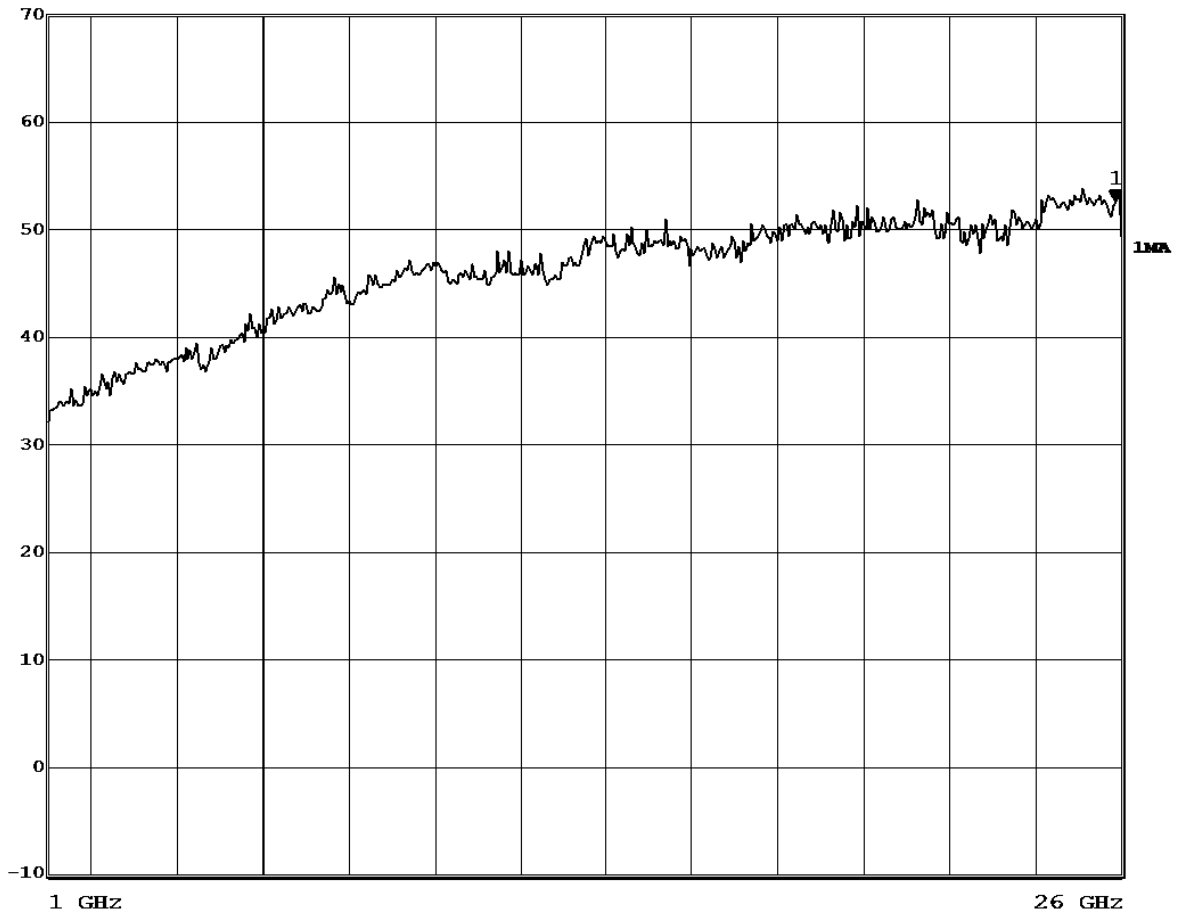

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2018-03-15  
 No. : HM18010023

Page 16 of 37

**Result of TX mode (MSK) (Middle Channel), (Above 1GHz): Pass**

<b>Field Strength of Fundamental and Harmonics Emissions</b>						
<b>Peak Value</b>						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2442.0	57.8	27.9	85.7	19,275.2	500,000	Vertical
* 4884.0	10.8	32.1	42.9	139.6	5,000	Vertical
* 7326.0	2.2	38.6	40.8	109.6	5,000	Vertical
9768.0	Emissions detected are more than 20 dB below the FCC Limits				5,000	Vertical
* 12210.0					5,000	Vertical
14652.0					5,000	Vertical
17094.0					5,000	Vertical
* 19536.0					5,000	Vertical
21978.0					5,000	Vertical
24420.0					5,000	Vertical

<b>Field Strength of Fundamental and Harmonics Emissions</b>						
<b>Average Value</b>						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2442.0	38.4	27.9	66.3	2,065.4	50,000	Vertical
* 4884.0	2.3	32.1	34.4	52.5	500	Vertical
* 7326.0	-1.2	38.6	37.4	74.1	500	Vertical
9768.0	Emissions detected are more than 20 dB below the FCC Limits				500	Vertical
* 12210.0					500	Vertical
14652.0					500	Vertical
17094.0					500	Vertical
* 19536.0					500	Vertical
21978.0					500	Vertical
24420.0					500	Vertical

Remarks: The fundamental frequency was not included in the pre-scan plot, a 2.4G notch filter was added prior to the Receiver, please refer the band-edge plot for the level of fundamental frequency.



## Test Report

Date : 2018-03-15  
 No. : HM18010023


Page 17 of 37

**Result of TX mode (MSK) (Highest Channel), (Above 1GHz): Pass**



Att 0 dB AUTO  
 INPUT 1

Det	MA/CA Trd	HORN
ResBW	1 MHz	
Meas T	100 ms Unit	dB $\mu$ V/m

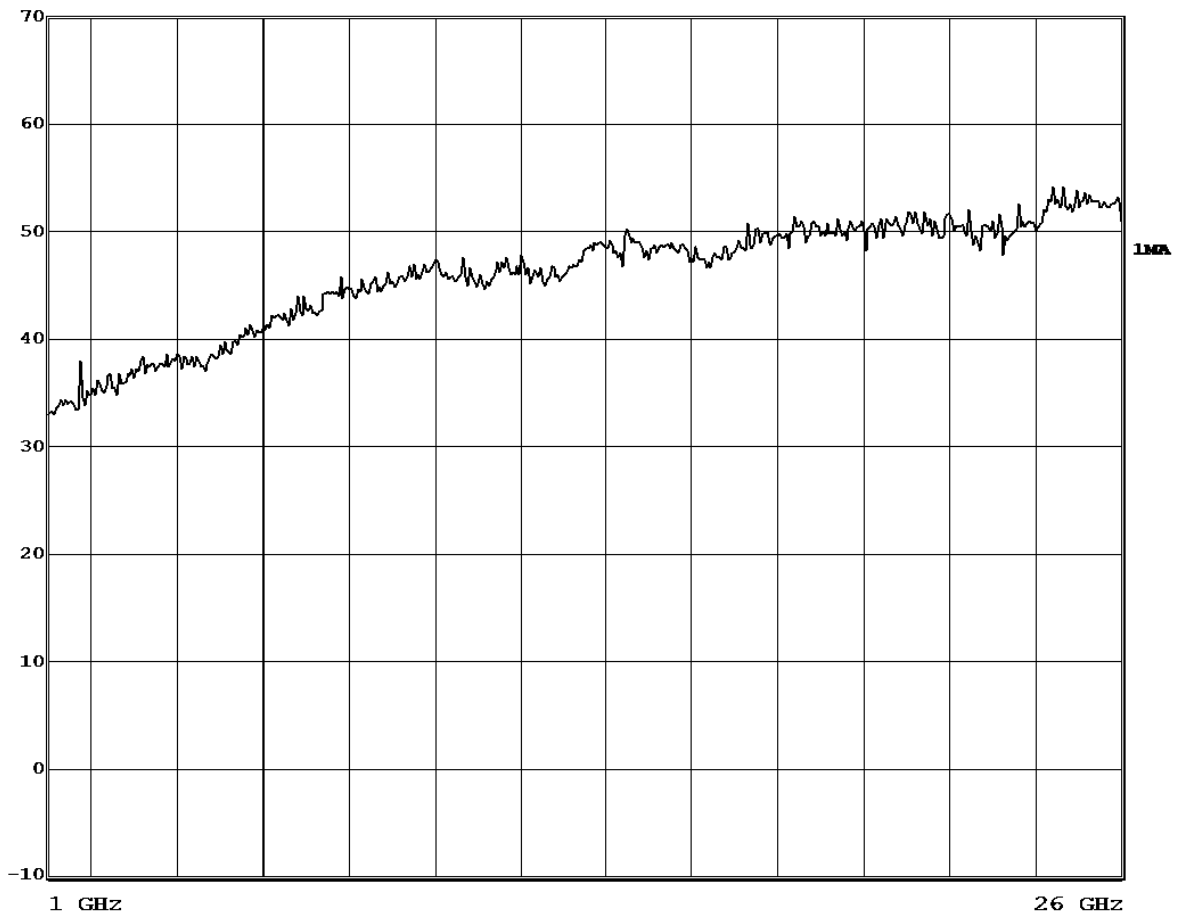

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2018-03-15  
 No. : HM18010023

Page 18 of 37

**Result of TX mode (MSK) (Highest Channel), (Above 1GHz): Pass**

<b>Field Strength of Fundamental and Harmonics Emissions</b>						
<b>Peak Value</b>						
Frequency MHz	Measured Level @3m dBμV/m	Correction Factor dBμV/m	Field Strength dBμV/m	Field Strength μV/m	Limit @3m μV/m	E-Field Polarity
2481.1	57.6	27.9	85.5	18,836.5	500,000	Vertical
* 4962.2	11.4	32.1	43.5	149.6	5,000	Vertical
* 7443.3	2.4	38.6	41.0	112.2	5,000	Vertical
9924.4	Emissions detected are more than 20 dB below the FCC Limits				5,000	Vertical
* 12405.5					5,000	Vertical
14886.6					5,000	Vertical
17367.7					5,000	Vertical
* 19848.8					5,000	Vertical
22329.9					5,000	Vertical
24811.0					5,000	Vertical

<b>Field Strength of Fundamental and Harmonics Emissions</b>						
<b>Average Value</b>						
Frequency MHz	Measured Level @3m dBμV/m	Correction Factor dBμV/m	Field Strength dBμV/m	Field Strength μV/m	Limit @3m μV/m	E-Field Polarity
2481.1	46.8	27.9	74.7	5,432.5	50,000	Vertical
* 4962.2	1.7	32.1	33.8	49.0	500	Vertical
* 7443.3	-0.9	38.6	37.7	76.7	500	Vertical
9924.4	Emissions detected are more than 20 dB below the FCC Limits				500	Vertical
* 12405.5					500	Vertical
14886.6					500	Vertical
17367.7					500	Vertical
* 19848.8					500	Vertical
22329.9					500	Vertical
24811.0					500	Vertical

Remarks: The fundamental frequency was not included in the pre-scan plot, a 2.4G notch filter was added prior to the Receiver, please refer the band-edge plot for the level of fundamental frequency.

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

\*: Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000 MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Calculated measurement uncertainty : 9kHz to 30MHz 2.4dB  
 30MHz to 18GHz 5.0dB  
 18GHz – 26.5Hz: 5.24dB

The Hong Kong Standards and Testing Centre Limited  
 Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong  
 Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong  
 Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.  
 For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report


Date : 2018-03-15  
 No. : HM18010023

Page 19 of 37

**Limits for 20dB Bandwidth of Fundamental Emission:**

Frequency Range [MHz]	20dB Bandwidth [MHz]
2402.0	1.11

**TX mode FSK Lowest Channel**

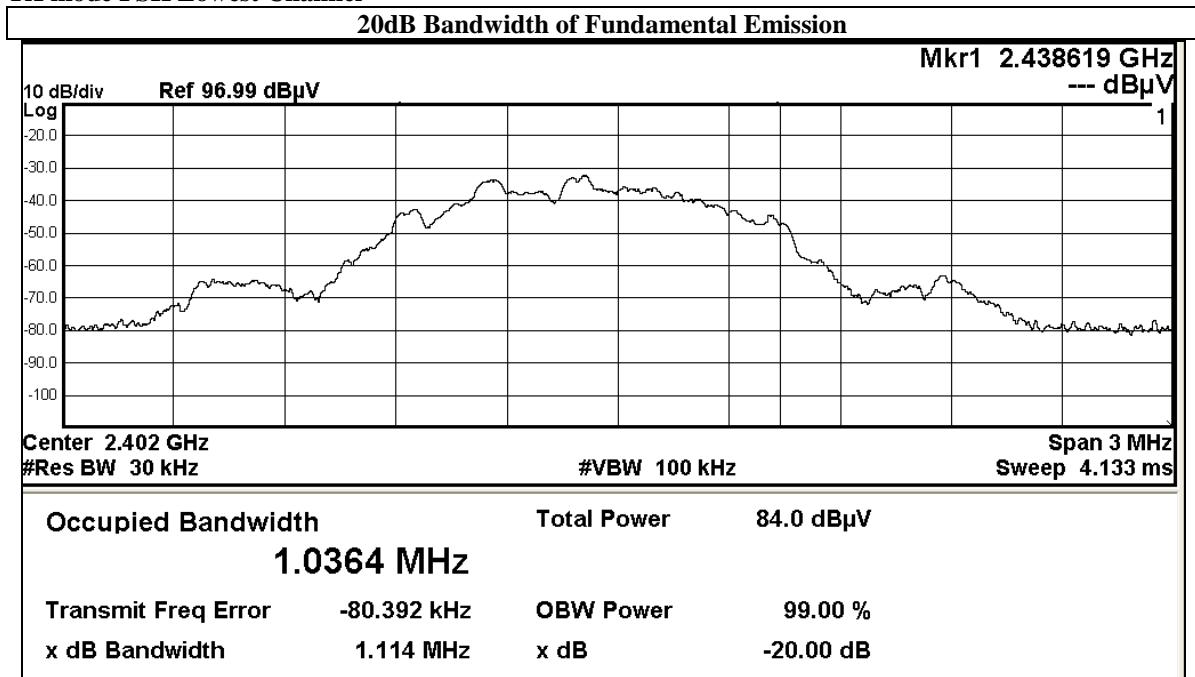

The Hong Kong Standards and Testing Centre Limited  
 Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong  
 Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.  
 For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report


Date : 2018-03-15  
 No. : HM18010023

Page 20 of 37

Frequency Range [MHz]	20dB Bandwidth [MHz]
2440.0	1.12

**TX mode FSK Middle Channel**

**20dB Bandwidth of Fundamental Emission**

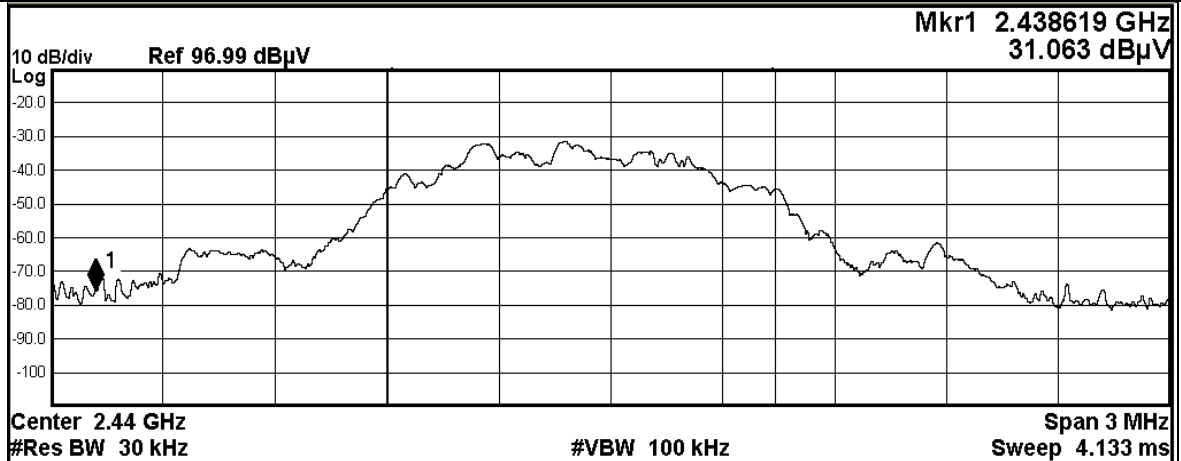

<b>Occupied Bandwidth</b>	<b>Total Power</b>	<b>85.4 dBµV</b>
<b>1.0376 MHz</b>		
<b>Transmit Freq Error</b>	<b>-78.081 kHz</b>	<b>OBW Power</b>
		<b>99.00 %</b>
<b>x dB Bandwidth</b>	<b>1.121 MHz</b>	<b>x dB</b>
		<b>-20.00 dB</b>




## Test Report

Date : 2018-03-15  
 No. : HM18010023

Page 21 of 37

Frequency Range [MHz]	20dB Bandwidth [MHz]
2480.0	1.12

**TX mode FSK Highest Channel**

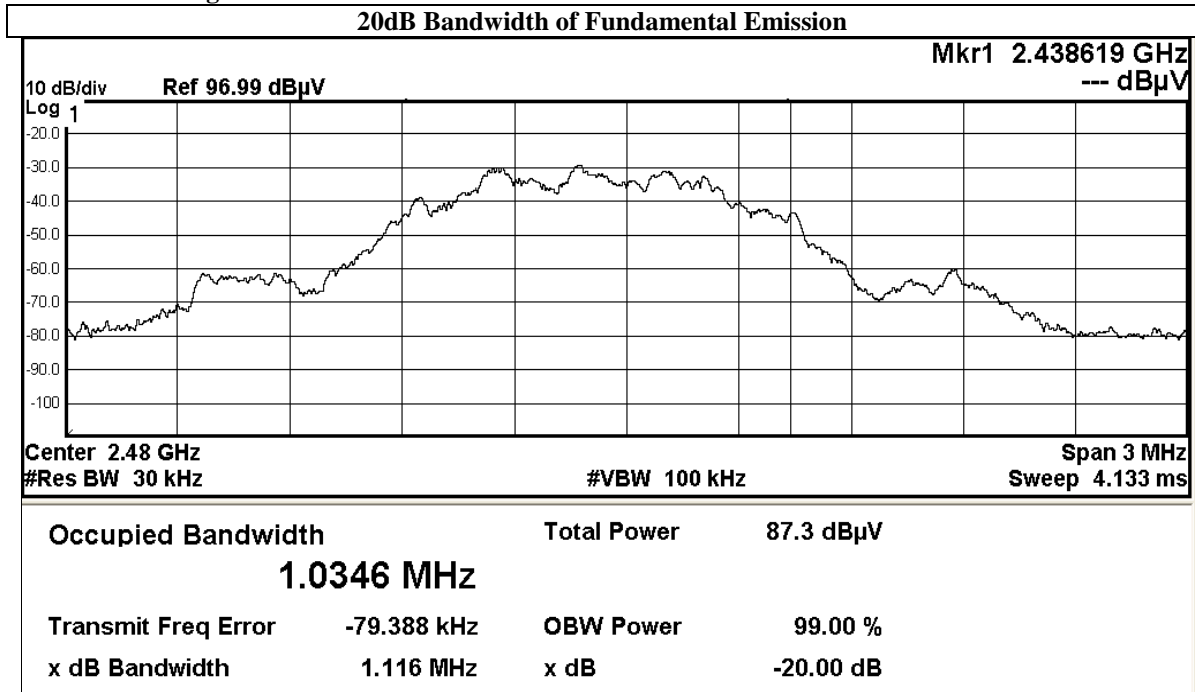

The Hong Kong Standards and Testing Centre Limited  
 Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong  
 Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.  
 For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




## Test Report

Date : 2018-03-15  
 No. : HM18010023

Page 22 of 37

Frequency Range [MHz]	20dB Bandwidth [MHz]
2401.0	0.600

**TX mode MSK Lowest Channel**

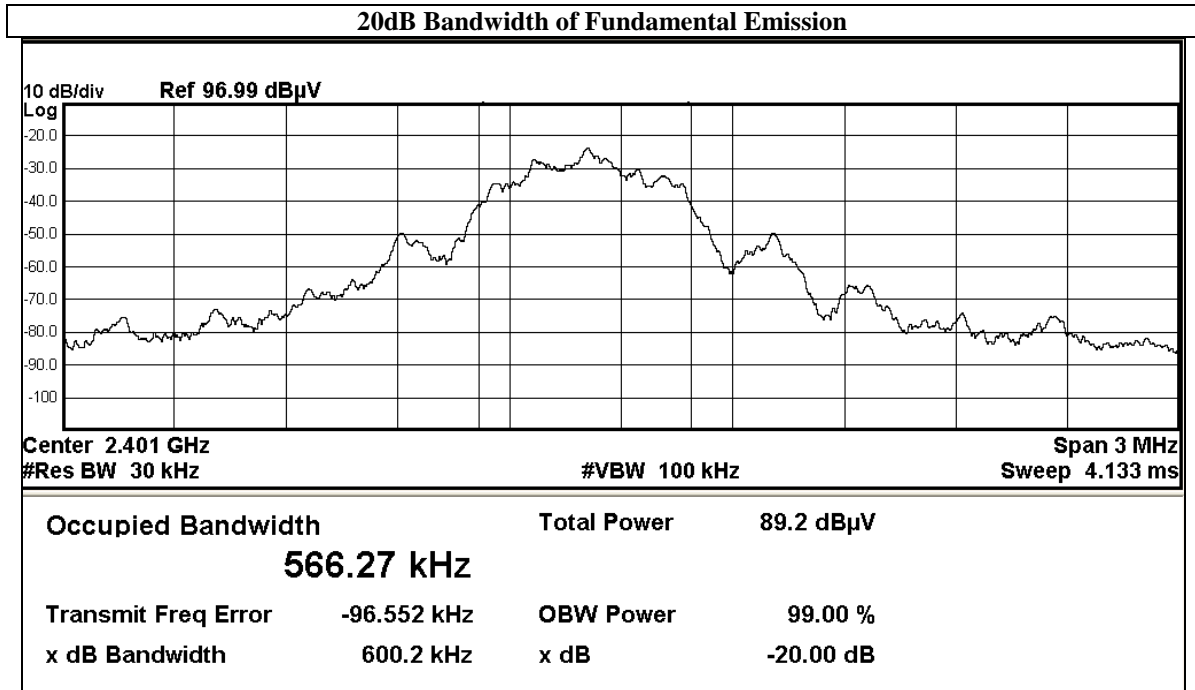




## Test Report

Date : 2018-03-15  
 No. : HM18010023

Page 23 of 37

Frequency Range [MHz]	20dB Bandwidth [MHz]
2442.0	0.604

**TX mode MSK Middle Channel**

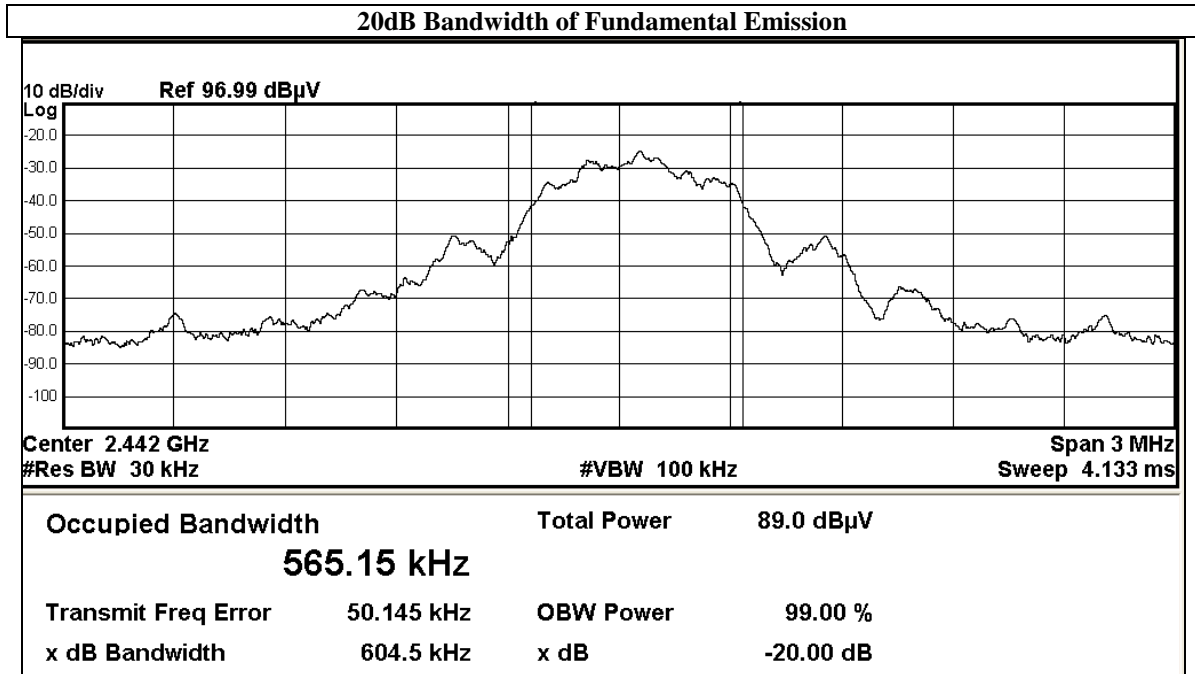




## Test Report

Date : 2018-03-15  
 No. : HM18010023

Page 24 of 37

Frequency Range [MHz]	20dB Bandwidth [MHz]
2481.1	0.609

**TX mode MSK Highest Channel**

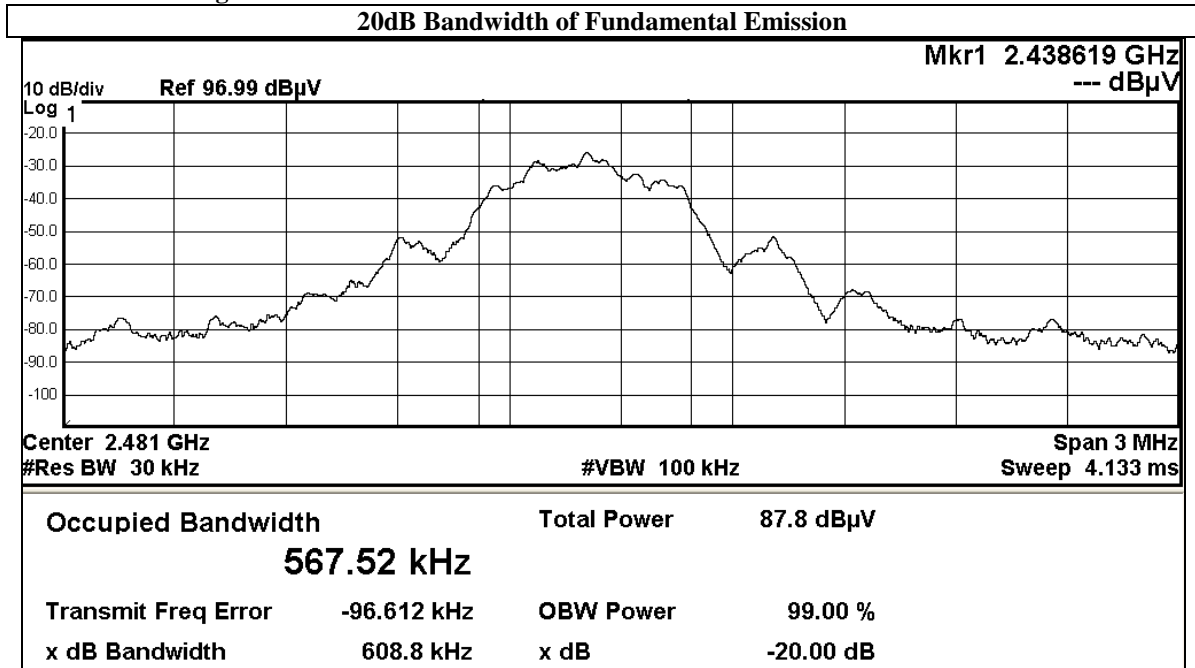

The Hong Kong Standards and Testing Centre Limited  
 Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong  
 Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.  
 For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.





## Test Report

Date : 2018-03-15  
 No. : HM18010023


Page 25 of 37

**Band Edge Measurement:**

**TX mode FSK**

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2400MHz – Lowest Fundamental	44.3

### Band Edge Compliance Measurement

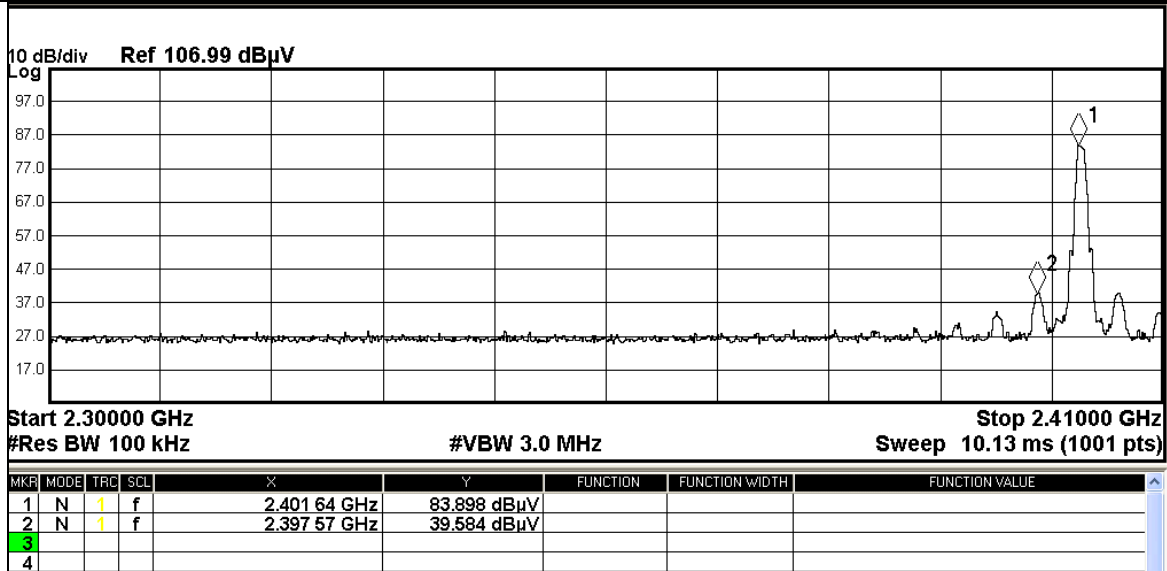

The Hong Kong Standards and Testing Centre Limited  
 Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong  
 Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.  
 For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



## Test Report

Date : 2018-03-15  
 No. : HM18010023


Page 26 of 37

**Band Edge Measurement:**

**TX mode FSK**

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
Highest Fundamental – 2483.5MHz	47.6

**Band Edge Compliance Measurement**

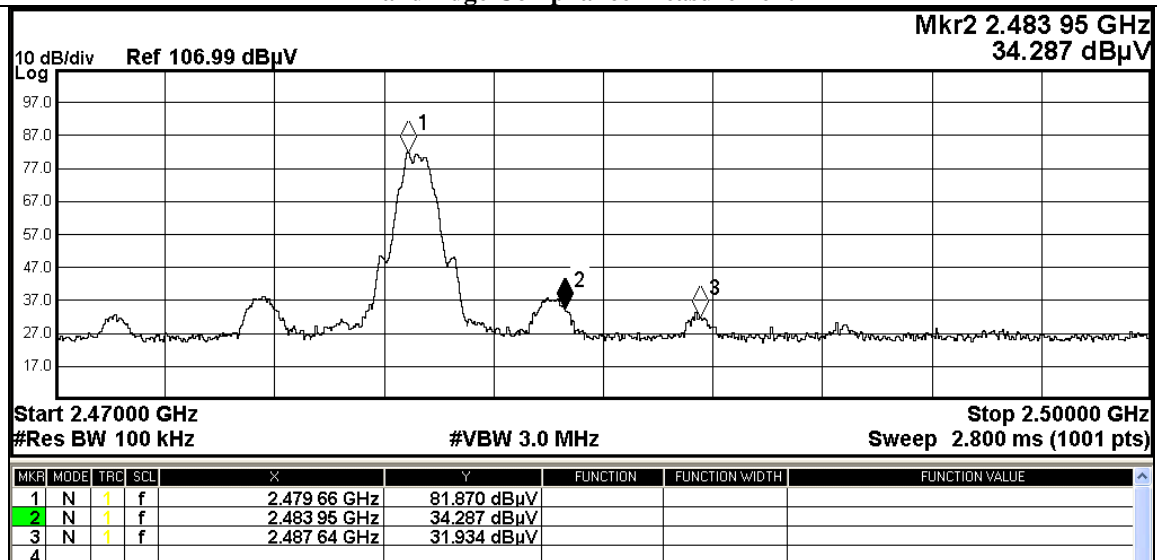

**Result of TX mode FSK, Band-edge measurement: PASS**

Field Strength of Fundamental and Harmonics Emissions Peak Value						
Frequency MHz	Measured Level @3m dBµV/m	Correction Factor dBµV/m	Field Strength dBµV/m	Field Strength µV/m	Limit @3m µV/m	E-Field Polarity
2397.6	12.7	27.6	40.3	103.5	5,000	Vertical
2487.6	10.4	28.0	38.4	83.2	5,000	Vertical

Field Strength of Fundamental and Harmonics Emissions Average Value						
Frequency MHz	Measured Level @3m dBµV/m	Correction Factor dBµV/m	Field Strength dBµV/m	Field Strength µV/m	Limit @3m µV/m	E-Field Polarity
2397.6	2.4	27.6	30.0	31.6	500	Vertical
2487.6	1.8	28.0	29.8	30.9	500	Vertical



## Test Report

Date : 2018-03-15  
 No. : HM18010023


Page 27 of 37

**Band Edge Measurement:**

**TX mode MSK**

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2400MHz – Lowest Fundamental	44.2

### Band Edge Compliance Measurement

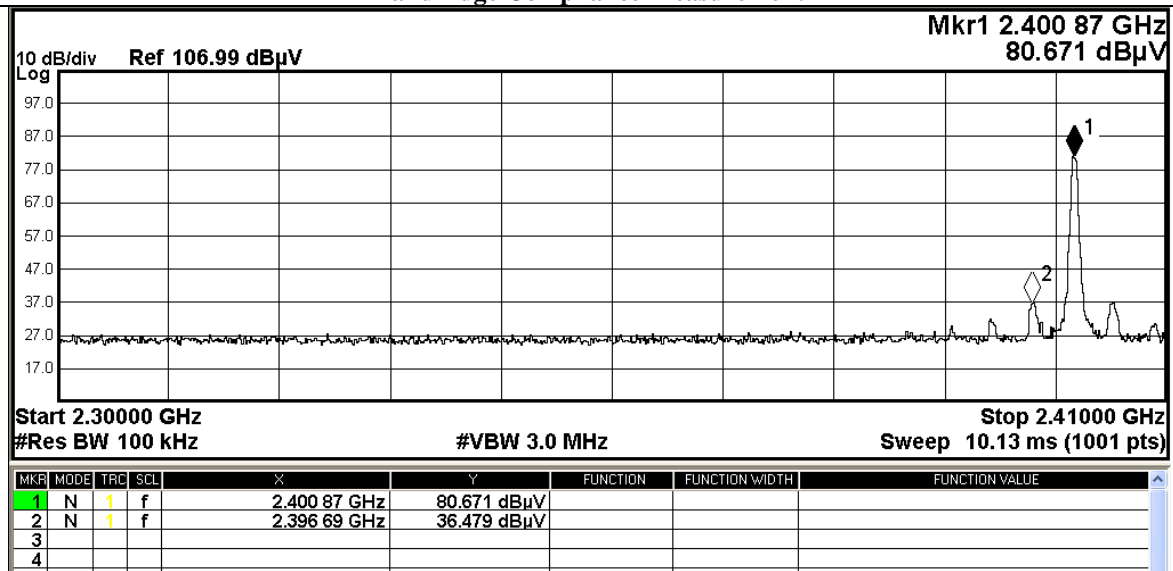



## Test Report


Date : 2018-03-15  
 No. : HM18010023

Page 28 of 37

**Band Edge Measurement:**

**TX mode MSK**

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
Highest Fundamental – 2483.5MHz	44.5

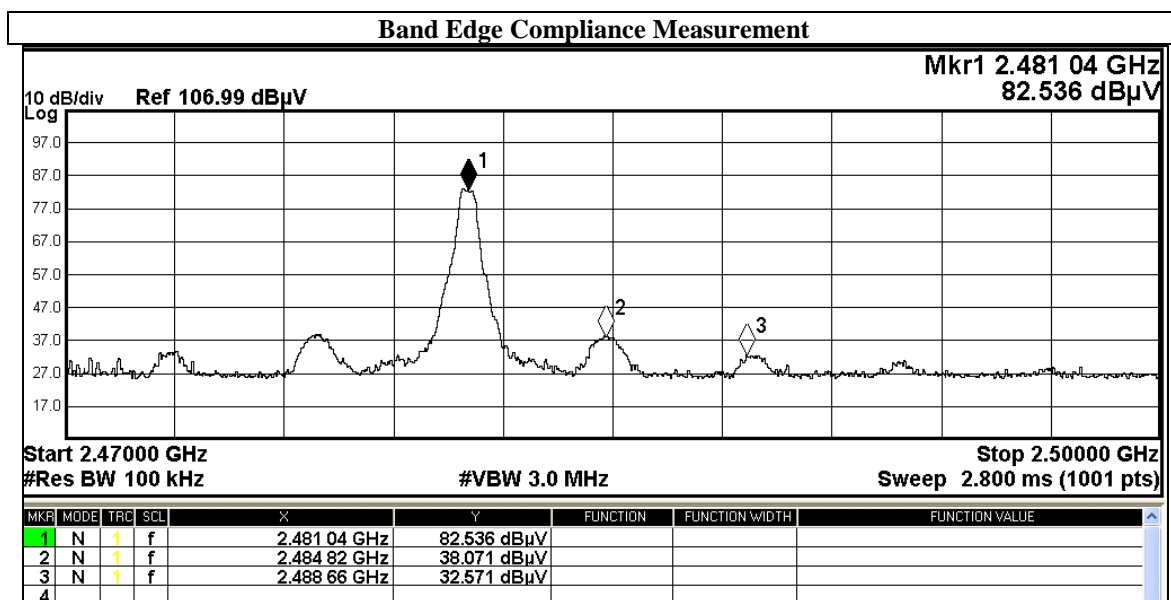

**Result of TX mode MSK, Band-edge measurement: PASS**

Field Strength of Fundamental and Harmonics Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2396.7	11.5	27.9	39.4	93.3	5,000	Vertical
2488.7	6.4	28.0	34.4	52.5	5,000	Vertical

Field Strength of Fundamental and Harmonics Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2396.7	2.4	27.9	30.3	32.7	500	Vertical
2488.7	2.1	28.0	30.1	32.0	500	Vertical



## Test Report

Date : 2018-03-15  
No. : HM18010023

Page 29 of 37

### Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [ $\mu$ V/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Result of Tx mode (MSK), (9kHz – 30MHz): PASS

Emissions detected are more than 20 dB below the FCC Limits

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




## Test Report

Date : 2018-03-15  
 No. : HM18010023

Page 30 of 37

**Result of Tx mode (MSK), (30MHz – 1GHz): PASS**

	Att 0 dB AUTO	Det	MA/QP Trd	3143B-H
	Preamp INPUT 2	ResBW	120 kHz	
		Meas T	100 ms Unit	dBµV/m

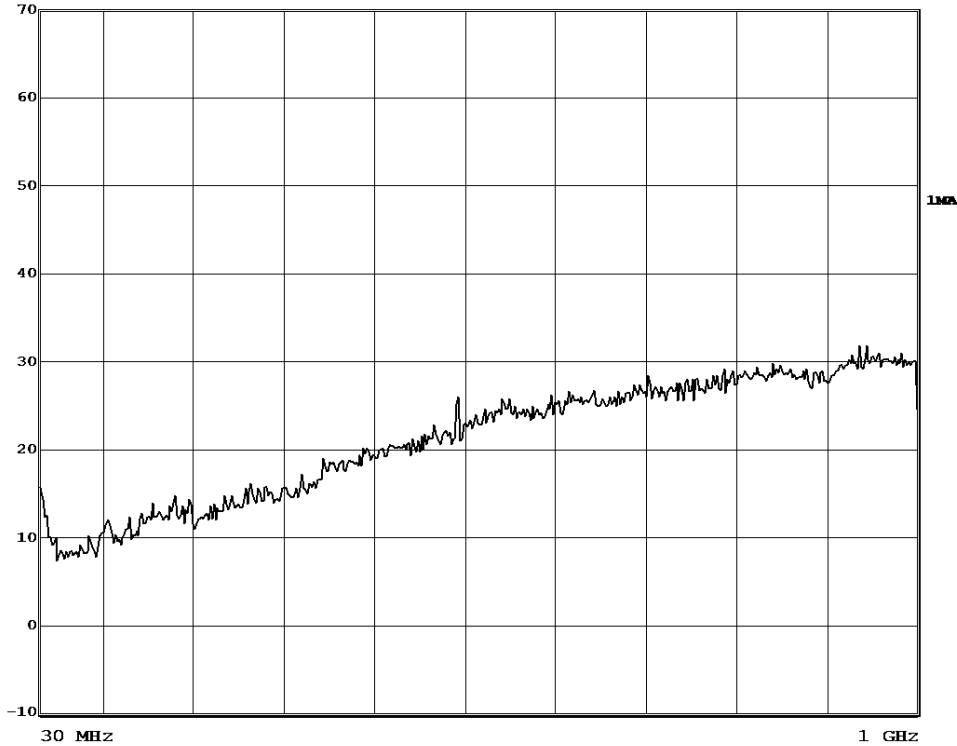

Field Strength of Fundamental and Harmonics Emissions						
Quasi-Peak Value						
Frequency MHz	Measured Level @3m dBµV/m	Correction Factor dBµV/m	Field Strength dBµV/m	Field Strength µV/m	Limit @3m µV/m	E-Field Polarity
78.4	1.6	6.8	8.4	2.6	100	Vertical
103.7	1.6	8.5	10.1	3.2	150	Horizontal
211.4	2.3	11.2	13.5	4.7	150	Horizontal
257.2	0.7	13.0	13.7	4.8	200	Horizontal
383.3	5.0	16.7	21.7	12.2	200	Horizontal
477.5	4.2	18.5	22.7	13.6	200	Horizontal

Remarks: Tx mode was tested in both FSK and MSK modulation, MSK modulation was the worst case found in Tx mode.



## Test Report

Date : 2018-03-15  
No. : HM18010023

Page 31 of 37

**Result of Receiver mode, (9kHz – 30MHz): PASS**

Emissions detected are more than 20 dB below the Limits

**Result of Receiver mode, (30MHz – 1GHz): PASS**

Emissions detected are more than 20 dB below the Limits

**Result of Receiver mode, (1GHz – 18GHz): PASS**

Field Strength of Fundamental and Harmonics Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2442.0	3.2	27.9	31.1	35.9	5,000	Vertical

Field Strength of Fundamental and Harmonics Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2442.0	0.4	27.9	28.3	26.0	500	Vertical

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz  
Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : (9kHz – 30MHz): 2.4dB  
(30MHz – 1GHz): 5.0dB  
(1GHz - 18GHz): 5.0dB  
(18GHz – 26GHz): 5.24dB



## Test Report

Date : 2018-03-15  
No. : HM18010023

Page 32 of 37

### Appendix A

#### LIST OF MEASUREMENT EQUIPMENT

##### Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-LINDGREN	FACT-3	--	2017/04/24	2018/04/24
EM356	ANTENNA POSITIONING TOWER	ETS-LINDGREN	2171B	00150346	N/A	N/A
EM355	BICONILOG ANTENNA	ETS-LINDGREN	3143B	00201783	2017/03/15	2019/03/15
EM229	EMI TEST RECEIVER	R&S	ESIB40	100248	2017/06/01	2018/06/01
EM299	DOUBLE-RIDGED WAVEGUIDE HORN ANTENNA	ETS-LINDGREN	3115	00114120	2016/04/27	2018/04/27
EM300	PYRAMIDAL STANDARD GAIN HORN ANTENNA	ETS-LINDGREN	3160-09	00130130	2016/05/13	2018/05/13
EM302	PRECISION OMNIDIRECTIONAL DIPOLE (1 – 6GHZ)	SEIBERSDORF LABORATORIES	POD 16	161806/L	2016/05/11	2018/05/11
EM303	PRECISION OMNIDIRECTIONAL DIPOLE (6 – 18GHZ)	SEIBERSDORF LABORATORIES	POD 618	6181908/L	2016/05/11	2018/05/11
EM353	LOOP ANTENNA	ETS_LINDGREN	6502	00206533	2016/03/16	2018/03/16

#### Remarks:

CM Corrective Maintenance  
N/A Not Applicable or Not Available  
TBD To Be Determined



## Test Report

Date : 2018-03-15  
No. : HM18010023

Page 33 of 37

### Appendix B

#### Photographs of EUT

Front View of the product



Rear View of the product



The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@hkstc.org Website: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

## Test Report

Date : 2018-03-15  
No. : HM18010023

Page 34 of 37

### Photographs of EUT

**Inner Circuit Top View**



**Inner Circuit Bottom View**



**Inner View of the product**




## Test Report

Date : 2018-03-15  
No. : HM18010023

Page 35 of 37

### Photographs of EUT

Measurement of Radiated Emission Test Set Up (9kHz to 30MHz)

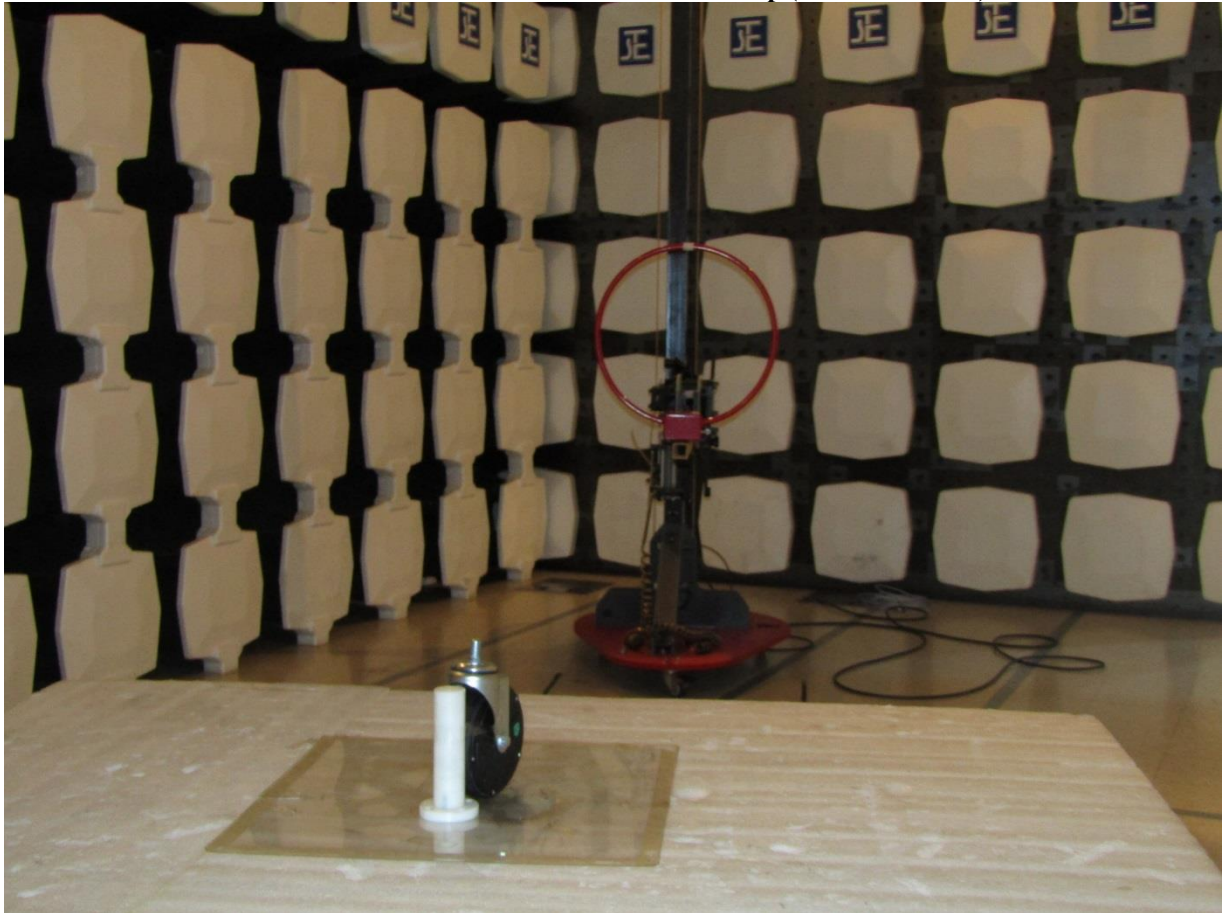




## Test Report

Date : 2018-03-15  
No. : HM18010023

Page 36 of 37

### Photographs of EUT

Measurement of Radiated Emission Test Set Up (30MHz to 1000MHz)

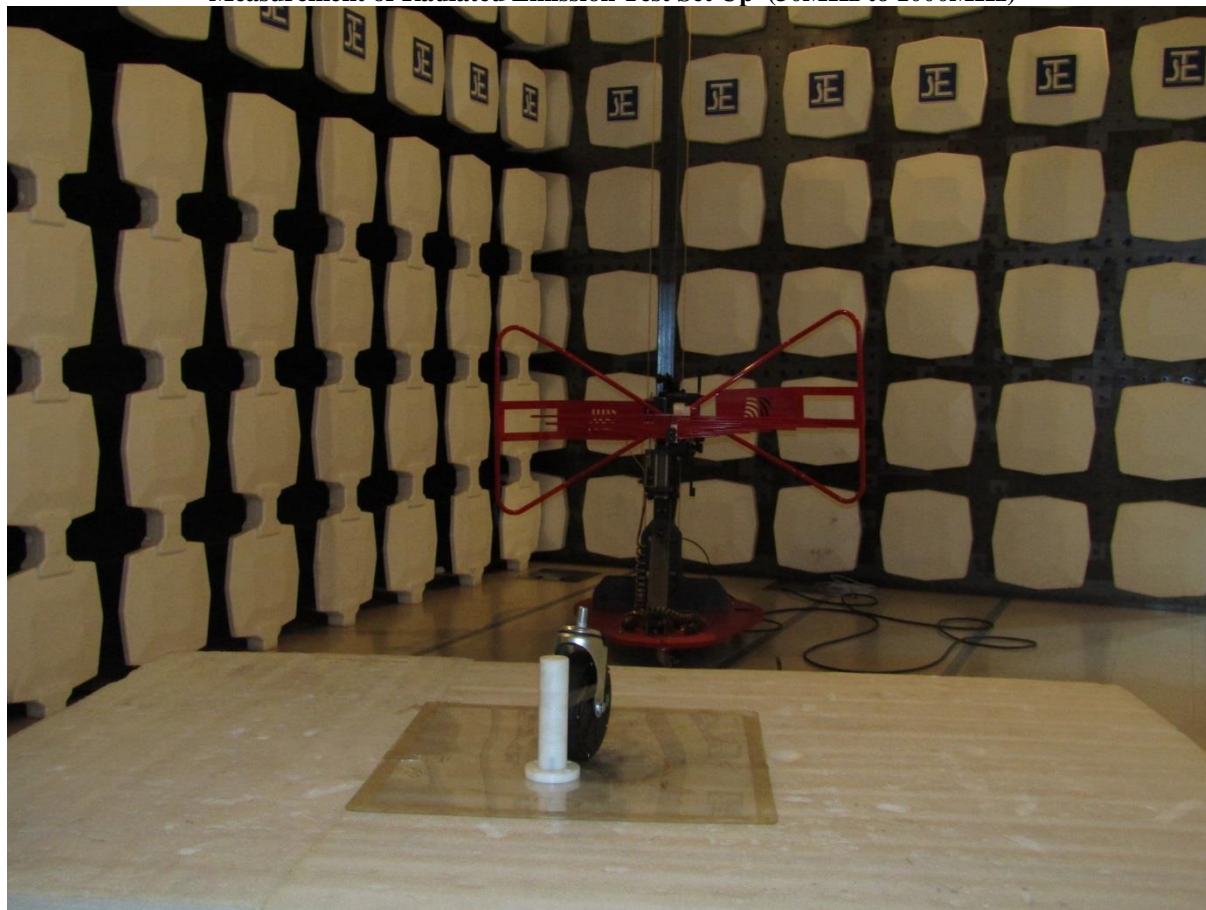


## Test Report

Date : 2018-03-15  
No. : HM18010023

Page 37 of 37

### Photographs of EUT

Measurement of Radiated Emission Test Set Up (Above 1000MHz)

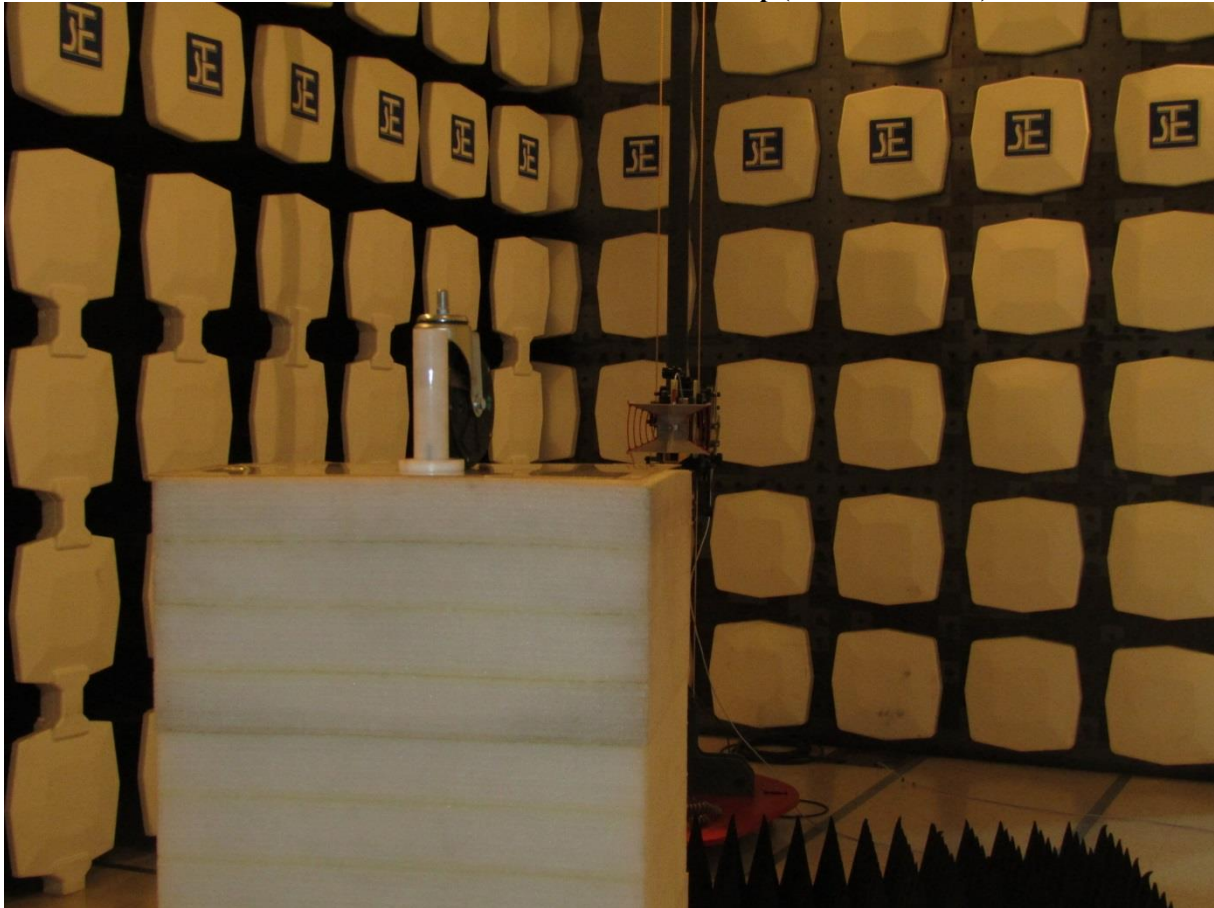

\*\*\*\*\* End of Test Report \*\*\*\*\*

## Conditions of Issuance of Test Reports

1. All samples and goods are accepted by The Hong Kong Standards & Testing Centre Limited (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The Company provides its services on the basis that such terms and conditions constitute express agreement between the Company and any person, firm or company requesting its services (the "Clients").
2. Any report issued by the Company as a result of this application for testing service (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to his customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
4. The Report refers only to the sample tested and does not apply to the bulk, unless the sampling has been carried out by the Company and is stated as such in the Report.
5. In the event of the improper use the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
6. Sample submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
7. The Company will not be liable for or accept responsibility for any loss or damage howsoever arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
9. Subject to the variable length of retention time for test data and report stored hereinto as to otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of this test report for a period of three years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after the retention period. Under no circumstances shall we be liable for damages of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.
10. Issuance records of the Report are available on the internet at [www.stc-group.org](http://www.stc-group.org). Further enquiry of validity or verification of the Reports should be addressed to the Company.