

TEST REPORT

DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel : 031-321-2664, Fax : 031-321-1664

Report No : DRTFCC1512-0255
Pages:(1) / (56) page

**1. Customer**

- Name : HYUNDAI ELEVATOR CO., LTD.
- Address : San 136-1, Ami-ri, Bubal-eup, Icheon-si, Gyeonggi-do, Korea

2. Use of Report : FCC Original Grant**3. Product Name (FCC ID) : RF Data Modem HWC-W120 (W4BHWC-W120)****4. Date of Test : 2015-11-30 ~ 2015-12-09****5. Test Method Used: FCC Part 15 Subpart C.247****6. Testing Environment : See appended test report****7. Test Result : ☒ Pass ☐ Fail**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Affirmation	Tested by Name : JaeJin Lee (Signature)	Technical Manager Name : GeunKi Son (Signature)
-------------	--	--

2015. 12. 10

DT&C Co., Ltd.

Test Report Version

Test Report No.	Date	Description
DRTFCC1512-0255	Dec. 10, 2015	Initial issue

Table of Contents

1. General Information	4
1.1 Testing Laboratory	4
1.2 Details of Applicant	4
1.3 Description of EUT	5
1.4 Declaration by the applicant / manufacturer	5
1.5 Test Conditions	5
1.6 Test Equipment List	6
1.7 Summary of Test Results	7
2. Test Methodology	8
2.1 EUT Configuration	8
2.2 EUT Exercise	8
2.3 General Test Procedures	8
2.4 Description of Test Modes	8
2.5 Instrument Calibration	8
3. Test Result	9
3.1 Maximum Peak Conducted Output Power	9
3.1.1 Test Setup	9
3.1.2 Test Procedures	9
3.1.3 Test Results	9
3.2 6 dB Bandwidth Measurement	14
3.2.1 Test Setup	14
3.2.2 Test Procedures	14
3.2.3 Test Results	14
3.3 Maximum Power Spectral Density	19
3.3.1 Test Setup	19
3.3.2 Test Procedures	19
3.3.3 Test Results	19
3.4 Unwanted Emissions (Conducted)	24
3.4.1 Test Setup	24
3.4.2 Test Procedures	24
3.4.3 Test Results	25
3.5 Unwanted Emissions (Radiated)	41
3.5.1 Test Setup	42
3.5.2 Test Procedures	42
3.5.3 Test Results	43
3.6 Power line Conducted Emissions	45
3.6.1 Test Setup	45
3.6.2 Test Procedures	45
3.6.3 Test Results	45
3.7 Occupied Bandwidth	46
3.7.1 Test Setup	46
3.7.2 Test Procedures	46
3.7.3 Test Results	46
4. ANTENNA REQUIREMENTS	47
APPENDIX I	48
APPENDIX II	49
APPENDIX III	51

1. General Information

1.1 Testing Laboratory

DT&C Co., Ltd.		
Standard	Site number	Address
FCC	☒ 165783	42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935
	☐ 804488	42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935
	☐ 596748	42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935
	☐ 678747	683-3, Yubang-dong, Cheoin-gu, Yongin-si, Kyeonggi-do, Korea, 449-080
IC	☐ 5740A-3	42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935
	☐ 5740A-2	683-3, Yubang-dong, Cheoin-gu, Yongin-si, Kyeonggi-do, Korea, 449-080
www.dtnc.net		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

1.2 Details of Applicant

Applicant : HYUNDAI ELEVATOR CO., LTD.
 Address : San 136-1, Ami-ri, Bubal-eup, Icheon-si, Gyeonggi-do, Korea
 Contact person : Kang Hyuk Lee

1.3 Description of EUT

EUT	RF Data Modem HWC-W120
Model Name	HWC-W120
Add Model Name	NA
Hardware version	V1.0.0
Software version	V1.0.0
Serial Number	Identical prototype
Power Supply	DC 24 V
Frequency Range	2405 ~ 2475MHz (15 channels)
Max. RF Output Power	6.70 dBm
Modulation Technique	O-QPSK
Antenna Specification	Antenna Type: Dipole Antenna Tx Diversity Main Antenna Gain: 1.53 dBi(PK) Sub Antenna Gain: 1.53 dBi(PK)

1.4 Declaration by the applicant / manufacturer

- NA

1.5 Test Conditions

Ambient Condition	
▪ Temperature	22 ~ 24 °C
▪ Relative Humidity	42 % ~ 45 %

1.6 Test Equipment List

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
MXA Signal Analyzer	Agilent Technologies	N9020A	15/08/18	16/08/18	MY50200867
DC Power Supply	HP	6633A	15/02/25	16/02/25	3524A06634
Multimeter	FLUKE	17B	15/04/27	16/04/27	26030065WS
Thermohygrometer	BODYCOM	BJ5478	15/02/26	16/02/26	1209
Vector Signal Generator	Rohde Schwarz	SMBV100A	15/01/06	16/01/06	255571
Signal Generator	Rohde Schwarz	SMF100A	15/06/29	16/06/29	102341
2W 3dB Attenuator	SMAJK	SMAJK-2-3	15/10/19	16/10/19	3
Loop Antenna	Schwarzbeck	FMZB1513	14/04/29	16/04/29	1513-128
TRILOG Broadband Test-Antenna	Schwarzbeck	VULB 9160	14/04/30	16/04/30	3358
HORN ANT	ETS	3117	14/05/12	16/05/12	00140394
HORN ANT	A.H.Systems	SAS-574	15/04/30	17/04/30	154
Highpass Filter	Wainwright	WHKX12-2580-3000-18000-80SS	15/09/23	16/09/23	3
Low Noise Pre Amplifier	tsj	MLA-010K01-B01-27	15/04/09	16/04/09	1844539
Amplifier (30dB)	Agilent	8449B	15/02/26	16/02/26	3008A00370
EMI TEST RECEIVER	R&S	ESR7	15/10/19	16/10/19	101109

1.7 Summary of Test Results

FCC Part	RSS Std.	Parameter	Limit	Test Condition	Status Note 1
15.247(a)	RSS-247 [5.2]	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	RSS-247 [5.4]	Transmitter Output Power	< 1 Watt		C
15.247(d)	RSS-247 [5.5]	Out of Band Emissions / Band Edge	20 dBc in any 100 kHz BW		C
15.247(e)	RSS-247 [5.2]	Transmitter Power Spectral Density	< 8 dBm/3 kHz		C
-	RSS-Gen [6.6]	Occupied Bandwidth (99 %)	RSS-Gen [6.6]		NA
15.247(d) 15.205 15.209	RSS-247 [5.5] RSS-Gen [8.9] RSS-Gen [8.10]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	FCC 15.209 limits	Radiated	C
15.207	RSS-Gen [8.8]	AC Line Conducted Emissions	FCC 15.207 limits	AC Line Conducted	NA ^{note2}
15.203	-	Antenna Requirements	FCC 15.203	-	C
Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable Note 2: The power of this device is only DC.(Not rechargeable Battery)					

2. Test Methodology

Generally the tests were performed according to the [KDB558074 D01 v03r03](#). And [ANSI C63.10-2013](#) was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the test mode to fix the TX frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB 558074.

So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10.

The EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

Basically the radiated tests were performed with KDB 558074. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10 as stated on section 12.1 of the KDB 558074.

The EUT is placed on a non-conductive table, which is above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 1 or 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of the EUT were rotated through three orthogonal axes.

2.4 Description of Test Modes

The EUT has been tested with the operating condition for maximizing the emission characteristics. A test program is used to control the EUT for staying in continuous transmitting. The lowest, middle and highest channels were tested and reported.

	Test Mode	Frequency [MHz]		
		Lowest channel	Middle channel	Highest channel
TM 1	ZIGBEE (Main ANT.)	2405	2440	2475
TM 2	ZIGBEE (Sub ANT.)	2405	2440	2475
TM 3	-	-	-	-
TM 4	-	-	-	-

2.5 Instrument Calibration

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

3. Test Result

3.1 Maximum Peak Conducted Output Power

■ Test Requirements and limit, §15.247(b) & RSS-247 [5.4]

A transmitter antenna terminal of EUT is connected to the input of a spectrum analyzer.

Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

3.1.1 Test Setup

Refer to the APPENDIX I.

3.1.2 Test Procedures

Maximum Peak Conducted Output Power is measured using Measurement Procedure Option 1 of **KDB558074**


1. Set the RBW $\geq$ DTS bandwidth. **Actual RBW = 2 MHz**
2. Set VBW $\geq 3 \times$ RBW. **Actual VBW = 6 MHz**
3. Set span $\geq 3 \times$ RBW.
4. Sweep time = **auto couple**
5. Detector = **peak**
6. Trace mode = **max hold**
7. Allow trace to fully stabilize
8. Use peak marker function to determine the peak amplitude level.

3.1.3 Test Results

Test Mode	Tested Channel	Test Results (dBm)
TM 1	Lowest	4.93
	Middle	4.40
	Highest	3.77
TM 2	Lowest	6.70
	Middle	6.36
	Highest	6.21


Peak Output Power

Test Channel : TM 1 & Lowest

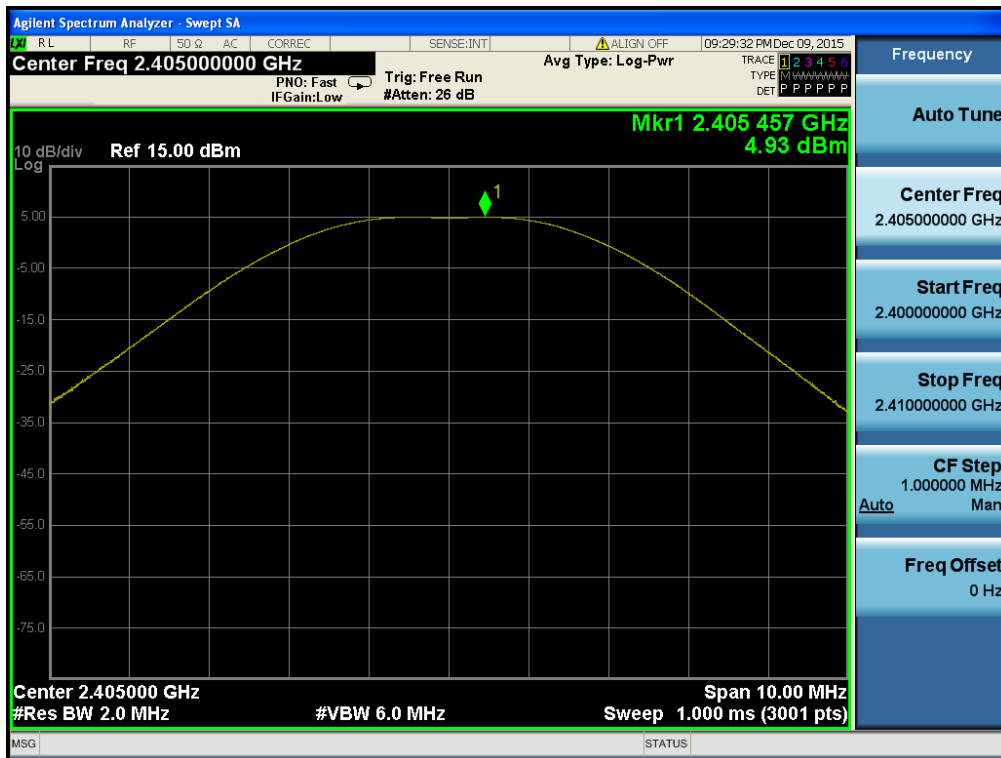


Peak Output Power

Test Channel : TM 1 & Middle

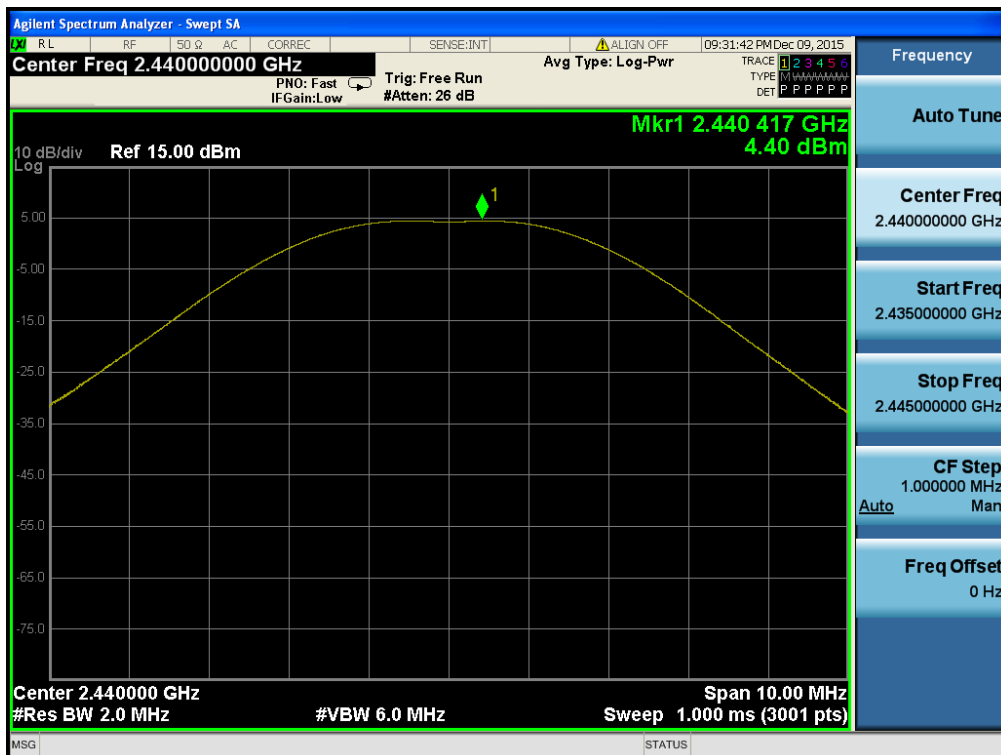


Peak Output Power

Test Channel : TM 1 & Highest

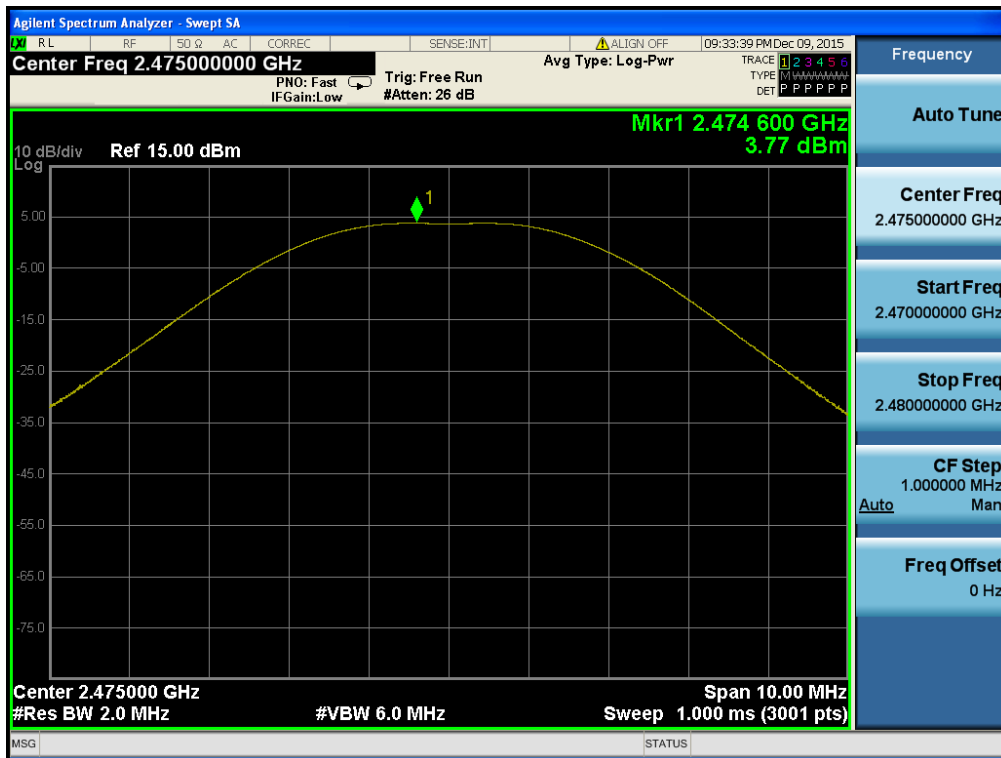


Peak Output Power

Test Channel : TM 2 & Lowest

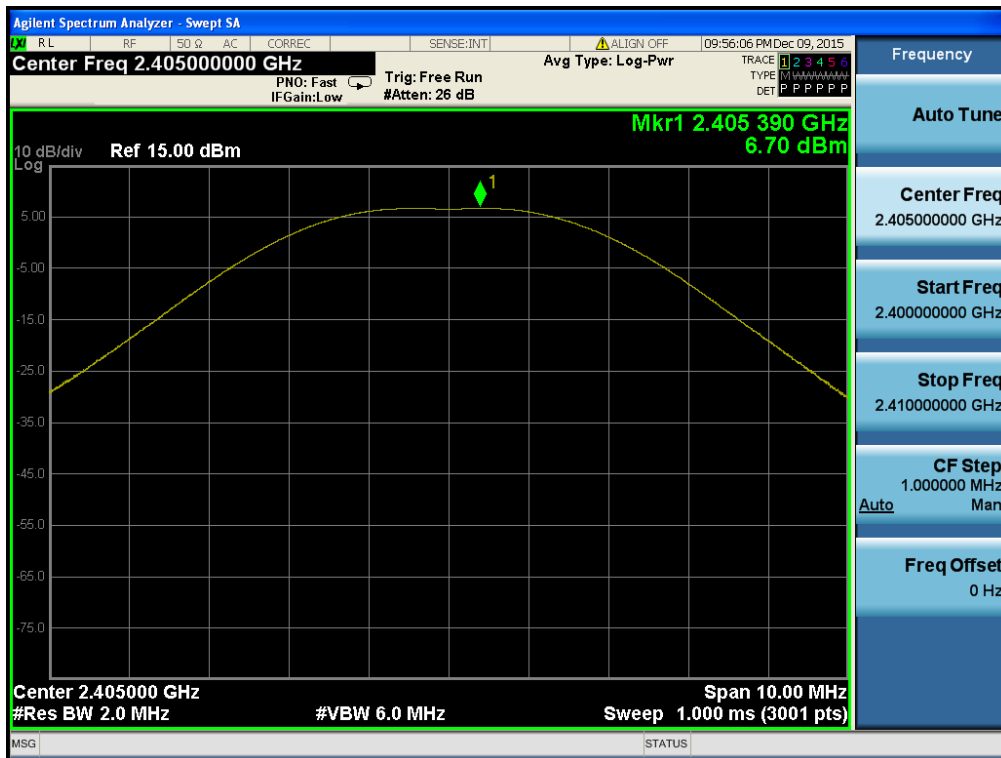


Peak Output Power

Test Channel : TM 2 & Middle

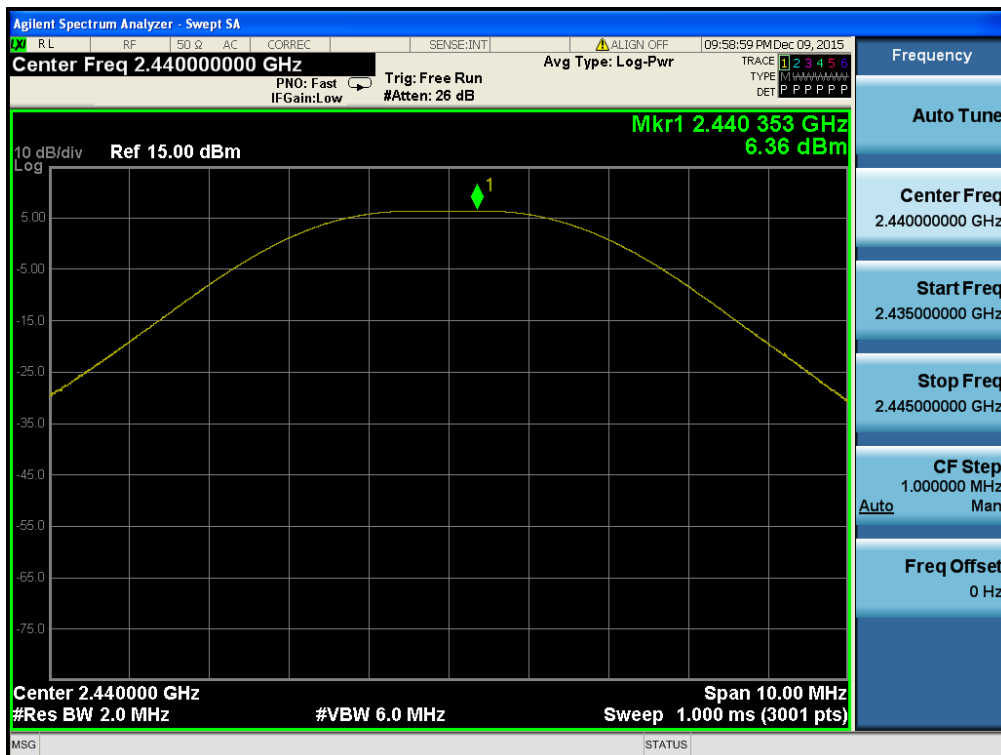

Peak Output Power

Test Channel : TM 2 & Highest

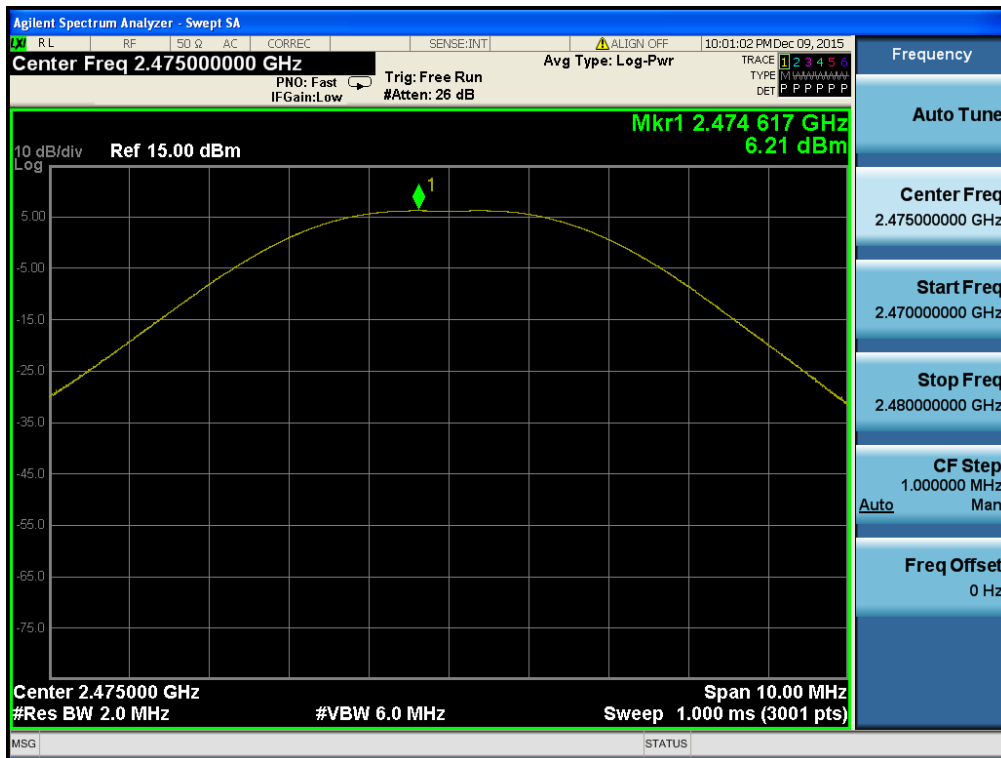

3.2 6 dB Bandwidth Measurement

■ Test Requirements and limit, §15.247(a) & RSS-247 [5.2]

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the EUT's antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6 dB bandwidth is 500 kHz.

3.2.1 Test Setup

Refer to the APPENDIX I.

3.2.2 Test Procedures

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB558074**

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.

(RBW : 100 kHz / VBW : 300 kHz)


3. Detector = **Peak**.
4. Trace mode = **max hold**.
5. Sweep = **auto couple**.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.2.3 Test Results

Test Mode	Tested Channel	Test Results [MHz]
TM 1	Lowest	1.629
	Middle	1.619
	Highest	1.635
TM 2	Lowest	1.644
	Middle	1.621
	Highest	1.614


6 dB Bandwidth

Test Channel : TM 1 & Lowest

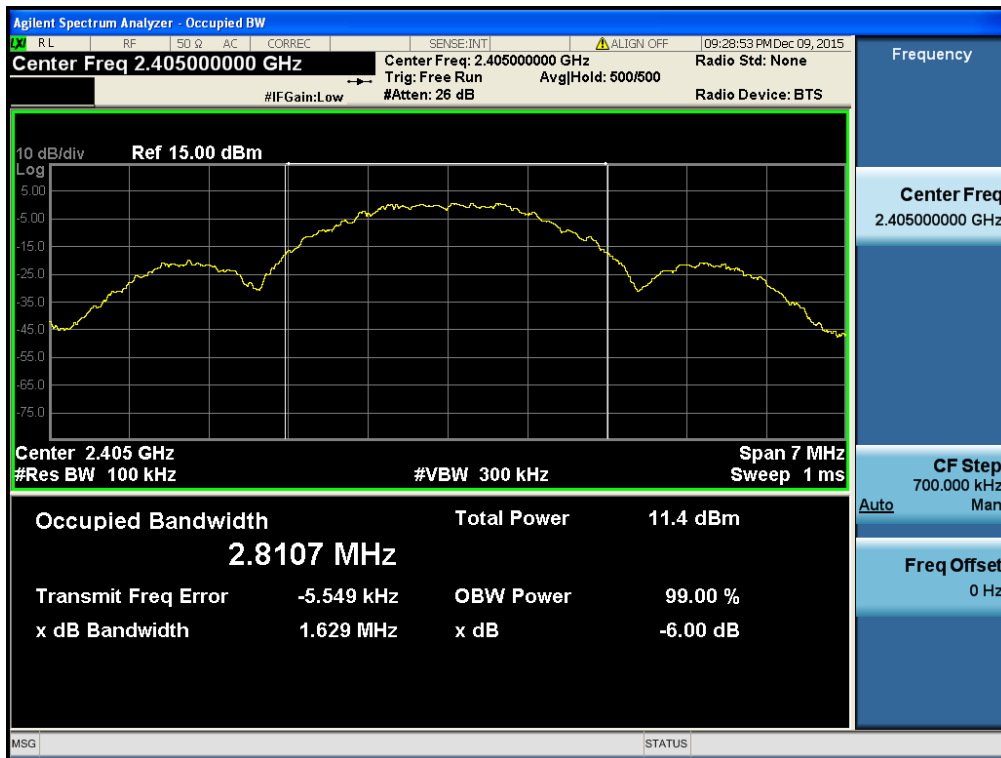


6 dB Bandwidth

Test Channel : TM 1 & Middle

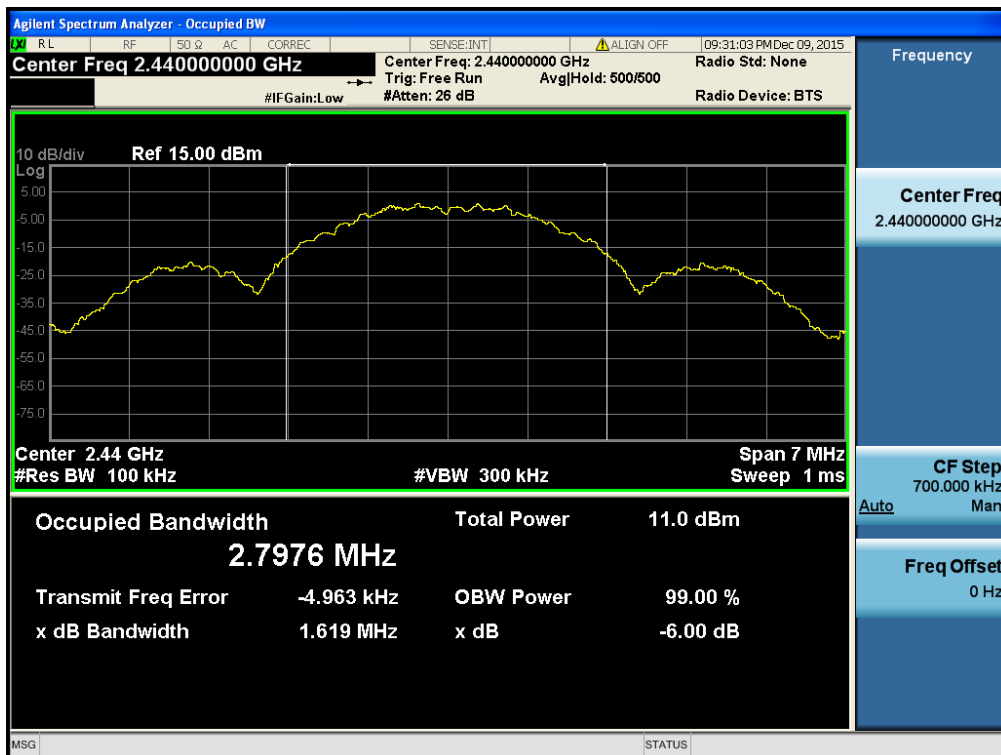


6 dB Bandwidth

Test Channel : TM 1 & Highest

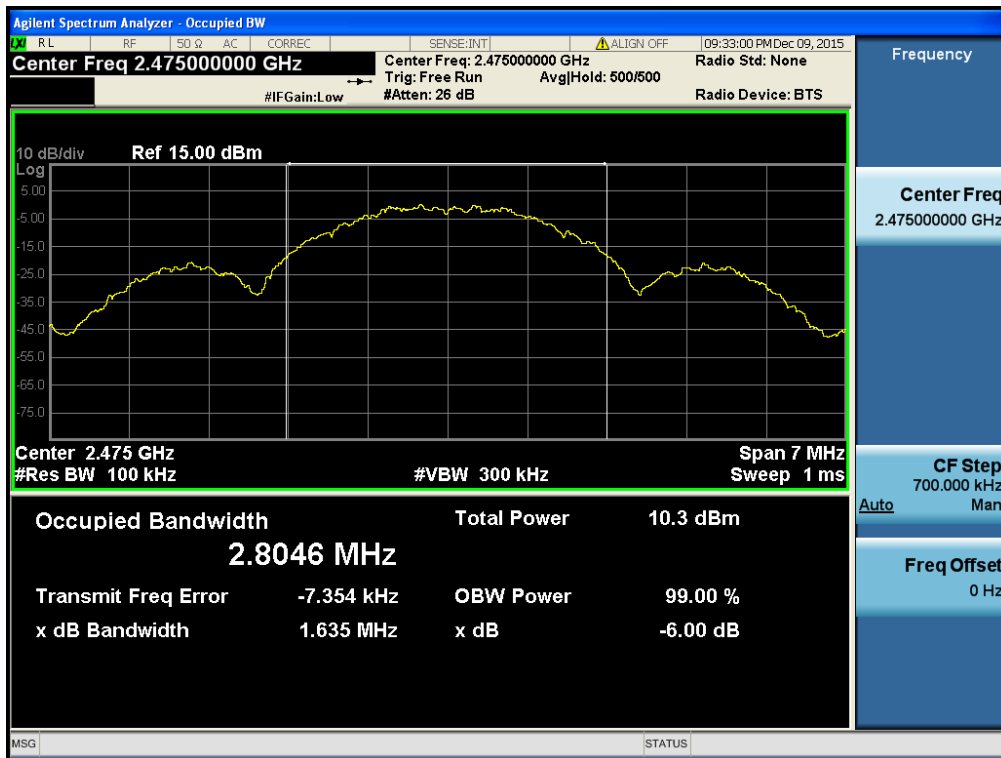


6 dB Bandwidth

Test Channel : TM 2 & Lowest

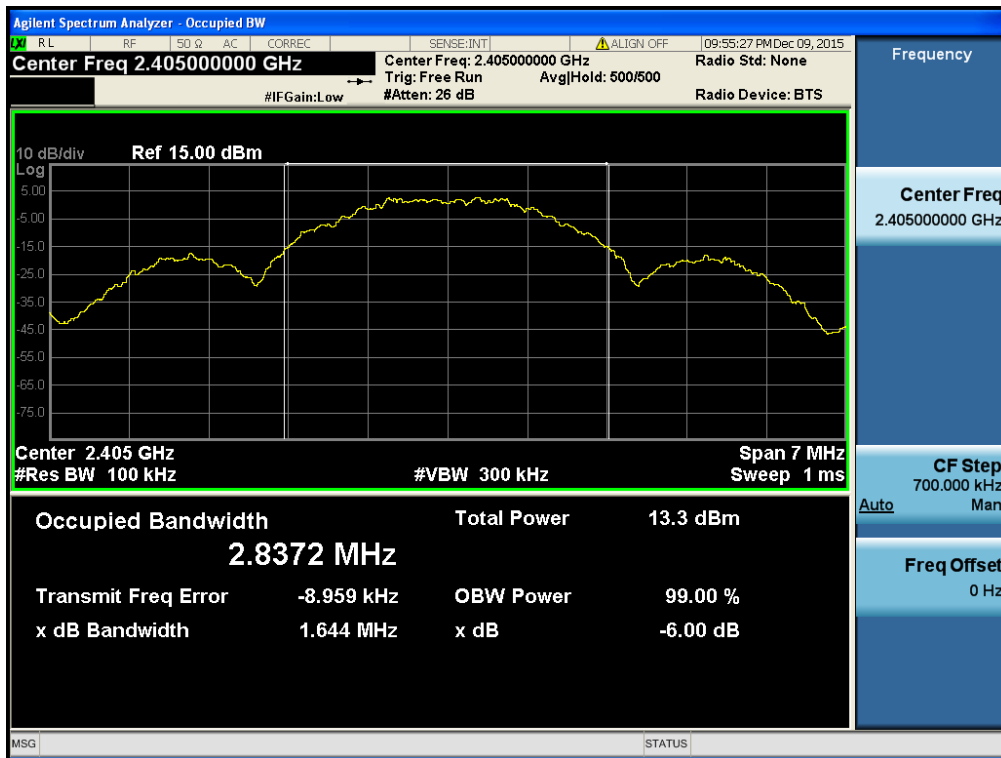


6 dB Bandwidth

Test Channel : TM 2 & Middle

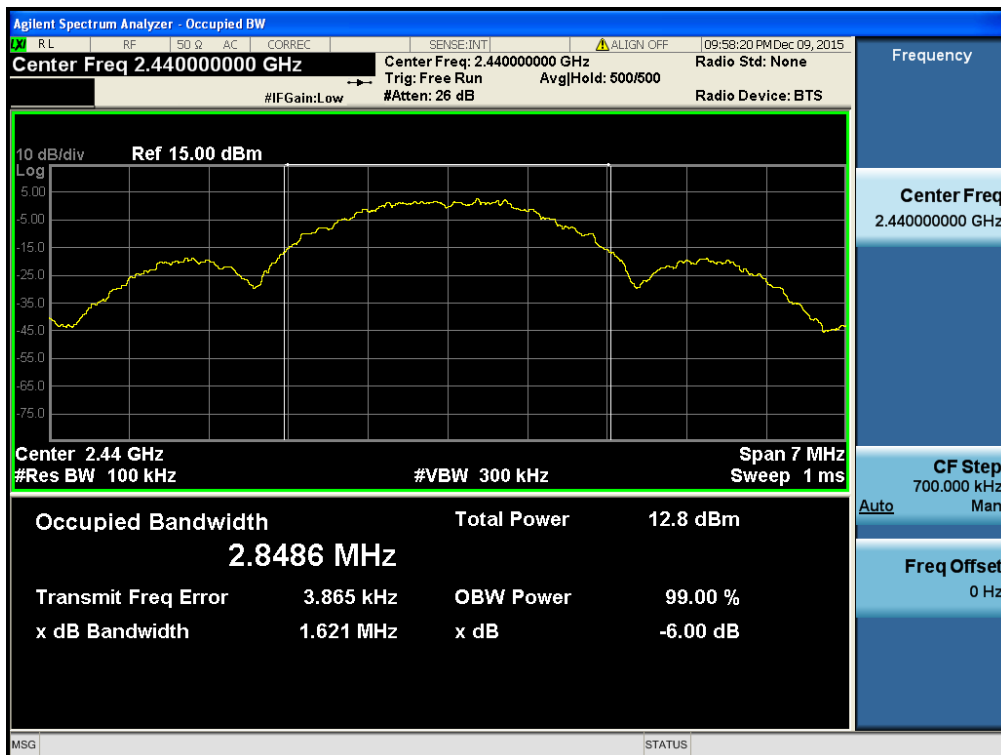

6 dB Bandwidth

Test Channel : TM 2 & Highest

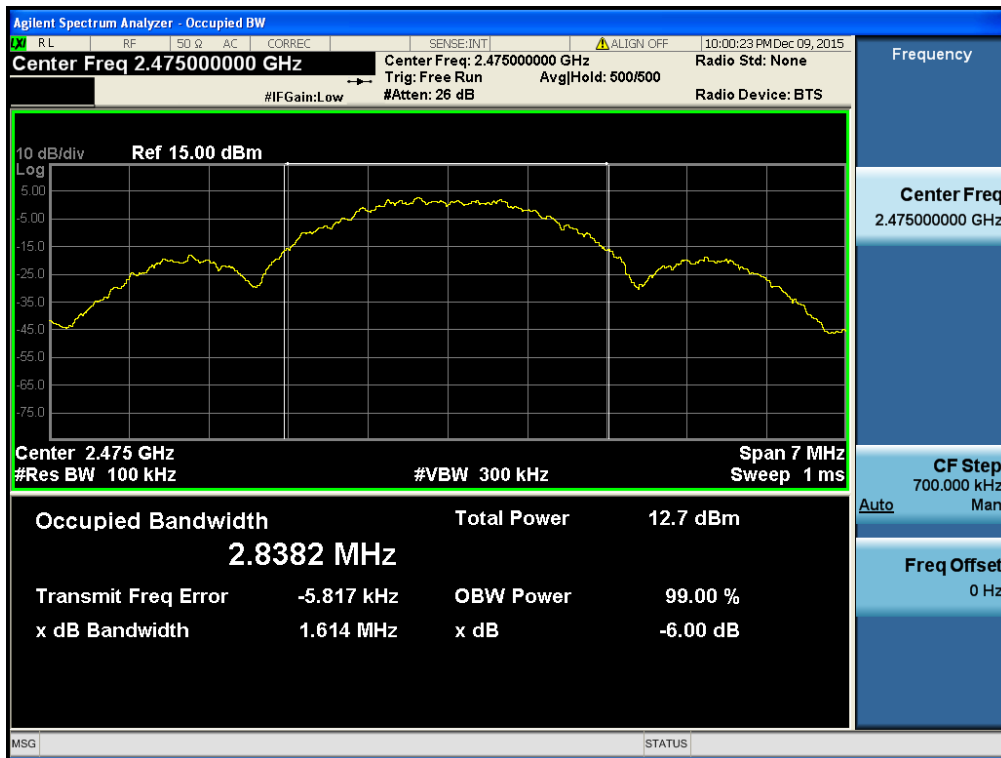

3.3 Maximum Power Spectral Density.

■ Test requirements and limit, §15.247(e) & RSS-247 [5.2]

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

3.3.1 Test Setup

Refer to the APPENDIX I.

3.3.2 Test Procedures

Method PKPSD of KDB558074 is used.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to **1.5 times** the DTS bandwidth.
3. Set the RBW : **3 kHz ≤ RBW ≤ 100 kHz**.
4. Set the VBW ≥ **3 x RBW**.
5. Detector = **peak**.
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. Allow trace to fully stabilize.
9. Use the **peak marker function** to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

3.3.3 Test Results

Test Mode	Tested Channel	PKPSD [dBm]
TM 1	Lowest	-10.06
	Middle	-10.86
	Highest	-11.42
TM 2	Lowest	-9.13
	Middle	-9.18
	Highest	-8.48

Maximum PKPSD

Test Channel : TM 1 & Lowest




Maximum PKPSD

Test Channel : TM 1 & Middle



Maximum PKPSD

Test Channel : TM 1 & Highest

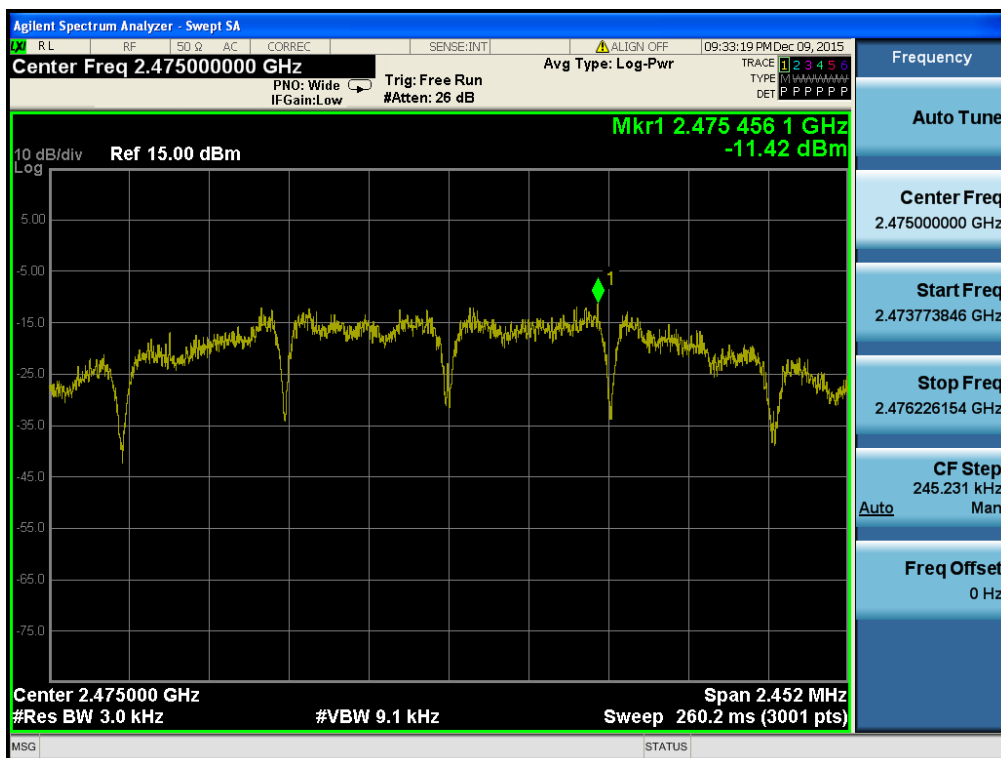


Maximum PKPSD

Test Channel : TM 2 & Lowest



Maximum PKPSD

Test Channel : TM 2 & Middle

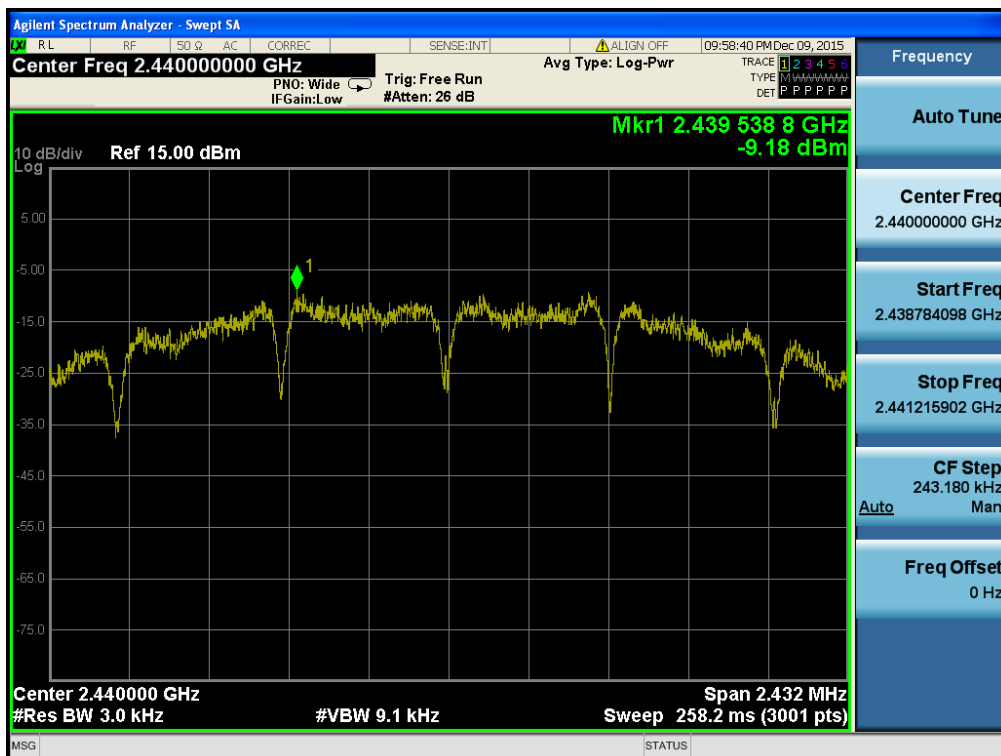

Maximum PKPSD

Test Channel : TM 2 & Highest



3.4 Unwanted Emissions (Conducted)

■ Test requirements and limit, §15.247(d) & RSS-247 [5.5]

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If the **peak output power procedure** is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated **by at least 20 dB** relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

In either case, attenuation to levels below the general emission limits specified in **§15.209(a)** is not required.

3.4.1 Test Setup

Refer to the APPENDIX I

3.4.2 Test Procedures

The transmitter output is connected to a spectrum analyzer.

- Measurement Procedure 1 – Reference Level

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to ≥ 1.5 times the DTS bandwidth.
3. Set the RBW = 100 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum PSD level
LIMIT LINE = 20 dB below of the reference level.

- Measurement Procedure 2 - Unwanted Emissions

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = **100 kHz.(Actual 1 MHz , See below note)**
3. Set the VBW $\geq 3 \times$ RBW.(Actual 3 MHz, See below note)
4. Detector = **peak**.
5. Ensure that the number of measurement points $\geq$ span / RBW
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. **Allow the trace to stabilize** (this may take some time, depending on the extent of the span).
9. Use the peak marker function to determine the maximum amplitude level.

Note : The conducted spurious emission was tested with below settings.

Frequency range	RBW	VBW	Detector	Trace	Sweep Point
9 kHz ~ 30 MHz	100 kHz	300 kHz	Peak	Max Hold	40001
30 MHz ~ 10 GHz	1 MHz	3 MHz			
10 GHz ~ 25 GHz	1 MHz	3 MHz			


If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2001 to get accurate emission level within 100 kHz BW.



3.4.3 Test Results


Reference (Test Channel : TM 1 & Lowest)



Low Band-edge (Test Channel : TM 1 & Lowest)

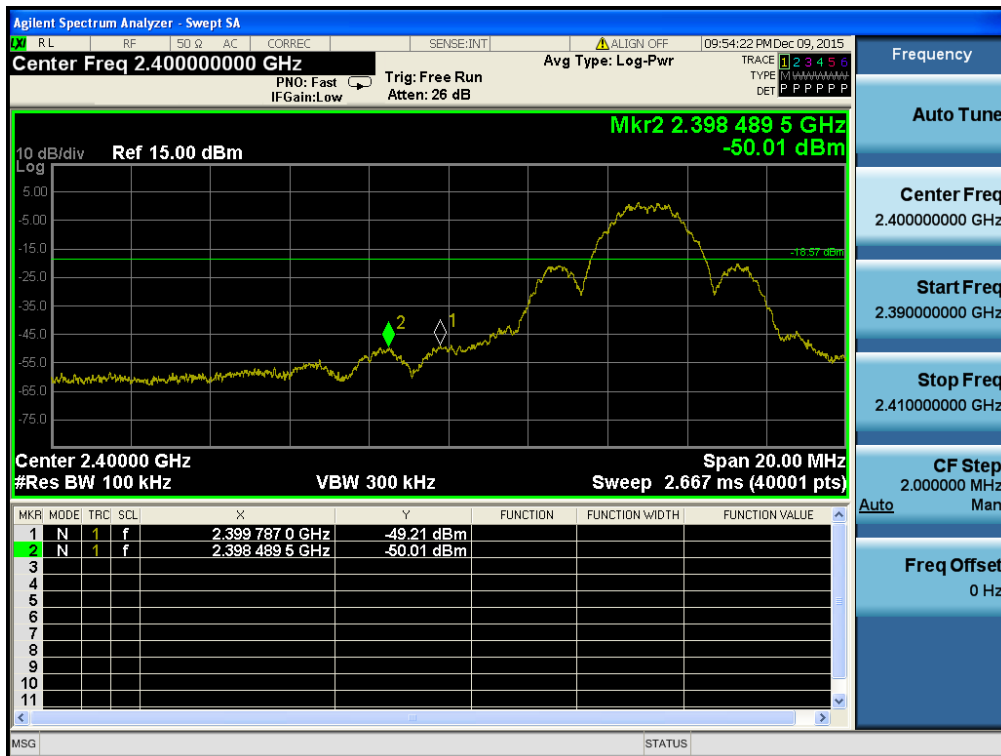

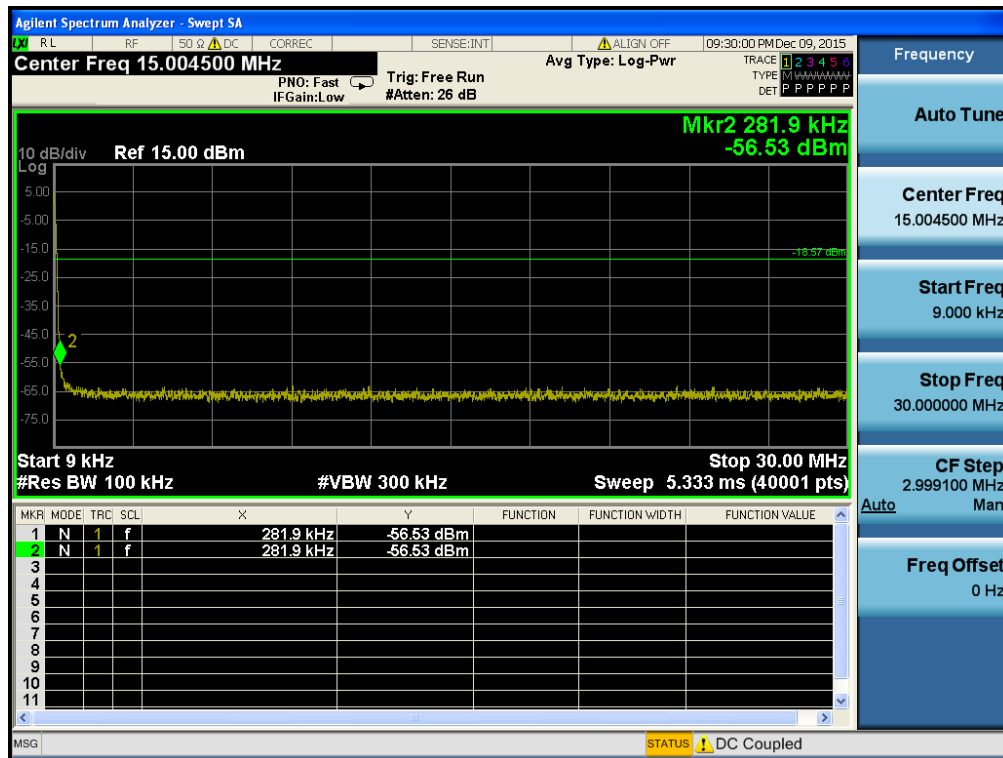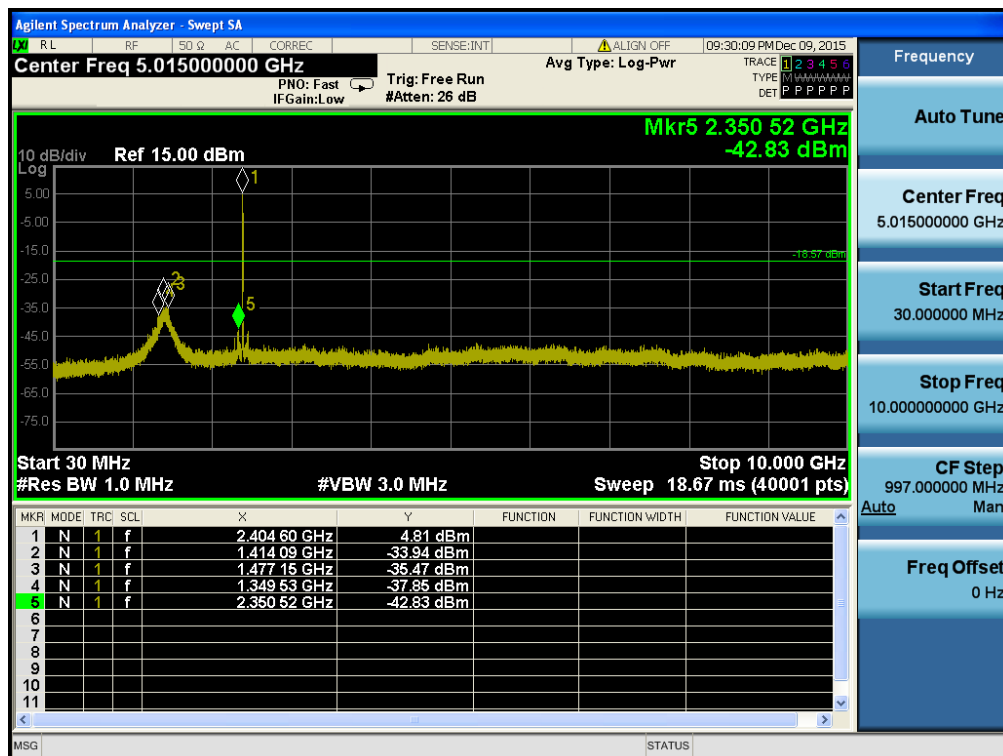
Conducted Spurious Emissions 1 (Test Channel : TM 1 & Lowest)**Conducted Spurious Emissions 2 (Test Channel : TM 1 & Lowest)**

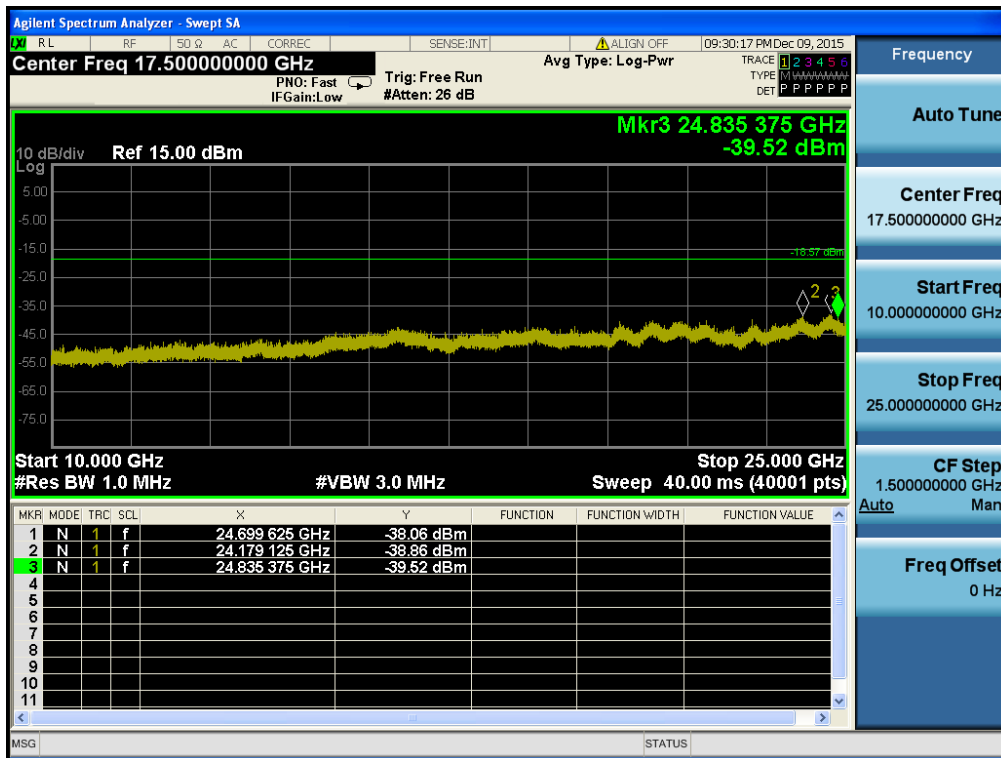Conducted Spurious Emissions 3 (Test Channel : TM 1 & Lowest)


Reference (Test Channel : TM 1 & Middle)




Conducted Spurious Emissions 1 (Test Channel : TM 1 & Middle)

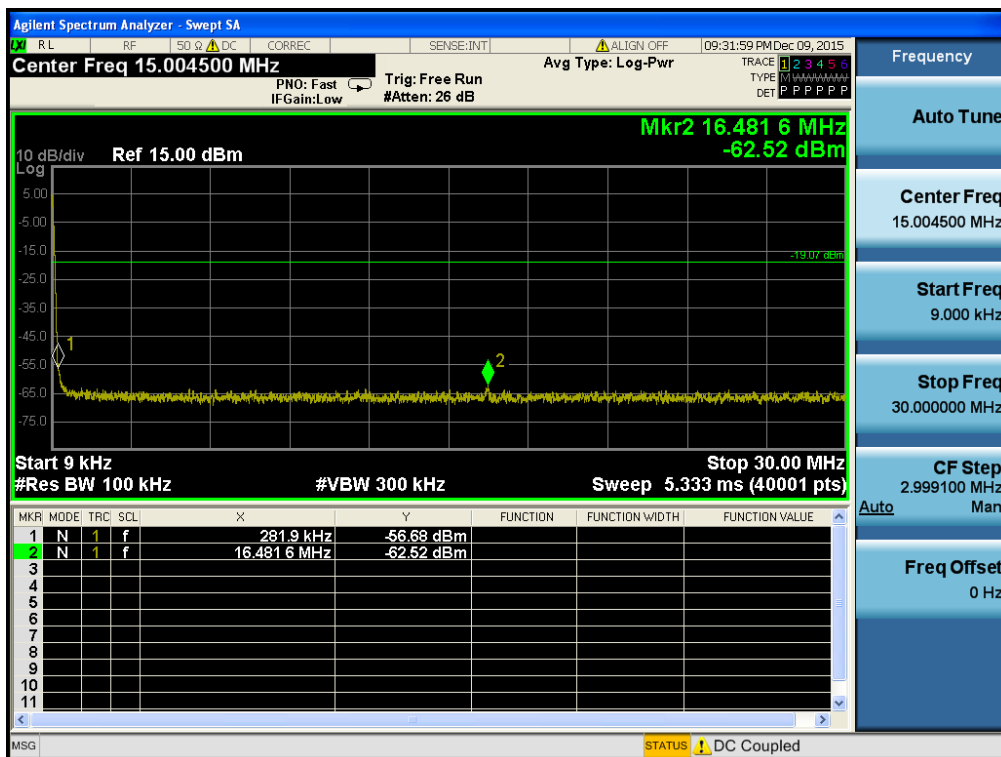


Conducted Spurious Emissions 2 (Test Channel : TM 1 & Middle)

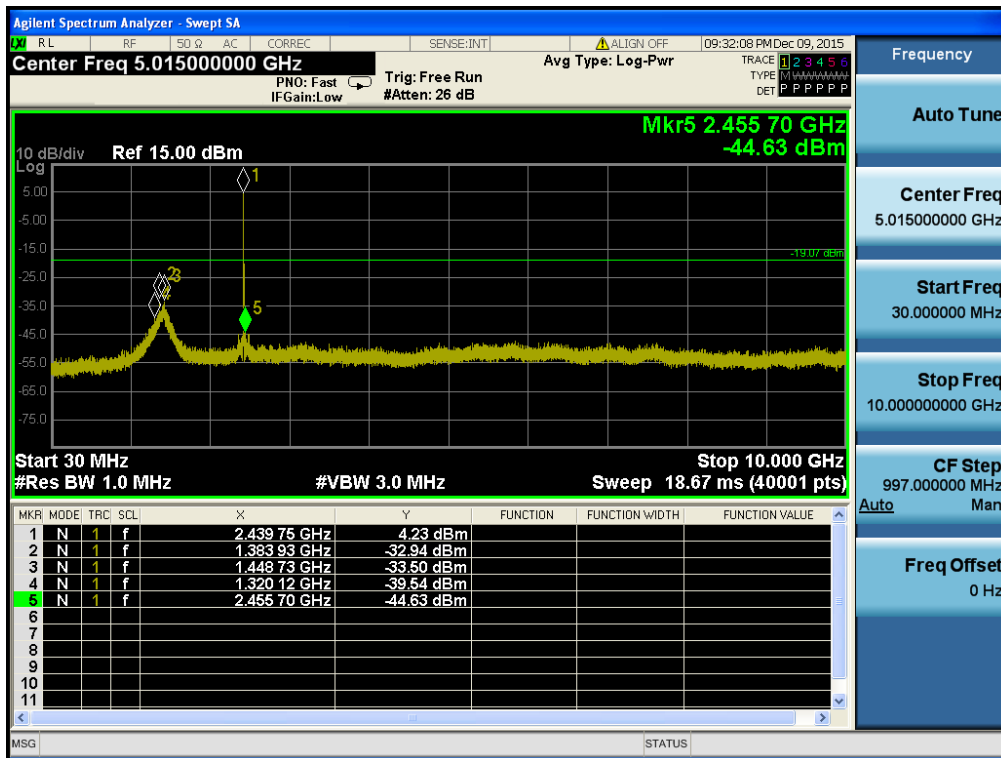


Conducted Spurious Emissions 3 (Test Channel : TM 1 & Middle)

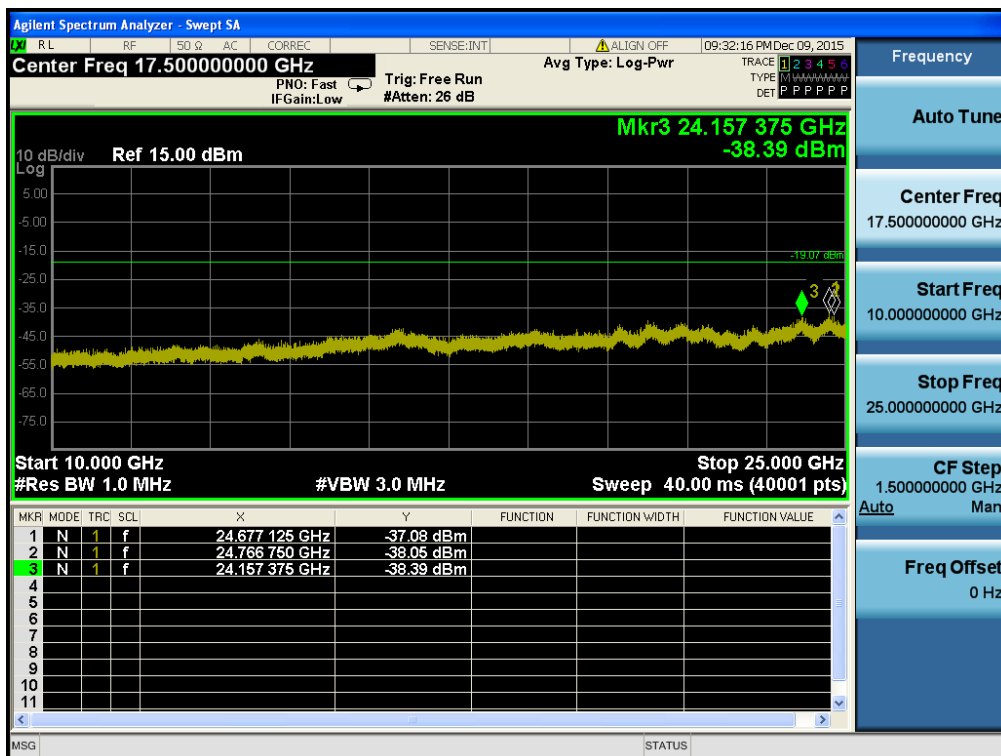


Reference (Test Channel : TM 1 & Highest)

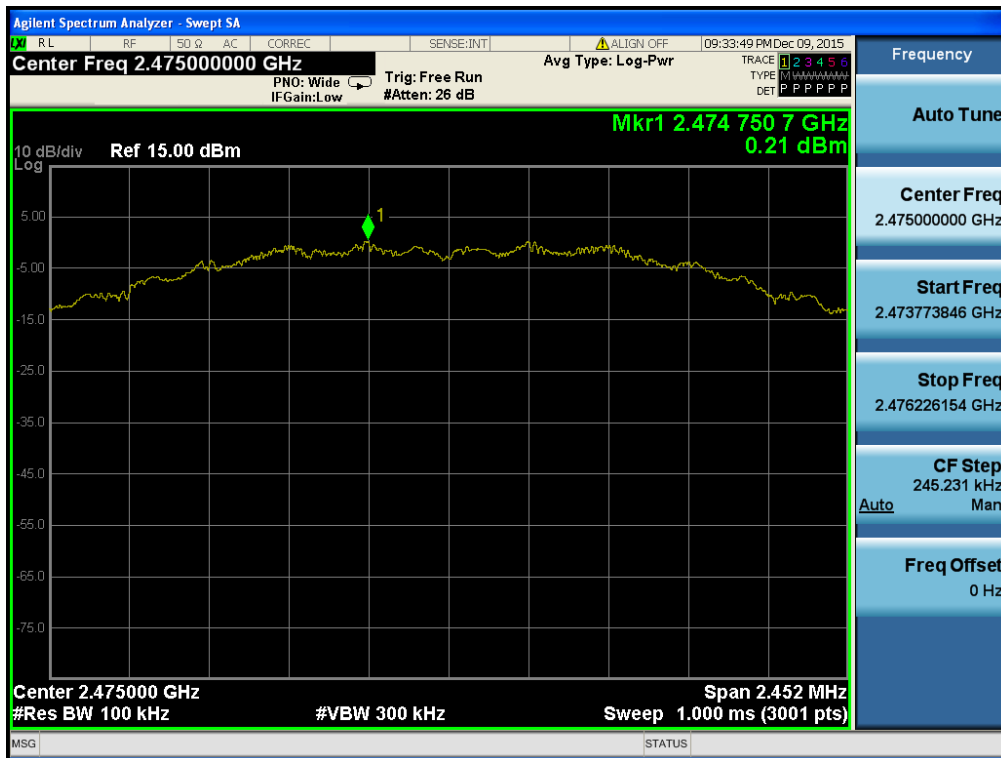


High Band-edge (Test Channel : TM 1 & Highest)

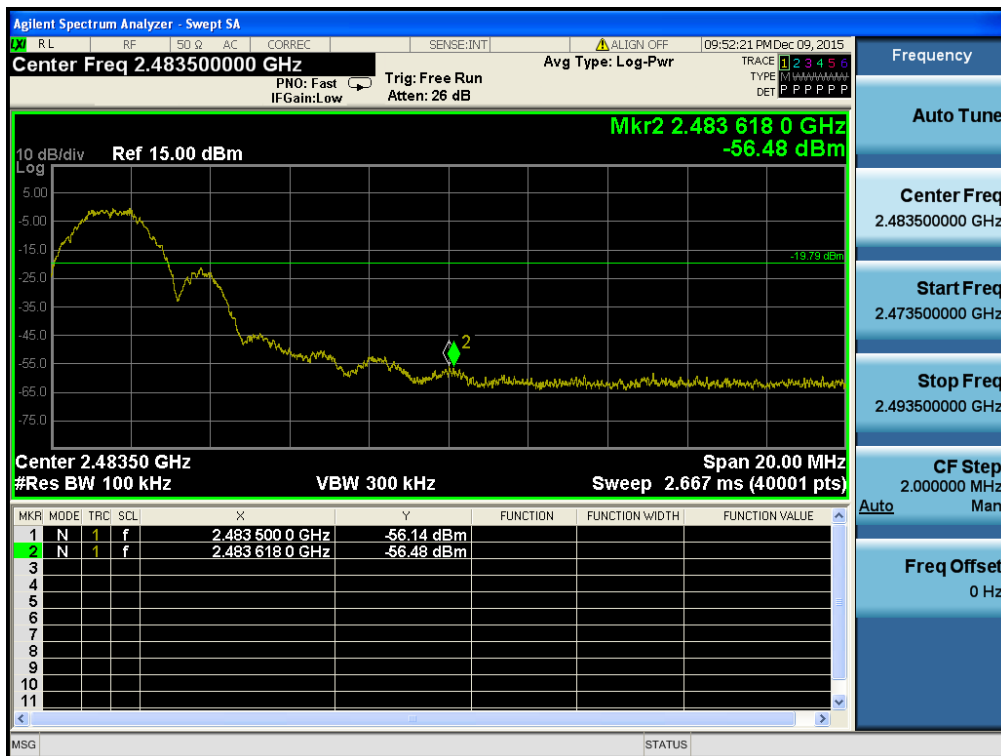


Conducted Spurious Emissions 1 (Test Channel : TM 1 & Highest)

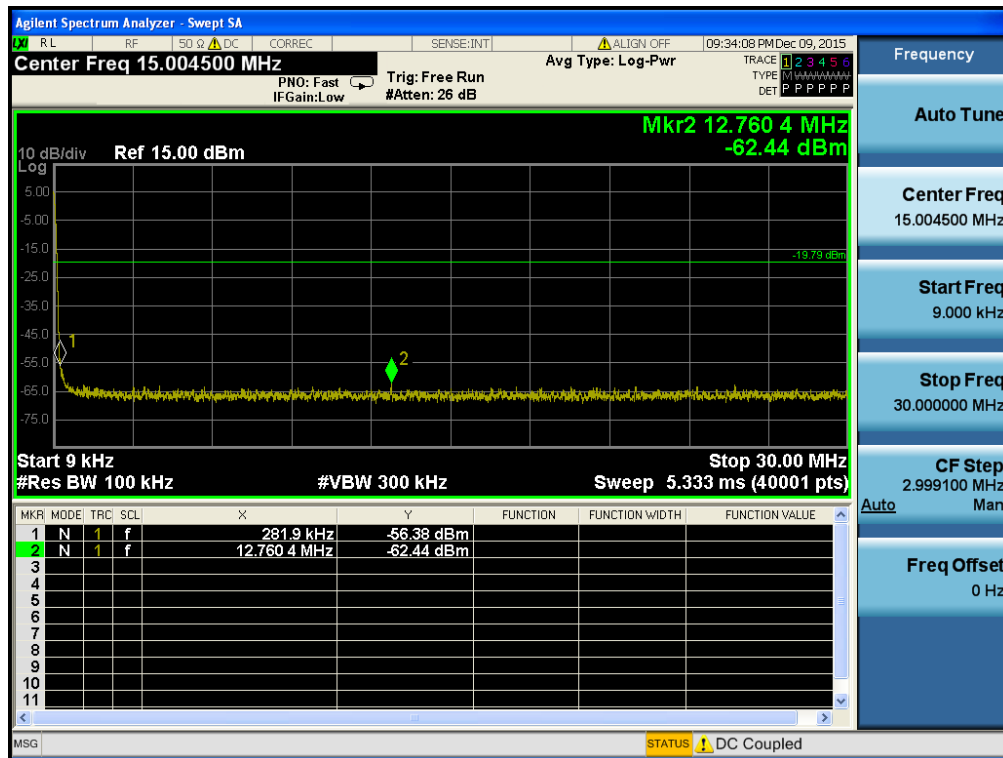

Conducted Spurious Emissions 2 (Test Channel : TM 1 & Highest)

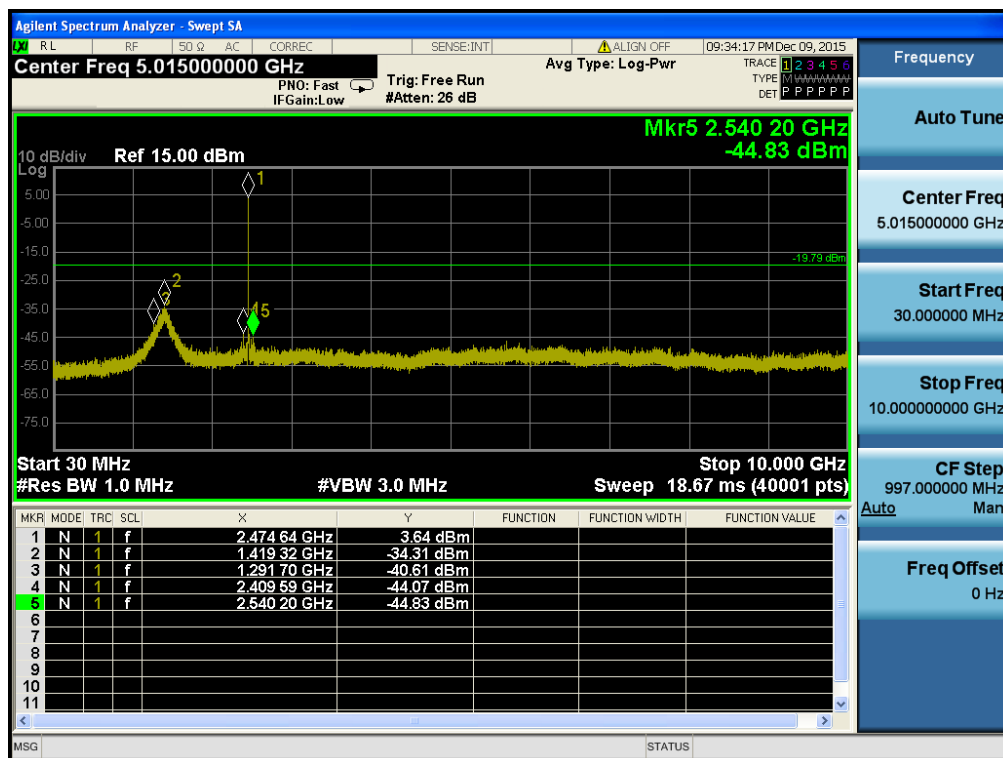


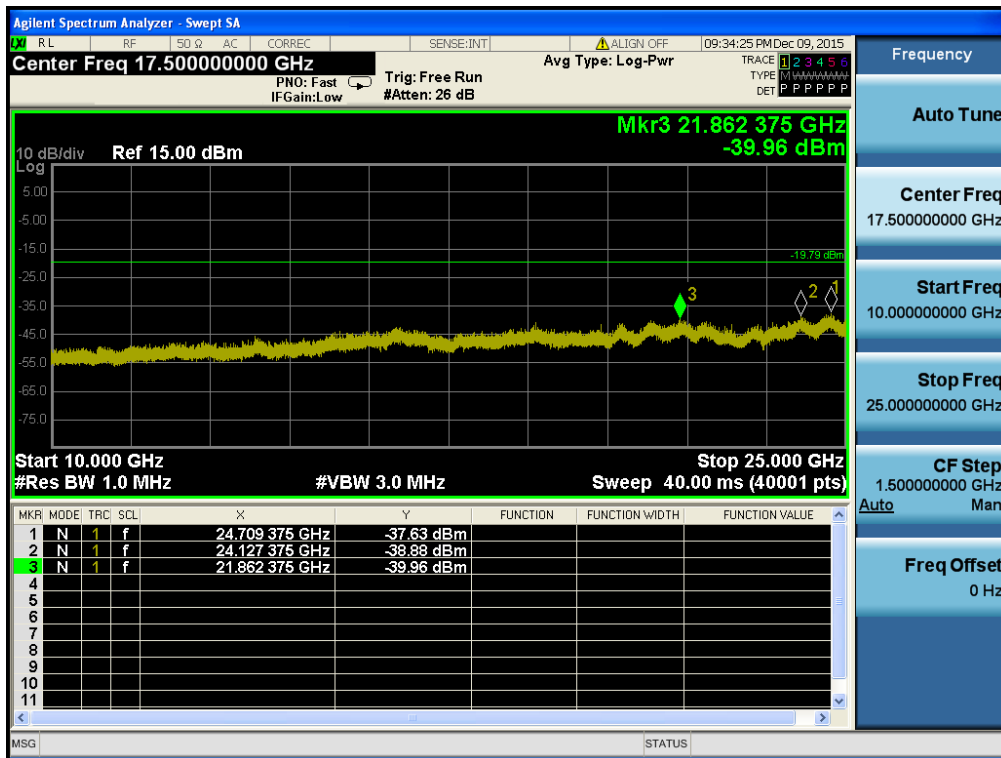
Conducted Spurious Emissions 3 (Test Channel : TM 1 & Highest)


Reference (Test Channel : TM 2 & Lowest)




Low Band-edge (Test Channel : TM 2 & Lowest)

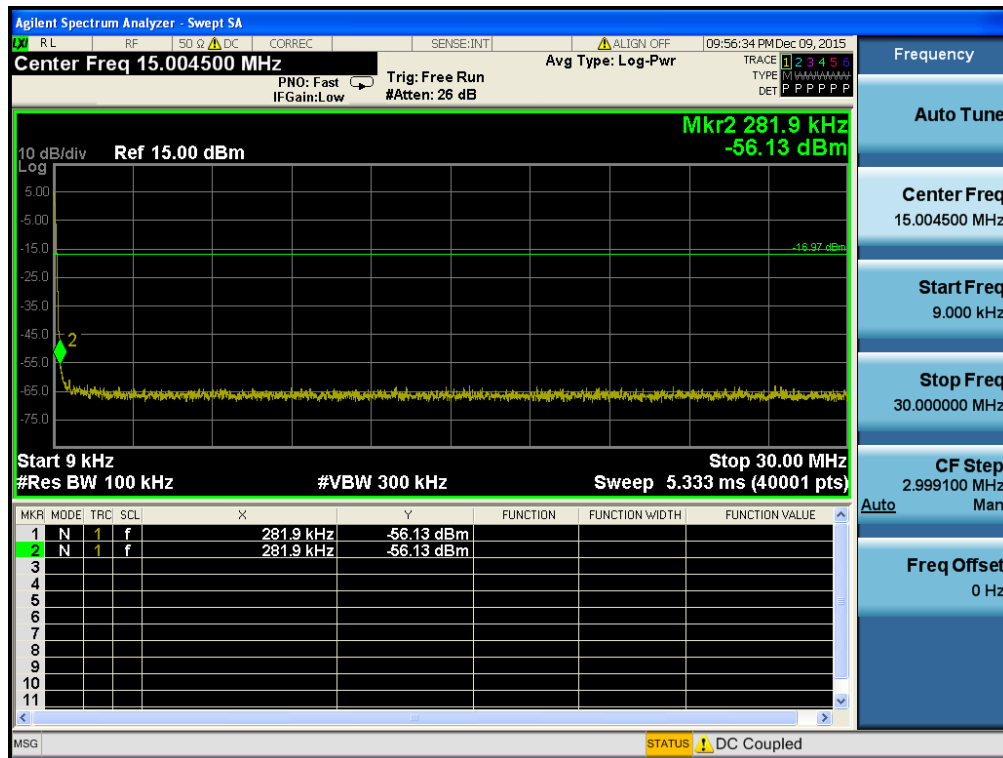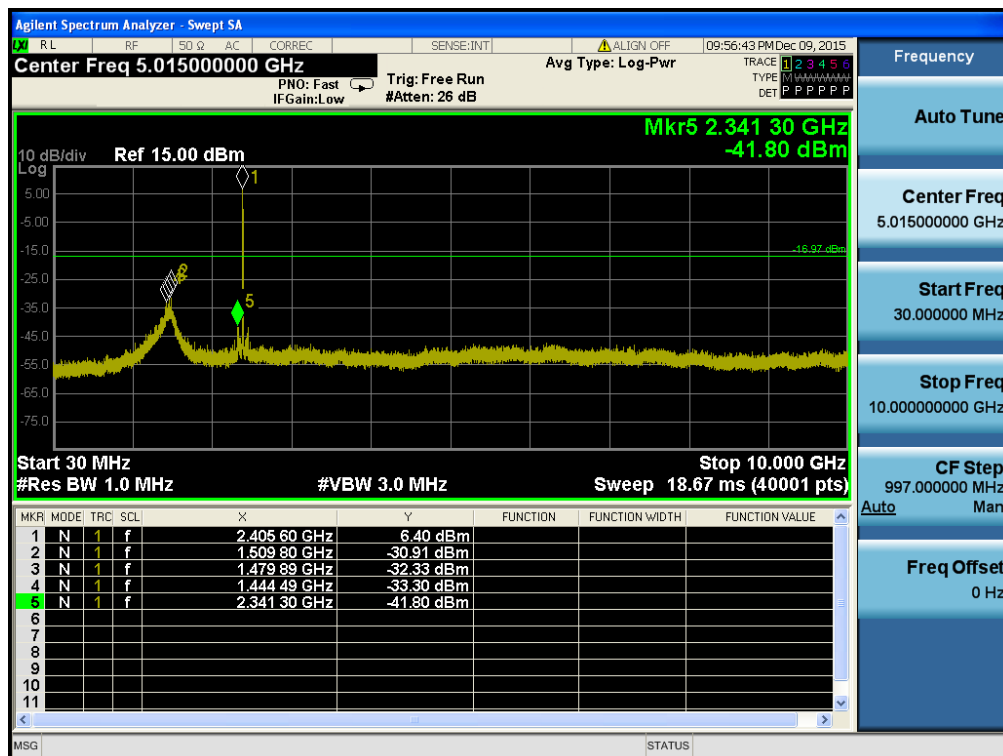


Conducted Spurious Emissions 1 (Test Channel : TM 2 & Lowest)**Conducted Spurious Emissions 2 (Test Channel : TM 2 & Lowest)**

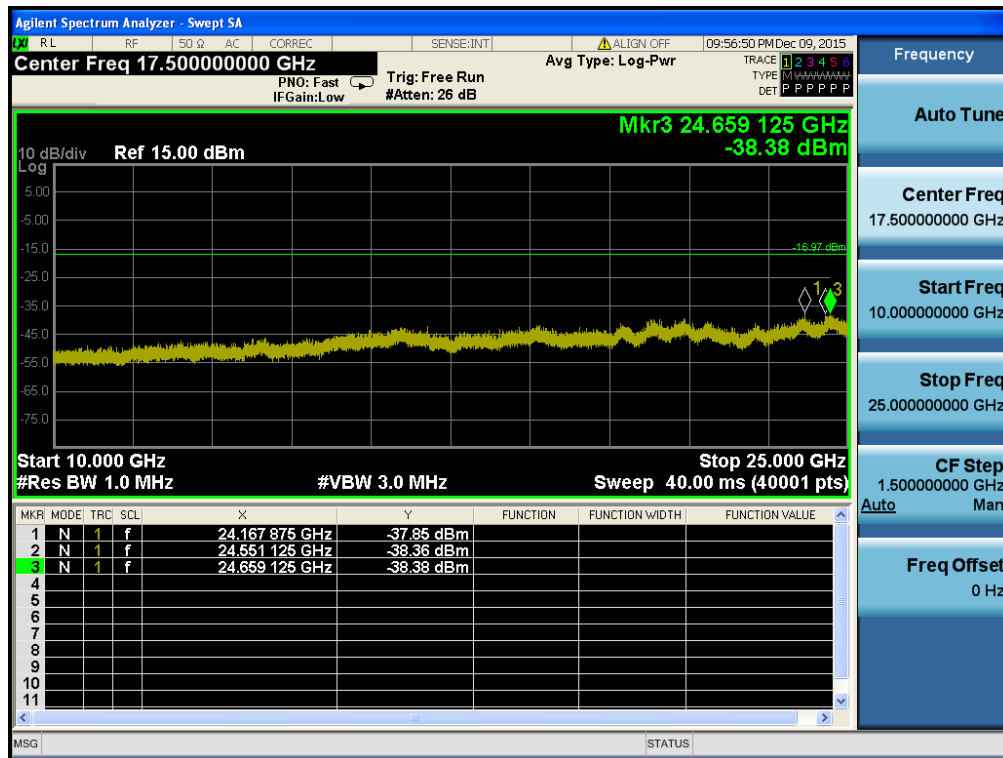Conducted Spurious Emissions 3 (Test Channel : TM 2 & Lowest)


Reference (Test Channel : TM 2 & Middle)

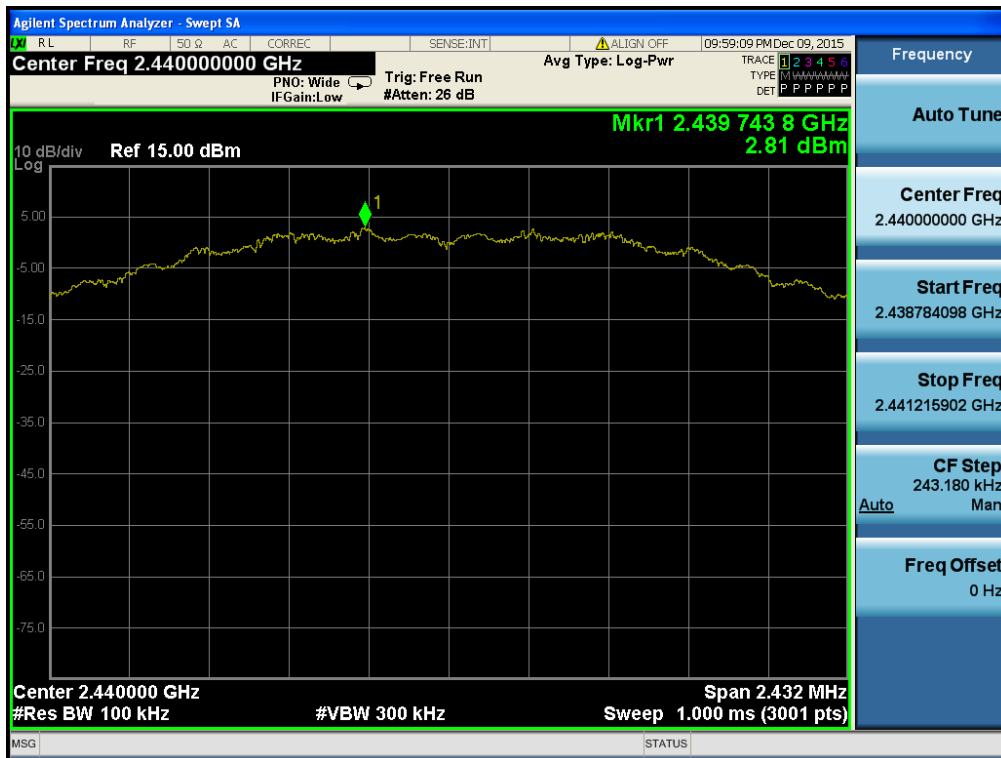


Conducted Spurious Emissions 1 (Test Channel : TM 2 & Middle)

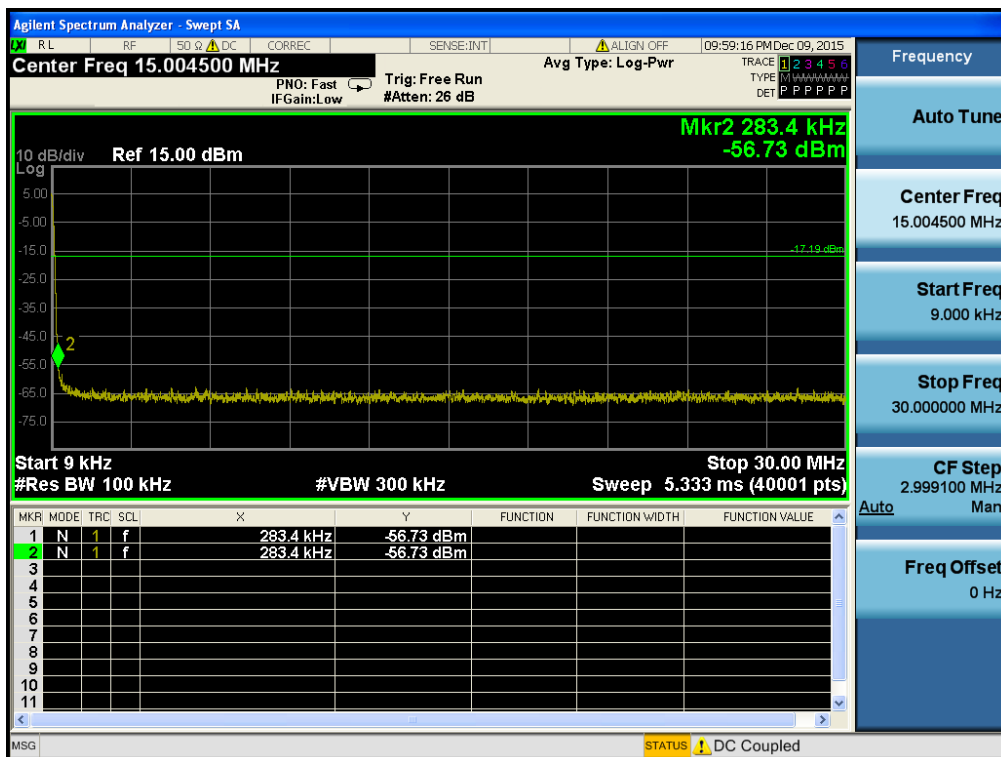


Conducted Spurious Emissions 2 (Test Channel : TM 2 & Middle)

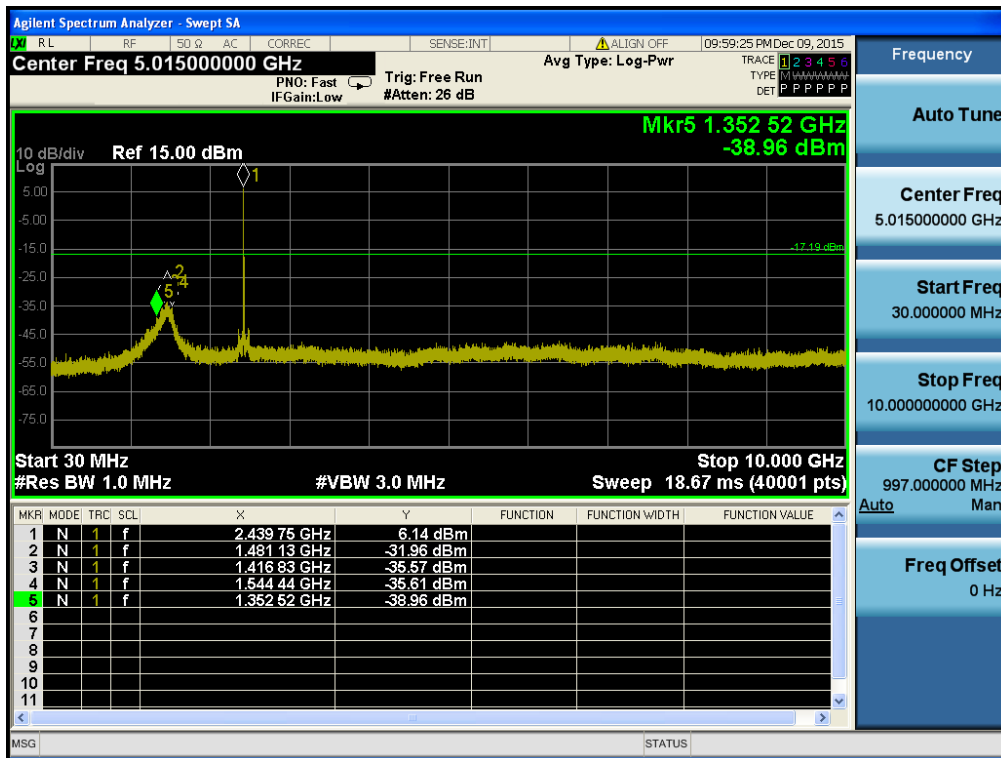

Conducted Spurious Emissions 3 (Test Channel : TM 2 & Middle)

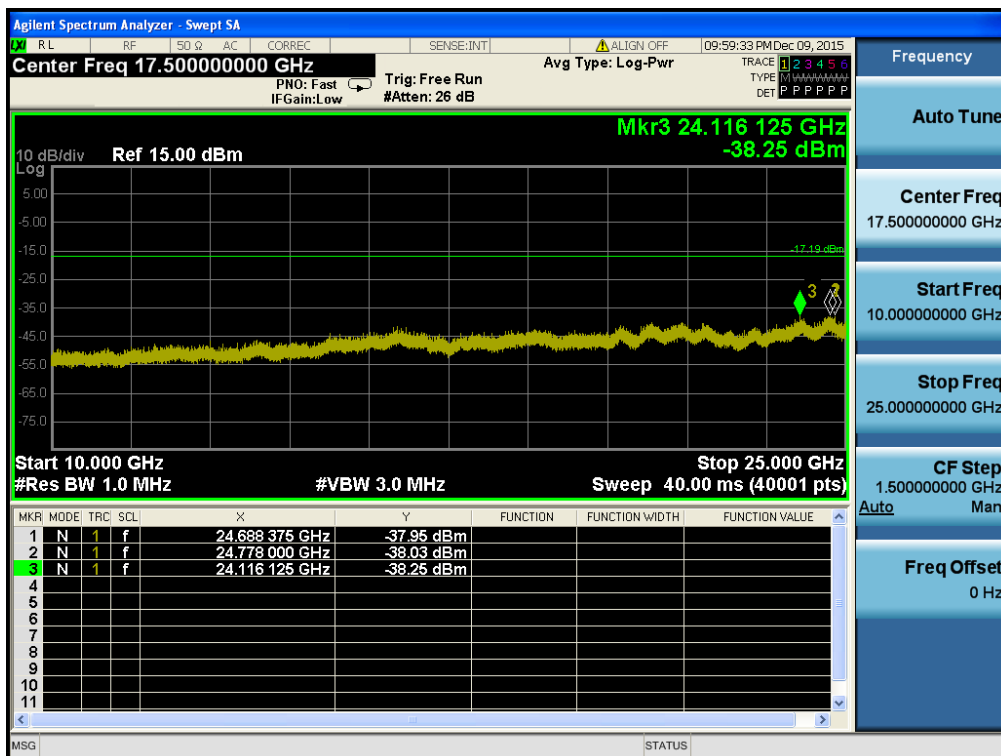


Reference (Test Channel : TM 2 & Highest)

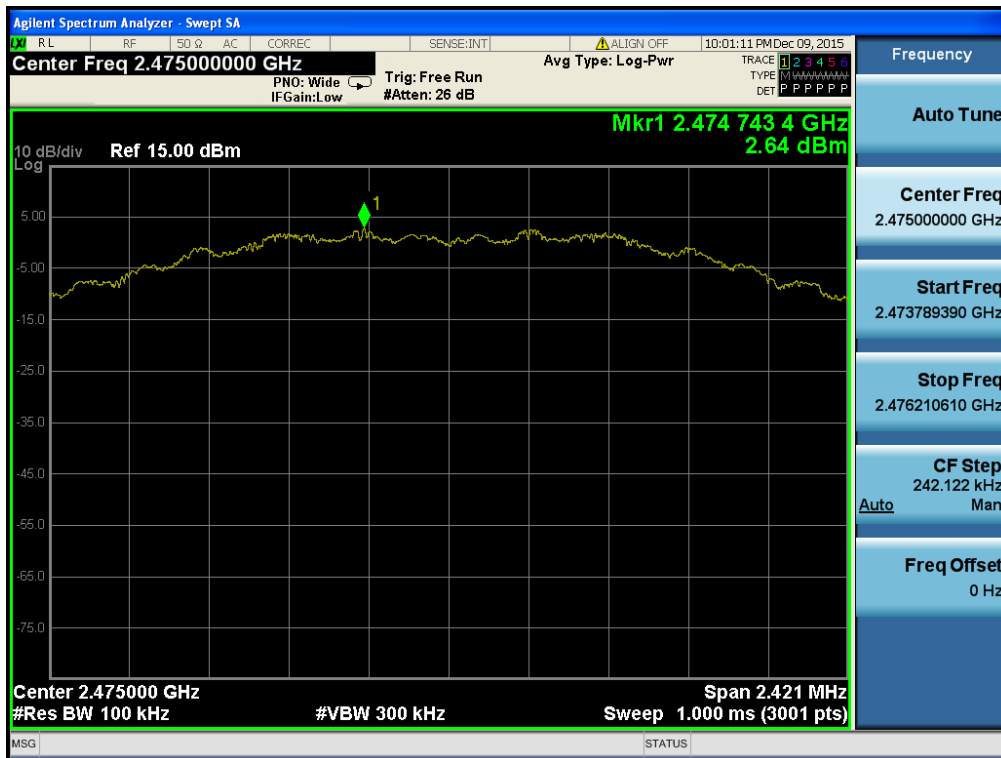


High Band-edge (Test Channel : TM 2 & Highest)




Conducted Spurious Emissions 1 (Test Channel : TM 2 & Highest)

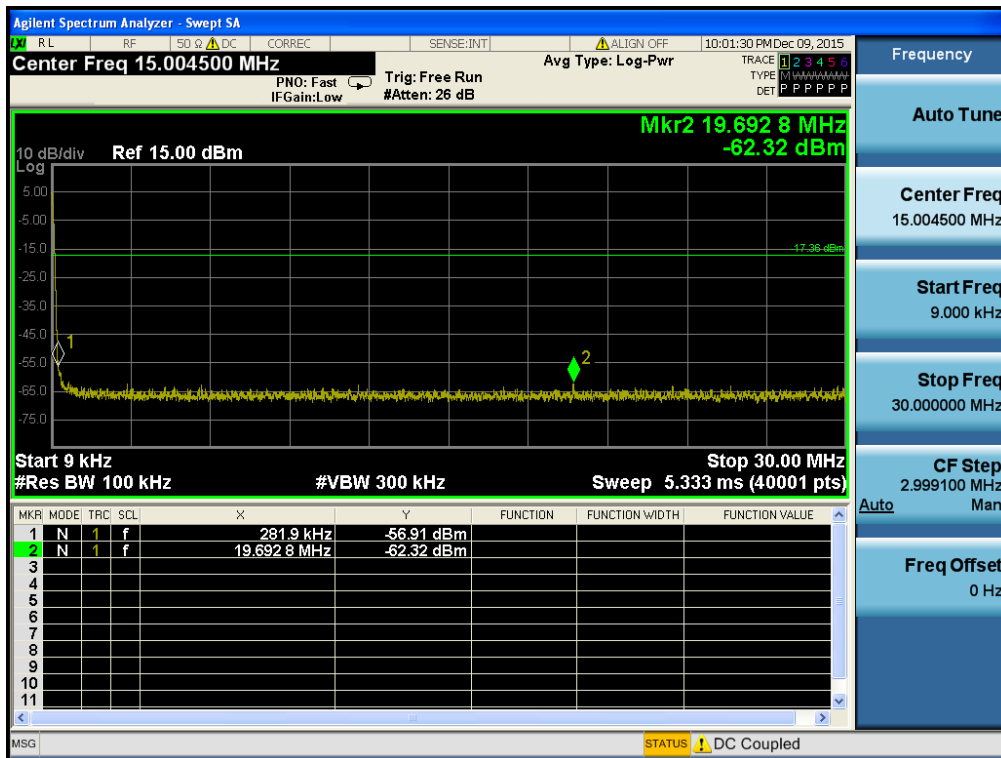

Conducted Spurious Emissions 2 (Test Channel : TM 2 & Highest)

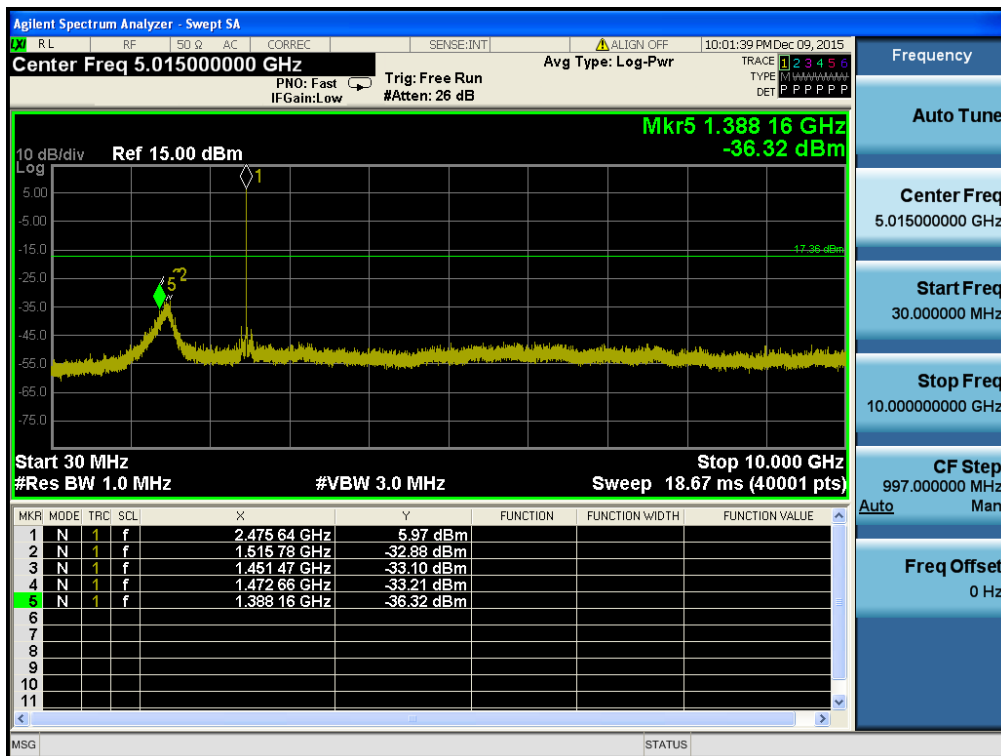

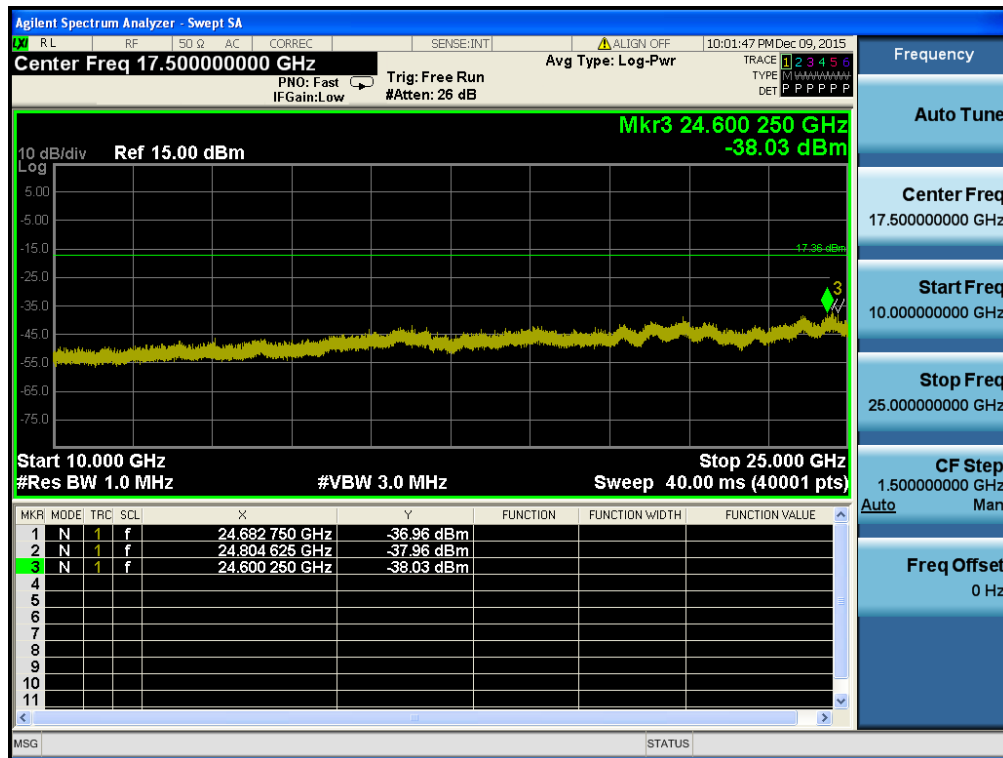Conducted Spurious Emissions 3 (Test Channel : TM 2 & Highest)

3.5 Unwanted Emissions (Radiated)

■ Test Requirements and limit,

§15.247(d), §15.205, §15.209 & RSS-247 [5.5], RSS-Gen [8.9], RSS-Gen [8.10]

In any 100 kHz bandwidth outside the operating frequency band, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below. In case the emission fall within the restricted band specified on 15.205(a) and (b), then the 15.209(a) limit in the table below has to be followed

▪ FCC Part 15.209(a) and (b)

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

▪ FCC Part 15.205 (a) : Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.52025	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	12.57675 ~	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	12.57725	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	13.36 ~ 13.41	162.0125 ~ 167.17	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.42 ~ 16.423	167.72 ~ 173.2	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	16.69475 ~	240 ~ 285	2655 ~ 2900		
8.291 ~ 8.294	16.69525	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	16.80425 ~	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	16.80475	608 ~ 614	3345.8 ~ 3358		
	25.5 ~ 25.67	960 ~ 1240	3600 ~ 4400		
	37.5 ~ 38.25				
	73 ~ 74.6				
	74.8 ~ 75.2				

▪ **FCC Part 15.205(b)** : The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

3.5.1 Test Setup

Refer to the APPENDIX I.

3.5.2 Test Procedures

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 1 or 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Note: Measurement Instrument Setting for Radiated Emission Measurements.

1. Frequency Range: ≤ 1 GHz

RBW = 100 or 120 kHz, VBW = 3 x RBW, Detector = Peak or Quasi Peak

2. Frequency Range: > 1 GHz

Peak Measurement

RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Sweep time = Auto, Trace mode = Max Hold until the trace stabilizes

Average Measurement > 1 GHz

1. RBW = 1 MHz (unless otherwise specified).
2. VBW $\geq 3 \times$ RBW.
3. Detector = RMS (Number of points $\geq 2 \times$ Span / RBW)
4. Averaging type = power (i.e., RMS).
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

3.5.3 Test Results

TM 1 & 9 kHz ~ 25 GHz Data

▪ Lowest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1412.49	Y	V	PK	60.62	-3.77	N/A	N/A	56.85	74.00	17.15
1413.03	Y	V	AV	52.02	-3.77	N/A	N/A	48.25	54.00	5.75
1440.16	Y	V	PK	62.68	-3.64	N/A	N/A	59.04	74.00	14.96
1440.09	Y	V	AV	53.93	-3.64	N/A	N/A	50.29	54.00	3.71
1476.83	Y	V	PK	60.40	-3.48	N/A	N/A	56.92	74.00	17.08
1476.96	Y	V	AV	52.65	-3.48	N/A	N/A	49.17	54.00	4.83
2373.92	X	H	PK	48.96	3.45	N/A	N/A	52.41	74.00	21.59
2373.68	X	H	AV	38.42	3.45	N/A	N/A	41.87	54.00	12.13
4810.33	X	V	PK	46.77	9.53	N/A	N/A	56.30	74.00	17.70
4810.00	X	V	AV	39.00	9.53	N/A	N/A	48.53	54.00	5.47

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1406.29	Y	V	PK	60.72	-3.80	N/A	N/A	56.92	74.00	17.08
1403.96	Y	V	AV	50.14	-3.80	N/A	N/A	46.34	54.00	7.66
1448.16	Y	V	PK	63.34	-3.61	N/A	N/A	59.73	74.00	14.27
1447.83	Y	V	AV	54.80	-3.61	N/A	N/A	51.19	54.00	2.81
1480.03	Y	V	PK	59.50	-3.46	N/A	N/A	56.04	74.00	17.96
1479.76	Y	V	AV	50.20	-3.46	N/A	N/A	46.74	54.00	7.26
4879.85	X	V	PK	47.27	9.75	N/A	N/A	57.02	74.00	16.98
4879.99	X	V	AV	39.50	9.75	N/A	N/A	49.25	54.00	4.75

▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1406.73	Y	V	PK	60.82	-3.79	N/A	N/A	57.03	74.00	16.97
1407.26	Y	V	AV	50.59	-3.79	N/A	N/A	46.80	54.00	7.20
1439.93	Y	V	PK	63.04	-3.64	N/A	N/A	59.40	74.00	14.60
1440.06	Y	V	AV	53.50	-3.64	N/A	N/A	49.86	54.00	4.14
1482.33	Y	V	PK	60.60	-3.45	N/A	N/A	57.15	74.00	16.85
1483.06	Y	V	AV	52.44	-3.45	N/A	N/A	48.99	54.00	5.01
2483.95	X	H	PK	48.48	3.70	N/A	N/A	52.18	74.00	21.82
2483.95	X	H	AV	36.66	3.70	N/A	N/A	40.36	54.00	13.64
4949.92	X	V	PK	45.83	9.90	N/A	N/A	55.73	74.00	18.27
4950.11	X	V	AV	37.17	9.90	N/A	N/A	47.07	54.00	6.93

▪ Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

3. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F + D.C.F + Distance Factor / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

D.C.F = Duty Cycle Correction Factor.

TM 2 & 9 kHz ~ 25 GHz Data▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1407.16	Y	V	PK	59.72	-3.79	N/A	N/A	55.93	74.00	18.07
1408.03	Y	V	AV	50.32	-3.79	N/A	N/A	46.53	54.00	7.47
1444.69	Y	V	PK	62.79	-3.62	N/A	N/A	59.17	74.00	14.83
1445.09	Y	V	AV	55.21	-3.62	N/A	N/A	51.59	54.00	2.41
1510.09	Y	V	PK	56.66	-3.28	N/A	N/A	53.38	74.00	20.62
1508.83	Y	V	AV	49.44	-3.28	N/A	N/A	46.16	54.00	7.84
2373.92	X	H	PK	49.89	3.45	N/A	N/A	53.34	74.00	20.66
2373.68	X	H	AV	40.28	3.45	N/A	N/A	43.73	54.00	10.27
4808.93	X	V	PK	49.20	9.53	N/A	N/A	58.73	74.00	15.27
4808.95	X	V	AV	41.66	9.53	N/A	N/A	51.19	54.00	2.81

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1415.56	Y	V	PK	59.14	-3.75	N/A	N/A	55.39	74.00	18.61
1416.03	Y	V	AV	51.63	-3.75	N/A	N/A	47.88	54.00	6.12
1444.29	Y	V	PK	60.17	-3.62	N/A	N/A	56.55	74.00	17.45
1444.09	Y	V	AV	50.96	-3.62	N/A	N/A	47.34	54.00	6.66
1480.89	Y	V	PK	61.69	-3.46	N/A	N/A	58.23	74.00	15.77
1480.23	Y	V	AV	54.23	-3.46	N/A	N/A	50.77	54.00	3.23
4878.92	X	V	PK	46.98	9.75	N/A	N/A	56.73	74.00	17.27
4878.96	X	V	AV	38.75	9.75	N/A	N/A	48.50	54.00	5.50

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1408.83	Y	V	PK	60.60	-3.79	N/A	N/A	56.81	74.00	17.19
1408.23	Y	V	AV	51.17	-3.79	N/A	N/A	47.38	54.00	6.62
1451.36	Y	V	PK	60.80	-3.60	N/A	N/A	57.20	74.00	16.80
1450.83	Y	V	AV	53.33	-3.60	N/A	N/A	49.73	54.00	4.27
1515.56	Y	V	PK	59.50	-3.76	N/A	N/A	55.74	74.00	18.26
1514.89	Y	V	AV	50.07	-3.76	N/A	N/A	46.31	54.00	7.69
2483.95	X	H	PK	49.27	3.70	N/A	N/A	52.97	74.00	21.03
2483.59	X	H	AV	39.54	3.70	N/A	N/A	43.24	54.00	10.76
4949.47	X	V	PK	44.83	9.90	N/A	N/A	54.73	74.00	19.27
4948.95	X	V	AV	34.59	9.90	N/A	N/A	44.49	54.00	9.51

▪ **Note.**

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

3. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F + D.C.F + Distance Factor / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

D.C.F = Duty Cycle Correction Factor.

3.6 Power line Conducted Emissions

■ Test Requirements and limit, §15.207 & RSS-Gen [8.8]

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

3.6.1 Test Setup

See test photographs for the actual connections between EUT and support equipment.

3.6.2 Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a 6.5 m $\times$ 3.5 m $\times$ 3.5 m (L $\times$ W $\times$ H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) $\times$ 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

3.6.3 Test Results

Not Applicable

3.7 Occupied Bandwidth

■ Test Requirements, RSS-Gen [6.6]

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99 % emission bandwidth, as calculated or measured.

3.7.1 Test Setup

3.7.2 Test Procedures

The 99 % power bandwidth was measured with a calibrated spectrum analyzer.

The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately $3 \times \text{RBW}$.

Spectrum analyzer plots are included on the following pages.

3.7.3 Test Results

Not Applicable

4. ANTENNA REQUIREMENTS

■ According to FCC 47 CFR §15.203 & RSS-Gen [6.7]


“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

**The antenna is dipole antenna, the antenna connector adheres to the antenna permanently with the glue.
Therefore this E.U.T Complies with the requirement of §15.203**


APPENDIX I

Test set up diagrams

▪ Radiated Measurement

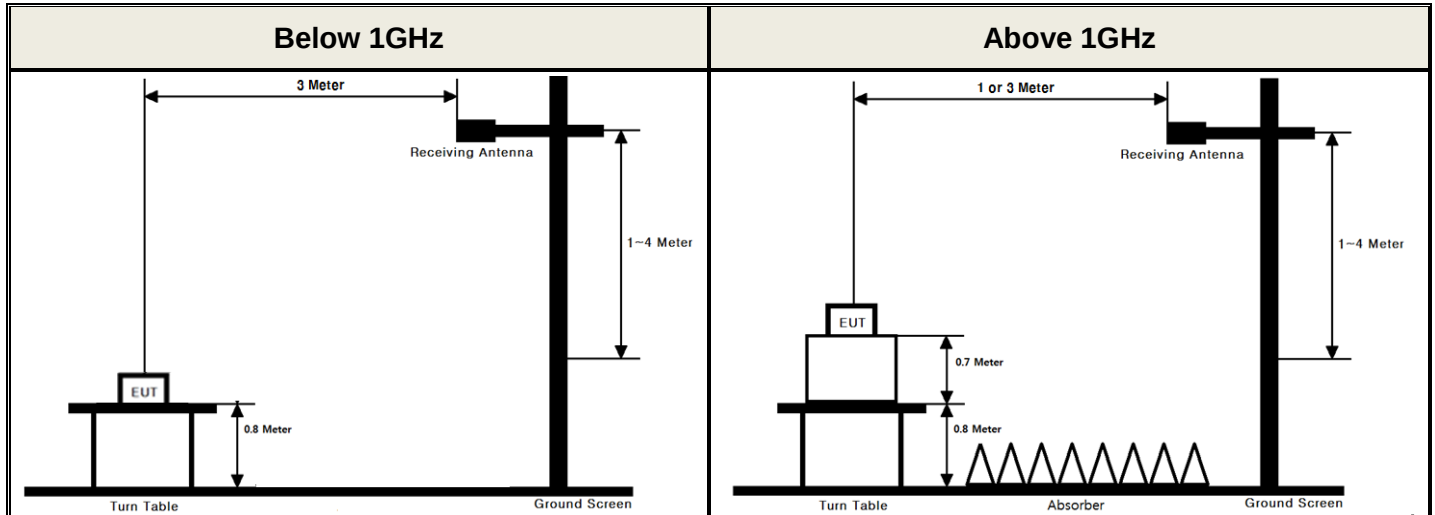

▪ Conducted Measurement

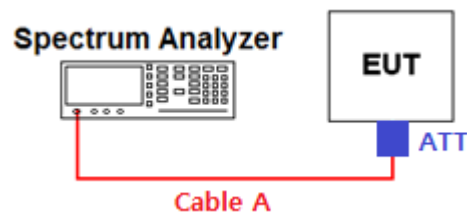

Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	3.07	15	4.40
1	3.16	20	4.69
2.405 & 2.440 & 2.475	3.43	25	4.97
5	3.61	-	-
10	4.12	-	-

Note 1 : The path loss from EUT to Spectrum analyzer was measured and used for test.

Path loss (S/A's correction factor) = Cable A (Attenuator, Applied only when it was used externally)

APPENDIX II

Duty cycle plots

▪ Test Procedure


Duty Cycle was measured using **section 6.0 b)** of KDB558074 :

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW $\geq$ OBW if possible; otherwise, set RBW to the largest available value. Set VBW $\geq$ RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)


Duty Cycle

Test Channel : TM 1 & Middle

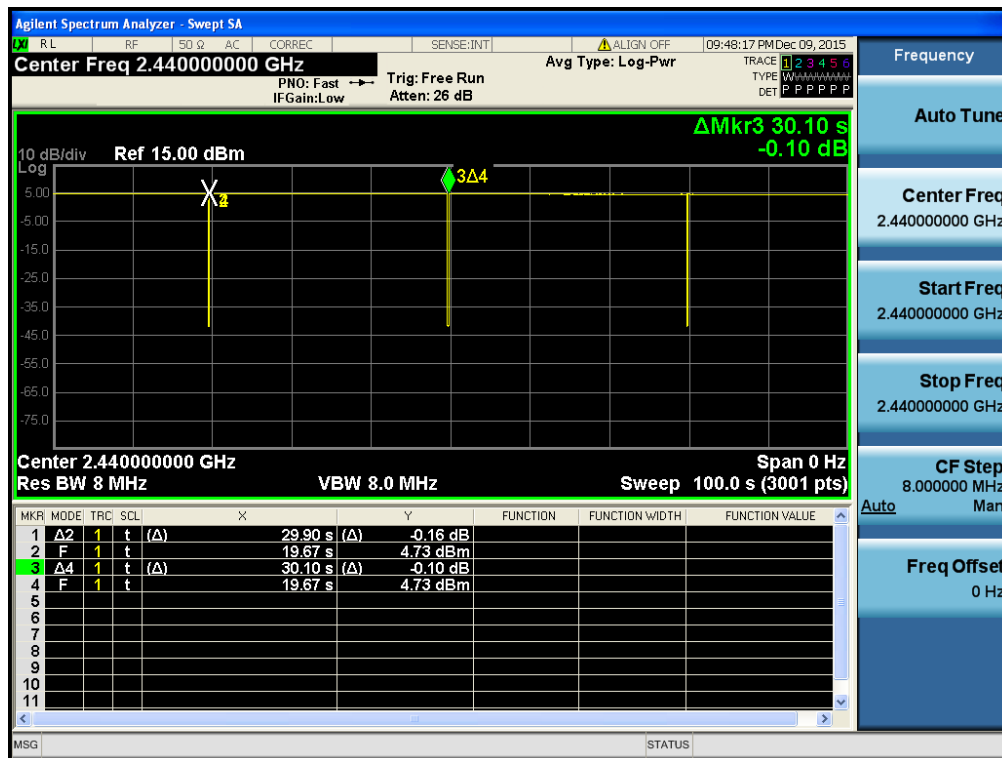

Duty Cycle

Test Channel : TM 2 & Middle

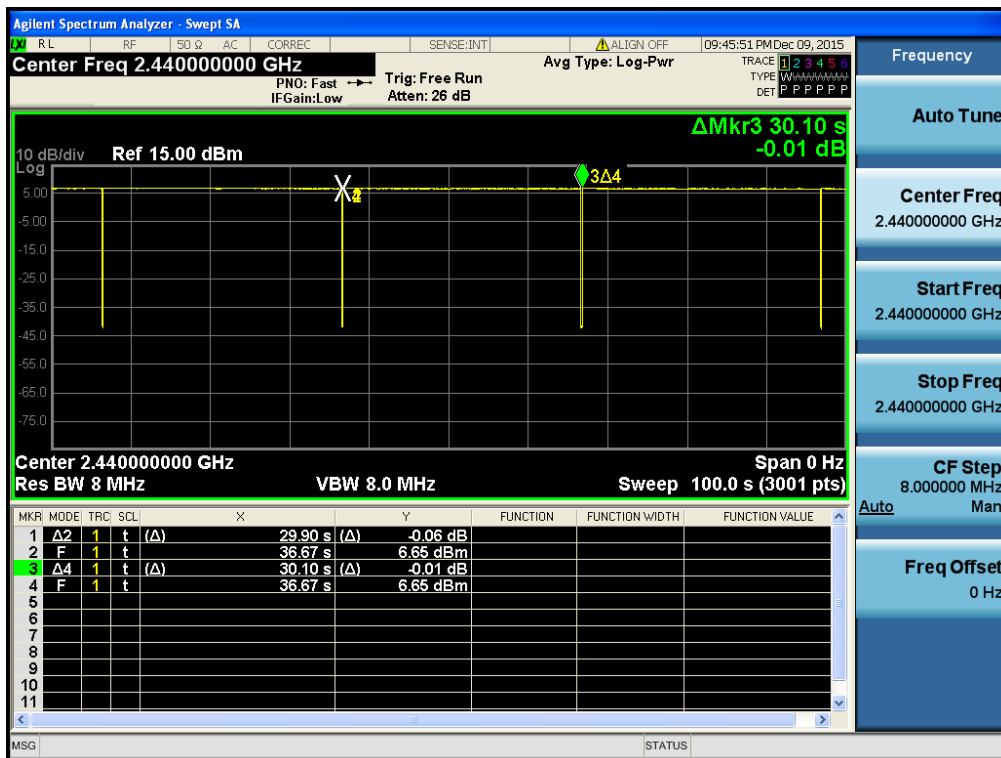


APPENDIX III

Restricted band edge(Plot of radiated)

Note: The offset was not include in test plot. (Reading value). The results refer to the clause 3.5.3.


TM 1 & Lowest & Edge & X & Hor

Detector Mode : PK

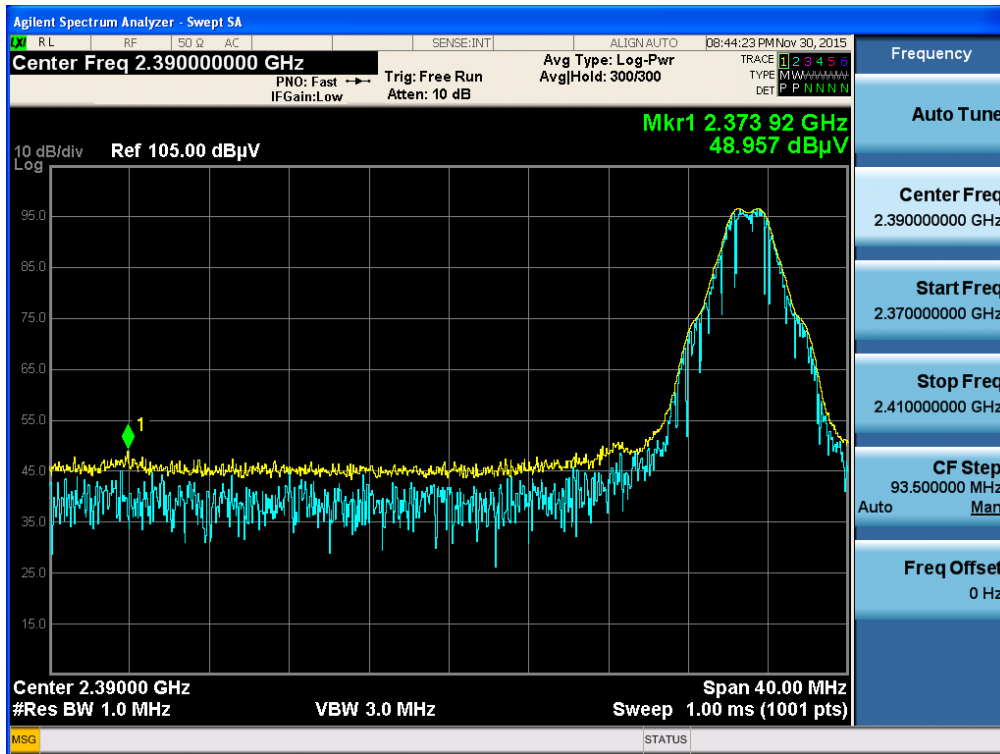


TM 1 & Lowest & Edge & X & Hor

Detector Mode : AV

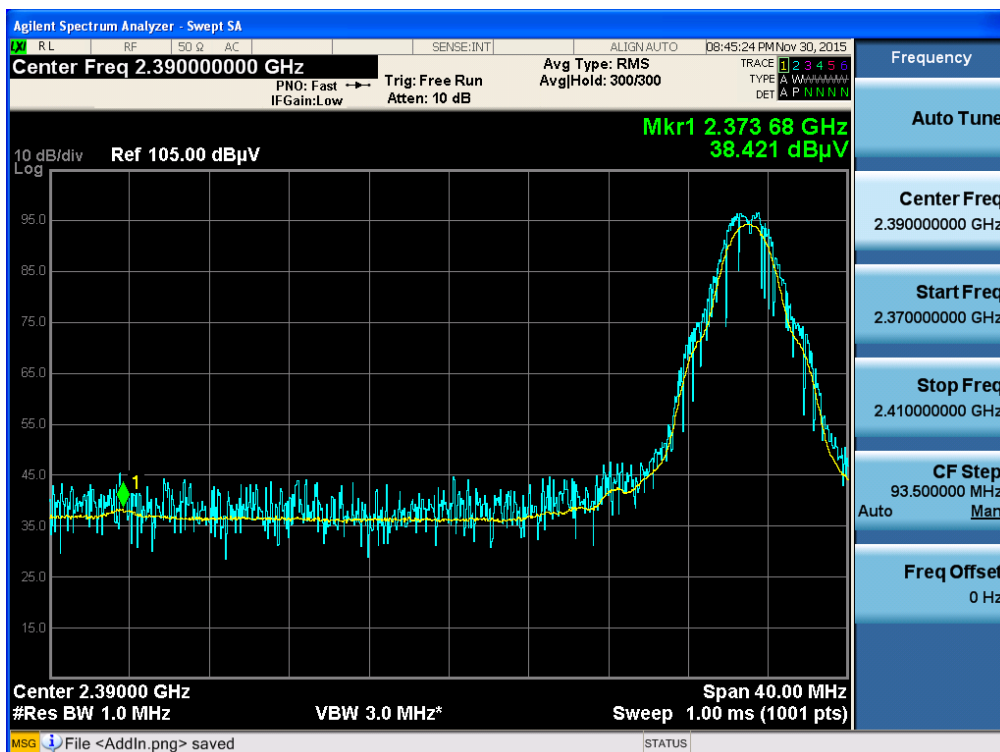


TM 1 & Highest & Edge & X & Hor

Detector Mode : PK

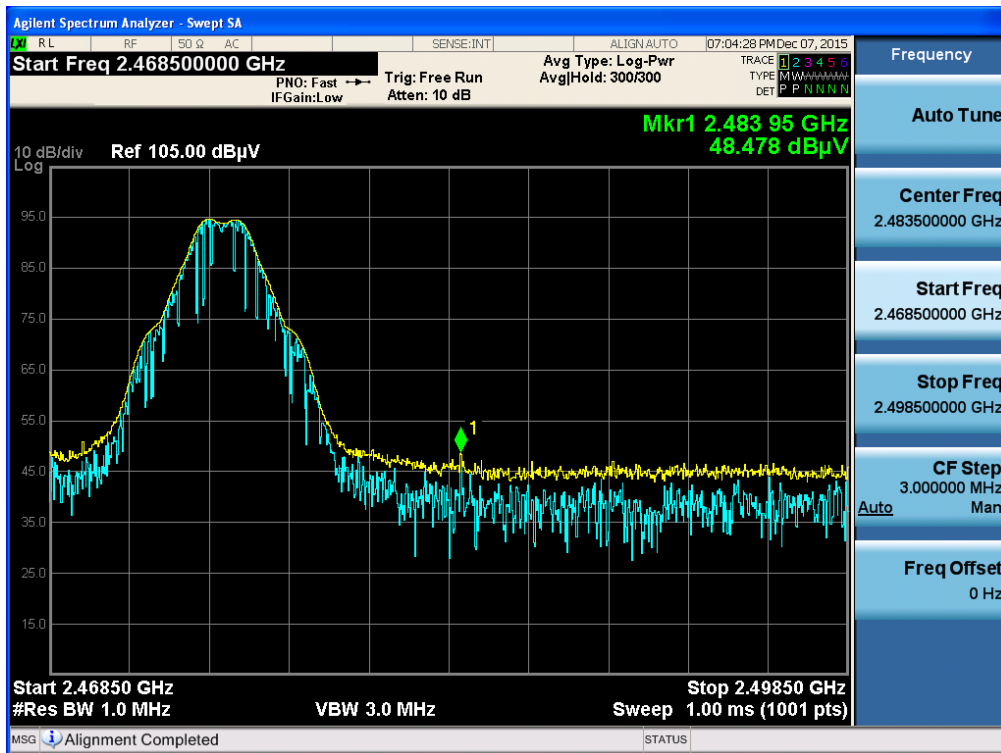


TM 1 & Highest & Edge & X & Hor

Detector Mode : AV

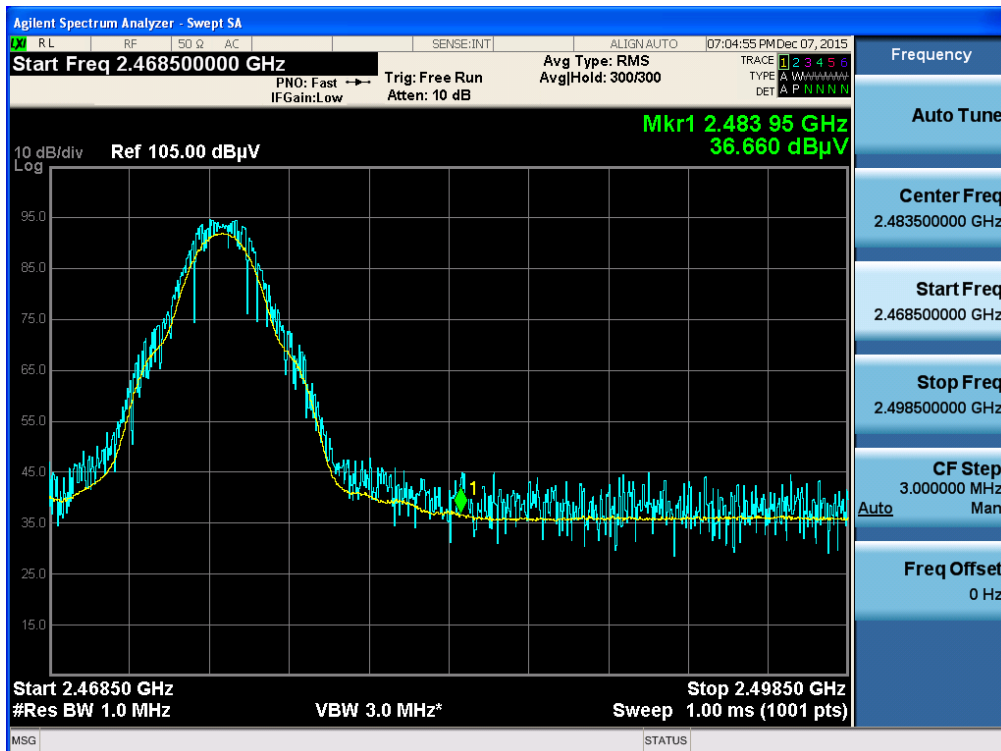


TM 2 & Lowest & Edge & X & Hor

Detector Mode : PK

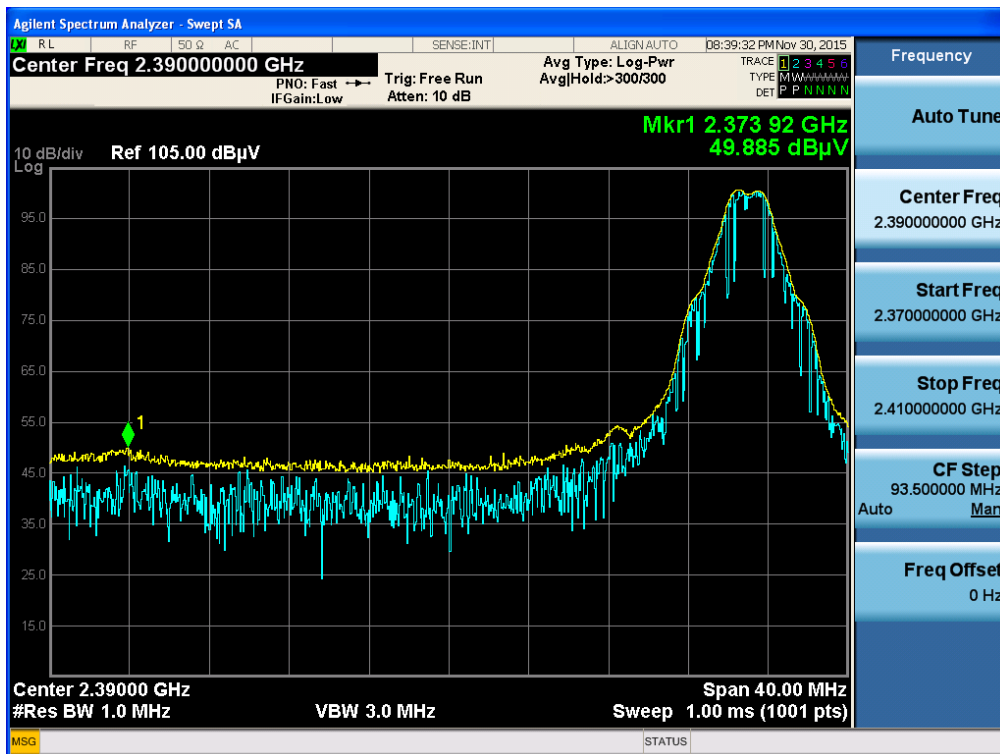


TM 2 & Lowest & Edge & X & Hor

Detector Mode : AV

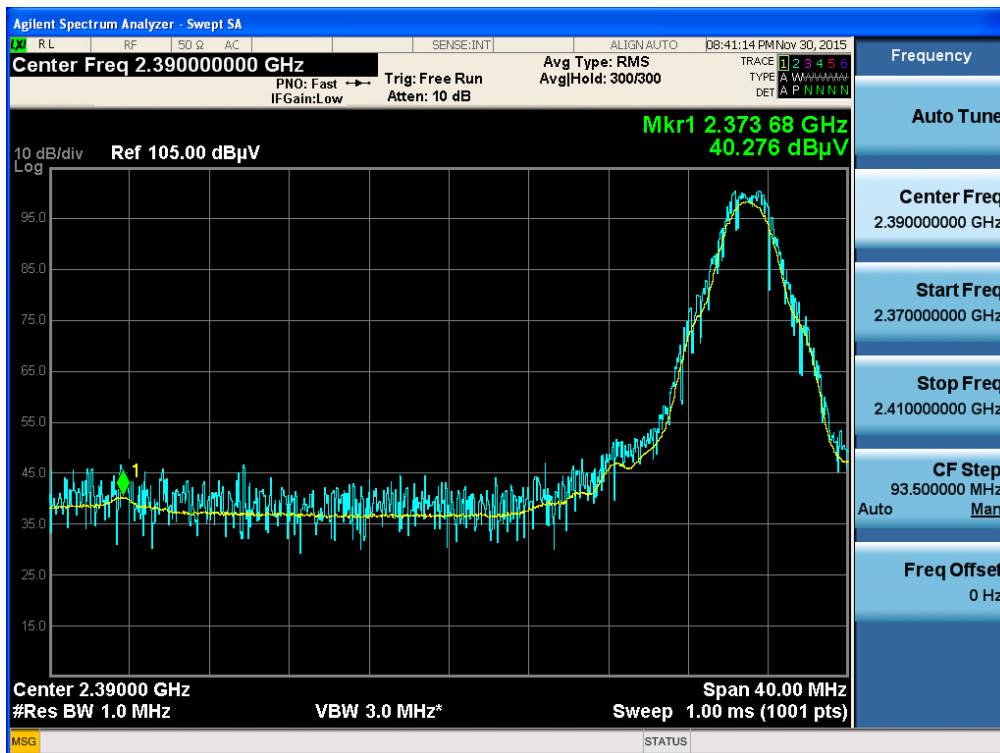


TM 2 & Highest & Edge & X & Hor

Detector Mode : PK

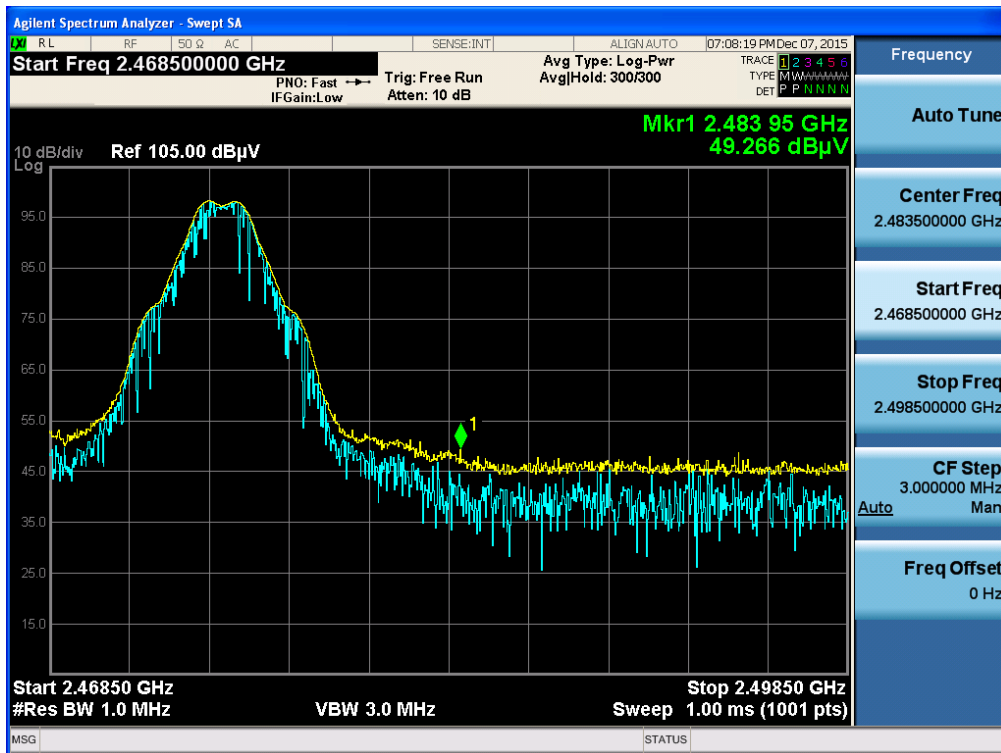

TM 2 & Highest & Edge & X & Hor

Detector Mode : AV

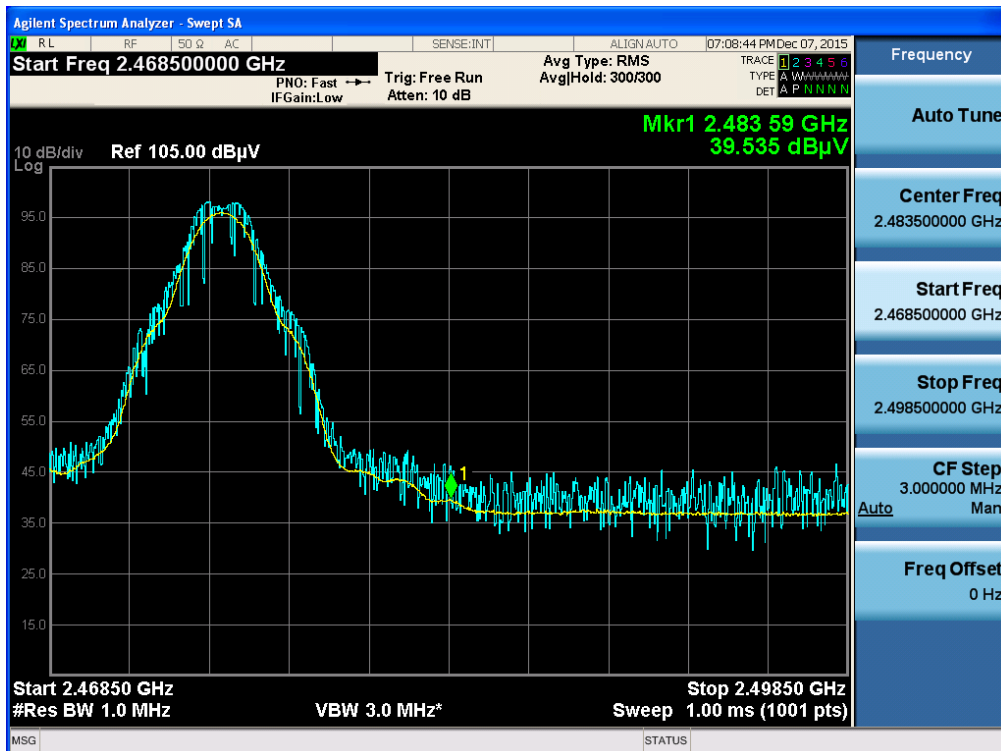


Spurious emission.(Plot of radiated)

Note: Attached plot of worst data.(Least margin)

The offset was not include in test plot.(Reading value) The results refer to the clause 3.5.3.


TM 1 & Middle & Y & Ver

Detector Mode : PK

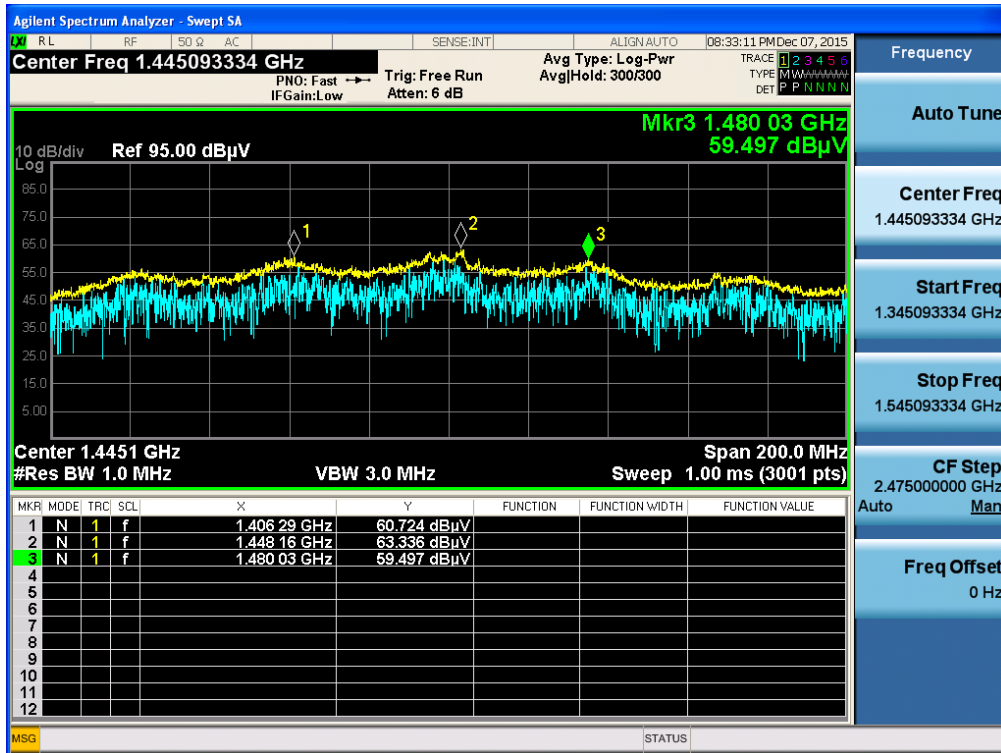


TM 1 & Middle & Y & Ver

Detector Mode : AV

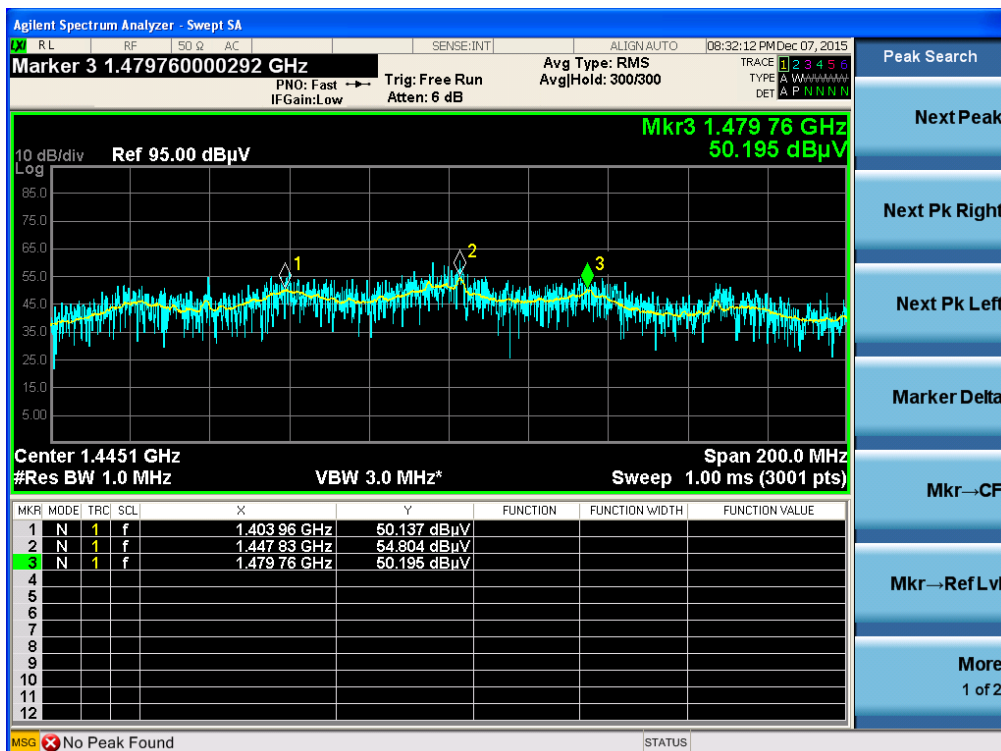

TM 2 & Lowest & Y & Ver

Detector Mode : PK

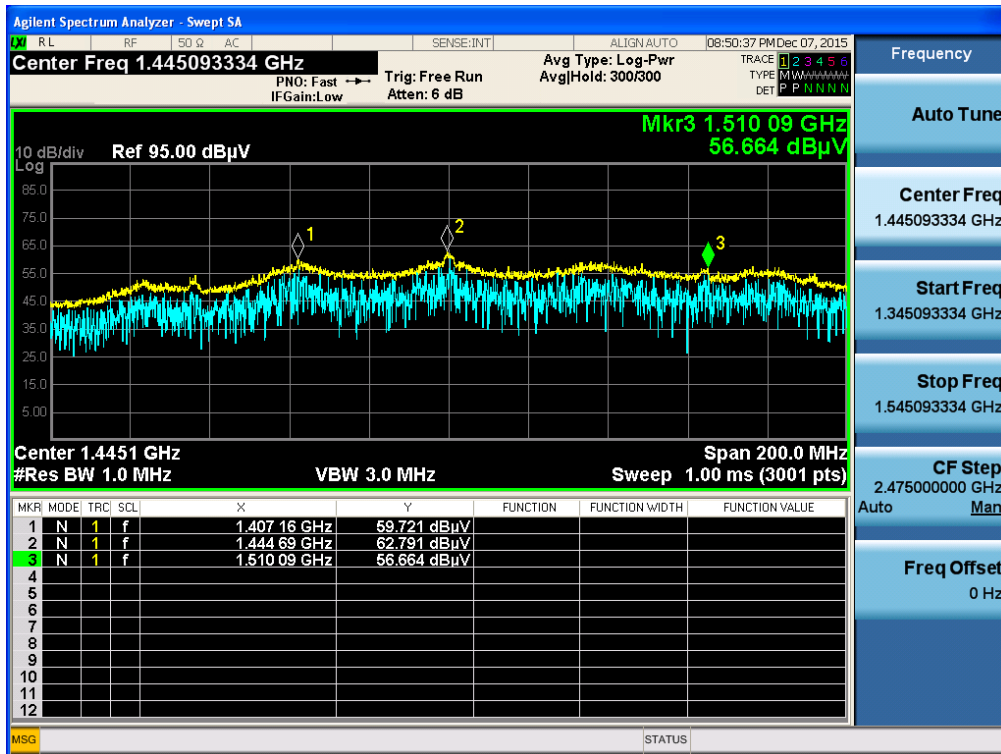

TM 2 & Lowest & Y & Ver

Detector Mode : AV

