

TEST REPORT For FCC

Test Report No. : TK-FR9024

Date of Issue : 12/01/2009

Description of Product : Lingo Next Generation

Model No. : Basic-D

Applicant : **PPW Ltd.**
B/D 4F, 126-5, Cheongdam-Dong, Gananam-Gu
Seoul, Korea


Manufacturer : **URND**
3F. 714. Gasan-dong, Geumcheon-gu, Seoul, Korea

Standards : FCC Part 15 Subpart C §15.247

Test Date : 11/20/2009 ~ 12/01/2009

Test Results : PASS FAIL

The test results relate only to the items tested.

Tested by: 
Kyu-Chul Shin
Test Engineer
Date: 12/01/2009

Reviewed by: 
KT Kang
Technical Manager
Date: 12/01/2009

THRU-KES CO.,LTD.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun Kyunggi-Do, 469-803, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

TABLE OF CONTENTS

| | | |
|--|---|----|
| 1.0 | General Product Description | 3 |
| 1.1 | Tested Frequency | 3 |
| 1.2 | Model Differences | 4 |
| 1.3 | Device Modifications | 4 |
| 1.4 | Peripheral Devices | 4 |
| 1.5 | Calibration Details of Equipment Used for Measurement | 5 |
| 1.6 | Test Facility..... | 5 |
| 2.0 | Summary of tests..... | 6 |
| 2.1 | Technical Characteristic Test | 7 |
| 2.1.1 | 6dB Bandwidth - 15.247(a)..... | 7 |
| 2.1.2 | Maximum peak Conducted Output Power-15.247(b) | 10 |
| 2.1.3 | Power Spectral Density-15.247(d)..... | 13 |
| 2.1.4 | Band - edge -15.247(d) | 16 |
| 2.1.5 | Field Strength of Emissions 15.209..... | 21 |
| 2.1.6 | AC Conducted Emissions 15.207 | 26 |
| APPENDIX A – Test Equipment Used For Tests | | 29 |

1.0 General Product Description

Equipment model name : Basic-D
Serial number : Prototype
EUT condition : Pre-production, not damaged
Antenna type : Chip antenna Gain 0.7dBi
Frequency Range : 2402MHz ~ 2480MHz
RF output power : -2.80 dBm Peak Conducted
Number of channels : 79
Channel Spacing : 1 MHz
Type of Modulation : GFSK
Power Source : DC 5V

1.1 Tested Frequency

| | LOW | MID | HIGH |
|-----------------|------|------|------|
| Frequency (MHz) | 2402 | 2441 | 2480 |

1.2 Model Differences

Not applicable

1.3 Device Modifications

The following modifications were necessary for compliance:

Not applicable

1.4 Peripheral Devices

| Device | Manufacturer | Model No. | Serial No. | FCC ID or DoC |
|----------|---------------------|-----------------|--------------|---------------|
| EUT | PPW Ltd. | Basic-D | - | - |
| Notebook | F U J I T S U L T D | LIFEBOOK S-5582 | 434230343466 | DoC |
| | | | | |

1.5 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.6 Test Facility(343818)

477-6, Hager-Ri, Yoju-Up, Yoju-Gun Kyunggi-Do,469-803, Korea

2.0 Summary of tests

| FCC Part Section(s) | Parameter | Limit | Test Condition | Status (note 1) |
|---------------------|------------------------------------|-------------------|----------------|-----------------|
| 15.247(a) | 6 dB Bandwidth | > 500kHz | Conducted | C |
| 15.247(b) | Transmitter Output Power | < 1Watt | | C |
| 15.247(d) | Conducted Spurious emission | > 20 dBc | | C |
| 15.247(d) | Band Edge | > 20 dBc | | C |
| 15.247(e) | Transmitter Power Spectral Density | < 8dBm @ 3kHz | | C |
| 15.209 | Field Strength of Harmonics | < 54 dBuV (at 3m) | Radiated | c |
| 15.207 | AC Conducted Emissions | EN 55022 | Line Conducted | C |

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:
- FCC Part 15.247, ANSI C63.4-2003

2.1 Technical Characteristic Test

2.1.1 6dB Bandwidth - 15.247(a)

Procedure:

The bandwidth at 6dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 40 MHz

VBW = 100 kHz (VBW ≥ RBW)

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data:



| Frequency (MHz) | Test Results | |
|-----------------|--------------------------|----------|
| | Measured Bandwidth (MHz) | Result |
| 2402 | 0.660 | Complies |
| 2441 | 0.720 | Complies |
| 2480 | 0.720 | Complies |


- See next pages for actual measured spectrum plots.

Minimum Standard:

6 dB Bandwidth > 500kHz

See next pages for actual measured spectrum plots.

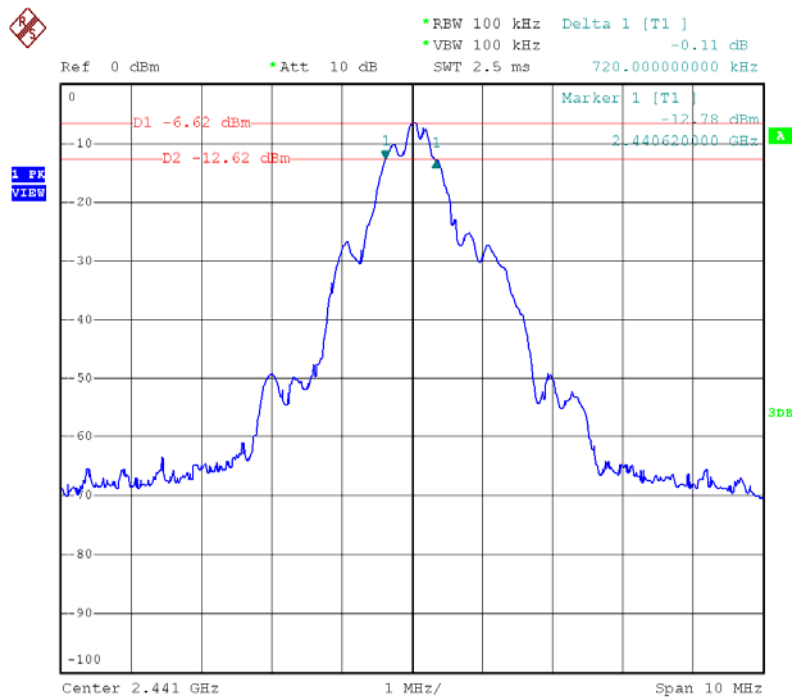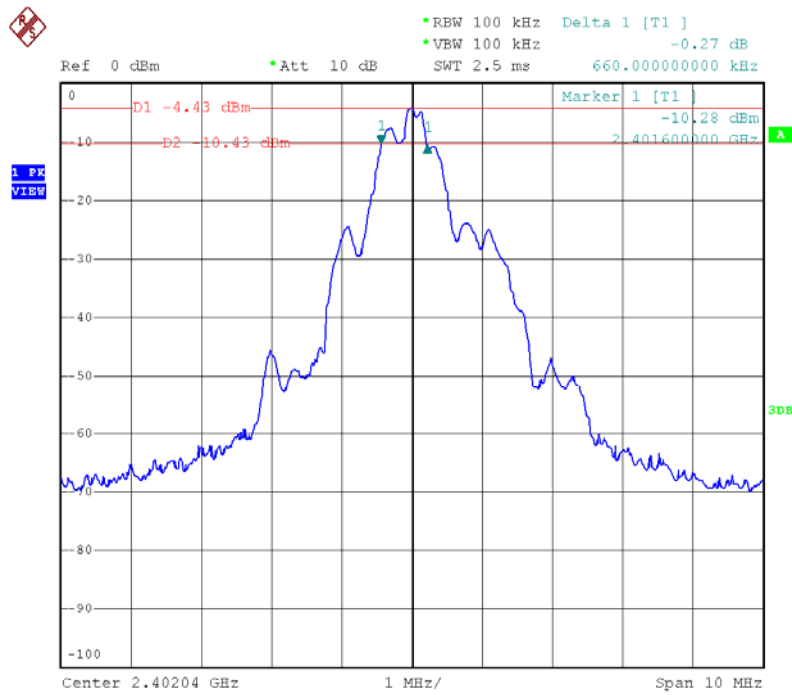

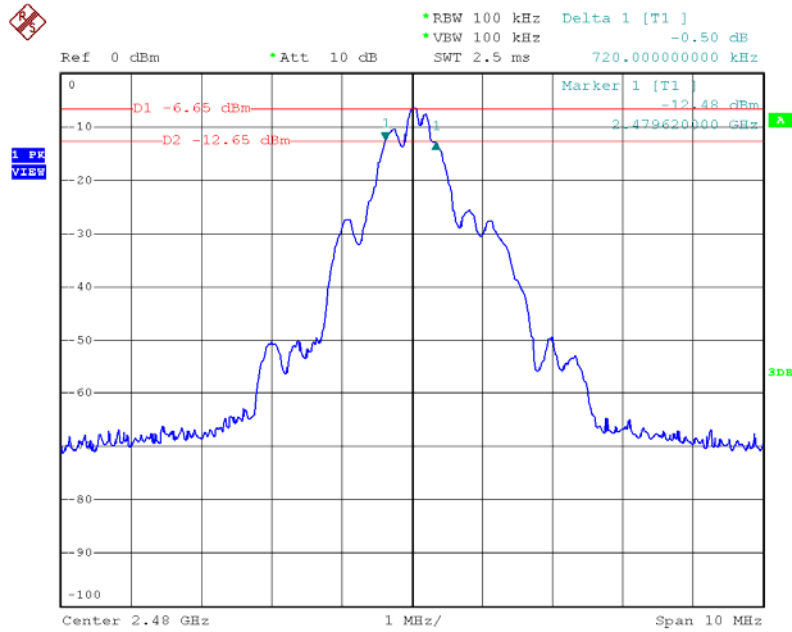

Date: 30.NOV.2009 09:36:20


2.1.2 Maximum peak Conducted Output Power-15.247(b)

Test Location

RF Test Room

Test Procedures

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.



Limit



< 1 W

Test Results


| Frequency (MHz) | Channel No. | Peak output power(dBm) | Limit | Result |
|-----------------|-------------|------------------------|-------|----------|
| 2402 | Low | -2.80 | 30dBm | Complies |
| 2441 | Middle | -4.68 | 30dBm | Complies |
| 2480 | High | -4.84 | 30dBm | Complies |

See next pages for actual measured spectrum plots.

Peak Conducted Output Power

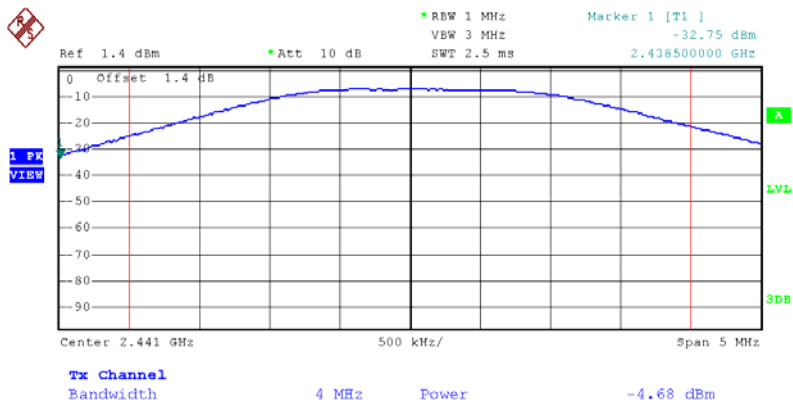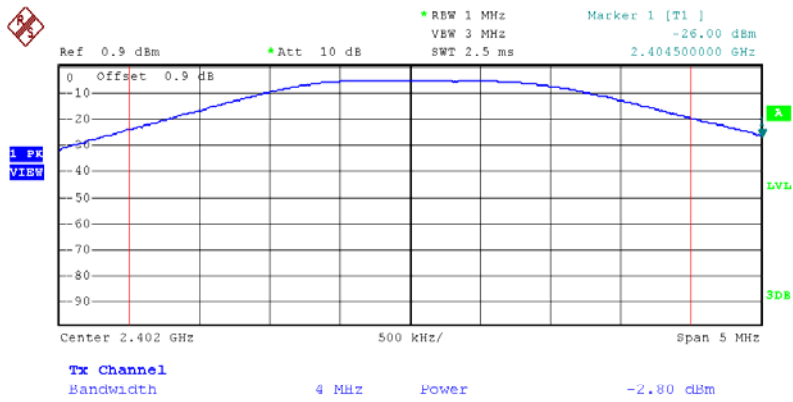

Peak Conducted Output Power

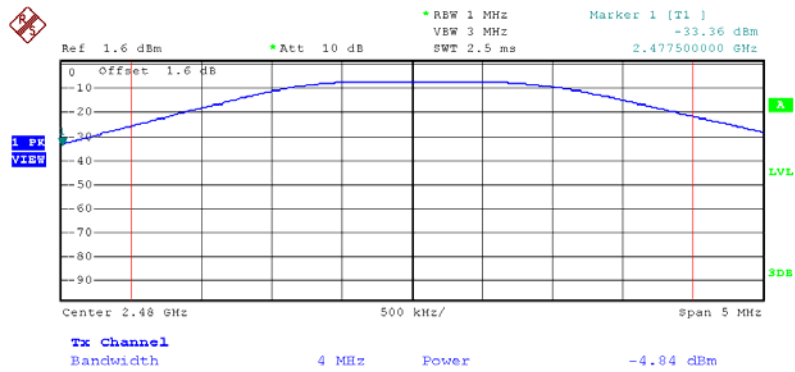

Date: 30.NOV.2009 09:45:50

2.1.3 Power Spectral Density-15.247(e)

Procedure:

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The spectrum analyzer is set to:

| | |
|---------------------------|-------------------|
| RBW = 3 kHz | VBW = (VBW ≥ RBW) |
| Sweep = 100KHz(Span/3KHz) | Span = 300 KHz |
| Detector function = peak | Trace = max hold |

Measurement Data:

| Frequency (MHz) | Ch. | Test Results | |
|-----------------|--------|--------------|----------|
| | | dBm | Result |
| 2402 | Low | -6.74 | Complies |
| 2441 | Middle | -8.82 | Complies |
| 2480 | High | -9.04 | Complies |



- See next pages for actual measured spectrum plots.


Minimum Standard:

| | |
|------------------------|------------------|
| Power Spectral Density | < 8dBm @ 3kHz BW |
|------------------------|------------------|

See next pages for actual measured spectrum plots.

Power Density Measurement

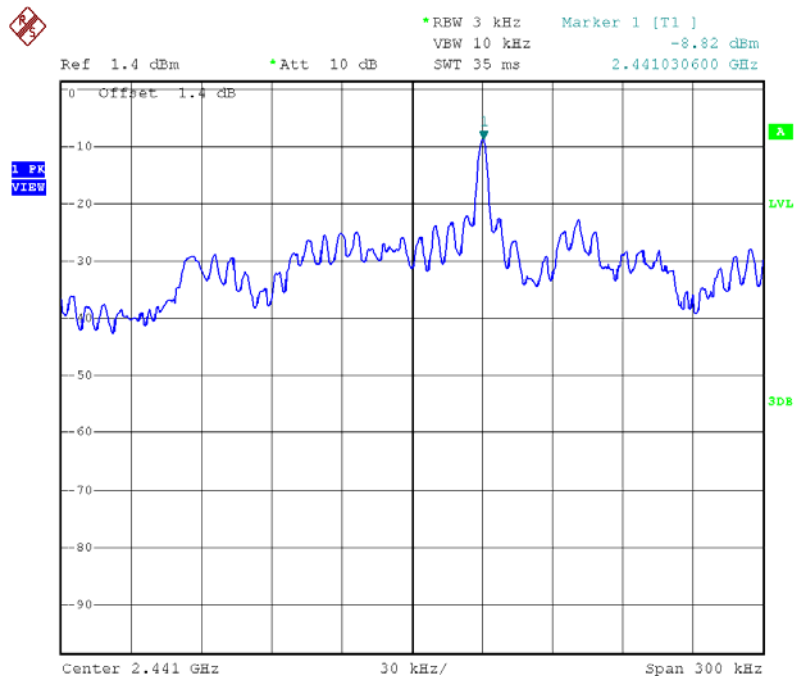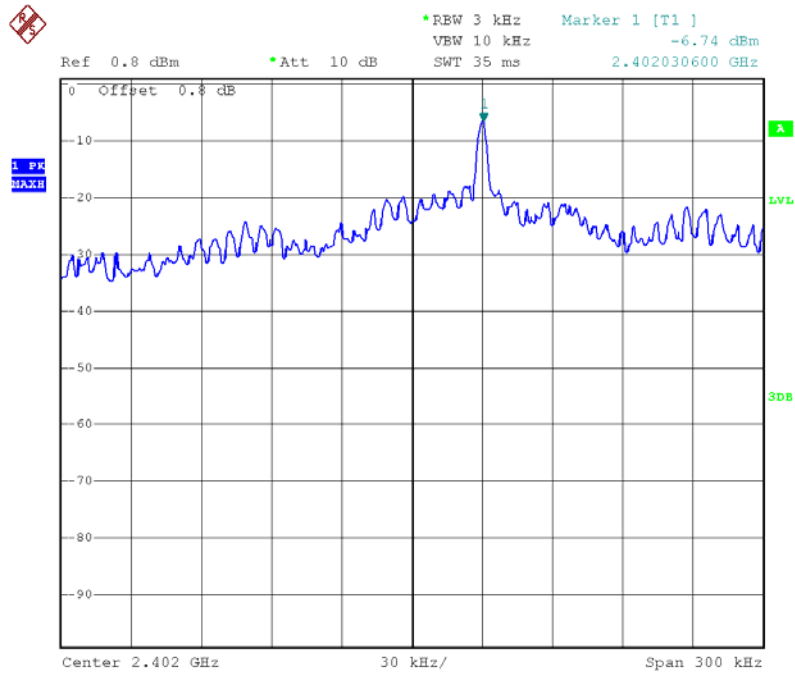

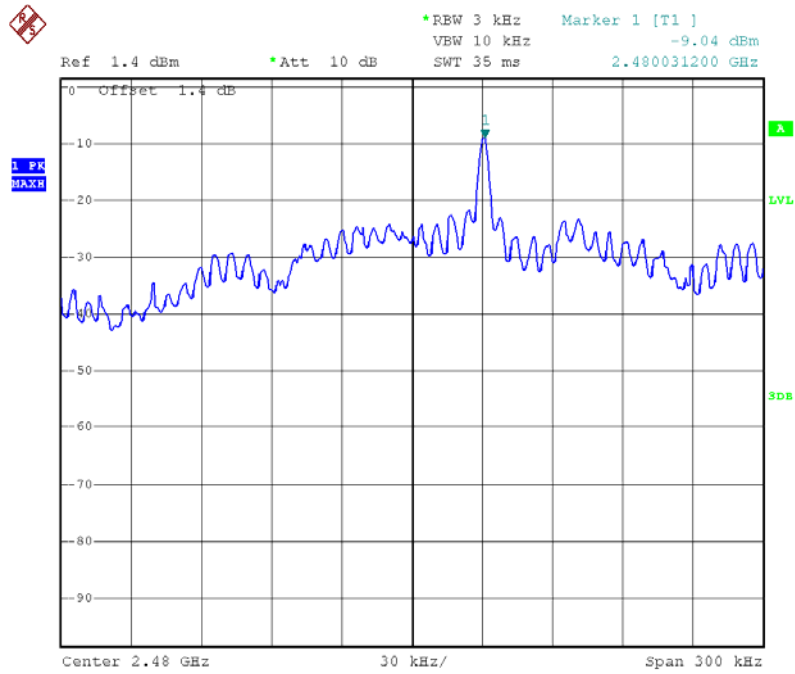

2.1.4 Band - edge -15.247(d)

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 40 MHz

Detector function = peak

Trace = max hold

Sweep = auto



Measurement Data: Complies

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.


| | |
|--------------------------|----------|
| Minimum Standard: | > 20 dBc |
|--------------------------|----------|

See next pages for actual measured spectrum plots.


Band-edge Measurements

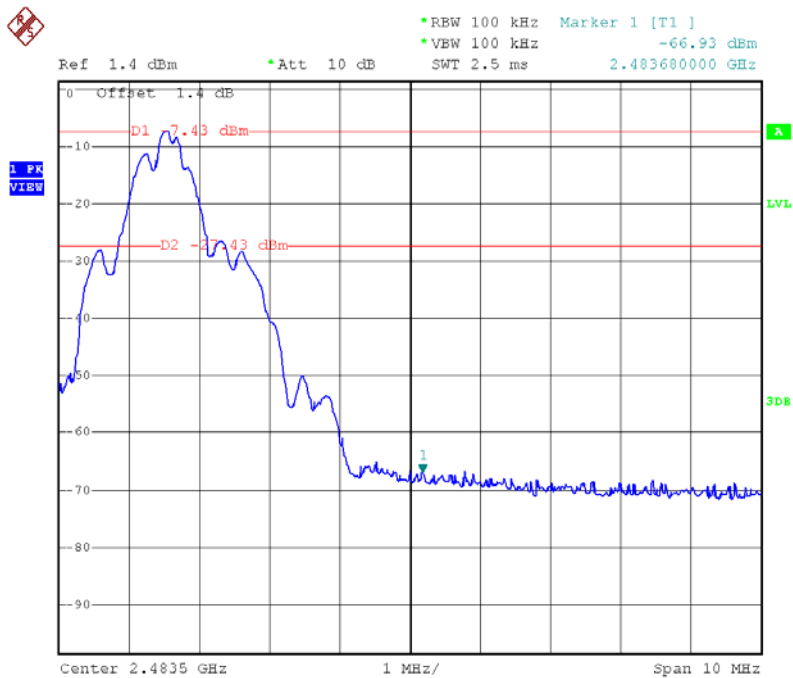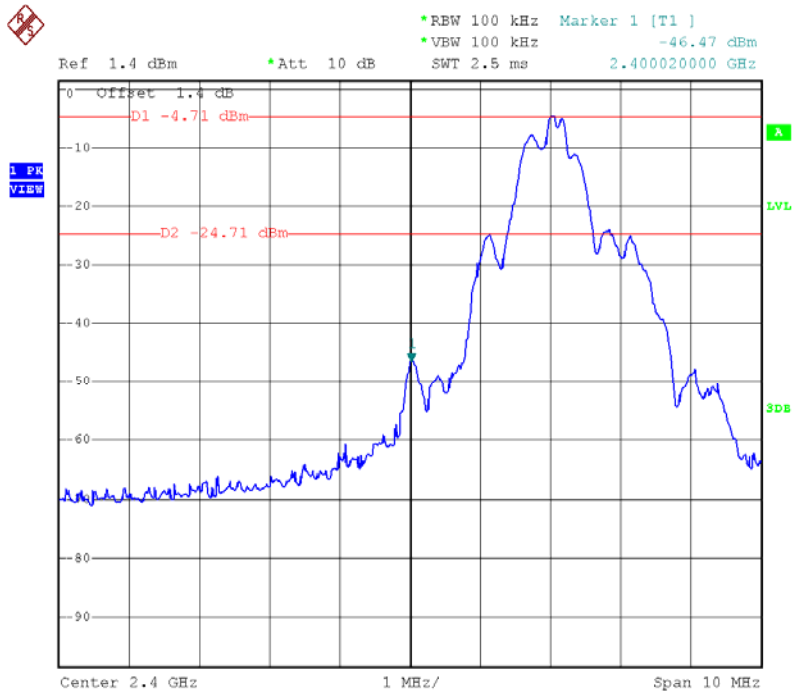


Band – edge (at 20 dB blow) – Low channel
Frequency Range = 30 MHz ~ 10th harmonic

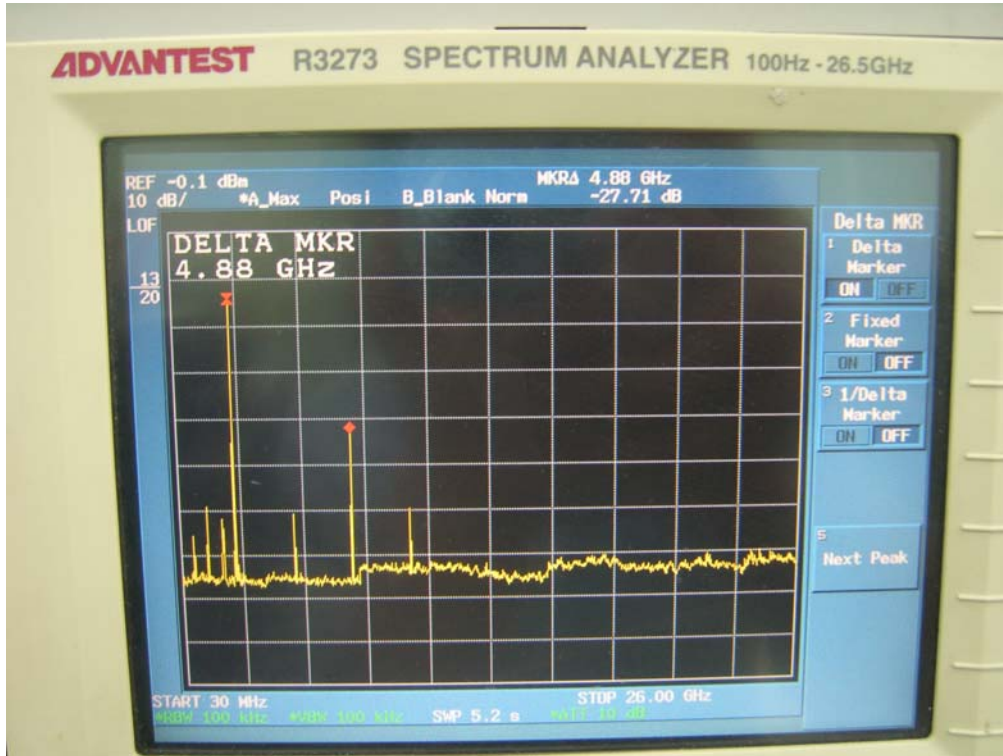

Band – edge (at 20 dB blow) – Mid channel
Frequency Range = 30 MHz ~ 10th harmonic

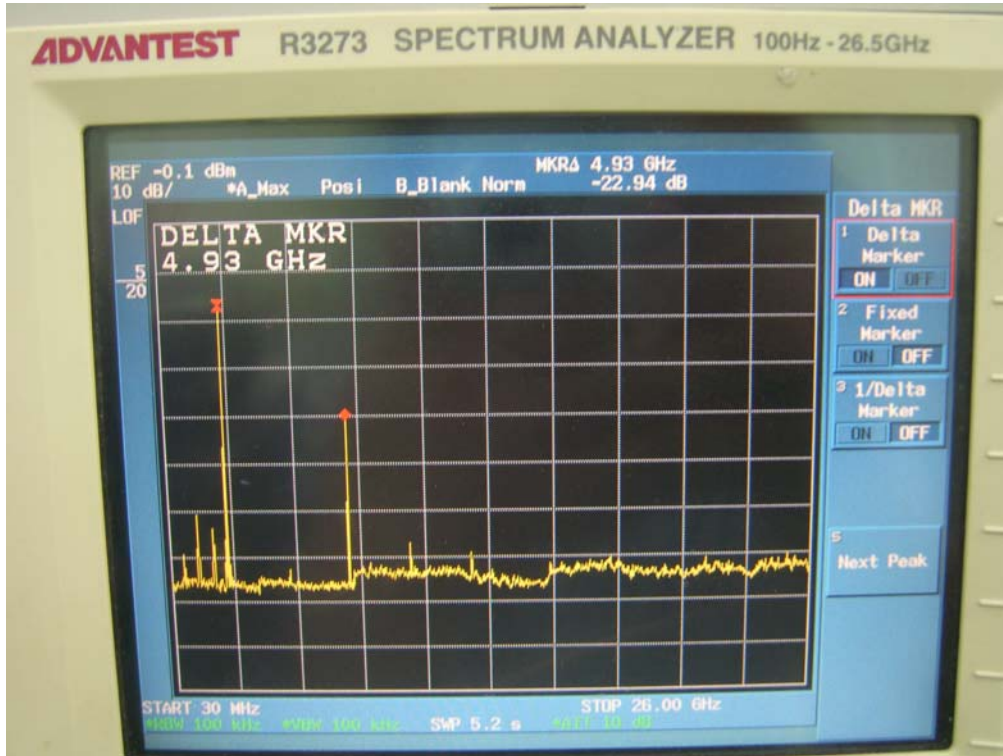

Band – edge (at 20 dB blow) – High channel
Frequency Range = 30 MHz ~ 10th harmonic

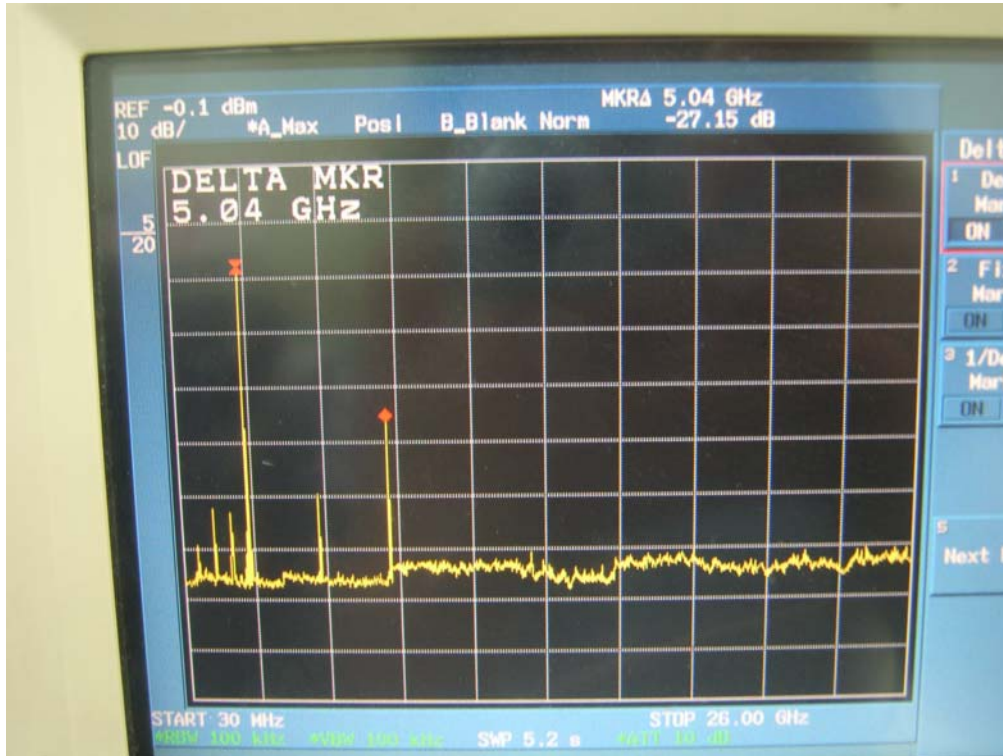

2.1.5 Field Strength of Emissions 15.209

Test Location

Testing was performed at a test distance of 3 meter Open Area Test Site

Test Procedures

The height of the measuring antenna was varied between 1 to 4 m and the table was rotated a full revolution in order to obtain maximum values of the electric field intensity. The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

The spectrum analyzer is set to:


Below 1GHz :

RBW=100KHz/VBW=300KHz/Sweep=AUTO

Above 1GHz:

(a) PEAK:RBW=VBW=1MHz/Sweep=AUTO

(b) AVERAGE:RBW=1MHz/VBW=10Hz/Sweep=AUTO

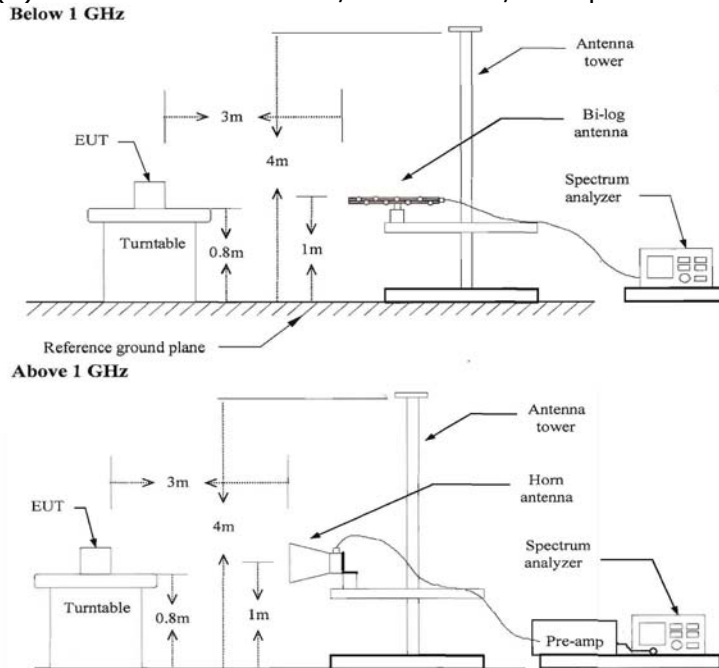

Limit

- 15.209(a)

| Frequency(MHz) | Field Strength uV/m@3m | Field Strength dBuV/m@3m |
|----------------|------------------------|--------------------------|
| 30-88 | 100** | 40 |
| 88-216 | 150** | 43.5 |
| 216-960 | 200** | 46 |
| Above 960 | 500 | 54 |

** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Test Results

| | | | |
|---------|-----------------------|--------------------|---------------|
| EUT | LINGO Next Generation | Measurement Detail | |
| Model | Basic-D | Frequency Range | Below 1000MHz |
| Channel | - | Detector function | Quasi-Peak |

The requirements are:

Complies

| Frequency (MHz) | Measured Data (dBUV/m) | Margin (dB) | Remark |
|-----------------|------------------------|-------------|------------|
| 960.00 | 41.0 | 5.0 | Quasi-Peak |

Test Data

| No | Emission Frequency (MHz) | Meter Reading dBUV/m | Ant. Polarity | Correction Factor dB | Cable Loss dB | Field Strength (dBUV/m) | Margin (dBuv) | Limit (dBUV/m) |
|----|--------------------------|----------------------|---------------|----------------------|---------------|-------------------------|---------------|----------------|
| 1 | 78.00 | 16.6 | V | 9.6 | 3.0 | 29.2 | 10.8 | 40.0 |
| 2 | 144.00 | 14.1 | H | 13.8 | 2.6 | 30.5 | 13.0 | 43.5 |
| 3 | 299.90 | 21.4 | V | 12.8 | 3.3 | 37.5 | 8.5 | 46.0 |
| 4 | 373.00 | 17.2 | H | 14.3 | 3.8 | 35.3 | 10.7 | 46.0 |
| 5 | 600.70 | 14.6 | V | 18.3 | 4.3 | 37.2 | 8.8 | 46.0 |
| 6 | 780.10 | 14.7 | H | 20.6 | 5.1 | 40.4 | 5.6 | 46.0 |
| 7 | 901.30 | 13.5 | H | 21.6 | 5.6 | 40.8 | 5.2 | 46.0 |
| 8 | 960.00 | 13.2 | V | 22.2 | 5.7 | 41.0 | 5.0 | 46.0 |

Note : 15.109. Radiated emission for Digital device is proceeded by Declaration of Conformity procedure.

Test Results

| | | | |
|---------|-----------------------|--------------------|--------------|
| EUT | LINGO Next Generation | Measurement Detail | |
| Model | Basic-D | Frequency Range | 1-25GHz |
| Channel | Low | Detector function | Average/Peak |

The requirements are:

Complies

| Frequency (MHz) | Measured Data (dBuV/m) | Margin (dB) | Remark |
|-----------------|------------------------|-------------|--------------|
| - | - | - | Average/Peak |

Test Data

| Frequency [MHz] | Reading A/P [dBuV/m] | Pol. | Height [m] | Correction Factor | | | Limits/ Detector A/P [dBuV/m] | Result A/P [dBuV/m] |
|--|----------------------------|------|---------------|----------------------|----------|-------|--|---------------------------|
| | | | | Antenna | Amp.Gain | Cable | | |
| No emissions were detected at a level greater than 20dB below limit. | | | | | | | | |

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

| Frequency [MHz] | Reading [dBuV/m] | Pol. | Height [m] | Correction Factor | | | Limits [dBuV/m] | Result [dBuV/m] |
|--|---------------------|------|---------------|----------------------|--------------|-------|--------------------|--------------------|
| | | | | Antenna | Amp. Gain | Cable | | |
| No emissions were detected at a level greater than 20dB below limit. | | | | | | | | |

Test Results

| | | | |
|---------|-----------------------|--------------------|--------------|
| EUT | LINGO Next Generation | Measurement Detail | |
| Model | Basic-D | Frequency Range | 1-25GHz |
| Channel | Middle | Detector function | Average/Peak |

The requirements are:

Complies

| Frequency (MHz) | Measured Data (dBuV/m) | Margin (dB) | Remark |
|-----------------|------------------------|-------------|--------------|
| - | - | - | Average/Peak |

Test Data

| Frequency [MHz] | Reading A/P [dBuV/m] | Pol. | Height [m] | Correction Factor | | | Limits/ Detector A/P [dBuV/m] | Result A/P [dBuV/m] |
|--|----------------------------|------|---------------|----------------------|-----------|-------|--|---------------------------|
| | | | | Antenna | Amp. Gain | Cable | | |
| No emissions were detected at a level greater than 20dB below limit. | | | | | | | | |

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

| Frequency [MHz] | Reading [dBuV/m] | Pol. | Height [m] | Correction Factor | | | Limits [dBuV/m] | Result [dBuV/m] |
|--|---------------------|------|---------------|----------------------|-----------|-------|--------------------|--------------------|
| | | | | Antenna | Amp. Gain | Cable | | |
| No emissions were detected at a level greater than 20dB below limit. | | | | | | | | |

Test Results

| | | | |
|---------|-----------------------|--------------------|--------------|
| EUT | LINGO Next Generation | Measurement Detail | |
| Model | Basic-D | Frequency Range | 1-25GHz |
| Channel | High | Detector function | Average/Peak |

The requirements are:

Complies

| Frequency (MHz) | Measured Data (dBuV/m) | Margin (dB) | Remark |
|-----------------|------------------------|-------------|--------------|
| - | - | - | Average/Peak |

Test Data

| Frequency [MHz] | Reading A/P [dBuV/m] | Pol. | Height [m] | Correction Factor | | | Limits/ Detector A/P [dBuV/m] | Result A/P [dBuV/m] |
|---|----------------------------|------|---------------|----------------------|----------|-------|--|---------------------------|
| | | | | Antenna | Amp.Gain | Cable | | |
| No emissions were detected at a level greater than 20dB below limit | | | | | | | | |

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

| Frequency [MHz] | Reading [dBuV/m] | Pol. | Height [m] | Correction Factor | | | Limits [dBuV/m] | Result [dBuV/m] |
|--|---------------------|------|---------------|----------------------|--------------|-------|--------------------|--------------------|
| | | | | Antenna | Amp. Gain | Cable | | |
| No emissions were detected at a level greater than 20dB below limit. | | | | | | | | |

2.1.6 AC Conducted Emissions 15.207

Test Location

Shielded Room

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

| Frequency (MHz) | Conducted Limit (dBuV) | |
|-----------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 ~ 0.5 | 66 to 56* | 56 to 46* |
| 0.5 ~ 5 | 56 | 46 |
| 5 ~ 30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

Test Results



The requirements are:

Complies

| Frequency (MHz) | Measured Data (dBuV/m) | Margin (dB) | Remark |
|-----------------|------------------------|-------------|------------|
| 0.15 | 48.25 | 5.77 | Quasi-Peak |

Test Data

| Frequency [MHz] | Correction Factor | | Line | Quasi-peak | | | Average | | |
|--------------------|-------------------|-------|------|------------|---------|--------|---------|---------|--------|
| | LISN | Cable | | Limit | Reading | Result | Limit | Reading | Result |
| 0.150 | 0.08 | 0.10 | H | 56.0 | 48.07 | 48.25 | 46.0 | 28.59 | 28.77 |
| 0.150 | 0.12 | 0.10 | N | 56.0 | 50.01 | 50.23 | 46.0 | 30.61 | 30.83 |
| 0.357 | 0.05 | 0.10 | H | 56.0 | 37.89 | 38.04 | 46.0 | 26.64 | 26.79 |
| 0.363 | 0.06 | 0.10 | N | 56.0 | 38.11 | 38.27 | 46.0 | 27.79 | 27.95 |
| 0.495 | 0.05 | 0.10 | H | 56.0 | 32.82 | 32.97 | 46.0 | 13.25 | 13.40 |
| 0.495 | 0.05 | 0.10 | N | 56.0 | 34.26 | 34.41 | 46.0 | 16.10 | 16.25 |
| 0.840 | 0.05 | 0.04 | N | 56.0 | 38.48 | 38.57 | 46.0 | 21.74 | 21.83 |
| 1.431 | 0.06 | 0.03 | H | 56.0 | 38.77 | 38.86 | 46.0 | 20.35 | 20.44 |
| 1.875 | 0.06 | 0.01 | H | 56.0 | 36.63 | 36.70 | 46.0 | 19.24 | 19.31 |
| 2.142 | 0.07 | 0.04 | N | 56.0 | 39.69 | 39.80 | 46.0 | 20.46 | 20.57 |
| 2.145 | 0.06 | 0.04 | H | 56.0 | 40.85 | 40.95 | 46.0 | 22.82 | 22.92 |
| 3.000 | 0.08 | 0.10 | N | 56.0 | 36.98 | 37.16 | 46.0 | 17.93 | 18.11 |
| 6.798 | 0.17 | 0.09 | H | 60.0 | 29.81 | 30.07 | 50.0 | 17.60 | 17.86 |
| 8.661 | 0.27 | 0.02 | H | 60.0 | 28.44 | 28.73 | 50.0 | 23.08 | 23.37 |
| 8.661 | 0.28 | 0.02 | N | 60.0 | 28.16 | 28.46 | 50.0 | 21.74 | 22.04 |
| 15.033 | 0.56 | 0.10 | N | 60.0 | 28.15 | 28.81 | 50.0 | 19.46 | 20.12 |
| 15.456 | 0.52 | 0.10 | H | 60.0 | 27.49 | 28.11 | 50.0 | 18.98 | 19.60 |
| 24.006 | 1.13 | 0.12 | N | 60.0 | 27.15 | 28.40 | 50.0 | 24.30 | 25.55 |

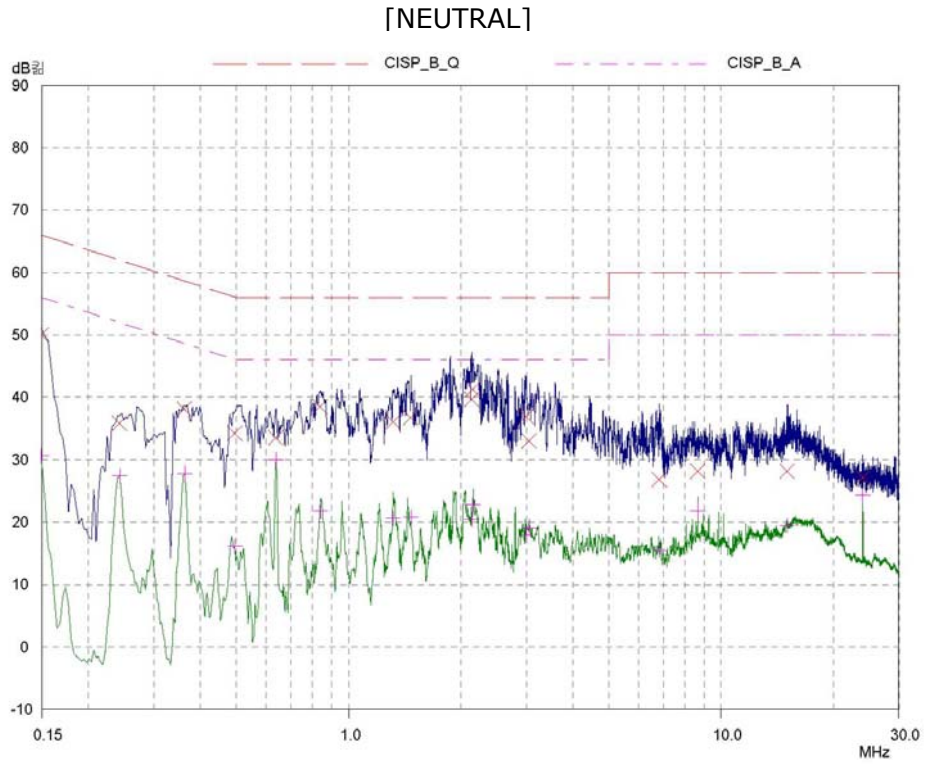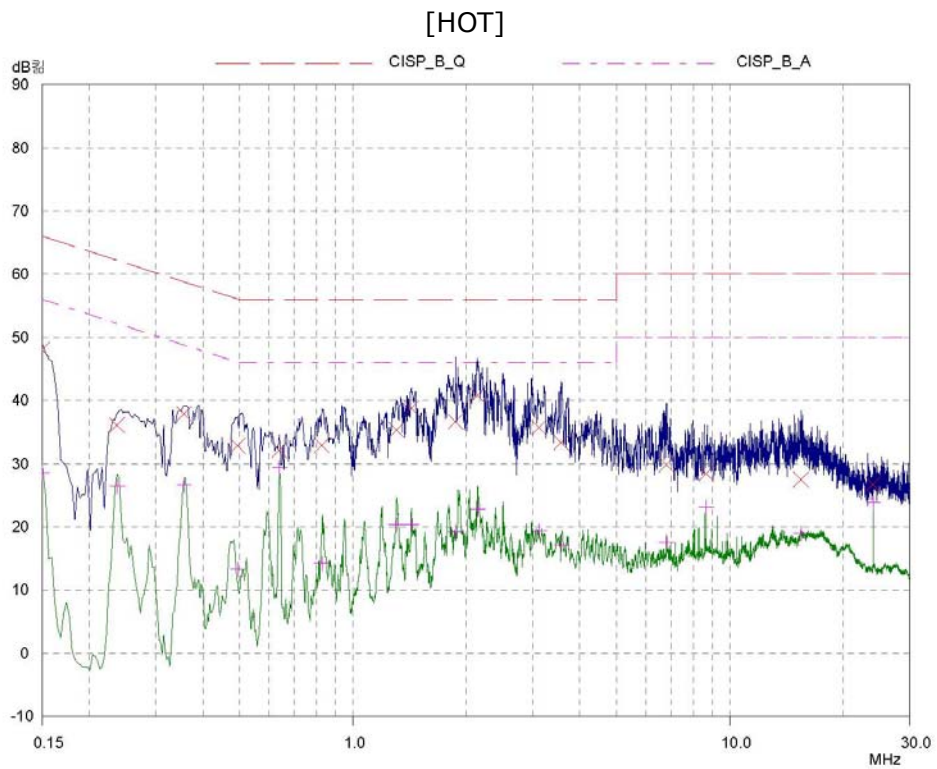

APPENDIX A – Test Equipment Used For Tests

| No | Description | Manufacturer | Model No. | Serial No. | Due Cal. |
|----|----------------------|------------------|---------------------|------------|----------------|
| 1 | Test Receiver | Rohde & Schwarz | ESHS 10 | 862970/018 | 2010.06.1 |
| 2 | Test Receiver | Rohde & Schwarz | ESVS 10 | 826008/014 | 2010.05.2 |
| 3 | Spectrum Analyzer | Hewlett Packard | 8566B | 2311A02394 | 2010.05.1 |
| 4 | Spectrum Analyzer | Rohde & Schwarz | FSP13 | 100130 | 2010.05.1 |
| 5 | Modulation Analyzer | Hewlett Packard | 8901B | 3438A05094 | 2010.05.1 |
| 6 | Audio analyzer | Hewlett Packard | 8903B | 3011A12915 | 2010.05.1 |
| 7 | Preamplifier | Hewlett Packard | 8447F | 2805A02570 | 2010.05.1 |
| 8 | Preamplifier | A.H. Systems | PAM-0118 | 164 | 2010.04.1 |
| 9 | Signal Generator | Hewlett Packard | 8673D | 2708A00448 | 2010.05.1 |
| 10 | Power Meter | Hewlett Packard | 437B | 312U24787 | 2010.04.2 |
| 11 | Power Sensor | Hewlett Packard | 8482B | 3318A06943 | 2010.05.1 |
| 12 | Loop Antenna | Rohde & Schwarz | HFH2-Z2.335.4711.52 | 826532/006 | 2011.02.0 |
| 13 | Dipole Antenna | Rohde & Schwarz | VHAP | 574 | 2010.07.0 |
| 14 | Dipole Antenna | Rohde & Schwarz | VHAP | 575 | 2010.07.1 |
| 15 | Dipole Antenna | Rohde & Schwarz | UHAP | 545 | 2010.07.1 |
| 16 | Dipole Antenna | Rohde & Schwarz | UHAP | 546 | 2010.07.0 |
| 17 | Biconical Antenna | Eaton Corp. | 94455-1 | 0977 | 2010.07.0 |
| 18 | Biconical Antenna | EMCO | 3104C | 9111-2468 | 2010.07.0 |
| 19 | Log Periodic Antenna | EMCO | 3146 | 2051 | 2010.06.0 |
| 20 | Log Periodic Antenna | EMCO | 3146 | 8901-2320 | 2010.07.0 |
| 21 | Horn Antenna | A.H. Systems | SAS-571 | 414 | 2011.03.1 |
| 22 | LISN | EMCO | 3810/2 | 2228 | 2010.05.1 |
| 23 | Waveform Generator | Hewlett Packard | 33120A | US34001190 | 2010.05.1 |
| 24 | Digital Oscilloscope | Tektronix | TDS 340A | B012287 | 2010.05.1 5 |
| 25 | Dummy Load | Bird Electronics | 8251 | 11511 | 2010.04.1 |

Test Setup Photos and Configuration

Conducted Voltage Emissions



Radiated Electric Field Emissions

