



Prüfbericht-Nr.: <i>Test Report No.:</i>	50129425 001	Auftrags-Nr.: <i>Order No.:</i>	114072120	Seite 1 von 23 Page 1 of 23	
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	5-Dec-2017		
Auftraggeber: <i>Client:</i>	HiTi Digital, Inc. 9F., No. 225, Sec. 3, Beixin Rd., TW-23143 Xindian Dist., New Taipei City, Taiwan,R.O.C.				
Prüfgegenstand: <i>Test item:</i>	HITI X610 PHOTO PRINTER				
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	X610				
Auftrags-Inhalt: <i>Order content:</i>	FCC test report				
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.225				
Wareneingangsdatum: <i>Date of receipt:</i>	15-Jan-2018				
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000670793-001				
Prüfzeitraum: <i>Testing period:</i>	1-Feb-2018 – 5-Feb-2018				
Ort der Prüfung: <i>Place of testing:</i>	EMC/RF Laboratory Taipei				
Prüflaboratorium: <i>Testing laboratory:</i>	TUV Rheinland Taiwan Ltd.				
Prüfergebnis*: <i>Test result*:</i>	Pass				
Report date / tested by:		kontrolliert von / reviewed by:			
2018-03-09	SamC.J. Kuo/Engineer		2018-03-09	Arvin Ho/Vice General Manager	
Datum	Name / Stellung	Unterschrift	Datum	Name / Stellung	Unterschrift
<i>Date</i>	<i>Name / Position</i>	<i>Signature</i>	<i>Date</i>	<i>Name / Position</i>	<i>Signature</i>
Sonstiges / Other:					
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	1 = sehr gut	2 = gut	3 = befriedigend	4 = ausreichend	5 = mangelhaft
	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet	
Legend:	1 = very good	2 = good	3 = satisfactory	4 = sufficient	5 = poor
	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested	
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</p> <p><i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>					

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: *Passed*

5.1.2 FIELD STRENGTH OF FUNDAMENTAL

RESULT: *Passed*

5.1.3 FREQUENCY STABILITY

RESULT: *Passed*

5.1.4 SPURIOUS EMISSION

RESULT: *Passed*

5.1.1 MAINS CONDUCTED EMISSIONS

RESULT: *Passed*

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS.....	4
2.	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY	7
3.	GENERAL PRODUCT INFORMATION.....	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	RATINGS AND SYSTEM DETAILS.....	9
3.3	INDEPENDENT OPERATION MODES.....	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS.....	10
4.	TEST SET-UP AND OPERATION MODES.....	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE.....	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	12
4.5	TEST SETUP DIAGRAM	12
4.6	TEST ENVIRONMENT	13
5.	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	14
<i>5.1.1</i>	<i>Antenna Requirement</i>	<i>14</i>
<i>5.1.2</i>	<i>Field strength of fundamental.....</i>	<i>15</i>
<i>5.1.3</i>	<i>Frequency Stability.....</i>	<i>16</i>
<i>5.1.4</i>	<i>Spurious Emission</i>	<i>17</i>
5.1	MAINS EMISSIONS.....	18
<i>5.1.1</i>	<i>Mains Conducted Emissions.....</i>	<i>18</i>
5.2	PHOTOGRAPHS OF THE TEST SET-UP.....	19
6.	LIST OF TABLES	23
7.	LIST OF PHOTOGRAPHS.....	23

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix P: Photo Documentation

(File Name: 50129425APPENDIXP)

Appendix D: Test Result of Radiated Emissions

(File Name: 50129425APPENDIXD)

Test Specifications

The following standards were applied (in bold: product standards, otherwise: basic standards).

Table 1: Applied Standard and Test Levels

Radio
FCC CFR47 Part 15: Subpart C Section 15.225
ANSI C63.10:2013

2. Test Sites

2.1 Test Facilities

TUV Rheinland Taiwan Ltd.

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

FCC Registration No.: 340738
IC Canada Registration No.: 9465A-1
TAF Accredited NCC Test Lab. No.:0759
TAF ISO17025 Certification effective periods: 2016-Jul-1st to 2019-Jun-30th



Testing Laboratory
0759

2.2 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manu-facturer	Type	S/N	Last Calibration	Next Calibration
Test Software	Farad	EZ_EMG	Ver. TUV3A1	N/A	N/A
EMI Test Receiver	R&S	ESR 7	101549	2017/11/10	2018/11/10
Spectrum Analyzer	R&S	FSV 40	100921	2017/05/02	2018/05/01
Spectrum Analyzer	Agilent	N9010A	MY53470241	2017/05/23	2018/05/22
Preamplifier (30MHz -1GHz)	HP	8447F	2805A03335	2017/08/14	2018/08/14
Preamplifier (18 GHz -40 GHz)	COM-POWER	PAM-840	461257	2018/01/18	2019/01/18
Pre-Amplifier (1GHz~18GHz)	EM Electronics	EM01G18G	60558	2017/11/21	2018/11/21
Bilog Antenna	TESEQ	CBL6111D	29804	2017/08/18	2018/08/18
Horn Antenna	ETS-Lindgren	3117	201918	2017/08/18	2018/08/18
Horn Antenna (18GHz~40GHz)	COM-POWER	AH-840	101029	2017/11/28	2018/11/28
Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	2017/06/14	2018/06/14
EMI Test Receiver	R&S	ESR 7	101549	2017/11/10	2018/11/10
Spectrum Analyzer	R&S	FSL3	101943	2015/09/07	2018/09/07
Temp. & Humid. Chamber	Giant Force	GCT-099-40-S	MAF0103-007	2017/03/09	2019/03/09
LISN (1 phase)	R&S	ENV216	101243	2017/06/18	2018/06/18
LISN	R&S	ENV216	101262	2017/06/22	2018/06/21

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are ± 3 dB.

Table 3: Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	± 1.5 dB
Adjacent channel power	± 3 dB
Radiated emission of transmitter, valid up to 26 GHz	± 6 dB
Radiated emission of receiver, valid up to 26 GHz	± 6 dB
Temperature	± 2 °C
Humidity	± 10 %

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a PHOTO PRINTER, working at 13.56 MHz with RFID function.
For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 Ratings and System Details

Table 4: Basic Information of EUT

Item	EUT information
Kind of Equipment	HITI X610 PHOTO PRINTER
Type Designation	X610
FCC ID	W5388D2635000T

Table 5: Technical Specification of EUT

Technical Specification	Value
Operating Frequency	13.56 MHz
Adapter rating	100-240Vac, 50-60Hz
Modulation	ASK

3.3 Independent Operation Modes

Basic operation modes are:

- A. Transmitting

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum emission level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Setup for testing: Test samples are provided with a special firmware which provides the test modes

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

None.

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

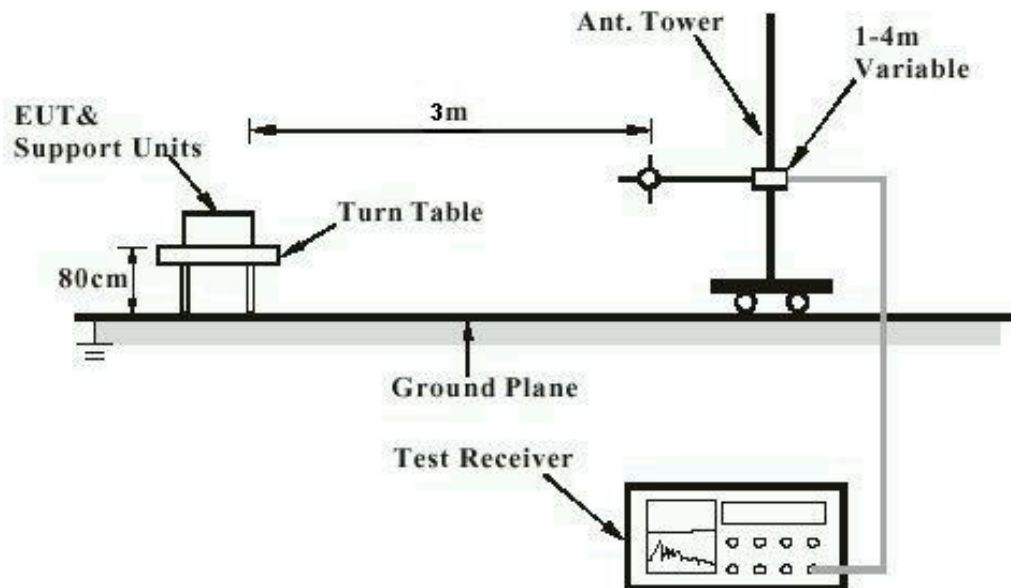
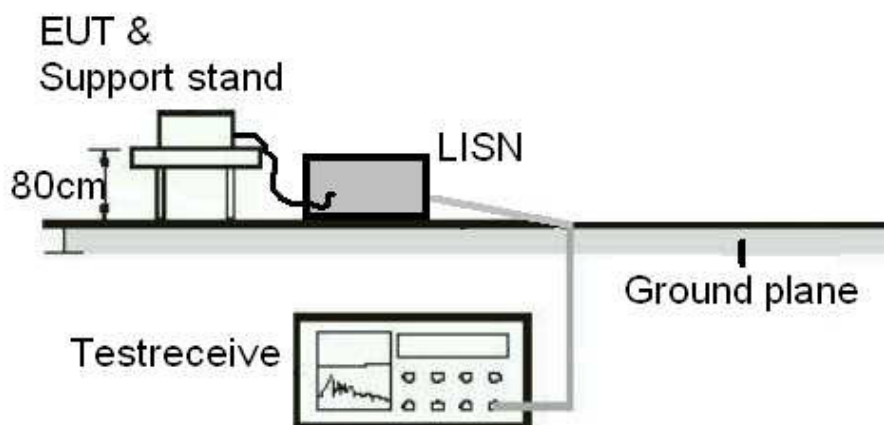


Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)


4.6 Test Environment

Ambient temperature	:	18-25 °C
Relative humidity	:	45-65 %

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Passed**

Standard : LP0002(2018): 2.2
Part 15.203 and RSS-Gen 7.1.4
Requirement : use of approved antennas only

The antenna is Coil inside the enclosure, soldered to the PCB with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

5.1.2 Field strength of fundamental

RESULT: **Passed**

Test standard : LP0002(2018) 3.2
 FCC Part 15. 225
 RSS-210 A2.6

Basic standard : ANSI C63.10:2013

Test setup

Test Frequency : 13.56 MHz
 Operation Mode : A
 Kind of test site : 3m Semi-Anechoic Chamber

Table 6: Test result of Field strength of fundamental and modulation sidebands

Frequency (MHz)	Meas. Result	Detector	Test Result	Limits		Pass/Fail
	dBµV/m @1.2m		dBµV/m @30m	dBµV/m@1.2m	dBµV/m@30m	
13.560	40.7	QP	<40.7	139.9	84	Pass

For details refer to Appendix D.

5.1.3 Frequency Stability

RESULT:
Passed

Test standard : LP0002(2018) 3.2.1.3
 FCC Part 15. 225(e)
 RSS-210 A2.6

Basic standard : ANSI C63.10:2013
 Kind of test site : Shielded room/Conducted room

Test setup

Test Frequency : 13.56 MHz
 Operation Mode : A

Table 7: Test result of Frequency Stability

Frequency Stability Measurement					
Fundamental frequency (MHz)	Temperature (°C)	Voltage	Measurement frequency (MHz)	Frequency Error (ppm)	Limit ±0.01%
13.56	-20	Normal	13.559789	-15.56	±100ppm
	-10	Normal	13.559810	-14.01	
	0	Normal	13.559820	-13.27	
	10	Normal	13.559800	-14.75	
	20	85%	13.559840	-11.80	
	20	Normal	13.559770	-16.96	
	20	115%	13.559795	-15.12	
	30	Normal	13.559750	-18.44	
	40	Normal	13.559720	-20.65	
	50	Normal	13.559700	-22.12	

5.1.4 Spurious Emission

RESULT:**Passed**

Test standard	:	LP0002(2018) 3.2.1.2 FCC part 15.209 FCC part 15.225 RSS-210 A2.6
Basic standard	:	ANSI C63.10: 2013
Limits	:	The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209. RSS-210: 30 microvolts/m (29.5 dB μ V/m) at 30 m, outside the band 13.110-14.010 MHz.
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Operation mode : A

Remark: Testing was carried out within frequency range 30MHz to the tenth harmonic.

For details refer to Appendix D.

The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case orientation is recorded in this test report.

5.1 Mains Emissions

5.1.1 Mains Conducted Emissions

RESULT:**Passed**

Test standard : FCC Part 15.207
FCC Part 15.107
RSS-Gen 8.8
LP0002(2018): 2.3

Limits : Mains Conducted emissions as defined in
above test standards must comply with the
mains conducted emission limits specified

Kind of test site : Shielded Room

Test setup

Test Frequency : 13.56 MHz
Operation mode : A


Remark: For details refer to Appendix D.

5.2 Photographs of the Test Set-Up


Photograph 1: Set-up for Spurious Emissions (Front View)



Photograph 2: Set-up for Spurious Emissions (Back View 1)

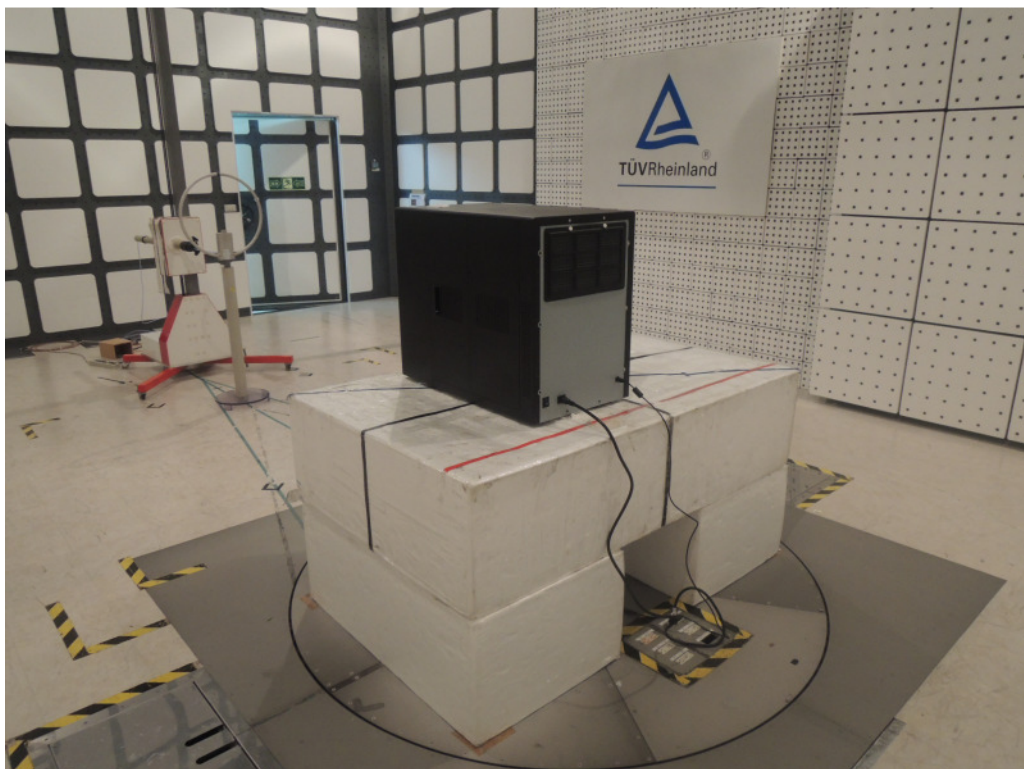

Photograph 3: Set-up for Spurious Emissions (Back View 2)

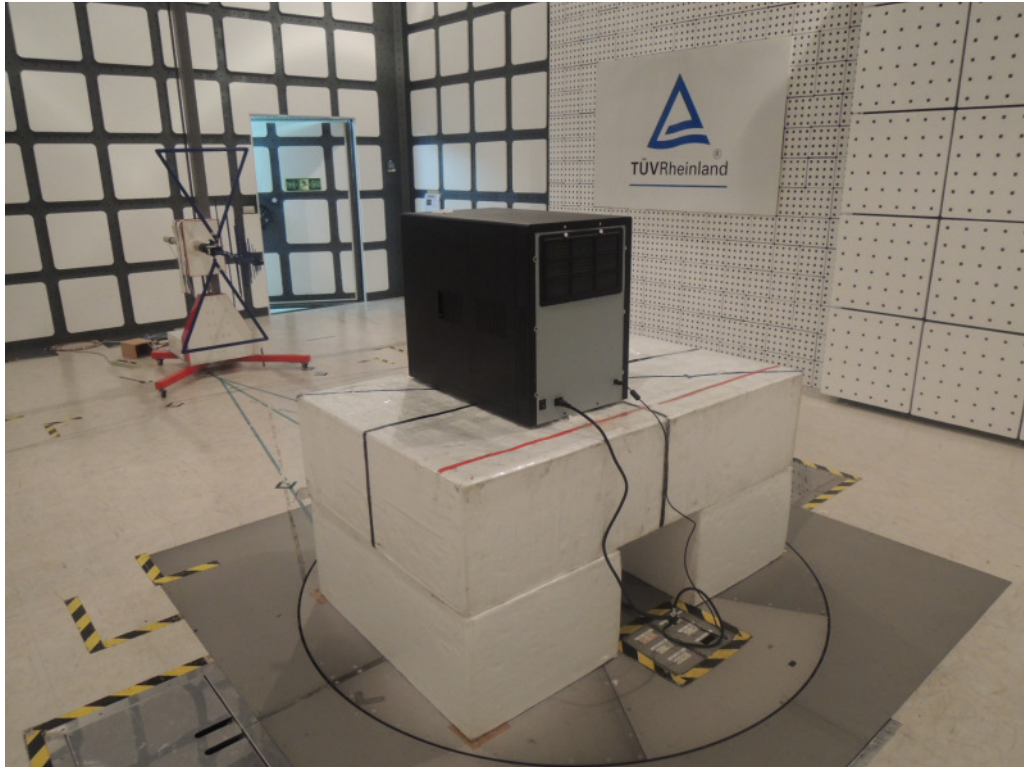

Photograph 4: Set-up for Conducted testing



Photograph 5: Set-up for Conducted testing



Photograph 6: Set-up for Mains Emissions (Front View)



Photograph 7: Set-up for Mains Emissions (Back View)



6. List of Tables

Table 1: Applied Standard and Test Levels	4
Table 2: List of Test and Measurement Equipment	6
Table 3: Emission Measurement Uncertainty.....	7
Table 4: Basic Information of EUT	9
Table 5: Technical Specification of EUT	9
Table 6: Test result of Field strength of fundamental and modulation sidebands.....	15
Table 7: Test result of Frequency Stability	16

7. List of Photographs

Photograph 1: Set-up for Spurious Emissions (Front View).....	19
Photograph 2: Set-up for Spurious Emissions (Back View 1)	19
Photograph 3: Set-up for Spurious Emissions (Back View 2)	20
Photograph 4: Set-up for Conducted testing	20
Photograph 5: Set-up for Conducted testing	21
Photograph 6: Set-up for Mains Emissions (Front View)	22
Photograph 7: Set-up for Mains Emissions (Back View).....	22