

**FCC PART 15 SUBPART C TEST REPORT**

**for**

**TPMS**

**Model No.: TX172**

**FCC ID: W55172DB3N4**

of

Applicant: ORO Technology Co., Ltd.

Address: 3F, NO. 29, 21st Rd., Industrial Park,  
408 Taichung City, TAIWAN, R.O.C.

Tested and Prepared

by

**Worldwide Testing Services (Taiwan) Co., Ltd.**

**FCC Registration No.: TW1477, TW1111, TW1072, TW1110**


**Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1**

**A2LA Accredited No.: 2732.01**



**Report No.: W6M21709-17439-C-1**

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.  
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: [wts@wts-lab.com](mailto:wts@wts-lab.com)




Registration number: W6M21709-17439-C-1  
FCC ID: W55172DB3N4

## **TABLE OF CONTENTS**

1	GENERAL INFORMATION .....	1
1.1	NOTES.....	2
1.2	TESTING LABORATORY .....	3
1.2.1	Location .....	3
1.2.2	Details of accreditation status .....	3
1.3	DETAILS OF APPROVAL HOLDER .....	3
1.4	APPLICATION DETAILS.....	4
1.5	TEST ITEM.....	4
1.6	TEST STANDARDS .....	4
2	TECHNICAL TEST .....	5
2.1	SUMMARY OF TEST RESULTS.....	5
2.2	TEST ENVIRONMENT .....	5
2.3	TEST EQUIPMENT UTILIZED.....	6
2.4	GENERAL TEST PROCEDURE.....	9
3	TEST RESULTS (ENCLOSURE) .....	10
3.1	TRANSMISSION REQUIREMENTS .....	11
3.1.1	Limit of Transmission Time.....	11
3.1.2	Results for the duration and silent period measurement.....	11
3.2	OUTPUT POWER (FIELD STRENGTH) .....	14
3.3	OUT OF BAND RADIATED EMISSIONS .....	18
3.4	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS.....	19
3.5	SPURIOUS EMISSION RADIATED, TRANSMITTER.....	20
3.6	CHANNEL BANDWIDTH.....	38
3.7	ANTENNA REQUIREMENT.....	40
3.8	DUTY CYCLE .....	41
3.9	CONDUCTED MEASUREMENT AT (AC) POWER LINE.....	43

Appendix: Photos



Registration number: W6M21709-17439-C-1  
FCC ID: W55172DB3N4

## **1 General Information**

### **1.1 Notes**

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services (Taiwan) Co., Ltd.

### **Tester:**

November 06, 2017

Kent Lin

Date

WTS-Lab.

Name

Signature

### **Technical responsibility for area of testing:**

November 06, 2017


Kevin Wang

Date

WTS

Name

Signature



Registration number: W6M21709-17439-C-1  
FCC ID: W55172DB3N4

## **1.2 Testing laboratory**

### 1.2.1 Location

OATS

No.5-1, Lishui, Shuang Sing Village,  
Wanli Dist., New Taipei City 207,  
Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228

FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068875

### 1.2.2 Details of accreditation status

Accredited testing laboratory


A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. TW1477, TW1111, TW1072, TW1110

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

## **1.3 Details of approval holder**

Name:	ORO Technology Co., Ltd.
Street:	3F, NO. 29, 21st Rd., Industrial Park,
Town:	408 Taichung City,
Country:	TAIWAN, R.O.C.
Telephone:	04-23593549
Fax:	04-23593650



Registration number: W6M21709-17439-C-1  
FCC ID: W55172DB3N4

## **1.4 Application details**

Date of receipt of test item: October 03, 2017  
Date of test: from October 03, 2017 to November 03, 2017

## **1.5 Test item**

Description of test item: TPMS  
Type identification: TX172  
Brand name: ORO  
Multi-listing model number: ./.  
Transmitting frequency: 315 MHz, 433.92 MHz  
Operation mode: Simplex  
Voltage supply: Battery 3 VDC (CR2050B)  
Antenna type: Monopole antenna  
Photos: see Annex


### **Manufacturer (if applicable)**

Name: ./.  
Street: ./.  
Town: ./.  
Country: ./.

Additional information: ./.

## **1.6 Test standards**

Technical standard : FCC RULES PART 15 SUBPART C § 15.231 (e) (2016-10)



Registration number: W6M21709-17439-C-1  
FCC ID: W55172DB3N4

## **2 Technical test**

### **2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests performed.


**or**

The deviations as specified in 3 were ascertained in the course of the tests performed.

### **2.2 Test environment**

Temperature: 23 °C  
Relative humidity content: 20 ... 75 %  
Air pressure: 86 ... 103 kPa  
Details of power supply: Battery 3 VDC (CR2050B)


Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Emission	Expanded Uncertainty : 0.74 dB
Estimation Result of Uncertainty of Radiated Emission(3M)	Expanded Uncertainty : 0.009-30 MHz : 2.17 dB 30-1000 MHz : 3.30 dB 1-18 GHz : 2.28 dB 18-40 GHz : 2.19 dB
Estimation Result of Uncertainty of Bandwidth Measurement 20 dB Bandwidth, Occupied bandwidth, Channel bandwidth, Necessary Bandwidth	Expanded Uncertainty : 0.45 kHz
Estimation Result of Uncertainty of Frequency Drift Measurement Frequency stability	Expanded Uncertainty : 6.09 Hz
Estimation Result of Uncertainty of Band Edge Measurement	Expanded Uncertainty : 0.98 dBc



Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

## 2.3 Test equipment utilized

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2017/5/26	2018/5/25
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2017/10/12	2018/10/11
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2017/8/22	2018/8/21
ETSTW-CE 008	HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2017/7/14	2018/7/13
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2017/8/31	2018/8/30
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2017/7/11	2018/7/10
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2017/5/26	2018/5/25
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2017/5/17	2018/5/16
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2017/8/25	2018/8/24
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2017/7/4	2018/7/3
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2017/7/3	2018/7/2
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2017/3/22	2018/3/21
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2017/2/7	2018/2/6
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2017/4/10	2018/4/9
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2017/4/27	2018/4/26
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2017/3/1	2018/2/28
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2017/3/1	2018/2/28
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2017/3/1	2018/2/28
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2017/3/1	2018/2/28
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2017/3/1	2018/2/28
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2017/4/12	2018/4/11
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2017/9/11	2018/9/10
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2017/9/19	2018/9/18
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2017/4/6	2018/4/5
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2017/3/1	2018/2/28




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2017/1/12	2018/1/11
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Function test	
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2017/5/26	2018/5/25
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2017/8/9	2018/8/8
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2017/8/9	2018/8/8
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2017/3/1	2018/2/28
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2017/8/9	2018/8/8
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2017/8/9	2018/8/8
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2017/4/12	2018/4/11
ETSTW-RE 147	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04005	ETC	2017/3/22	2018/3/21
ETSTW-RE 151	Thermohyrometer	608-h1	45104376	TESTO	2017/8/30	2018/8/29
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2017/5/10	2018/5/9
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2017/2/24	2018/2/23
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2017/2/10	2018/2/9
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2016/12/15	2017/12/14
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2017/1/12	2018/1/11
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2017/1/12	2018/1/11
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2017/1/12	2018/1/11
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2017/1/12	2018/1/11
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2017/9/13	2018/9/12
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test Use NCR	
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2017/2/23	2018/2/22
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2017/2/23	2018/2/22
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2017/2/23	2018/2/22
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2017/2/23	2018/2/22
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2017/7/3	2018/7/2
ETSTW-Cable 022	N TYPE Cable	5006	0002	JYE BAO CO.,LTD.	2017/4/6	2018/4/5
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2017/3/1	2018/2/28
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2017/5/12	2018/5/11
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2017/9/7	2018/9/6
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2017/9/7	2018/9/6
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S Cable 9)	279067	HUBER+SUHNER	2017/3/1	2018/2/28
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S Cable 10)	238092	HUBER+SUHNER	2017/4/12	2018/4/11
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2017/4/12	2018/4/11
ETSTW-Cable 048	Microwave Cable	SUCOFLEX 104	325519	HUBER+SUHNER	2017/4/12	2018/4/11






# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1

FCC ID: W55172DB3N4

ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2017/2/20	2018/2/19
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2017/4/12	2018/4/11
ETSTW-Cable 066	SMA type cable	32022	None	ASTROLAB	2017/8/31	2018/8/30
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM- NM-25000	170239	EMCI	2017/2/20	2018/2/19
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	



Registration number: W6M21709-17439-C-1  
FCC ID: W55172DB3N4

## **2.4 General Test Procedure**

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was ANSI STANDARD C63.10-2013 6.3 using a spectrum analyzer. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was the 100 kHz and the video bandwidth was 300 kHz.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:


Freq (MHz)      METER READING + ACF + CABLE LOSS (to the receiver) = FS  
33                      20 dB $\mu$ V + 10.36 dB/m + 6 dB = 36.36 dB $\mu$ V/m @3m

**ANSI STANDARD C63.10-2013 6.2.2 MEASUREMENT PROCEDURES:** The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table). The EUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10<sup>th</sup> harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

**ANSI STANDARD C63.10-2009 B.2.7:** Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.




Registration number: W6M21709-17439-C-1  
FCC ID: W55172DB3N4

**3 Test results (enclosure)**

1st test                       test after modification                       production test

TEST CASE	Para. Number	Required	Test passed	Test failed
Transmission Requirements	FCC 15.231(e)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Emission	FCC 15.231(e)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Bandwidth of Emission	FCC 15.231(c)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Frequency Tolerance	FCC 15.231(d)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Period Alternate Field Strength Requirements	FCC 15.231(e)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Antenna Requirement	FCC 15.203	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Conducted Measurement at (AC) Power Line	FCC 15.207	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**The following is intentionally left blank.**



Registration number: W6M21709-17439-C-1  
FCC ID: W55172DB3N4

## 3.1 Transmission Requirements

FCC 15.231(e)

### 3.1.1 Limit of Transmission Time


Devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

### 3.1.2 Results for the duration and silent period measurement


This manually operated transmitter employs software to control the duration of each transmission and silent period between transmissions. The real measured result for the duration of each transmission is \_\_\_\_\_ms, and the result for silent period between transmissions is \_\_\_\_\_second.

315 MHz


This transmitter is operated by automatic activation, and the duration of each transmission and silent period between transmissions will be controlled by software. The real measured result for the duration of each transmission is 8.814103 ms, and the result for silent period between transmissions is 27.820513 second.

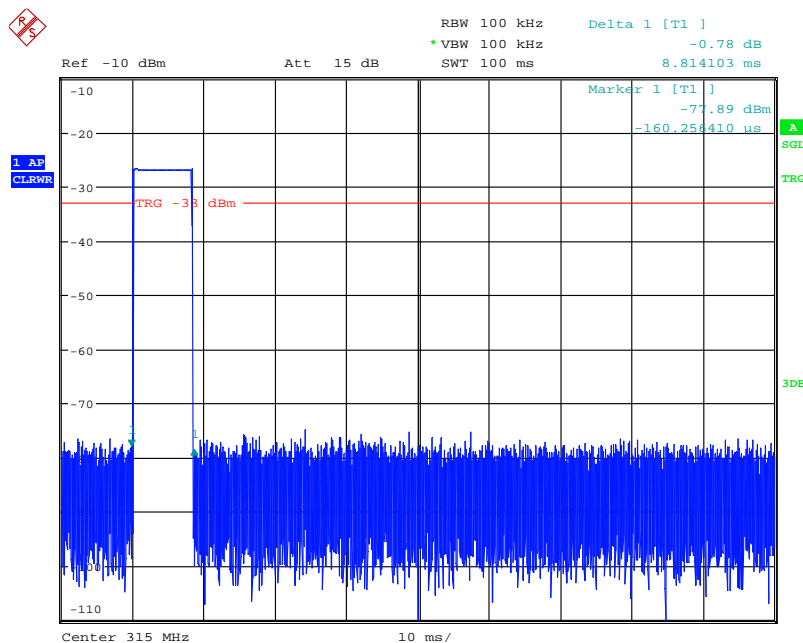

Date: 3.OCT.2017 20:42:48




Registration number: W6M21709-17439-C-1  
FCC ID: W55172DB3N4

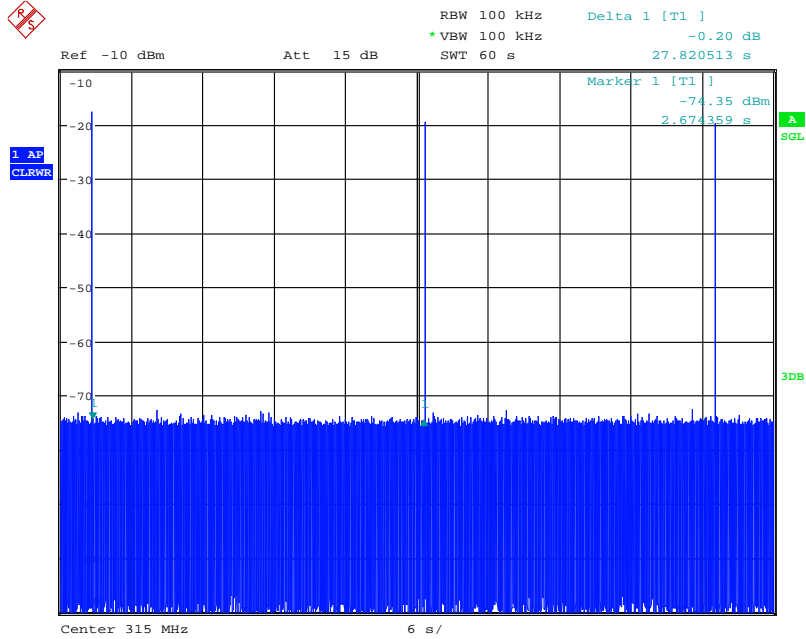


Date: 3.OCT.2017 20:33:33

433.92 MHz


This transmitter is operated by automatic activation, and the duration of each transmission and silent period between transmissions will be controlled by software. The real measured result for the duration of each transmission is 8.814103 ms, and the result for silent period between transmissions is 27.724359 second.

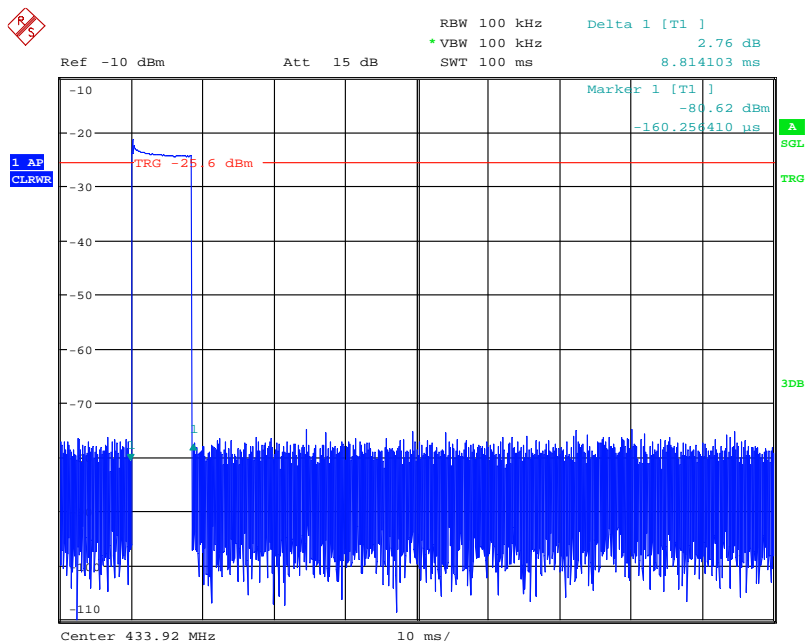

Date: 3.OCT.2017 20:41:30




Registration number: W6M21709-17439-C-1  
FCC ID: W55172DB3N4

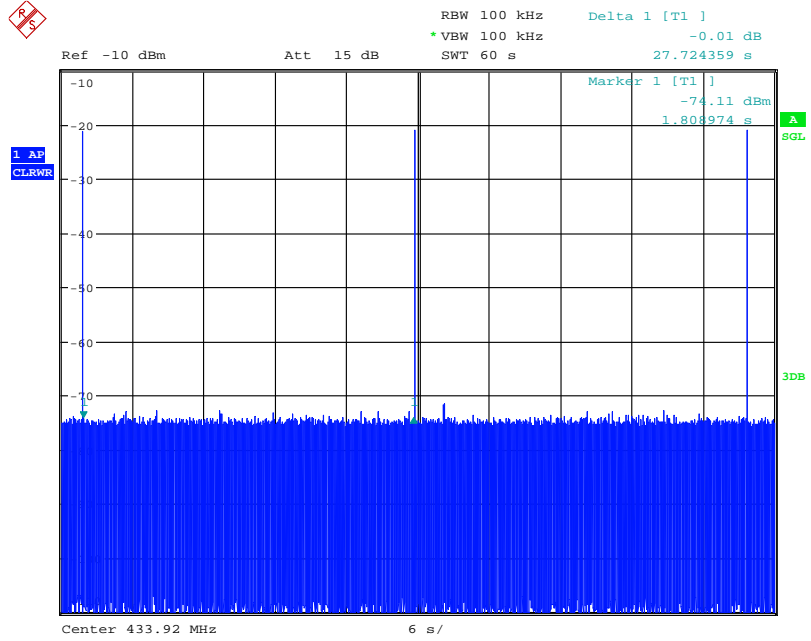

Date: 3.OCT.2017 20:40:23

Test equipment used : ETSTW-RE 004 ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147



Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

## 3.2 Output Power (Field Strength)

Radiated Emission Measurement

Operator: Leon

File :power  
 110.0 dBuV/m


Data :#1

Date: 2017/10/13

Temperature:24 °C

Time: 下午 05:15:12

Humidity:60 %

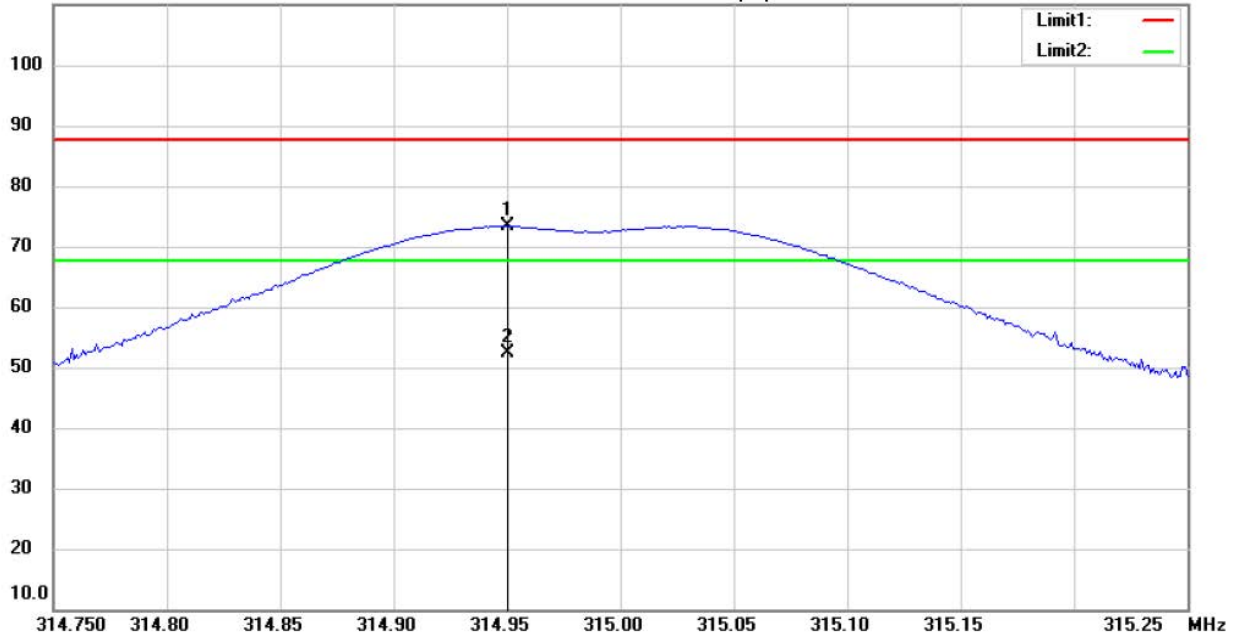

Site : Chamber

Condition : FCC 15.231(315MHz)Power(PK)<e>

Polarization: *Horizontal*

EUT : W6M21709-17439

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 315MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	314.9504	51.58	peak	21.82	73.40	87.66	100	0	-14.26	
	314.9504	30.48	AVG	21.82	52.30	67.66	100	0	-15.36	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

## Radiated Emission Measurement

Operator: Leon

File :power  
 110.0 dBuV/m


Data :#2

Date: 2017/10/13

Temperature:24 °C

Time: 下午 05:19:08

Humidity:60 %

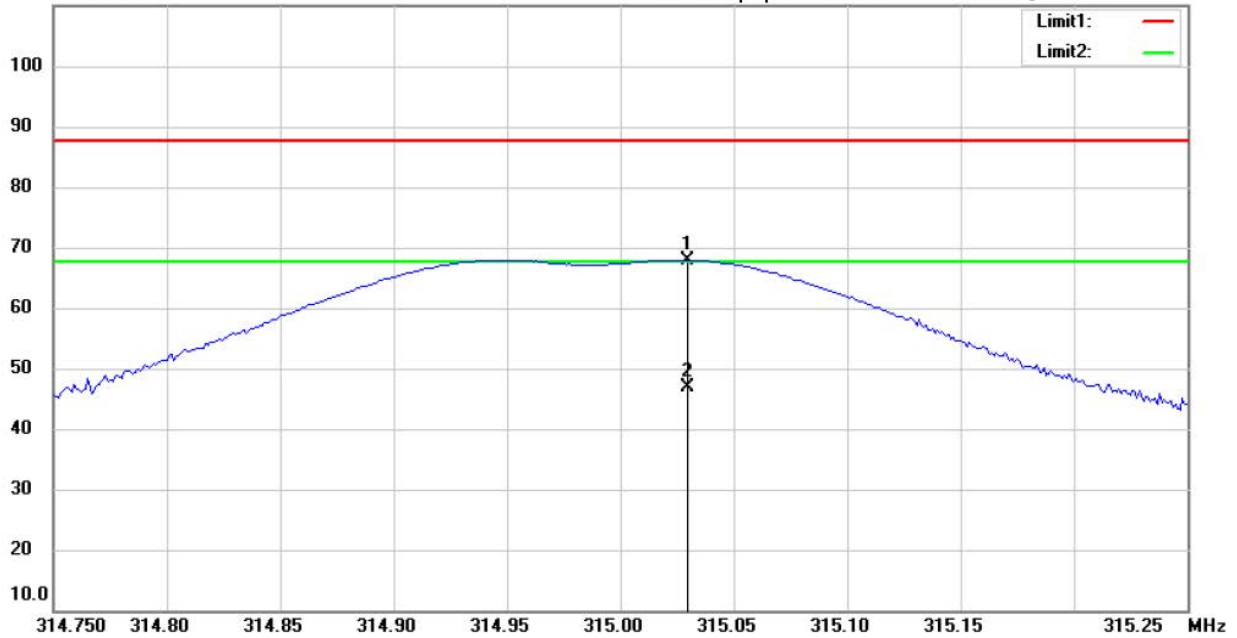

Site : Chamber

Condition : FCC 15.231(315MHz)Power(PK)<e>

Polarization: *Vertical*

EUT : W6M21709-17439

Power : 3 Vd.c.

M/N:


Distance: 3m

Test Mode : TX 315MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	315.0295	46.17	peak	21.82	67.99	87.66	190	15	-19.67	
	315.0295	25.07	AVG	21.82	46.89	67.66	190	15	-20.77	





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4


### Radiated Emission Measurement

Operator: Leon  
 Temperature: 24 °C  
 Humidity: 60 %

File :power  
 110.0 dBuV/m

Data :#1

Date: 2017/10/13  
 Time: 下午 05:09:45

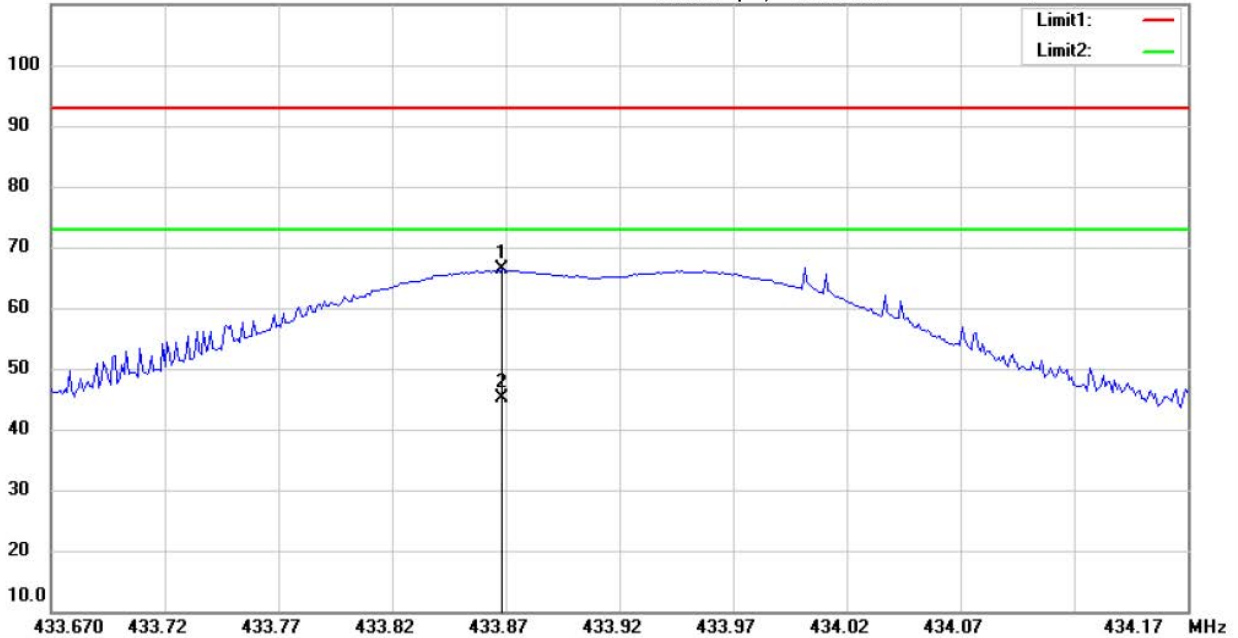

Site : Chamber

Condition : FCC 15.231(433MHz)Power(PK)<e>

Polarization: *Horizontal*

EUT : W6M21709-17439

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 433.92MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	433.8684	41.47	peak	24.82	66.29	92.80	200	40	-26.51	
	433.8684	20.37	AVG	24.82	45.19	72.80	200	40	-27.61	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
FCC ID: W55172DB3N4

## Radiated Emission Measurement

Operator: Leon

File :power  
110.0 dBuV/m


Data :#2

Date: 2017/10/13

Temperature:24 °C

Time: 下午 05:12:14

Humidity:60 %

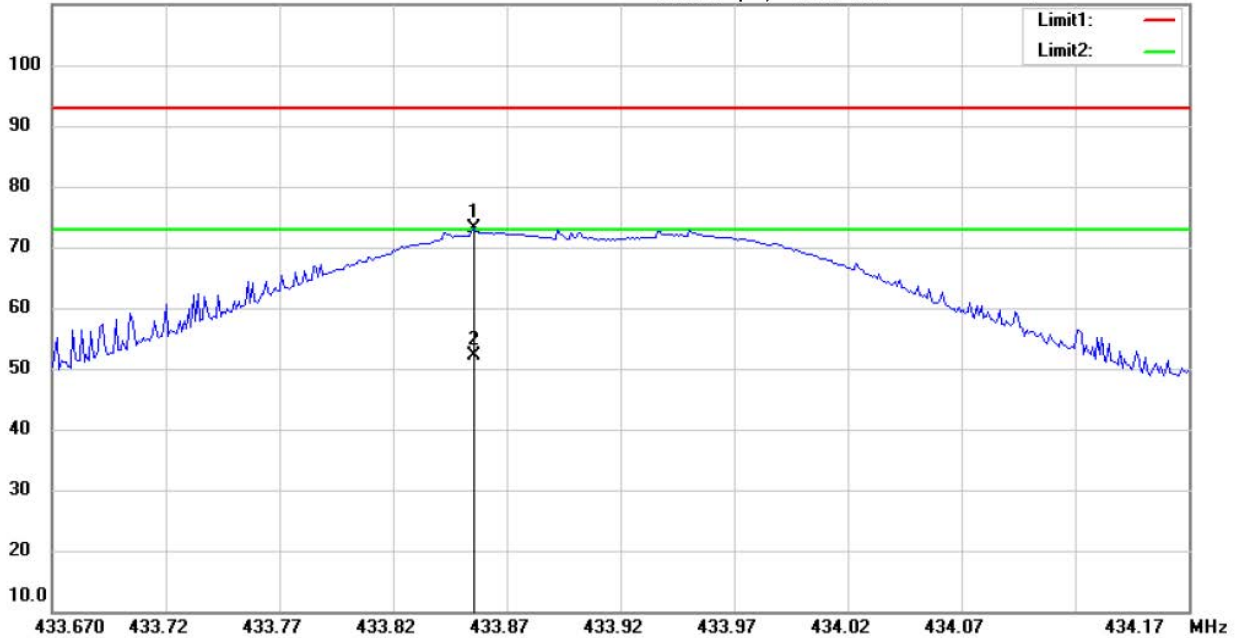

Site : Chamber

Condition : FCC 15.231(433MHz)Power(PK)<e>

Polarization: *Vertical*

EUT : W6M21709-17439

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 433.92MHz

Note :


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	433.8554	48.30	peak	24.82	73.12	92.80	150	360	-19.68	
	433.8553	27.20	AVG	24.82	52.02	72.80	150	360	-20.78	

Limit 15.231(e)

Fundamental Frequency (MHz)	Field strength of fundamental, limit $\mu\text{V/m}$
40.66 – 40.70	1,000
70 – 130	500
130 – 174	500 to 1,500
174 – 260	1,500
260 – 470	1,50 to 50,000** (315 MHz: 67.66 dB $\mu\text{V/m}$ = 2416.677 $\mu\text{V/m}$ ) (433.92 MHz: 72.87 dB $\mu\text{V/m}$ = 4398.681 $\mu\text{V/m}$ )
Above 470	5,000

\*\* linear interpolation

Test equipment used: ETSTW-RE 004, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147



Registration number: W6M21709-17439-C-1  
FCC ID: W55172DB3N4

### **3.3 Out of Band Radiated Emissions**

FCC Rule: 15.231(e) , 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Guidance on Measurement of pulsed emission: 15.35(c)

“the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.”

Duty Cycle correction =  $20 \log (\text{dwell time}/100\text{ms or one period})$

Limits:

For frequencies (Average measurements)

Correction factor conform 15.35 (c) (Average measurements)

Duty cycle correction :

Max. Peak reading – duty cycle correction

Max permitted average Limits = Max permitted Fundamental limit – 20 dB

For example for 315 MHz fundamental carrier:


Max permitted average Limit:  $67.66 \text{ dB } \mu \text{ V/m} - 20 \text{ dB} = 47.66 \text{ dB } \mu \text{ V/m}$

For example for 433.92 MHz fundamental carrier:

Max permitted average Limit:  $72.87 \text{ dB } \mu \text{ V/m} - 20 \text{ dB} = 52.87 \text{ dB } \mu \text{ V/m}$

For frequencies above 1GHz (Peak measurements).

Modified Limits for peak conform 15.35 (b) = Max Permitted average Limits + 20dB (because Peak detector is used)



Registration number: W6M21709-17439-C-1  
FCC ID: W55172DB3N4

### **3.4 Transmitter Radiated Emissions in restricted Bands**

FCC Rules: 15.231 (b), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 8000 MHz.

For radiated emission tests, the analyzer setting was as followings:

RES BW VID BW

Frequency <1 GHz 100 kHz 100 kHz (Peak measurements)

Frequency >1 GHz 1 MHz 1 MHz (Peak measurements)

1 MHz 1 MHz (Average measurements)

Limits:

For frequencies below 1GHz :

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of pulsed emission:

“If the emission is pulsed, modify the unit for continues operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.

For frequencies above 1GHz (Average measurements).

The correction factor, based on the channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction =  $20 \log (\text{dwell time}/100\text{ms})$


No duty cycle correction was added to the reading

Modified Limits for peak conform 15.35 (b) = Max Permitted average Limits + 20dB (because Peak detector is used)

Above 960 MHz

For mode DSSS CW:  $54 \text{ dB}\mu\text{V}/\text{m} + 20 \text{ dB} = 74 \text{ dB}\mu\text{V}/\text{m}$

Explanation: See attached diagrams.



Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

### 3.5 Spurious Emission radiated, Transmitter

Spurious emission was measured with modulation (declared by manufacturer).

The limits on the field strength of the spurious emission in the table § 15.231(e) are based on the fundamental frequency of the intentional radiator. Spurious emission shall be attenuated to the average (or alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in § 15.209, whichever limit permits a higher field strength.

In addition, radiated emission which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance to point 2.3.


Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value an exhibit the compliance with the above calculated Limits.


Summary table with radiated data of the test plots

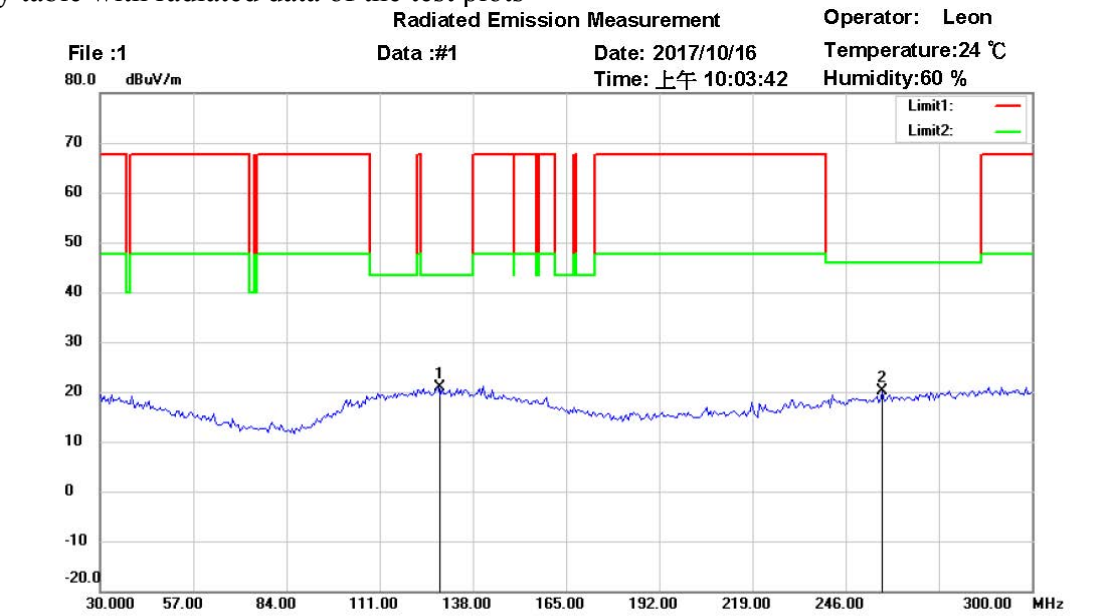

Site : Chamber  
 Condition : FCC 15.231(315MHz) 30-300(PK)<e>  
 EUT : W6M21709-17439  
 M/N :  
 Test Mode : TX 315MHz  
 Note :

Polarization: *Horizontal*  
 Power : 3 Vd.c.  
 Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	127.9360	27.65	peak	-6.69	20.96	43.50	100	175	-22.54	
	256.7134	27.42	peak	-7.40	20.02	46.00	100	80	-25.98	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

## Radiated Emission Measurement

Operator: Leon  
 Temperature: 24 °C  
 Humidity: 60 %


File :1

Data :#2

Date: 2017/10/16

Time: 上午 10:08:12

80.0 dBuV/m

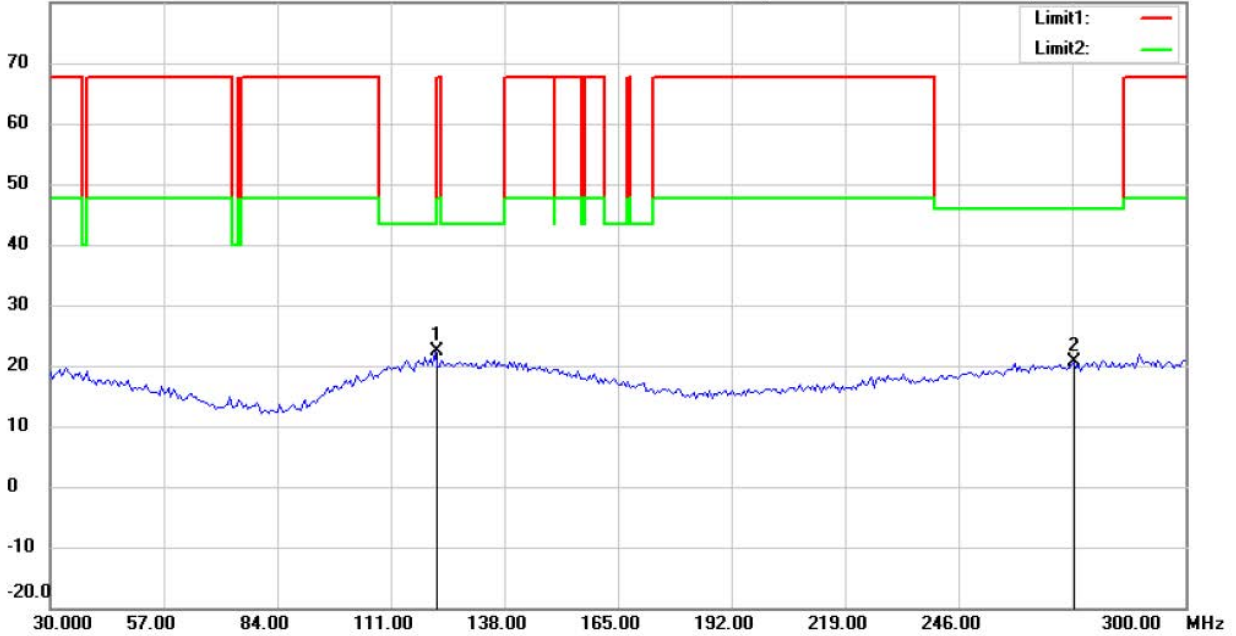

Site : Chamber

Condition : FCC 15.231(315MHz) 30-300(PK)<e>

Polarization: *Vertical*

EUT : W6M21709-17439

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 315MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	121.4430	29.09	peak	-6.82	22.27	43.50	100	270	-21.23	
	273.4870	27.17	peak	-6.60	20.57	46.00	100	55	-25.43	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

## Radiated Emission Measurement

Operator: Leon  
 Temperature: 24 °C  
 Humidity: 60 %


File :2

Data :#1

Date: 2017/10/13

Time: 下午 04:54:39

80.0 dBuV/m

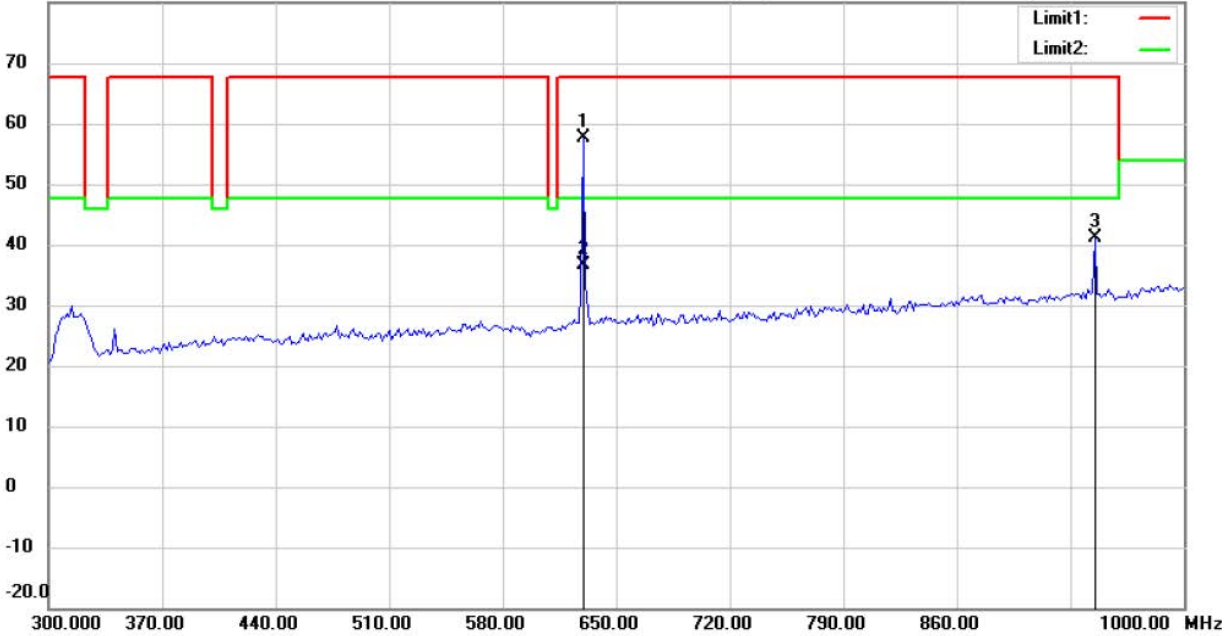

Site : Chamber

Condition : FCC 15.231(315MHz) 300-1000(PK)<e>

EUT : W6M21709-17439

M/N:

Test Mode : TX 315MHz


Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	629.6593	58.61	peak	-0.88	57.73	67.66	100	275	-9.93	
	629.6593	37.51	AVG	-0.88	36.63	47.66	100	275	-11.03	
	945.2906	36.74	peak	4.46	41.20	67.66	100	190	-26.46	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

## Radiated Emission Measurement

Operator: Leon  
 Temperature: 24 °C  
 Humidity: 60 %


File :2

Data :#2

Date: 2017/10/13

Time: 下午 04:55:55

80.0 dBuV/m

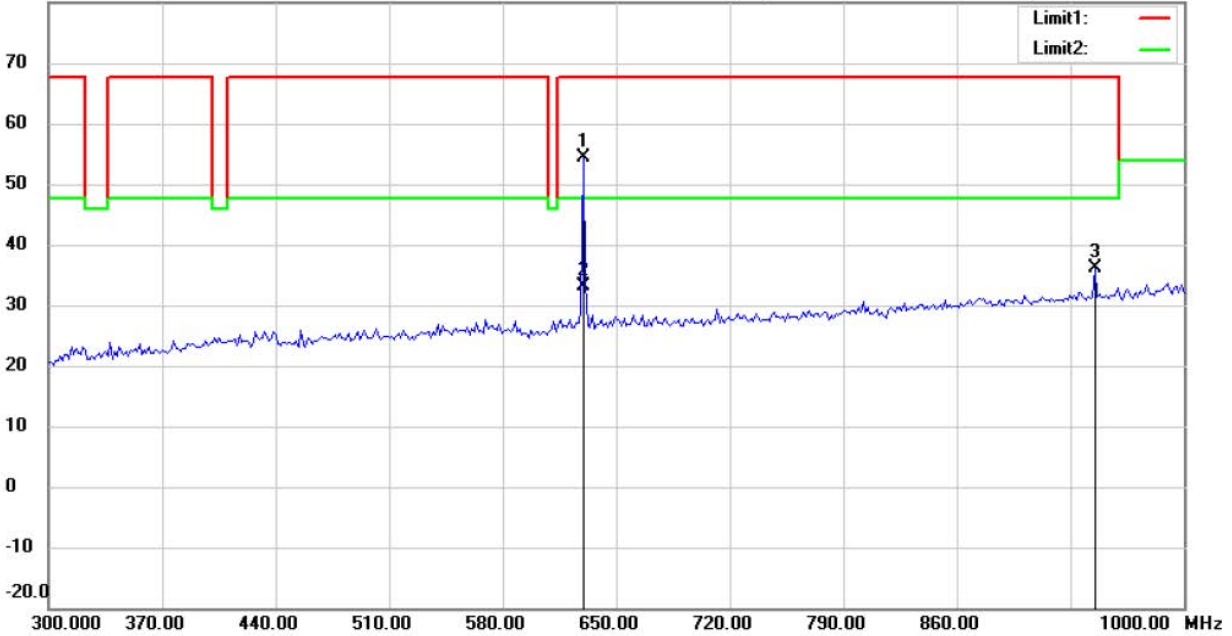

Site : Chamber

Condition : FCC 15.231(315MHz) 300-1000(PK)<e>

Polarization: *Vertical*

EUT : W6M21709-17439

Power : 3 Vd.c.

M/N:


Distance: 3m

Test Mode : TX 315MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	629.6593	55.24	peak	-0.88	54.36	67.66	100	235	-13.30	
	629.6593	34.04	AVG	-0.88	33.16	47.66	100	235	-14.50	
	945.2906	31.74	peak	4.46	36.20	67.66	100	110	-31.46	





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

## Radiated Emission Measurement

Operator: Leon

File :3

Data :#1


Date: 2017/10/13

Temperature:24 °C

90.0 dBuV/m

Time: 下午 04:36:29

Humidity:60 %

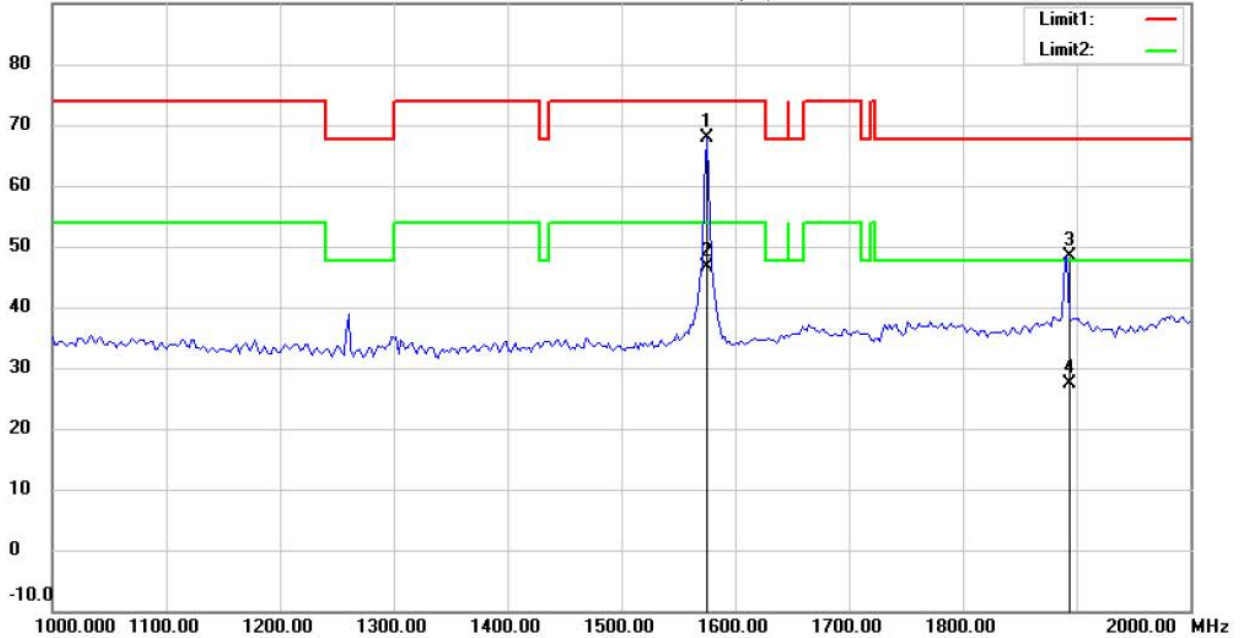

Site : Chamber

Condition : FCC 15.231(315MHz) 1000-2000(PK)<e>

Polarization: *Horizontal*

EUT : W6M21709-17439

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 315MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1575.150	76.10	peak	-8.32	67.78	74.00	150	220	-6.22	
	1575.150	55.00	AVG	-8.32	46.68	54.00	150	220	-7.32	
	1891.784	54.67	peak	-6.26	48.41	67.66	150	175	-19.25	
	1891.784	33.57	AVG	-6.26	27.31	47.66	150	175	-20.35	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

## Radiated Emission Measurement

Operator: Leon

File :3

Data :#3


Date: 2017/10/13

Temperature:24 °C

90.0 dBuV/m

Time: 下午 04:38:20

Humidity:60 %

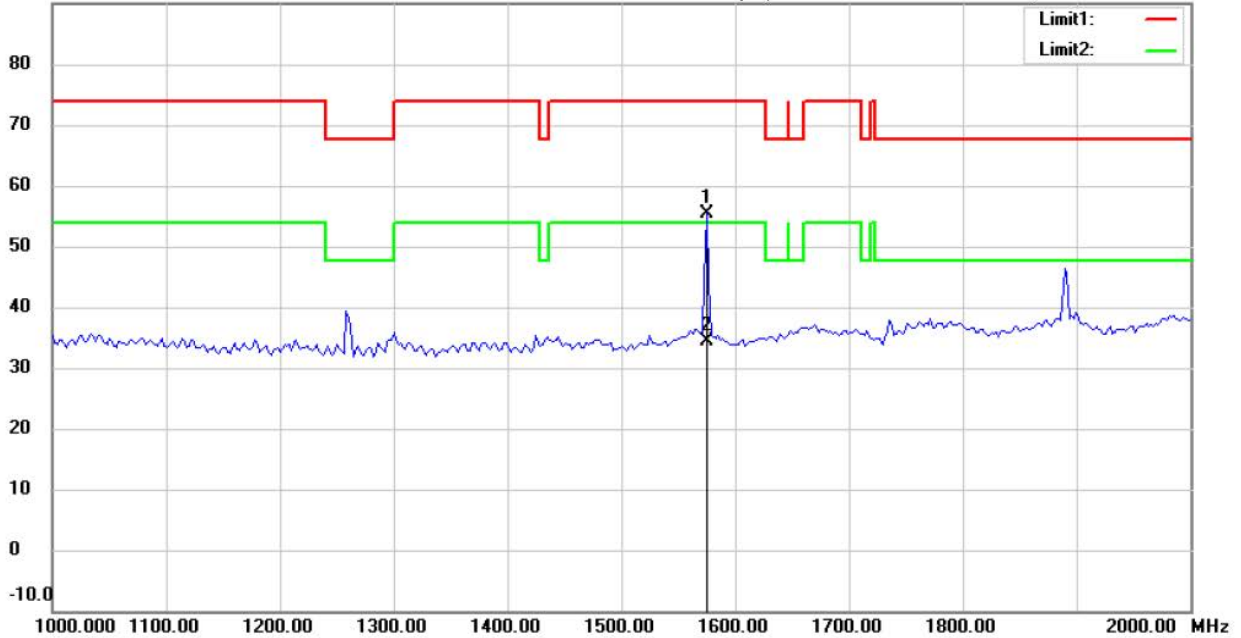

Site : Chamber

Condition : FCC 15.231(315MHz) 1000-2000(PK)<e>

Polarization: *Vertical*

EUT : W6M21709-17439

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 315MHz


Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1575.150	63.68	peak	-8.32	55.36	74.00	150	175	-18.64	
	1575.150	42.58	AVG	-8.32	34.26	54.00	150	175	-19.74	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

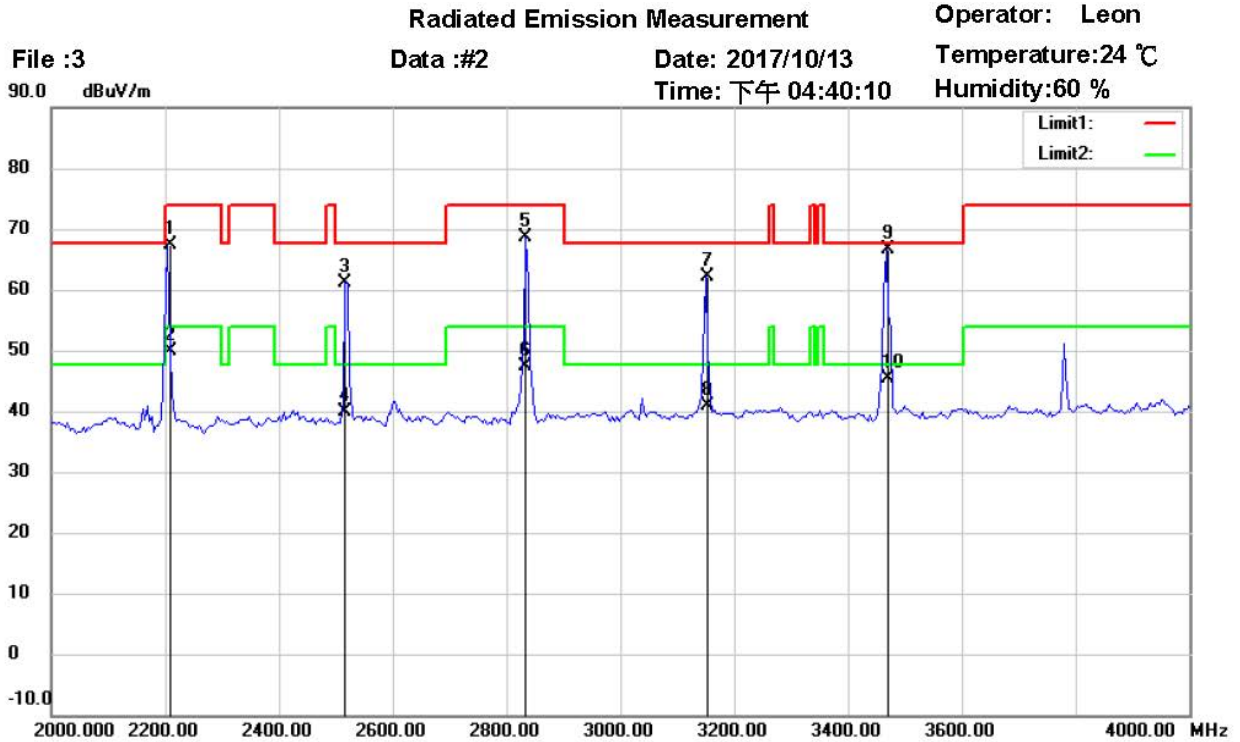

Site : Chamber

Condition : FCC 15.231(315MHz) 2000-4000(PK)<e>

Polarization: *Horizontal*

EUT : W6M21709-17439

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 315MHz


Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2204.409	72.66	peak	-5.31	67.35	74.00	150	255	-6.65	
	2204.409	55.12	AVG	-5.31	49.81	54.00	150	255	-4.19	
	2517.034	65.22	peak	-4.18	61.04	67.66	150	130	-6.62	
	2517.034	44.12	AVG	-4.18	39.94	47.66	150	130	-7.72	
	2833.667	72.27	peak	-3.69	68.58	74.00	150	170	-5.42	
	2833.667	51.17	AVG	-3.69	47.48	54.00	150	170	-6.52	
	3150.301	64.62	peak	-2.59	62.03	67.66	150	80	-5.63	
	3150.301	43.52	AVG	-2.59	40.93	47.66	150	80	-6.73	
*	3466.934	69.03	peak	-2.51	66.52	67.66	150	265	-1.14	
	3466.934	47.93	AVG	-2.51	45.42	47.66	150	265	-2.24	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

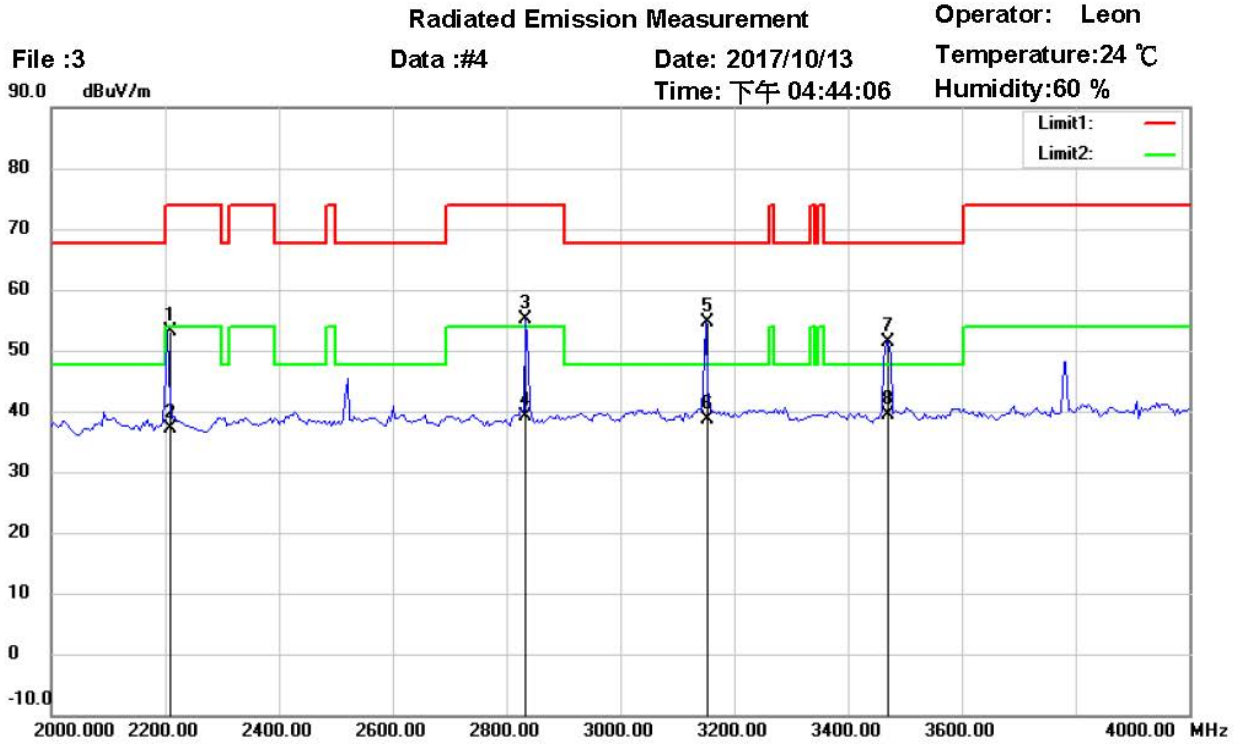

Site : Chamber

Condition : FCC 15.231(315MHz) 2000-4000(PK)<e>

Polarization: *Vertical*

EUT : W6M21709-17439

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 315MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2204.409	58.47	peak	-5.31	53.16	74.00	150	245	-20.84	
	2204.409	42.37	AVG	-5.31	37.06	54.00	150	245	-16.94	
	2833.667	58.85	peak	-3.69	55.16	74.00	150	90	-18.84	
	2833.667	42.75	AVG	-3.69	39.06	54.00	150	90	-14.94	
	3150.301	57.25	peak	-2.59	54.66	67.66	150	330	-13.00	
	3150.301	41.15	AVG	-2.59	38.56	47.66	150	330	-9.10	
	3466.934	53.97	peak	-2.51	51.46	67.66	150	170	-16.20	
*	3466.934	41.87	AVG	-2.51	39.36	47.66	150	170	-8.30	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

### Radiated Emission Measurement

Operator: Leon

File :1

Data :#1


Date: 2017/10/16

Temperature:24 °C

80.0 dBuV/m

Time: 上午 10:09:40

Humidity:60 %

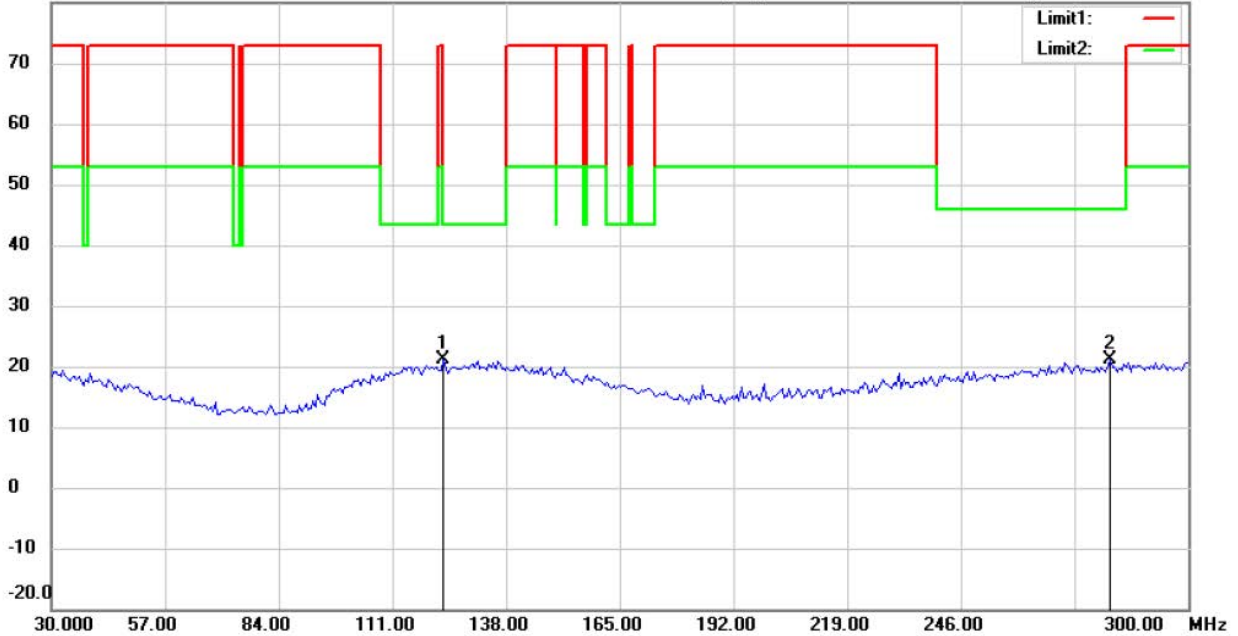

Site : Chamber

Condition : FCC 15.231(433MHz) 30-300(PK)<e>

Polarization: *Horizontal*

EUT : W6M21709-17439

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 433.92MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	123.0661	27.80	peak	-6.79	21.01	43.50	100	25	-22.49	
	281.6031	27.33	peak	-6.32	21.01	46.00	100	90	-24.99	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

## Radiated Emission Measurement

Operator: Leon

File :1

Data :#2


Date: 2017/10/16

Temperature:24 °C

80.0 dBuV/m

Time: 上午 10:10:33

Humidity:60 %

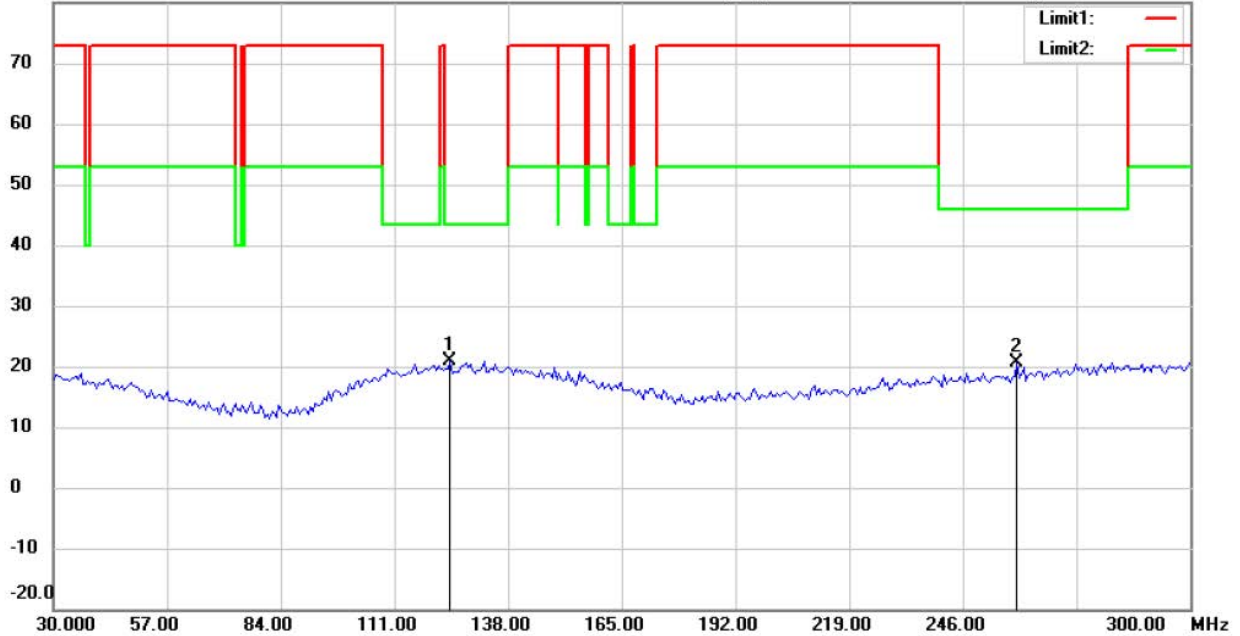

Site : Chamber

Condition : FCC 15.231(433MHz) 30-300(PK)<e>

Polarization: *Vertical*

EUT : W6M21709-17439

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 433.92MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	124.1483	27.56	peak	-6.77	20.79	43.50	100	120	-22.71	
	258.8778	27.91	peak	-7.27	20.64	46.00	100	175	-25.36	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

## Radiated Emission Measurement

Operator: Leon  
 Temperature: 24 °C  
 Humidity: 60 %


File :2

Data :#1

Date: 2017/10/13

Time: 下午 05:00:05

80.0 dBuV/m

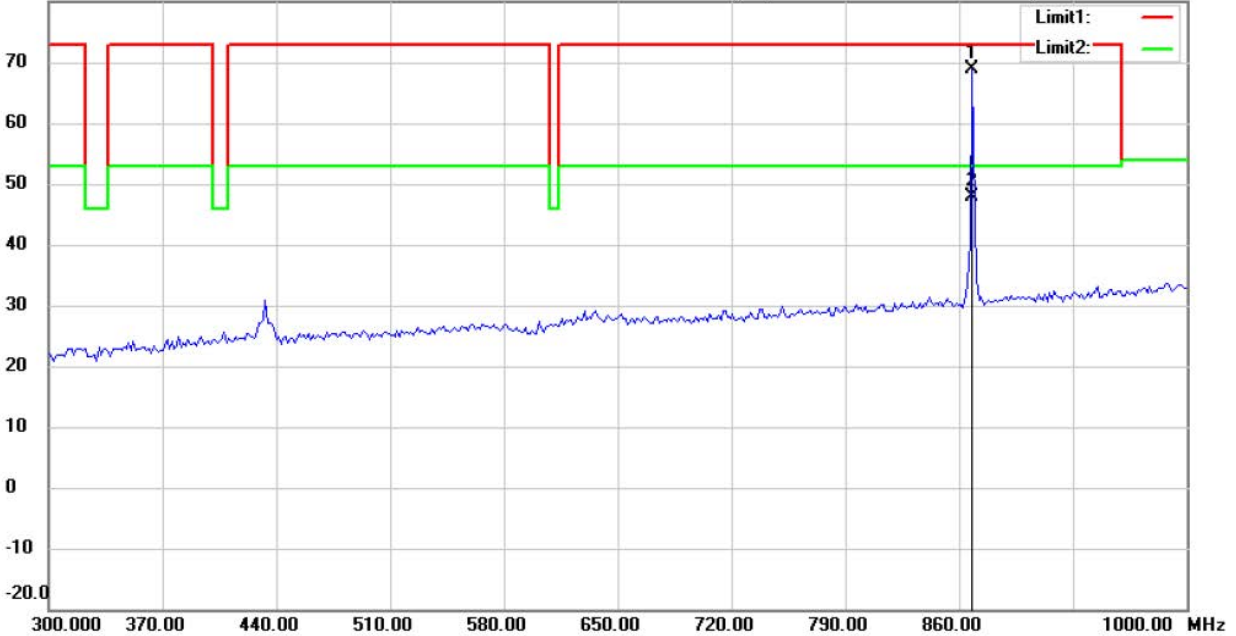

Site : Chamber

Condition : FCC 15.231(433MHz) 300-1000(PK)<e>

Polarization: *Horizontal*

EUT : W6M21709-17439

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 433.92MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	868.1363	66.15	peak	2.74	68.89	72.80	100	55	-3.91	
	868.1363	45.05	AVG	2.74	47.79	52.80	100	55	-5.01	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

## Radiated Emission Measurement

Operator: Leon  
 Temperature: 24 °C  
 Humidity: 60 %


File :2

Data :#2

Date: 2017/10/13

Time: 下午 05:01:48

80.0 dBuV/m

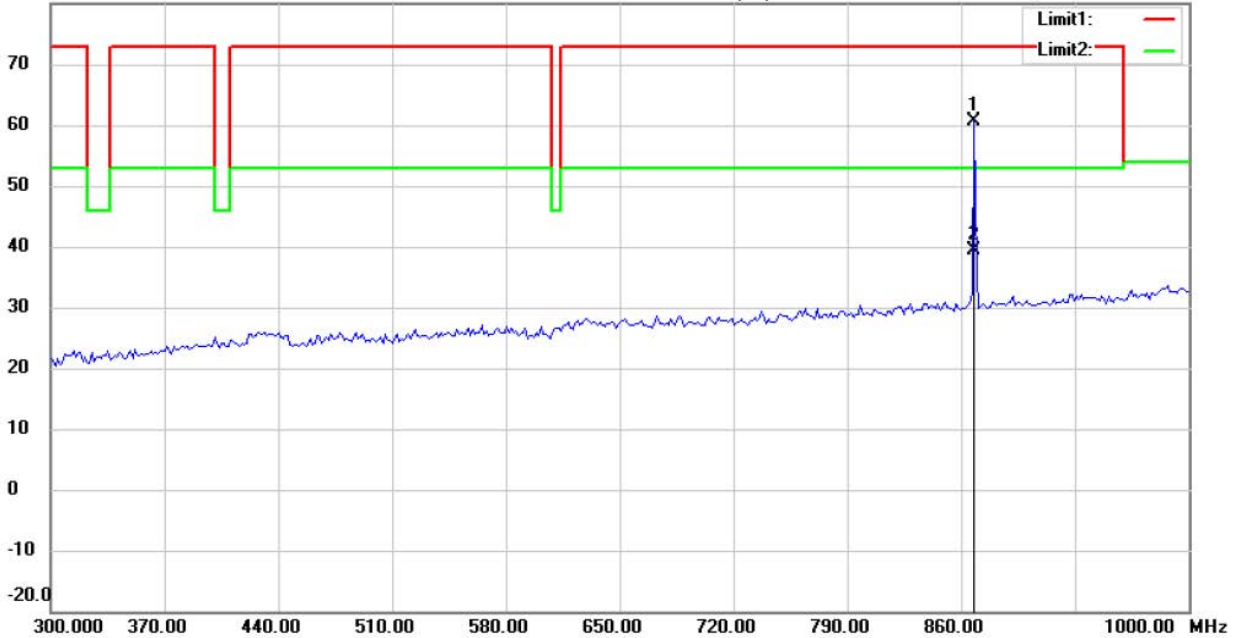

Site : Chamber

Condition : FCC 15.231(433MHz) 300-1000(PK)<e>

Polarization: *Vertical*

EUT : W6M21709-17439

Power : 3 Vd.c.

M/N:


Distance: 3m

Test Mode : TX 433.92MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	868.1363	57.80	peak	2.74	60.54	72.80	100	275	-12.26	
	868.1363	36.70	AVG	2.74	39.44	52.80	100	275	-13.36	





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

## Radiated Emission Measurement

Operator: Leon  
 Temperature: 24 °C  
 Humidity: 60 %


File :3

Data :#1

Date: 2017/10/13

Time: 下午 04:21:54

90.0 dBuV/m

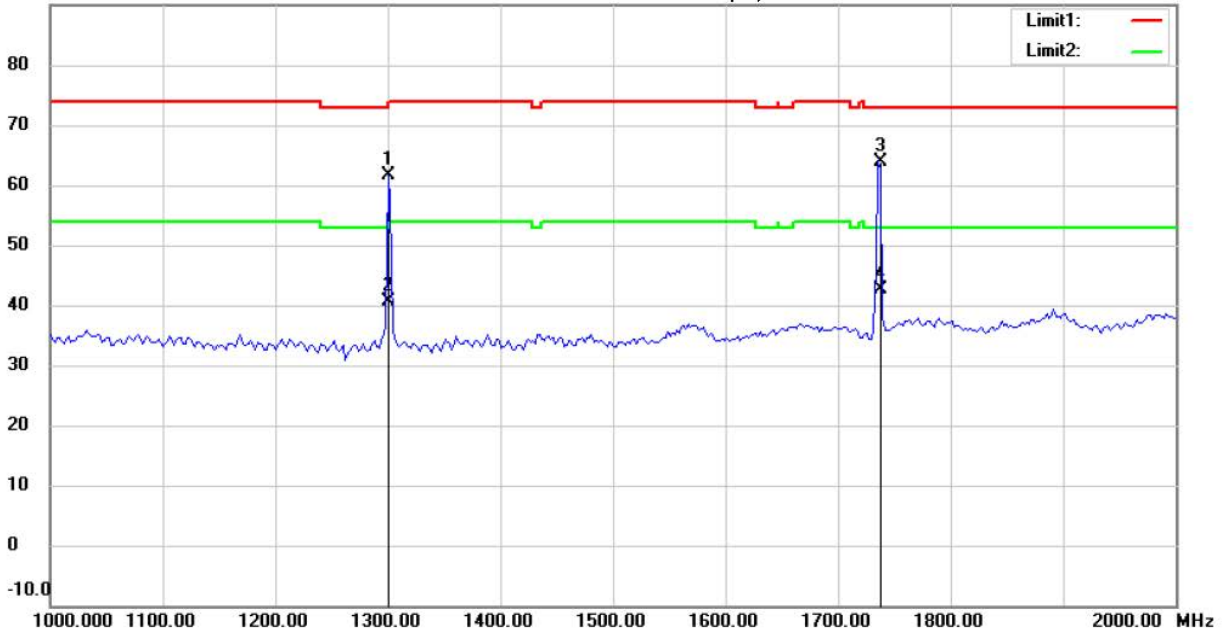

Site : Chamber

Condition : FCC 15.231(433MHz) 1000-2000(PK)<e>

Polarization: *Horizontal*

EUT : W6M21709-17439

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 433.92MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1300.601	70.84	peak	-9.18	61.66	74.00	150	275	-12.34	
	1300.601	49.74	AVG	-9.18	40.56	54.00	150	275	-13.44	
*	1735.471	70.99	peak	-7.17	63.82	72.80	150	80	-8.98	
	1735.471	49.89	AVG	-7.17	42.72	52.80	150	80	-10.08	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

## Radiated Emission Measurement

Operator: Leon  
 Temperature: 24 °C  
 Humidity: 60 %


File :3

Data :#4

Date: 2017/10/13

Time: 下午 04:23:38

90.0 dBuV/m

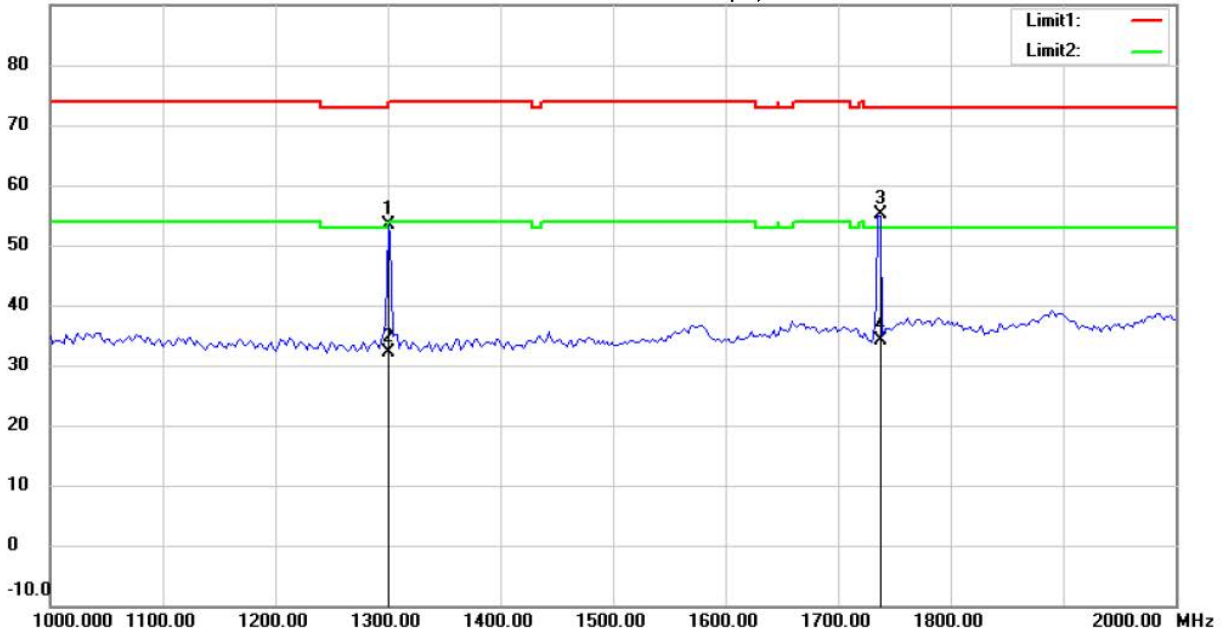

Site : Chamber

Condition : FCC 15.231(433MHz) 1000-2000(PK)<e>

Polarization: *Vertical*

EUT : W6M21709-17439

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 433.92MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1300.601	62.45	peak	-9.18	53.27	74.00	150	220	-20.73	
	1300.601	41.35	AVG	-9.18	32.17	54.00	150	220	-21.83	
*	1735.471	62.38	peak	-7.17	55.21	72.80	150	170	-17.59	
	1735.471	41.28	AVG	-7.17	34.11	52.80	150	170	-18.69	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

## Radiated Emission Measurement

Operator: Leon  
 Temperature: 24 °C  
 Humidity: 60 %


File :3

Data :#2

Date: 2017/10/13

Time: 下午 04:25:04

90.0 dBuV/m

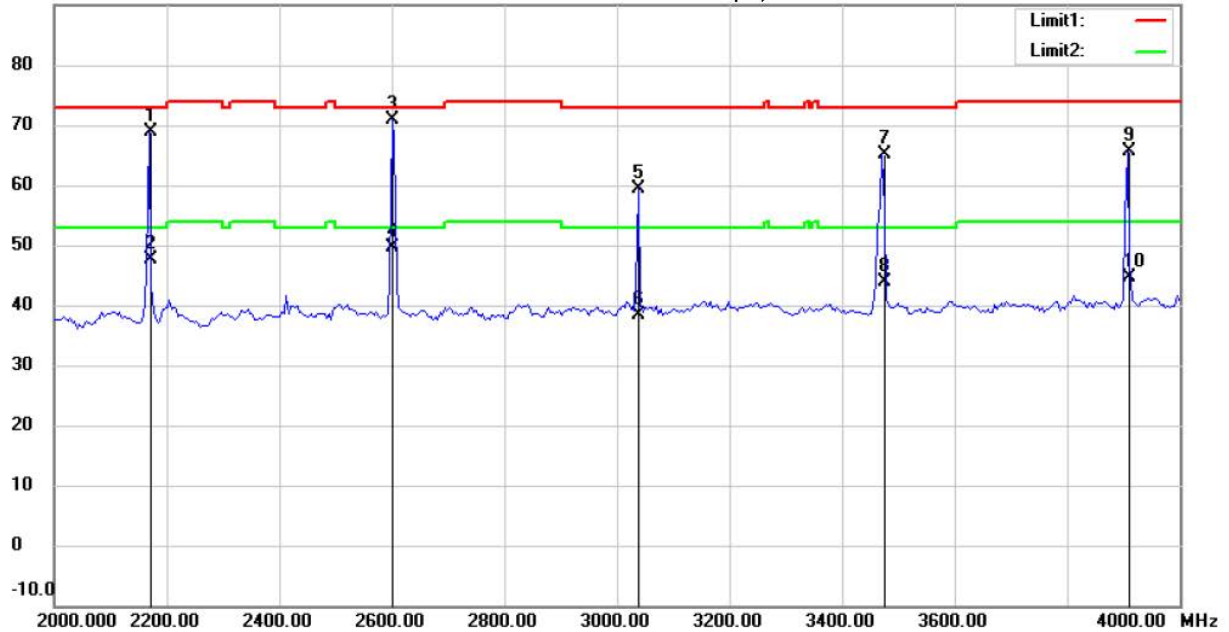

Site : Chamber

Condition : FCC 15.231(433MHz) 2000-4000(PK)<e>

Polarization: *Horizontal*

EUT : W6M21709-17439

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 433.92MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2168.337	74.20	peak	-5.37	68.83	72.80	150	175	-3.97	
	2168.337	53.10	AVG	-5.37	47.73	52.80	150	175	-5.07	
*	2601.202	74.53	peak	-3.77	70.76	72.80	150	240	-2.04	
	2601.202	53.43	AVG	-3.77	49.66	52.80	150	240	-3.14	
	3038.076	62.46	peak	-3.09	59.37	72.80	150	90	-13.43	
	3038.076	41.36	AVG	-3.09	38.27	52.80	150	90	-14.53	
	3470.942	67.55	peak	-2.49	65.06	72.80	150	220	-7.74	
	3470.942	46.45	AVG	-2.49	43.96	52.80	150	220	-8.84	
	3907.816	66.80	peak	-1.13	65.67	74.00	150	315	-8.33	
	3907.816	45.70	AVG	-1.13	44.57	54.00	150	315	-9.43	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

## Radiated Emission Measurement

Operator: Leon  
 Temperature: 24 °C  
 Humidity: 60 %


File :3

Data :#5

Date: 2017/10/13

Time: 下午 04:26:09

90.0 dBuV/m

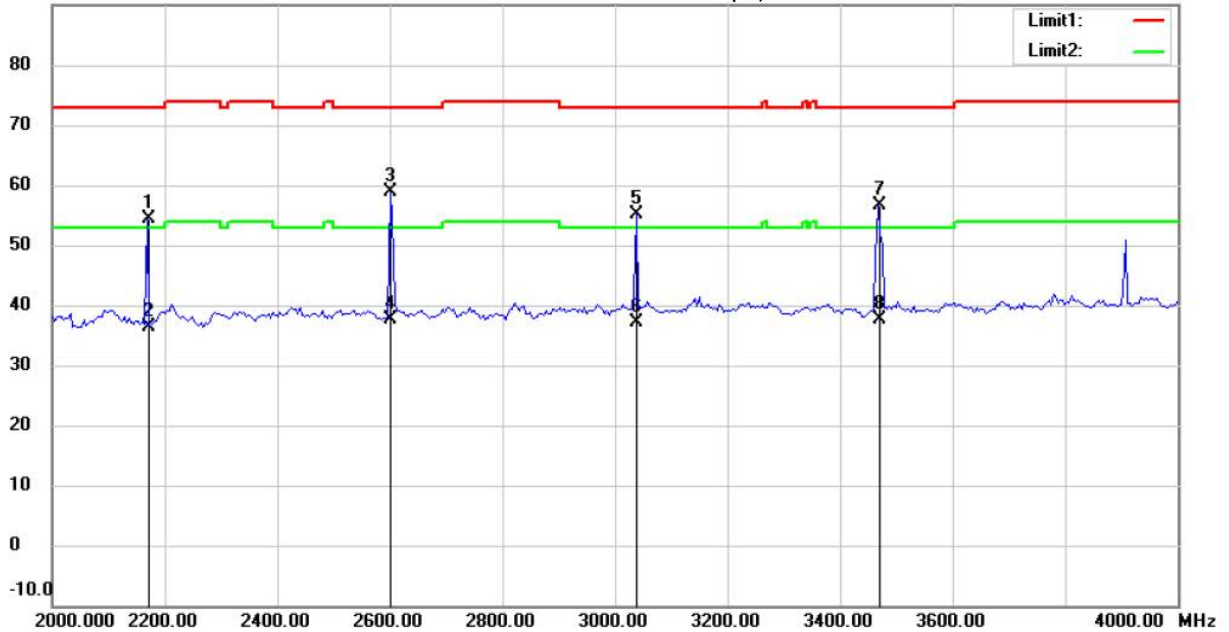

Site : Chamber

Condition : FCC 15.231(433MHz) 2000-4000(PK)<e>

Polarization: *Vertical*

EUT : W6M21709-17439

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 433.92MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2168.337	59.83	peak	-5.37	54.46	72.80	150	245	-18.34	
	2168.337	41.73	AVG	-5.37	36.36	52.80	150	245	-16.44	
*	2601.202	62.53	peak	-3.77	58.76	72.80	150	330	-14.04	
	2601.202	41.43	AVG	-3.77	37.66	52.80	150	330	-15.14	
	3038.076	58.25	peak	-3.09	55.16	72.80	150	50	-17.64	
	3038.076	40.15	AVG	-3.09	37.06	52.80	150	50	-15.74	
	3466.934	59.15	peak	-2.51	56.64	72.80	150	165	-16.16	
	3466.934	40.05	AVG	-2.51	37.54	52.80	150	165	-15.26	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

### Radiated Emission Measurement

Operator: Leon  
 Temperature: 24 °C  
 Humidity: 60 %


File :3

Data :#3

Date: 2017/10/13

Time: 下午 04:27:46

90.0 dBuV/m

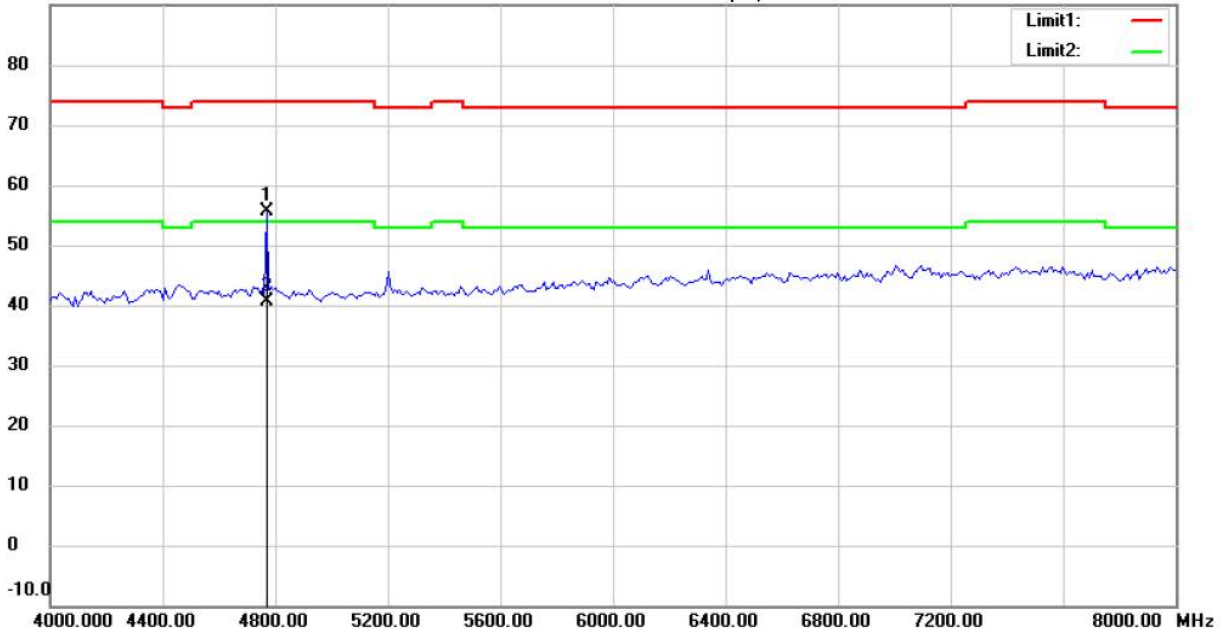

Site : Chamber

Condition : FCC 15.231(433MHz) 4000-8000(PK)<e>

Polarization: *Horizontal*

EUT : W6M21709-17439

Power : 3 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 433.92MHz


Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4769.539	55.64	peak	-0.03	55.61	74.00	150	135	-18.39	
*	4769.539	40.54	AVG	-0.03	40.51	54.00	105	135	-13.49	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

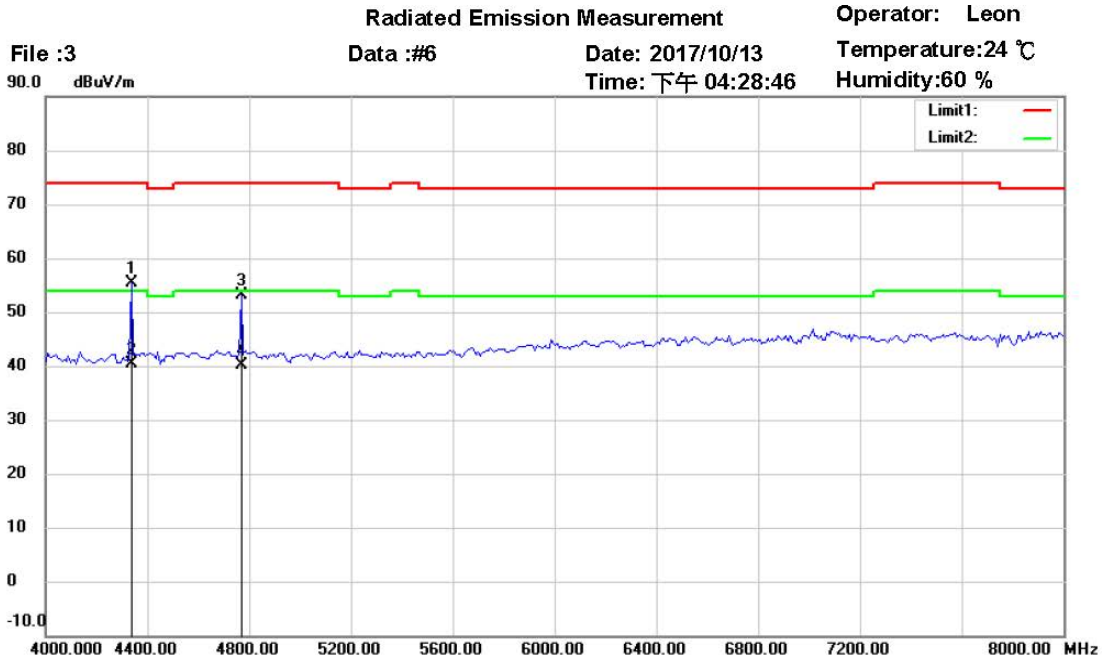

Site : Chamber  
 Condition : FCC 15.231(433MHz) 4000-8000(PK)<e>      Polarization: **Vertical**  
 EUT : W6M21709-17439      Power : 3 Vd.c.  
 M/N:      Distance: 3m  
 Test Mode : TX 433.92MHz  
 Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4336.673	55.86	peak	-0.50	55.36	74.00	150	175	-18.64	
*	4336.673	40.76	AVG	-0.50	40.26	54.00	150	175	-13.74	
	4769.539	53.21	peak	-0.03	53.18	74.00	150	80	-20.82	
	4769.539	40.11	AVG	-0.03	40.08	54.00	150	80	-13.92	

**Note**

1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Measurement uncertainty for 3m measurement : 30-1000 MHz = ± 3.30 dB, 1-18 GHz = ±2.28 dB, 18-40 GHz = ±2.19 dB ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
6. Up Line: PK Limit Line, Down Line: Ave Limit Line.

All other not noted test plots do not contain significant test results in relation to the limits  
 Test results: The unit meet the FCC requirements.

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 142,  
 ETSTW-RE 147

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

### 3.6 Channel Bandwidth


Measurement of Necessary Bandwidth (BN)

Used frequency	Bandwidth	Limit
315 MHz	419.83967936 kHz	0.7875 MHz



Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

Used frequency	Bandwidth	Limit
433.92 MHz	411.82364729 kHz	1.0848 MHz

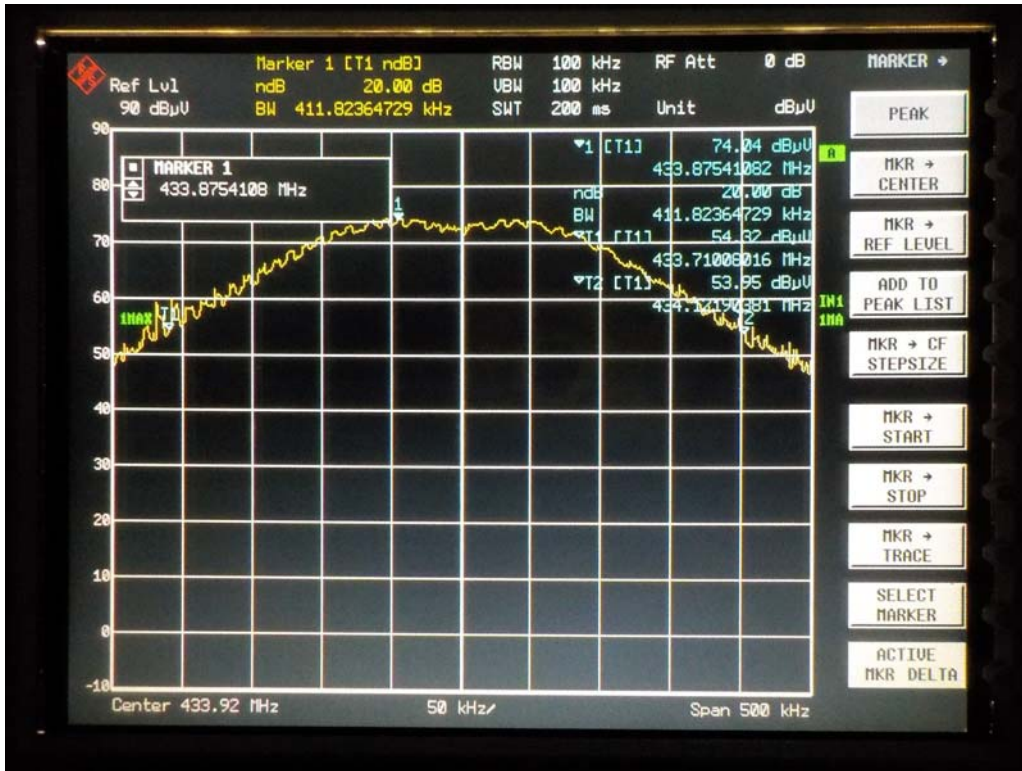


Explanation: The bandwidth fulfills the requirements of FCC § 15.231, see attached diagrams.

### Limits:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test equipment used: ETSTW-RE 004






Registration number: W6M21709-17439-C-1  
FCC ID: W55172DB3N4

**3.7 Antenna requirement**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

Explanation: This Monopole antenna is integral antenna which passes antenna requirement.

The equipment meets the requirements	yes <input checked="" type="checkbox"/>	no <input type="checkbox"/>
--------------------------------------	--	--------------------------------



Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

### 3.8 Duty Cycle

The correction factor, based on the channel dwell time in a 100ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the measured value.


Average Reading = Peak Reading (dBuV/m) + Duty Cycle Correction

Duty Cycle Correction = 20 log (Cycle)


In order to determine the Duty Cycle, the EUT is measured as:

315 MHz

Testing Mode	T period (ms)	T on (ms)	Duty Cycle	Duty Cycle Correction 20*log(Duty Cycle)
Transmitting mode	100	8.814103	0.08814103	-21.10

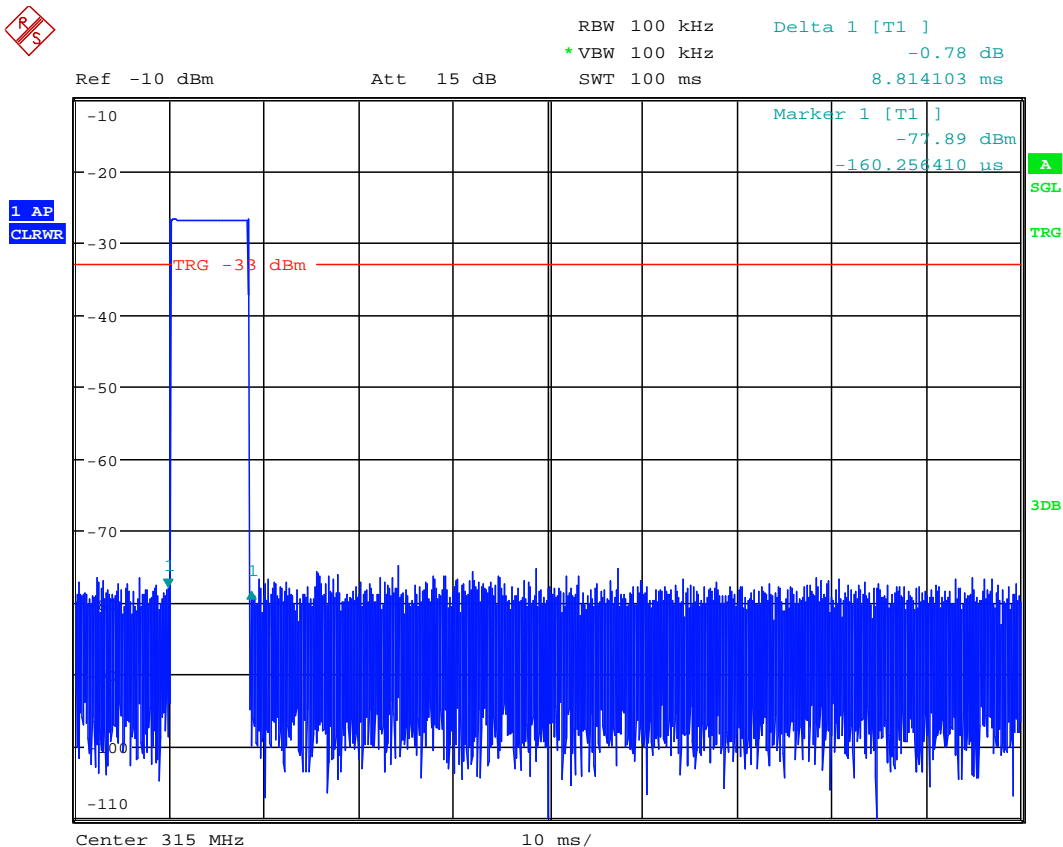

Date: 3.OCT.2017 20:42:48




# Worldwide Testing Services (Taiwan) Co., Ltd.

Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4


433.92 MHz

Testing Mode	T period (ms)	T on (ms)	Duty Cycle	Duty Cycle Correction 20*log(Duty Cycle)
Transmitting mode	100	8.814103	0.08814103	-21.10

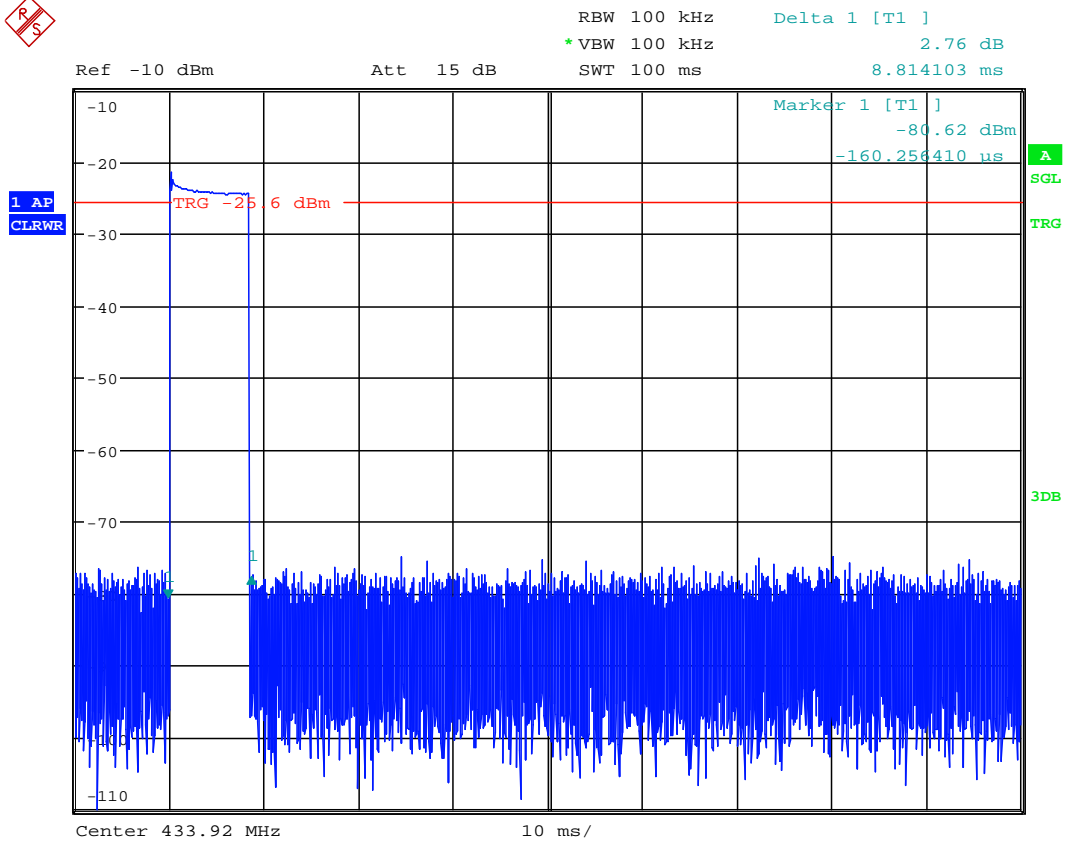

Date: 3.OCT.2017 20:41:30

Test equipment used: ETSTW-RE 004



Registration number: W6M21709-17439-C-1  
 FCC ID: W55172DB3N4

### 3.9 Conducted Measurement at (AC) Power Line

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Frequency	Level	
	quasi-peak (dB $\mu$ V/m)	average (dB $\mu$ V/m)
-- kHz	--	--

**Note**

1. The formula of measured value as: **Test Result = Reading + Correction Factor**
2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Measurement uncertainty =  $\pm 0.74$  dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
6. Up Line: QP Limit Line, Down Line: Ave Limit Line.
7. This test is not required because the EUT is battery-used.

**Limits:**

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-CE 028.