

FCC Test Report

Product Name : ORO Transmitter
Model No. : INAFM13B
FCC ID. : W55INAFM13B

Applicant : Oro Technology Co., LTD
Address : 3F, No.32-1, 24th Road, Industrial Park,
Taichung 408, Taiwan

Date of Receipt : 2012/08/23
Issued Date : 2013/06/20
Report No. : 128451R-RFUSP41V01
Report Version : V1.0



The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Issued Date : 2013/06/20

Report No. : 128451R-RFUSP41V01



Product Name : ORO Transmitter
 Applicant : Oro Technology Co., LTD
 Address : 3F, No.32-1, 24th Road, Industrial Park, Taichung 408,
 Taiwan
 Manufacturer : Oro Technology Co., LTD
 Model No. : INAFM13B
 FCC ID. : W55INAFM13B
 EUT Voltage : Battery 3V
 Trade Name : ORO
 Applicable Standard : FCC 15 Subpart C Section 15.231(e): 2012
 Test Result : Complied

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By :

(Carol Tsai / Engineering Adm. Specialist)

Reviewed By :

(Quale Tang / Engineer)

Approved By :

(Roy Wang / Manager)

Laboratory Information

We, **Quietek Corporation**, are an independent RF consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted (audited or listed) by the following related bodies in compliance with ISO 17025 specified testing scopes:

Taiwan R.O.C.	: TAF, Accreditation Number: 1313
USA	: FCC, Registration Number: 365520
Canada	: IC, Submission No: 150981

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site:<http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory:

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.

TEL:+886-3-592-8858 / FAX:+886-3-592-8859

E-Mail : service@quietek.com

Linkou Testing Laboratory:

No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451, Taiwan, R.O.C.

TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789

E-Mail : service@quietek.com

TABLE OF CONTENTS

Description	Page
1. General Information.....	5
1.1. EUT Description	5
1.2. Operation Description.....	6
1.3. Test Mode	7
1.4. Tested System Details	8
1.5. Configuration of tested System	8
1.6. EUT Exercise Software	8
1.7. Test Facility.....	9
2. Radiated Emission.....	10
2.1. Test Equipment.....	10
2.2. Test Setup	11
2.3. Limits	12
2.4. Test Procedure	13
2.5. Test Specification.....	13
2.6. Uncertainty	13
2.7. Test Result.....	14
2.8. Test Photo	19
3. Occupied Bandwidth.....	21
3.1. Test Equipment.....	21
3.2. Test Setup	21
3.3. Limits	21
3.4. Test Specification.....	21
3.5. Uncertainty	21
3.6. Test Result.....	22
4. Duty cycle	23
4.1. Test Equipment.....	23
4.2. Test Setup	23
4.3. Limits	23
4.4. Test Specification.....	23
4.5. Uncertainty	23
4.6. Test Result.....	24
5. Transmitter time	25
5.1. Test Equipment.....	25
5.2. Test Setup	25
5.3. Limits	25
5.4. Test Specification.....	25
5.5. Uncertainty	25
5.6. Test Result.....	26
Attachment.....	28
EUT Photograph.....	28

1. General Information

1.1. EUT Description

Product Name	ORO Transmitter
Trade Name	ORO
Model No.	INAFM13B
Frequency Range/Channel Number	315 MHz / 1 Channel
Antenna Gain	0dBi
Type of Modulation	FSK, ASK
Antenna Type	Monopole antenna

Working Frequency of Each Channel	
Channel	Frequency
001	315MHz

Note:

1. This device is a ORO Transmitter included a 315MHz transmitter function.
2. These tests are conducted on a sample for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.231.
3. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

1.3. Test Mode

QuieTek verified the construction and function in typical operation. All the test modes are performed in normal operation and are defined as:

Pre-Test Mode	
TX	Mode 1: Transmit
Final Test Mode	
TX	Mode 1: Transmit


Emission	
Performed Item	
Conducted Emission	No
Radiated Emission	Yes
Occupied Bandwidth	Yes
Duty cycle	Yes
Transmitter time	Yes

1.4. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

N/A

1.5. Configuration of tested System

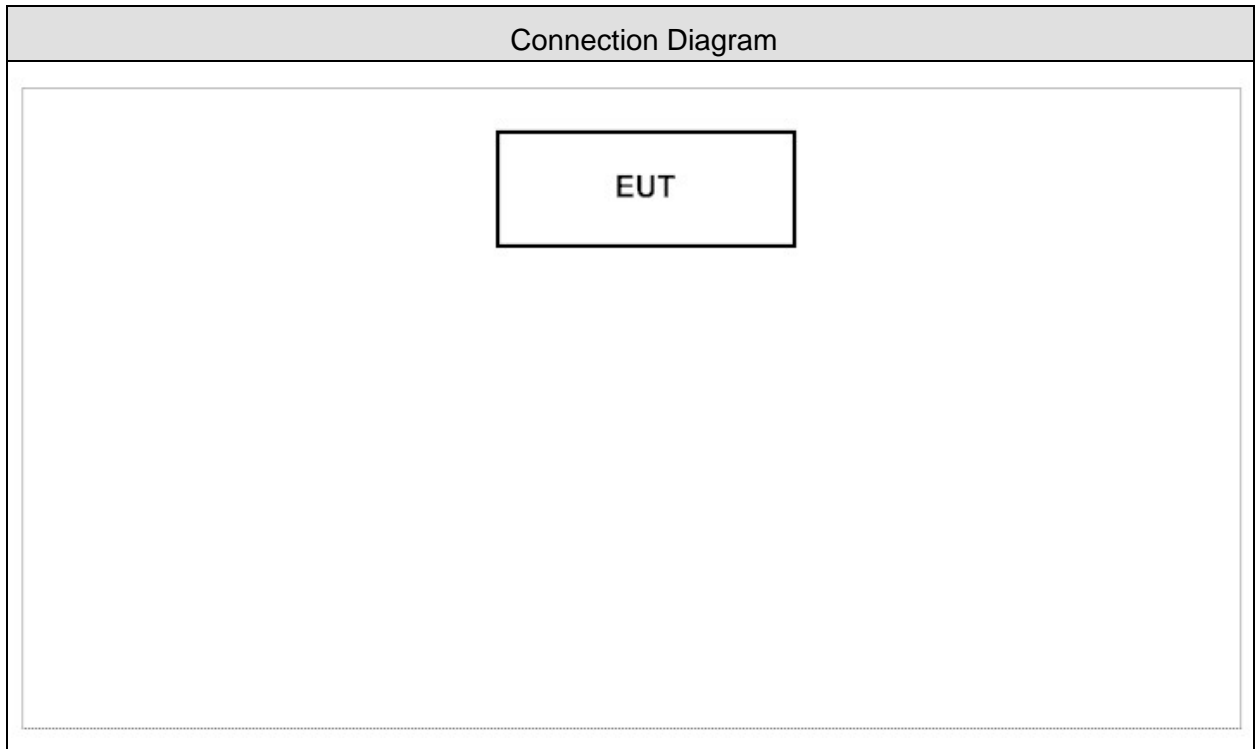

1.6. EUT Exercise Software

1	Setup the EUT as shown in section 1.5.
2	Turn on the EUT power.
3	The RF signal's status will continue transmit through EUT.
4	Repeat the above procedure.

1.7. Test Facility

Ambient conditions in the laboratory:

Items	Test Item	Required (IEC 68-1)	Actual
Temperature (°C)	FCC PART 15 C 15.231 Radiated Emission	15 - 35	25
Humidity (%RH)		25 - 75	48
Barometric pressure (mbar)		860 - 1060	950-1000
Temperature (°C)	FCC PART 15 C 15.231 Occupied Bandwidth	15 - 35	25
Humidity (%RH)		25 - 75	48
Barometric pressure (mbar)		860 - 1060	950-1000
Temperature (°C)	FCC PART 15 C 15.231 Duty Cycle	15 - 35	25
Humidity (%RH)		25 - 75	48
Barometric pressure (mbar)		860 - 1060	950-1000
Temperature (°C)	FCC PART 15 C 15.231 Transmitter Time	15 - 35	25
Humidity (%RH)		25 - 75	48
Barometric pressure (mbar)		860 - 1060	950-1000

2. Radiated Emission

2.1. Test Equipment

The following test equipments are used during the test:


Radiated Emission / CB1

Instrument	Manufacturer	Model No.	Serial No	Next Cal. Date
Bilog Antenna	SCHAFFNER	CBL6112B	2895	2013/08/14
Double Ridged Guide Horn Antenna	Schwarzback	BBHA 9120	D743	2014/02/17
Pre-Amplifier	MITEQ	AMF-4D-005180-24-10P	888003	2013/12/02
Pre-Amplifier	QuieTek	AP-025C	CHM-0706049	2014/02/19
Spectrum Analyzer	Agilent	E4440A	MY46187335	2014/01/27
k Type Cable	Huber Suhner	Sucoflex 102	25623/2	2014/02/21


Note: 1. All equipments that need to calibrate are with calibration period of 1 year.

2.2. Test Setup

Under 1GHz Test Setup:

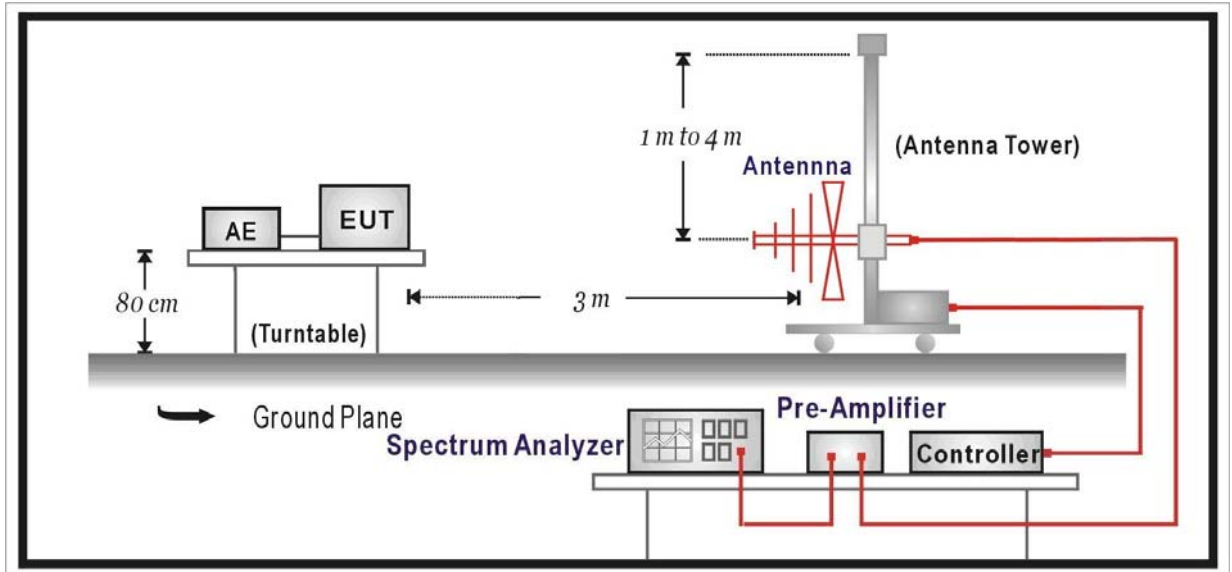

Above 1GHz Test Setup:

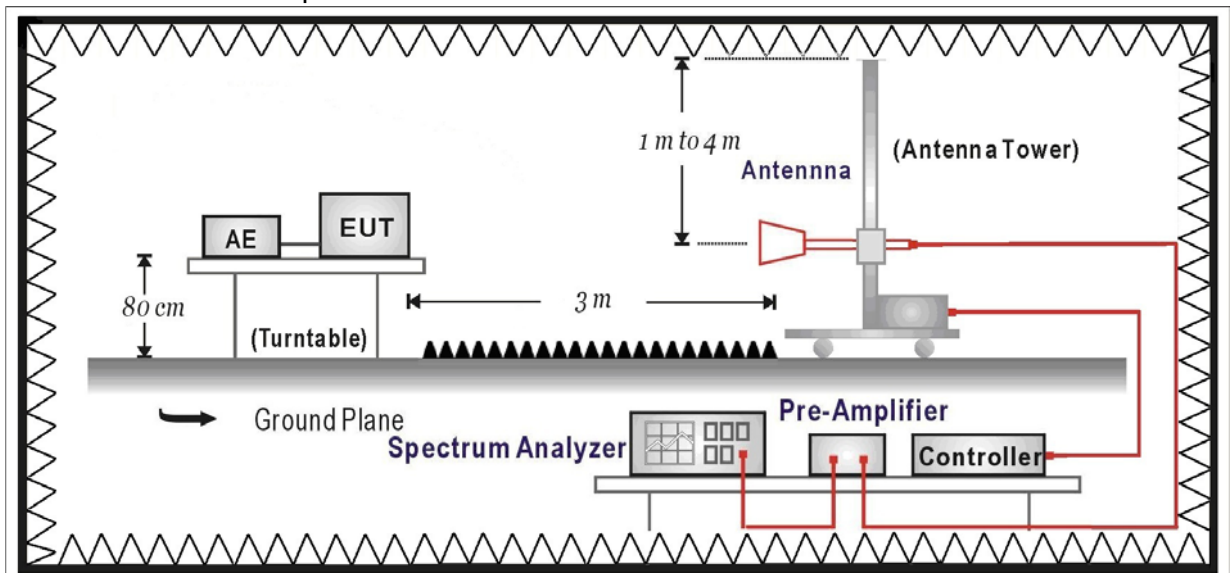

2.3. Limits

➤ Fundamental and Harmonics Emission Limits

FCC Part 15 Subpart C Paragraph 15.231(e) Limits				
Fundamental Frequency MHz	Field Strength of Fundamental		Field Strength of Harmonics	
	uV/m	dBuV/m	uV/m	dBuV/m
40.66-40.70	1000	60	100	40
70-130	500	53.98	50	33,98
130-174	500-1500	53.98-63.52	50-150	33.98-43.52
174-260	1500	63.52	150	43.52
260-470	1500-5000	53.52-73.98	150-500	33.52-53.98
above 470	5000	73.98	500	53.98

Remarks: 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

➤ Spurious electric field strength limits

FCC Part 15 Subpart C Paragraph 15.209 Limits			
Frequency MHz	uV/m	dBuV/m	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	See Remark ¹	300
0.490-1.705	24000/F(kHz)	See Remark ¹	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Remarks : 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)

2. In the Above Table, the tighter limit applies at the band edges.

3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

2.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2009 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

Radiated emission measurements below 1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB beamwidth of the antenna.

The worst radiated emission is measured on the Final Measurement.

The frequency range from 30MHz to 10th harmonics is checked.

2.5. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.231(e): 2012

2.6. Uncertainty

± 3.8 dB below 1GHz

± 3.9 dB above 1GHz

2.7. Test Result

Product	ORO Transmitter				
Test Item	Fundamental Radiated Emission				
Test Mode	Mode 1: Transmit				
Date of Test	2013/05/31	Test Site	CB1		

Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Peak Measurement Level (dBuV/m)	Average Measurement Level (dBuV/m)	Average Limit (dBuV/m)
Horizontal					
315.00(X-axis)	315.050	59.984	73.097	52.567	67.660
315.00(Y-axis)	315.050	53.193	66.306	45.776	67.660
315.00(Z-axis)	315.050	56.274	69.387	48.857	67.660
Vertical					
315.00(X-axis)	315.042	51.656	64.769	44.239	67.660
315.00(Y-axis)	315.050	58.188	71.301	50.771	67.660
315.00(Z-axis)	314.958	60.612	73.723	53.193	67.660

Note1:

Peak Measurement Level = Reading Level + Correct Factor


Average Measurement Level = Peak Measurement Level + 20Log (Duty Cycle)

Duty Cycle=(Ton/(Ton+Toff)) = 9.40/100 = 0.094

20*Log(Duty Cycle) = -20.53

30MHz-1GHz Spurious :

Site : CB1	Time : 2013/05/31 - 17:26
Limit : FCC_SpartC_15.231(e)_H_315MHz_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_30-1G-2_1011 - HORIZONTAL	Power : DC 3V
EUT : ORO Transmitter	Note : Z Axis

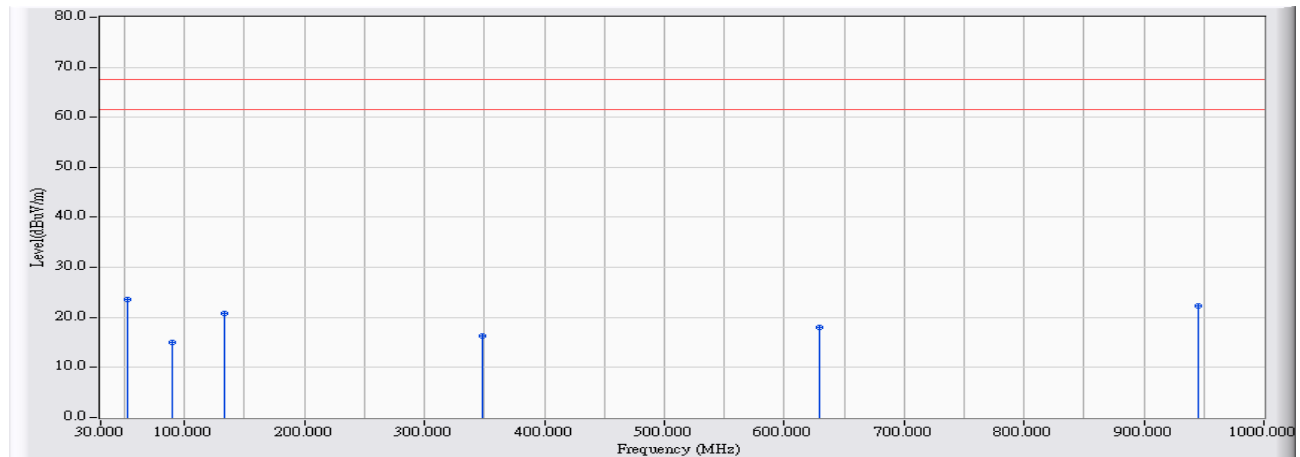

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	52.633	-47.422	70.967	23.545	-44.115	67.660	PEAK
2		89.817	-46.290	61.252	14.962	-52.698	67.660	PEAK
3		133.467	-43.422	64.264	20.843	-46.817	67.660	PEAK
4		348.483	-39.551	55.754	16.202	-51.458	67.660	PEAK
5		629.783	-34.836	52.928	18.093	-49.567	67.660	PEAK
6		945.033	-32.474	54.698	22.224	-45.436	67.660	PEAK


Note:

1. All reading above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurement :RBW=1MHz,VBW=3MHz,Sweep:Auto.
3. " * ", means this data is the worst emission level.
4. Measurement Level = Reading Level + Correct Factor.
5. Average Measurement Level = Peak Measurement Level + 20Log (Duty Cycle)

$$\text{Duty Cycle} = (\text{Ton} / (\text{Ton} + \text{Toff})) = 9.40 / 100 = 0.094$$

$$20 * \text{Log}(\text{Duty Cycle}) = -20.53$$
6. The average measurement was not performed when the peak measured data under the limit of peak detection.

Site : CB1	Time : 2013/05/31 - 17:27
Limit : FCC_SpartC_15.231(e)_H_315MHz_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_30-1G-2_1011 - VERTICAL	Power : DC 3V
EUT : ORO Transmitter	Note : Z Axis

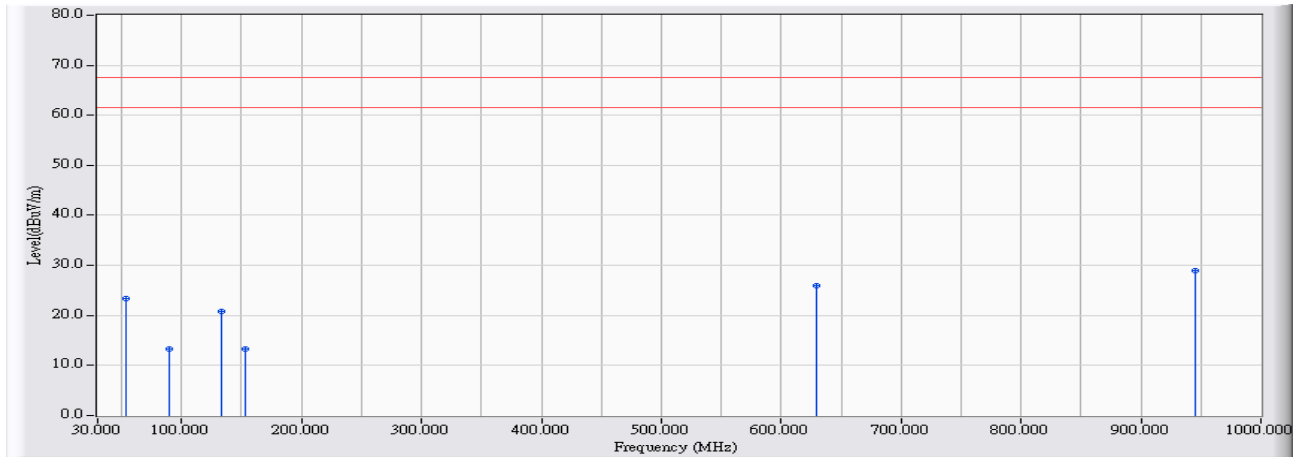


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		54.250	-47.549	71.024	23.475	-44.185	67.660	PEAK
2		89.817	-46.290	59.532	13.242	-54.418	67.660	PEAK
3		133.467	-43.422	64.265	20.844	-46.816	67.660	PEAK
4		152.867	-44.287	57.527	13.240	-54.420	67.660	PEAK
5		629.783	-34.836	60.692	25.857	-41.803	67.660	PEAK
6	*	945.033	-32.474	61.518	29.044	-38.616	67.660	PEAK

Note:

- All reading above 1GHz are performed with peak and/or average measurements as necessary.
- Peak measurement :RBW=1MHz,VBW=3MHz,Sweep:Auto.
- " * ", means this data is the worst emission level.
- Measurement Level = Reading Level + Correct Factor.
- Average Measurement Level = Peak Measurement Level + 20Log (Duty Cycle)
 $Duty\ Cycle = (Ton / (Ton + Toff)) = 9.40 / 100 = 0.094$
 $20 * Log(Duty\ Cycle) = -20.53$
- The average measurement was not performed when the peak measured data under the limit of peak detection.

Above 1GHz Spurious:

Site : CB1	Time : 2013/05/30 - 20:10
Limit : FCC_SpartC_15.231(e)_H_315MHz_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G-1_0901 - HORIZONTAL	Power : DC 3V
EUT : ORO Transmitter	Note : Z Axis

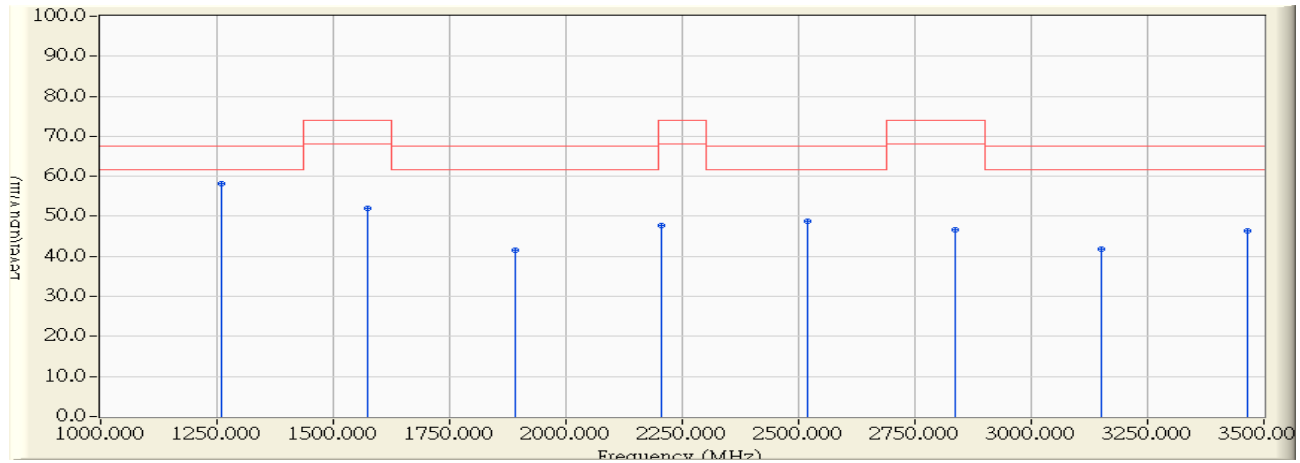


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	1260.000	-10.476	68.563	58.087	-9.573	67.660	PEAK
2		1575.000	-9.080	61.043	51.963	-22.037	74.000	PEAK
3		1890.000	-8.066	49.544	41.478	-26.182	67.660	PEAK
4		2205.000	-5.752	53.418	47.666	-26.334	74.000	PEAK
5		2520.000	-2.975	51.843	48.868	-18.792	67.660	PEAK
6		2835.000	-3.804	50.323	46.519	-27.481	74.000	PEAK
7		3150.000	-4.175	45.963	41.788	-25.872	67.660	PEAK
8		3465.000	-4.036	50.460	46.424	-21.236	67.660	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. “ * ”, means this data is the worst emission level.
4. Measurement Level = Reading Level + Correct Factor.
5. Average Measurement Level = Peak Measurement Level + 20Log (Duty Cycle)
Duty Cycle=(Ton/(Ton+Toff)) = 9.40/100 = 0.094
20*Log(Duty Cycle) = -20.53
6. The average measurement was not performed when the peak measured data under the limit of peak detection.

Site : CB1	Time : 2013/05/30 - 20:15
Limit : FCC_SpartC_15.231(e)_H_315MHz_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G-1_0901 - VERTICAL	Power : DC 3V
EUT : ORO Transmitter	Note : Z Axis

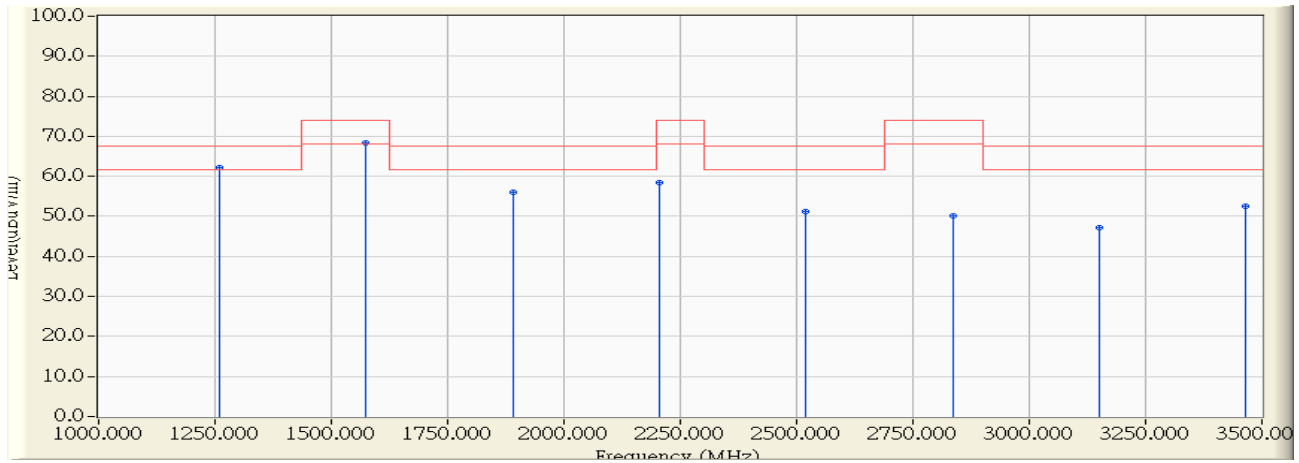

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	1260.000	-10.476	72.774	62.298	-5.362	67.660	PEAK
2		1575.000	-9.080	77.390	68.310	-5.690	74.000	PEAK
3		1890.000	-8.066	64.064	55.998	-11.662	67.660	PEAK
4		2205.000	-5.752	64.100	58.348	-15.652	74.000	PEAK
5		2520.000	-2.975	54.071	51.096	-16.564	67.660	PEAK
6		2835.000	-3.804	53.804	50.000	-24.000	74.000	PEAK
7		3150.000	-4.175	51.296	47.121	-20.539	67.660	PEAK
8		3465.000	-4.036	56.514	52.478	-15.182	67.660	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. “ * ”, means this data is the worst emission level.
4. Measurement Level = Reading Level + Correct Factor.
5. Average Measurement Level = Peak Measurement Level + 20Log (Duty Cycle)
 $Duty\ Cycle = (Ton / (Ton + Toff)) = 9.40 / 100 = 0.094$
 $20 * Log(Duty\ Cycle) = -20.53$
6. The average measurement was not performed when the peak measured data under the limit of peak detection.

3. Occupied Bandwidth

3.1. Test Equipment


The following test equipments are used during the radiated emission tests:

Occupied Bandwidth / SR7

Instrument	Manufacturer	Model No.	Serial No	Next Cal. Date
Spectrum Analyzer	R&S	FSP40	100005	2014/03/13

Note: 1. All equipments that need to calibrate are with calibration period of 1 year.

3.2. Test Setup

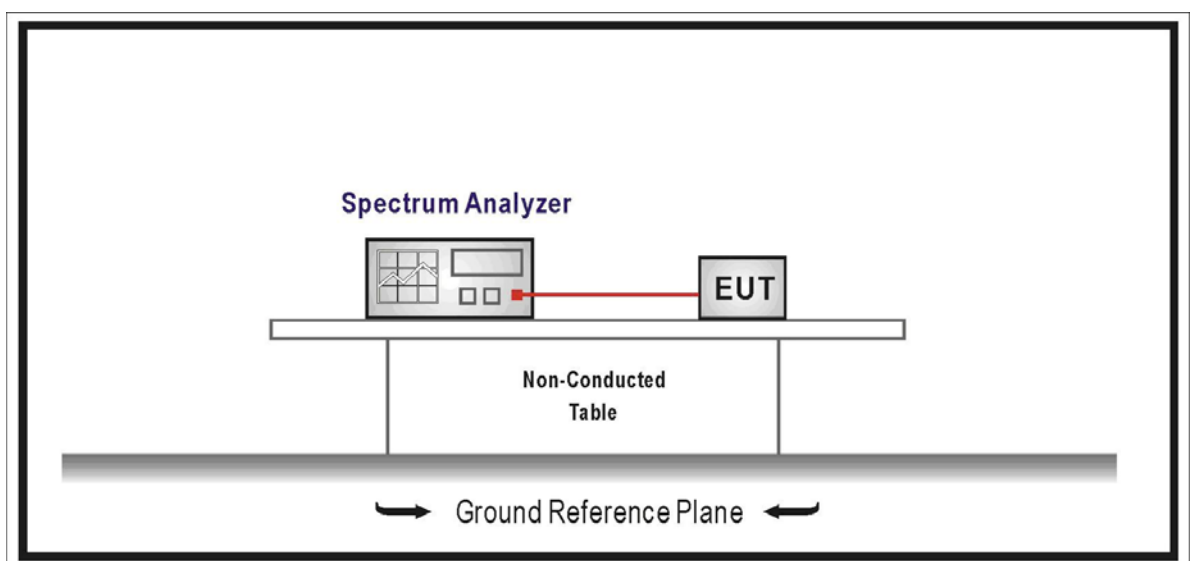

3.3. Limits

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

3.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.231(e): 2012

3.5. Uncertainty

± 150Hz

3.6. Test Result

Product	ORO Transmitter		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit		
Date of Test	2013/06/02	Test Site	SR7

Center Frequency	315.00 MHz
Allowable Bandwidth (70-900 MHz: 0.25%, Above 900MHz: 0.5%)	787.50KHz
Bandwidth at 20dB down (Max)	236.00KHz
Result	PASS



DELTA MARKER 3

236 kHz

Ref 13 dBm

*Att 20 dB

*RBW 30 kHz

Delta 3 [T1]


*VBW 100 kHz

0.30 dB

*SWT 100 ms

236.000000000 kHz

1 PK
VIEW

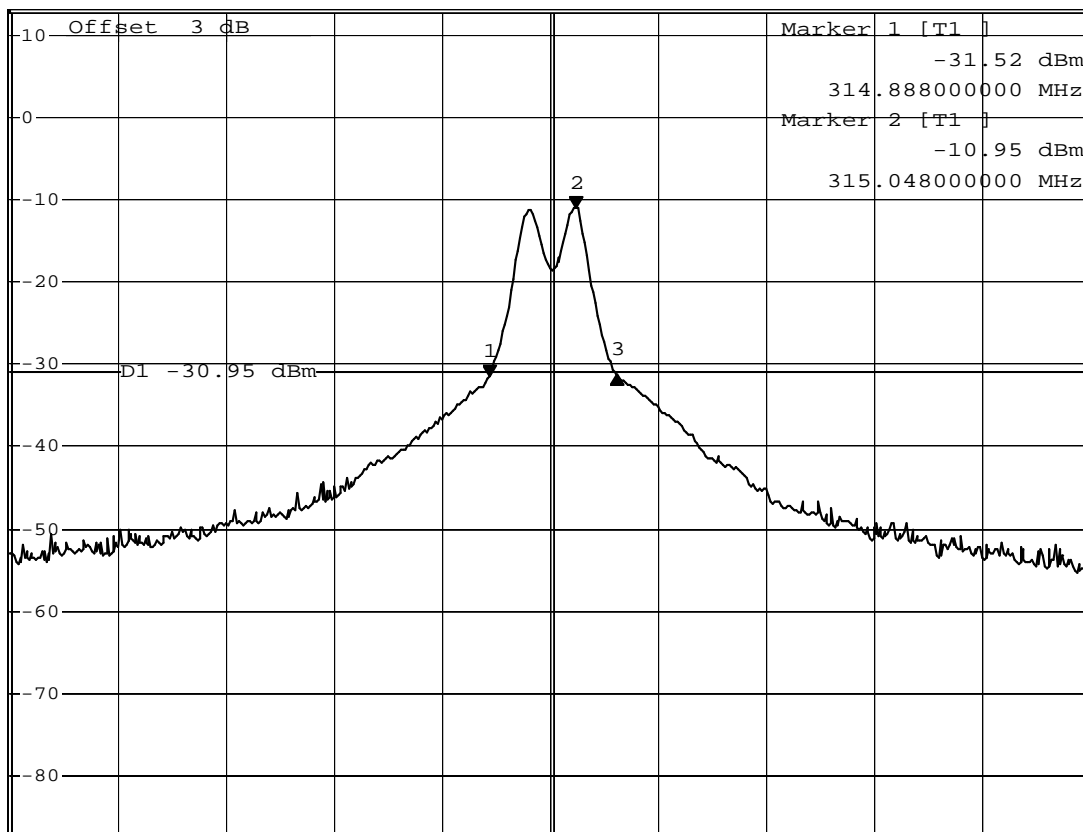

Center 315 MHz

200 kHz/

Span 2 MHz

Date: 2.JUN.2013 11:53:54

4. Duty cycle

4.1. Test Equipment


The following test equipments are used during the radiated emission tests:

Duty cycle / SR7

Instrument	Manufacturer	Model No.	Serial No	Next Cal. Date
Spectrum Analyzer	R&S	FSP40	100005	2014/03/13

Note: 1. All equipments that need to calibrate are with calibration period of 1 year.

4.2. Test Setup

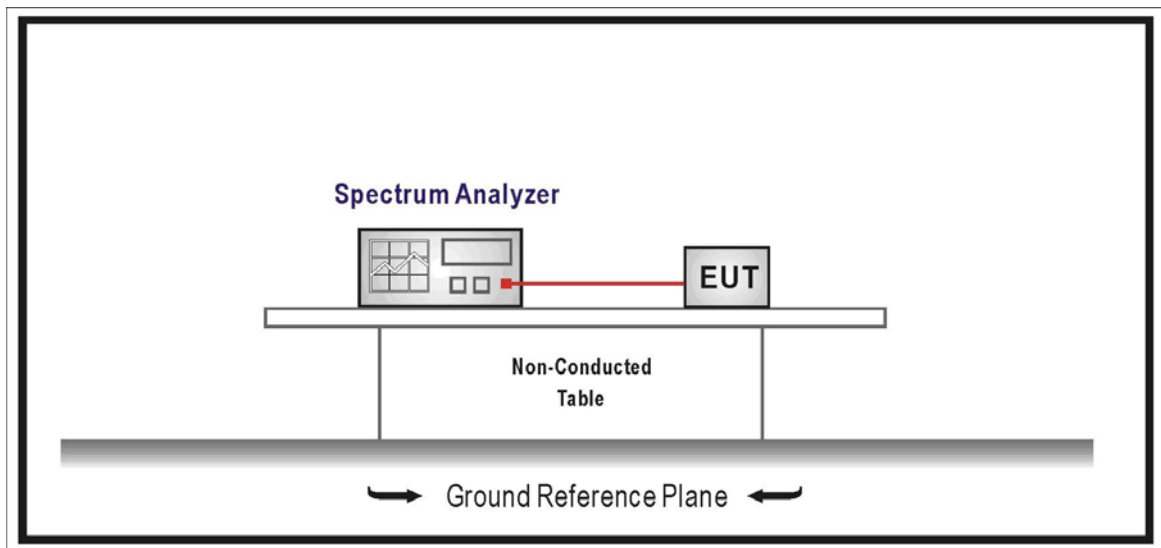

4.3. Limits

N/A

4.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.231(e): 2012

4.5. Uncertainty

$\pm 25\text{msec}$

4.6. Test Result

Product	ORO Transmitter		
Test Item	Duty Cycle		
Test Mode	Mode 1: Transmit		
Date of Test	2013/06/13	Test Site	SR7

Center Frequency	315.00 MHz
Ton= 9.40ms	
Ton+Toff= 100ms	
Duty Cycle= 0.094/100%	9.40%


DELTA MARKER 2

9.4 ms

Ref -20 dBm

*Att 0 dB

RBW 10 kHz


Delta 2 [T1]

*VBW 30 kHz

0.38 dB

SWT 100 ms

9.400000 ms

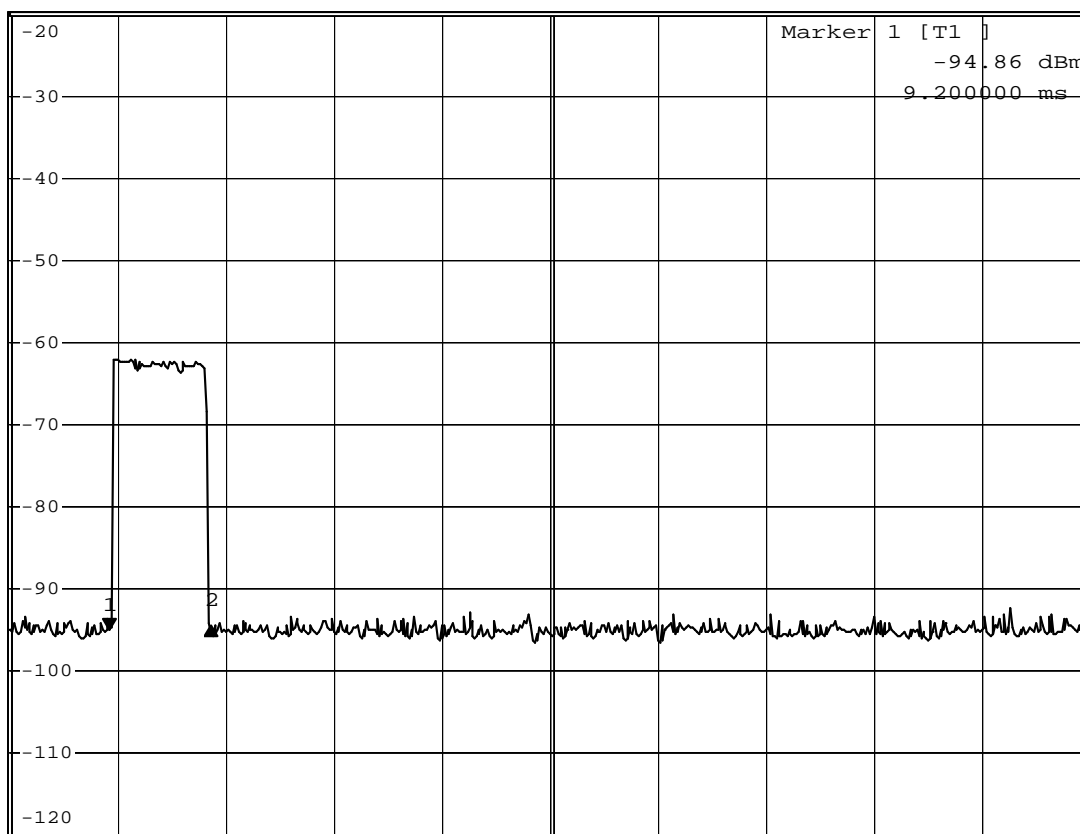1 PK
VIEW


Center 315 MHz

10 ms/

Date: 13.JUN.2013 18:30:30

5. Transmitter time

5.1. Test Equipment


The following test equipments are used during the radiated emission tests:

Transmitter time / SR7

Instrument	Manufacturer	Model No.	Serial No	Next Cal. Date
Spectrum Analyzer	R&S	FSP40	100005	2014/03/13

Note: 1. All equipments that need to calibrate are with calibration period of 1 year.

5.2. Test Setup

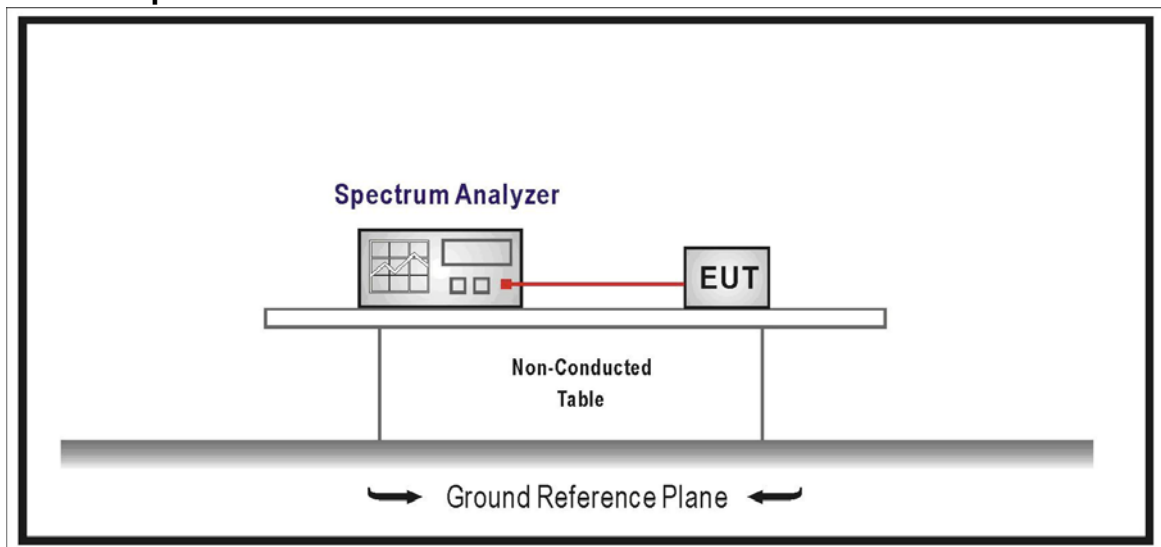

5.3. Limits

The duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

5.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.231(e): 2012

5.5. Uncertainty

± 25msec


5.6. Test Result

Product	ORO Transmitter		
Test Item	Transmitter time		
Test Mode	Mode 1: Transmit		
Date of Test	2013/06/14	Test Site	SR7

Frequency (MHz)	Transmitter time (ms.)		Silent period (sec.)	
	Measure value	Limit	Measure value	Limit
315.00	9.40	1000.00	30.40	10.00


Result	PASS
--------	------

Transmitter time in 100ms

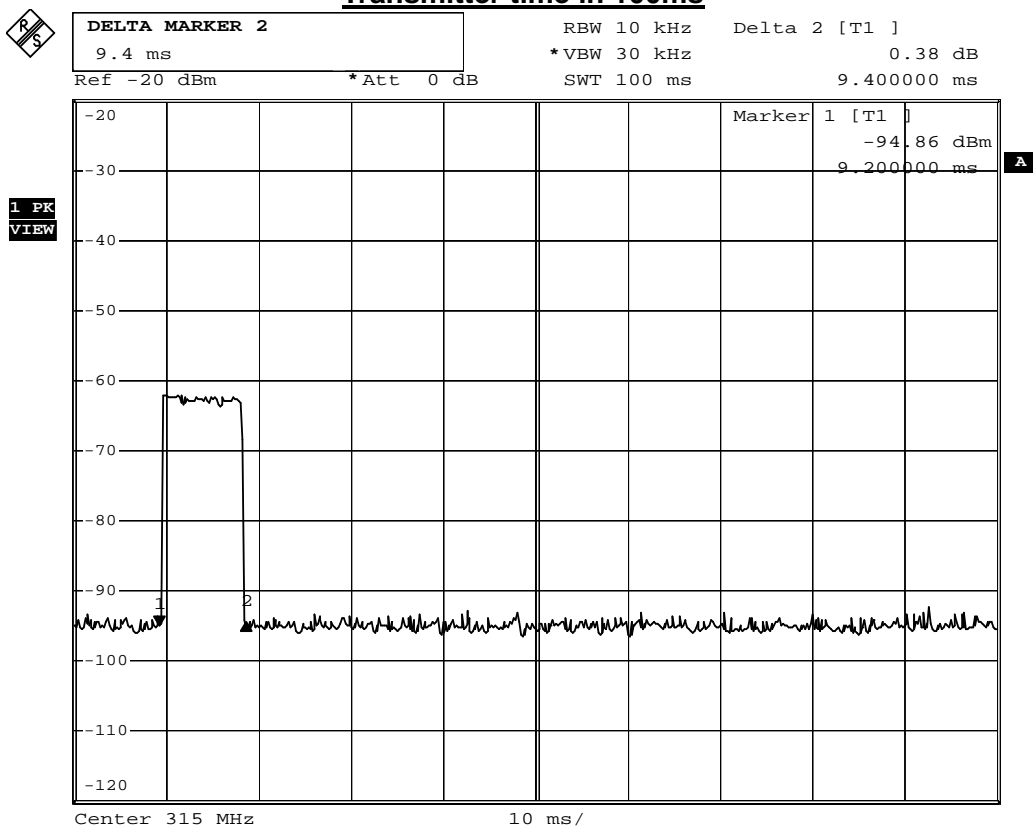

Date: 13.JUN.2013 18:30:30

Transmitter time in 80sec

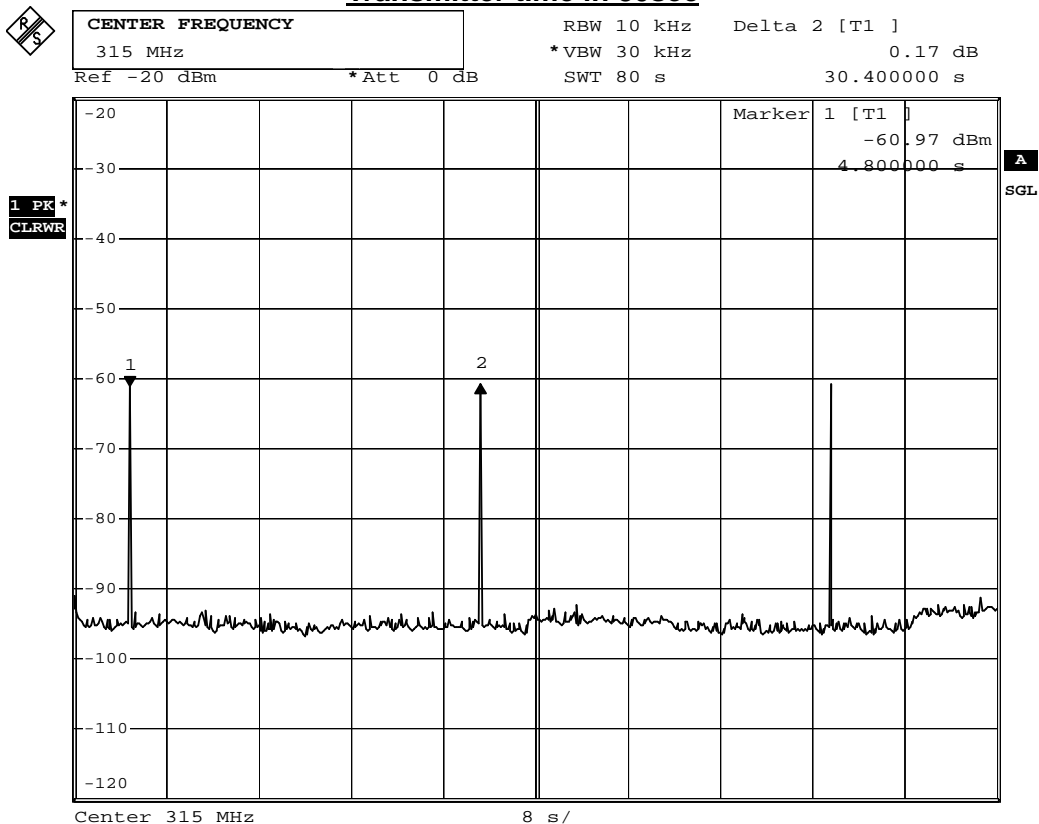

Date: 13.JUN.2013 18:28:06