




# FCC RADIO EXPOSURE TEST REPORT

FCC ID : W59XAP1610  
Equipment : Apex Wave 2 AC3100 Dual-Band Wireless AP  
Brand Name : Luxul  
Model Name : XAP-1610, XWS-2610  
Applicant : Luxul Wireless  
12884 S Frontrunner Blvd Suite 201 Draper Utah  
United States 84020  
Standard : 47 CFR Part 2.1091

The product was received on Apr. 09, 2018, and testing was started from Apr. 09, 2018 and completed on May 12, 2018. We, SPORTON INTERTIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERTIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

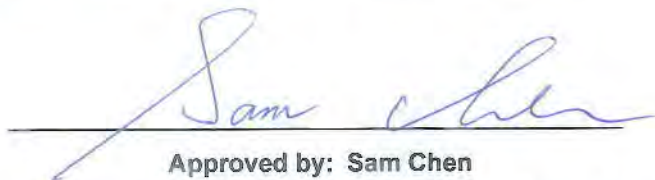

Approved by: Sam Chen

**SPORTON INTERTIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....3  
Summary of Test Result.....4  
**1 General Description .....5**  
1.1 EUT General Information .....5  
1.2 Table for Multiple Listing .....5  
1.3 Testing Location .....5  
**2 Maximum Permissible Exposure .....6**  
2.1 Limit of Maximum Permissible Exposure .....6  
2.2 MPE Calculation Method.....6  
2.3 Calculated Result and Limit.....7  
Photographs of EUT v01



### History of this test report

Report No.	Version	Description	Issued Date
FA841602	01	Initial issue of report	May 31, 2018



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

**Reviewed by: Cliff Chang**

**Report Producer: Cindy Peng**



# 1 General Description

## 1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
5GHz WLAN	5150-5250 5725-5850	5180-5240 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)

## 1.2 Table for Multiple Listing

The EUT has two model names which are identical to each other in all aspects except for the following table:

Model Name	Description
XAP-1610	There is nothing different of two models, just for different marketing use.
XWS-2610	

From the above models, model: XAP-1610 was selected as representative model for the test and its data was recorded in this report.

## 1.3 Testing Location

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.



## 2 Maximum Permissible Exposure

### 2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

### 2.2 MPE Calculation Method

The MPE was calculated at 26 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



### 2.3 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm <sup>2</sup> )	S Limit (mW/cm <sup>2</sup> )
2.4G;D1D	8.87	27.10	35.97	0.03	36.00	3.98107	26	0.46863	1.00000
5.2G;D1D	9.55	26.43	35.98	0.02	36.00	3.98107	26	0.46863	1.00000
5.8G;D1D	9.55	26.42	35.97	0.03	36.00	3.98107	26	0.46863	1.00000

Simultaneous Transmission Analysis Mode: WLAN 2.4GHz+WLAN 5GHz

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm <sup>2</sup> )	S Limit (mW/cm <sup>2</sup> )	Ratio (S/Limit)
2.4G;D1D	8.87	27.10	35.97	0.03	36.00	3.98107	26	0.46863	1.00000	0.46863
5.2G;D1D	9.55	26.43	35.98	0.02	36.00	3.98107	26	0.46863	1.00000	0.46863
									Sum Ratio	0.93726
									Ratio Limit	1

————THE END————