



DATE: 14 August 2014

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for

SuperCom Ltd.

Equipment under test:

HealthCare Tag v2.0

**Wrist Tag PRF-HCT20WT
Lock Alert PRF-HCT20LA**

Written by:

R. Pinchuck
R. Pinchuck, Documentation

Approved by:

M. Zohar
M. Zohar, Test Engineer

Approved by:

I. Raz
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for SuperCom Ltd.

HealthCare Tag v2.0

Wrist Tag PRF-HCT20WT

Lock Alert PRF-HCT20LA

FCC ID: W5P-PRF-HCT20

This report concerns:

Original Grant: X

Class I change:

Class II change:

Equipment type:

Part 15 Security/Remote Control Transmitter

Limits used:

47CFR15 Section 15.231 (a-d)

Measurement procedure used is ANSI C63.4-2003.

Application for Certification
prepared by:

R. Pinchuck
ITL (Product Testing) Ltd.
1 Bat Sheva St.
Lod 7116002
Israel
e-mail rpinchuck@itl.co.il

Applicant for this device:
(different from "prepared by")

Ze'ev Lavi
SuperCom Ltd.
1 Arie Shenkar St.
Herzliya 4672501
Israel
Tel: + 972 - 9 - 889 - 0800
Fax: + 972 - 9 - 889 - 0814
e-mail: Zeev@SuperCom.com



TABLE OF CONTENTS

1.	GENERAL INFORMATION -----	5
1.1	Administrative Information	5
1.2	List of Accreditations	6
1.3	Product Description	7
1.4	Test Methodology	7
1.5	Test Facility	7
1.6	Measurement Uncertainty	7
2.	SYSTEM TEST CONFIGURATION -----	8
2.1	Justification	8
2.2	EUT Exercise Software	8
2.3	Special Accessories	8
2.4	Equipment Modifications	8
2.5	Configuration of Tested System	8
3.	RADIATED MEASUREMENT TEST SET-UP PHOTO -----	9
4.	AVERAGE FACTOR CALCULATION -----	13
4.1	Test Instrumentation Used; Average Factor Calculation	14
5.	PERIODIC OPERATION -----	15
5.1	Specification	15
5.2	Requirements	15
5.3	Results	15
5.4	Test Instrumentation Used; Periodic Operation	19
6.	FIELD STRENGTH OF FUNDAMENTAL -----	20
6.1	Test Specification	20
6.2	Test Procedure	20
6.3	Measured Data	20
6.4	Test Instrumentation Used; Field Strength of Fundamental	27
7.	RADIATED EMISSION, 9 KHZ – 30 MHZ -----	28
7.1	Test Specification	28
7.2	Test Procedure	28
7.3	Measured Data	28
7.4	Test Instrumentation Used, Radiated Measurements	29
7.5	Field Strength Calculation	29
8.	RADIATED EMISSION 30 MHZ -4.5 GHZ -----	30
8.1	Test Specification	30
8.2	Test Procedure	30
8.3	Test Data	31
8.4	Test Instrumentation Used, Radiated Measurements	33
9.	20DB BANDWIDTH -----	34
9.1	Test procedure	34
9.2	Results Table	34
9.3	Test Equipment Used; 20dB Bandwidth	36
10.	26DB BANDWIDTH -----	37
10.1	Test Procedure	37
10.2	Results Table	38
10.3	Test Equipment Used; 26dB Bandwidth	39
11.	R.F EXPOSURE/SAFETY -----	40
12.	APPENDIX A - CORRECTION FACTORS -----	41
12.1	Correction factors for CABLE	41
12.2	Correction factors for CABLE	42
12.3	Correction factors for CABLE	43
12.4	12.6 Correction factors for LOG PERIODIC ANTENNA	44
12.5	Correction factors for LOG PERIODIC ANTENNA	45



12.6	Correction factors for BICONICAL ANTENNA.....	46
12.7	Correction factors for Double-Ridged Waveguide Horn	47
12.8	Correction factors for Horn Antenna	48
12.9	Correction factors for Horn Antenna	49
12.10	Correction factors for ACTIVE LOOP ANTENNA	50



1. General Information

1.1 Administrative Information

Manufacturer:	SuperCom Ltd.
Manufacturer's Address:	1 Arie Shenkar St. Herzeliya, 4672501 Israel Tel: 972-9-889-0800 Fax: 972-9-889-0814
Manufacturer's Representative:	Ehud Bachman
Equipment Under Test (E.U.T):	HealthCare Tag v2.0
Equipment Model No.:	Wrist Tag PRF-HCT20WT Lock Alert PRF-HCT20LA
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	23.07.2014
Start of Test:	23.07.2014
End of Test:	06.08.2014
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	FCC Part 15, Subpart C



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 **Product Description**

The HC (HealthCare) tag is SuperCom's next generation super-mini RFID tags, with a mission to be integrated in application like Anti-Wandering systems and LockAlert system (smart security locking system).

The Anti-Wandering system can give peace of mind for your loved ones to maintain their dignity and security. With our new Companion Anti-Wandering System (Based on PRF-MFT10 and PRF-HCT20) you can now rest easy. The system helps Alzheimers or Dementia patients who may be prone to wandering you know the importance of keeping them safe and secure in your home or facility.

Once they come within a set proximity of the doorway the local alarm will sound until they move from the area. You can easily set the distance for the warning allowing you the time needed to secure your loved one before they can exit.

The LockAlert™ system offers a complete tracking and monitoring via a secured and reliable locking mechanism. The system is based on a well-established Radio Frequency Identification technology, a reliable and secured solution.

The LockAlert™ system monitors all activity and provides real-time alerts when a lock has been breached.

1.4 **Test Methodology**

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 **Test Facility**

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing November 21, 2012). I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 **Measurement Uncertainty**

Conducted Emission

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) 0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.44 dB

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB

2. System Test Configuration

2.1 *Justification*

Both models incorporate the same PCB with different plastic enclosures.

The antennas differ in both models: Wrist Tag consist of an antenna trace and the LockAlert is a simple wire connected internally to the PCB.

Both models have 2 optional modulation modes: ASK and FSK.

Testing was done for each configuration mode after radiated emission screening was performed in 3 orthogonal orientations. The worst case orientation was the vertical position.

2.2 *EUT Exercise Software*

No special exercise software was needed.

2.3 *Special Accessories*

No special accessories were needed.

2.4 *Equipment Modifications*

No modifications were needed in order to achieve compliance

2.5 *Configuration of Tested System*

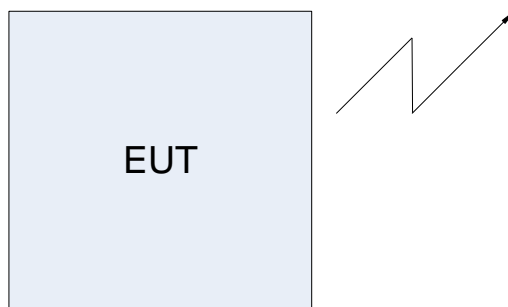


Figure 1. Configuration of Tested System

3. Radiated Measurement Test Set-up Photo



Figure 2. Radiated Emission Test – Lock Alert PRF-HCT20LA



Figure 3. Radiated Emission Test - Lock Alert PRF-HCT20LA



Figure 4. Radiated Emission Test - Lock Alert PRF-HCT20LA



Figure 5. Radiated Emission Test - Lock Alert PRF-HCT20LA



Figure 6. Radiated Emission Test – Wrist Tag PRF-HCT20WT



Figure 7. Radiated Emission Test – Wrist Tag PRF-HCT20WT



Figure 8. Radiated Emission Test – Wrist Tag PRF-HCT20WT



Figure 9. Radiated Emission Test – Wrist Tag PRF-HCT20WT

4. Average Factor Calculation

1. Transmission pulse duration = n/a
2. Transmission pulse period = n/a
3. Burst duration = 5.87msec
4. Time between bursts = 300 msec , >100ms
5. Average Factor = $20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100 \text{ msec}} \times \text{Num of burst within 100 msec} \right]$

$$\text{Average Factor} = 20 \log \left[1 \times \frac{5.87}{100} \times 1 \right] = -24.7 \text{ dB}$$

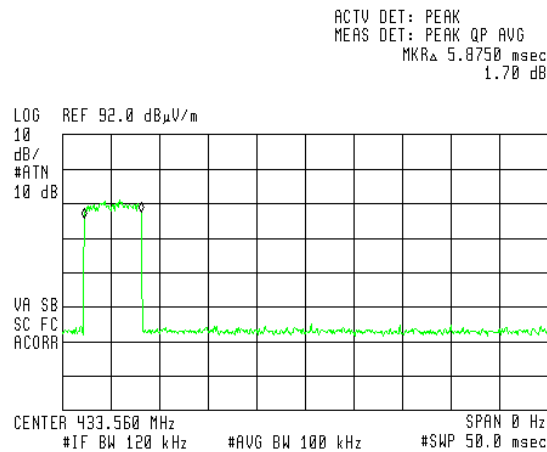


Figure 10. Burst duration = 5.875msec

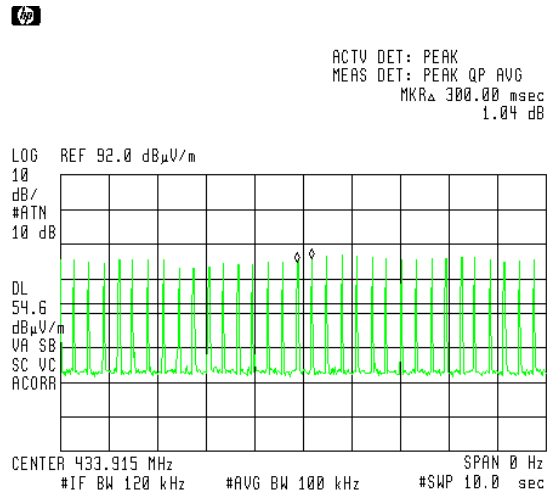


Figure 11. Time between bursts = 300msec , >100ms

4.1 Test Instrumentation Used; Average Factor Calculation

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2014	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2012	2 years
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	2 years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

Figure 12 Test Equipment Used



5. Periodic Operation

5.1 Specification

F.C.C., Part 15, Subpart C, Section 15.231(a)

5.2 Requirements


Requirement	Rationale	Verdict
Continuous transmissions are not permitted.	N/A	Complies
A manually operated transmitter shall be deactivated within not more than 5 seconds after releasing the switch.	See plot in Figure 13	Complies
An automatically operated transmitter shall cease operation within 5 seconds after activation.	N/A	Complies
Periodic transmissions at regular predetermined intervals are not permitted.	N/A	Complies
Polling or supervised transmissions to determine system integrity of transmitter used in security or safety applications shall not exceed more than 2 seconds per hour.	See plots in Figure 16 and Figure 17	Complies

5.3 Results

JUDGEMENT: Passed

The EUT met the FCC Part 15, Subpart C, Section 15.231(a) specification requirements.

TEST PERSONNEL:

Tester Signature: 

Date: 25.08.14

Typed/Printed Name: M. Zohar

Periodic Operation

E.U.T Description HealthCare Tag v2.0
Type Wrist Tag PRF-HCT20WT
 Lock Alert PRF-HCT20LA
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

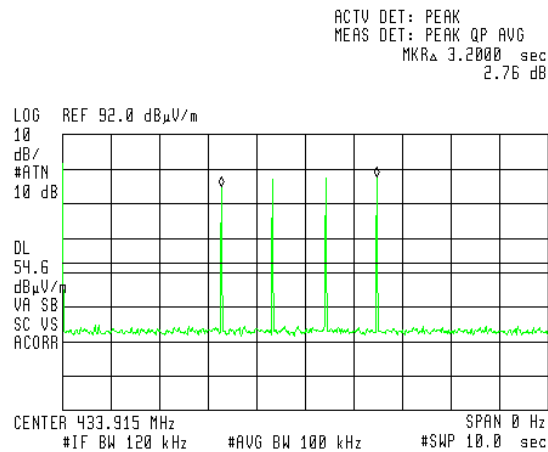


Figure 13. Manual transmission tamper switch (Lock Alert)

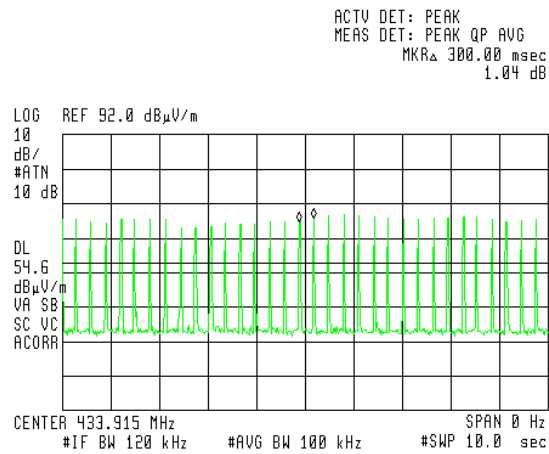


Figure 14. Alarm - Activator Mode (Lock Alert/Wrist Tag)

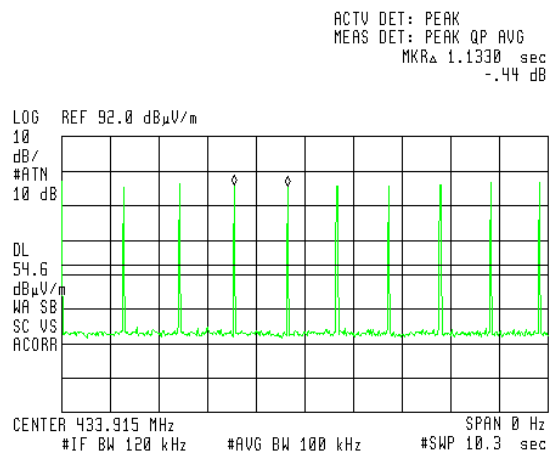


Figure 15. Alarm - Motion Mode (Lock Alert)

Periodic Operation

E.U.T Description HealthCare Tag v2.0
Type Wrist Tag PRF-HCT20WT
 Lock Alert PRF-HCT20LA
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

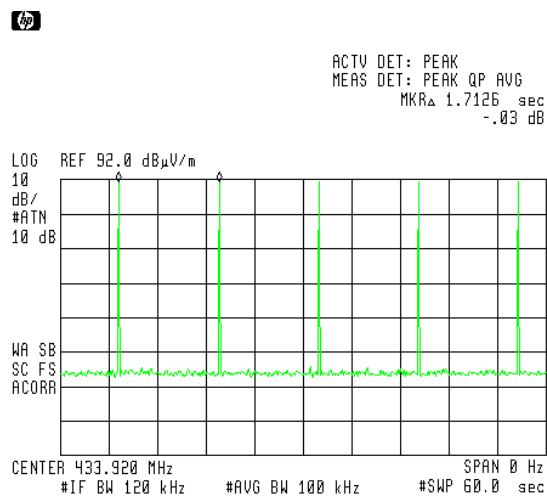


Figure 16. Supervision Within 1 min (Lock Alert/Wrist Tag)

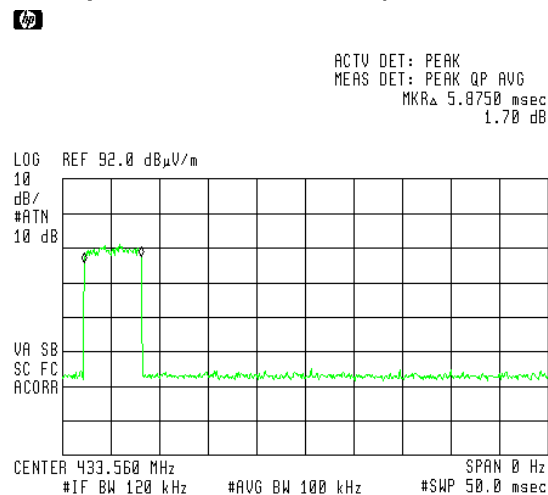


Figure 17. Supervision, burst duration (Lock Alert/Wrist Tag)
(5.875 milliseconds X 300 = 1761 milliseconds)

5.4 Test Instrumentation Used; Periodic Operation

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	January 15, 2014	1 Year
RF Section	HP	85420E	3705A00248	January 15, 2014	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	2 years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

Figure 18 Test Equipment Used

6. Field Strength of Fundamental

6.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.231(b)

6.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency and Peak Detection.

The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver.

The measurement was performed for vertical and horizontal polarizations of the test antenna.

The test was performed for 2 TAG types: Lock Alert and Wrist Tag.

2 modulation modes were tested for each TAG: ASK and FSK.

The average result is:

Peak Level(dBμV/m) + E.U.T. Duty Cycle Factor in 100msec time window (dB)

6.3 Measured Data

JUDGEMENT: Passed by 12.8 dB

The EUT met the FCC Part 15, Subpart C, Section 15.231(b) specification requirements.

The details of the highest emissions are given in Figure 19 to Figure 27.

TEST PERSONNEL:

Tester Signature: 

Date: 25.08.14

Typed/Printed Name: M. Zohar



Field Strength of Fundamental

E.U.T Description HealthCare Tag v2.0
Type Wrist Tag PRF-HCT20WT
Lock Alert PRF-HCT20LA
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters Detector: Peak

TAG	Modulation	Freq. (MHz)	Pol. V/H	Peak Reading (dBμV/m)	Average Factor (dB)	AVG Result (dBμV/m)	AVG Specification (dBμV/m)	Margin (dB)
Lock Alert	FSK	433.92	H	91.8	-24.7	67.1	80.8	-13.7
	FSK	433.92	V	91.2	-24.7	66.5	80.8	-14.3
	ASK	433.92	H	92.7	-24.7	68.0	80.8	-12.8
	ASK	433.92	V	91.2	-24.7	66.5	80.8	-14.3
Wrist	FSK	433.92	H	72.3	-24.7	47.6	80.8	-33.2
	FSK	433.92	V	73.0	-24.7	48.3	80.8	-32.5
	ASK	433.92	H	70.7	-24.7	46.0	80.8	-34.8
	ASK	433.92	V	73.1	-24.7	48.4	80.8	-32.4

Figure 19. AVG Test Results - Field Strength of Fundamental

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. "Peak Reading." (dBμV/m) included the "Correction Factors".
3. "Correction Factors" (dB) = Test Antenna Correction Factor(dB) + Cable Loss.
4. "Average Factor = $20 \log [(burst\ duration/100msec)*Num\ of\ burst\ within\ 100msec]$ = $20 \log [(5.87/100)*1]$ = -24.7
5. "Average Result" (dBμV/m) = Peak Reading (dBμV/m) + D.C.F. (dB)

Field Strength of Fundamental


E.U.T Description HealthCare Tag v2.0
Type Lock Alert PRF-HCT20LA
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Horizontal

Test Distance: 3 meters

Detector: Peak

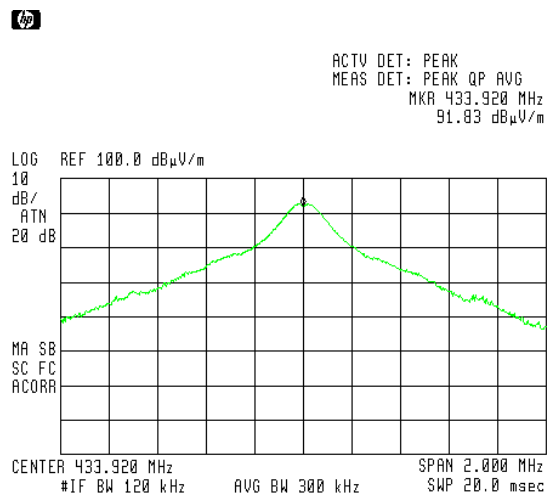

**Figure 20. Lock Alert - Field Strength of Fundamental; Antenna Polarization: HORIZONTAL.
Detector: Peak (FSK MODULATION)**

Field Strength of Fundamental

E.U.T Description HealthCare Tag v2.0
Type Lock Alert PRF-HCT20LA
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Vertical

Test Distance: 3 meters

Detector: Peak

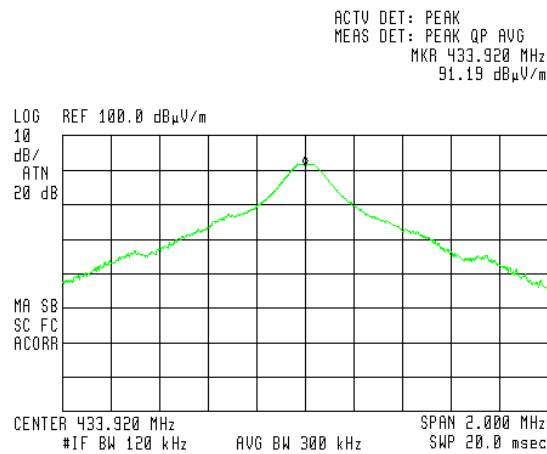


Figure 21. Lock Alert - Field Strength of Fundamental. Antenna Polarization: VERTICAL. Detector: Peak (FSK MODULATION)


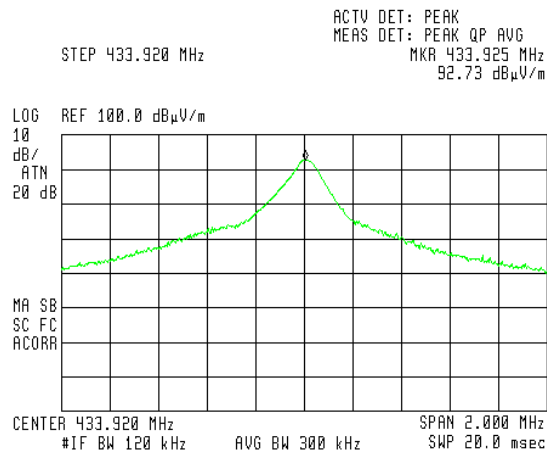


Figure 22. Lock Alert - Field Strength of Fundamental. Antenna Polarization: HORIZONTAL. Detector: Peak (ASK MODULATION)

Field Strength of Fundamental

E.U.T Description HealthCare Tag v2.0
Type Lock Alert PRF-HCT20LA
Serial Number: Not Designated

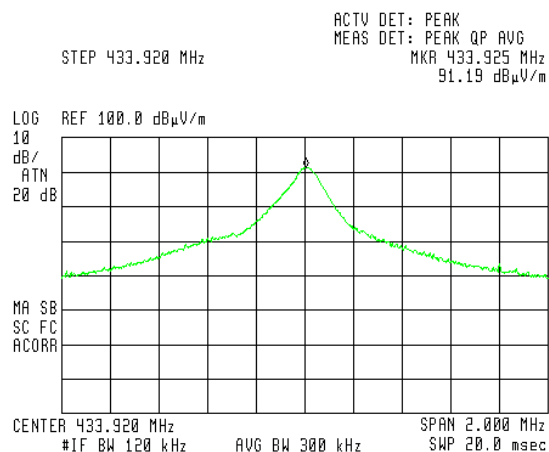

**Figure 23. Lock Alert - Field Strength of Fundamental. Antenna Polarization: VERTICAL.
Detector: Peak (ASK MODULATION)**

Field Strength of Fundamental

E.U.T Description HealthCare Tag v2.0
Type Wrist Tag PRF-HCT20WT
Serial Number: Not Designated

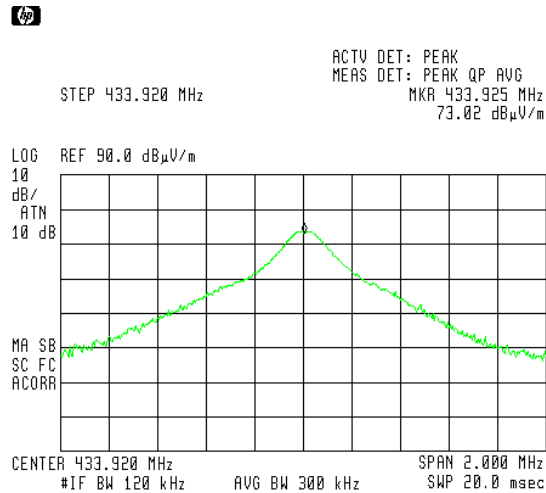


Figure 24. Wrist Tag - Field Strength of Fundamental. Antenna Polarization: VERTICAL. Detector: Peak (FSK MODULATION)



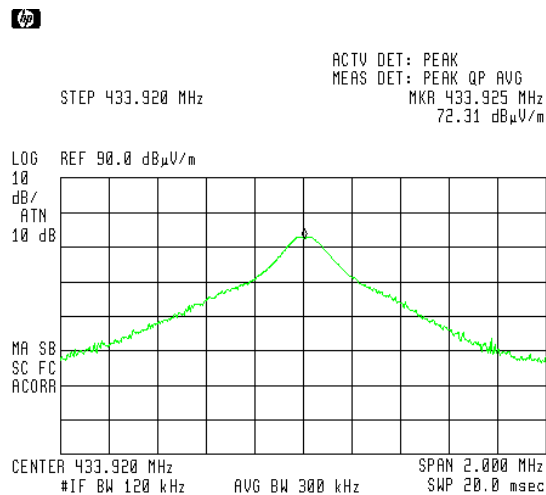


Figure 25. Wrist Tag - Field Strength of Fundamental. Antenna Polarization: HORIZONTAL. Detector: Peak (FSK MODULATION)

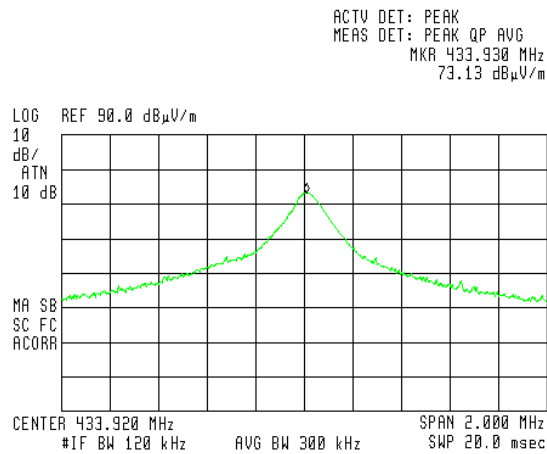

**Figure 26. Wrist Tag - Field Strength of Fundamental. Antenna Polarization: VERTICAL.
Detector: Peak (ASK MODULATION)**

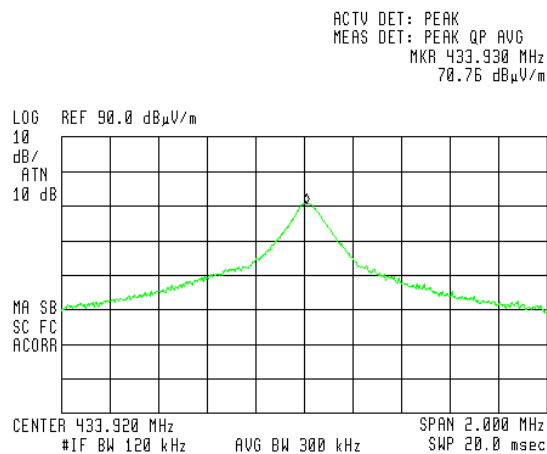

**Figure 27. Wrist Tag - Field Strength of Fundamental. Antenna Polarization: HORIZONTAL.
Detector: Peak (ASK MODULATION)**



6.4 Test Instrumentation Used; Field Strength of Fundamental

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	January 15, 2014	1 year
RF Section	HP	85420E	3705A00248	January 15, 2014	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	2 years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 28 Test Equipment Used

7. Radiated Emission, 9 kHz – 30 MHz

7.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

7.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was operated at the frequency of 433.9 kHz. This frequency was measured using a peak detector.

7.3 Measured Data

JUDGEMENT: Passed

No unwanted emission spurious was detected in frequency range of 9 kHz-30 MHz.

The EUT was tested and it met the requirements of the FCC Part 15, Subpart C specification.

TEST PERSONNEL:

Tester Signature: 

Date: 25.08.14

Typed/Printed Name: M. Zohar

7.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	January 15, 2014	1 year
RF Section	HP	85420E	3705A00248	January 15, 2014	1 year
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2013	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

Figure 29 Test Equipment Used

7.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]

RA: Receiver Amplitude [dB μ V]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

8. Radiated Emission 30 MHz -4.5 GHz

8.1 Test Specification

30 MHz-4.5 GHz, F.C.C., Part 15, Subpart C

8.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3. See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The signals from the list of the highest emissions were verified and the list was updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The frequency range 30 MHz to 4.5 GHz was scanned and the list of the highest emissions was verified and updated accordingly.

The emissions in the frequency range 30MHz – 1000 MHz were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9GHz – 4.5 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.



8.3 **Test Data**

JUDGEMENT: Passed by 49.4 dB

The EUT met the requirements of the F.C.C. Part 15, Subpart C specification.

The margin between the emission level and the specification limit was 49.4 dB in the worst case at the frequency of 867.8 MHz, vertical polarization.

For additional information see Figure 30.

TEST PERSONNEL:

Tester Signature: 

Date: 25.08.14

Typed/Printed Name: M. Zohar



Radiated Emission

E.U.T Description HealthCare Tag v2.0
Type Wrist Tag PRF-HCT20WT
Lock Alert PRF-HCT20LA
Serial Number: Not Designated

Specification: FCC Part 15, Subpart C

Antenna Polarization: Vertical
Antenna: 3 meters distance

Frequency range: 30 MHz to 6GHz
Detectors: Peak

TAG	Frequency	Pol.	Peak Reading	Average Factor	AVG Result	AVG Specification	Margin
	MHz		(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
Lock Alert	867.8	V	56.1	-24.7	31.4	80.8	-49.4
	1301.7	V	52.8	-24.7	28.1	80.8	-52.7
Wrist	867.8	V	47.0	-24.7	22.3	80.8	-58.5
	1301.7	V	54.6	-24.7	29.9	80.8	-50.9

**Figure 30. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak**

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. "Peak Reading." (dB μ V/m) included the "Correction Factors".
3. "Correction Factors" (dB) = Test Antenna Correction Factor(dB) + Cable Loss.
4. "Average Result" (dB μ V/m)=Peak Reading (dB μ V/m)+ Average Factor (dB)

8.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	January 15, 2014	1 year
RF Section	HP	85420E	3705A00248	January 15, 2014	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS- 0411N313	013	August 21, 2013	1 year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2014	1 year
Antenna Biconical	EMCO	3104	2606	August 30, 2012	2 years
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	2 years
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 14, 2012	3 years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 31 Test Equipment Used

9. 20dB Bandwidth

9.1 Test procedure

The transmitter unit operated with normal modulation. The spectrum analyzer was set to 30 kHz resolution BW and center frequency of the transmitter fundamental. The spectrum bandwidth of the transmitter unit was measured and recorded. The BW was measured at 20 dBc points.

The EUT was set up as shown in Figure 1, and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on the modulation envelope. The E.U.T was tested in 2 modulation modes: ASK and FSK.

9.2 Results Table

E.U.T Description: HealthCare Tag v2.0
Model: Lock Alert PRF-HCT20LA
Serial Number: Not Designated
Specification: F.C.C. Part 15, Subpart C: (15.231(c))

Modulation	Bandwidth Reading (kHz)	Specification* (kHz)	Margin (kHz)
FSK	380	<1082	-702
ASK	235	<1082	-847

Figure 32 20dB Bandwidth Test Results

JUDGEMENT: Passed by 702 kHz

For additional information see Figure 33 and Figure 34.

TEST PERSONNEL:

Tester Signature: 

Date: 25.08.14

Typed/Printed Name: M. Zohar

(*) 0.25% of the E.U.T. fundamental frequency, Section 15.231(c).



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKRΔ 235 kHz
.07 dB

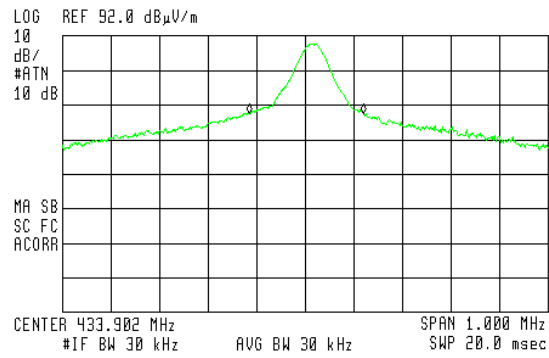


Figure 33 20dB ASK MODULATION



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKRΔ 300 kHz
.05 dB

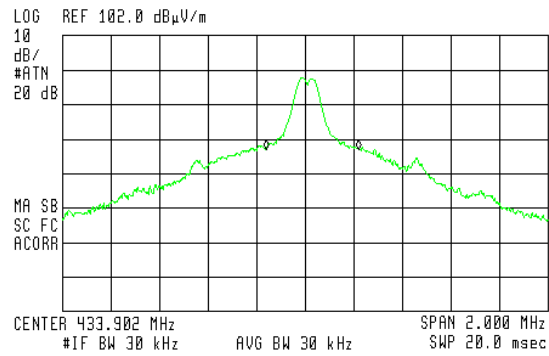


Figure 34 20dB FSK MODULATION



9.3 Test Equipment Used; 20dB Bandwidth

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	January 15, 2014	1 year
RF Section	HP	85420E	3705A00248	January 15, 2014	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	2 years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 35 Test Equipment Used

10. 26dB Bandwidth

10.1 Test Procedure

The transmitter unit operated with normal modulation. The spectrum analyzer was set to 30 kHz resolution BW and center frequency of the transmitter fundamental. The spectrum bandwidth of the transmitter unit was measured and recorded. The BW was measured at 26 dBc points.

The EUT was set up as shown in Figure 1 and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on the modulation envelope. The E.U.T was tested in 2 modulation modes: ASK and FSK.

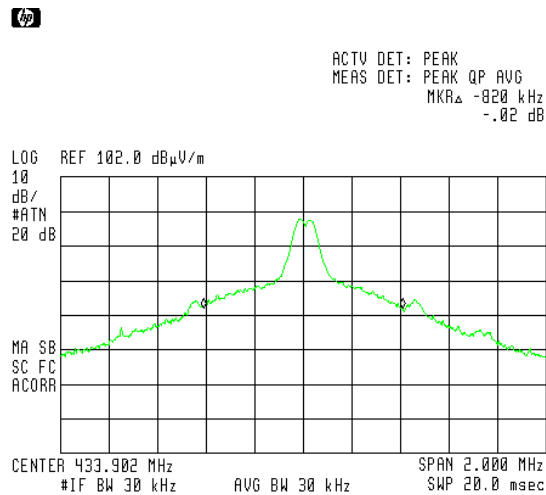


Figure 36 26dB FSK Modulation

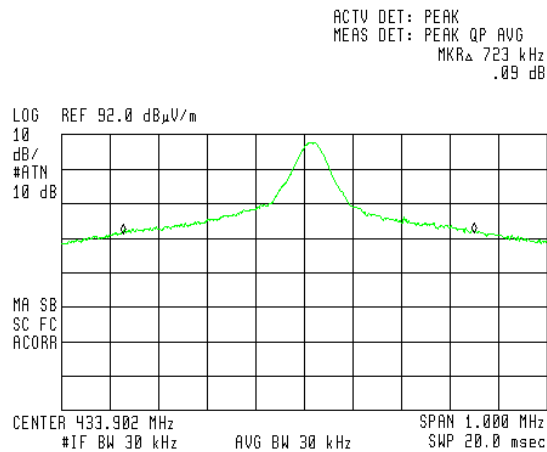


Figure 37 26dB ASK Modulation

10.2 Results Table


E.U.T Description: HealthCare Tag v2.0
Model: Wrist Tag PRF-HCT20WT
Lock Alert PRF-HCT20LA
Serial Number: Not Designated
Specification: F.C.C. Part 15, Subpart C: (15.231(c))

Modulation	Bandwidth Reading (kHz)
FSK	820
ASK	723

Figure 38 26dB Test Results

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: 

Date: 25.08.014

Typed/Printed Name: M. Zohar



10.3 Test Equipment Used; 26dB Bandwidth

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	January 15, 2014	1 year
RF Section	HP	85420E	3705A00248	January 15, 2014	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 39 Test Equipment Used

11. R.F Exposure/Safety

The typical placement of the E.U.T. is as a personal tag. The typical distance between the E.U.T. and the user is 0.5 cm.

Calculation of Maximum Permissible Exposure (MPE)

Based on 47CFR1 Section 1.1310 Requirements

- (a) FCC Limit at 433.92 MHz is:

$$\frac{f}{1500} = 0.289 \frac{mW}{cm^2}$$

Using Table 1 of 47CFR1 Section 1.1310 limit for general population/uncontrolled exposures, the above levels are an average over 30 minutes.

- (b) The power density produced by the E.U.T. is:

$$S = \frac{P_t G_t}{4\pi R^2}$$

P_t = Calculated Transmitted Power (includes G_t) = 2.18×10^{-5}

G_t = Antenna Gain

R = Distance From Transmitter = 0.5cm

- (c) The peak power density produced by the E.U.T. is:

$$S_p = \frac{2.18 \times 10^{-5}}{4\pi(0.5)^2} = 6.93 \times 10^{-6} \frac{mW}{cm^2}$$

- (d) This value is below the FCC limit.

12. APPENDIX A - CORRECTION FACTORS

12.1 Correction factors for CABLE from EMI receiver to test antenna at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

12.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

1. The cable type is RG-8.
2. The overall length of the cable is 10 meters.

12.3 Correction factors for CABLE
from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

**12.4 12.6 Correction factors for LOG PERIODIC
ANTENNA**

**Type LPD 2010/A
at 3 and 10 meter ranges.**

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range,
and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission
Test EMI Receiver".

12.5 Correction factors for

LOG PERIODIC ANTENNA

**Type SAS-200/511
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

**12.6 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".



12.7 Correction factors for Double-Ridged Waveguide Horn

Model: 3115, S/N 29845
at 3 meter range.

FREQUENCY Y (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENNA Gain (dBi)	FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENNA Gain (dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			



12.8 Correction factors for

**Horn Antenna
Model: SWH-28
at 1 meter range.**

FREQUENCY (GHz)	APE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4



12.9 Correction factors for

**Horn Antenna
Model: V637**

FREQUENCY (GHz)	APE (dB /m)	Gain (dB1)
26.0	43.6	14.9
27.0	43.7	15.1
28.0	43.8	15.3
29.0	43.9	15.5
30.0	43.9	15.8
31.0	44.0	16.0
32.0	44.1	16.2
33.0	44.1	16.4
34.0	44.1	16.7
35.0	44.2	16.9
36.0	44.2	17.1
37.0	44.2	17.4
38.0	44.2	17.6
39.0	44.2	17.8
40.0	44.2	18.0

12.10 Correction factors for ACTIVE LOOP ANTENNA

Model 6502

S/N 9506-2950

FREQUENCY	Magnetic Antenna Factor	Electric Antenna Factor
(MHz)	(dB)	(dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2