



FCC ID: W5Y-1002244  
Report No.: T191120D05-RP11

Page: 1 / 95  
Rev.: 02

## FCC 47 CFR PART 22 SUBPART H

### TEST REPORT

For

**GUARDIAN SYSTEM LTE**

**Model No.: G2-SY-CON2**

**Trade Name: GUARDIAN**

*Issued to*

**Seeing Machines Pty Ltd  
80 Mildura Street, Fyshwick, ACT , Canberra 2609 Australia**

*Issued by*

**Compliance Certification Services Inc.  
Wugu Laboratory  
No.11, Wugong 6th Rd., Wugu Dist.,  
New Taipei City, Taiwan. (R.O.C.)  
Issued Date: June 6, 2020**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T191120D05-RP11

Page: 2 / 93

Rev.: 02

### Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	January 22, 2020	Initial Issue	ALL	Doris Chu
01	May 29, 2020	See the following Note Rev. (01)	P.1, P.4, P.6, P.21-23, P.55-64	May Lin
02	June 6, 2020	See the following Note Rev. (02)	P.33, P.39-43	Allison Chen

*Rev (01):*

- 1. Remove IC information.*
- 2. Revised the section 2 · 8.2 · 8.5.*

*Rev (02):*

- 1. Revised the section 8.4*



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION</b> .....	<b>4</b>
<b>2. EUT DESCRIPTION</b> .....	<b>6</b>
<b>3. TEST METHODOLOGY</b> .....	<b>7</b>
3.1 EUT CONFIGURATION .....	7
3.2 DESCRIPTION OF TEST MODES .....	7
<b>4. TEST SUMMERY</b> .....	<b>9</b>
<b>5. INSTRUMENT CALIBRATION</b> .....	<b>10</b>
5.1 FACILITIES AND TEST LOCATION .....	10
5.2 MEASUREMENT EQUIPMENT USED .....	11
5.3 MEASUREMENT UNCERTAINTY .....	12
<b>6. FACILITIES AND ACCREDITATIONS</b> .....	<b>13</b>
6.1 FACILITIES.....	13
6.2 EQUIPMENT.....	13
6.3 LABORATORY ACCREDITATIONS AND LISTING .....	13
<b>7. SETUP OF EQUIPMENT UNDER TEST</b> .....	<b>14</b>
7.1 SETUP CONFIGURATION OF EUT .....	14
7.2 SUPPORT EQUIPMENT.....	14
<b>8. FCC PART 22 REQUIREMENTS</b> .....	<b>15</b>
8.1 ERP & EIRP MEASUREMENT .....	15
8.2 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT .....	21
8.3 OCCUPIED BANDWIDTH MEASUREMENT .....	24
8.4 PEAK TO AVERAGE POWER RATIO .....	31
8.5 CONDUCTED BAND EDGE MEASUREMENT.....	44
8.6 CONDUCTED SPURIOUS EMISSIONS.....	65
8.7 SPURIOUS RADIATION MEASUREMENT .....	86
<b>9. APPENDIX A PHOTOGRAPHS OF TEST SETUP</b> .....	<b>A-1</b>
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>	



Report No.: T191120D05-RP11

## 1. TEST RESULT CERTIFICATION

**Applicant:** Seeing Machines Pty Ltd  
80 Mildura Street, Fyshwick, ACT , Canberra 2609 Australia

**Manufacturer:** ADLINK TECHNOLOGY INC.  
9F, No. 166, Jian Yi Rd., Zhonghe Dist., New Taipei City, 235  
Taiwan

**Equipment Under Test:** GUARDIAN SYSTEM LTE

**Trade Name:** GUARDIAN

**Model No.:** G2-SY-CON2

**Date of Test:** December 20, 2019 ~ January 8, 2020



APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR PART 22 SUBPART H	No non-compliance noted
Statements of Conformity	
Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.	

**We hereby certify that:**

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA -603-E and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rule FCC PART 22 Subpart H.

*Approved by:*

---

Kevin Tsai  
Deputy Manager  
Compliance Certification Services Inc.

## 2. EUT DESCRIPTION

<b>Product</b>	GUARDIAN SYSTEM LTE		
<b>Model No.</b>	G2-SY-CON2		
<b>Model Discrepancy</b>	N/A		
<b>Trade</b>	GUARDIAN		
<b>Received Date</b>	November 20, 2019		
<b>Power Supply</b>	Powered from DC supply: DC 12V.		
<b>Frequency Range</b>	LTE Band 26 Channel Bandwidth: 1.4MHz	824.7MHz ~ 843.3MHz	
	LTE Band 26 Channel Bandwidth: 3MHz	825.5MHz ~ 847.5MHz	
	LTE Band 26 Channel Bandwidth: 5MHz	826.5MHz ~ 846.5MHz	
	LTE Band 26 Channel Bandwidth: 10MHz	829MHz ~ 841MHz	
	LTE Band 26 Channel Bandwidth: 15MHz	831.5MHz ~ 841.5MHz	
<b>Modulation Technique</b>	LTE Band 26	QPSK, 16QAM	
<b>Antenna Specification</b>	Dipole Antenna Antenna gain: -0.1 dBi		
<b>Transmit Power (ERP Power)</b>	LTE Band 26 Channel Bandwidth: 1.4MHz	QPSK:	19.98 dBm
		16QAM:	19.53 dBm
	LTE Band 26 Channel Bandwidth: 3MHz	QPSK:	19.99 dBm
		16QAM:	19.54 dBm
	LTE Band 26 Channel Bandwidth: 5MHz	QPSK:	20.04 dBm
	16QAM:	19.59 dBm	
	LTE Band 26 Channel Bandwidth: 10MHz	QPSK:	20.06 dBm
		16QAM:	19.61 dBm
	LTE Band 26 Channel Bandwidth: 15MHz	QPSK:	20.10 dBm
		16QAM:	19.65 dBm
<b>HW Version</b>	V1		
<b>SW Version</b>	V9		

**Remark:** The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

### 3. TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures document on chapter 13 of TIA-603-E and FCC CFR 47, Part 2 and Part 22 Subpart H, KDB 971168 D01 Power Meas License Digital Systems.

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 DESCRIPTION OF TEST MODES

The EUT (Model: G2-SY-CON2) had been tested under operating condition. The EUT be set in maximum power transmission via call box during testing.

#### LTE Band 26: 824 MHz ~ 849 MHz

Three channels had been tested for each channel bandwidth.

Channel Bandwidth	1.4MHz		3MHz		5MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
Low channel (L)	26797	824.7	26805	825.5	26815	826.5
Middle channel (M)	26915	836.5	26915	836.5	26915	836.5
High channel (H)	27033	848.3	27025	847.5	27015	846.5
Channel Bandwidth	10MHz		15MHz			
	Channel	Frequency (MHz)	Channel	Frequency (MHz)		
Low channel (L)	26840	829	26865	831.5		
Middle channel (M)	26915	836.5	26915	836.5		
High channel (H)	26960	841	26965	841.5		

### 3.2.1 The worst mode of measurement

Radiated Emission Measurement Above 1G	
Test Condition	Radiated Emission Above 1G
Power supply Mode	Mode 1: EUT power by Power supply
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
Worst Position	<input type="checkbox"/> Placed in fixed position. <input checked="" type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by Power supply
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

*Remark:*

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z and two polarity, for radiated measurement. The worst case(X-Plane) were recorded in this report



#### 4. TEST SUMMERY

FCC Standard Sec.	Report Section	Test Item	Result
-	2	Antenna Requirement	Pass
22.913(a)	8.1	ERP and EIRP Measurement	Pass
2.1055, 22.355	8.2	Frequency Stability v.s. temperature measurement	Pass
2.1049	8.3	Occupied Bandwidth Measurement	Pass
22.917(a)	8.4	Conducted Band Edge	Pass
22.913(d)	8.5	Peak to Average Ratio	Pass
22.917(a)	8.6	Conducted Spurious Emission	Pass
22.917(a)	8.7	Spurious Radiation Measurement	Pass



Report No.: T191120D05-RP11

Page: 10 / 93

Rev.: 02

## 5. INSTRUMENT CALIBRATION

### 5.1 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
Radiation	Jerry Chang	-
RF Conducted	Dally Hong	-

**Remark:** The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

## 5.2 MEASUREMENT EQUIPMENT USED

### Equipment Used for Emissions Measurement

**Remark:** Each piece of equipment is scheduled for calibration once a year.

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Coaxial Cable	Woken	WC12	CC001	06/28/2019	06/27/2020
Coaxial Cable	Woken	WC12	CC003	06/28/2019	06/27/2020
Power Divider	Solvang Technology	STI08-0015	008	08/06/2019	08/05/2020
Signal Analyzer	R&S	FSV 40	101073	09/25/2019	09/24/2020
Wideband Radio Communication Tester	R&S	CMW 500	116875	07/29/2019	07/28/2020
DC Power Supplies	GW Instek	SPS-3610	GPE880163	01/14/2019	2020/1/13
Software	N/A				

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020
Bilog Antenna	Sunol Sciences	JB3	A030105	07/26/2019	07/25/2020
Coaxial Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020
Coaxial Cable	EMCI	EMC105	190914+25111	09/20/2019	09/19/2020
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	10/04/2019	10/03/2020
Loop Ant	COM-POWER	AL-130	121051	03/22/2019	03/21/2020
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020
Wideband Radio Communication Tester	R&S	CMW 500	116875	07/29/2019	07/28/2020
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/29/2019	05/28/2020
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 6.11-20180413				

### 5.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Report No.: T191120D05-RP11

## 6. FACILITIES AND ACCREDITATIONS

### 6.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan. (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2013 and CISPR Publication 22.

### 6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 6.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, 2324G-2 for 3M Semi Anechoic Chamber B.



Report No.: T191120D05-RP11

## 7. SETUP OF EQUIPMENT UNDER TEST

### 7.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### 7.2 SUPPORT EQUIPMENT

No.	Equipment	Brand	Model	Series No.	FCC ID	IC ID
1	NB(J)	TOSHIBA	PT345T-00L002	N/A	PD97260H	1000M-7260H

**Remark:**

1. *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
2. *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

## **8. FCC PART 22 REQUIREMENTS**

### **8.1 ERP & EIRP MEASUREMENT**

#### **LIMIT**

**According to FCC §2.1046**

FCC 22.913(b):

The Effective Radiated Power (ERP) of mobile transmitters must not exceed 7 Watts.

#### **TEST PROCEDURES**

##### **CONDUCTED POWER MEASUREMENT:**

1. The transmitter output power was connected to the call box.
2. Set EUT at maximum output power via call box.
3. Set Call box at lowest, middle and highest channels for each band and modulation.

#### **TEST RESULTS**

*No non-compliance noted.*

### LTE Band 26

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	EIRP Power (dBm)		
Band 26	1.4M	26797	824.7	QPSK	1	0	0	21.99	19.74		
					1	2	0	22.23	19.98		
					1	5	0	22.14	19.89		
					3	0	1	21.41	19.16		
					3	1	1	21.33	19.08		
					3	2	1	21.29	19.04		
				16QAM	6	0	1	21.39	19.14		
					1	0	1	21.53	19.28		
					1	2	1	21.51	19.26		
					1	5	1	21.78	19.53		
					3	0	2	20.36	18.11		
					3	1	2	20.29	18.04		
		26915	836.5	QPSK	836.5	QPSK	1	0	0	22.15	19.90
							1	2	0	22.11	19.86
							1	5	0	22.07	19.82
							3	0	1	21.20	18.95
							3	1	1	21.14	18.89
							3	2	1	21.15	18.90
				16QAM	6	0	1	21.16	18.91		
					1	0	1	21.66	19.41		
					1	2	1	21.50	19.25		
					1	5	1	21.39	19.14		
					3	0	2	20.24	17.99		
					3	1	2	20.20	17.95		
		27033	848.3	QPSK	848.3	QPSK	3	2	2	20.08	17.83
							3	2	2	20.17	17.92
							6	0	2	20.17	17.92
							1	0	0	22.11	19.86
							1	2	0	22.12	19.87
							1	5	0	21.14	18.89
				16QAM	3	0	1	21.35	19.10		
					3	1	1	21.13	18.88		
					3	2	1	21.11	18.86		
					6	0	1	21.28	19.03		
					1	0	1	21.18	18.93		
					1	2	1	21.38	19.13		
16QAM	1	5	1	21.09	18.84						
	3	0	2	20.33	18.08						
	3	1	2	20.15	17.90						
	3	2	2	20.18	17.93						
	6	0	2	20.38	18.13						



Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	EIRP Power (dBm)
Band 26	3M	26805	825.5	QPSK	1	0	0	22.00	19.75
					1	7	0	22.24	19.99
					1	14	0	22.15	19.90
					8	0	1	21.42	19.17
					8	4	1	21.34	19.09
					8	7	1	21.30	19.05
				15	0	1	21.40	19.15	
				16QAM	1	0	1	21.54	19.29
					1	7	1	21.52	19.27
					1	14	1	21.79	19.54
					8	0	2	20.37	18.12
					8	4	2	20.30	18.05
		8	7		2	20.27	18.02		
		15	0	2	20.50	18.25			
		26915	836.5	QPSK	1	0	0	22.16	19.91
					1	7	0	22.12	19.87
					1	14	0	22.08	19.83
					8	0	1	21.21	18.96
					8	4	1	21.15	18.90
					8	7	1	21.16	18.91
				15	0	1	21.17	18.92	
				16QAM	1	0	1	21.67	19.42
					1	7	1	21.51	19.26
					1	14	1	21.40	19.15
					8	0	2	20.25	18.00
					8	4	2	20.21	17.96
		8	7		2	20.09	17.84		
		15	0	2	20.18	17.93			
		27025	847.5	QPSK	1	0	0	22.13	19.88
					1	7	0	22.14	19.89
					1	14	0	21.16	18.91
					8	0	1	21.37	19.12
					8	4	1	21.15	18.90
					8	7	1	21.13	18.88
				15	0	1	21.30	19.05	
				16QAM	1	0	1	21.20	18.95
1	7				1	21.40	19.15		
1	14				1	21.11	18.86		
8	0				2	20.35	18.10		
8	4				2	20.17	17.92		
8	7	2	20.20		17.95				
15	0	2	20.40	18.15					

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	EIRP Power (dBm)
Band 26	5M	26815	826.5	QPSK	1	0	0	22.05	19.80
					1	12	0	22.29	20.04
					1	24	0	22.20	19.95
					12	0	1	21.47	19.22
					12	6	1	21.39	19.14
					12	11	1	21.35	19.10
		25	0	1	21.45	19.20			
		1	0	1	21.59	19.34			
		1	12	1	21.57	19.32			
		1	24	1	21.84	19.59			
		12	0	2	20.42	18.17			
		12	6	2	20.35	18.10			
		12	11	2	20.32	18.07			
		25	0	2	20.55	18.30			
		1	0	0	22.20	19.95			
		1	12	0	22.16	19.91			
		1	24	0	22.12	19.87			
		12	0	1	21.25	19.00			
	12	6	1	21.19	18.94				
	12	11	1	21.20	18.95				
	25	0	1	21.21	18.96				
	1	0	1	21.71	19.46				
	1	12	1	21.55	19.30				
	1	24	1	21.44	19.19				
	12	0	2	20.29	18.04				
	12	6	2	20.25	18.00				
	12	11	2	20.13	17.88				
	25	0	2	20.22	17.97				
	1	0	0	22.18	19.93				
	1	12	0	22.19	19.94				
	1	24	0	21.21	18.96				
	12	0	1	21.42	19.17				
	12	6	1	21.20	18.95				
	12	11	1	21.18	18.93				
	25	0	1	21.35	19.10				
	1	0	1	21.25	19.00				
1	12	1	21.45	19.20					
1	24	1	21.16	18.91					
12	0	2	20.40	18.15					
12	6	2	20.22	17.97					
12	11	2	20.25	18.00					
25	0	2	20.45	18.20					

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	EIRP Power (dBm)
Band 26	10M	26840	829.0	QPSK	1	0	0	22.07	19.82
					1	24	0	22.31	20.06
					1	49	0	22.22	19.97
					25	0	1	21.49	19.24
					25	12	1	21.41	19.16
					25	24	1	21.37	19.12
					50	0	1	21.47	19.22
				16QAM	1	0	1	21.61	19.36
					1	24	1	21.59	19.34
					1	49	1	21.86	19.61
					25	0	2	20.44	18.19
					25	12	2	20.37	18.12
					25	24	2	20.34	18.09
					50	0	2	20.57	18.32
		26915	836.5	QPSK	1	0	0	22.22	19.97
					1	24	0	22.18	19.93
					1	49	0	22.14	19.89
					25	0	1	21.27	19.02
					25	12	1	21.21	18.96
					25	24	1	21.22	18.97
					50	0	1	21.23	18.98
				16QAM	1	0	1	21.73	19.48
					1	24	1	21.57	19.32
					1	49	1	21.46	19.21
					25	0	2	20.31	18.06
					25	12	2	20.27	18.02
					25	24	2	20.15	17.90
					50	0	2	20.24	17.99
		26990	844.0	QPSK	1	0	0	22.21	19.96
					1	24	0	22.22	19.97
1	49				0	21.24	18.99		
25	0				1	21.45	19.20		
25	12				1	21.23	18.98		
25	24				1	21.21	18.96		
50	0				1	21.38	19.13		
16QAM	1			0	1	21.28	19.03		
	1			24	1	21.48	19.23		
	1			49	1	21.19	18.94		
	25			0	2	20.43	18.18		
	25			12	2	20.25	18.00		
	25			24	2	20.28	18.03		
	50			0	2	20.48	18.23		

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	EIRP Power (dBm)
Band 26	15M	26865	831.5	QPSK	1	0	0	22.11	19.86
					1	37	0	22.35	20.10
					1	74	0	22.26	20.01
					36	0	1	21.53	19.28
					36	18	1	21.45	19.20
					36	35	1	21.41	19.16
					75	0	1	21.51	19.26
				16QAM	1	0	1	21.65	19.40
					1	37	1	21.63	19.38
					1	74	1	21.90	19.65
					36	0	2	20.48	18.23
					36	18	2	20.41	18.16
					36	35	2	20.38	18.13
					75	0	2	20.61	18.36
		26915	836.5	QPSK	1	0	0	22.29	20.04
					1	37	0	22.25	20.00
					1	74	0	22.21	19.96
					36	0	1	21.34	19.09
					36	18	1	21.28	19.03
					36	35	1	21.29	19.04
					75	0	1	21.30	19.05
				16QAM	1	0	1	21.80	19.55
					1	37	1	21.64	19.39
					1	74	1	21.53	19.28
					36	0	2	20.38	18.13
					36	18	2	20.34	18.09
					36	35	2	20.22	17.97
					75	0	2	20.31	18.06
		26965	841.5	QPSK	1	0	0	22.29	20.04
					1	37	0	22.30	20.05
1	74				0	21.32	19.07		
36	0				1	21.53	19.28		
36	18				1	21.31	19.06		
36	35				1	21.29	19.04		
75	0				1	21.46	19.21		
16QAM	1			0	1	21.36	19.11		
	1			37	1	21.56	19.31		
	1			74	1	21.27	19.02		
	36			0	2	20.51	18.26		
	36			18	2	20.33	18.08		
	36			35	2	20.36	18.11		
	75			0	2	20.56	18.31		

## 8.2 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT

### LIMIT

**According to FCC §2.1055, FCC §22.355.**

Frequency Tolerance: +/- 2.5ppm

### TEST PROCEDURE

Use Anritsu 8820 with frequency Error measurement capability.

Temp = -40°C to +65°C

Voltage= 85% to 115% of the nominal value for AC powered equipment.

**NOTE:** *The frequency error was recorded frequency error from the communication simulator.*

### TEST RESULTS

*No non-compliance noted.*



Report No.: T191120D05-RP11

### Test Results

#### FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT: LTE Band 26 / QPSK

Reference Frequency: LTE Band 26, 836.5 MHz at 20(°C)				
Limit: 2.5 ppm = 2091.25 Hz				
Power Supply (Vac)	Environment Temperature (°C)	BW: 10M Frequency Error(Hz)	Frequency Error (ppm)	Limit (ppm)
12	65	0.02	0.000024	+/- 2.5
12	50	0.01	0.000012	
12	40	0.00	0.000000	
12	30	0.01	0.000012	
12	20	0.00	0.000000	
12	10	0.01	0.000012	
12	0	-0.01	-0.000012	
12	-10	0.00	0.000000	
12	-20	-0.01	-0.000012	
12	-30	0.00	0.000000	
12	-40	0.01	0.000012	

#### LTE Band 26 / 16QAM

Reference Frequency: LTE Band 26, 836.5 MHz at 20(°C)				
Limit: 2.5 ppm = 2091.25 Hz				
Power Supply (Vac)	Environment Temperature (°C)	BW: 10M Frequency Error(Hz)	Frequency Error (ppm)	Limit (ppm)
12	65	0.03	0.000036	+/- 2.5
12	50	0.02	0.000024	
12	40	0.01	0.000012	
12	30	0.01	0.000012	
12	20	0.00	0.000000	
12	10	0.01	0.000012	
12	0	0.02	0.000024	
12	-10	0.02	0.000024	
12	-20	-0.01	-0.000012	
12	-30	0.01	0.000012	
12	-40	0.00	0.000000	



Report No.: T191120D05-RP11

**FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT:**

**LTE Band 26 / QPSK**

Reference Frequency: LTE Band 26, 836.5 MHz at 20(°C)				
Limit: 2.5 ppm = 2091.25 Hz				
Power Supply (Vac)	Environment Temperature (°C)	BW: 20M Frequency Error(Hz)	Frequency Error (ppm)	Limit (ppm)
10.2	20	0.01	0.000012	+/- 2.5
12		0.00	0.000000	
13.8		0.02	0.000024	

**LTE Band 26 / 16QAM**

Reference Frequency: LTE Band 26, 836.5 MHz at 20(°C)				
Limit: 2.5 ppm = 2091.25 Hz				
Power Supply (Vac)	Environment Temperature (°C)	BW: 20M Frequency Error(Hz)	Frequency Error (ppm)	Limit (ppm)
10.2	20	0.02	0.000024	+/- 2.5
12		0.00	0.000000	
13.8		0.03	0.000036	

### **8.3 OCCUPIED BANDWIDTH MEASUREMENT**

#### **Limits**

For Reporting purposes only.

#### **TEST PROCEDURES**

KDB 971168 D01

1. The occupied bandwidth was measured with the spectrum analyzer at the lowest, middle and highest channels in each band and different modulation. The 99% and -26dB bandwidth was measured and recorded.
2. RBW = 1-5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max. hold






Report No.: T191120D05-RP11

**LTE Band 26**

Band	BW (MHz)	Channel	Mode	UL RB Allocation	UL RB offset	OBW(99%)(MHz)	26 dB Bandwidth(MHz)
26	1.4	Middle	QPSK	6	0	1.0941	1.2981
		Middle	16QAM	6	0	1.1027	1.3155
	3	Middle	QPSK	15	0	2.6831	2.9218
		Middle	16QAM	15	0	2.6831	2.9479
	5	Middle	QPSK	25	0	4.4863	4.9590
		Middle	16QAM	25	0	4.4718	4.8730
	10	Middle	QPSK	50	0	8.9436	9.7060
		Middle	16QAM	50	0	8.9146	9.6480
	15	Middle	QPSK	75	0	13.3719	14.6410
		Middle	16QAM	75	0	13.3719	14.5540


Report No.: T191120D05-RP11

**LTE Band 26**  
**BW: 1.4MHz / QPSK / RB =6, RB Offset = 0**  
**CH Mid**

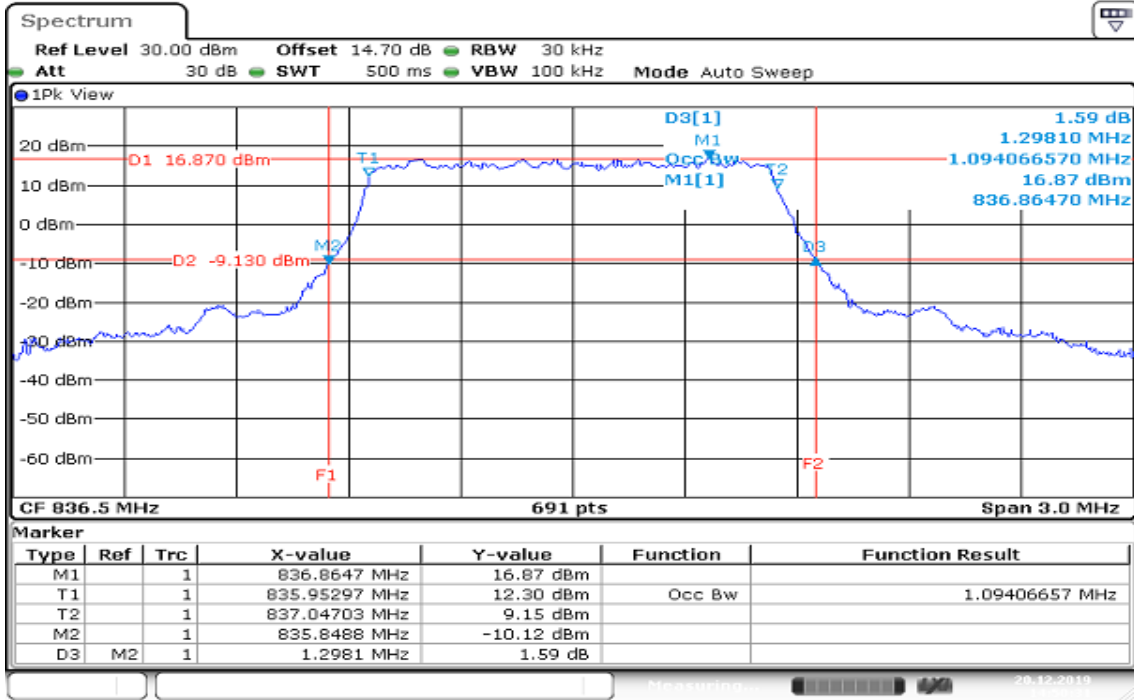


Date: 20.DEC.2019 14:50:32

**BW: 1.4MHz / 16QAM / RB =6, RB Offset = 0**  
**CH Mid**

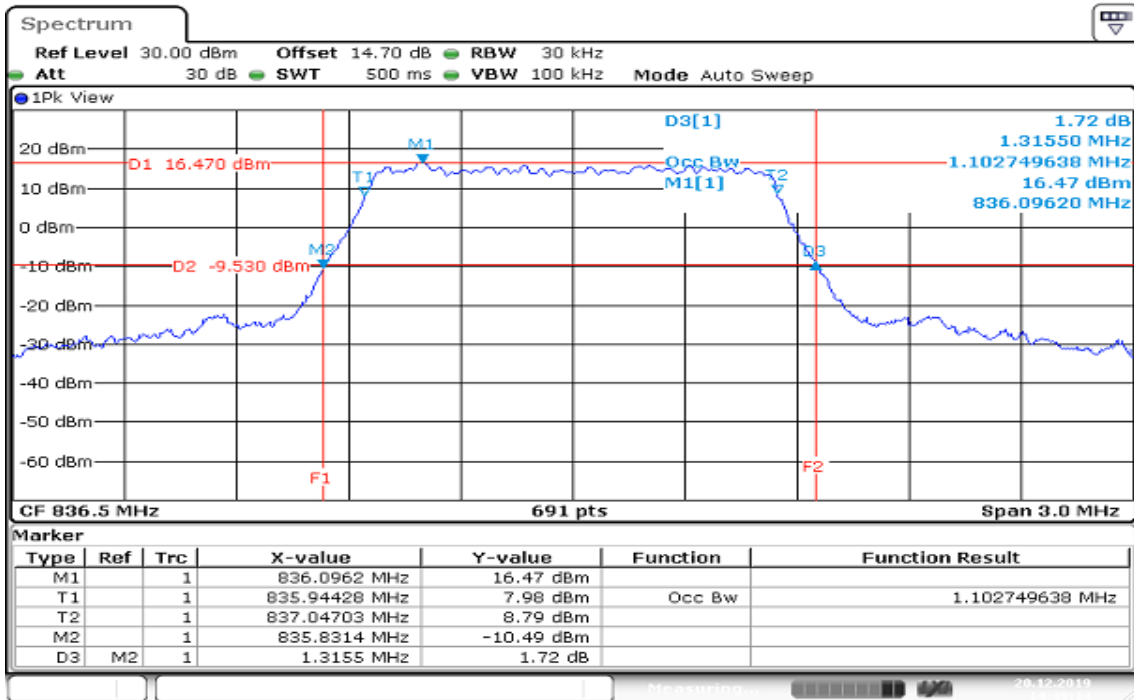


Date: 20.DEC.2019 14:49:15

**BW: 3MHz / QPSK / RB =15, RB Offset = 0**  
**CH Mid**

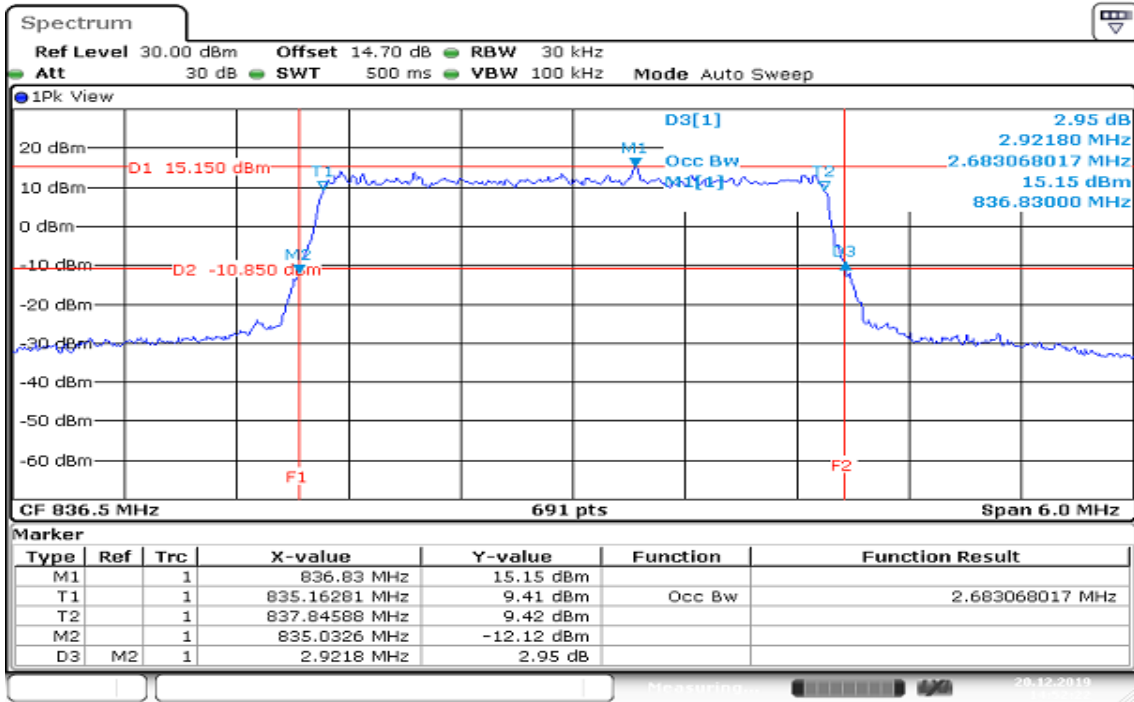


Date: 20.DEC.2019 14:52:23

**BW: 3MHz / 16QAM / RB =15, RB Offset = 0**  
**CH Mid**

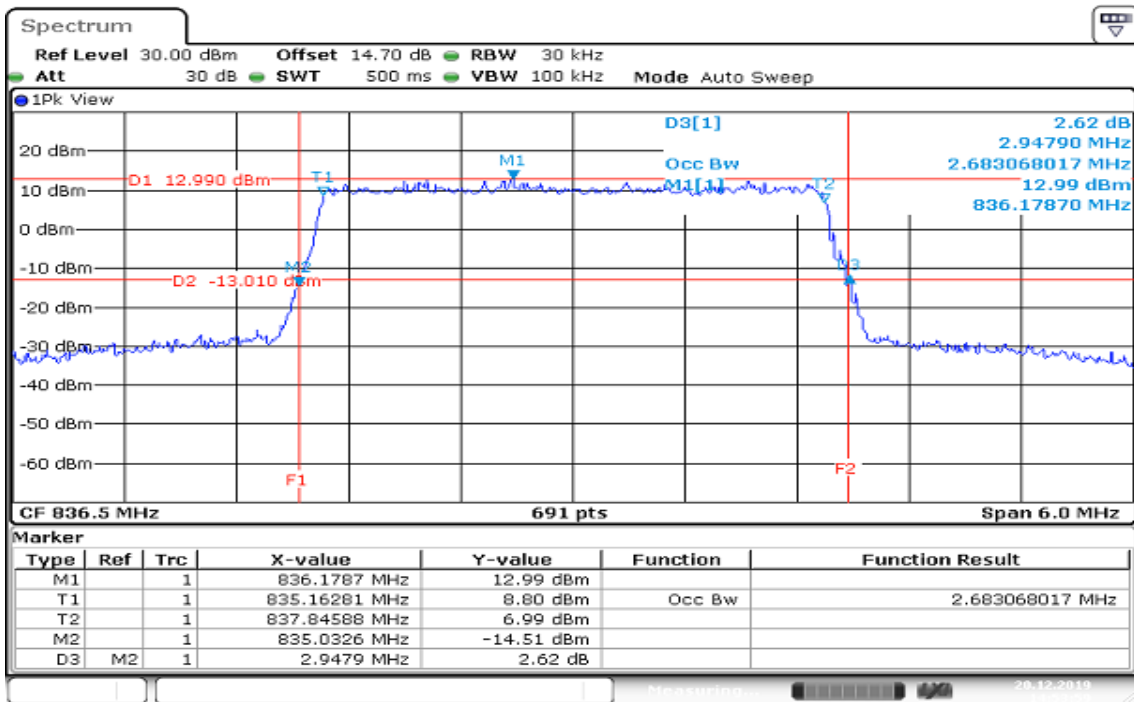


Date: 20.DEC.2019 14:54:00

**BW: 5MHz / QPSK / RB =25, RB Offset = 0**  
**CH Mid**

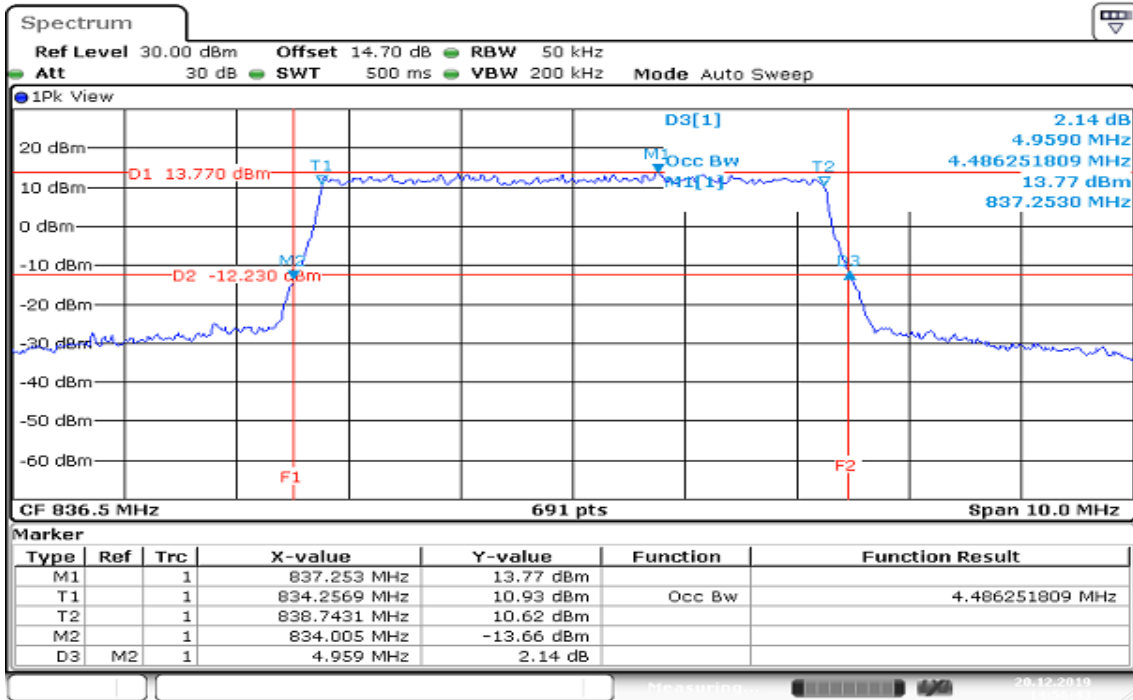


Date: 20.DEC.2019 14:56:43

**BW: 5MHz / 16QAM / RB =25, RB Offset = 0**  
**CH Mid**

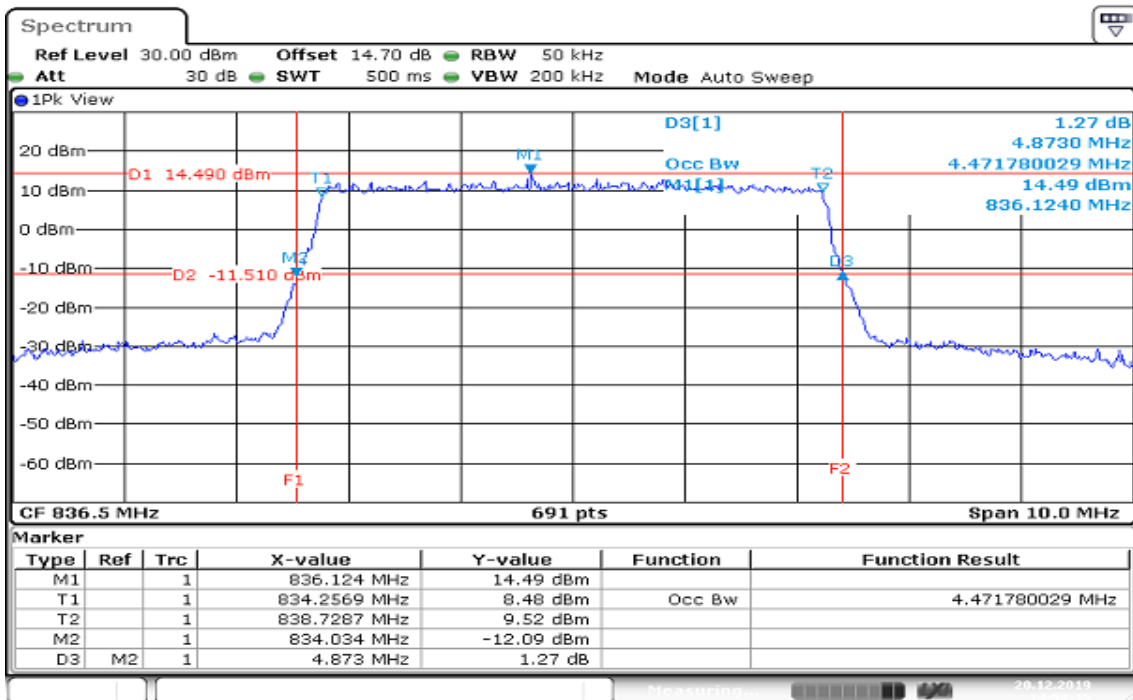


Date: 20.DEC.2019 14:58:16

**BW: 10MHz / QPSK / RB =50, RB Offset = 0**  
**CH Mid**

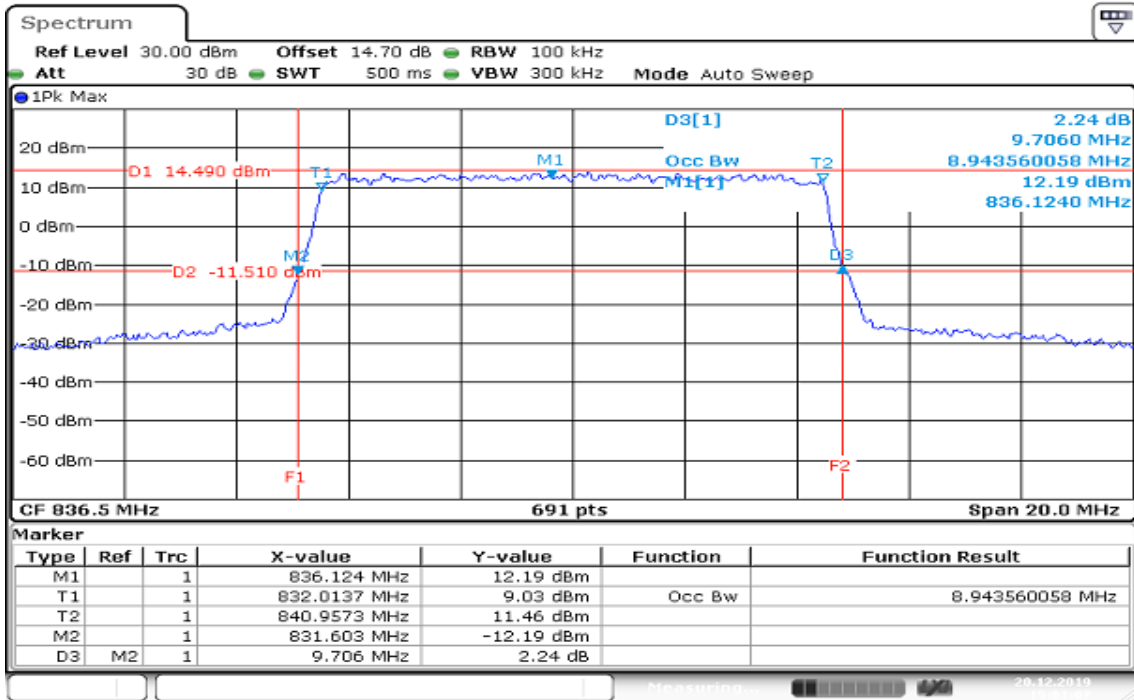

Date: 20.DEC.2019 15:01:08


**BW: 10MHz / 16QAM / RB =50, RB Offset = 0**  
**CH Mid**

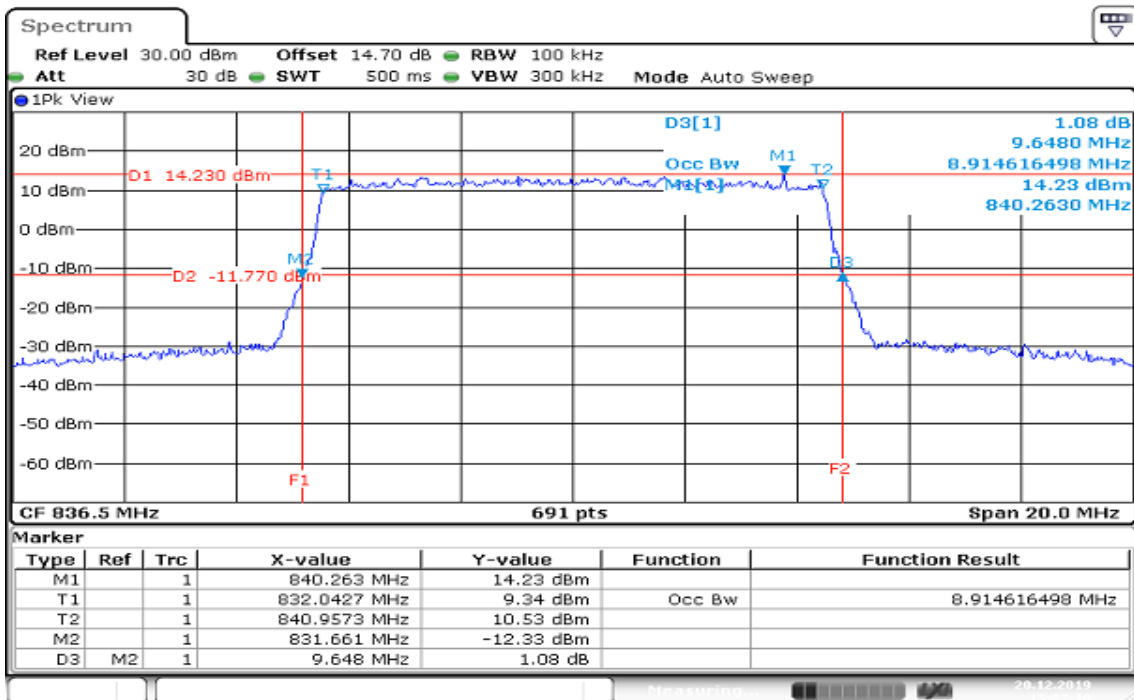

Date: 20.DEC.2019 15:02:11


Report No.: T191120D05-RP11

**BW: 15MHz / QPSK / RB =75, RB Offset = 0**  
**CH Mid**

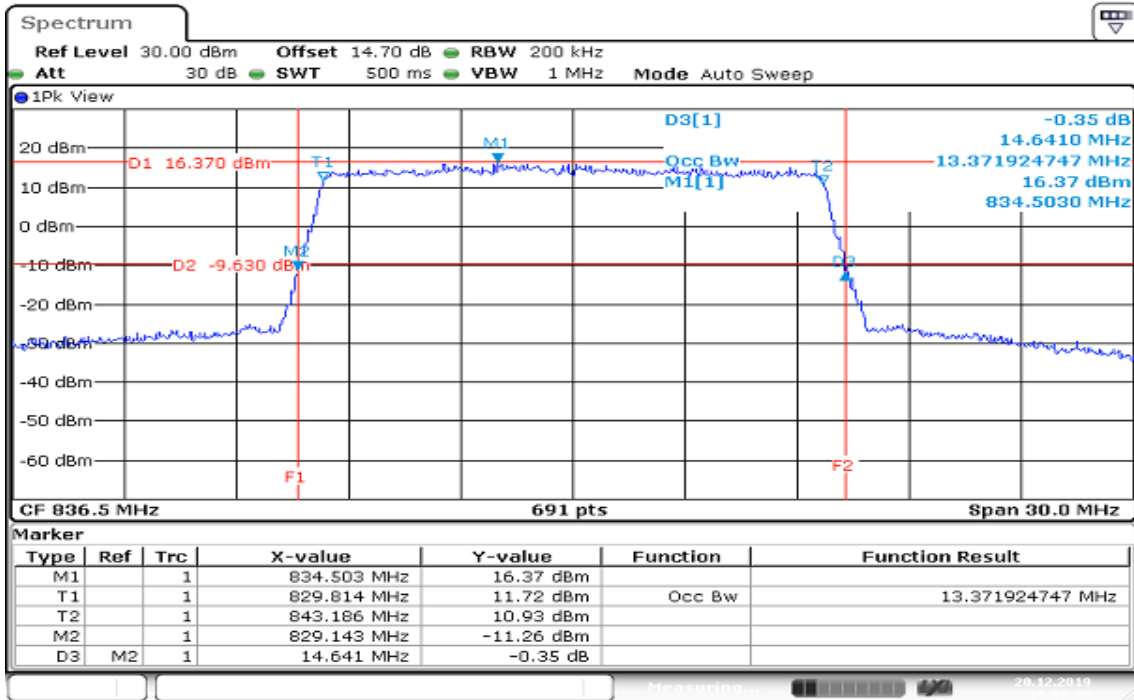

Date: 20.DEC.2019 15:09:35

**BW: 15MHz / 16QAM / RB =75, RB Offset = 0**  
**CH Mid**

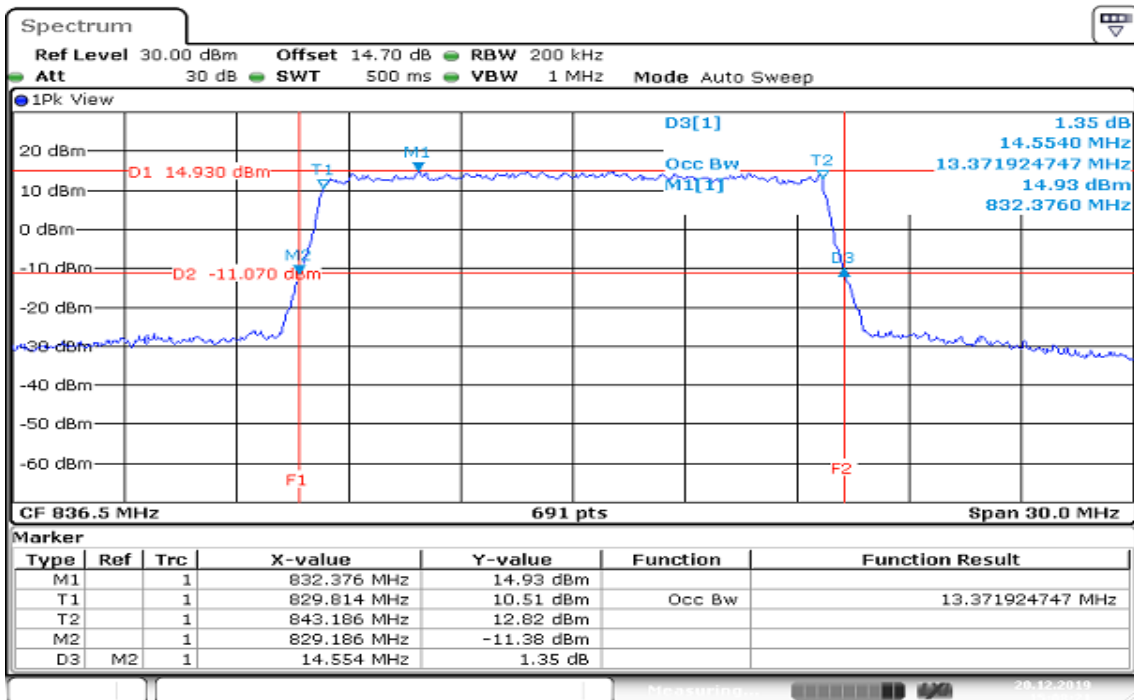

Date: 20.DEC.2019 15:08:21

## 8.4 PEAK TO AVERAGE POWER RATIO

### Limit

In measuring transmissions in this band using an average power technique, the peak to average power ratio (PAPR) of the transmission may not exceed 13 dB.

### Test Procedures

1. According to KDB 971168 D01,
2. The EUT was connect to spectrum analyzer and call box.
3. Set the CCDF function in spectrum analyzer.
4. The highest RF output power were measured and recorded the maximum PAPR level associated with a probability of 0.1%.
5. Record the Peak to Average Power Ratio.

**Note:** We selected worst case to performed test in middle channel, the results can be meet other channel.

## Test Results

### LTE Band 26

#### CHANNEL BANDWIDTH: 1.4MHz / QPSK / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	4.41

#### CHANNEL BANDWIDTH: 1.4MHz / 16QAM / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	5.10

#### CHANNEL BANDWIDTH: 3MHz / QPSK / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	4.32

#### CHANNEL BANDWIDTH: 3MHz / 16QAM / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	5.13

#### CHANNEL BANDWIDTH: 5MHz / QPSK / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	4.55

#### CHANNEL BANDWIDTH: 5MHz / 16QAM / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	5.59

#### CHANNEL BANDWIDTH: 10MHz / QPSK / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	4.55

#### CHANNEL BANDWIDTH: 10MHz / 16QAM / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	5.48

#### CHANNEL BANDWIDTH: 15MHz / QPSK / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	4.72

#### CHANNEL BANDWIDTH: 15MHz / 16QAM / 1RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	5.68

**Note:** We selected worst case to performed test in middle channel, the results can be meet other channel.



**CHANNEL BANDWIDTH: 1.4MHz / QPSK / Full RB**

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	5.07

**CHANNEL BANDWIDTH: 1.4MHz / 16QAM / Full RB**

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	5.91

**CHANNEL BANDWIDTH: 3MHz / QPSK / Full RB**

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	4.90

**CHANNEL BANDWIDTH: 3MHz / 16QAM / Full RB**

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	5.94

**CHANNEL BANDWIDTH: 5MHz / QPSK / Full RB**

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	4.87

**CHANNEL BANDWIDTH: 5MHz / 16QAM / Full RB**

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	5.91

**CHANNEL BANDWIDTH: 10MHz / QPSK / Full RB**

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	4.93

**CHANNEL BANDWIDTH: 10MHz / 16QAM / Full RB**

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	5.94

**CHANNEL BANDWIDTH: 15MHz / QPSK / Full RB**


Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	5.22

**CHANNEL BANDWIDTH: 15MHz / 16QAM / Full RB**

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
26915	836.5	6.12


**Note:** We selected worst case to performed test in middle channel, the results can be meet other channel.

**LTE Band 26**  
**BW: 1.4MHz / QPSK / RB =1, RB Offset = 0**  
**CH Mid**

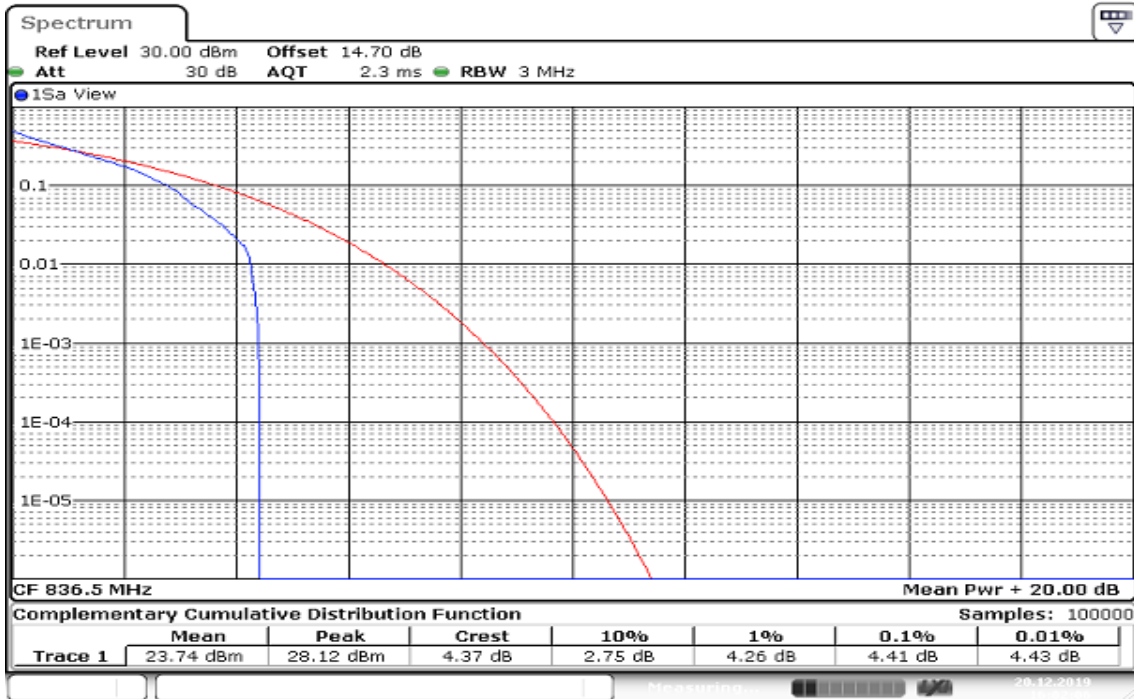

Date: 20.DEC.2019 16:02:07


**BW: 1.4MHz / 16QAM / RB =1, RB Offset = 0**  
**CH Mid**

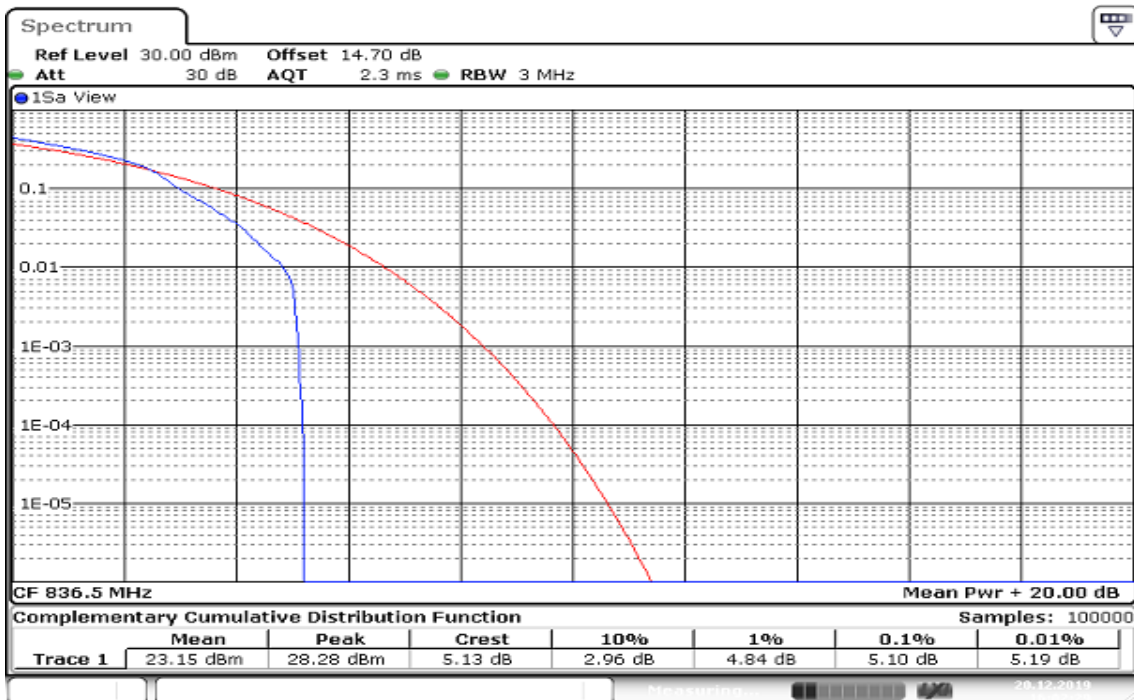

Date: 20.DEC.2019 16:02:30


Report No.: T191120D05-RP11

**BW: 3MHz / QPSK / RB =1, RB Offset = 0**  
**CH Mid**

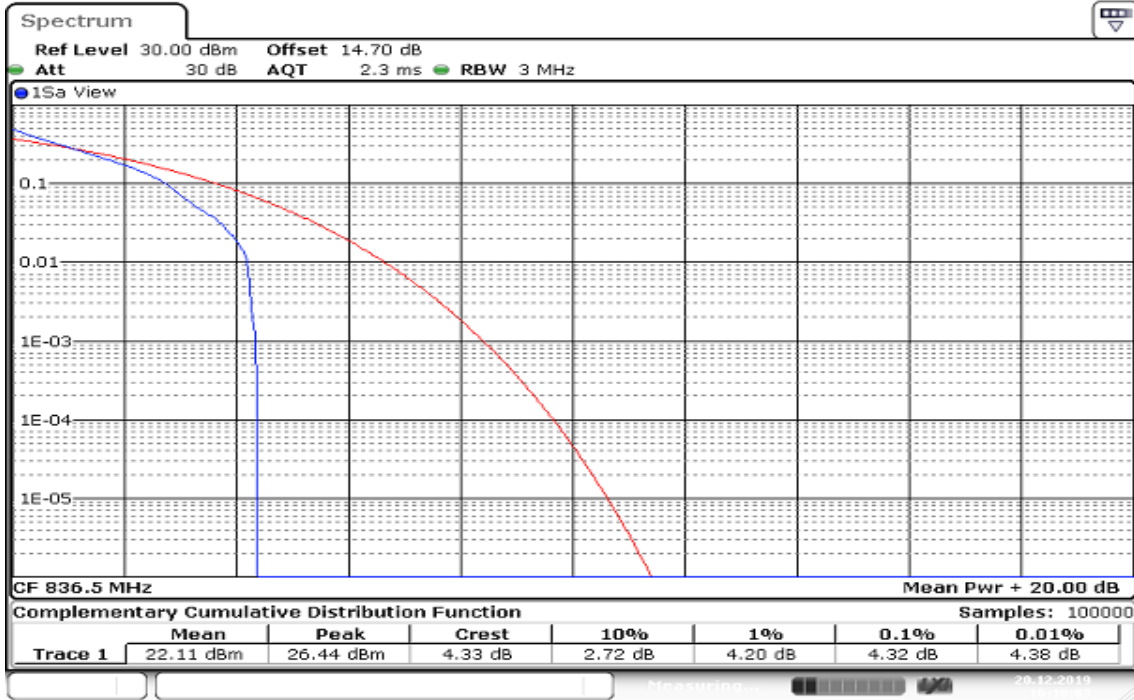

Date: 20.DEC.2019 16:10:04


**BW: 3MHz / 16QAM / RB =1, RB Offset = 0**  
**CH Mid**

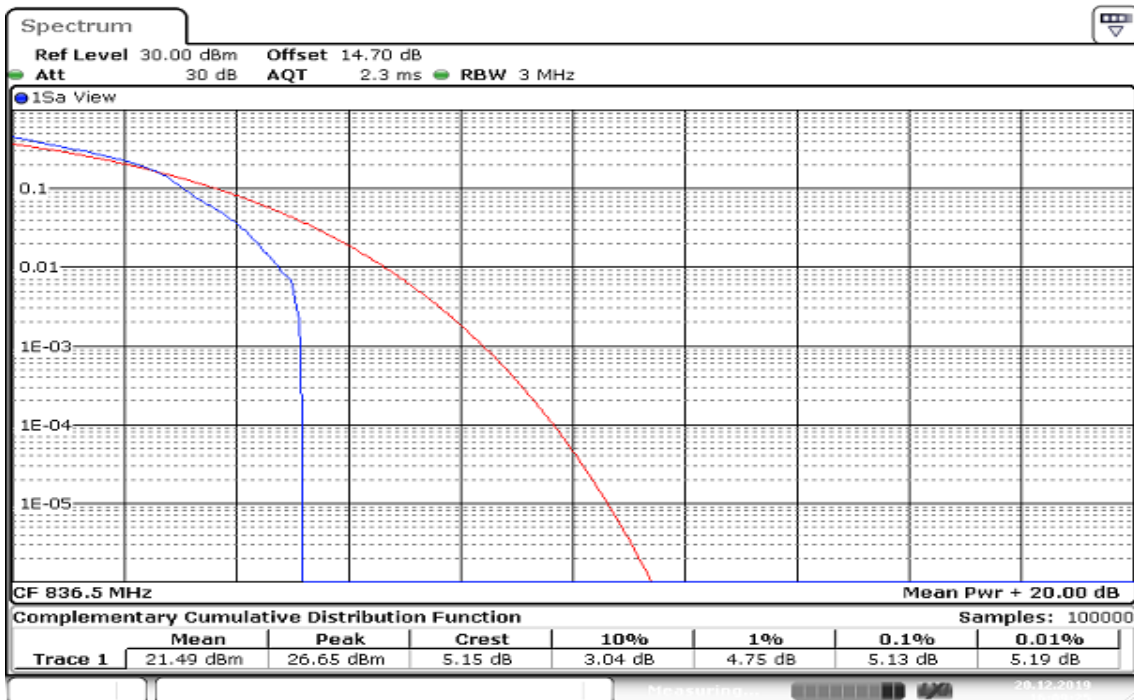

Date: 20.DEC.2019 16:09:26


Report No.: T191120D05-RP11

**BW: 5MHz / QPSK / RB =1, RB Offset = 0**  
**CH Mid**

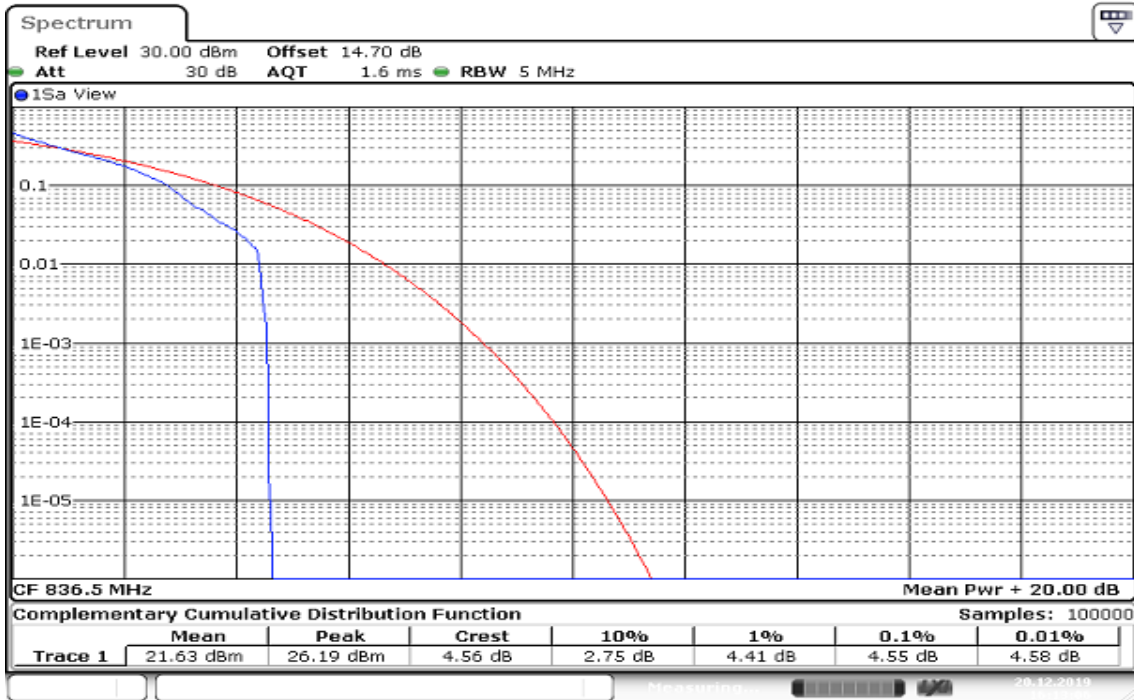

Date: 20.DEC.2019 16:13:07


**BW: 5MHz / 16QAM / RB =1, RB Offset = 0**  
**CH Mid**

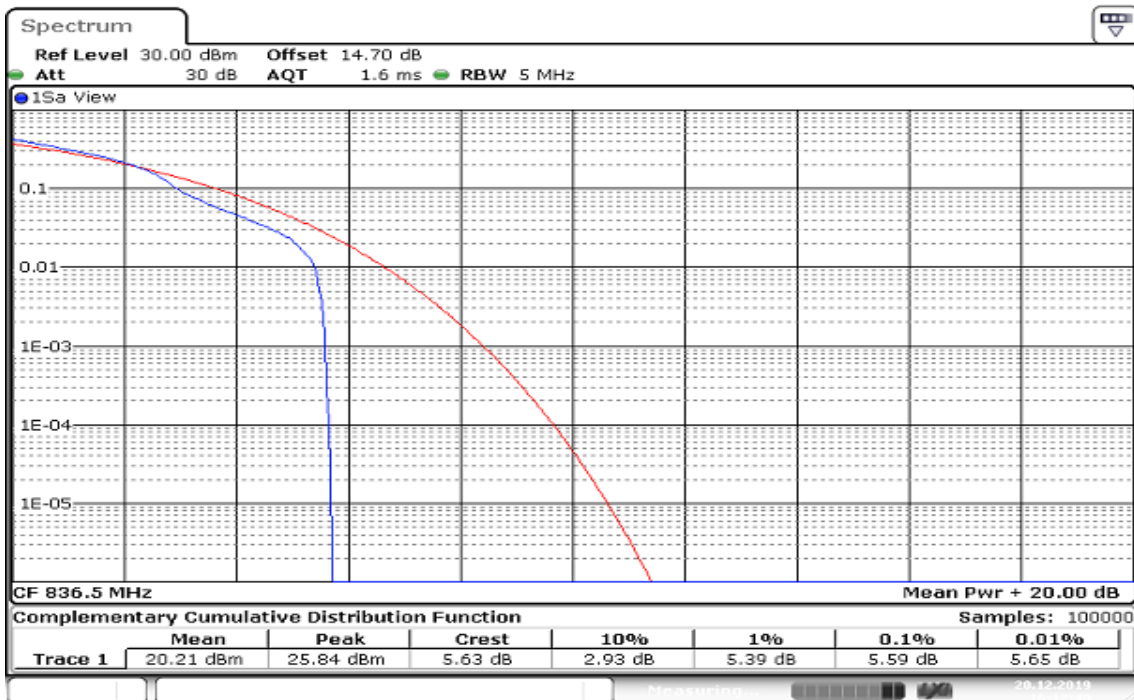

Date: 20.DEC.2019 16:12:41


Report No.: T191120D05-RP11

**BW: 10MHz / QPSK /RB =1, RB Offset = 0**  
**CH Mid**

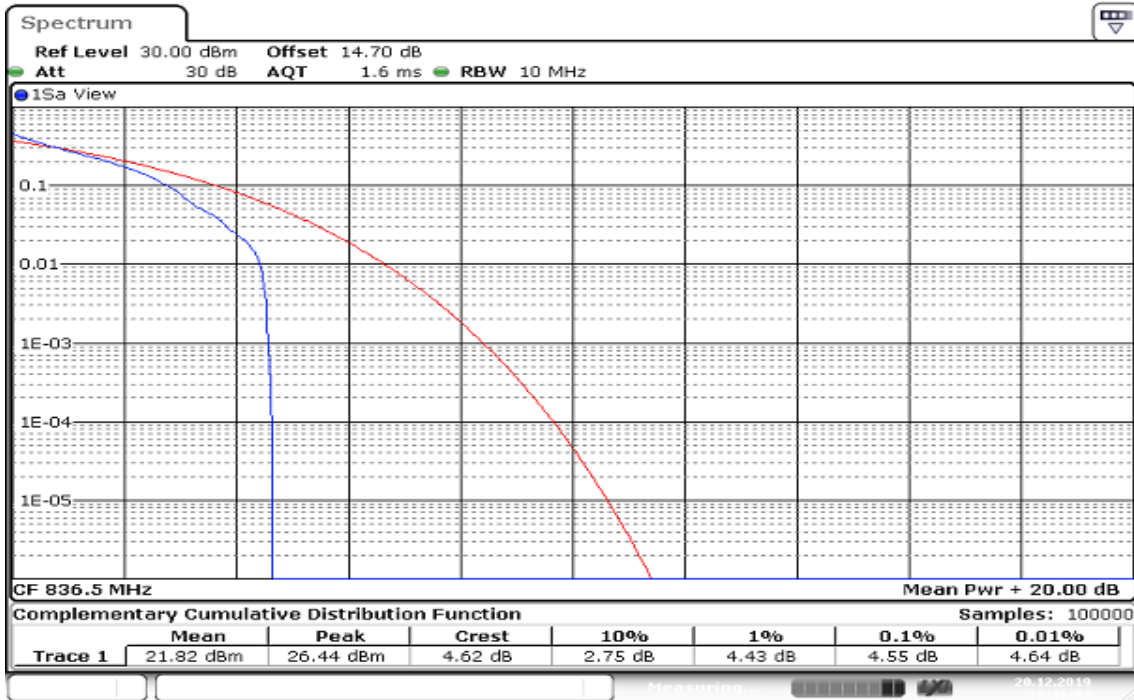

Date: 20.DEC.2019 16:16:52


**BW: 10MHz / 16QAM /RB =1, RB Offset = 0**  
**CH Mid**

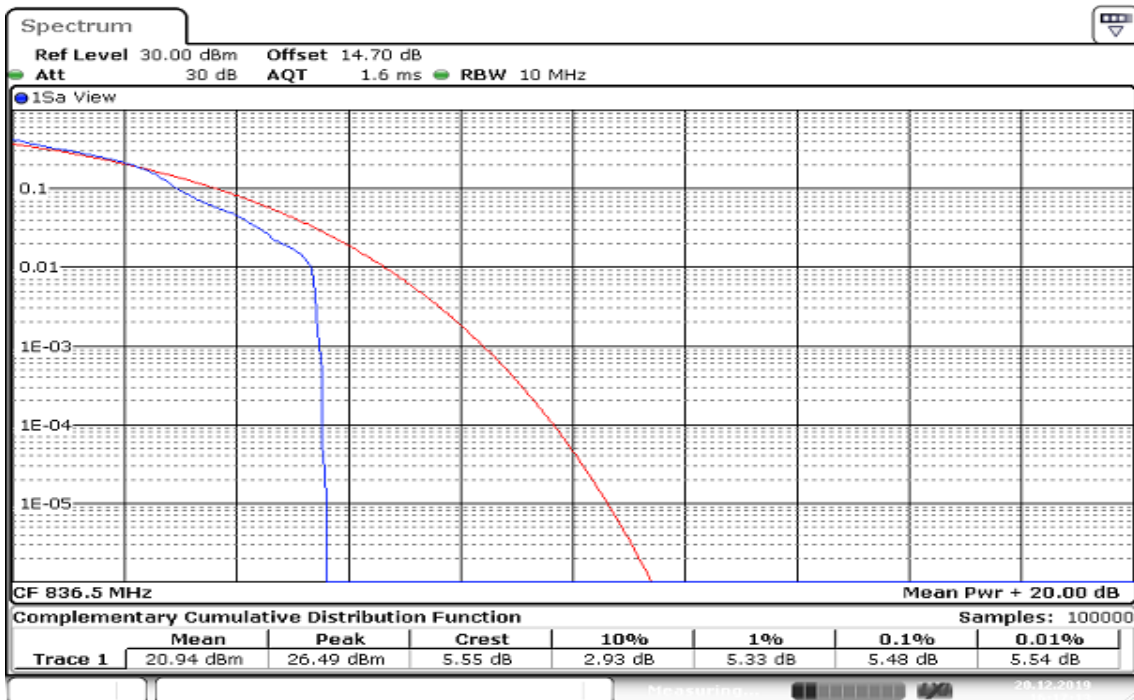

Date: 20.DEC.2019 16:17:14


Report No.: T191120D05-RP11

**BW: 15MHz / QPSK /RB =1, RB Offset = 0**  
**CH Mid**

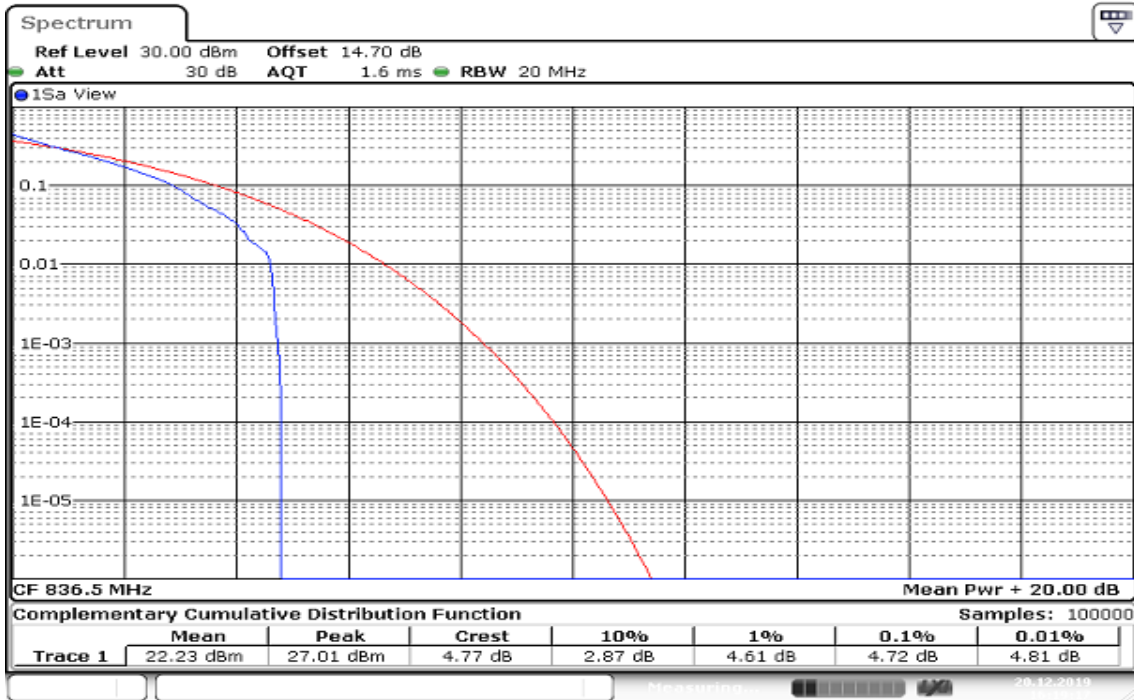

Date: 20.DEC.2019 16:19:17


**BW: 15MHz / 16QAM /RB =1, RB Offset = 0**  
**CH Mid**

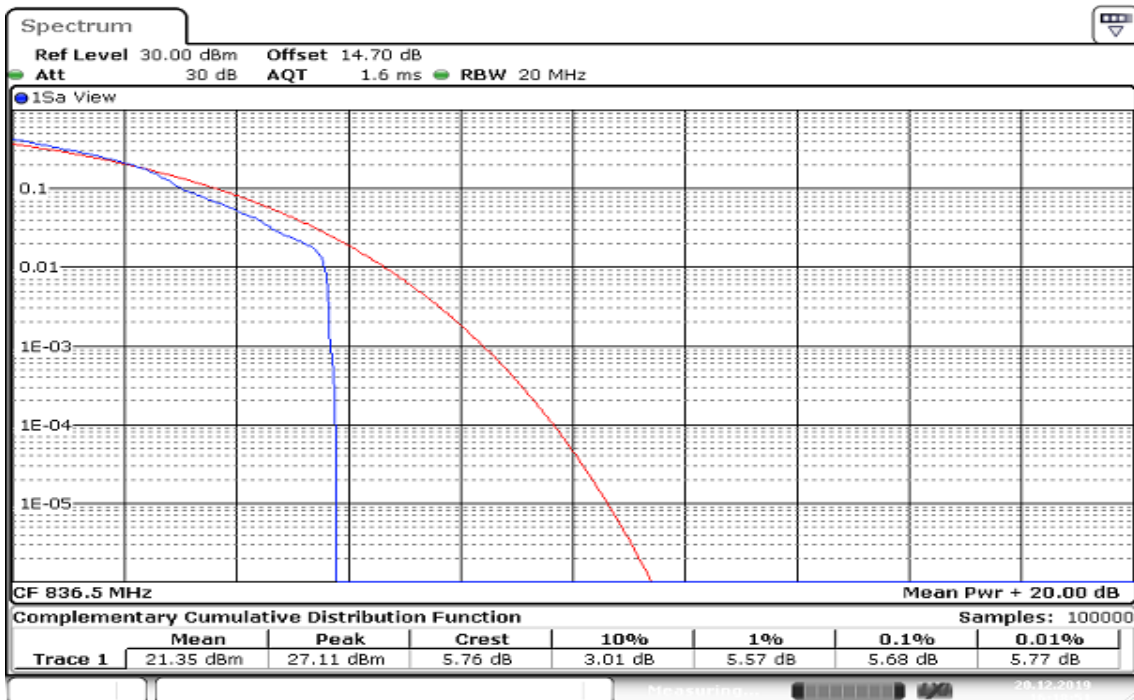

Date: 20.DEC.2019 16:18:51


Report No.: T191120D05-RP11

**BW: 1.4MHz / QPSK / RB =Full, RB Offset = 0**  
**CH Mid**

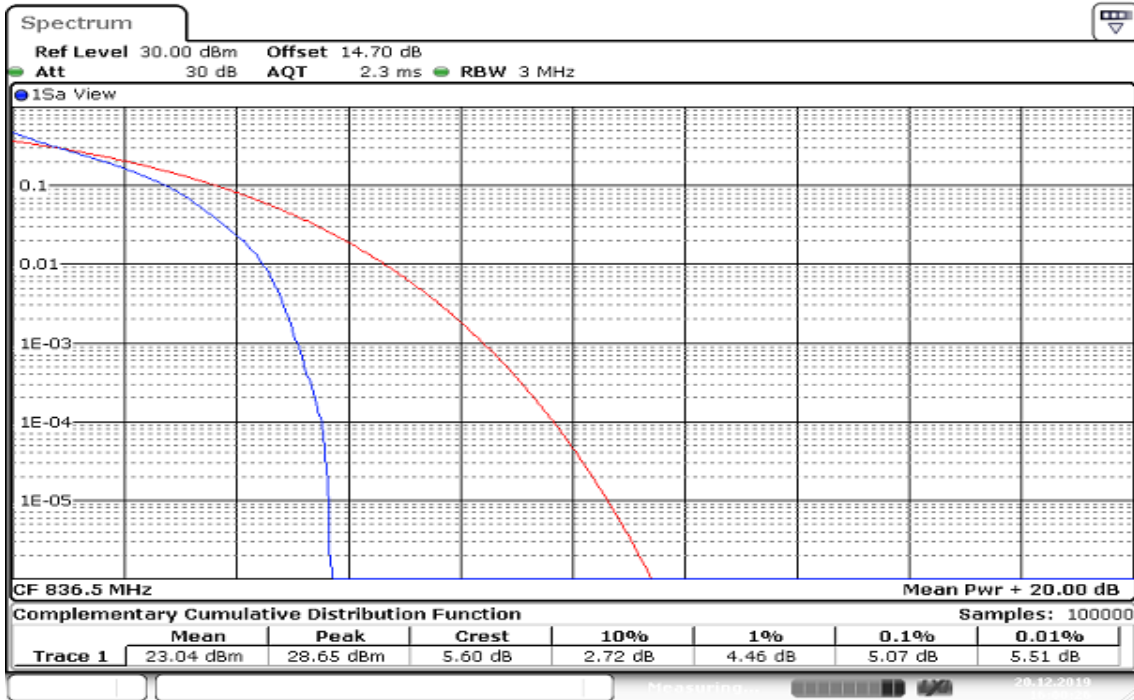

Date: 20.DEC.2019 16:00:27


**BW: 1.4MHz / 16QAM / RB =Full, RB Offset = 0**  
**CH Mid**

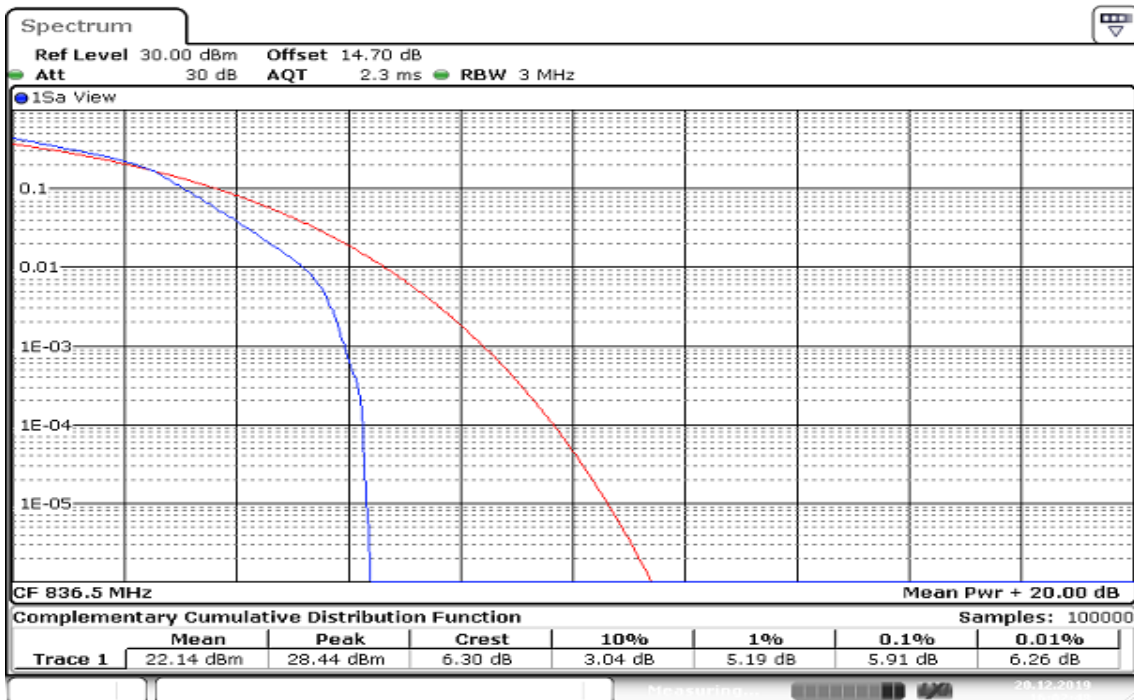

Date: 20.DEC.2019 16:02:49


Report No.: T191120D05-RP11

**BW: 3MHz / QPSK / RB =Full, RB Offset = 0**  
**CH Mid**

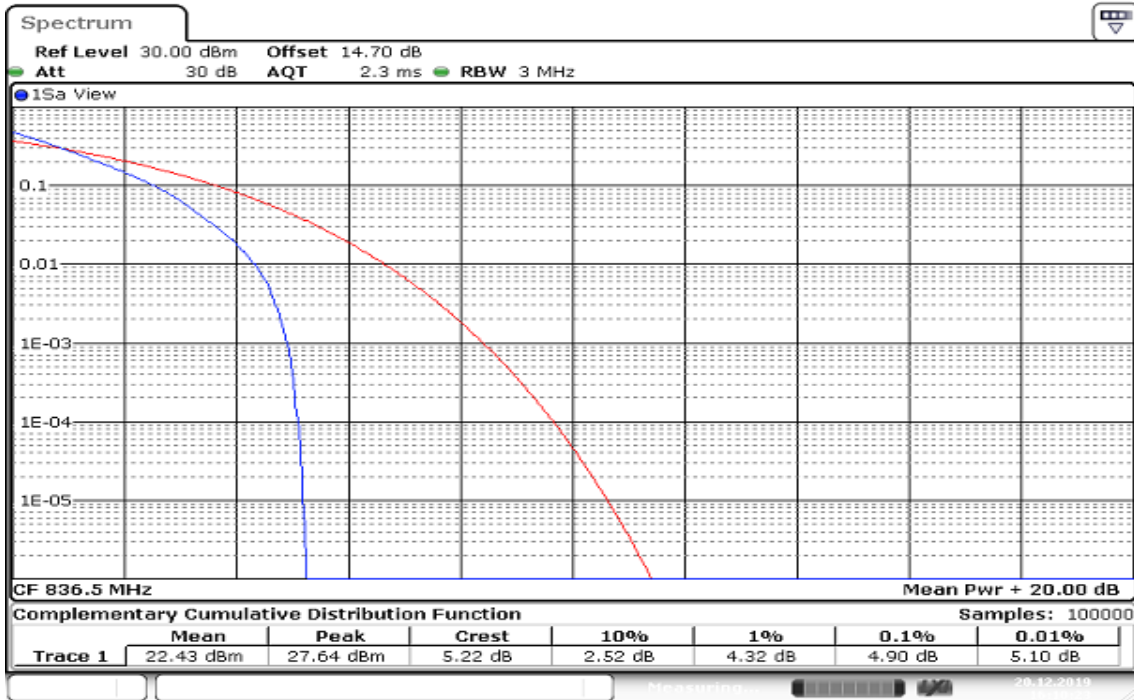

Date: 20.DEC.2019 16:10:23

**BW: 3MHz / 16QAM / RB =Full, RB Offset = 0**  
**CH Mid**

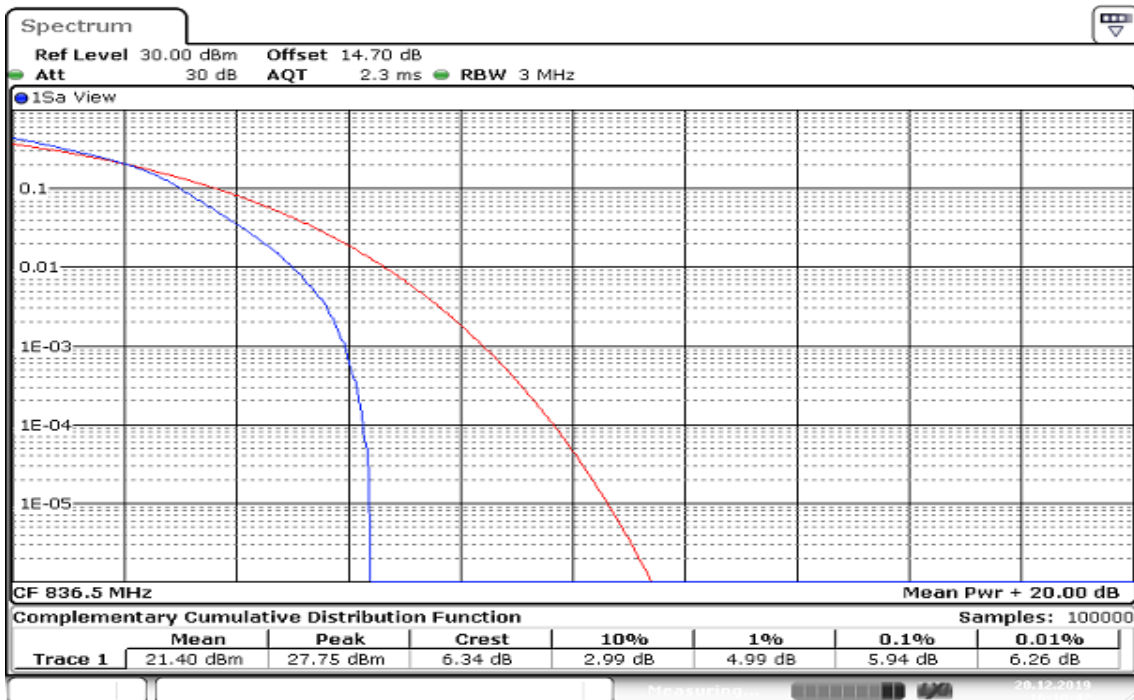


Date: 20.DEC.2019 16:10:43




Report No.: T191120D05-RP11

**BW: 5MHz / QPSK / RB =Full, RB Offset = 0**  
**CH Mid**

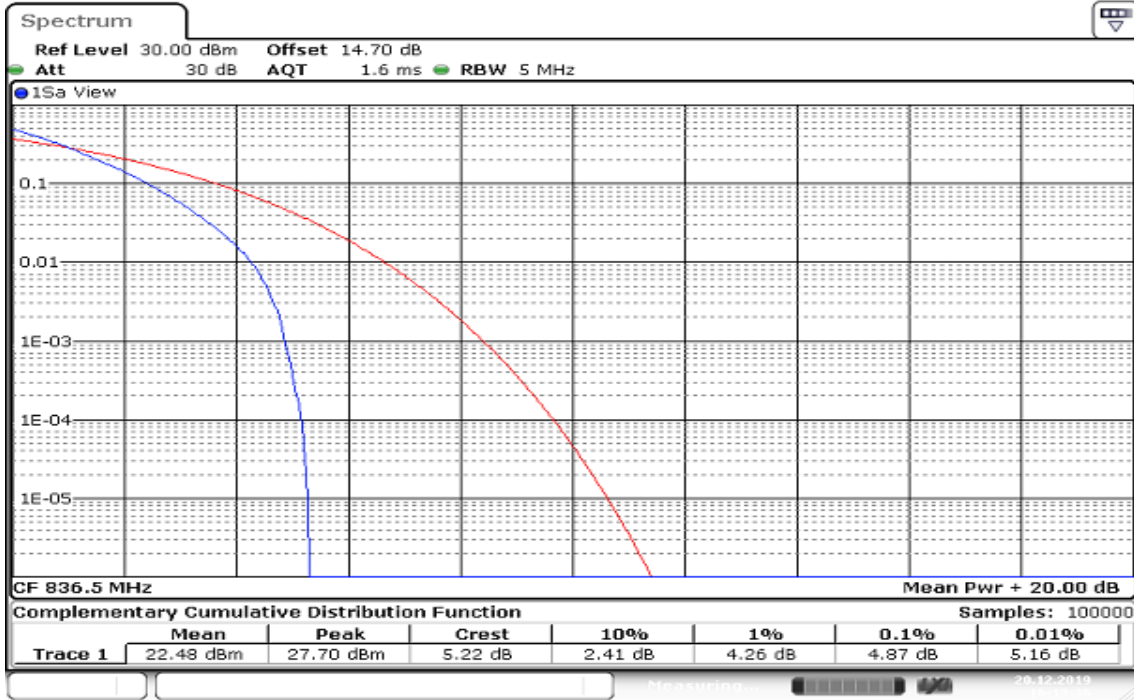

Date: 20.DEC.2019 16:13:37


**BW: 5MHz / 16QAM / RB =Full, RB Offset = 0**  
**CH Mid**

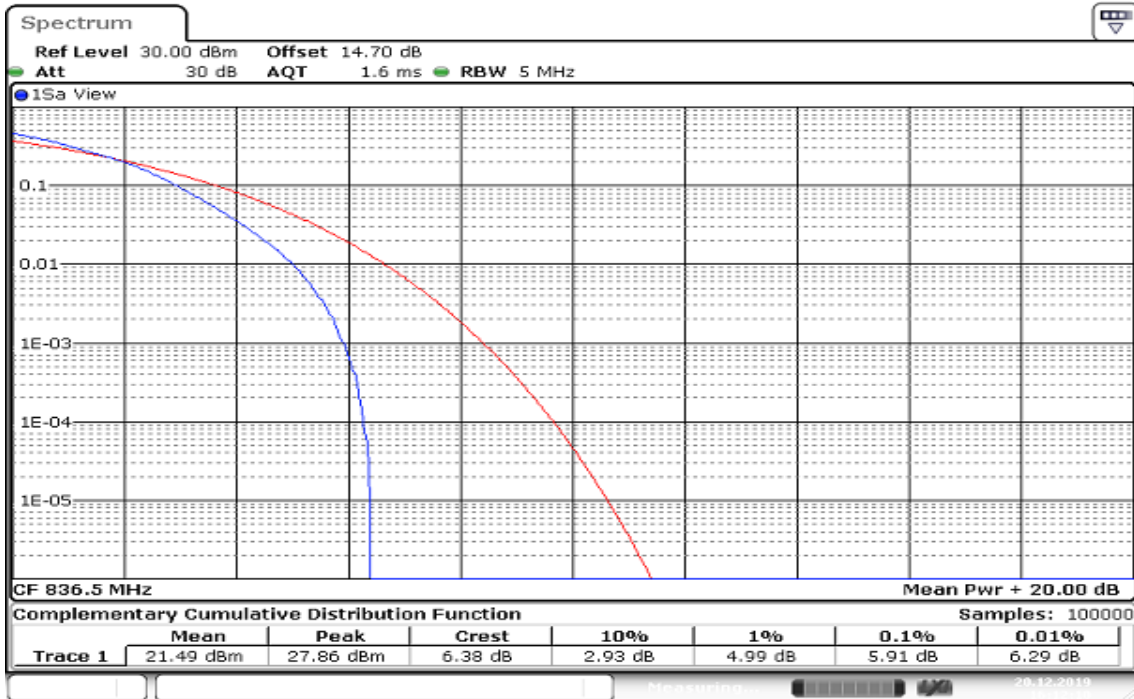

Date: 20.DEC.2019 16:12:10


Report No.: T191120D05-RP11

**BW: 10MHz / QPSK /RB =Full, RB Offset = 0**  
**CH Mid**

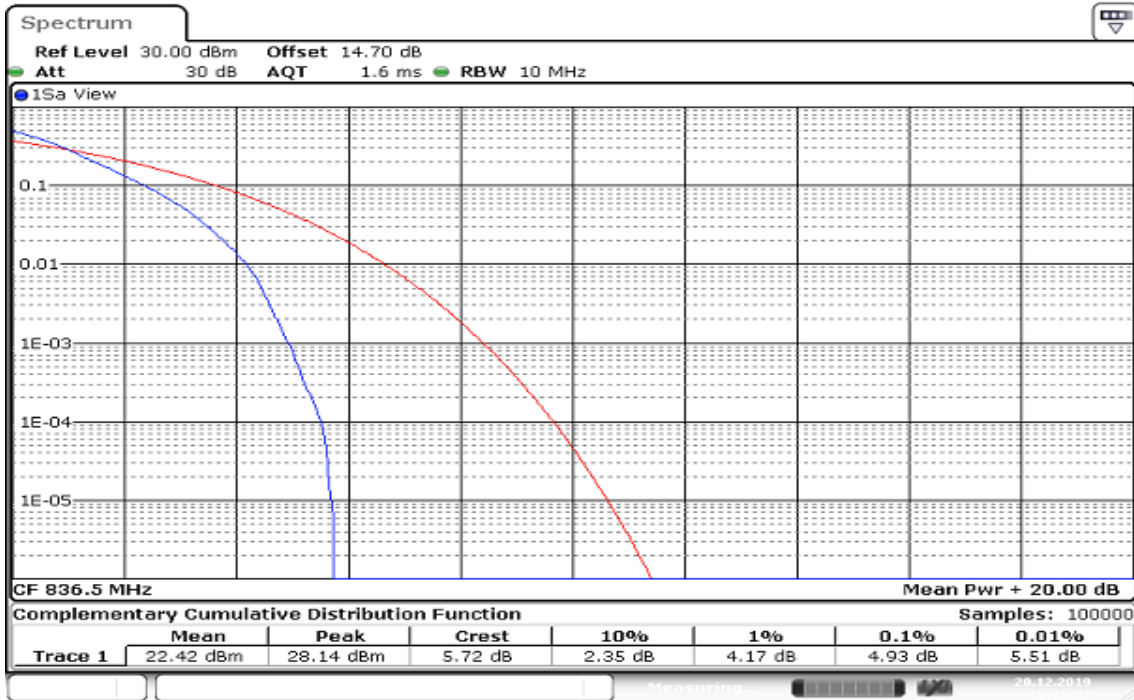

Date: 20.DEC.2019 16:16:28


**BW: 10MHz / 16QAM /RB =Full, RB Offset = 0**  
**CH Mid**

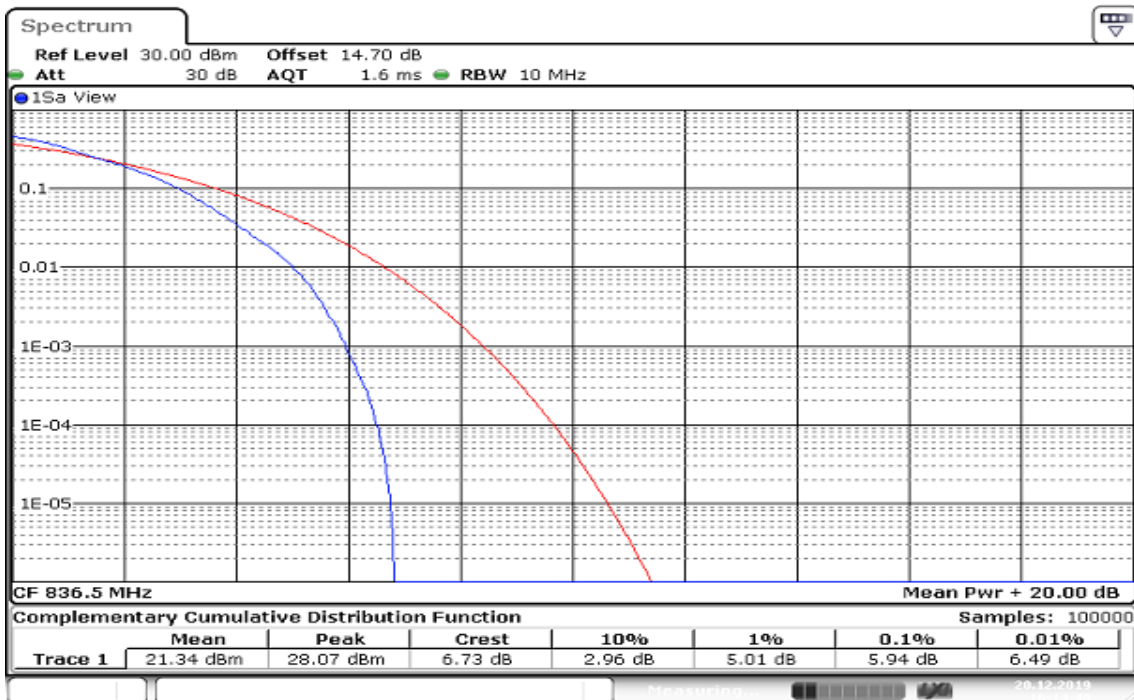

Date: 20.DEC.2019 16:14:48


Report No.: T191120D05-RP11

**BW: 15MHz / QPSK /RB =Full, RB Offset = 0**  
**CH Mid**

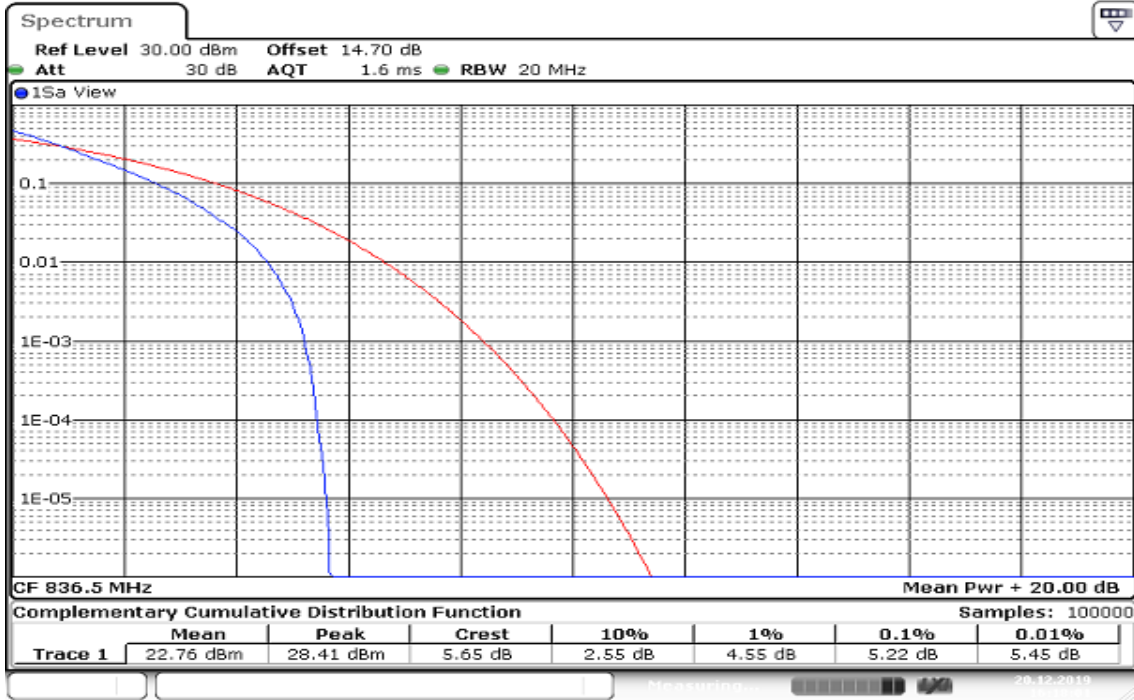

Date: 20.DEC.2019 16:18:02

**BW: 15MHz / 16QAM /RB =Full, RB Offset = 0**  
**CH Mid**

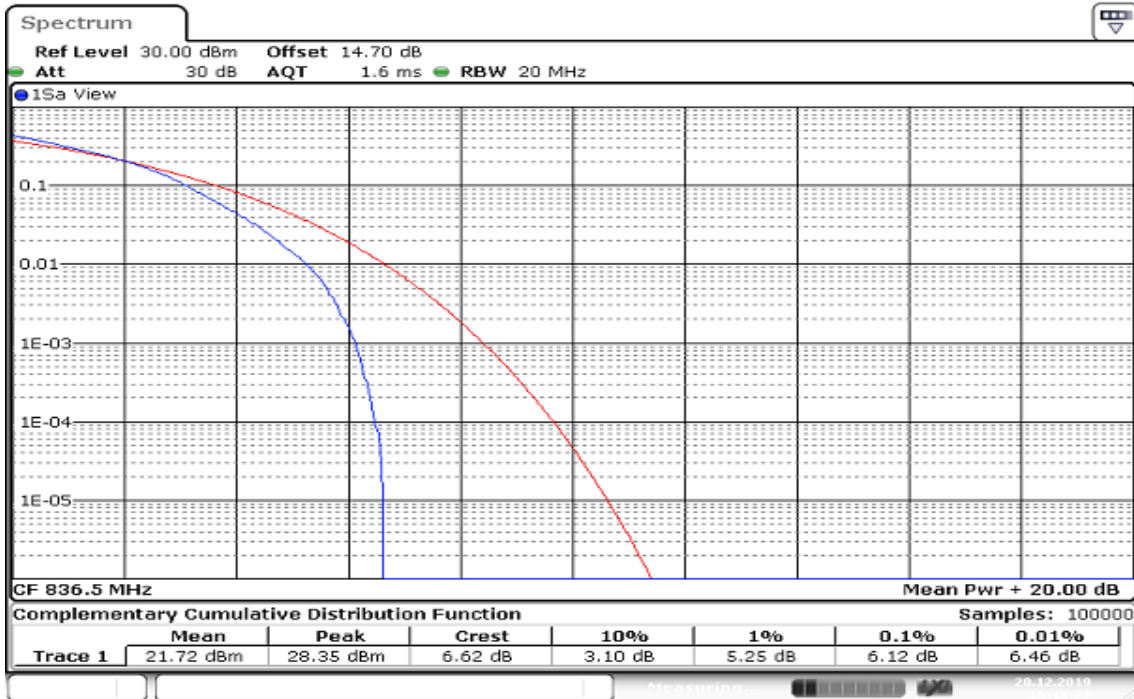

Date: 20.DEC.2019 16:18:27

## 8.5 CONDUCTED BAND EDGE MEASUREMENT

### Limit

#### **FCC §22.917(a), Band 5**

For operations in the 824-849 MHz band, Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### Test Procedures

KDB 971168 D01,

1. RBW  $\geq$  1% of the emission bandwidth
2. VBW  $\geq$  3 x RBW
3. Span was set large enough so as to capture all out of emissions near the band edge.


Report No.: T191120D05-RP11

**Test Results:**

**LTE Band 26**


**CHANNEL BANDWIDTH: 1.4MHz / QPSK / 1RB ALLOCATED**

**LOWER BAND EDGE**

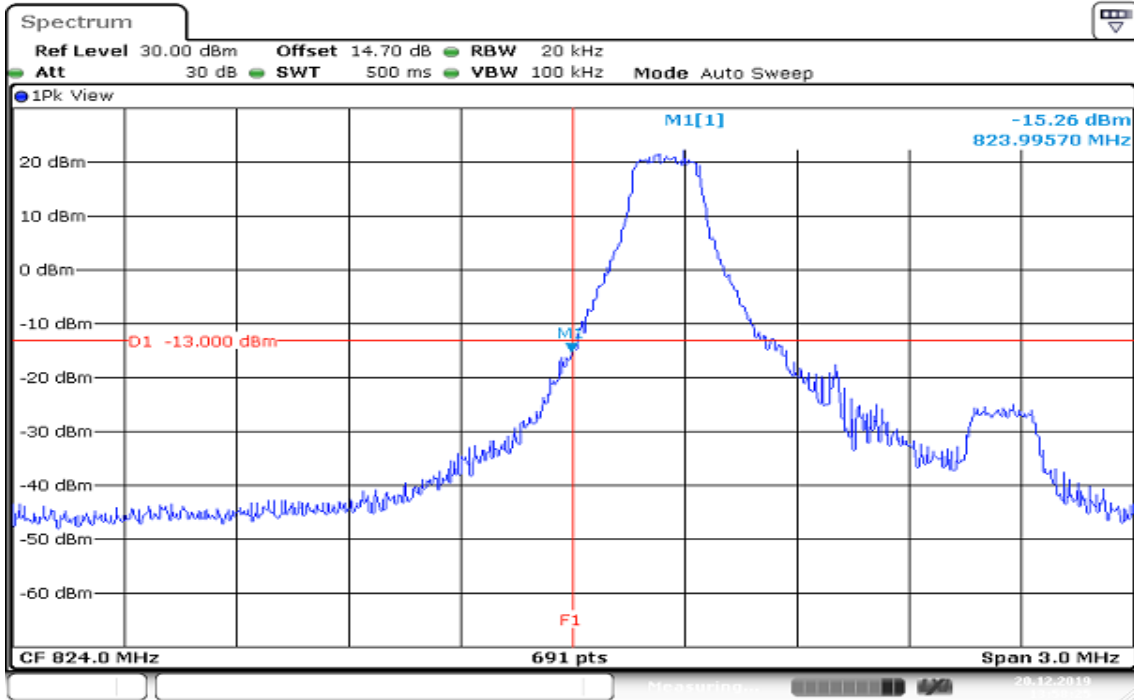

Date: 20.DEC.2019 13:58:25


**HIGHER BAND EDGE**

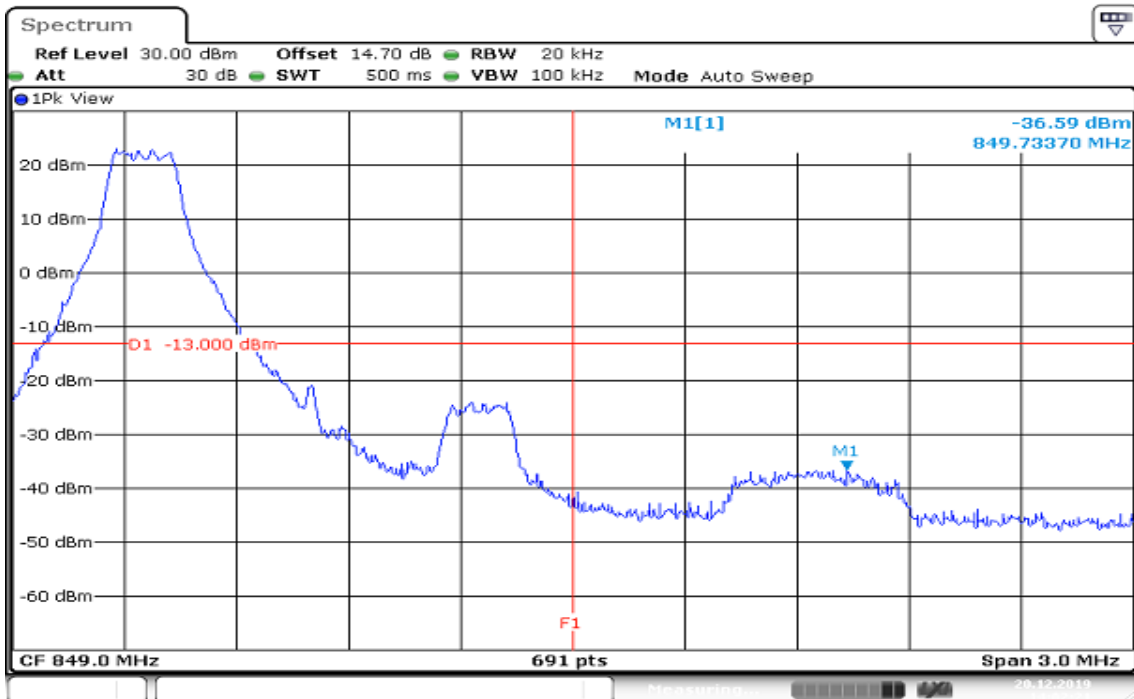


Date: 20.DEC.2019 14:02:21

Report No.: T191120D05-RP11

**CHANNEL BANDWIDTH: 1.4MHz / 16QAM / 1RB ALLOCATED  
LOWER BAND EDGE**

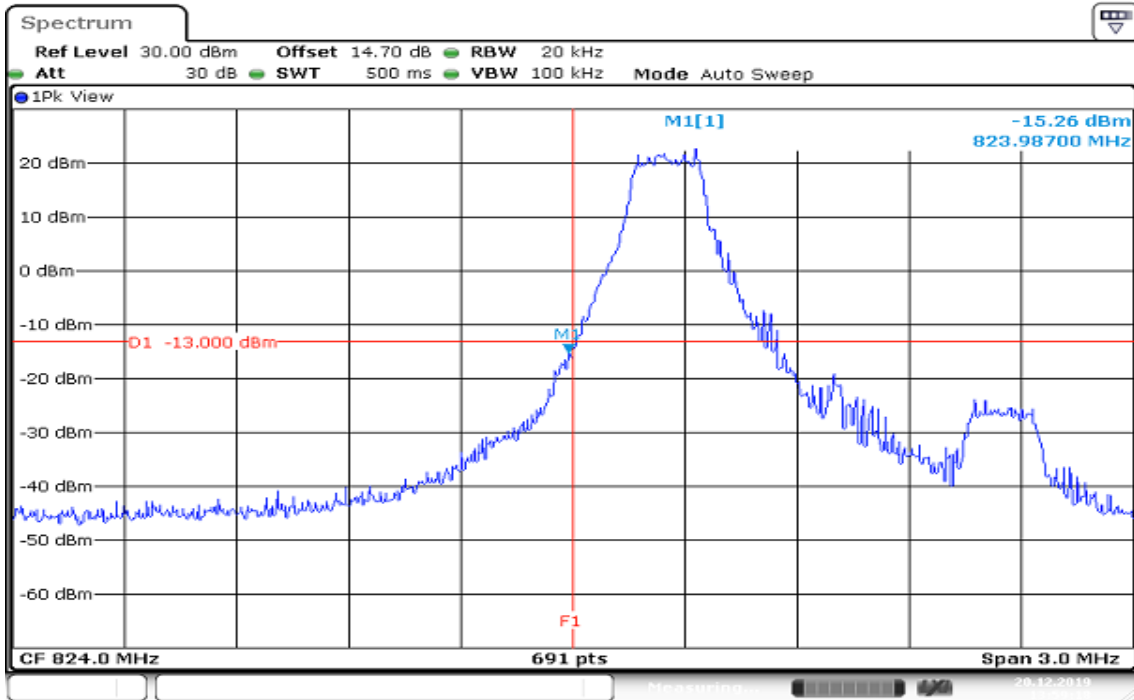


**HIGHER BAND EDGE**

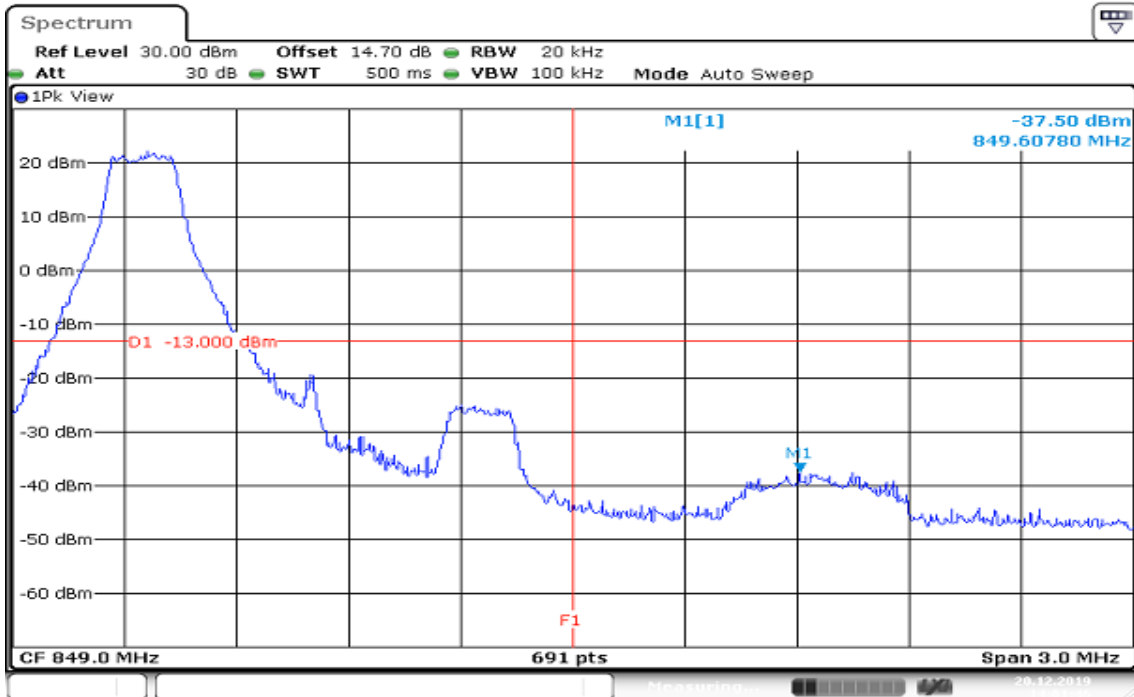


Report No.: T191120D05-RP11

**CHANNEL BANDWIDTH: 3MHz / QPSK / 1RB ALLOCATED  
LOWER BAND EDGE**

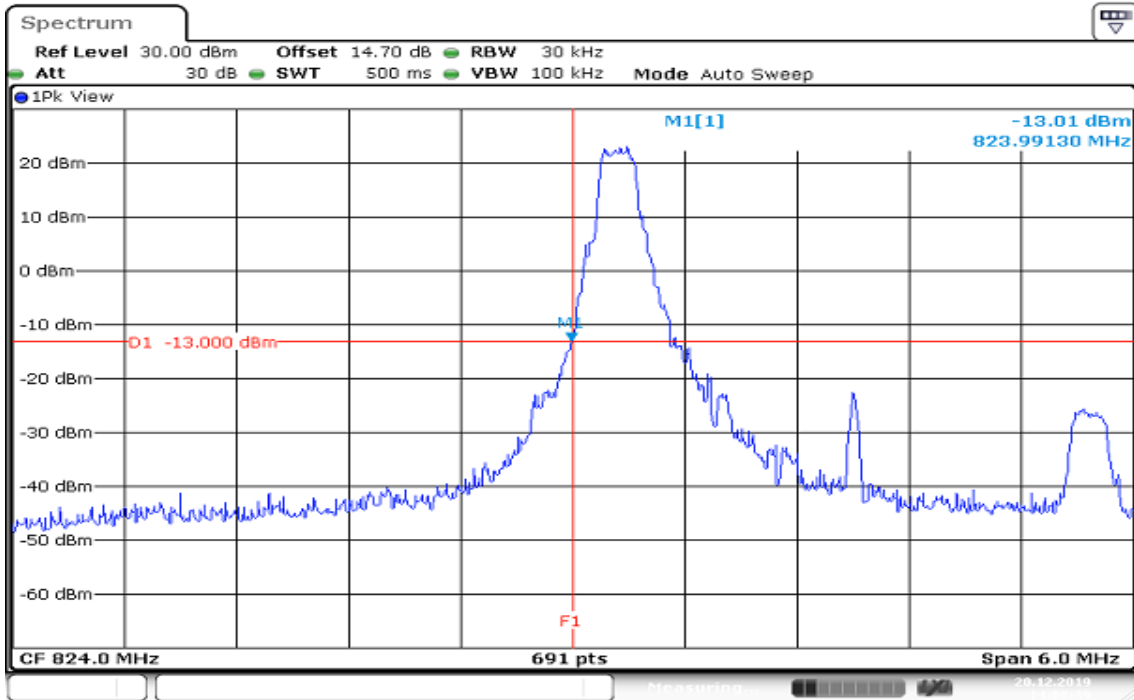


**HIGHER BAND EDGE**

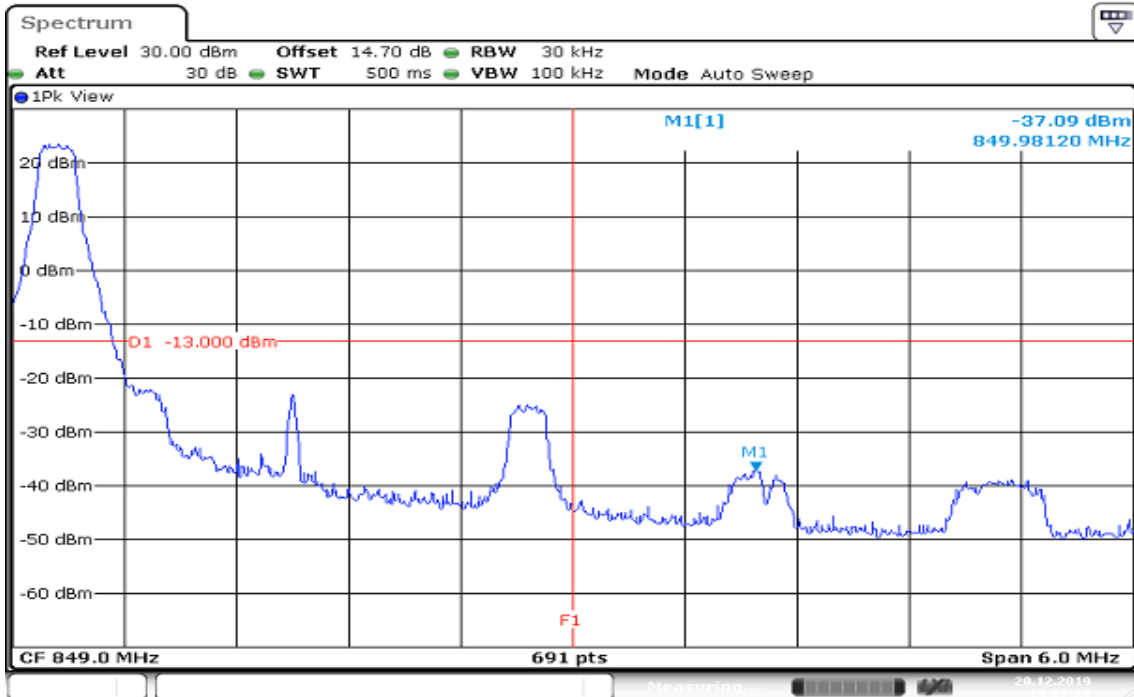


Report No.: T191120D05-RP11

**CHANNEL BANDWIDTH: 3MHz / 16QAM / 1RB ALLOCATED  
LOWER BAND EDGE**

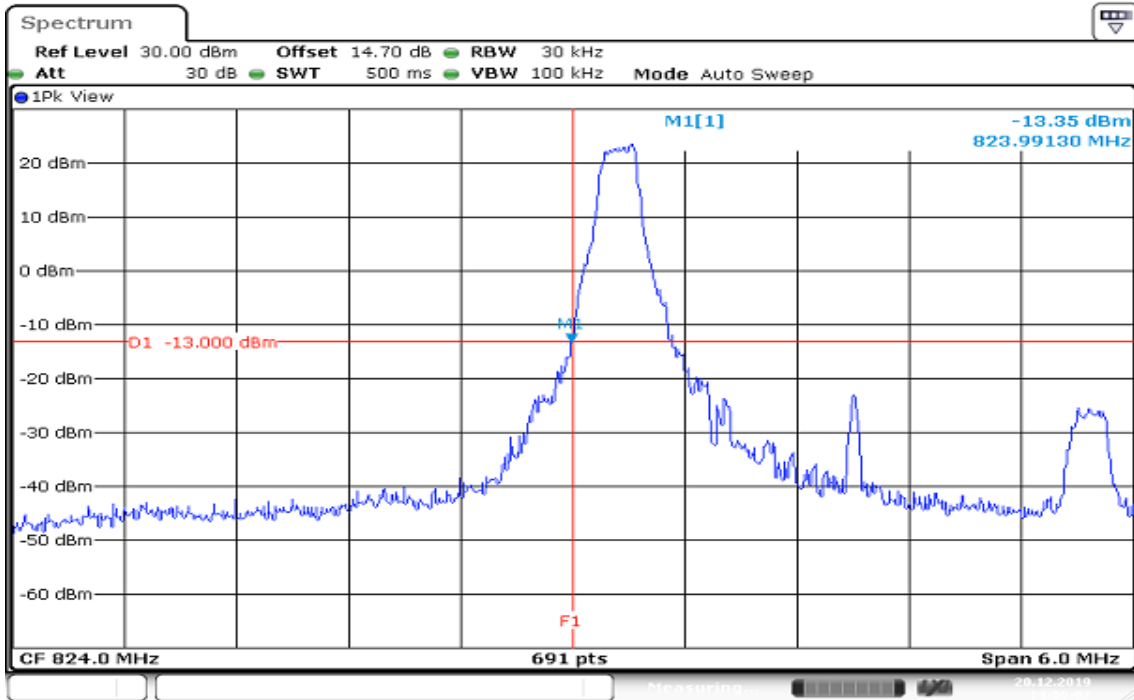

Date: 20.DEC.2019 14:09:03

**HIGHER BAND EDGE**

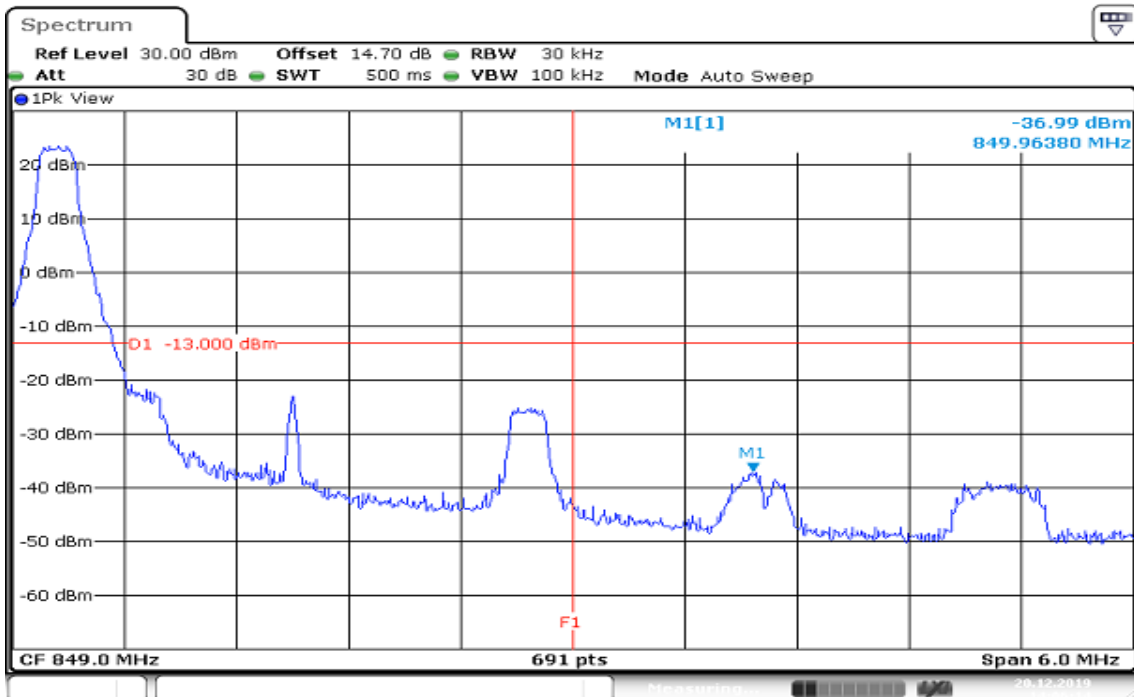


Date: 20.DEC.2019 14:06:15




Report No.: T191120D05-RP11

**CHANNEL BANDWIDTH: 5MHz / QPSK / 1RB ALLOCATED  
LOWER BAND EDGE**

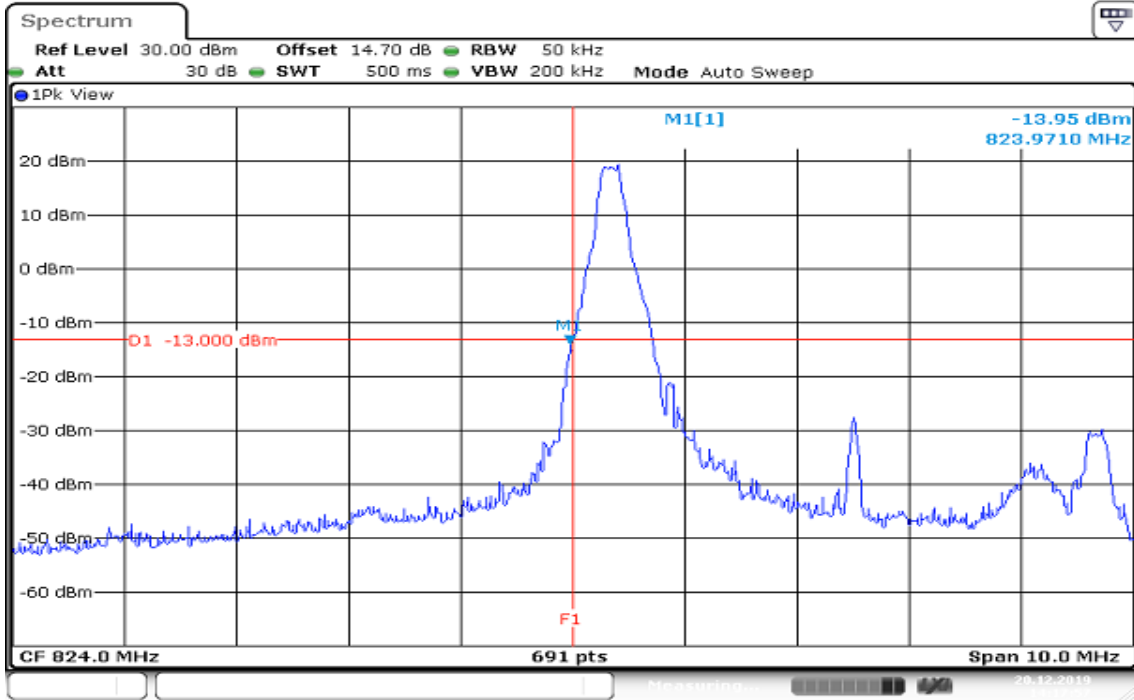


Date: 20.DEC.2019 14:17:57

**HIGHER BAND EDGE**

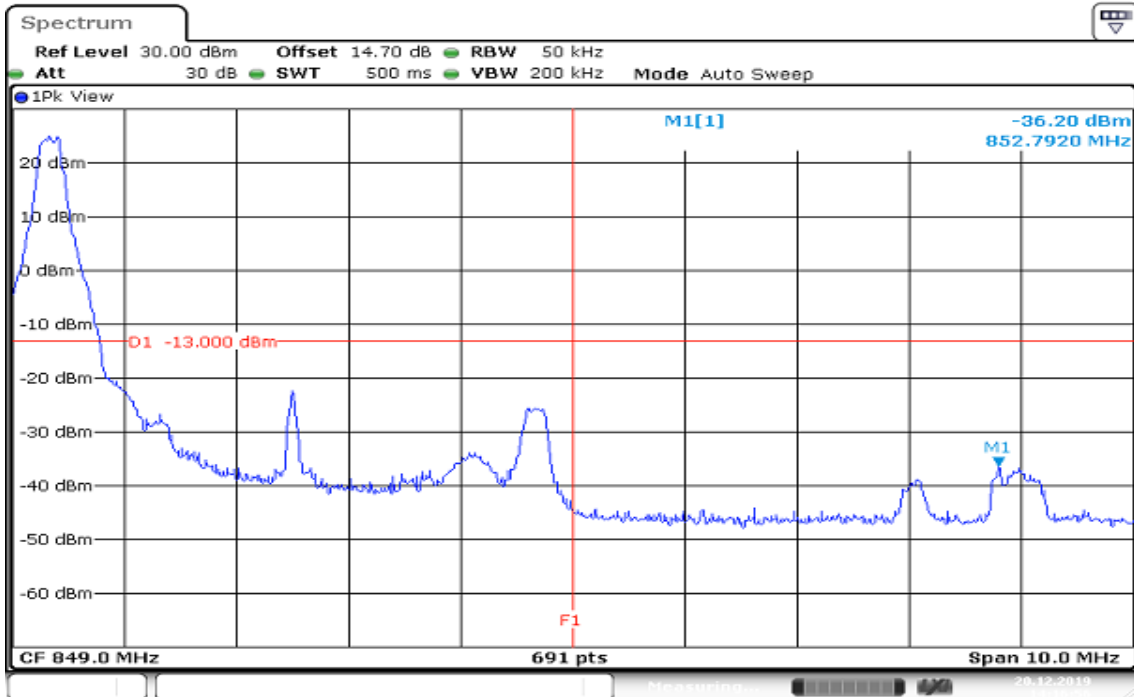


Date: 20.DEC.2019 14:16:57

## CHANNEL BANDWIDTH: 5MHz / 16QAM / 1RB ALLOCATED LOWER BAND EDGE

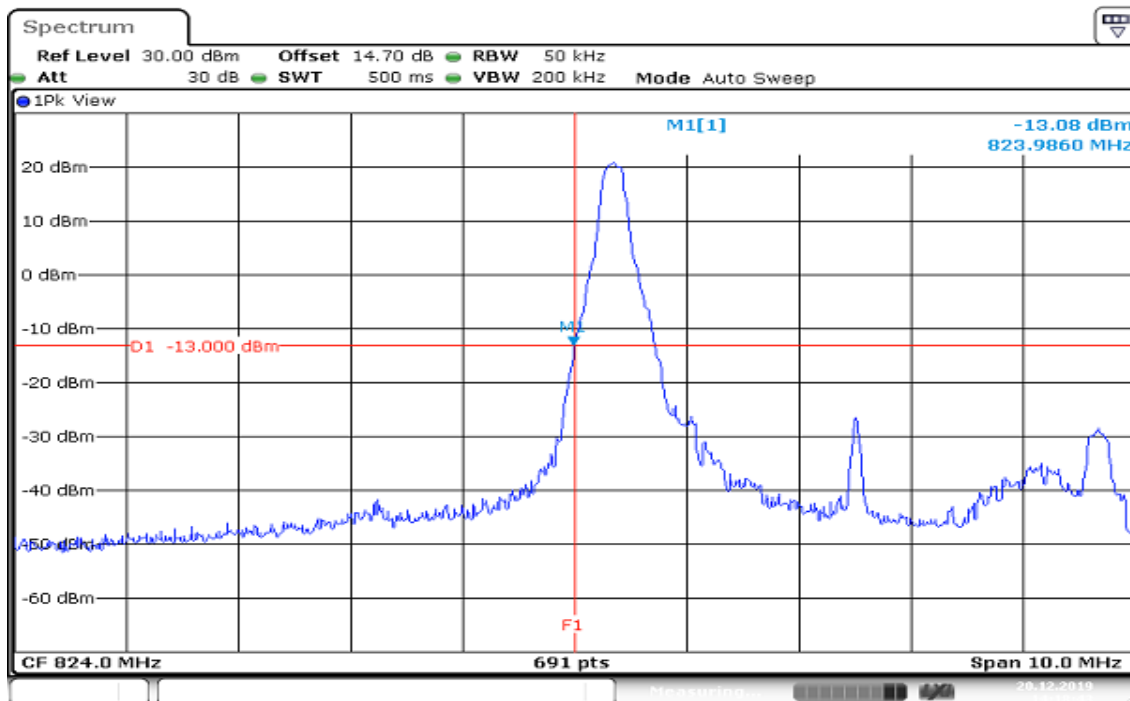

Date: 20.DEC.2019 14:18:43


## HIGHER BAND EDGE

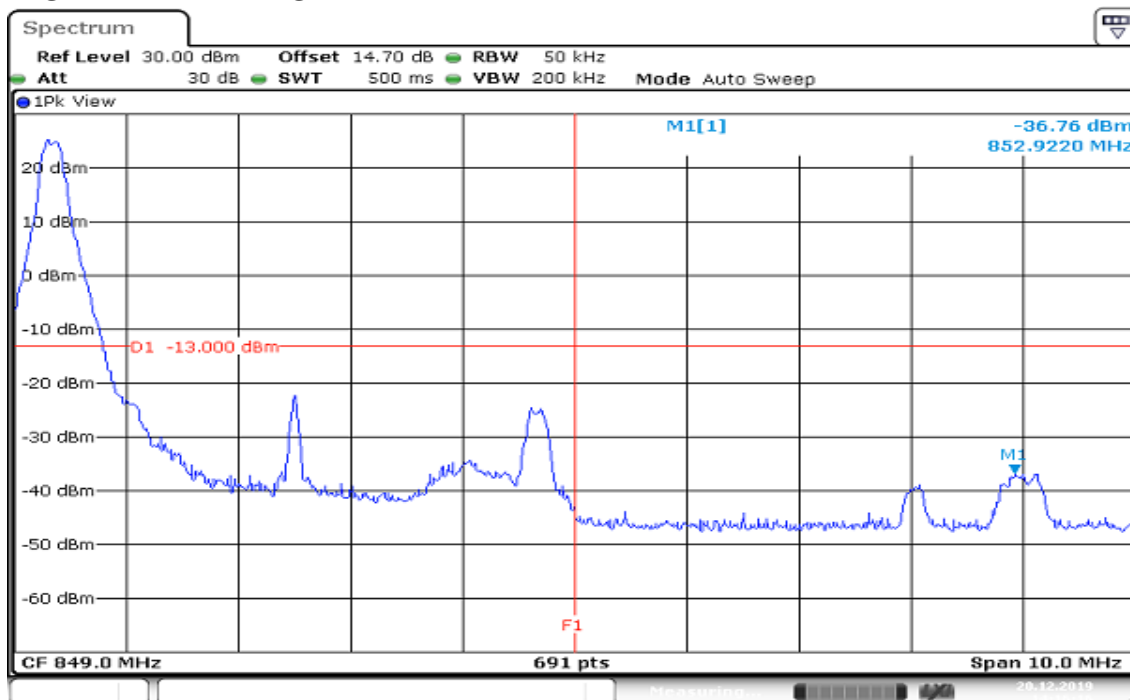

Date: 20.DEC.2019 14:16:17


Report No.: T191120D05-RP11

**CHANNEL BANDWIDTH: 10MHz / QPSK / 1RB ALLOCATED  
LOWER BAND EDGE**

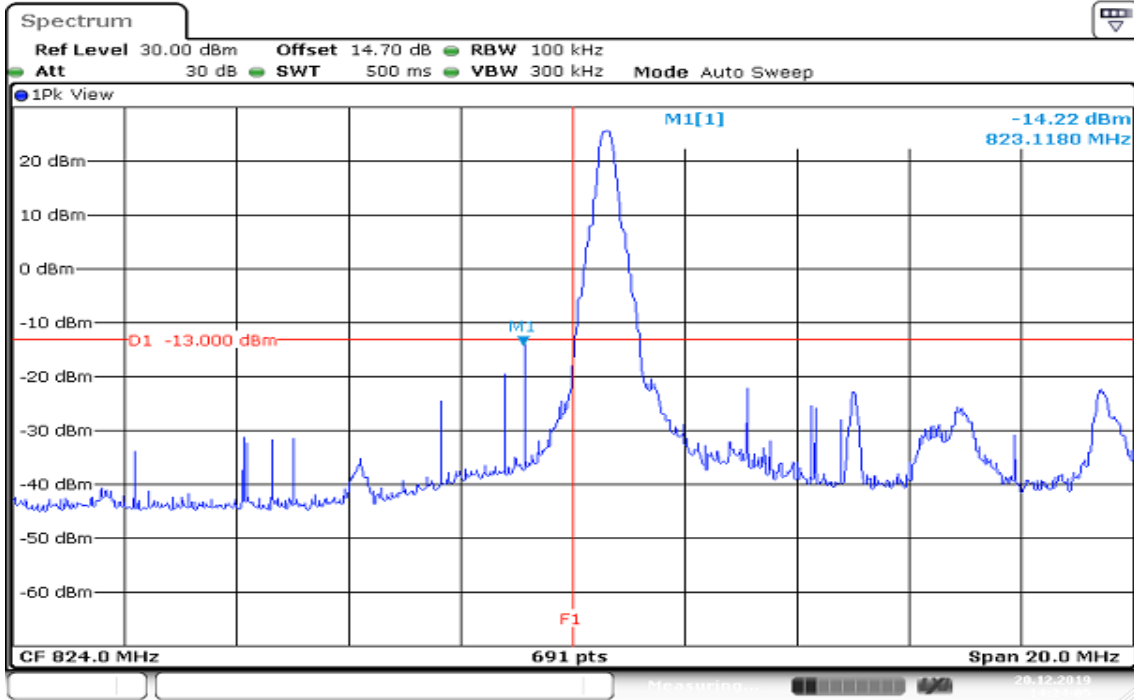

Date: 20.DEC.2019 14:24:05


**HIGHER BAND EDGE**

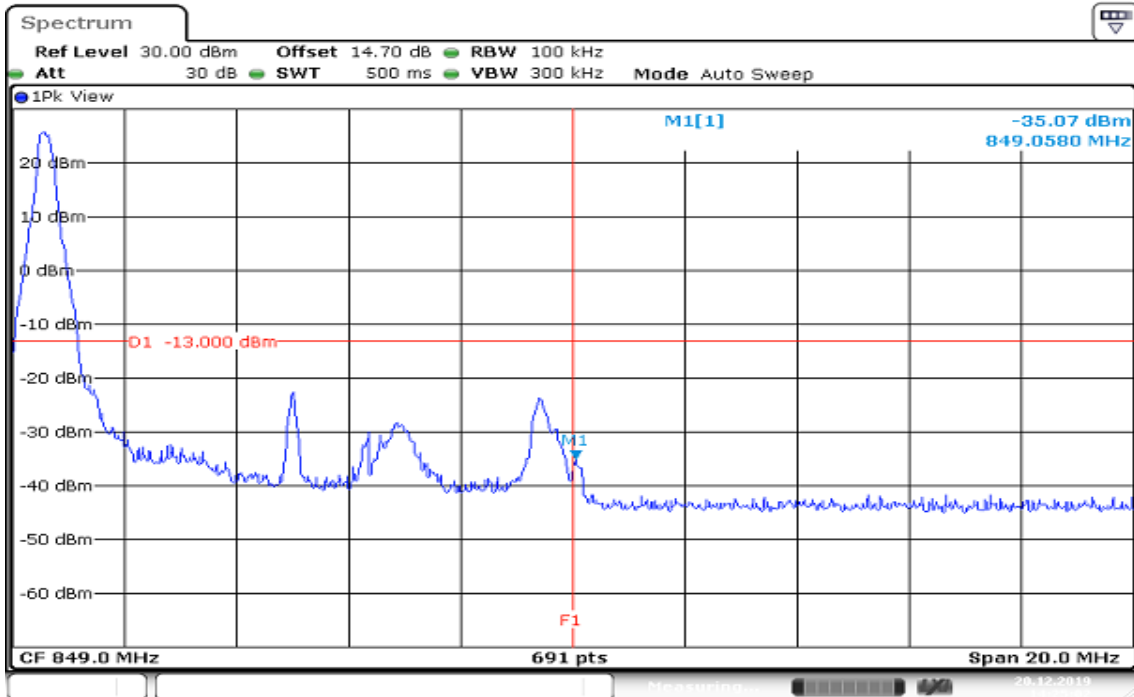

Date: 20.DEC.2019 14:25:03


Report No.: T191120D05-RP11

**CHANNEL BANDWIDTH: 10MHz / 16QAM / 1RB ALLOCATED  
LOWER BAND EDGE**

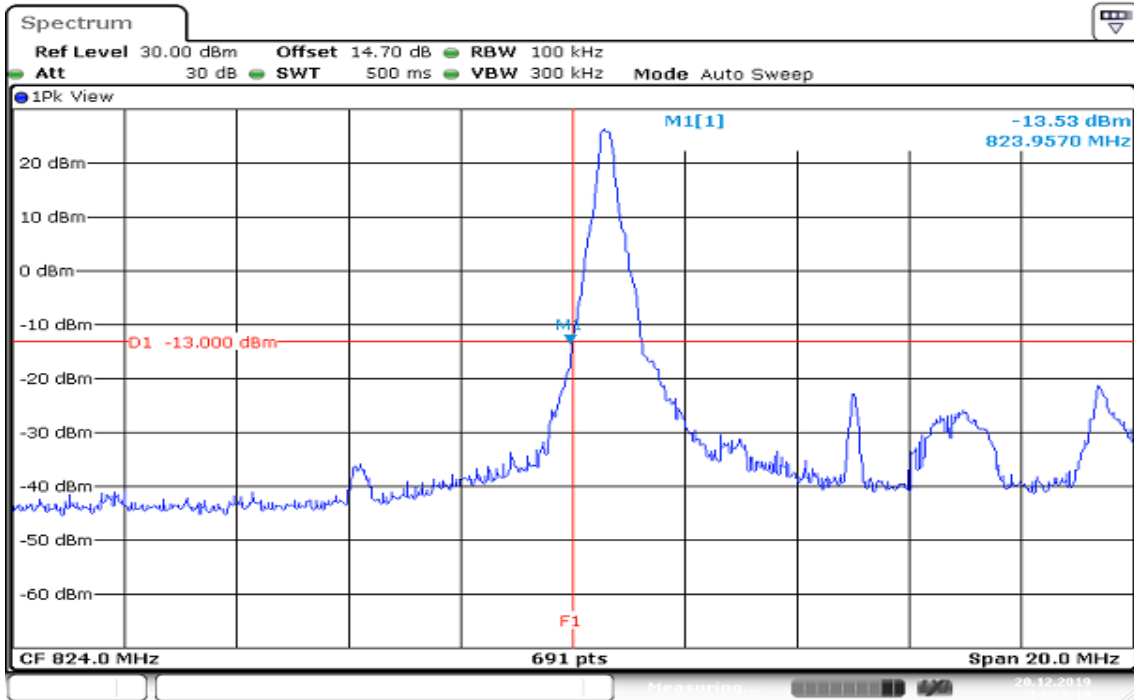

Date: 20.DEC.2019 14:23:11


**HIGHER BAND EDGE**

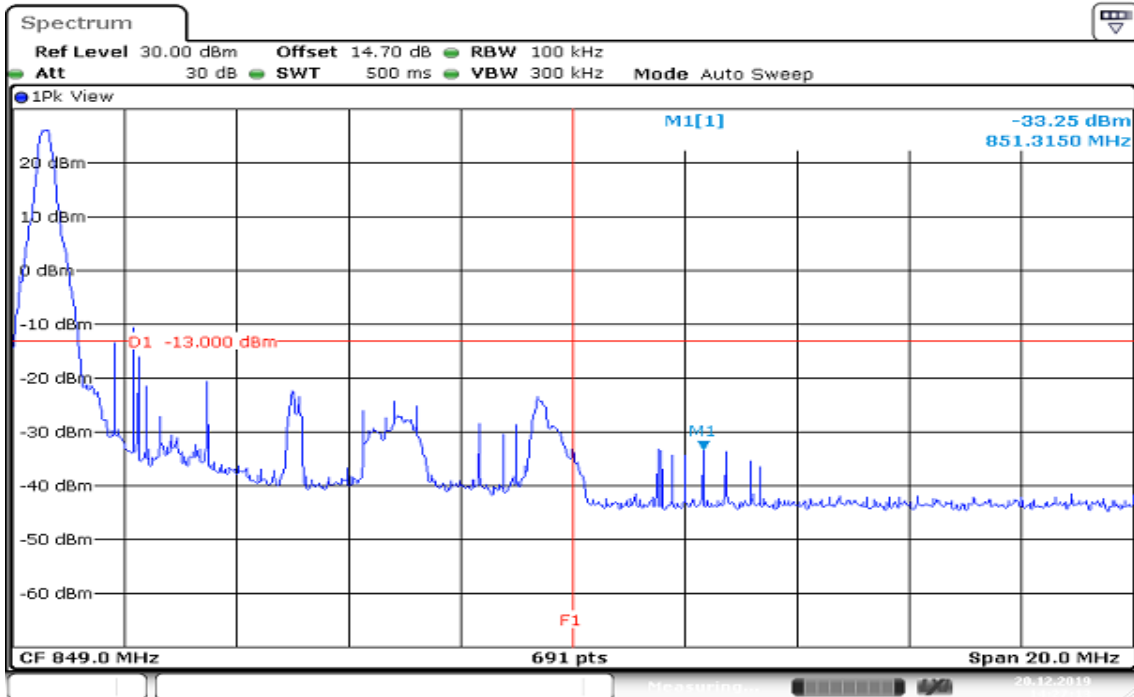

Date: 20.DEC.2019 14:27:14


Report No.: T191120D05-RP11

**CHANNEL BANDWIDTH: 15MHz / QPSK / 1RB ALLOCATED  
LOWER BAND EDGE**

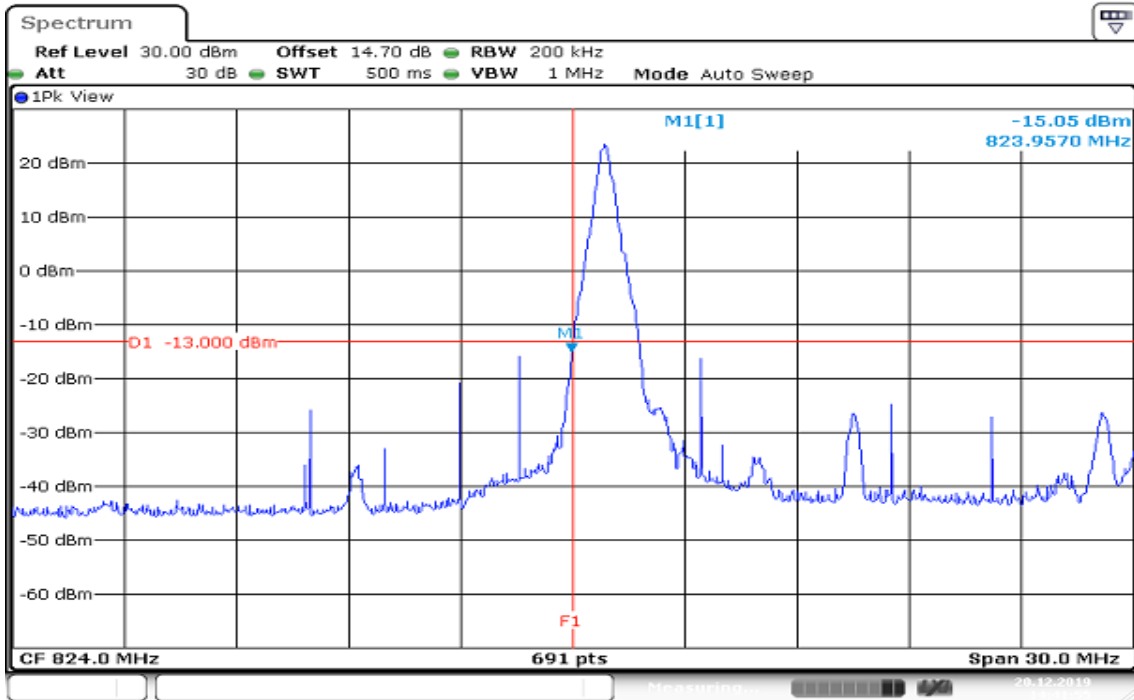

Date: 20.DEC.2019 14:41:56


**HIGHER BAND EDGE**

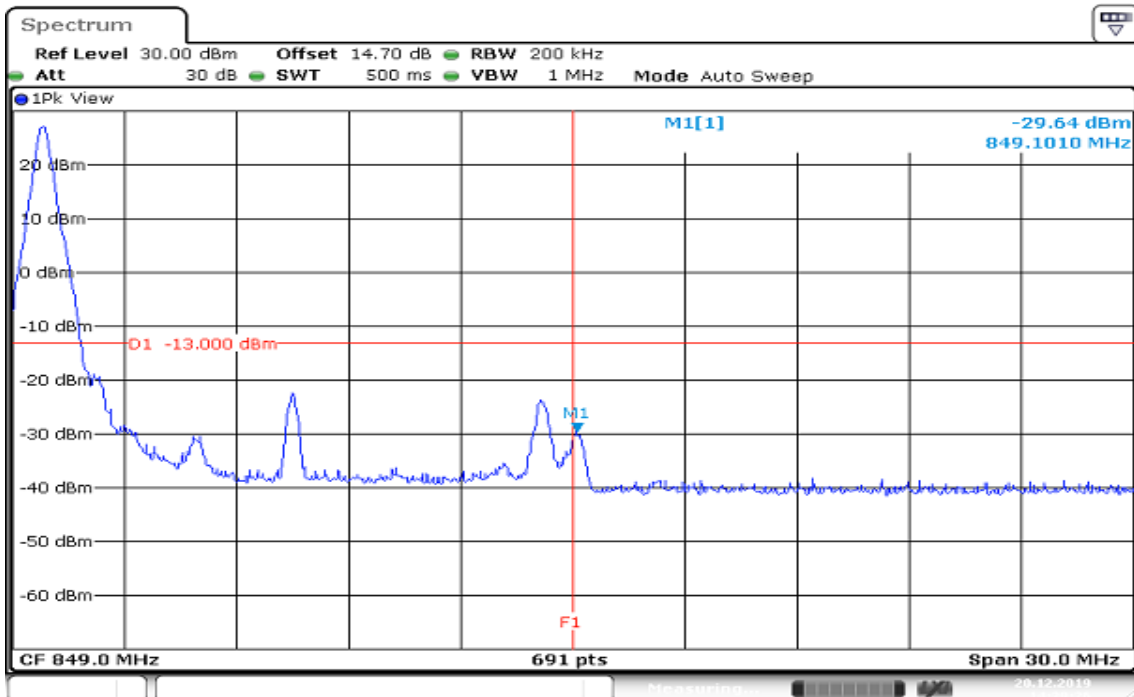


Date: 20.DEC.2019 14:39:26

Report No.: T191120D05-RP11

**CHANNEL BANDWIDTH: 15MHz / 16QAM / 1RB ALLOCATED  
LOWER BAND EDGE**

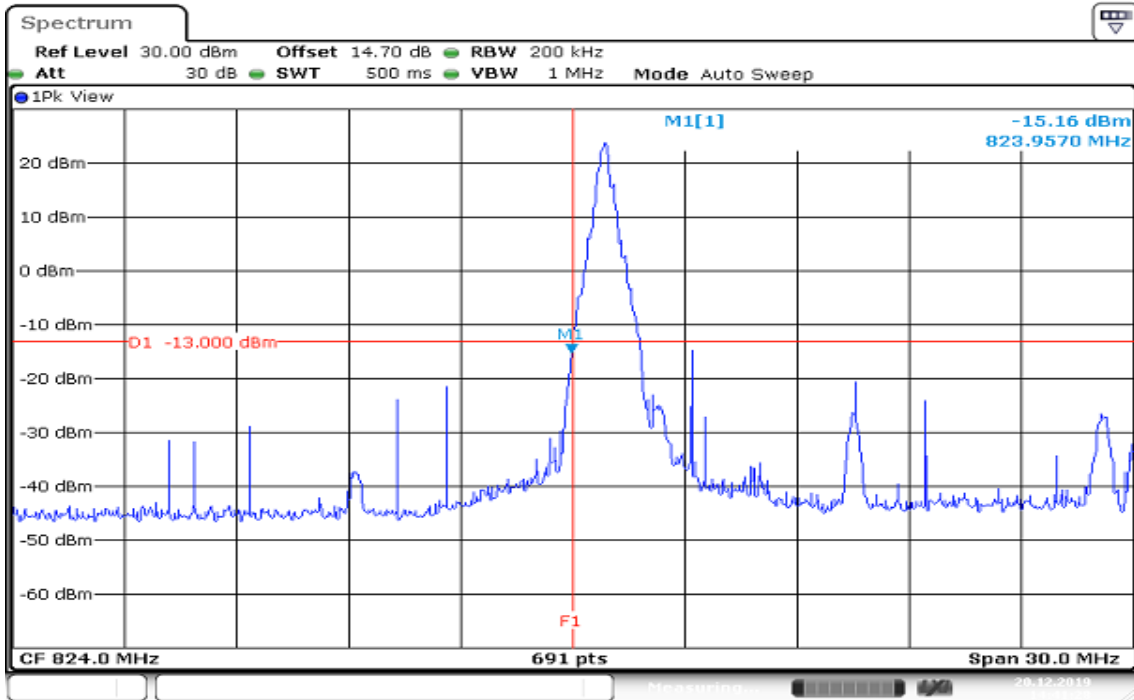


**HIGHER BAND EDGE**

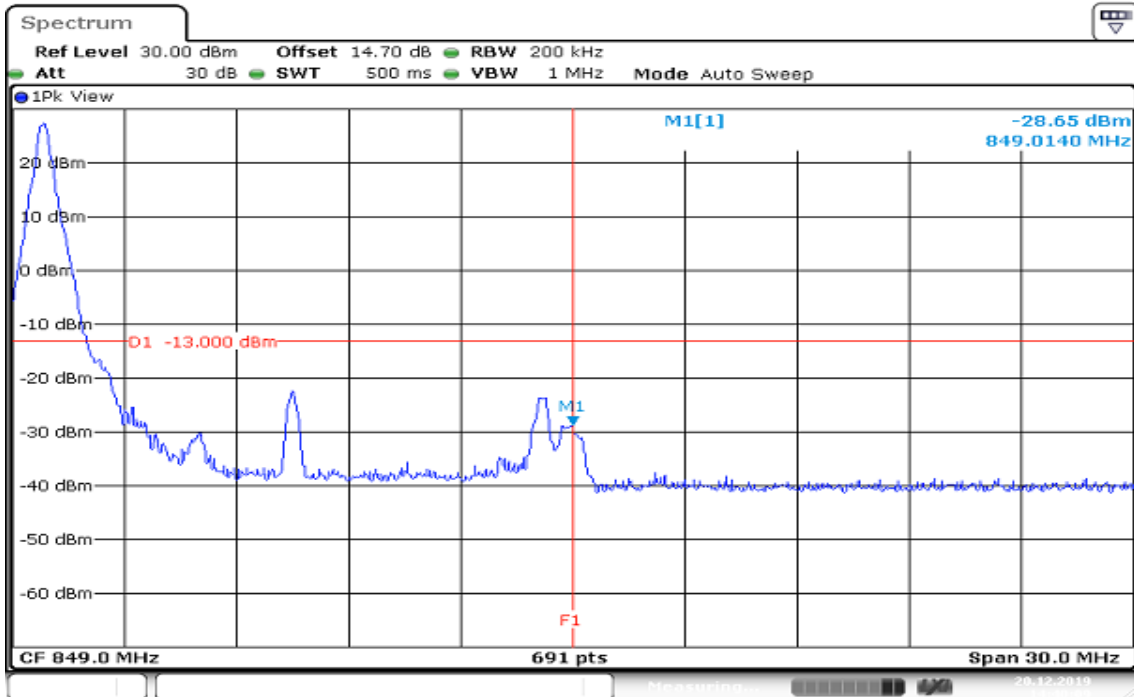


Report No.: T191120D05-RP11

**CHANNEL BANDWIDTH: 1.4MHz / QPSK / Full RB ALLOCATED  
LOWER BAND EDGE**

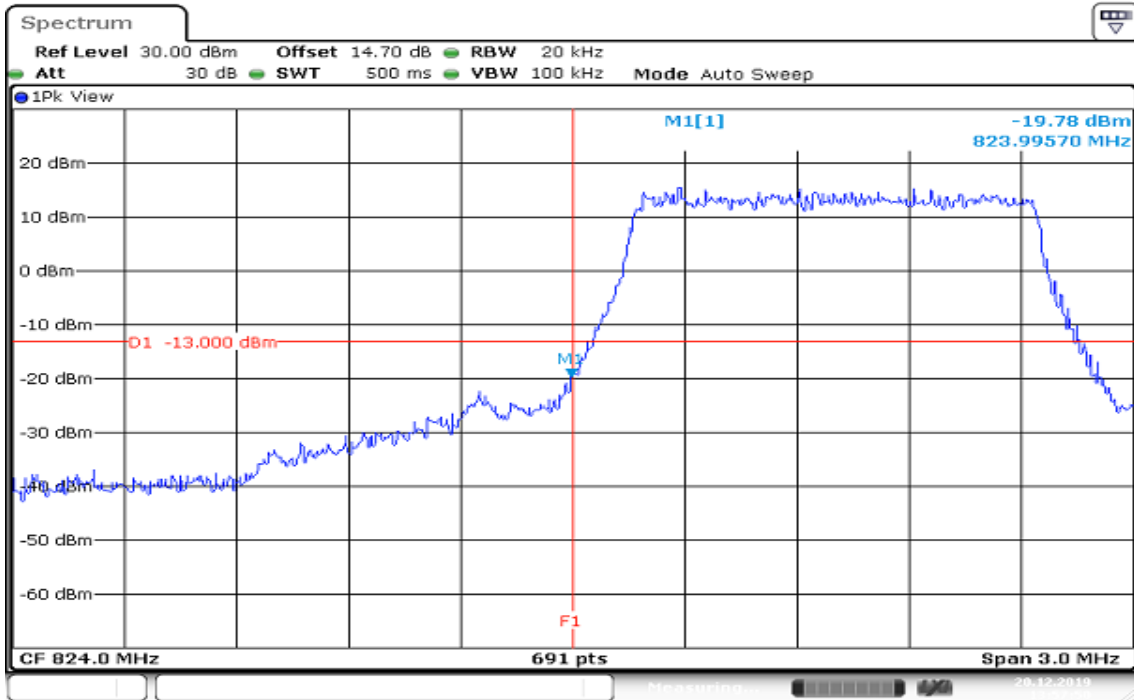

Date: 20.DEC.2019 13:57:51


**HIGHER BAND EDGE**

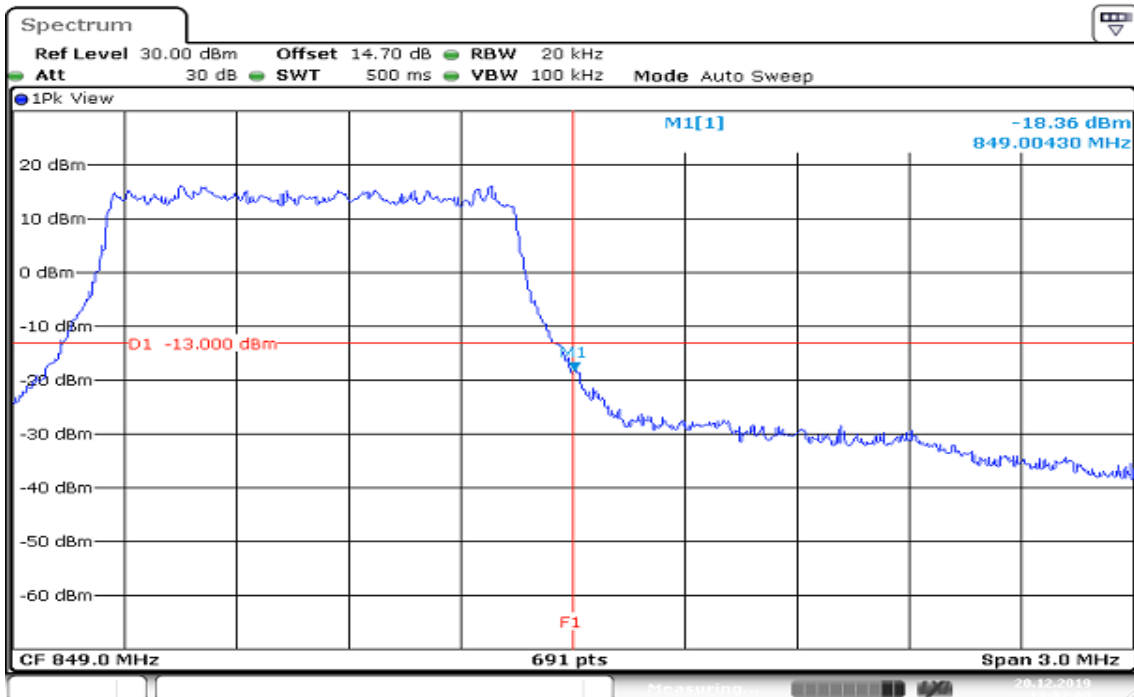

Date: 20.DEC.2019 14:03:01


Report No.: T191120D05-RP11

**CHANNEL BANDWIDTH: 1.4MHz / 16QAM / Full RB ALLOCATED  
LOWER BAND EDGE**

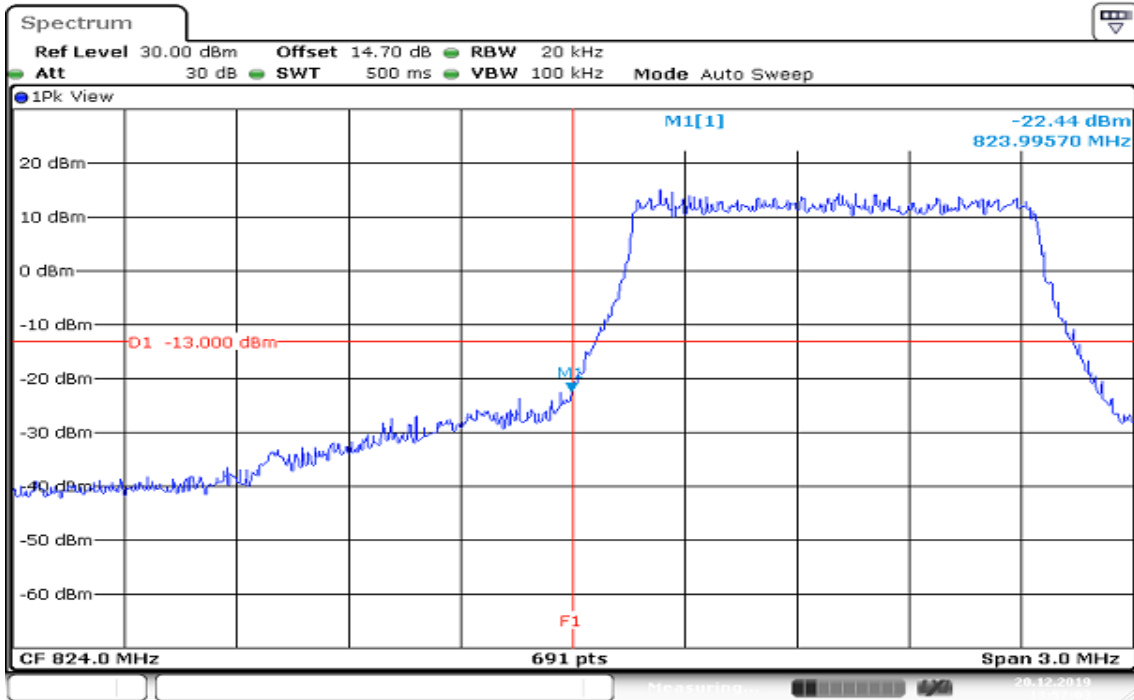

Date: 20.DEC.2019 13:57:04

**HIGHER BAND EDGE**

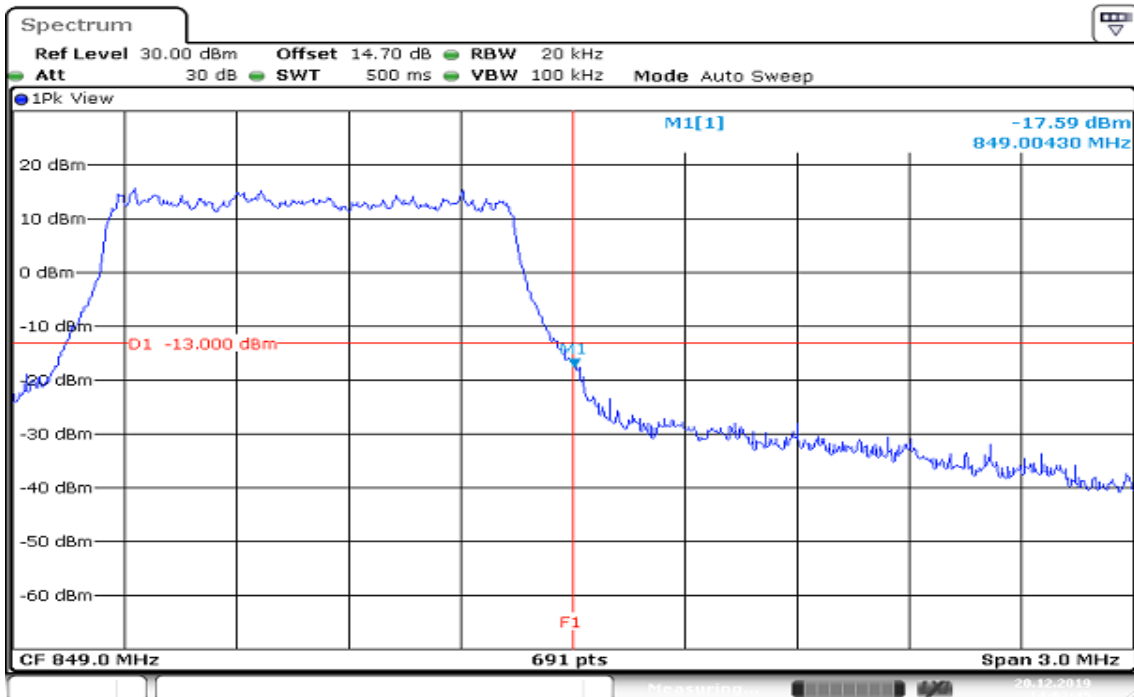


Date: 20.DEC.2019 14:03:45




Report No.: T191120D05-RP11

**CHANNEL BANDWIDTH: 3MHz / QPSK / Full RB ALLOCATED  
LOWER BAND EDGE**

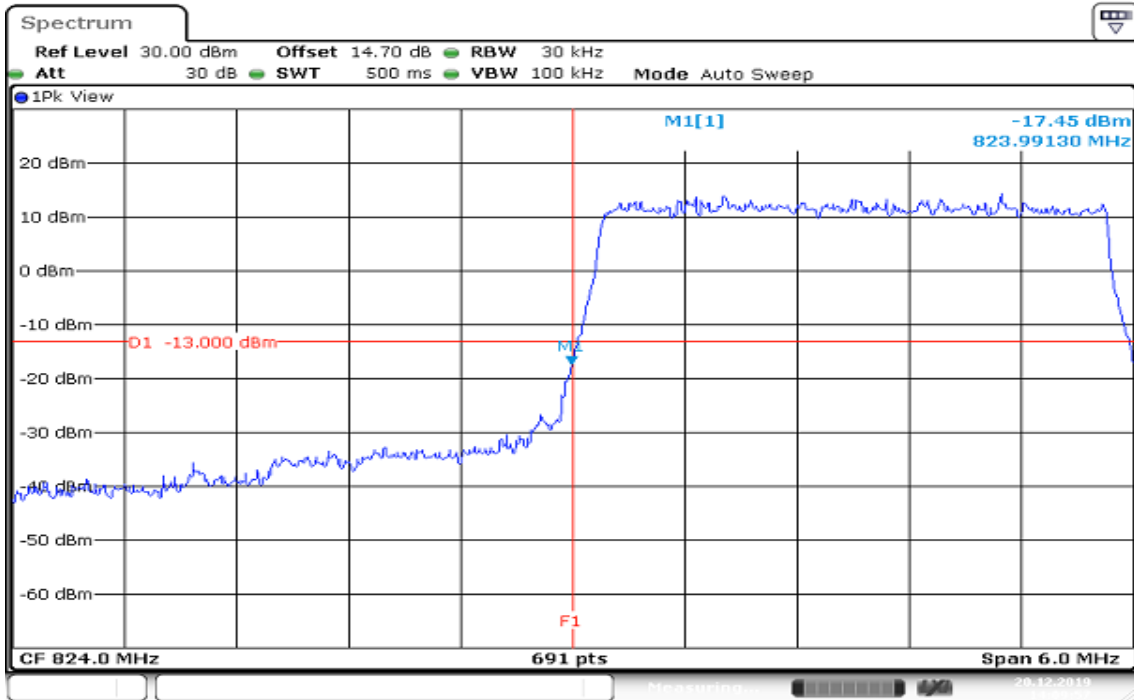


**HIGHER BAND EDGE**

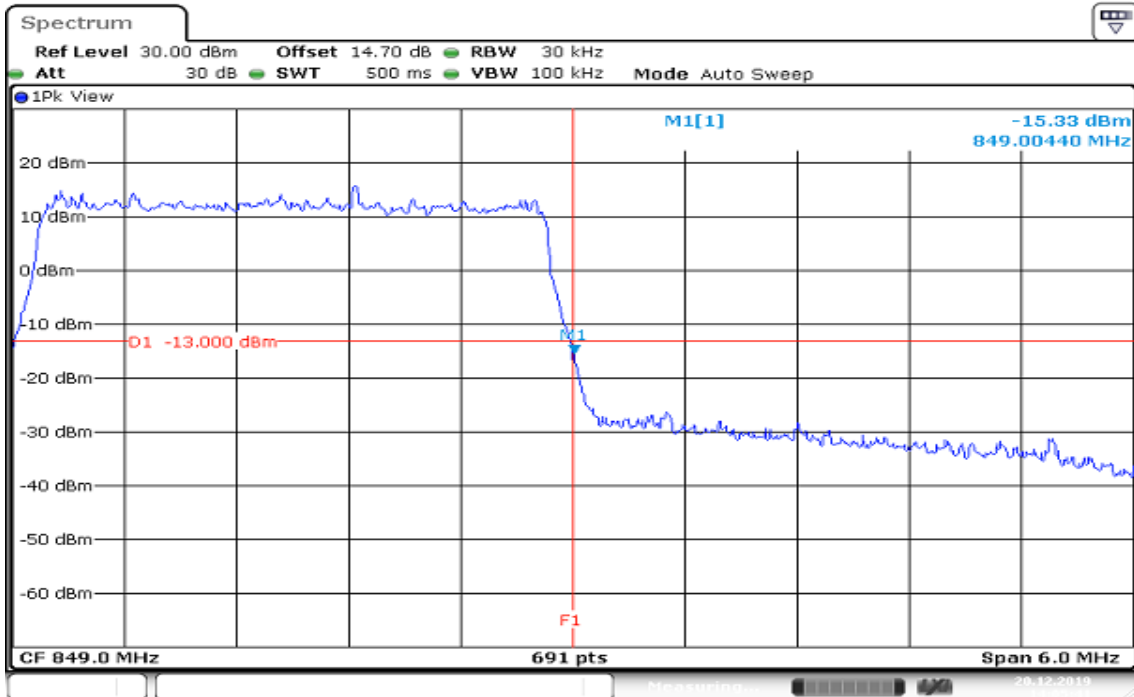


Report No.: T191120D05-RP11

**CHANNEL BANDWIDTH: 3MHz / 16QAM / Full RB ALLOCATED  
LOWER BAND EDGE**

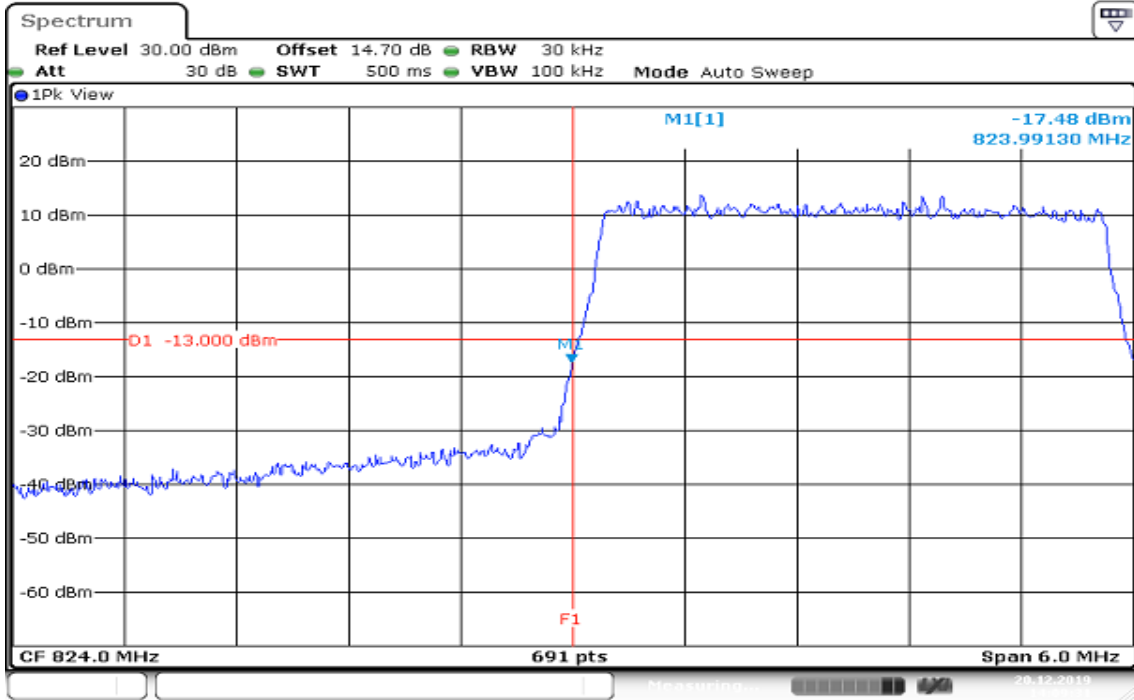


Date: 20.DEC.2019 14:09:32

**HIGHER BAND EDGE**

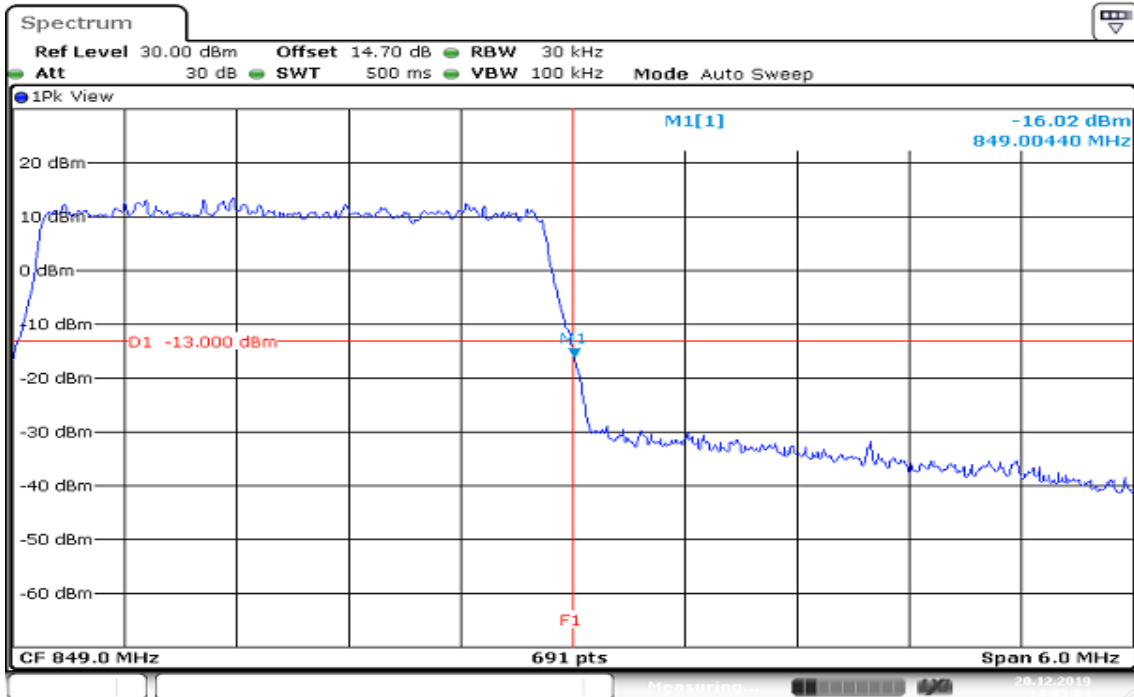


Date: 20.DEC.2019 14:05:05

**CHANNEL BANDWIDTH: 5MHz / QPSK / Full RB ALLOCATED  
LOWER BAND EDGE**

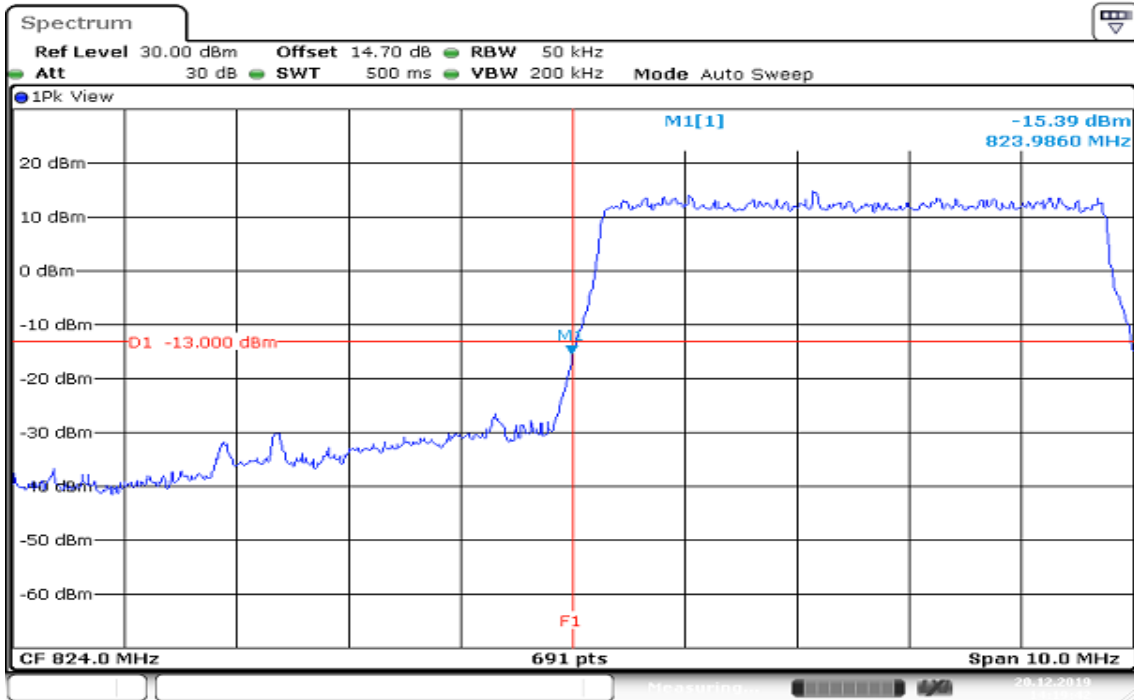


Date: 20.DEC.2019 14:19:42

**HIGHER BAND EDGE**

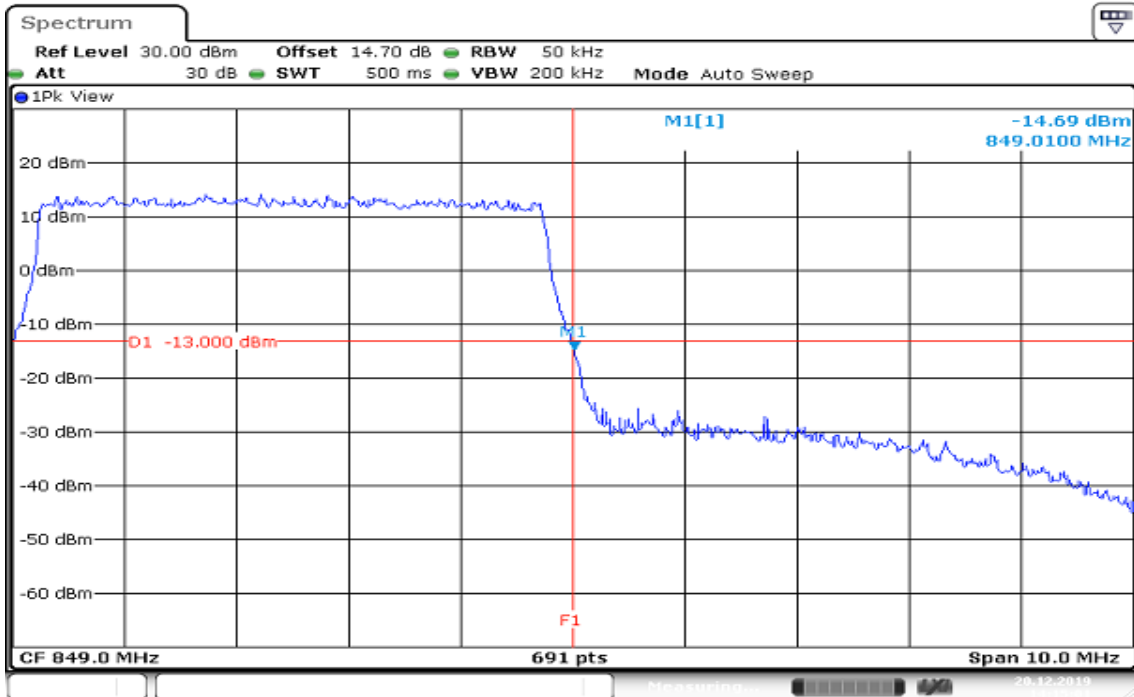


Date: 20.DEC.2019 14:15:02

**CHANNEL BANDWIDTH: 5MHz / 16QAM / Full RB ALLOCATED  
LOWER BAND EDGE**

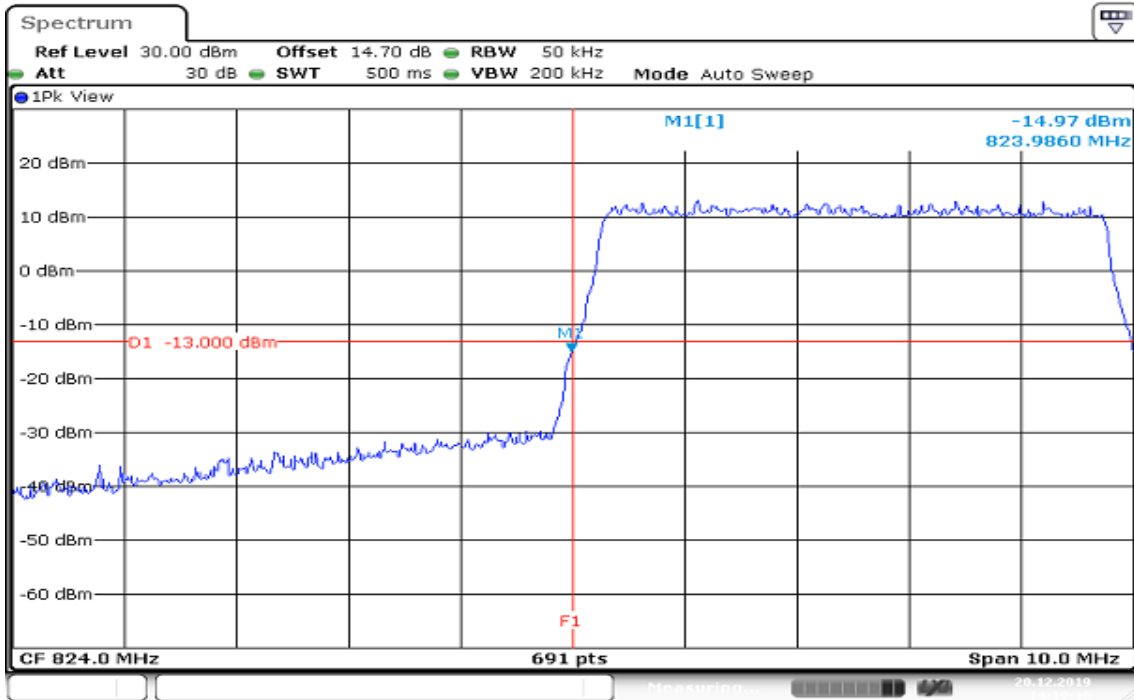

Date: 20.DEC.2019 14:19:16


**HIGHER BAND EDGE**

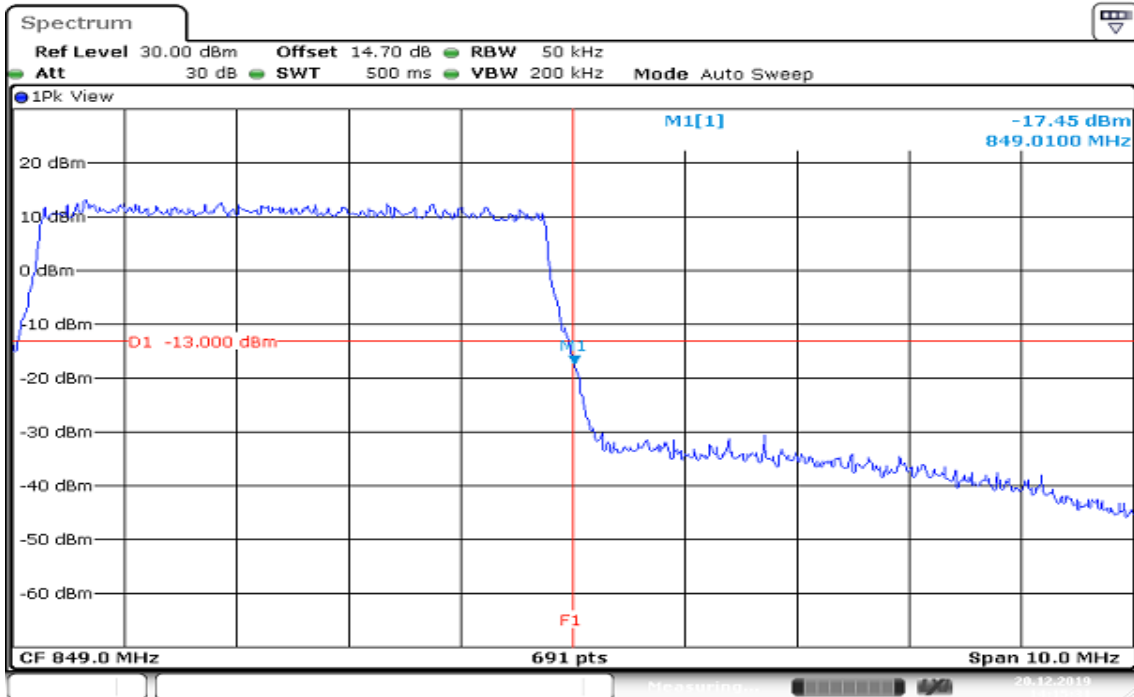

Date: 20.DEC.2019 14:15:32


Report No.: T191120D05-RP11

**CHANNEL BANDWIDTH: 10MHz / QPSK / Full RB ALLOCATED  
LOWER BAND EDGE**

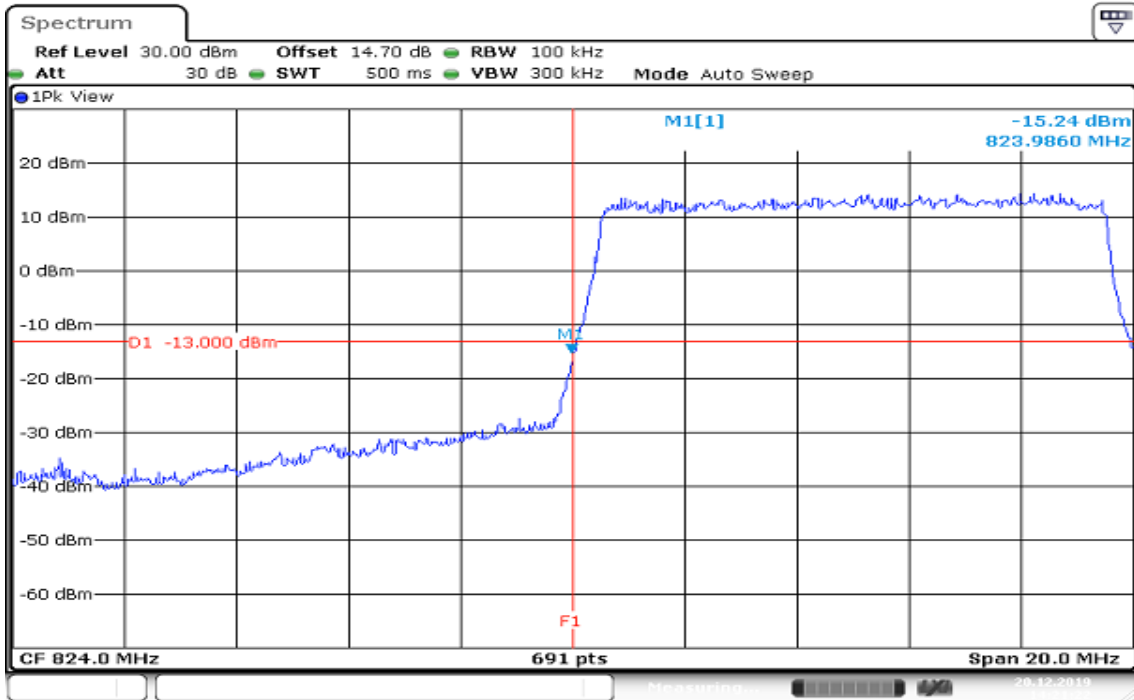

Date: 20.DEC.2019 14:21:22


**HIGHER BAND EDGE**

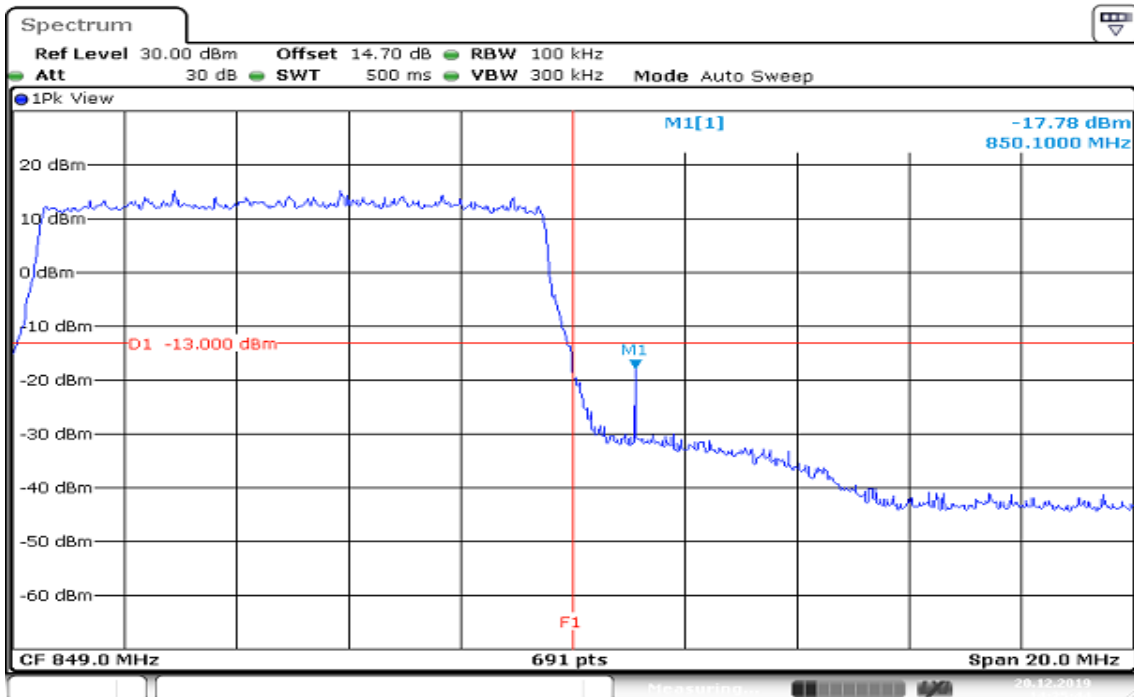

Date: 20.DEC.2019 14:25:45


Report No.: T191120D05-RP11

**CHANNEL BANDWIDTH: 10MHz / 16QAM / Full RB ALLOCATED  
LOWER BAND EDGE**

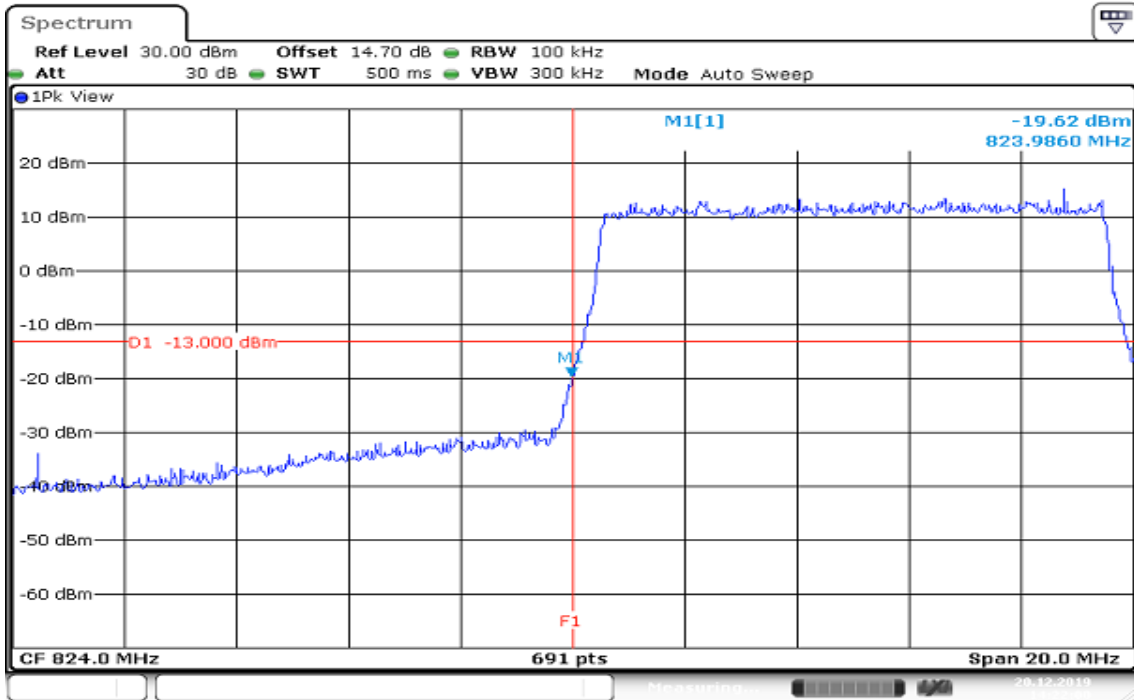


Date: 20.DEC.2019 14:22:01

**HIGHER BAND EDGE**

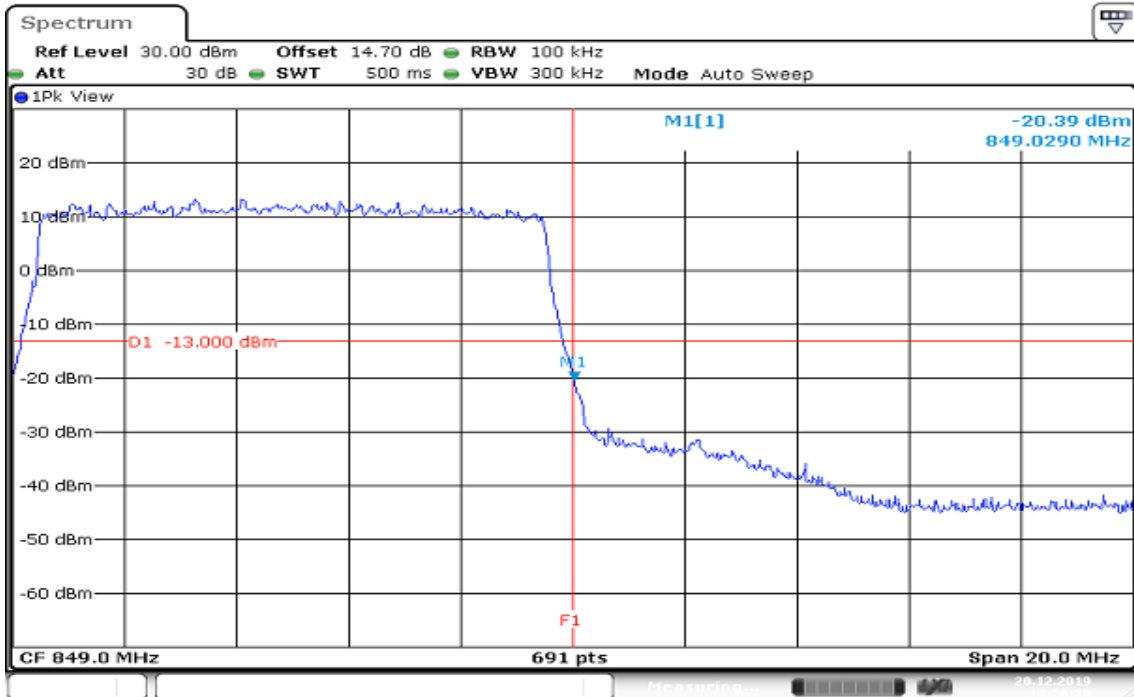


Date: 20.DEC.2019 14:26:21

**CHANNEL BANDWIDTH: 15MHz / QPSK / Full RB ALLOCATED  
LOWER BAND EDGE**

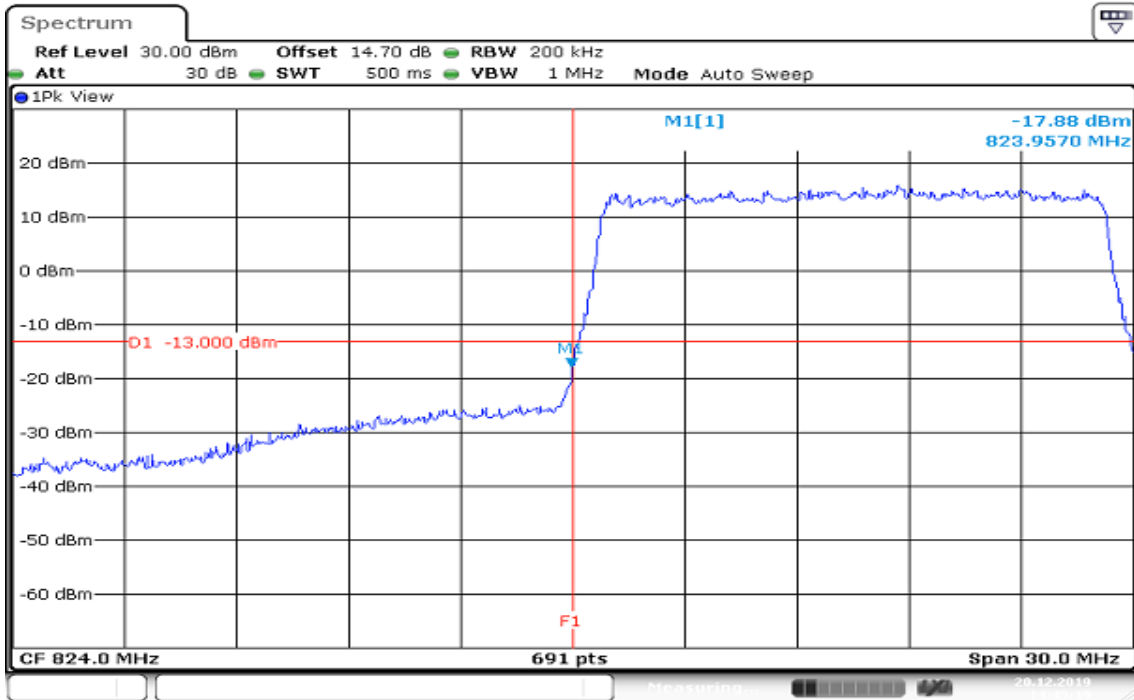


**HIGHER BAND EDGE**

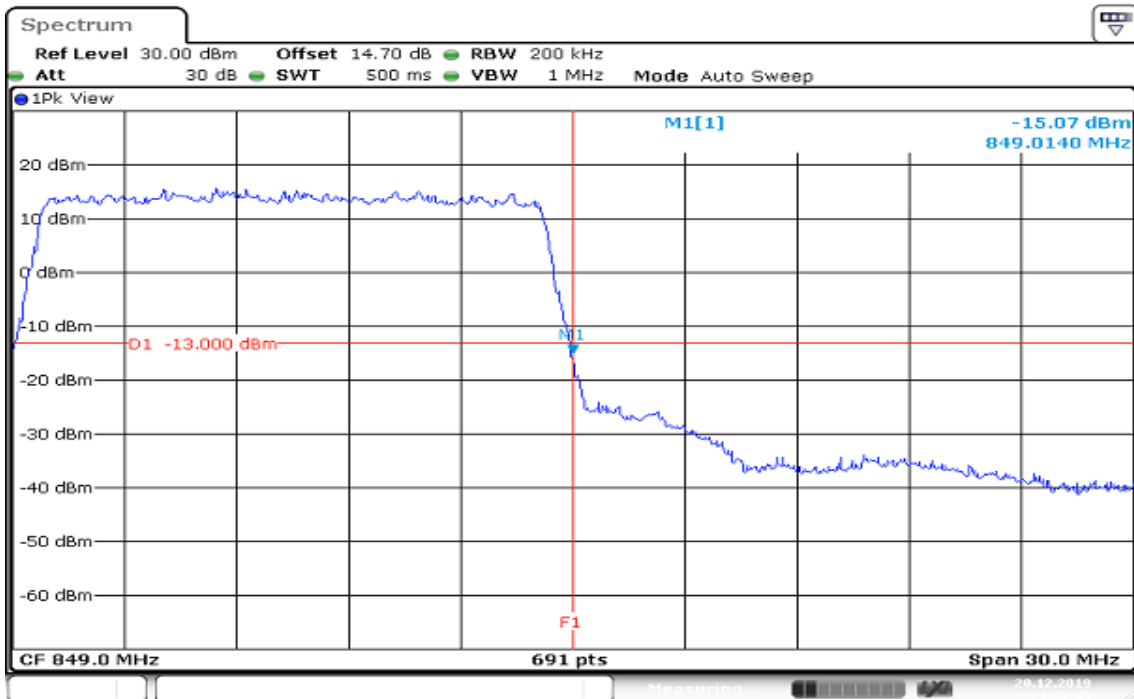

Report No.: T191120D05-RP11

**CHANNEL BANDWIDTH: 15MHz / 16QAM / Full RB ALLOCATED  
LOWER BAND EDGE**

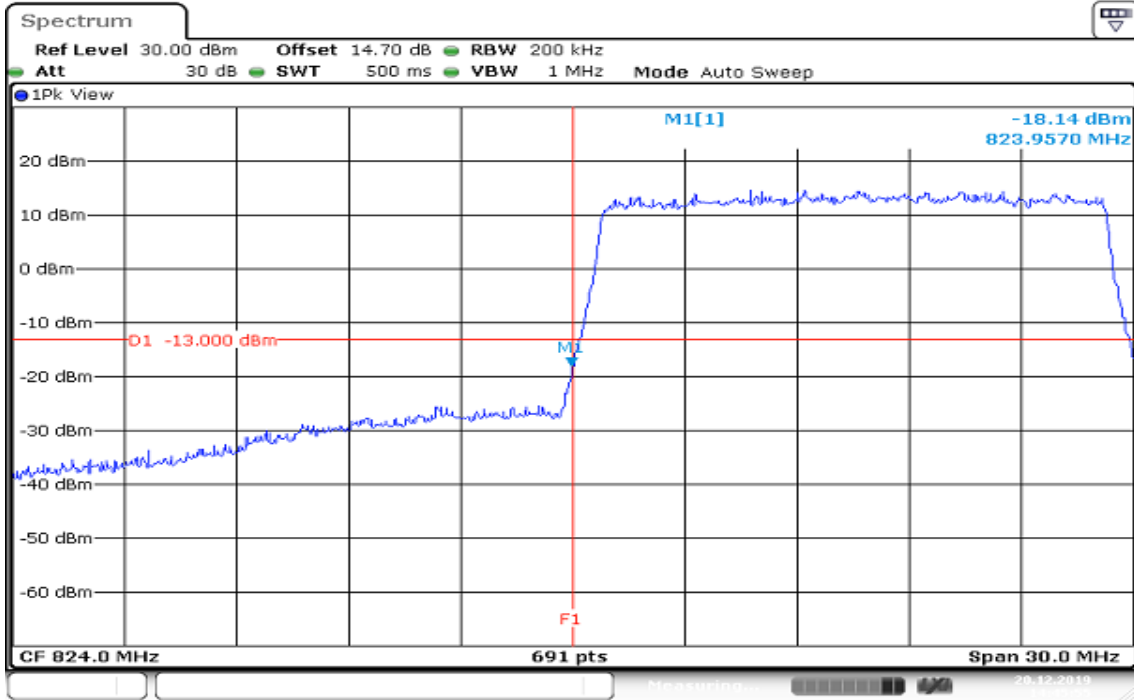

**HIGHER BAND EDGE**

