
Hopping off
Test Mode: GF

Hopping on




Polarization:

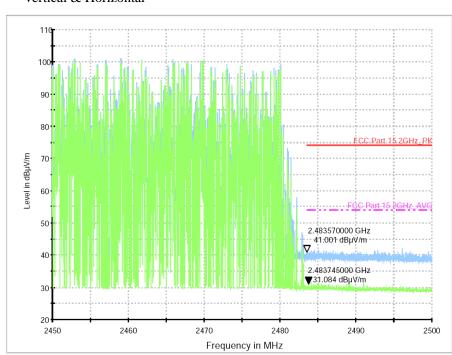


Hopping off

Polarization: Vertical & Horizontal Test Mode: $\pi/4$ DQPSK -Low

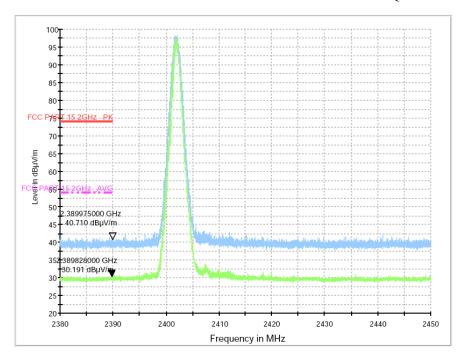


Hopping on

Polarization: Vertical & Horizontal

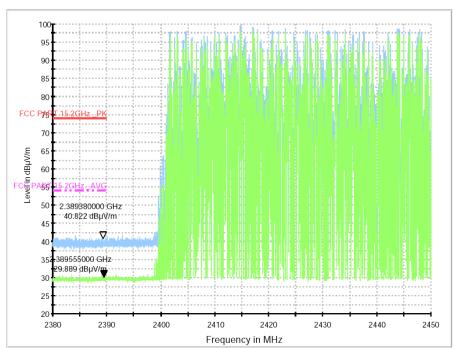


Hopping off

Polarization: Vertical & Horizontal Test Mode: $\pi/4$ DQPSK -High

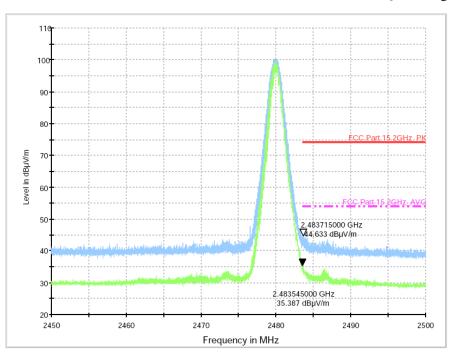


Hopping on

Polarization: Vertical & Horizontal

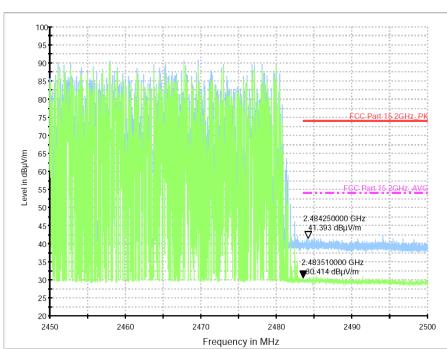


Hopping off

Polarization: Vertical & Horizontal Test Mode: 8-DPSK -Low

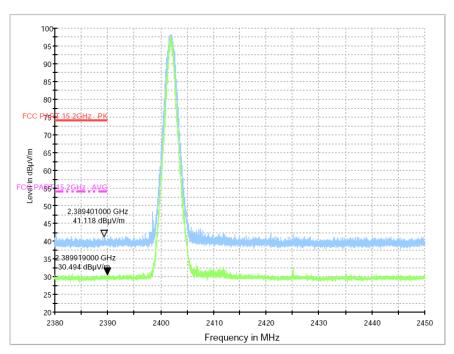


Hopping on

Polarization: Vertical & Horizontal

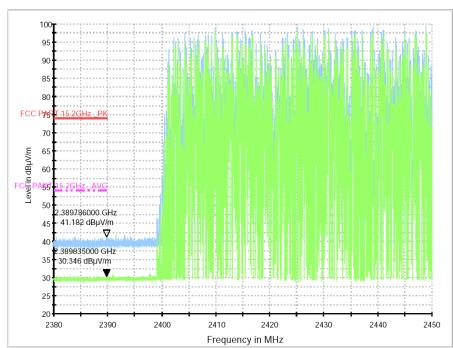


Hopping off

Polarization: Vertical & Horizontal Test Mode: 8-DPSK -High

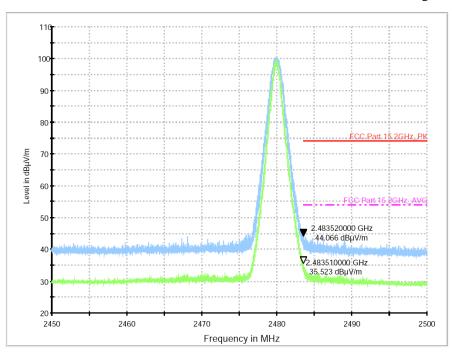

Hopping on

Polarization: Vertical & Horizontal

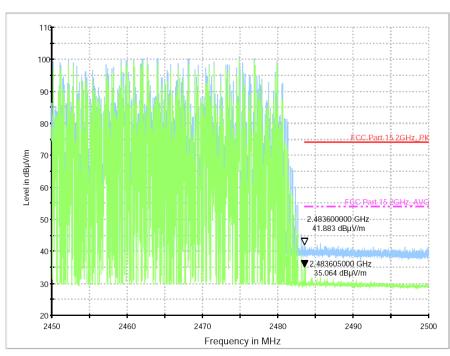


Conducted Method

Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission




Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref




Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission




Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Emission




Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Ref




Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Emission



Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Ref



Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Emission




Date: 21.0CT.2021 13:02:49

Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Ref




Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Emission




Band Edge(Hopping)

Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Emission



Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Emission



Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Emission



Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Emission




Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Emission



Band Edge(Hopping) NVNT 3-DH1 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 3-DH1 2480MHz Ant1 Hopping Emission



10. Power Line Conducted Emissions

10.1.Block Diagram of Test Setup

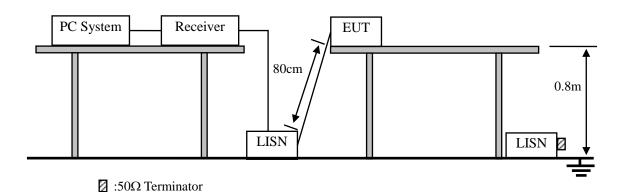

10.2.Limit

| | Maximum RF Line Voltage | | |
|-----------------|-------------------------|---------------|--|
| Frequency | Quasi-Peak Level | Average Level | |
| | $dB(\mu V)$ | $dB(\mu V)$ | |
| 150kHz ~ 500kHz | 66 ~ 56* | 56 ~ 46* | |
| 500kHz ~ 5MHz | 56 | 46 | |
| 5MHz ~ 30MHz | 60 | 50 | |

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

10.3.Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

10.4.Test Result


PASS. (See below detailed test data)

Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

| EUT Description | Bluetooth Headphone | Model No. | SAROS C740S |
|------------------------|---------------------|-----------|----------------|
| Temperature | 24°C | Humidity | 56% |
| Pol | Line | Test date | 2021/10/26 |
| Test Voltage | AC 120V/60Hz | Test mode | GFSK (2480MHz) |

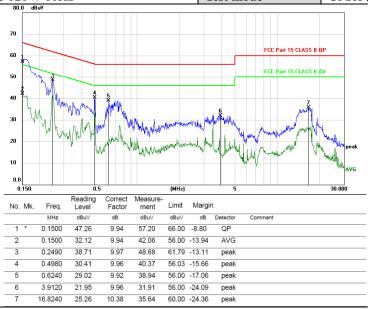

Pol Neutral
80.0 dBuV
70

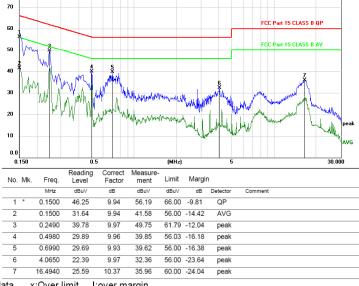

^{*:}Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable Remark: All modes have been tested, and only worst data of GFSK (2480MHz) was listed in this report.

11. Antenna Requirements

11.1.Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


11.2.Result

The EUT antenna is internal antenna. It complies with the standard requirement.


Page 60 of 70

12. Test Setup Photo

12.1.Photos of Radiated Emission Test (In Semi Anechoic Chamber 30MHz~1GHz)

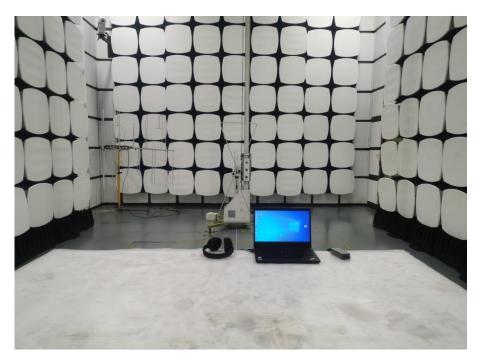


12.2.Photos of Radiated Emission Test (In Semi Anechoic Chamber above 1GHz)

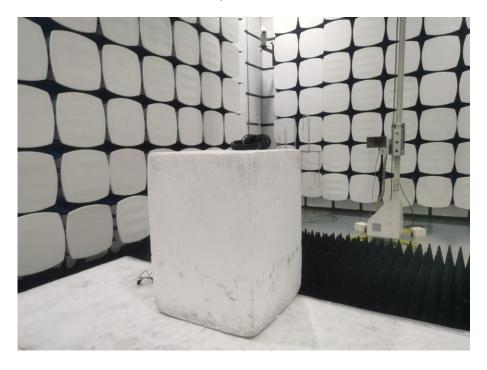

12.3.Photos of Conducted disturbance at mains terminals test



13. Photographs Of The EUT

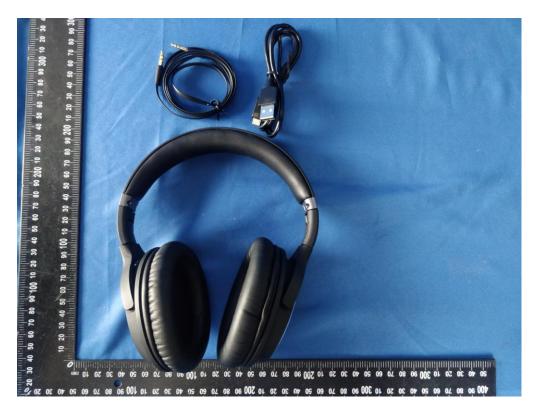






















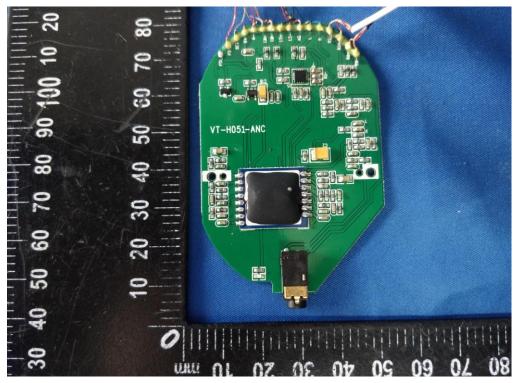


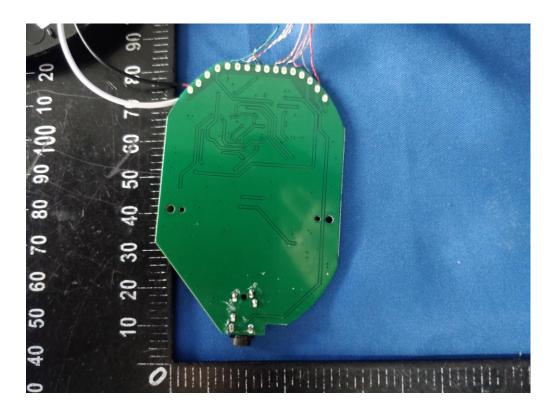

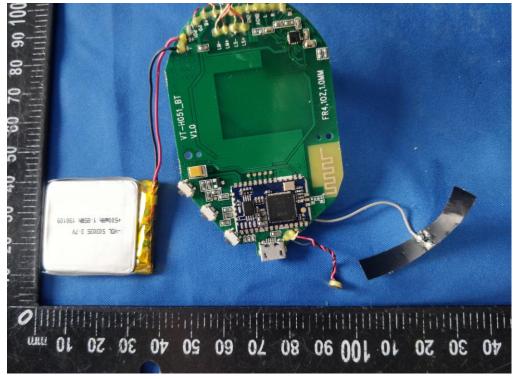

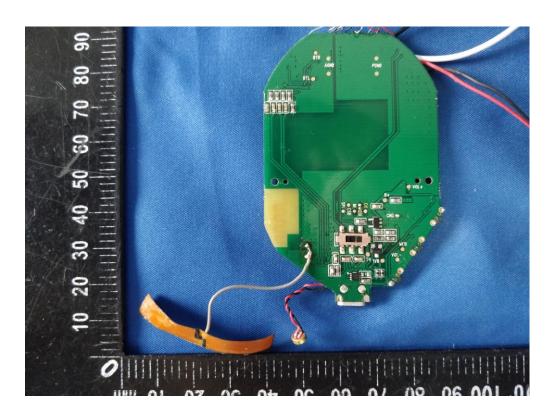

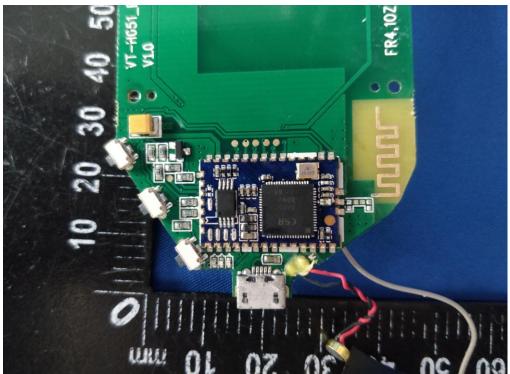

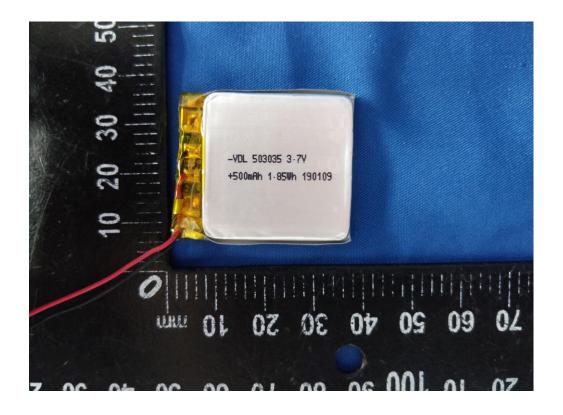

----- END OF REPORT-----