



A D T

# RF TEST REPORT

**REPORT NO.:** RF120302C25D-1 R1

**MODEL NO.:** RNWD-N9003PCE

**FCC ID:** W6RRNWD-N9003PCE

**RECEIVED:** Mar. 10, 2012

**TESTED:** Mar 10 to Apr. 25, 2012

**ISSUED:** Oct. 19, 2012

**APPLICANT:** Rosewill Inc.

**ADDRESS:** 17708 Rowland Street, City of Industry,  
CA91748, USA

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

**LAB ADDRESS :** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

**TEST LOCATION (1):** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

**TEST LOCATION (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

This report should not be used by the client to claim  
product certification, approval, or endorsement by  
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

## Table of Contents

RELEASE CONTROL RECORD .....	4
1. CERTIFICATION .....	5
2. SUMMARY OF TEST RESULTS .....	6
2.1 MEASUREMENT UNCERTAINTY .....	7
3. GENERAL INFORMATION .....	8
3.1 GENERAL DESCRIPTION OF EUT .....	8
3.2 DESCRIPTION OF TEST MODES .....	11
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	12
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	14
3.4 DUTY CYCLE OF TEST SIGNAL .....	14
3.5 DESCRIPTION OF SUPPORT UNITS .....	15
3.6 CONFIGURATION OF SYSTEM UNDER TEST .....	17
4. TEST TYPES AND RESULTS .....	19
4.1 CONDUCTED EMISSION MEASUREMENT .....	19
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	19
4.1.2 TEST INSTRUMENTS .....	19
4.1.3 TEST PROCEDURES .....	20
4.1.4 DEVIATION FROM TEST STANDARD .....	20
4.1.5 TEST SETUP .....	21
4.1.6 EUT OPERATING CONDITIONS .....	21
4.1.7 TEST RESULTS .....	22
4.2 RADIATED EMISSION MEASUREMENT .....	24
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	24
4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS .....	25
4.2.3 TEST INSTRUMENTS .....	26
4.2.4 TEST PROCEDURES .....	28
4.2.5 DEVIATION FROM TEST STANDARD .....	28
4.2.6 TEST SETUP .....	29
4.2.7 EUT OPERATING CONDITION .....	29
4.2.8 TEST RESULTS .....	30
4.3 PEAK TRANSMIT POWER MEASUREMENT .....	48
4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT .....	48
4.3.2 TEST INSTRUMENTS .....	48
4.3.3 TEST PROCEDURE .....	49
4.3.4 DEVIATION FROM TEST STANDARD .....	49
4.3.5 TEST SETUP .....	50
4.3.6 EUT OPERATING CONDITIONS .....	50
4.3.7 TEST RESULTS .....	51



A D T

4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT .....	55
4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT .....	55
4.4.2 TEST INSTRUMENTS.....	55
4.4.3 TEST PROCEDURES .....	55
4.4.4 DEVIATION FROM TEST STANDARD .....	55
4.4.5 TEST SETUP .....	55
4.4.6 EUT OPERATING CONDITIONS .....	56
4.4.7 TEST RESULTS .....	57
4.5 PEAK POWER EXCURSION MEASUREMENT .....	59
4.5.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT .....	59
4.5.2 TEST INSTRUMENTS.....	59
4.5.3 TEST PROCEDURE.....	59
4.5.4 DEVIATION FROM TEST STANDARD .....	59
4.5.5 TEST SETUP .....	59
4.5.6 EUT OPERATING CONDITIONS .....	59
4.5.7 TEST RESULTS .....	60
4.6 FREQUENCY STABILITY.....	66
4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT .....	66
4.6.2 TEST INSTRUMENTS.....	66
4.6.3 TEST PROCEDURE.....	66
4.6.4 DEVIATION FROM TEST STANDARD .....	67
4.6.5 TEST SETUP .....	67
4.6.6 EUT OPERATING CONDITION.....	67
4.6.7 TEST RESULTS .....	68
5. PHOTOGRAPHS OF THE TEST CONFIGURATION.....	69
6. INFORMATION ON THE TESTING LABORATORIES .....	70
7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	71



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120302C25D-1	Original release	Oct. 16, 2012
RF120302C25D-1 R1	1. Modified the FCC ID. 2. Removed the "Dynamic Frequency Selection" data to Report No.: RE120302C25D-2.	Oct. 19, 2012



A D T

## 1. CERTIFICATION

**PRODUCT:** Dual Band Wireless PCIE Adapter

**BRAND NAME:** Rosewill

**MODEL NO.:** RNWD-N9003PCE

**TEST SAMPLE:** PROTOTYPE

**APPLICANT:** Rosewill Inc.

**TESTED:** Mar 10 to Apr. 25, 2012

**STANDARDS:** FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10-2009

The above equipment (Model: RNWD-N9003PCE) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Phoenix Huang, **DATE:** Oct. 19, 2012  
(Phoenix Huang, Specialist)

**APPROVED BY :** May Chen, **DATE:** Oct. 19, 2012  
(May Chen, Deputy Manager)



A D T

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 5GHz, 5150~5250MHz

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.26dB at 0.20859MHz
15.407(b/1/2/3) (b)(5)	Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.9dB at 5250.00MHz
15.407(a/1/2/3)	Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is SMA Reverse not a standard connector.

**NOTE:**

1. The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.35GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 5.15~5.35GHz. For the 2400 ~ 2483.5MHz and 5.725~5.850GHz RF parameters was recorded in another test report.
2. The "Dynamic Frequency Selection" was recorded in Report No.: RE120302C25D-2.



A D T

## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
<b>Operating in 5.15GHz ~ 5.25GHz frequencies band.</b>	
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.89 dB
Radiated emissions (1GHz -18GHz)	2.19 dB
Radiated emissions (18GHz -40GHz)	2.56 dB
<b>Operating in 5.25GHz ~ 5.35GHz frequencies band.</b>	
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.69 dB
Radiated emissions (1GHz -6GHz)	4.93 dB
Radiated emissions (6GHz -18GHz)	5.32 dB
Radiated emissions (18GHz -40GHz)	5.36 dB



A D T

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Dual Band Wireless PCIE Adapter
MODEL NO.	RNWD-N9003PCE
POWER SUPPLY	DC 3.3V from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11a / g: up to 54Mbps 802.11n: up to 450Mbps
OPERATING FREQUENCY	<b>For 15.407</b> <b>5.0GHz:</b> 5.18 ~ 5.24GHz, 5.26 ~ 5.32GHz  <b>For 15.247</b> <b>2.4GHz:</b> 2.412 ~ 2.462GHz <b>5.0GHz:</b> 5.745 ~ 5.825GHz
NUMBER OF CHANNEL	<b>For 15.407</b> 8 for 802.11a, 802.11n (HT20) 4 for 802.11n (HT40)  <b>For 15.247 (2.4GHz)</b> 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)  <b>For 15.247 (5GHz)</b> 5 for 802.11a, 802.11n (HT20) 2 for 802.11n (HT40)



A D T

<b>MAXIMUM OUTPUT POWER</b>	<b>For 15.407</b> 802.11a: 13.87mW 802.11n (HT20): 13.241mW 802.11n (HT40): 15.303mW
	<b>For 15.247 (2.4GHz)</b> 802.11b: 231.149mW 802.11g: 688.102mW 802.11n (HT20): 527.839mW 802.11n (HT40): 219.005mW
	<b>For 15.247 (5GHz)</b> 802.11a: 155.431mW 802.11n (HT20): 156.926mW 802.11n (HT40): 169.013mW
<b>ANTENNA TYPE</b>	Please see NOTE
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	Refer to user's manual
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. The antennas provided to the EUT, please refer to the following table:

Transmitter Circuit	Antenna Type	Peak Gain (dBi)	Connector Type
Chain (0)	Omni	2	SMA Reverse
Chain (1)	Omni	2	SMA Reverse
Chain (2)	Omni	2	SMA Reverse

2. The EUT incorporates a MIMO function. Physically, the EUT provides three completed transmitters and three receivers.

MODULATION MODE	TX/RX FUNCTION
802.11b	3Tx/3Rx
802.11g	3Tx/3Rx
802.11a	3Tx/3Rx
802.11n (HT20)	3Tx/3Rx
802.11n (HT40)	3Tx/3Rx

3. The EUT is 3 \* 3 spatial MIMO (3Tx & 3Rx) without beam forming function.



A D T

4. The EUT incorporates CDD function with 802.11a, 802.11b, 802.11g.
5. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 23.
6. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

### 3.2 DESCRIPTION OF TEST MODES

#### Operated in 5150MHz ~ 5250MHz bands:

8 channels are provided for 802.11a, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	52	5260 MHz
40	5200 MHz	56	5280 MHz
44	5220 MHz	60	5300 MHz
48	5240 MHz	64	5320 MHz

4 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY
38	5190 MHz
46	5230 MHz
54	5270 MHz
62	5310 MHz



A D T

### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE $\geq$ 1G	APCM	
-	✓	✓	✓	✓	-

Where **PLC**: Power Line Conducted Emission**RE < 1G**: Radiated Emission below 1GHz**RE  $\geq$  1G**: Radiated Emission above 1GHz**APCM**: Antenna Port Conducted Measurement

#### **POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (MBPS)
802.11a	36 to 64	36	OFDM	BPSK	6

#### **RADIATED EMISSION TEST (BELOW 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 64	36	OFDM	BPSK	6

#### **RADIATED EMISSION TEST (ABOVE 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 64	36, 40, 48, 52, 60, 64	OFDM	BPSK	6
For 5 GHz 802.11n (HT20)	36 to 64	36, 40, 48, 52, 60, 64	OFDM	BPSK	6.5
For 5 GHz 802.11n (HT40)	38 to 62	38, 46, 54, 62	OFDM	BPSK	13.5



A D T

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 64	36, 40, 48, 52, 60, 64	OFDM	BPSK	6
For 5 GHz 802.11n (HT20)	36 to 64	36, 40, 48, 52, 60, 64	OFDM	BPSK	6.5
For 5 GHz 802.11n (HT40)	38 to 62	38, 46, 54, 62	OFDM	BPSK	13.5

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	22deg. C, 64%RH	120Vac, 60Hz	Kyle Huang
RE<1G	23deg. C, 70%RH	120Vac, 60Hz	Amos Chuang
RE <sup>3</sup> 1G	23deg. C, 71%RH	120Vac, 60Hz	Amos Chuang
	25deg. C, 66%RH	120Vac, 60Hz	Amos Chuang
APCM	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang
	25deg. C, 60%RH	120Vac, 60Hz	Amos Chuang



A D T

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### FCC Part 15, Subpart E (15.407)

#### 789033 D01 General UNII Test Procedures v01r01

#### ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

**Note:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DUTY CYCLE OF TEST SIGNAL

Duty cycle of test signal is 100 % > 98 %, duty factor is not required.





A D T

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT (For conducted emission test)	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER (For conducted emission test)	DELL	DCSCMF	9KKB32S	FCC DoC
	PERSONAL COMPUTER (For other test items)	DELL	DCNE	HRJB32S	FCC DoC
2	MONITOR (For conducted emission and radiated emission (Band 1) test)	DELL	E2210Hc	CN-OG337R-6418 0-97S-OQDS	FCC DoC
	MONITOR (For other test items)	EPSON	LQ-300+II	G88Y074015	FCC DoC
3	PRINTER (For conducted emission test)	EPSON	LQ-300+II	G88Y074083	FCC DoC
	PRINTER (For other test items)	EPSON	LQ-300+II	G88Y074015	FCC DoC
4	MODEM	ACEEX	1414	0206026778	IFAXDM1414
5	KEYBOARD	DELL	SK-8115	MY-0DJ325-71619 -99B-0476	FCC DoC
6	MOUSE (For conducted emission test)	DELL	MOC5UO	I1401LVG	FCC DoC
	MOUSE (For other test items)	DELL	MOC5UO	I14066PS	FCC DoC
7	WIRELESS AP	Linksys	WRT160N V3	NA	NA




A D T

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	VGA cable (1.4m), with 2 cores
3	USB cable (1.8m)
4	RS232 cable (1m) / RS232 cable (1.1m)
5	USB cable (1.8m), with 1 core
6	USB cable (1.5m) / USB cable (1.8m)
7	NA

**NOTE:** All power cords of the above support units are non shielded (1.8m).

### 3.6 CONFIGURATION OF SYSTEM UNDER TEST


For conducted emission test:

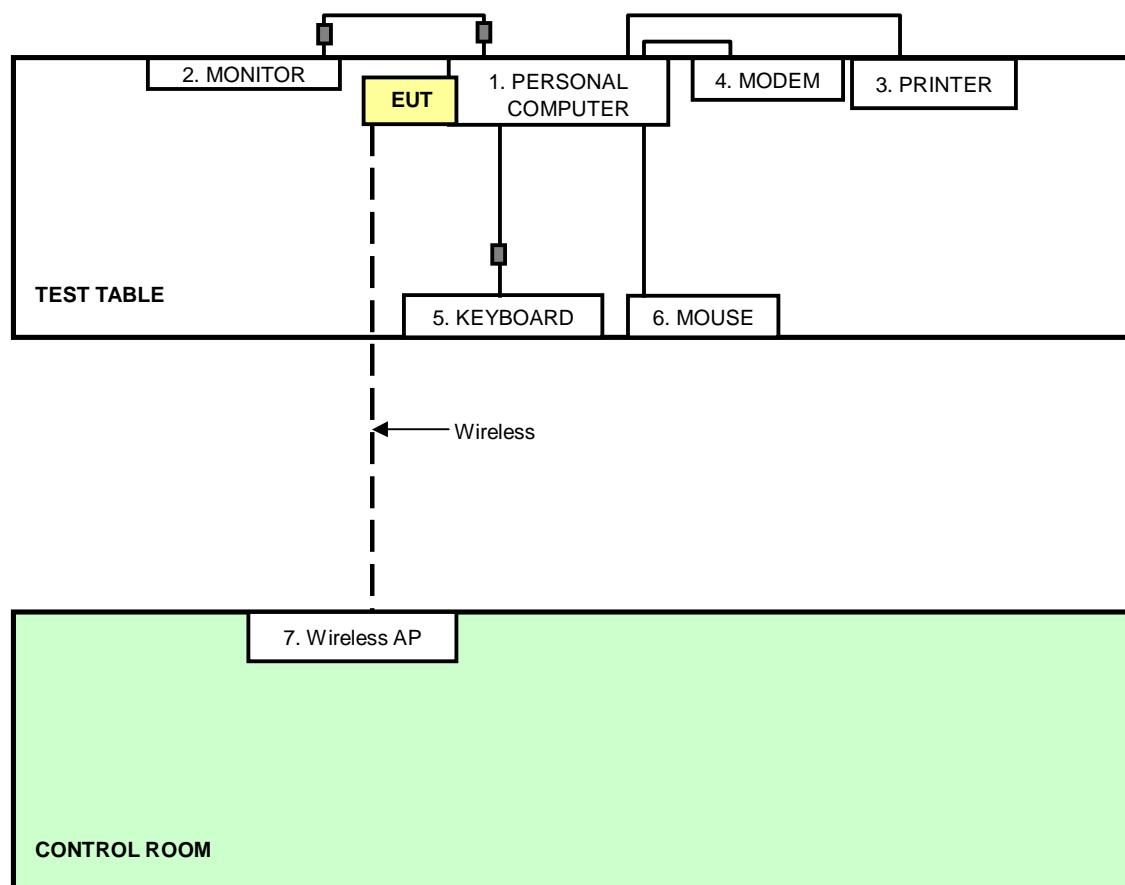



A D T

**For other test items:**

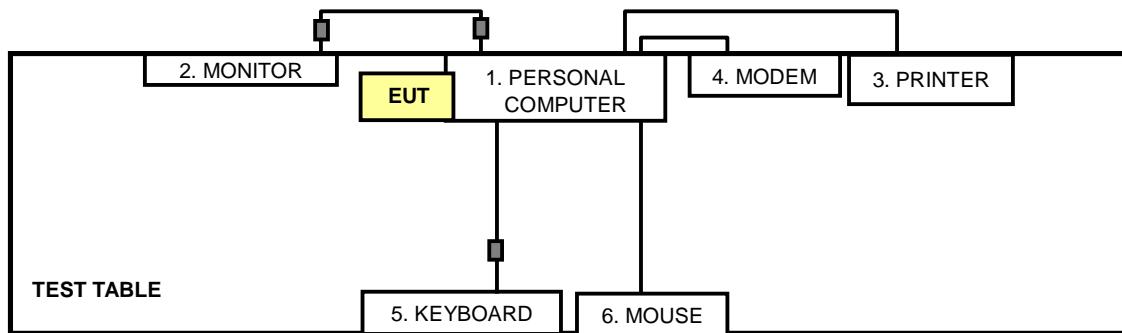



A D T

## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

**NOTE:** 1. The lower limit shall apply at the transition frequencies.  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Feb. 29, 2012	Feb. 28, 2013
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-523	Sep. 20, 2011	Sep. 19, 2012
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100072	June 10, 2011	June 09, 2012
RF Cable (JYEBAO)	5DFB	COACAB-002	Aug. 06, 2011	Aug. 05, 2012
50 ohms Terminator	50	3	Nov. 02, 2011	Nov. 01, 2012
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested Date: Mar. 29, 2012.



A D T


#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit – 20dB) was not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

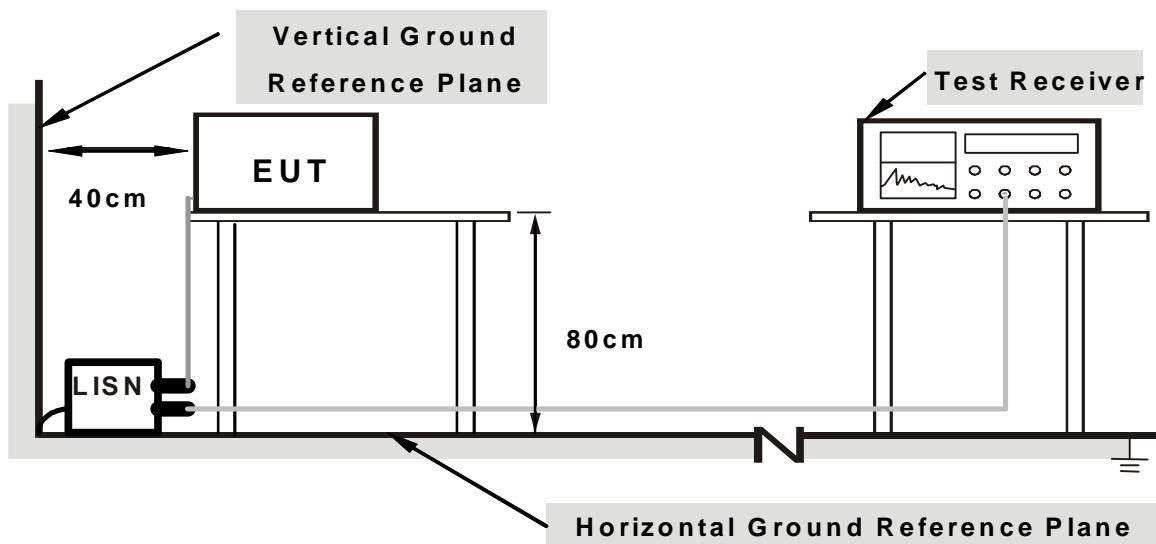

**Note:** 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit 1 (PC) which is placed on a testing table.
2. The support unit 1 (PC) runs a test program "Ping. exe" to enable EUT under transmission/receiving condition continuously with support unit 7 (Wireless AP) via wireless.




A D T

#### 4.1.7 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16497	0.06	39.88	39.35	39.94	39.41	65.21	55.21	-25.27	-15.80
2	0.20859	0.06	39.58	38.22	39.64	38.28	63.26	53.26	-23.62	-14.98
3	0.27500	0.06	31.66	27.11	31.72	27.17	60.97	50.97	-29.24	-23.79
4	0.46250	0.08	32.05	28.94	32.13	29.02	56.65	46.65	-24.52	-17.63
5	0.90000	0.11	33.17	32.99	33.28	33.10	56.00	46.00	-22.72	-12.90
6	18.03125	0.58	33.12	32.17	33.70	32.75	60.00	50.00	-26.30	-17.25

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. The emission levels of other frequencies were very low against the limit.
  3. Margin value = Emission level - Limit value
  4. Correction factor = Insertion loss + Cable loss
  5. Emission Level = Correction Factor + Reading Value.

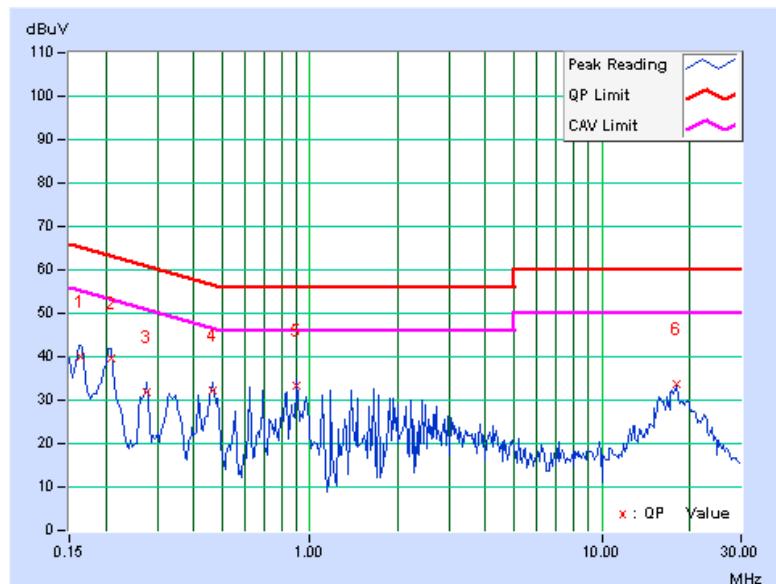




A D T

<b>PHASE</b>	Neutral (N)	<b>6dB BANDWIDTH</b>	9 kHz
--------------	-------------	----------------------	-------

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.07	40.39	39.80	40.46	39.87	65.38	55.38	-24.92	-15.51
2	<b>0.20859</b>	<b>0.07</b>	<b>45.23</b>	<b>44.93</b>	<b>45.30</b>	<b>45.00</b>	<b>63.26</b>	<b>53.26</b>	<b>-17.96</b>	<b>-8.26</b>
3	0.27500	0.07	36.50	33.27	36.57	33.34	60.97	50.97	-24.39	-17.62
4	0.34531	0.08	36.64	35.68	36.72	35.76	59.07	49.07	-22.36	-13.32
5	1.44922	0.15	26.62	21.49	26.77	21.64	56.00	46.00	-29.23	-24.36
6	18.03125	0.56	32.88	32.09	33.44	32.65	60.00	50.00	-26.56	-17.35

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. The emission levels of other frequencies were very low against the limit.
  3. Margin value = Emission level - Limit value
  4. Correction factor = Insertion loss + Cable loss
  5. Emission Level = Correction Factor + Reading Value.

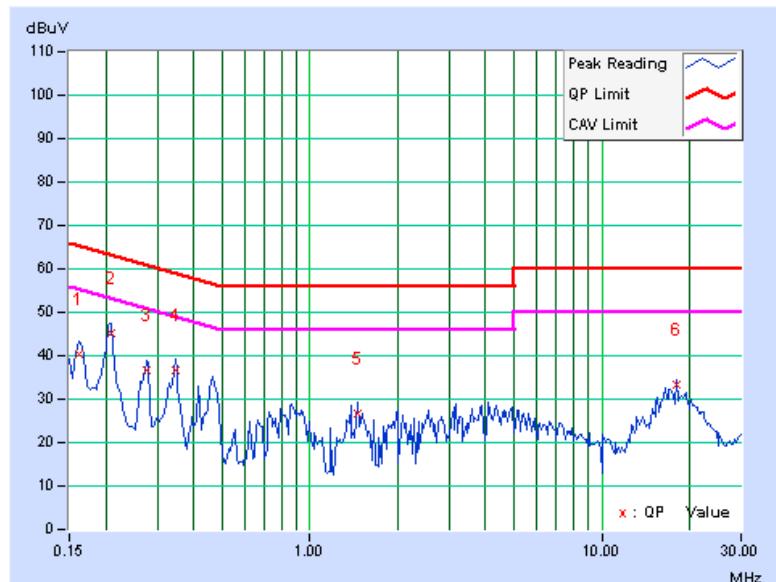



A D T

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>uV/m</sub>) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

#### 4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB $\mu$ V/m) *Note 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27 *Note 1	68.3
	-17 *Note 2	78.3

**Note:**

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (EIRP) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu V/m, \text{ where } P \text{ is the EIRP (Watts)}$$



A D T

#### 4.2.3 TEST INSTRUMENTS

##### For above 1GHz (Band 2):

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
Agilent Pre-Selector	N9039A	MY46520311	July 12, 2011	July 11, 2012
Agilent Signal Generator	N5181A	MY49060517	July 12, 2011	July 11, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02578	July 04, 2011	July 03, 2012
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 09, 2012	Apr. 08, 2013
AISI Horn_Antenna	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	Oct. 07, 2011	Oct. 06, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.  
3. The test was performed in 966 Chamber No. G.  
4. The FCC Site Registration No. is 966073.  
5. The VCCI Site Registration No. is G-137.  
6. The CANADA Site Registration No. is IC 7450H-2.  
7. Tested Date: Apr. 18, 2012



A D T

**For Other test:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 29, 2011	Aug. 28, 2012
Agilent Pre-Selector	N9039A	MY46520310	Aug. 29, 2011	Aug. 28, 2012
Agilent Signal Generator	N5181A	MY49060347	July 25, 2011	July 24, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02465	Feb. 27, 2012	Feb. 26, 2013
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 14, 2011	Apr. 13, 2012
AISI Horn_Antenna	AIH.8018	0000220091110	Nov. 23, 2011	Nov. 22, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-205 RF104-207 RF104-202	Dec. 27, 2011	Dec. 26, 2012
RF Cable	NA	CHHCAB_001	Oct. 08, 2011	Oct. 07, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.  
3. The test was performed in 966 Chamber No. H.  
4. The FCC Site Registration No. is 797305.  
5. The CANADA Site Registration No. is IC 7450H-3.  
6. Tested Date: Mar. 10, 2012.



A D T

#### 4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.5 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.6 TEST SETUP

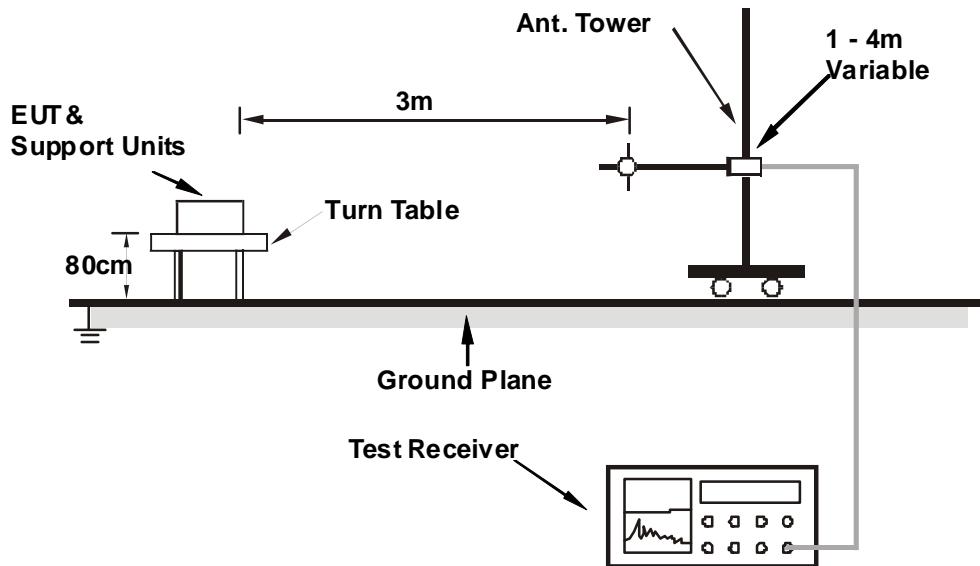

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.7 EUT OPERATING CONDITION

1. Placed the EUT on testing table.
2. Prepared other computer system (support unit 1) to act as communication partners.
3. The communication partners ran test program “artgui.exe” to enable EUT under transmission/receiving condition continuously.



A D T

#### 4.2.8 TEST RESULTS

##### BELOW 1GHz WORST-CASE DATA


###### 802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	101.17	26.4 QP	43.5	-17.1	2.00 H	99	16.71	9.65
2	329.96	23.2 QP	46.0	-22.8	1.00 H	227	7.13	16.07
3	375.08	23.2 QP	46.0	-22.8	2.00 H	240	6.06	17.11
4	566.34	25.9 QP	46.0	-20.1	1.50 H	53	4.34	21.52
5	696.96	29.1 QP	46.0	-17.0	1.50 H	41	5.98	23.07
6	763.27	32.1 QP	46.0	-13.9	1.00 H	234	7.47	24.60

###### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

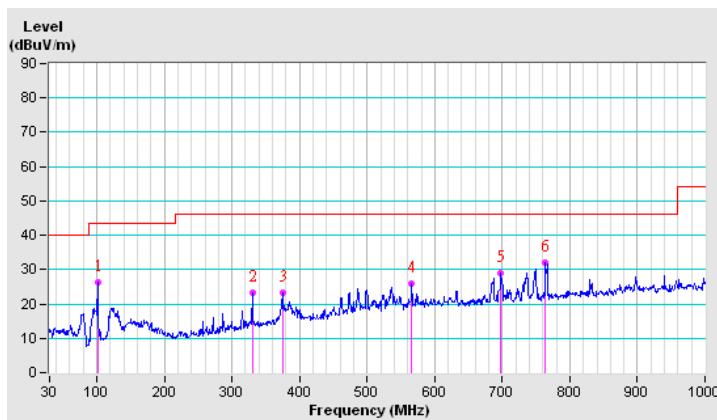




A D T

<b>CHANNEL</b>	TX Channel 36	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.12	24.8 QP	40.0	-15.2	1.00 V	203	11.72	13.09
2	329.96	25.1 QP	46.0	-20.9	1.50 V	176	9.06	16.07
3	374.97	33.5 QP	46.0	-12.5	1.50 V	192	16.38	17.10
4	486.40	28.3 QP	46.0	-17.7	1.00 V	129	8.58	19.73
5	698.61	36.8 QP	46.0	-9.2	1.50 V	146	13.71	23.09
6	940.67	33.2 QP	46.0	-12.8	1.00 V	360	5.62	27.54

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

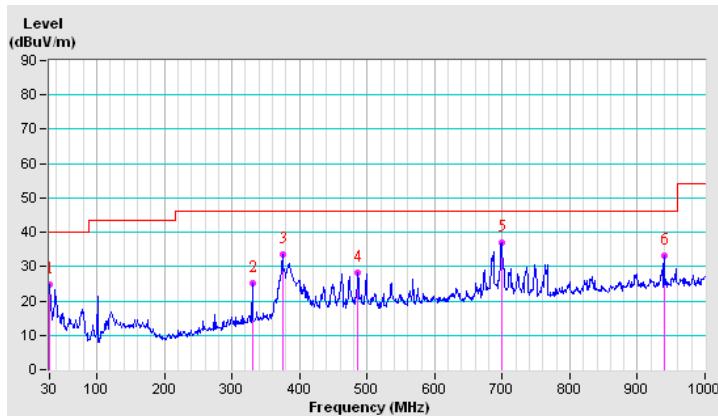



A D T

## ABOVE 1GHz DATA

## 802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5040.00	59.5 PK	74.0	-14.5	1.10 H	42	22.92	36.58
2	5040.00	47.6 AV	54.0	-6.4	1.10 H	42	11.02	36.58
3	*5180.00	102.1 PK			1.09 H	43	65.34	36.76
4	*5180.00	92.8 AV			1.09 H	43	56.04	36.76
5	#10360.00	56.6 PK	68.3	-11.7	1.00 H	30	10.24	46.36
6	15540.00	63.5 PK	74.0	-10.5	1.27 H	183	15.35	48.15
7	15540.00	51.0 AV	54.0	-3.0	1.27 H	183	2.85	48.15

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5040.00	59.5 PK	74.0	-14.5	1.27 V	44	22.92	36.58
2	5040.00	48.9 AV	54.0	-5.1	1.27 V	44	12.32	36.58
3	*5180.00	112.6 PK			1.24 V	44	75.84	36.76
4	*5180.00	102.1 AV			1.24 V	44	65.34	36.76
5	5400.00	61.3 PK	74.0	-12.7	1.30 V	43	24.28	37.02
6	5400.00	51.3 AV	54.0	-2.7	1.30 V	43	14.28	37.02
7	#10360.00	56.4 PK	68.3	-11.9	1.00 V	156	10.04	46.36
8	15540.00	63.7 PK	74.0	-10.3	1.00 V	234	15.55	48.15
9	15540.00	51.3 AV	54.0	-2.7	1.00 V	234	3.15	48.15

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 40	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	102.5 PK			1.07 H	41	65.71	36.79
2	*5200.00	92.7 AV			1.07 H	41	55.91	36.79
3	#10400.00	56.4 PK	68.3	-11.9	1.00 H	33	9.91	46.49
4	15600.00	63.5 PK	74.0	-10.5	1.27 H	194	15.65	47.85
5	15600.00	51.2 AV	54.0	-2.8	1.27 H	194	3.35	47.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	111.5 PK			1.22 V	50	74.71	36.79
2	*5200.00	102.0 AV			1.22 V	50	65.21	36.79
3	5400.00	61.5 PK	74.0	-12.5	1.30 V	45	24.48	37.02
4	5400.00	51.6 AV	54.0	-2.4	1.30 V	45	14.58	37.02
5	#10400.00	56.3 PK	68.3	-12.0	1.00 V	151	9.81	46.49
6	15600.00	63.9 PK	74.0	-10.1	1.02 V	225	16.05	47.85
7	15600.00	51.5 AV	54.0	-2.5	1.02 V	225	3.65	47.85

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 48	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	102.3 PK			1.06 H	42	65.43	36.87
2	*5240.00	91.7 AV			1.06 H	42	54.83	36.87
3	#5250.00	67.0 PK	68.3	-1.3	1.06 H	77	30.12	36.88
4	5350.00	58.9 PK	74.0	-15.1	1.05 H	43	21.90	37.00
5	5350.00	46.6 AV	54.0	-7.4	1.05 H	43	9.60	37.00
6	#10480.00	56.5 PK	68.3	-11.8	1.01 H	35	10.06	46.44
7	15720.00	63.8 PK	74.0	-10.2	1.26 H	177	15.74	48.06
8	15720.00	51.5 AV	54.0	-2.5	1.26 H	177	3.44	48.06

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	110.3 PK			1.24 V	46	73.43	36.87
2	*5240.00	101.4 AV			1.24 V	46	64.53	36.87
3	#5250.00	66.9 PK	68.3	-1.4	1.24 V	50	30.02	36.88
4	5400.00	60.9 PK	74.0	-13.1	1.30 V	45	23.88	37.02
5	5400.00	51.9 AV	54.0	-2.1	1.30 V	45	14.88	37.02
6	#10480.00	56.3 PK	68.3	-12.0	1.00 V	153	9.86	46.44
7	15720.00	64.2 PK	74.0	-9.8	1.02 V	243	16.14	48.06
8	15720.00	51.6 AV	54.0	-2.4	1.02 V	243	3.54	48.06

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 52	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.6 PK	74.0	-16.4	1.43 H	355	17.05	40.55
2	5150.00	46.3 AV	54.0	-7.7	1.43 H	355	5.75	40.55
3	*5260.00	102.3 PK			1.43 H	356	61.34	40.96
4	*5260.00	92.3 AV			1.43 H	356	51.34	40.96
5	#10520.00	55.5 PK	68.3	-12.8	1.00 H	155	7.77	47.73
6	15780.00	62.5 PK	74.0	-11.5	1.00 H	52	9.96	52.54
7	15780.00	50.7 AV	54.0	-3.3	1.00 H	52	-1.84	52.54

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5120.00	57.9 PK	74.0	-16.1	1.15 V	50	17.48	40.42
2	5120.00	47.8 AV	54.0	-6.2	1.15 V	50	7.38	40.42
3	*5260.00	115.1 PK			1.15 V	46	74.14	40.96
4	*5260.00	100.1 AV			1.15 V	46	59.14	40.96
5	5360.00	60.0 PK	74.0	-14.0	1.14 V	46	18.84	41.16
6	5360.00	51.9 AV	54.0	-2.1	1.14 V	46	10.74	41.16
7	#10520.00	54.4 PK	68.3	-13.9	1.15 V	162	6.67	47.73
8	15780.00	62.7 PK	74.0	-11.3	1.55 V	245	10.16	52.54
9	15780.00	50.6 AV	54.0	-3.4	1.55 V	245	-1.94	52.54

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 60	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	103.1 PK			1.45 H	347	62.02	41.08
2	*5300.00	92.4 AV			1.45 H	347	51.32	41.08
3	10600.00	54.8 PK	74.0	-19.2	1.00 H	144	7.04	47.76
4	10600.00	43.9 AV	54.0	-10.1	1.00 H	144	-3.86	47.76
5	15900.00	62.3 PK	74.0	-11.7	1.00 H	46	9.36	52.94
6	15900.00	50.4 AV	54.0	-3.6	1.00 H	46	-2.54	52.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	110.5 PK			1.27 V	46	69.42	41.08
2	*5300.00	99.9 AV			1.27 V	46	58.82	41.08
3	5360.00	59.9 PK	74.0	-14.1	1.24 V	46	18.74	41.16
4	5360.00	51.8 AV	54.0	-2.2	1.24 V	46	10.64	41.16
5	10600.00	53.7 PK	74.0	-20.3	1.15 V	153	5.94	47.76
6	10600.00	43.6 AV	54.0	-10.4	1.15 V	153	-4.16	47.76
7	15900.00	62.4 PK	74.0	-11.6	1.51 V	233	9.46	52.94
8	15900.00	50.7 AV	54.0	-3.3	1.51 V	233	-2.24	52.94

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



A D T

<b>CHANNEL</b>	TX Channel 64	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	103.9 PK			1.43 H	344	62.79	41.11
2	*5320.00	92.9 AV			1.43 H	344	51.79	41.11
3	10640.00	55.2 PK	74.0	-18.8	1.00 H	152	7.32	47.88
4	10640.00	43.8 AV	54.0	-10.2	1.00 H	152	-4.08	47.88
5	15960.00	62.2 PK	74.0	-11.8	1.03 H	60	9.43	52.77
6	15960.00	50.4 AV	54.0	-3.6	1.03 H	60	-2.37	52.77
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	108.9 PK			1.27 V	45	67.79	41.11
2	*5320.00	98.5 AV			1.27 V	45	57.39	41.11
3	5360.00	61.9 PK	74.0	-12.1	1.24 V	47	20.74	41.16
4	5360.00	51.9 AV	54.0	-2.1	1.24 V	47	10.74	41.16
5	10640.00	54.5 PK	74.0	-19.5	1.13 V	141	6.62	47.88
6	10640.00	44.1 AV	54.0	-9.9	1.13 V	141	-3.78	47.88
7	15960.00	62.9 PK	74.0	-11.1	1.56 V	218	10.13	52.77
8	15960.00	51.0 AV	54.0	-3.0	1.56 V	218	-1.77	52.77

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



A D T

## 802.11n (HT20)

<b>CHANNEL</b>	TX Channel 36	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5040.00	58.3 PK	74.0	-15.7	1.05 H	50	21.72	36.58
2	5040.00	46.8 AV	54.0	-7.2	1.05 H	50	10.22	36.58
3	*5180.00	102.3 PK			1.07 H	41	65.54	36.76
4	*5180.00	92.9 AV			1.07 H	41	56.14	36.76
5	#10360.00	56.6 PK	68.3	-11.7	1.00 H	32	10.24	46.36
6	15540.00	63.6 PK	74.0	-10.4	1.25 H	179	15.45	48.15
7	15540.00	51.3 AV	54.0	-2.7	1.25 H	179	3.15	48.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5120.00	59.9 PK	74.0	-14.1	1.27 V	46	23.24	36.66
2	5120.00	49.1 AV	54.0	-4.9	1.27 V	46	12.44	36.66
3	*5180.00	110.4 PK			1.26 V	45	73.64	36.76
4	*5180.00	101.1 AV			1.26 V	45	64.34	36.76
5	5400.00	60.3 PK	74.0	-13.7	1.26 V	59	23.28	37.02
6	5400.00	51.6 AV	54.0	-2.4	1.26 V	59	14.58	37.02
7	#10360.00	56.4 PK	68.3	-11.9	1.00 V	155	10.04	46.36
8	15540.00	63.7 PK	74.0	-10.3	1.00 V	230	15.55	48.15
9	15540.00	51.3 AV	54.0	-2.7	1.00 V	230	3.15	48.15

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 40	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	101.4 PK			1.05 H	40	64.61	36.79
2	*5200.00	92.7 AV			1.05 H	40	55.91	36.79
3	#10400.00	56.4 PK	68.3	-11.9	1.00 H	31	9.91	46.49
4	15600.00	63.4 PK	74.0	-10.6	1.23 H	180	15.55	47.85
5	15600.00	51.0 AV	54.0	-3.0	1.23 H	180	3.15	47.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	110.1 PK			1.25 V	44	73.31	36.79
2	*5200.00	100.8 AV			1.25 V	44	64.01	36.79
3	5400.00	62.3 PK	74.0	-11.7	1.29 V	44	25.28	37.02
4	5400.00	51.4 AV	54.0	-2.6	1.29 V	44	14.38	37.02
5	#10400.00	56.7 PK	68.3	-11.6	1.00 V	153	10.21	46.49
6	15600.00	63.5 PK	74.0	-10.5	1.00 V	232	15.65	47.85
7	15600.00	51.4 AV	54.0	-2.6	1.00 V	232	3.55	47.85

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 48	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	101.5 PK			1.07 H	43	64.63	36.87
2	*5240.00	91.9 AV			1.07 H	43	55.03	36.87
3	#5250.00	67.2 PK	68.3	-1.1	1.07 H	31	30.32	36.88
4	5350.00	59.7 PK	74.0	-14.3	1.10 H	50	22.70	37.00
5	5350.00	47.3 AV	54.0	-6.7	1.10 H	50	10.30	37.00
6	#10480.00	56.7 PK	68.3	-11.6	1.01 H	33	10.26	46.44
7	15720.00	63.6 PK	74.0	-10.4	1.23 H	177	15.54	48.06
8	15720.00	51.2 AV	54.0	-2.8	1.23 H	177	3.14	48.06

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	109.3 PK			1.23 V	49	72.43	36.87
2	*5240.00	99.9 AV			1.23 V	49	63.03	36.87
3	#5250.00	67.3 PK	68.3	-1.0	1.24 V	60	30.42	36.88
4	5400.00	61.3 PK	74.0	-12.7	1.30 V	45	24.28	37.02
5	5400.00	51.6 AV	54.0	-2.4	1.30 V	45	14.58	37.02
6	#10480.00	56.6 PK	68.3	-11.7	1.00 V	151	10.16	46.44
7	15720.00	63.4 PK	74.0	-10.6	1.00 V	231	15.34	48.06
8	15720.00	51.3 AV	54.0	-2.7	1.00 V	231	3.24	48.06

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 52	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.9 PK	74.0	-16.1	1.43 H	345	17.35	40.55
2	5150.00	46.5 AV	54.0	-7.5	1.43 H	345	5.95	40.55
3	*5260.00	100.9 PK			1.45 H	344	59.94	40.96
4	*5260.00	91.2 AV			1.45 H	344	50.24	40.96
5	#10520.00	55.3 PK	68.3	-13.0	1.00 H	155	7.57	47.73
6	15780.00	62.5 PK	74.0	-11.5	1.00 H	52	9.96	52.54
7	15780.00	50.7 AV	54.0	-3.3	1.00 H	52	-1.84	52.54

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4960.00	57.4 PK	74.0	-16.6	1.25 V	60	17.45	39.95
2	4960.00	47.6 AV	54.0	-6.4	1.25 V	60	7.65	39.95
3	*5260.00	109.8 PK			1.25 V	58	68.84	40.96
4	*5260.00	99.3 AV			1.25 V	58	58.34	40.96
5	5360.00	61.1 PK	74.0	-12.9	1.21 V	59	19.94	41.16
6	5360.00	51.9 AV	54.0	-2.1	1.21 V	59	10.74	41.16
7	#10520.00	54.5 PK	68.3	-13.8	1.15 V	162	6.77	47.73
8	15780.00	62.7 PK	74.0	-11.3	1.55 V	245	10.16	52.54
9	15780.00	50.6 AV	54.0	-3.4	1.55 V	245	-1.94	52.54

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 60	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	100.4 PK			1.46 H	346	59.32	41.08
2	*5300.00	91.1 AV			1.46 H	346	50.02	41.08
3	10600.00	55.2 PK	74.0	-18.8	1.00 H	160	7.44	47.76
4	10600.00	43.6 AV	54.0	-10.4	1.00 H	160	-4.16	47.76
5	15900.00	62.1 PK	74.0	-11.9	1.01 H	43	9.16	52.94
6	15900.00	50.5 AV	54.0	-3.5	1.01 H	43	-2.44	52.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	108.1 PK			1.23 V	59	67.02	41.08
2	*5300.00	98.5 AV			1.23 V	59	57.42	41.08
3	5360.00	60.5 PK	74.0	-13.5	1.23 V	59	19.34	41.16
4	5360.00	51.9 AV	54.0	-2.1	1.23 V	59	10.74	41.16
5	10600.00	54.5 PK	74.0	-19.5	1.05 V	176	6.74	47.76
6	10600.00	44.1 AV	54.0	-9.9	1.05 V	176	-3.66	47.76
7	15900.00	63.1 PK	74.0	-10.9	1.60 V	244	10.16	52.94
8	15900.00	50.9 AV	54.0	-3.1	1.60 V	244	-2.04	52.94

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



A D T

<b>CHANNEL</b>	TX Channel 64	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	100.1 PK			1.42 H	351	58.99	41.11
2	*5320.00	90.8 AV			1.42 H	351	49.69	41.11
3	10640.00	55.8 PK	74.0	-18.2	1.01 H	152	7.92	47.88
4	10640.00	43.6 AV	54.0	-10.4	1.01 H	152	-4.28	47.88
5	15960.00	62.8 PK	74.0	-11.2	1.03 H	30	10.03	52.77
6	15960.00	50.9 AV	54.0	-3.1	1.03 H	30	-1.87	52.77

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	107.6 PK			1.23 V	62	66.49	41.11
2	*5320.00	97.6 AV			1.23 V	62	56.49	41.11
3	5360.00	61.7 PK	74.0	-12.3	1.22 V	58	20.54	41.16
4	5360.00	51.8 AV	54.0	-2.2	1.22 V	58	10.64	41.16
5	10640.00	54.2 PK	74.0	-19.8	1.16 V	157	6.32	47.88
6	10640.00	43.8 AV	54.0	-10.2	1.16 V	157	-4.08	47.88
7	15960.00	61.8 PK	74.0	-12.2	1.49 V	208	9.03	52.77
8	15960.00	50.0 AV	54.0	-4.0	1.49 V	208	-2.77	52.77

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



A D T

## 802.11n (HT40)

<b>CHANNEL</b>	TX Channel 38	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5040.00	59.5 PK	74.0	-14.5	1.05 H	51	22.92	36.58
2	5040.00	49.1 AV	54.0	-4.9	1.05 H	51	12.52	36.58
3	*5190.00	100.3 PK			1.05 H	50	63.53	36.77
4	*5190.00	91.1 AV			1.05 H	50	54.33	36.77
5	#10380.00	56.5 PK	68.3	-11.8	1.00 H	41	10.07	46.43
6	15570.00	62.8 PK	74.0	-11.2	1.22 H	169	14.80	48.00
7	15570.00	50.3 AV	54.0	-3.7	1.22 H	169	2.30	48.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.7 PK	74.0	-11.3	1.26 V	45	25.99	36.71
2	5150.00	51.9 AV	54.0	-2.1	1.26 V	45	15.19	36.71
3	*5190.00	108.7 PK			1.25 V	46	71.93	36.77
4	*5190.00	99.3 AV			1.25 V	46	62.53	36.77
5	5400.00	61.4 PK	74.0	-12.6	1.30 V	46	24.38	37.02
6	5400.00	51.9 AV	54.0	-2.1	1.30 V	46	14.88	37.02
7	#10380.00	56.3 PK	68.3	-12.0	1.00 V	153	9.87	46.43
8	15570.00	62.2 PK	74.0	-11.8	1.00 V	230	14.20	48.00
9	15570.00	50.1 AV	54.0	-3.9	1.00 V	230	2.10	48.00

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 46	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	100.9 PK			1.08 H	41	64.05	36.85
2	*5230.00	90.7 AV			1.08 H	41	53.85	36.85
3	#5250.00	67.4 PK	68.3	-0.9	1.08 H	44	30.52	36.88
4	5350.00	59.1 PK	74.0	-14.9	1.08 H	44	22.10	37.00
5	5350.00	47.3 AV	54.0	-6.7	1.08 H	44	10.30	37.00
6	#10460.00	56.1 PK	68.3	-12.2	1.00 H	39	9.65	46.45
7	15690.00	62.5 PK	74.0	-11.5	1.20 H	164	14.46	48.04
8	15690.00	50.1 AV	54.0	-3.9	1.20 H	164	2.06	48.04

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5120.00	59.0 PK	74.0	-15.0	1.26 V	45	22.34	36.66
2	5120.00	51.4 AV	54.0	-2.6	1.26 V	45	14.74	36.66
3	*5230.00	108.5 PK			1.23 V	43	71.65	36.85
4	*5230.00	99.6 AV			1.23 V	43	62.75	36.85
5	#5250.00	66.9 PK	68.3	-1.4	1.22 V	41	30.02	36.88
6	5400.00	61.6 PK	74.0	-12.4	1.17 V	45	24.58	37.02
7	5400.00	51.9 AV	54.0	-2.1	1.17 V	45	14.88	37.02
8	5440.00	60.4 PK	74.0	-13.6	1.26 V	60	23.32	37.08
9	5440.00	51.6 AV	54.0	-2.4	1.26 V	60	14.52	37.08
10	#10460.00	56.2 PK	68.3	-12.1	1.00 V	150	9.75	46.45
11	15690.00	63.1 PK	74.0	-10.9	1.00 V	231	15.06	48.04
12	15690.00	50.2 AV	54.0	-3.8	1.00 V	231	2.16	48.04

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 54	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.9 PK	74.0	-16.1	1.09 H	349	17.35	40.55
2	5150.00	45.8 AV	54.0	-8.2	1.09 H	349	5.25	40.55
3	*5270.00	99.7 PK			1.03 H	356	58.71	40.99
4	*5270.00	89.1 AV			1.03 H	356	48.11	40.99
5	#10540.00	55.7 PK	68.3	-12.6	1.02 H	142	7.96	47.74
6	15810.00	61.8 PK	74.0	-12.2	1.01 H	38	9.23	52.57
7	15810.00	49.9 AV	54.0	-4.1	1.01 H	38	-2.67	52.57
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4960.00	58.1 PK	74.0	-15.9	1.23 V	62	18.15	39.95
2	4960.00	47.5 AV	54.0	-6.5	1.23 V	62	7.55	39.95
3	*5270.00	109.1 PK			1.25 V	56	68.11	40.99
4	*5270.00	98.2 AV			1.25 V	56	57.21	40.99
5	5360.00	61.3 PK	74.0	-12.7	1.21 V	59	20.14	41.16
6	5360.00	51.6 AV	54.0	-2.4	1.21 V	59	10.44	41.16
7	#10540.00	54.5 PK	68.3	-13.8	1.15 V	159	6.76	47.74
8	15810.00	61.5 PK	74.0	-12.5	1.44 V	256	8.93	52.57
9	15810.00	49.8 AV	54.0	-4.2	1.44 V	256	-2.77	52.57

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 62	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	99.5 PK			1.07 H	351	58.41	41.09
2	*5310.00	88.6 AV			1.07 H	351	47.51	41.09
3	5360.00	59.2 PK	74.0	-14.8	1.08 H	350	18.04	41.16
4	5360.00	47.7 AV	54.0	-6.3	1.08 H	350	6.54	41.16
5	10620.00	54.6 PK	74.0	-19.4	1.00 H	124	6.78	47.82
6	10620.00	43.6 AV	54.0	-10.4	1.00 H	124	-4.22	47.82
7	15930.00	62.9 PK	74.0	-11.1	1.00 H	23	10.04	52.86
8	15930.00	50.1 AV	54.0	-3.9	1.00 H	23	-2.76	52.86

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	108.9 PK			1.23 V	60	67.81	41.09
2	*5310.00	97.7 AV			1.23 V	60	56.61	41.09
3	5360.00	61.1 PK	74.0	-12.9	1.22 V	59	19.94	41.16
4	5360.00	51.7 AV	54.0	-2.3	1.22 V	59	10.54	41.16
5	10620.00	54.1 PK	74.0	-19.9	1.09 V	153	6.28	47.82
6	10620.00	45.2 AV	54.0	-8.8	1.09 V	153	-2.62	47.82
7	15930.00	62.1 PK	74.0	-11.9	1.50 V	271	9.24	52.86
8	15930.00	50.2 AV	54.0	-3.8	1.50 V	271	-2.66	52.86

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



A D T

## 4.3 PEAK TRANSMIT POWER MEASUREMENT

### 4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.47 – 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

**NOTE:** Where B is the 26dB emission bandwidth in MHz.

### 4.3.2 TEST INSTRUMENTS

#### FOR POWER OUTPUT MEASUREMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 04, 2011	May 03, 2012
Peak Power Sensor	MA2411B	0738172	May 03, 2011	May 02, 2012

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 20 to Apr. 25, 2012

#### FOR 26dB OCCUPIED BANDWIDTH

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 20 to Apr. 25, 2012



A D T

#### 4.3.3 TEST PROCEDURE

##### FOR POWER OUTPUT MEASUREMENT

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

##### FOR 26dB OCCUPIED BANDWIDTH

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### 4.3.4 DEVIATION FROM TEST STANDARD


No deviation




A D T

#### 4.3.5 TEST SETUP

##### FOR POWER OUTPUT MEASUREMENT

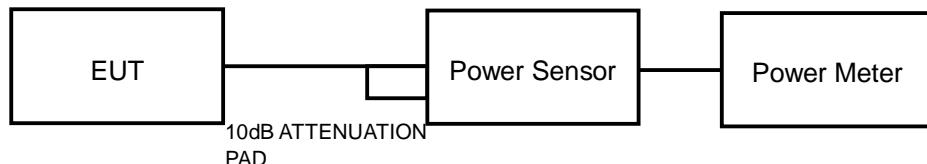

##### FOR 26dB OCCUPIED BANDWIDTH

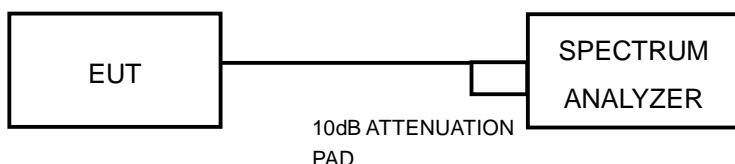

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

#### 4.3.7 TEST RESULTS

##### POWER OUTPUT:

###### 802.11a

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
36	5180	6.30	6.00	7.50	13.87	11.42	16.23	PASS
40	5200	6.10	6.20	7.10	13.372	11.26	16.23	PASS
48	5240	5.80	6.50	6.30	12.535	10.98	16.23	PASS
52	5260	5.50	6.10	6.50	12.089	10.82	23.23	PASS
60	5300	6.50	5.90	6.90	13.255	11.22	23.23	PASS
64	5320	6.50	6.00	7.30	13.818	11.40	23.23	PASS

Note: Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

Effective Legacy Gain (dBi) = 6.77

The effective legacy gain is 6.77dB, therefore the limit needs to reduce.

###### 802.11n (HT20)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
36	5180	6.00	5.90	7.30	13.241	11.22	17	PASS
40	5200	6.20	6.00	6.80	12.936	11.12	17	PASS
48	5240	5.60	6.10	6.10	11.779	10.71	17	PASS
52	5260	5.40	5.30	5.00	10.017	10.01	24	PASS
60	5300	5.20	5.00	5.50	10.021	10.01	24	PASS
64	5320	5.20	4.90	5.70	10.116	10.05	24	PASS



A D T

## 802.11n (HT40)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
38	5190	6.70	6.20	8.10	15.303	11.85	17	PASS
46	5230	6.50	6.80	7.60	15.007	11.76	17	PASS
54	5270	6.20	6.00	6.50	12.617	11.01	24	PASS
62	5310	6.30	5.70	7.00	12.993	11.14	24	PASS



A D T

**26dB BANDWIDTH:****802.11a**

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		
		CHAIN 0	CHAIN 1	CHAIN 2
36	5180	22.82	22.51	22.46
40	5200	22.76	22.45	22.44
48	5240	22.83	22.67	22.43
52	5260	22.82	23.24	22.59
60	5300	22.18	22.81	22.58
64	5320	22.66	21.92	22.38

**802.11n (HT20)**

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		
		CHAIN 0	CHAIN 1	CHAIN 2
36	5180	23.17	23.18	23.09
40	5200	23.21	23.91	24.23
48	5240	23.79	23.24	24.56
52	5260	23.17	24.31	23.02
60	5300	23.61	23.52	23.50
64	5320	23.53	23.68	23.40



A D T

## 802.11n (HT40)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		
		CHAIN 0	CHAIN 1	CHAIN 2
38	5190	49.25	47.50	47.98
46	5230	49.24	50.01	47.30
54	5270	48.76	48.18	47.27
62	5310	48.86	48.19	48.73



A D T

## 4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

### 4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.47 – 5.725GHz	11dBm
5.725 ~ 5.825GHz	17dBm

### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 20 to Apr. 25, 2012


### 4.4.3 TEST PROCEDURES

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1 MHz, Set VBW  $\geq$  3 MHz, Detector = RMS
- 3) Sweep time = auto, trigger set to “free run”.
- 4) Trace average at least 100 traces in power averaging mode.
- 5) Record the max value

### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.4.5 TEST SETUP

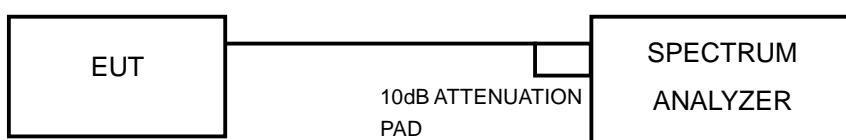



A D T

#### 4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6



A D T

#### 4.4.7 TEST RESULTS

##### 802.11a

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)			TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
36	5180	-4.09	-5.15	-3.22	0.21	3.23	PASS
40	5200	-4.33	-5.40	-3.80	-0.11	3.23	PASS
48	5240	-4.49	-4.70	-4.74	-0.27	3.23	PASS
52	5260	-3.69	-5.53	-4.09	0.29	10.23	PASS
60	5300	-3.54	-5.39	-3.48	0.57	10.23	PASS
64	5320	-3.76	-5.72	-3.46	0.46	10.23	PASS

**NOTE:** 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.  
 2. Directional gain = gain of antenna element + 10 log (# of TX antenna elements)  
 Effective Legacy Gain (dBi) = 6.77  
 The effective legacy gain is 6.77dB<sub>i</sub>, therefore the limit needs to reduce.

##### 802.11n (HT20)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)			TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
36	5180	-4.41	-4.61	-3.81	-0.13	4	PASS
40	5200	-4.45	-4.77	-4.37	-0.34	4	PASS
48	5240	-5.08	-5.42	-5.38	-0.77	4	PASS
52	5260	-4.67	-5.98	-4.51	-0.56	11	PASS
60	5300	-4.84	-5.63	-4.17	-0.15	11	PASS
64	5320	-4.44	-5.58	-3.78	0.12	11	PASS

**NOTE:** Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.



A D T

## 802.11n (HT40)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)			TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
38	5190	-6.31	-7.54	-6.13	-2.01	4	PASS
46	5230	-7.20	-7.95	-6.28	-2.87	4	PASS
54	5270	-7.23	-8.72	-7.27	-3.19	11	PASS
62	5310	-7.07	-8.98	-6.98	-2.99	11	PASS

**NOTE:** Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.



A D T

## 4.5 PEAK POWER EXCURSION MEASUREMENT

### 4.5.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Shall not exceed 13 dB

### 4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 20 to Apr. 25, 2012


### 4.5.3 TEST PROCEDURE

1. Set RBW = 1 MHz, VBW  $\geq$  3 MHz, Detector = peak.
2. Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
3. Use the peak search function to find the peak of the spectrum.
4. Measure the PPSD.
5. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.5.5 TEST SETUP



### 4.5.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

#### 4.5.7 TEST RESULTS



802.11a

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)			PPSD (dBm)			PEAK EXCURSION (dB)			LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2		
36	5180	4.34	4.67	6.90	-4.09	-5.15	-3.22	8.43	9.82	10.12	13	PASS
40	5200	4.40	4.60	6.46	-4.33	-5.40	-3.80	8.73	10.00	10.26	13	PASS
48	5240	4.23	4.94	5.46	-4.49	-4.70	-4.74	8.72	9.64	10.20	13	PASS
52	5260	4.86	5.09	6.34	-3.69	-5.53	-4.09	8.55	10.62	10.43	13	PASS
60	5300	5.04	4.90	6.90	-3.54	-5.39	-3.48	8.58	10.29	10.38	13	PASS
64	5320	5.13	4.71	7.50	-3.76	-5.72	-3.46	8.89	10.43	10.96	13	PASS



A D T

### Chain 2: CH 64

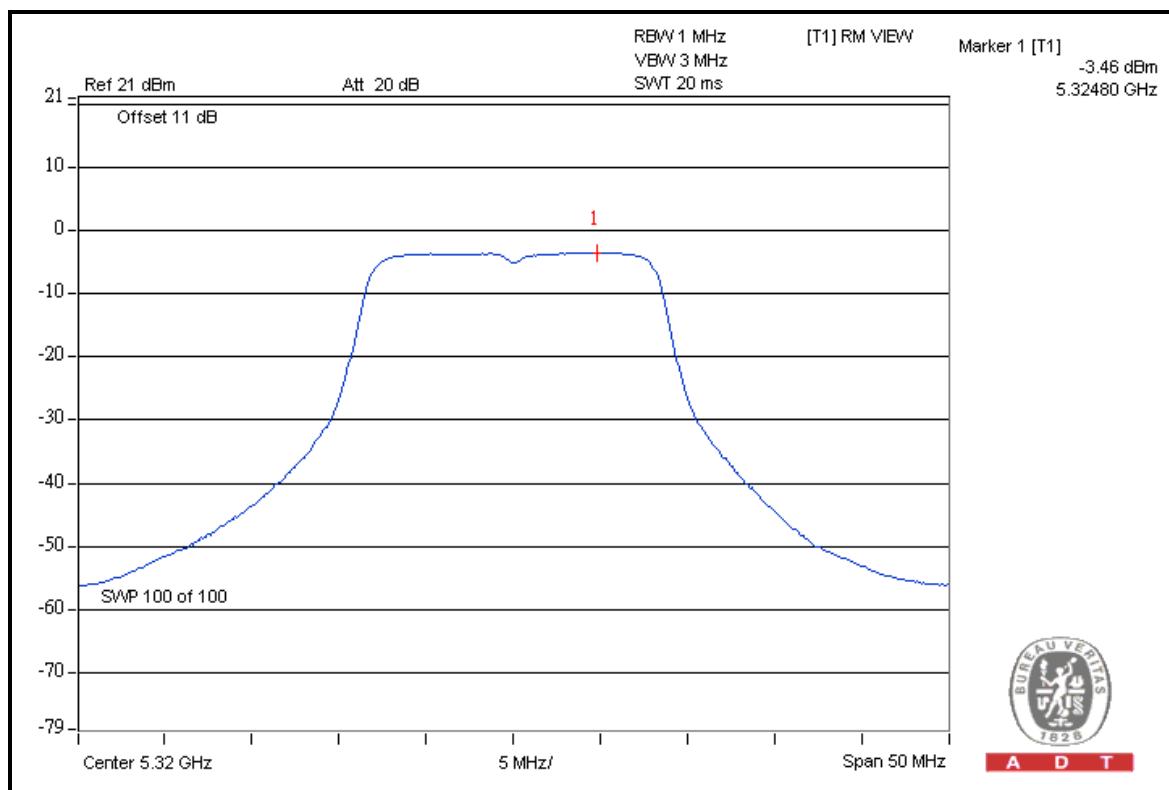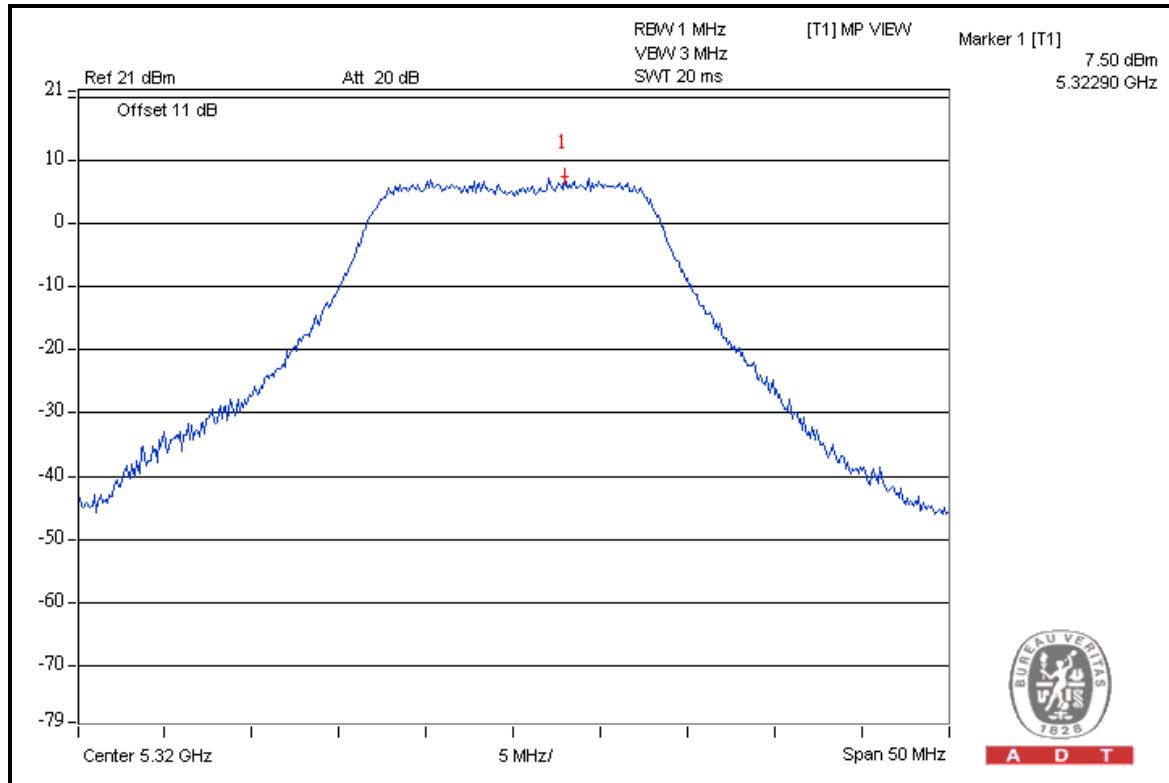



A D T



## 802.11n (HT20)

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)			PPSD (dBm)			PEAK EXCURSION (dB)			LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2		
36	5180	4.80	4.89	6.73	-4.41	-4.61	-3.81	9.21	9.50	10.54	13	PASS
40	5200	4.65	4.78	5.64	-4.45	-4.77	-4.37	9.10	9.55	10.01	13	PASS
48	5240	4.52	4.15	4.97	-5.08	-5.42	-5.38	9.60	9.57	10.35	13	PASS
52	5260	4.46	3.67	5.96	-4.67	-5.98	-4.51	9.13	9.65	10.47	13	PASS
60	5300	4.40	3.88	6.95	-4.84	-5.63	-4.17	9.24	9.51	11.12	13	PASS
64	5320	4.90	3.88	6.45	-4.44	-5.58	-3.78	9.34	9.46	10.23	13	PASS



A D T

## Chain 2: CH 60

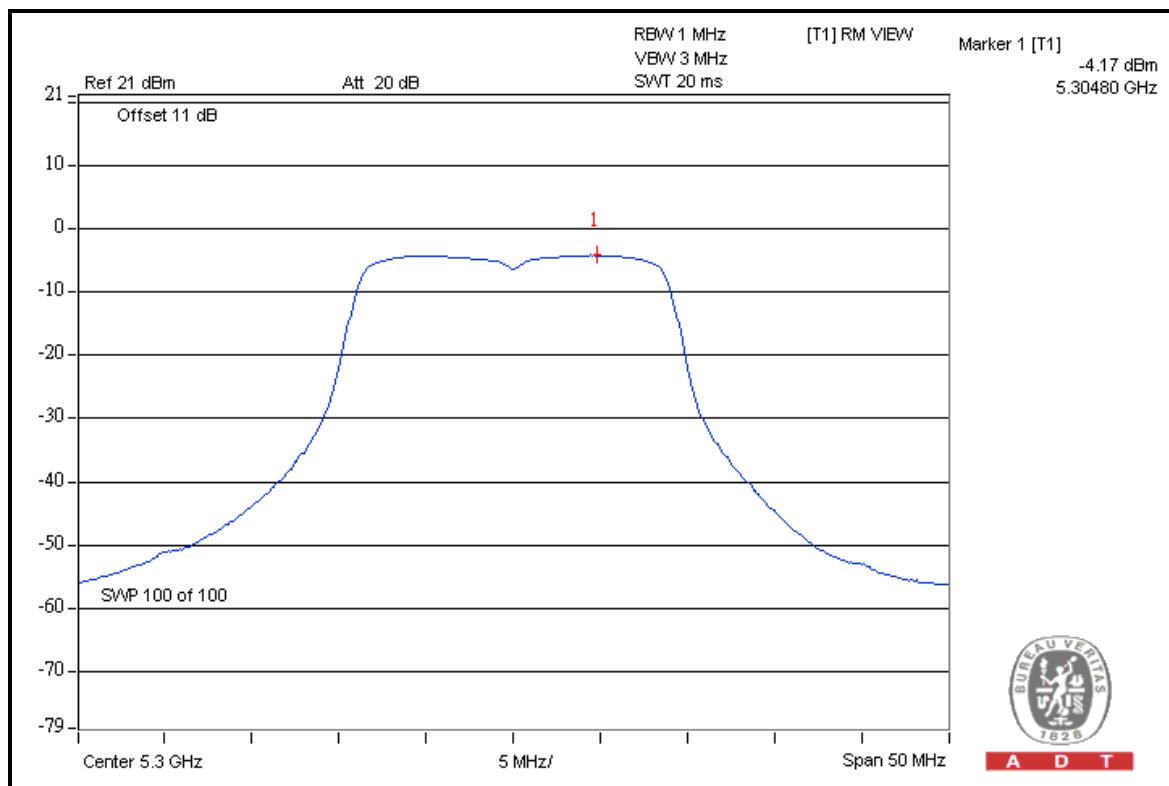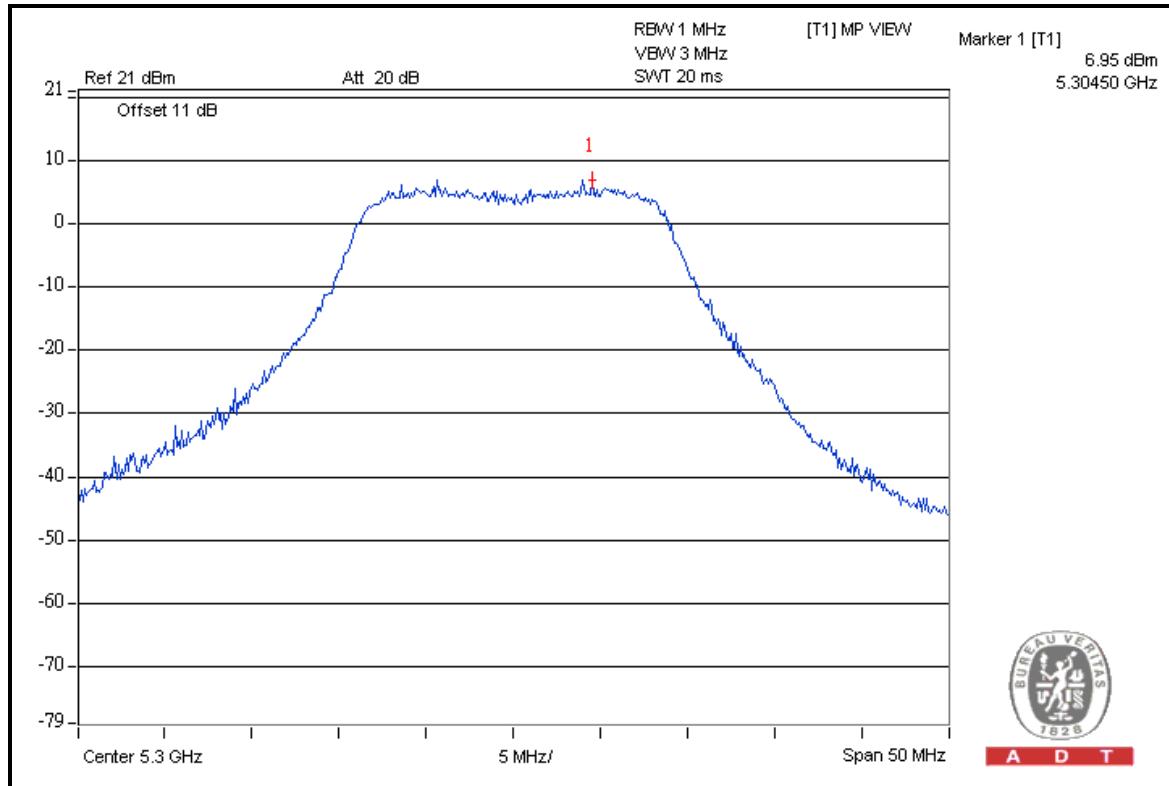



A D T



## 802.11n (HT40)

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)			PPSD (dBm)			PEAK EXCURSION (dB)			LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2		
38	5190	3.35	1.94	4.16	-6.31	-7.54	-6.13	9.66	9.48	10.29	13	PASS
46	5230	1.99	2.49	3.85	-7.20	-7.95	-6.28	9.19	10.44	10.13	13	PASS
54	5270	1.89	0.77	3.15	-7.23	-8.72	-7.27	9.12	9.49	10.42	13	PASS
62	5310	1.92	1.40	4.26	-7.07	-8.98	-6.98	8.99	10.38	11.24	13	PASS



A D T

## Chain 2: CH 62

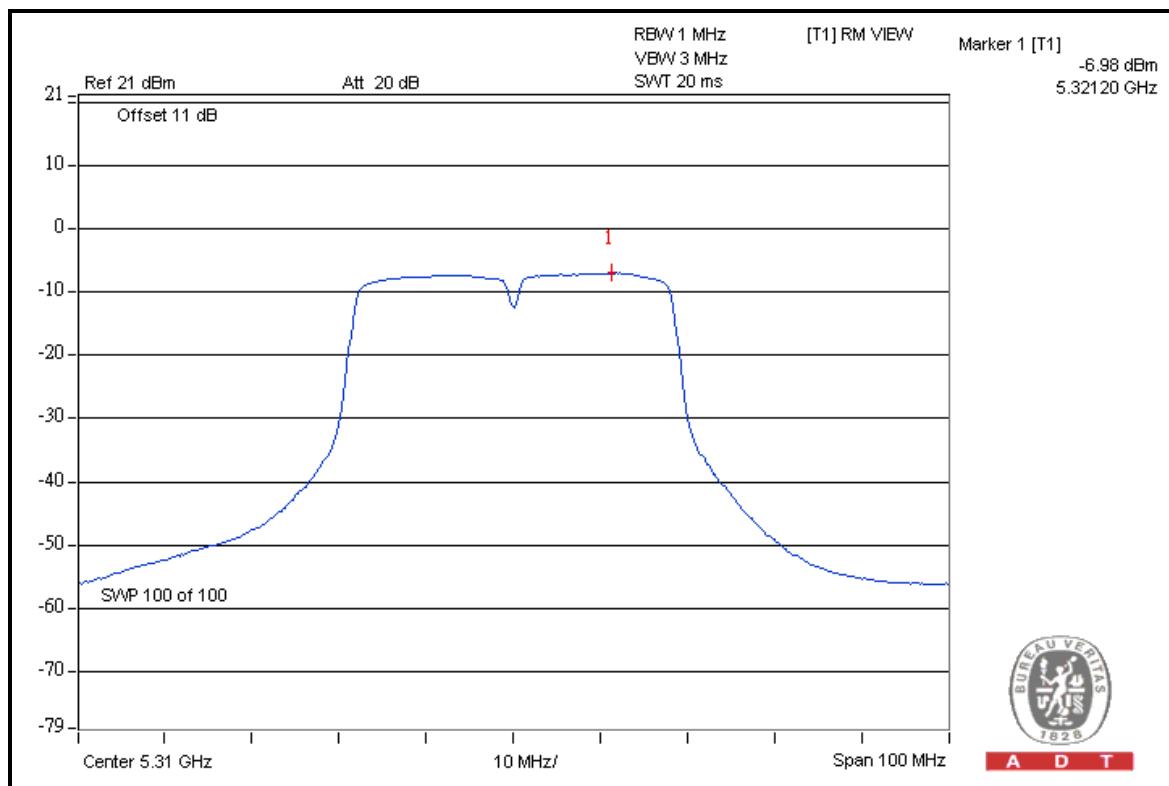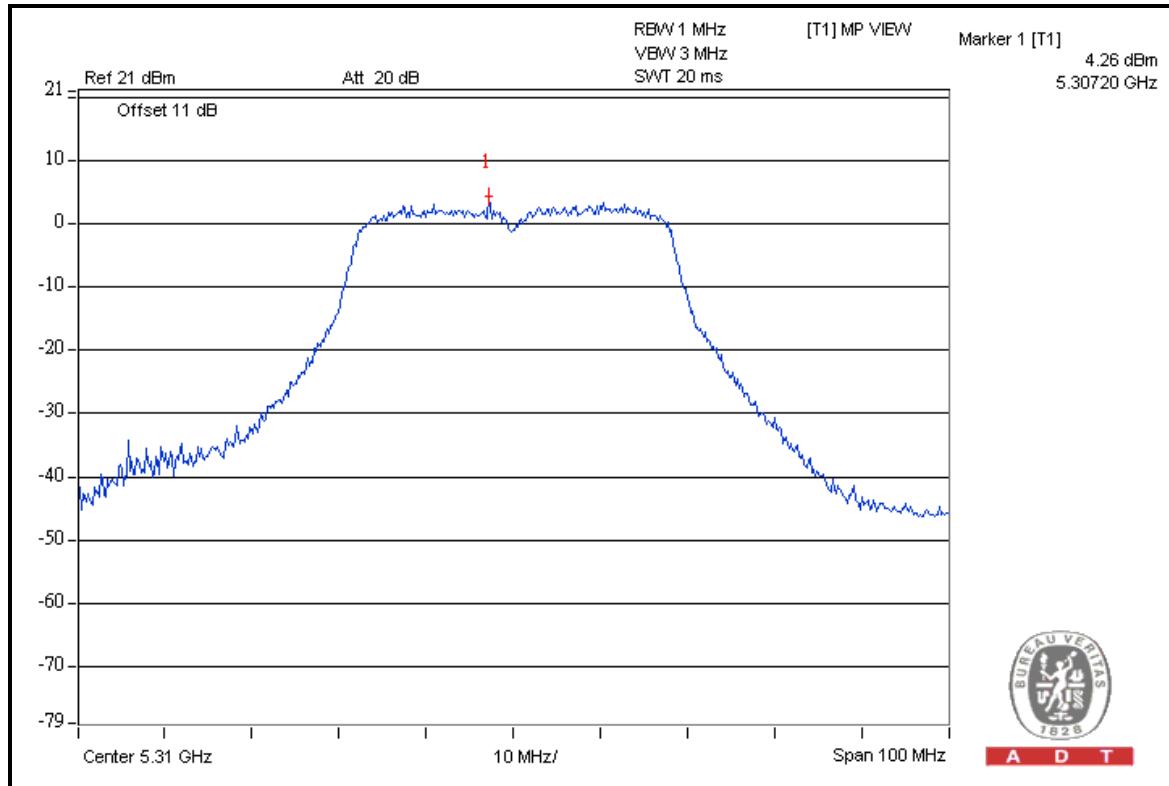



A D T

## 4.6 FREQUENCY STABILITY

### 4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 20 to Apr. 25, 2012


### 4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

#### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.6.5 TEST SETUP

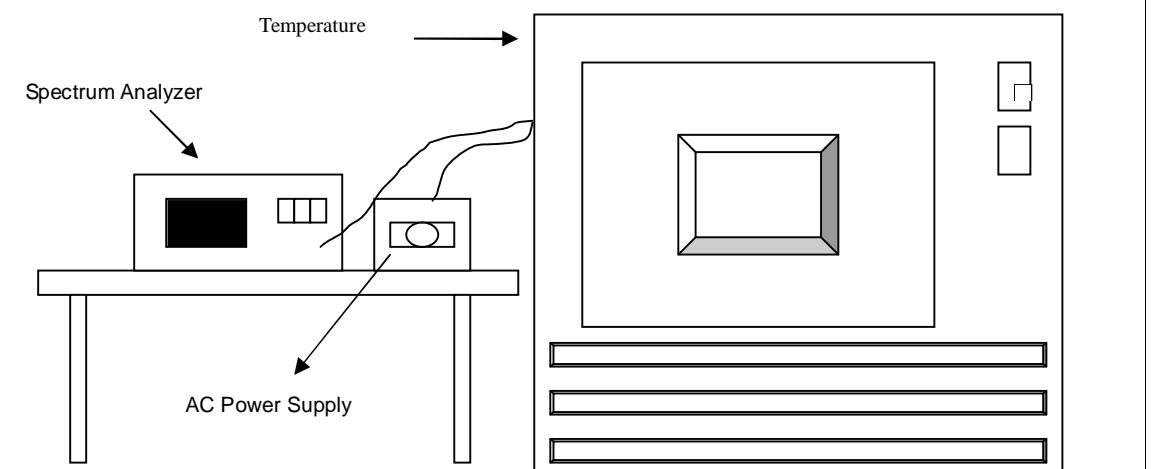

#### 4.6.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



A D T

#### 4.6.7 TEST RESULTS

FREQUEMCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5320MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift						
		(MHz)	ppm	(MHz)	ppm	(MHz)	ppm	(MHz)	ppm
50	120	5319.9974	-0.4887	5319.9992	-0.1504	5320.0031	0.5827	5319.9993	-0.1316
40	120	5320.0106	1.9925	5320.007	1.3158	5320.0107	2.0113	5320.0141	2.6504
30	120	5319.9864	-2.5564	5319.9868	-2.4812	5319.9851	-2.8008	5319.9813	-3.5150
20	120	5319.986	-2.6316	5319.9835	-3.1015	5319.9835	-3.1015	5319.9836	-3.0827
10	120	5319.9984	-0.3008	5320.0014	0.2632	5319.9984	-0.3008	5319.9939	-1.1466
0	120	5319.9882	-2.2180	5319.9836	-3.0827	5319.9806	-3.6466	5319.9814	-3.4962
-10	120	5319.9878	-2.2932	5319.9841	-2.9887	5319.9805	-3.6654	5319.9783	-4.0789
-20	120	5319.9786	-4.0226	5319.9797	-3.8158	5319.9844	-2.9323	5319.9833	-3.1391
-30	120	5320.0194	3.6466	5320.0227	4.2669	5320.0289	5.4323	5320.0301	5.6579

FREQUEMCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5320MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift						
		(MHz)	ppm	(MHz)	ppm	(MHz)	ppm	(MHz)	ppm
20	138	5319.9869	-2.4624	5319.9836	-3.0827	5319.9835	-3.1015	5319.9838	-3.0451
	120	5319.986	-2.6316	5319.9835	-3.1015	5319.9835	-3.1015	5319.9836	-3.0827
	102	5319.9868	-2.4812	5319.9838	-3.0451	5319.9833	-3.1391	5319.9839	-3.0263



A D T

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

## 6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.



A D T

## 7.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---