


Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 M/N : BEL01

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5824.450	34.13	9.63	35.70	91.14	99.20	74.00	-25.20	Peak
2	5850.000	34.14	9.66	35.70	48.07	56.17	74.00	17.83	Peak
3	7250.000	36.05	10.99	35.45	50.23	61.82	74.00	12.18	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

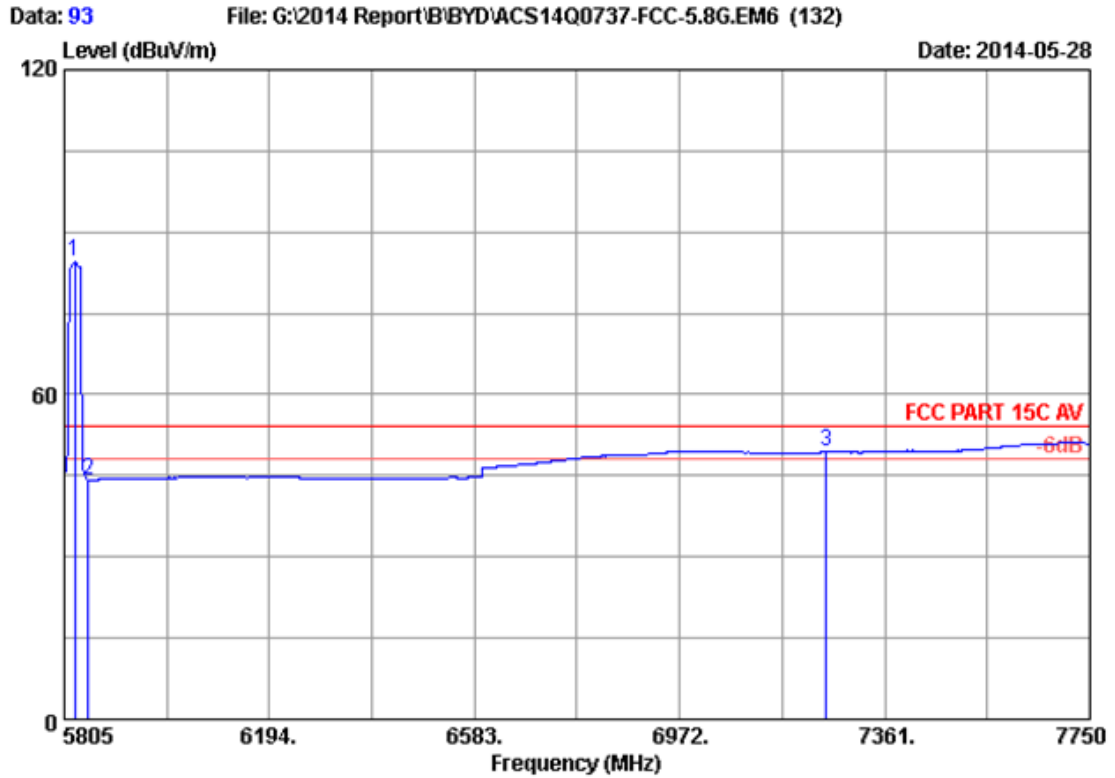

Site no. : 3m Chamber Data no. : 93
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 M/N : BEL01

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5824.450	34.13	9.63	35.70	76.38	84.44	54.00	-30.44	Average
2	5850.000	34.14	9.66	35.70	36.19	44.29	54.00	9.71	Average
3	7250.000	36.05	10.99	35.45	37.76	49.35	54.00	4.65	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

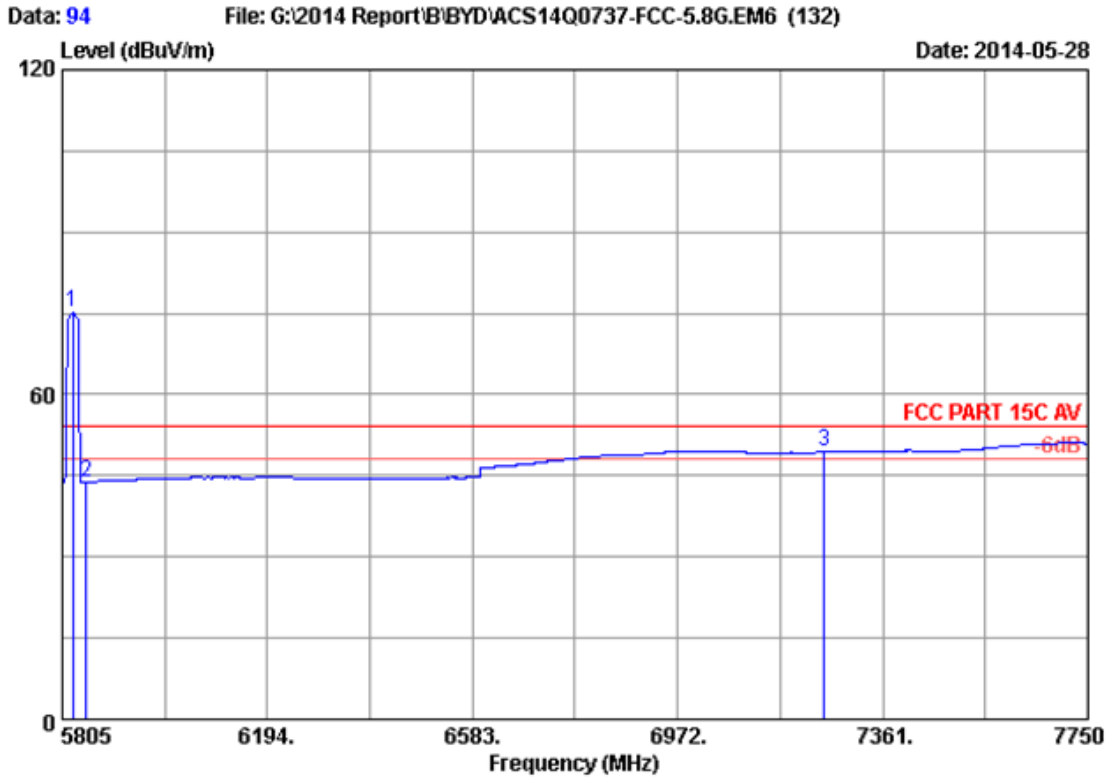

Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 M/N : BEL01

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5824.450	34.13	9.63	35.70	67.02	75.08	54.00	-21.08	Average
2	5850.000	34.14	9.66	35.70	35.67	43.77	54.00	10.23	Average
3	7250.000	36.05	10.99	35.45	37.75	49.34	54.00	4.66	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

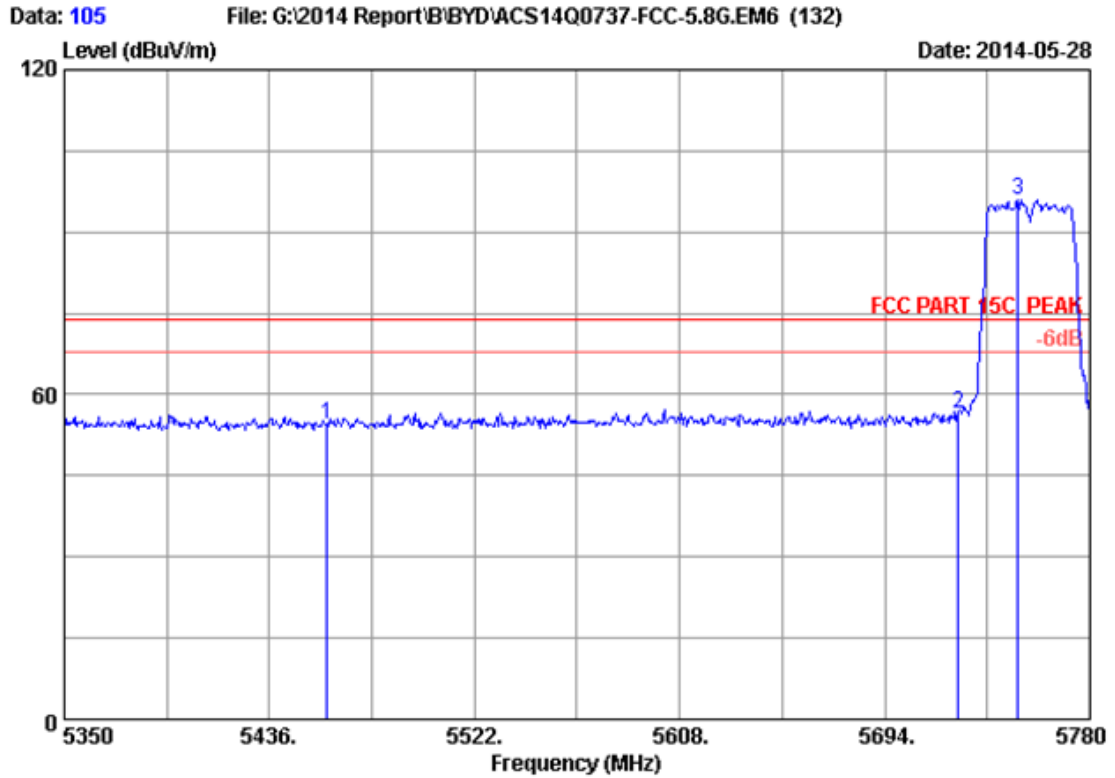

Site no. : 3m Chamber Data no. : 105
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 M/N : BEL01

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.94	9.25	35.70	47.02	54.51	74.00	19.49	Peak
2	5725.000	34.09	9.52	35.70	48.45	56.36	74.00	17.64	Peak
3	5749.900	34.10	9.55	35.70	87.94	95.89	74.00	-21.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

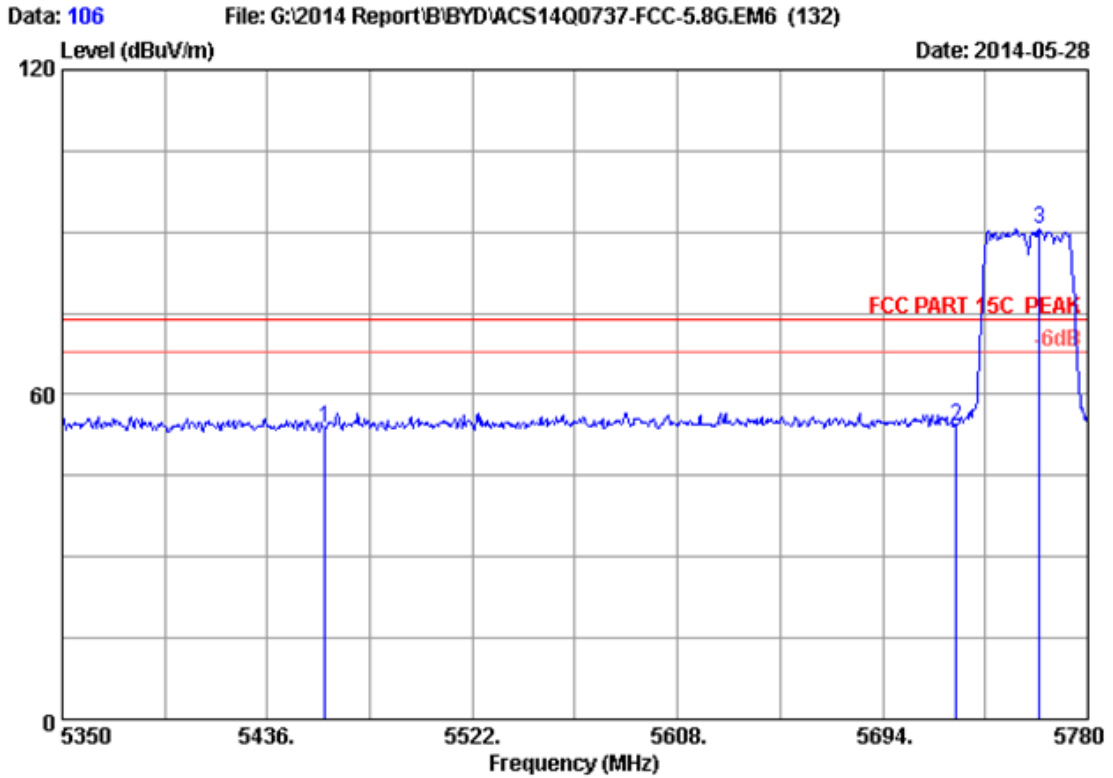

Site no. : 3m Chamber Data no. : 106
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 M/N : BEL01

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.94	9.25	35.70	46.28	53.77	74.00	20.23	Peak
2	5725.000	34.09	9.52	35.70	46.27	54.18	74.00	19.82	Peak
3	5759.790	34.10	9.56	35.70	82.71	90.67	74.00	-16.67	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

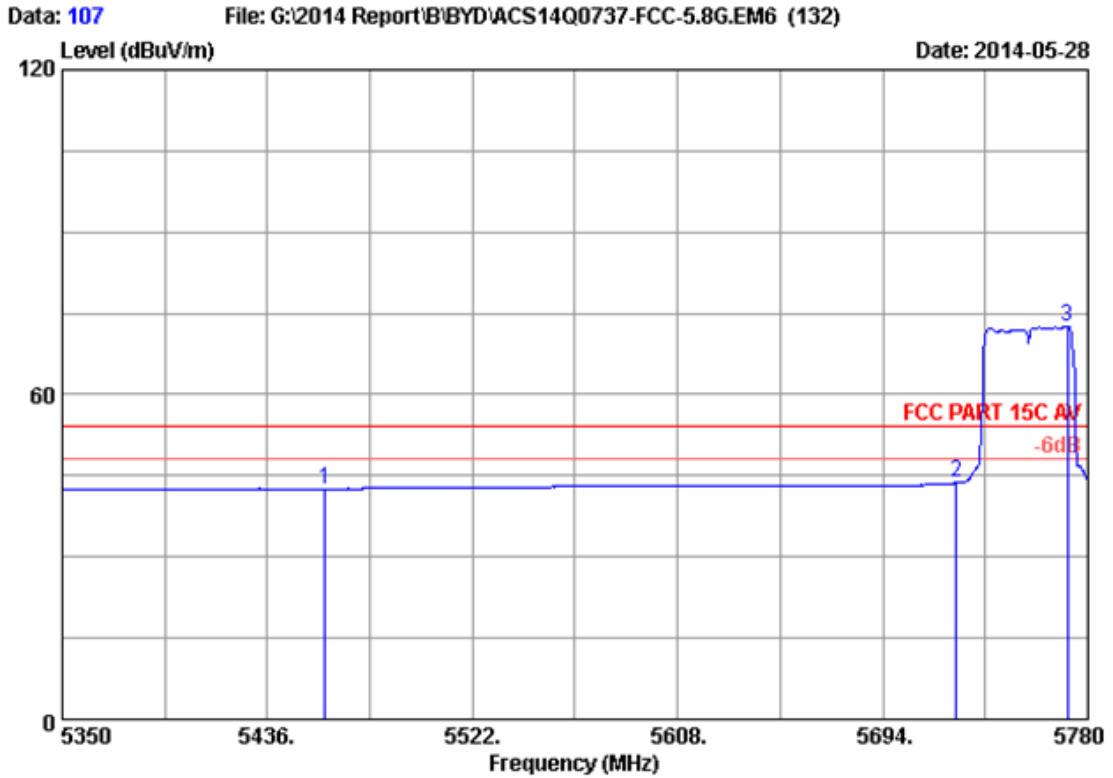

Site no. : 3m Chamber Data no. : 107
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 M/N : BEL01

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	5460.000	33.94	9.25	35.70	35.08	42.57	54.00	11.43	Average
2	5725.000	34.09	9.52	35.70	35.74	43.65	54.00	10.35	Average
3	5771.400	34.11	9.57	35.70	64.64	72.62	54.00	-18.62	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

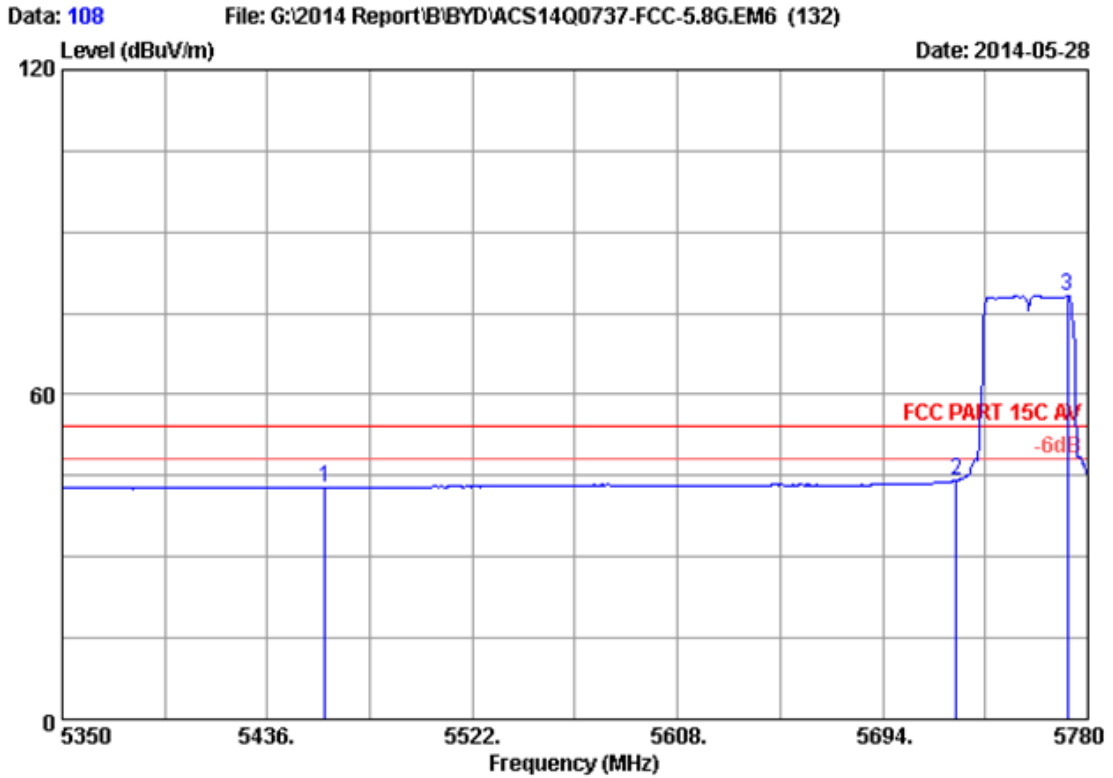

Site no. : 3m Chamber Data no. : 108
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 M/N : BEL01

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.94	9.25	35.70	35.27	42.76	54.00	11.24	Average
2	5725.000	34.09	9.52	35.70	36.18	44.09	54.00	9.91	Average
3	5771.400	34.11	9.57	35.70	70.20	78.18	54.00	-24.18	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

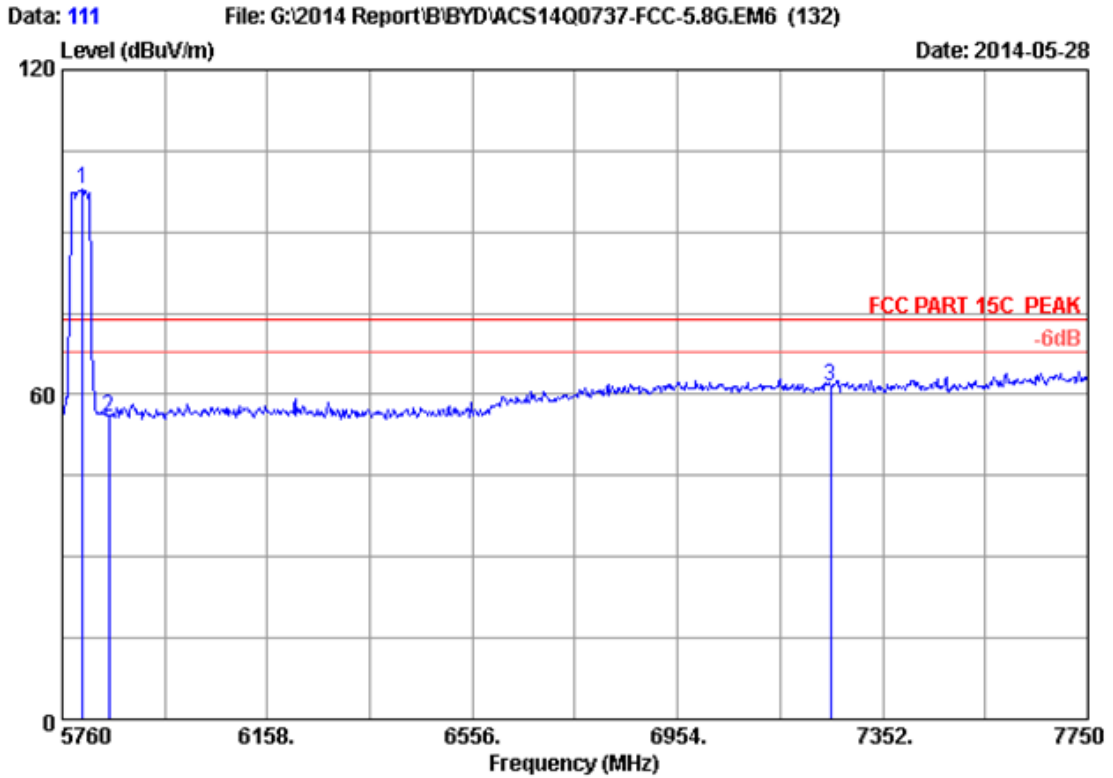

Site no. : 3m Chamber Data no. : 111
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx
 M/N : BEL01

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5799.800	34.12	9.60	35.70	89.85	97.87	74.00	-23.87	Peak
2	5850.000	34.14	9.66	35.70	47.81	55.91	74.00	18.09	Peak
3	7250.000	36.05	10.99	35.45	50.00	61.59	74.00	12.41	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

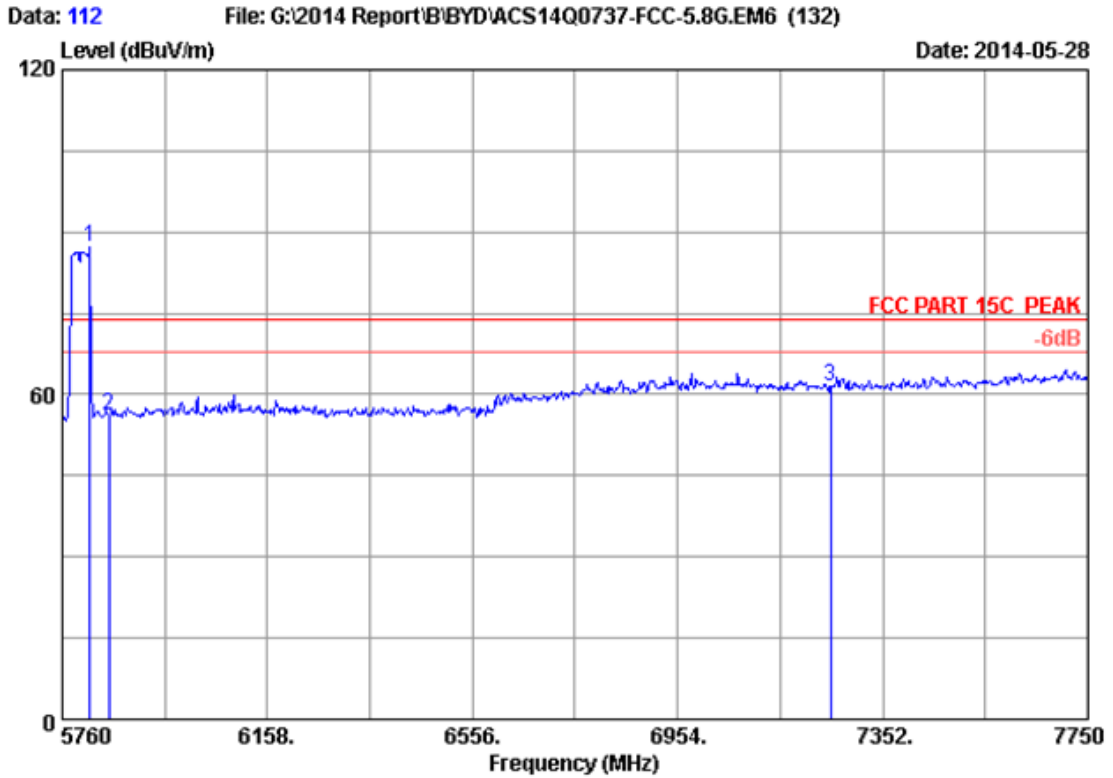

Site no. : 3m Chamber Data no. : 112
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx
 M/N : BEL01

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5813.730	34.13	9.62	35.70	79.15	87.20	74.00	-13.20	Peak
2	5850.000	34.14	9.66	35.70	47.94	56.04	74.00	17.96	Peak
3	7250.000	36.05	10.99	35.45	49.95	61.54	74.00	12.46	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

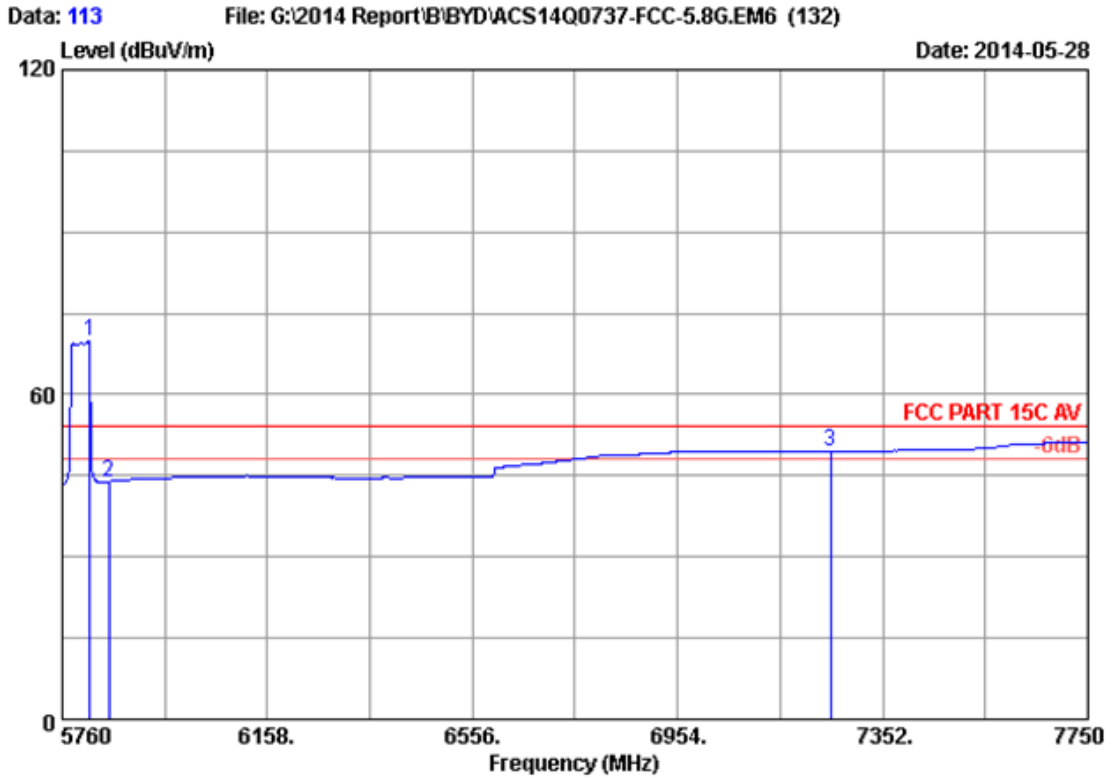

Site no. : 3m Chamber Data no. : 113
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx
 M/N : BEL01

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	5813.730	34.13	9.62	35.70	61.82	69.87	54.00	-15.87	Average
2	5850.000	34.14	9.66	35.70	35.82	43.92	54.00	10.08	Average
3	7250.000	36.05	10.99	35.45	37.91	49.50	54.00	4.50	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

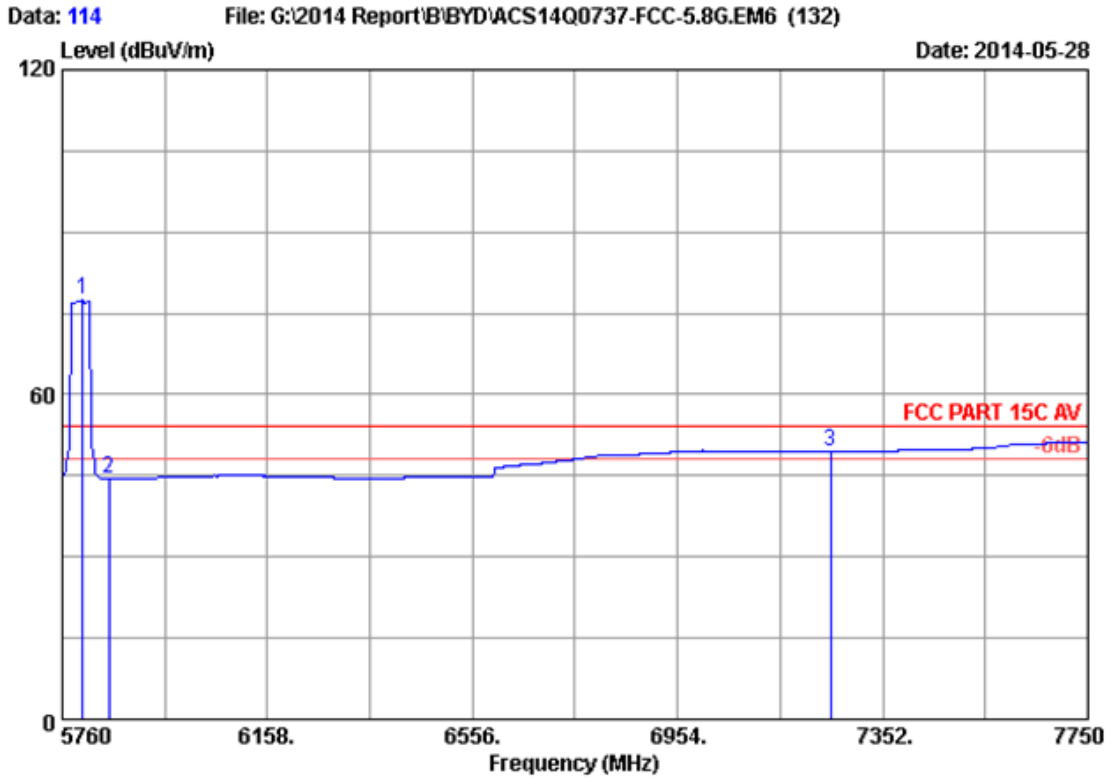

Site no. : 3m Chamber Data no. : 114
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx
 M/N : BEL01

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5799.800	34.12	9.60	35.70	69.36	77.38	54.00	-23.38	Average
2	5850.000	34.14	9.66	35.70	36.24	44.34	54.00	9.66	Average
3	7250.000	36.05	10.99	35.45	37.90	49.49	54.00	4.51	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

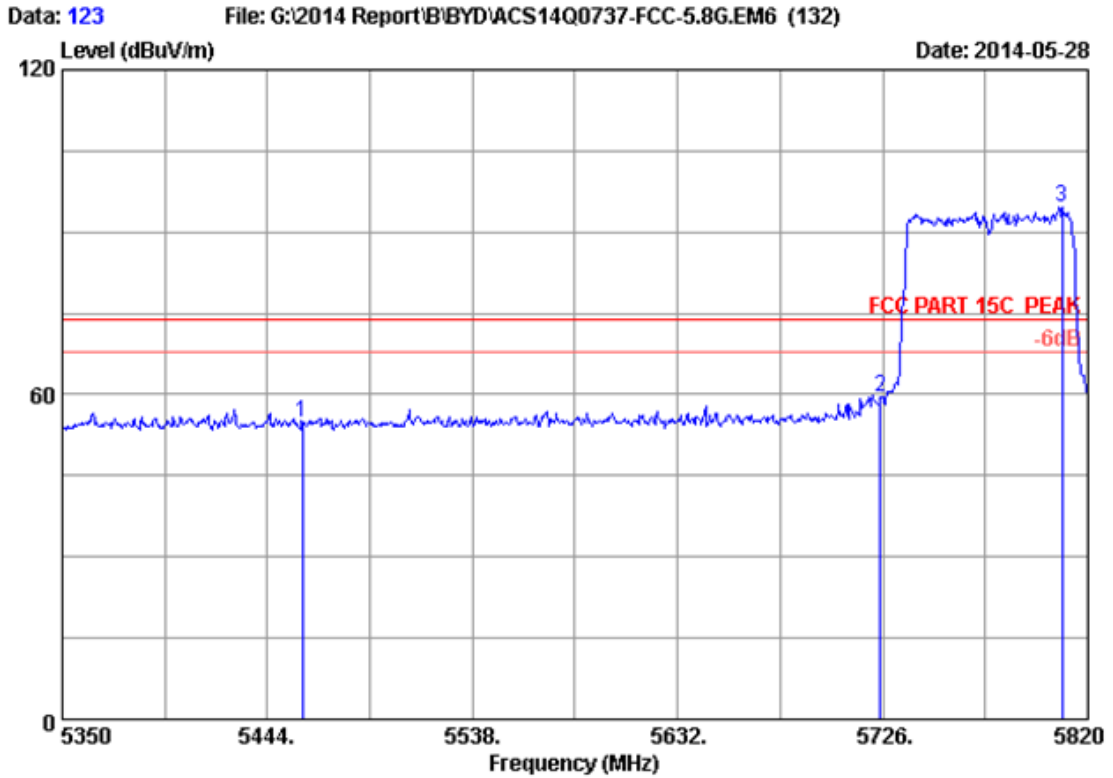

Site no. : 3m Chamber Data no. : 123
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 M/N : BEL01

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.94	9.25	35.70	47.23	54.72	74.00	19.28	Peak
2	5725.000	34.09	9.52	35.70	51.65	59.56	74.00	14.44	Peak
3	5808.250	34.12	9.61	35.70	86.68	94.71	74.00	-20.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

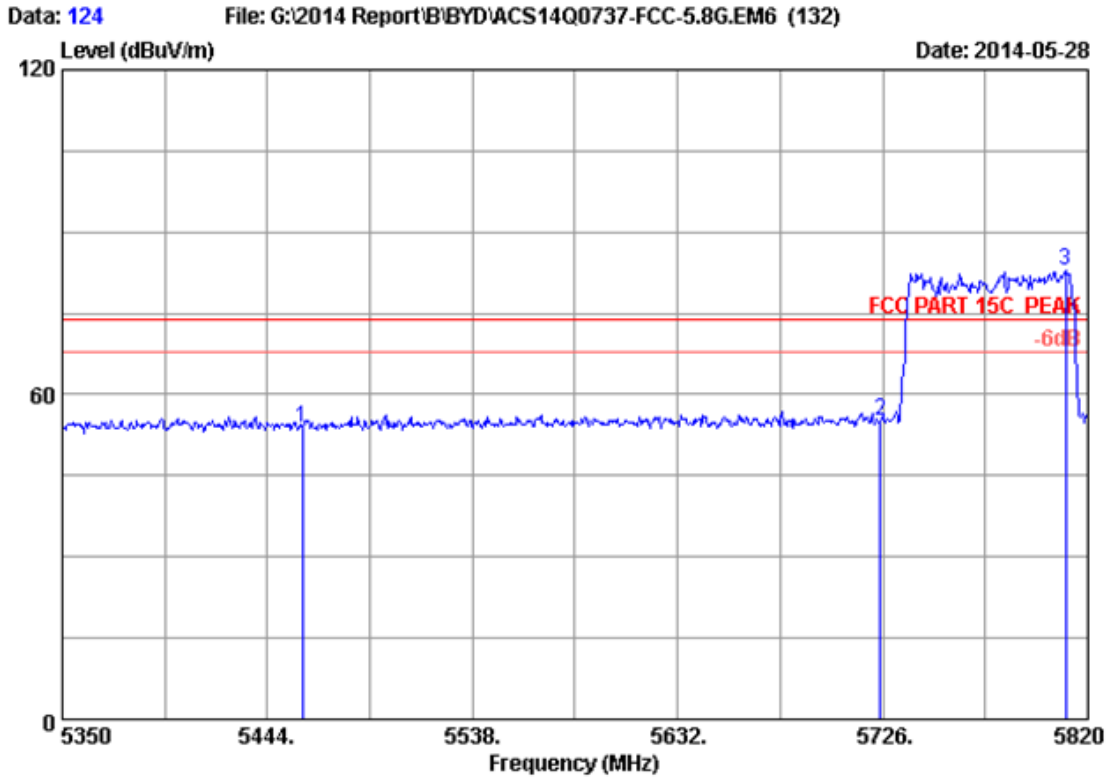

Site no. : 3m Chamber Data no. : 124
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 M/N : BELO1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.94	9.25	35.70	46.44	53.93	74.00	20.07	Peak
2	5725.000	34.09	9.52	35.70	47.34	55.25	74.00	18.75	Peak
3	5809.660	34.12	9.61	35.70	74.94	82.97	74.00	-8.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

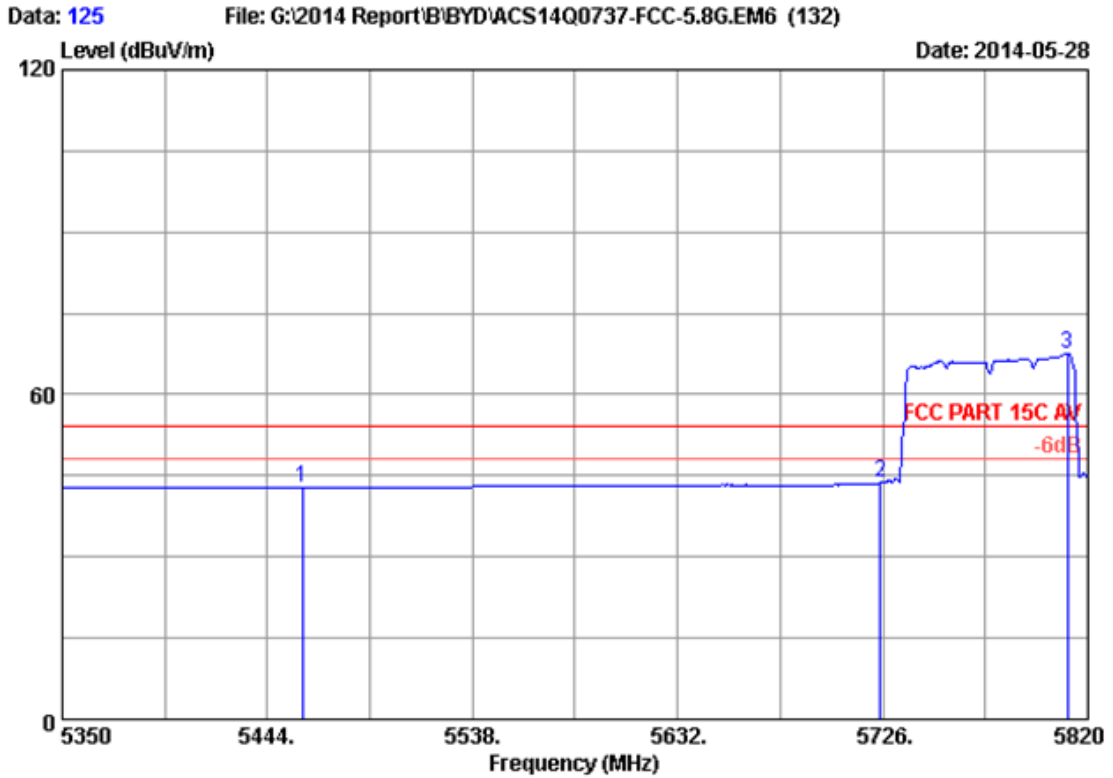

Site no. : 3m Chamber Data no. : 125
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 M/N : BELO1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	5460.000	33.94	9.25	35.70	35.16	42.65	54.00	11.35	Average
2	5725.000	34.09	9.52	35.70	35.81	43.72	54.00	10.28	Average
3	5810.600	34.12	9.61	35.70	59.49	67.52	54.00	-13.52	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

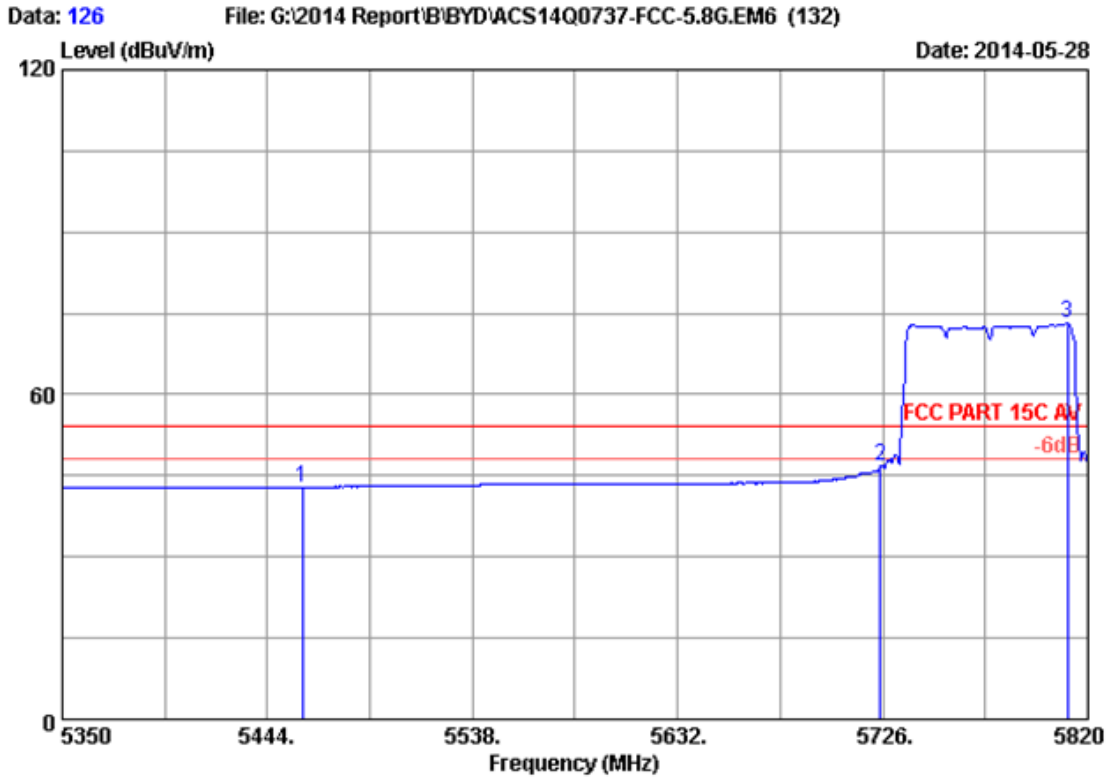

Site no. : 3m Chamber Data no. : 126
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 M/N : BELO1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.94	9.25	35.70	35.38	42.87	54.00	11.13	Average
2	5725.000	34.09	9.52	35.70	38.81	46.72	54.00	7.28	Average
3	5810.600	34.12	9.61	35.70	65.02	73.05	54.00	-19.05	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

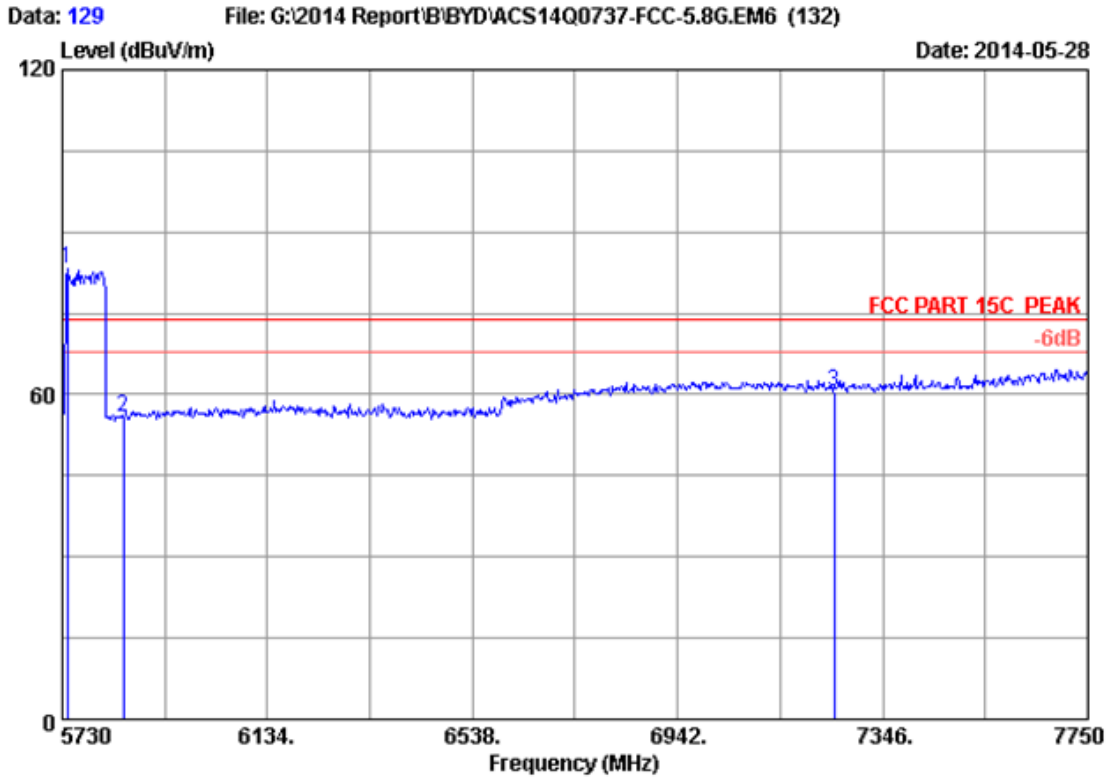

Site no. : 3m Chamber Data no. : 129
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 M/N : BEL01

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5740.100	34.10	9.54	35.70	75.20	83.14	74.00	-9.14	Peak
2	5850.000	34.14	9.66	35.70	47.88	55.98	74.00	18.02	Peak
3	7250.000	36.05	10.99	35.45	49.06	60.65	74.00	13.35	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

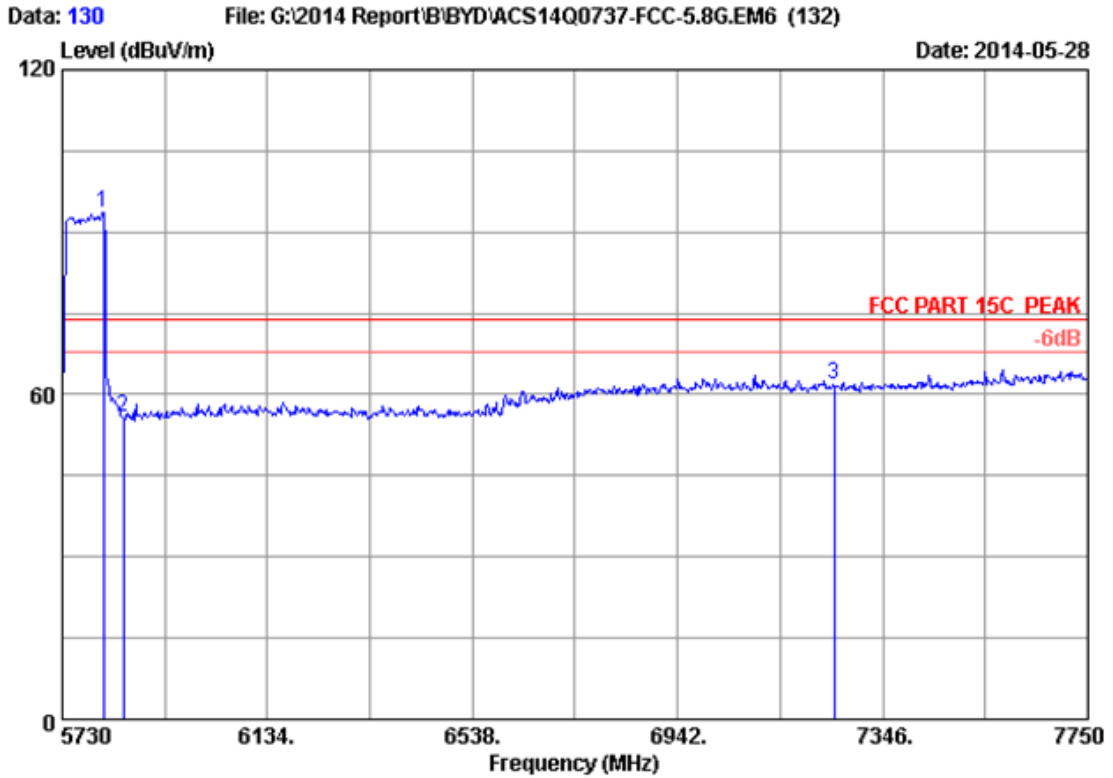

Site no. : 3m Chamber Data no. : 130
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 M/N : BEL01

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5810.800	34.12	9.61	35.70	85.60	93.63	74.00	-19.63	Peak
2	5850.000	34.14	9.66	35.70	47.64	55.74	74.00	18.26	Peak
3	7250.000	36.05	10.99	35.45	50.33	61.92	74.00	12.08	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

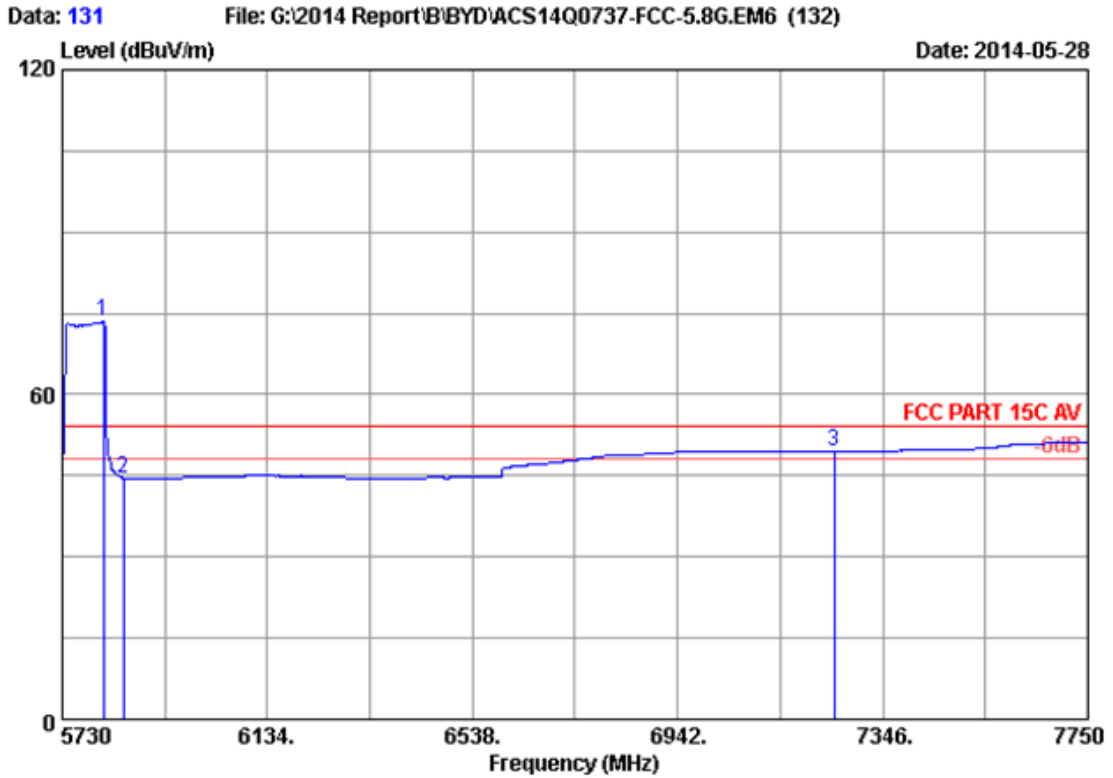

Site no. : 3m Chamber Data no. : 131
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 M/N : BEL01

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5810.800	34.12	9.61	35.70	65.45	73.48	54.00	-19.48	Average
2	5850.000	34.14	9.66	35.70	36.48	44.58	54.00	9.42	Average
3	7250.000	36.05	10.99	35.45	37.89	49.48	54.00	4.52	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

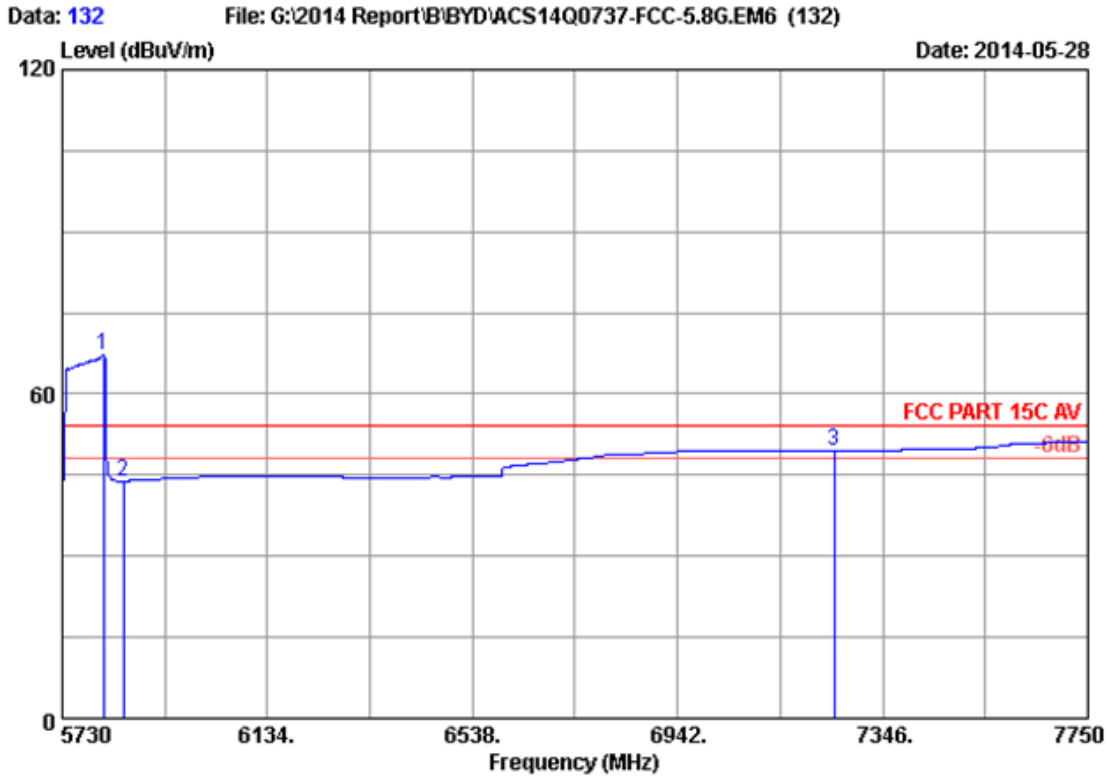

Site no. : 3m Chamber Data no. : 132
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Kevin_HMJ
 EUT : Dell Cast Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 M/N : BELO1

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5810.800	34.12	9.61	35.70	59.24	67.27	54.00	-13.27	Average
2	5850.000	34.14	9.66	35.70	35.79	43.89	54.00	10.11	Average
3	7250.000	36.05	10.99	35.45	37.91	49.50	54.00	4.50	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

7. 6dB Bandwidth Test

7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.31, 13	1Year
2.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr. 28,14	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX102	28620/2	Apr. 28,14	1 Year

7.2. Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

7.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 300kHz RBW and 1MHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

7.4. Test Results

2.4G:

EUT:AC750 Wireless Dual Band Gigabit Router		
M/N:PW-AC4573R		
Test date: 2014-06-11	Pressure: 101.2±1.0 kpa	Humidity: 49.2±3.0%
Tested by: Kevin_Hu	Test site: RF site	Temperature:22.5±0.6 °C

Cable loss: 1 dB		Attenuator loss: 20 dB		
Test Mode	CH	6dB bandwidth (MHz)		Limit (kHz)
		ANT 0	ANT 1	
11b	CH1	10.16	10.18	>500
	CH6	10.17	10.18	>500
	CH11	10.18	10.17	>500
11g	CH1	16.76	16.63	>500
	CH6	16.47	16.80	>500
	CH11	16.52	16.72	>500
11n HT20	CH1	17.67	17.65	>500
	CH6	17.61	17.67	>500
	CH11	17.62	17.62	>500
11n HT40	CH1	36.49	36.54	>500
	CH4	36.49	36.56	>500
	CH7	36.56	36.51	>500
Conclusion : PASS				

5.8G:

EUT: EUT:AC750 Wireless Dual Band Gigabit Router		
M/N:PW-AC4573R		
Test date: 2014-06-11	Pressure: 101.3±1.0 kpa	Humidity:53.4±3.0%
Tested by: Kevin_Hu	Test site: RF site	Temperature:21.8±0.6 °C

Cable loss: 1 dB		Attenuator loss: 20 dB	
Test Mode	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)
		ANT 0	
11a	5745	16.41	>500
	5785	16.40	>500
	5825	16.43	>500
11n HT20	5745	17.36	>500
	5785	17.55	>500
	5825	17.48	>500
11n HT40	5755	36.34	>500
	5795	36.45	>500
11ac VHT20	5745	17.45	>500
	5785	17.49	>500
	5825	17.42	>500
11ac VHT40	5755	36.38	>500
	5795	36.45	>500
11ac VHT80	5775	75.86	>500


Conclusion : PASS

2.4G:


ANT 0:

Test Mode: IEEE 802.11b TX


Test CH1: 2412MHz

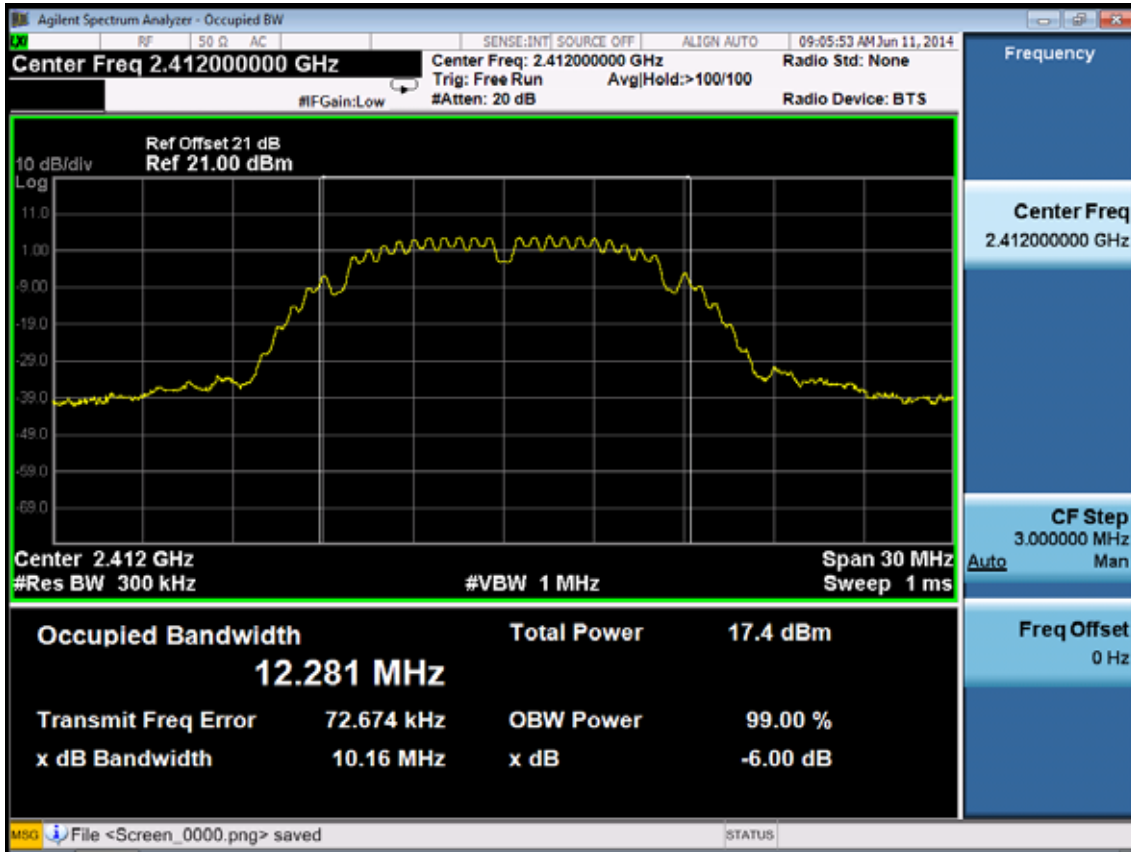

Test CH6: 2437MHz

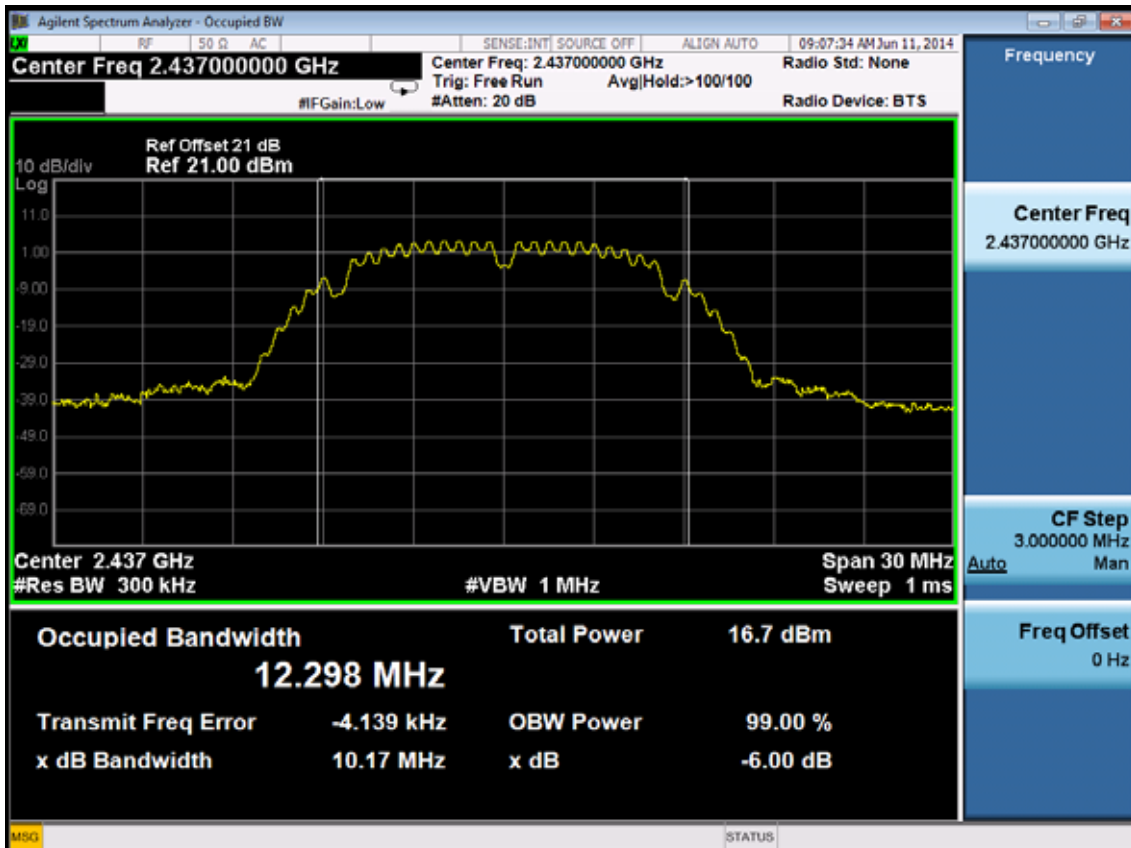


Test CH11: 2462MHz

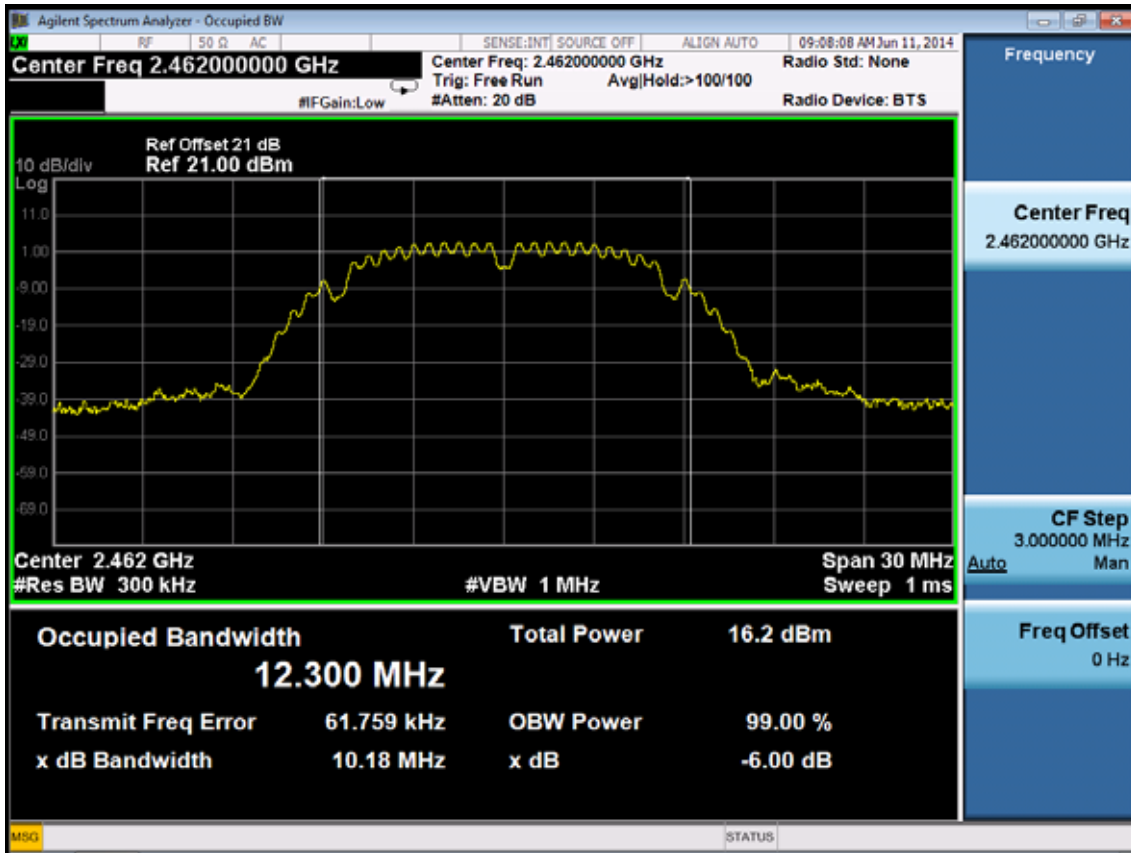


Test Mode: IEEE 802.11g TX


Test CH1: 2412MHz

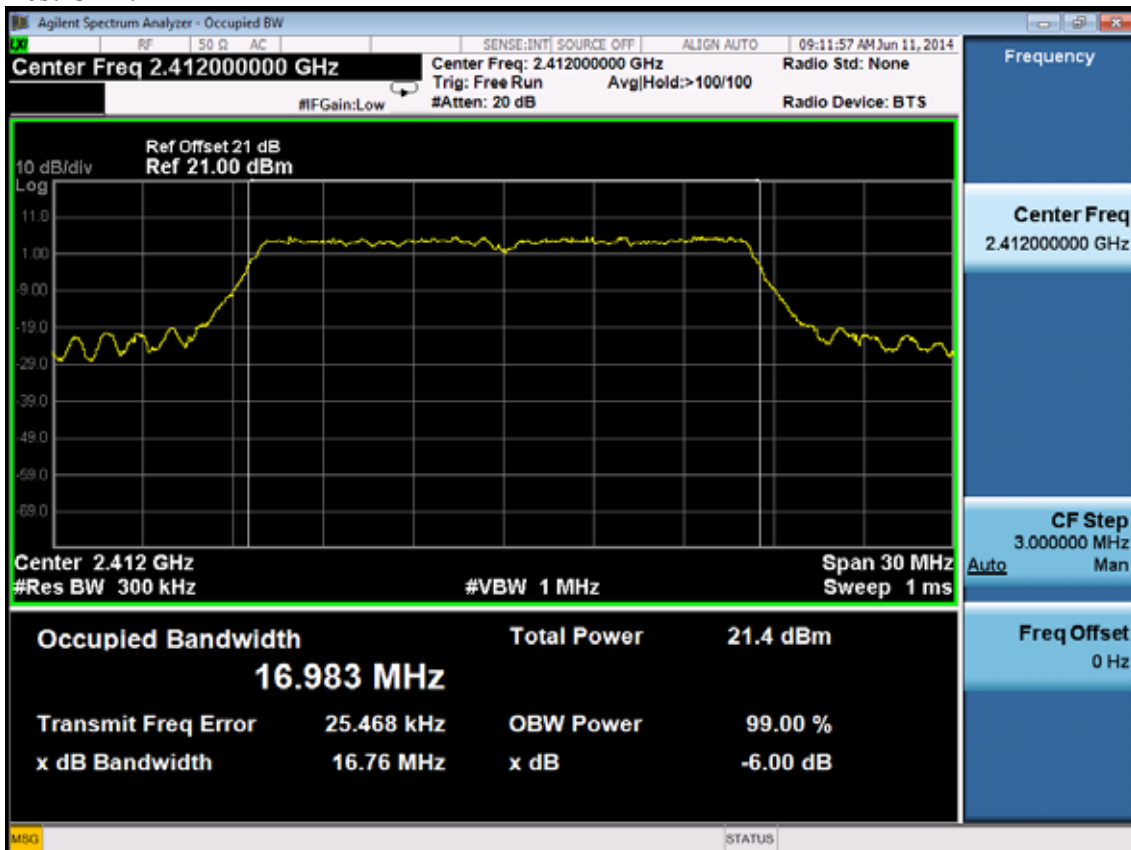


Test CH6: 2437MHz

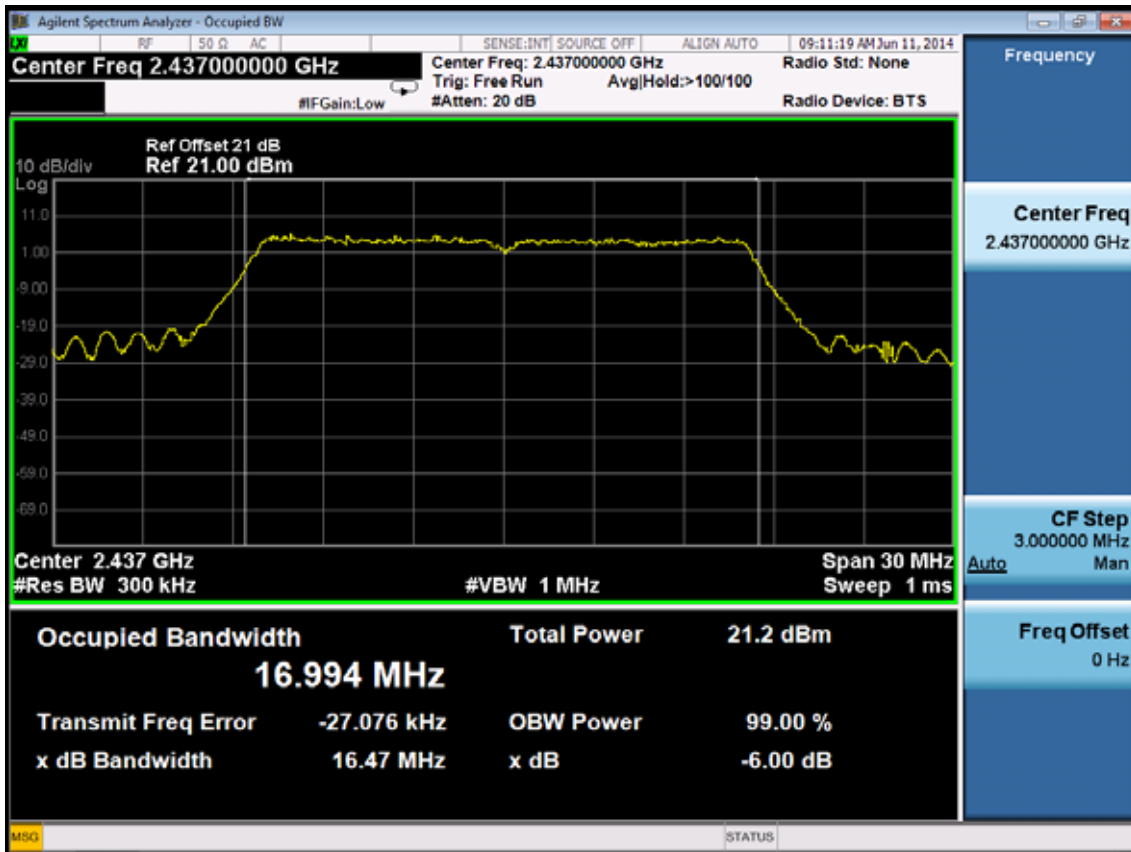


Test CH11: 2462MHz

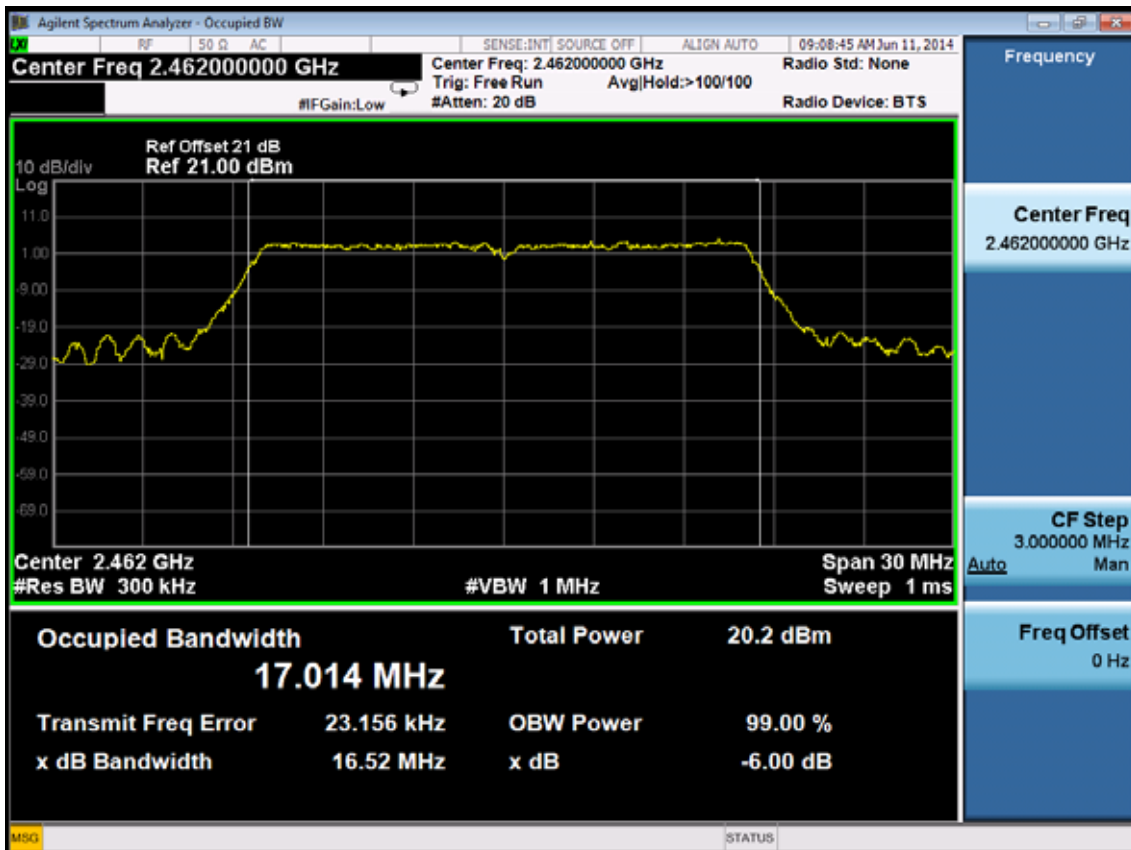


Test Mode: IEEE 802.11n HT20 TX
 Test CH1: 2412MHz

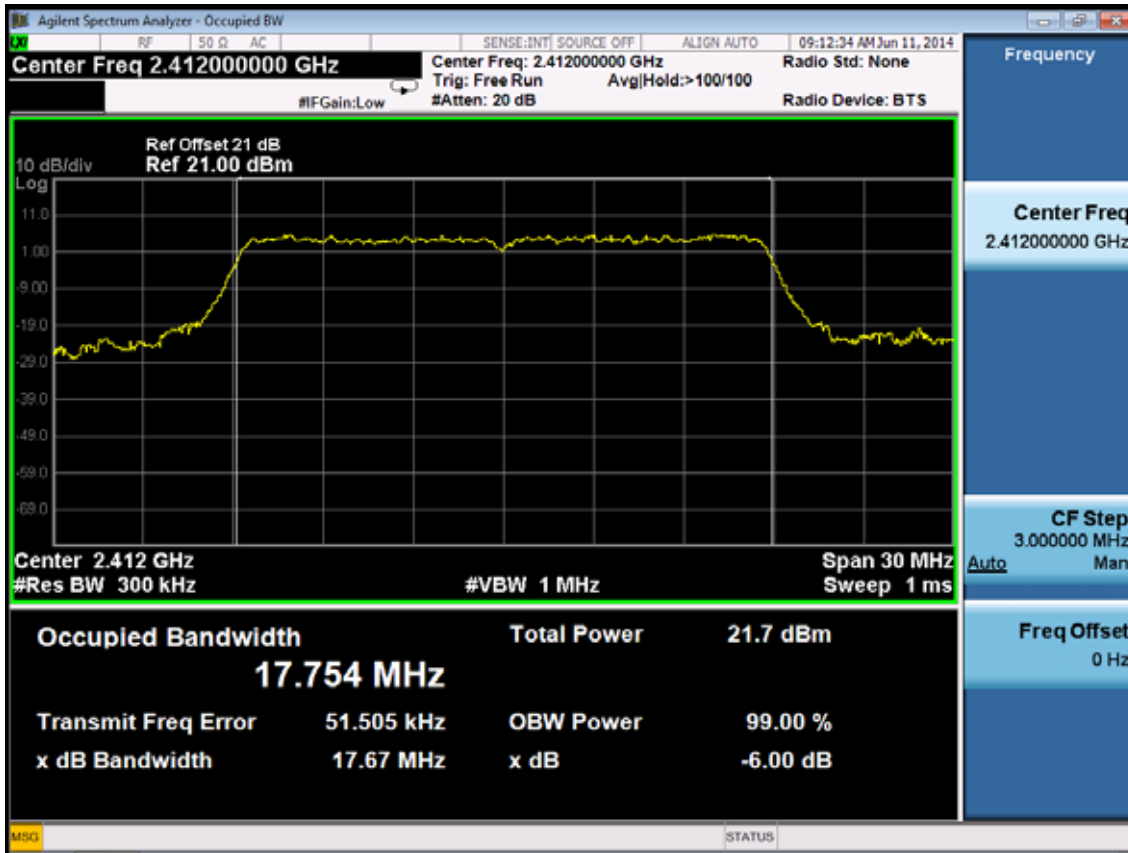

Test CH6: 2437MHz

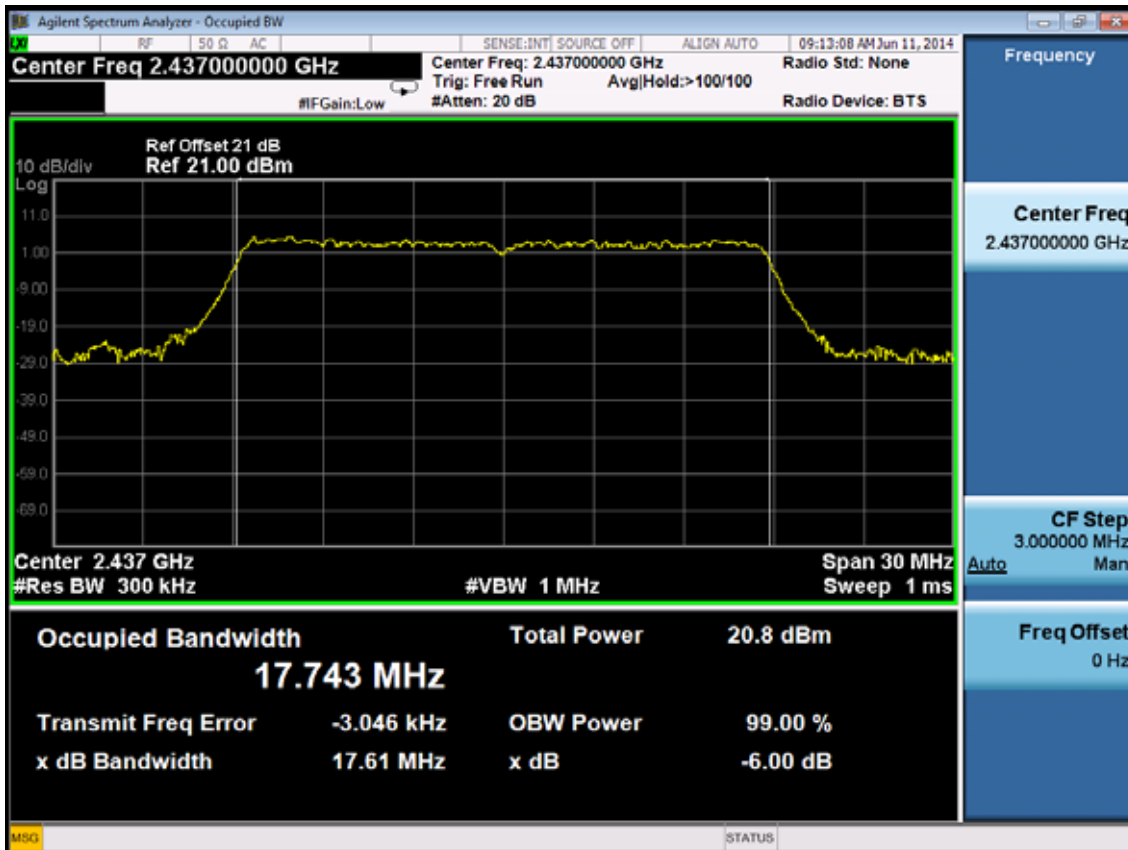


Test CH11: 2462MHz

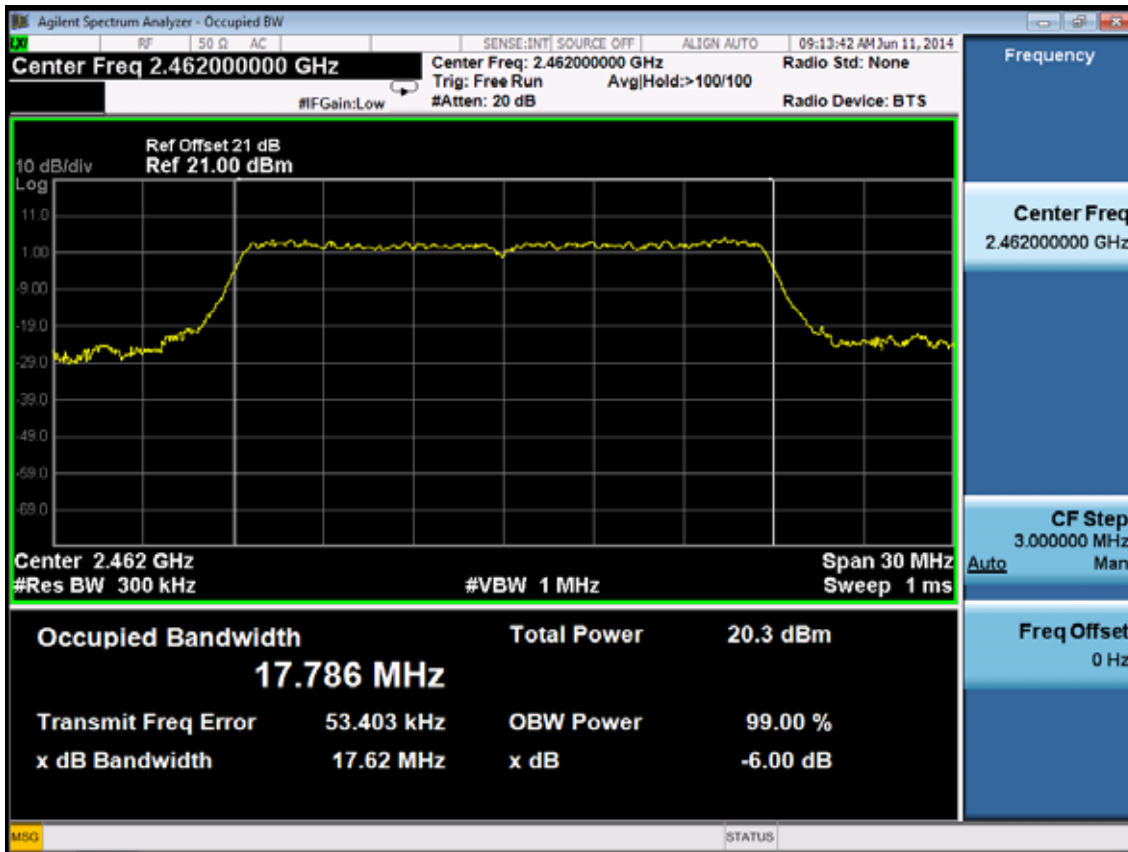


Test Mode: IEEE 802.11n HT40 TX


Test CH1: 2422MHz

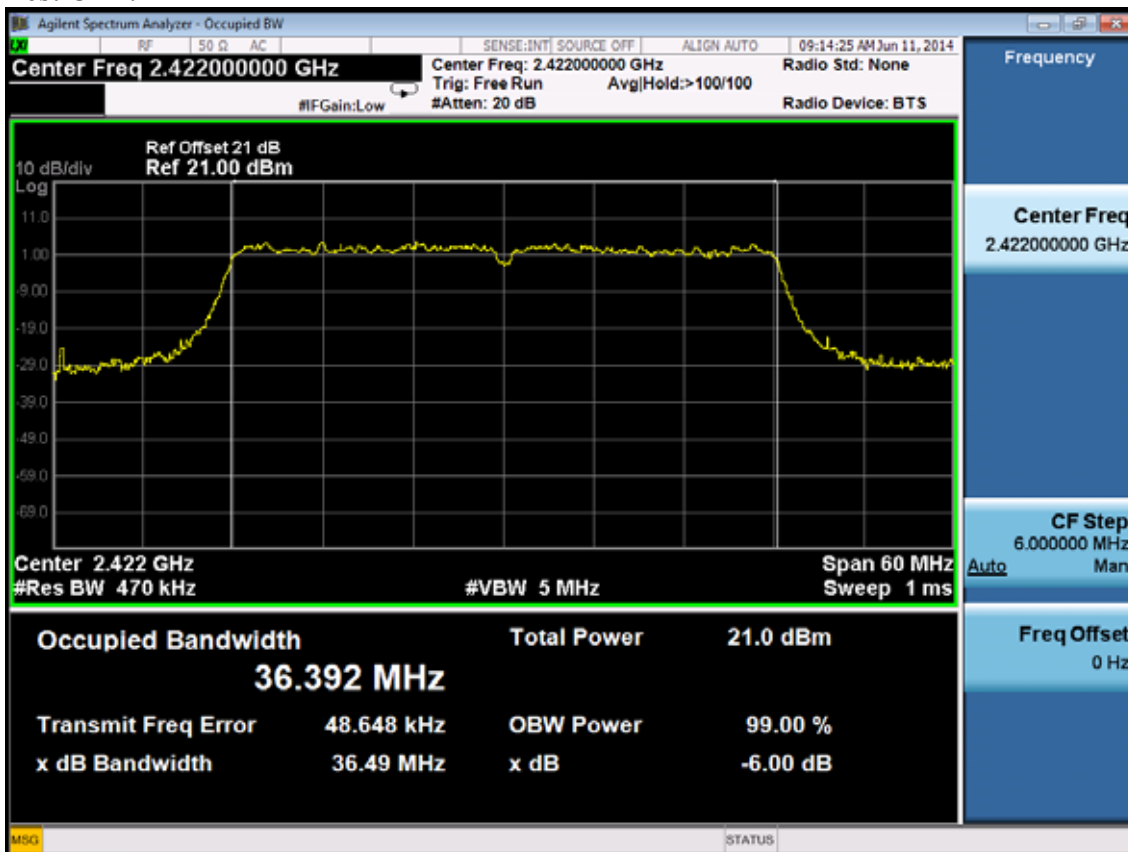

Test CH4: 2437MHz

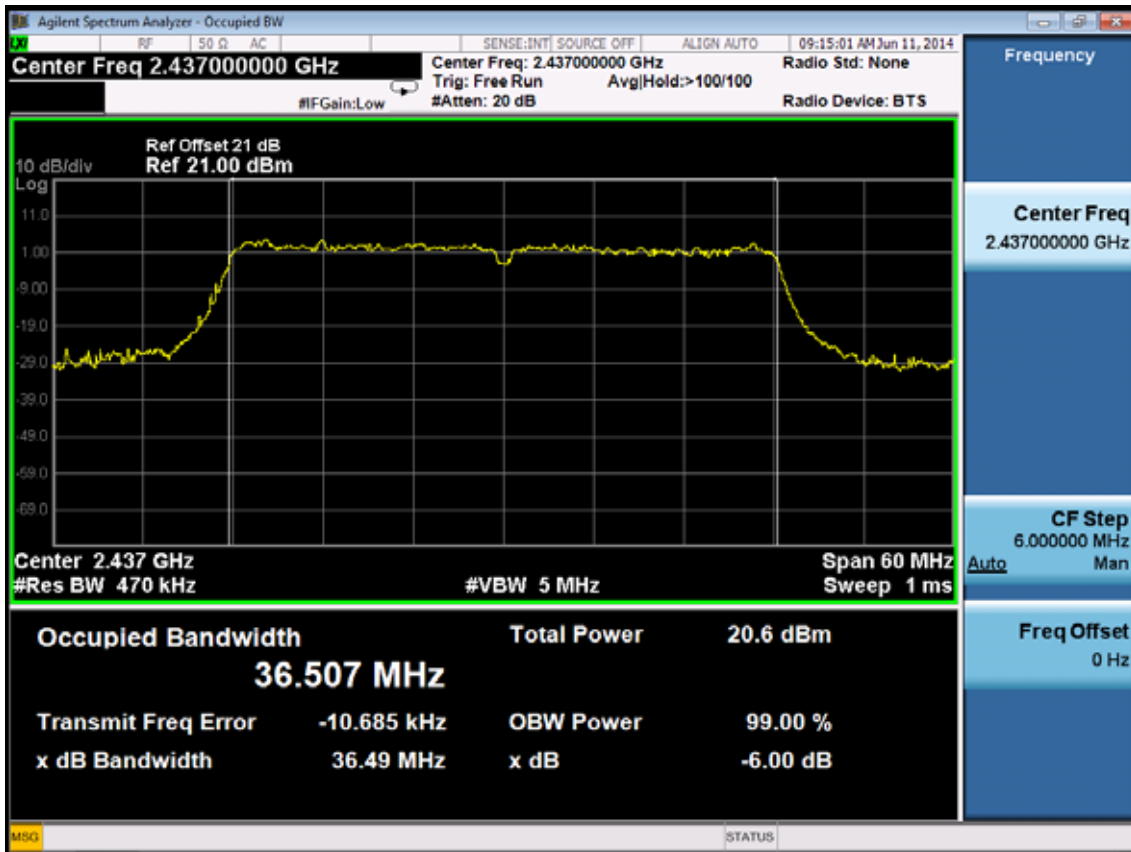


Test CH7: 2452MHz

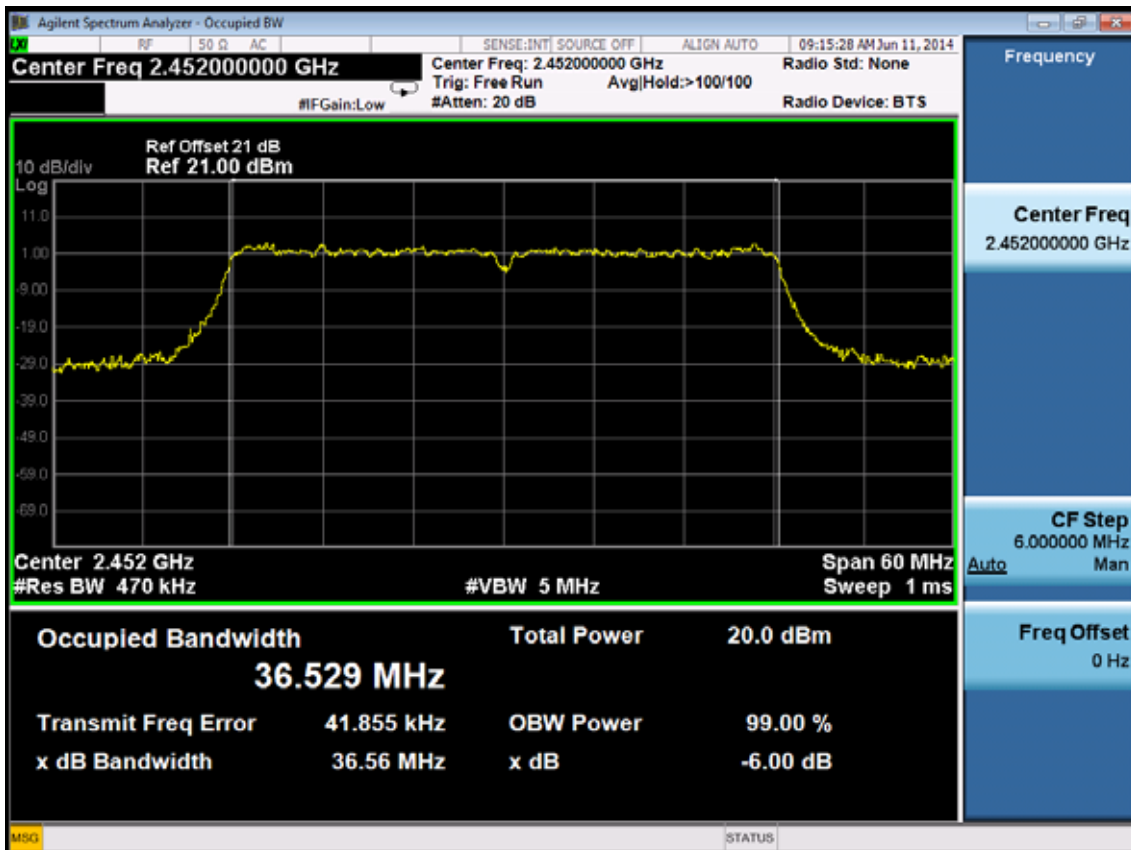


ANT 1:

Test Mode: IEEE 802.11b TX


Test CH1: 2412MHz

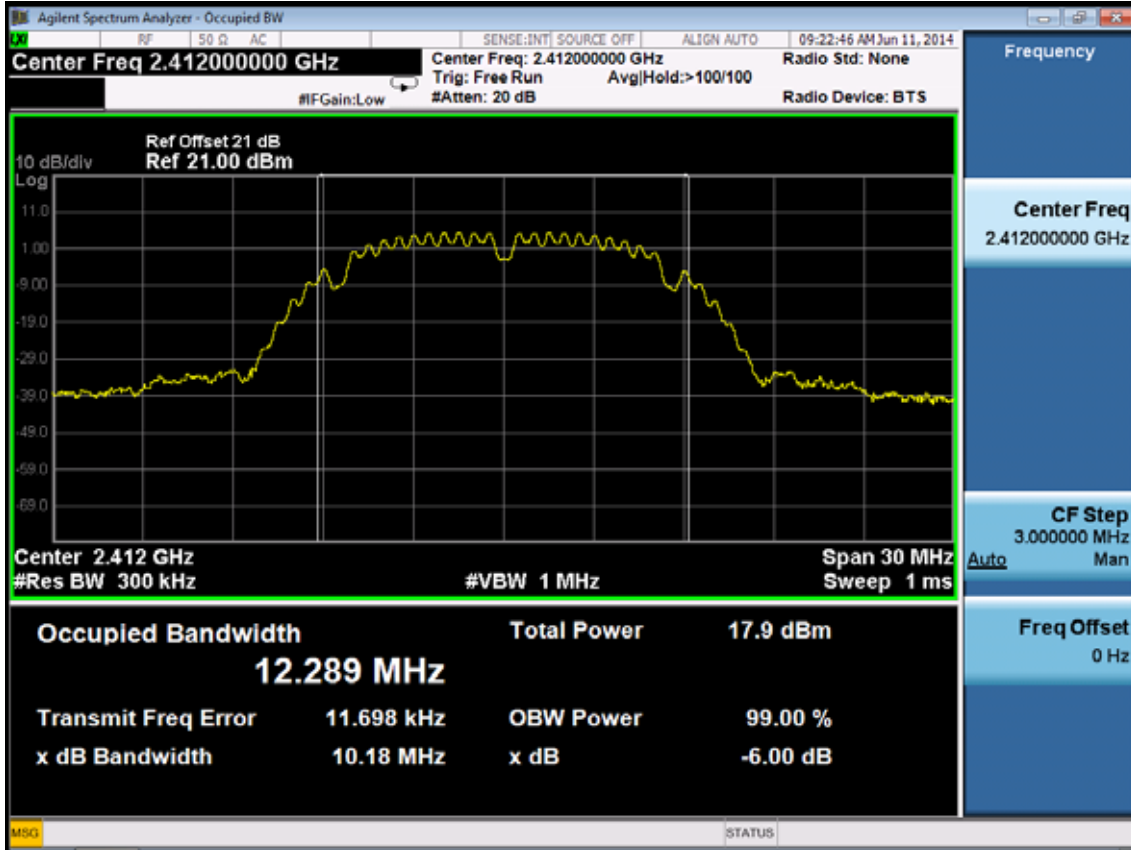

Test CH6: 2437MHz

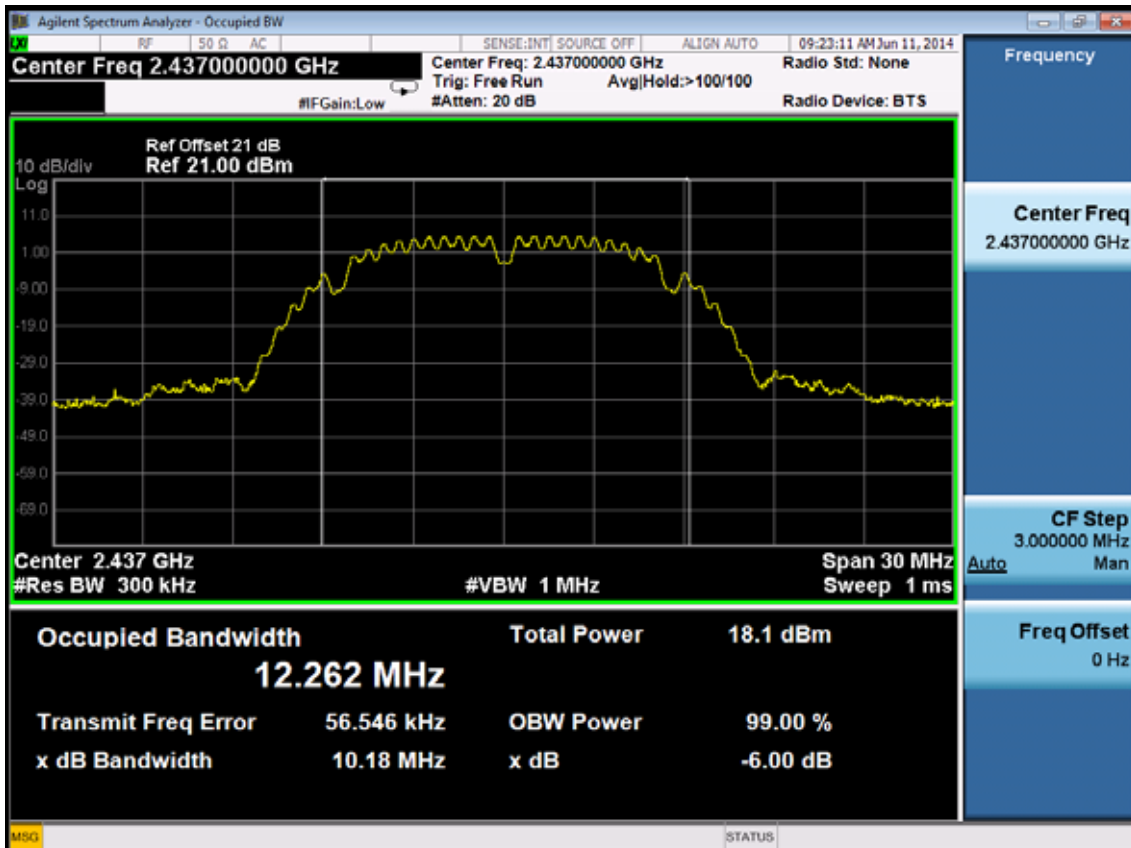


Test CH11: 2462MHz

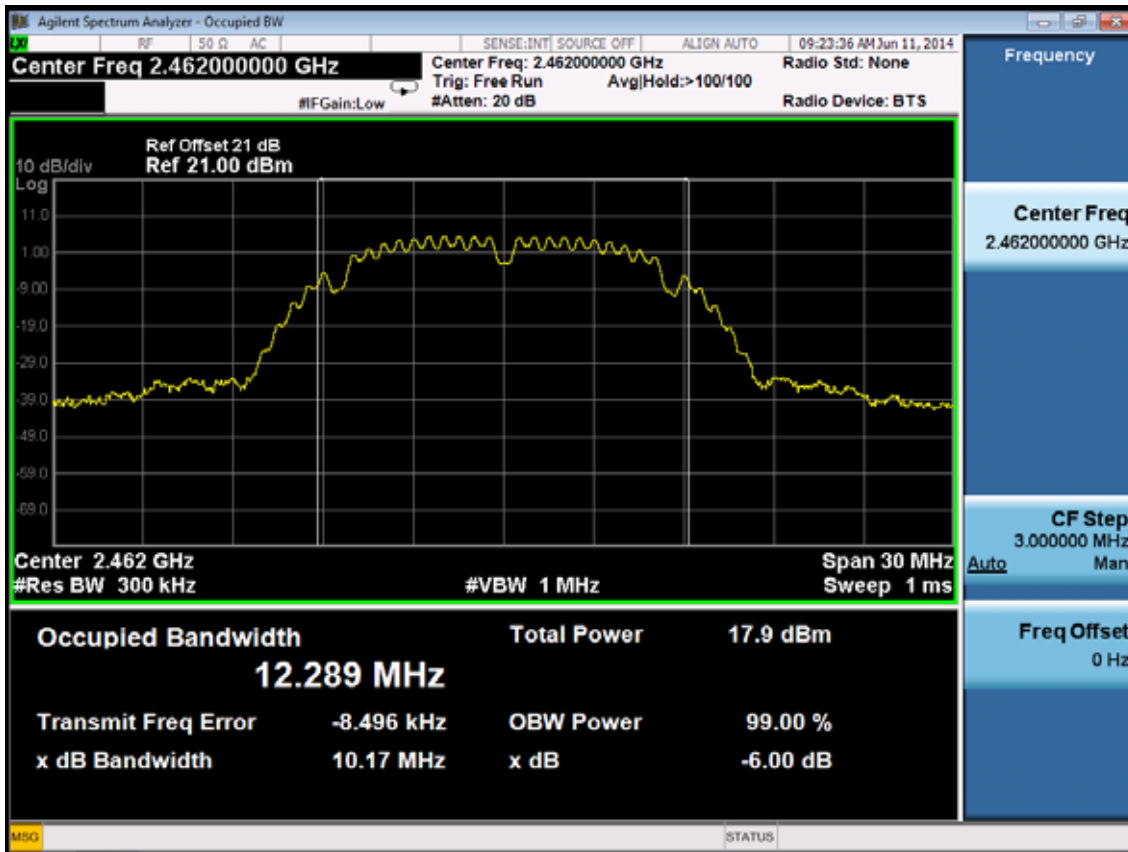


Test Mode: IEEE 802.11g TX

Test CH1: 2412MHz

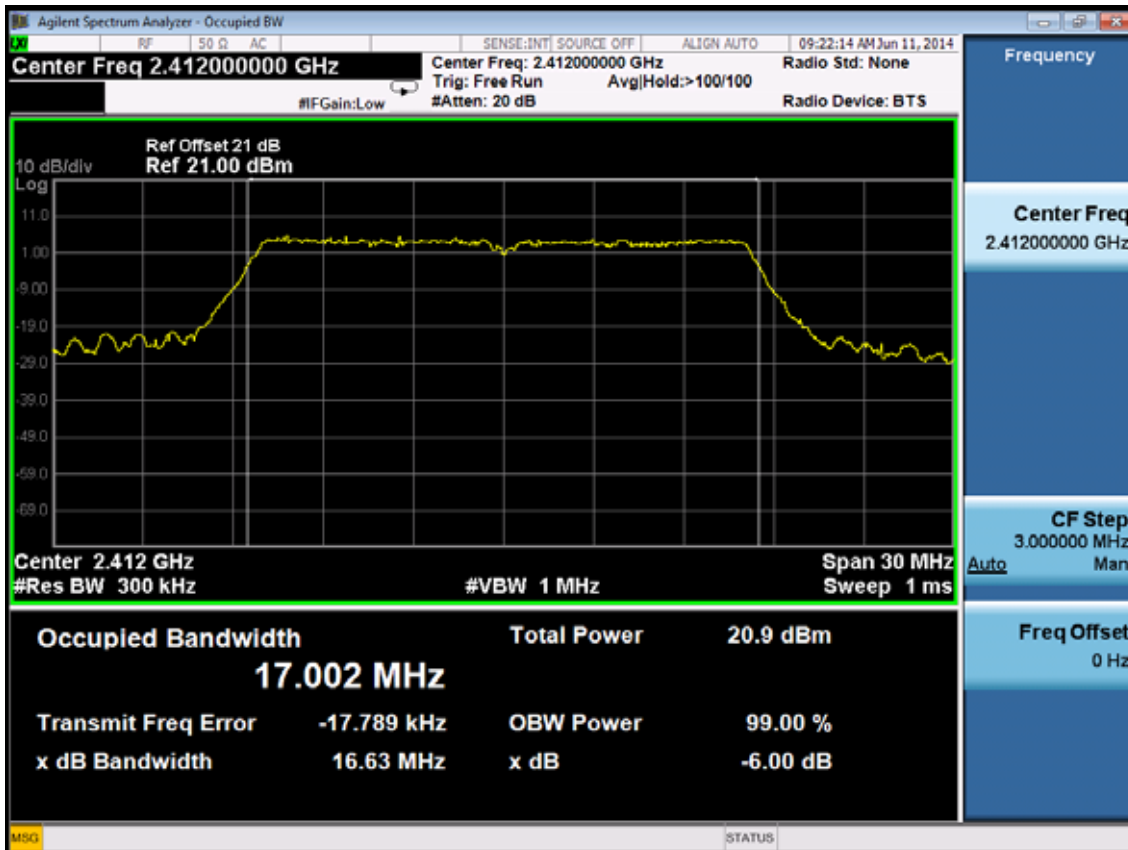

Test CH6: 2437MHz

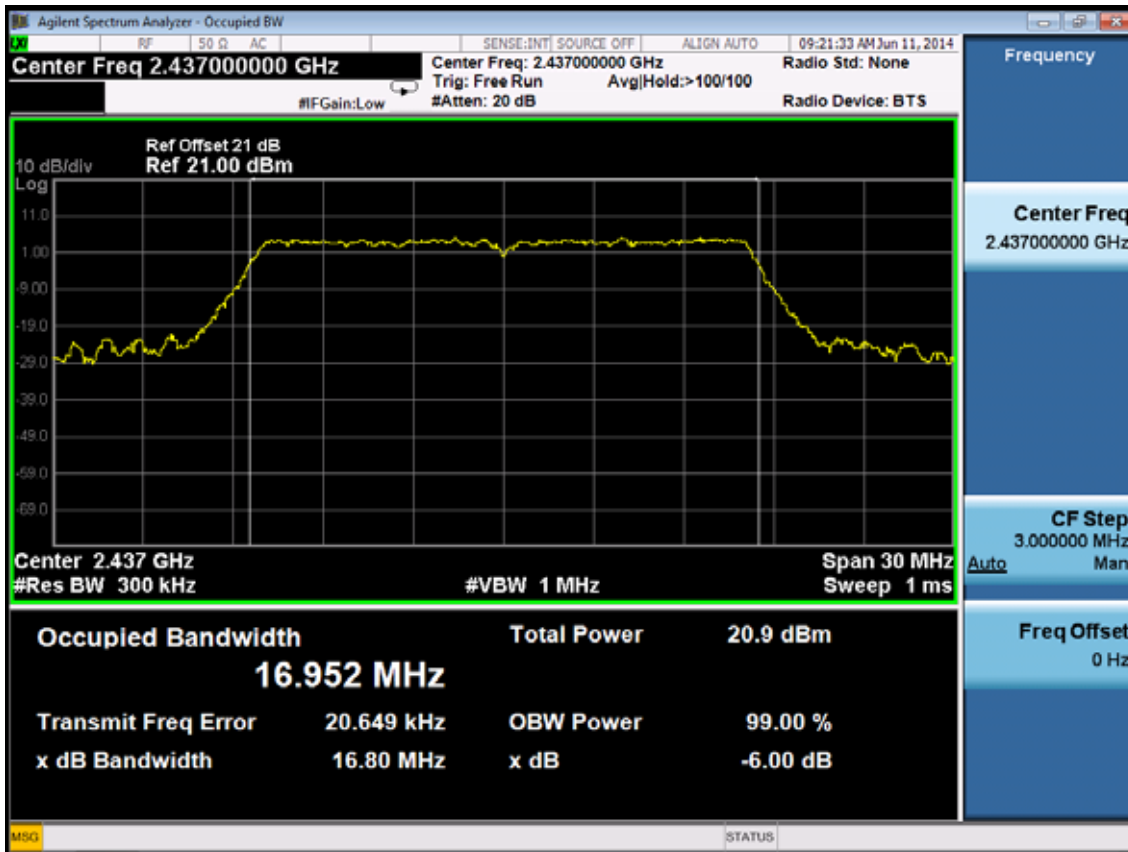

Test CH11: 2462MHz

