



FCC ID: W6RRNX-N360PC

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

Rosewill Inc.

Wireless N PCI Adapter

Model No.: RNX-N360PC

FCC ID: W6RRNX-N360PC

Prepared for : Rosewill Inc.

17708 Rowland Street, City of Industry, CA91748, USA

Prepared By : Audix Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F11153

Date of Test : Jul.17~18, 2011

Date of Report : Jul.20, 2011

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. SUMMARY OF STANDARDS AND RESULTS.....	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT)	2-1
2.2. Test Information.....	2-2
2.3. Tested Supporting System Details	2-3
2.4. Block diagram of connection between the EUT and simulators	2-3
2.5. Test Facility	2-4
2.6. Measurement Uncertainty (95% confidence levels, k=2)	2-4
3. POWER LINE CONDUCTED EMISSION TEST	3-1
3.1. Test Equipments.....	3-1
3.2. Block Diagram of Test Setup.....	3-1
3.3. Power Line Conducted Emission Test Limits.....	3-1
3.4. Configuration of EUT on Test	3-2
3.5. Operating Condition of EUT.....	3-2
3.6. Test Procedure.....	3-2
3.7. Power Line Conducted Emission Test Results	3-2
4. RADIATED EMISSION TEST	4-1
4.1. Test Equipment	4-1
4.2. Block Diagram of Test Setup.....	4-1
4.3. Radiated Emission Limit.....	4-2
4.4. EUT Configuration on Test.....	4-3
4.5. Operating Condition of EUT.....	4-3
4.6. Test Procedure.....	4-3
4.7. Radiated Emission Test Results	4-4
5. CONDUCTED SPURIOUS EMISSIONS.....	5-1
5.1. Test Equipment	5-1
5.2. Limit.....	5-1
5.3. Test Procedure.....	5-1
5.4. Test result.....	5-1
6. BAND EDGE COMPLIANCE TEST	6-1
6.1. Test Equipment	6-1
6.2. Limit.....	6-1
6.3. Test Produce	6-1
6.4. Test Results	6-1
7. 6dB Bandwidth Test.....	7-1
7.1. Test Equipment	7-1
7.2. Limit.....	7-1
7.3. Test Procedure.....	7-1
7.4. Test Results	7-1
8. OUTPUT POWER TEST.....	8-1
8.1. Test Equipment	8-1
8.2. Limit (FCC Part 15C 15.247 b(3)).....	8-1
8.3. Test Procedure.....	8-1
8.4. Test Results	8-2
9. POWER SPECTRAL DENSITY TEST	9-1
9.1. Test Equipment	9-1

FCC ID: W6RRNX-N360PC

9.2.	Limit.....	9-1
9.3.	Test Procedure.....	9-1
9.4.	Test Results	9-2
10.	ANTENNA REQUIREMENT	10-1
10.1.	STANDARD APPLICABLE.....	10-1
10.2.	ANTENNA CONNECTED CONSTRUCTION	10-1
11.	MPE ESTIMATION.....	11-1
11.1.	Limit for General Population/ Uncontrolled Exposures	11-1
11.2.	Estimation Result	11-2
12.	DEVIATION TO TEST SPECIFICATIONS.....	12-1
13.	PHOTOGRAPH OF TEST	13-1
13.1.	Photos of Power Line Conducted Emission Test	13-1
13.2.	Photos of Radiated Emission Test.....	13-2
14.	PHOTOS OF THE EUT.....	14-1

FCC ID: W6RRNX-N360PC

TEST REPORT CERTIFICATION

Applicant : Rosewill Inc.
 Manufacturer : Rosewill Inc.
 EUT Description : Wireless N PCI Adapter
 FCC ID : W6RRNX-N360PC
 (A) MODEL NO. : RNX-N360PC
 (B) SERIAL NO. : N/A
 (C) POWER SUPPLY : DC 3.3V
 (D) TEST VOLTAGE : DC 3.3V From PC Input, AC 120/60Hz

Tested for comply with:
 FCC Rules and Regulations Part 15 Subpart C: 2008

Test procedure used:
 ANSI C63.10:2009

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements.

The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. This report contains data that are not covered by the NVLAP accreditation. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Jul.17~18, 2011 Report of date: Jul.20, 2011

Prepared by : Blove Ye Reviewer by : Sunny Lu
 Blove Ye / Assistant Sunny Lu / Senior Assistant

信華科技(深圳)有限公司
 Audix Technology (Shenzhen) Co., Ltd.
 EMC 部門報告專用章
 Stamp only for EMC Dept. Report
 Signature: Ken Lu 2011

Approved & Authorized Signer : Ken Lu / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10: 2009	PASS
Radiated Emission	FCC Part 15: 15.209 ANSI C63.10: 2009	PASS
Band Edge Compliance	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Conducted spurious emissions	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
6dB Bandwidth	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Peak Output Power	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Power Spectral Density	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product Name	:	Wireless N PCI Adapter
Model Number	:	RNX-N360PC
FCC ID	:	W6RRNX-N360PC
Operation Frequency	:	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE802.11n HT20: 2412MHz—2462MHz IEEE802.11n HT40: 2422MHz—2452MHz
Channel Number	:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7Channels
Modulation Technology	:	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Output Power (Peak)	:	IEEE 802.11b: 15.81dBm IEEE 802.11g: 19.02dBm IEEE 802.11n HT20: 23.18dBm IEEE 802.11n HT40: 23.91dBm
Antenna and Gain	:	Dipole Antenna, 2dBi Gain (maximum)
Applicant	:	Rosewill Inc. 17708 Rowland Street, City of Industry, CA91748, USA
Manufacturer	:	Rosewill Inc. 17708 Rowland Street, City of Industry, CA91748, USA
Date of Test	:	Jul.17~18, 2011
Date of Receipt	:	Jul.16, 2011
Sample Type	:	Prototype production

2.2. Test Information

A special test software was used to control EUT work in Continuous TX mode(100% duty cycle), and select test channel, wireless mode and data rate.


Tested mode, channel, and data rate information			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	11	Low :CH1	2412
	11	Middle: CH6	2437
	11	High: CH11	2462
IEEE 802.11g	54	Low :CH1	2412
	54	Middle: CH6	2437
	54	High: CH11	2462
IEEE 802.11n HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11n HT40	13.5	Low :CH1	2422
	13.5	Middle: CH4	2437
	13.5	High: CH7	2452

Note1: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.3. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number	Approved type
1.	Personal Computer	Test PC L	Lenovo	CR6	L38N404	<input checked="" type="checkbox"/> FCC DoC <input checked="" type="checkbox"/> BSMI ID: R33B65
		Power Cord: Unshielded, Detachable, 1.8m				
2.	Monitor	ACS-EMC-LM03R	DELL	1907FPt	CN-009759-71618 -6CG-BDWV	<input checked="" type="checkbox"/> FCC DoC <input checked="" type="checkbox"/> BSMI ID: R3A002
		Power Cord: Unshielded, Detachable, 1.8m VGA Cable: Shielded, Detachable, 2.0m (with two cores) DVI Cable: Shielded, Detachable, 2.0m (with two cores)				
3.	USB Mouse	ACS-EMC-M03R	DELL	M056UO	512023253	<input checked="" type="checkbox"/> FCC DoC <input checked="" type="checkbox"/> BSMI ID: R41108
		Power Cord: shielded, Undetachable, 1.8m				
4.	USB Keyboard	ACS-EMC- K03R	DELL	SK-8115	CN-ODJ313-7161 6-711-04WJ	<input checked="" type="checkbox"/> FCC DoC <input checked="" type="checkbox"/> BSMI ID: T3A002
		Power Cord: shielded, Undetachable, 2.0m				

2.4. Block diagram of connection between the EUT and simulators

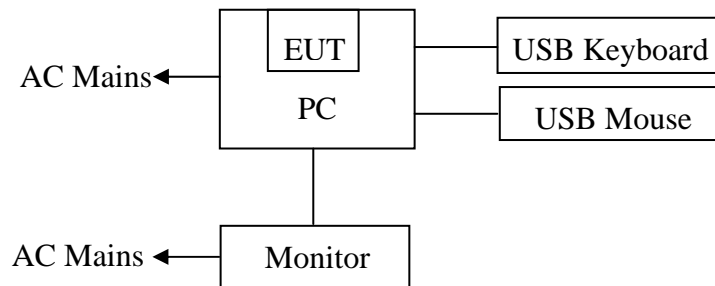

(EUT: Wireless N PCI Adapter)

2.5. Test Facility

Site Description

- Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block, Shenzhen
Science & Industrial Park,Nantou,
Shenzhen, Guangdong, China
- 3m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 90454
Valid Date: Mar.31, 2012
- 3m & 10m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 794232
Valid Date: Dec.30, 2012
- EMC Lab. : Certificated by Industry Canada
Registration Number: IC 5183A-1
Valid Date: Jul. 02, 2011
- : Accredited by DATech, German
Registration Number: DAT-P-091/99-01
Valid Date: Feb. 01, 2014
- Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2012

2.6.Measurement Uncertainty (95% confidence levels, k=2)


Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.2 dB(150kHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	3.6 dB(30~200MHz, Polarize: H)
	3.7 dB(30~200MHz, Polarize: V)
	4.0 dB(200M~1GHz, Polarize: H)
	3.7 dB(200M~1GHz, Polarize: V)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.57dB
Uncertainty for Conduction Spurious emission test	2.00 dB
Uncertainty for Output power test	0.73 dB
Uncertainty for Power density test	2.00 dB
Uncertainty for Frequency range test	7×10^{-8}
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.038 %
Uncertainty for test site temperature and humidity	0.6°C
	3%

3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	Nov.05, 10	1 Year
2.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	834066/011	Nov.05, 11	1 Year
3.	Terminator	Hubersuhner	50Ω	No. 1	May.08, 11	1 Year
4.	RF Cable	Fujikura	3D-2W	LISN Cable 1#	May.08, 11	1Year
5.	Coaxial Switch	Anritsu	MP59B	M55367	May.08, 11	1 Year
6.	Passive Probe	Rohde & Schwarz	ESH2-Z3	299.7810.52	May.08, 11	1 Year
7.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100341	May.08, 11	1 Year

3.2. Block Diagram of Test Setup

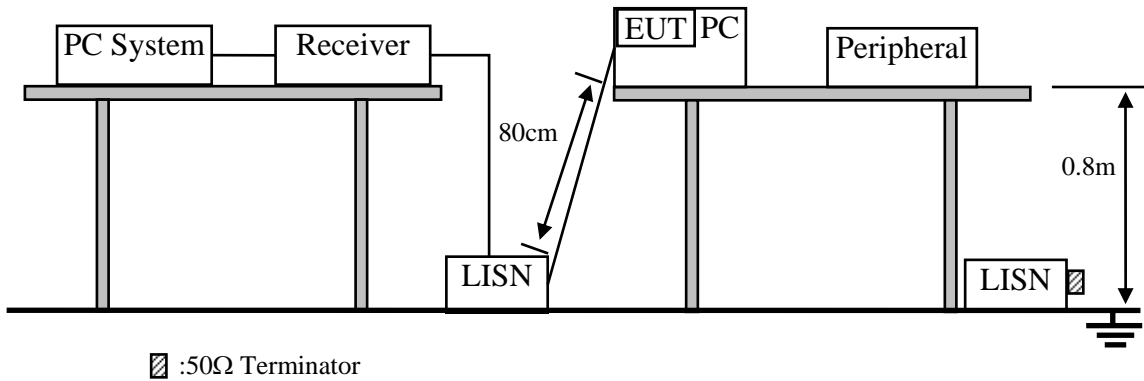

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. Wireless N PCI Adapter (EUT)

Model Number : RNX-N360PC
Serial Number : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.3.

3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 2.4.

3.5.2. Turned on the power of all equipment.

3.5.3. Notebook run test software to control EUT work in Tx mode.

3.6. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2009 on Conducted Emission Test.


The bandwidth of test receiver (R & S ESHS10) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7. Power Line Conducted Emission Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

FCC ID:W6RRNX-N360PC

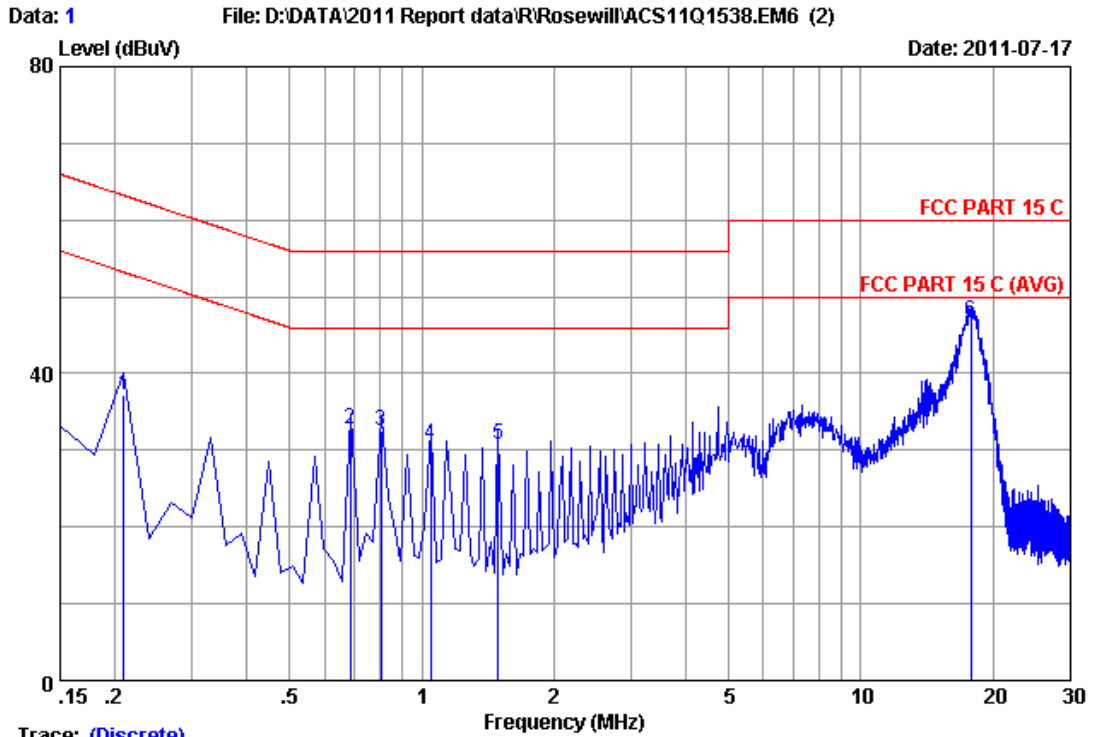


Trace: (Discrete)

Site no :1#conduction Data No :1
 Dis./Ant. :** 2011 ESH2-25 LINE
 Limit :FCC PART 15 C
 Env./Ins. :29.5*C/55% Engineer :Leo_Li
 EUT :Wireless N PCI Adapter
 Power Rating :DC 3.3V From PC Input AC 120V/60Hz
 Test Mode :Tx Mode
 M/N:RNX-N360PC

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.20970	0.17	9.98	26.97	37.12	63.22	26.10	QP
2	0.68730	0.19	9.97	22.68	32.84	56.00	23.16	QP
3	0.80670	0.21	9.97	22.29	32.47	56.00	23.53	QP
4	1.046	0.23	9.98	20.59	30.80	56.00	25.20	QP
5	1.493	0.27	9.97	20.52	30.76	56.00	25.24	QP
6	17.791	0.98	9.97	35.78	46.73	60.00	13.27	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

FCC ID:W6RRNX-N360PC

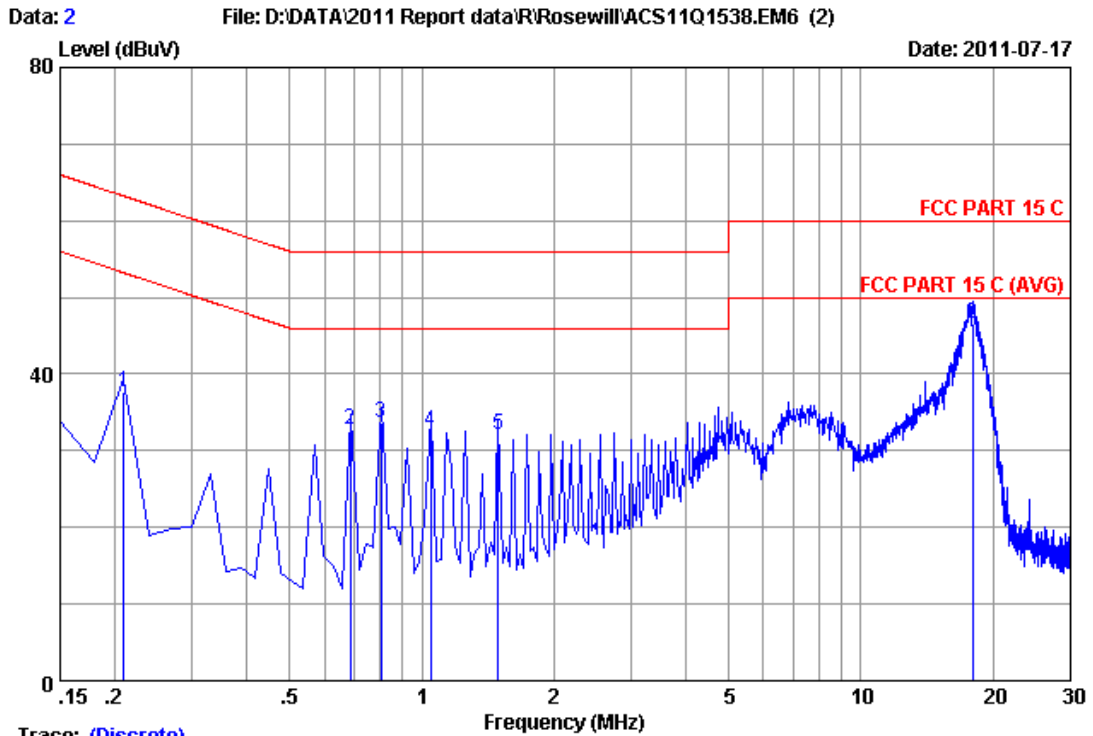

Trace: (Discrete)

Site no :1#conduction Data No :2
 Dis./Ant. **: 2011 ESH2-Z5 NEUTRAL
 Limit :FCC PART 15 C
 Env./Ins. :29.5*C/55% Engineer :Leo_Li
 EUT :Wireless N PCI Adapter
 Power Rating :DC 3.3V From PC Input AC 120V/60Hz
 Test Mode :Tx Mode
 M/N:RNX-N360PC

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.20970	0.21	9.98	27.36	37.55	63.22	25.67	QP
2	0.68730	0.23	9.97	22.56	32.76	56.00	23.24	QP
3	0.80670	0.23	9.97	23.41	33.61	56.00	22.39	QP
4	1.046	0.24	9.98	22.35	32.57	56.00	23.43	QP
5	1.493	0.25	9.97	21.82	32.04	56.00	23.96	QP
6	17.970	0.70	9.98	35.88	46.56	60.00	13.44	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector. the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipment

Frequency rang: 30~1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	3#Chamber	AUDIX	N/A	N/A	Dec.06,10	1 Year
2	EMI Spectrum	Agilent	E4407B	MY41440292	May.08, 11	1 Year
3	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	May.08, 11	1 Year
4	Amplifier	HP	8447D	2648A04738	May.08, 11	1 Year
5	Bilog Antenna	Schaffner	CBL6111C	2598	Oct.26, 10	1 Year
6	RF Cable	MIYAZAKI	8D-FB	3# Chamber No.1	May.08, 11	1 Year
7	Coaxial Switch	Anritsu	MP59B	M73989	May.08, 11	1 Year

Frequency rang: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	May.08, 11	1 Year
2	Horn Antenna	EMCO	3115	9607-4877	May.25, 11	1.5 Year
3	Amplifier	Agilent	8449B	3008A00863	May.08, 11	1 Year
4	RF Cable	Hubersuhner	SUCOFLEX102	28622/2	May.08, 11	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX102	29091/2	May.08, 11	1 Year


4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

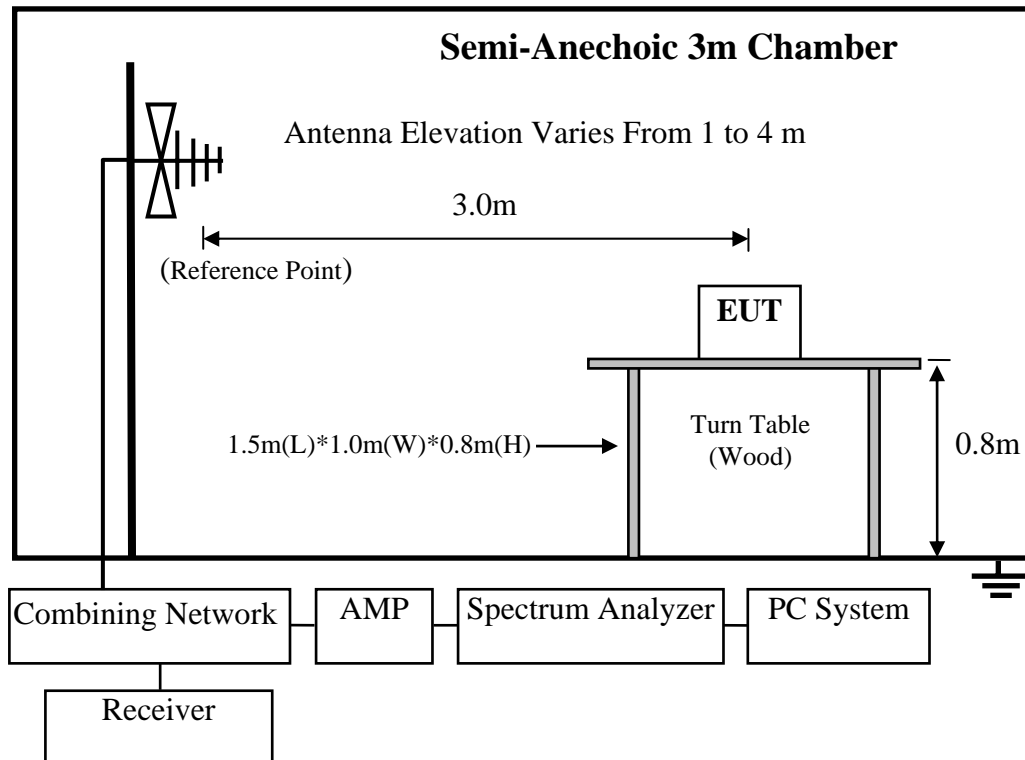

FCC ID:W6RRNX-N360PC

For frequency range 1GHz-25GHz

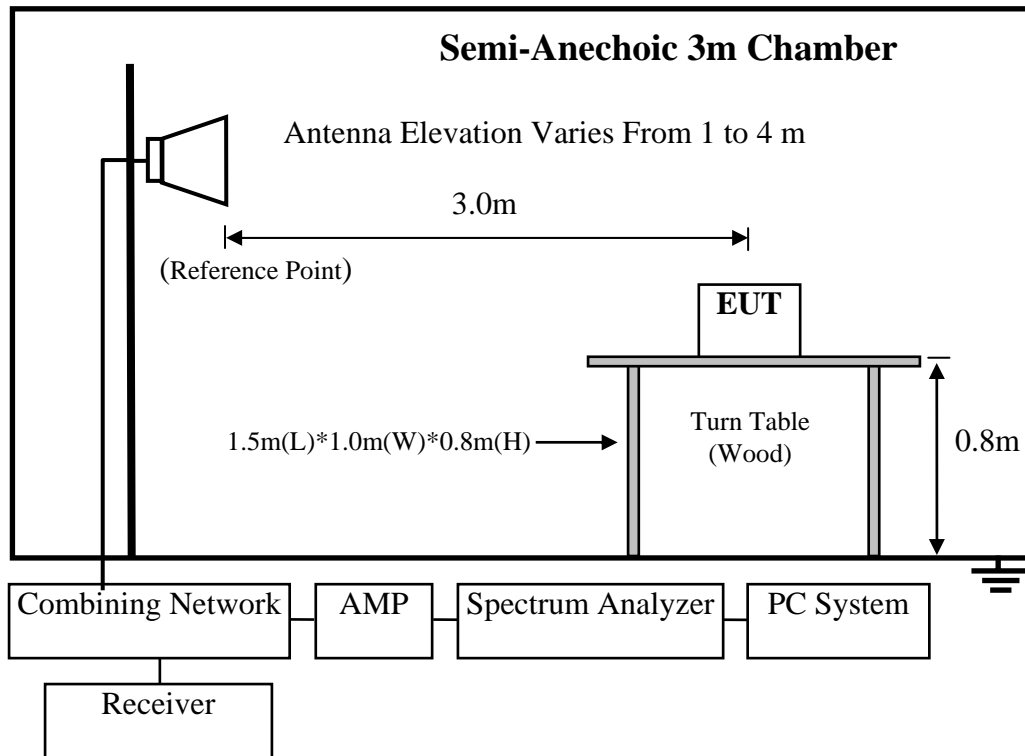

4.3. Radiated Emission Limit

4.3.1.15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Remark : (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3.2.15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.4.EUT Configuration on Test

The configurations of EUT are listed in Section 3.5.

4.5.Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 4.2.

4.6.Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.7. Radiated Emission Test Results


PASS.

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.

Note: For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

FCC ID: W6RRNX-N360PC

Frequency: 30MHz~1GHz

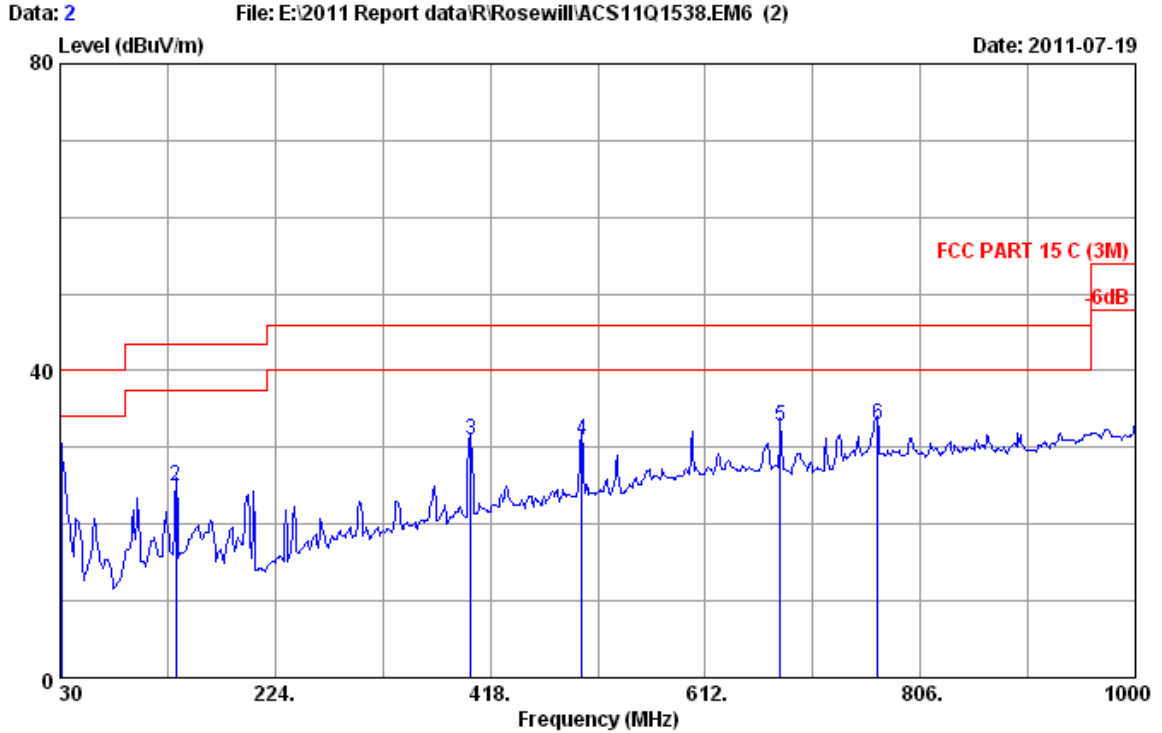


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2010 CBL6111C 2598 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24°C/56% Engineer : Gary
 EUT : Wireless N PCI Adapter
 Power rating : DC 3.3V From PC input AC 120V/60Hz
 Test Mode : Tx Mode
 M/N:RNX-N360PC

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	31.940	18.88	0.61	8.44	27.93	40.00	12.07	QP
2	134.760	12.10	1.40	11.51	25.01	43.50	18.49	QP
3	400.540	16.41	3.34	11.12	30.87	46.00	15.13	QP
4	500.450	18.30	4.00	8.78	31.08	46.00	14.92	QP
5	679.900	20.70	4.90	7.18	32.78	46.00	13.22	QP
6	767.200	22.07	5.34	5.59	33.00	46.00	13.00	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

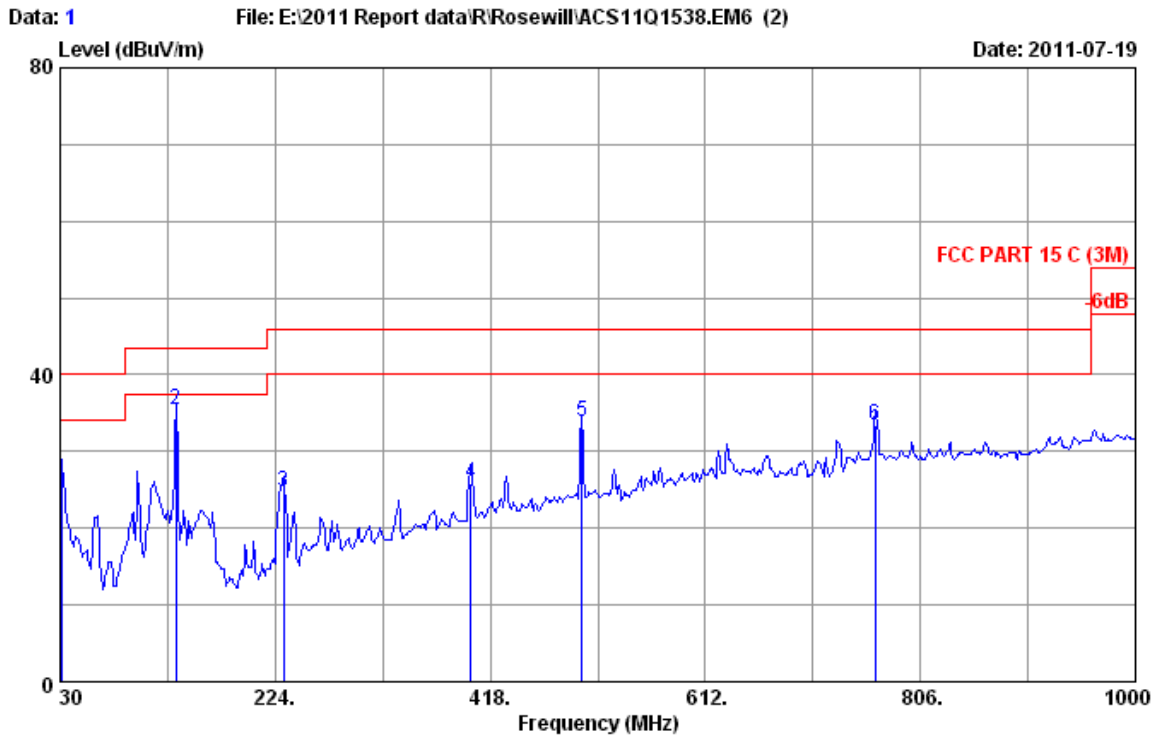


Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2010 CBL6111C 2598 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24°C/56% Engineer : Gary
 EUT : Wireless N PCI Adapter
 Power rating : DC 3.3V From PC input AC 120V/60Hz
 Test Mode : Tx Mode
 M/N:RNX-N360PC

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	31.940	18.88	0.61	6.79	26.28	40.00	13.72	QP
2	134.760	12.10	1.40	21.87	35.37	43.50	8.13	QP
3	231.760	11.12	2.20	11.36	24.68	46.00	21.32	QP
4	400.540	16.41	3.34	6.17	25.92	46.00	20.08	QP
5	500.450	18.30	4.00	11.57	33.87	46.00	12.13	QP
6	765.260	22.05	5.32	6.00	33.37	46.00	12.63	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: W6RRNX-N360PC

Frequency: 1GHz~18GHz

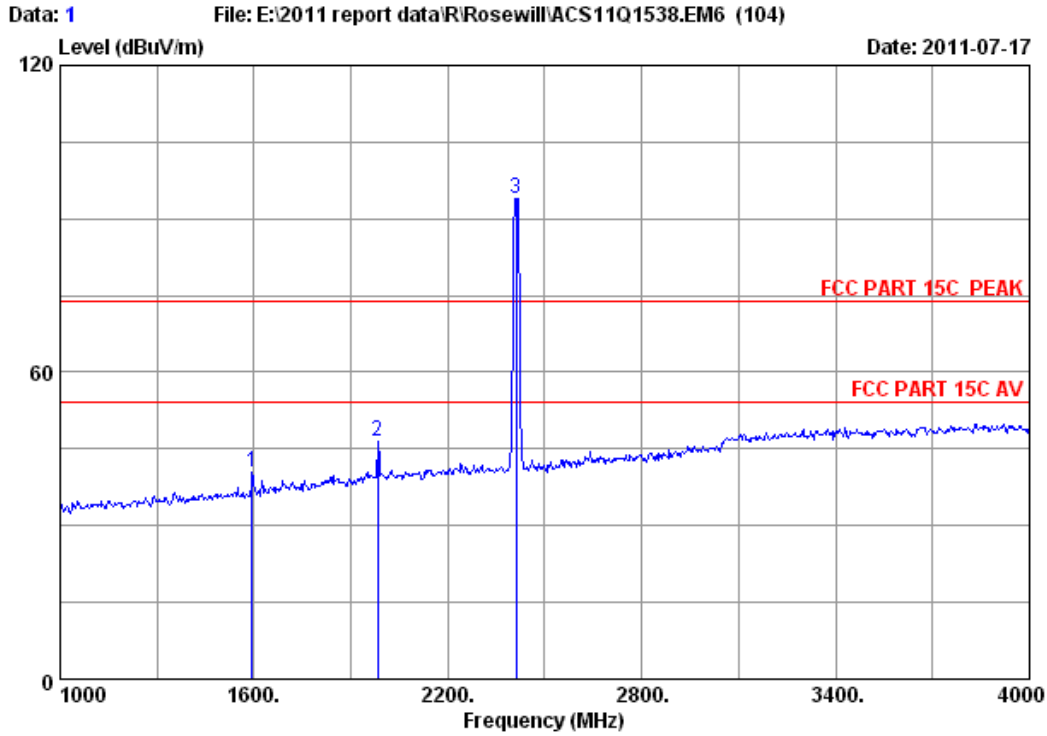


Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1594.000	26.96	6.92	36.43	42.92	40.37	74.00	33.63	Peak
2	1984.000	29.11	7.87	36.06	45.56	46.48	74.00	27.52	Peak
3	2412.000	29.45	8.72	35.95	91.80	94.02	74.00	-20.02	Peak

- Remarks:
1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

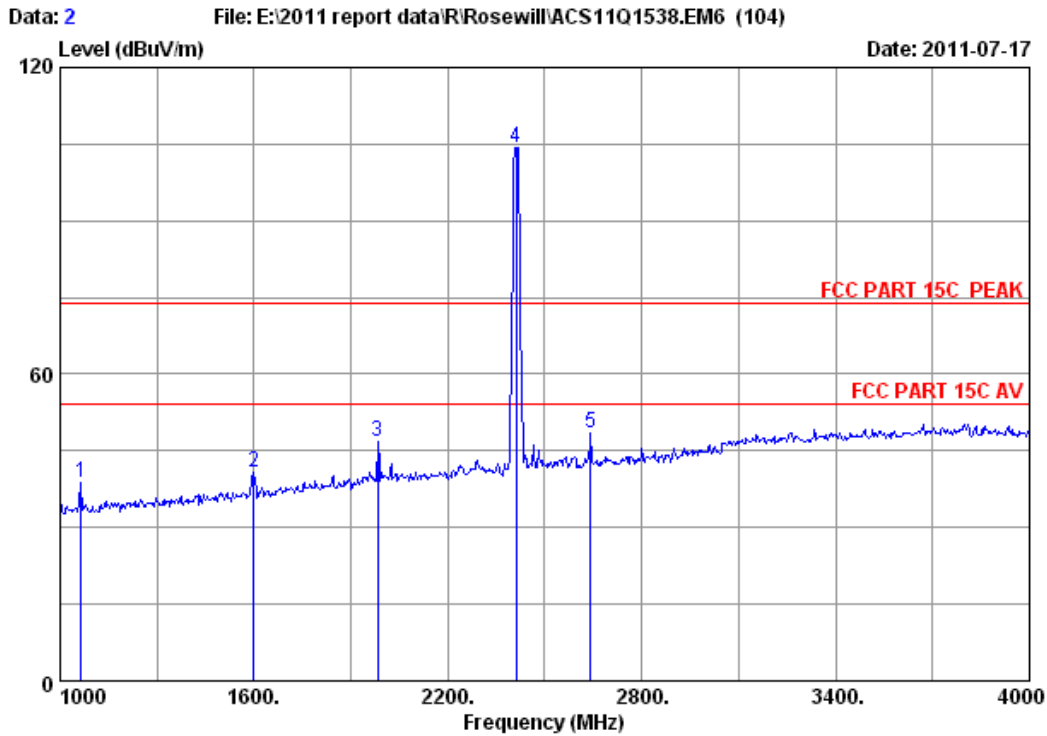


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1066.000	25.54	5.60	37.26	44.82	38.70	74.00	35.30	Peak
2	1600.000	26.96	6.98	36.43	43.44	40.95	74.00	33.05	Peak
3	1984.000	29.11	7.87	36.06	45.78	46.70	74.00	27.30	Peak
4	2412.000	29.45	8.72	35.95	102.20	104.42	74.00	-30.42	Peak
5	2641.000	30.25	9.17	35.77	44.92	48.57	74.00	25.43	Peak


Remarks:
 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

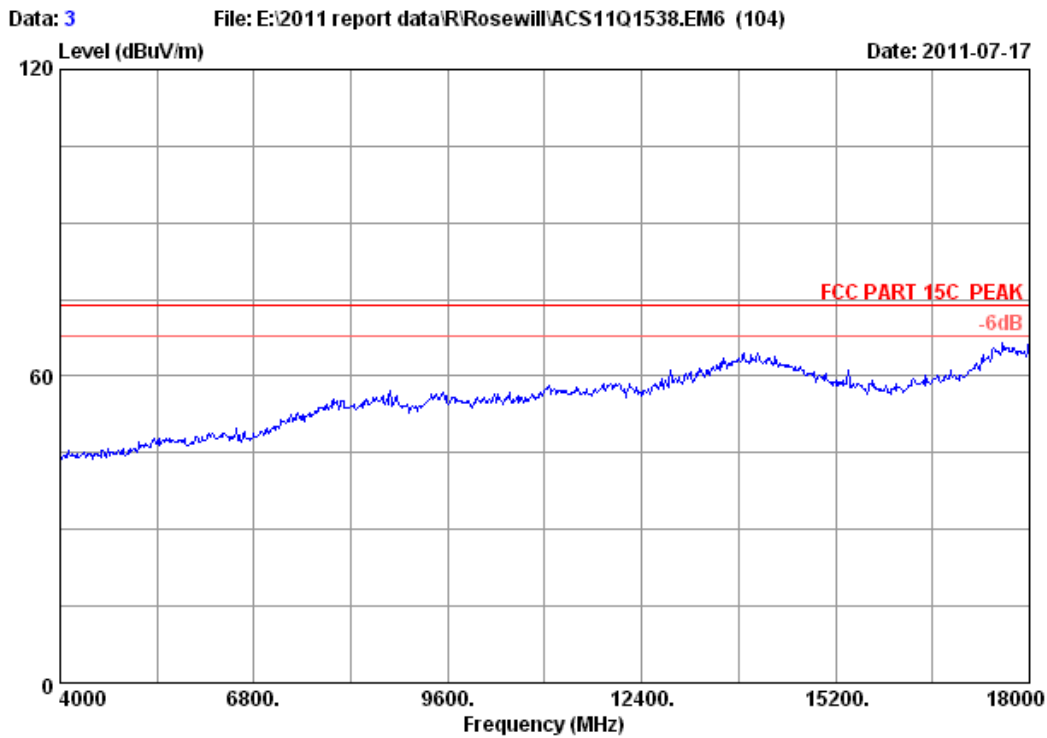

Site no. : 3m Chamber Data no. : 3
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11b CH1 2412MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

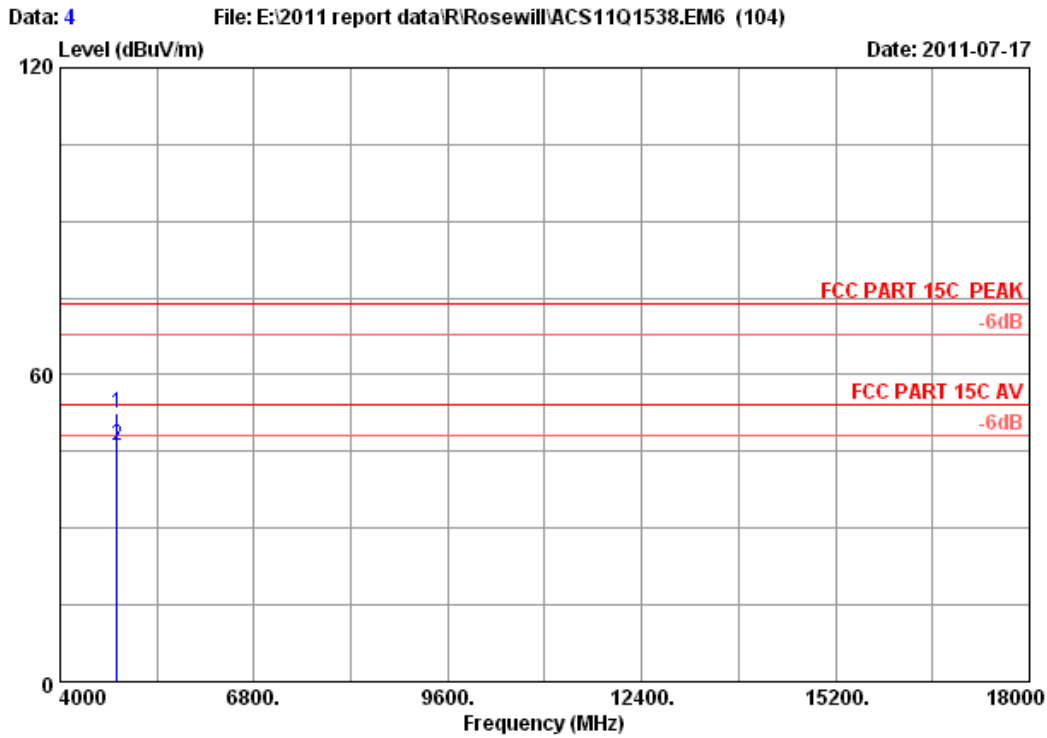


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.32	12.38	35.25	41.02	52.47	74.00	21.53	Peak
2	4824.000	34.32	12.38	35.25	34.58	46.03	54.00	7.97	Average

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

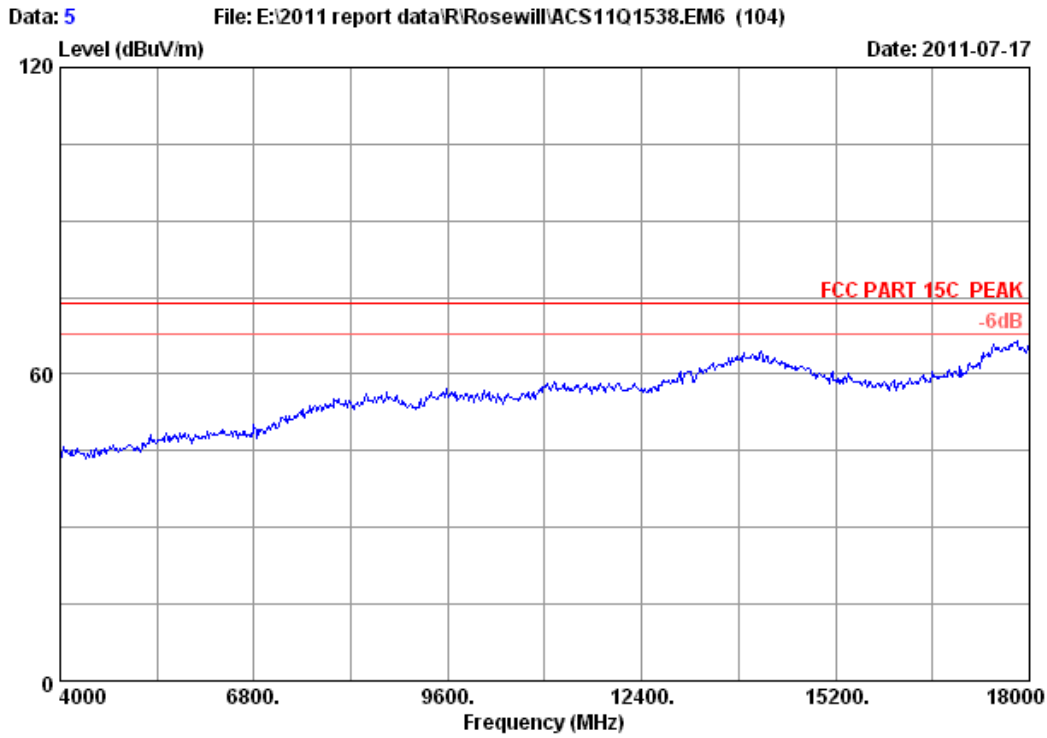

Site no. : 3m Chamber Data no. : 5
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11b CH1 2412MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

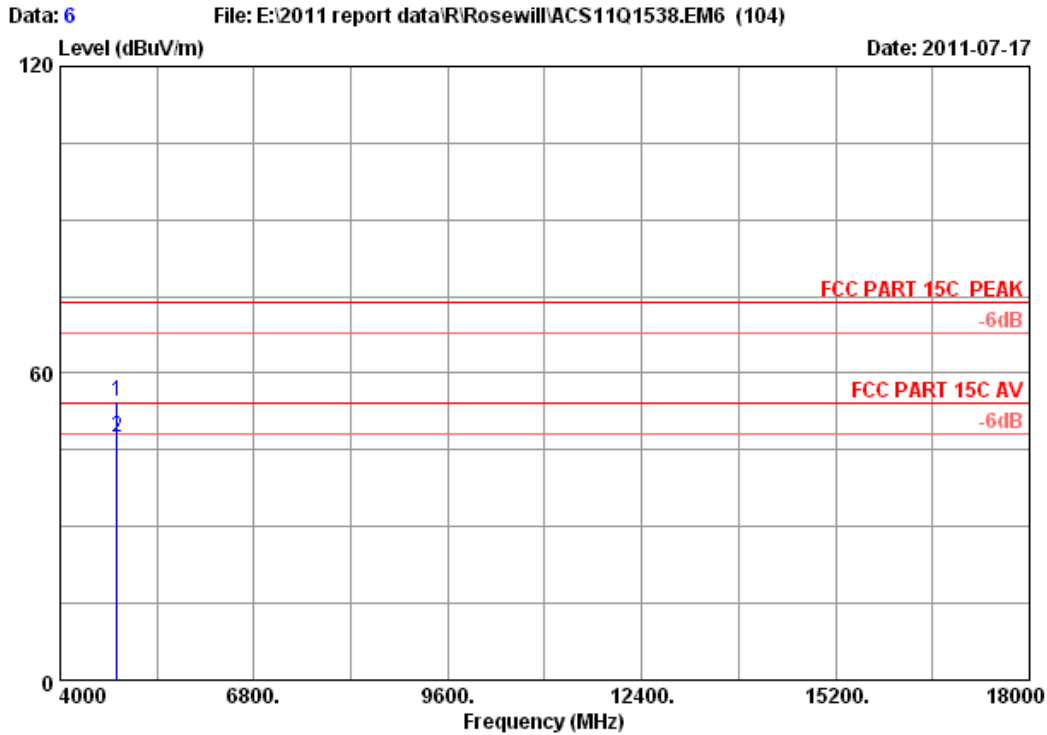


Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH1 2412MHz Tx
 M/N : RNX-N360PC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.32	12.38	35.25	42.96	54.41	74.00	19.59	Peak
2	4824.000	34.32	12.38	35.25	35.89	47.34	54.00	6.66	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

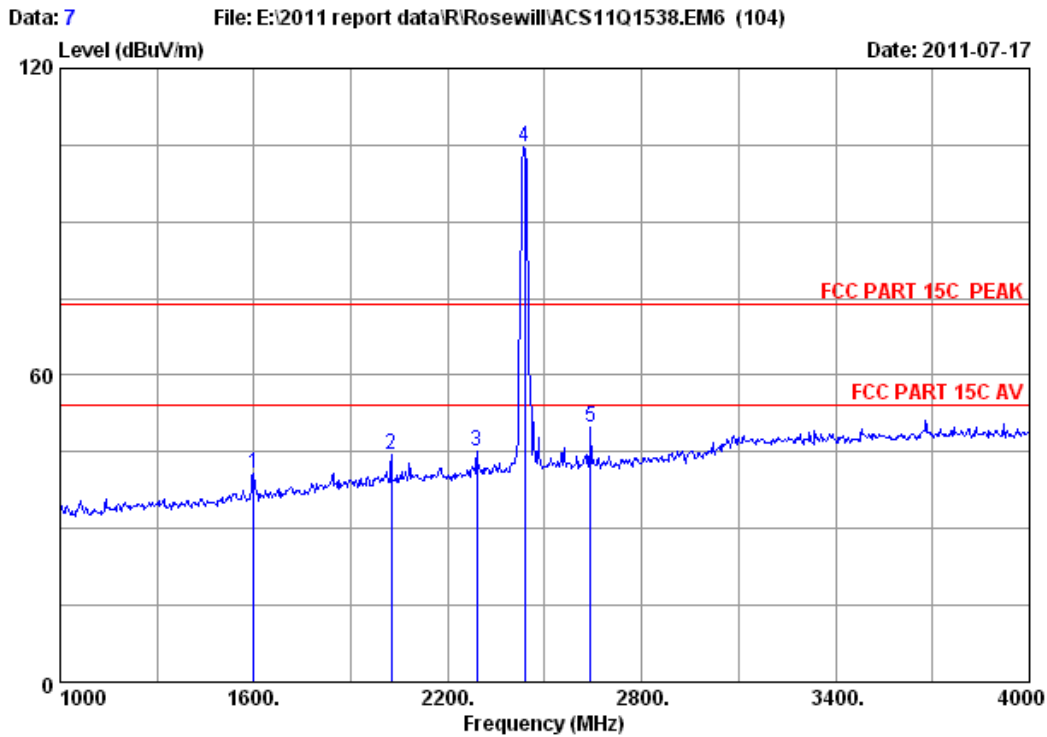


Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH6 2437MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1600.000	26.96	6.98	36.43	43.35	40.86	74.00	33.14	Peak
2	2026.000	29.21	7.97	36.12	43.32	44.38	74.00	29.62	Peak
3	2290.000	29.38	8.47	35.92	43.07	45.00	74.00	29.00	Peak
4	2437.000	29.47	8.77	36.06	102.55	104.73	74.00	-30.73	Peak
5	2641.000	30.25	9.17	35.77	46.29	49.94	74.00	24.06	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

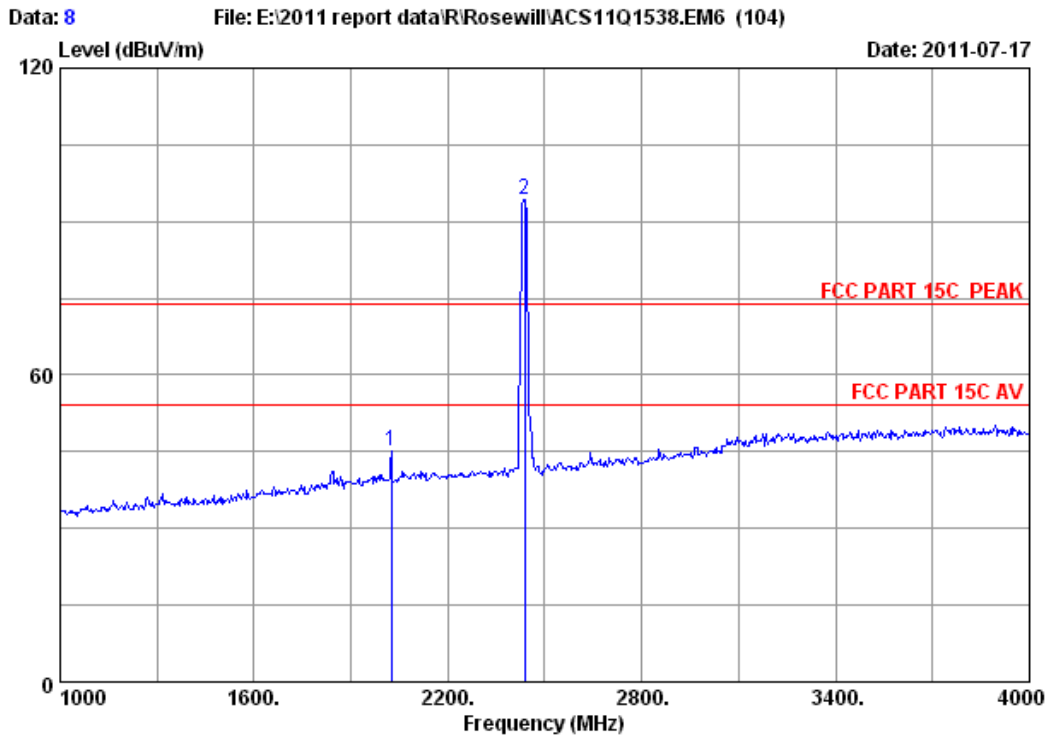


Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH6 2437MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2026.000	29.21	7.97	36.12	44.01	45.07	74.00	28.93	Peak
2	2437.000	29.47	8.77	36.06	92.03	94.21	74.00	-20.21	Peak

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

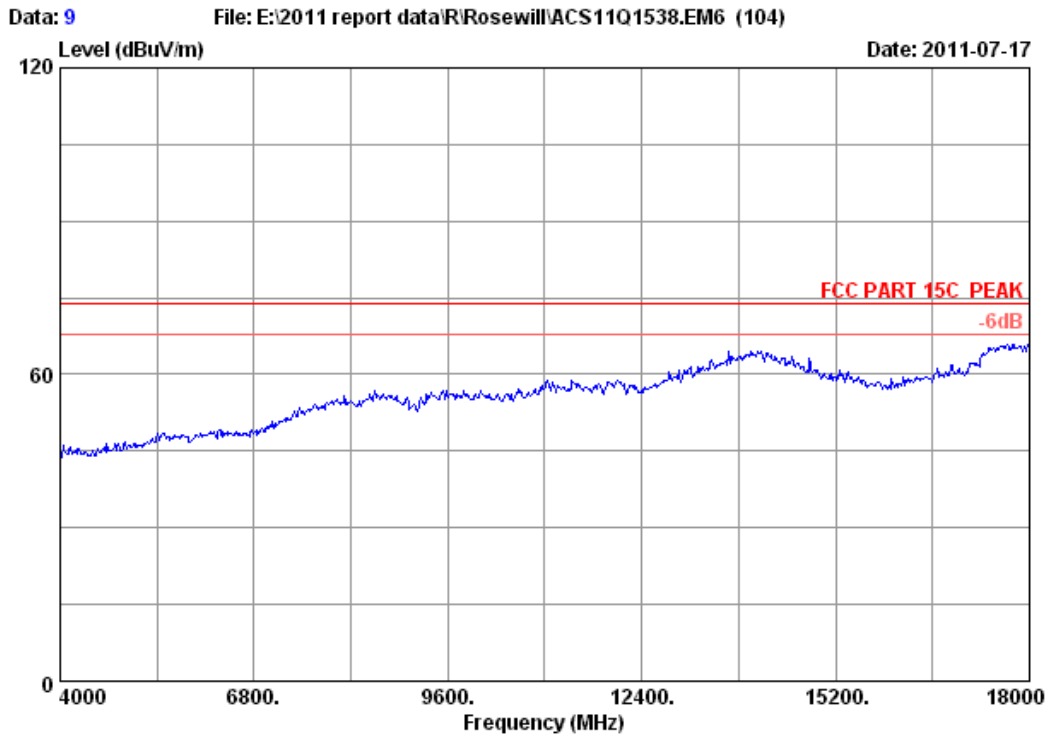

Site no. : 3m Chamber Data no. : 9
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11b CH6 2437MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

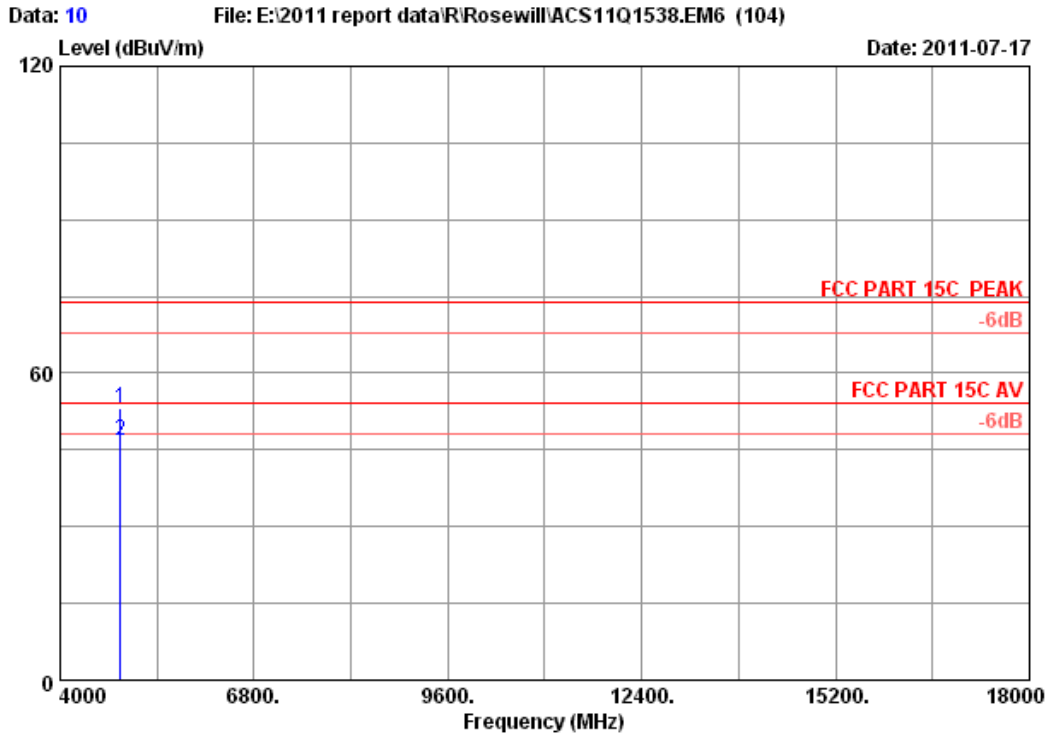


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH6 2437MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Cable loss (dB/m)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark	
1	4874.000	34.41	12.44	35.36	41.51	53.00	74.00	21.00	Peak
2	4874.000	34.41	12.44	35.36	35.20	46.69	54.00	7.31	Average

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

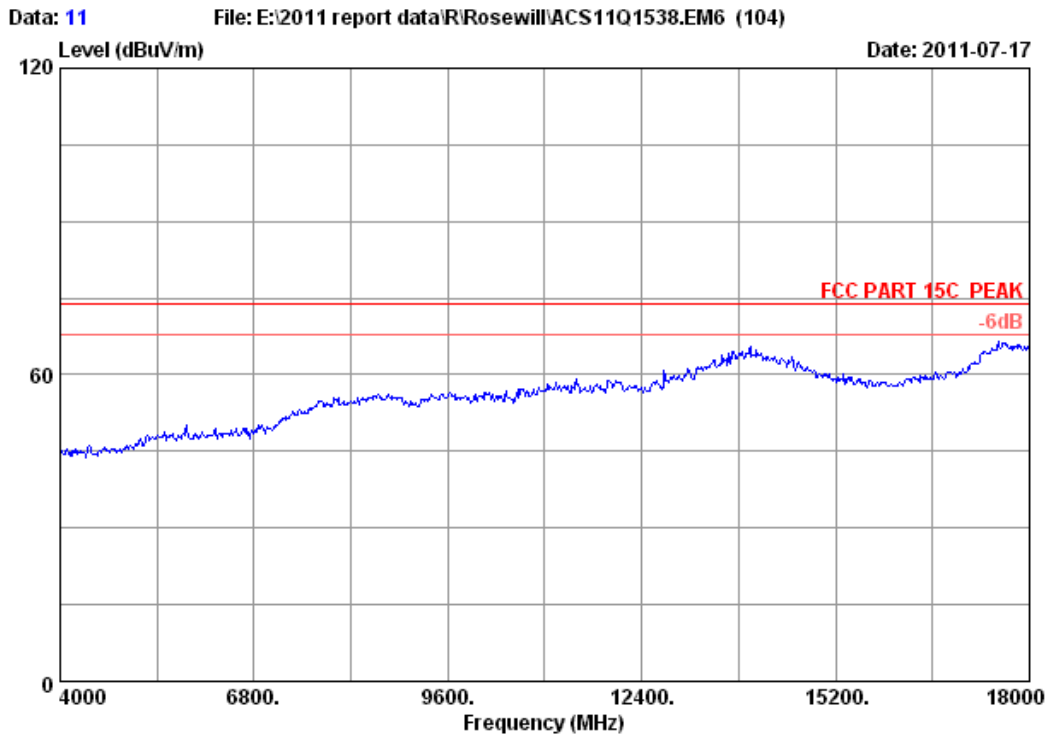

Site no. : 3m Chamber Data no. : 11
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11b CH6 2437MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

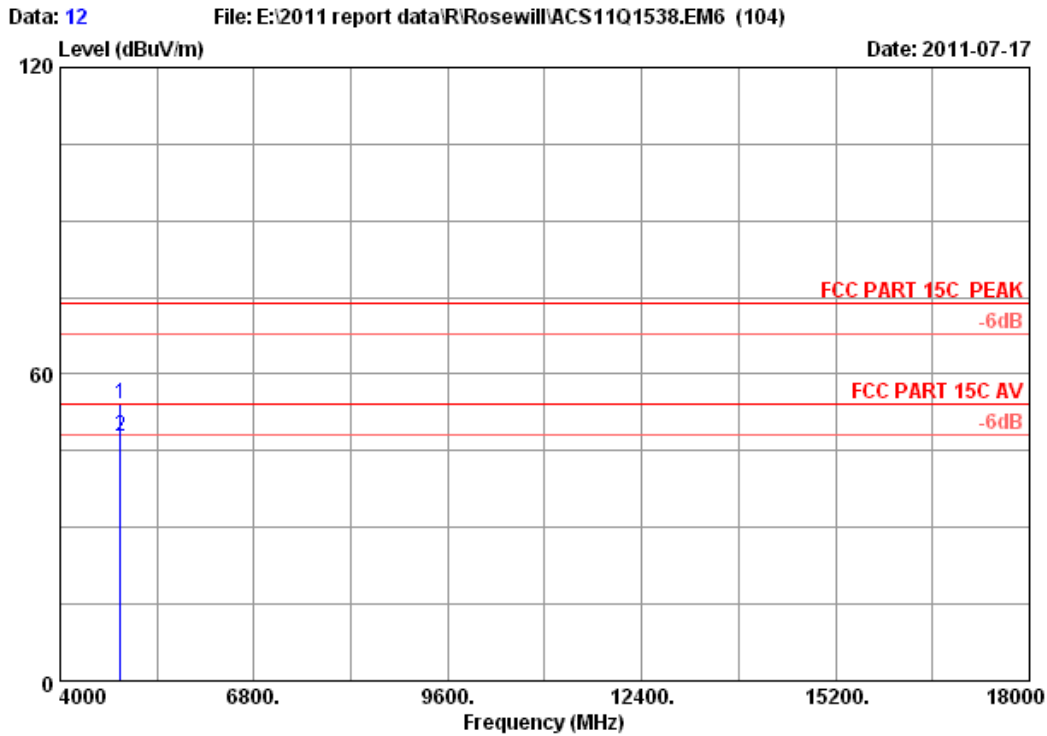


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH6 2437MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.41	12.44	35.36	42.64	54.13	74.00	19.87	Peak
2	4874.000	34.41	12.44	35.36	36.17	47.66	54.00	6.34	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

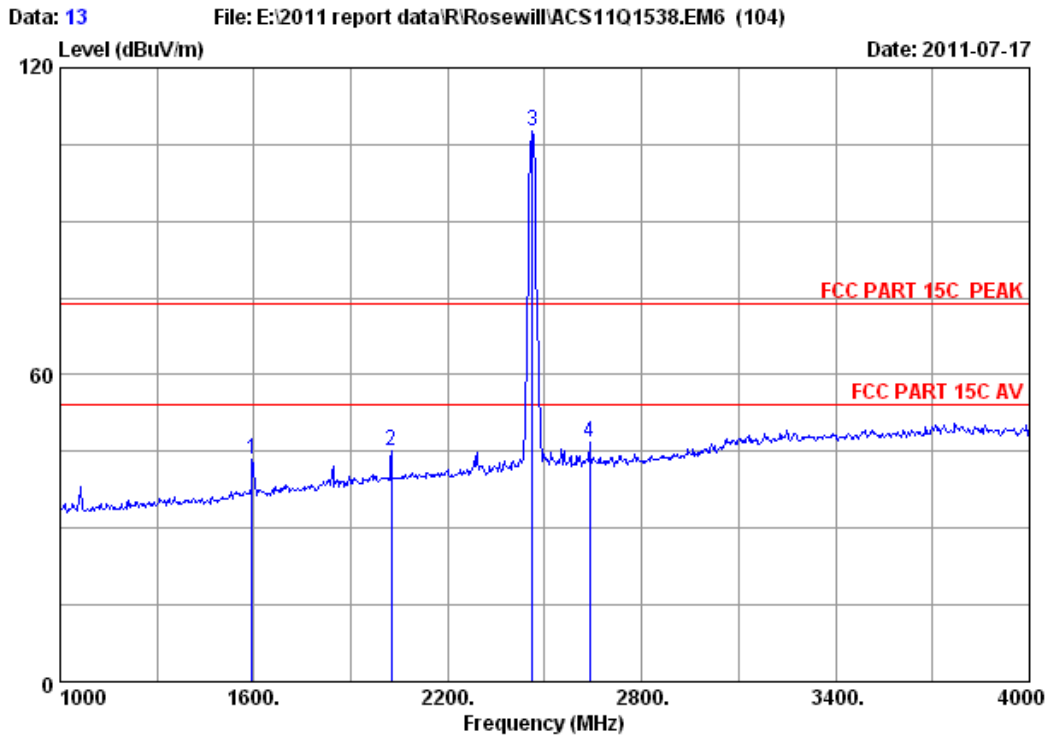


Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1594.000	26.96	6.92	36.43	46.14	43.59	74.00	30.41	Peak
2	2026.000	29.21	7.97	36.12	44.21	45.27	74.00	28.73	Peak
3	2462.000	29.48	8.82	36.02	105.32	107.60	74.00	-33.60	Peak
4	2638.000	30.17	9.17	35.91	43.32	46.75	74.00	27.25	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

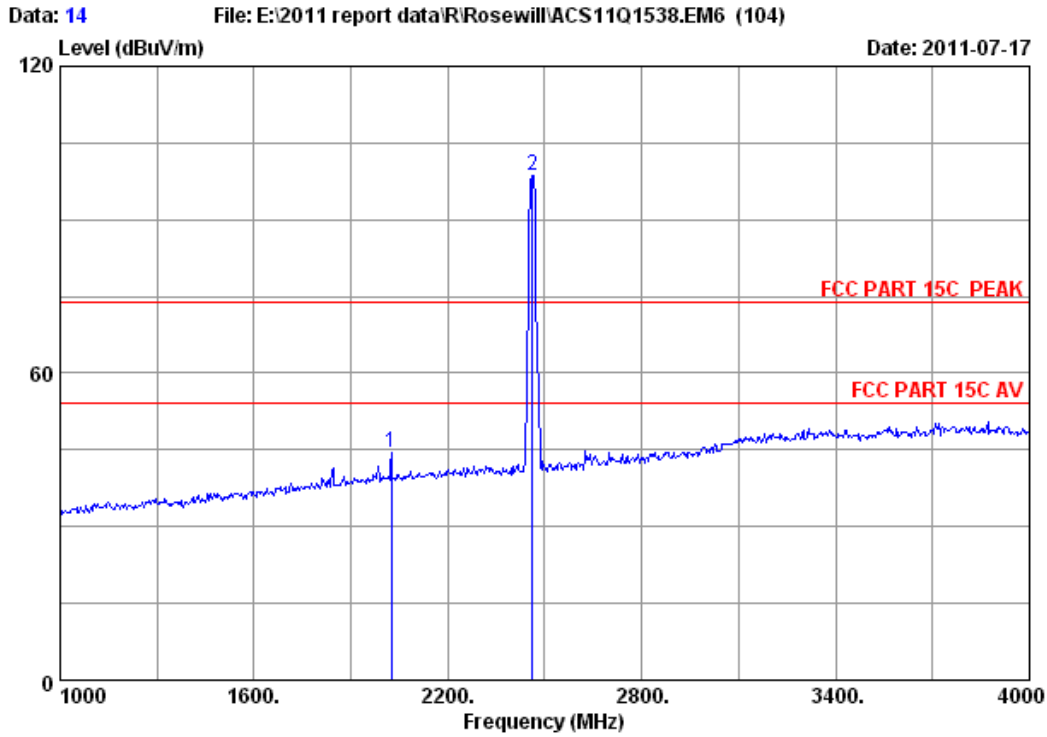


Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2026.000	29.21	7.97	36.12	43.56	44.62	74.00	29.38	Peak
2	2462.000	29.48	8.82	36.02	96.48	98.76	74.00	-24.76	Peak

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

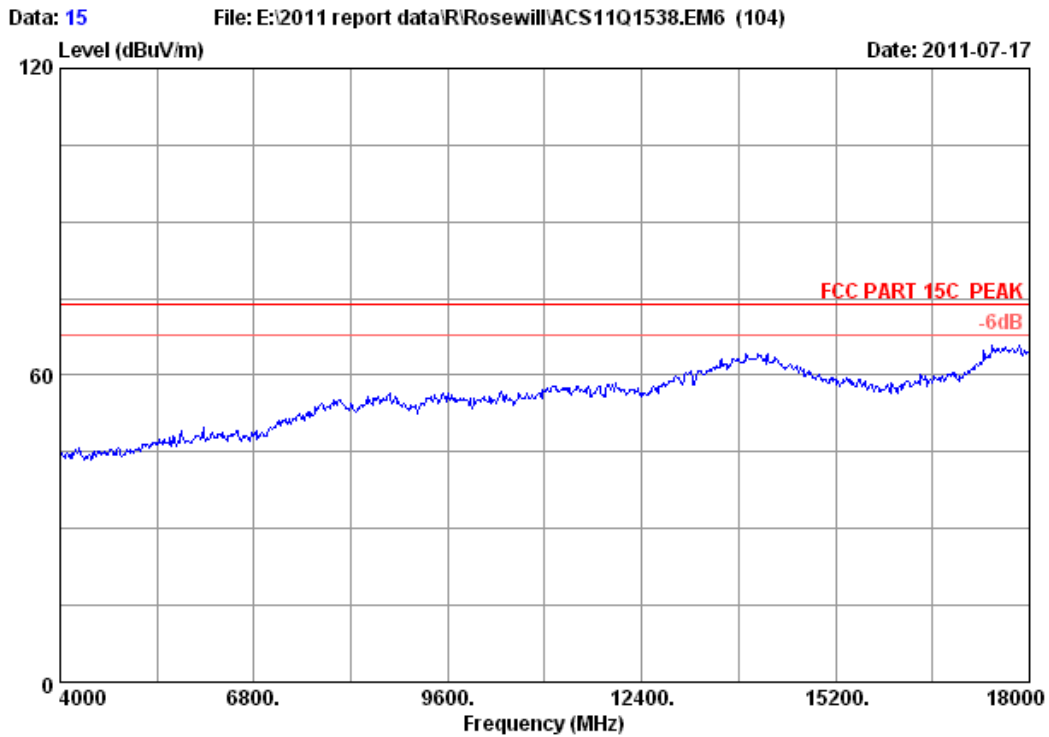

Site no.	: 3m Chamber	Data no. :	15
Dis. / Ant.	: 3m 3115(0911)	Ant. pol. :	VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer :	Leo-Li
EUT	: Wireless N PCI Adapter		
Power	: DC 3.3V From PC input AC 120V/60Hz		
Test mode	: IEEE802.11b CH11 2462MHz Tx		
M/N	: RNX-N360PC		

FCC ID:W6RRNX-N360PC

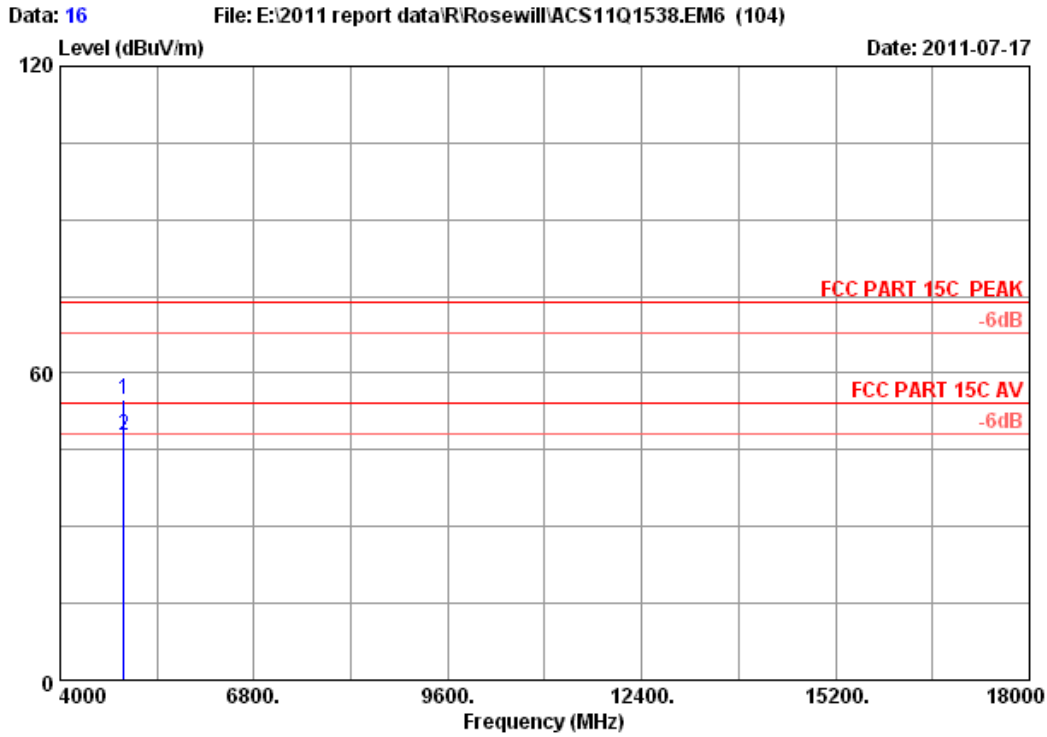


Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.49	12.50	35.34	43.15	54.80	74.00	19.20	Peak
2	4924.000	34.49	12.50	35.34	36.27	47.92	54.00	6.08	Average

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

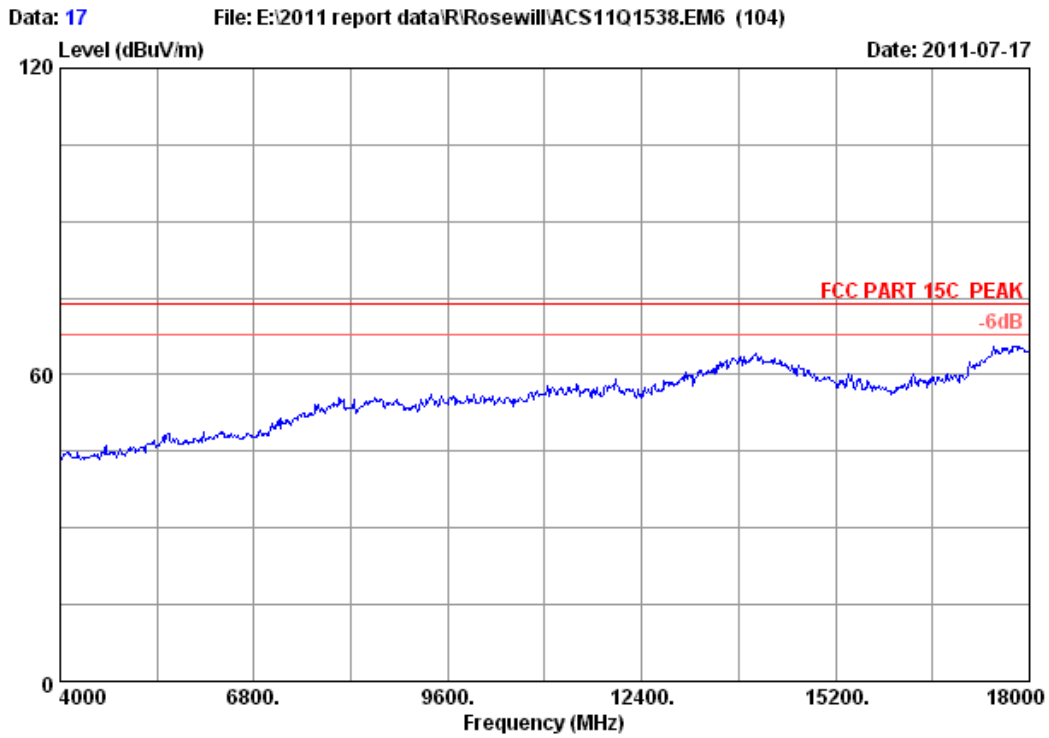

Site no.	: 3m Chamber	Data no. :	17
Dis. / Ant.	: 3m 3115(0911)	Ant. pol. :	HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer :	Leo-Li
EUT	: Wireless N PCI Adapter		
Power	: DC 3.3V From PC input AC 120V/60Hz		
Test mode	: IEEE802.11b CH11 2462MHz Tx		
M/N	: RNX-N360PC		

FCC ID:W6RRNX-N360PC

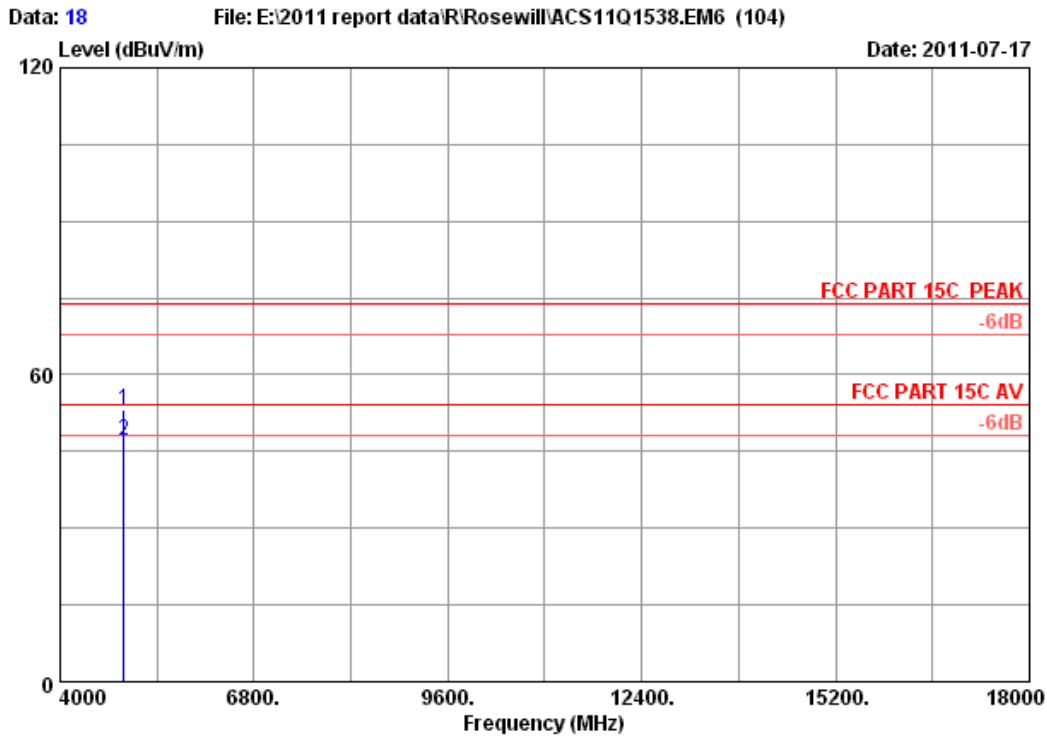


Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH11 2462MHz Tx
 M/N : RNX-N360PC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	4924.000	34.49	12.50	35.34	41.58	53.23	74.00	20.77	Peak
2	4924.000	34.49	12.50	35.34	35.62	47.27	54.00	6.73	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

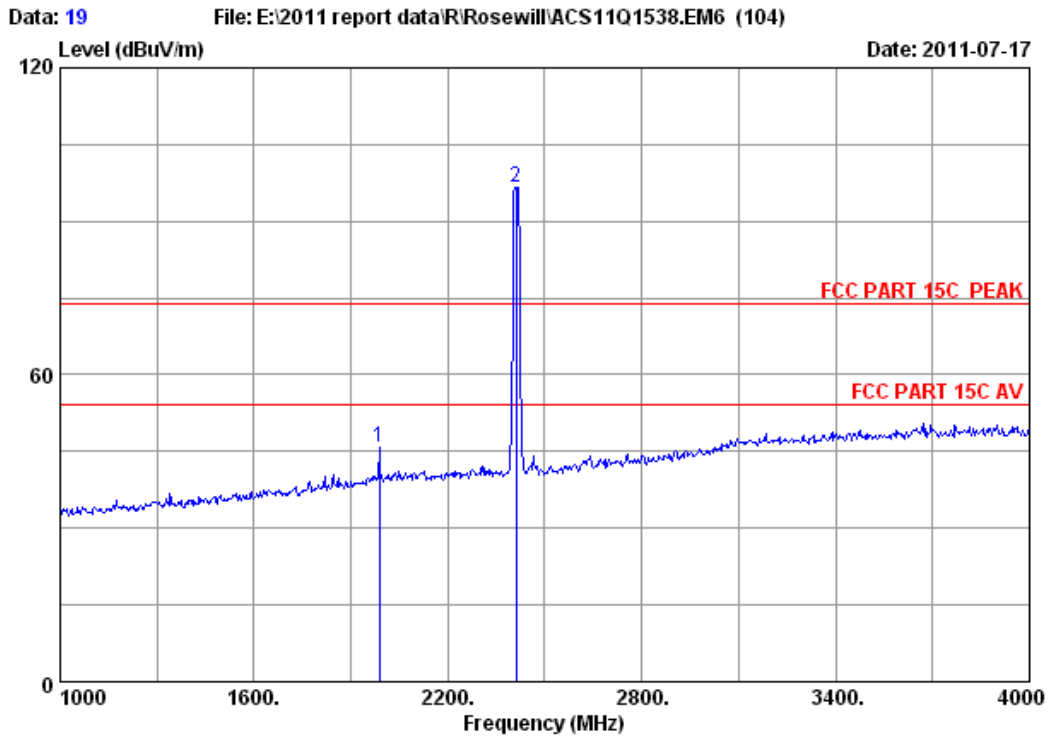


Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1987.000	29.11	7.87	36.06	44.89	45.81	74.00	28.19	Peak
2	2412.000	29.45	8.72	35.95	94.34	96.56	74.00	-22.56	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

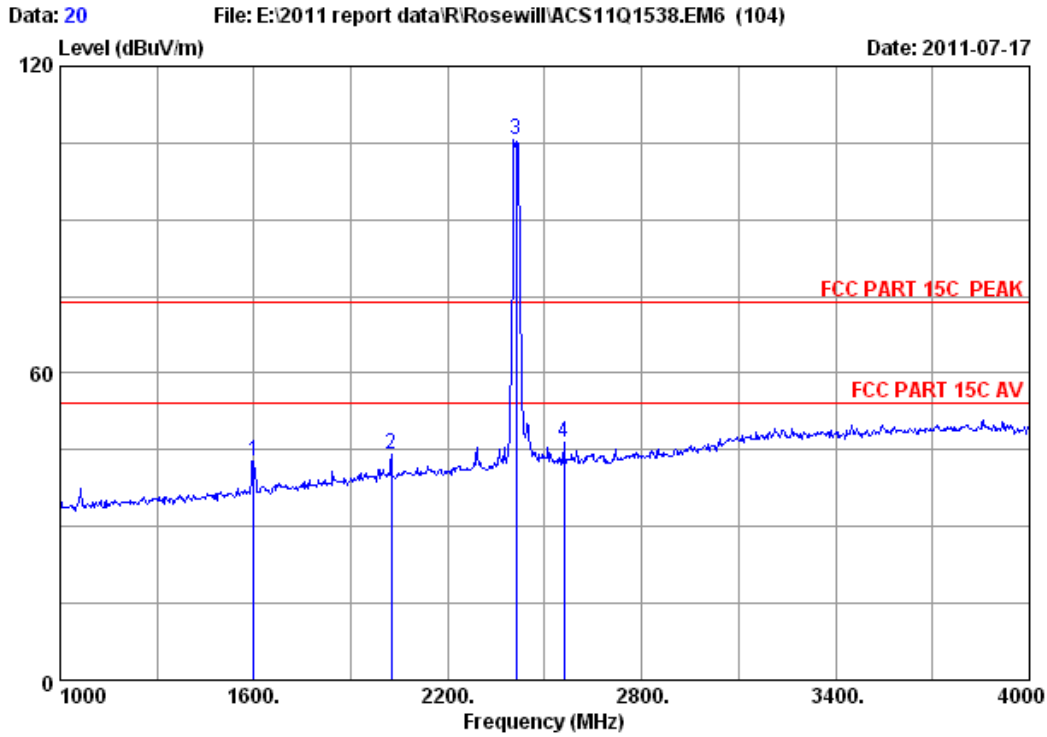


Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1600.000	26.96	6.98	36.43	45.40	42.91	74.00	31.09	Peak
2	2026.000	29.21	7.97	36.12	43.05	44.11	74.00	29.89	Peak
3	2412.000	29.45	8.72	35.95	103.27	105.49	74.00	-31.49	Peak
4	2560.000	29.83	9.02	35.88	43.39	46.36	74.00	27.64	Peak

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

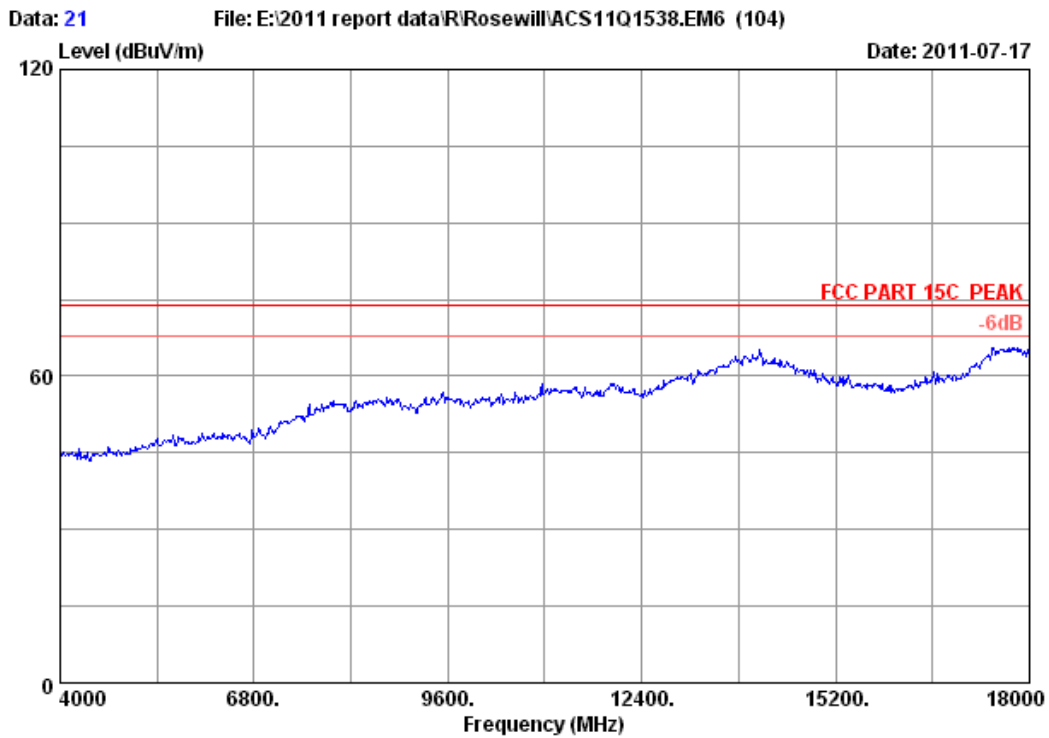

Site no. : 3m Chamber Data no. : 21
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11g CH1 2412MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

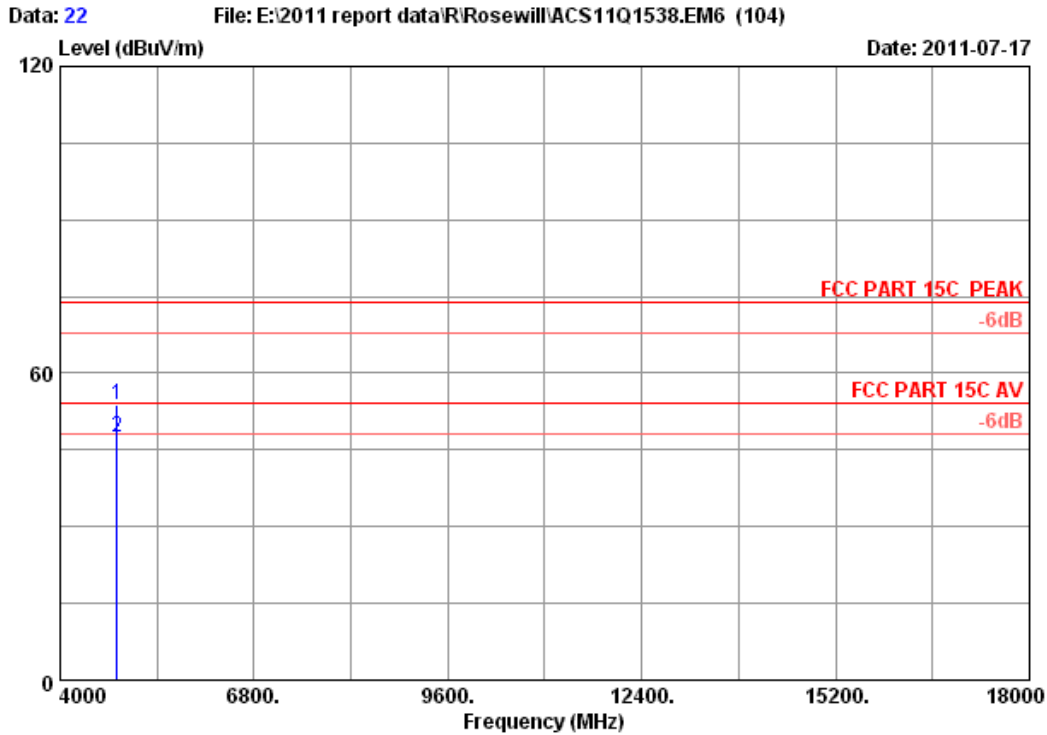


Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.32	12.38	35.25	42.35	53.80	74.00	20.20	Peak
2	4824.000	34.32	12.38	35.25	35.98	47.43	54.00	6.57	Average

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

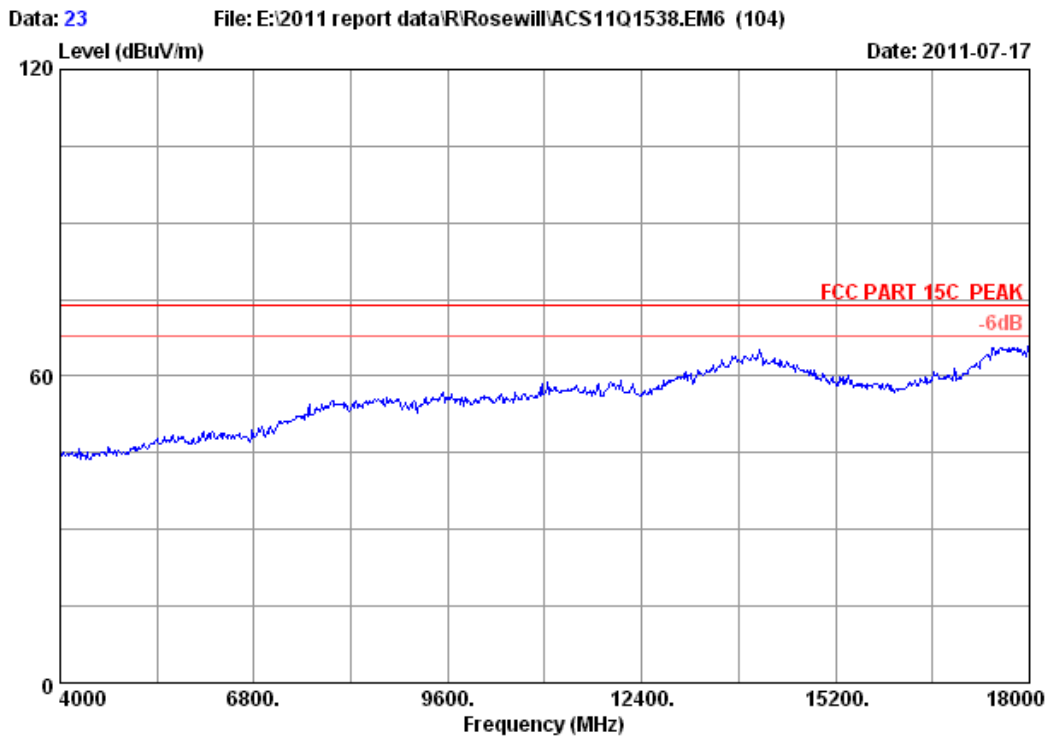

Site no.	: 3m Chamber	Data no. :	23
Dis. / Ant.	: 3m 3115(0911)	Ant. pol. :	VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer :	Leo-Li
EUT	: Wireless N PCI Adapter		
Power	: DC 3.3V From PC input AC 120V/60Hz		
Test mode	: IEEE802.11g CH1 2412MHz Tx		
M/N	: RNX-N360PC		

FCC ID:W6RRNX-N360PC

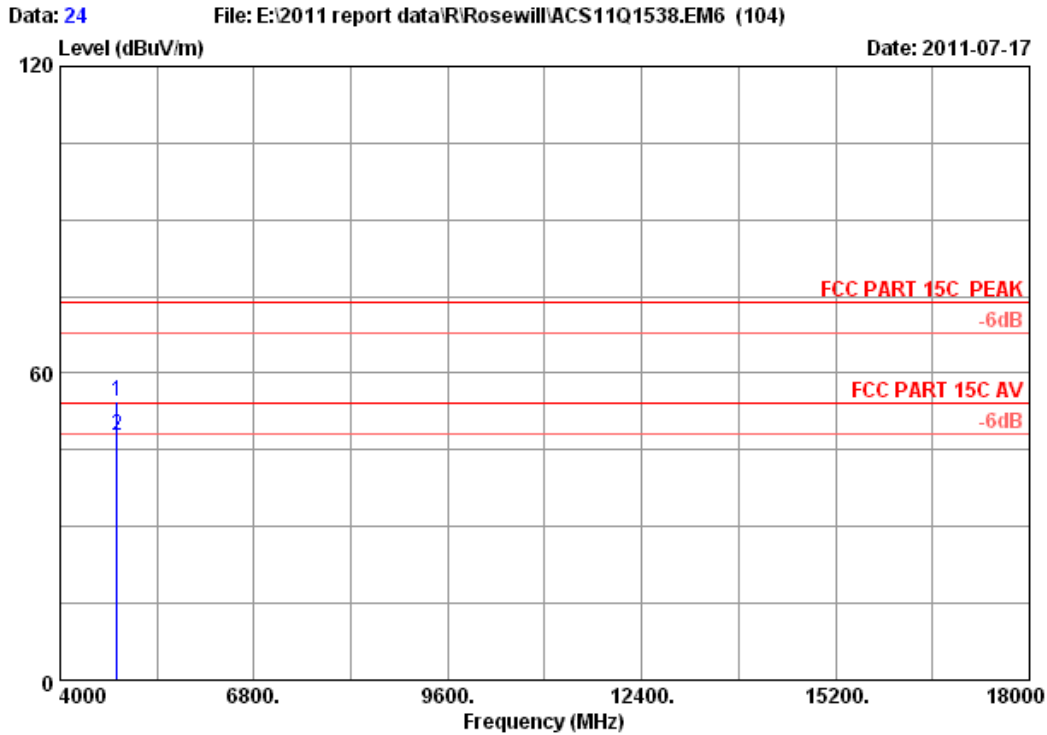


Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.32	12.38	35.25	42.87	54.32	74.00	19.68	Peak
2	4824.000	34.32	12.38	35.25	36.45	47.90	54.00	6.10	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

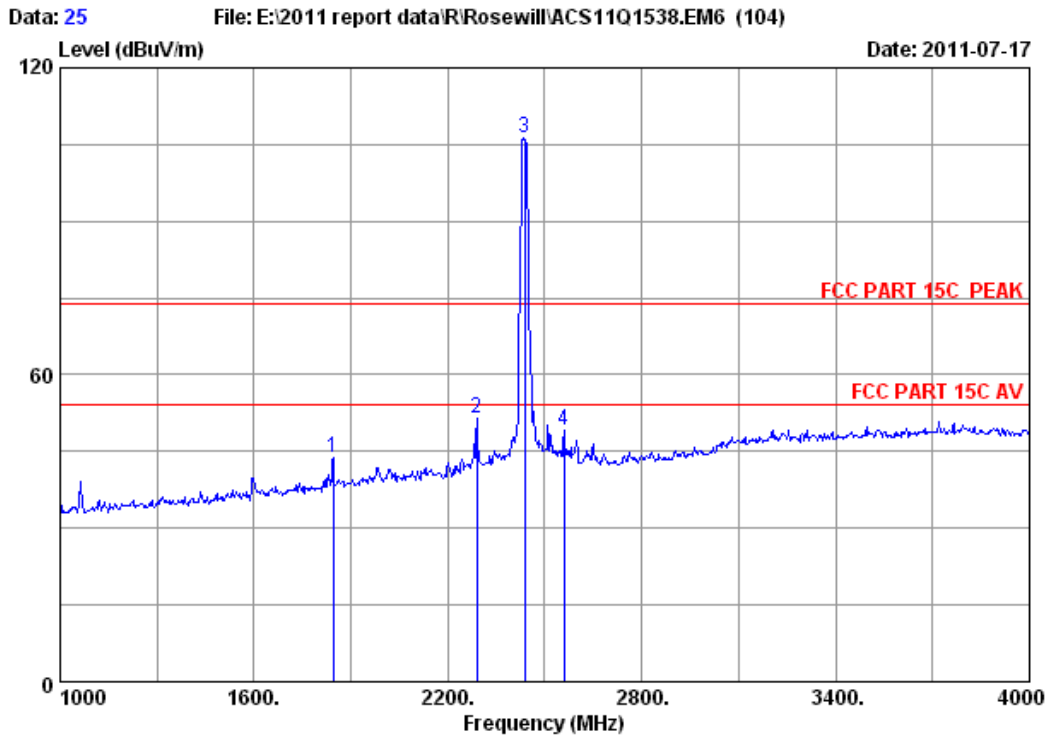


Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH6 2437MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1846.000	28.36	7.51	36.23	44.21	43.85	74.00	30.15	Peak
2	2290.000	29.38	8.47	35.92	49.69	51.62	74.00	22.38	Peak
3	2437.000	29.47	8.77	36.06	104.00	106.18	74.00	-32.18	Peak
4	2560.000	29.83	9.02	35.88	46.31	49.28	74.00	24.72	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

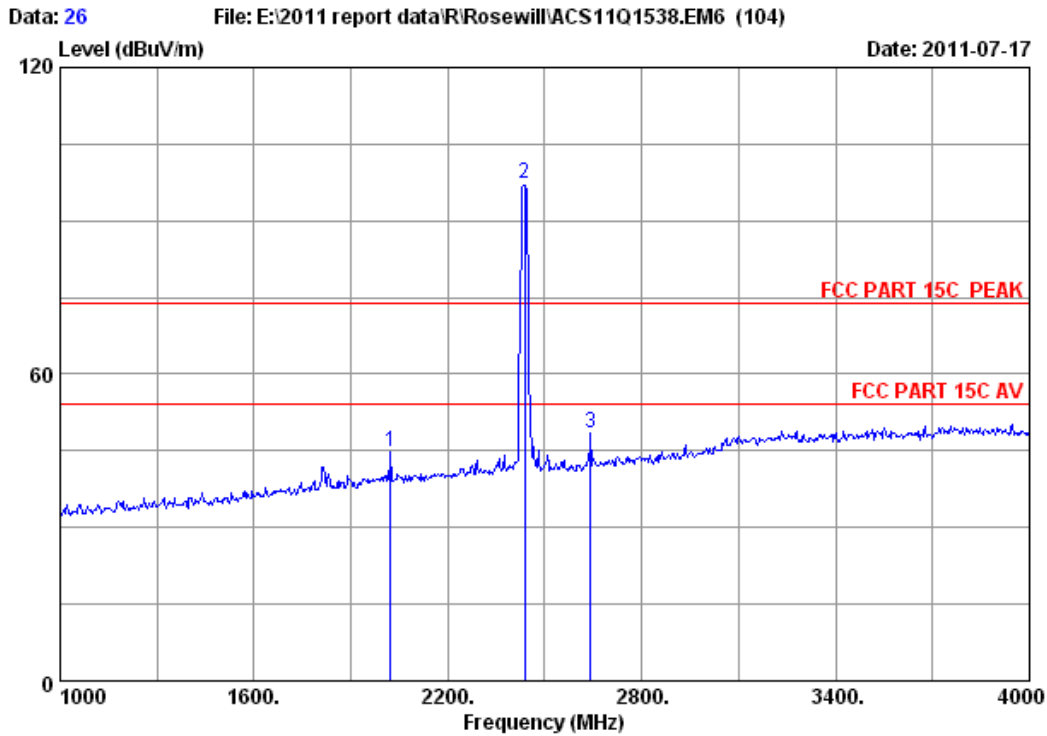


Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH6 2437MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2023.000	29.21	7.97	36.12	43.81	44.87	74.00	29.13	Peak
2	2437.000	29.47	8.77	36.06	94.93	97.11	74.00	-23.11	Peak
3	2641.000	30.25	9.17	35.77	44.79	48.44	74.00	25.56	Peak

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

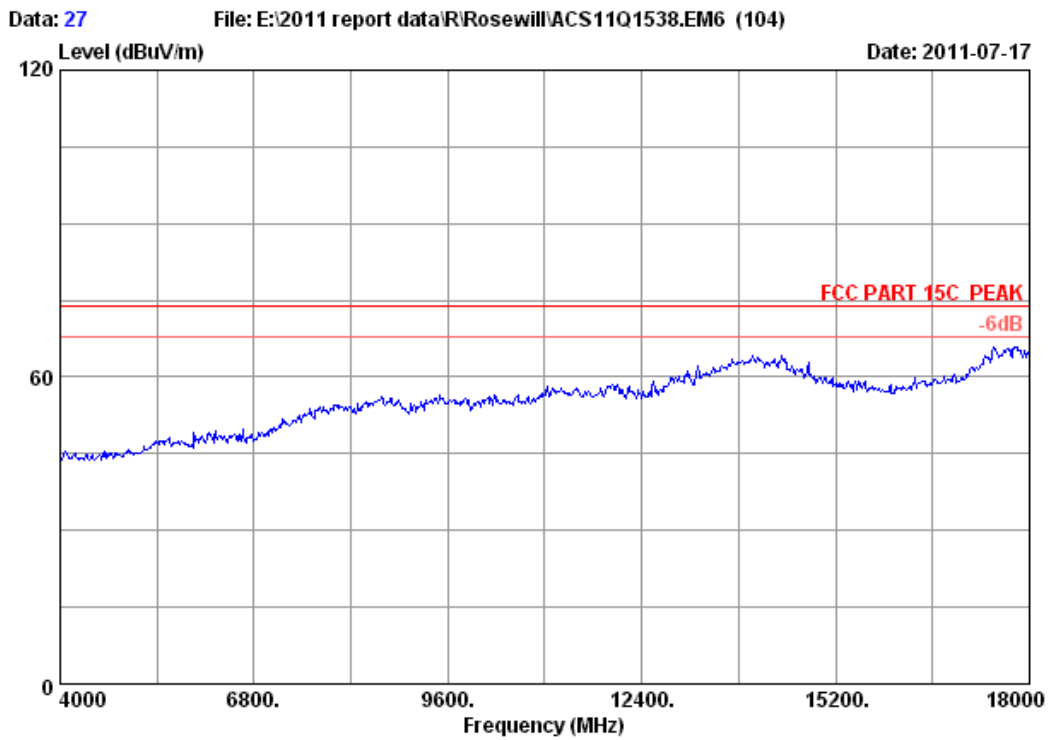

Site no. : 3m Chamber Data no. : 27
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11g CH6 2437MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

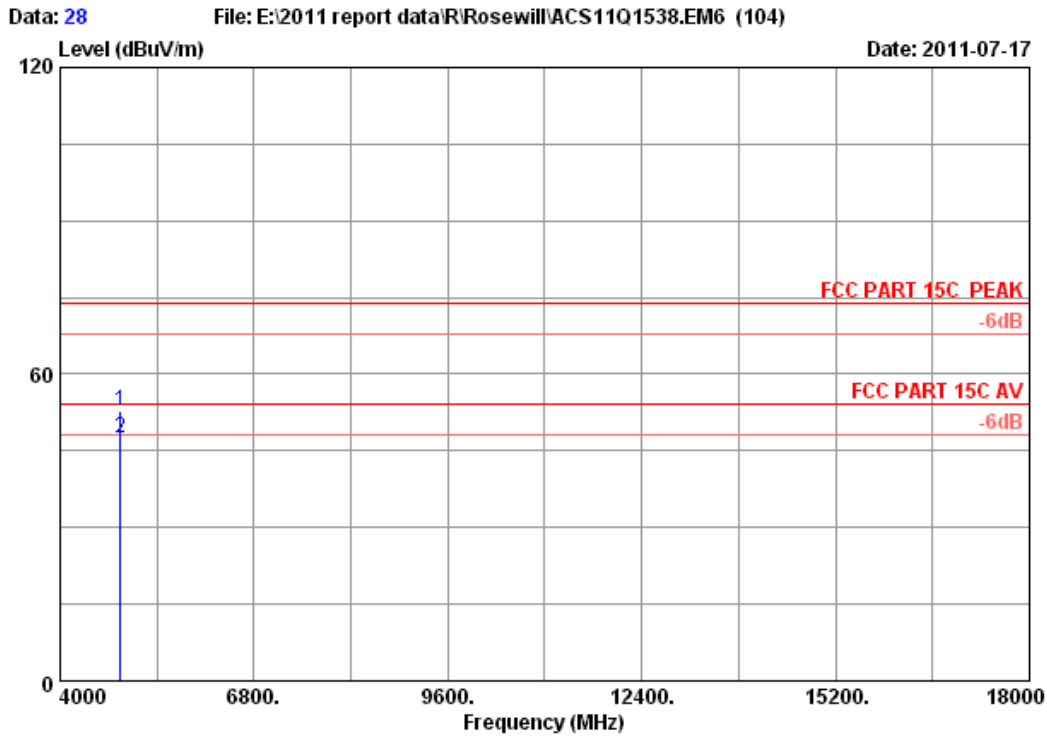


Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH6 2437MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.41	12.44	35.36	41.24	52.73	74.00	21.27	Peak
2	4874.000	34.41	12.44	35.36	35.97	47.46	54.00	6.54	Average


Remarks:
 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

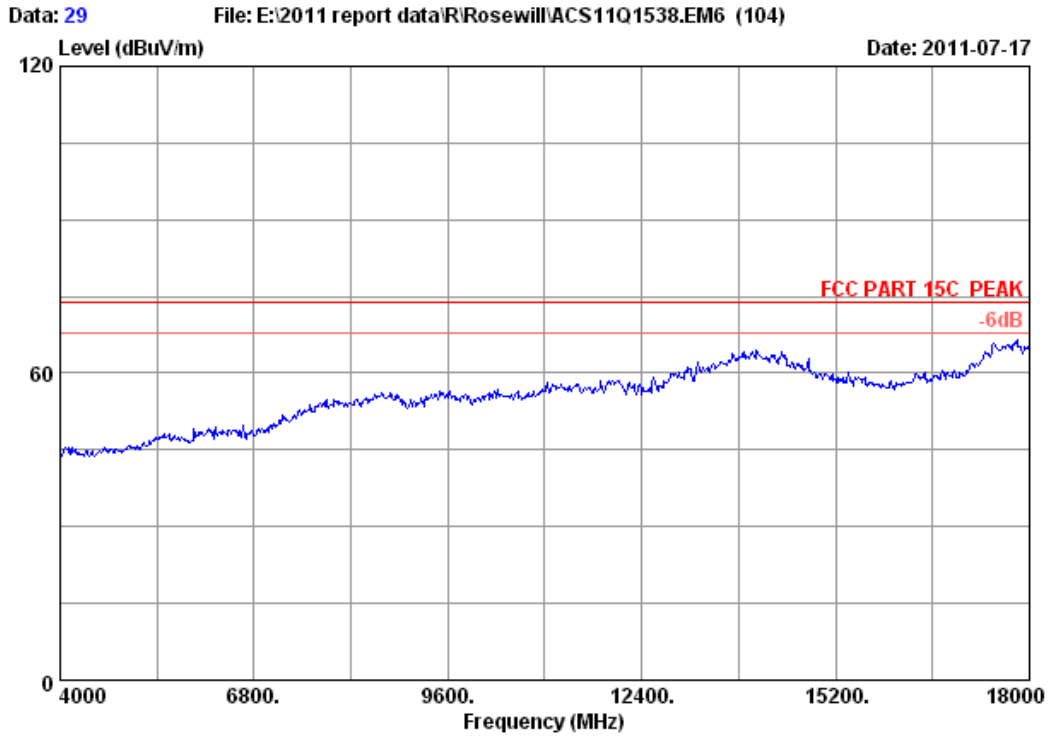

Site no. : 3m Chamber Data no. : 29
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11g CH6 2437MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

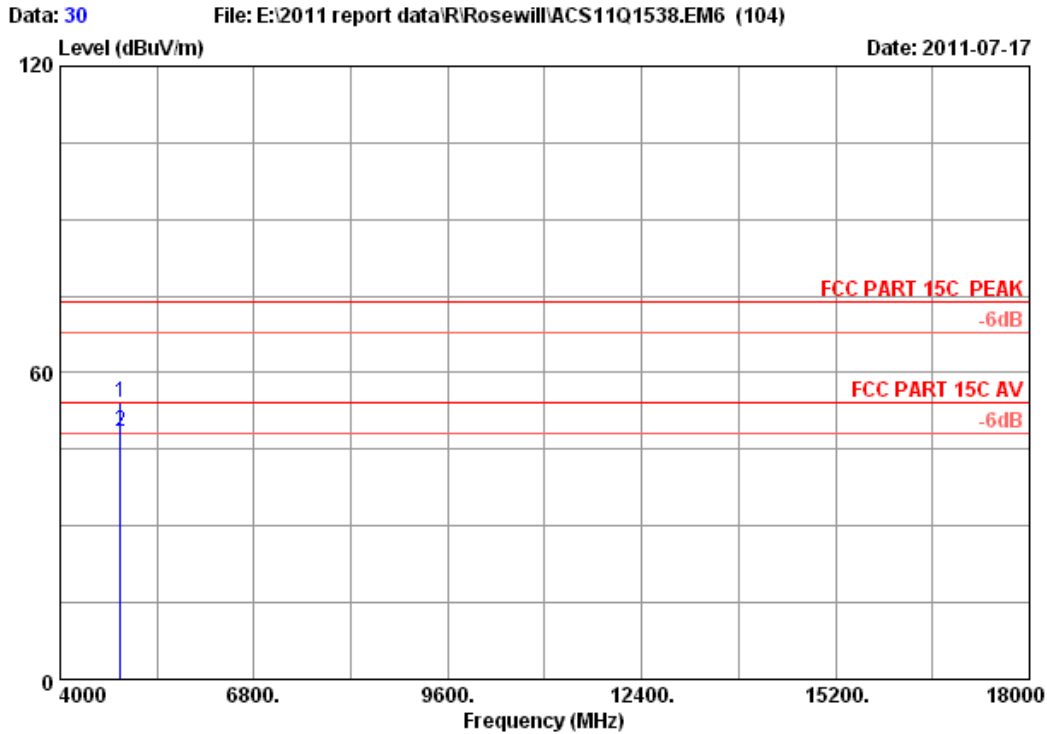


Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH6 2437MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.41	12.44	35.36	42.62	54.11	74.00	19.89	Peak
2	4874.000	34.41	12.44	35.36	36.84	48.33	54.00	5.67	Average

- Remarks:
- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
 - The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

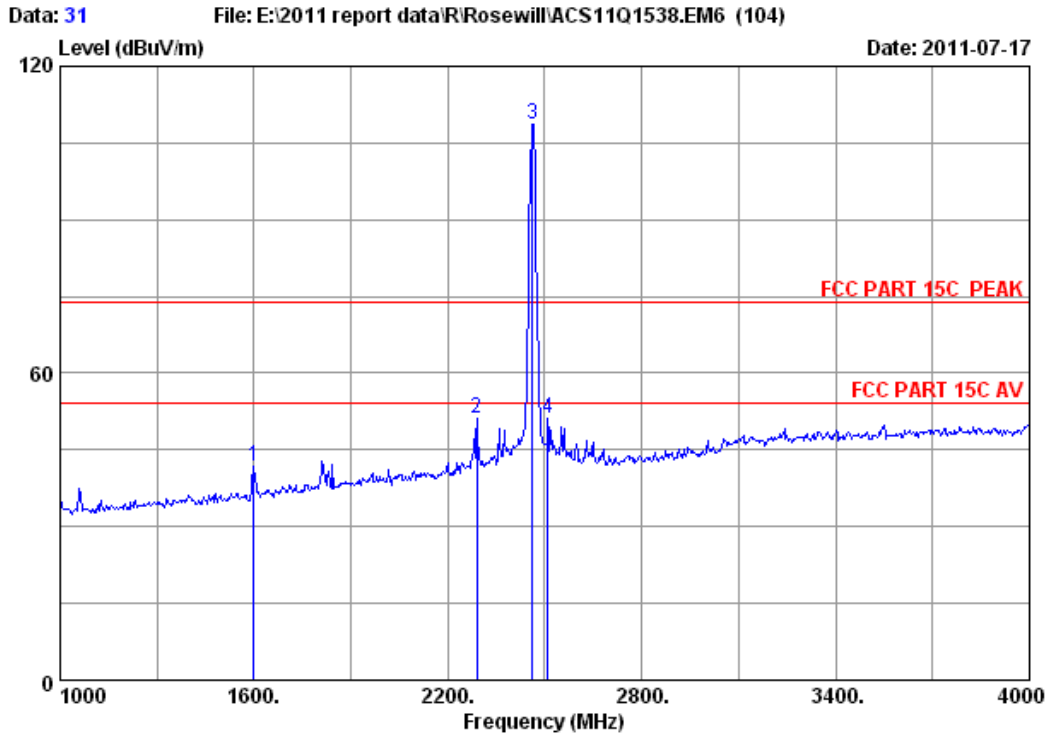


Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1600.000	26.96	6.98	36.43	44.21	41.72	74.00	32.28	Peak
2	2290.000	29.38	8.47	35.92	49.16	51.09	74.00	22.91	Peak
3	2462.000	29.48	8.82	36.02	106.24	108.52	74.00	-34.52	Peak
4	2509.000	29.58	8.92	35.99	48.48	50.99	74.00	23.01	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

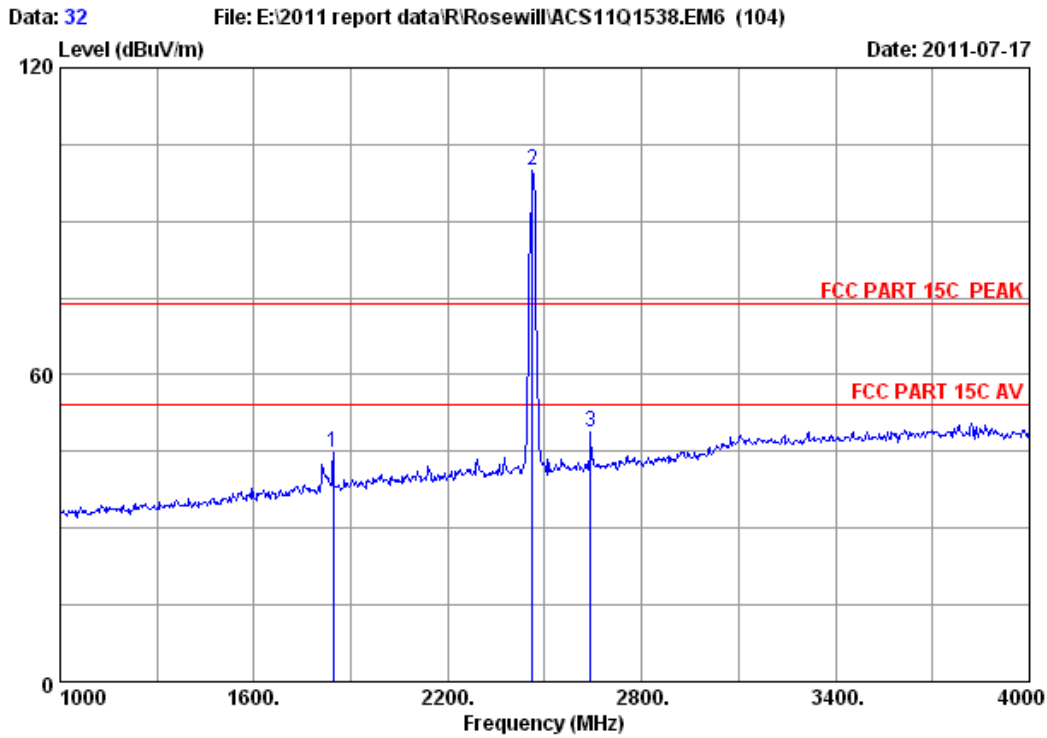


Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1846.000	28.36	7.51	36.23	45.06	44.70	74.00	29.30	Peak
2	2462.000	29.48	8.82	36.02	97.54	99.82	74.00	-25.82	Peak
3	2641.000	30.25	9.17	35.77	45.30	48.95	74.00	25.05	Peak

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

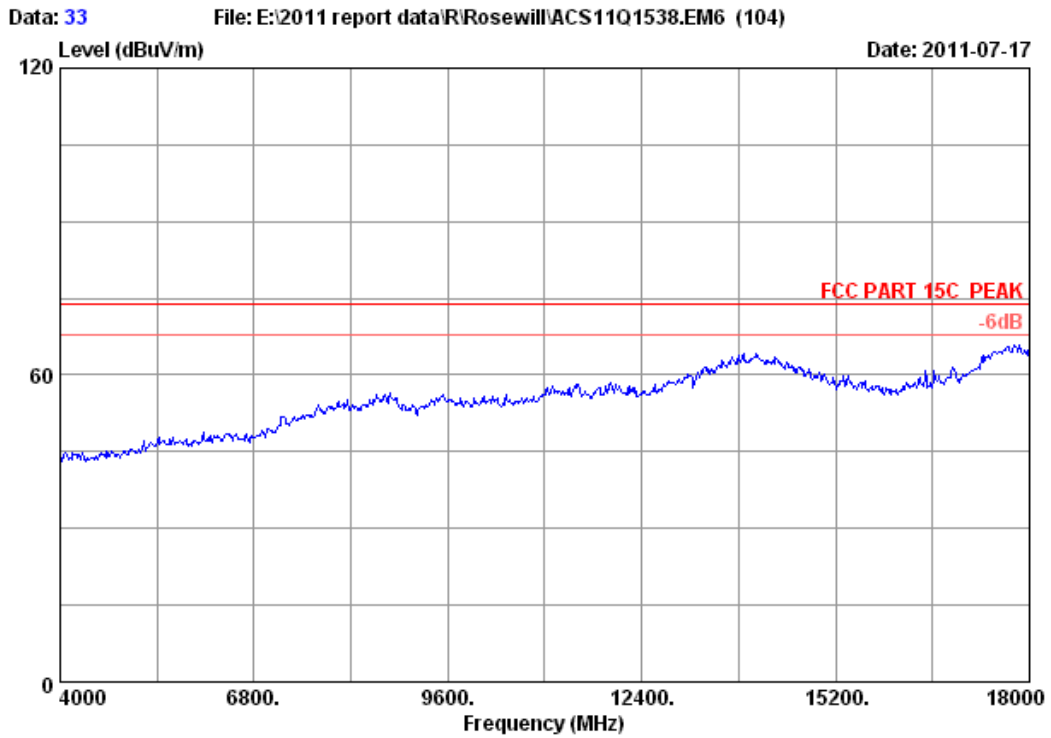

Site no.	: 3m Chamber	Data no. :	33
Dis. / Ant.	: 3m 3115(0911)	Ant. pol. :	VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer :	Leo-Li
EUT	: Wireless N PCI Adapter		
Power	: DC 3.3V From PC input AC 120V/60Hz		
Test mode	: IEEE802.11g CH11 2462MHz Tx		
M/N	: RNX-N360PC		

FCC ID:W6RRNX-N360PC

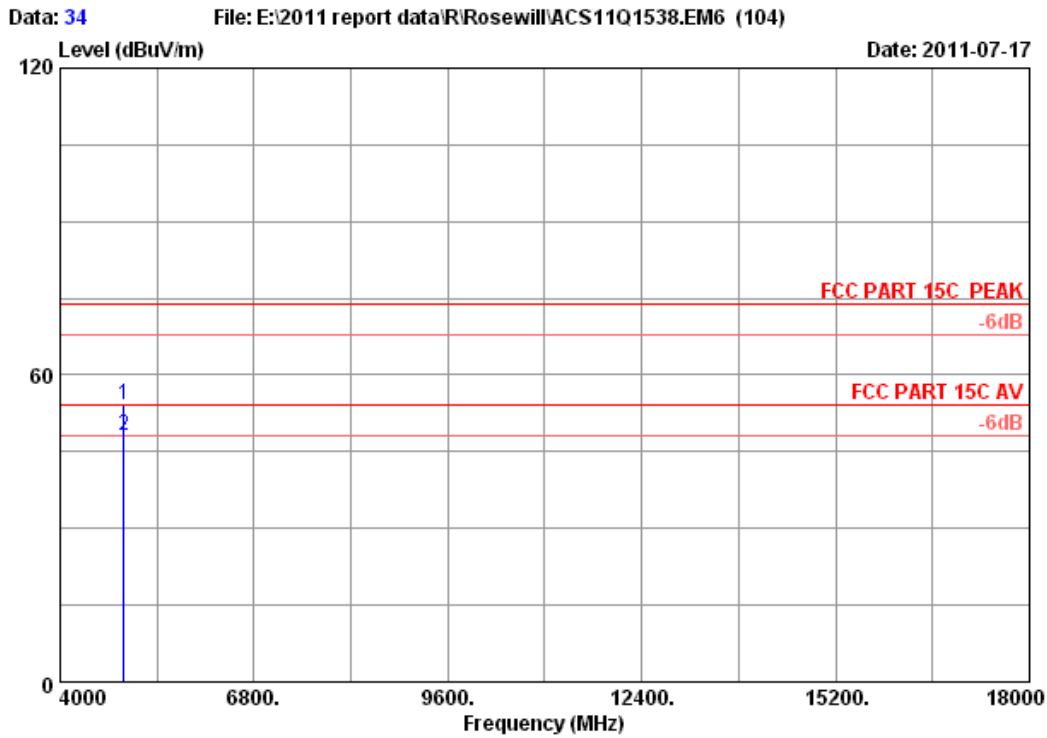


Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH11 2462MHz Tx
 M/N : RNX-N360PC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.49	12.50	35.34	42.39	54.04	74.00	19.96	Peak
2	4924.000	34.49	12.50	35.34	36.48	48.13	54.00	5.87	Average

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

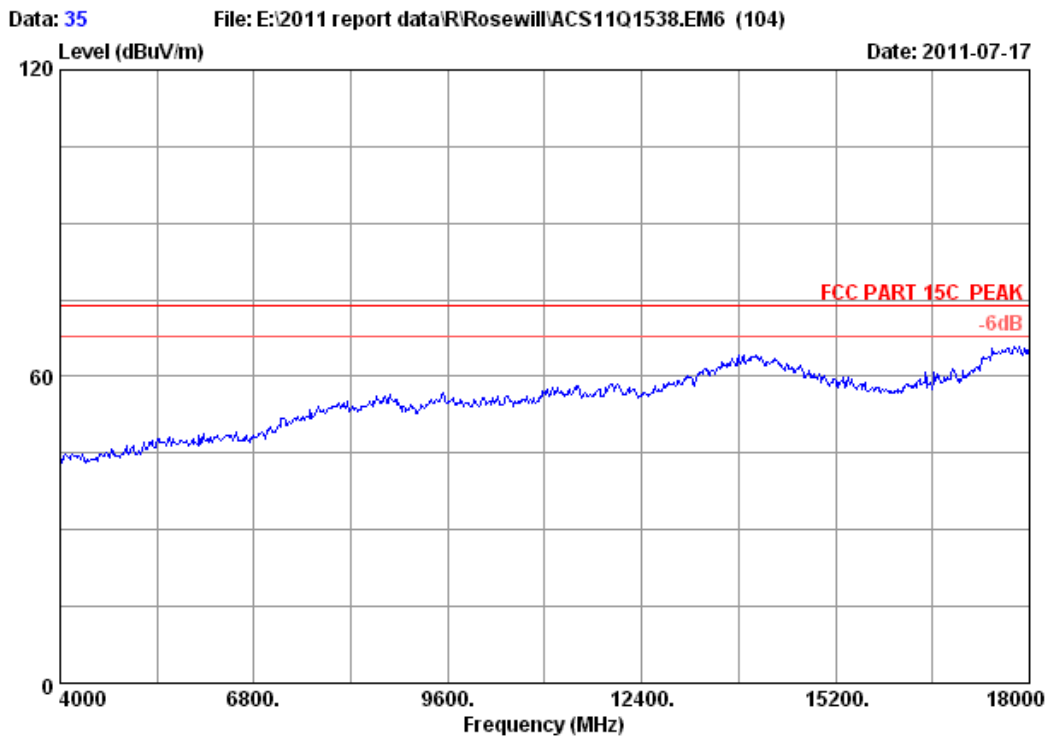

Site no. : 3m Chamber Data no. : 35
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11g CH11 2462MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

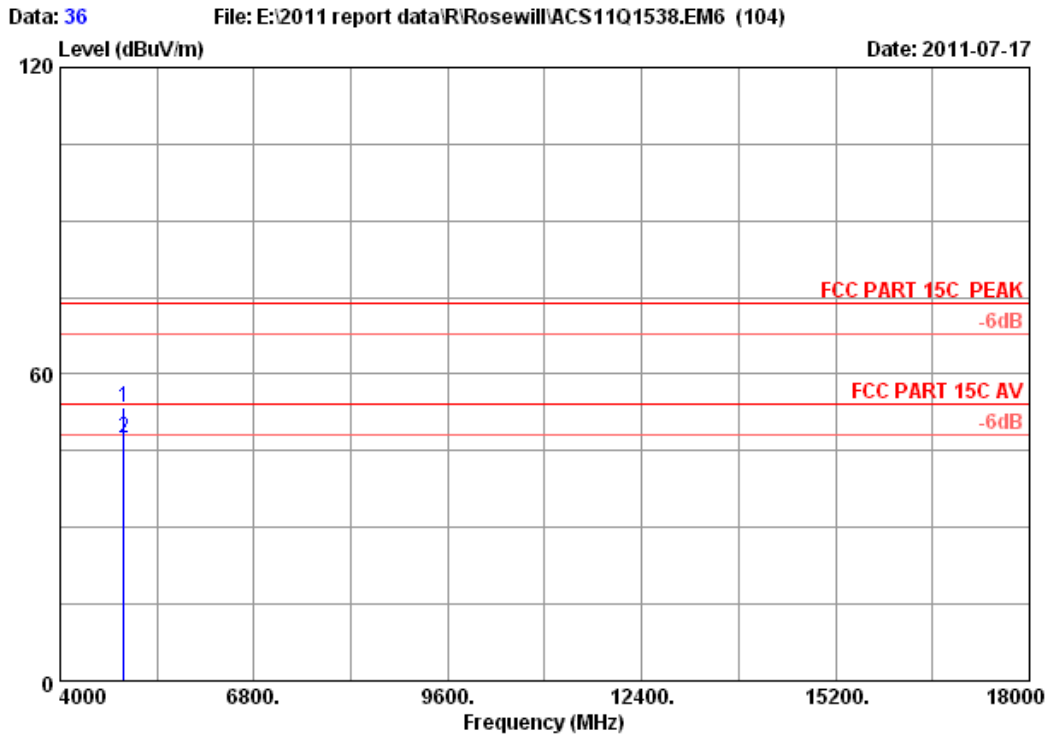


Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.49	12.50	35.34	41.96	53.61	74.00	20.39	Peak
2	4924.000	34.49	12.50	35.34	35.87	47.52	54.00	6.48	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

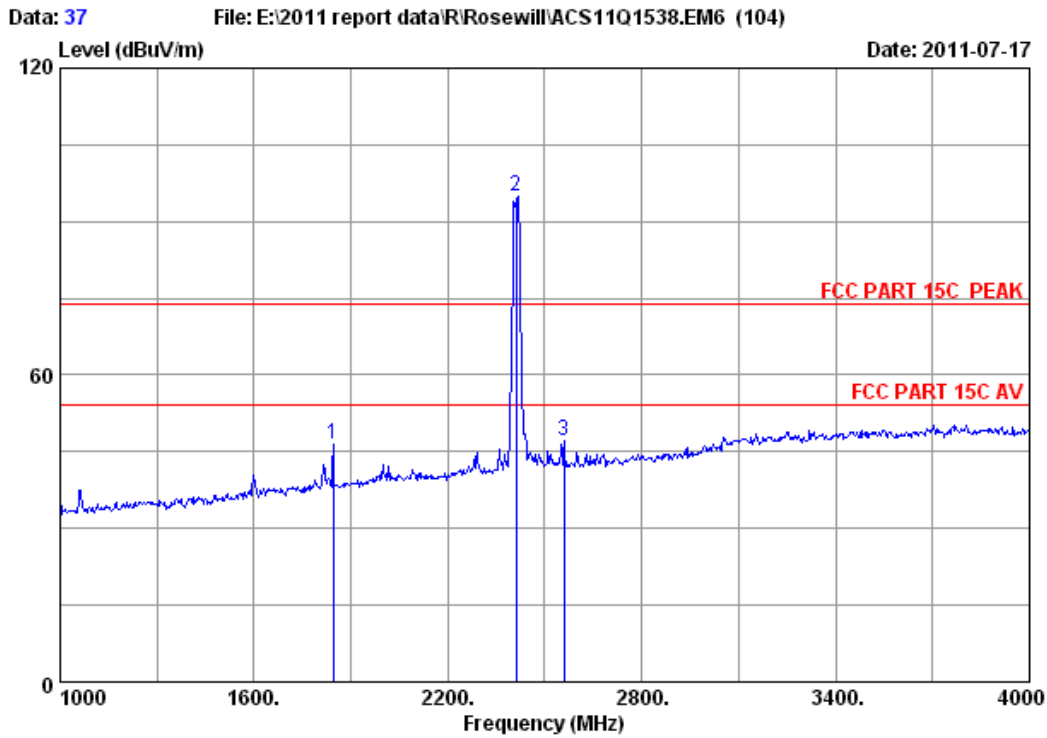


Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1846.000	28.36	7.51	36.23	46.75	46.39	74.00	27.61	Peak
2	2412.000	29.45	8.72	35.95	92.62	94.84	74.00	-20.84	Peak
3	2560.000	29.83	9.02	35.88	44.01	46.98	74.00	27.02	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

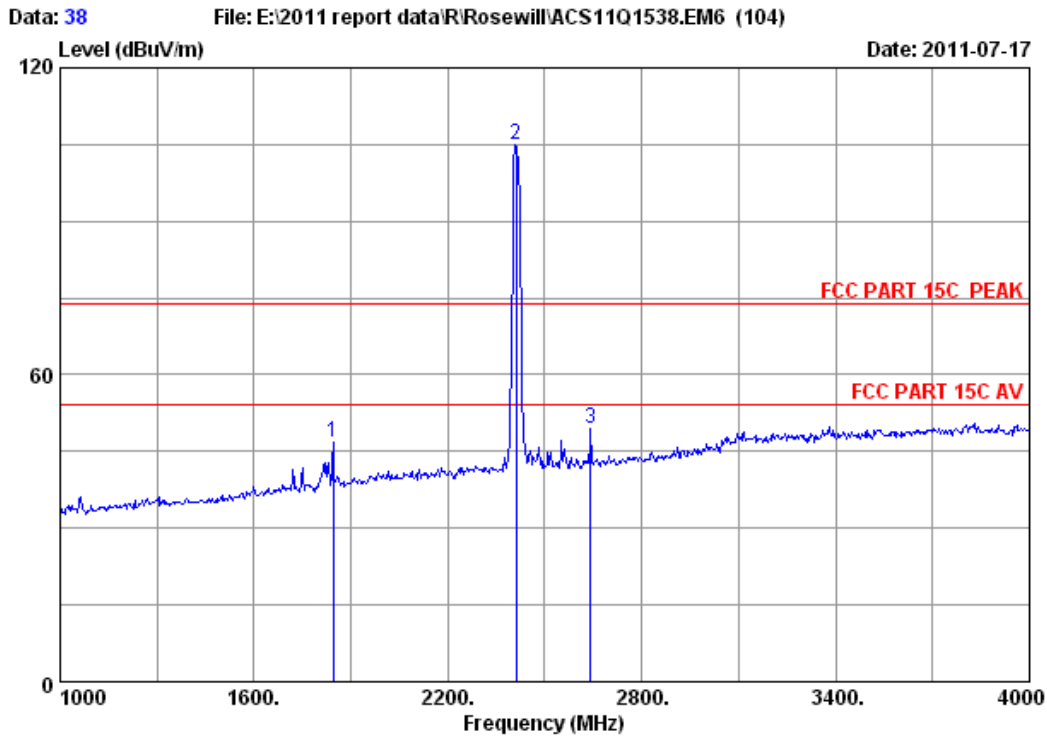

```


Site no.      : 3m Chamber           Data no. : 38
Dis. / Ant.  : 3m 3115(0911)        Ant. pol.: VERTICAL
Limit        : FCC PART 15C PEAK
Env. / Ins.  : 23*C/54%             Engineer : Leo-Li
EUT          : Wireless N PCI Adapter
Power        : DC 3.3V From PC input AC 120V/60Hz
Test mode    : IEEE802.11n HT20 CH1 2412MHz Tx
M/N         : RNX-N360PC
    
```

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1846.000	28.36	7.51	36.23	47.08	46.72	74.00	27.28	Peak
2	2412.000	29.45	8.72	35.95	102.89	105.11	74.00	-31.11	Peak
3	2641.000	30.25	9.17	35.77	45.77	49.42	74.00	24.58	Peak

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

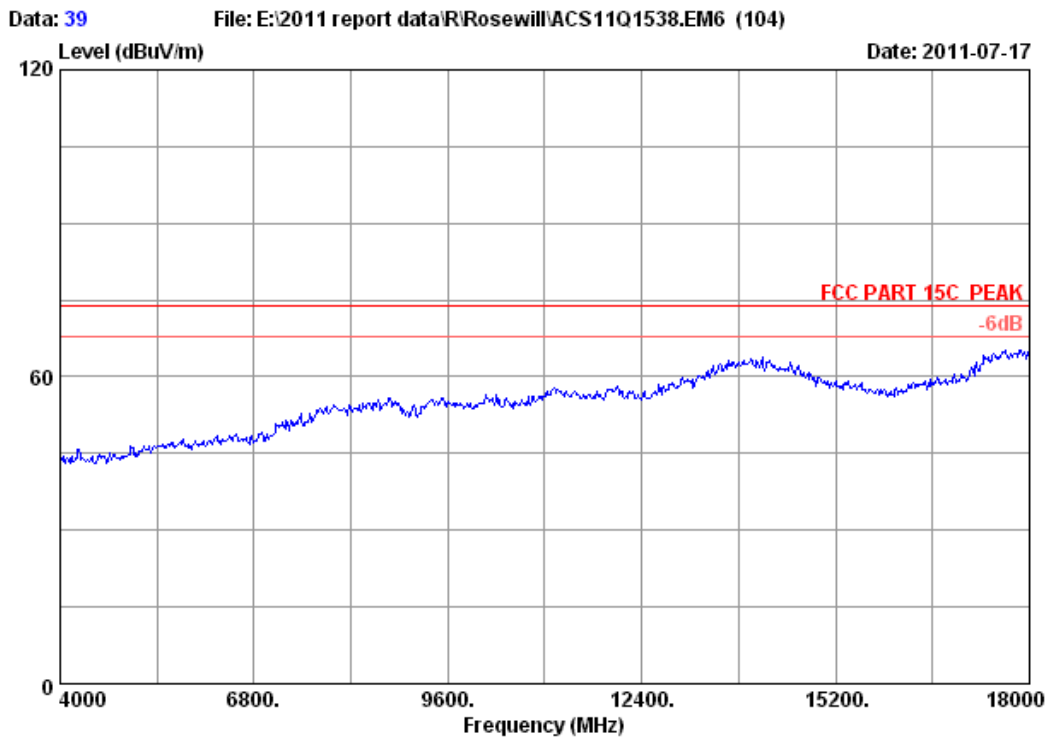

Site no. : 3m Chamber Data no. : 39
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

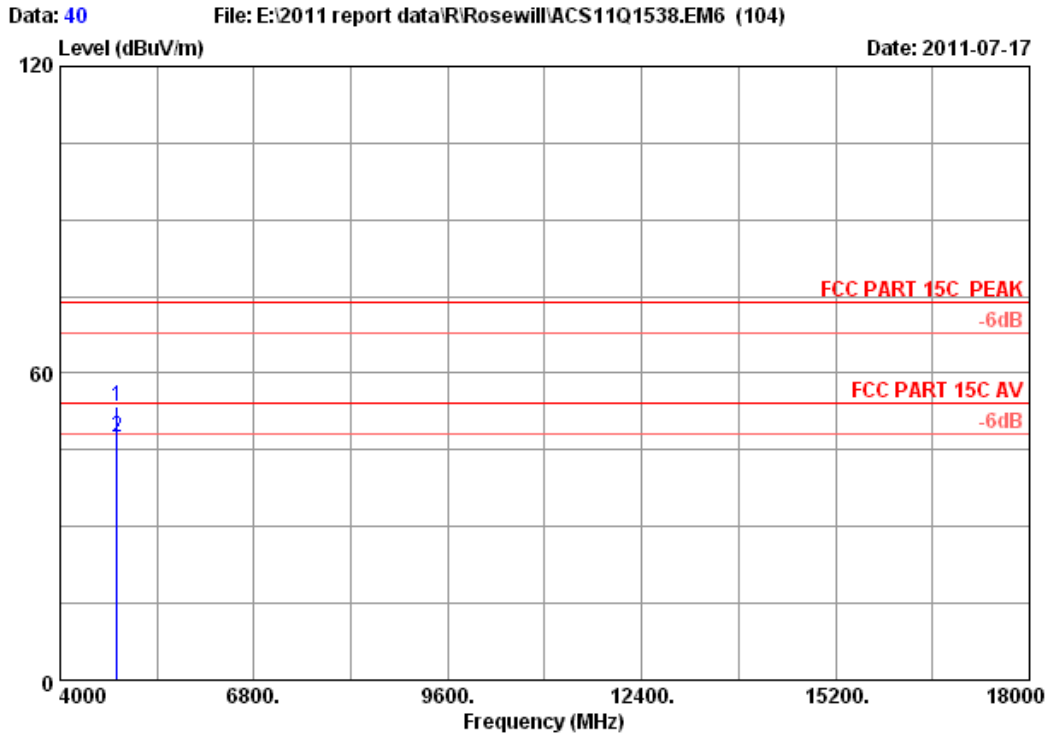


Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.32	12.38	35.25	41.96	53.41	74.00	20.59	Peak
2	4824.000	34.32	12.38	35.25	35.86	47.31	54.00	6.69	Average

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

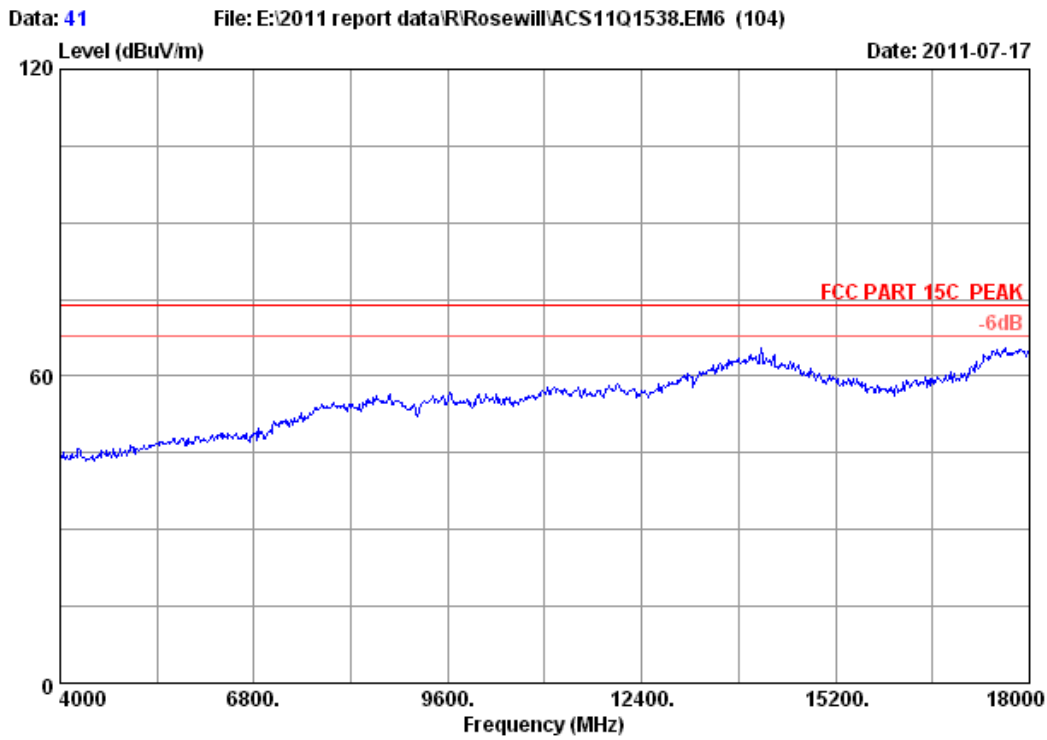

Site no. : 3m Chamber Data no. : 41
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

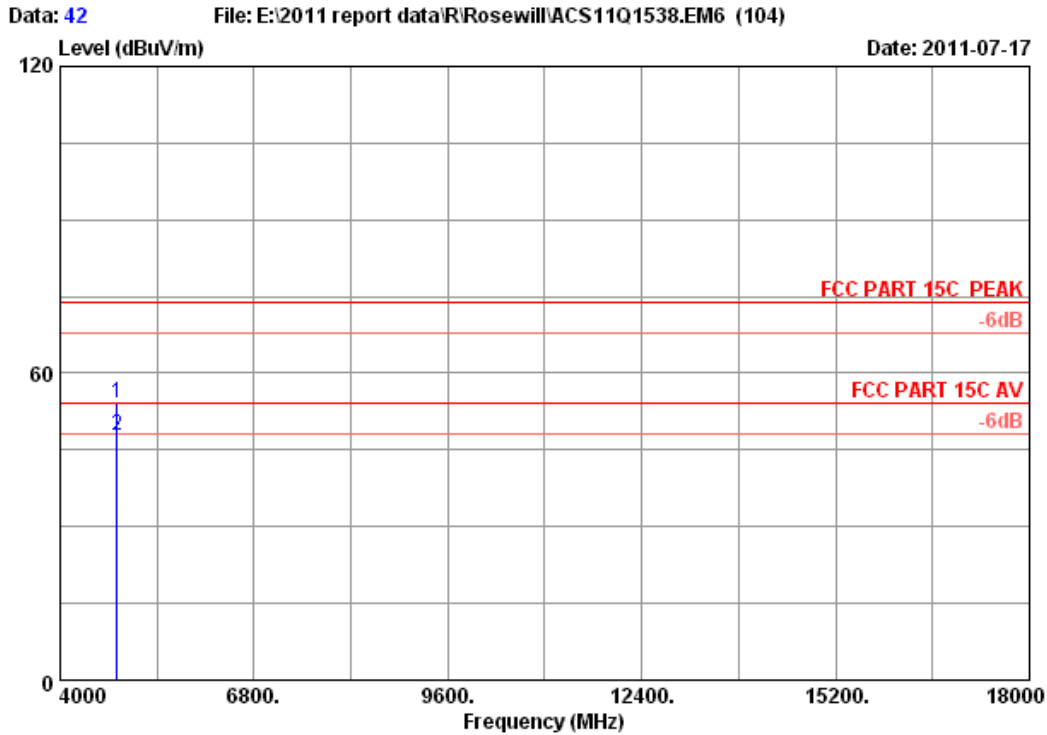


Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
 M/N : RNX-N360PC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.32	12.38	35.25	42.59	54.04	74.00	19.96	Peak
2	4824.000	34.32	12.38	35.25	36.48	47.93	54.00	6.07	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

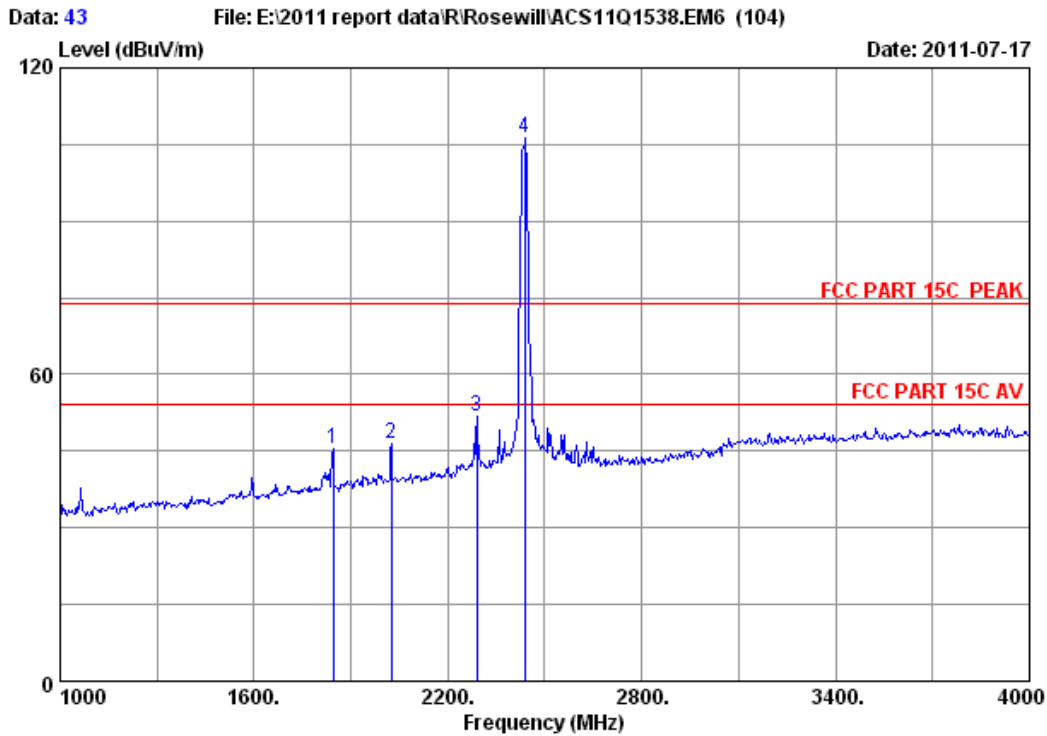


Site no. : 3m Chamber Data no. : 43
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH6 2437MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1846.000	28.36	7.51	36.23	45.95	45.59	74.00	28.41	Peak
2	2026.000	29.21	7.97	36.12	45.28	46.34	74.00	27.66	Peak
3	2290.000	29.38	8.47	35.92	49.86	51.79	74.00	22.21	Peak
4	2437.000	29.47	8.77	36.06	104.15	106.33	74.00	-32.33	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

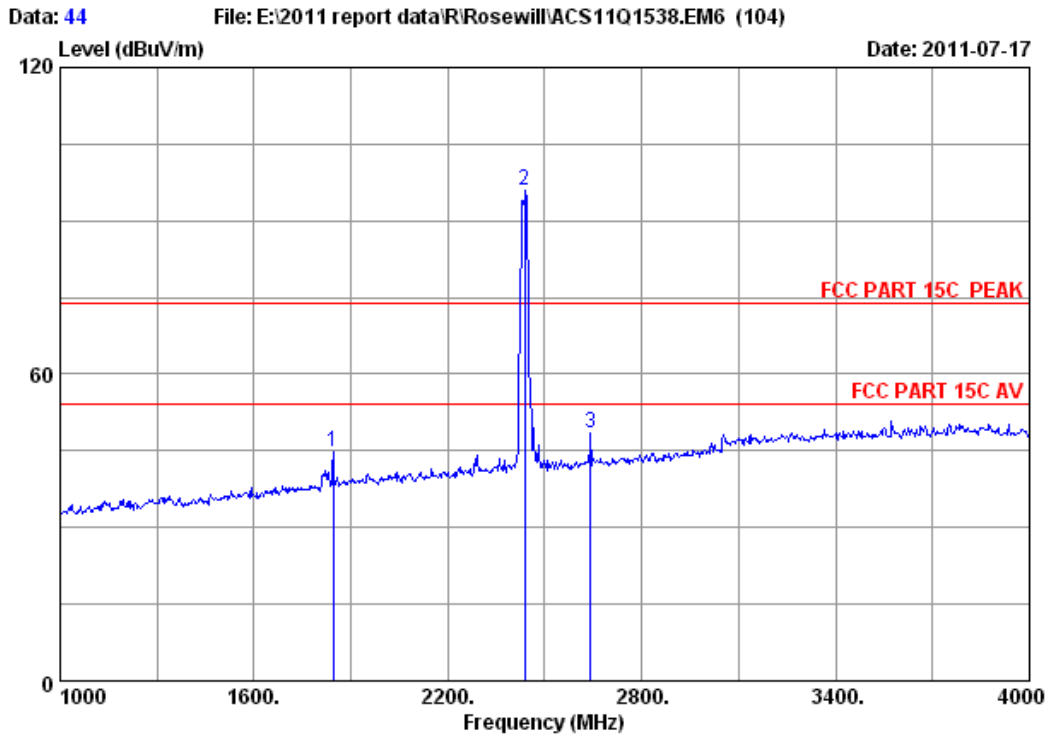


Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH6 2437MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1846.000	28.36	7.51	36.23	45.27	44.91	74.00	29.09	Peak
2	2437.000	29.47	8.77	36.06	93.73	95.91	74.00	-21.91	Peak
3	2641.000	30.25	9.17	35.77	44.77	48.42	74.00	25.58	Peak

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

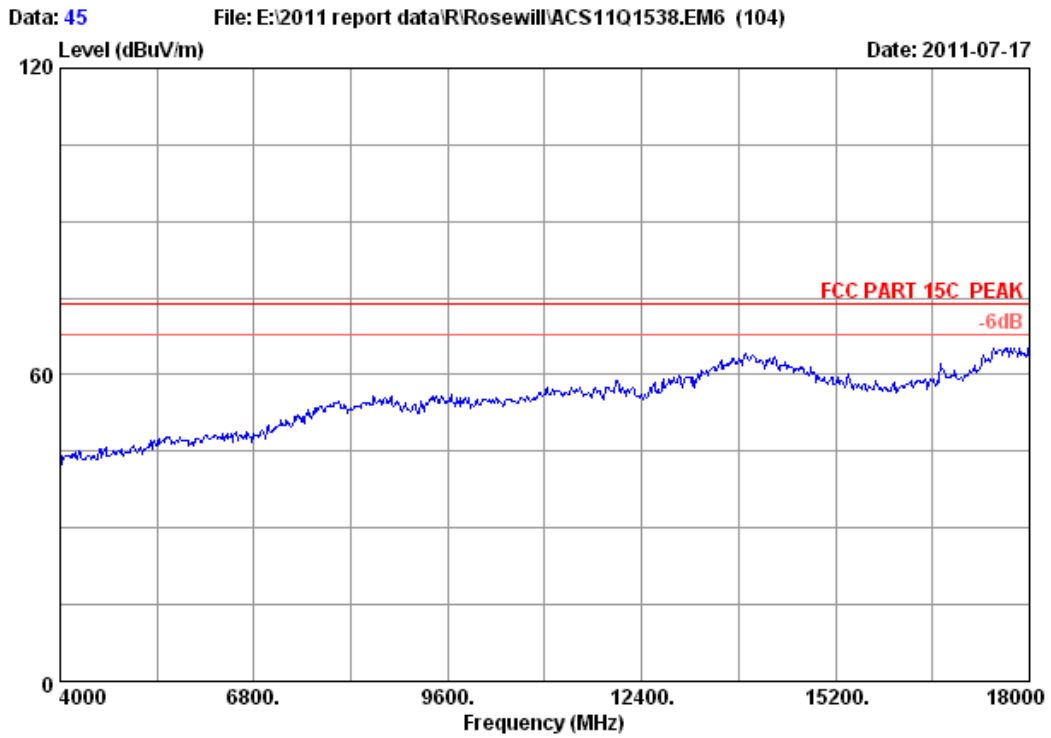

Site no. : 3m Chamber Data no. : 45
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH6 2437MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

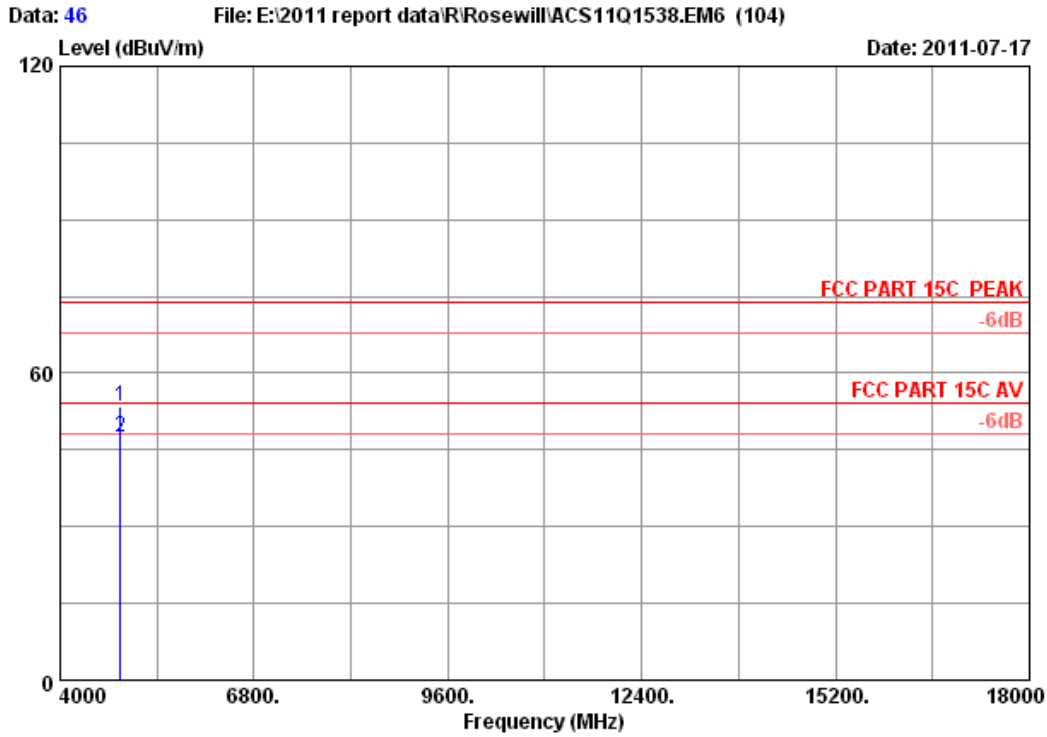


Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH6 2437MHz Tx
 M/N : RNX-N360PC

	Ant.	Cable	Amp.	Emission					
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	4874.000	34.41	12.44	35.36	41.89	53.38	74.00	20.62	Peak
2	4874.000	34.41	12.44	35.36	36.01	47.50	54.00	6.50	Average

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

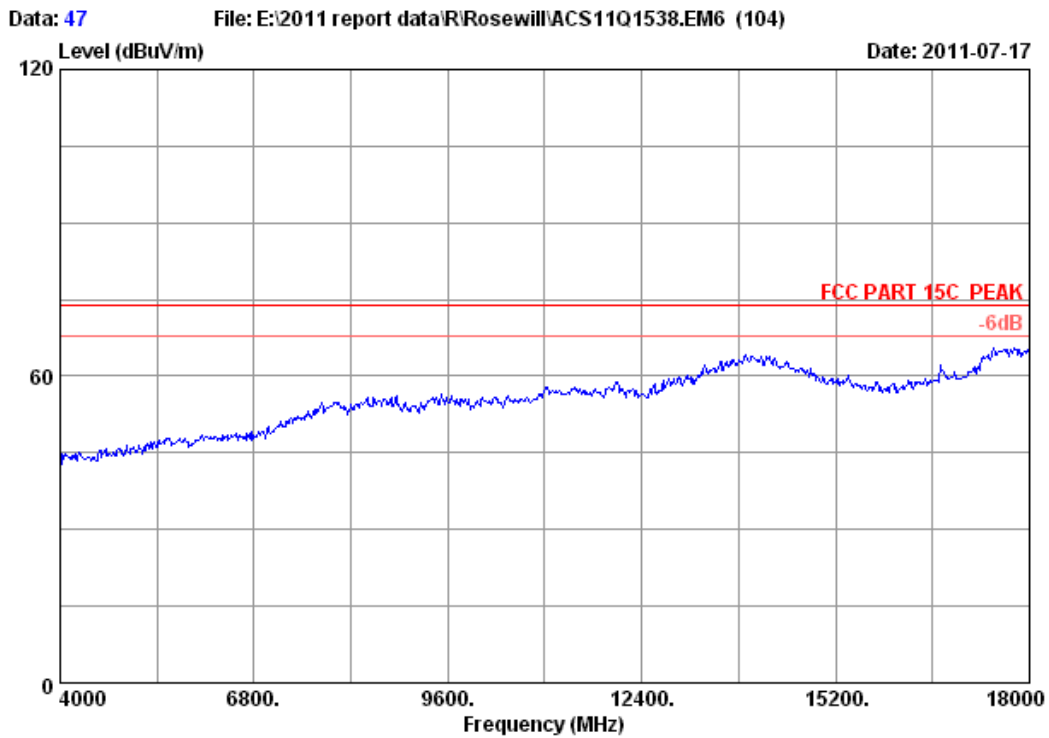

Site no. : 3m Chamber Data no. : 47
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH6 2437MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

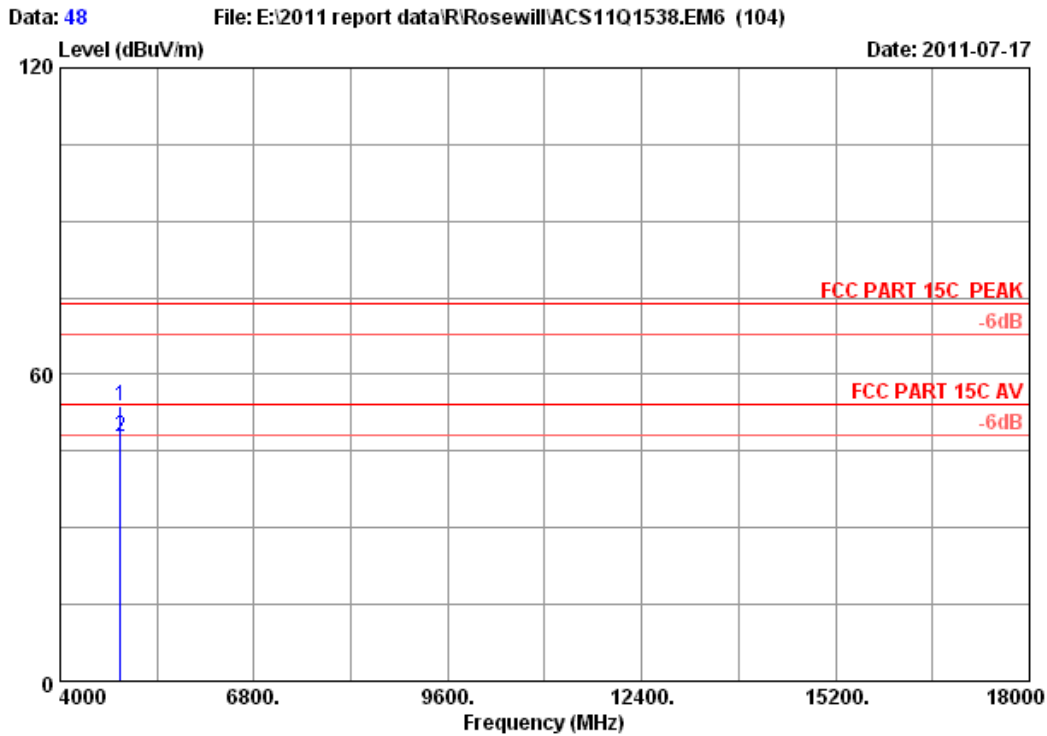


Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH6 2437MHz Tx
 M/N : RNX-N360PC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.41	12.44	35.36	42.38	53.87	74.00	20.13	Peak
2	4874.000	34.41	12.44	35.36	36.23	47.72	54.00	6.28	Average

Remarks:
 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

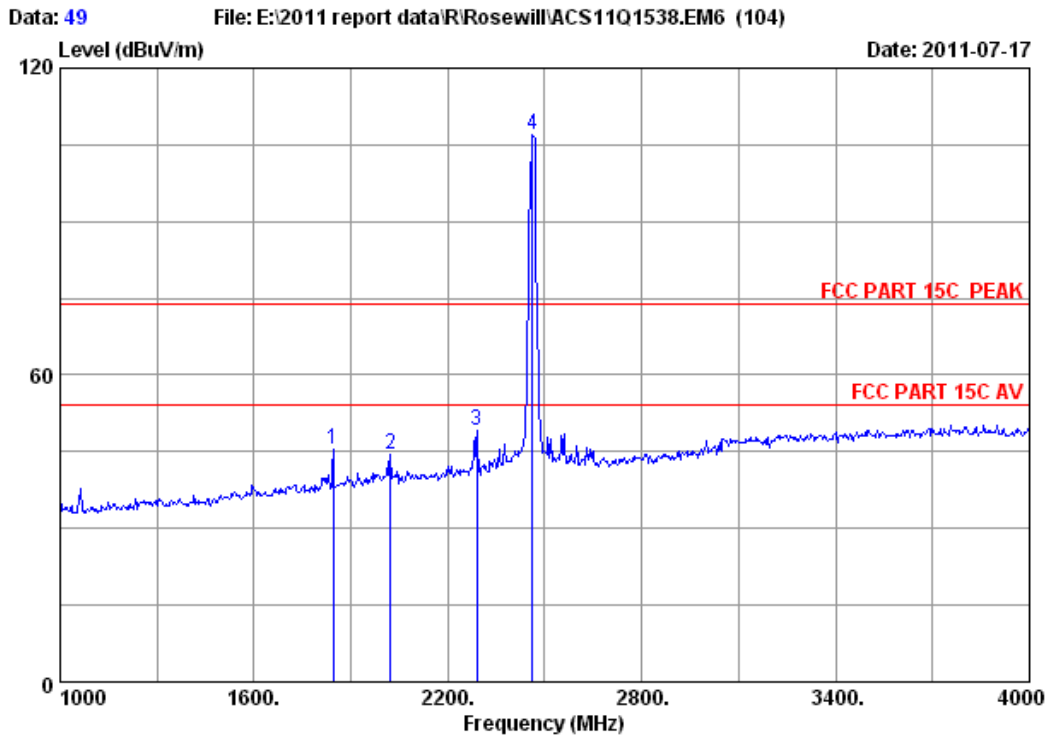


Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1846.000	28.36	7.51	36.23	45.67	45.31	74.00	28.69	Peak
2	2023.000	29.21	7.97	36.12	43.49	44.55	74.00	29.45	Peak
3	2290.000	29.38	8.47	35.92	47.09	49.02	74.00	24.98	Peak
4	2462.000	29.48	8.82	36.02	104.74	107.02	74.00	-33.02	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

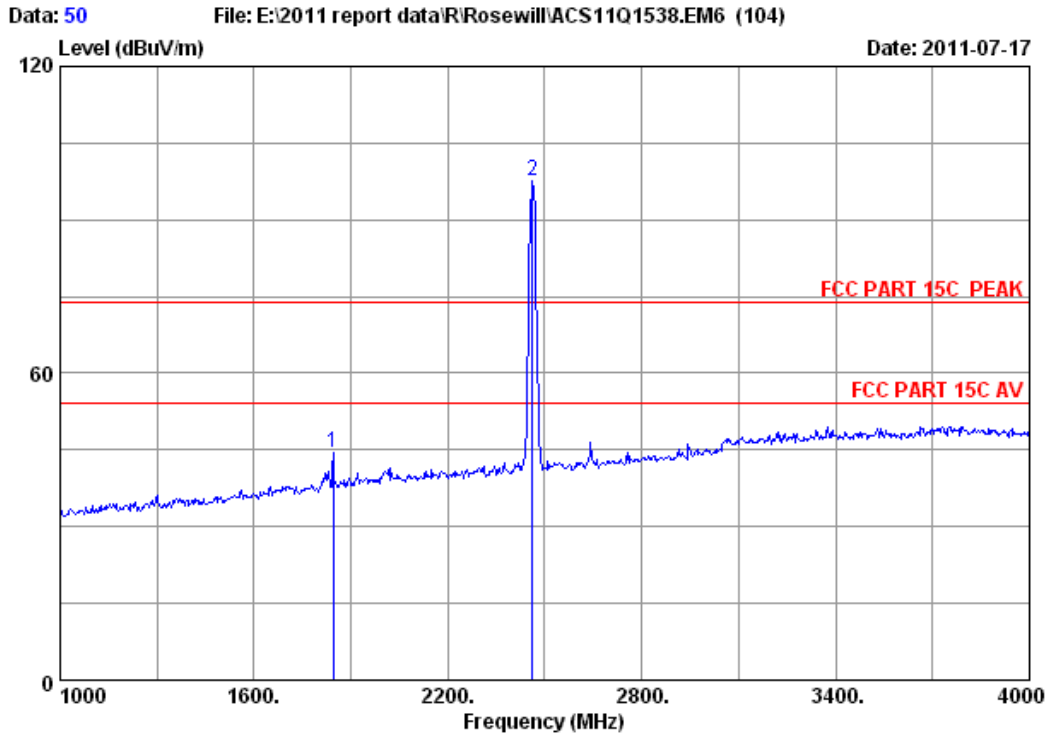


Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1846.000	28.36	7.51	36.23	44.74	44.38	74.00	29.62	Peak
2	2462.000	29.48	8.82	36.02	95.17	97.45	74.00	-23.45	Peak

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

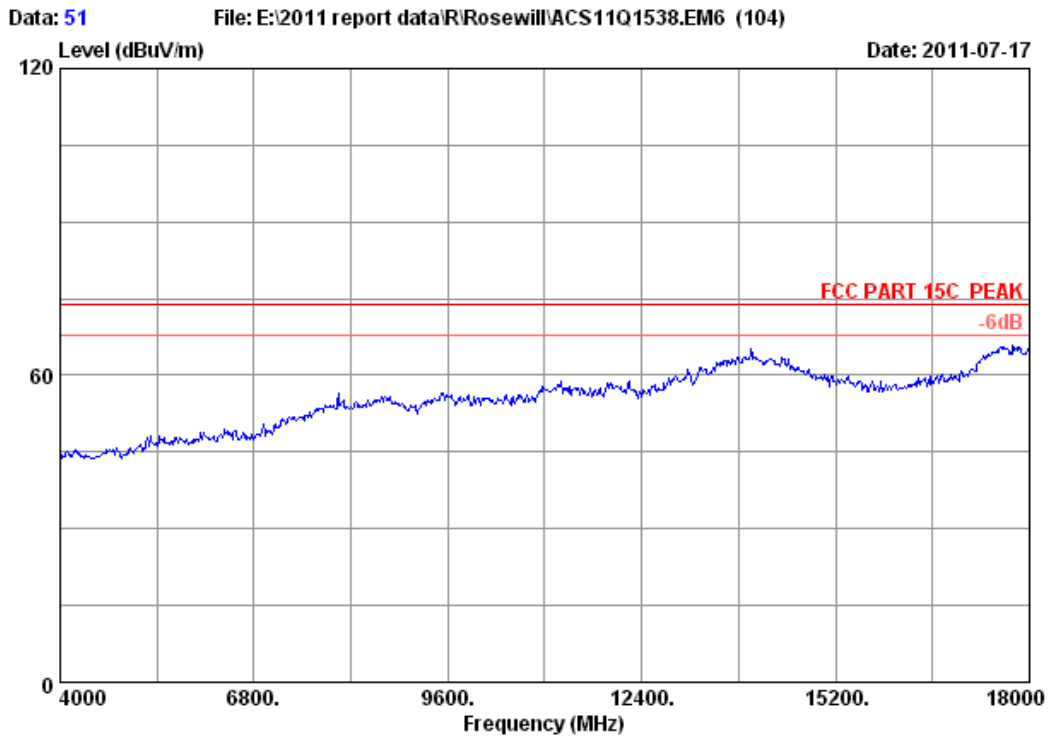

Site no. : 3m Chamber Data no. : 51
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

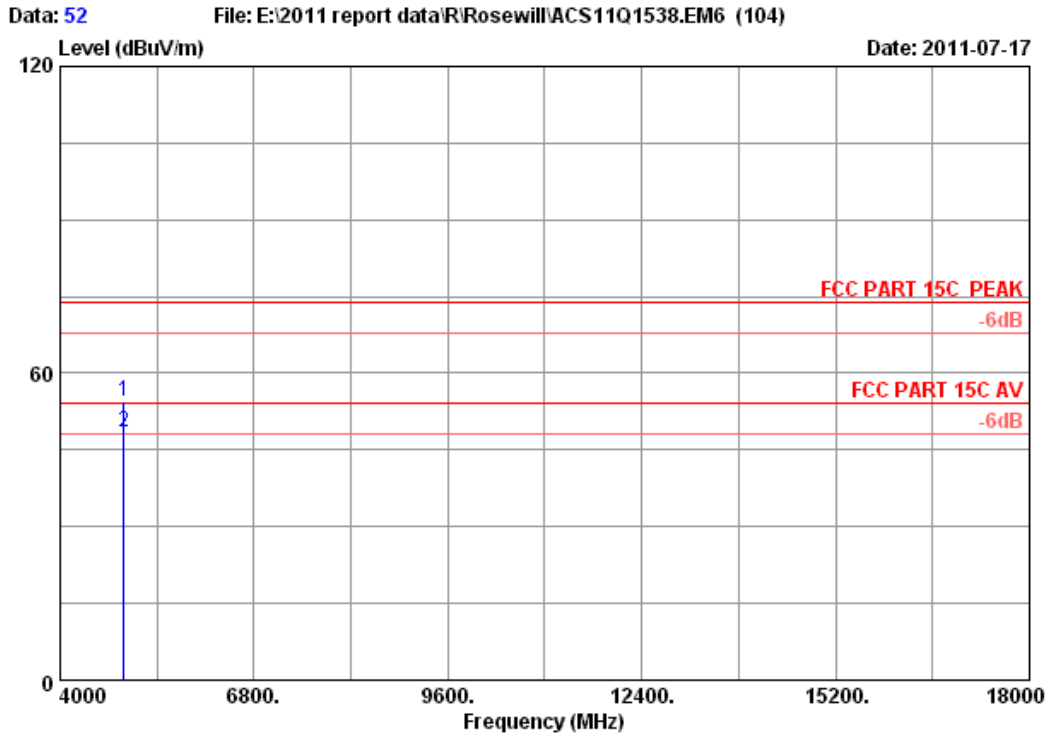


Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
 M/N : RNX-N360PC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.49	12.50	35.34	42.69	54.34	74.00	19.66	Peak
2	4924.000	34.49	12.50	35.34	36.87	48.52	54.00	5.48	Average

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

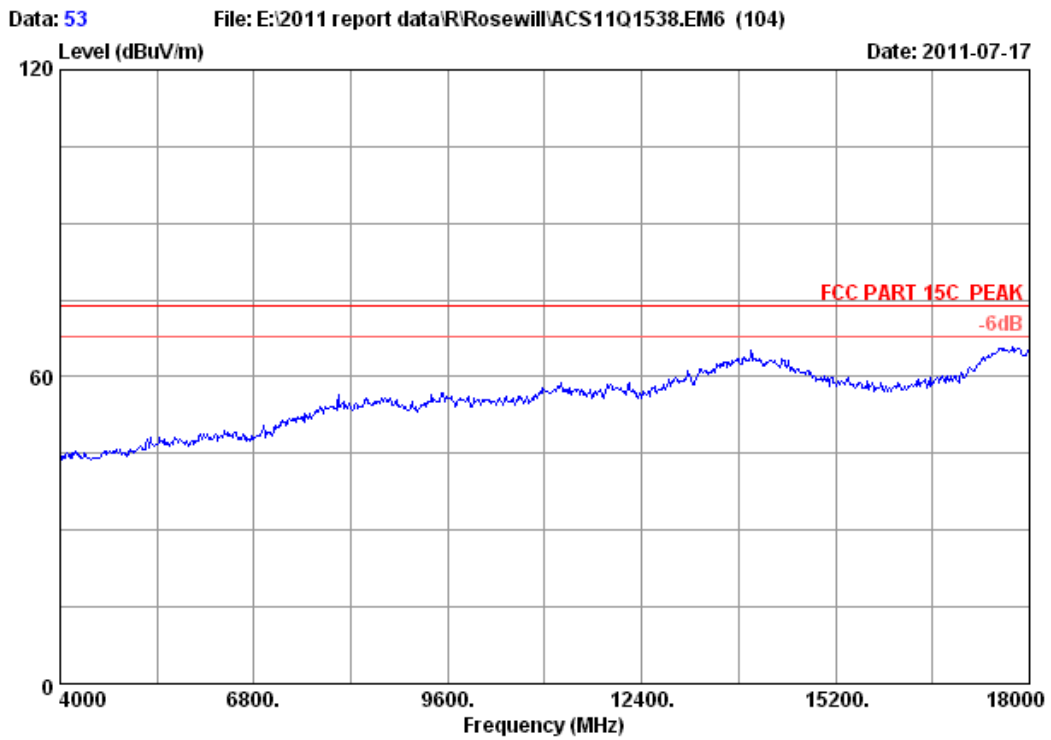

Site no. : 3m Chamber Data no. : 53
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

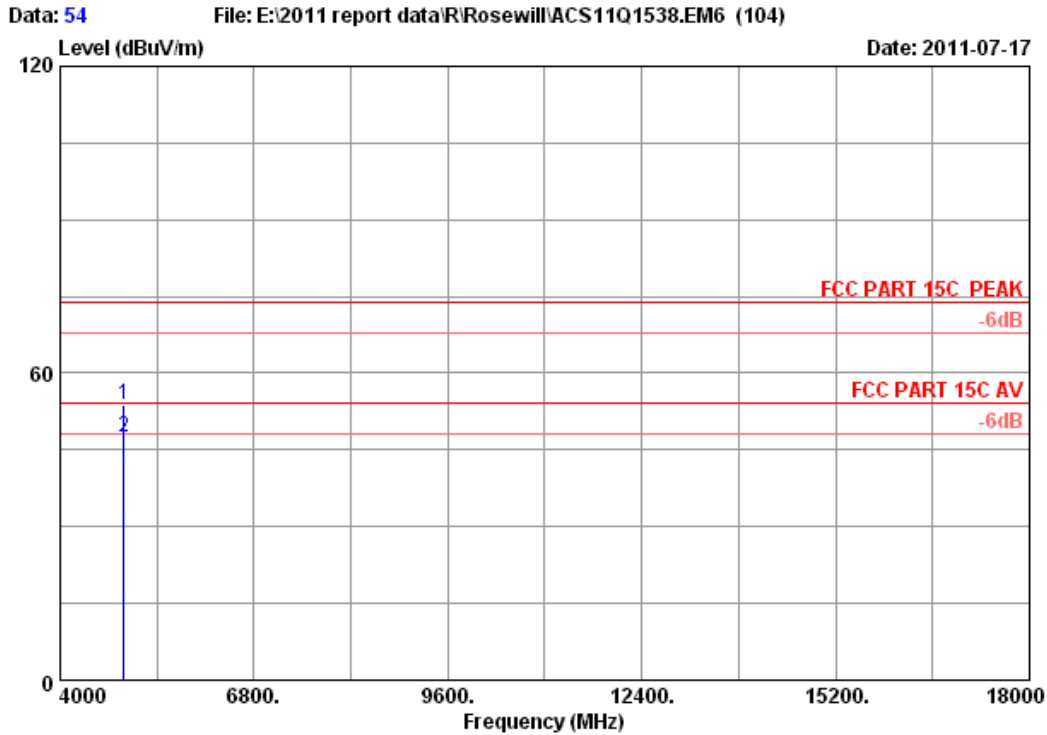


Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.49	12.50	35.34	42.05	53.70	74.00	20.30	Peak
2	4924.000	34.49	12.50	35.34	35.89	47.54	54.00	6.46	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

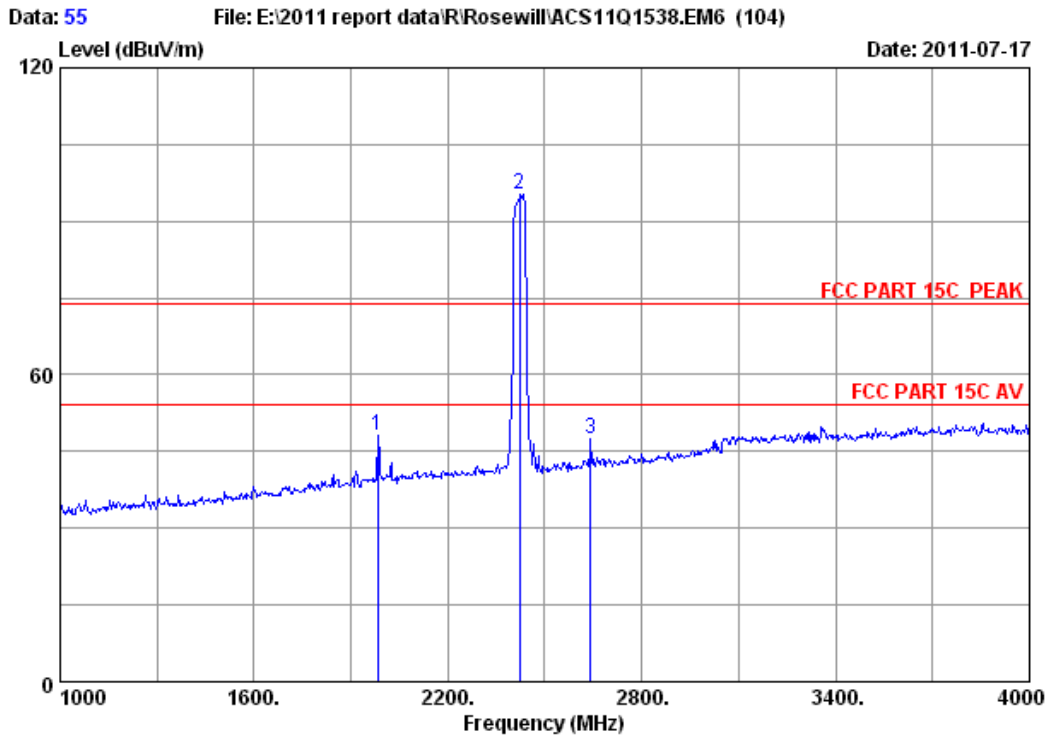


Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1984.000	29.11	7.87	36.06	47.12	48.04	74.00	25.96	Peak
2	2422.000	29.46	8.77	36.01	92.97	95.19	74.00	-21.19	Peak
3	2641.000	30.25	9.17	35.77	43.78	47.43	74.00	26.57	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

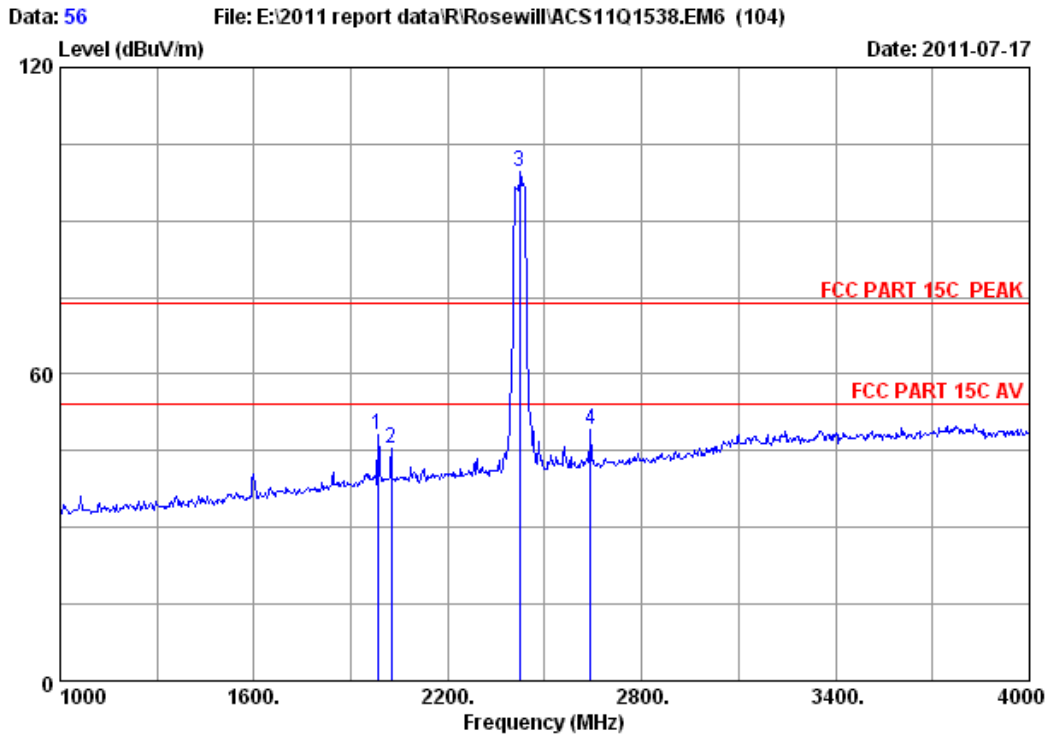


Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1984.000	29.11	7.87	36.06	47.27	48.19	74.00	25.81	Peak
2	2026.000	29.21	7.97	36.12	44.41	45.47	74.00	28.53	Peak
3	2422.000	29.46	8.77	36.01	97.53	99.75	74.00	-25.75	Peak
4	2641.000	30.25	9.17	35.77	45.58	49.23	74.00	24.77	Peak

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

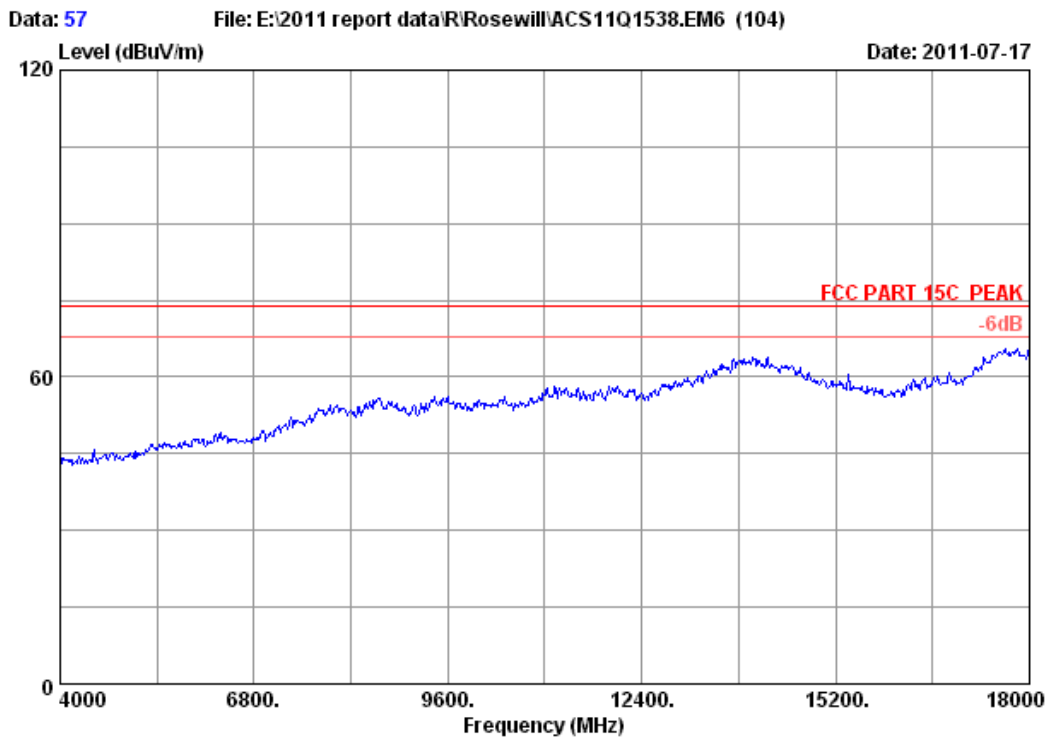

Site no. : 3m Chamber Data no. : 57
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

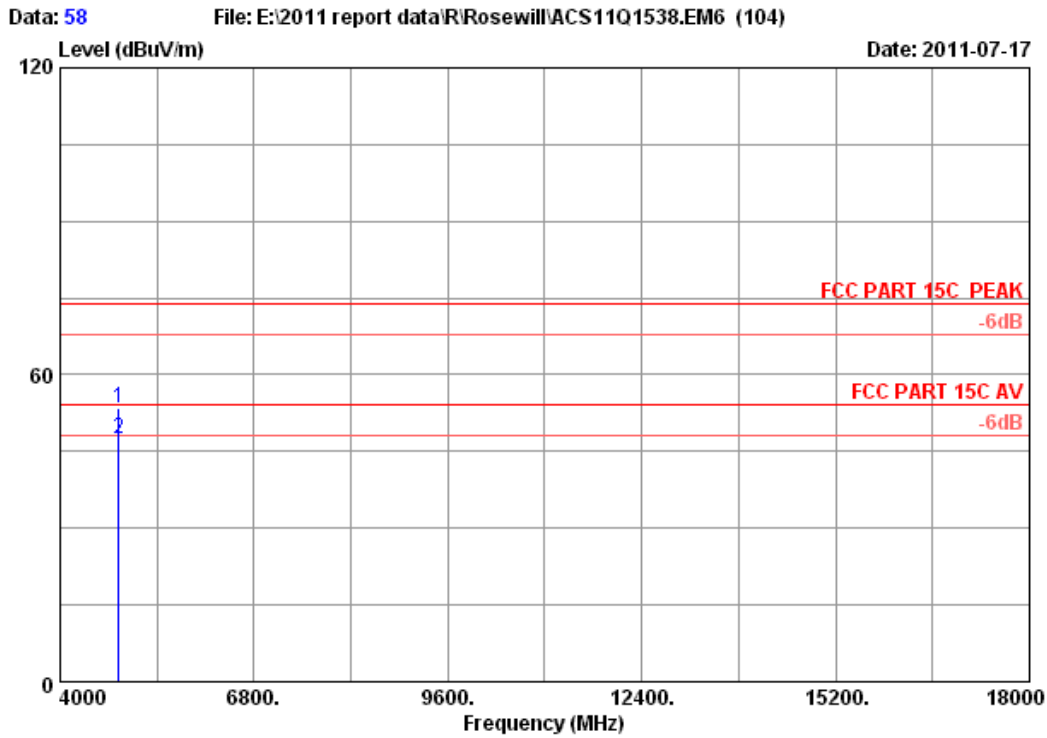


Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
 M/N : RNX-N360PC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.000	34.35	12.38	35.25	41.99	53.47	74.00	20.53	Peak
2	4844.000	34.35	12.38	35.25	36.03	47.51	54.00	6.49	Average

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

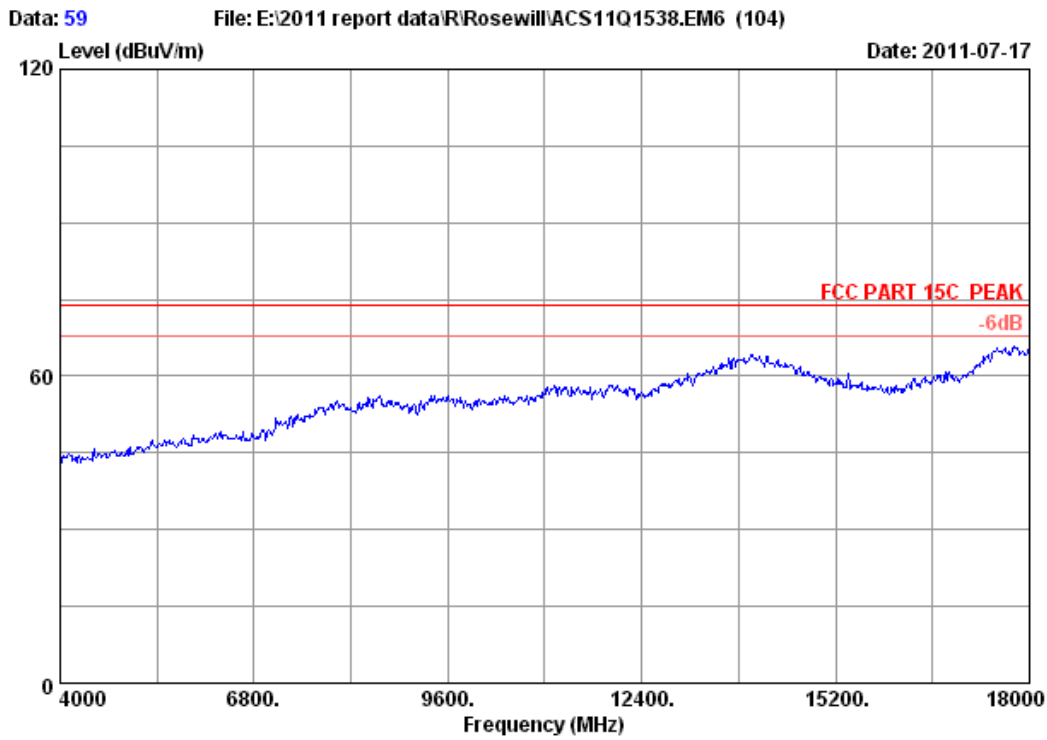

Site no. : 3m Chamber Data no. : 59
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

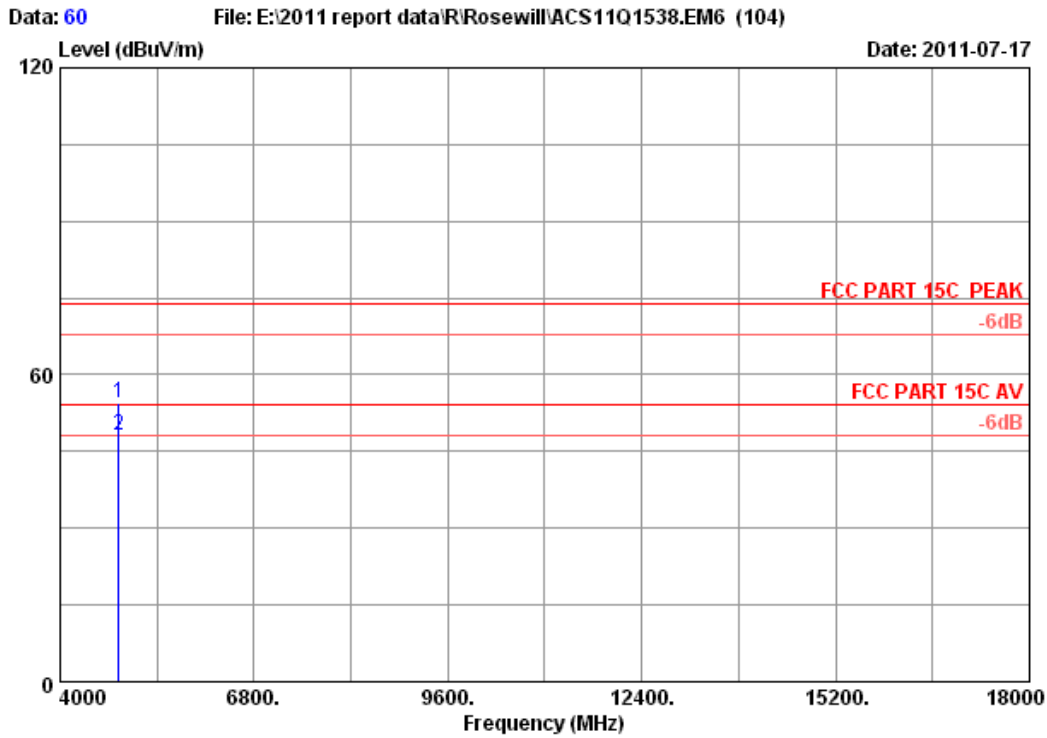


Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
 M/N : RNX-N360PC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.000	34.35	12.38	35.25	42.96	54.44	74.00	19.56	Peak
2	4844.000	34.35	12.38	35.25	36.57	48.05	54.00	5.95	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

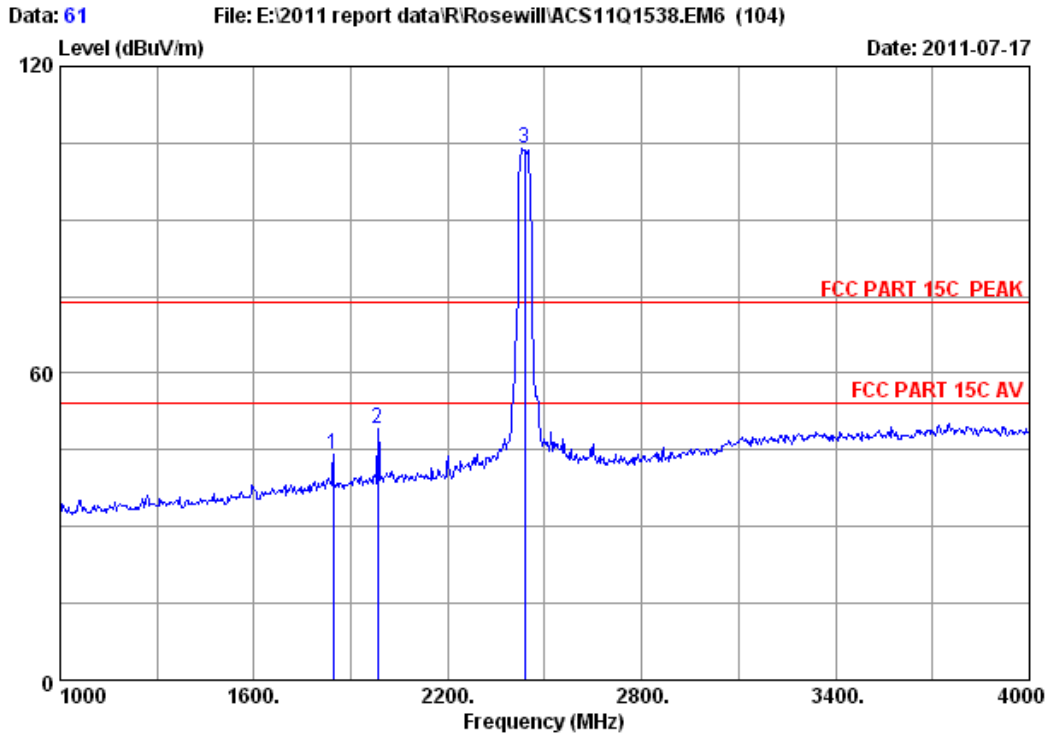


Site no. : 3m Chamber Data no. : 61
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH4 2437MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1846.000	28.36	7.51	36.23	44.65	44.29	74.00	29.71	Peak
2	1984.000	29.11	7.87	36.06	48.30	49.22	74.00	24.78	Peak
3	2437.000	29.47	8.77	36.06	101.83	104.01	74.00	-30.01	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

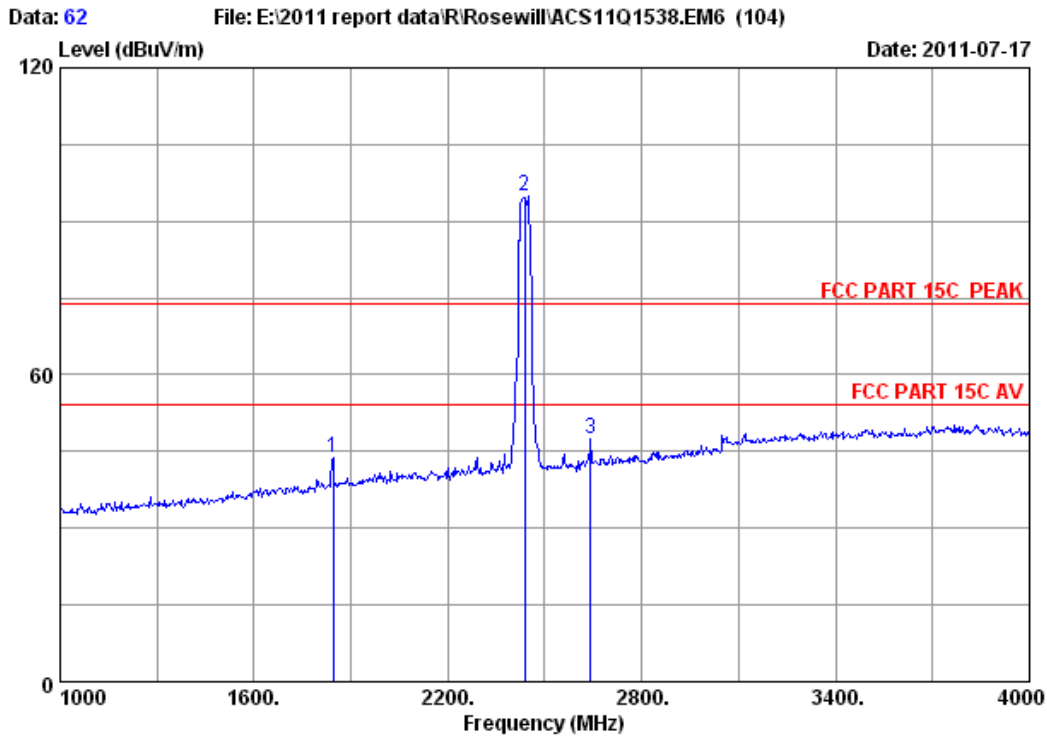


Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH4 2437MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1846.000	28.36	7.51	36.23	44.30	43.94	74.00	30.06	Peak
2	2437.000	29.47	8.77	36.06	92.80	94.98	74.00	-20.98	Peak
3	2641.000	30.25	9.17	35.77	43.80	47.45	74.00	26.55	Peak

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

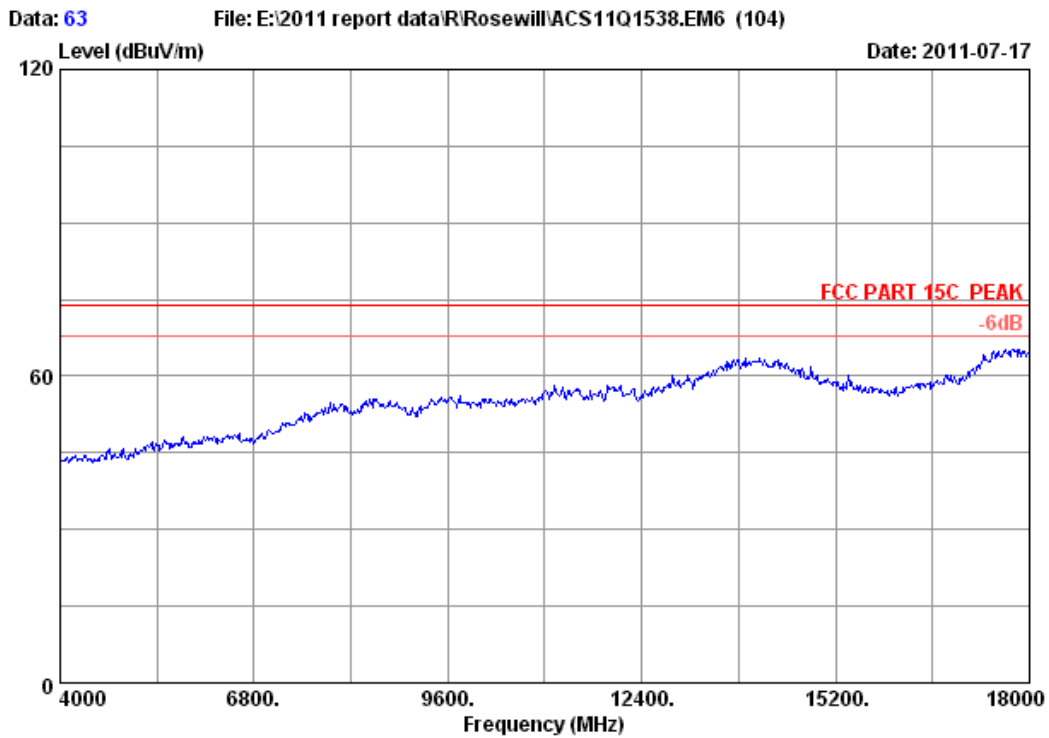

Site no. : 3m Chamber Data no. : 63
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH4 2437MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

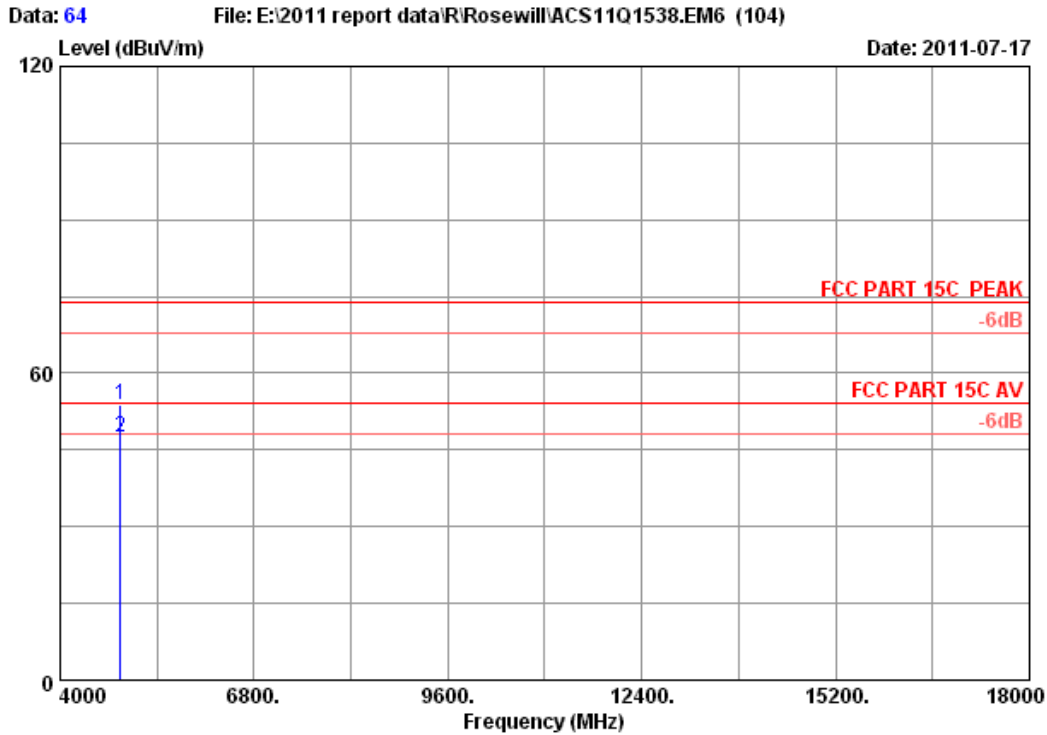


Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH4 2437MHz Tx
 M/N : RNX-N360PC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.41	12.44	35.36	42.34	53.83	74.00	20.17	Peak
2	4874.000	34.41	12.44	35.36	36.06	47.55	54.00	6.45	Average

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

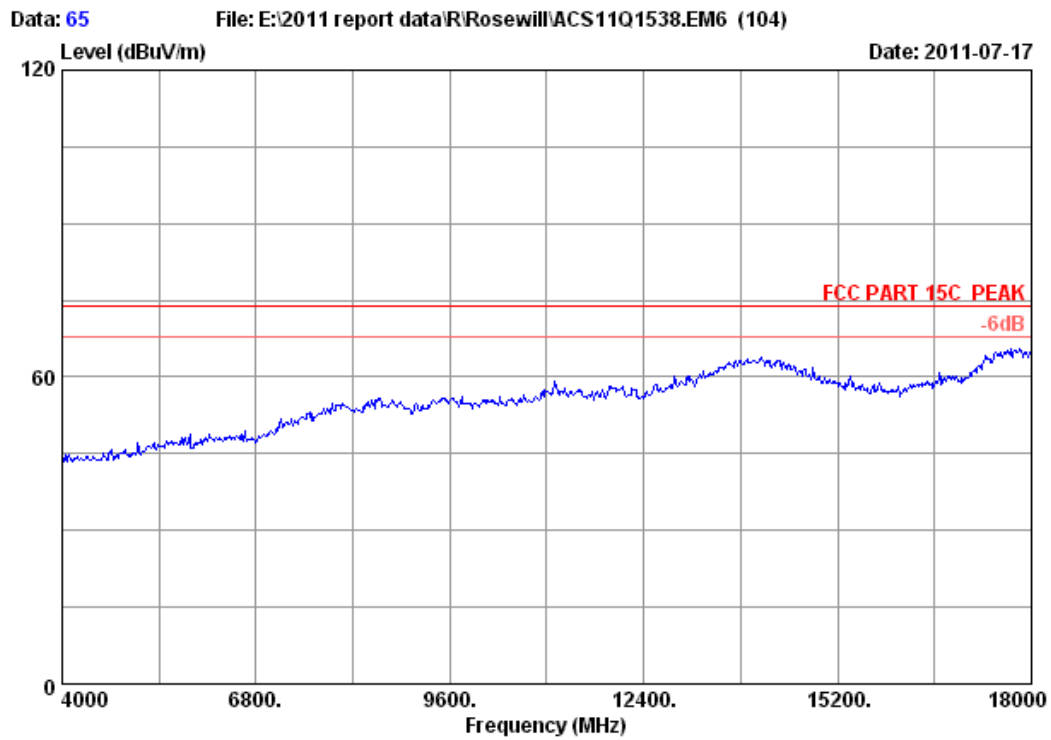

Site no. : 3m Chamber Data no. : 65
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH4 2437MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

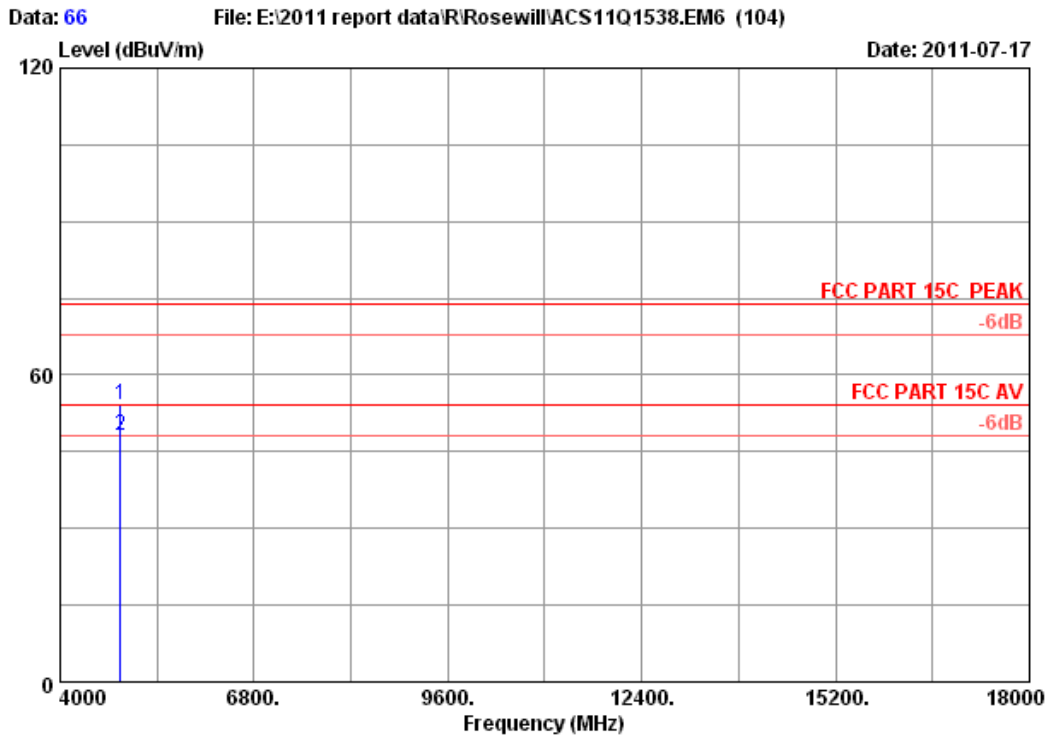


Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH4 2437MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.41	12.44	35.36	42.68	54.17	74.00	19.83	Peak
2	4874.000	34.41	12.44	35.36	36.58	48.07	54.00	5.93	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

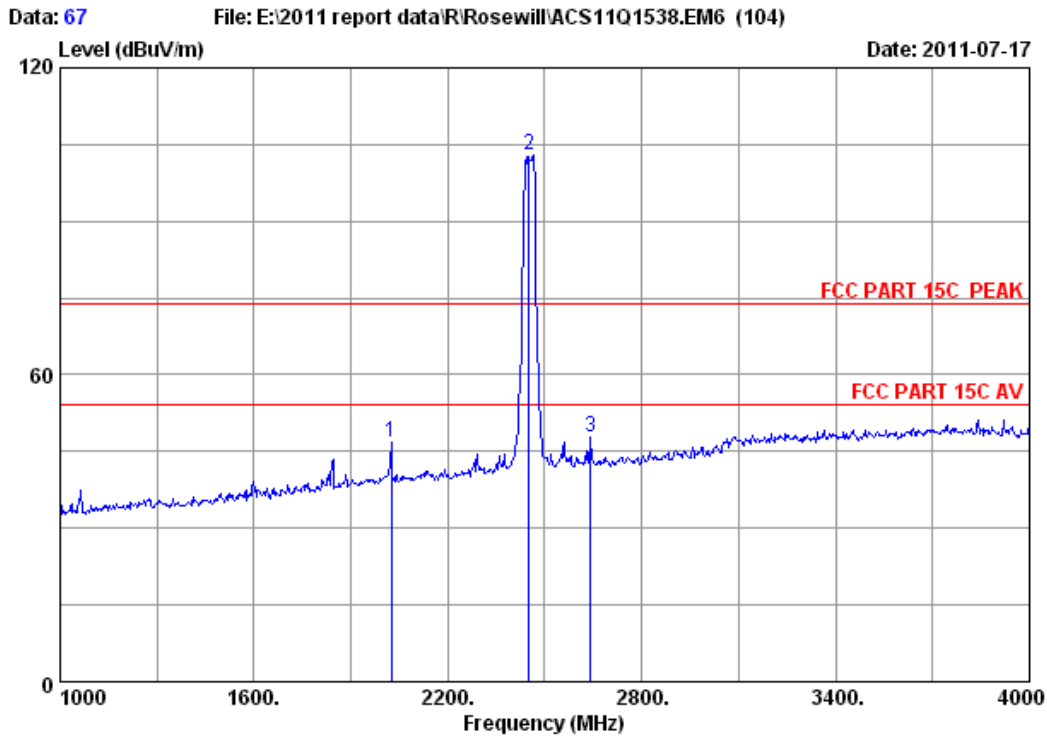

```


Site no.      : 3m Chamber           Data no. : 67
Dis. / Ant.   : 3m 3115(0911)       Ant. pol. : VERTICAL
Limit        : FCC PART 15C PEAK
Env. / Ins.   : 23*C/54%           Engineer  : Leo-Li
EUT          : Wireless N PCI Adapter
Power        : DC 3.3V From PC input AC 120V/60Hz
Test mode    : IEEE802.11n HT40 CH7 2452MHz Tx
M/N         : RNX-N360PC
    
```

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2026.000	29.21	7.97	36.12	45.73	46.79	74.00	27.21	Peak
2	2452.000	29.47	8.82	36.06	100.64	102.87	74.00	-28.87	Peak
3	2641.000	30.25	9.17	35.77	44.24	47.89	74.00	26.11	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

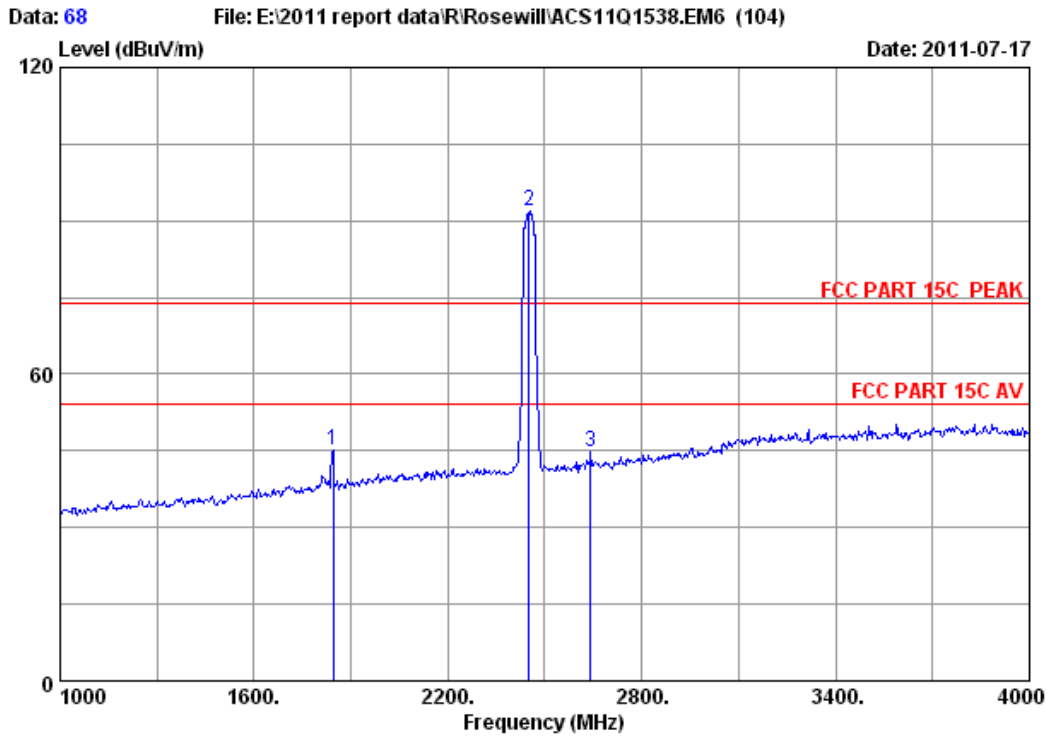


Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1846.000	28.36	7.51	36.23	45.52	45.16	74.00	28.84	Peak
2	2452.000	29.47	8.82	36.06	89.58	91.81	74.00	-17.81	Peak
3	2641.000	30.25	9.17	35.77	41.20	44.85	74.00	29.15	Peak

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

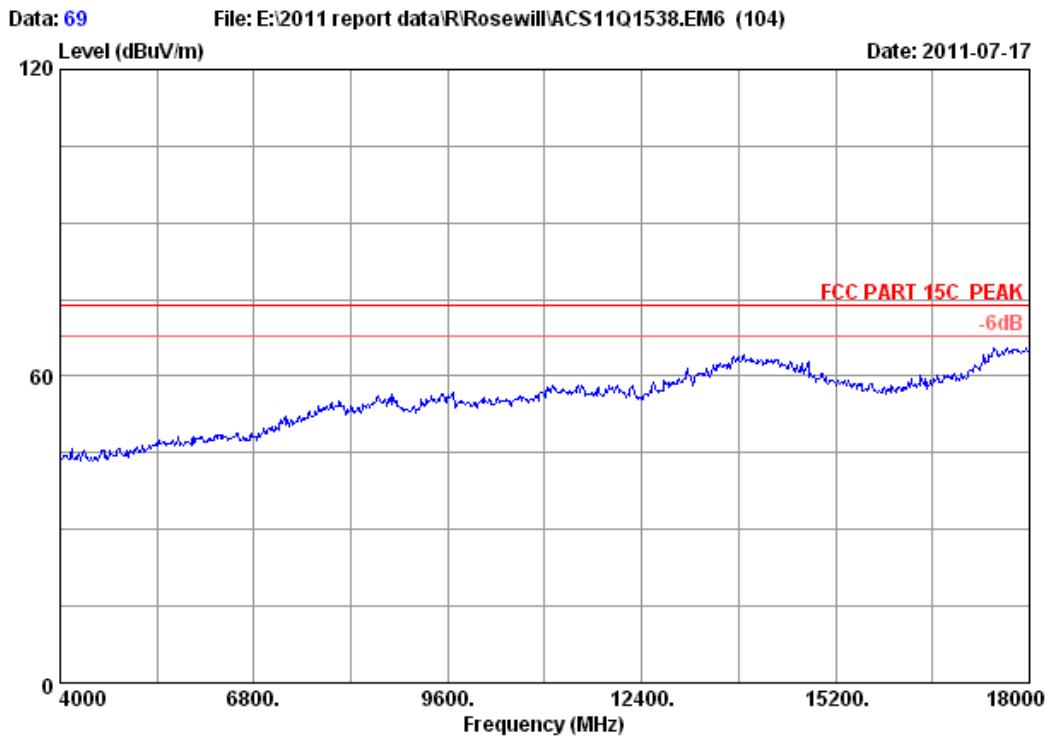

Site no. : 3m Chamber Data no. : 69
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : Wireless N PCI Adapter
Power : DC 3.3V From PC input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
M/N : RNX-N360PC

FCC ID:W6RRNX-N360PC

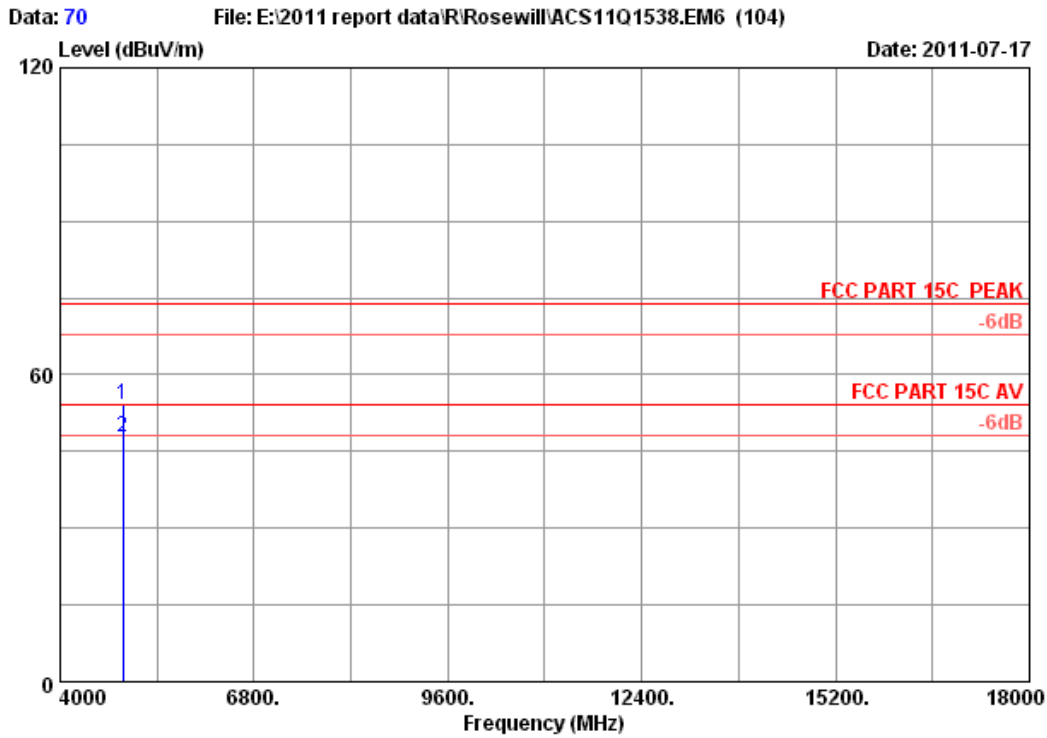


Site no. : 3m Chamber Data no. : 70
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.000	34.46	12.47	35.27	42.52	54.18	74.00	19.82	Peak
2	4904.000	34.46	12.47	35.27	36.17	47.83	54.00	6.17	Average

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

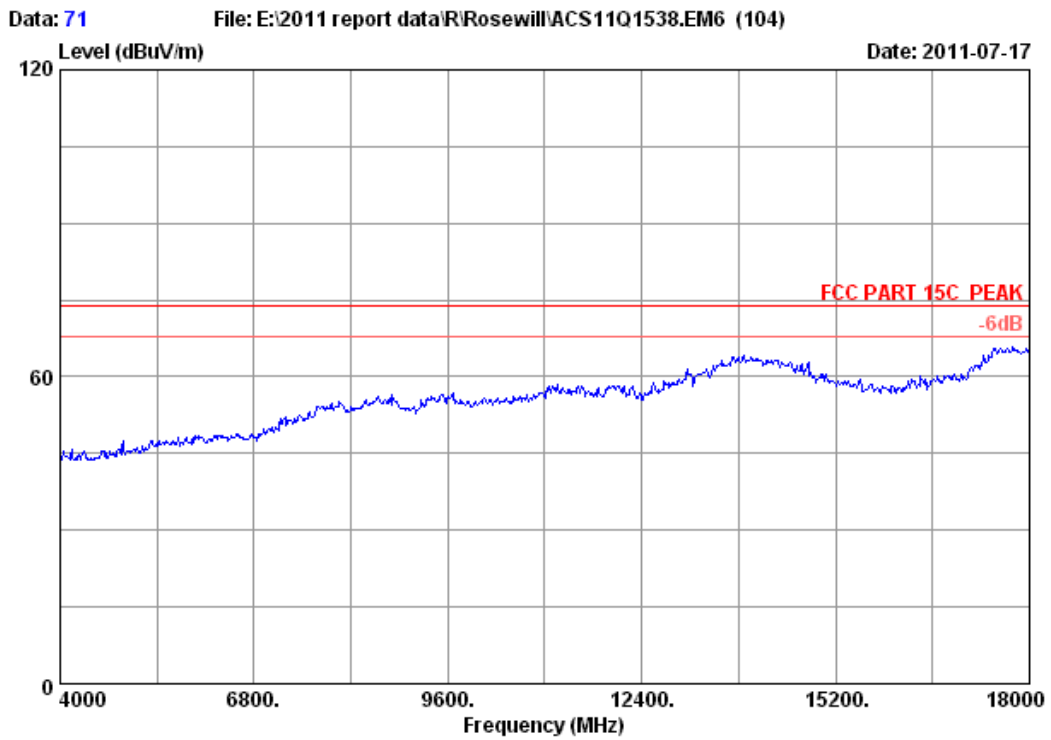

Site no.	: 3m Chamber	Data no. :	71
Dis. / Ant.	: 3m 3115(0911)	Ant. pol. :	HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer :	Leo-Li
EUT	: Wireless N PCI Adapter		
Power	: DC 3.3V From PC input AC 120V/60Hz		
Test mode	: IEEE802.11n HT40 CH7 2452MHz Tx		
M/N	: RNX-N360PC		

FCC ID:W6RRNX-N360PC

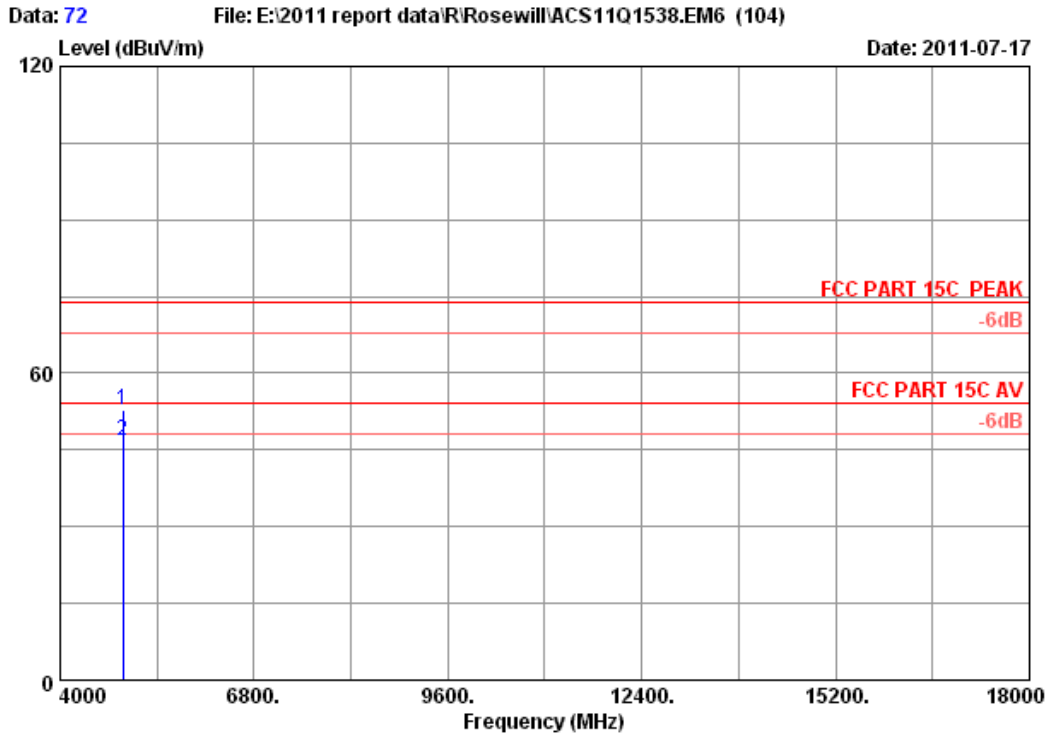

Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.000	34.46	12.47	35.27	41.09	52.75	74.00	21.25	Peak
2	4904.000	34.46	12.47	35.27	35.28	46.94	54.00	7.06	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,11	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08,11	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08,11	1Year

5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

5.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions detected.

5.4. Test result

PASS (The testing data was attached in the next pages.)



FCC ID: W6RRNX-N360PC

Conducted emission test data:



Chain 0:

Test Mode: IEEE 802.11b TX



Test CH1: 2412MHz

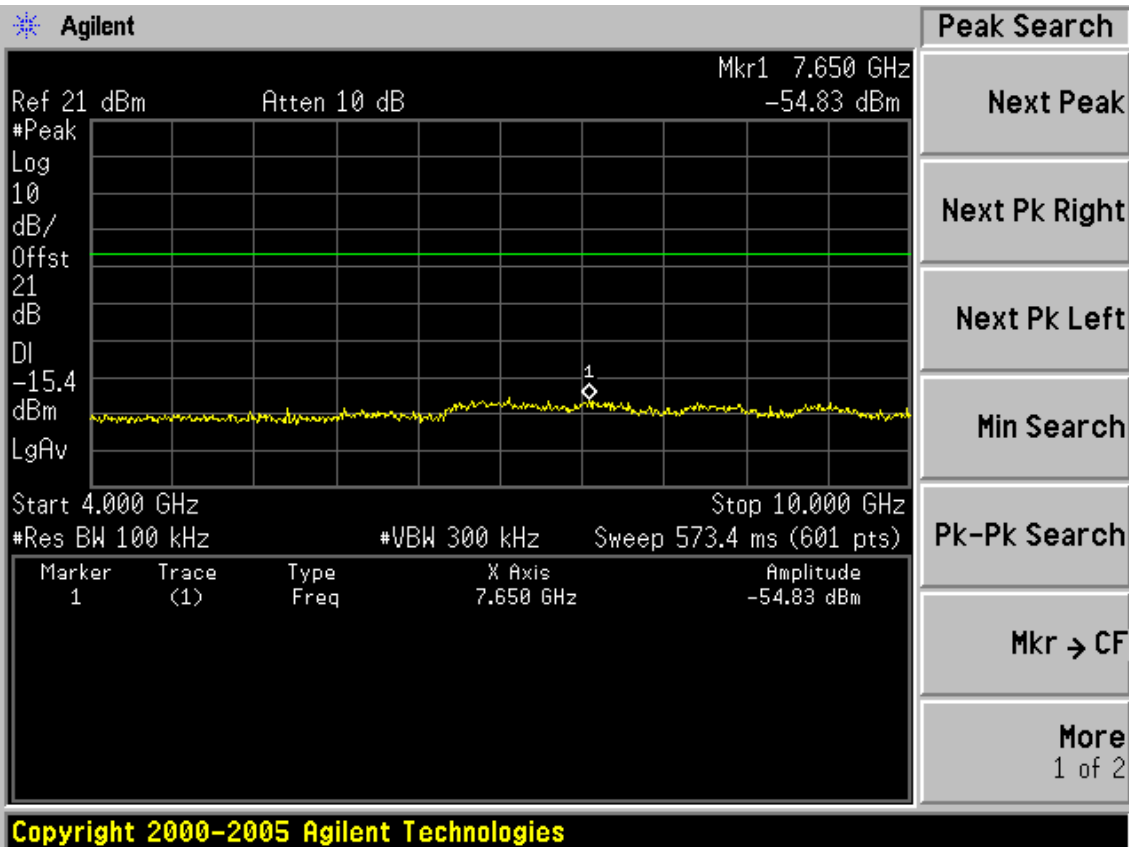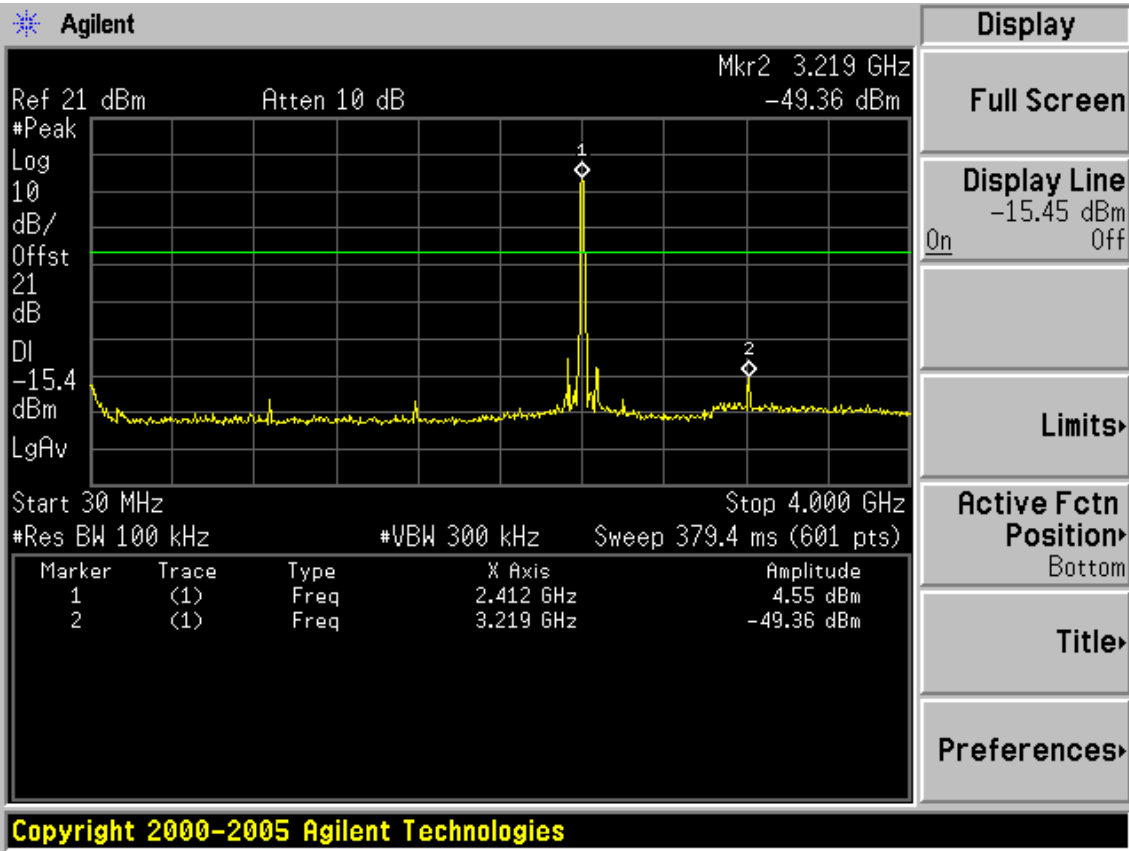


FCC ID: W6RRNX-N360PC

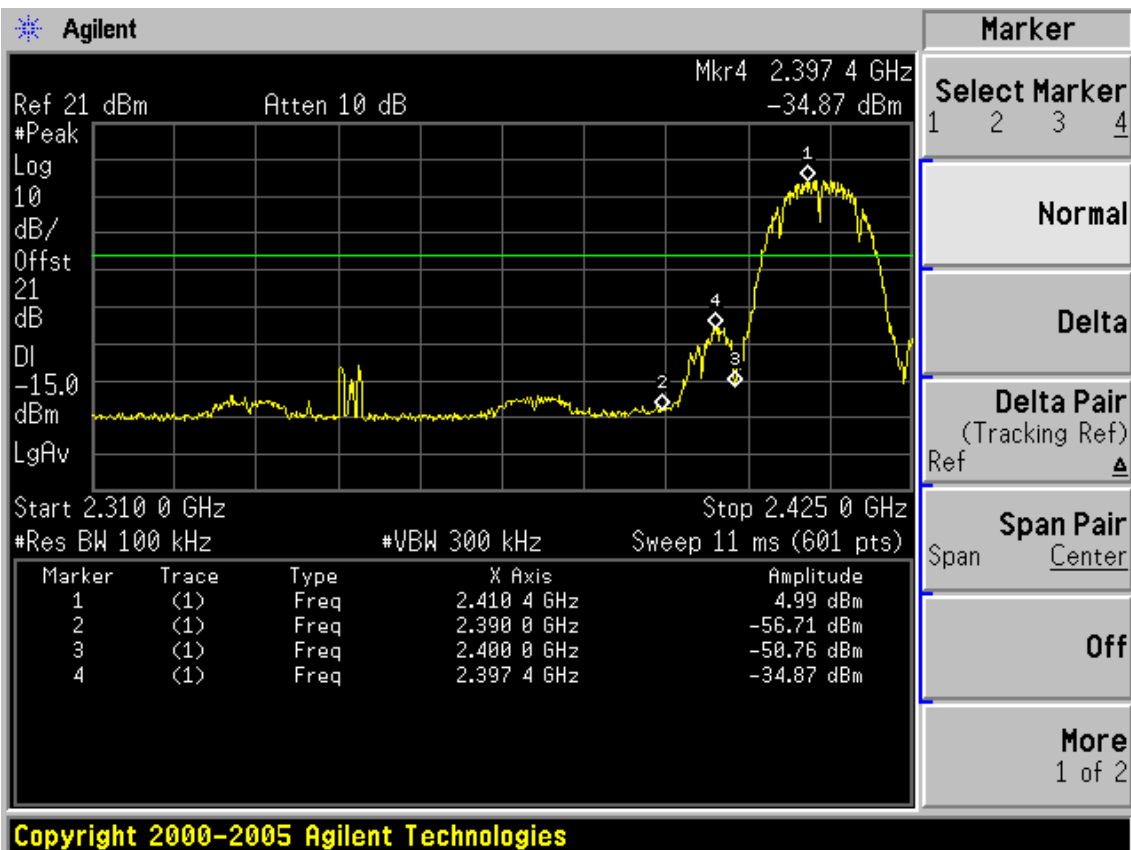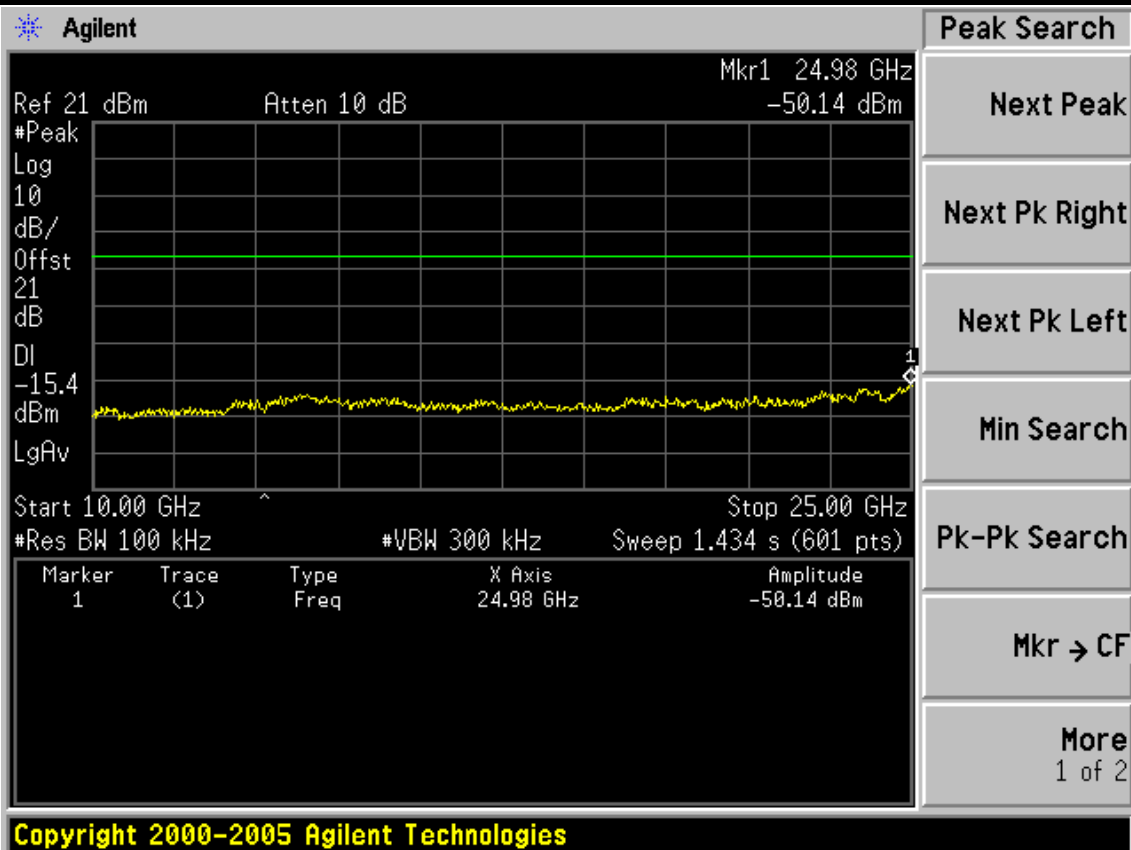


FCC ID: W6RRNX-N360PC

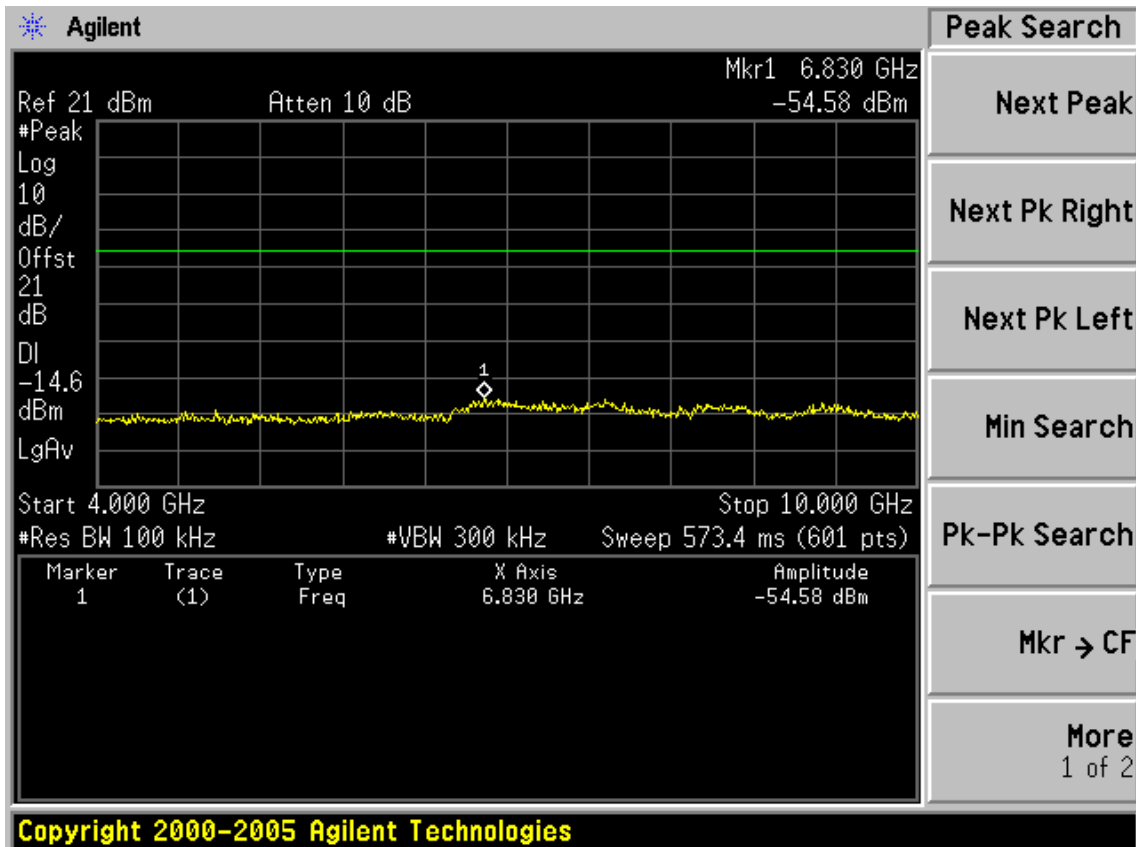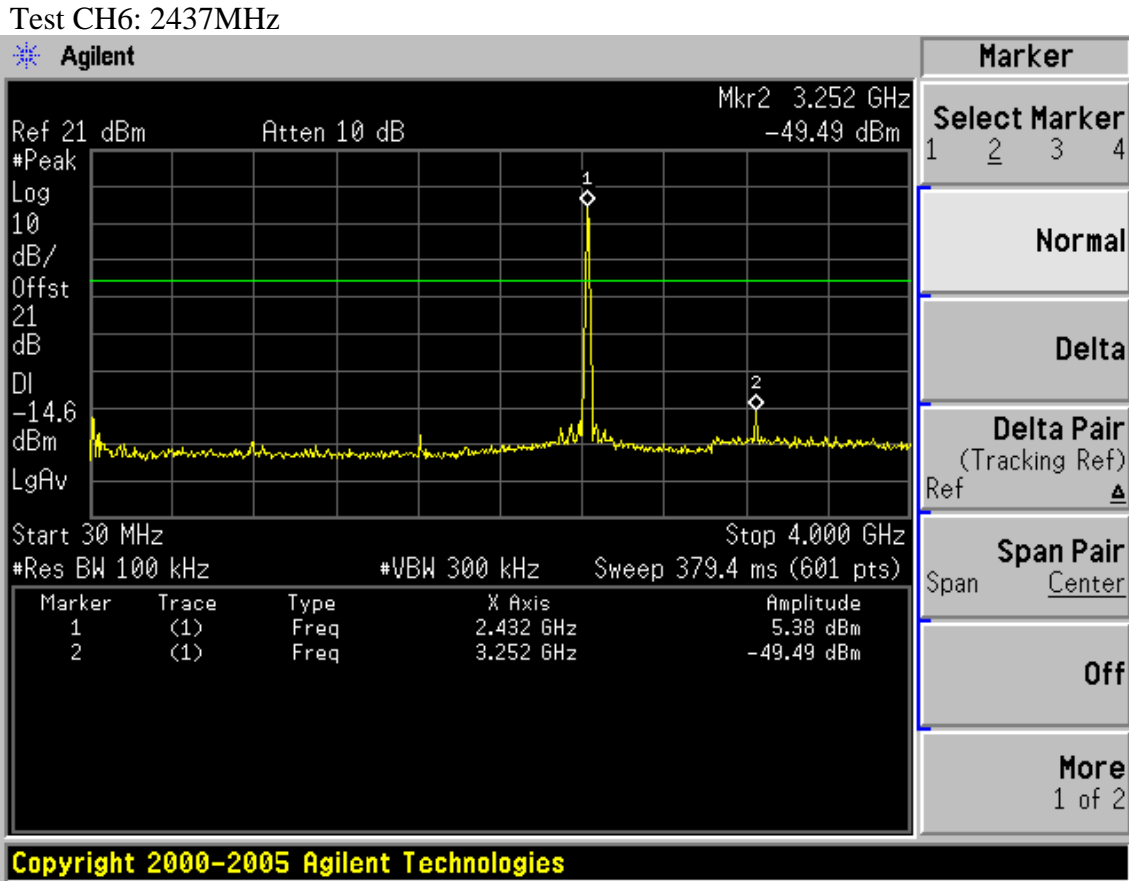



FCC ID: W6RRNX-N360PC

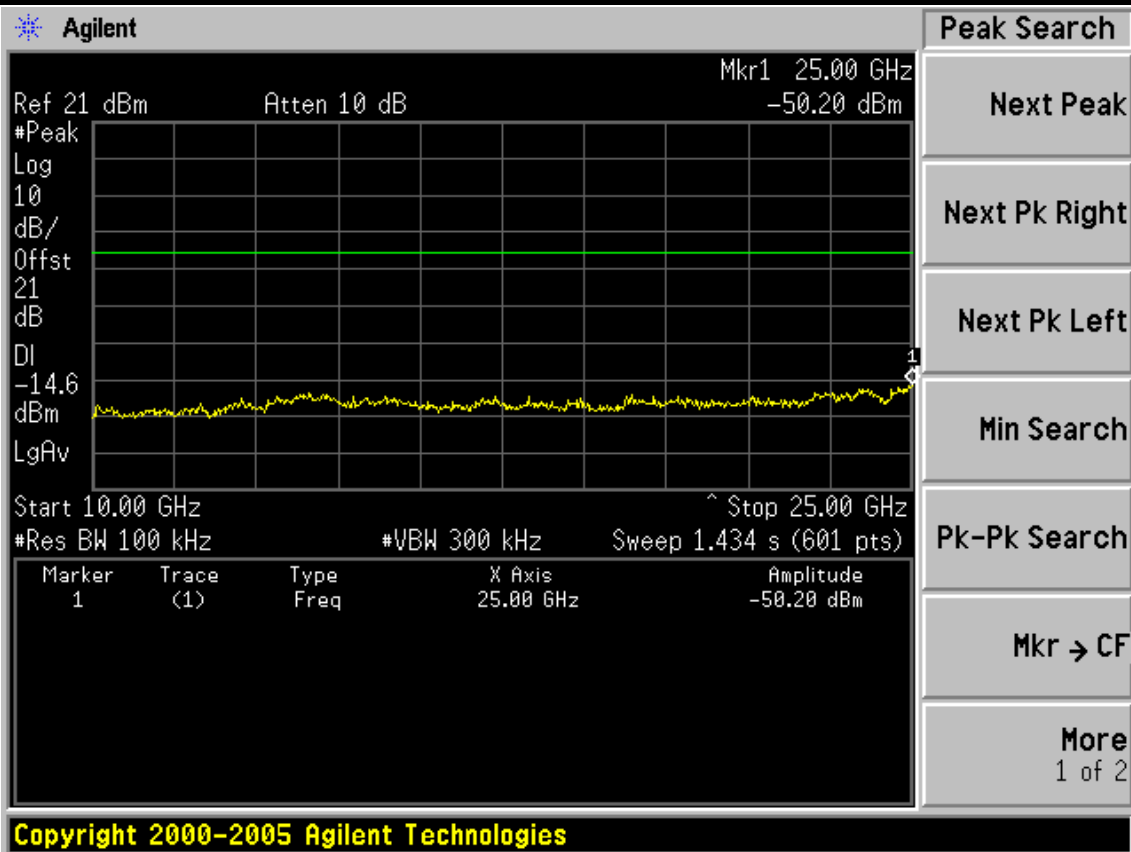


Test CH11: 2462MHz

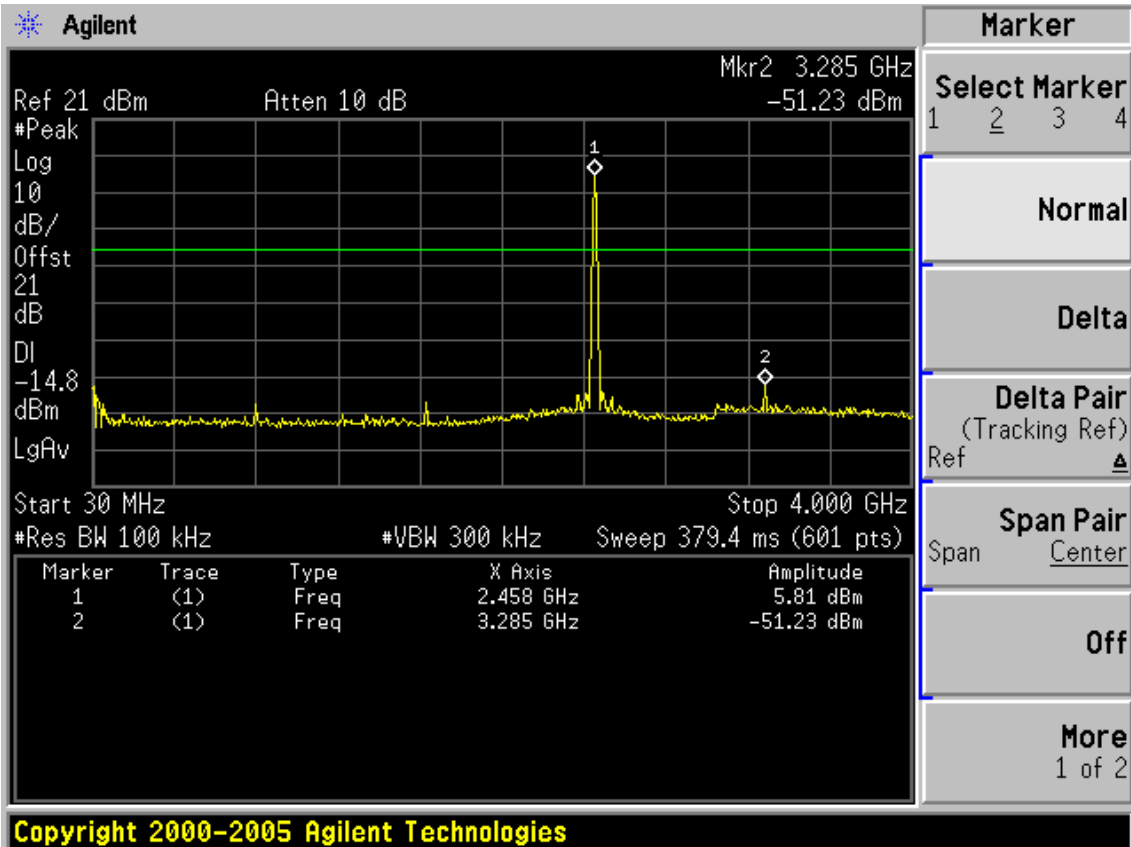


FCC ID: W6RRNX-N360PC

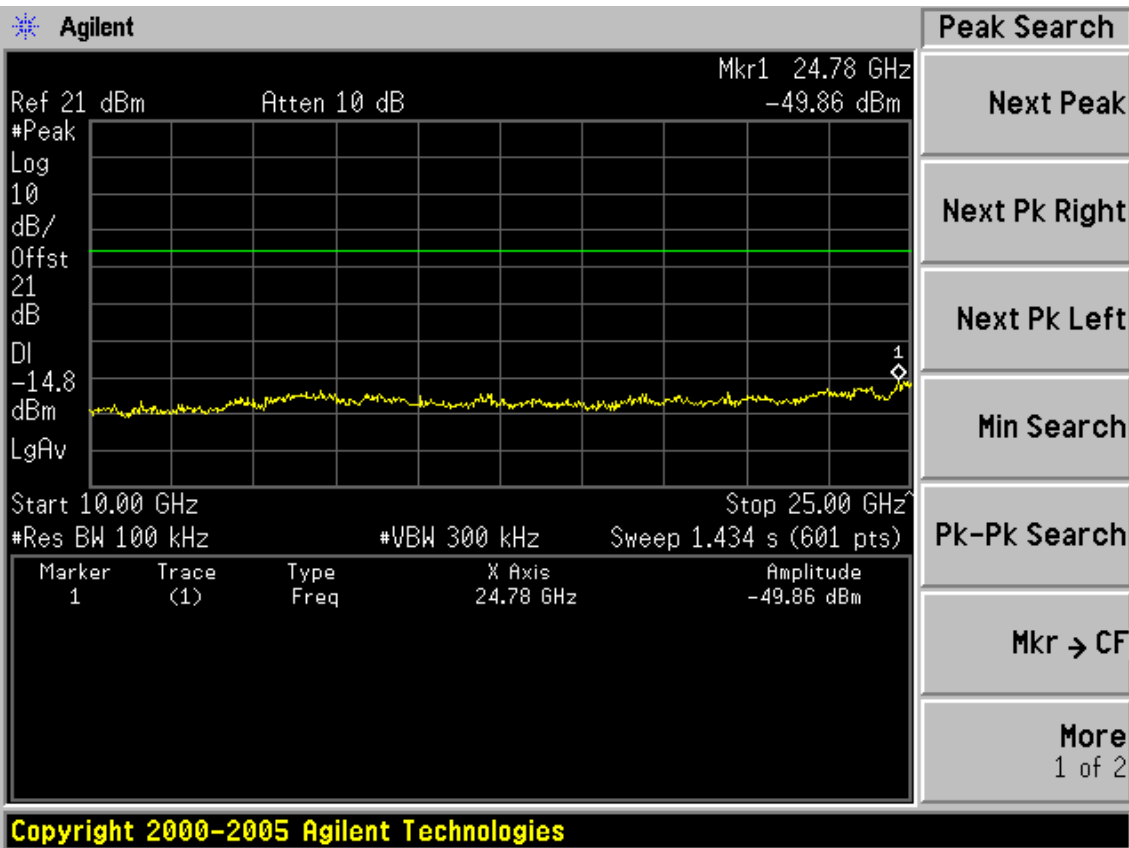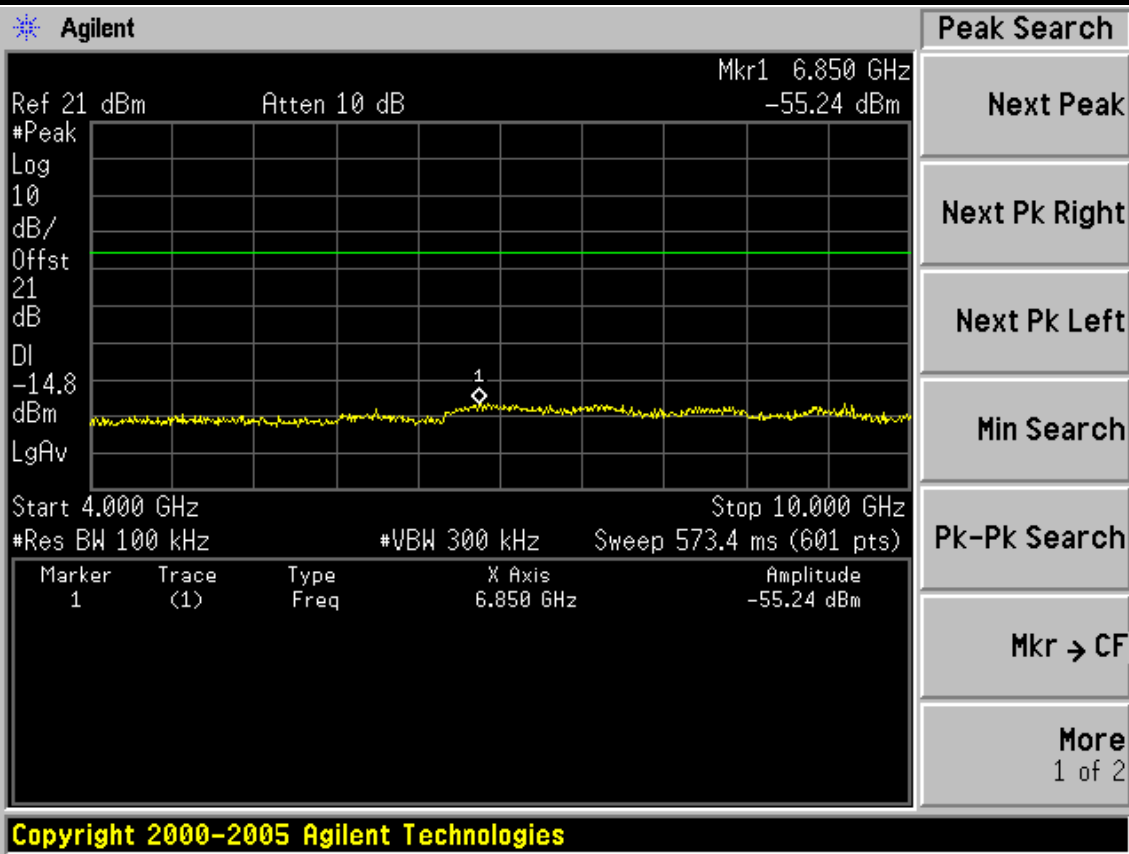



FCC ID: W6RRNX-N360PC

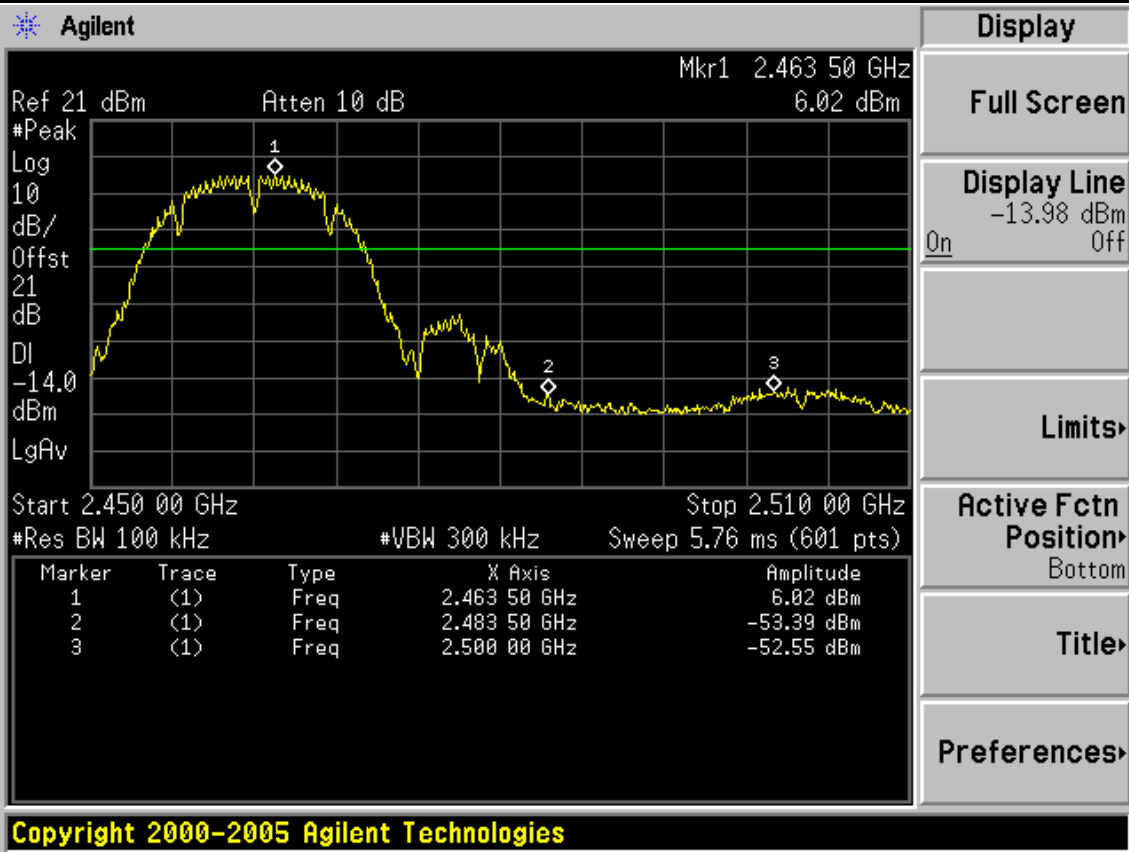


Test Mode: IEEE 802.11g TX
Test CH1: 2412MHz

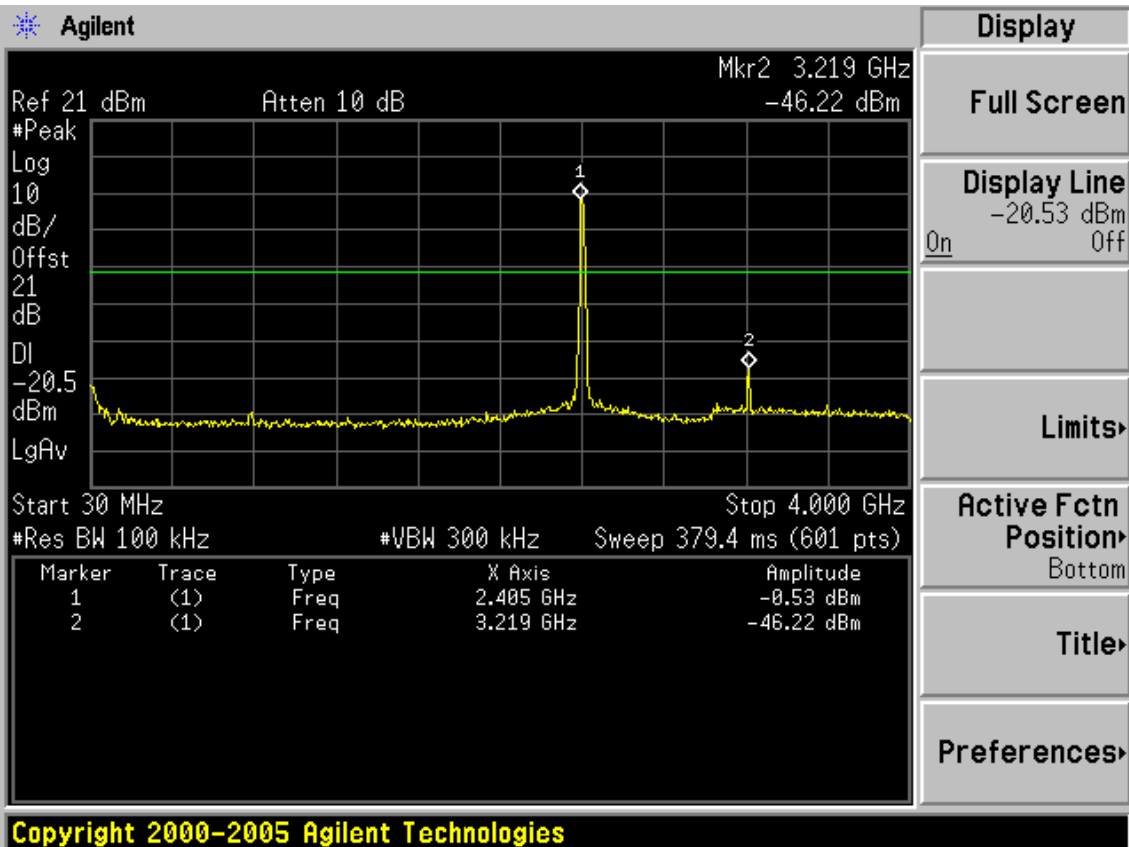


FCC ID: W6RRNX-N360PC

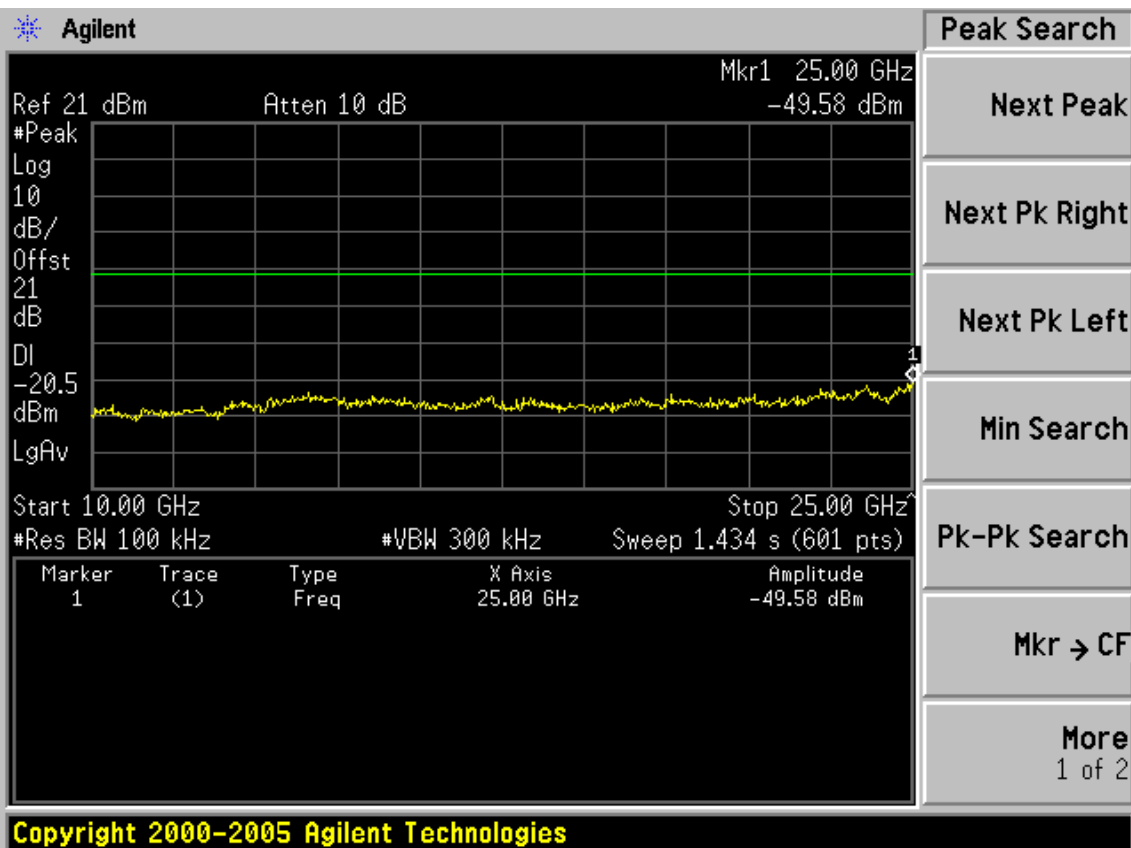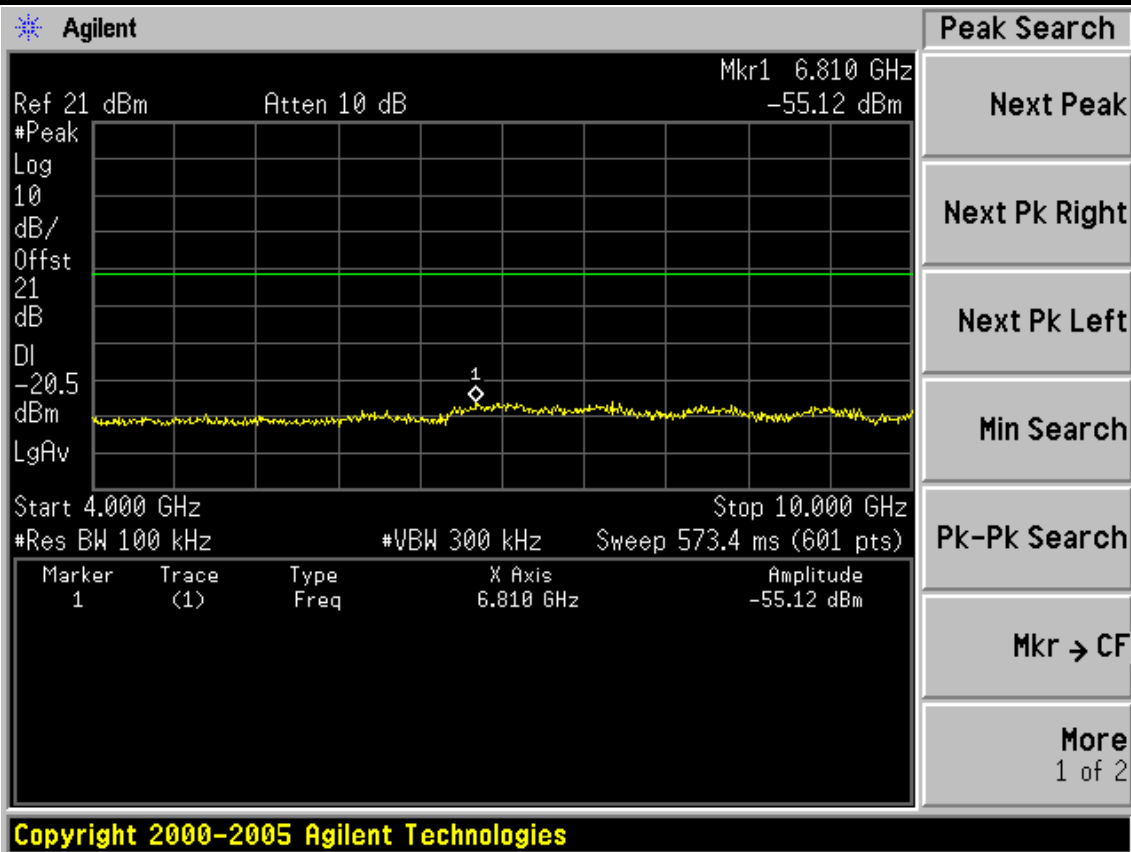



FCC ID: W6RRNX-N360PC

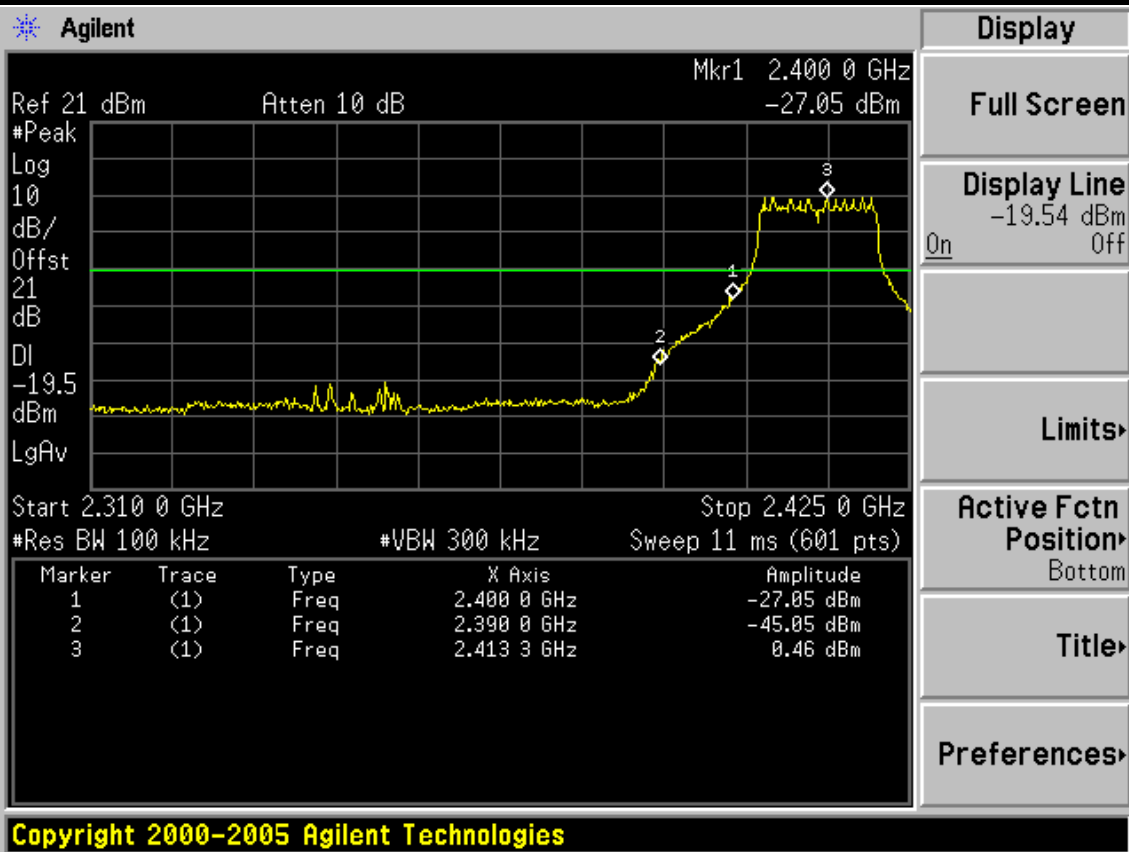



Test CH6: 2437MHz

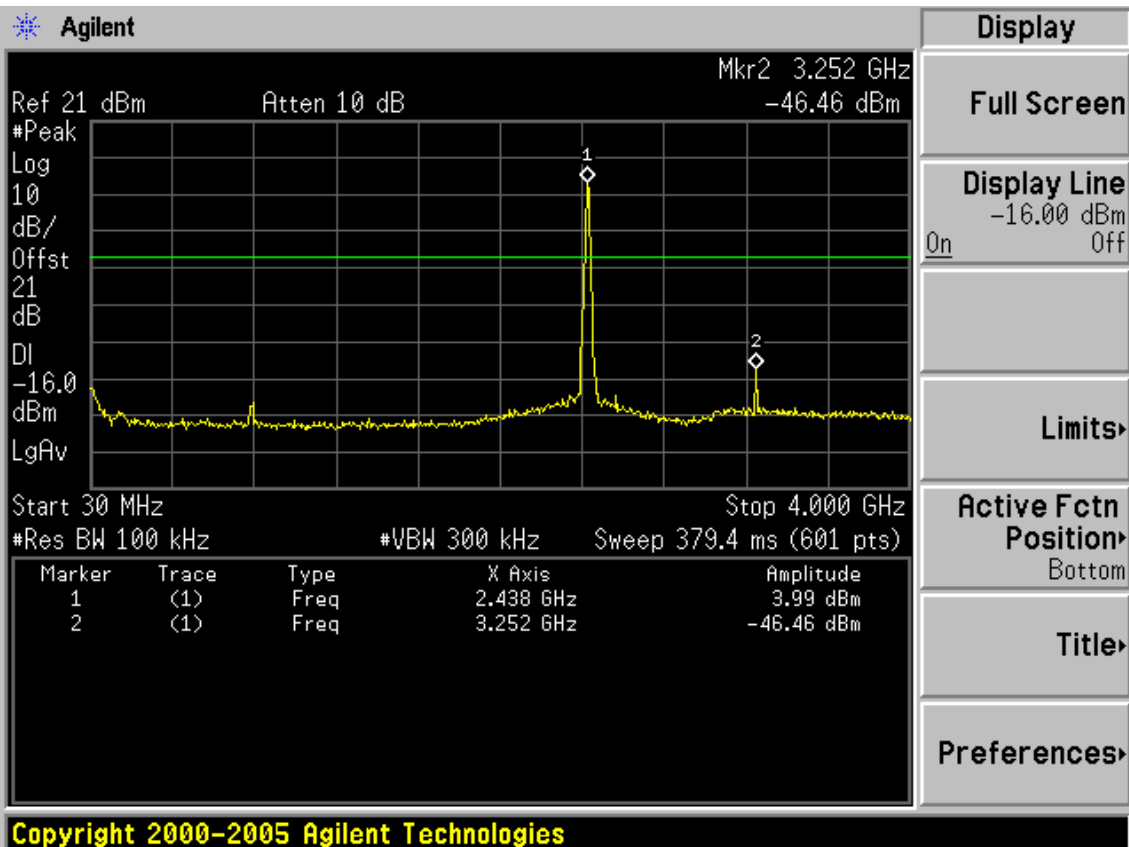

FCC ID: W6RRNX-N360PC

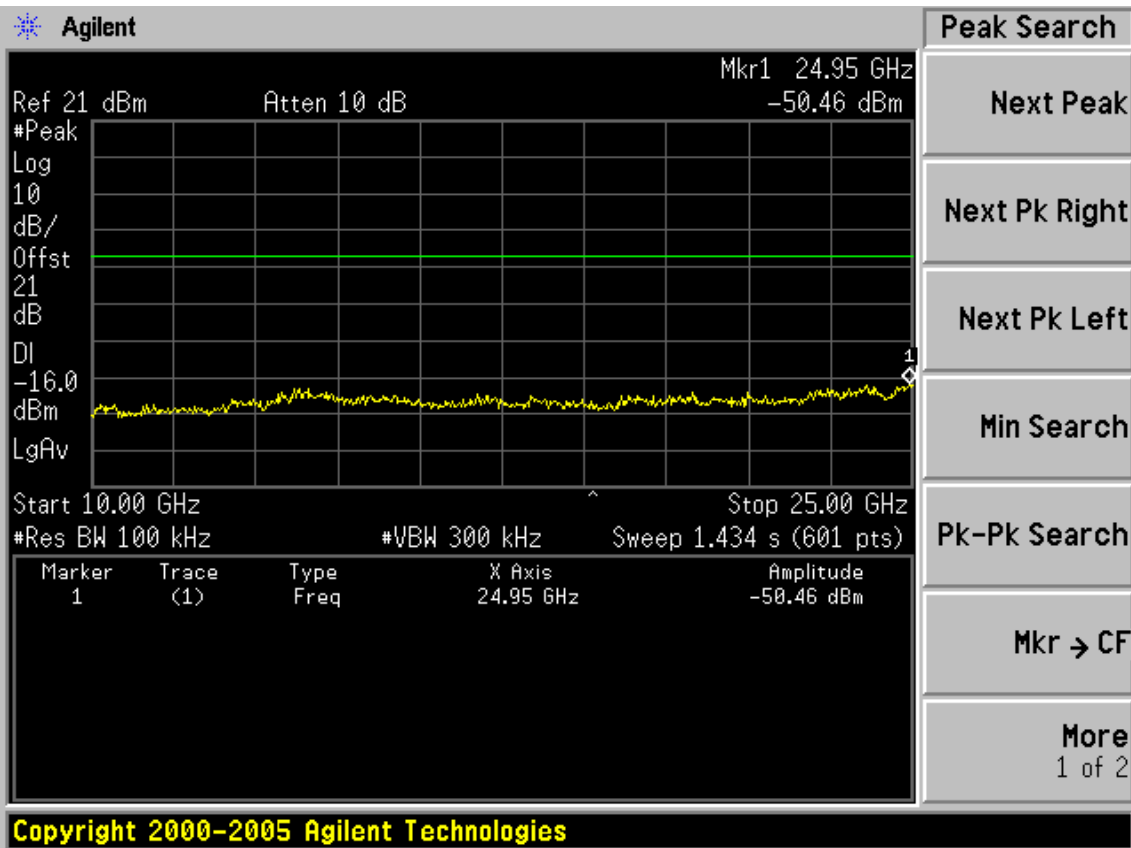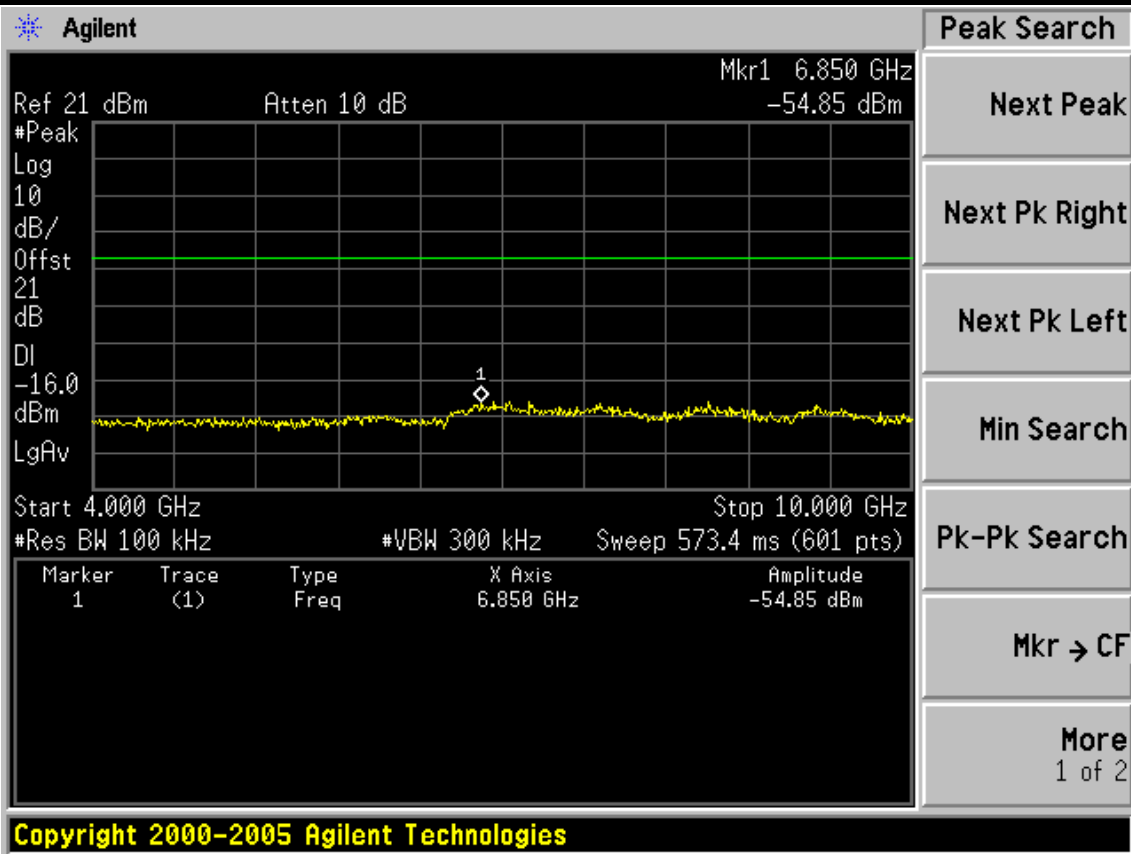

FCC ID: W6RRNX-N360PC

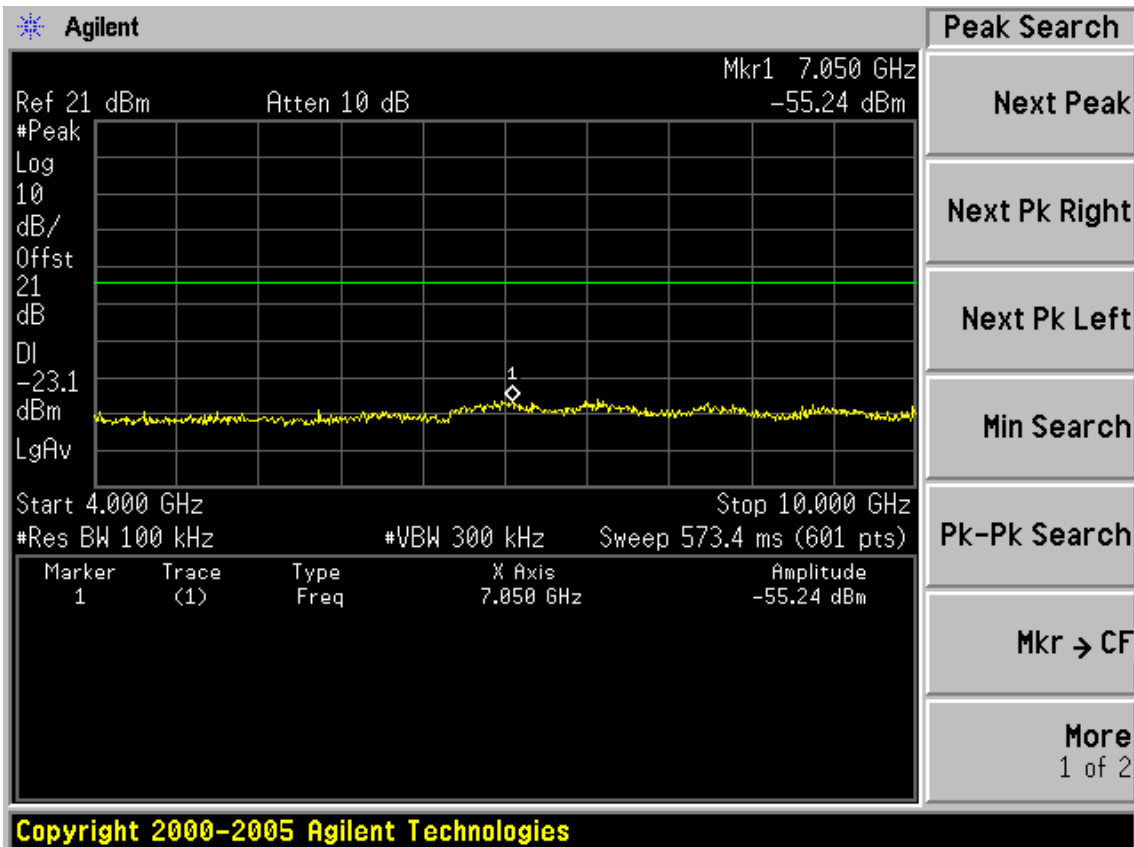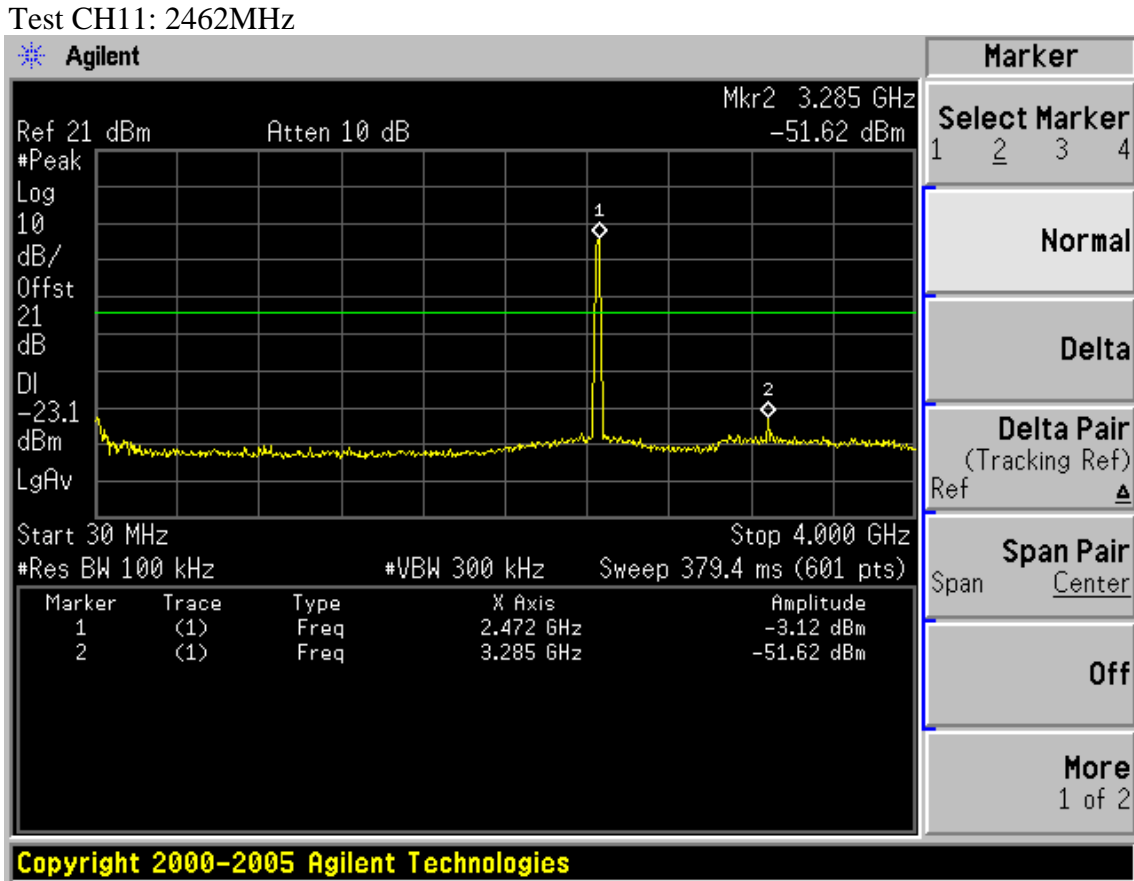

FCC ID: W6RRNX-N360PC

Agilent

Ref 21 dBm Atten 10 dB Mkr1 24.98 GHz
 -50.98 dBm

#Peak
 Log
 10
 dB/
 Offst
 21
 dB
 DI
 -23.1
 dBm
 LgAv

Start 10.00 GHz Stop 25.00 GHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 1.434 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	24.98 GHz	-50.98 dBm

Peak Search
 Next Peak
 Next Pk Right
 Next Pk Left
 Min Search
 Pk-Pk Search
 Mkr → CF
 More
 1 of 2

Copyright 2000-2005 Agilent Technologies

Agilent

Ref 21 dBm Atten 10 dB Mkr3 2.500 00 GHz
 -56.88 dBm

#Peak
 Log
 10
 dB/
 Offst
 21
 dB
 DI
 -23.0
 dBm
 LgAv

Start 2.450 00 GHz Stop 2.510 00 GHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 5.76 ms (601 pts)



Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.457 00 GHz	-2.94 dBm
2	(1)	Freq	2.483 50 GHz	-50.81 dBm
3	(1)	Freq	2.500 00 GHz	-56.88 dBm

Marker
 Select Marker
 1 2 3 4
 Normal
 Delta
 Delta Pair
 (Tracking Ref)
 Ref ▲
 Span Pair
 Span Center
 Off
 More
 1 of 2



Copyright 2000-2005 Agilent Technologies

FCC ID: W6RRNX-N360PC



Test Mode: IEEE 802.11n HT20 TX
 Test CH1: 2412MHz

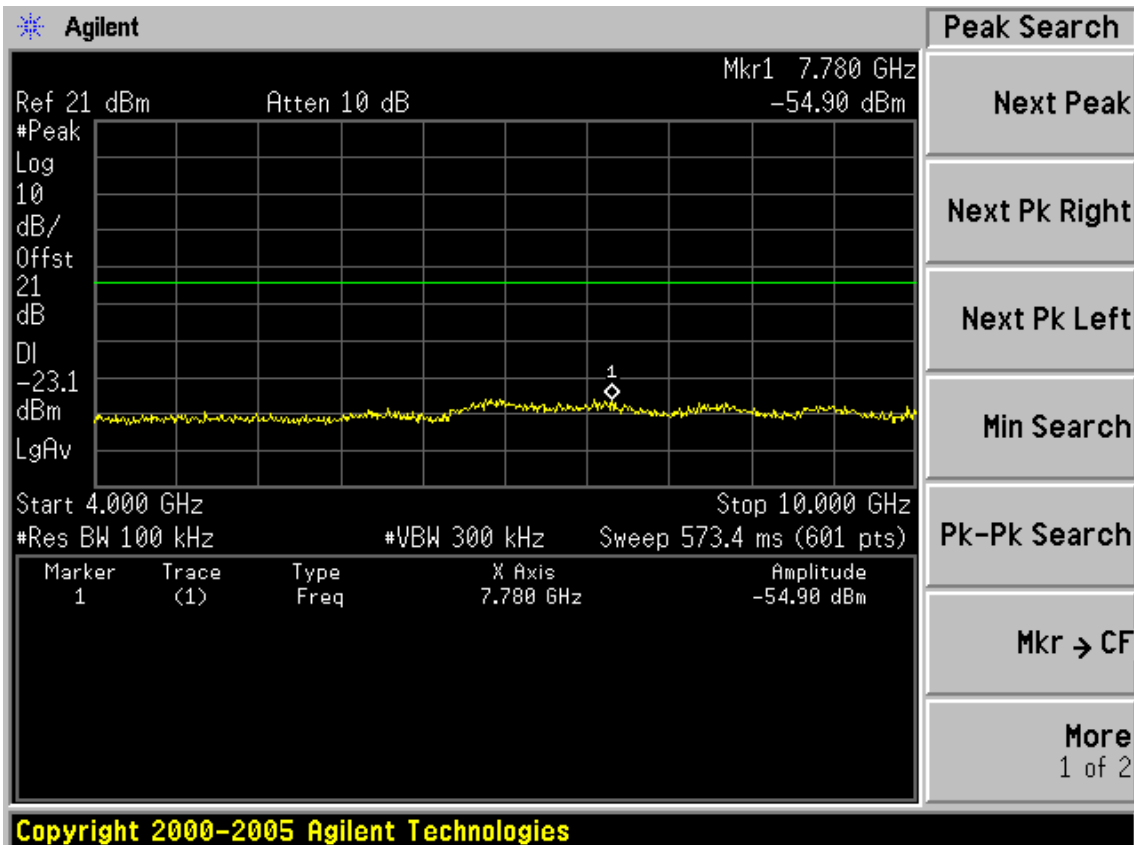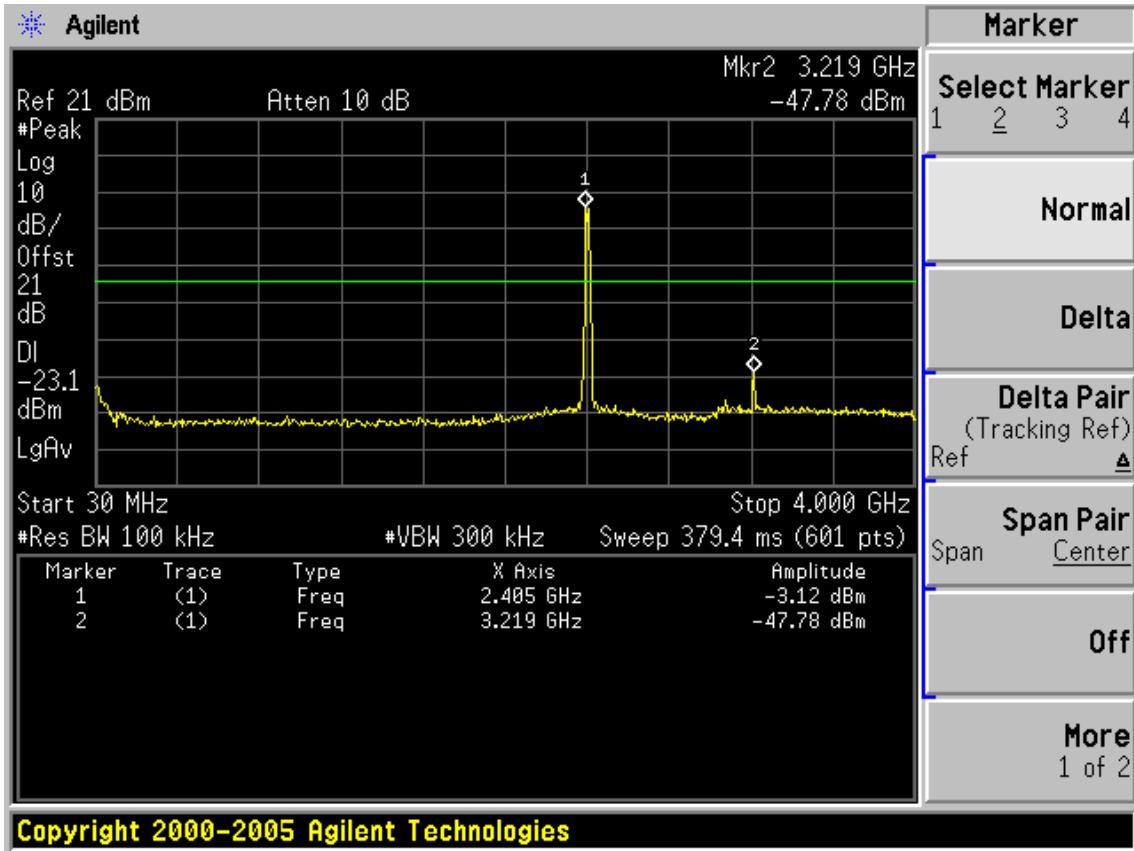


FCC ID: W6RRNX-N360PC

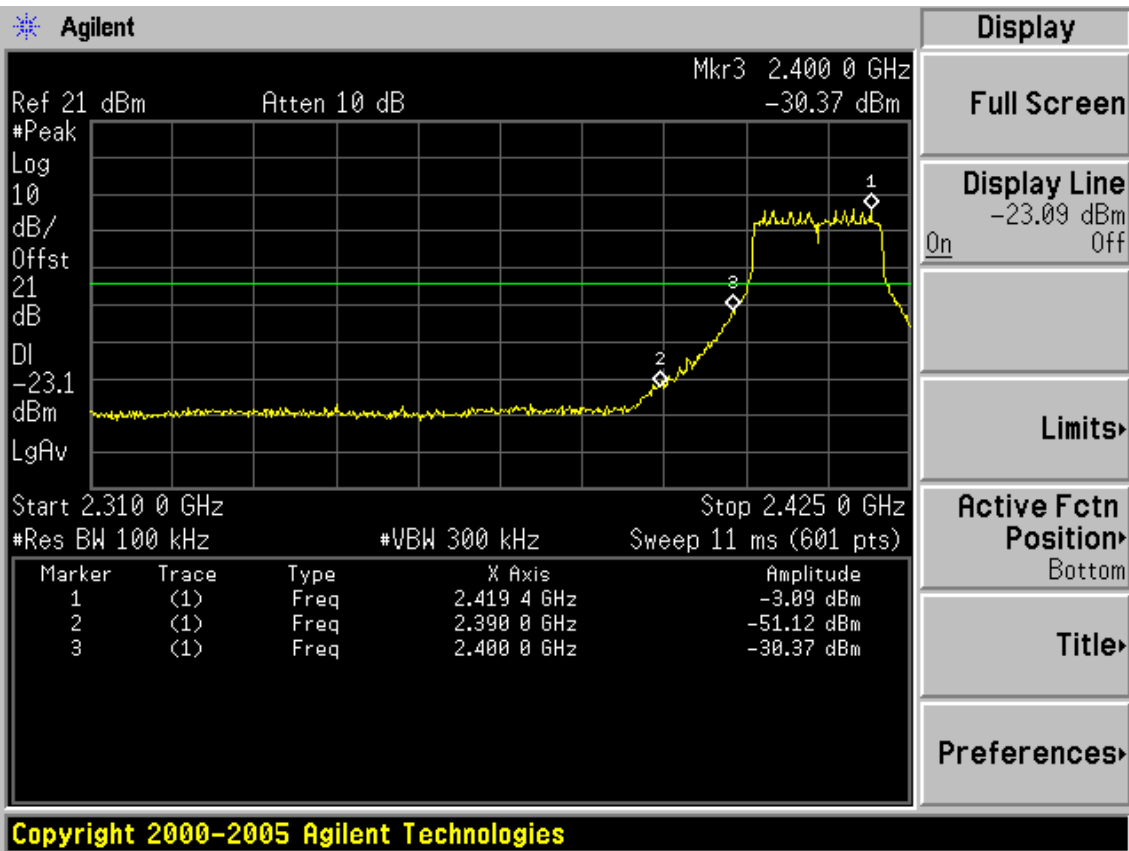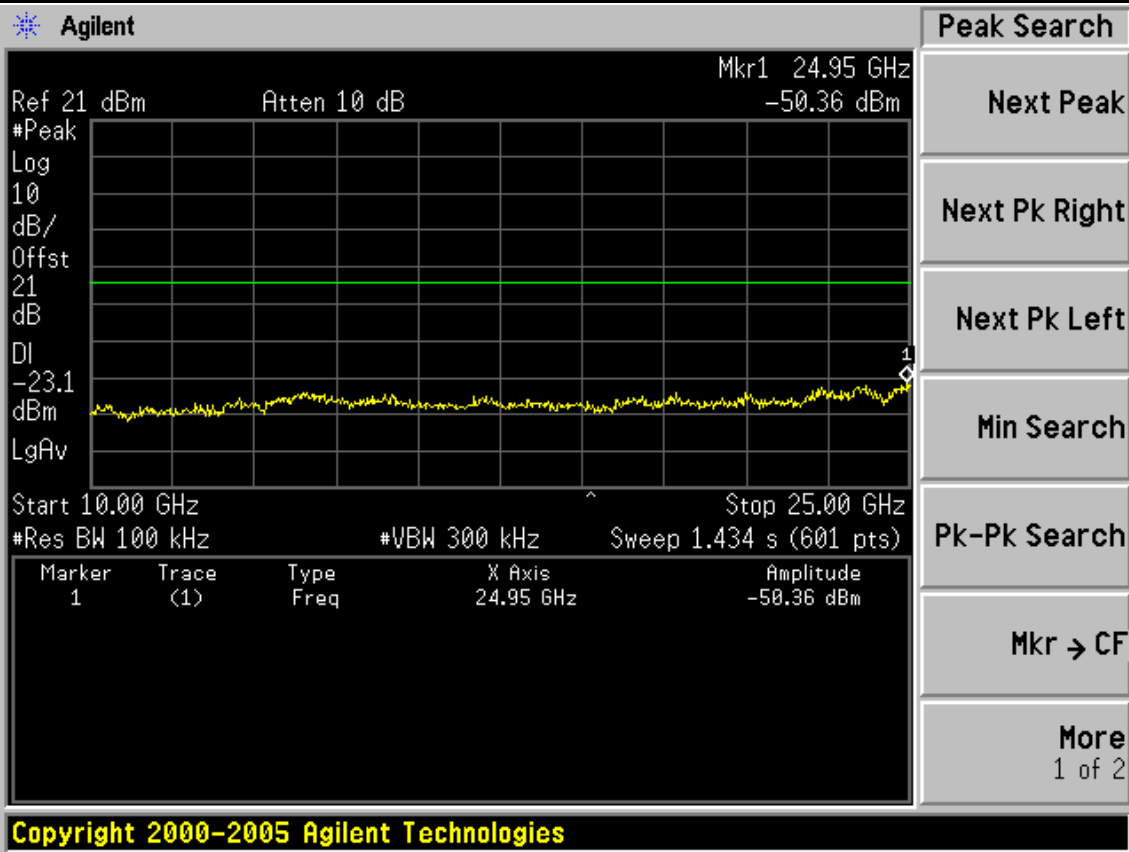


FCC ID: W6RRNX-N360PC

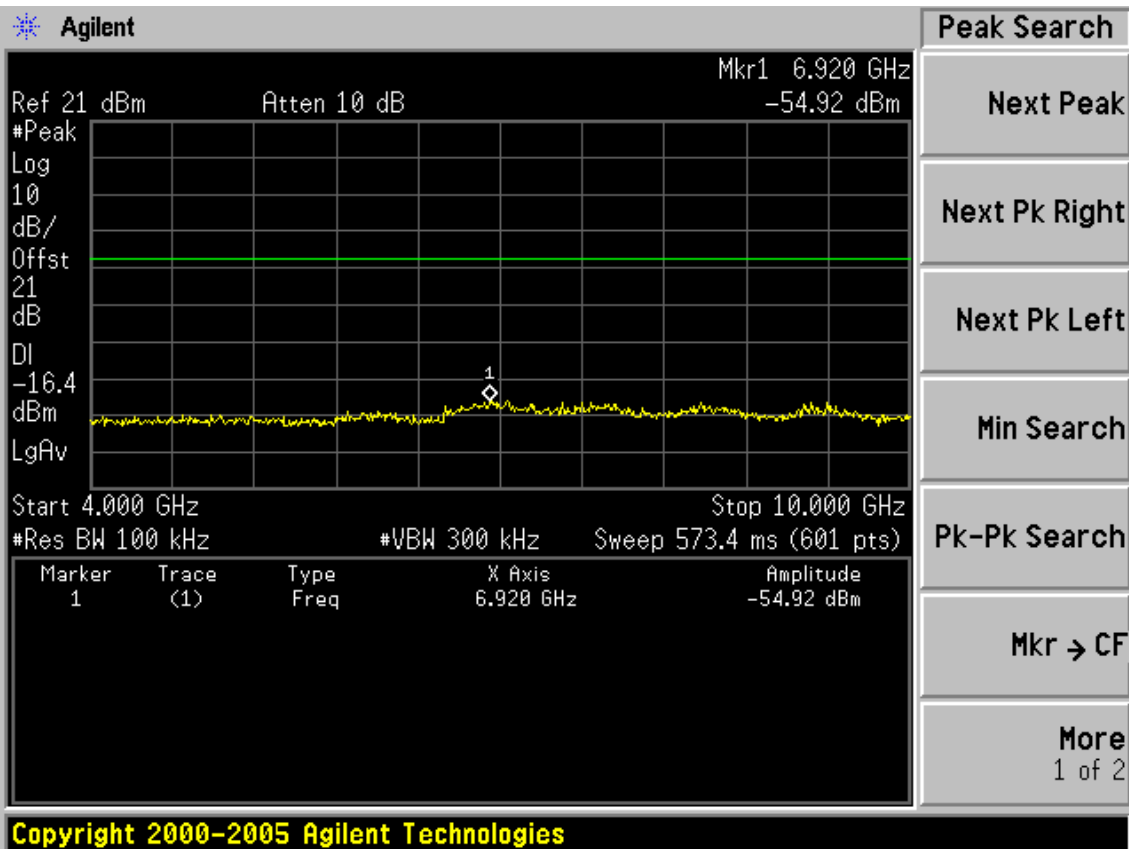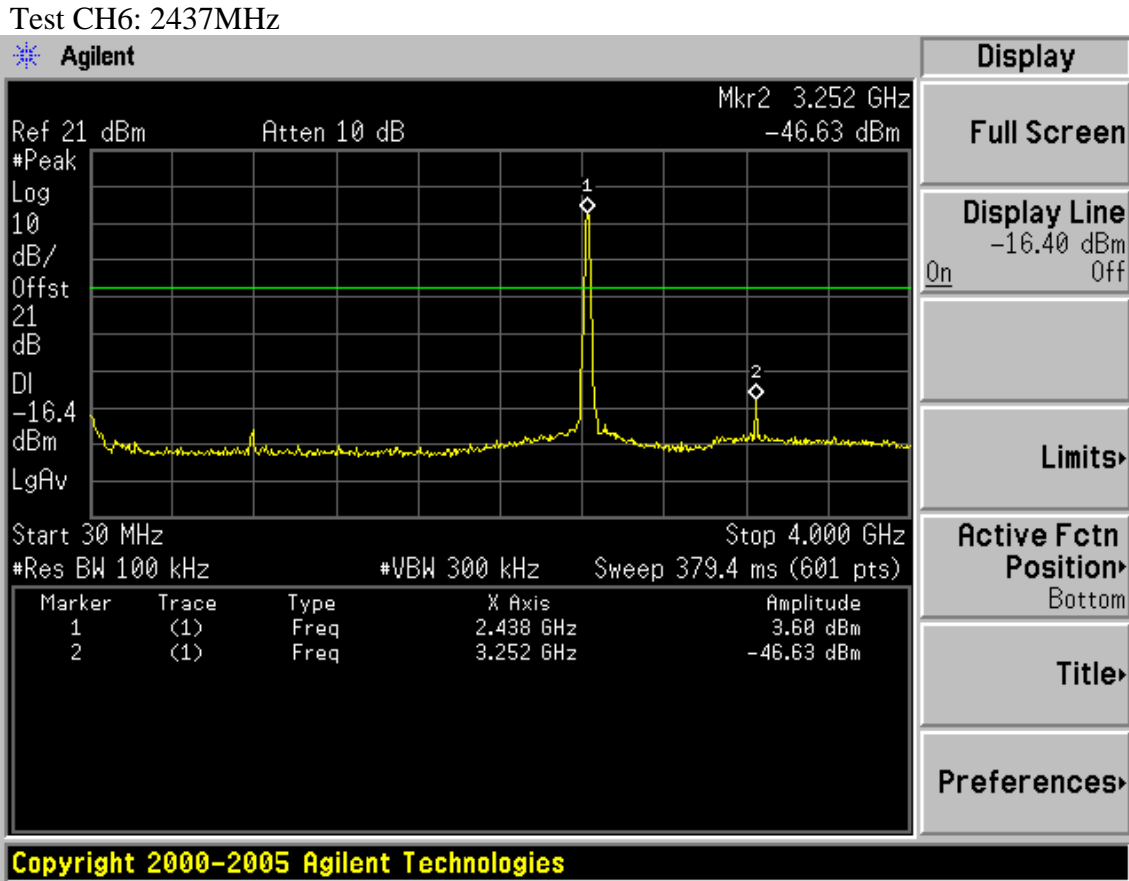



FCC ID: W6RRNX-N360PC

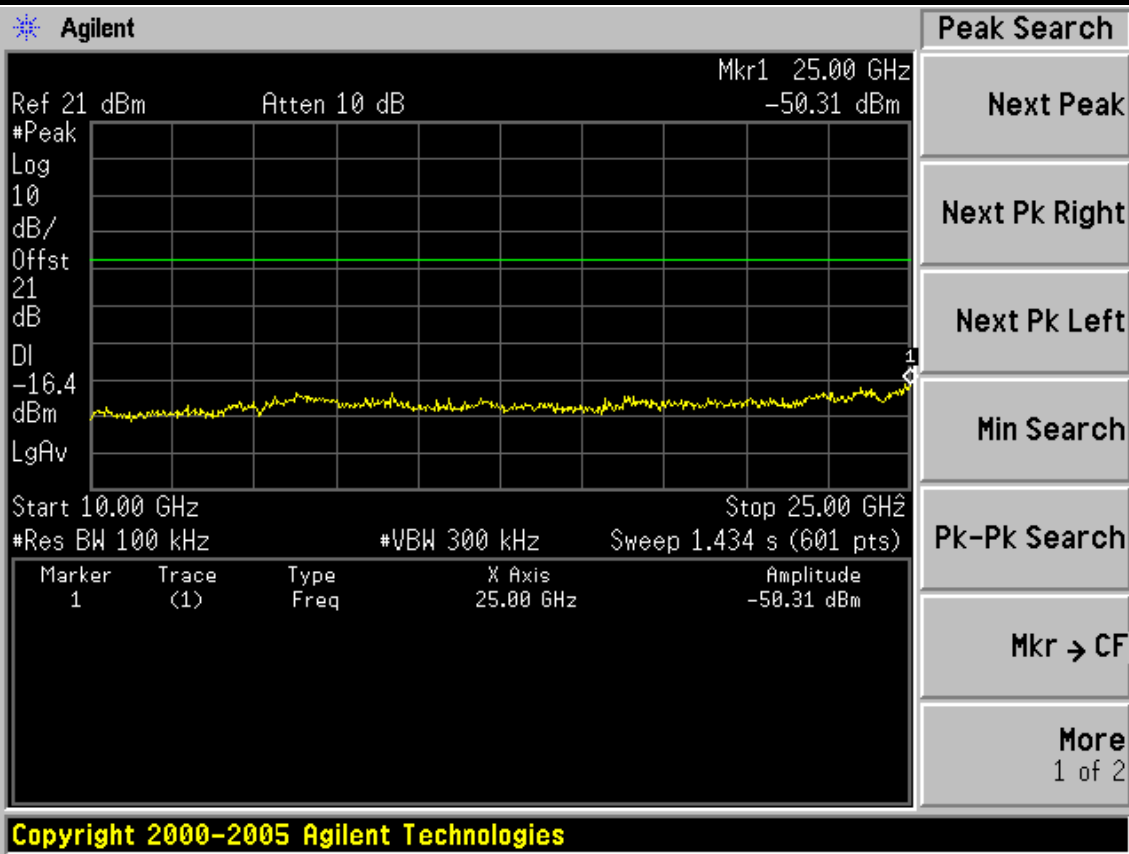


Test CH11: 2462MHz

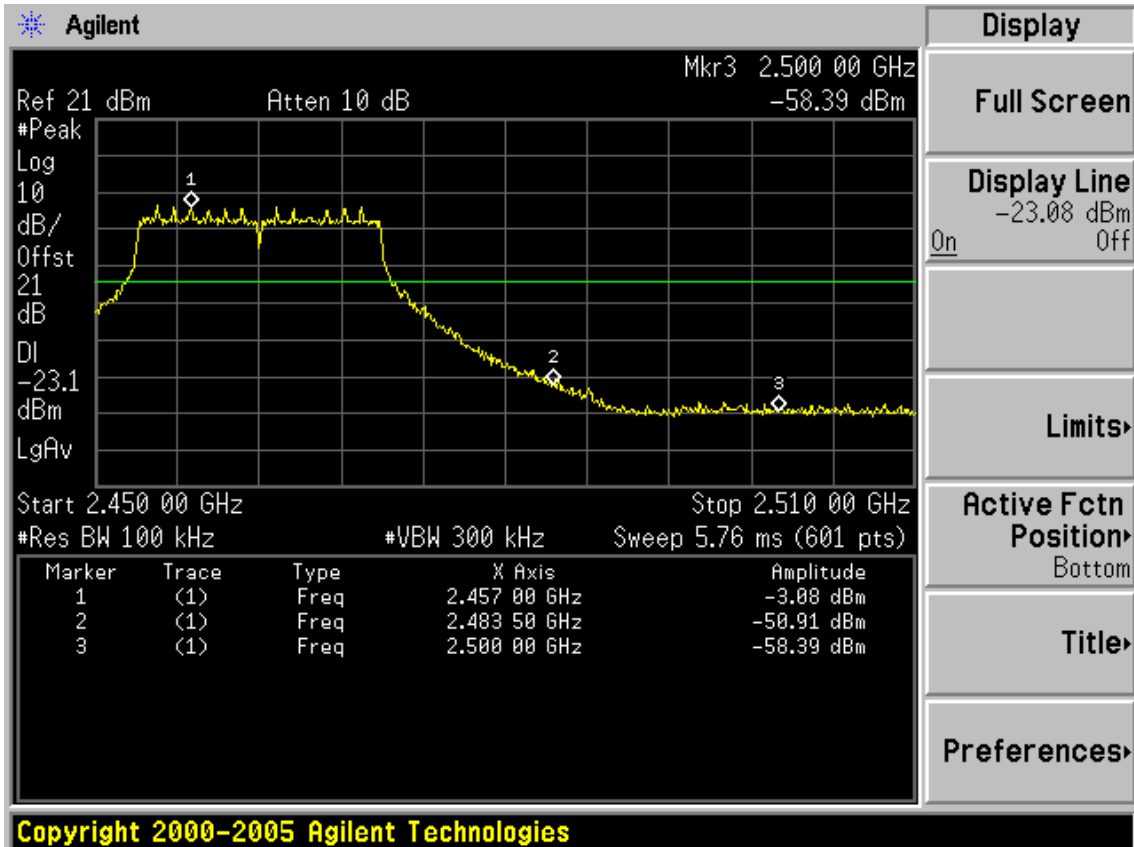


FCC ID: W6RRNX-N360PC

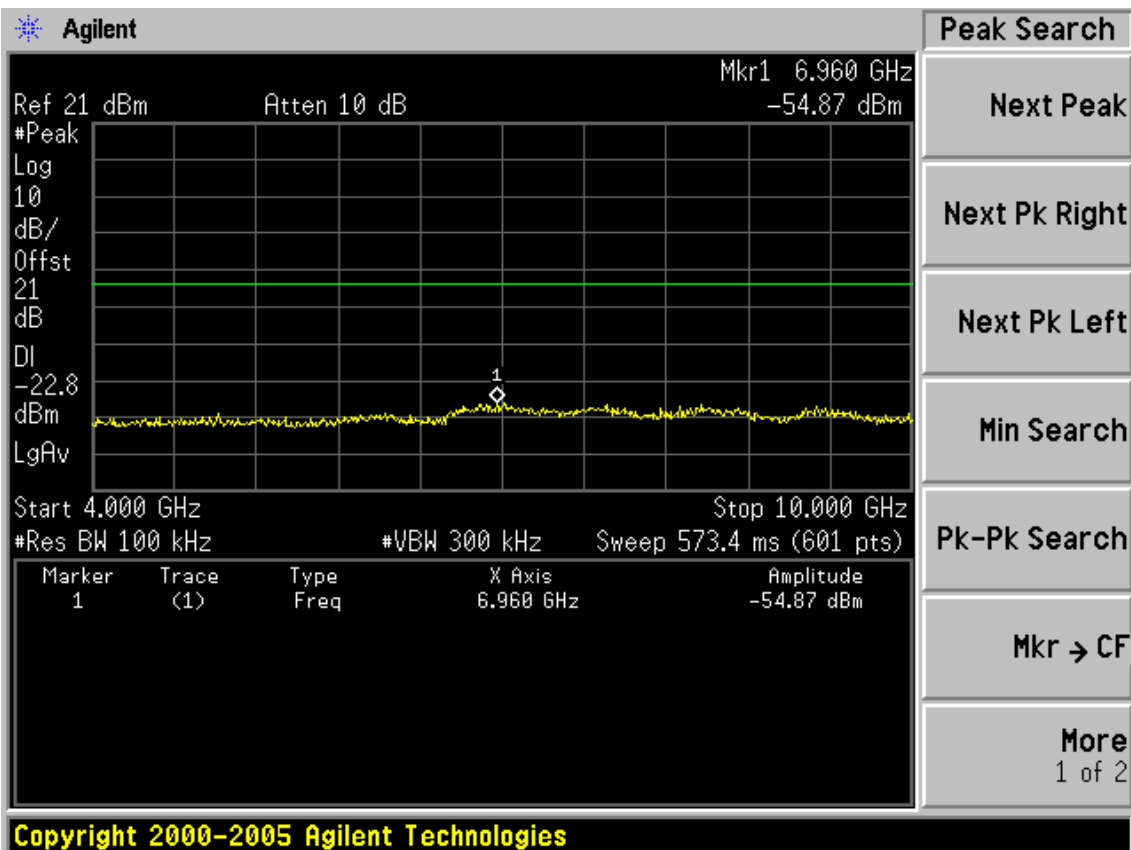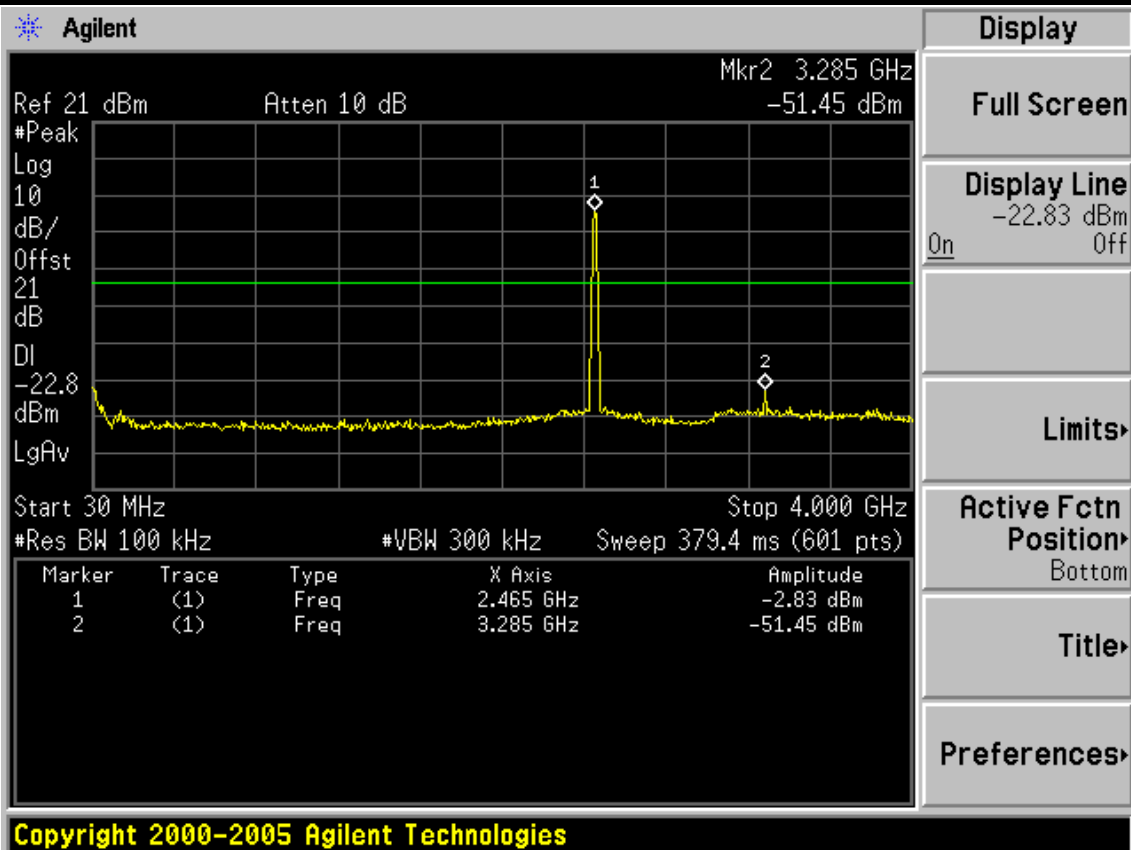



FCC ID: W6RRNX-N360PC

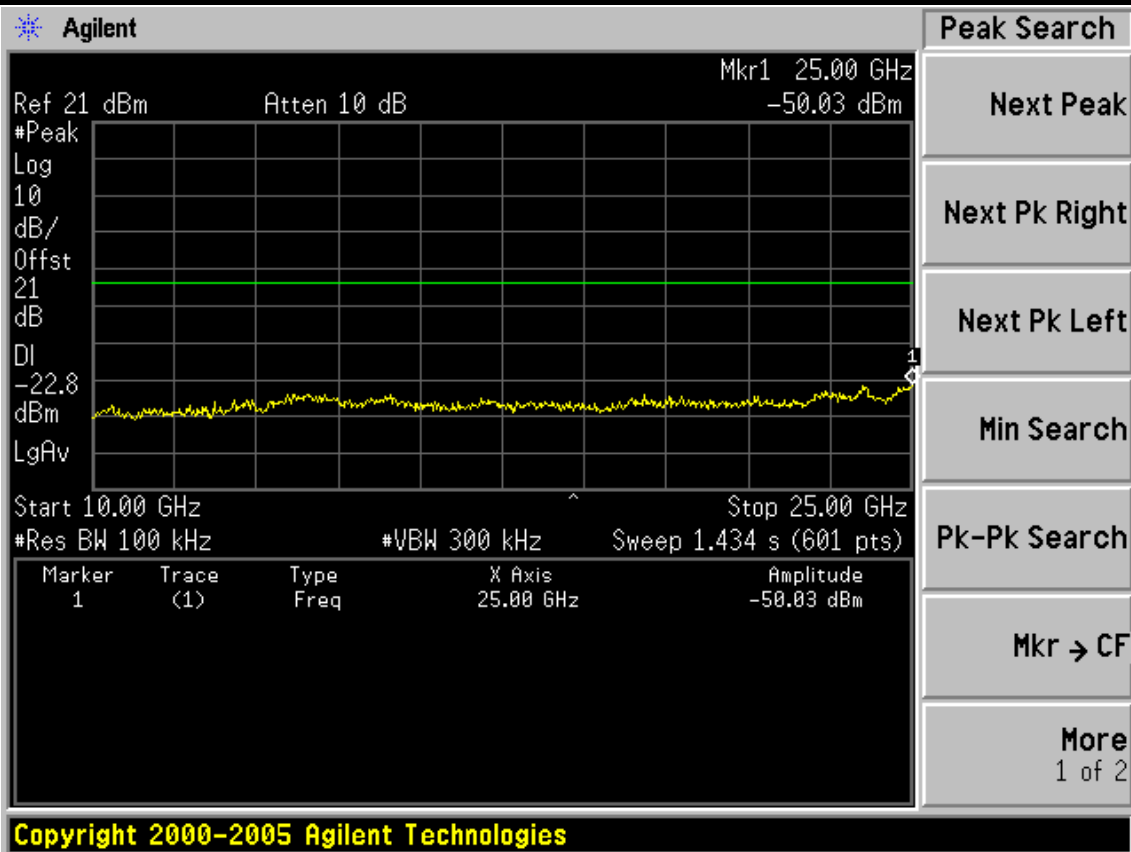


Test Mode: IEEE 802.11n HT40 TX
Test CH1: 2422MHz

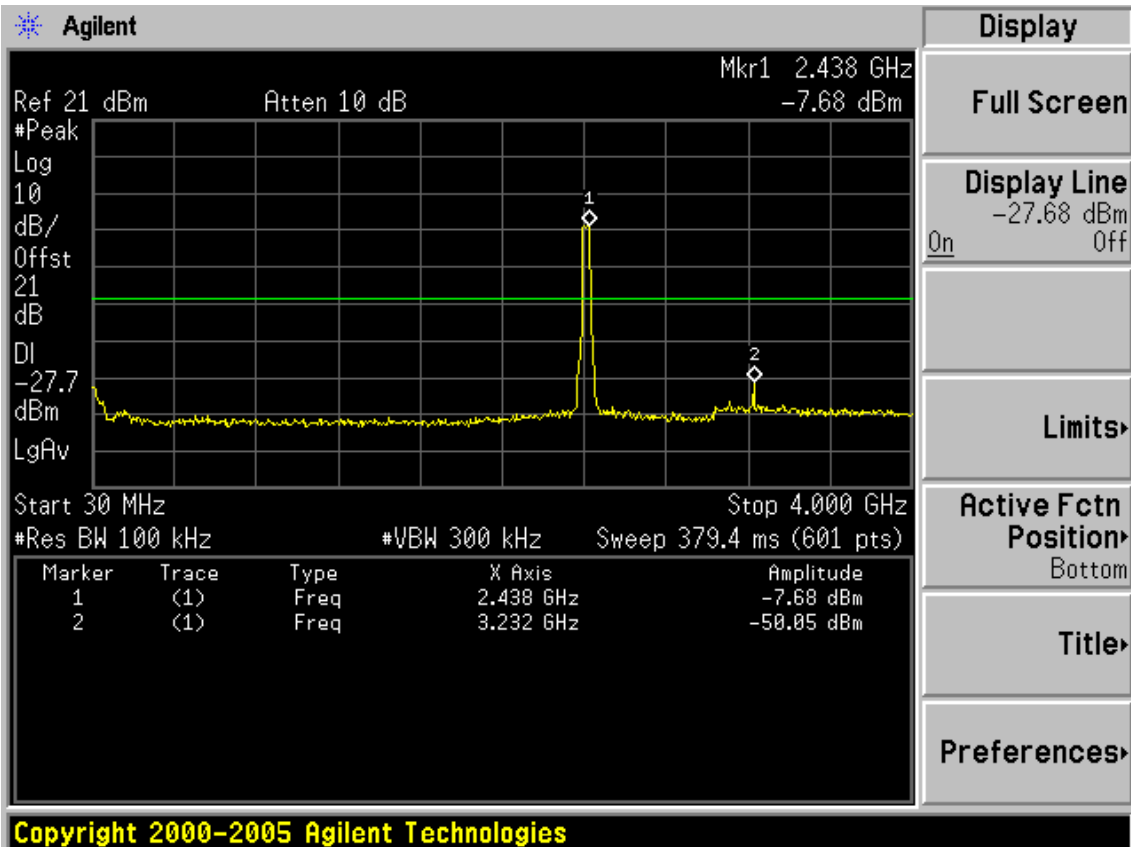


FCC ID: W6RRNX-N360PC

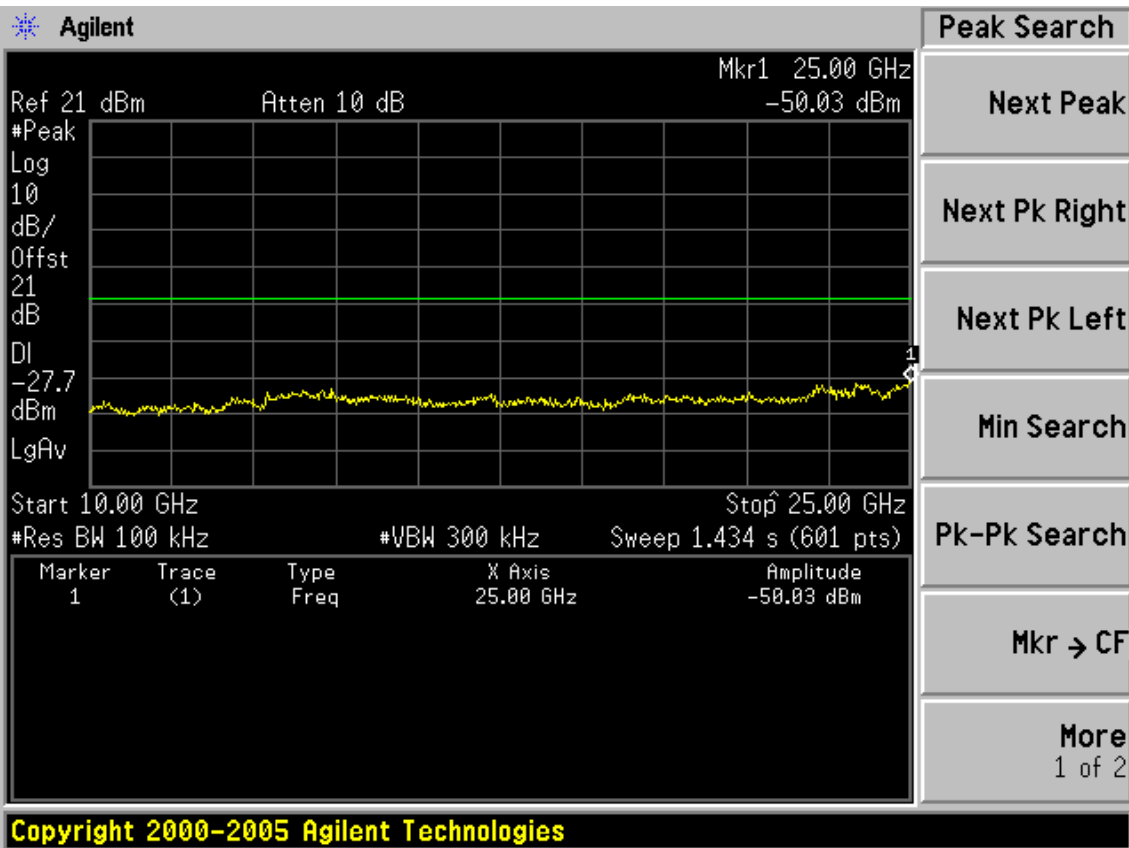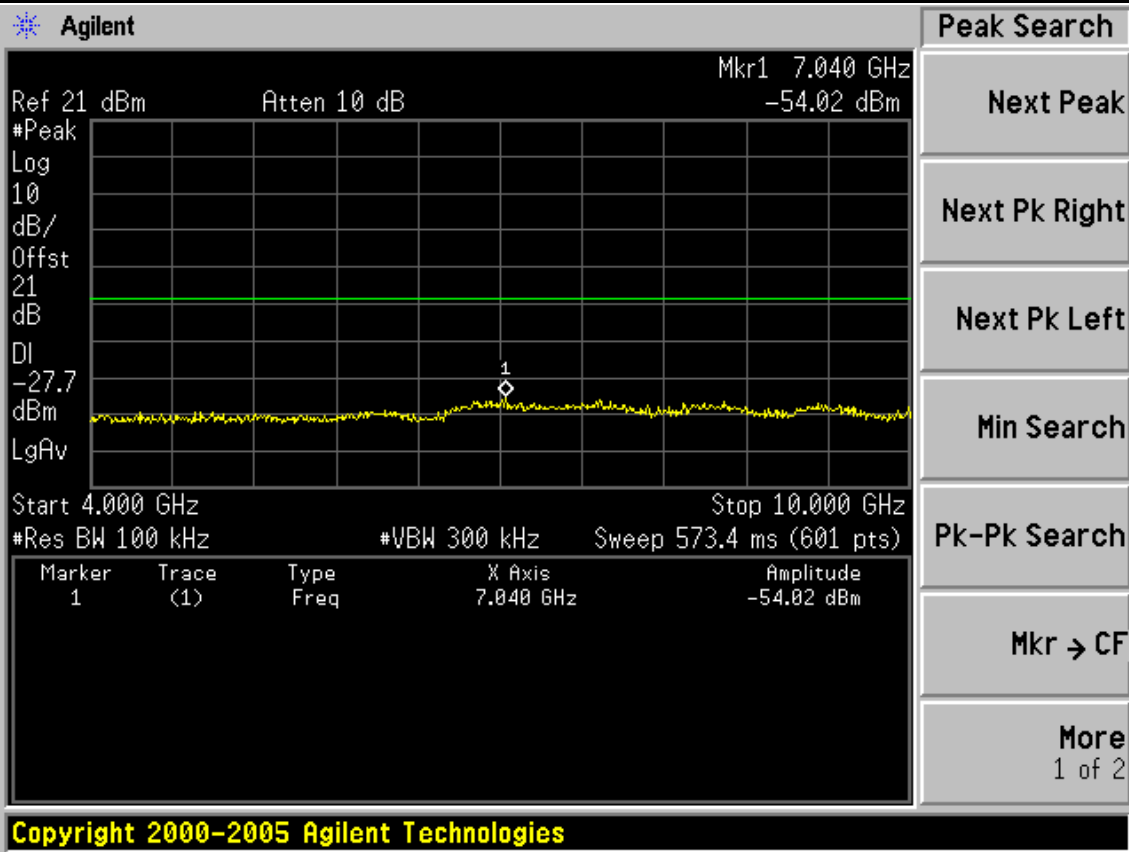



FCC ID: W6RRNX-N360PC

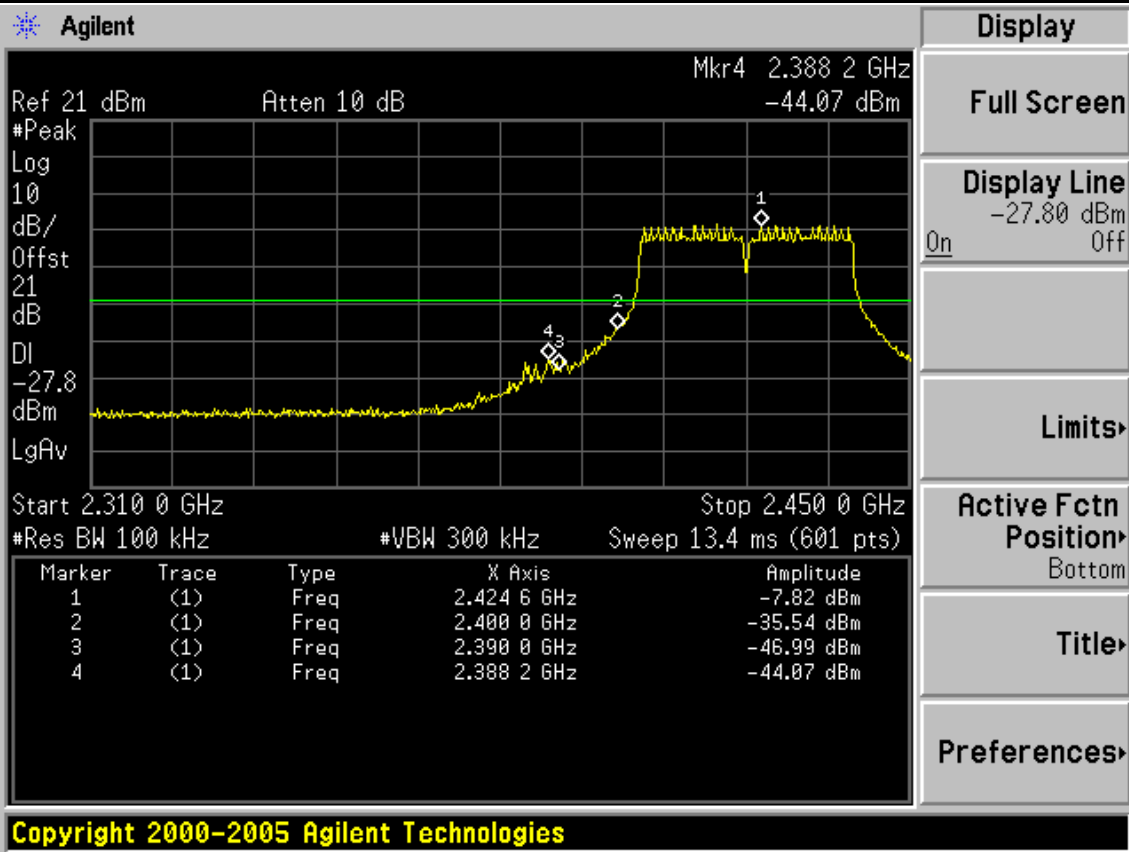



Test CH4: 2437MHz

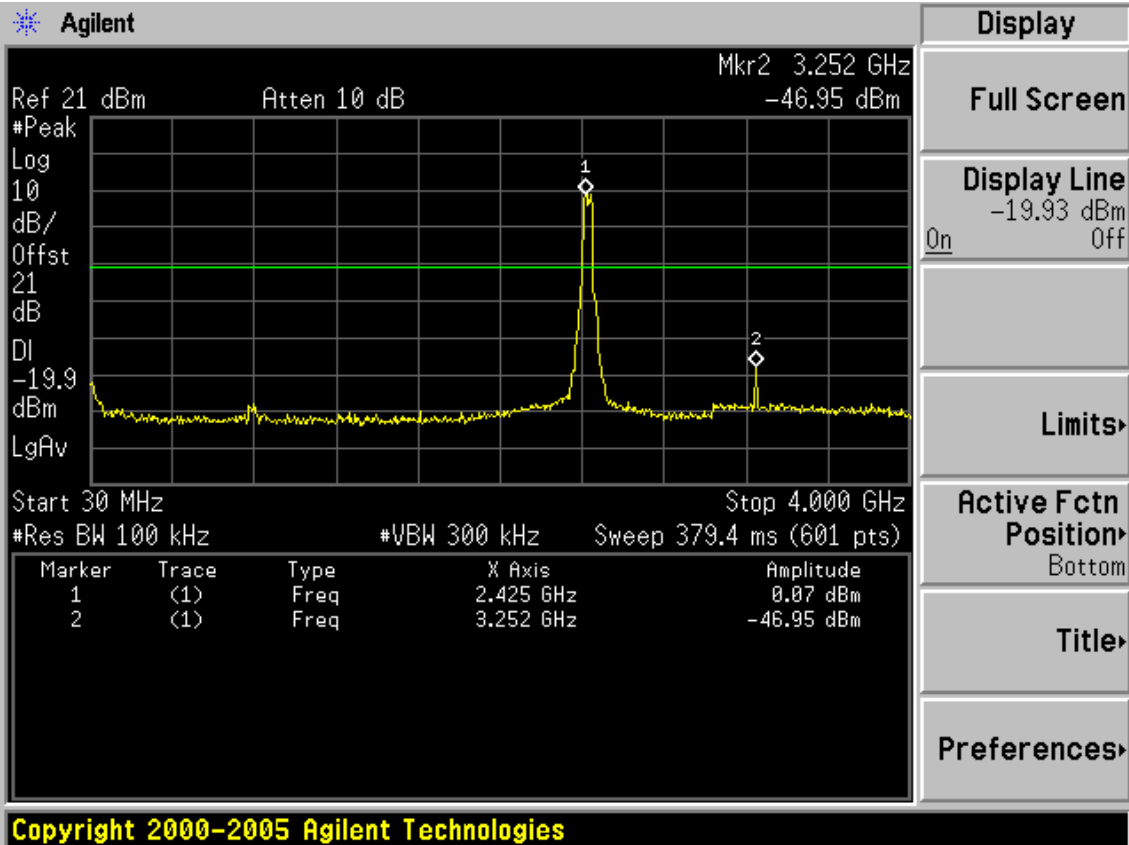



FCC ID: W6RRNX-N360PC

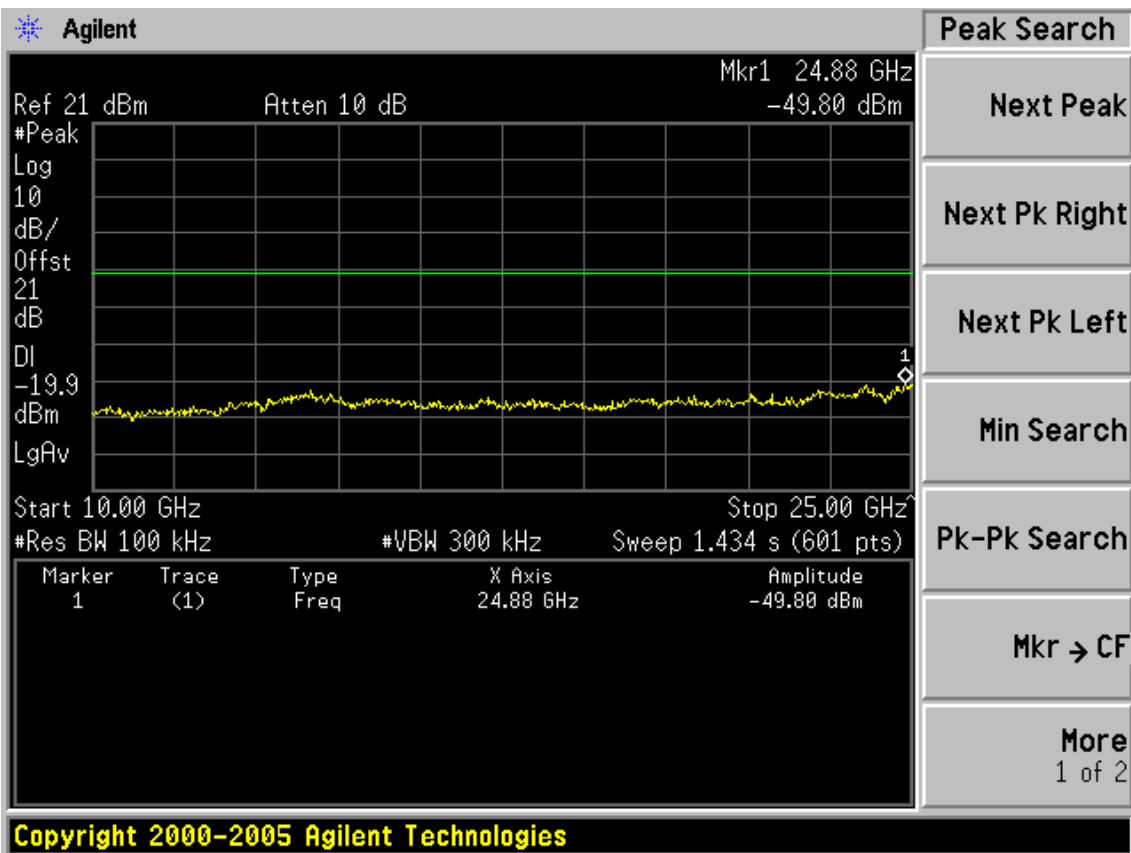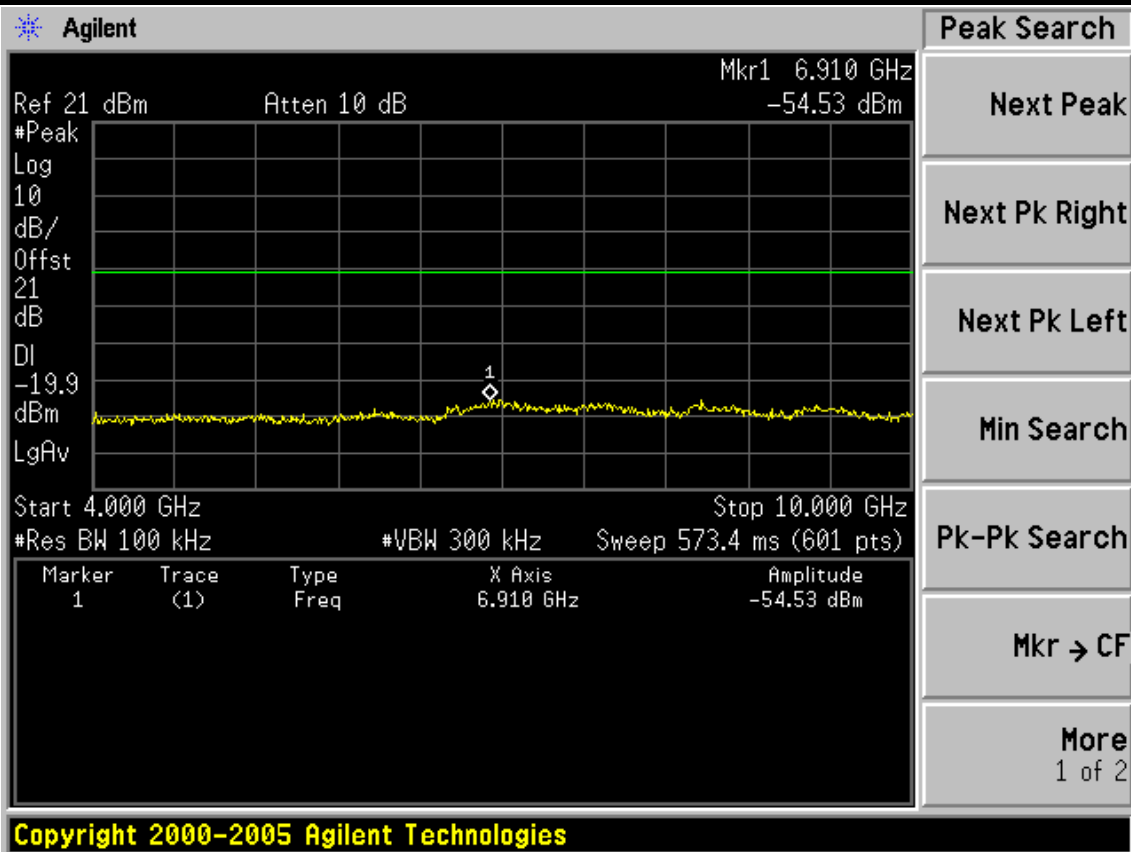

FCC ID: W6RRNX-N360PC

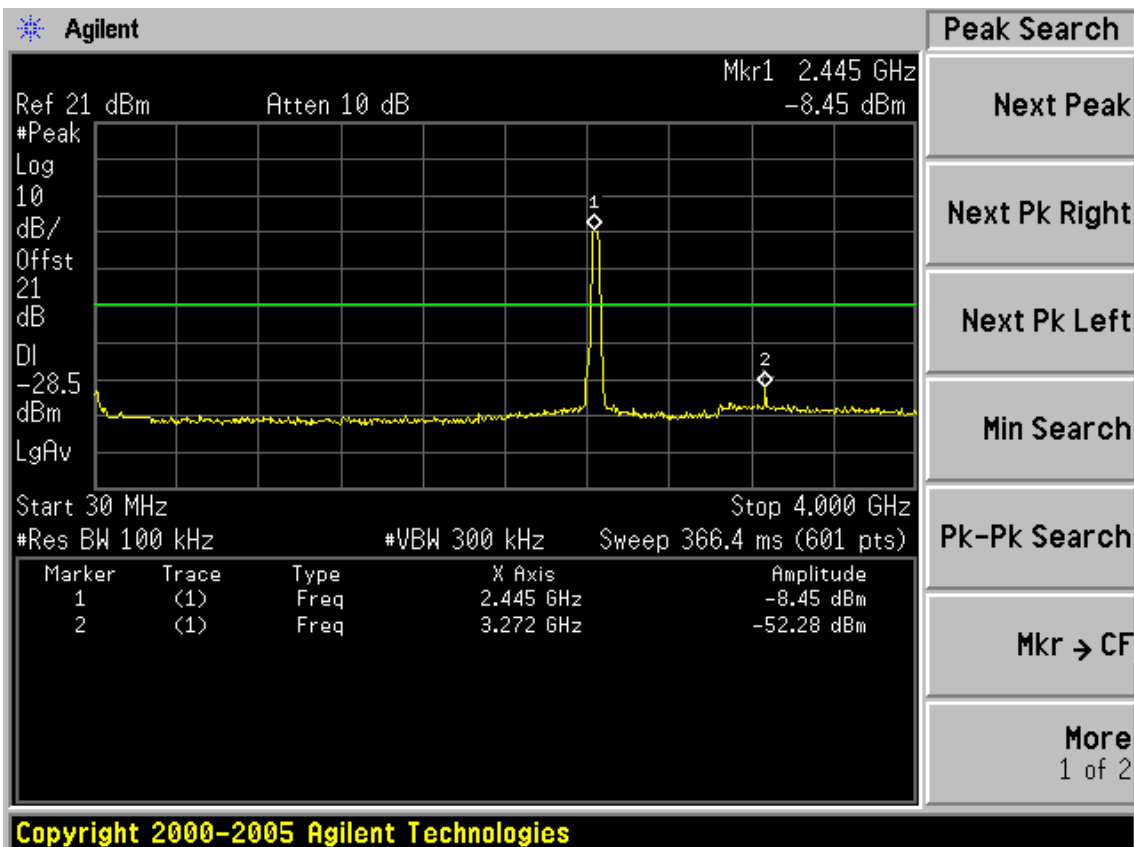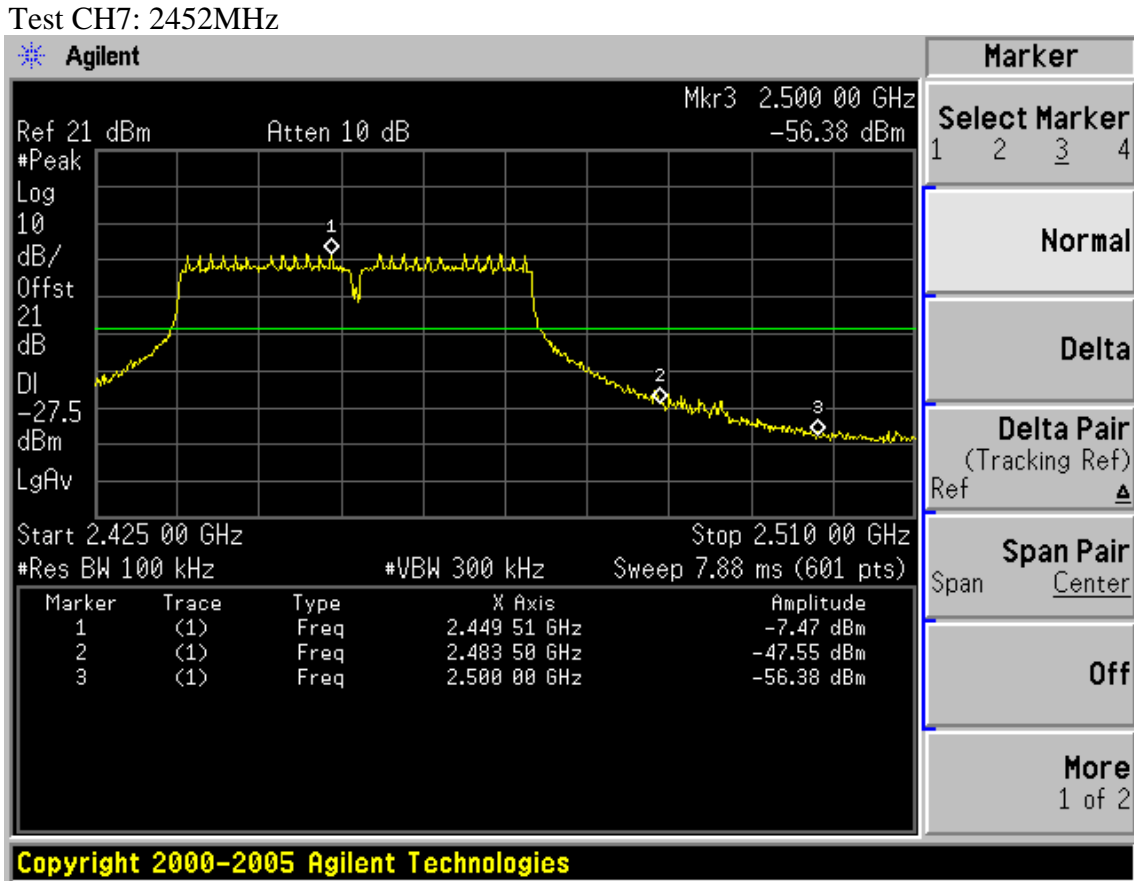

FCC ID: W6RRNX-N360PC

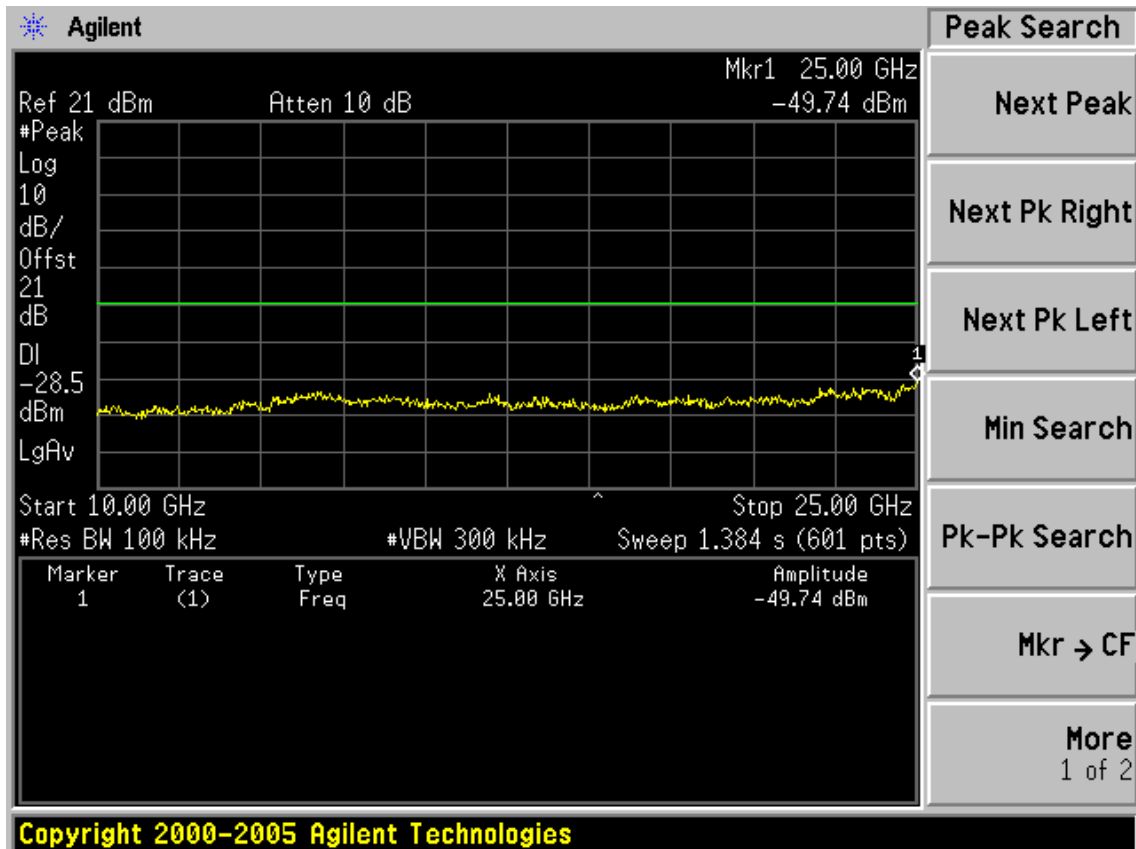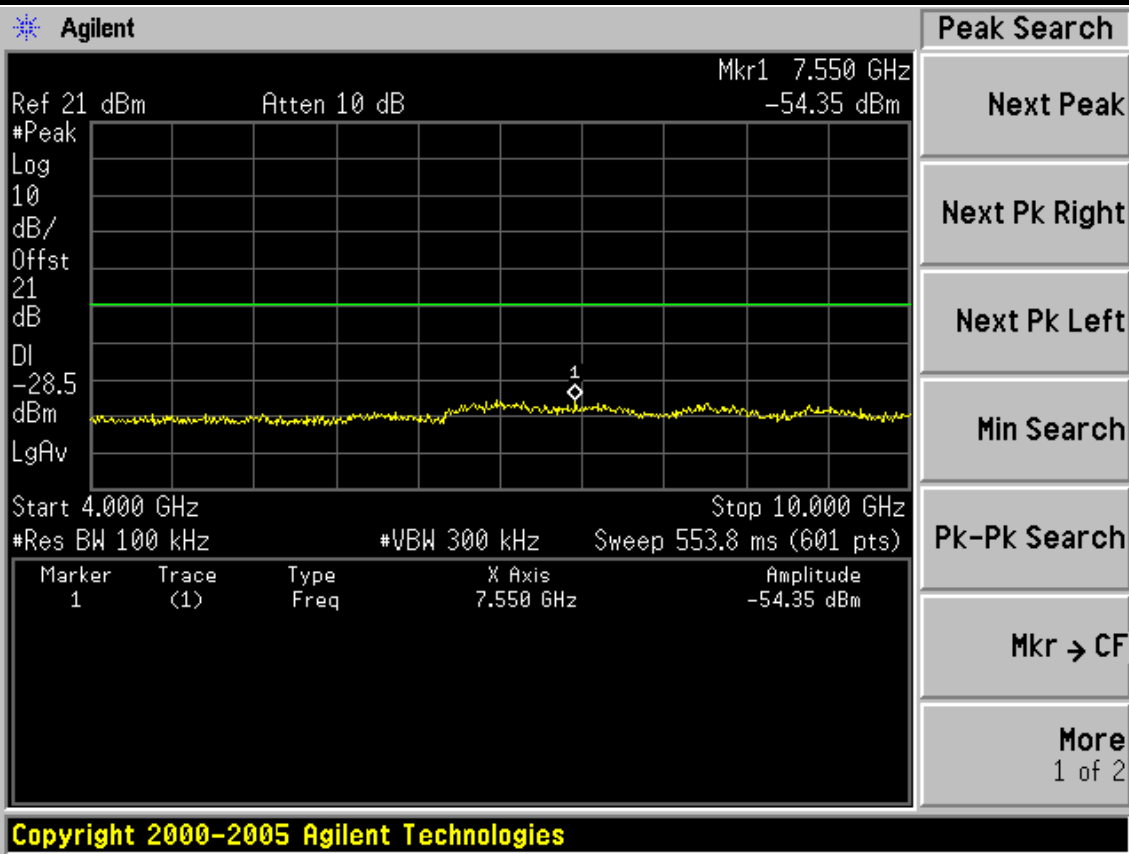


FCC ID: W6RRNX-N360PC


Chain 1:

Test Mode: IEEE 802.11b TX

Test CH1: 2412MHz


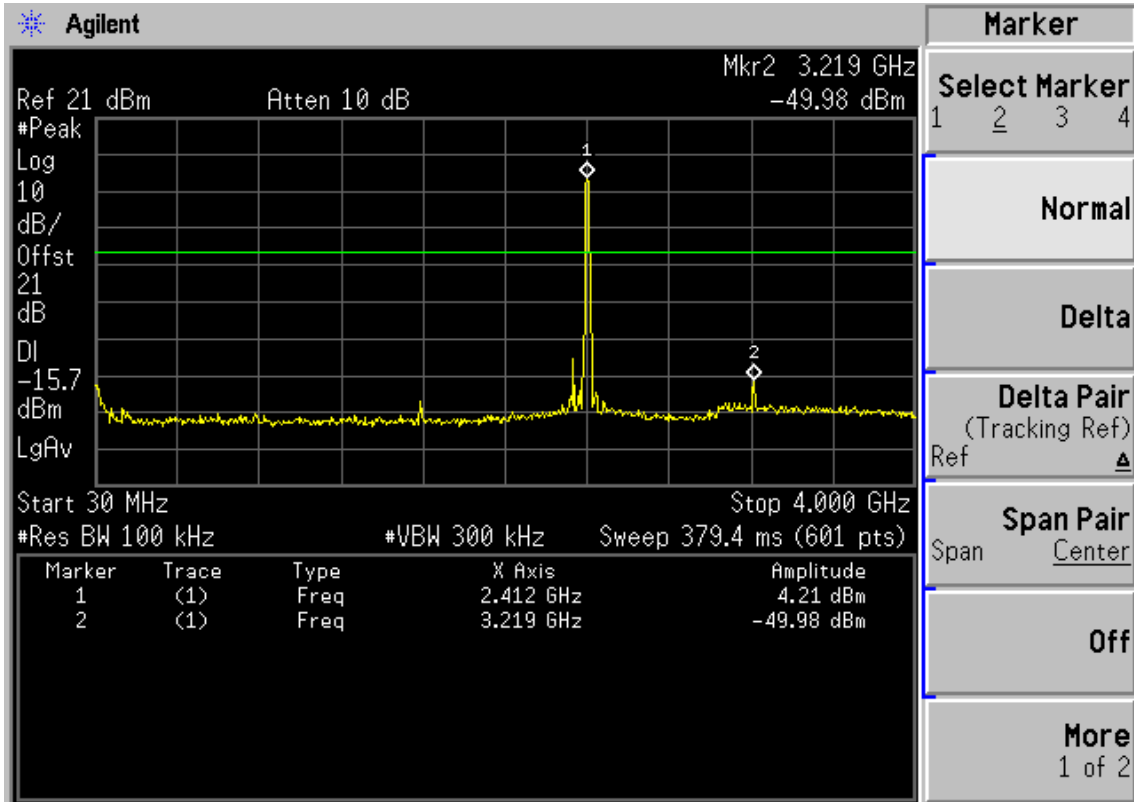


Copyright 2000-2005 Agilent Technologies

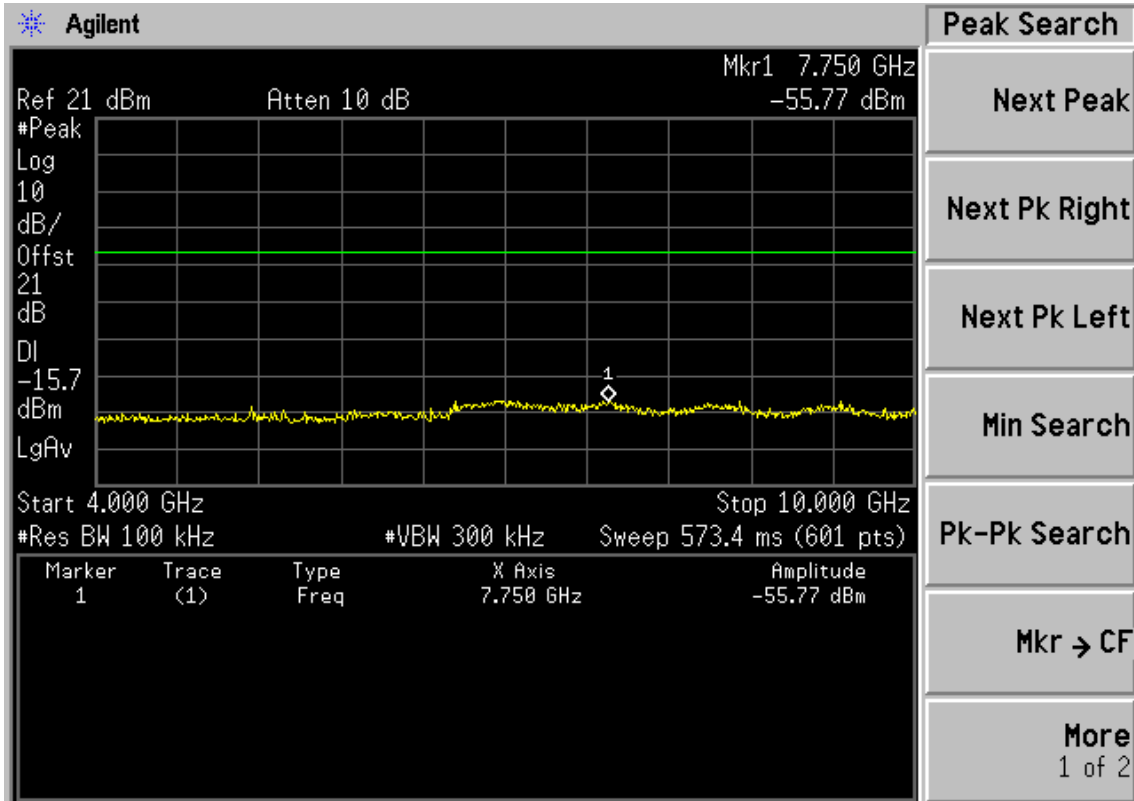



Copyright 2000-2005 Agilent Technologies

FCC ID: W6RRNX-N360PC

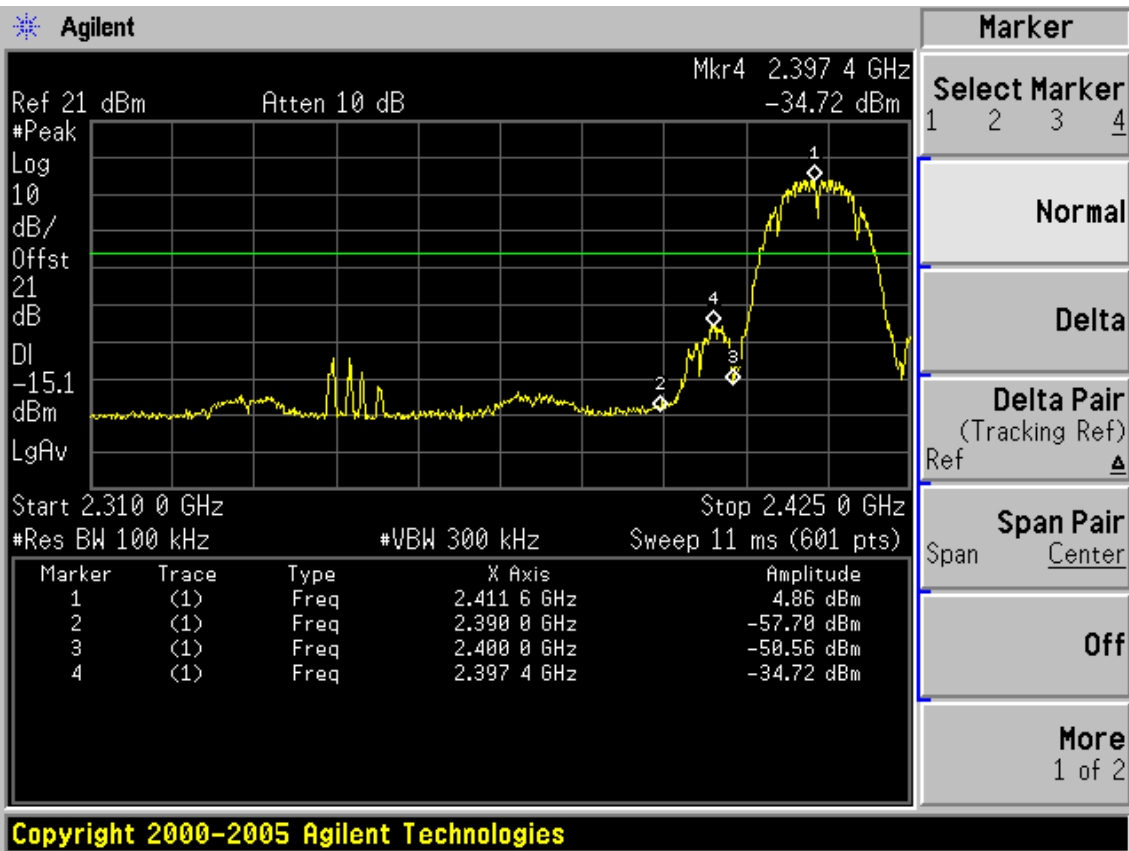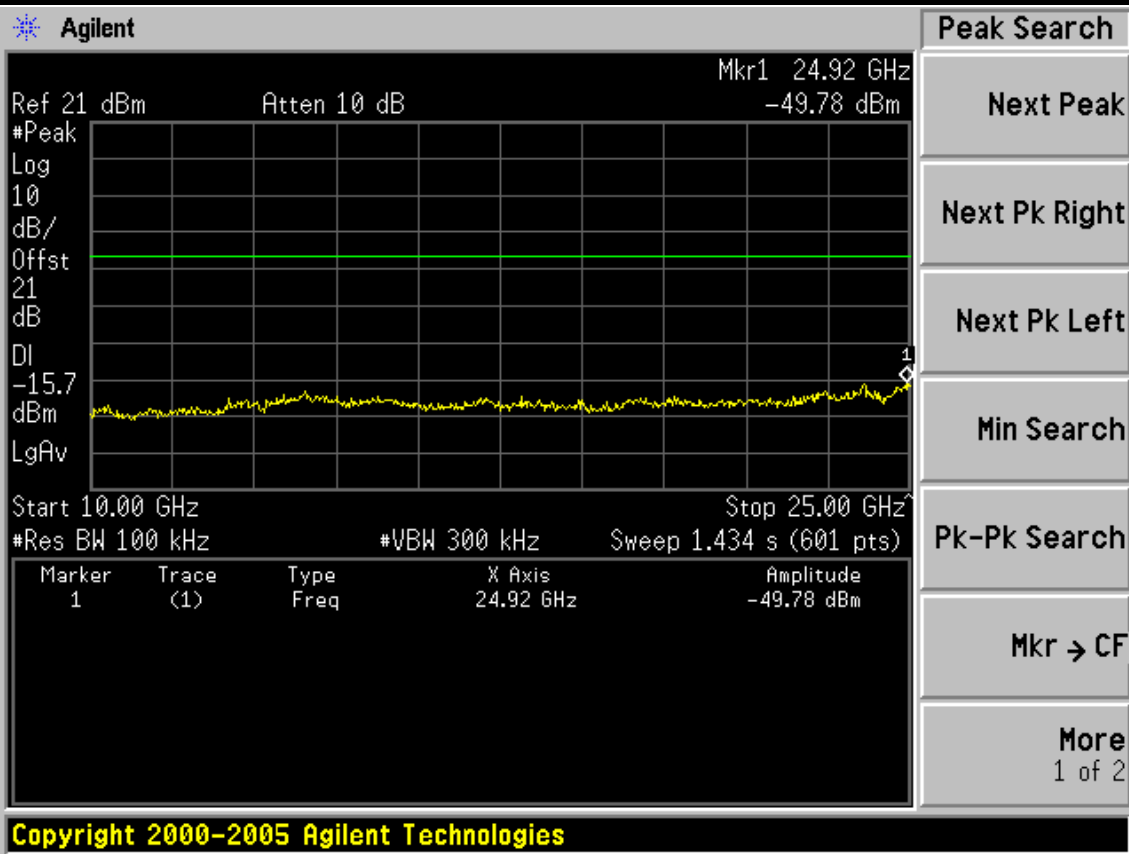


FCC ID: W6RRNX-N360PC


Test CH6: 2437MHz

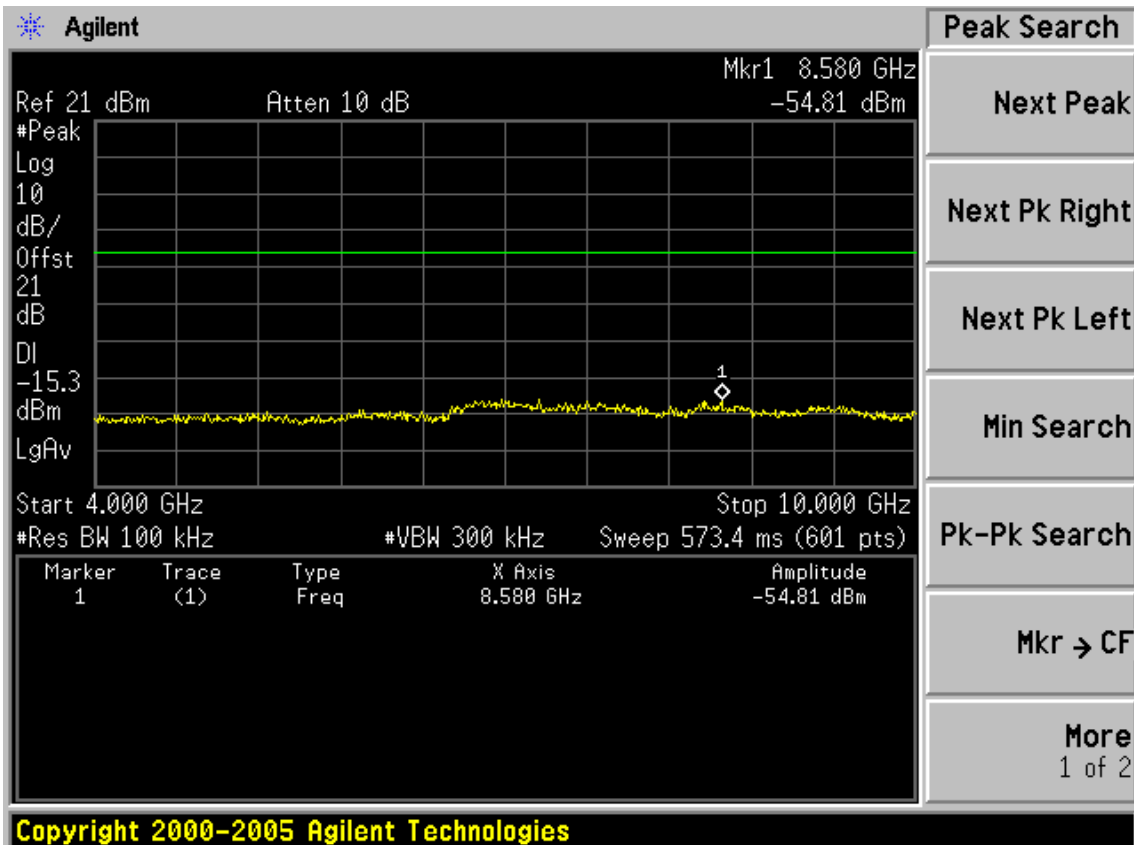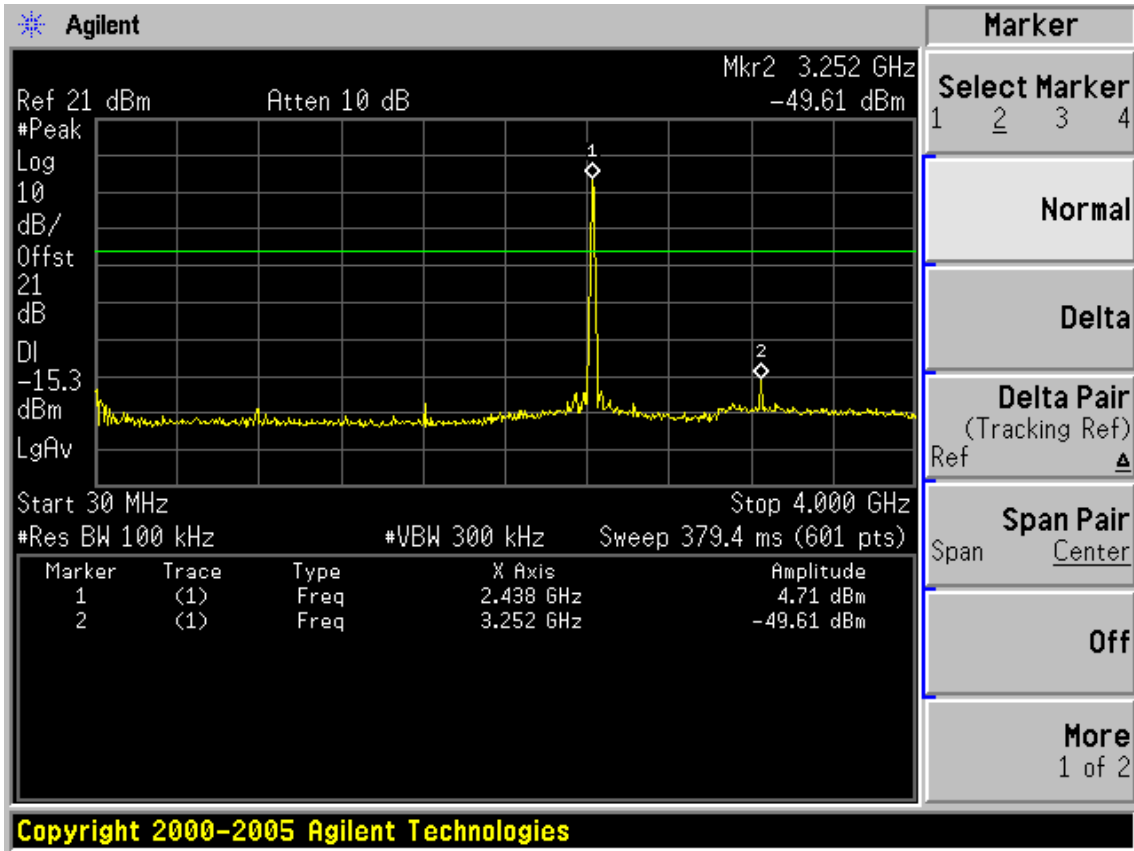



FCC ID: W6RRNX-N360PC

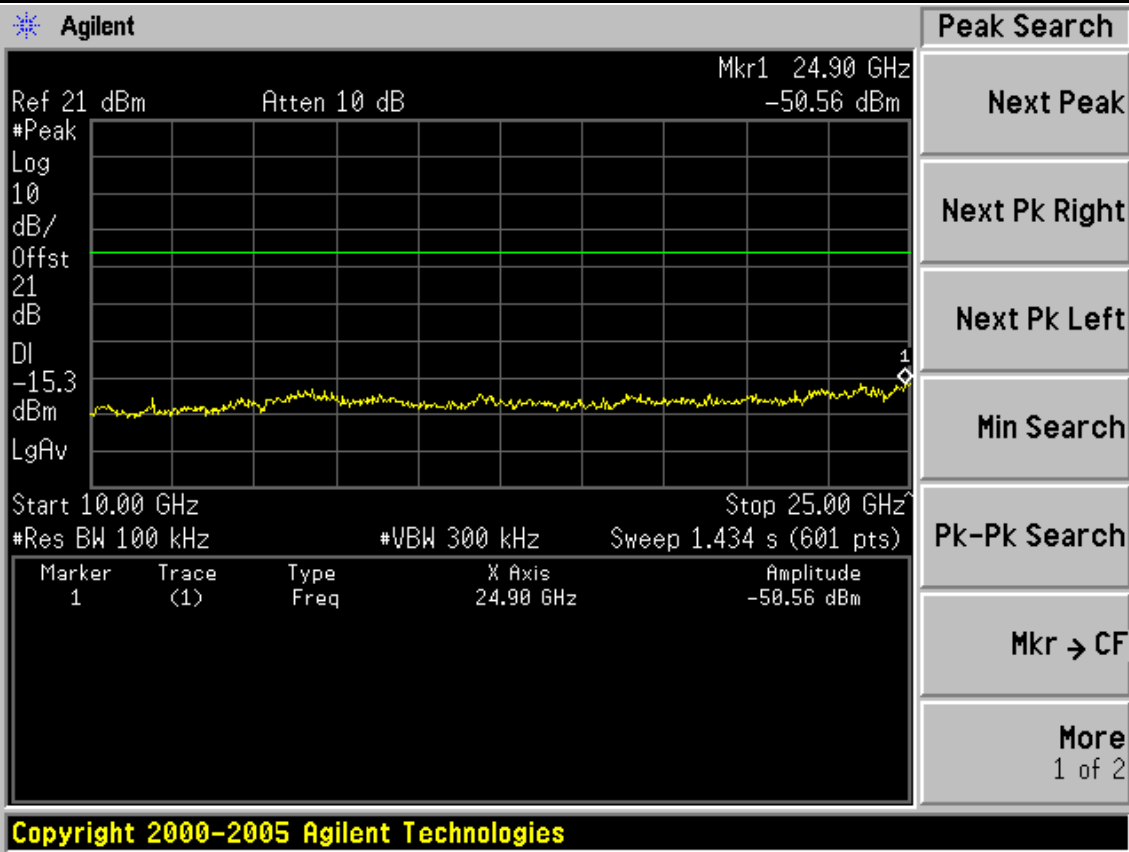


Test CH11: 2462MHz

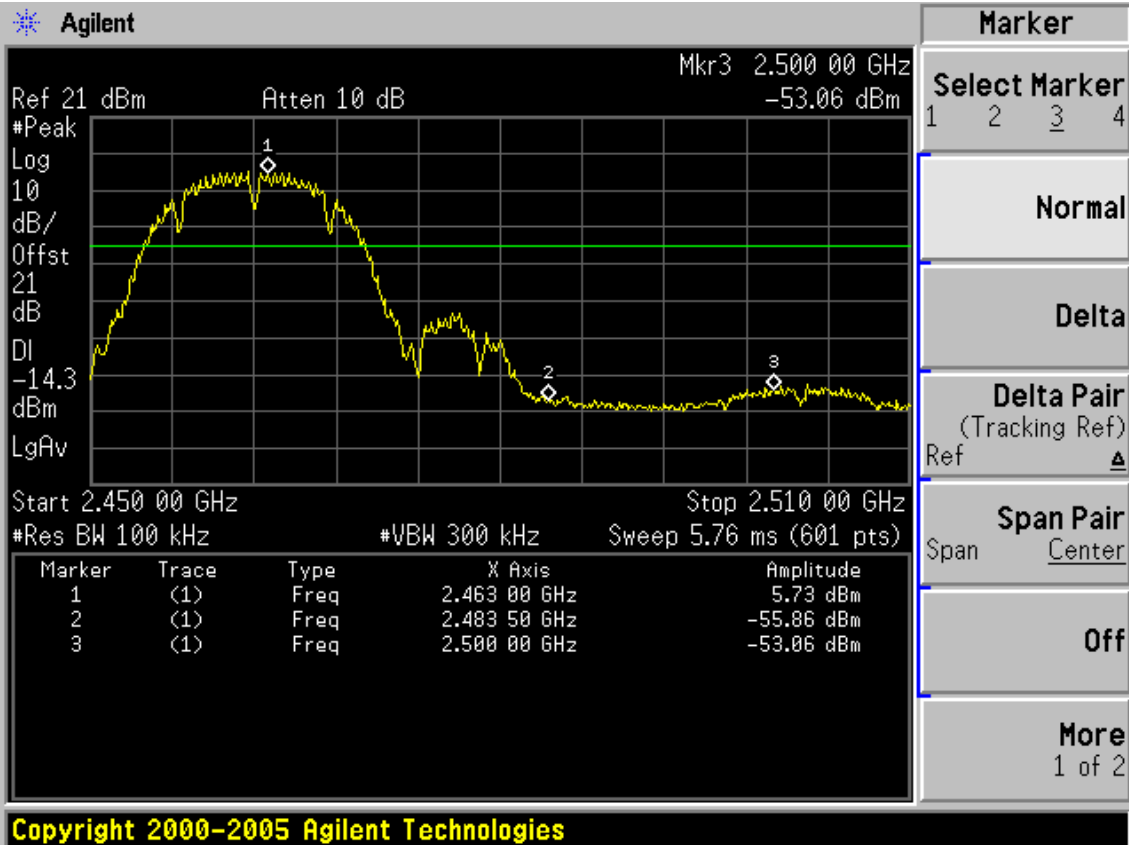


FCC ID: W6RRNX-N360PC

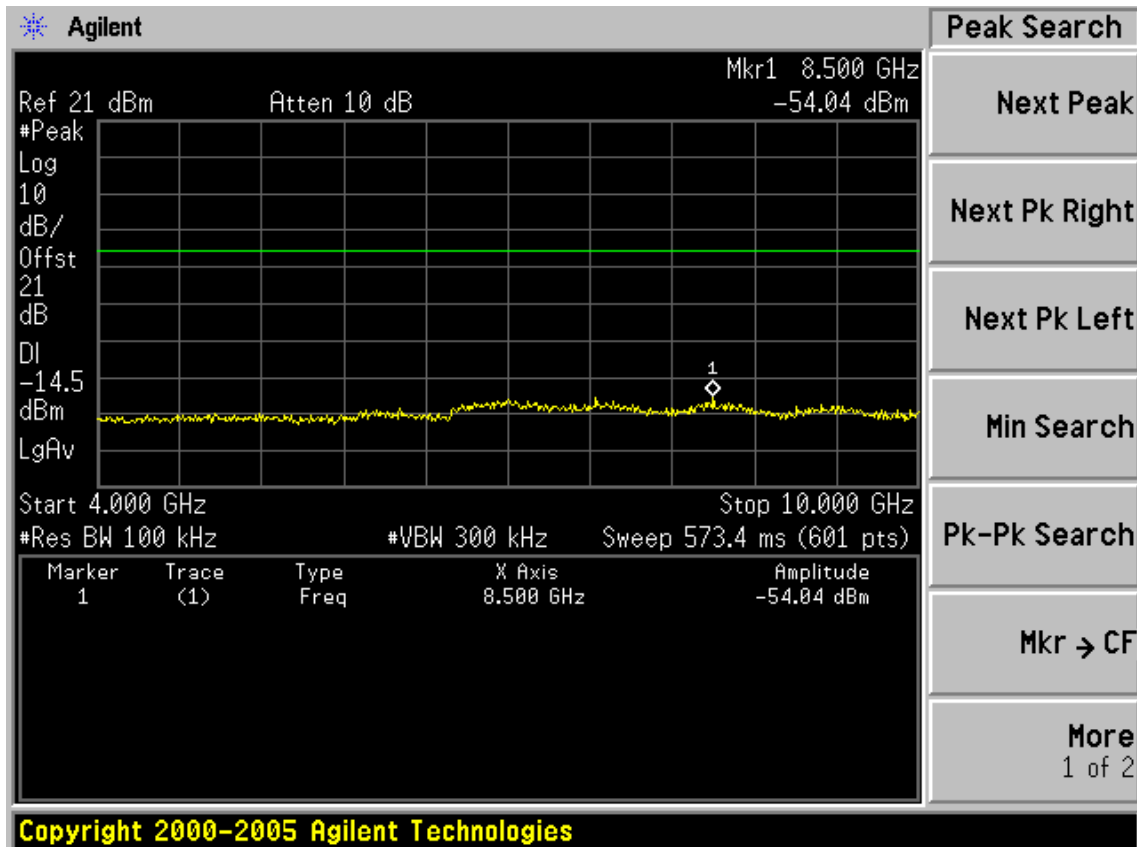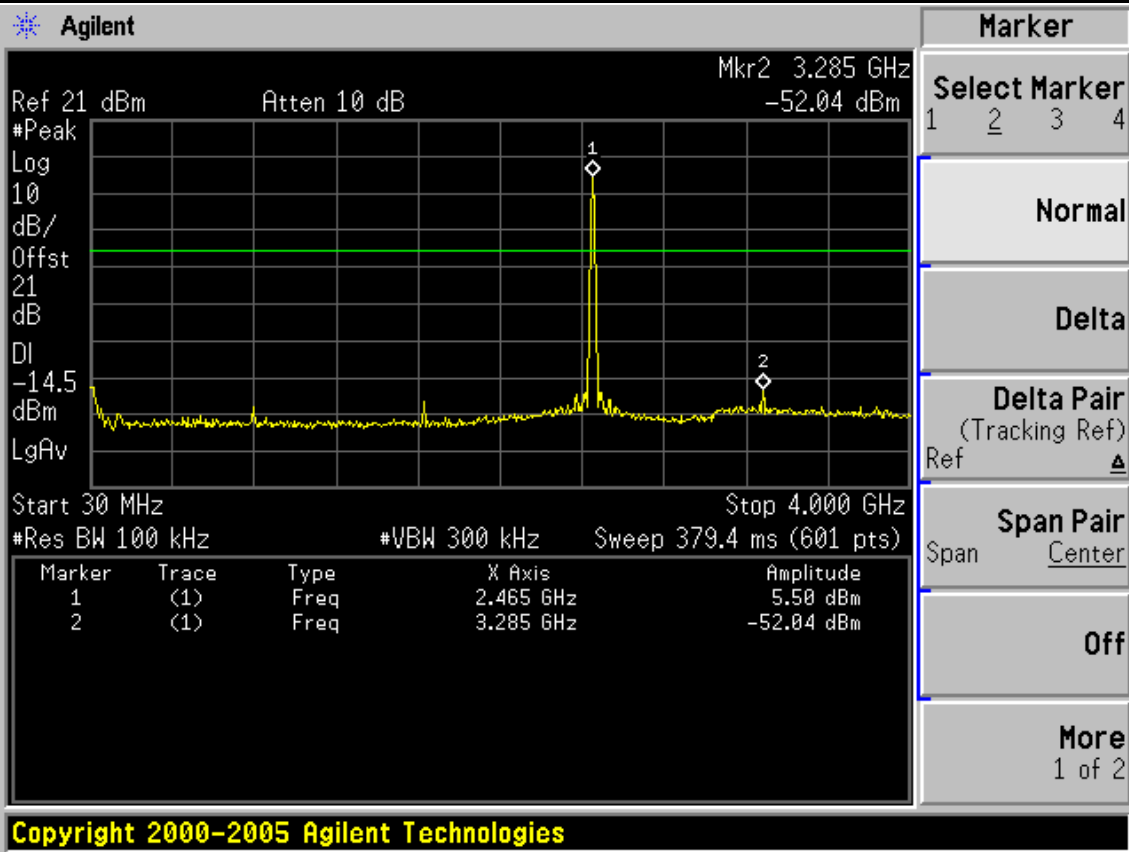



FCC ID: W6RRNX-N360PC

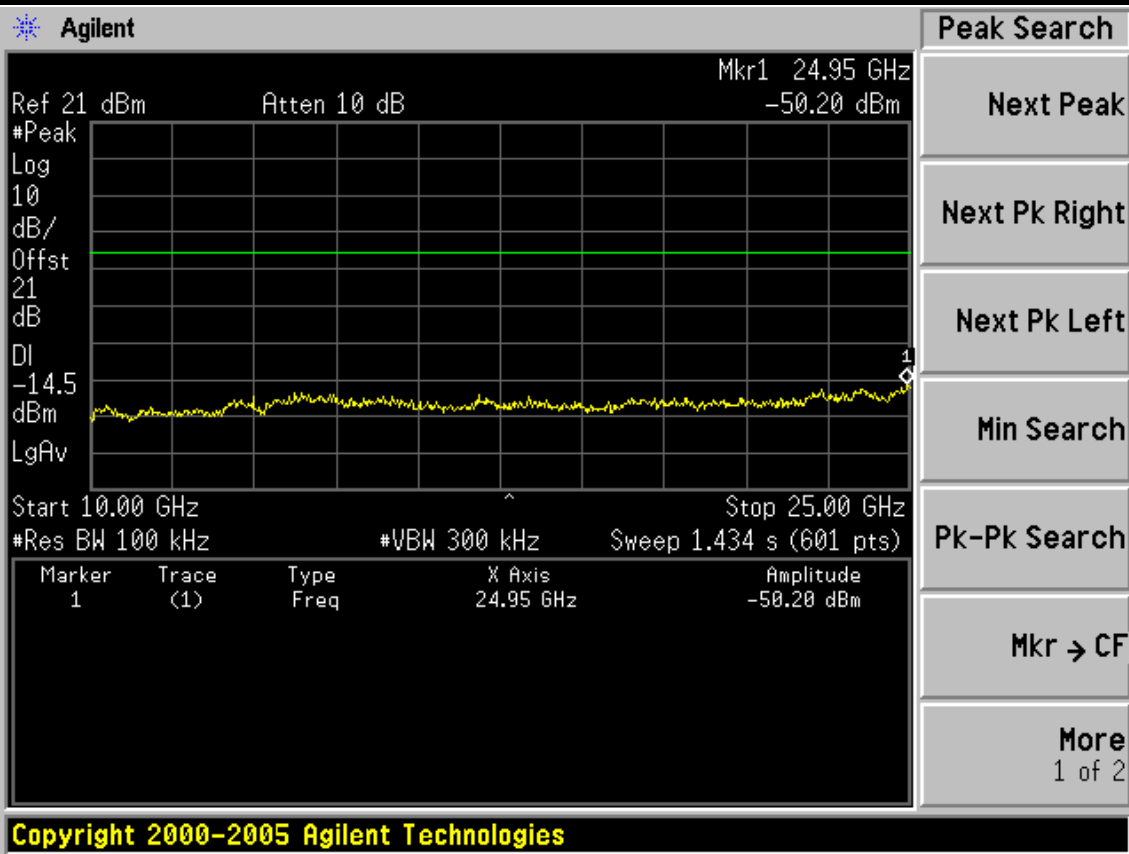


Test Mode: IEEE 802.11g TX
 Test CH1: 2412MHz

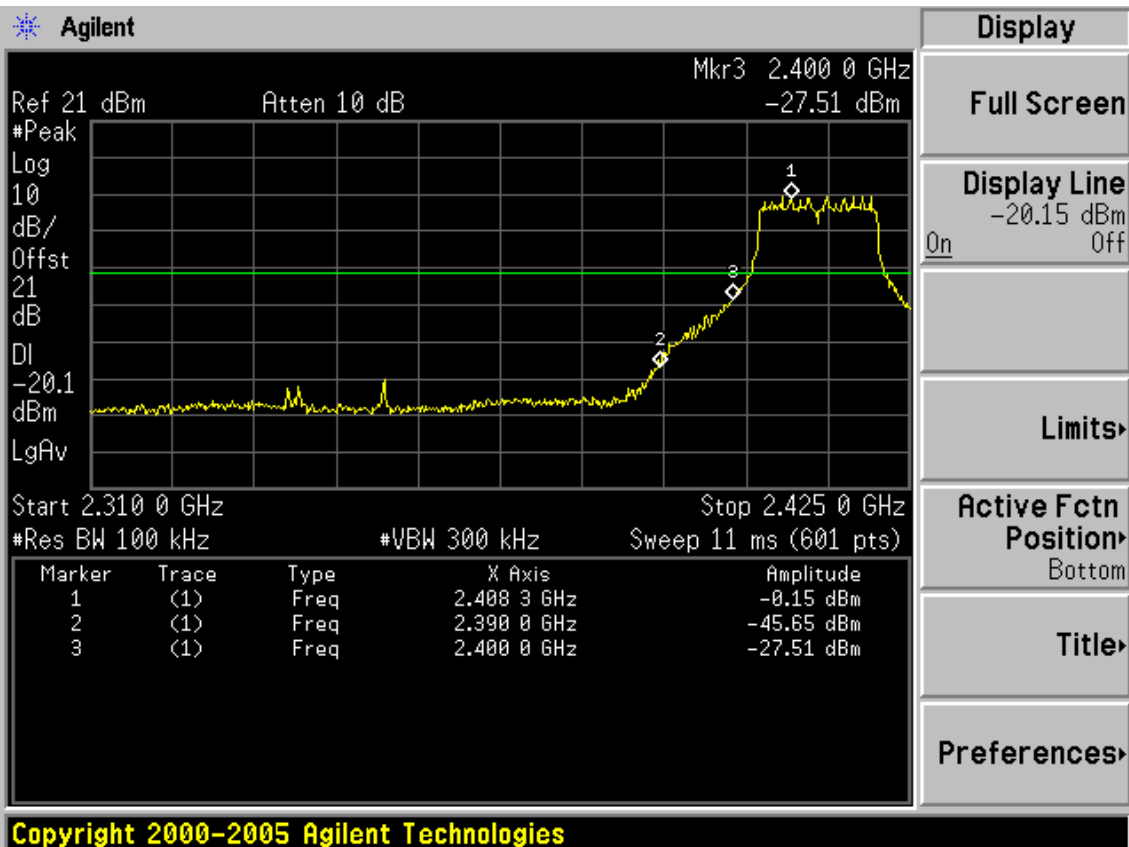


FCC ID: W6RRNX-N360PC

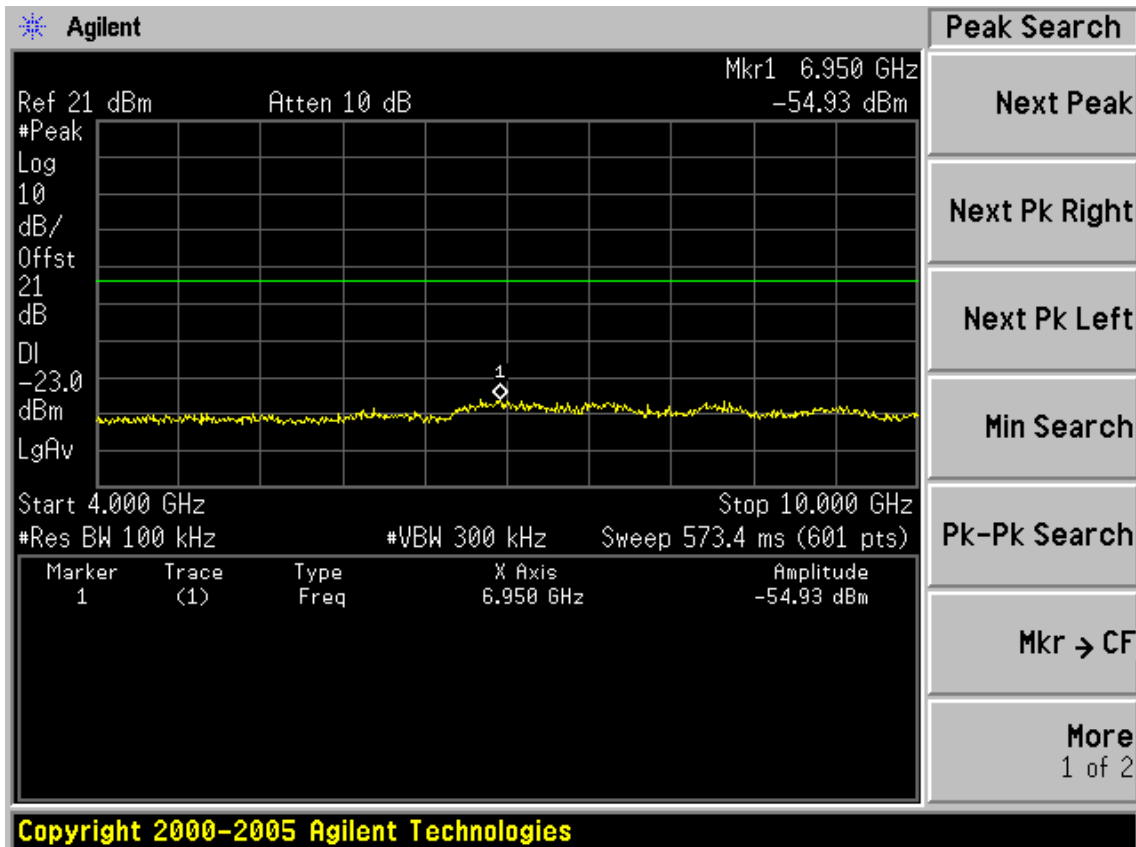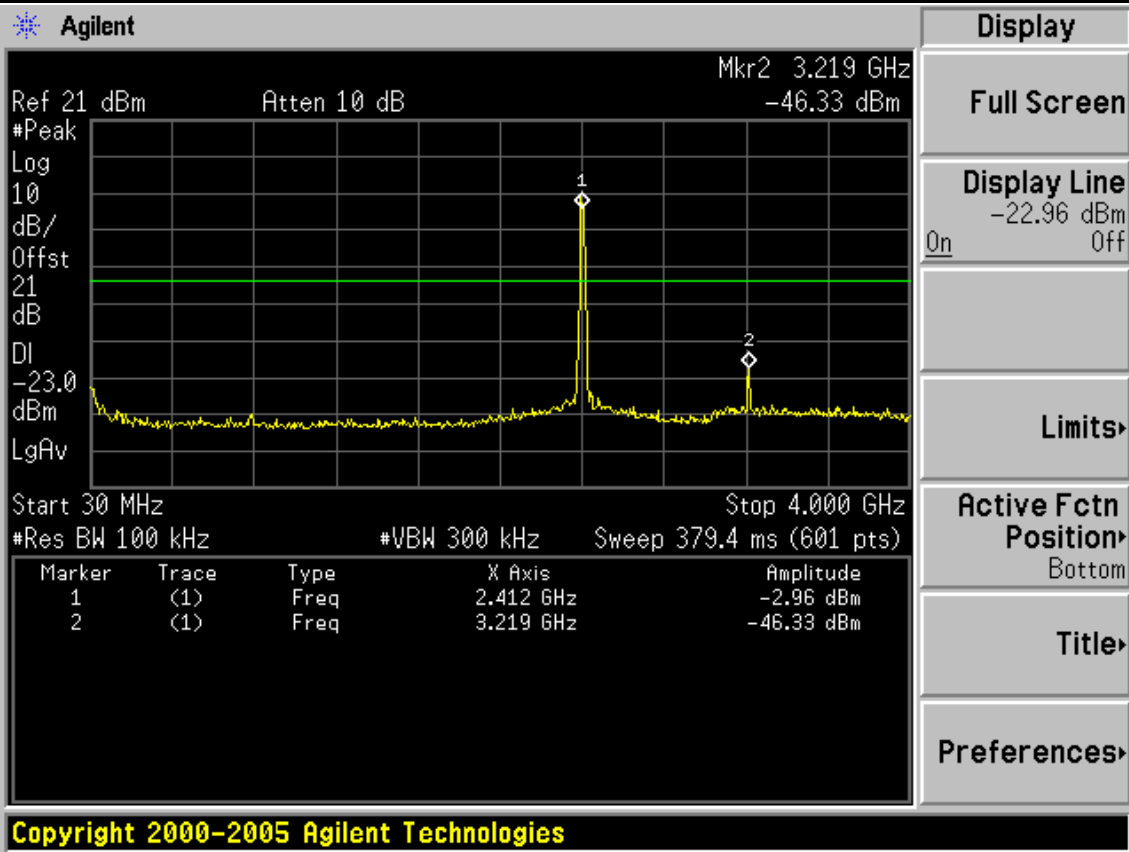



FCC ID: W6RRNX-N360PC

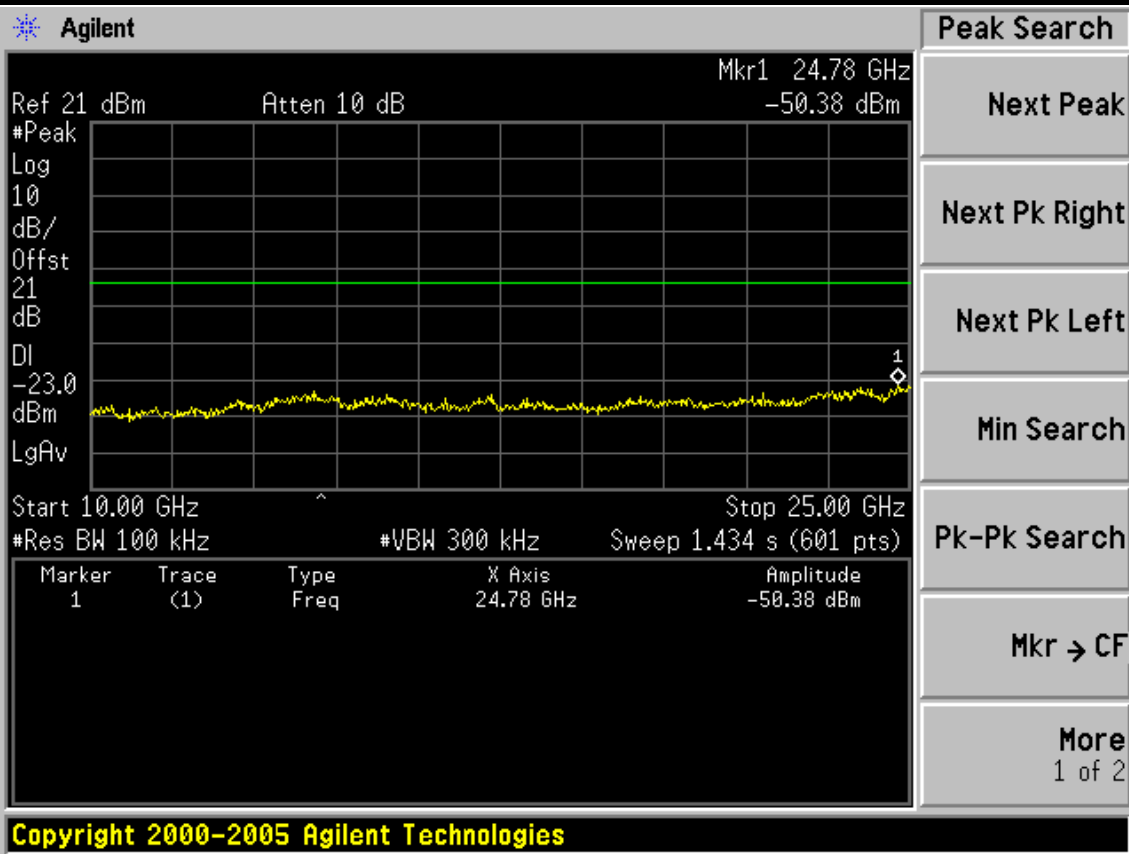



Test CH6: 2437MHz

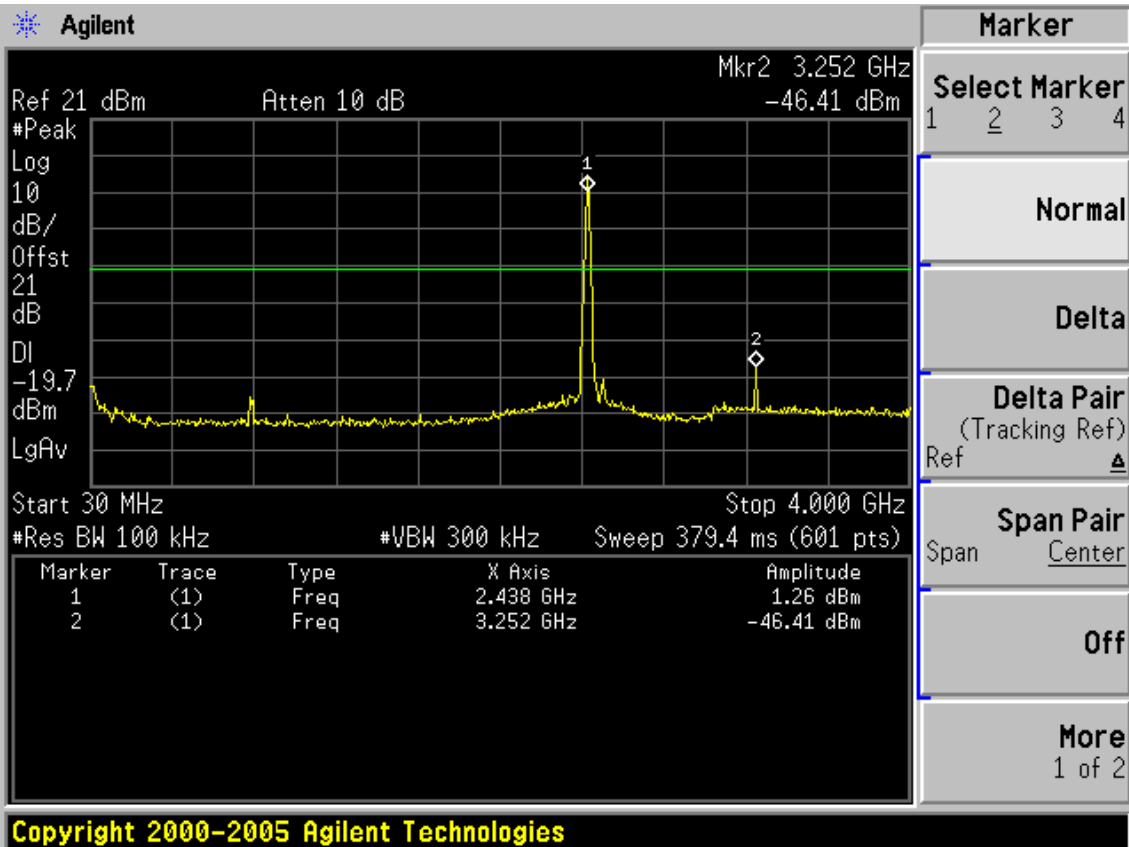



FCC ID: W6RRNX-N360PC

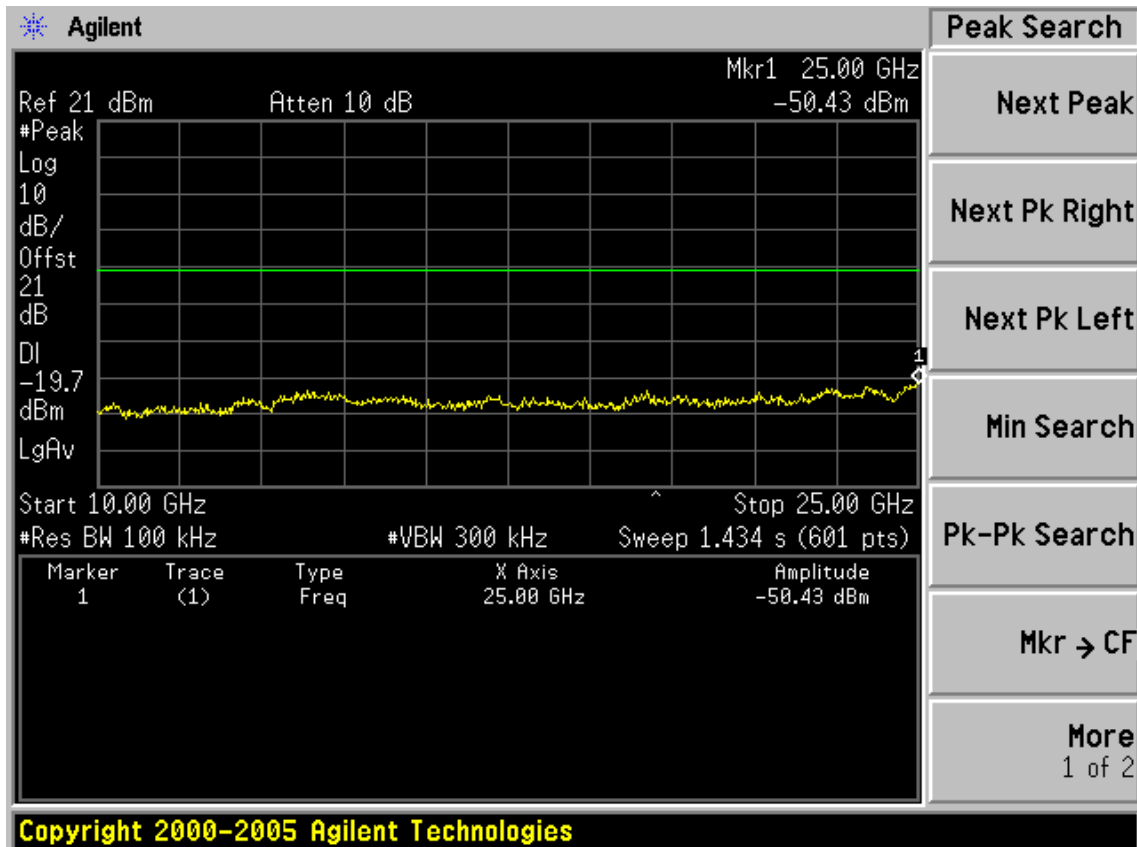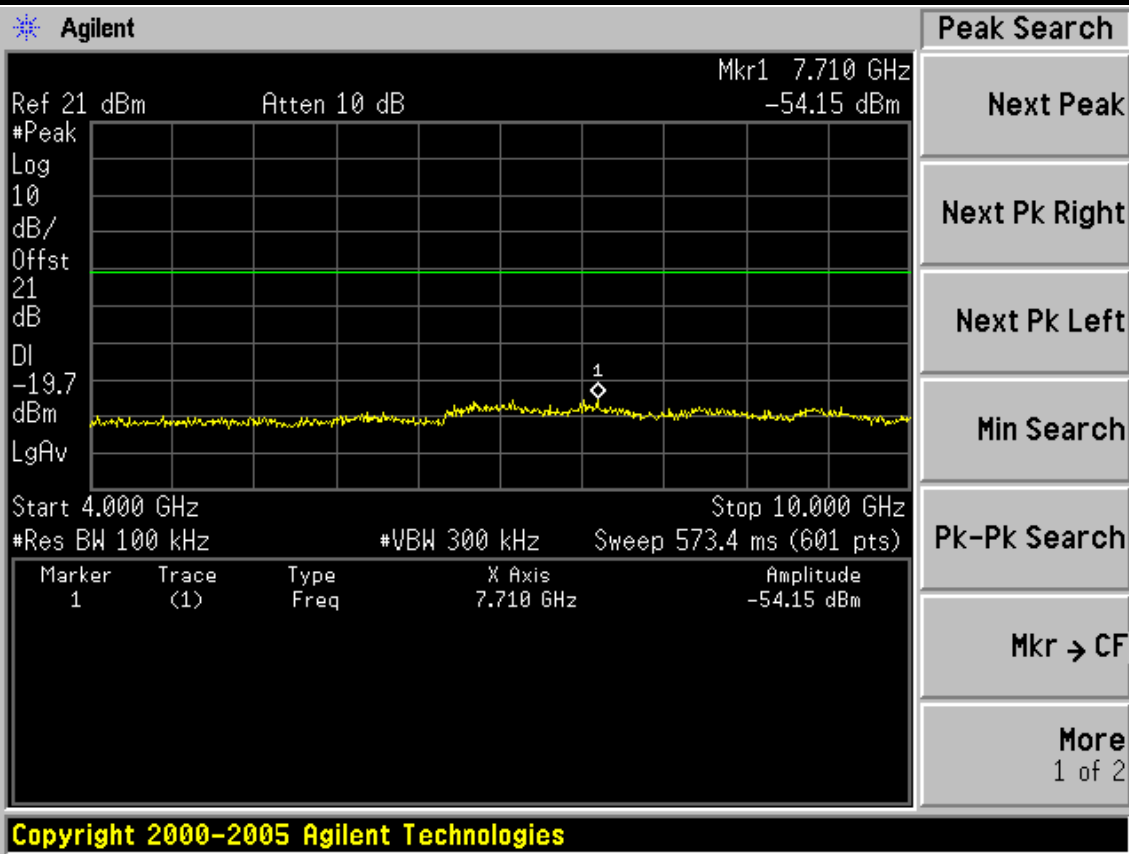

FCC ID: W6RRNX-N360PC

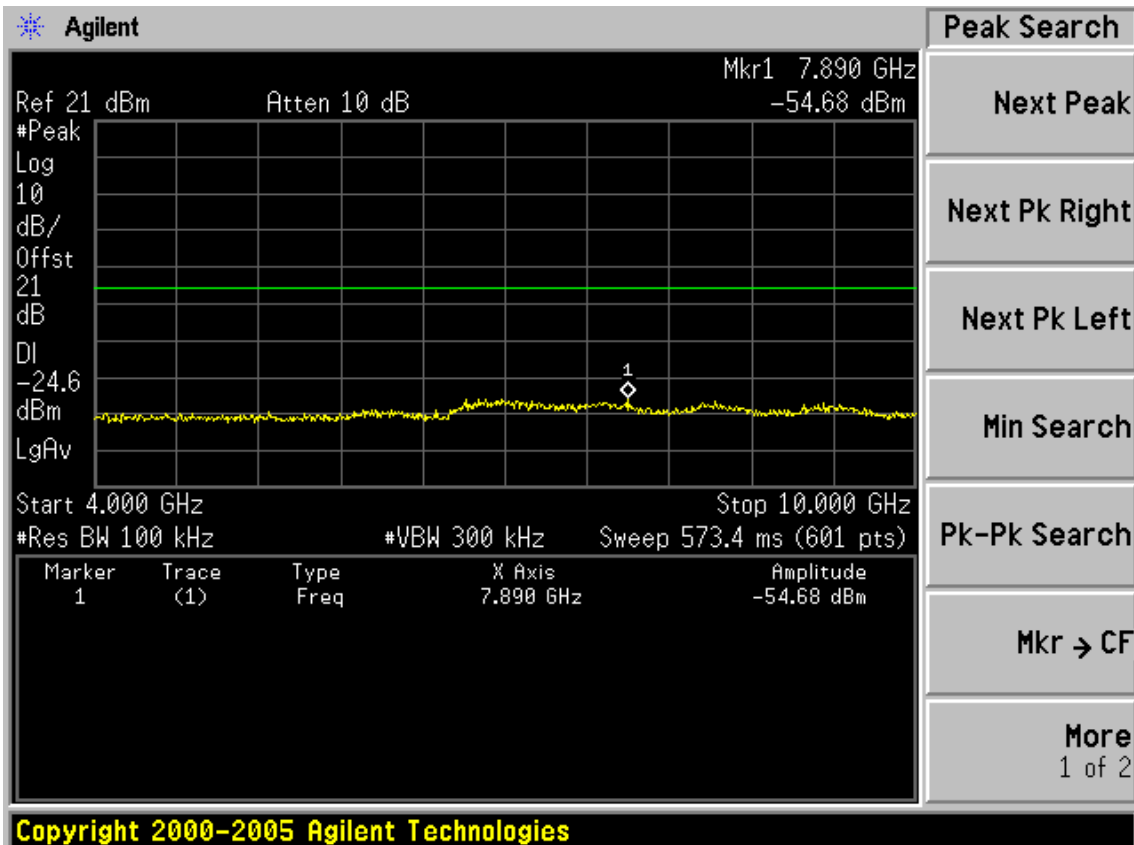
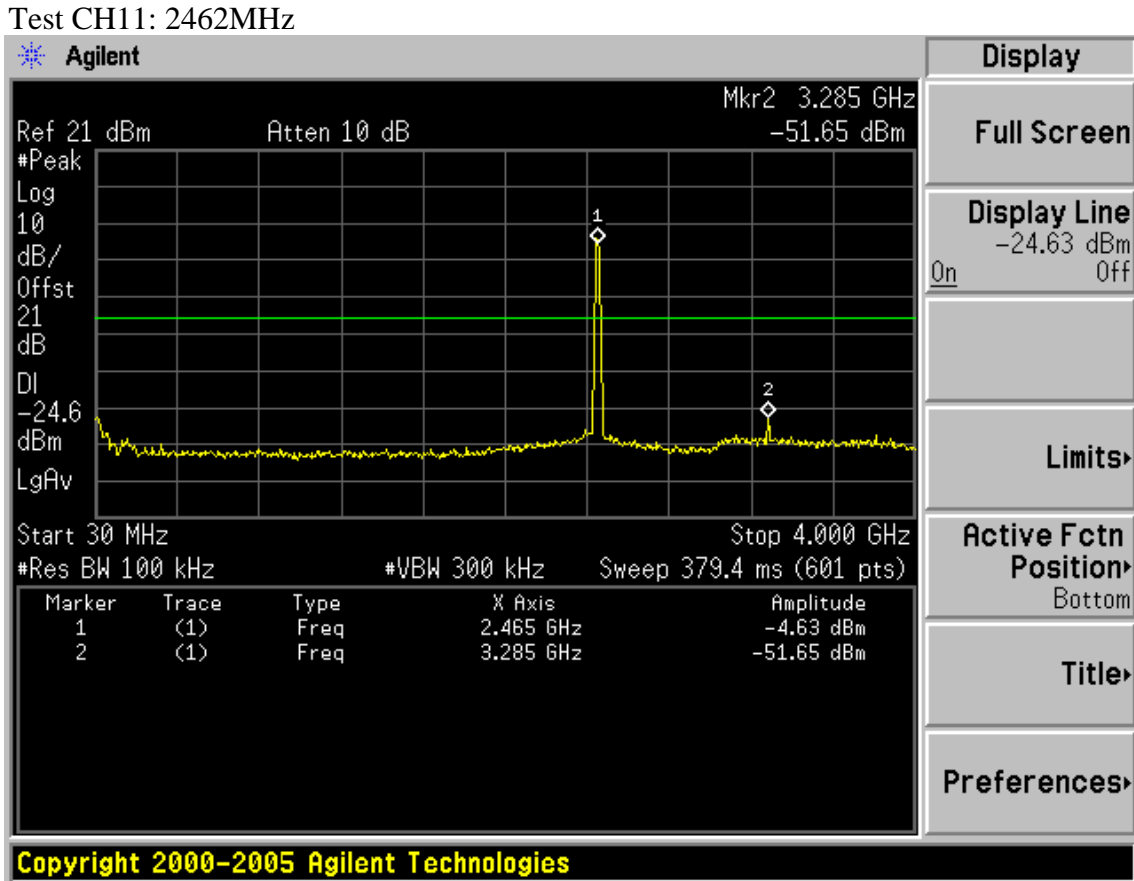


FCC ID: W6RRNX-N360PC

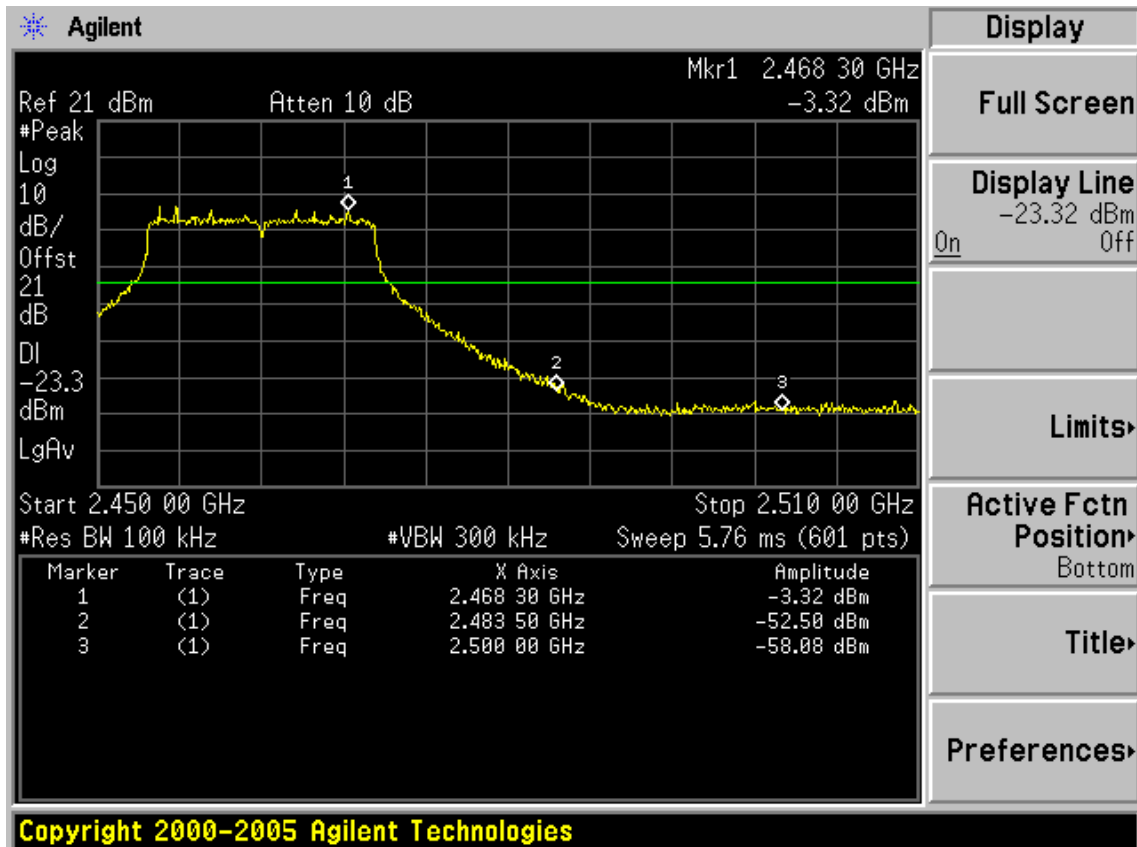
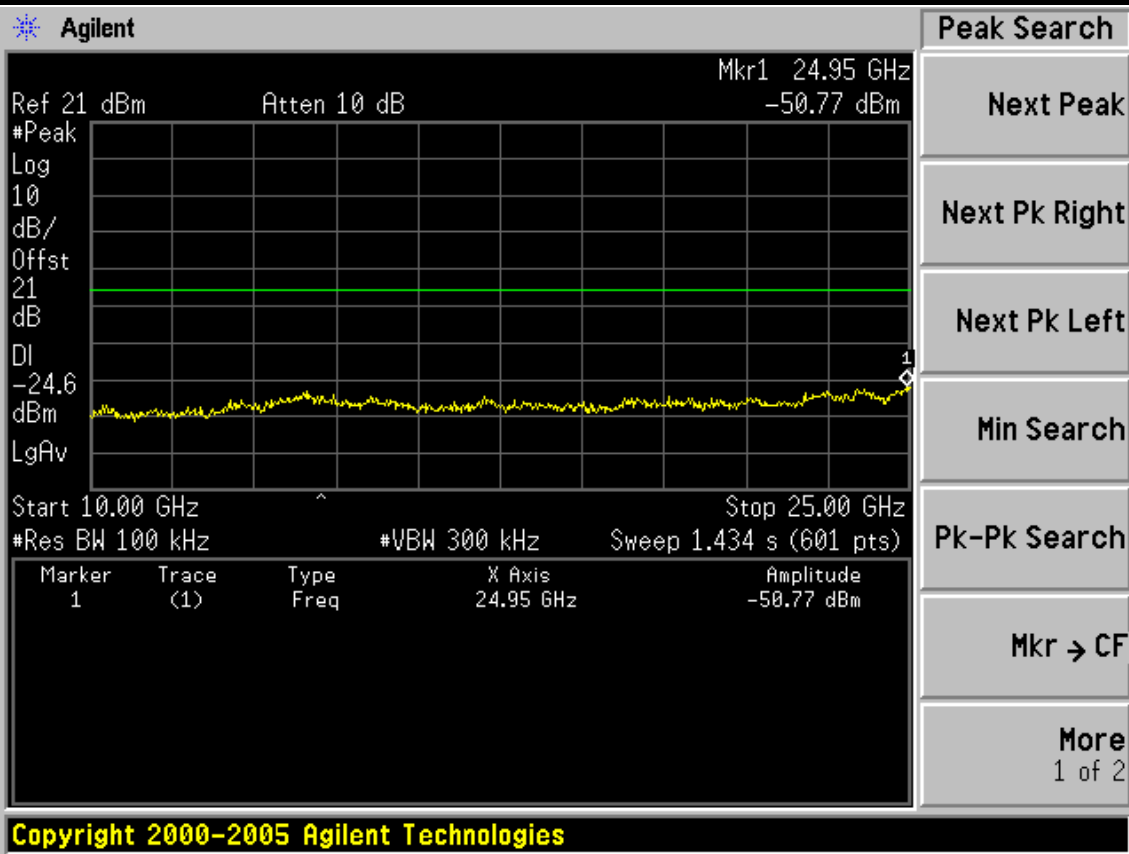


FCC ID: W6RRNX-N360PC

Test Mode: IEEE 802.11n HT20 TX
 Test CH1: 2412MHz

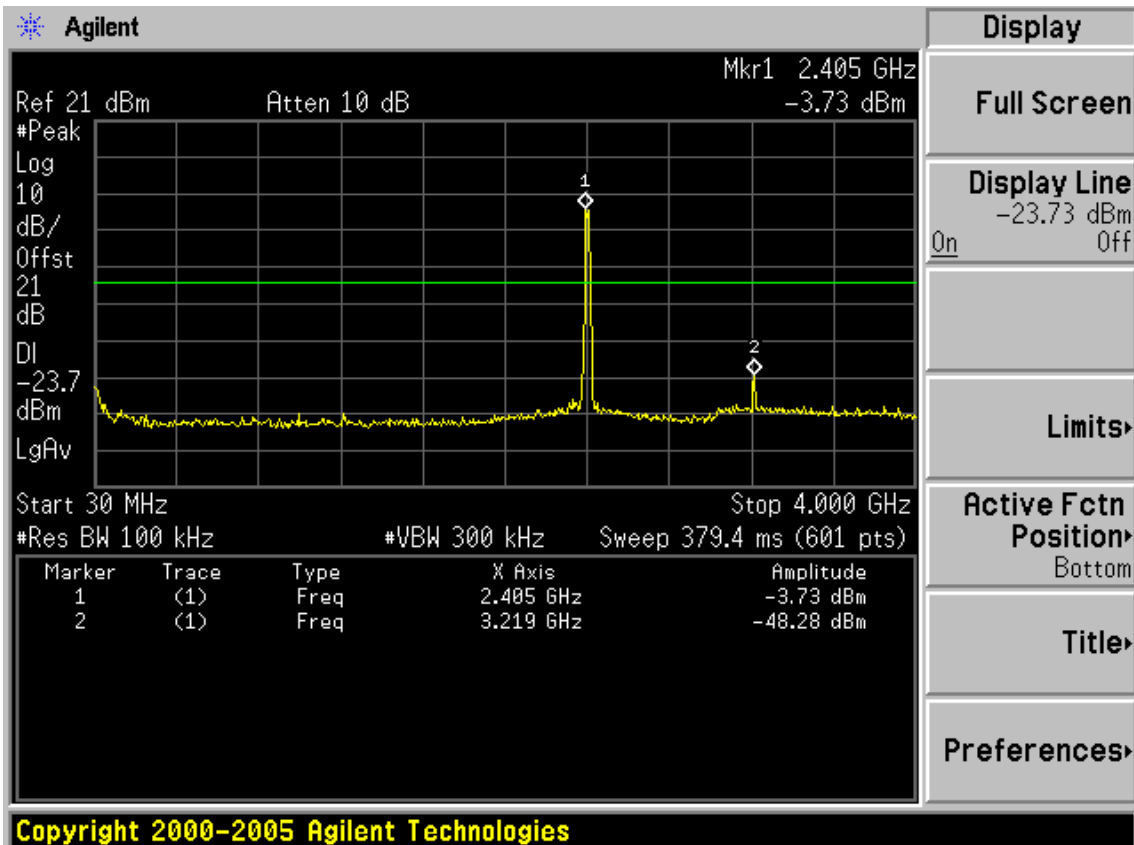
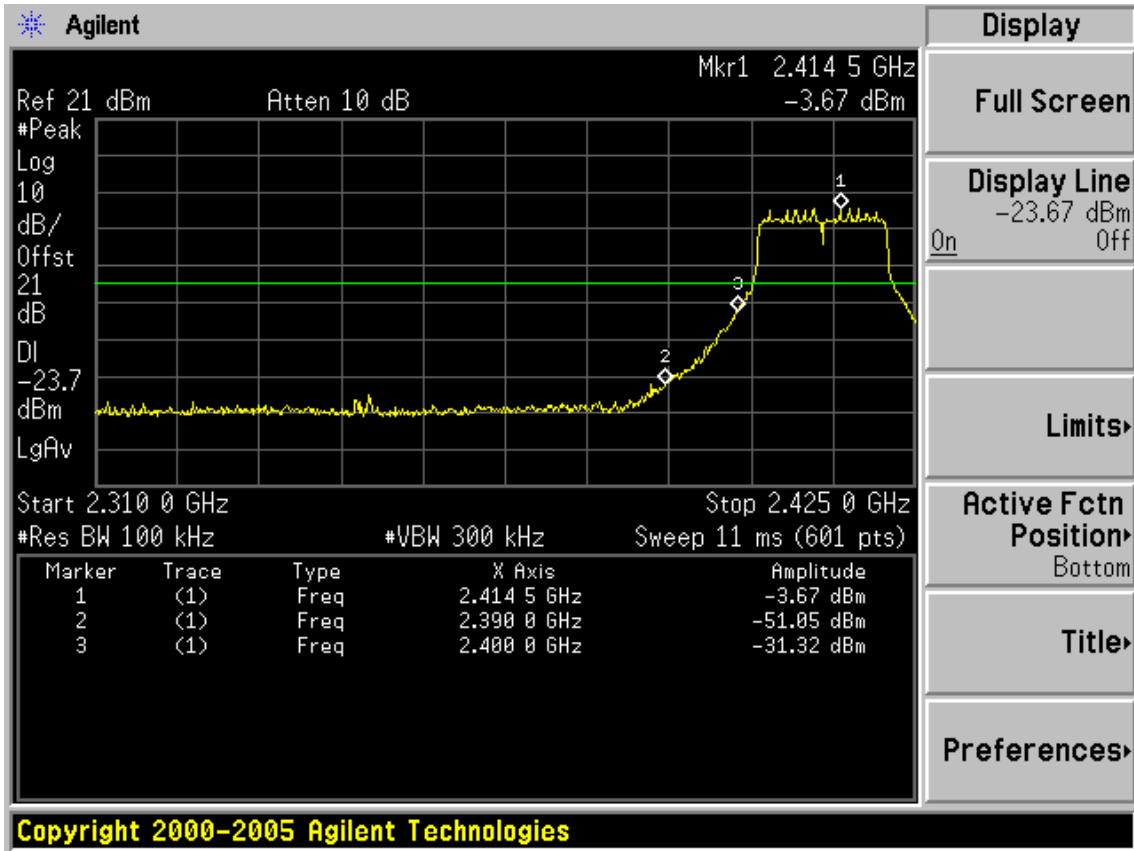


FCC ID: W6RRNX-N360PC

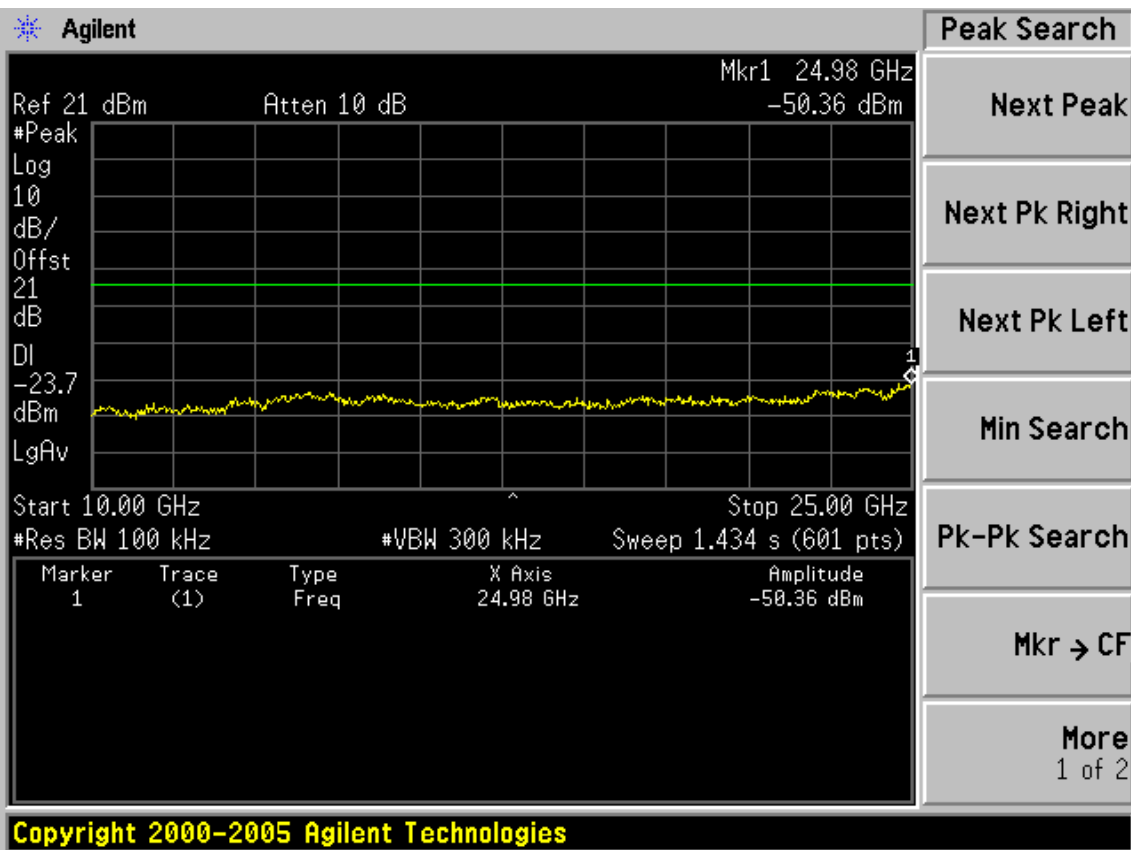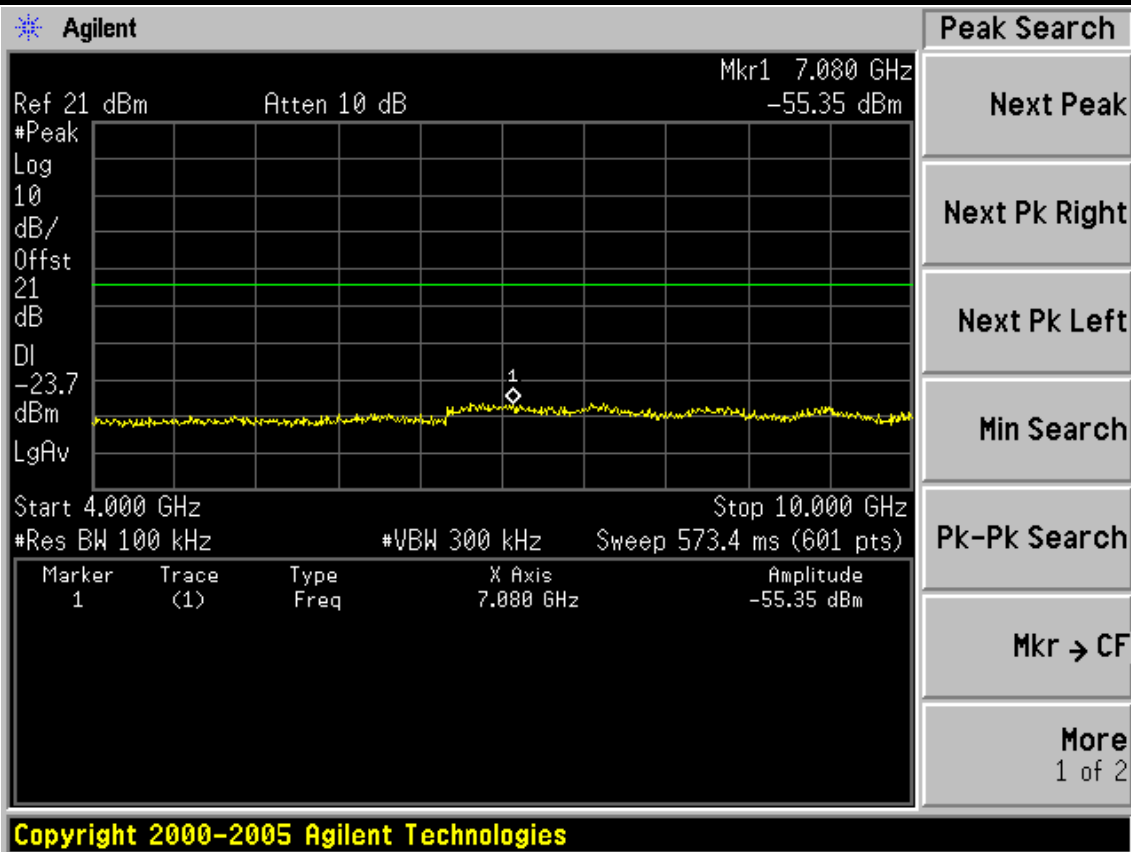


FCC ID: W6RRNX-N360PC


Test CH6: 2437MHz

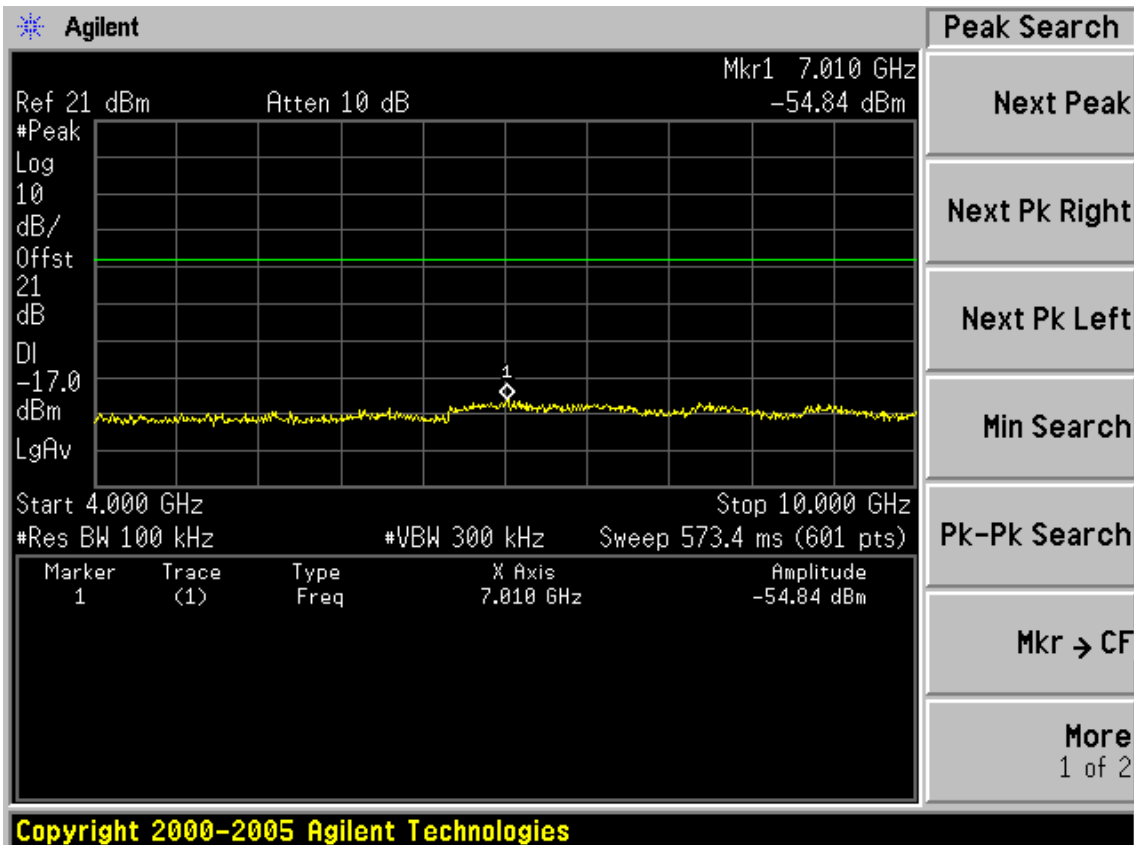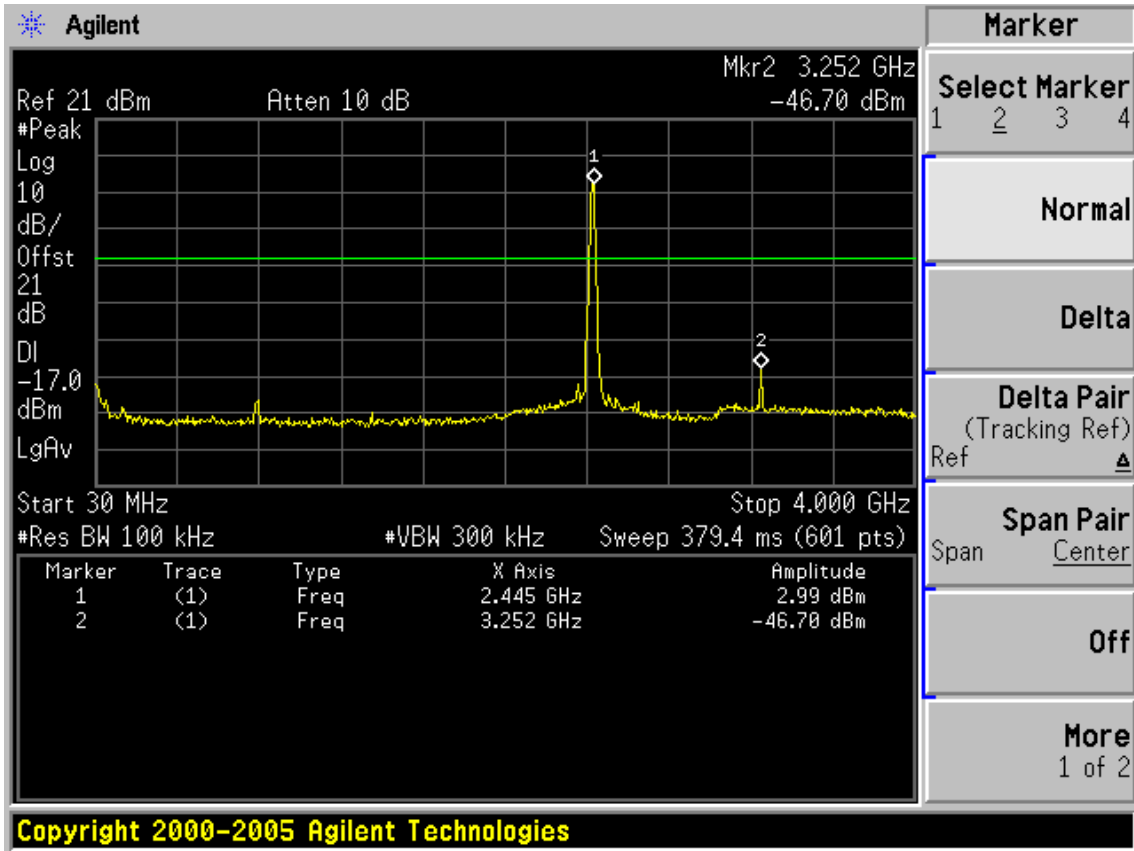



FCC ID: W6RRNX-N360PC

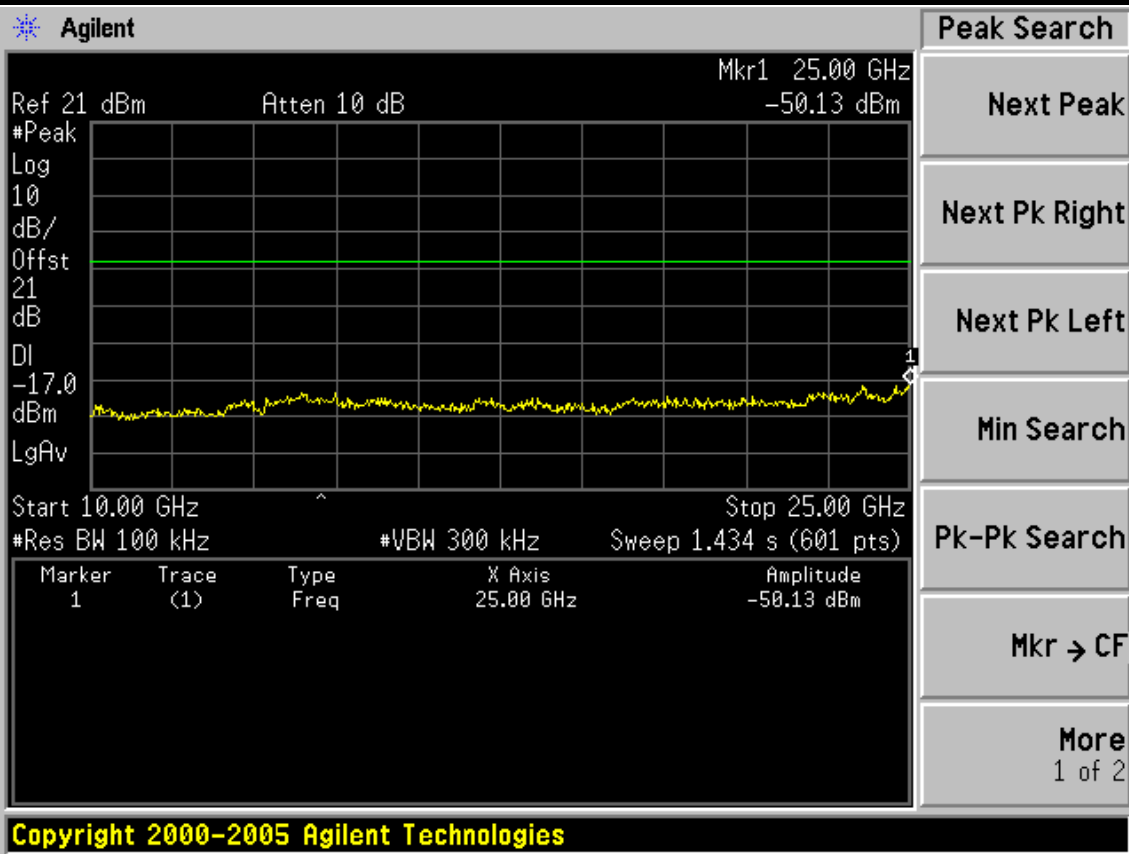


Test CH11: 2462MHz

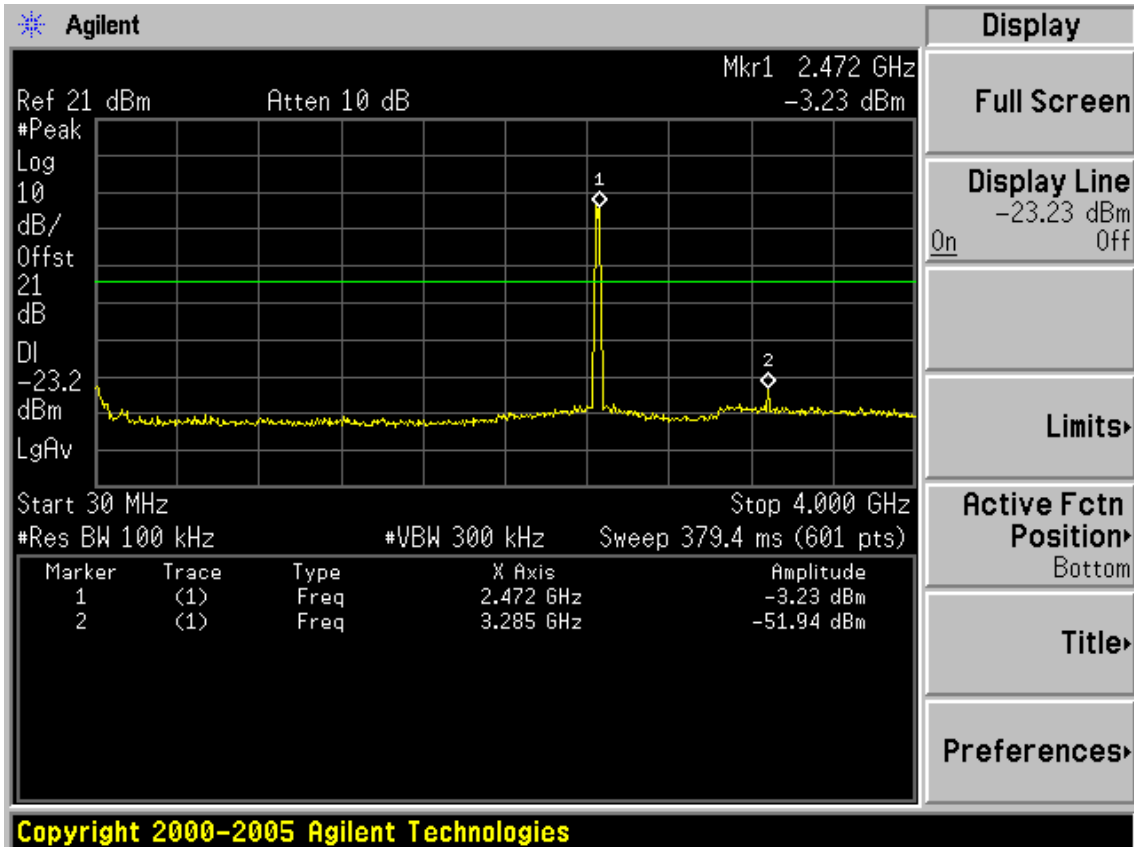

FCC ID: W6RRNX-N360PC

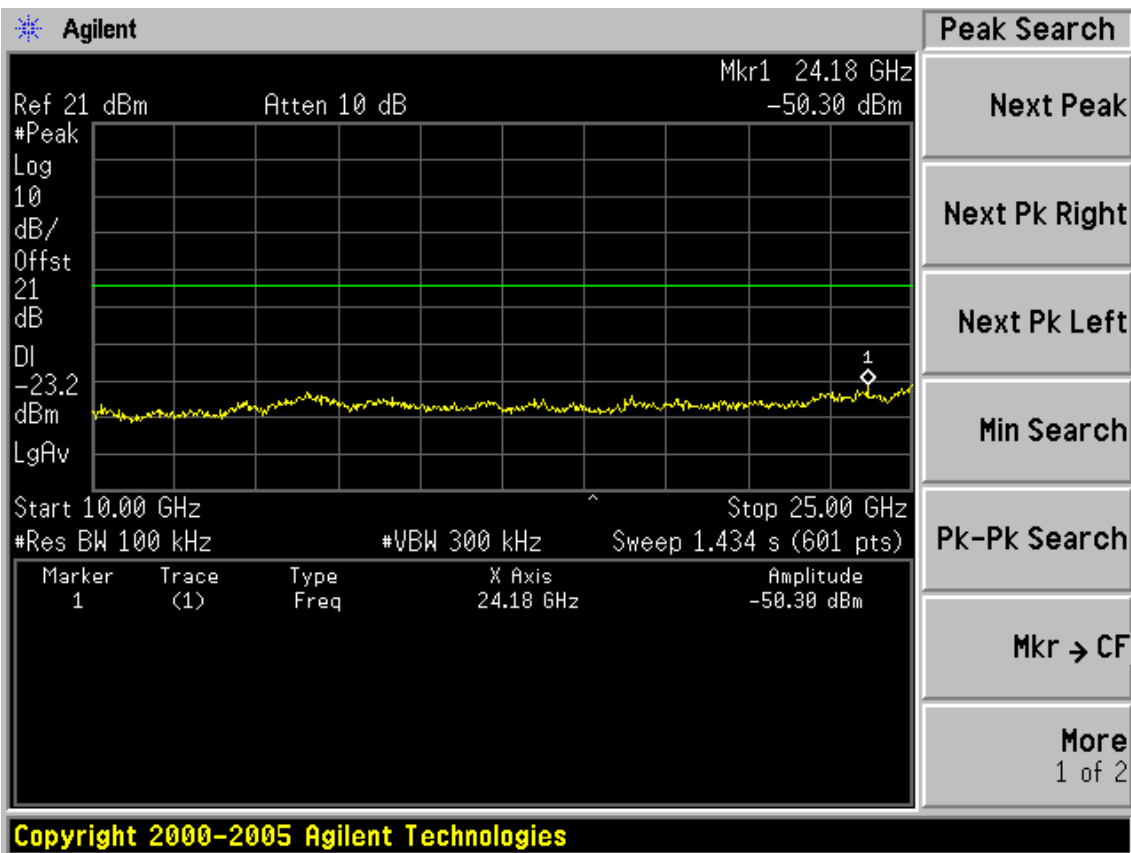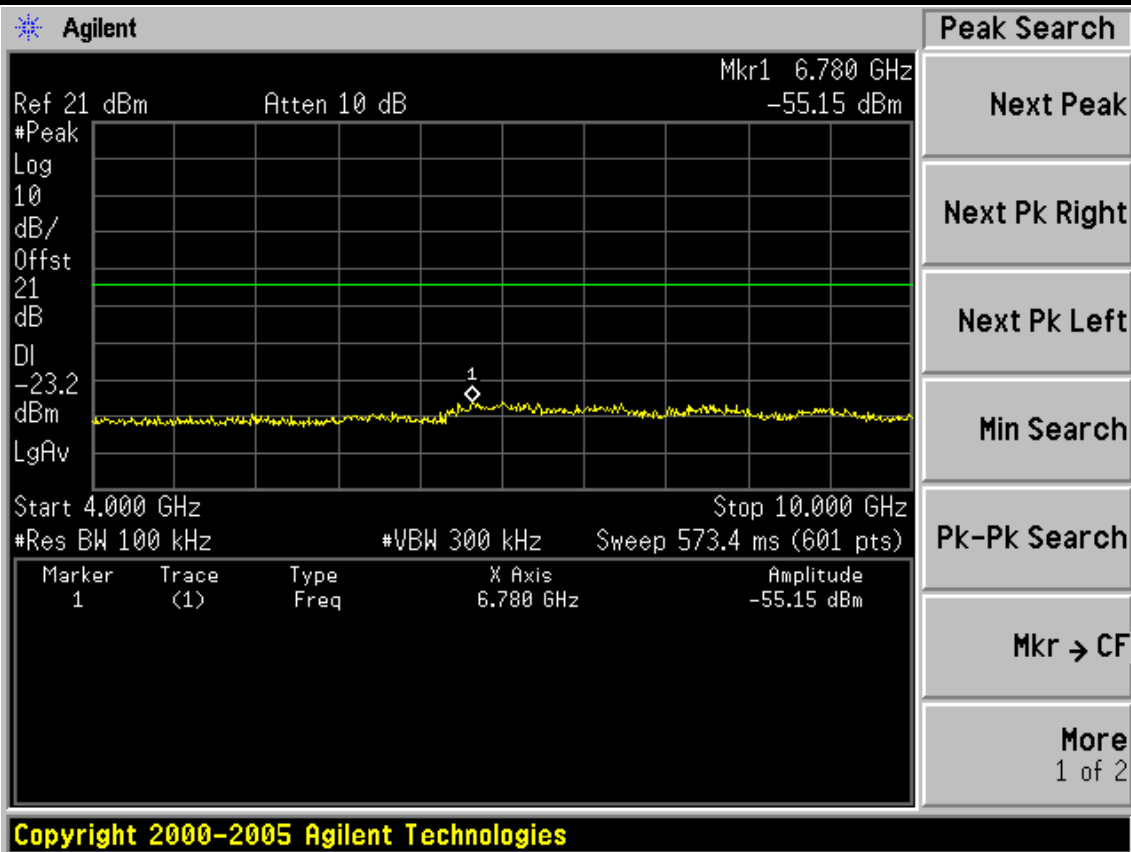


FCC ID: W6RRNX-N360PC


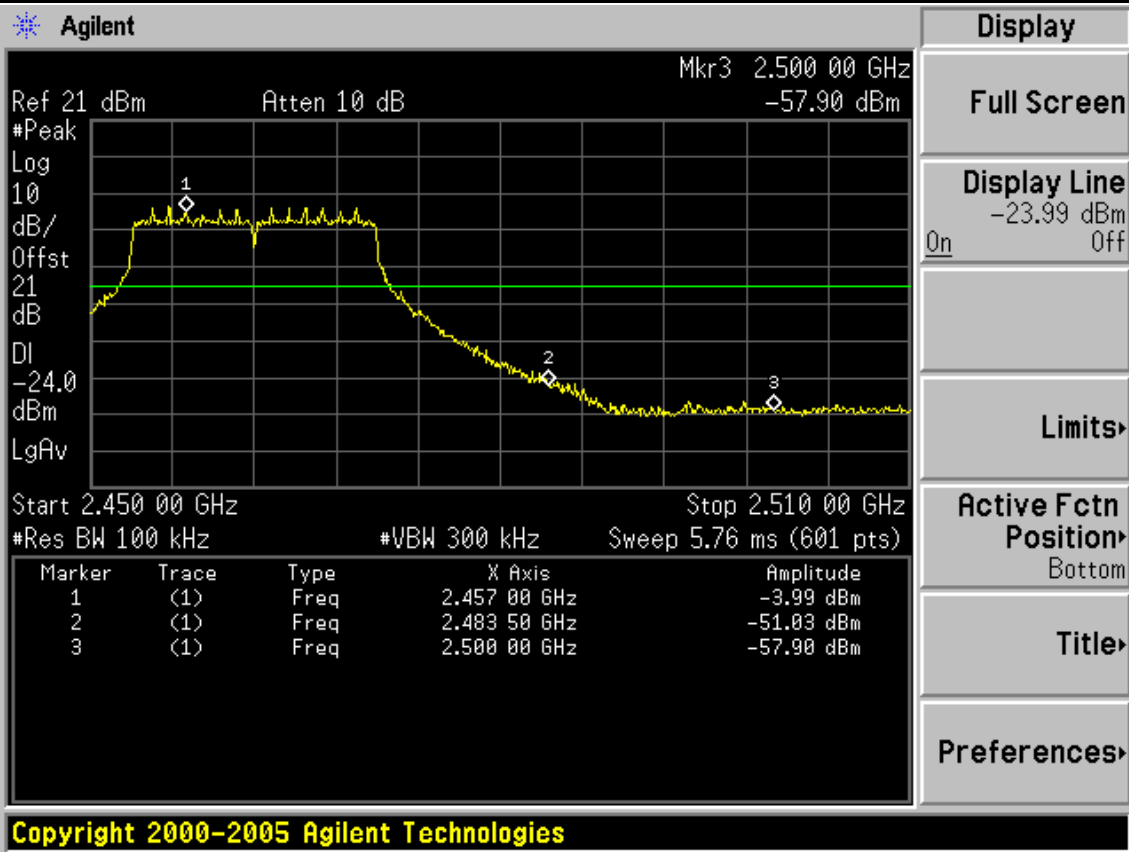


Test Mode: IEEE 802.11n HT40 TX


Test CH1: 2422MHz

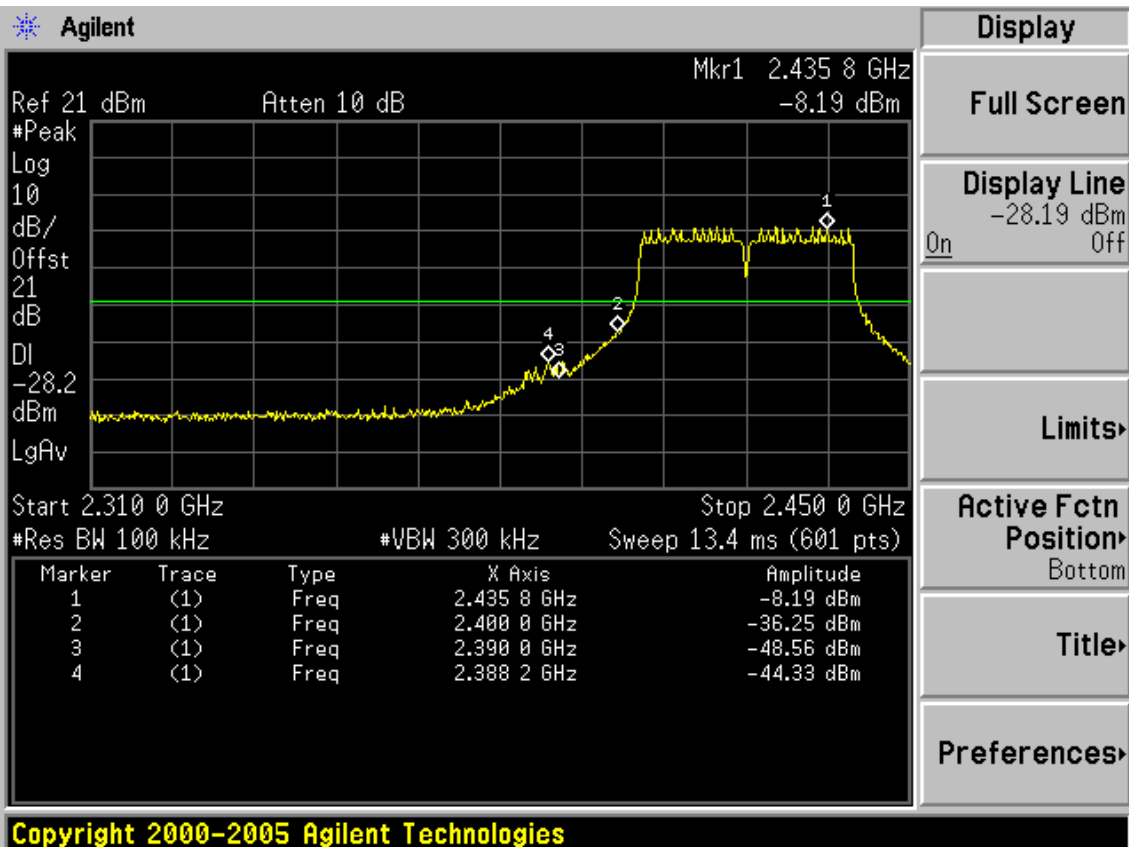


FCC ID: W6RRNX-N360PC

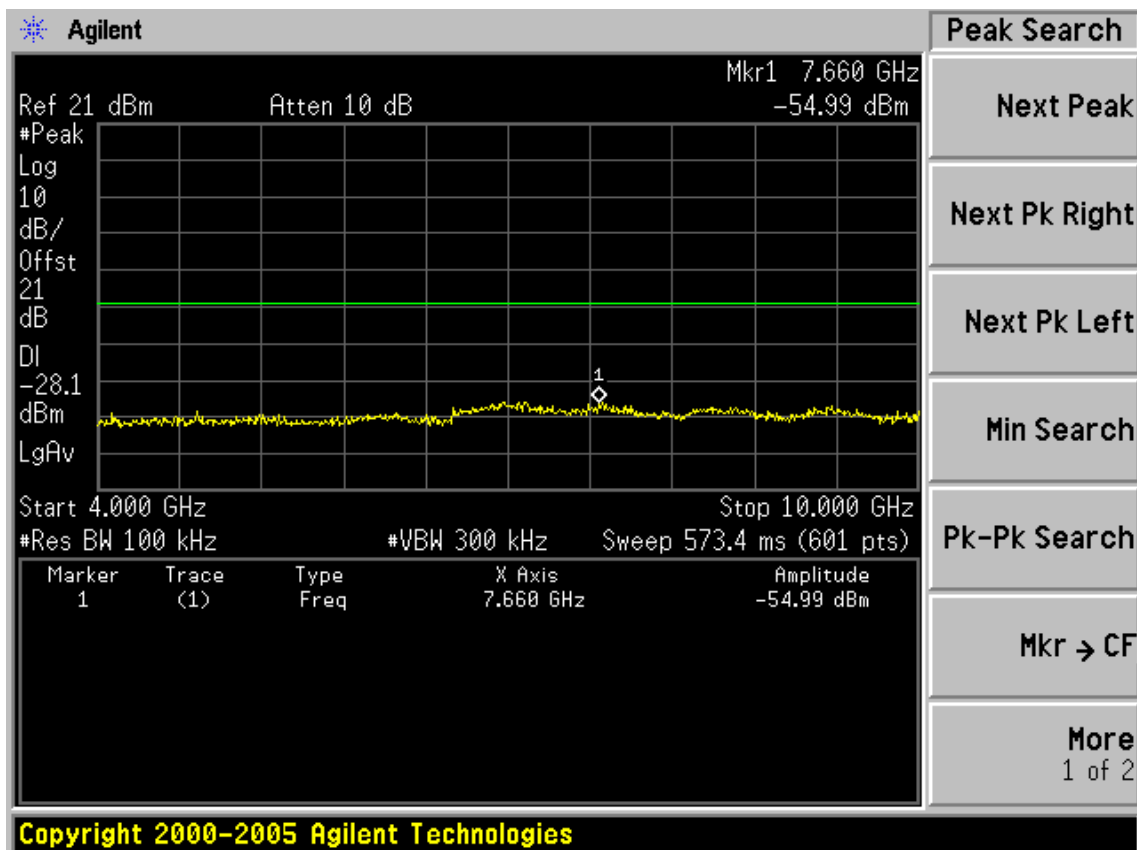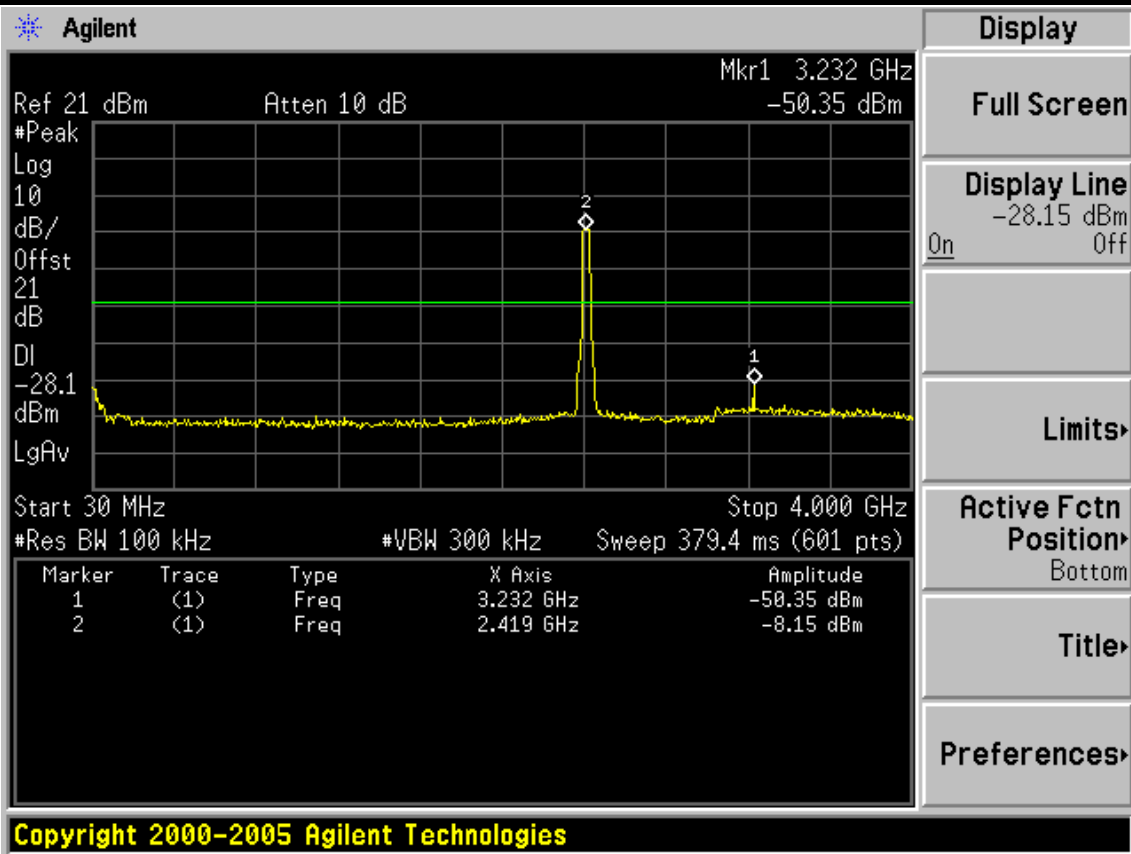



FCC ID: W6RRNX-N360PC

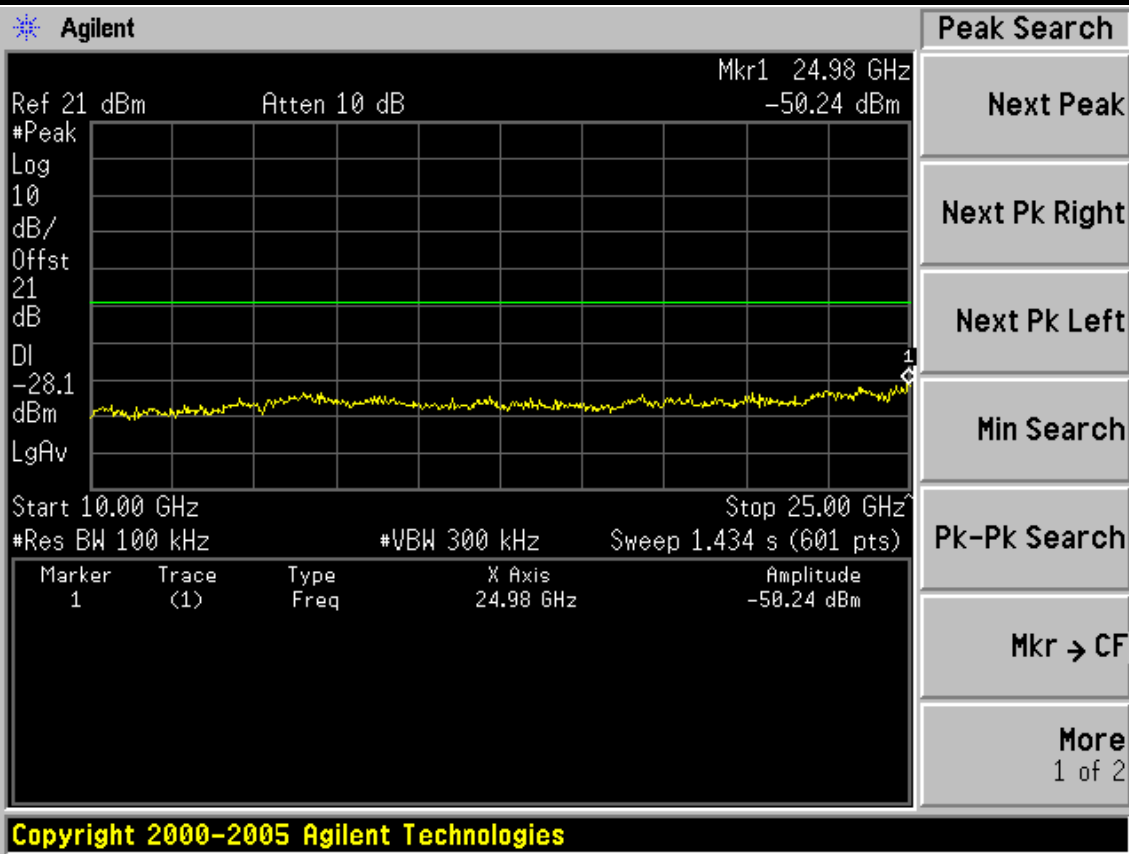

Test CH4: 2437MHz


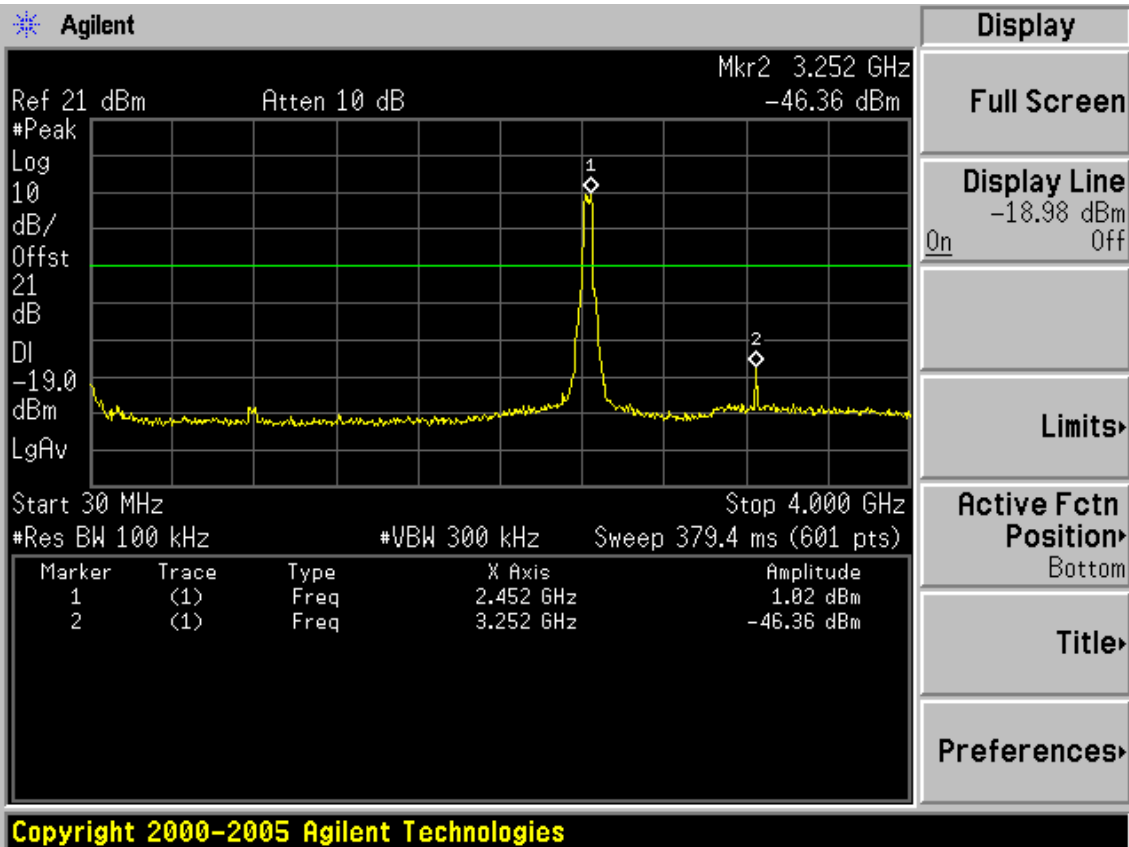


FCC ID: W6RRNX-N360PC

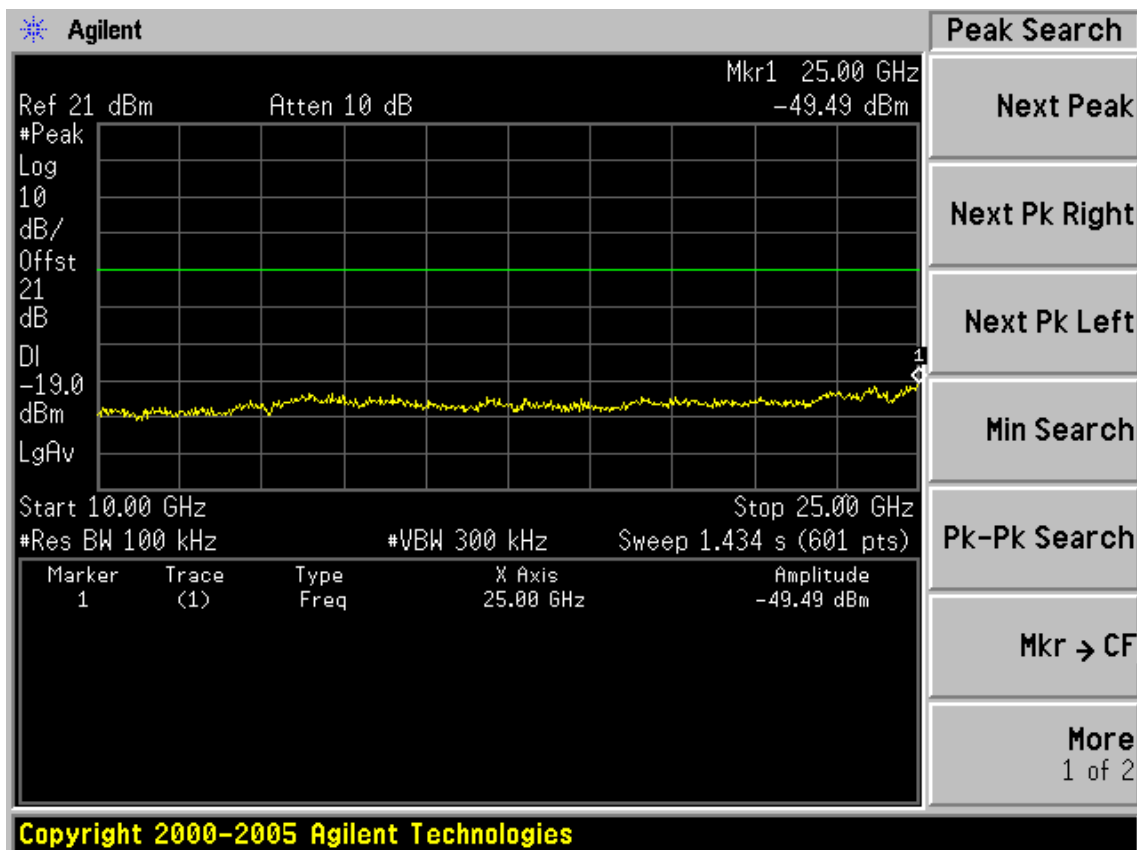
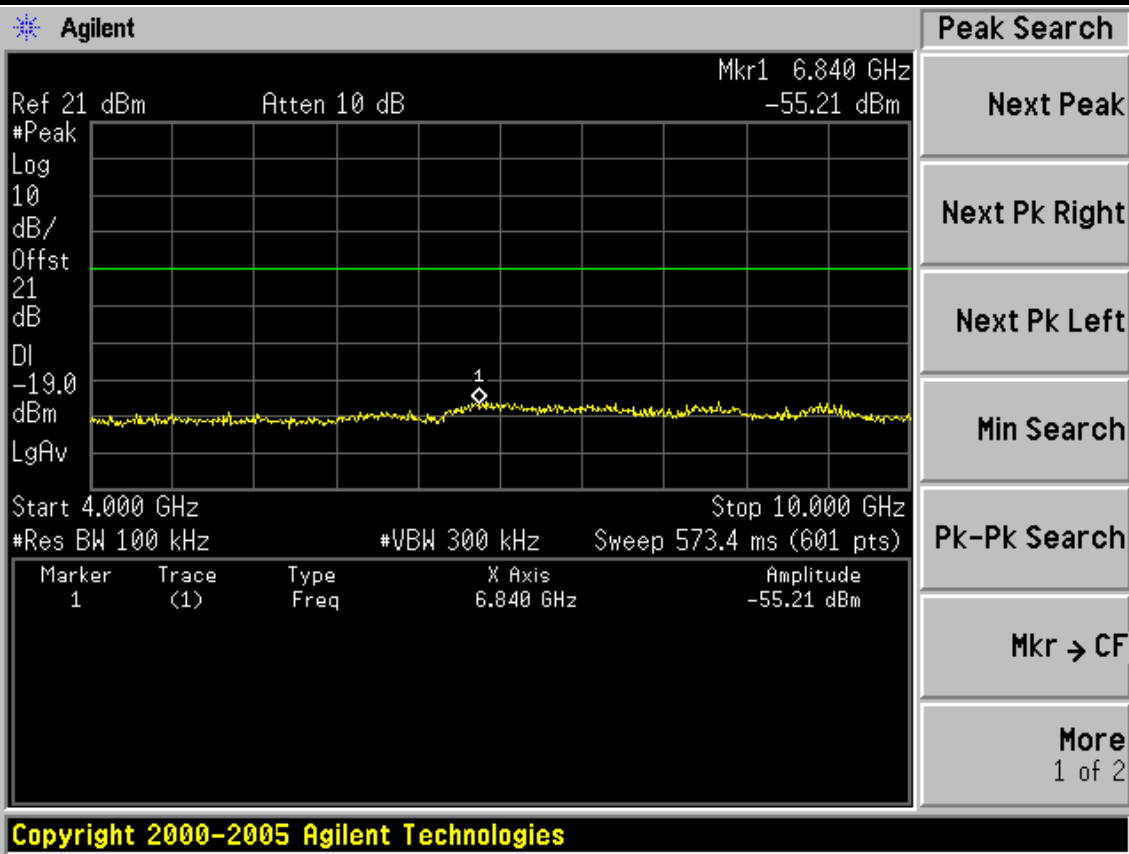


FCC ID: W6RRNX-N360PC

Test CH7: 2452MHz

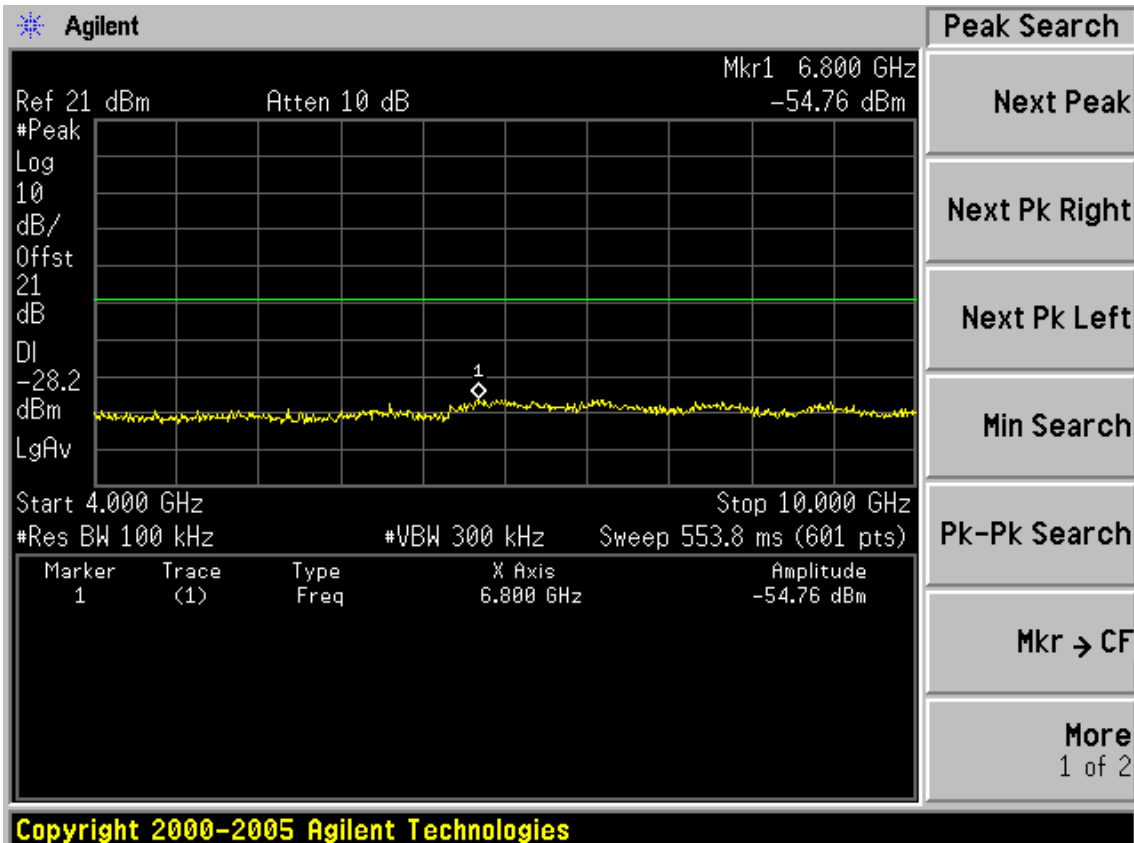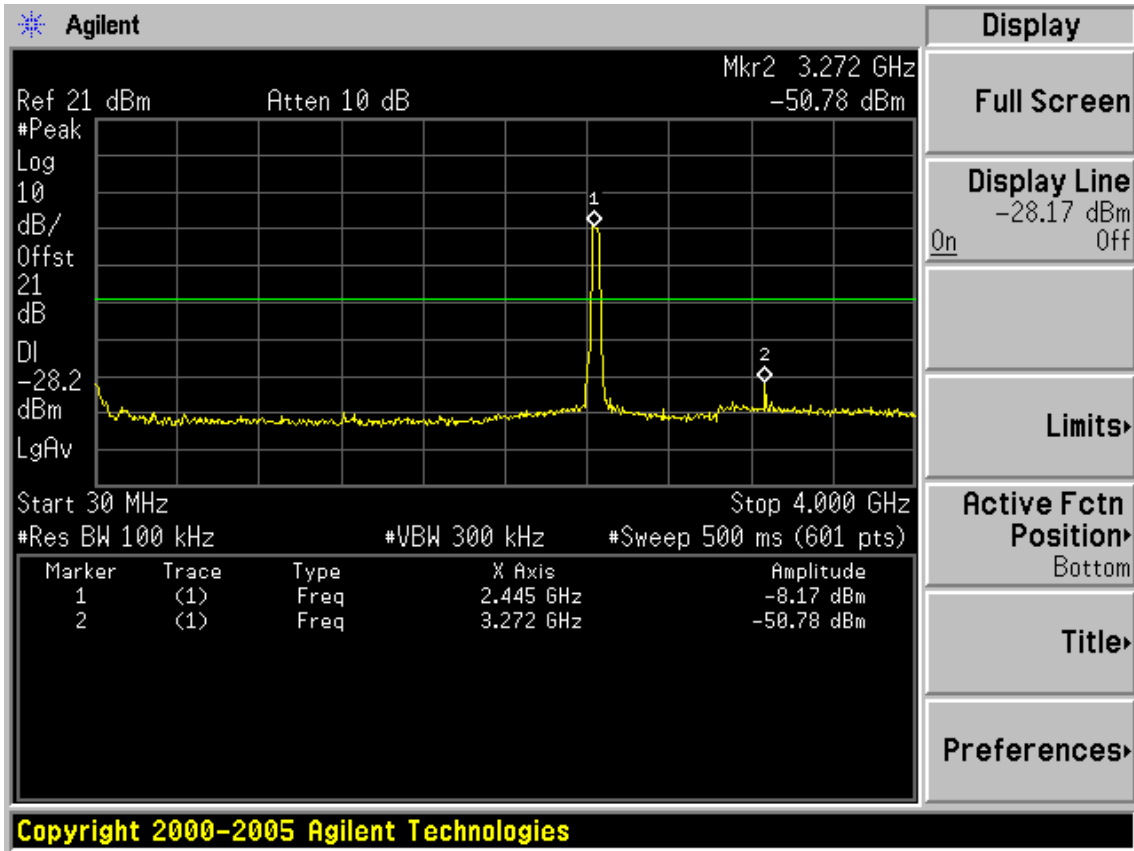

FCC ID: W6RRNX-N360PC

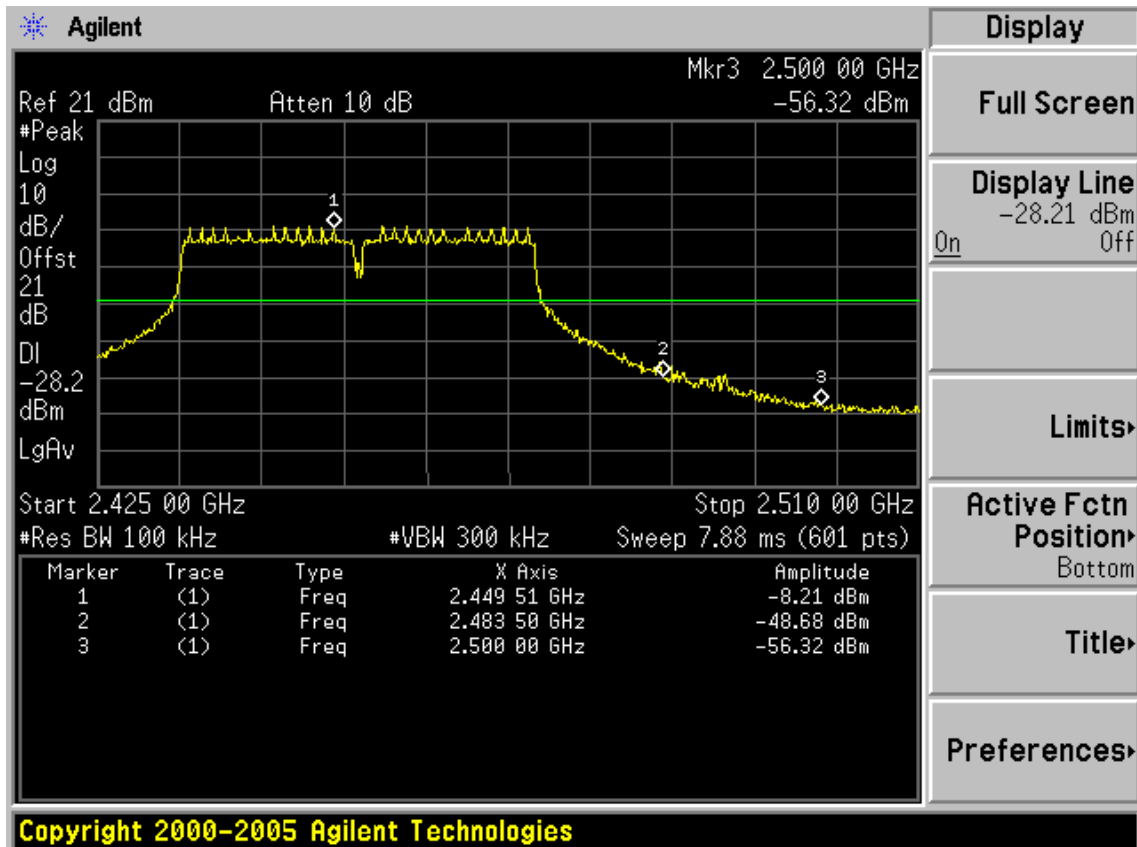
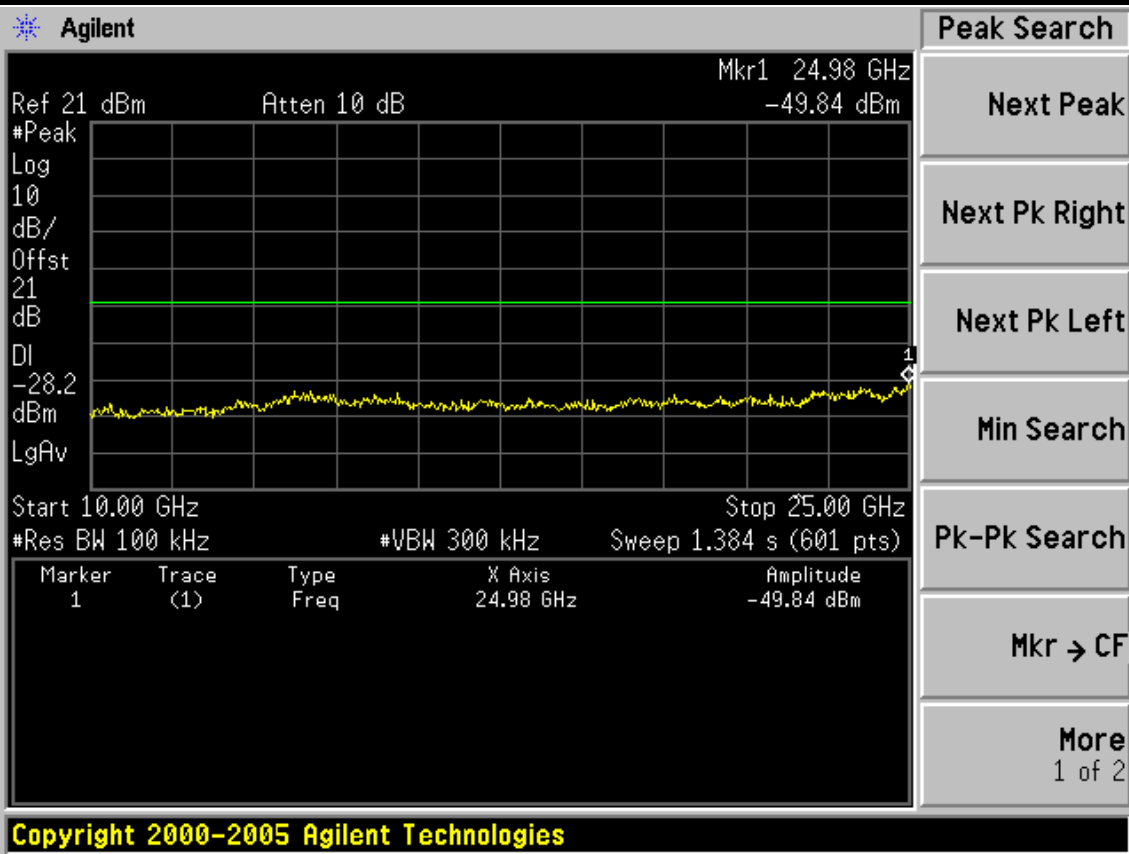


FCC ID: W6RRNX-N360PC



Chain 3:

Test Mode: IEEE 802.11b TX

Test CH1: 2412MHz

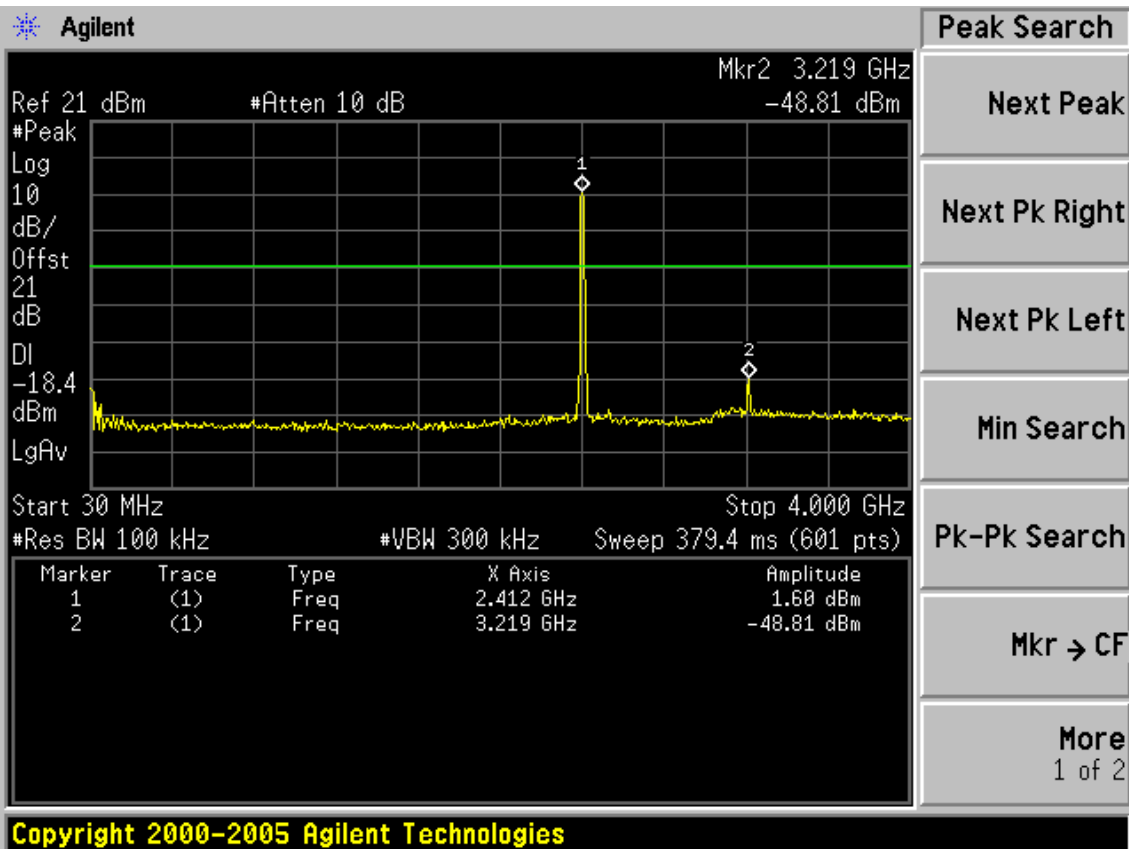
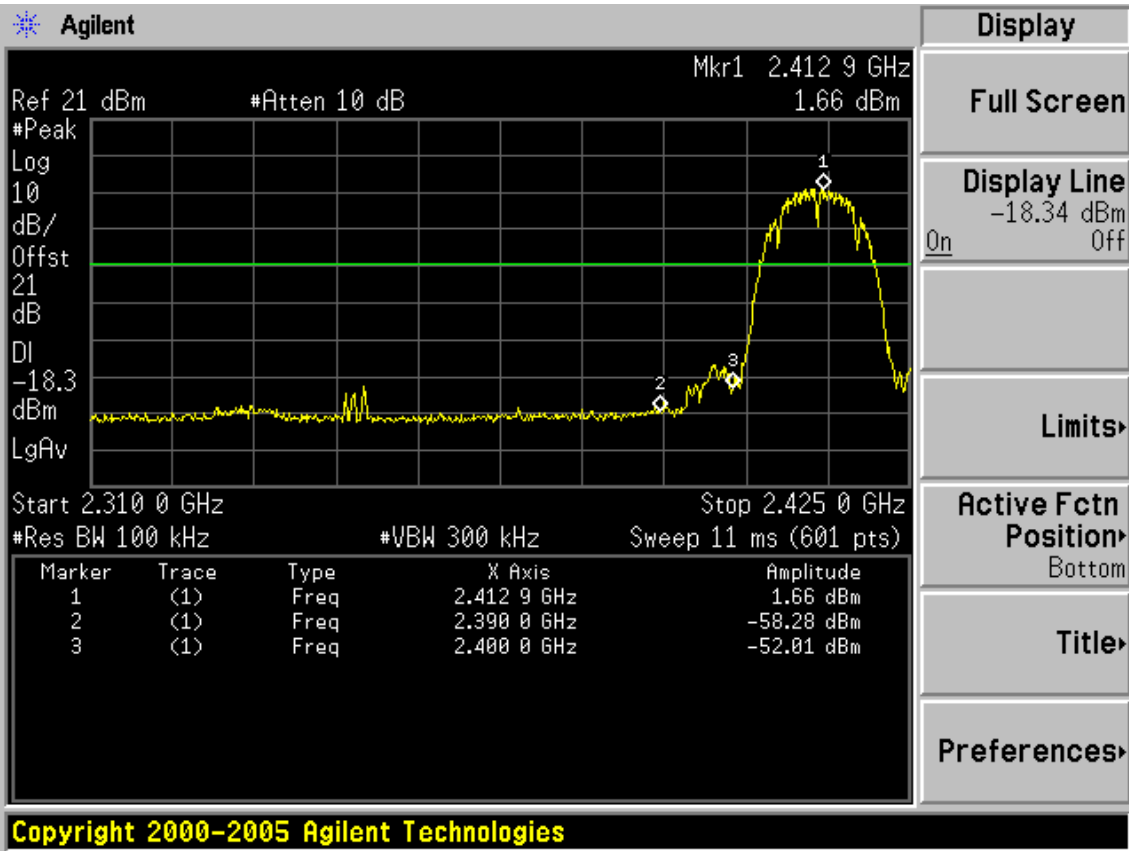


FCC ID: W6RRNX-N360PC

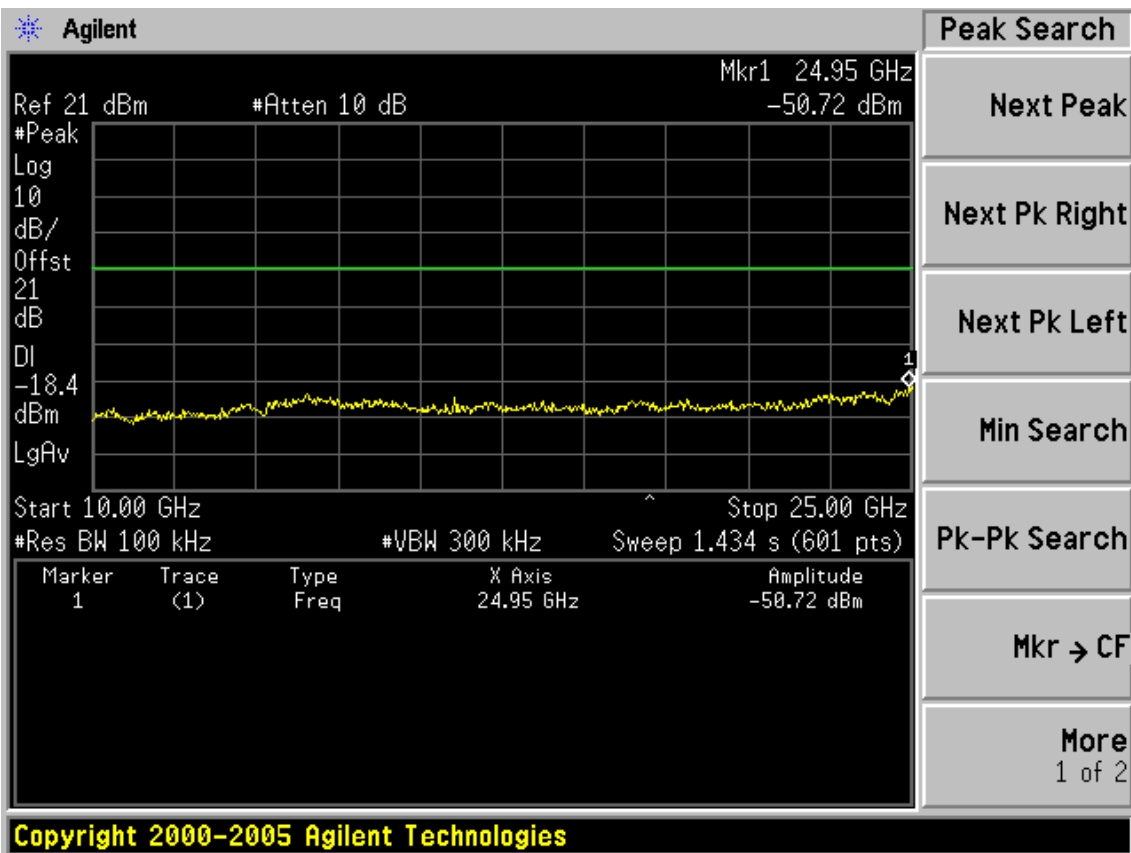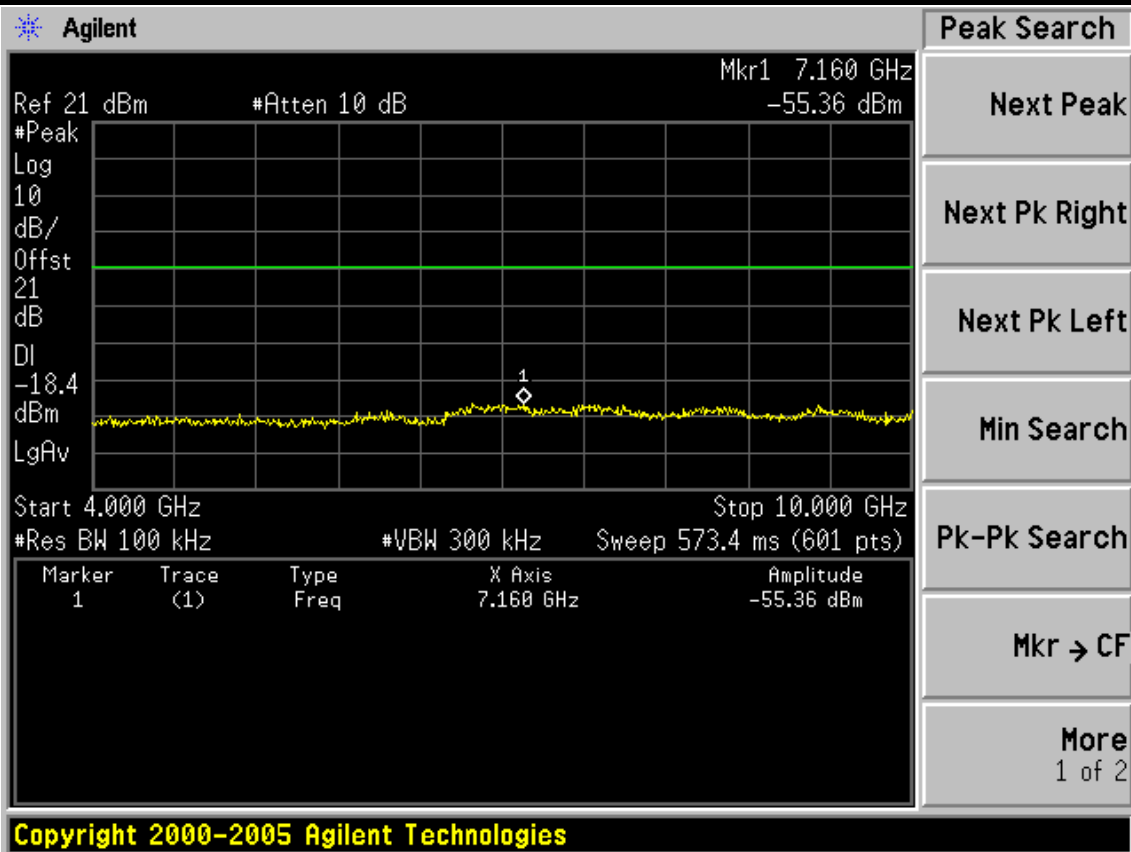


FCC ID: W6RRNX-N360PC


Test CH6: 2437MHz

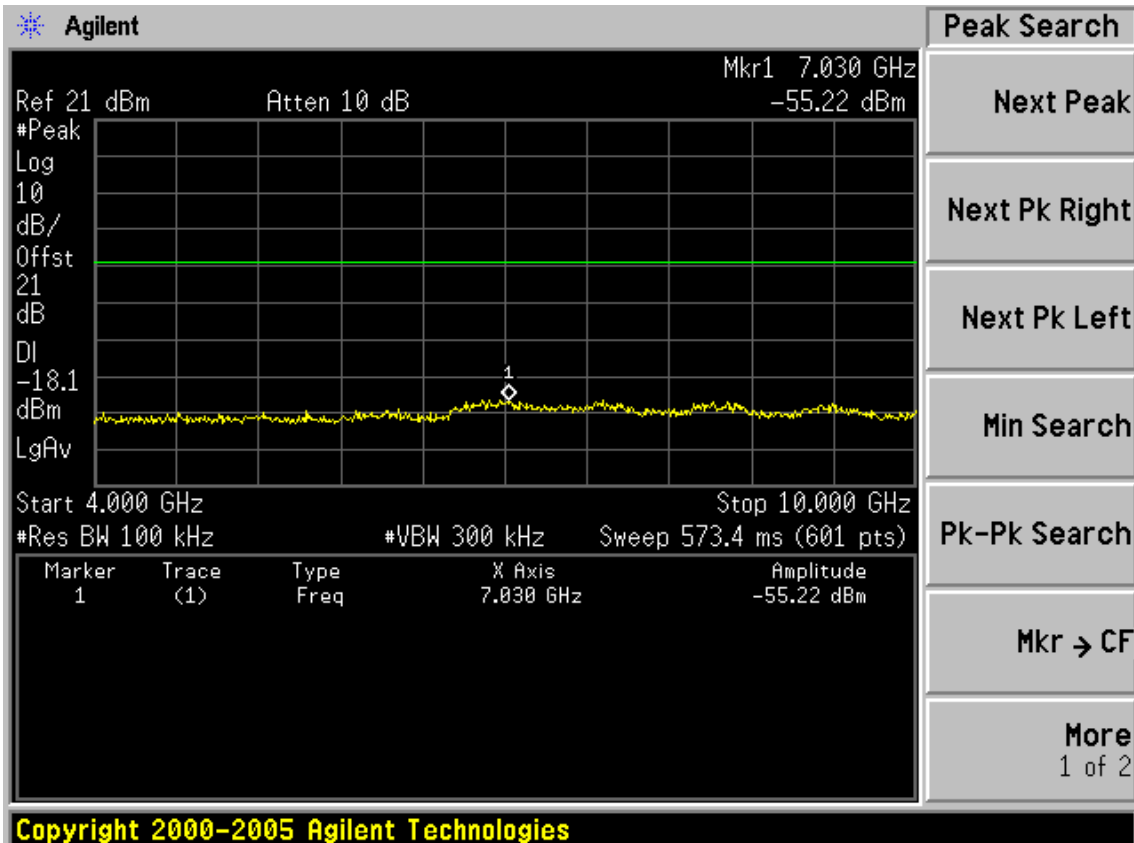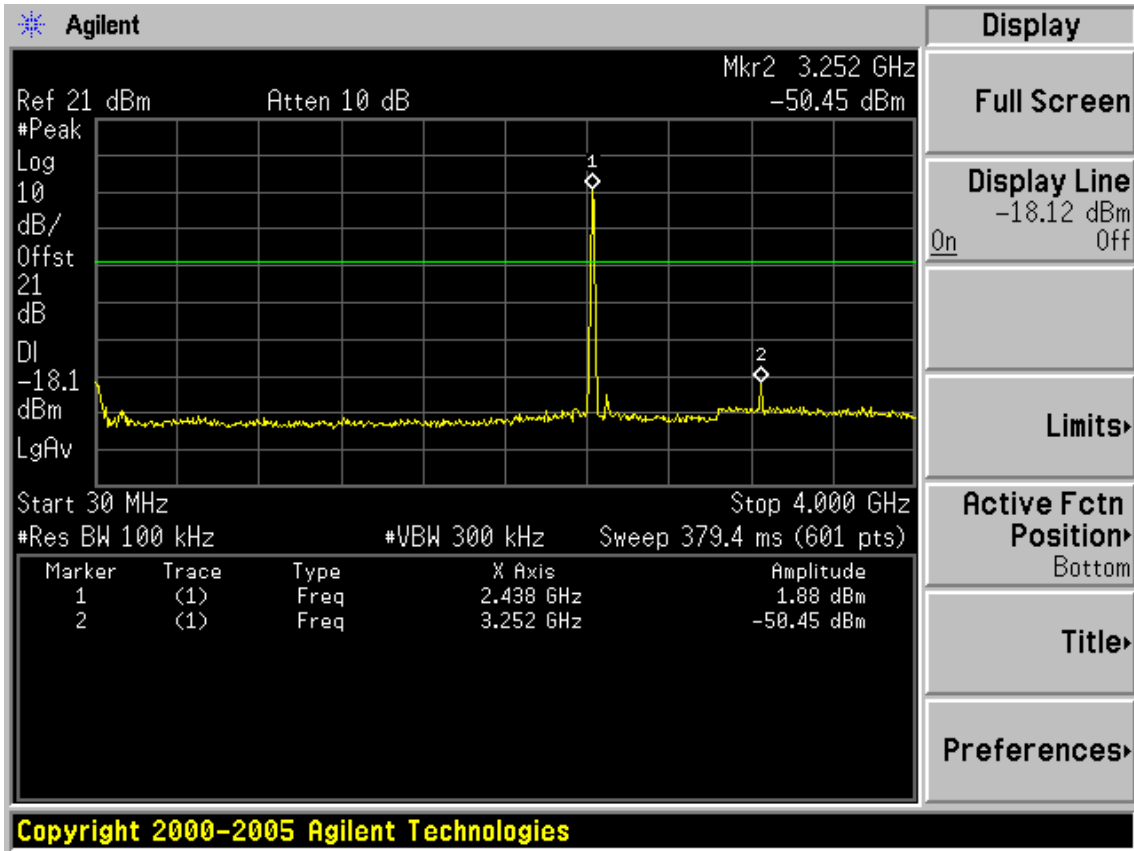



FCC ID: W6RRNX-N360PC

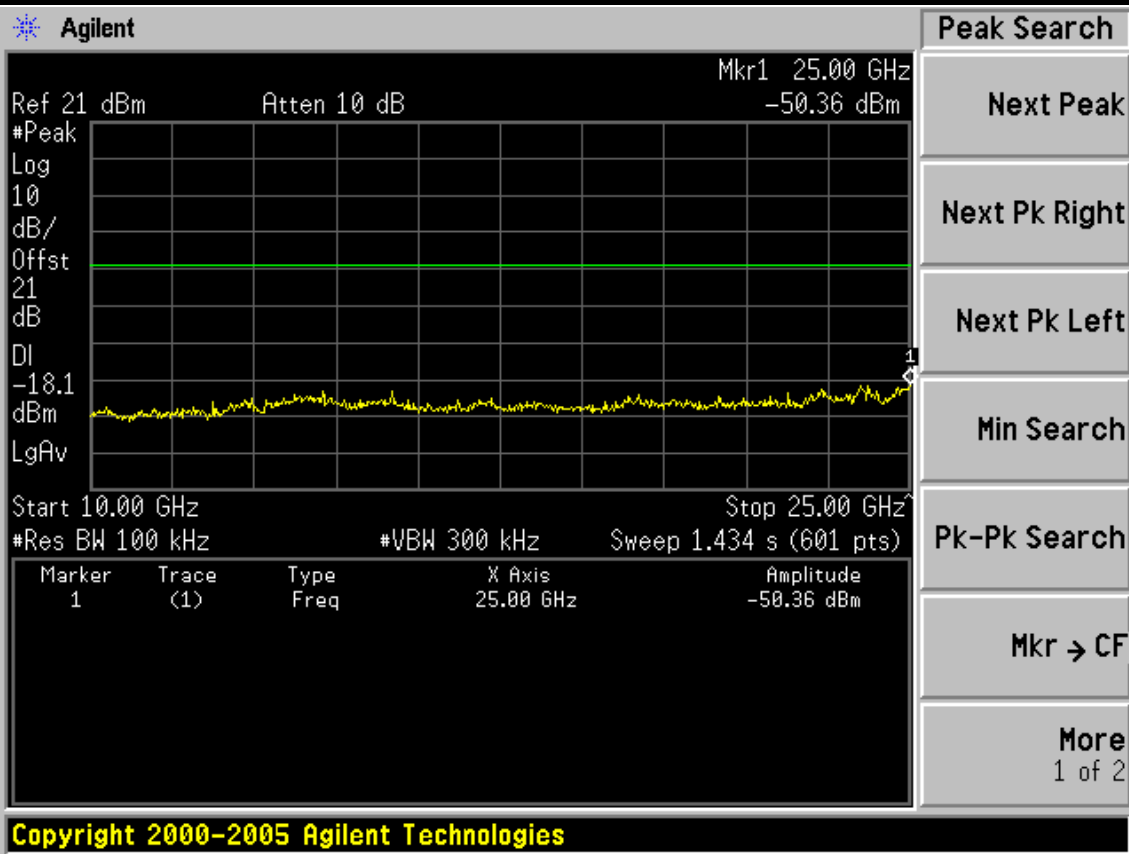


Test CH11: 2462MHz

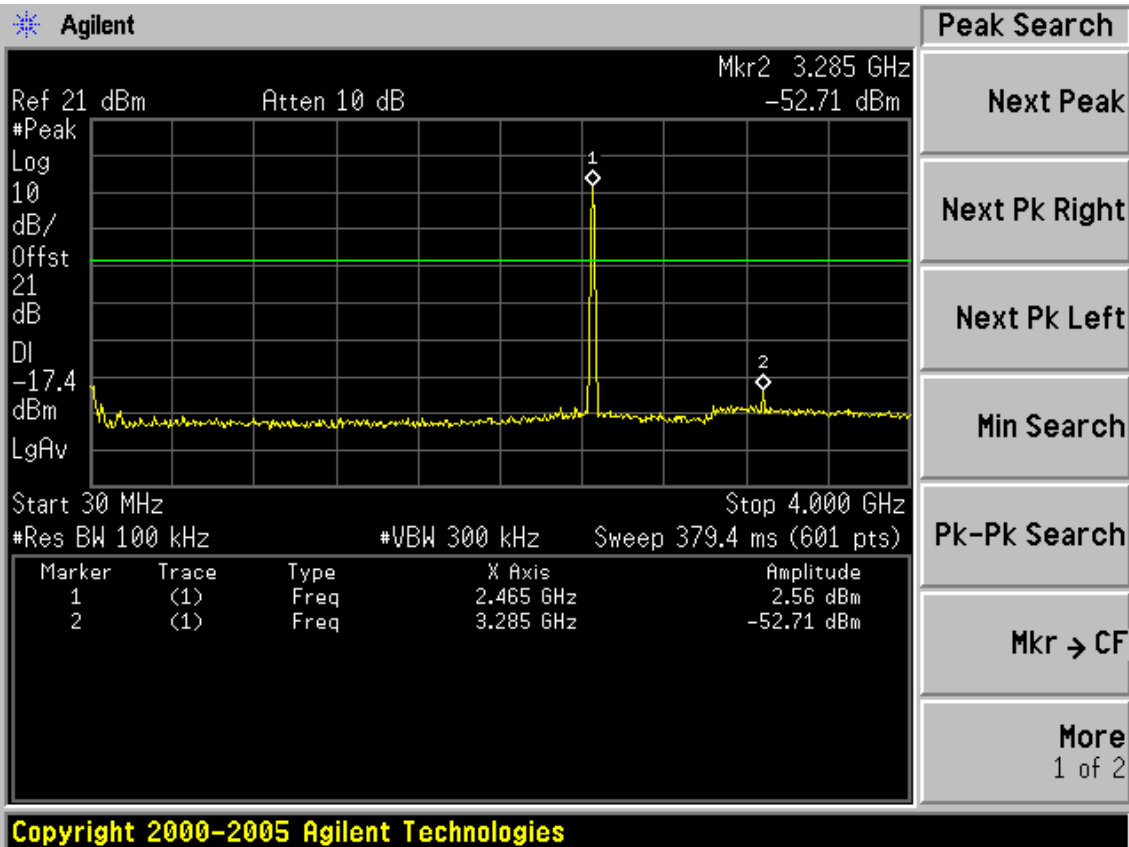

FCC ID: W6RRNX-N360PC

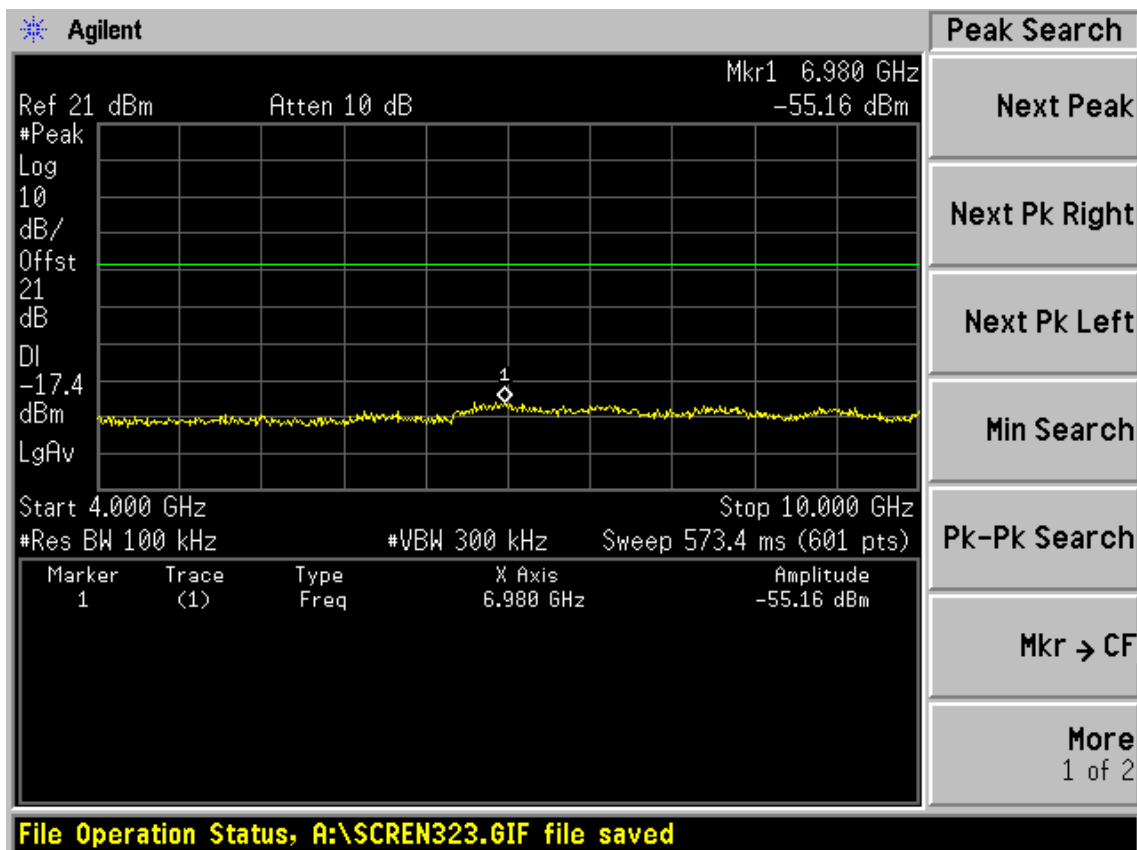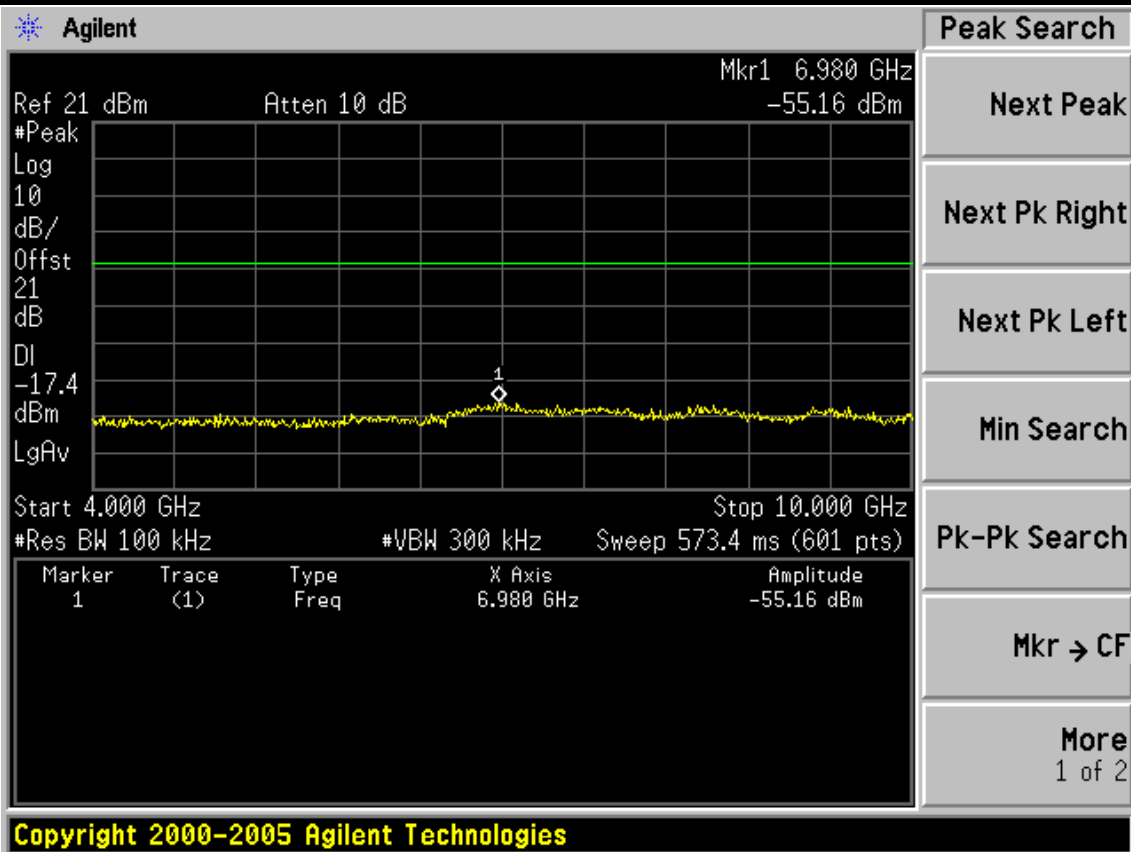


FCC ID: W6RRNX-N360PC


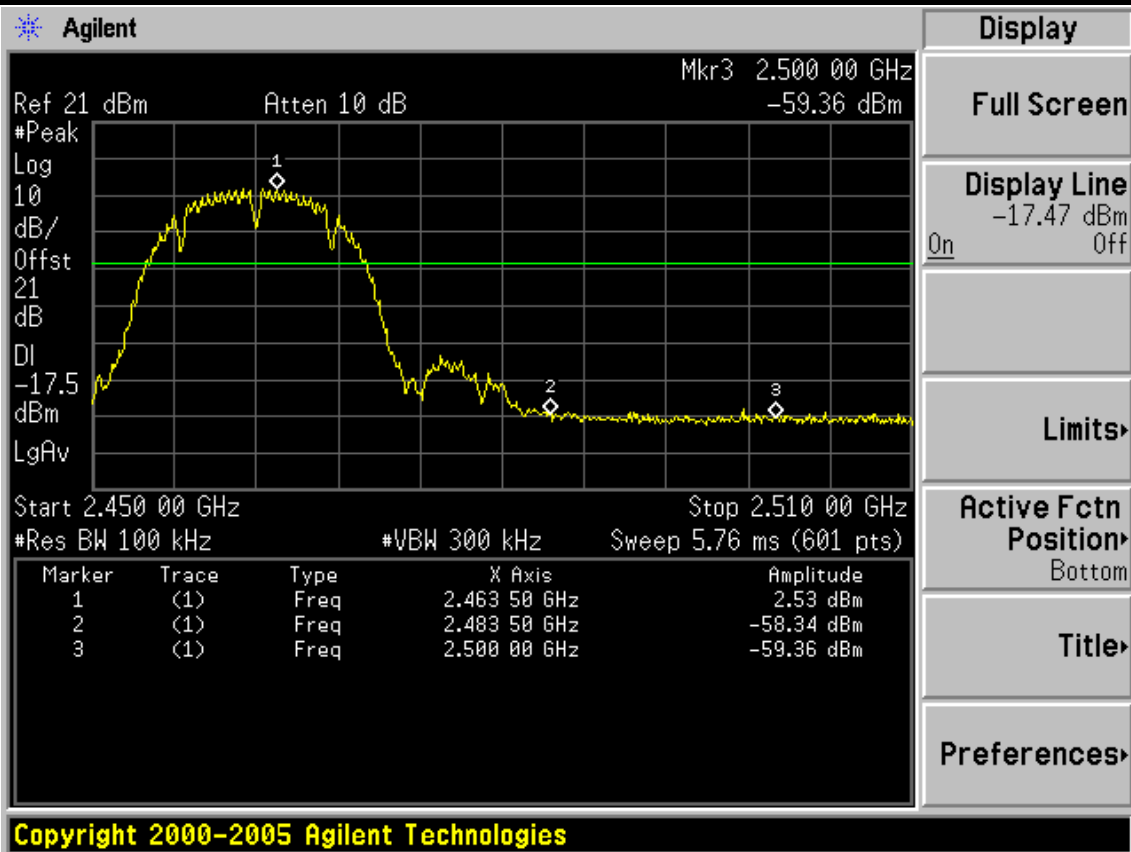


Test Mode: IEEE 802.11g TX


Test CH1: 2412MHz

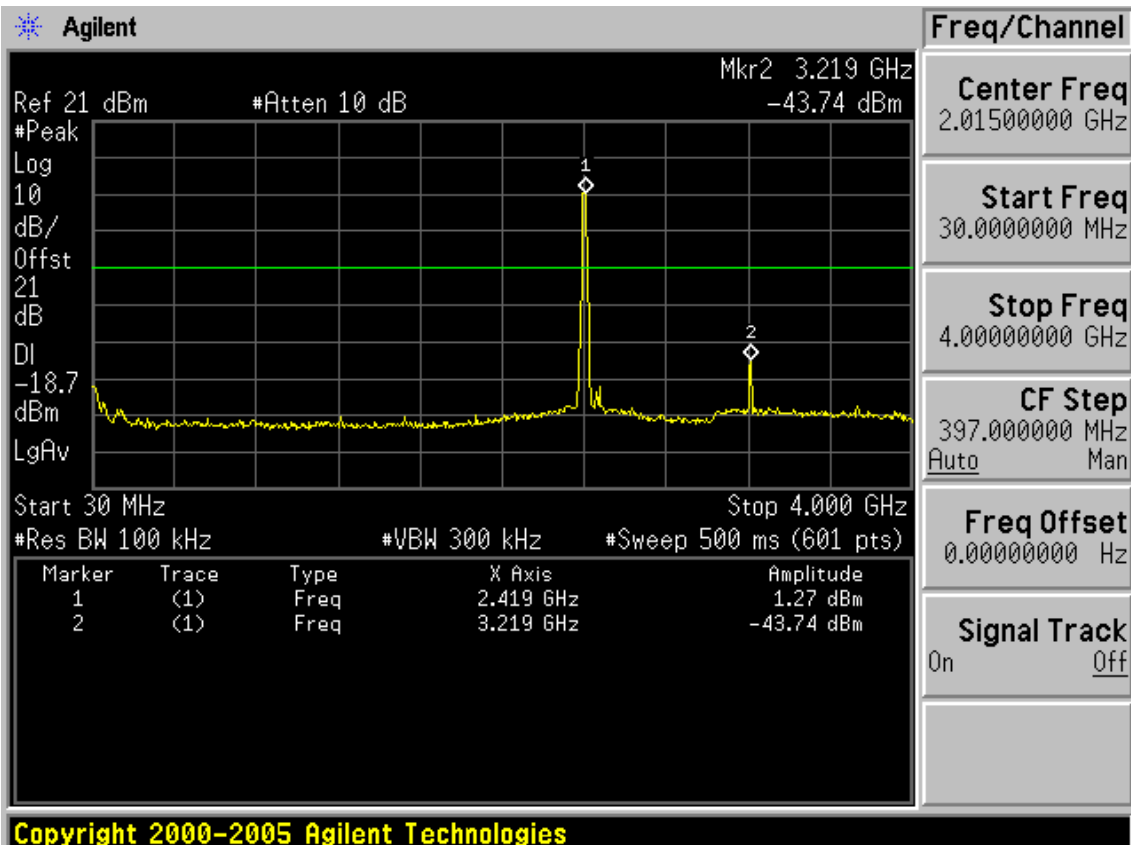


FCC ID: W6RRNX-N360PC

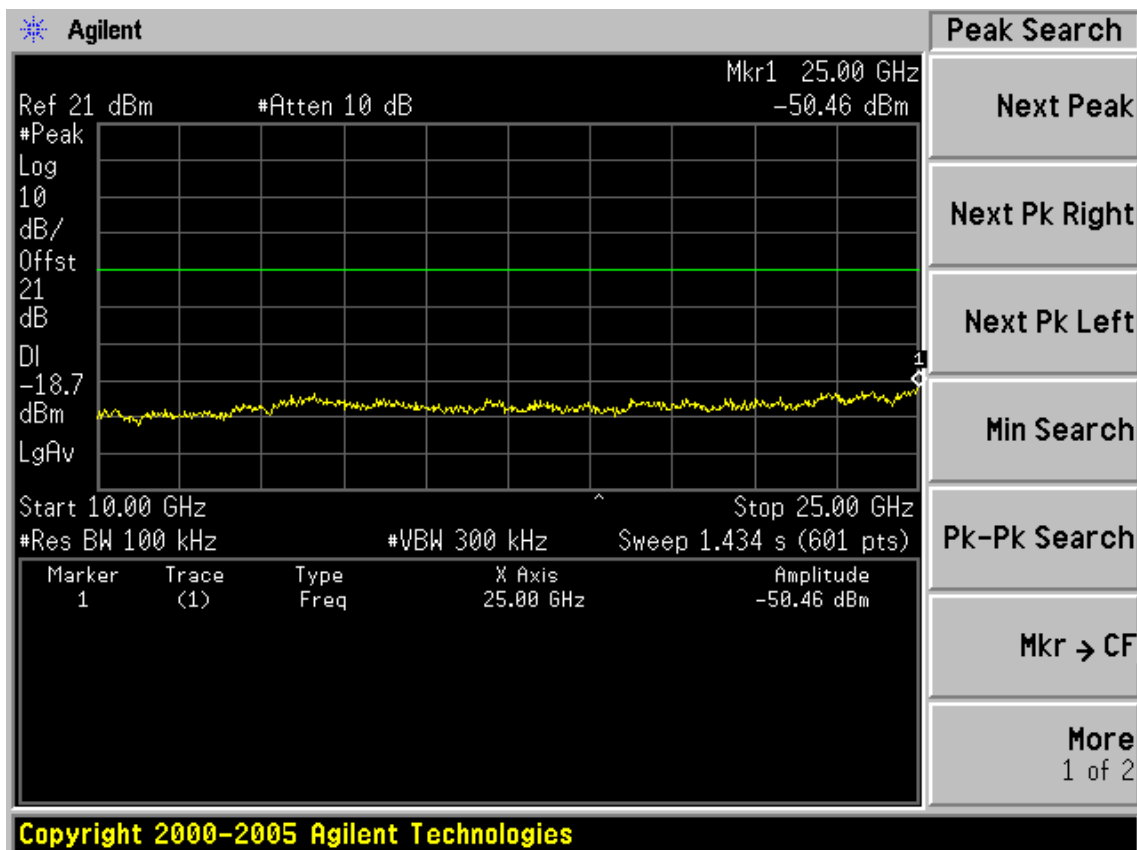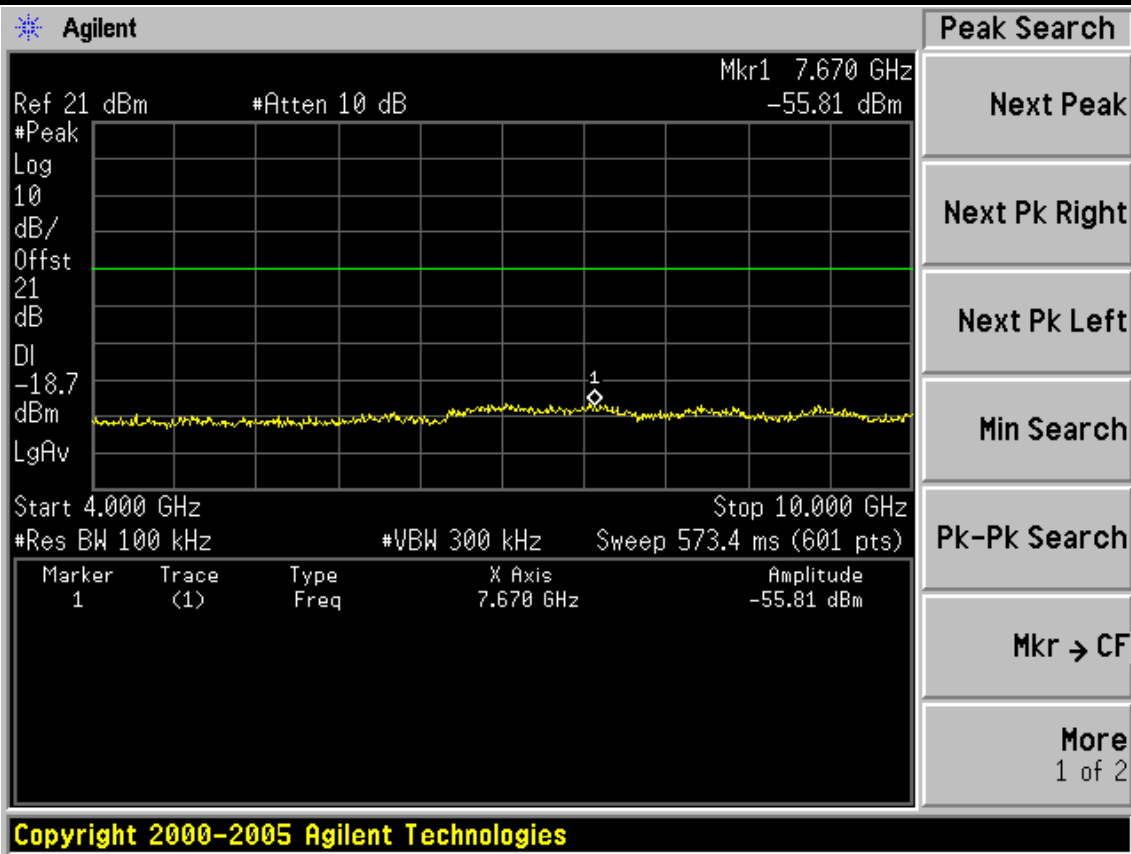



FCC ID: W6RRNX-N360PC

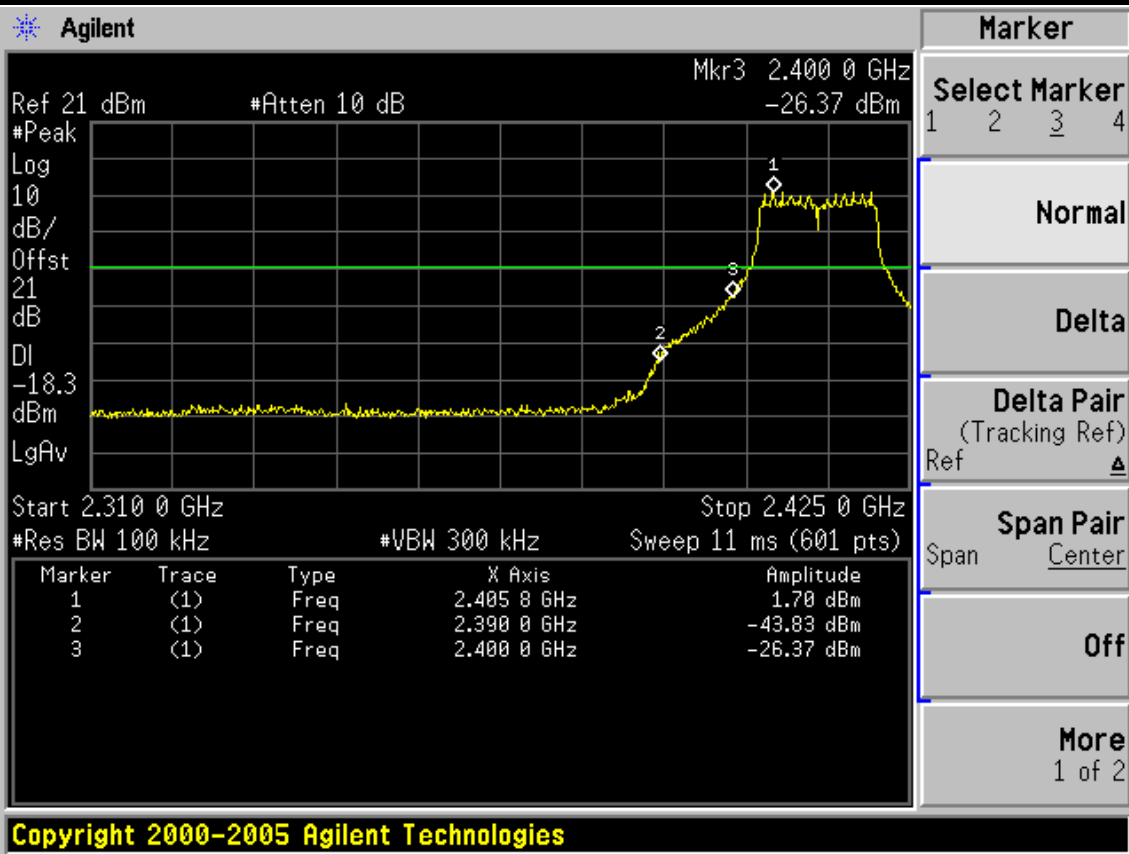



Test CH6: 2437MHz

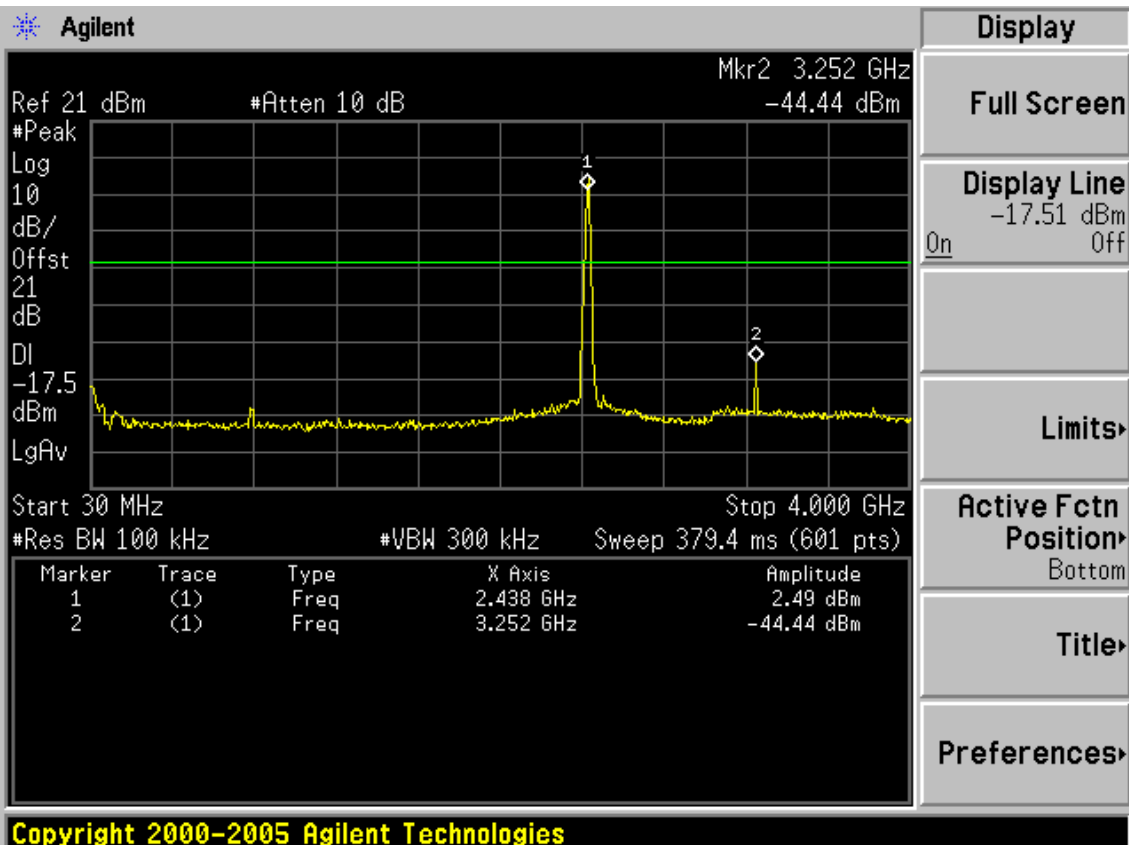



FCC ID: W6RRNX-N360PC

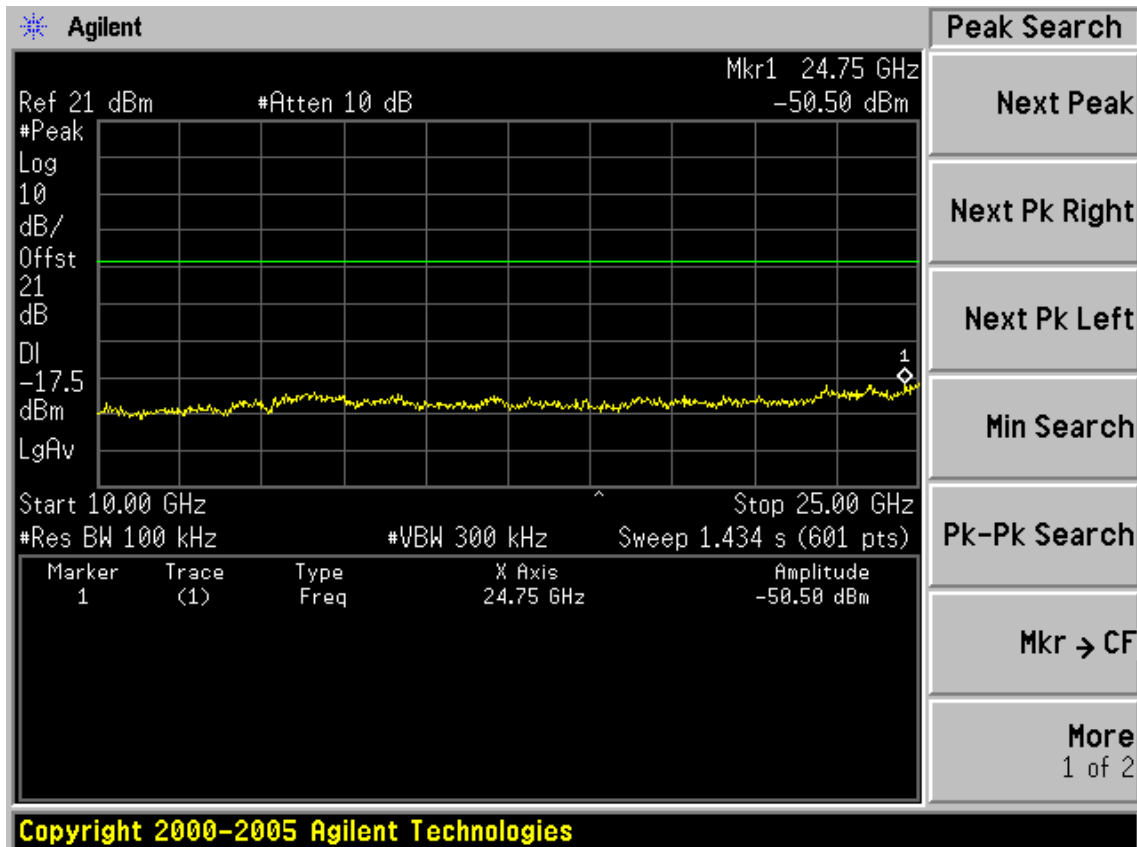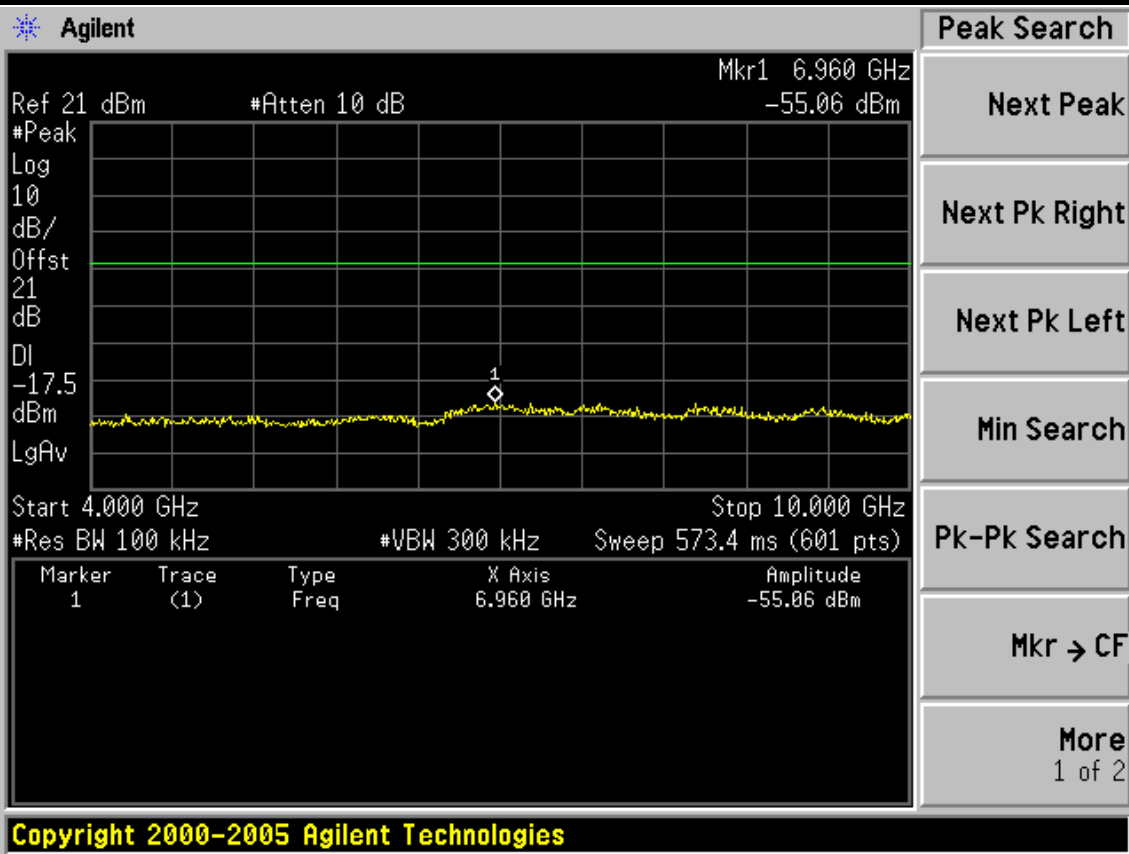

FCC ID: W6RRNX-N360PC

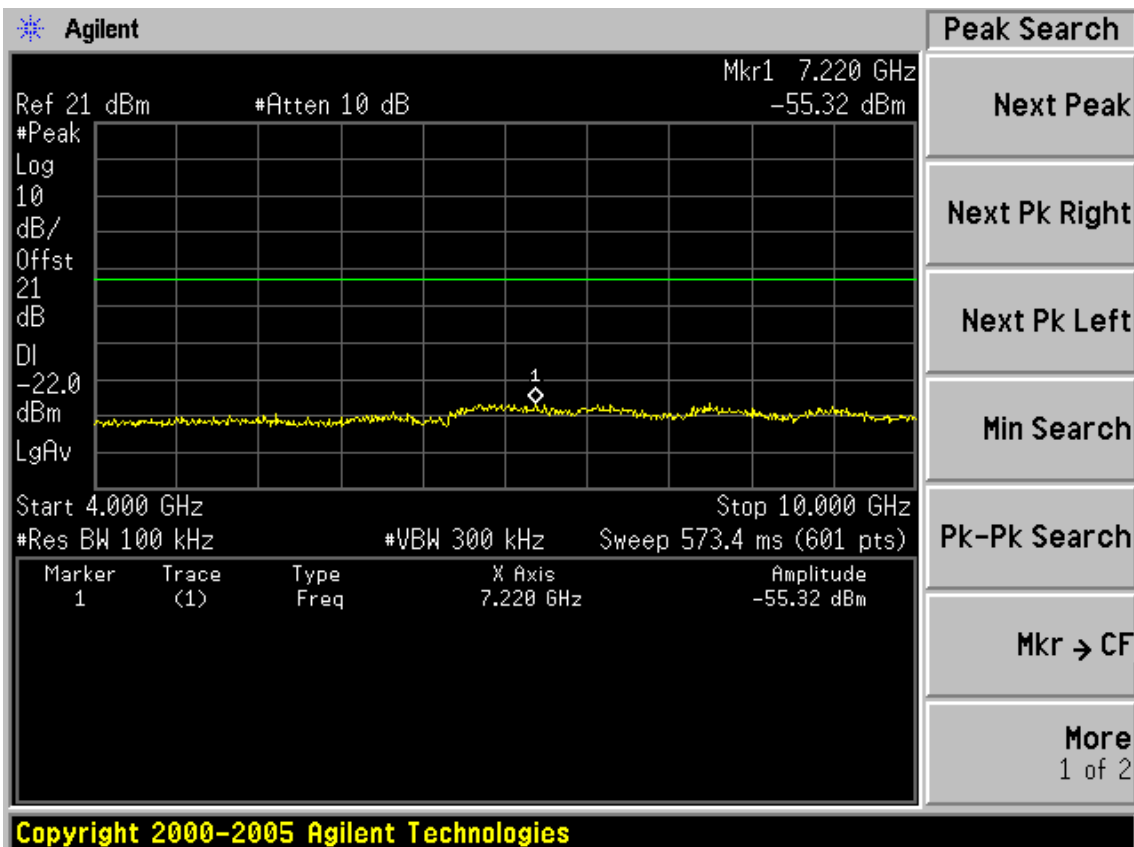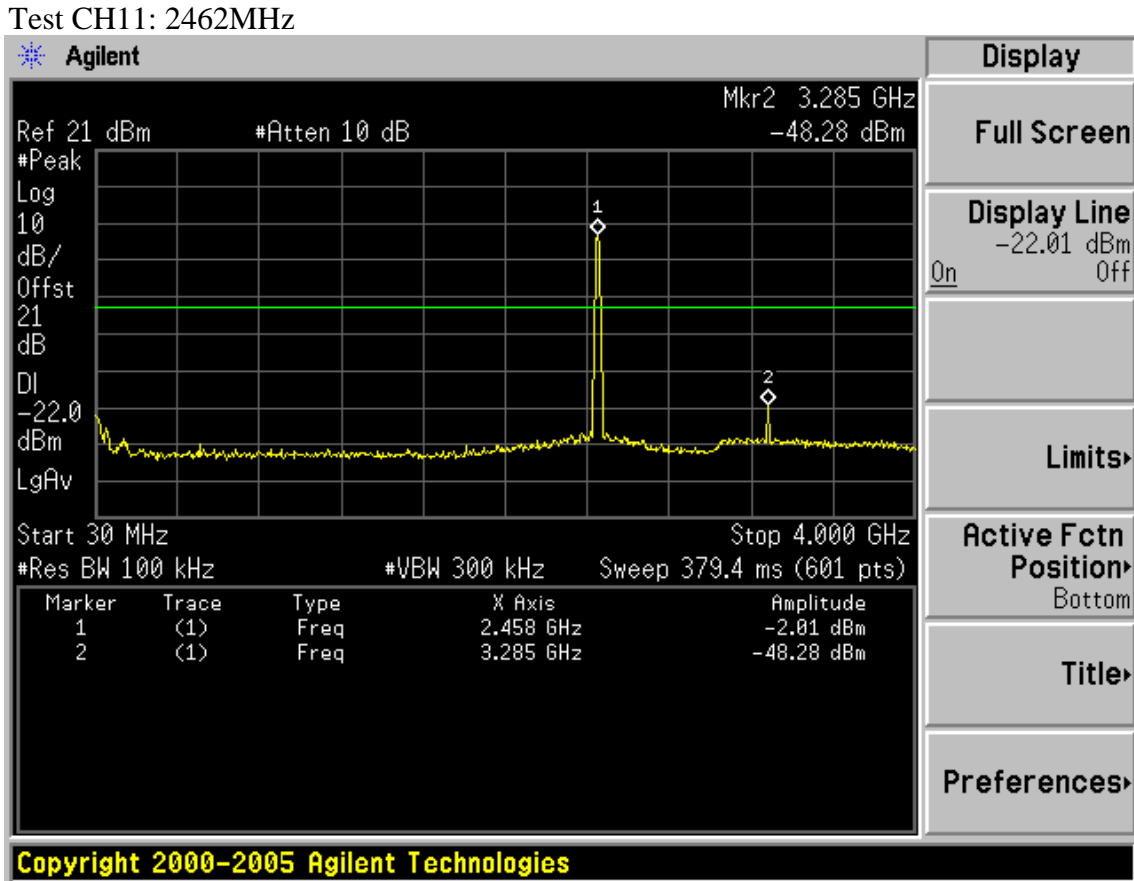



FCC ID: W6RRNX-N360PC

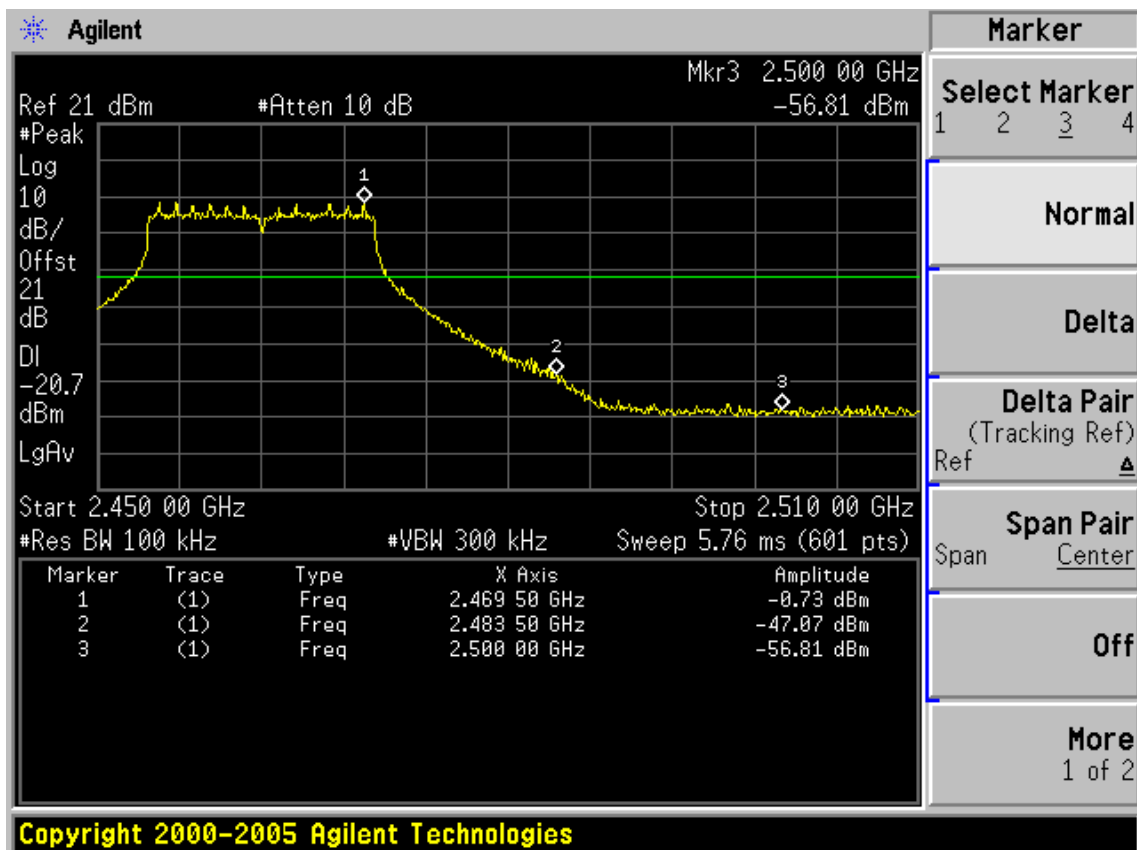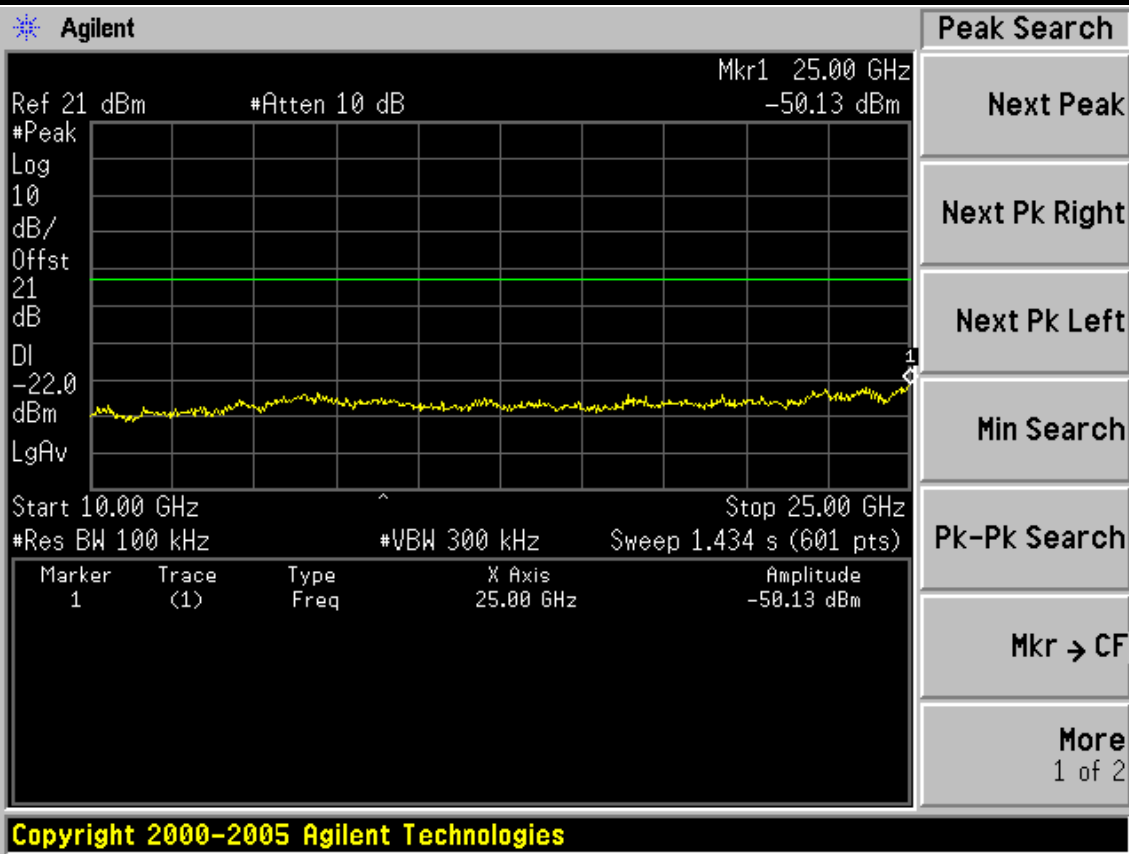



FCC ID: W6RRNX-N360PC

Test Mode: IEEE 802.11n HT20 TX

Test CH1: 2412MHz

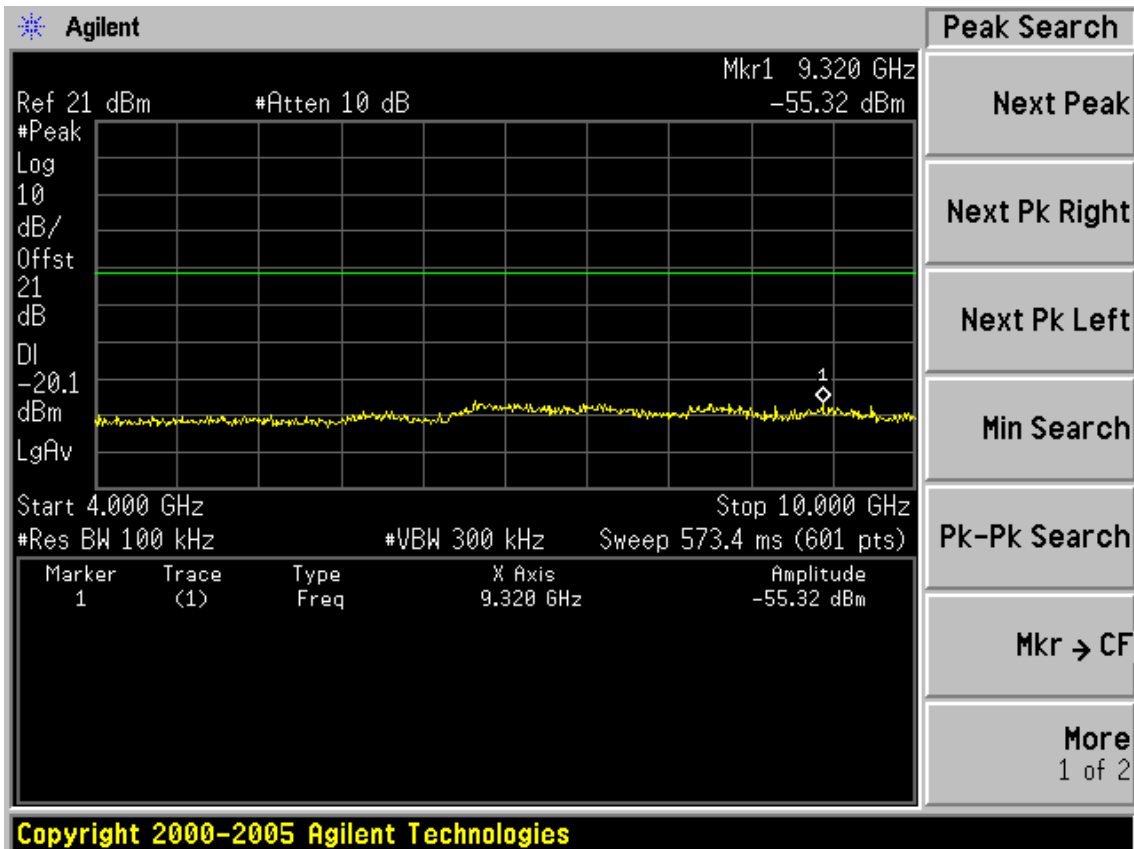
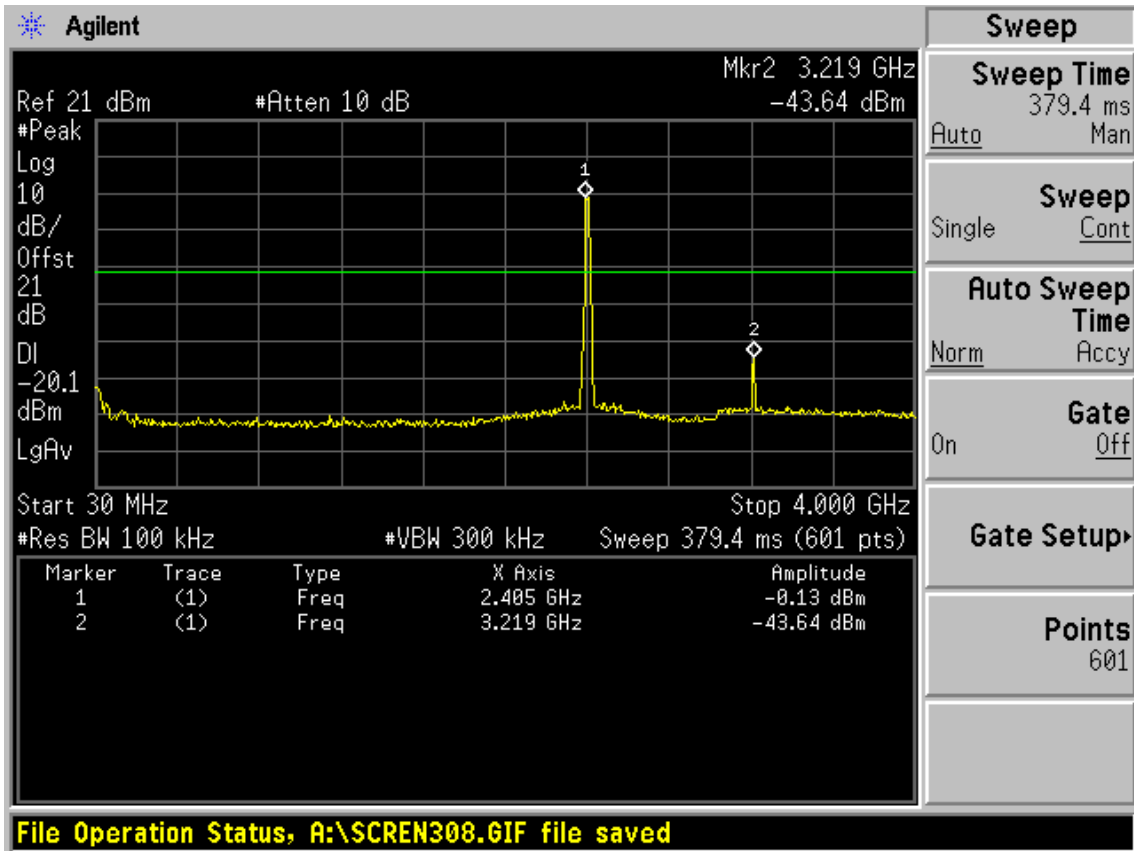


FCC ID: W6RRNX-N360PC

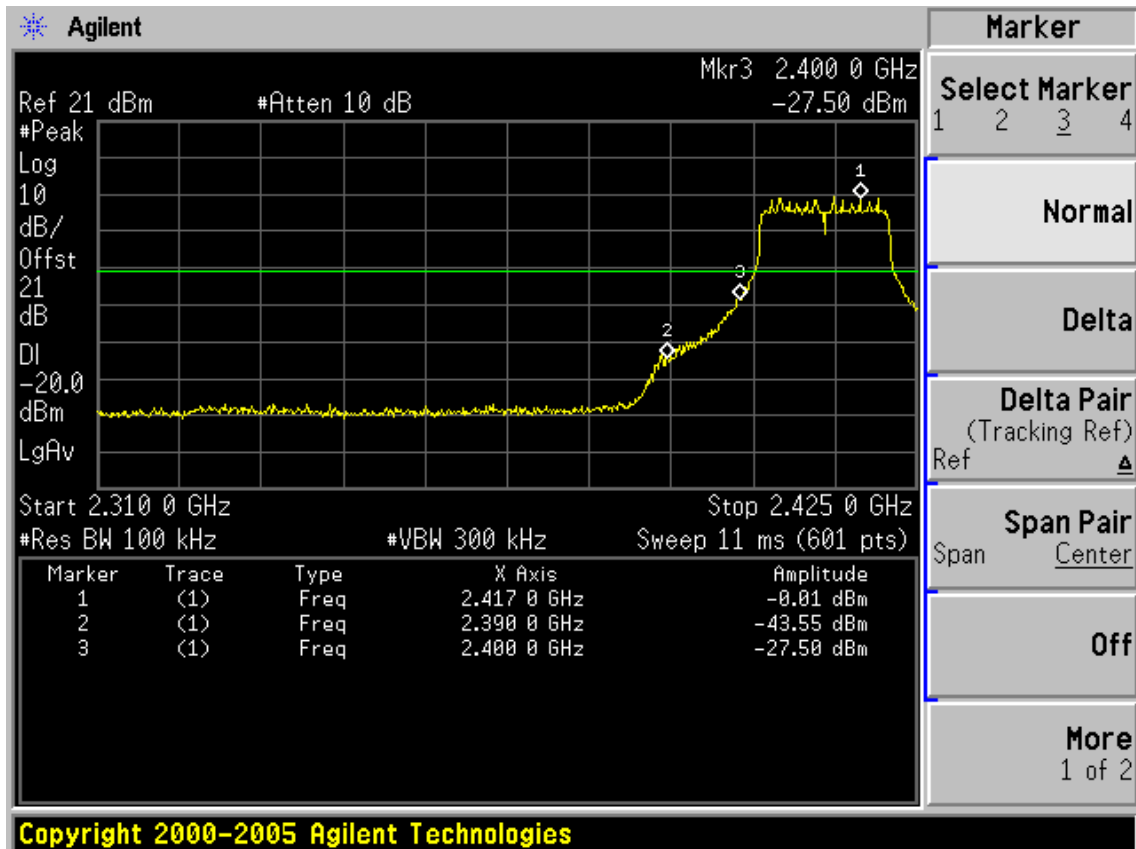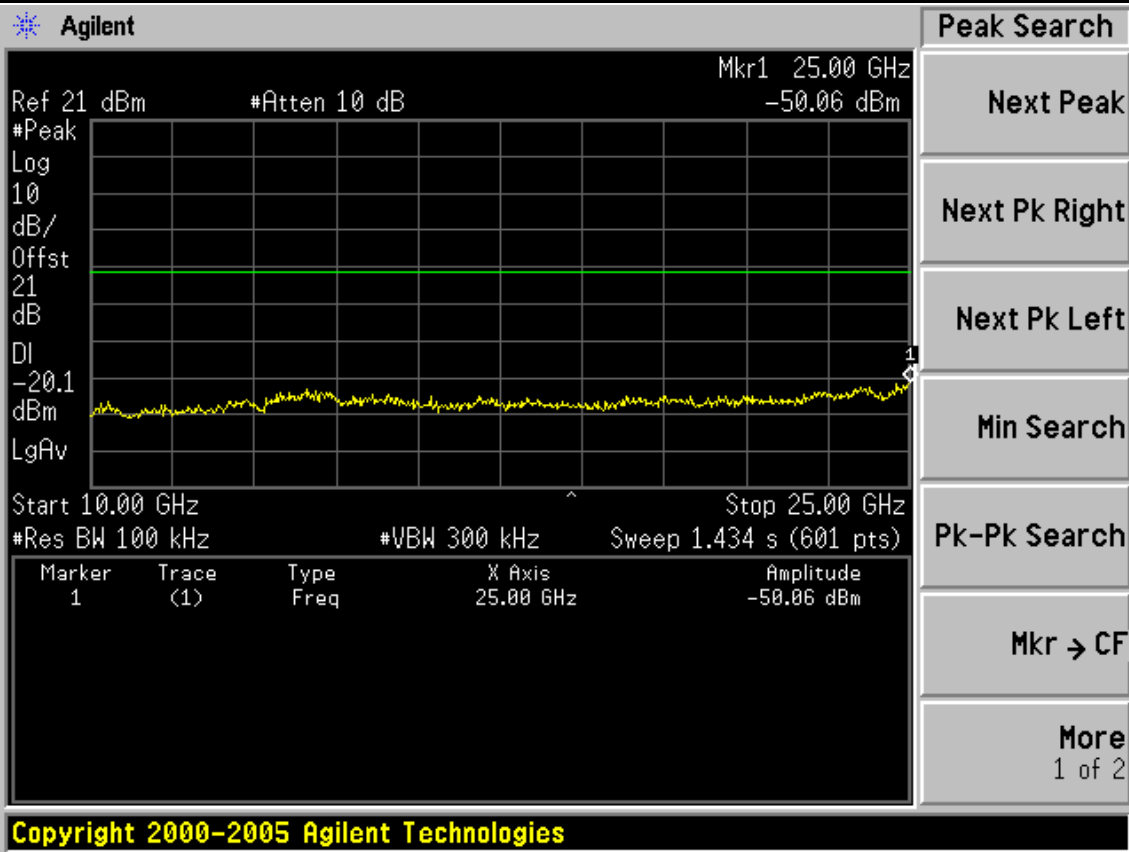


FCC ID: W6RRNX-N360PC


Test CH6: 2437MHz

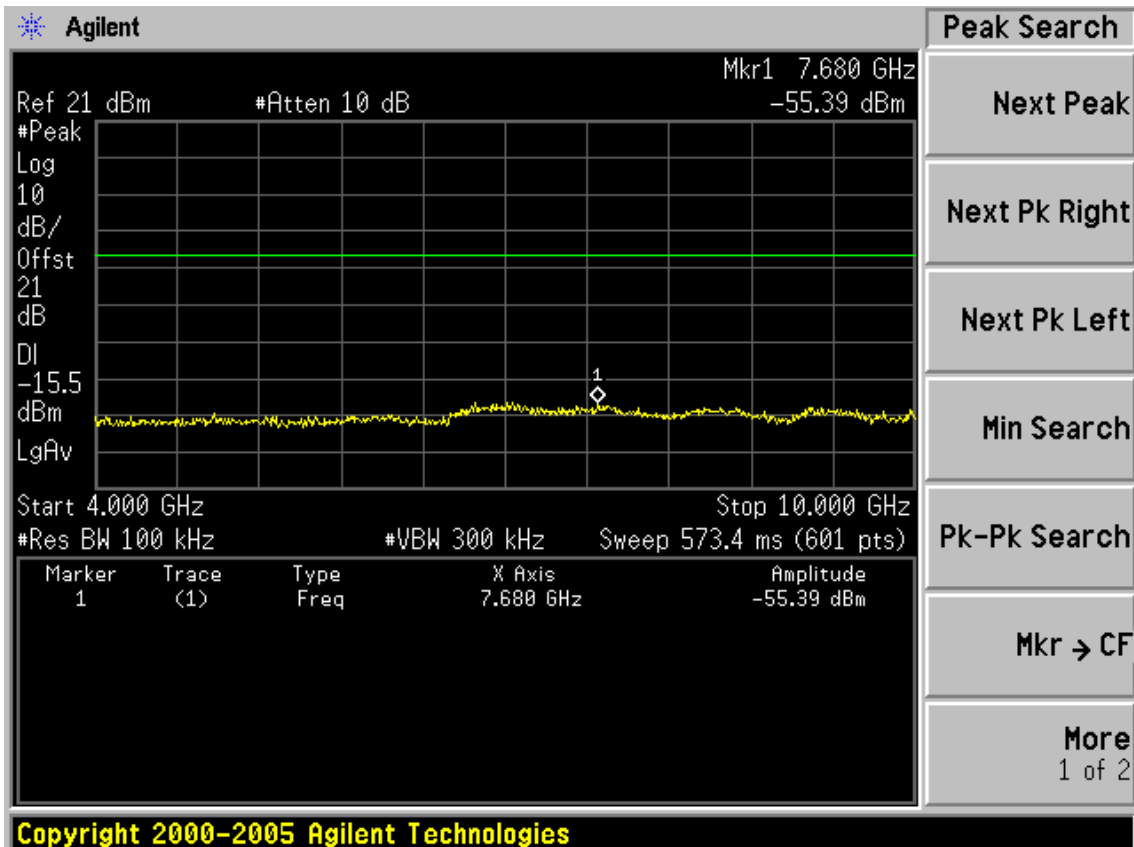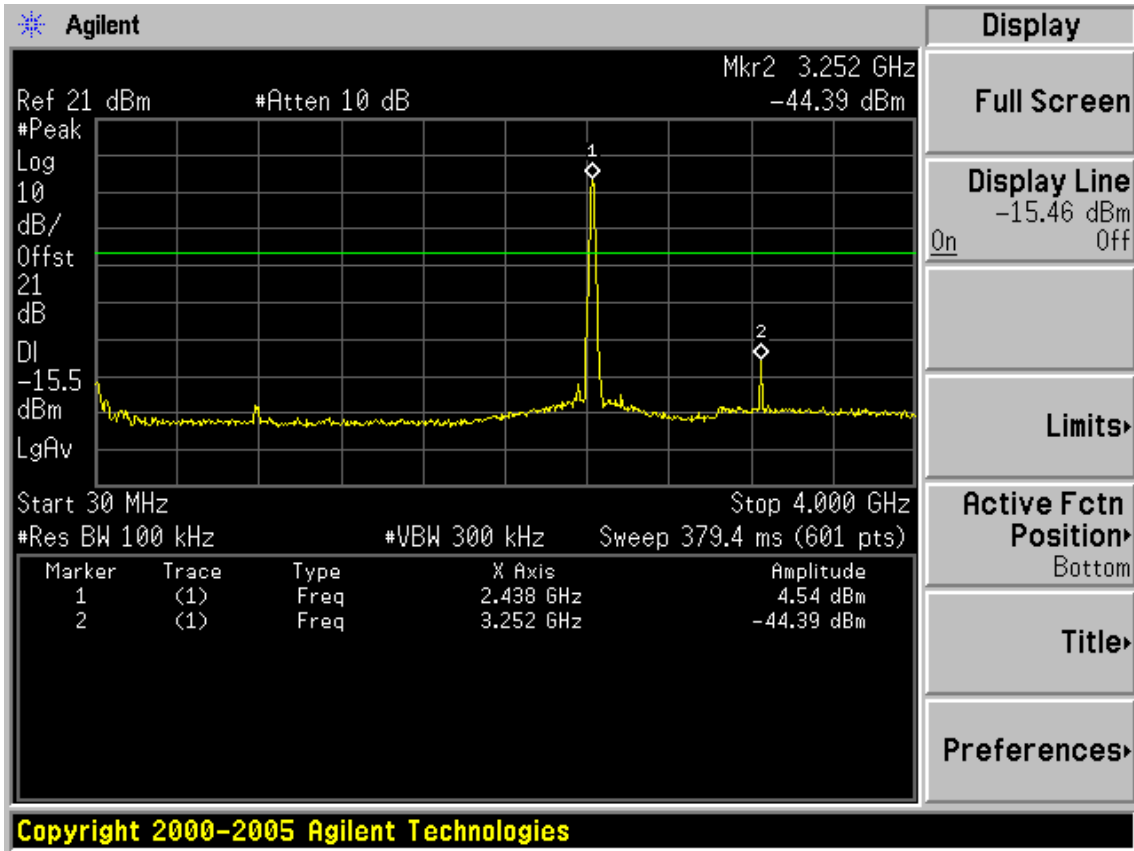



FCC ID: W6RRNX-N360PC

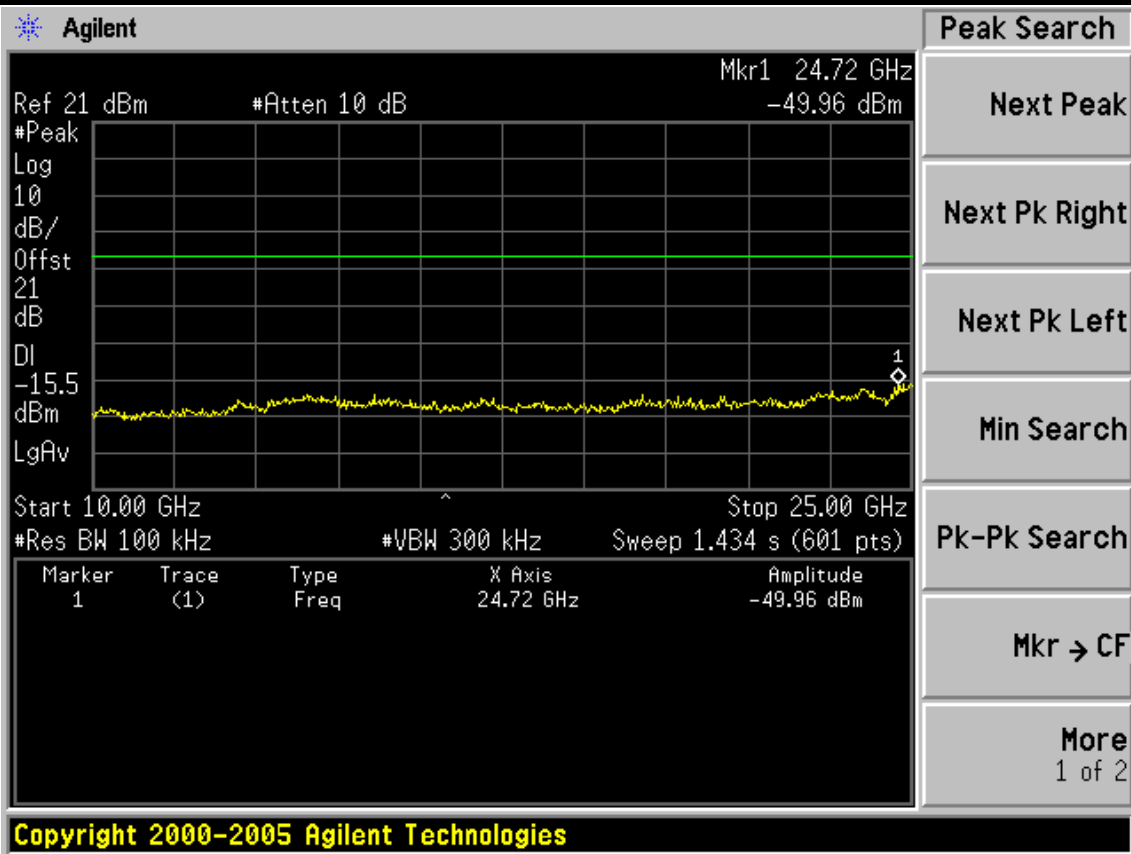


Test CH11: 2462MHz

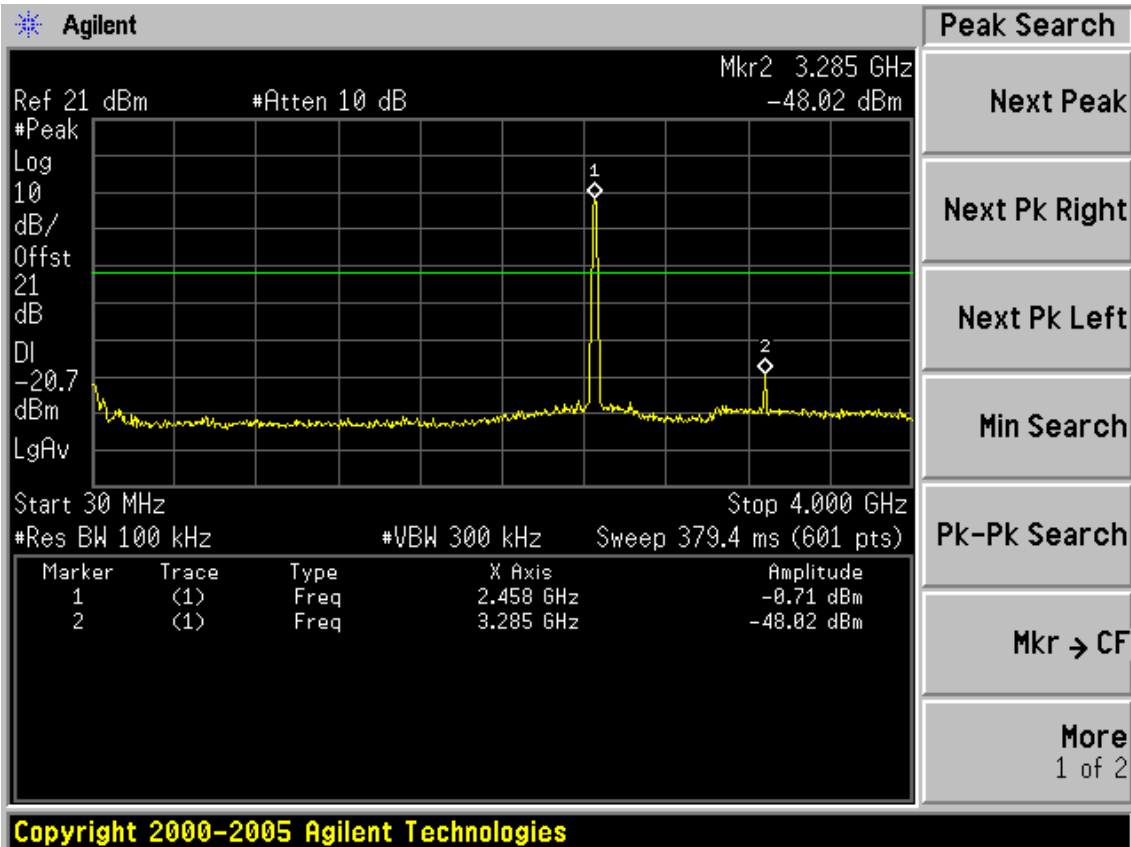


FCC ID: W6RRNX-N360PC

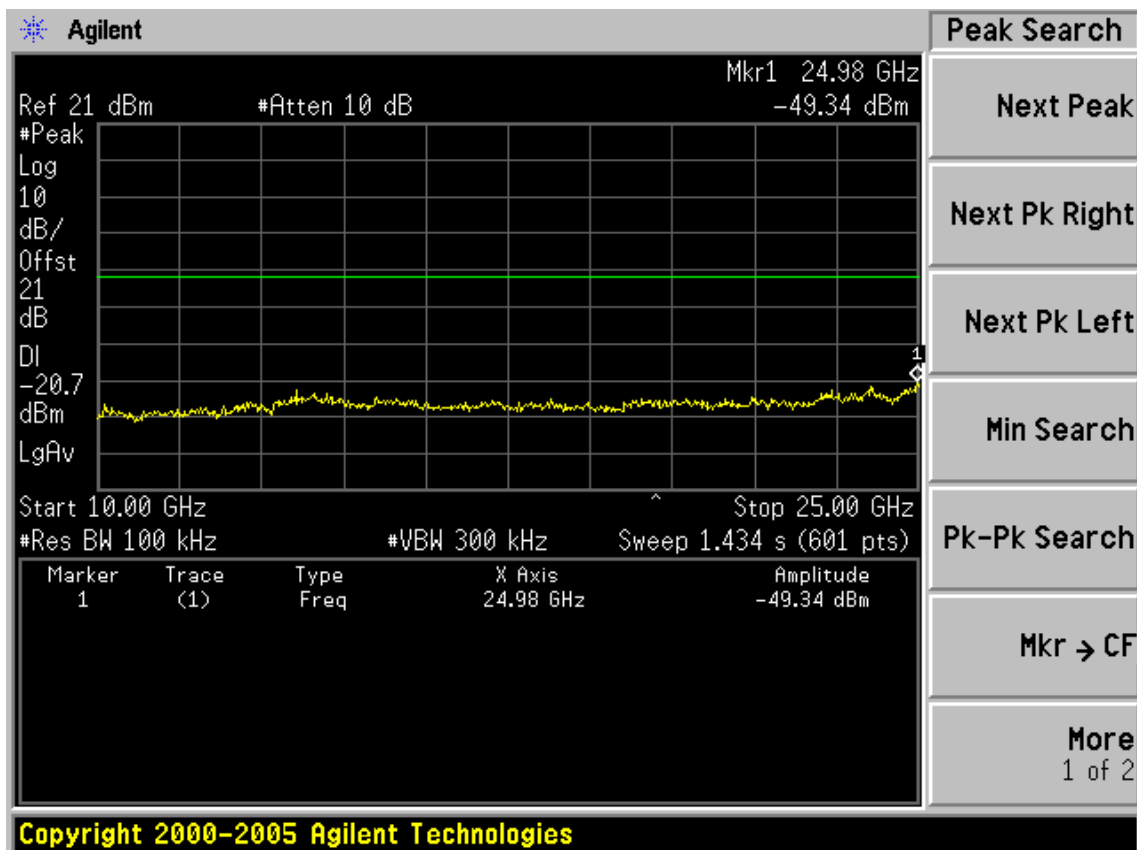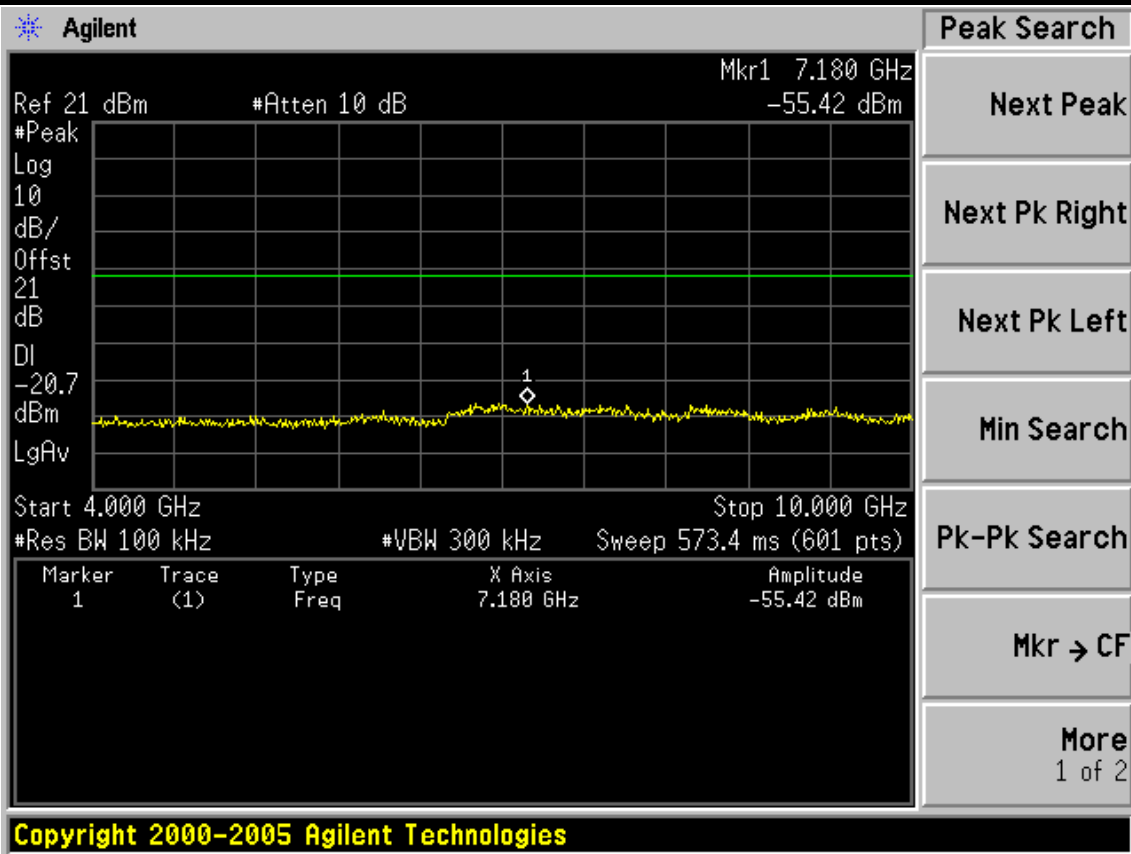



FCC ID: W6RRNX-N360PC

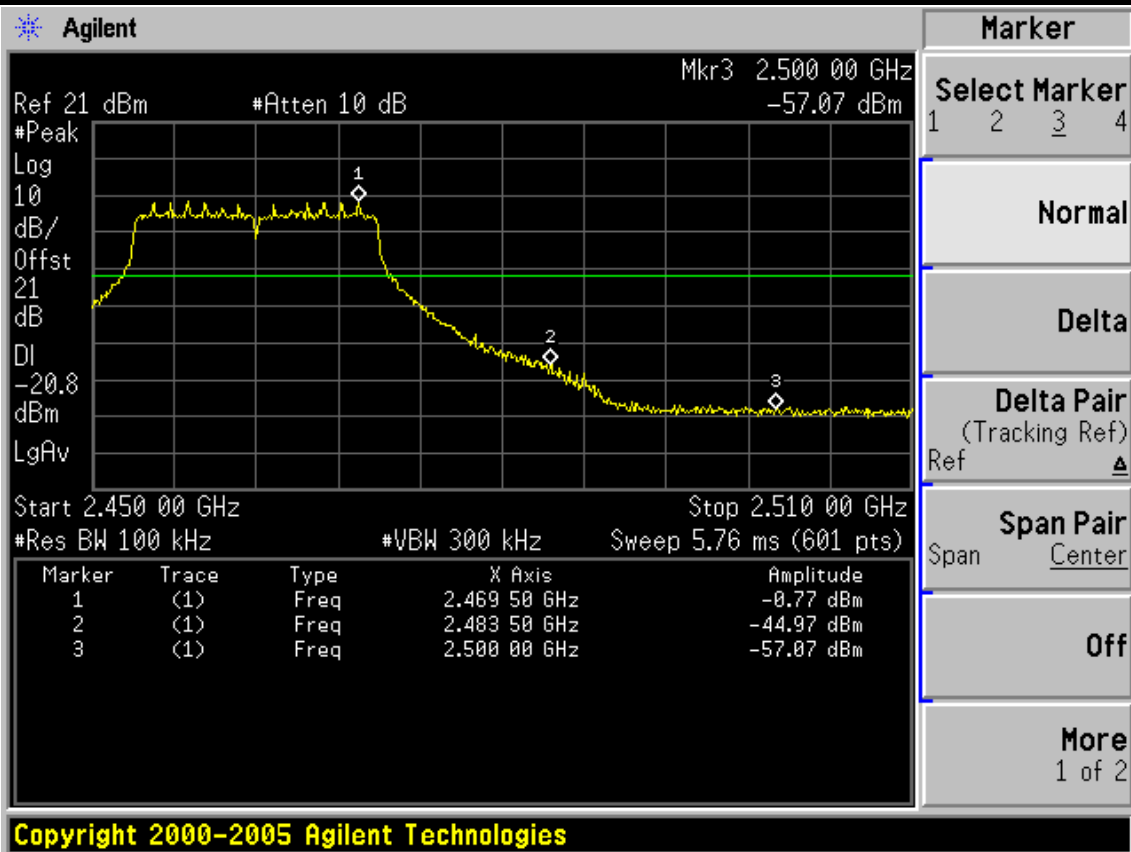


Test Mode: IEEE 802.11n HT40 TX
 Test CH1: 2422MHz

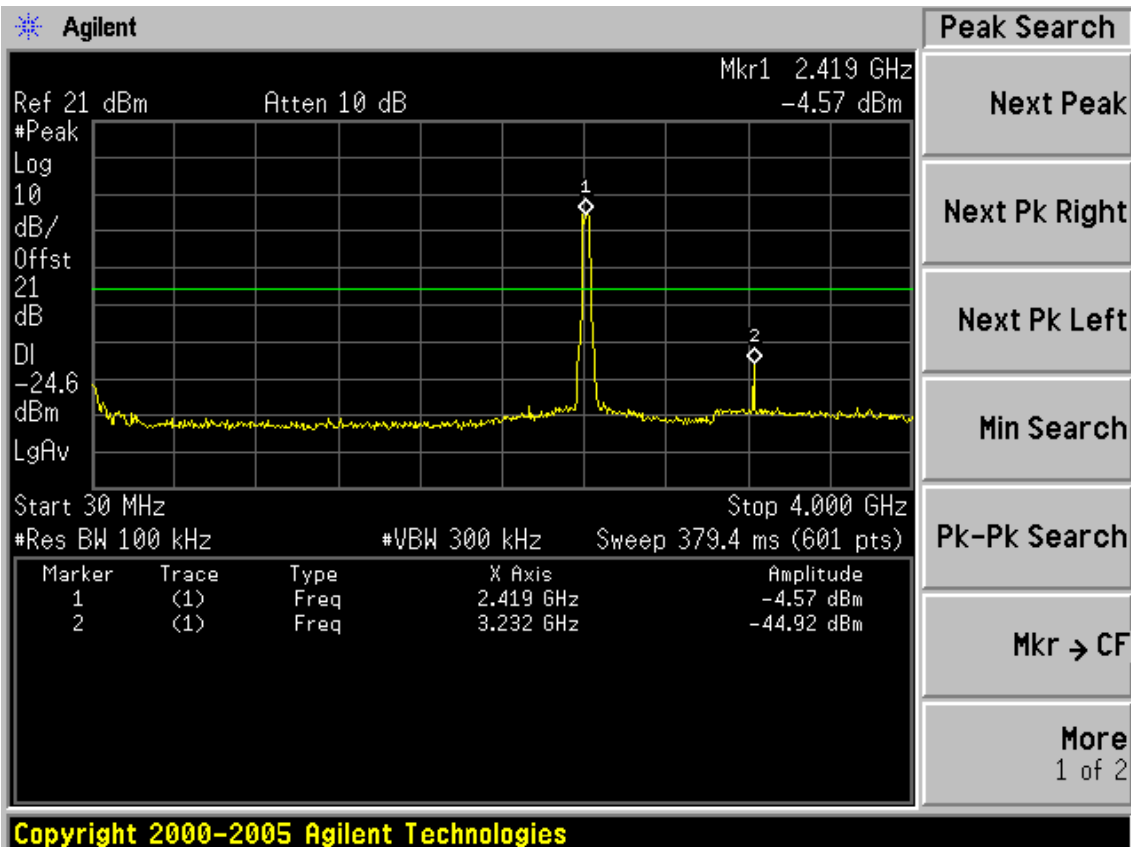

FCC ID: W6RRNX-N360PC

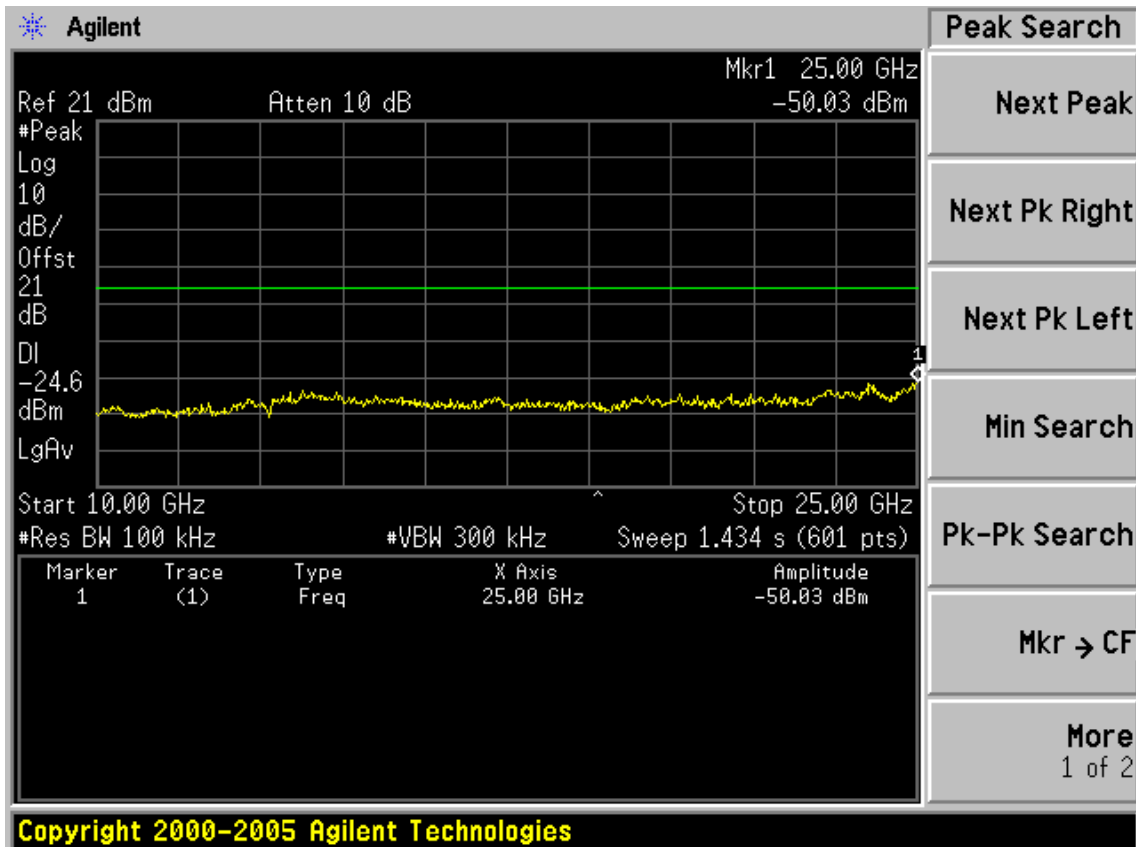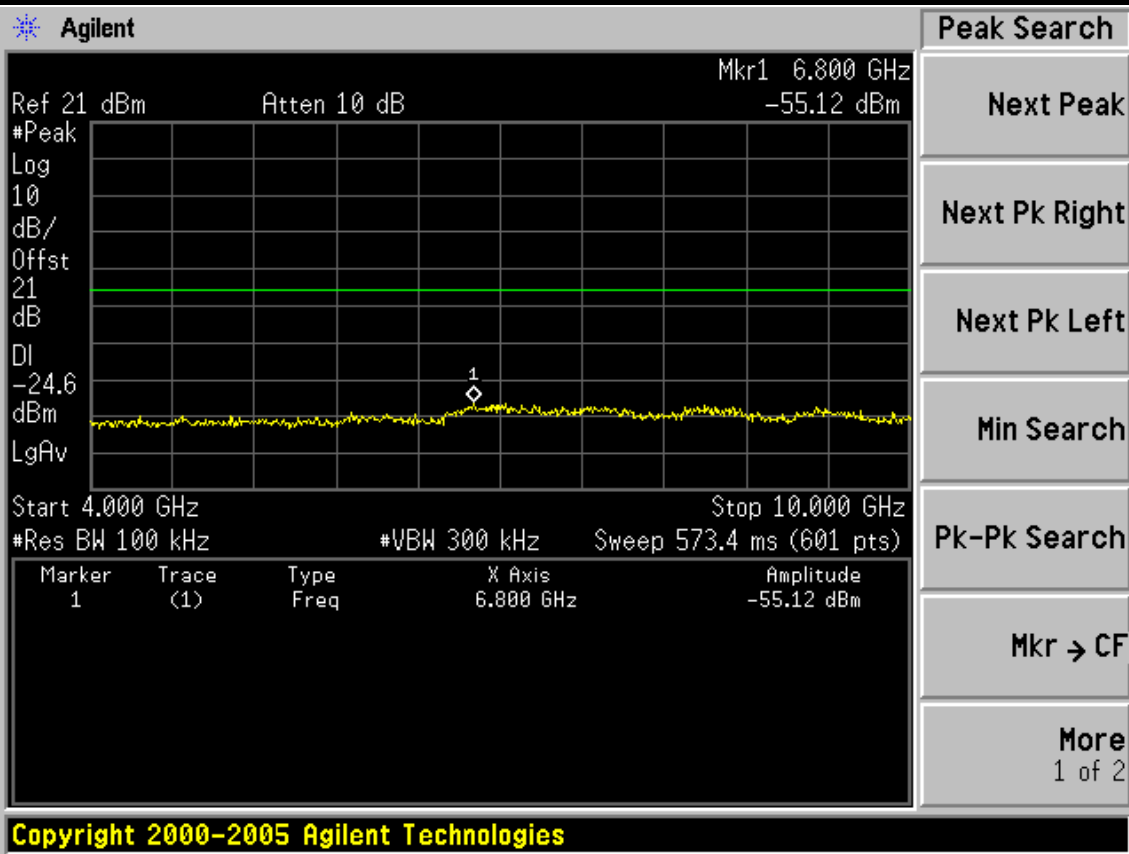


FCC ID: W6RRNX-N360PC

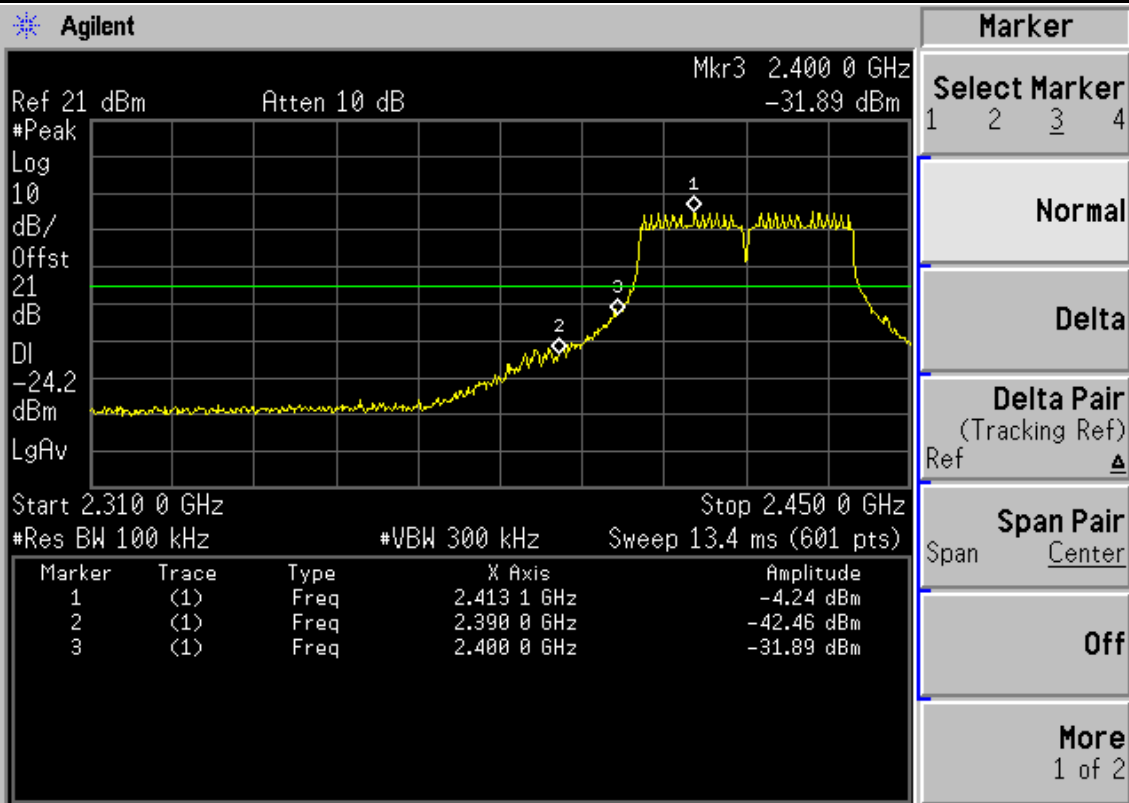



Copyright 2000-2005 Agilent Technologies

Test CH4: 2437MHz

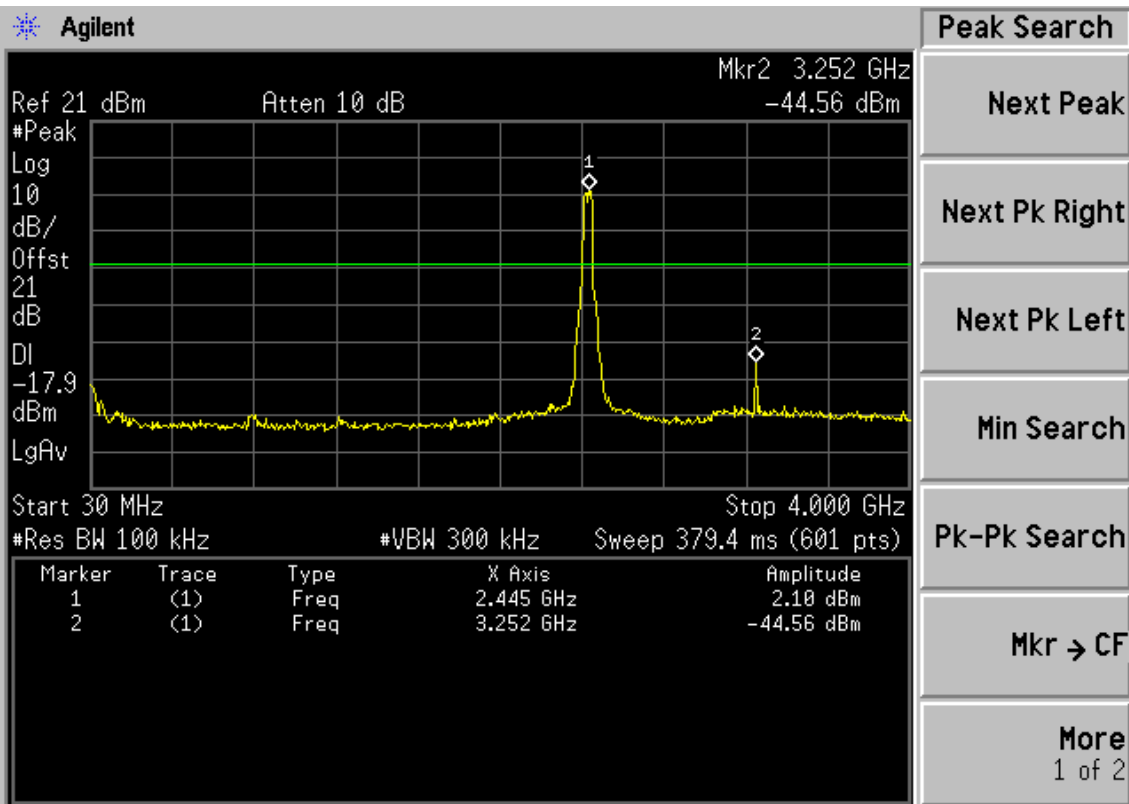



Copyright 2000-2005 Agilent Technologies

FCC ID: W6RRNX-N360PC

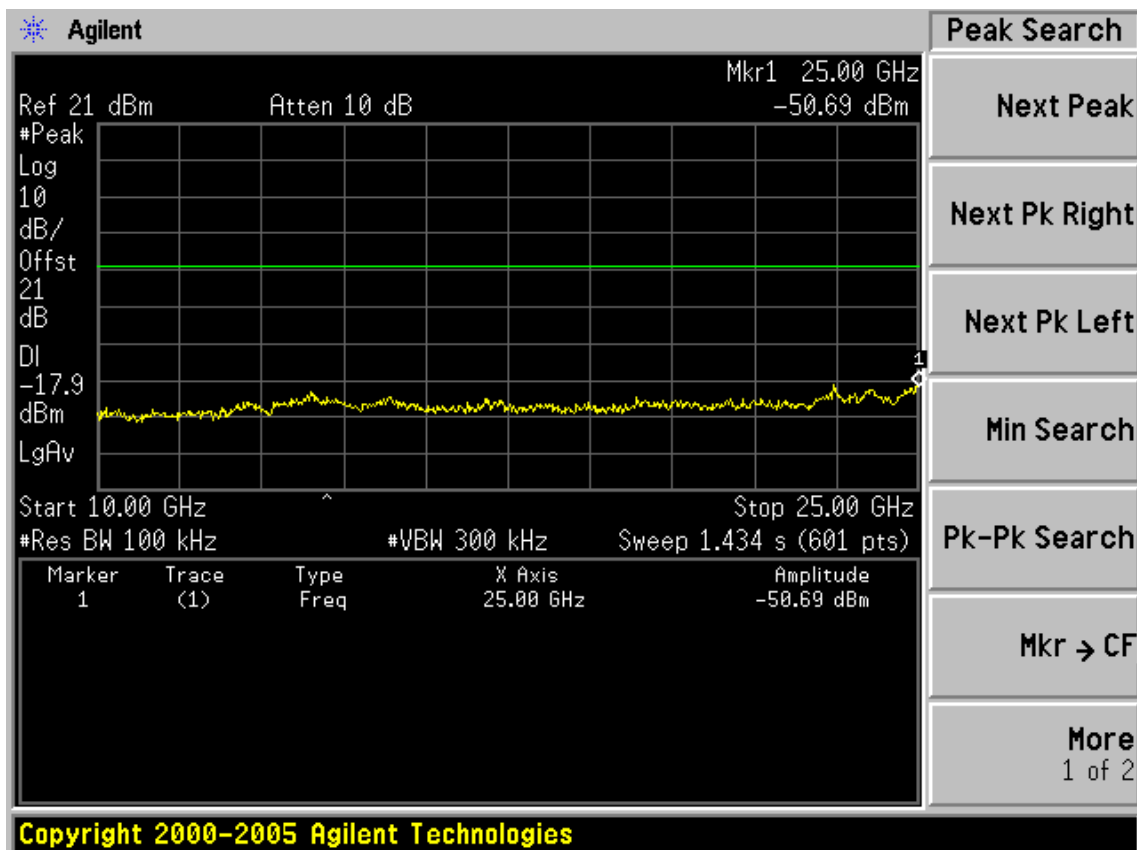
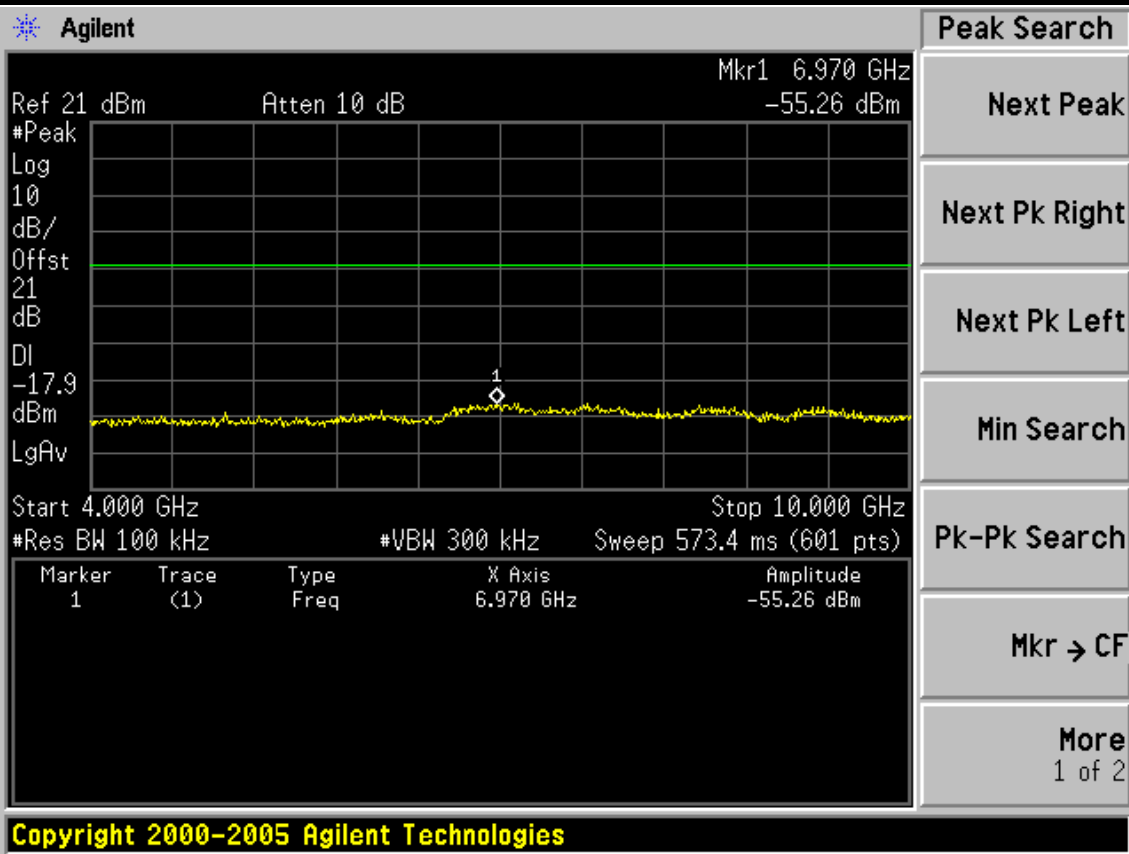


FCC ID: W6RRNX-N360PC

Test CH7: 2452MHz

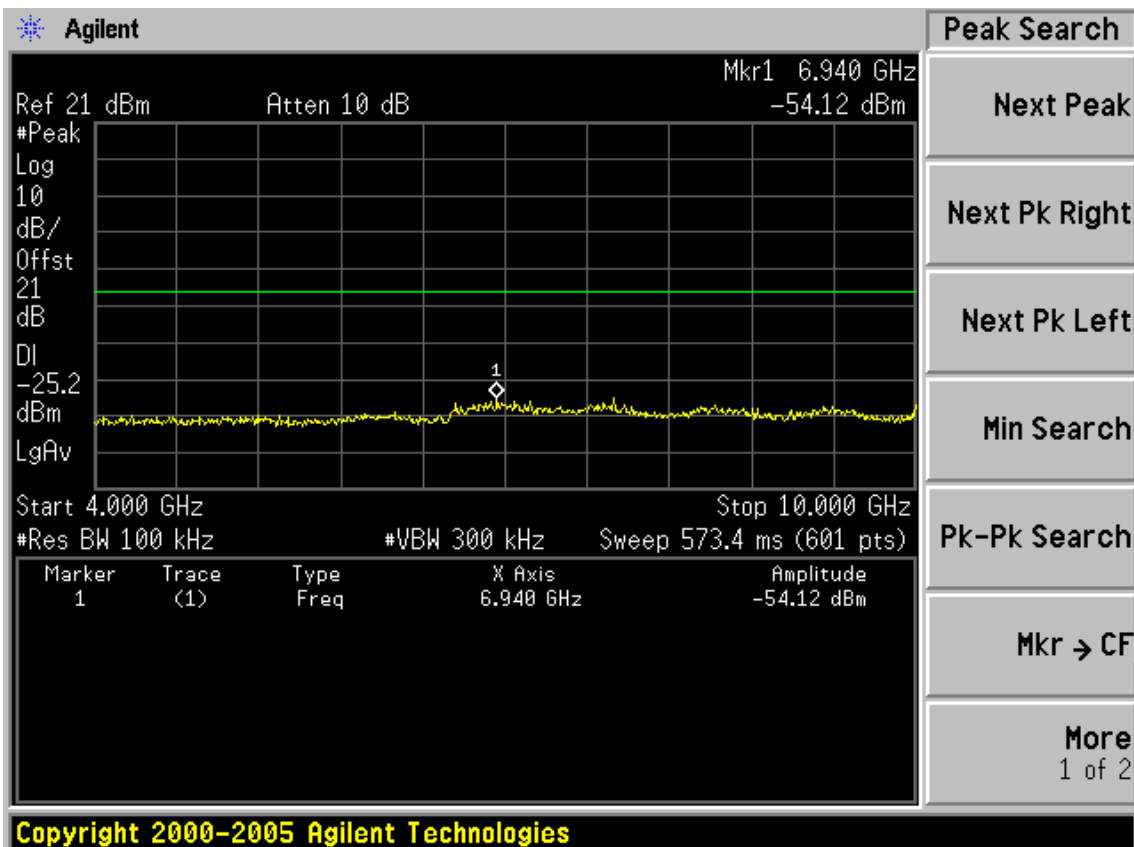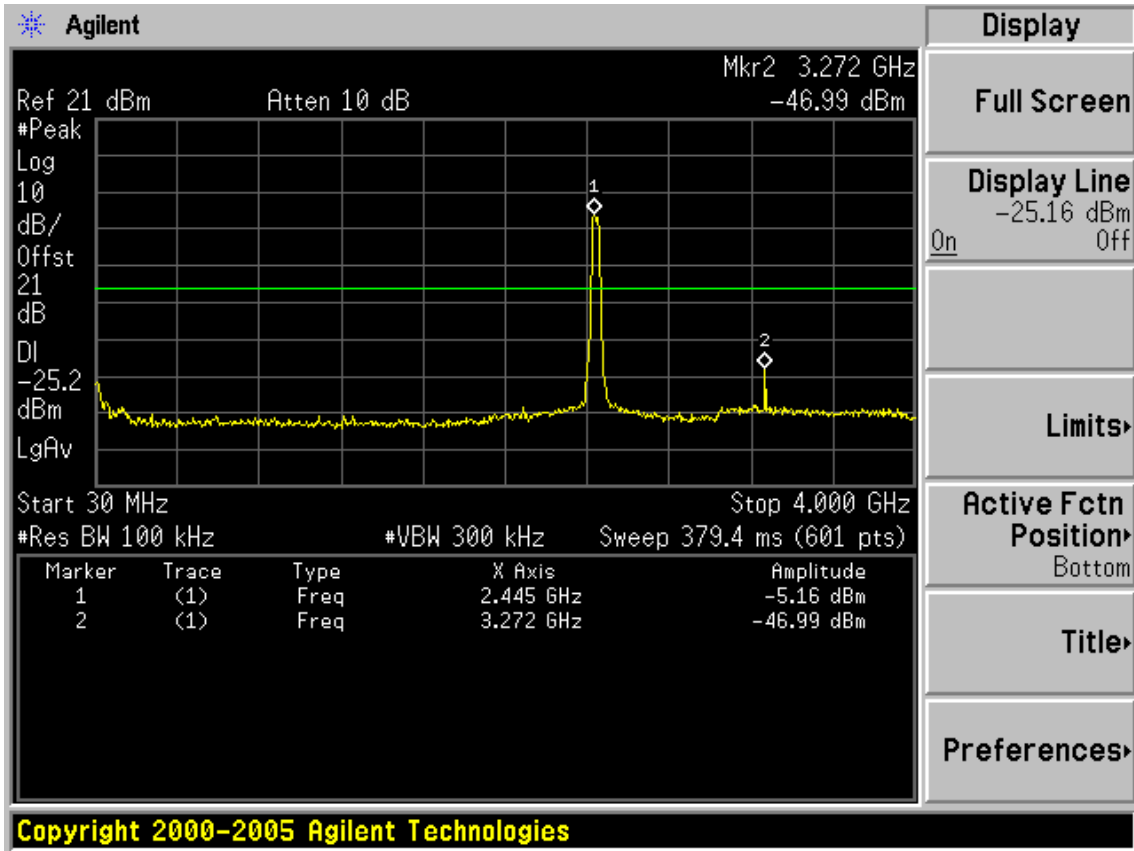

FCC ID: W6RRNX-N360PC

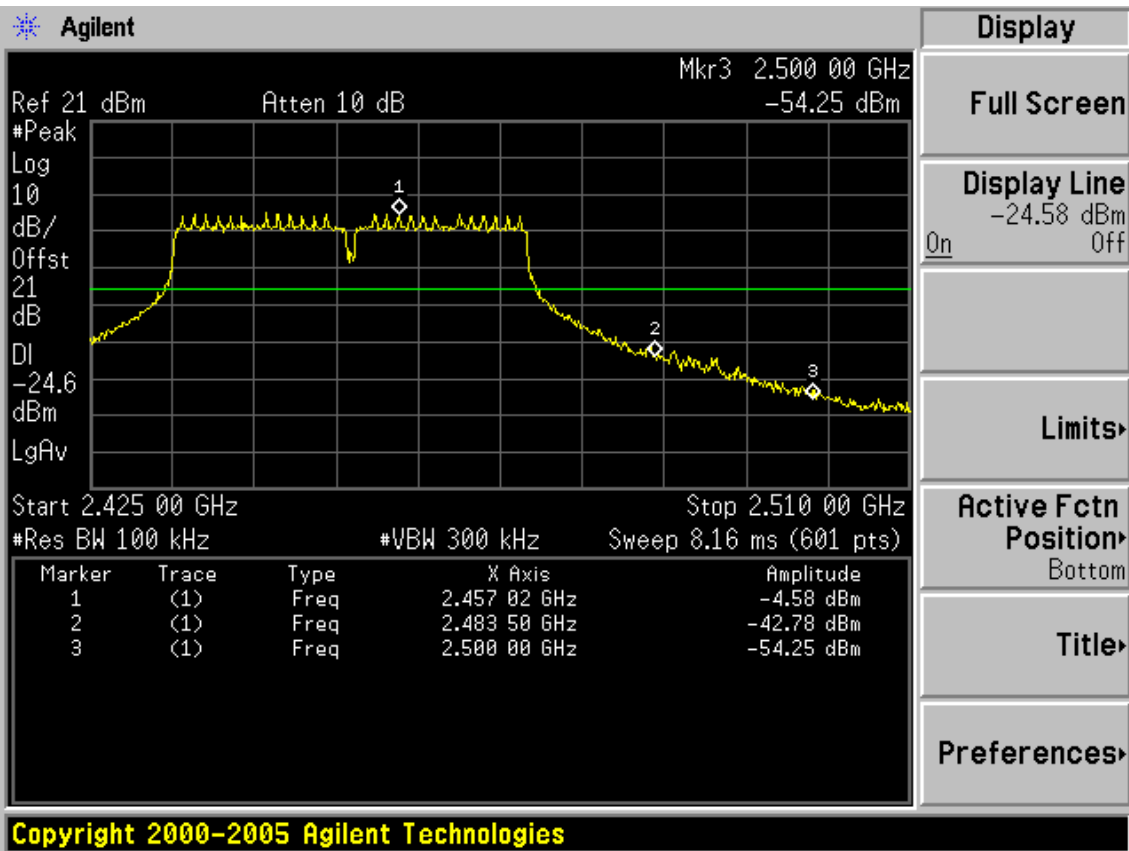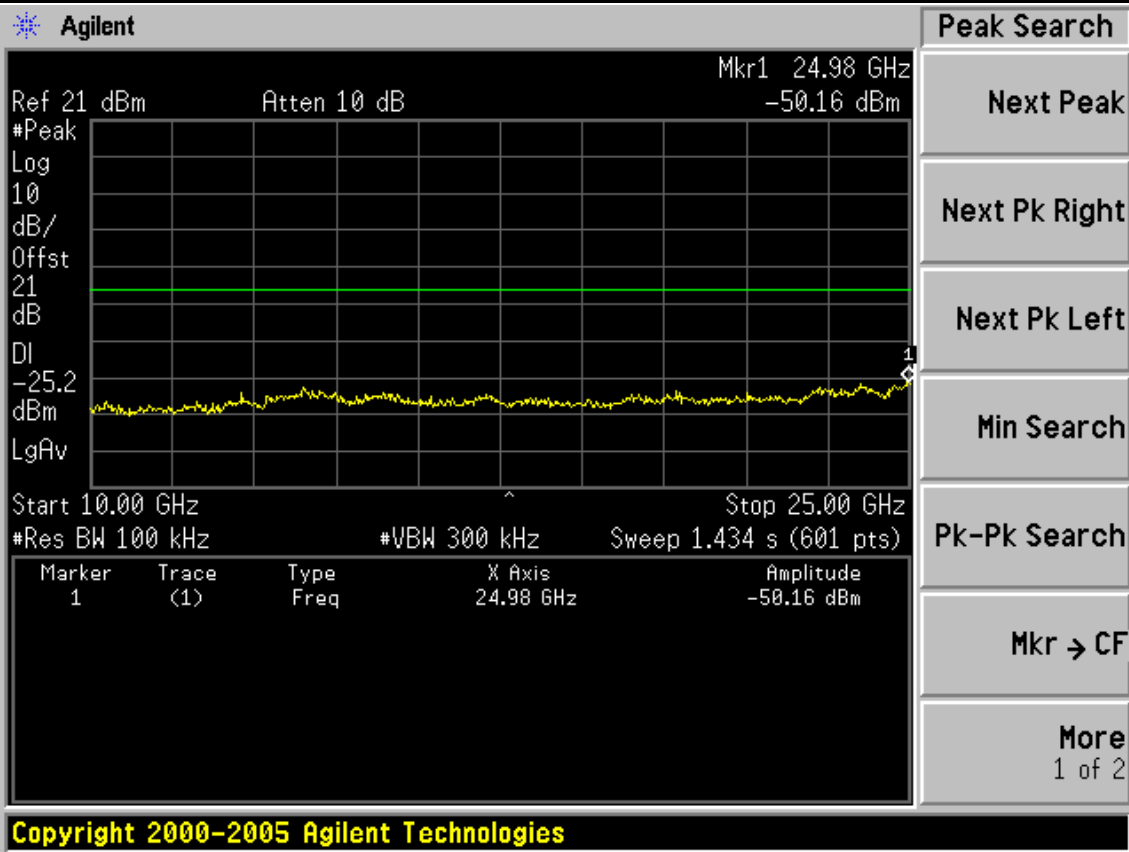

6. BAND EDGE COMPLIANCE TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,11	1 Year
2.	Horn Antenna	EMCO	3115	9607-4877	Nov.25, 10	1.5 Year
3.	Amplifier	Agilent	8449B	3008A02495	May.08, 11	1 Year
4.	RF Cable	Hubersuhner	SUCOFLEX102	28620/2	May.08,11	1 Year
5.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08,11	1 Year
6.	RF Cable	Hubersuhner	SUCOFLEX102	28610/2	May.08,11	1 Year

6.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.


6.3. Test Produce

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz; Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz; VBW=10Hz; Sweep=AUTO

6.4. Test Results

Pass (The testing data was attached in the next pages.)

FCC ID:W6RRNX-N360PC

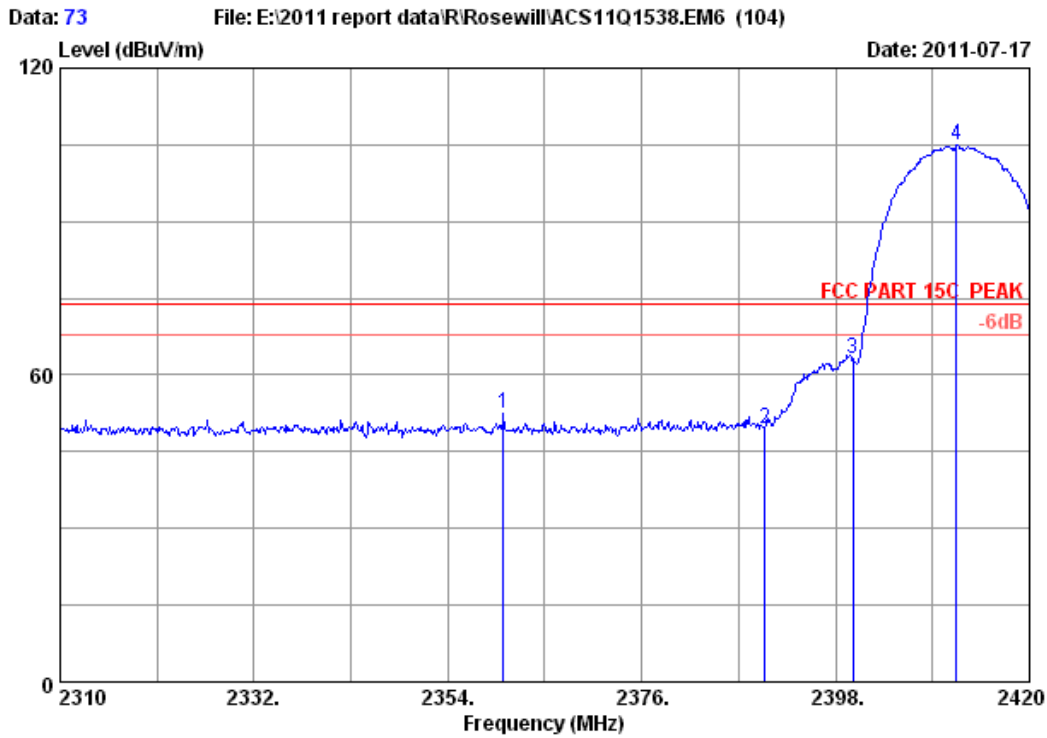


Site no. : 3m Chamber Data no. : 73
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2360.270	29.42	8.62	35.91	50.40	52.53	74.00	21.47	Peak
2	2390.000	29.44	8.67	36.09	47.61	49.63	74.00	24.37	Peak
3	2400.000	29.44	8.72	36.09	61.26	63.33	74.00	10.67	Peak
4	2411.750	29.45	8.72	35.95	102.76	104.98	74.00	-30.98	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

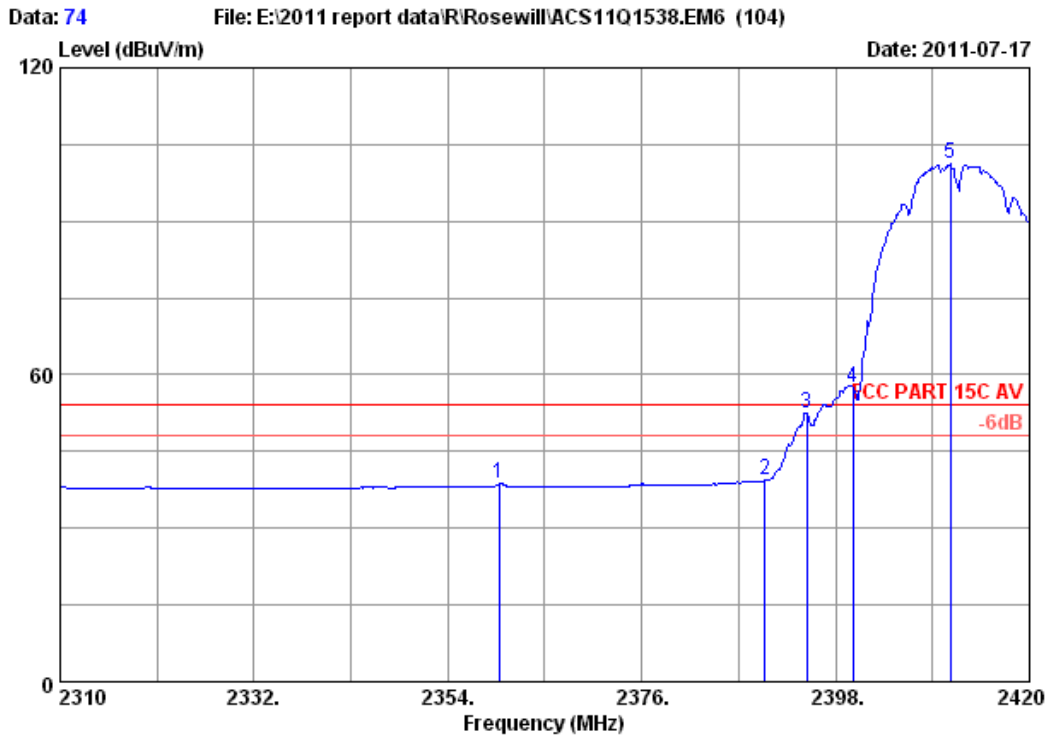


Site no. : 3m Chamber Data no. : 74
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2359.830	29.42	8.62	35.91	36.57	38.70	54.00	15.30	Average
2	2390.000	29.44	8.67	36.09	37.30	39.32	54.00	14.68	Average
3	2394.700	29.44	8.67	36.09	50.37	52.39	54.00	1.61	Average
4	2400.000	29.44	8.72	36.09	55.35	57.42	54.00	-3.42	Average
5	2410.980	29.45	8.72	35.95	99.19	101.41	54.00	-47.41	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

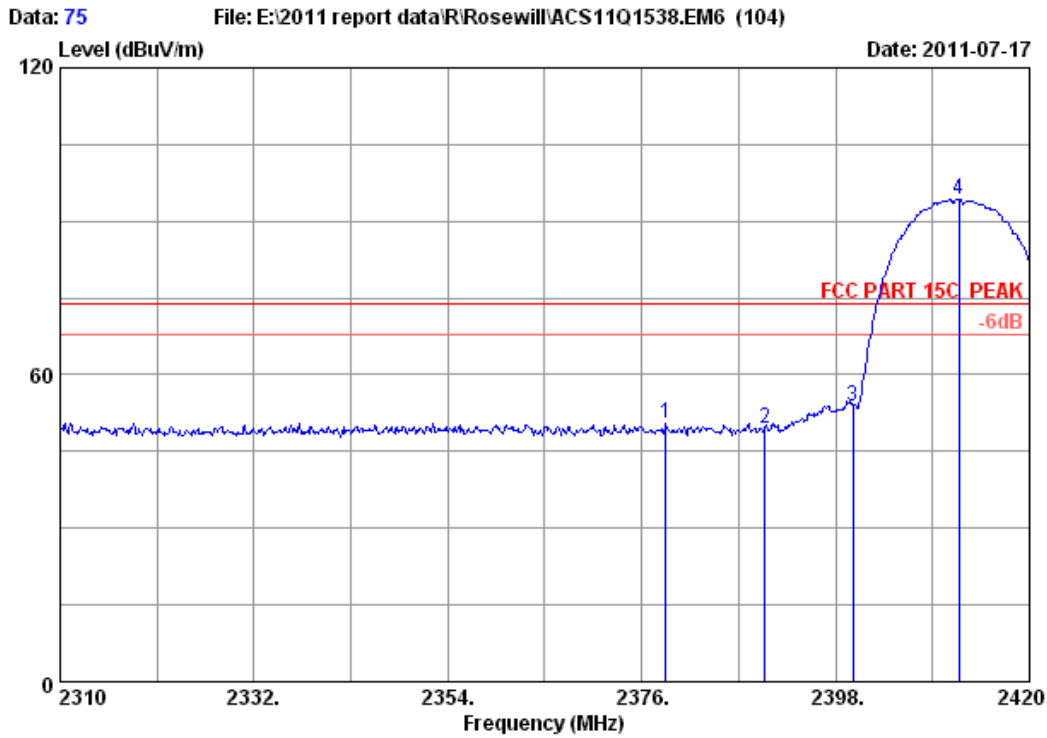


Site no. : 3m Chamber Data no. : 75
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2378.750	29.43	8.67	36.00	48.53	50.63	74.00	23.37	Peak
2	2390.000	29.44	8.67	36.09	47.34	49.36	74.00	24.64	Peak
3	2400.000	29.44	8.72	36.09	51.80	53.87	74.00	20.13	Peak
4	2411.970	29.45	8.72	35.95	92.19	94.41	74.00	-20.41	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

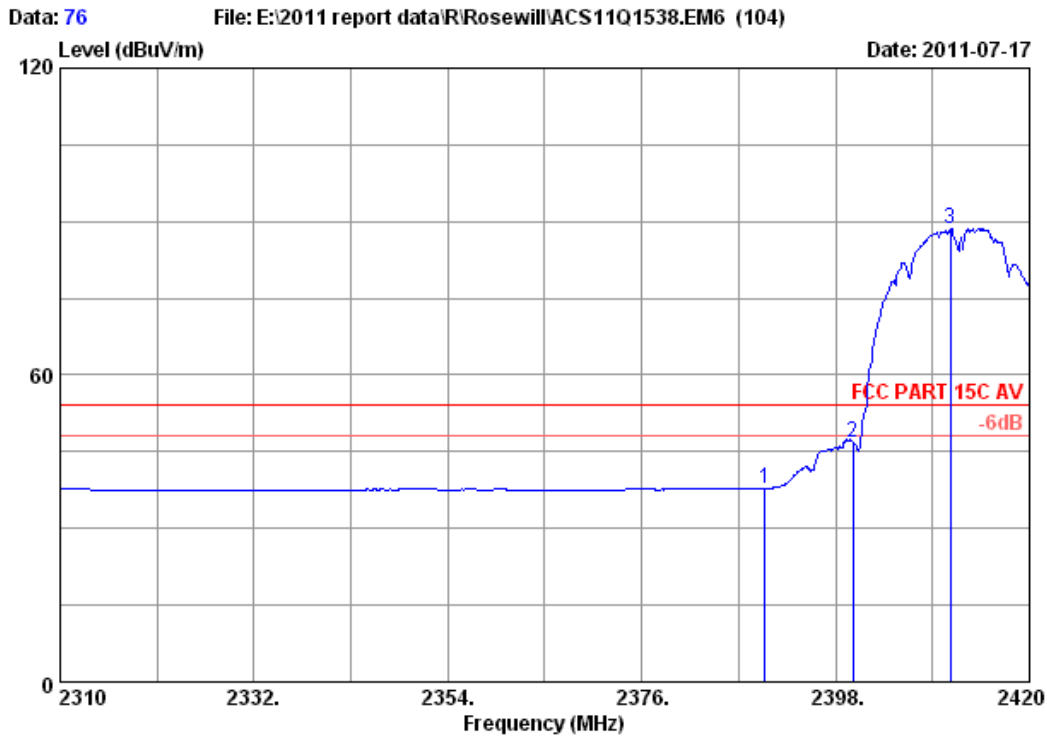


Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	29.44	8.67	36.09	35.84	37.86	54.00	16.14	Average
2	2400.000	29.44	8.72	36.09	44.89	46.96	54.00	7.04	Average
3	2410.980	29.45	8.72	35.95	86.43	88.65	54.00	-34.65	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

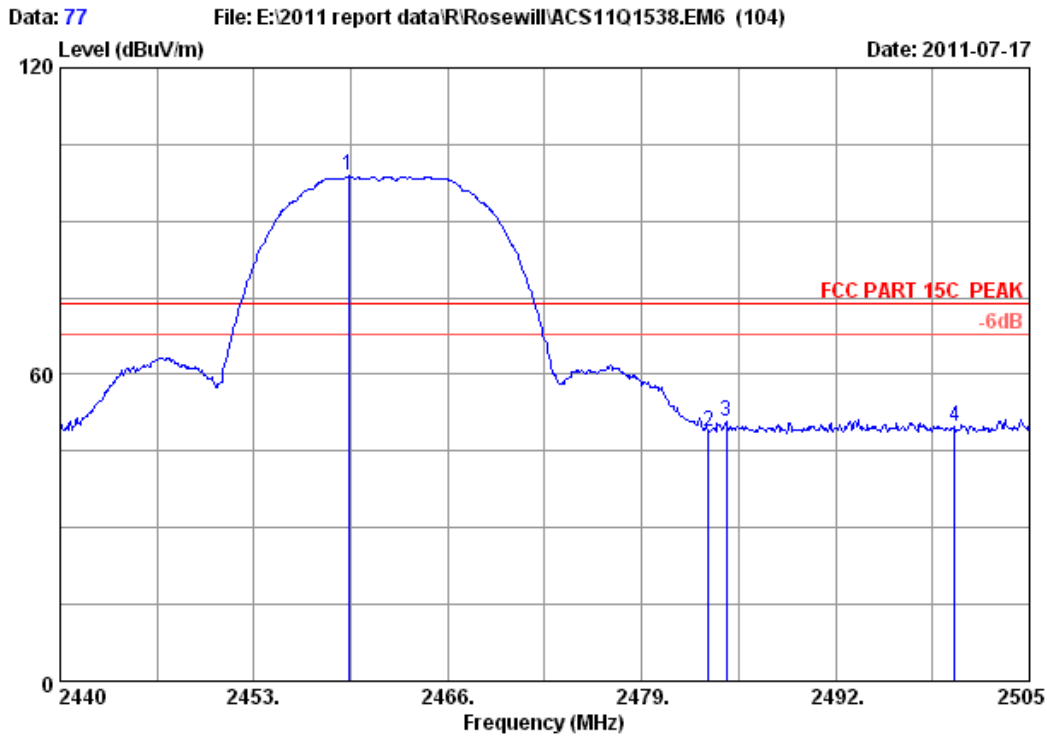


Site no. : 3m Chamber Data no. : 77
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2459.370	29.48	8.82	36.02	96.54	98.82	74.00	-24.82	Peak
2	2483.500	29.49	8.87	35.97	46.34	48.73	74.00	25.27	Peak
3	2484.655	29.49	8.87	35.97	48.56	50.95	74.00	23.05	Peak
4	2500.000	29.50	8.92	36.00	47.29	49.71	74.00	24.29	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

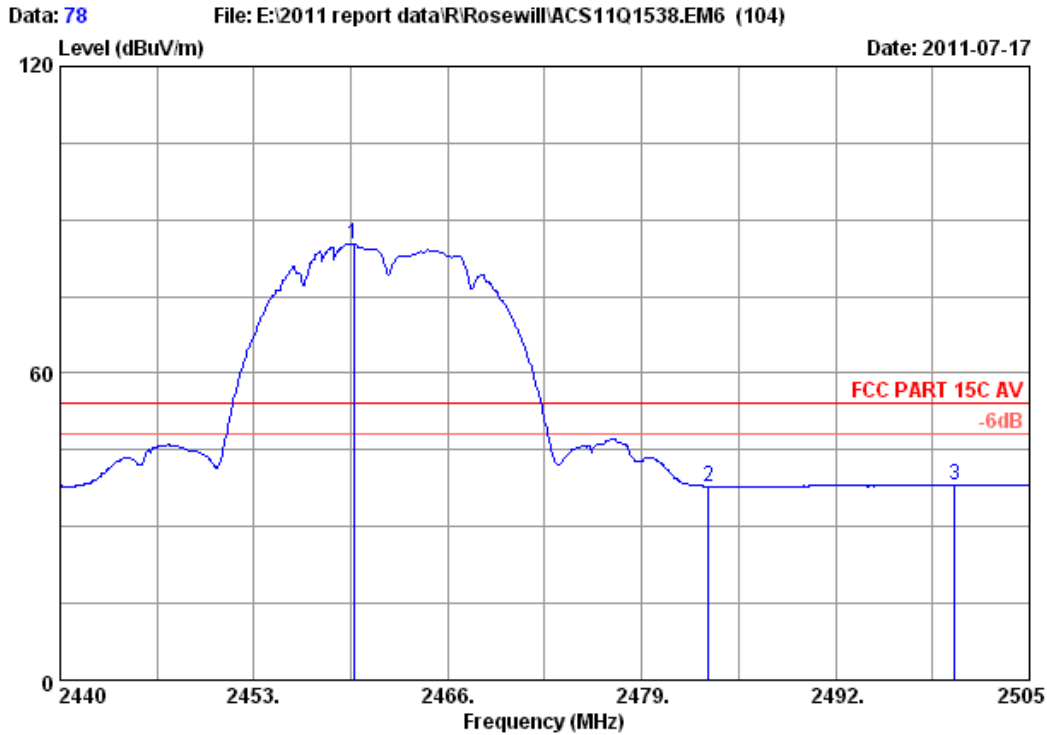


Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2459.695	29.48	8.82	36.02	82.88	85.16	54.00	-31.16	Average
2	2483.500	29.49	8.87	35.97	35.47	37.86	54.00	16.14	Average
3	2500.000	29.50	8.92	36.00	35.56	37.98	54.00	16.02	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

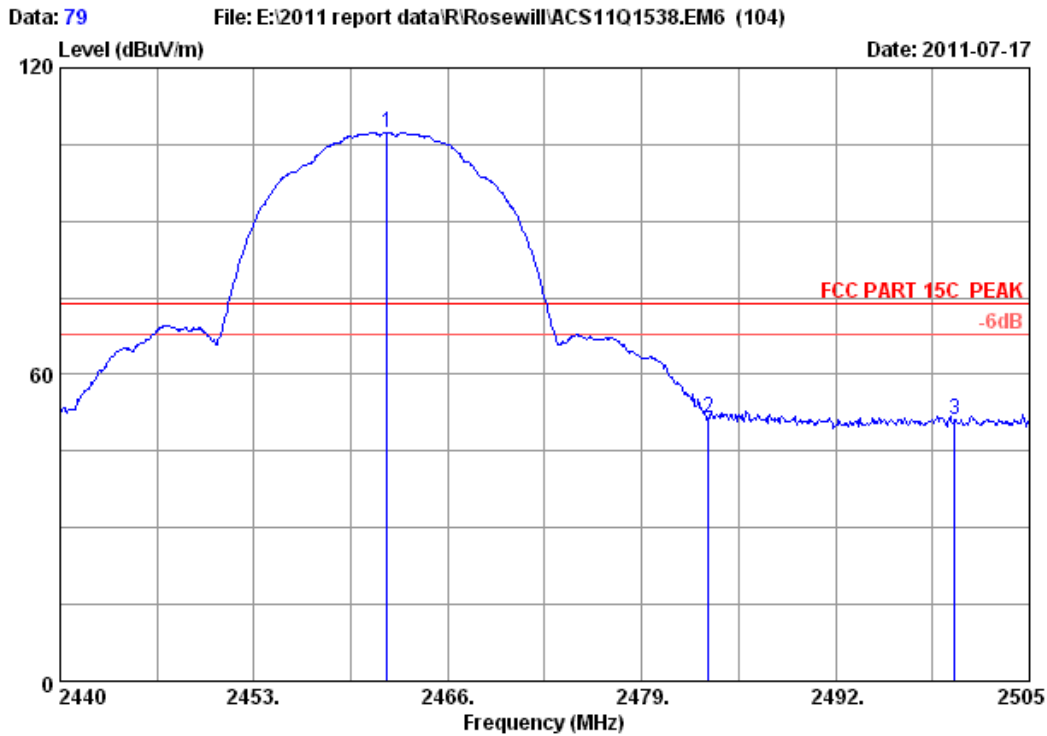


Site no. : 3m Chamber Data no. : 79
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.905	29.48	8.82	36.02	105.16	107.44	74.00	-33.44	Peak
2	2483.500	29.49	8.87	35.97	49.02	51.41	74.00	22.59	Peak
3	2500.000	29.50	8.92	36.00	48.86	51.28	74.00	22.72	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

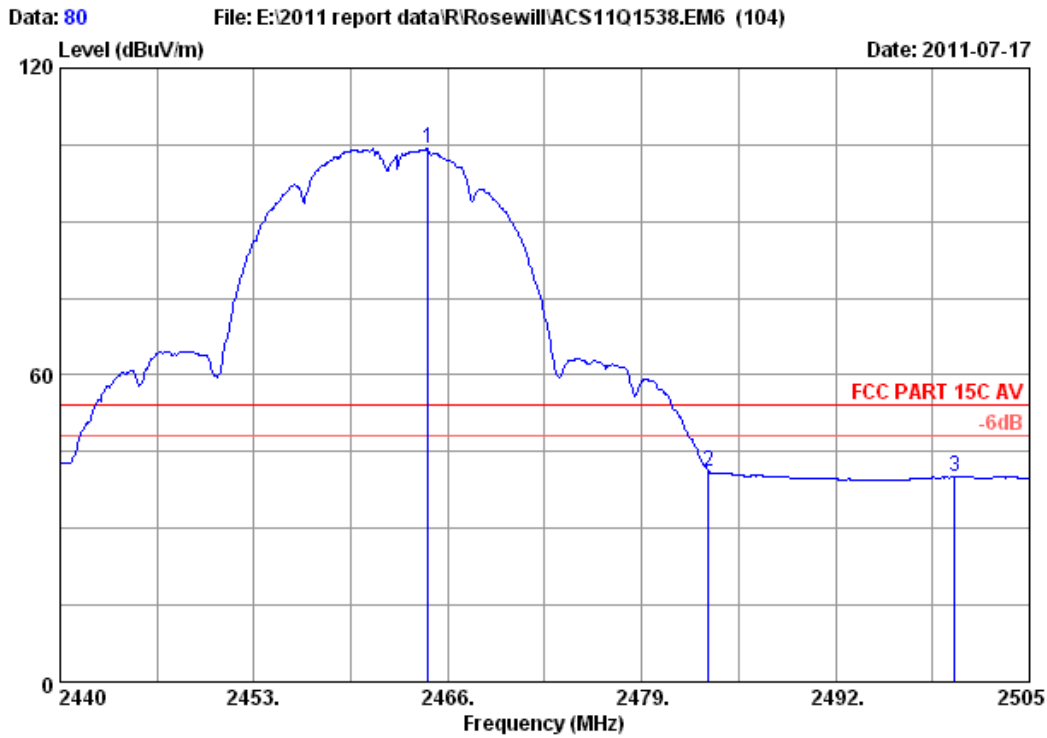


Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11b CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.700	29.48	8.82	36.02	101.88	104.16	54.00	-50.16	Average
2	2483.500	29.49	8.87	35.97	38.81	41.20	54.00	12.80	Average
3	2500.000	29.50	8.92	36.00	37.58	40.00	54.00	14.00	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

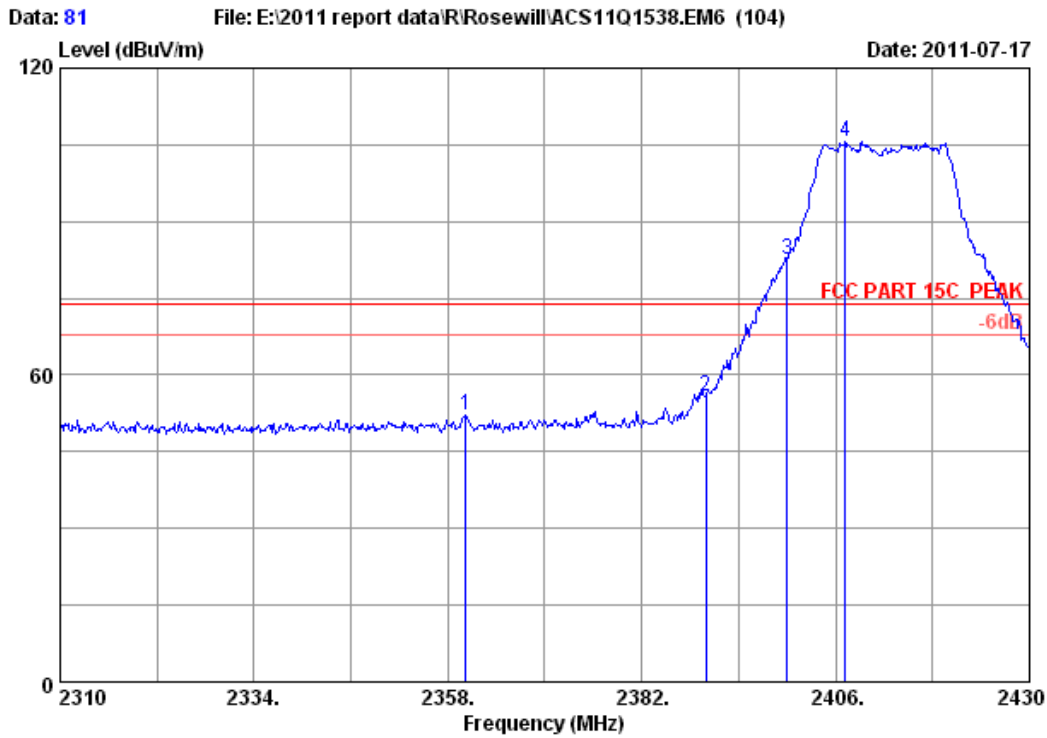


Site no. : 3m Chamber Data no. : 81
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2360.160	29.42	8.62	35.91	50.13	52.26	74.00	21.74	Peak
2	2390.000	29.44	8.67	36.09	53.73	55.75	74.00	18.25	Peak
3	2400.000	29.44	8.72	36.09	80.58	82.65	74.00	-8.65	Peak
4	2407.200	29.45	8.72	35.95	103.27	105.49	74.00	-31.49	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

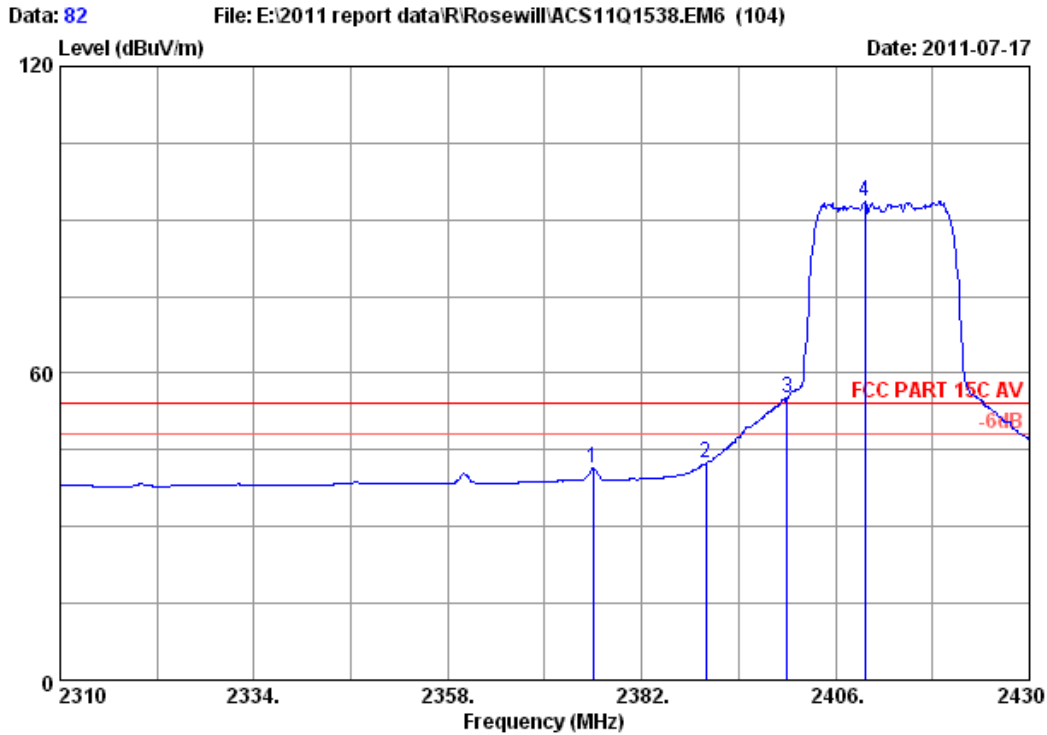


Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH1 2412MHz Tx
 M/N : RNX-N360PC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2376.000	29.43	8.67	36.00	39.24	41.34	54.00	12.66	Average
2	2390.000	29.44	8.67	36.09	40.55	42.57	54.00	11.43	Average
3	2400.000	29.44	8.72	36.09	52.95	55.02	54.00	-1.02	Average
4	2409.600	29.45	8.72	35.95	91.40	93.62	54.00	-39.62	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

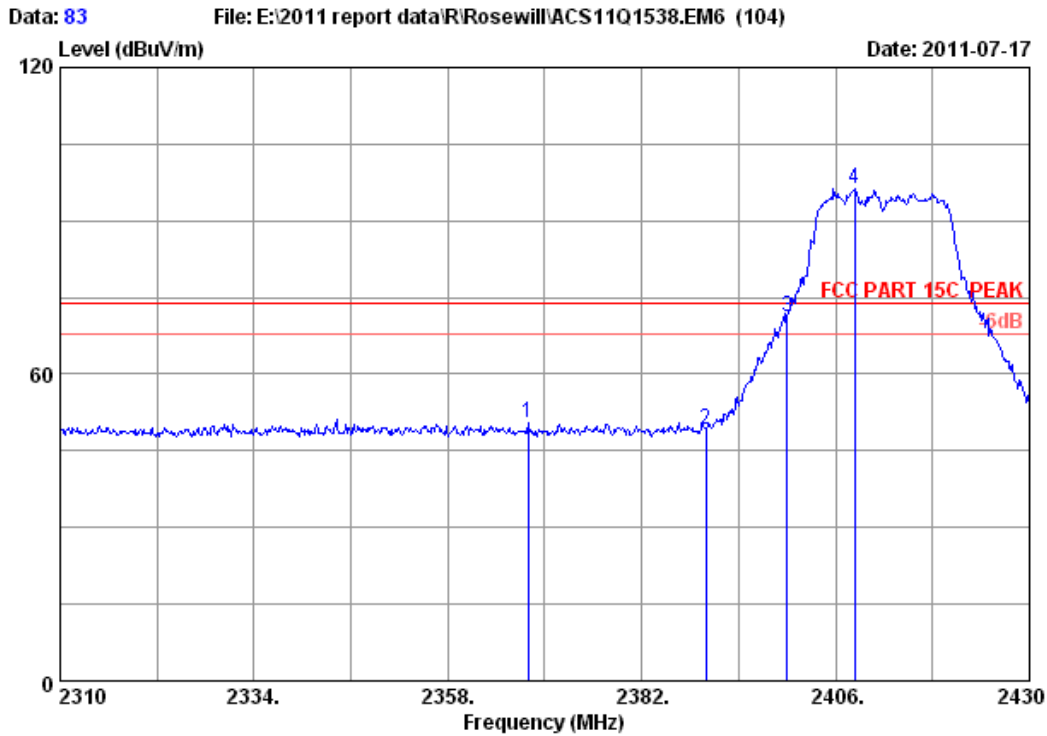


Site no. : 3m Chamber Data no. : 83
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH1 2412MHz Tx
 M/N : RNX-N360PC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2367.960	29.42	8.62	35.91	48.43	50.56	74.00	23.44	Peak
2	2390.000	29.44	8.67	36.09	47.14	49.16	74.00	24.84	Peak
3	2400.000	29.44	8.72	36.09	69.05	71.12	74.00	2.88	Peak
4	2408.400	29.45	8.72	35.95	93.92	96.14	74.00	-22.14	Peak

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

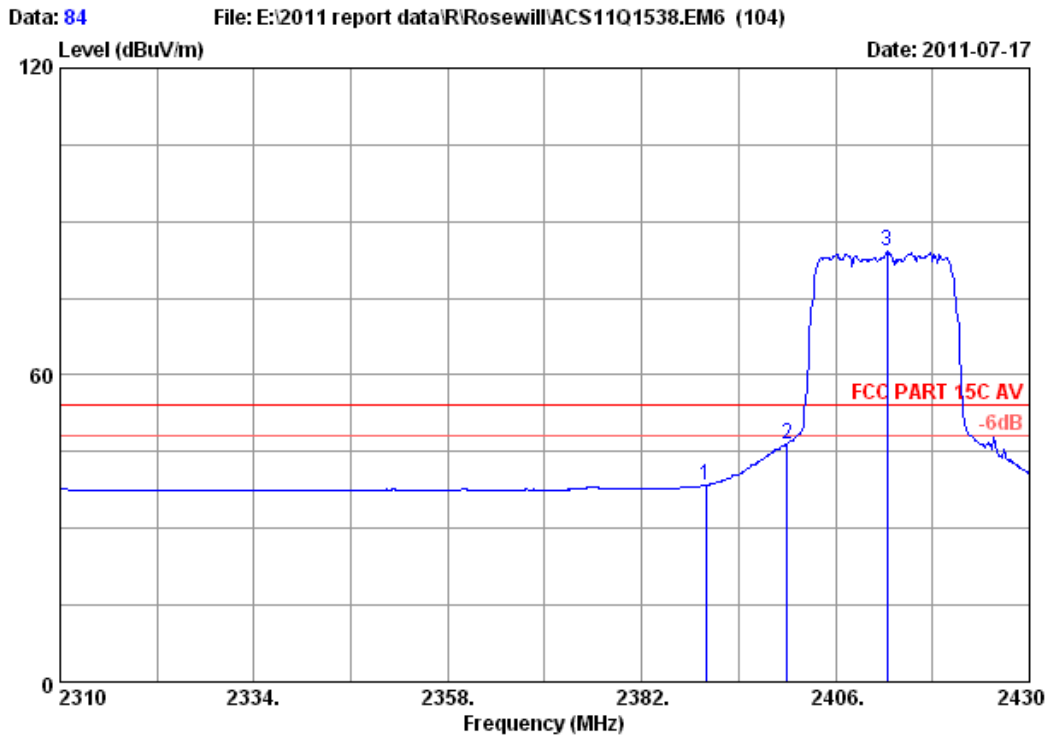


Site no. : 3m Chamber Data no. : 84
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	29.44	8.67	36.09	36.44	38.46	54.00	15.54	Average
2	2400.000	29.44	8.72	36.09	44.55	46.62	54.00	7.38	Average
3	2412.360	29.45	8.72	35.95	82.00	84.22	54.00	-30.22	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

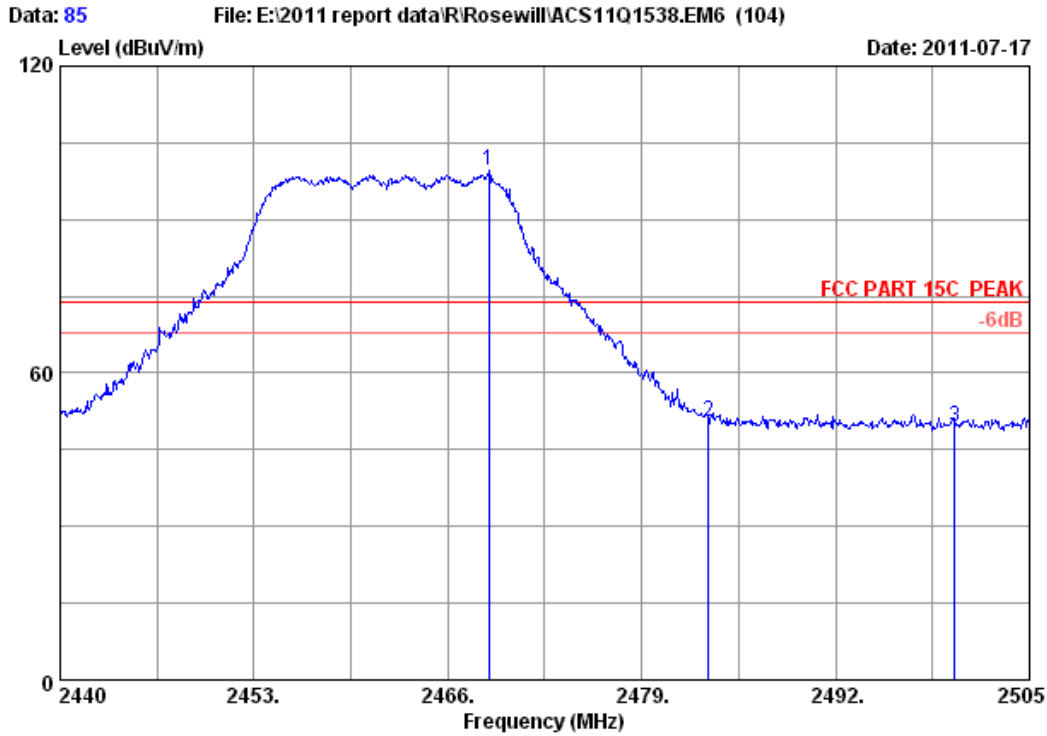


Site no. : 3m Chamber Data no. : 85
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2468.730	29.48	8.82	36.02	97.25	99.53	74.00	-25.53	Peak
2	2483.500	29.49	8.87	35.97	48.25	50.64	74.00	23.36	Peak
3	2500.000	29.50	8.92	36.00	46.97	49.39	74.00	24.61	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

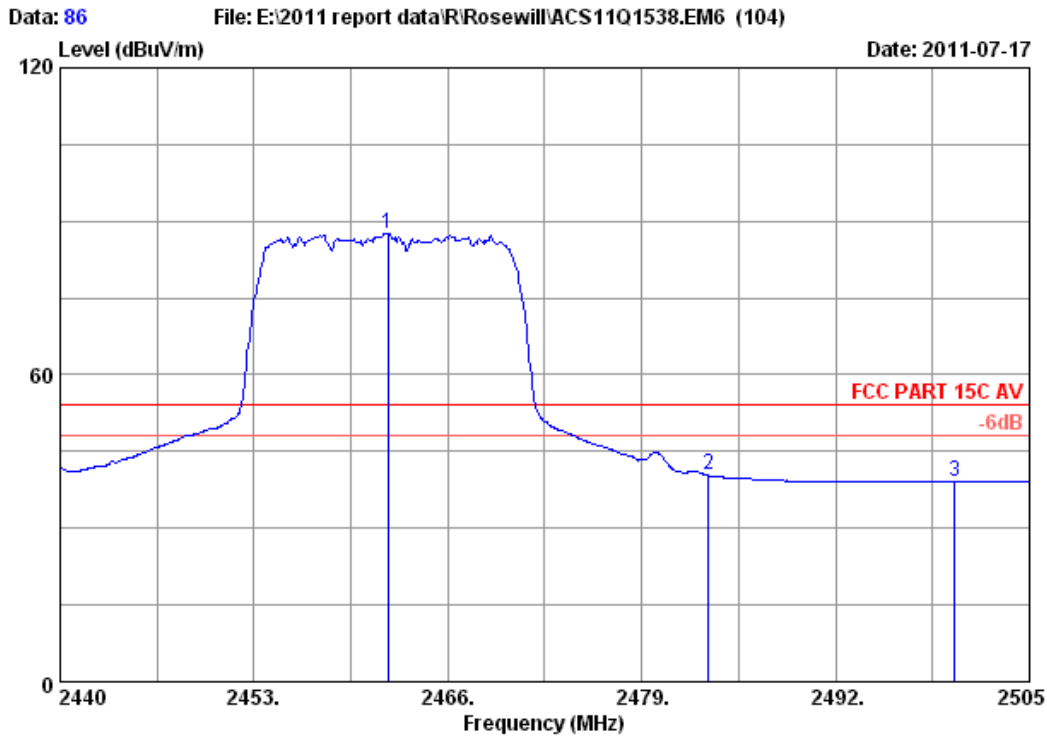


Site no. : 3m Chamber Data no. : 86
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2461.970	29.48	8.82	36.02	85.45	87.73	54.00	-33.73	Average
2	2483.500	29.49	8.87	35.97	37.89	40.28	54.00	13.72	Average
3	2500.000	29.50	8.92	36.00	36.81	39.23	54.00	14.77	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

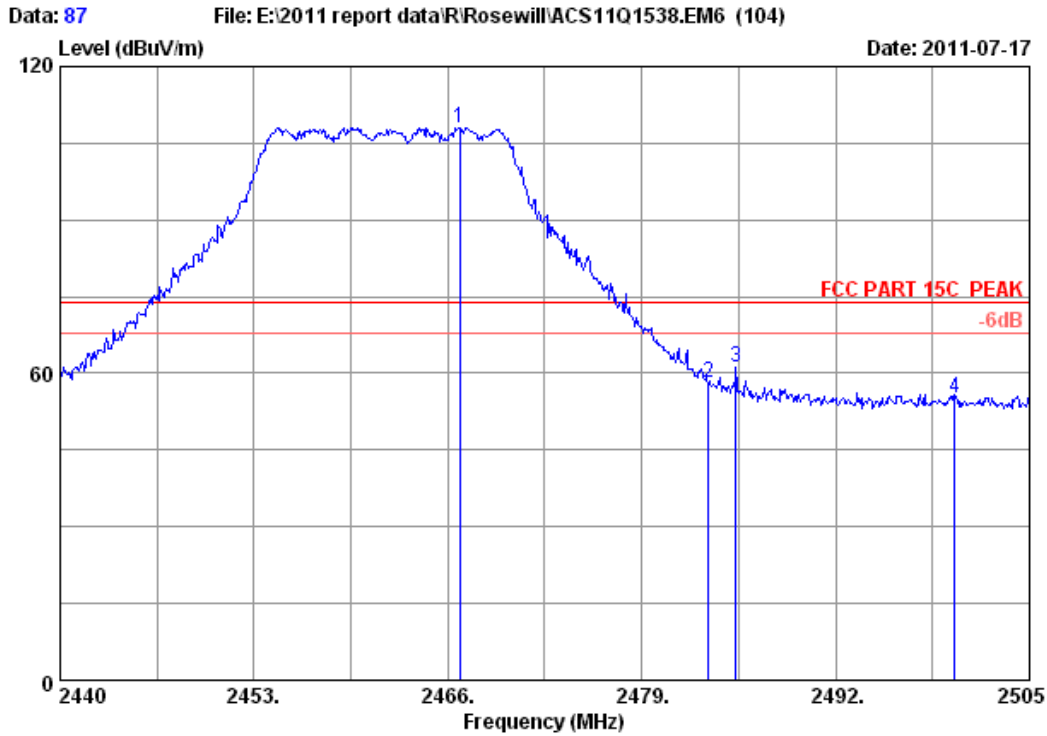


Site no. : 3m Chamber Data no. : 87
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2466.780	29.48	8.82	36.02	105.83	108.11	74.00	-34.11	Peak
2	2483.500	29.49	8.87	35.97	55.84	58.23	74.00	15.77	Peak
3	2485.305	29.49	8.87	35.97	58.84	61.23	74.00	12.77	Peak
4	2500.000	29.50	8.92	36.00	52.57	54.99	74.00	19.01	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

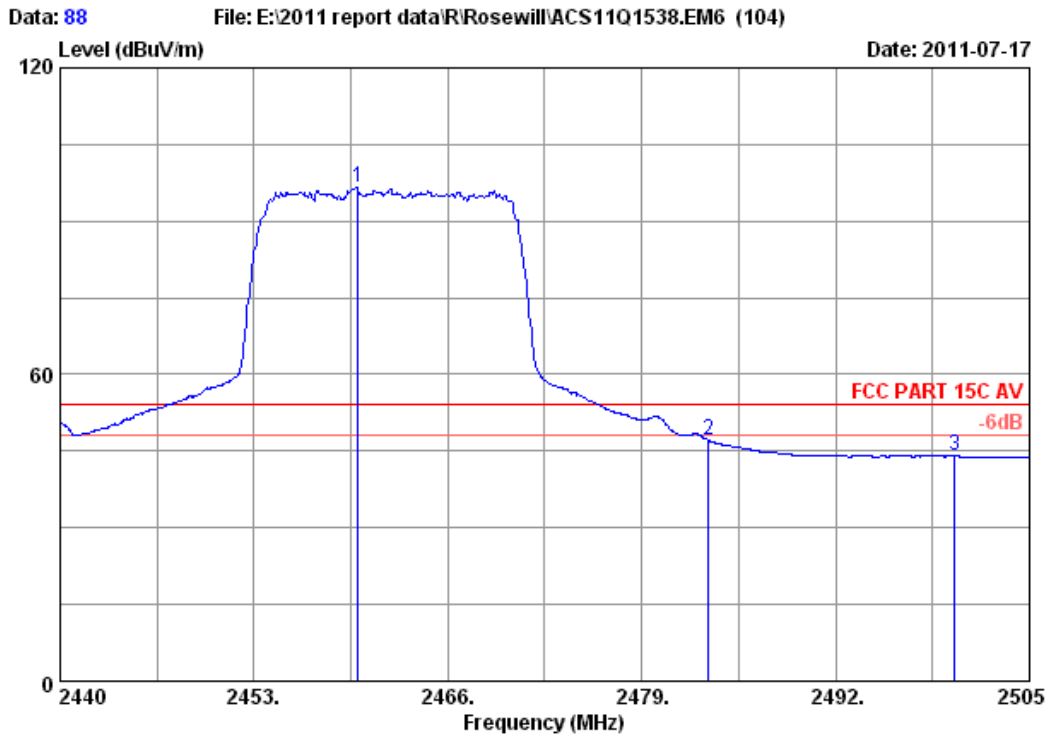


Site no. : 3m Chamber Data no. : 88
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11g CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2459.955	29.48	8.82	36.02	94.41	96.69	54.00	-42.69	Average
2	2483.500	29.49	8.87	35.97	44.65	47.04	54.00	6.96	Average
3	2500.000	29.50	8.92	36.00	41.63	44.05	54.00	9.95	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

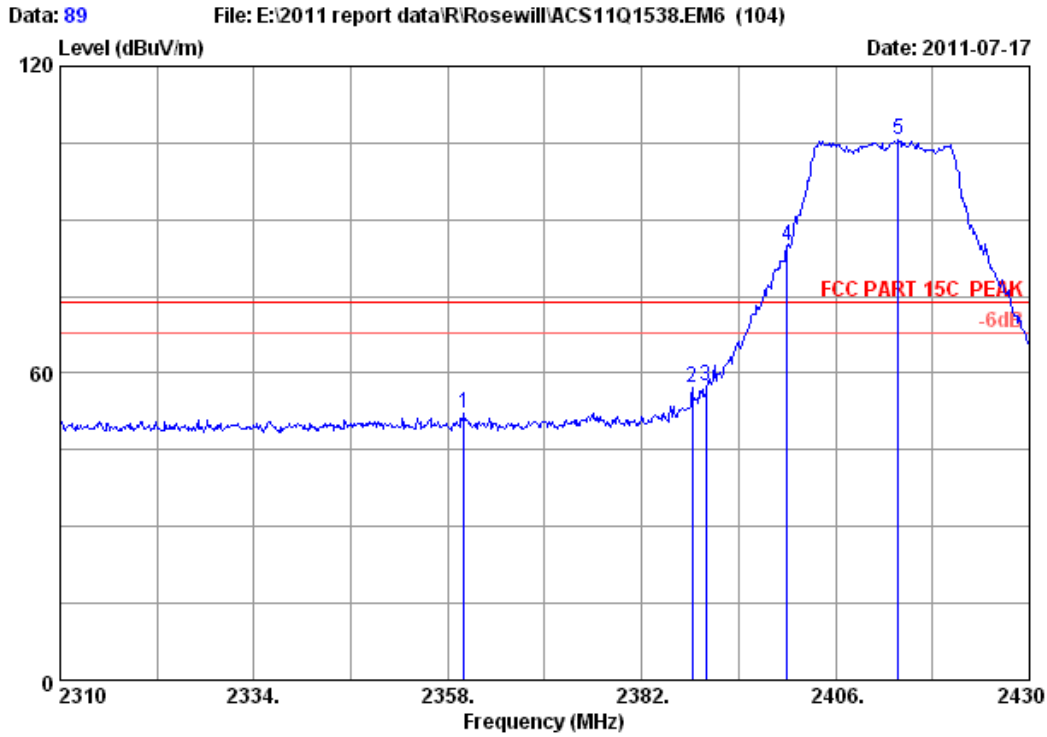


Site no. : 3m Chamber Data no. : 89
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2360.040	29.42	8.62	35.91	50.06	52.19	74.00	21.81	Peak
2	2388.240	29.44	8.67	36.09	55.03	57.05	74.00	16.95	Peak
3	2390.000	29.44	8.67	36.09	55.33	57.35	74.00	16.65	Peak
4	2400.000	29.44	8.72	36.09	82.95	85.02	74.00	-11.02	Peak
5	2413.800	29.45	8.72	35.95	103.30	105.52	74.00	-31.52	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

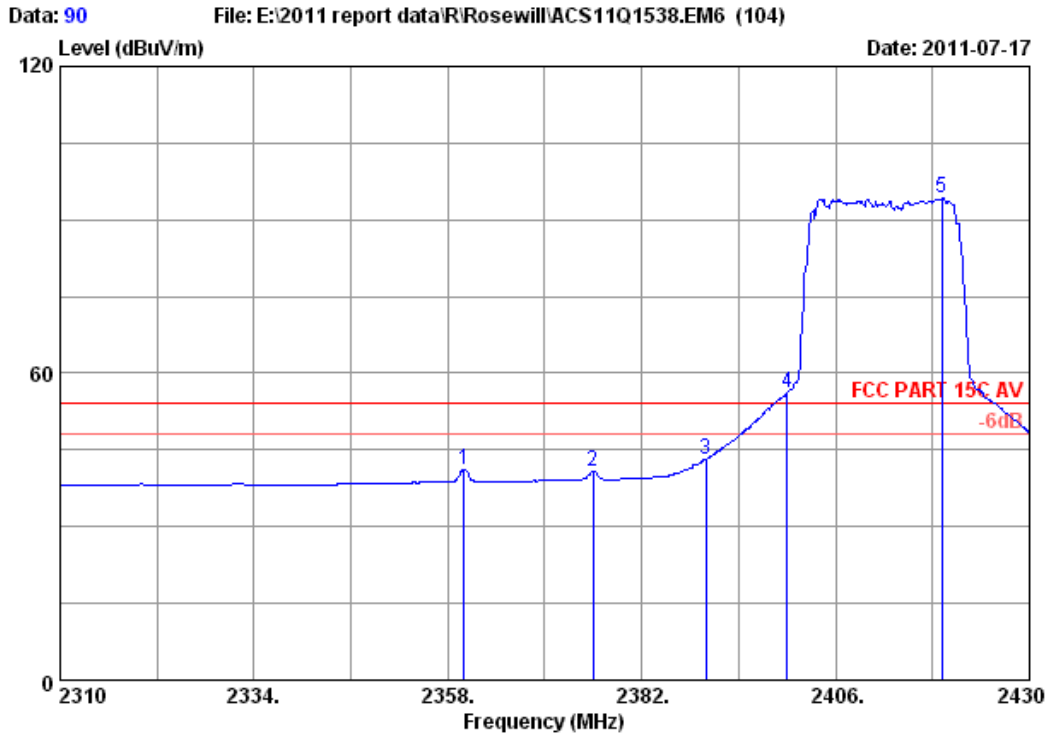


Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2360.040	29.42	8.62	35.91	38.97	41.10	54.00	12.90	Average
2	2376.000	29.43	8.67	36.00	38.71	40.81	54.00	13.19	Average
3	2390.000	29.44	8.67	36.09	41.23	43.25	54.00	10.75	Average
4	2400.000	29.44	8.72	36.09	54.15	56.22	54.00	-2.22	Average
5	2419.200	29.45	8.72	35.95	91.97	94.19	54.00	-40.19	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

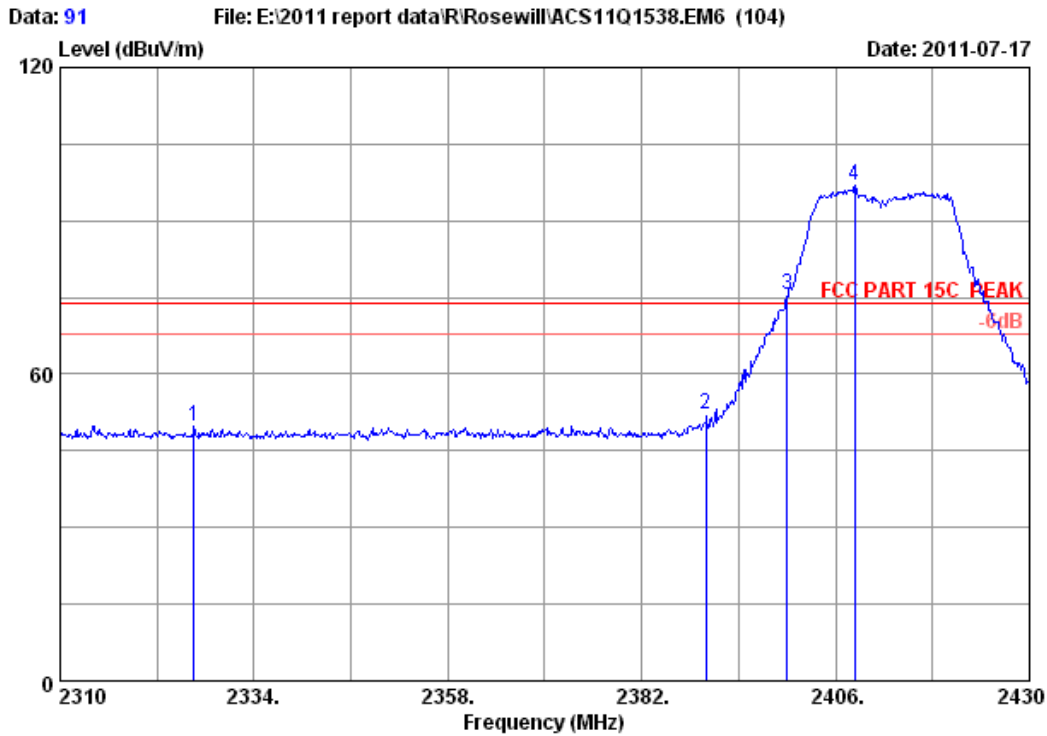


Site no. : 3m Chamber Data no. : 91
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2326.560	29.40	8.57	36.06	47.89	49.80	74.00	24.20	Peak
2	2390.000	29.44	8.67	36.09	50.27	52.29	74.00	21.71	Peak
3	2400.000	29.44	8.72	36.09	73.47	75.54	74.00	-1.54	Peak
4	2408.400	29.45	8.72	35.95	94.64	96.86	74.00	-22.86	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

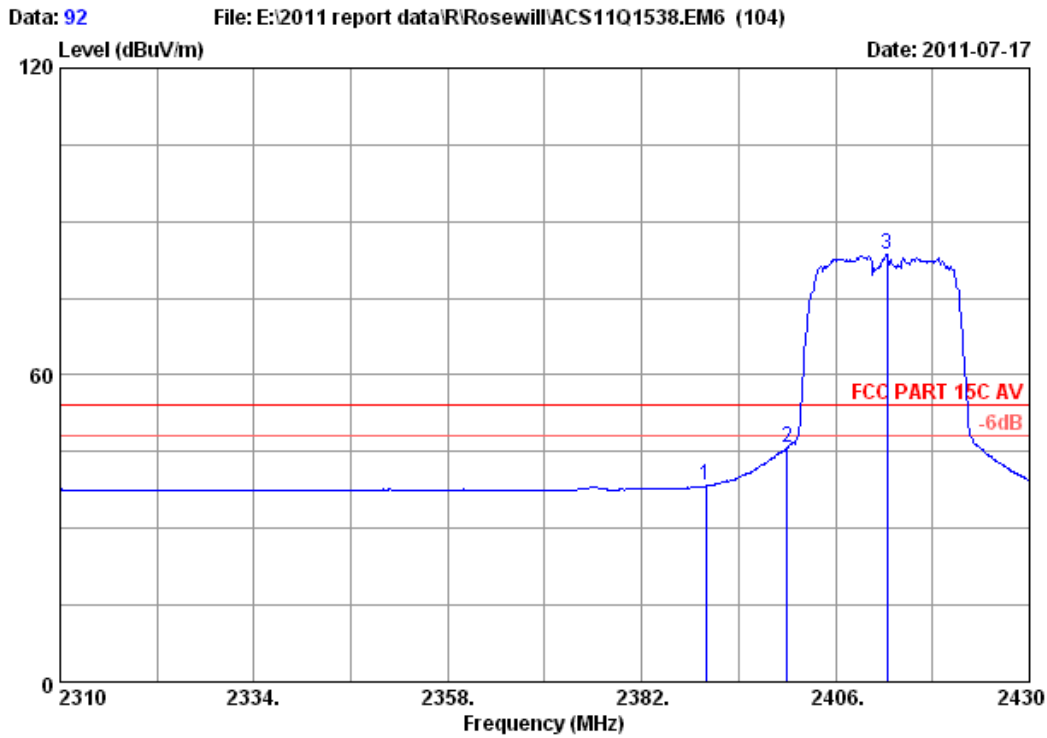


Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	29.44	8.67	36.09	36.32	38.34	54.00	15.66	Average
2	2400.000	29.44	8.72	36.09	43.61	45.68	54.00	8.32	Average
3	2412.360	29.45	8.72	35.95	81.30	83.52	54.00	-29.52	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

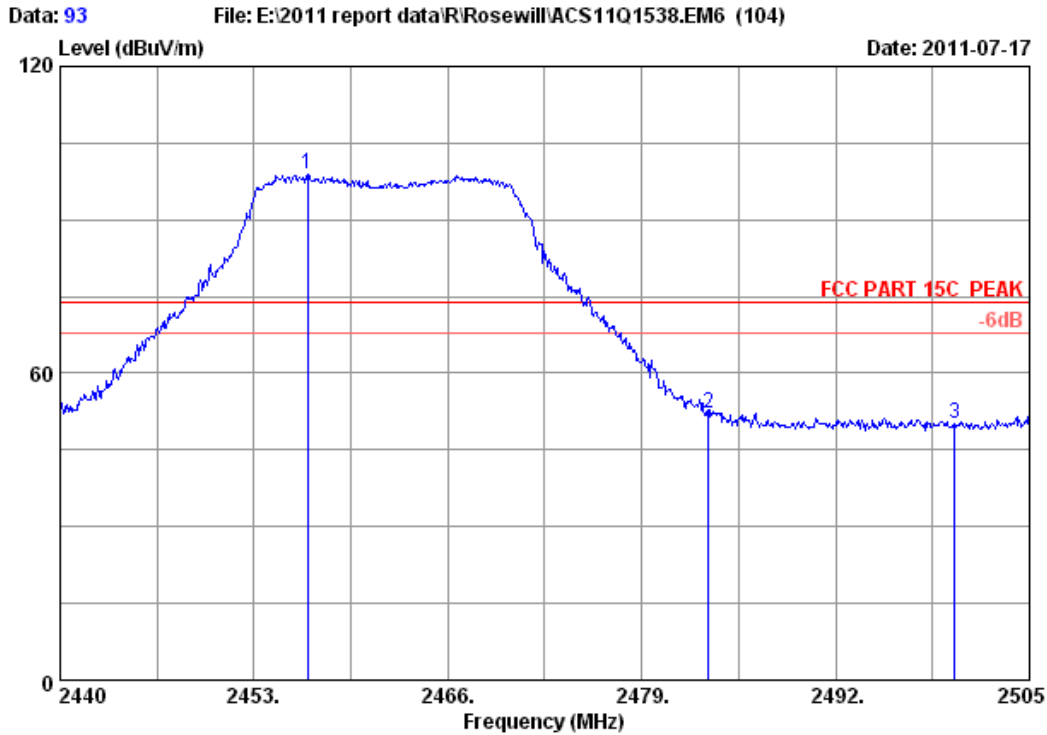


Site no. : 3m Chamber Data no. : 93
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2456.575	29.48	8.82	36.02	96.54	98.82	74.00	-24.82	Peak
2	2483.500	29.49	8.87	35.97	49.75	52.14	74.00	21.86	Peak
3	2500.000	29.50	8.92	36.00	47.65	50.07	74.00	23.93	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

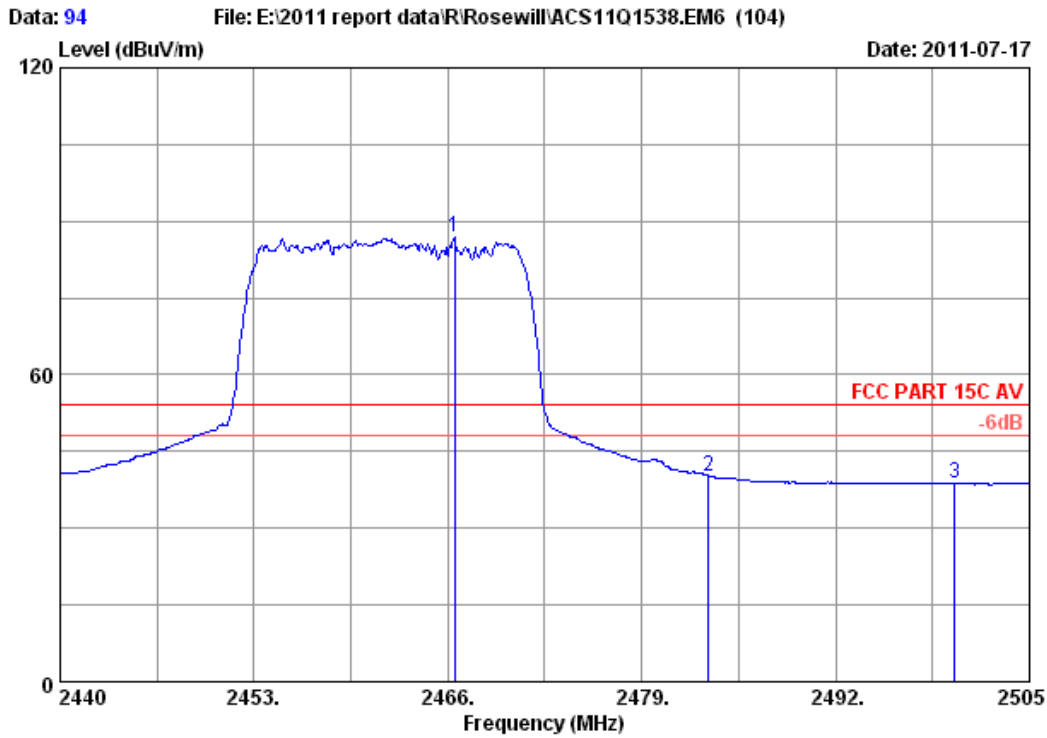


Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2466.455	29.48	8.82	36.02	84.52	86.80	54.00	-32.80	Average
2	2483.500	29.49	8.87	35.97	37.86	40.25	54.00	13.75	Average
3	2500.000	29.50	8.92	36.00	36.45	38.87	54.00	15.13	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

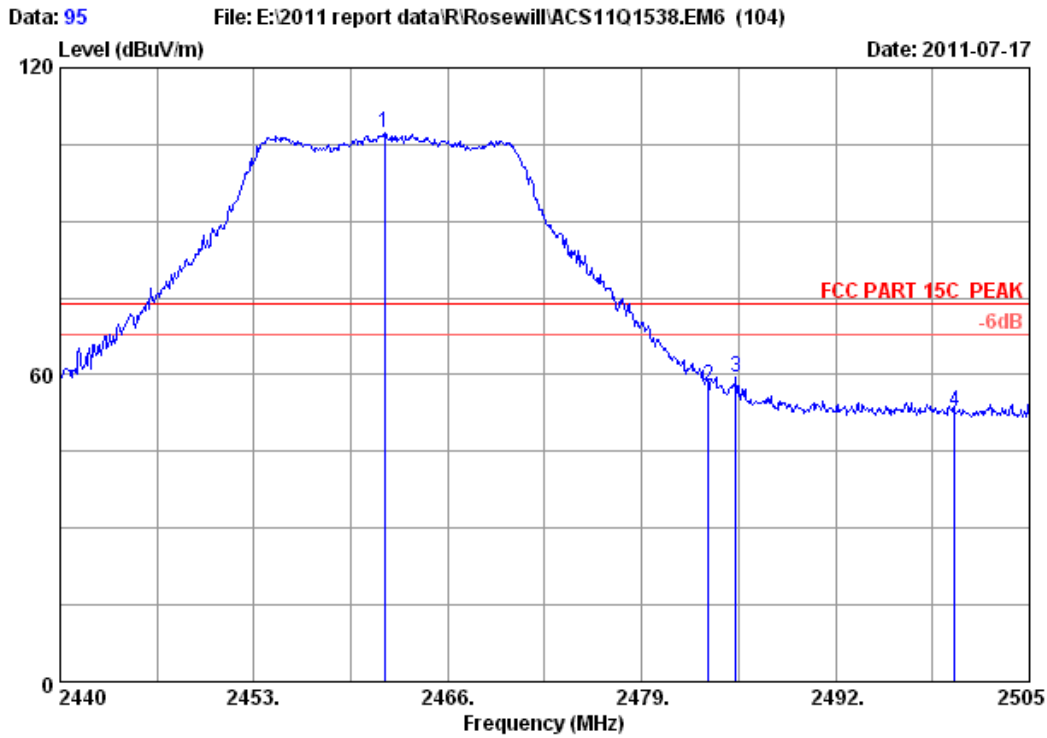


Site no. : 3m Chamber Data no. : 95
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.775	29.48	8.82	36.02	104.95	107.23	74.00	-33.23	Peak
2	2483.500	29.49	8.87	35.97	55.58	57.97	74.00	16.03	Peak
3	2485.305	29.49	8.87	35.97	57.12	59.51	74.00	14.49	Peak
4	2500.000	29.50	8.92	36.00	50.40	52.82	74.00	21.18	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

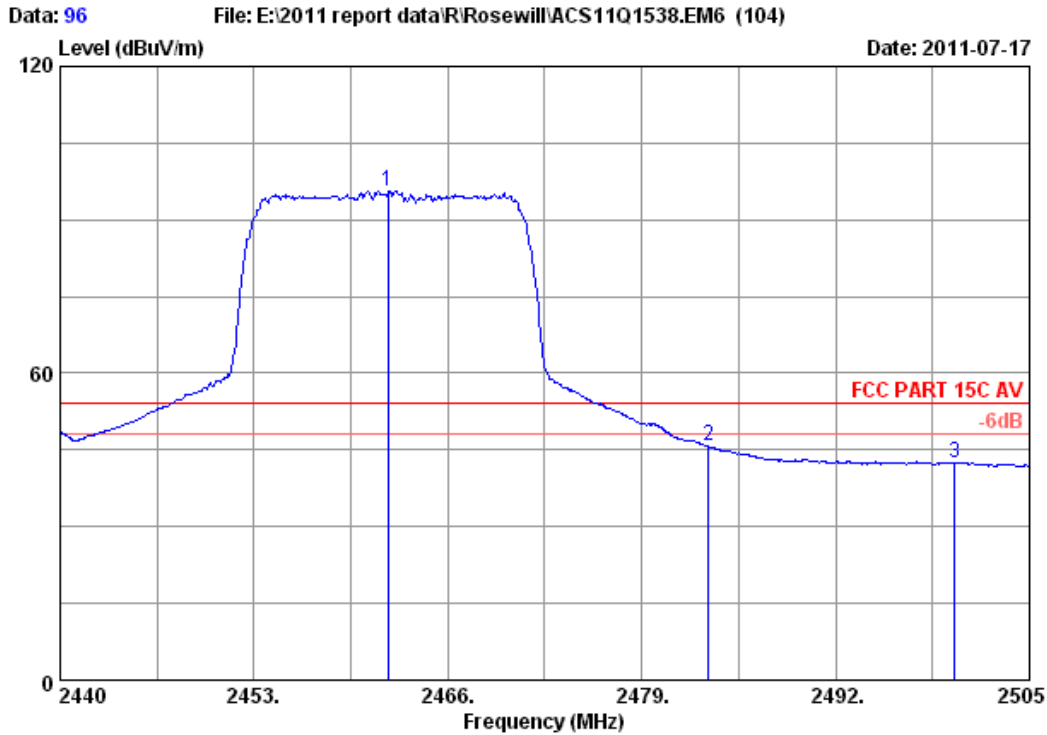


Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
 M/N : RNX-N360PC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.970	29.48	8.82	36.02	93.45	95.73	54.00	-41.73	Average
2	2483.500	29.49	8.87	35.97	43.26	45.65	54.00	8.35	Average
3	2500.000	29.50	8.92	36.00	40.19	42.61	54.00	11.39	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

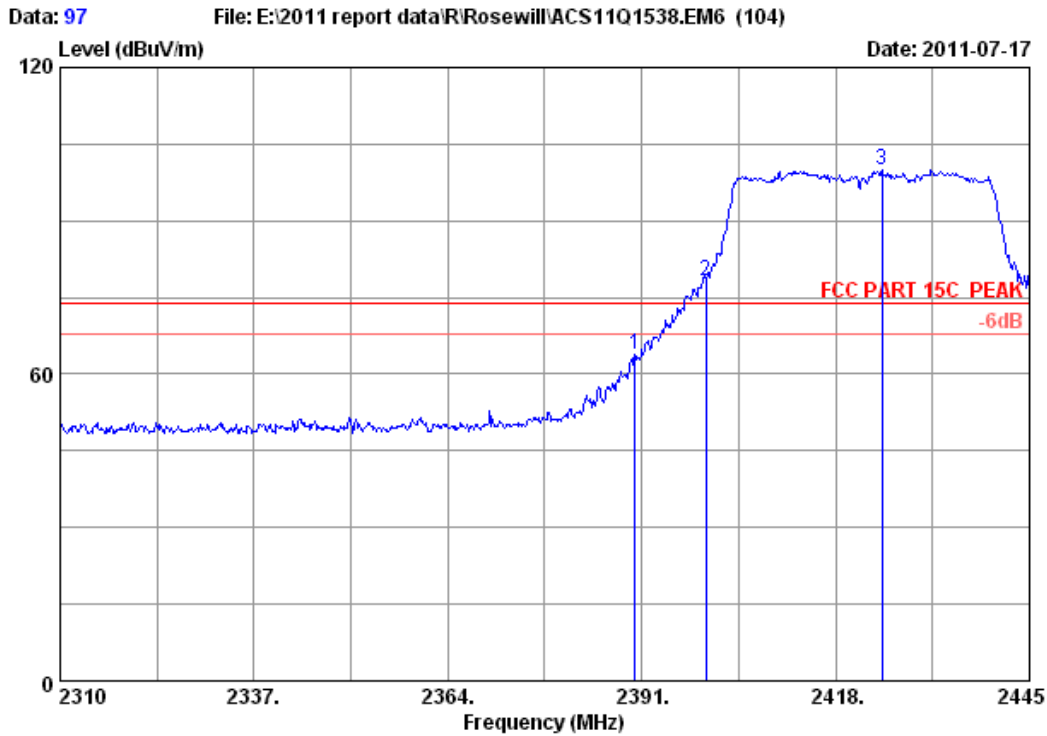


Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.000	29.44	8.67	36.09	61.70	63.72	74.00	10.28	Peak
2	2400.000	29.44	8.72	36.09	75.98	78.05	74.00	-4.05	Peak
3	2424.480	29.46	8.77	36.01	97.62	99.84	74.00	-25.84	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

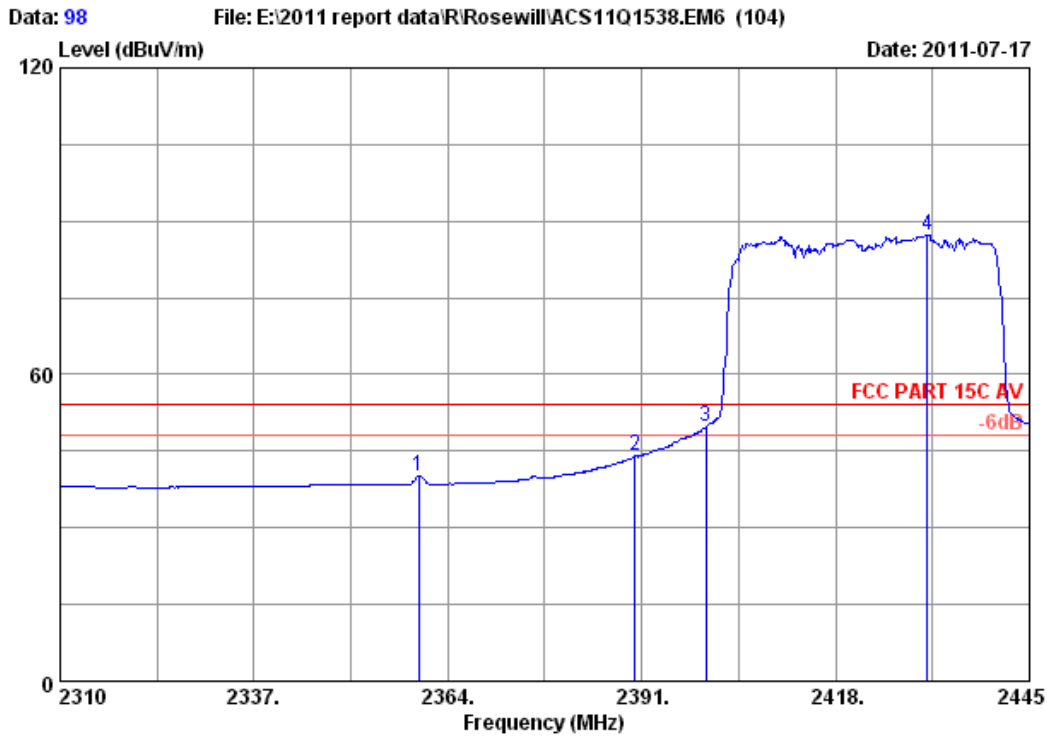


Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2359.950	29.42	8.62	35.91	38.13	40.26	54.00	13.74	Average
2	2390.000	29.44	8.67	36.09	42.07	44.09	54.00	9.91	Average
3	2400.000	29.44	8.72	36.09	47.73	49.80	54.00	4.20	Average
4	2430.825	29.46	8.77	36.01	85.09	87.31	54.00	-33.31	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

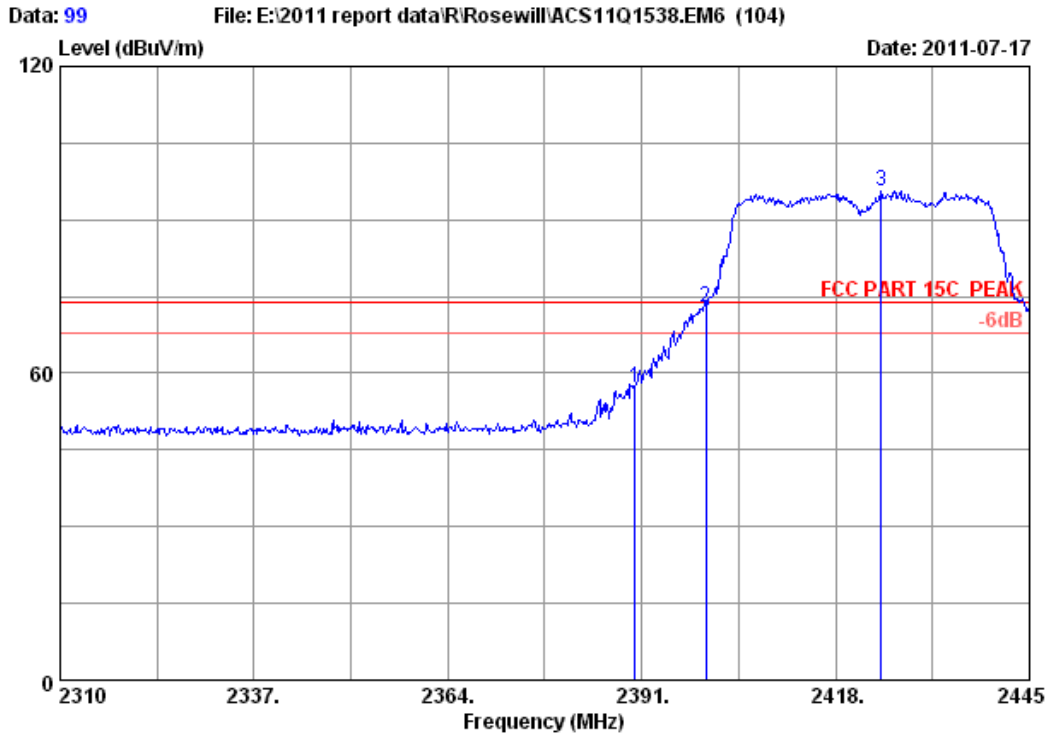


Data: 99 File: E:\2011 report data\R\Rosewill\ACS11Q1538.EM6 (104) Date: 2011-07-17
 Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
 M/N : RNX-N360PC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.000	29.44	8.67	36.09	55.28	57.30	74.00	16.70	Peak
2	2400.000	29.44	8.72	36.09	70.74	72.81	74.00	1.19	Peak
3	2424.345	29.46	8.77	36.01	93.55	95.77	74.00	-21.77	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

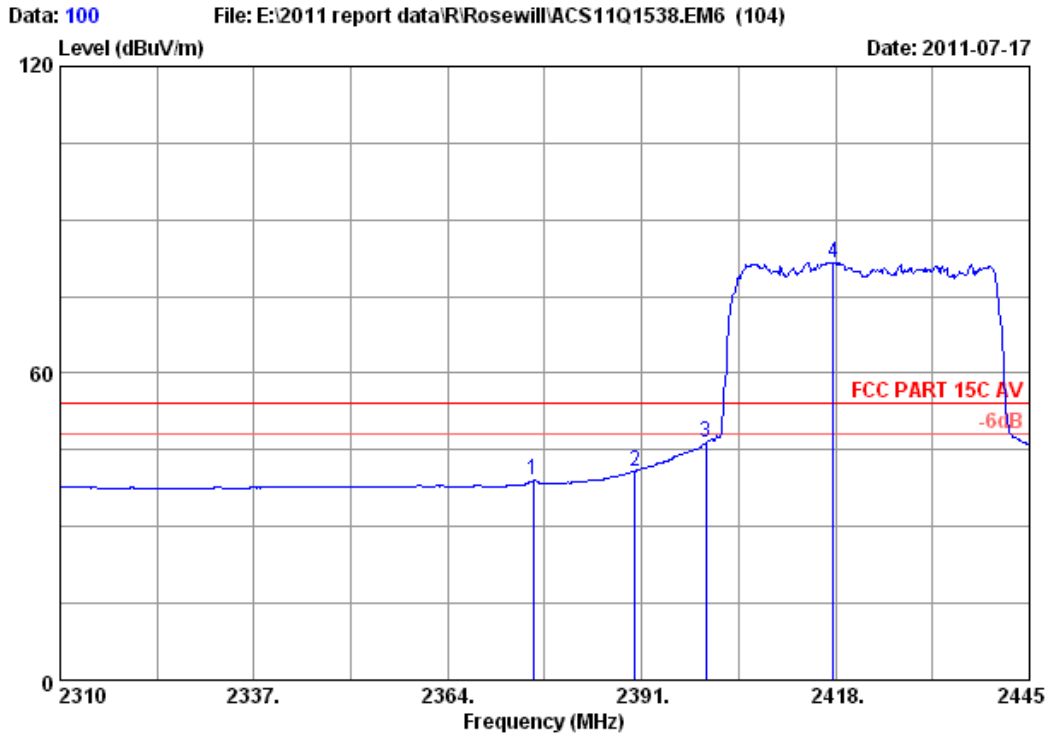


Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2375.880	29.43	8.67	36.00	36.90	39.00	54.00	15.00	Average
2	2390.000	29.44	8.67	36.09	38.87	40.89	54.00	13.11	Average
3	2400.000	29.44	8.72	36.09	44.47	46.54	54.00	7.46	Average
4	2417.730	29.45	8.72	35.95	79.44	81.66	54.00	-27.66	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

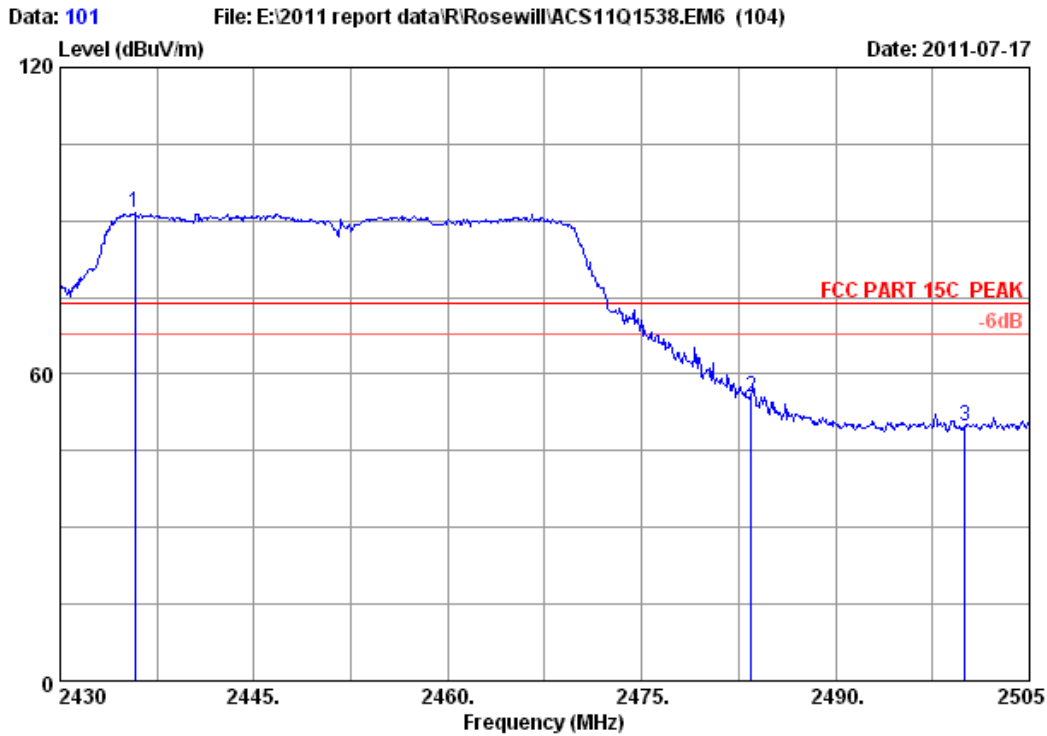


Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2435.775	29.46	8.77	36.01	89.25	91.47	74.00	-17.47	Peak
2	2483.500	29.49	8.87	35.97	53.11	55.50	74.00	18.50	Peak
3	2500.000	29.50	8.92	36.00	47.30	49.72	74.00	24.28	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

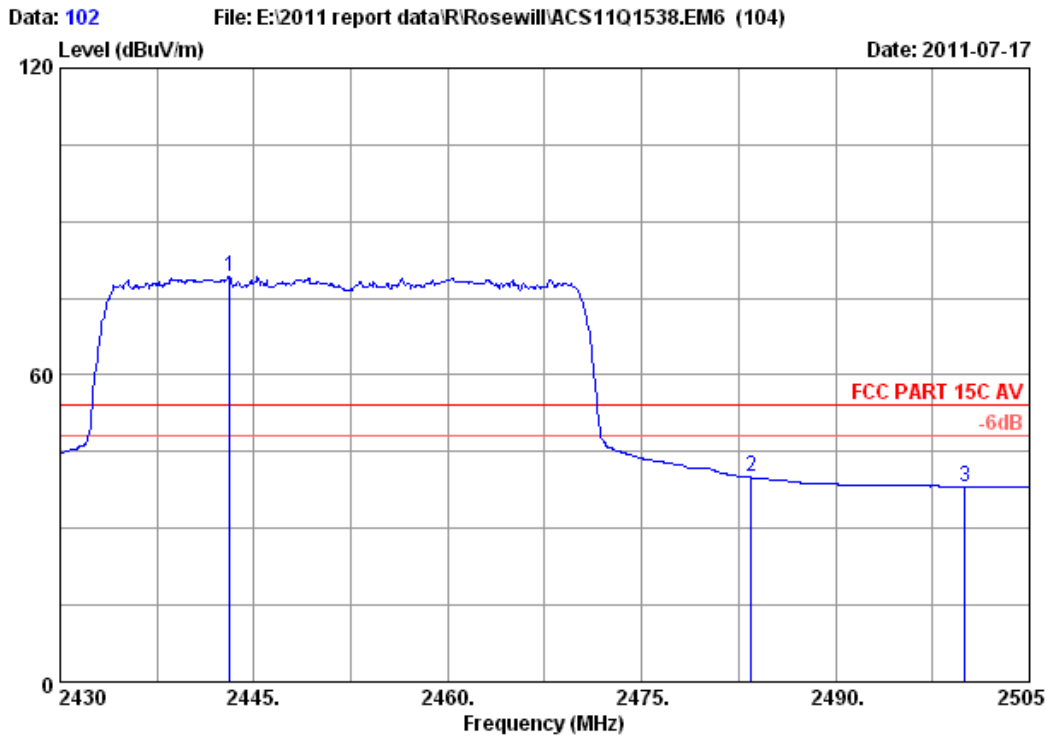


Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2443.125	29.47	8.77	36.06	77.06	79.24	54.00	-25.24	Average
2	2483.500	29.49	8.87	35.97	37.56	39.95	54.00	14.05	Average
3	2500.000	29.50	8.92	36.00	35.75	38.17	54.00	15.83	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

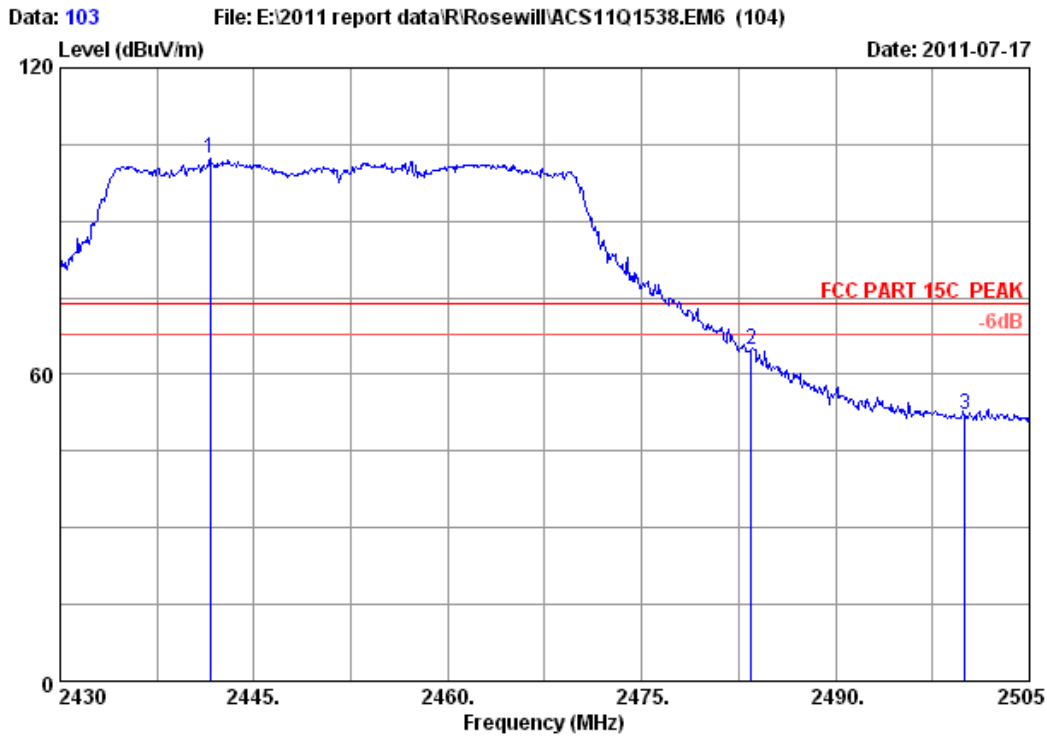


Site no. : 3m Chamber Data no. : 103
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
 M/N : RNX-N360PC

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.625	29.47	8.77	36.06	99.99	102.17	74.00	-28.17	Peak
2	2483.500	29.49	8.87	35.97	62.52	64.91	74.00	9.09	Peak
3	2500.000	29.50	8.92	36.00	49.84	52.26	74.00	21.74	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID:W6RRNX-N360PC

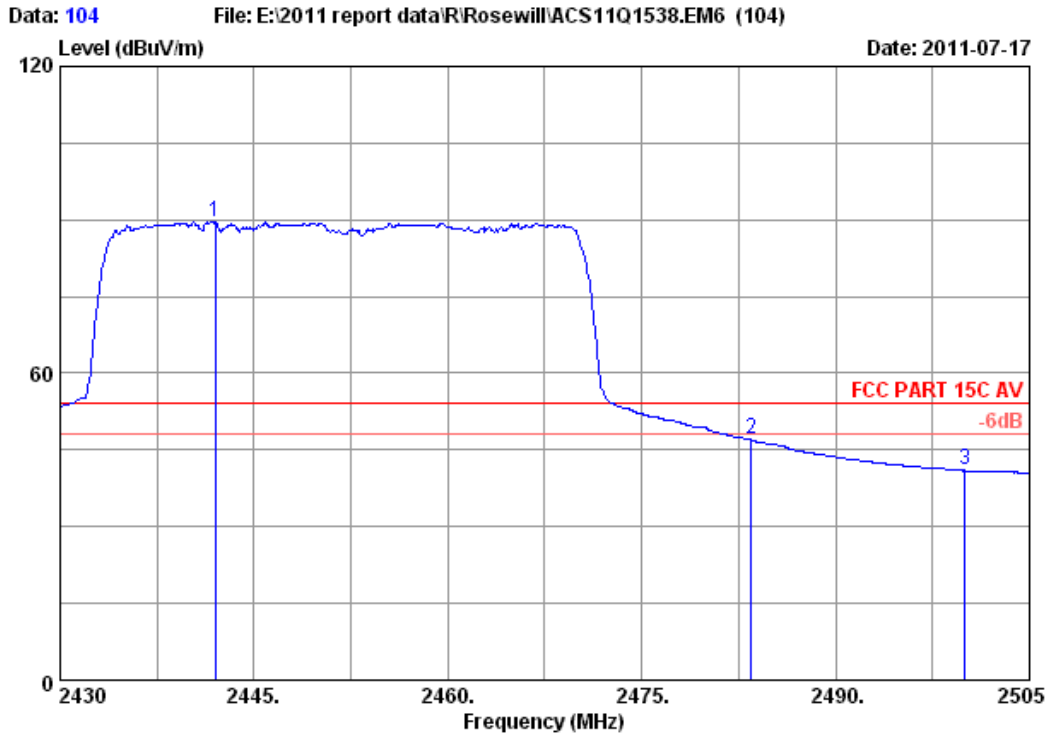

Site no. : 3m Chamber Data no. : 104
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Wireless N PCI Adapter
 Power : DC 3.3V From PC input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
 M/N : RNX-N360PC

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2442.000	29.47	8.77	36.06	87.51	89.69	54.00	-35.69	Average
2	2483.500	29.49	8.87	35.97	44.59	46.98	54.00	7.02	Average
3	2500.000	29.50	8.92	36.00	38.53	40.95	54.00	13.05	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

7. 6dB Bandwidth Test

7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,11	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08,11	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08,11	1 Year

7.2. Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

7.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300 kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

7.4. Test Results

EUT: Wireless N PCI Adapter		
M/N: RNX-N360PC		
Test date:2011-07-18	Pressure: 101.6 kpa	Humidity: 53%
Tested by: Leo-Li	Test site: RF Site	Temperature : 25 °C

Cable loss: 1 dB		Attenuator loss: 20 dB			Antenna Gain: 2 dBi
Test Mode	CH	6dB bandwidth (MHz)			Limit (KHz)
		Chain0	Chain1	Chain2	
11b	CH1	10.162	10.151	10.162	>500
	CH6	10.156	10.160	10.156	>500
	CH11	10.159	10.173	10.159	>500
11g	CH1	16.457	16.463	16.457	>500
	CH6	16.451	16.471	16.451	>500
	CH11	16.465	16.457	16.465	>500
11n HT20	CH1	17.658	17.644	17.673	>500
	CH6	17.652	17.634	17.652	>500
	CH11	17.673	17.669	17.658	>500
11n HT40	CH1	36.722	36.708	36.539	>500
	CH4	36.760	36.727	36.577	>500
	CH7	36.699	36.682	36.636	>500
Conclusion : PASS					

FCC ID: W6RRNX-N360PC

Chain 0:

Test Mode: IEEE 802.11b TX

Test CH1: 2412MHz

* Agilent

Ch Freq 2.412 GHz
 Trig Free

Occupied Bandwidth

Ref 21 dBm Atten 10 dB

#Peak
Log
10
dB/
Offst
21
dB

Center 2.412 00 GHz
Span 50 MHz

#Res BW 100 kHz
#VBW 300 kHz
Sweep 4.8 ms (601 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
14.1224 MHz	x dB	-6.00 dB
Transmit Freq Error	-13.019 kHz	
x dB Bandwidth	10.162 MHz	

File Operation Status, A:\SCREN066.GIF file saved

Trace

Trace	Trace	Trace
1	2	3

Clear Write

Max Hold

Min Hold

View

Blank

More
1 of 2

Test CH6: 2437MHz

* Agilent

Ch Freq 2.437 GHz
 Trig Free

Occupied Bandwidth

Ref 21 dBm Atten 10 dB

#Peak
Log
10
dB/
Offst
21
dB

Center 2.437 00 GHz
Span 50 MHz

#Res BW 100 kHz
#VBW 300 kHz
Sweep 4.8 ms (601 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
14.1643 MHz	x dB	-6.00 dB
Transmit Freq Error	-6.811 kHz	
x dB Bandwidth	10.156 MHz	

File Operation Status, A:\SCREN068.GIF file saved

Trace

Trace	Trace	Trace
1	2	3

Clear Write

Max Hold


Min Hold

View


Blank

More
1 of 2



FCC ID: W6RRNX-N360PC

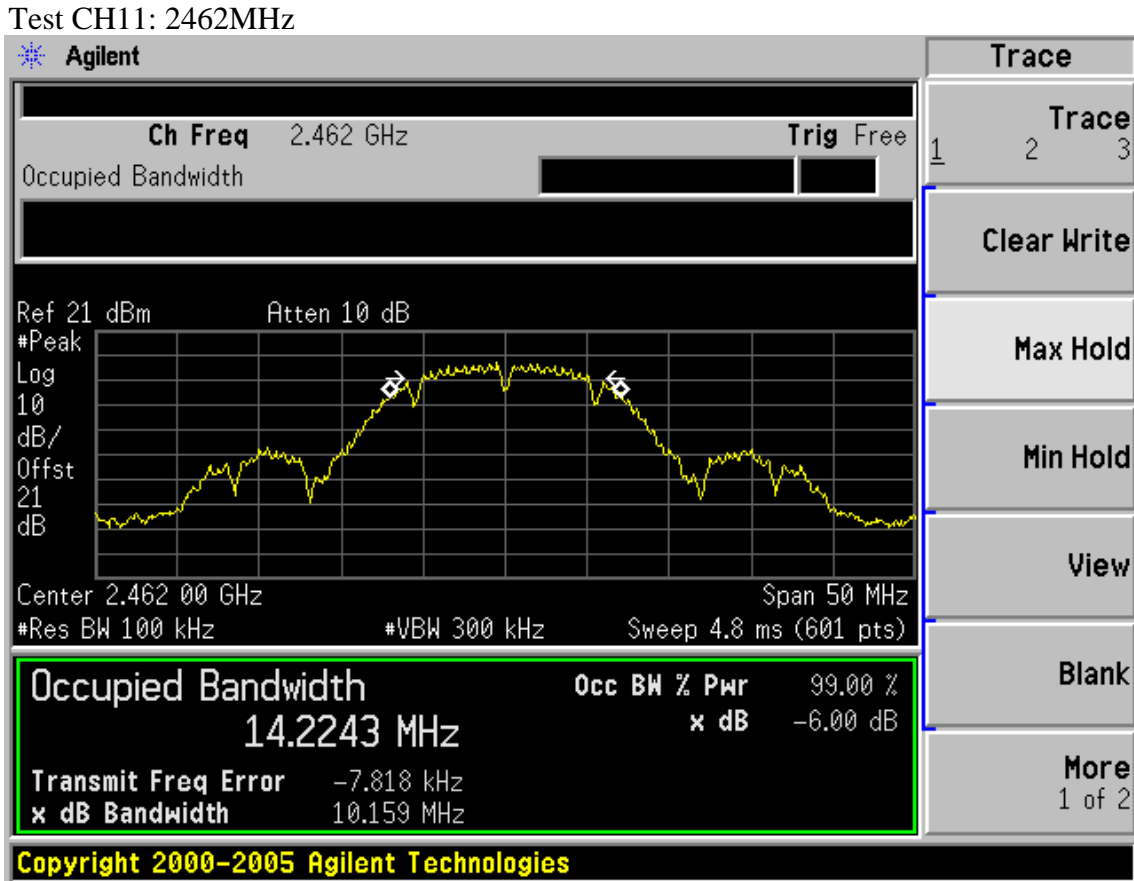

Test Mode: IEEE 802.11g TX
 Test CH1: 2412MHz

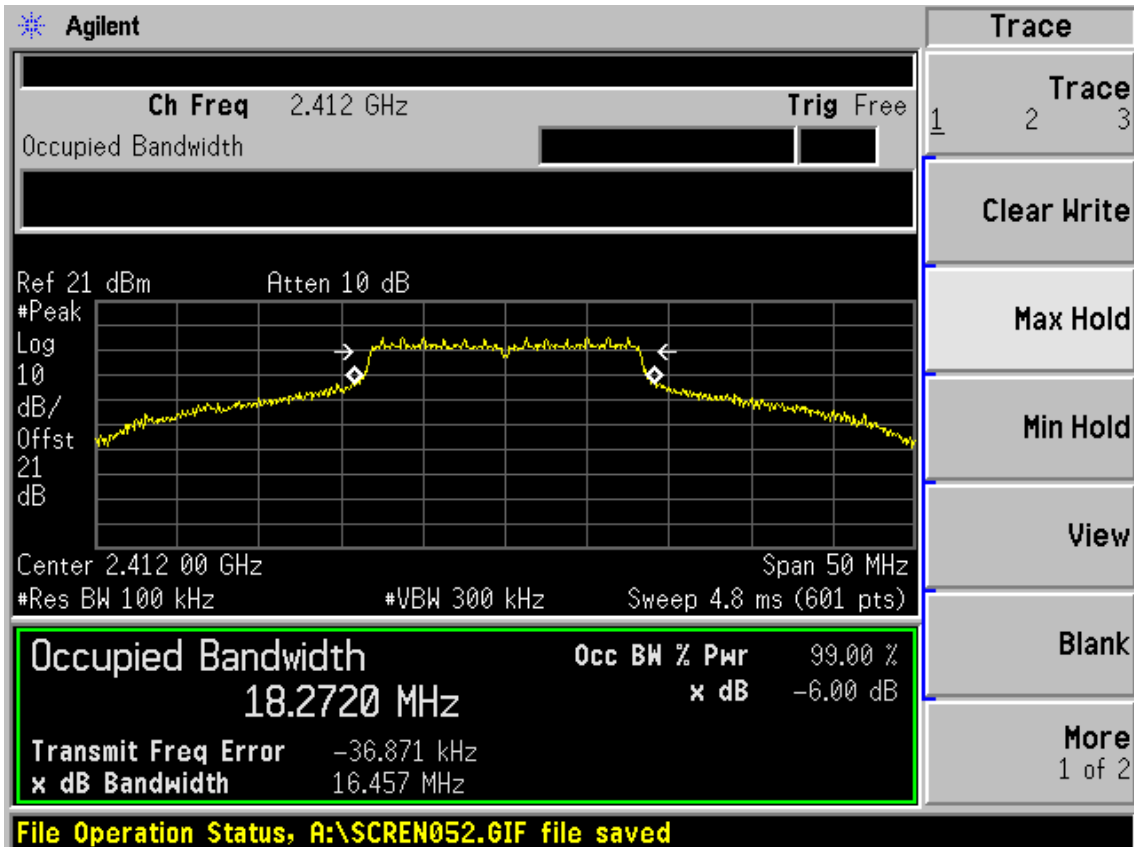


FCC ID: W6RRNX-N360PC

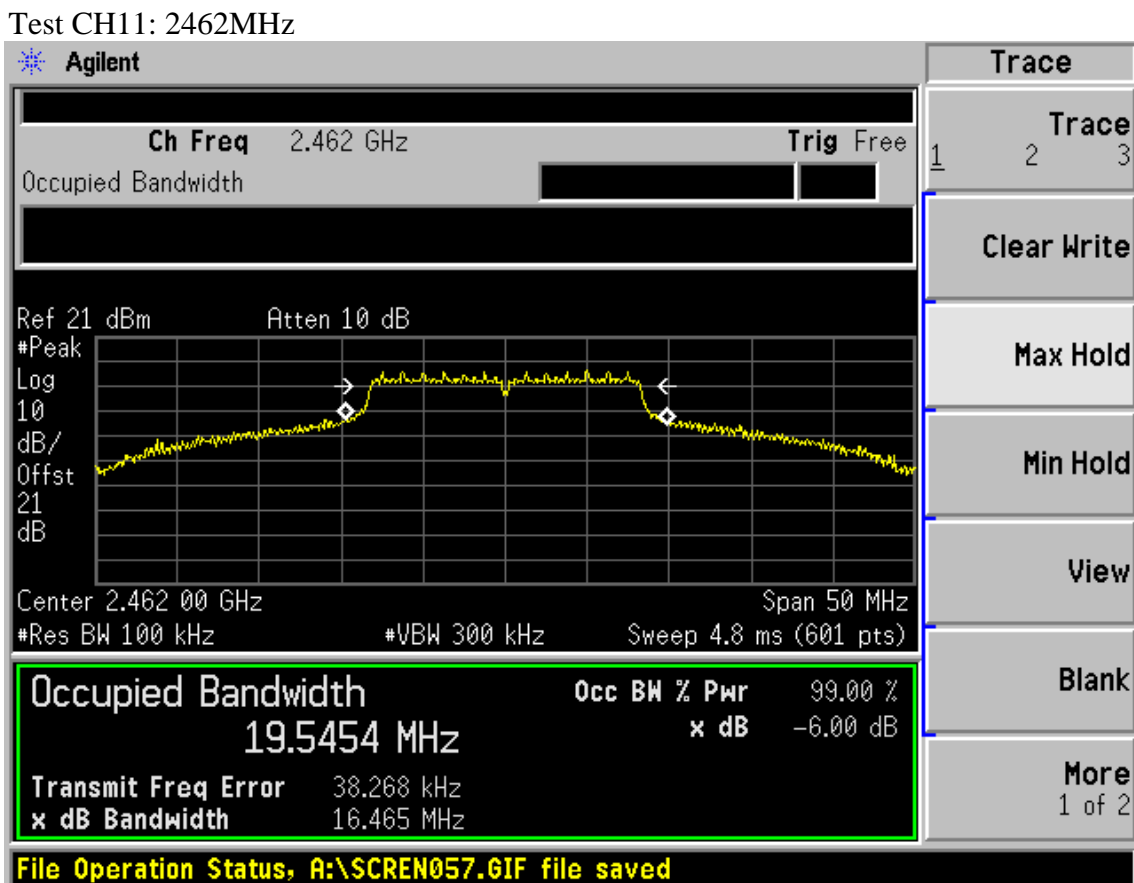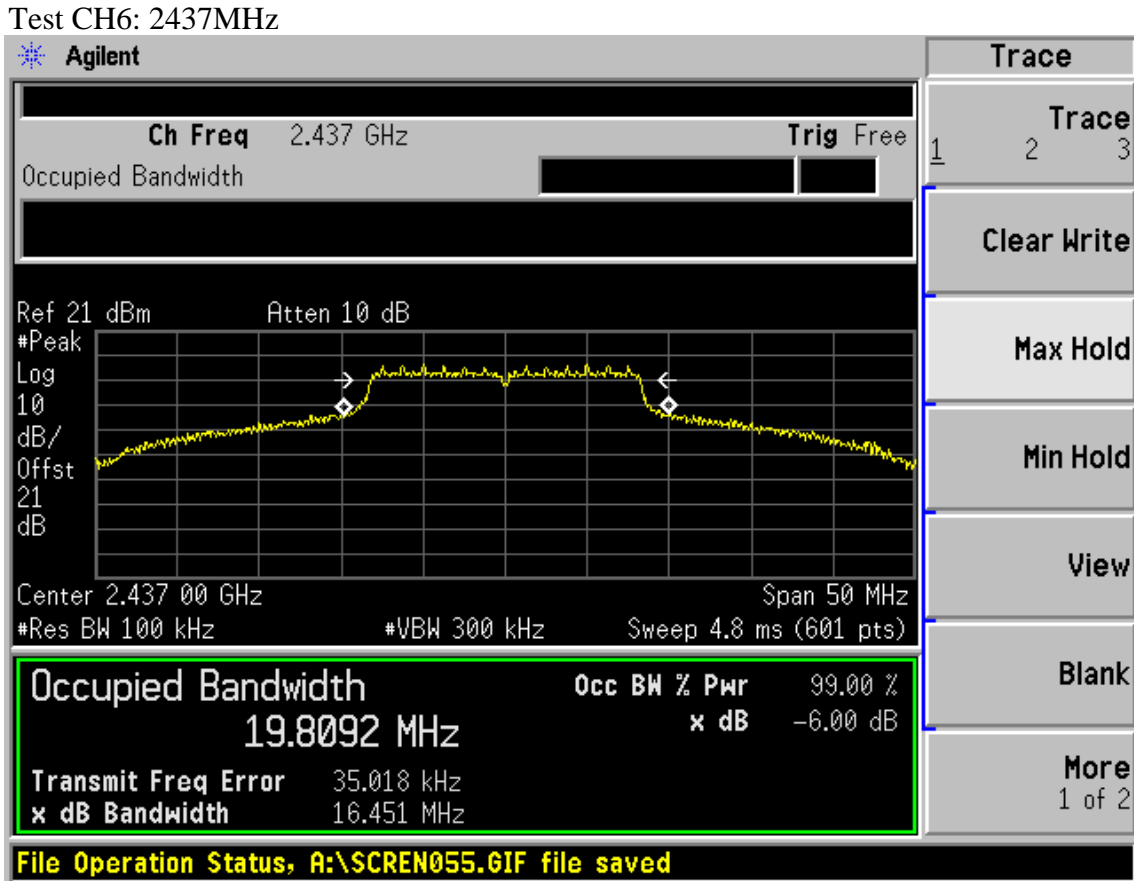


FCC ID: W6RRNX-N360PC


Test Mode: IEEE 802.11n HT20 TX
 Test CH1: 2412MHz

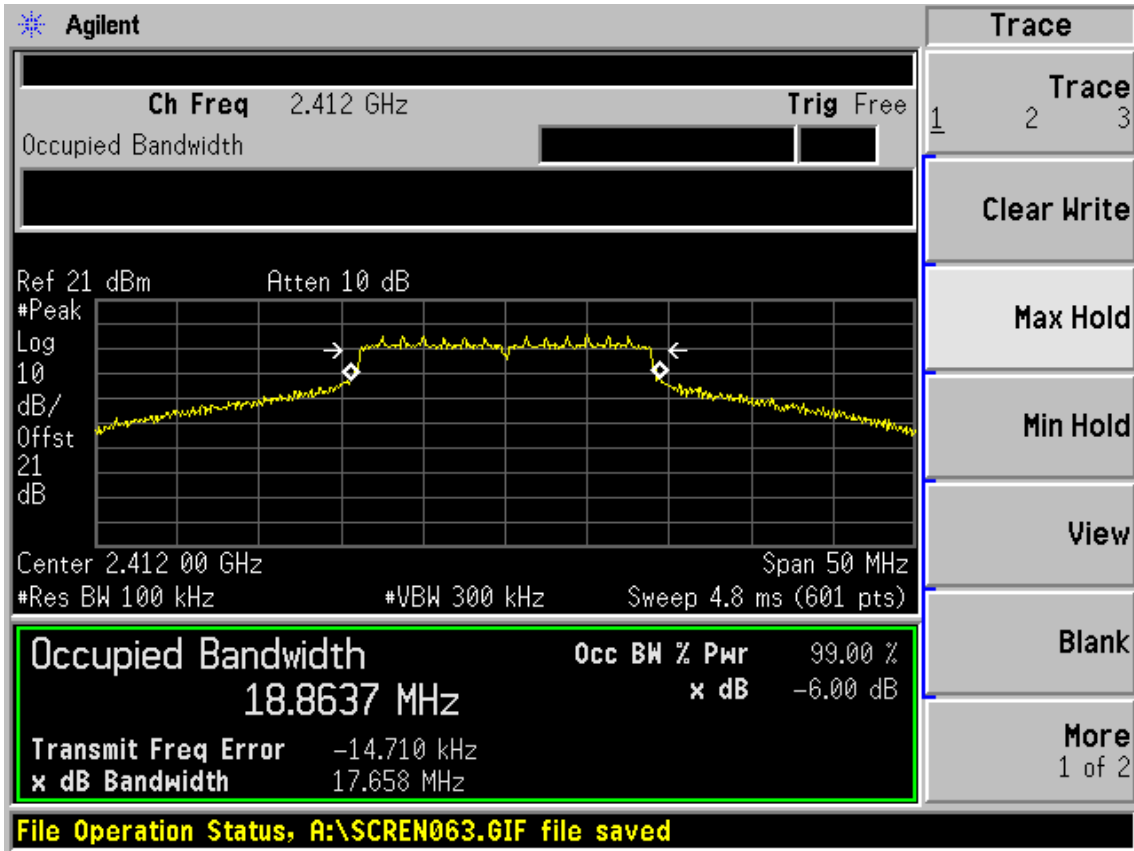


Test CH6: 2437MHz

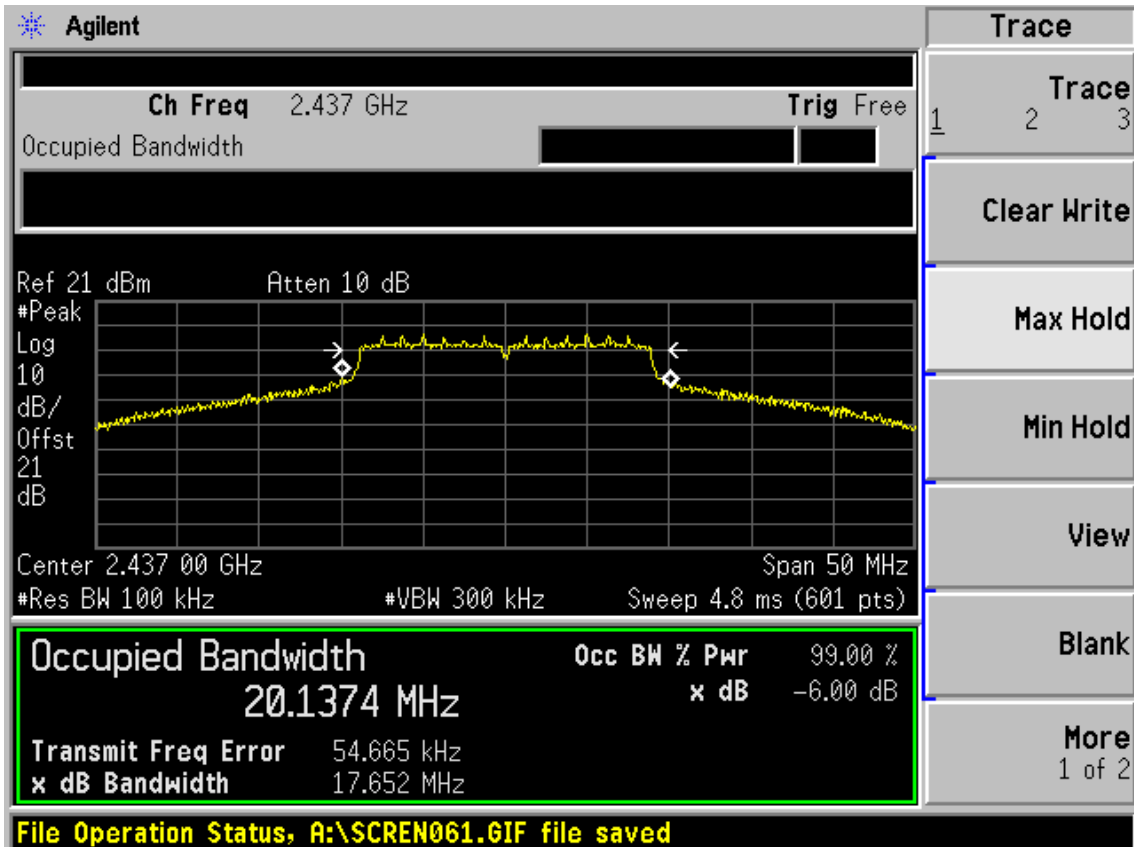

FCC ID: W6RRNX-N360PC

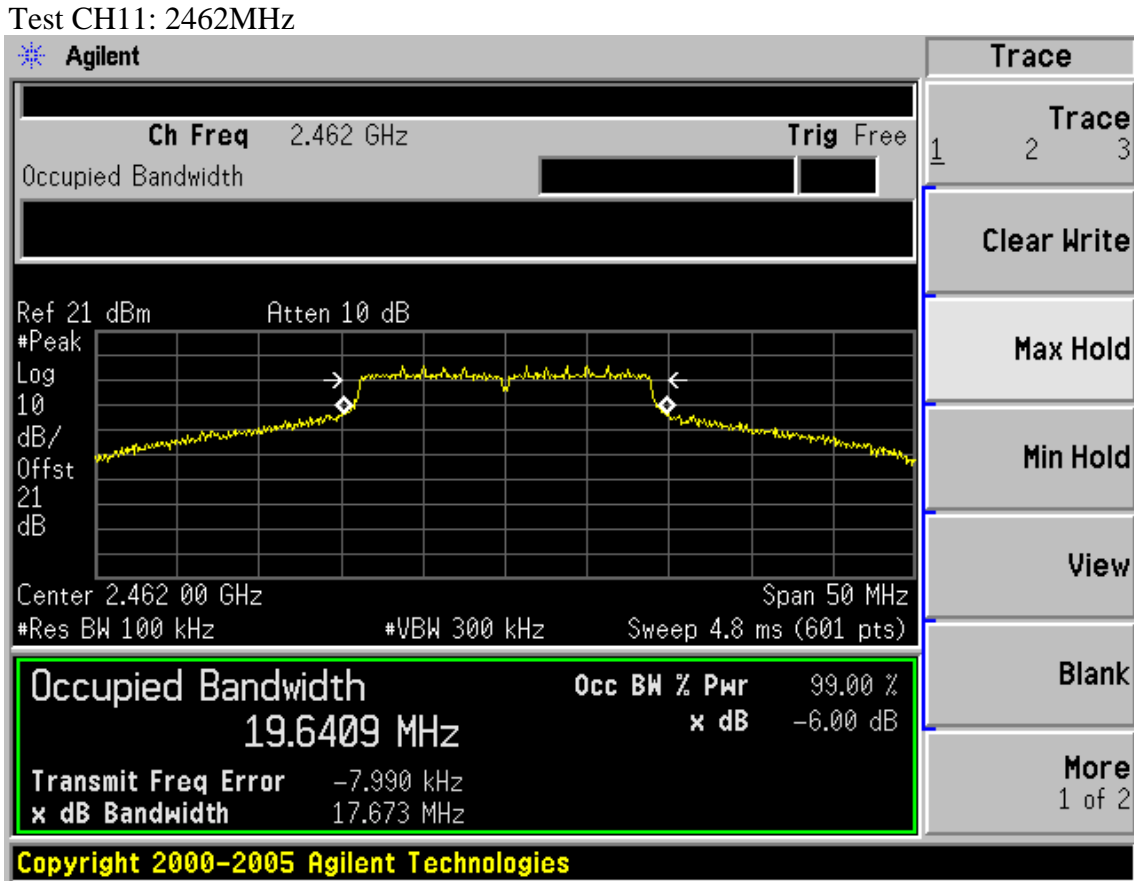

Test Mode: IEEE 802.11n HT40 TX
 Test CH1: 2422MHz

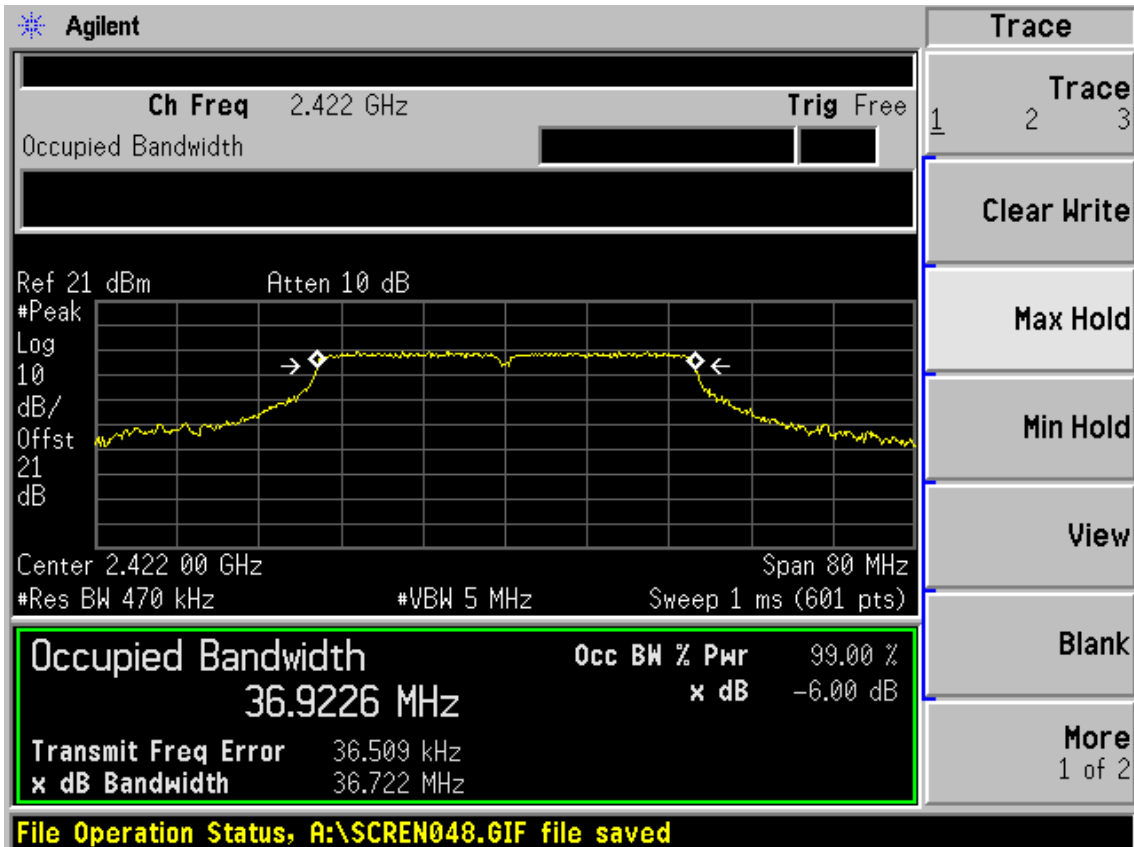

FCC ID: W6RRNX-N360PC

Test CH4: 2437MHz

Agilent

Ch Freq	2.437 GHz	Trig	Free
Occupied Bandwidth			

1	2	3
---	---	---

Ref 21 dBm	Atten 10 dB		
#Peak			
Log			
10			
dB/			
Offst			
21			
dB			

Center 2.437 00 GHz
Span 80 MHz

#Res BW 470 kHz
#VBW 5 MHz
Sweep 1 ms (601 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
37.0999 MHz	x dB	-6.00 dB
Transmit Freq Error	18.044 kHz	
x dB Bandwidth	36.760 MHz	

Trace
Trace
Clear Write
Max Hold
Min Hold
View
Blank
More
1 of 2

File Operation Status, A:\SCREN046.GIF file saved

Test CH7: 2452MHz

Agilent

Ch Freq	2.452 GHz	Trig	Free
Occupied Bandwidth			

1	2	3
---	---	---

Ref 21 dBm	Atten 10 dB		
#Peak			
Log			
10			
dB/			
Offst			
21			
dB			

Center 2.452 00 GHz
Span 80 MHz

#Res BW 470 kHz
#VBW 5 MHz
Sweep 1 ms (601 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
36.9865 MHz	x dB	-6.00 dB
Transmit Freq Error	20.501 kHz	
x dB Bandwidth	36.699 MHz	

Trace
Trace
Clear Write
Max Hold
Min Hold
View
Blank
More
1 of 2

File Operation Status, A:\SCREN050.GIF file saved

Audix Technology (Shenzhen) Co., Ltd. Report No. ACS-F11153

FCC ID: W6RRNX-N360PC

Chain 1:

Test Mode: IEEE 802.11b TX

Test CH1: 2412MHz

✦ **Agilent**

Ch Freq 2.412 GHz
Trig Free

Ref 21 dBm Atten 10 dB

#Peak

Log

10

dB/

Offst

21

dB

Center 2.412 00 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)

Occupied Bandwidth **Occ BW % Pwr** 99.00 %

14.1463 MHz

x dB -6.00 dB

Transmit Freq Error -14.248 kHz

x dB Bandwidth 10.151 MHz

Trace

Trace

1 2 3

Clear Write

Max Hold

Min Hold

View

Blank

More

1 of 2

Copyright 2000-2005 Agilent Technologies

Test CH6: 2437MHz

✦ **Agilent**

Ch Freq 2.437 GHz
Trig Free

Ref 21 dBm Atten 10 dB

#Peak

Log

10

dB/

Offst

21

dB

Center 2.437 00 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)

Occupied Bandwidth **Occ BW % Pwr** 99.00 %

14.1515 MHz

x dB -6.00 dB

Transmit Freq Error -10.645 kHz

x dB Bandwidth 10.160 MHz

Trace

Trace

1 2 3

Clear Write

Max Hold

Min Hold

View


Blank

More


1 of 2

Copyright 2000-2005 Agilent Technologies



FCC ID: W6RRNX-N360PC

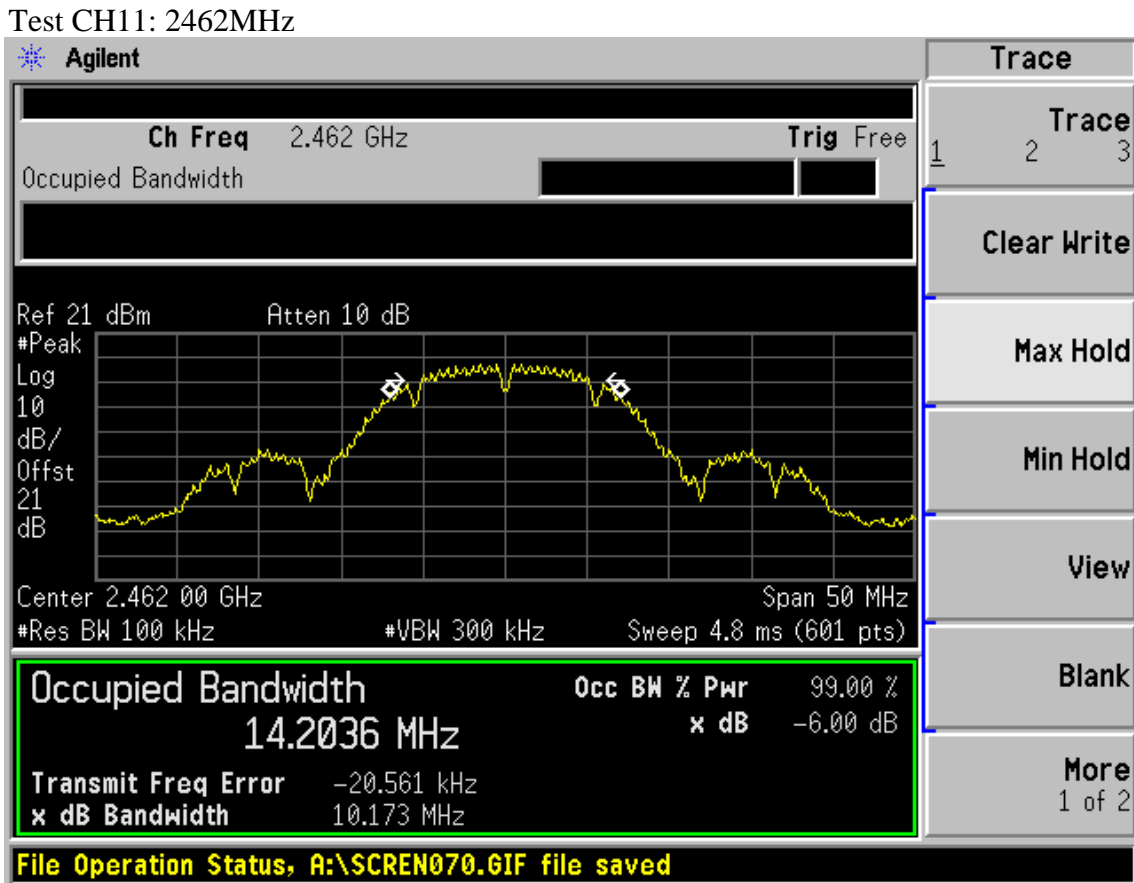

Test Mode: IEEE 802.11g TX
 Test CH1: 2412MHz

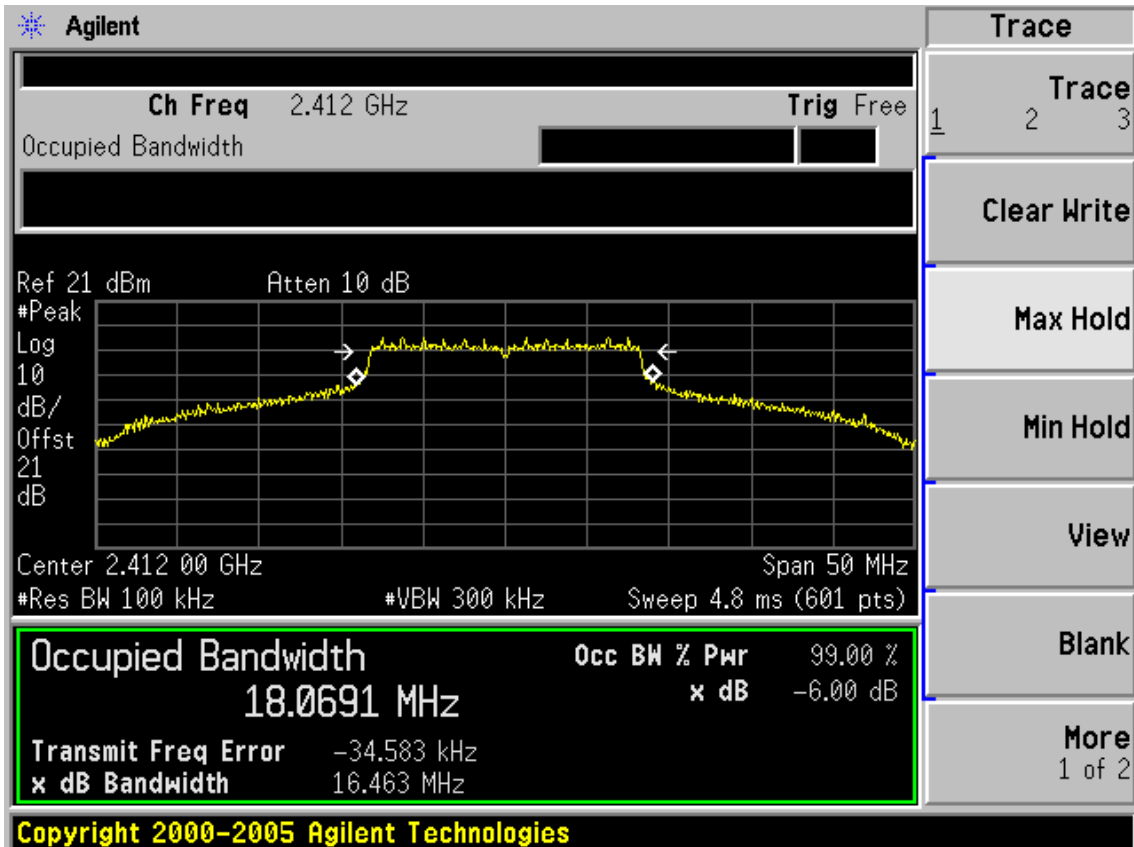


FCC ID: W6RRNX-N360PC

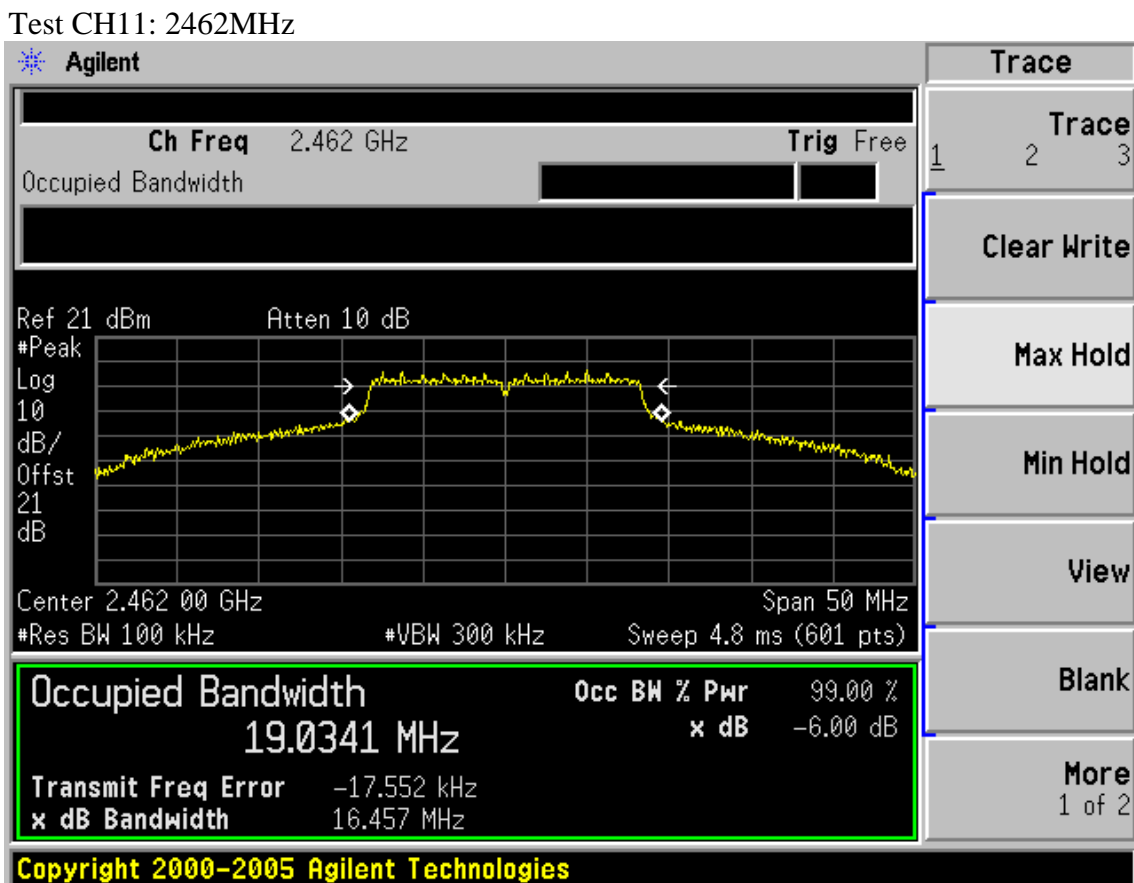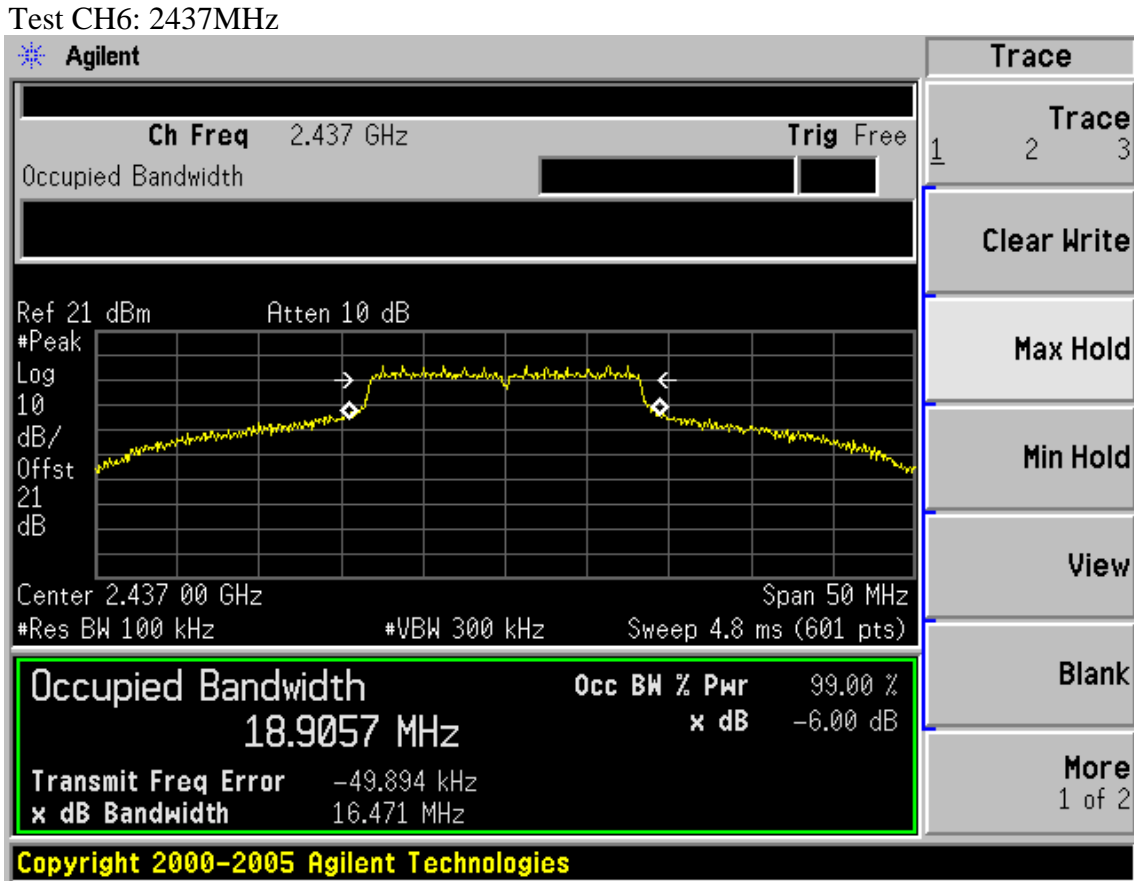


FCC ID: W6RRNX-N360PC

Test Mode: IEEE 802.11n HT20 TX


Test CH1: 2412MHz

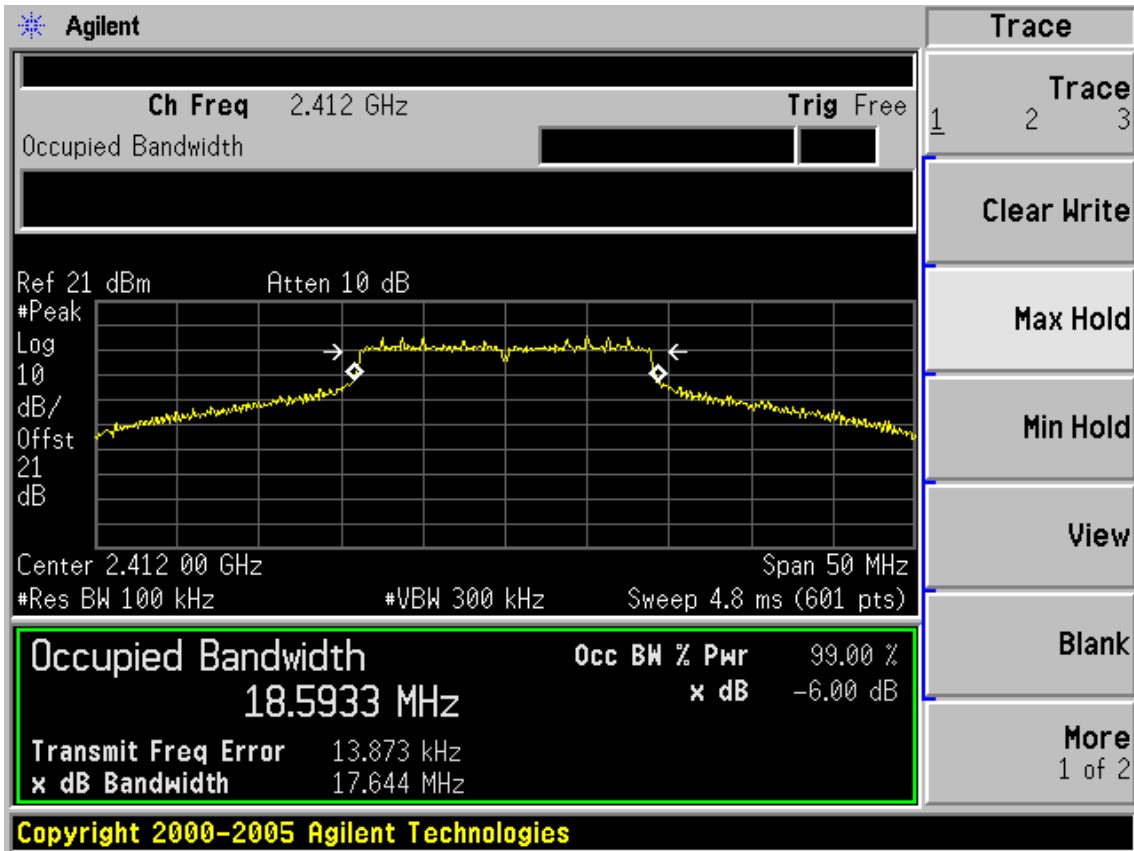


Test CH6: 2437MHz

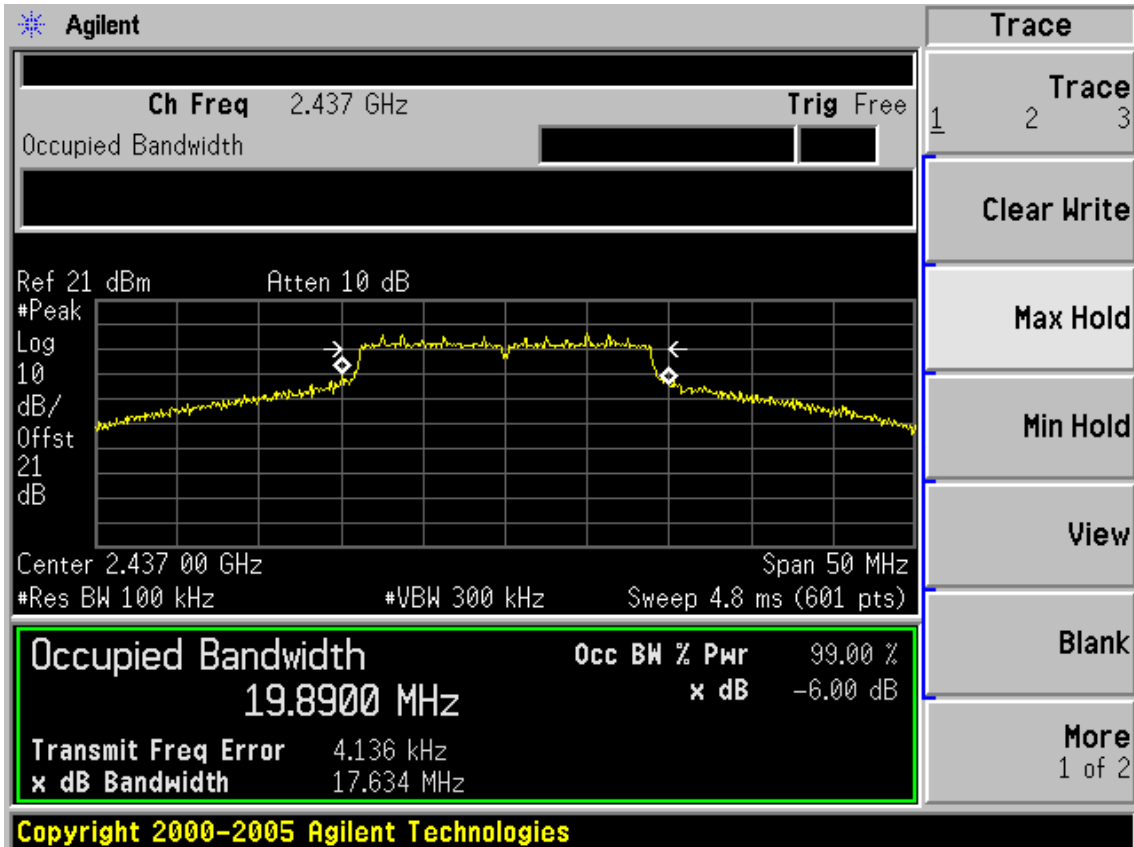

FCC ID: W6RRNX-N360PC

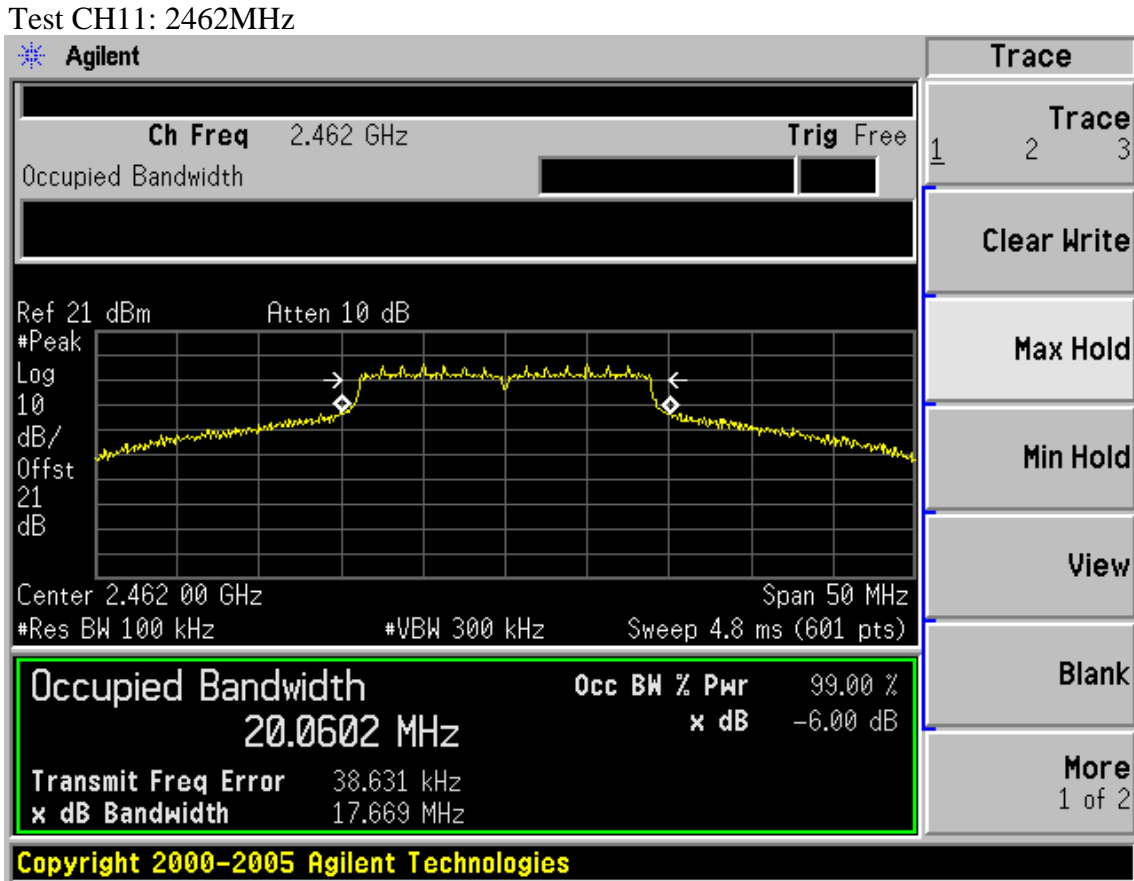


Test Mode: IEEE 802.11n HT40 TX
 Test CH1: 2422MHz

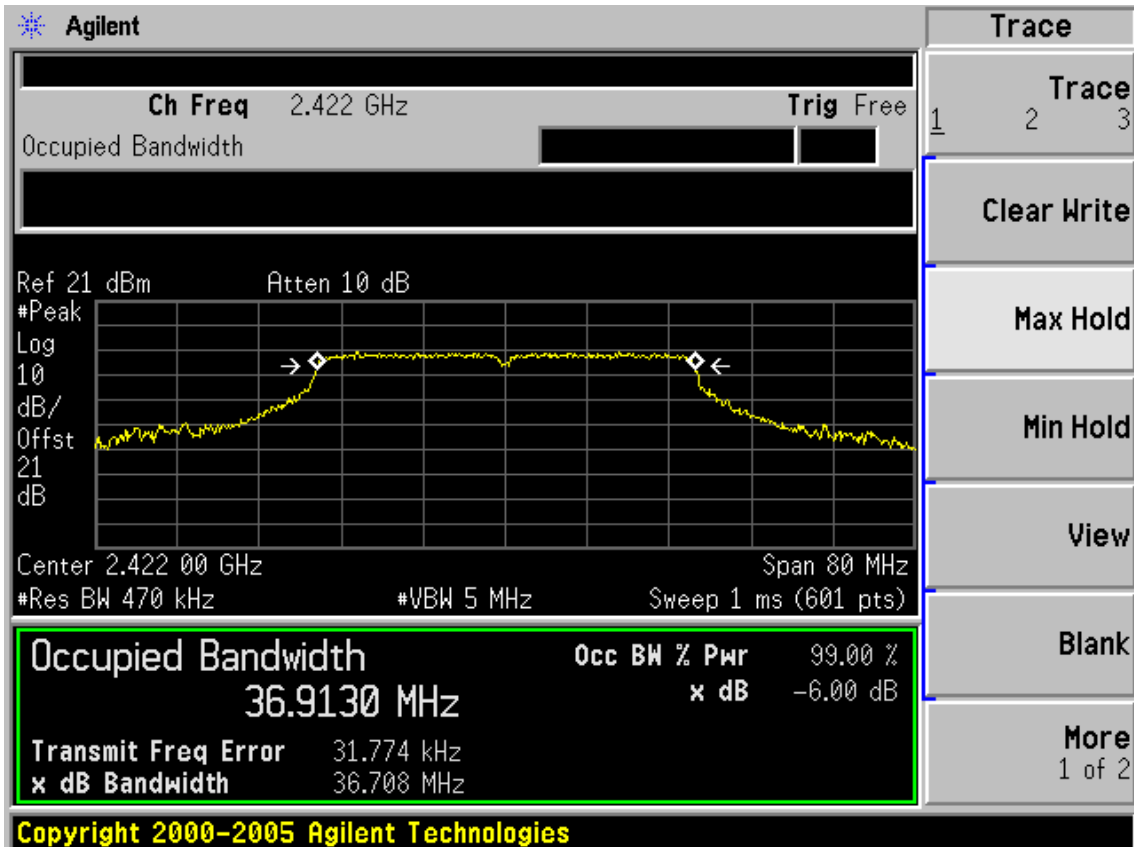


FCC ID: W6RRNX-N360PC

Test CH4: 2437MHz

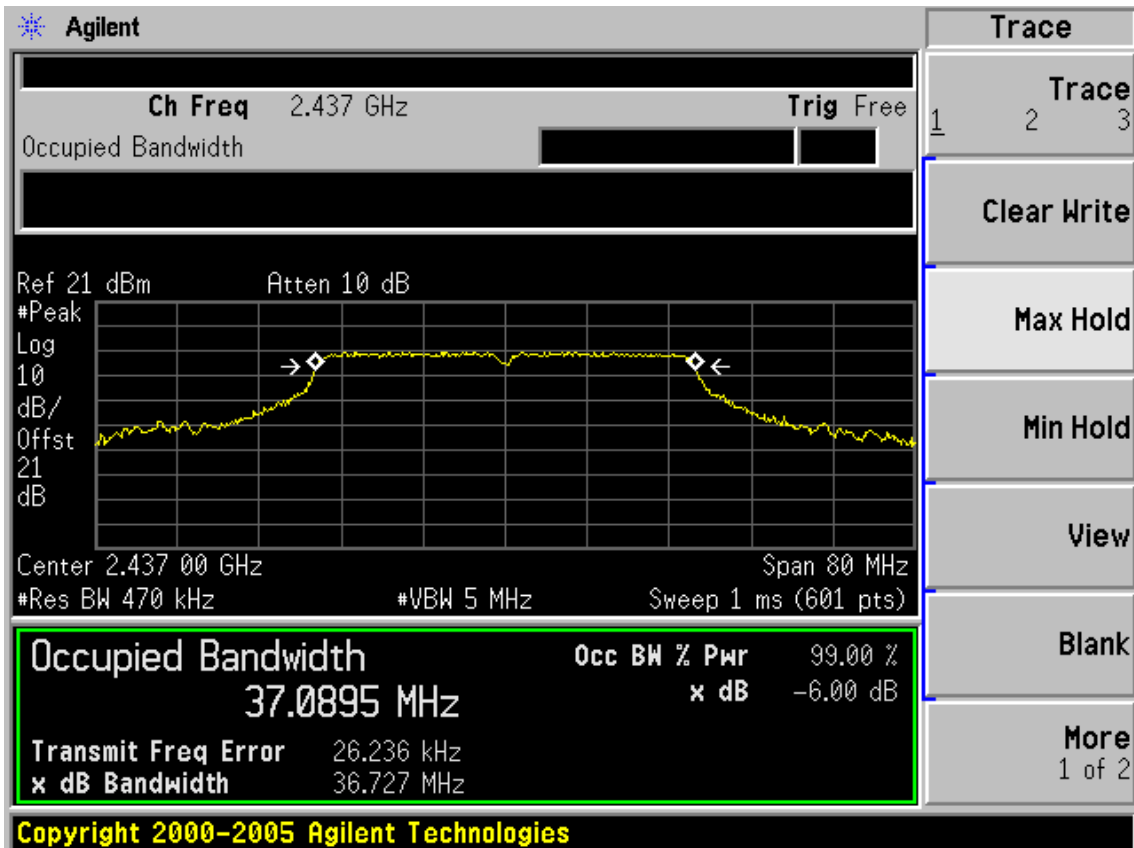

Test CH7: 2452MHz

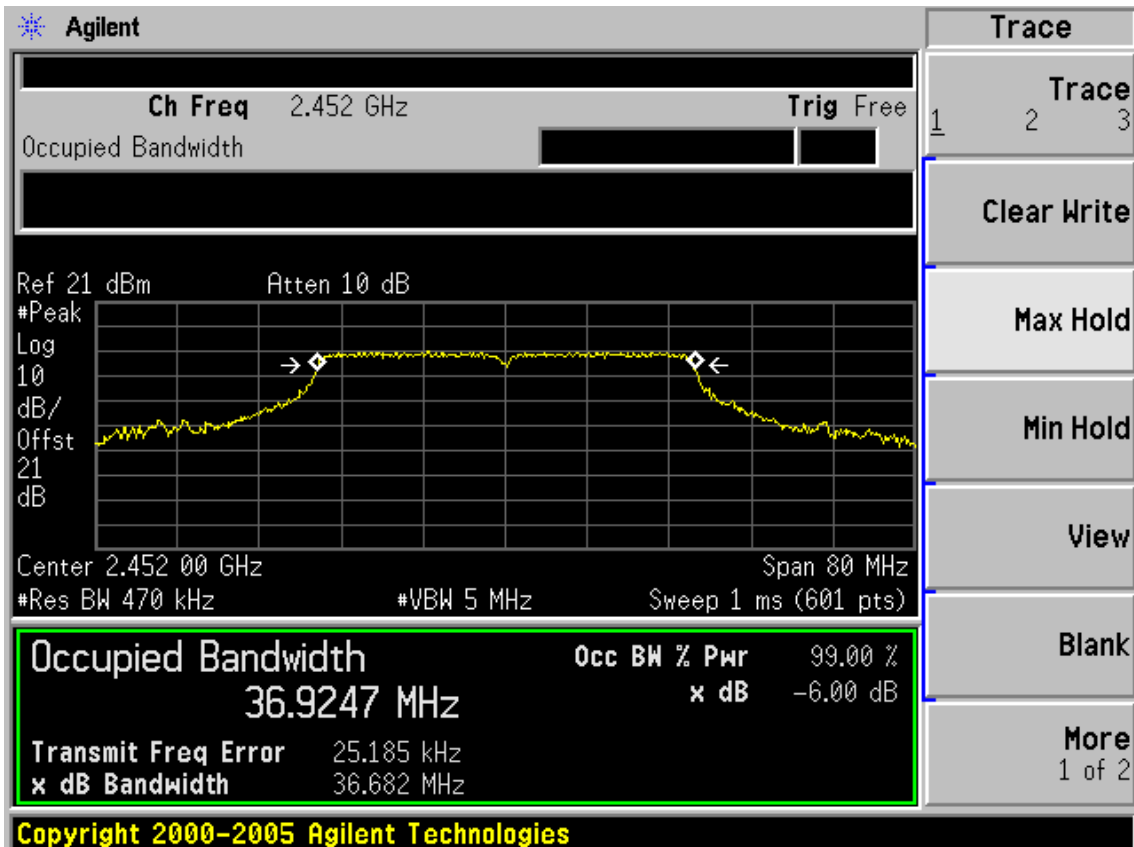

FCC ID: W6RRNX-N360PC

Chain 2:

Test Mode: IEEE 802.11b TX

Test CH1: 2412MHz

* **Agilent**

Ch Freq 2.412 GHz
Trig Free

Ref 21 dBm Atten 10 dB

#Peak

Log

10

dB/

Offst

21

dB

Center 2.412 00 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
14.1224 MHz	x dB	-6.00 dB
Transmit Freq Error	-13.019 kHz	
x dB Bandwidth	10.162 MHz	

File Operation Status, A:\SCREN066.GIF file saved

Trace

1	2	3
Trace		
Clear Write		
Max Hold		
Min Hold		
View		
Blank		
More		
1 of 2		

Test CH6: 2437MHz

* **Agilent**

Ch Freq 2.437 GHz
Trig Free

Ref 21 dBm Atten 10 dB

#Peak

Log

10

dB/

Offst

21

dB

Center 2.437 00 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)


Occupied Bandwidth	Occ BW % Pwr	99.00 %
14.1643 MHz	x dB	-6.00 dB
Transmit Freq Error	-6.811 kHz	
x dB Bandwidth	10.156 MHz	

File Operation Status, A:\SCREN068.GIF file saved


Trace

1	2	3
Trace		
Clear Write		
Max Hold		
Min Hold		
View		
Blank		
More		
1 of 2		



FCC ID: W6RRNX-N360PC

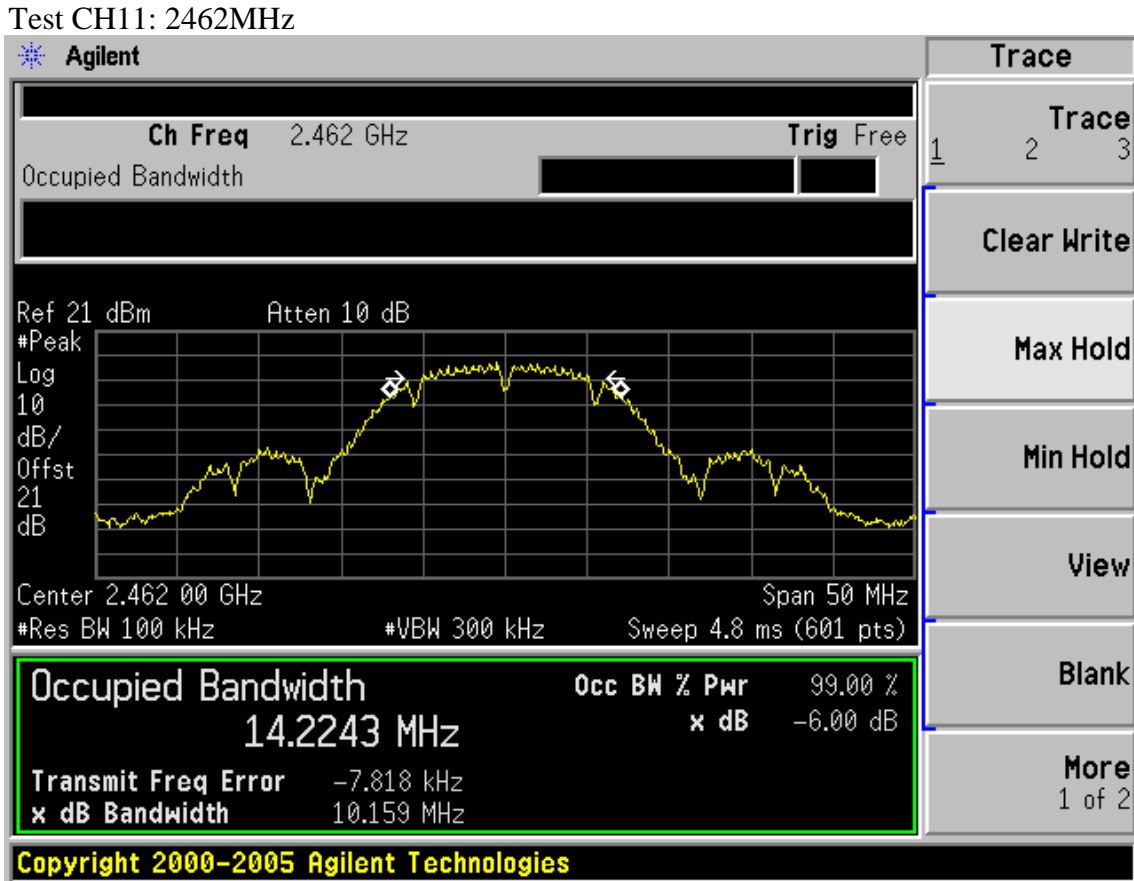

Test Mode: IEEE 802.11g TX
 Test CH1: 2412MHz

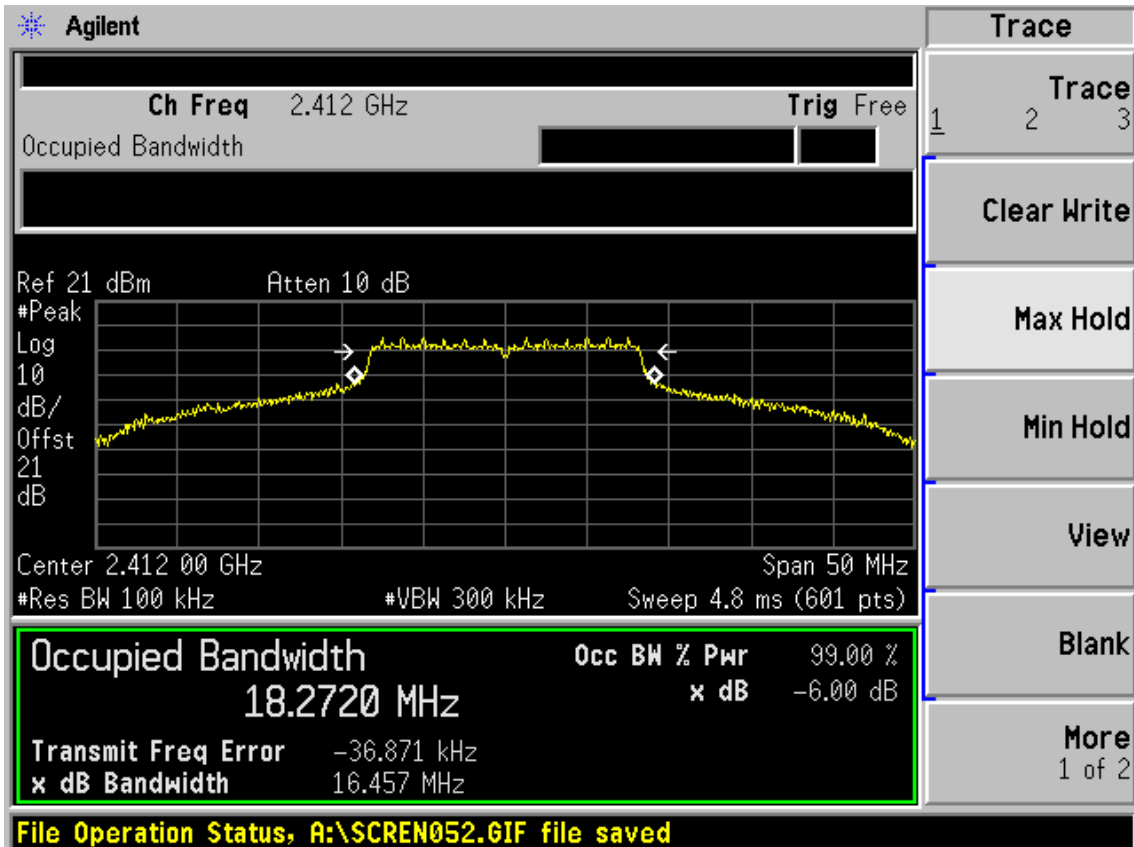


FCC ID: W6RRNX-N360PC

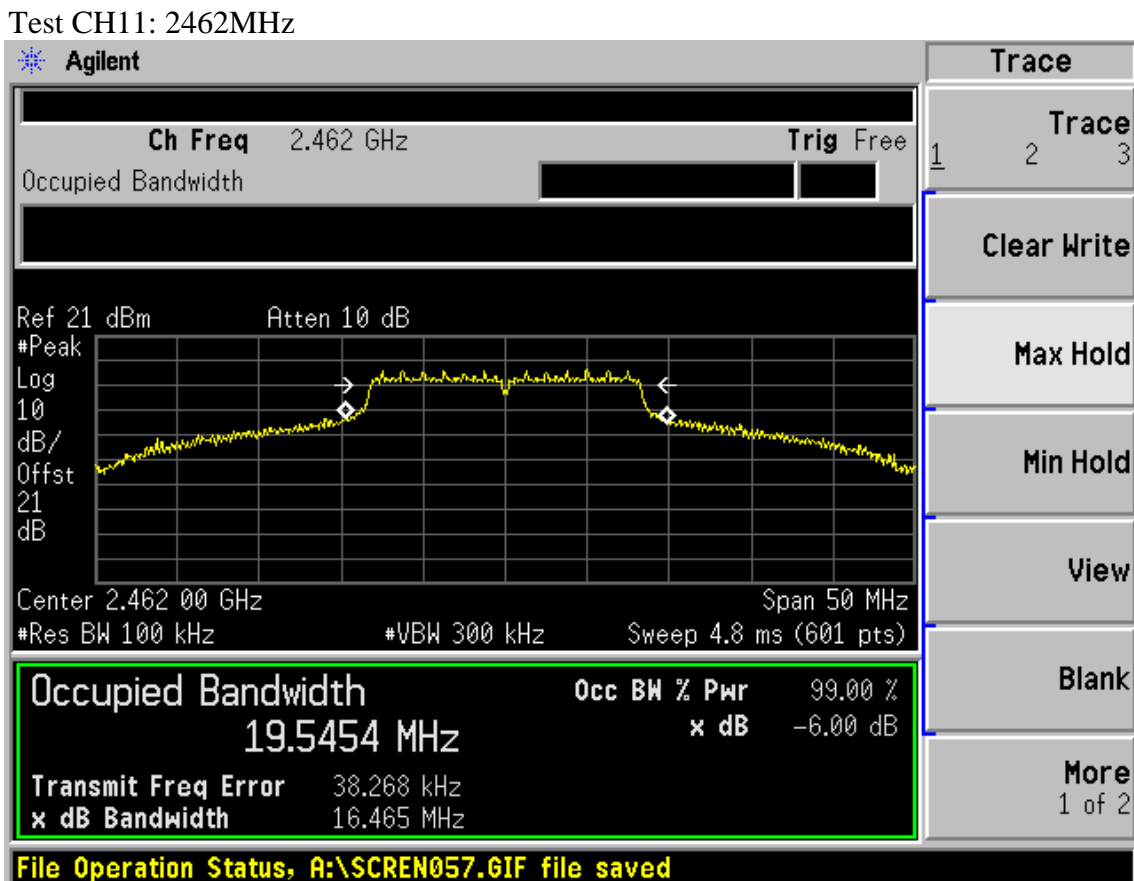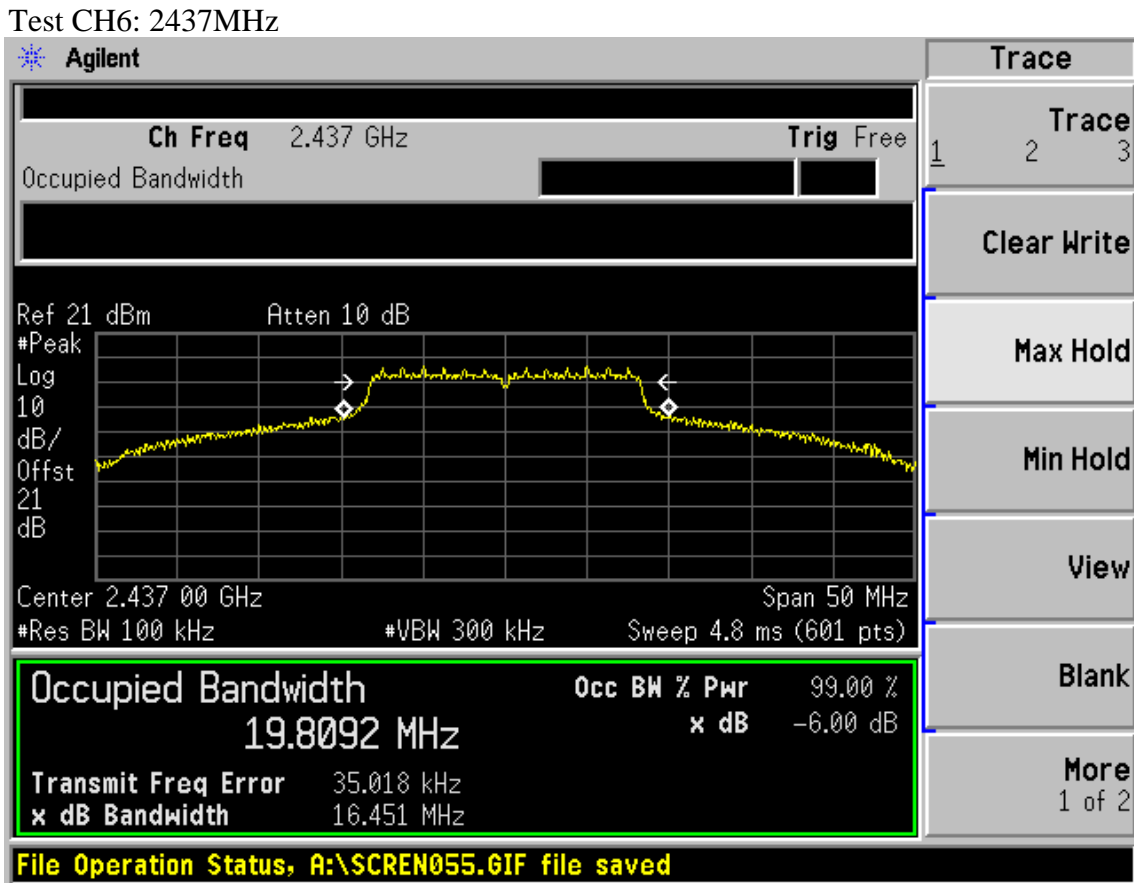


FCC ID: W6RRNX-N360PC

Test Mode: IEEE 802.11n HT20 TX
 Test CH1: 2412MHz

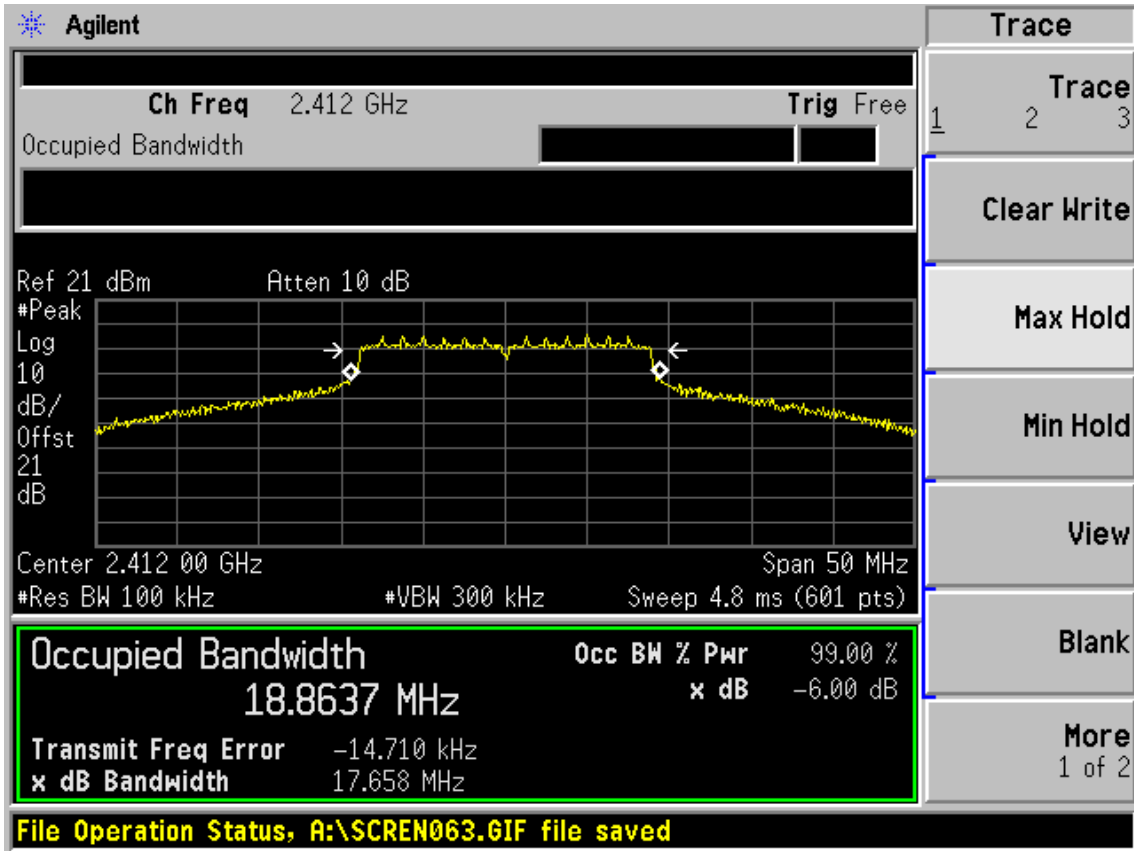


Test CH6: 2437MHz

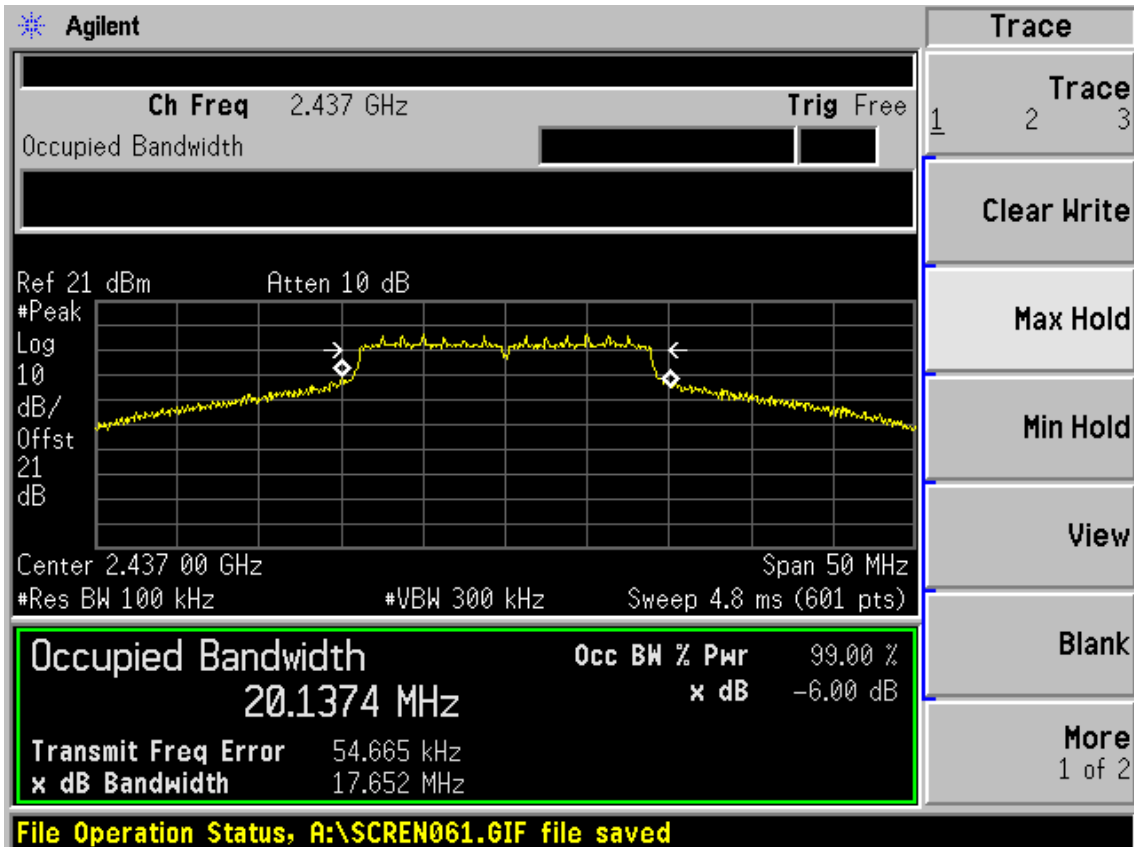


FCC ID: W6RRNX-N360PC

Test CH11: 2462MHz

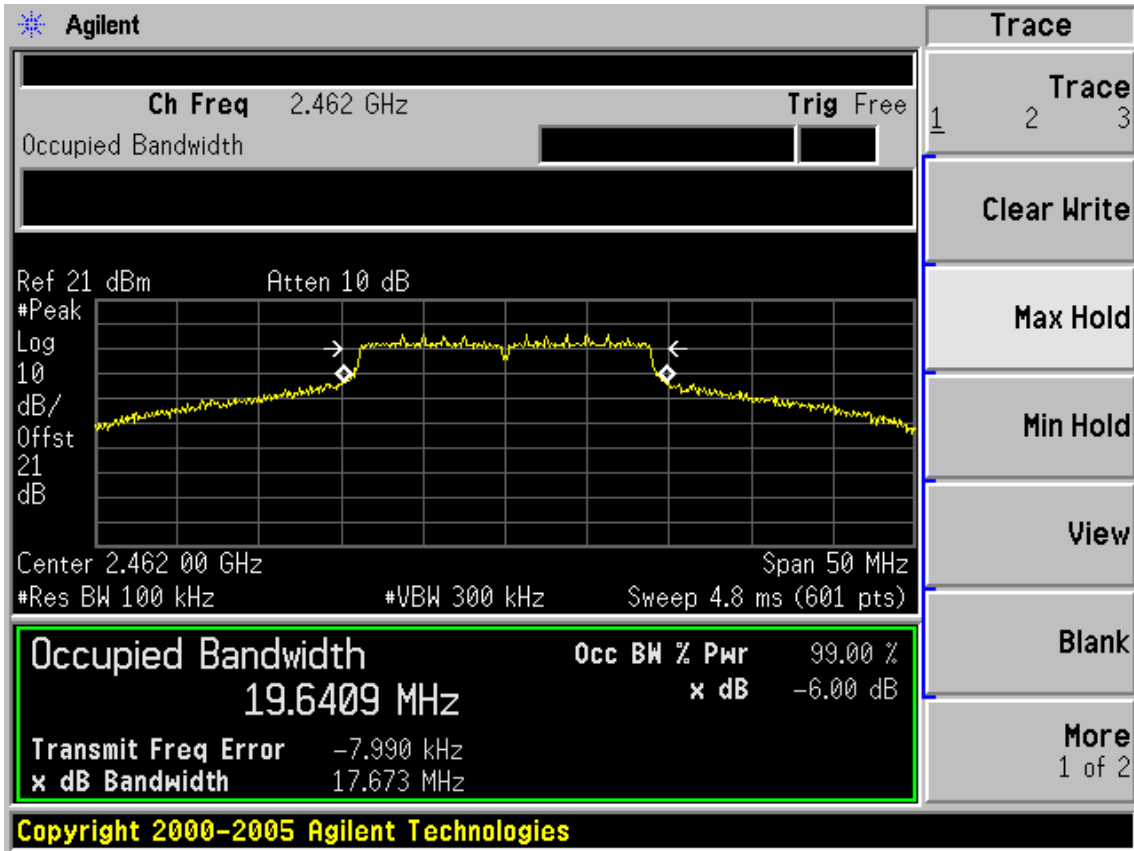


Test Mode: IEEE 802.11n HT40 TX


Test CH1: 2422MHz

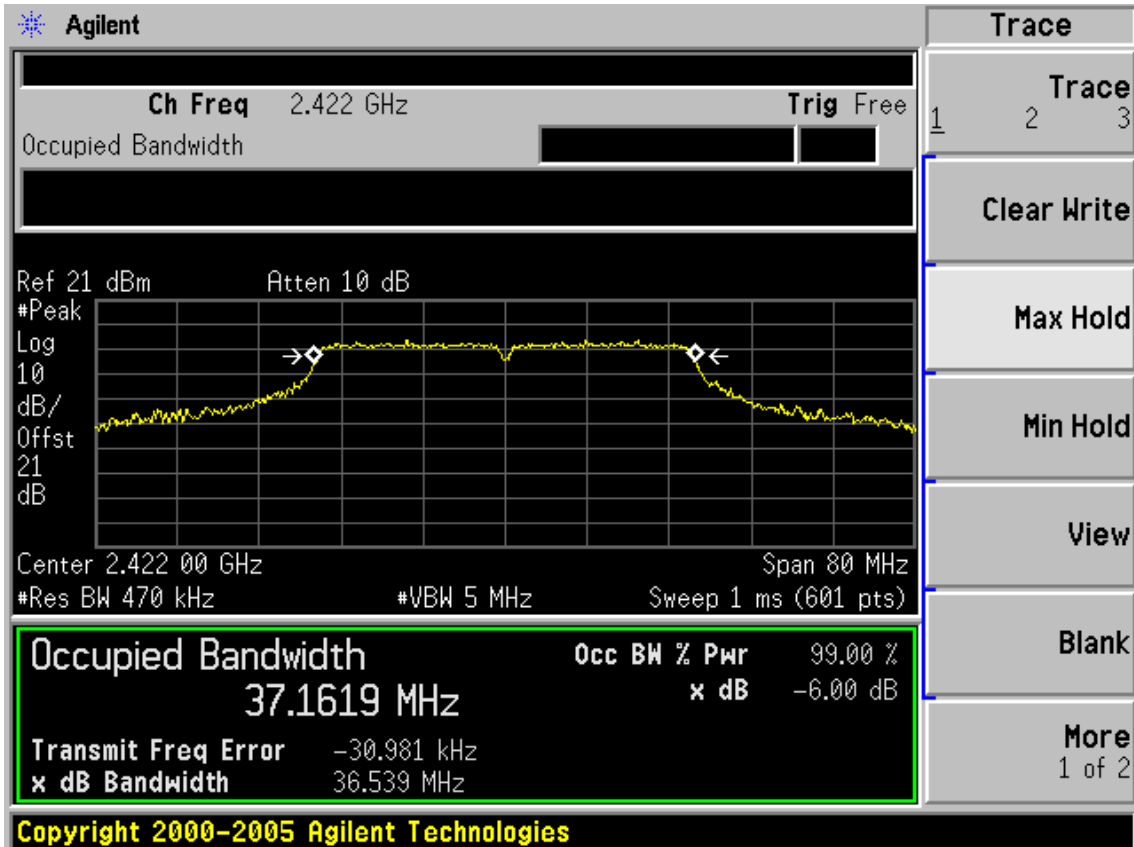

FCC ID: W6RRNX-N360PC

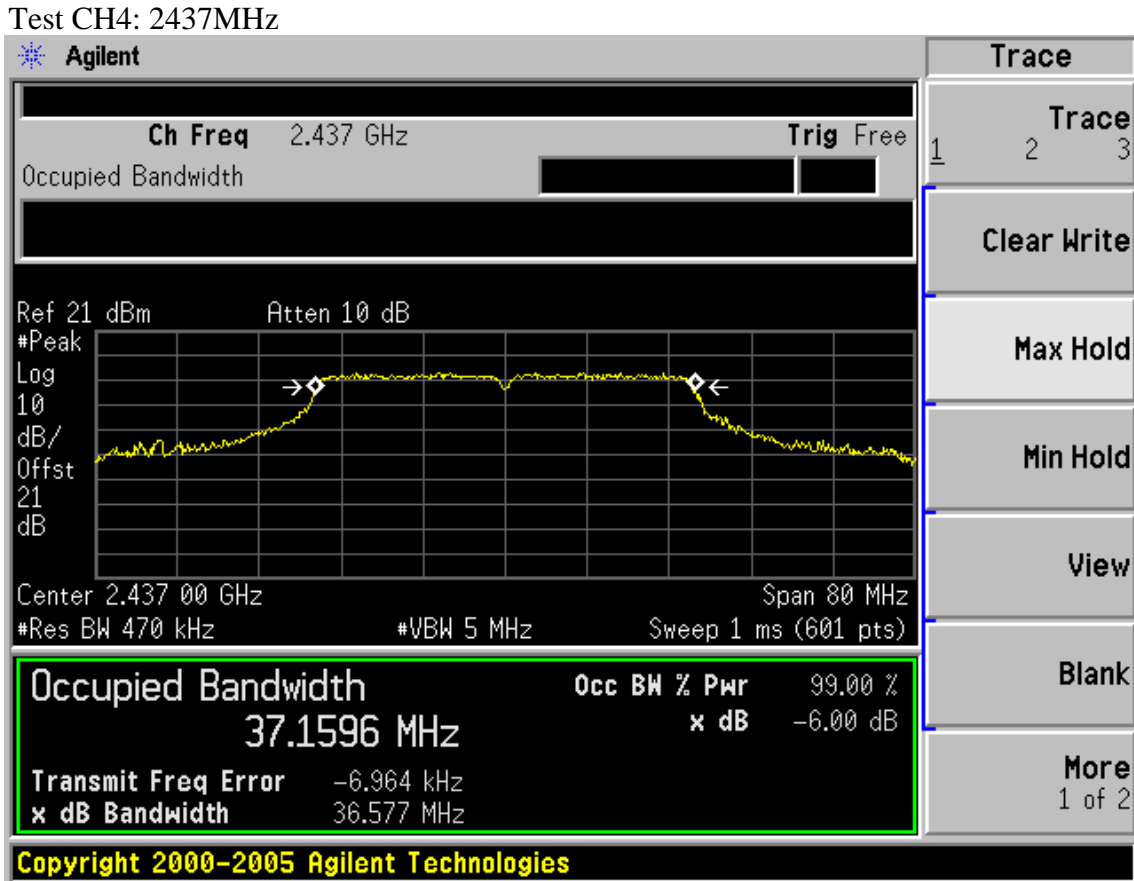

Test CH7: 2452MHz

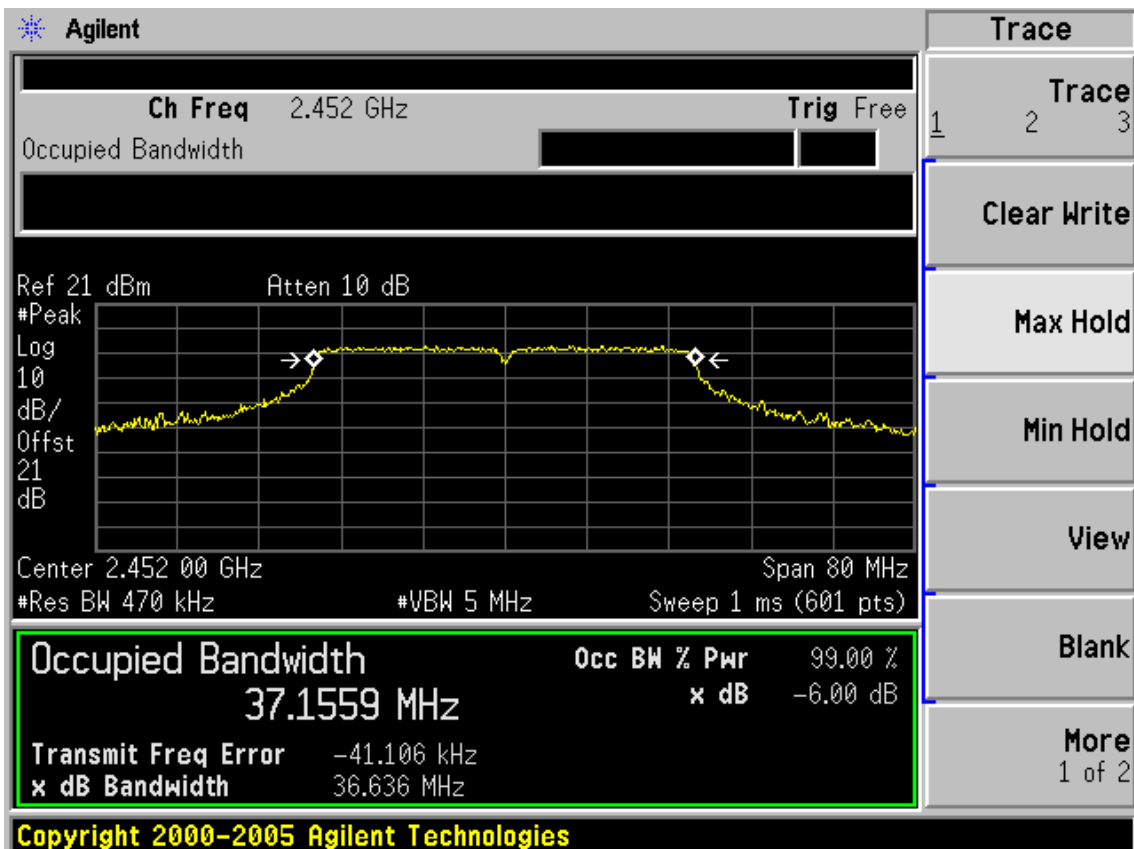

8. OUTPUT POWER TEST

8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Power meter	Anritsu	ML2487A	6K00002472	May.08,11	1 Year
2.	Power sensor	Anritsu	MA2491A	0033005	May.08,11	1 Year
3	Attenuator	Agilent	8491B	MY39262165	May.08,11	1 Year
4	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 11	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08,11	1 Year

8.2. Limit (FCC Part 15C 15.247 b(3))

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm)

8.3. Test Procedure

- 1, Connected the EUT's antenna port to measure device by 20dB attenuator.
- 2, For IEEE 802.11b/g and IEEE802.11n HT20 mode, use a PK power meter which's bandwidth is 20MHz and above 6dB bandwidth of signal to measure out each test modes' PK output power.
- 3, For IEEE802.11n HT40 mode, because the signal's bandwidth is about 40MHz and above 20MHz bandwidth of power sensor ML2491A. So Bandwidth correction method according to ANSI C63.10 clause 6.10.2.1 part (c) was used:
 - 1) Set the RBW=3MHz and VBW =8MHz
 - 2) Turn averaging off
 - 3) Set sweep to automatic
 - 4) Set the span just large enough to capture the emission
 - 5) Use a peak detector on max hold
 - 6) Record the measured power
 - 7) Calculate Output power of EUT use the formula:

Peak output power =measured power+ 10log[(6dB bandwidth of emission)/(analyzer RBW)]

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

FCC ID: W6RRNX-N360PC

8.4. Test Results



EUT: Wireless N PCI Adapter						
M/N: RNX-N360PC						
Test date: 2011-07-18		Pressure: 101.3 kpa			Humidity: 55 %	
Tested by: Leo-Li		Test site: RF site			Temperature: 25 °C	
Cable loss: 1 dB		Attenuator loss: 20 dB			Antenna Gain: 2 dBi	
Test Mode	CH (MHz)	Peak output Power (dBm)				Limit (dBm)
		Chain0	Chain1	Chain2	Total	
11b	CH1	15.52	15.54	15.64	N/A	30
	CH6	15.29	15.49	15.81	N/A	30
	CH11	15.64	15.41	15.52	N/A	30
11g	CH1	17.79	17.90	17.86	N/A	30
	CH6	18.39	18.59	19.02	N/A	30
	CH11	18.56	17.88	17.68	N/A	30
11n HT20	CH1	18.33	18.53	18.34	23.17	30
	CH6	18.29	18.45	18.46	23.17	30
	CH11	18.42	18.63	18.16	23.18	30

Test Mode	CH	Result							Limit (dBm)
		Measured power(dBm)/3MHz			PK Output power (dBm)				
		Chain0	Chain 1	Chain 2	Chain0	Chain1	Chain2	Total	
11n HT40	CH1	8.53	8.12	7.84	19.41	19.00	18.72	23.82	30
	CH4	8.42	8.23	7.94	19.30	19.11	18.82	23.85	30
	CH7	8.62	8.16	7.99	19.49	19.03	18.86	23.91	30
Chain 0 6dB Bandwidth for 11n HT40: 36.76MHz									
Chain 1 6dB Bandwidth for 11n HT40: 36.73MHz									
Chain 2 6dB Bandwidth for 11n HT40: 36.64MHz									
Chain 0 BW correction factor = $10\log[(36.76\text{MHz})/(3\text{MHz})] = 10.88\text{dB}$									
Chain 1 BW correction factor = $10\log[(36.73\text{MHz})/(3\text{MHz})] = 10.88\text{dB}$									
Chain 2 BW correction factor = $10\log[(36.64\text{MHz})/(3\text{MHz})] = 10.87\text{dB}$									
Conclusion: PASS									


FCC ID: W6RRNX-N360PC

Chain 0:

Test Mode: IEEE 802.11n HT40 TX

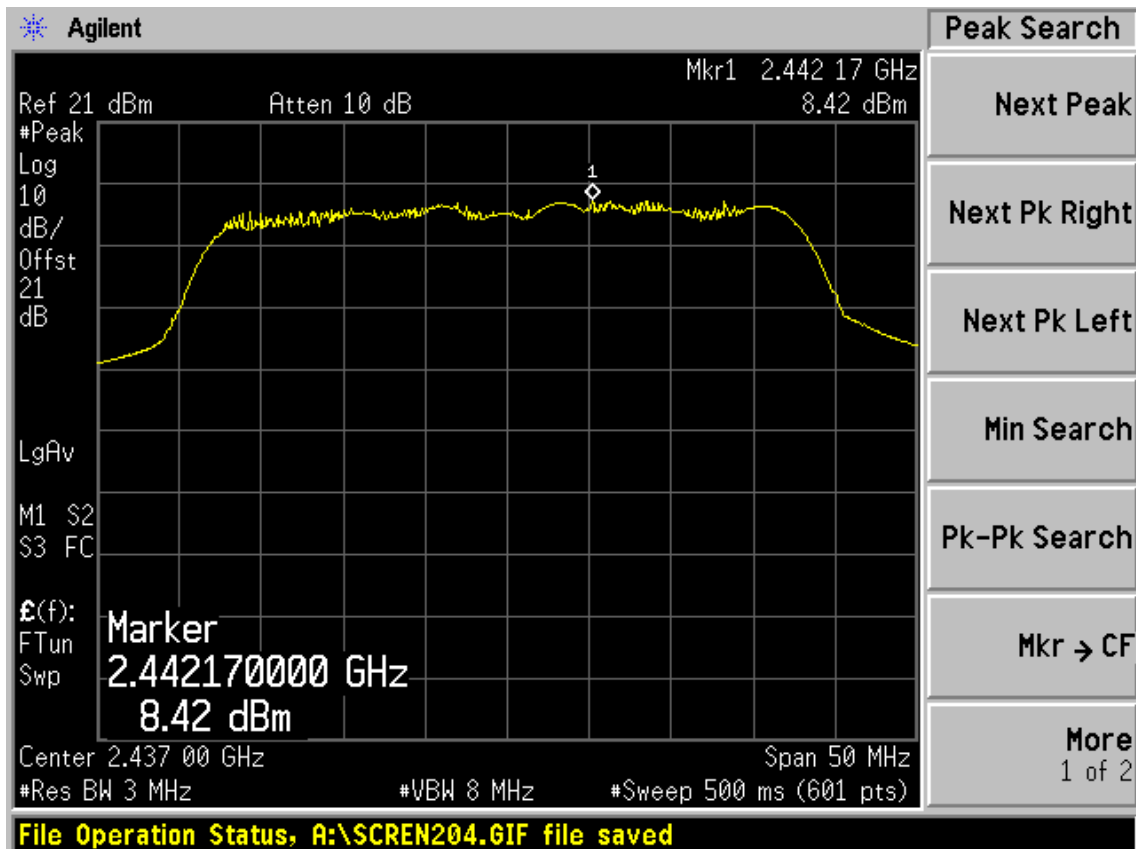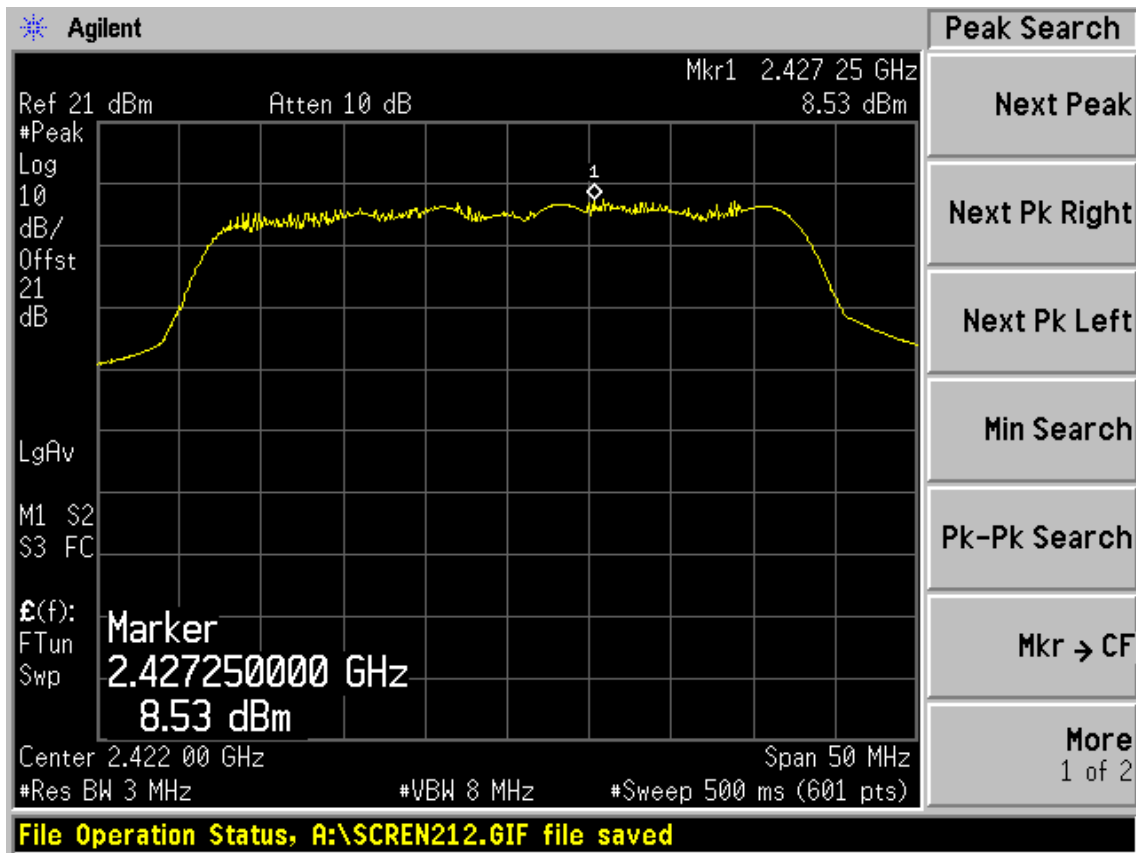


FCC ID: W6RRNX-N360PC


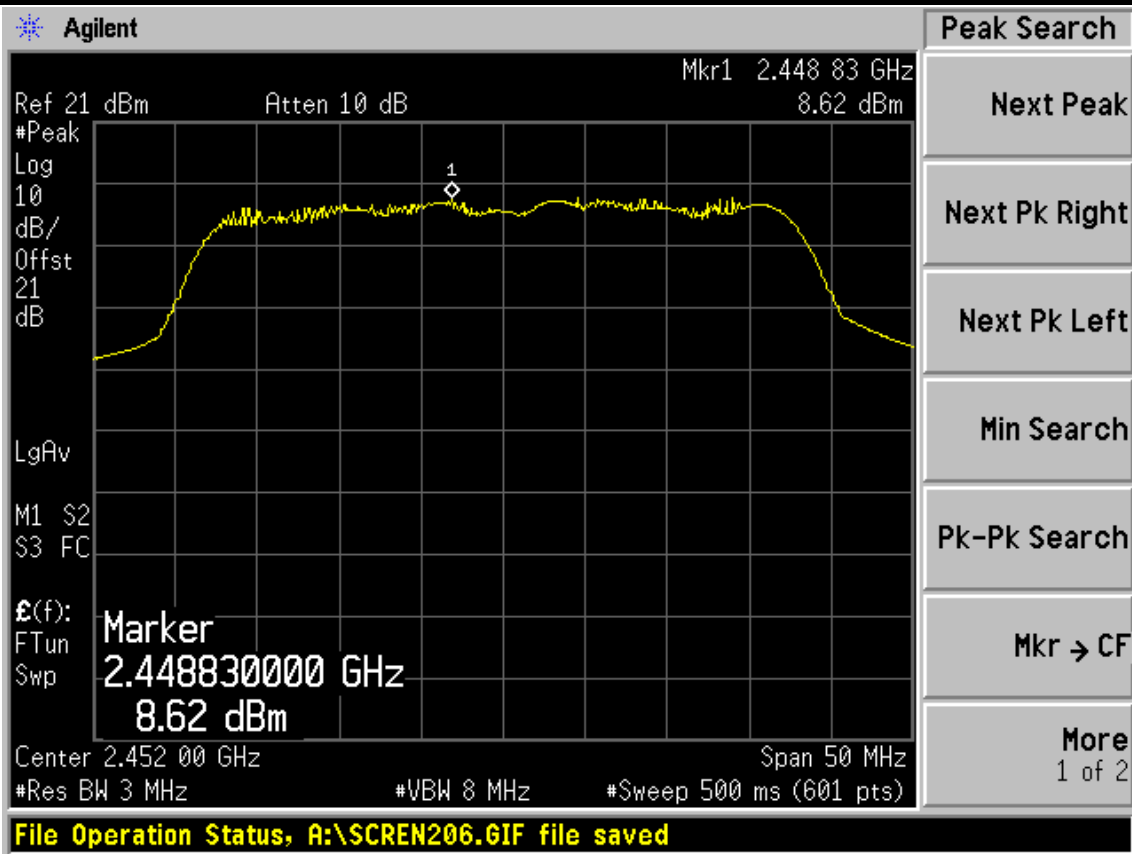


Chain 1:

Test Mode: IEEE 802.11n HT40 TX

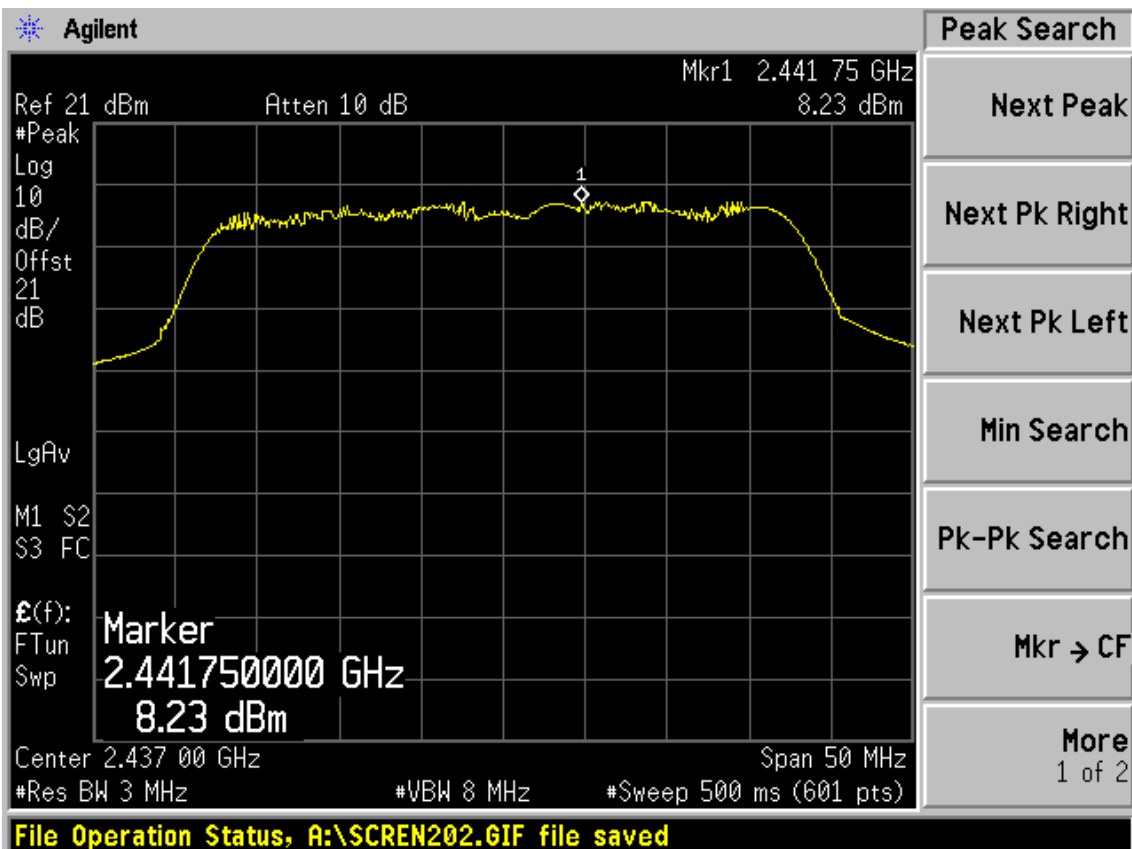


FCC ID: W6RRNX-N360PC

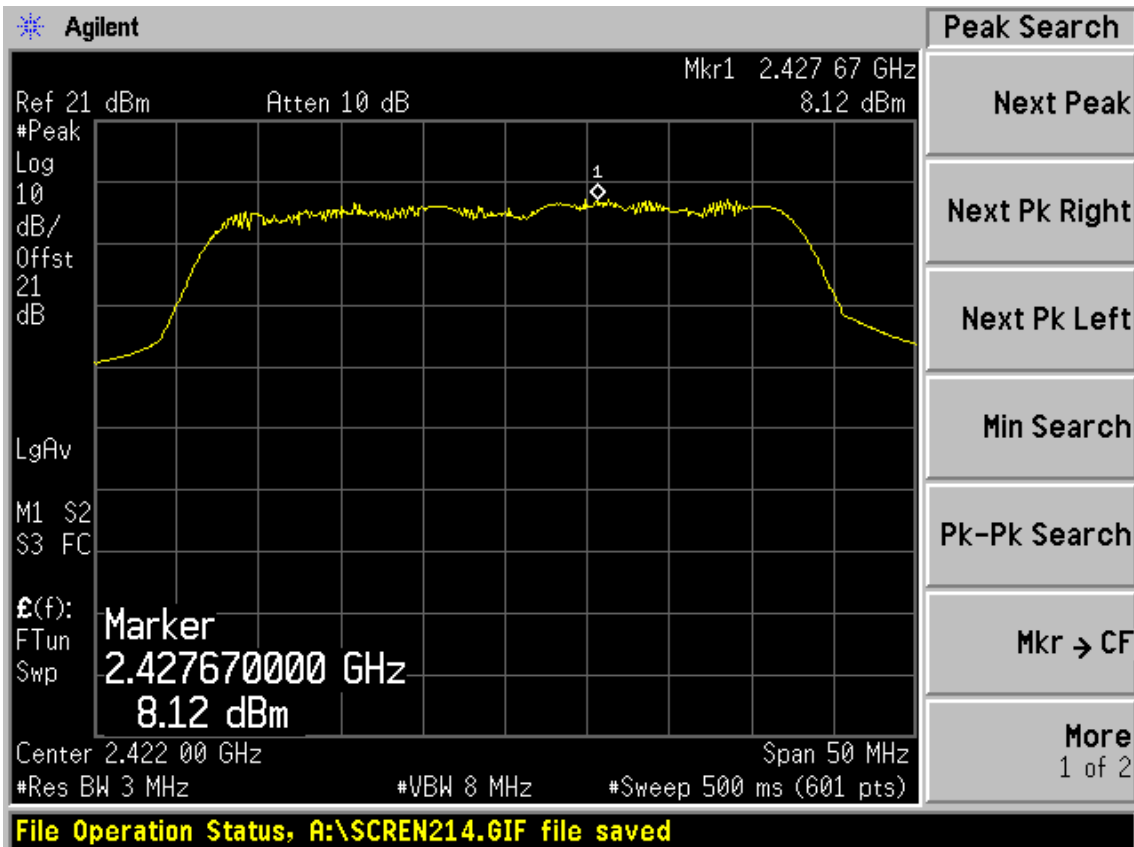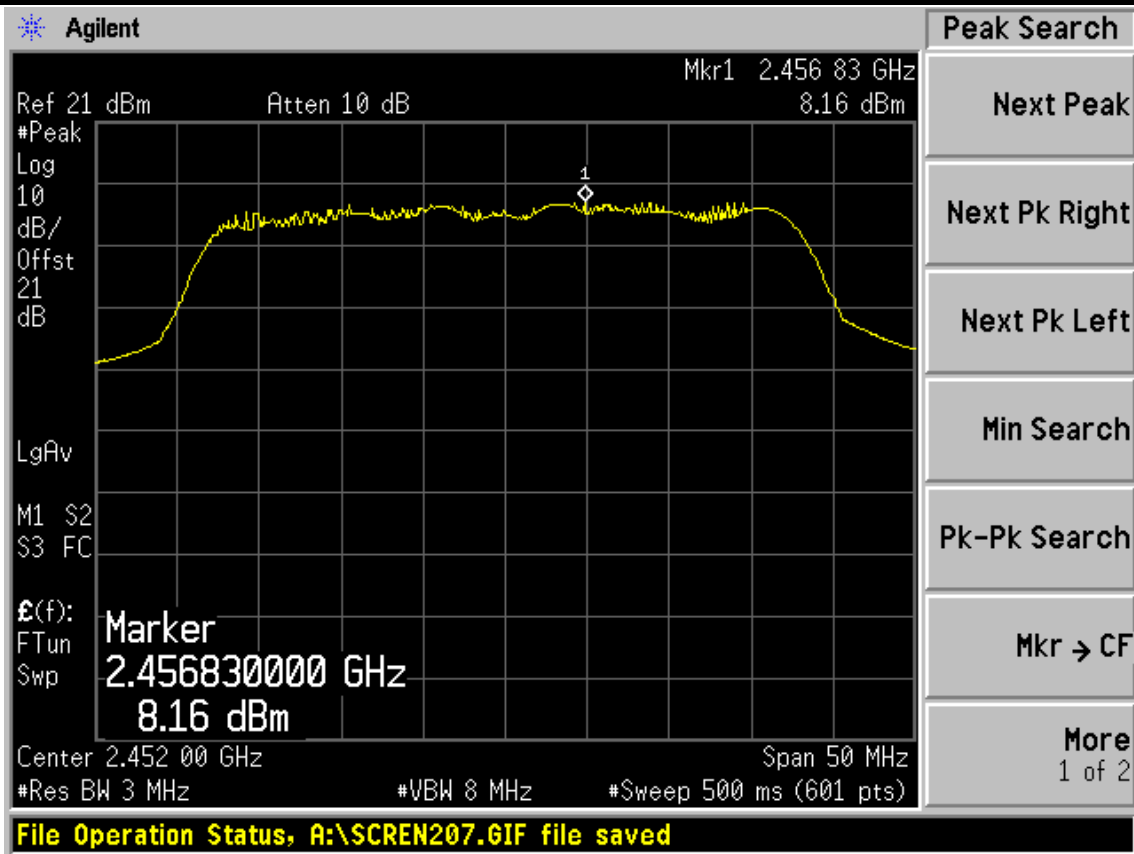


FCC ID: W6RRNX-N360PC

Chain 2:

Test Mode: IEEE 802.11n HT40 TX

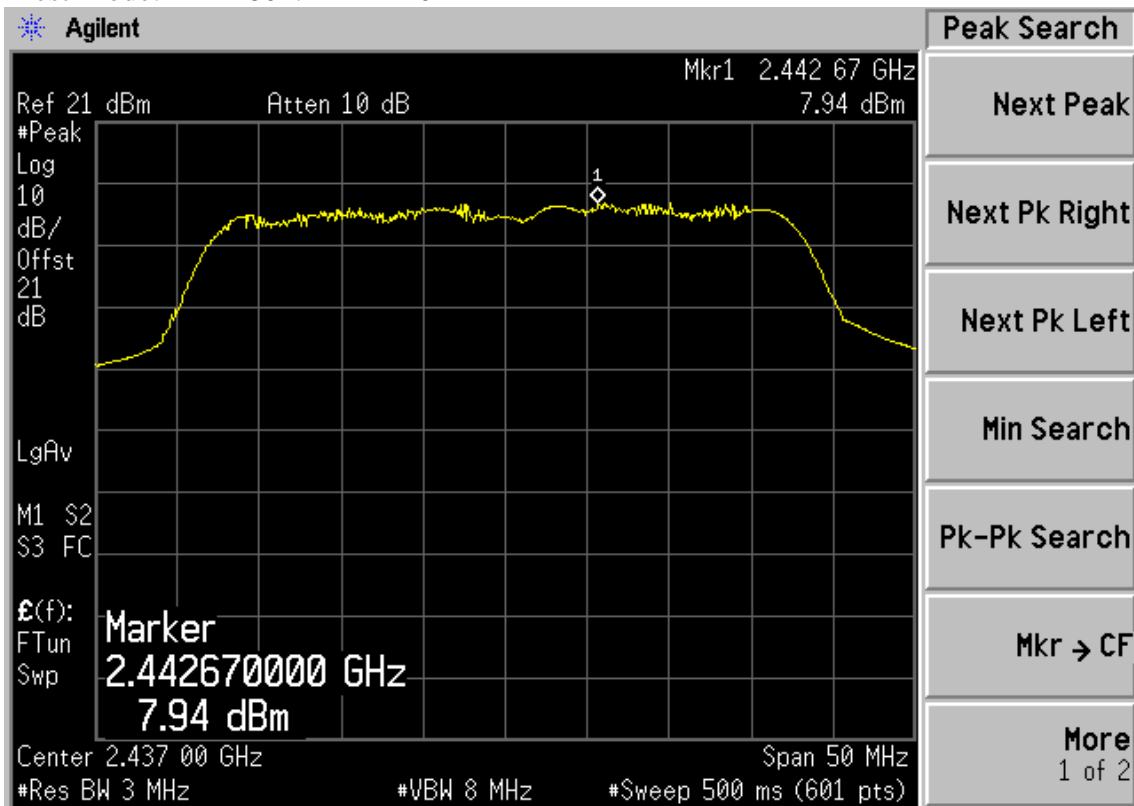


File Operation Status, A:\SCREN205.GIF file saved

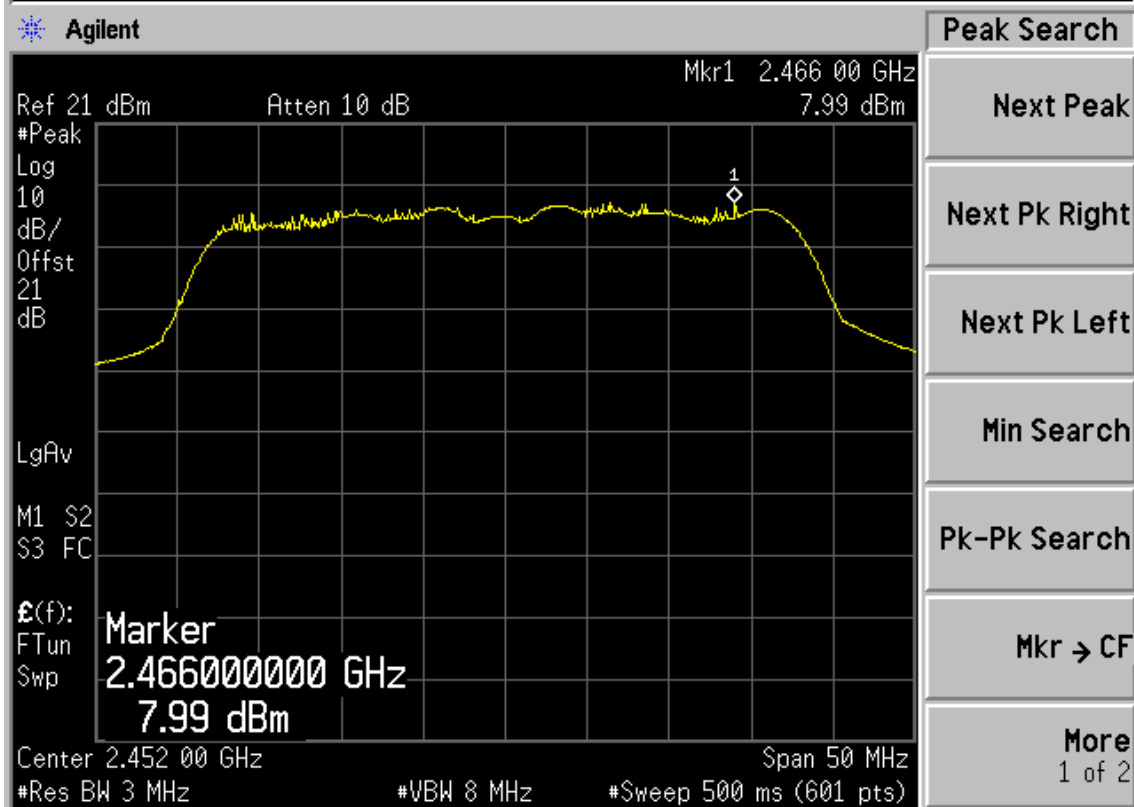

File Operation Status, A:\SCREN208.GIF file saved

FCC ID: W6RRNX-N360PC

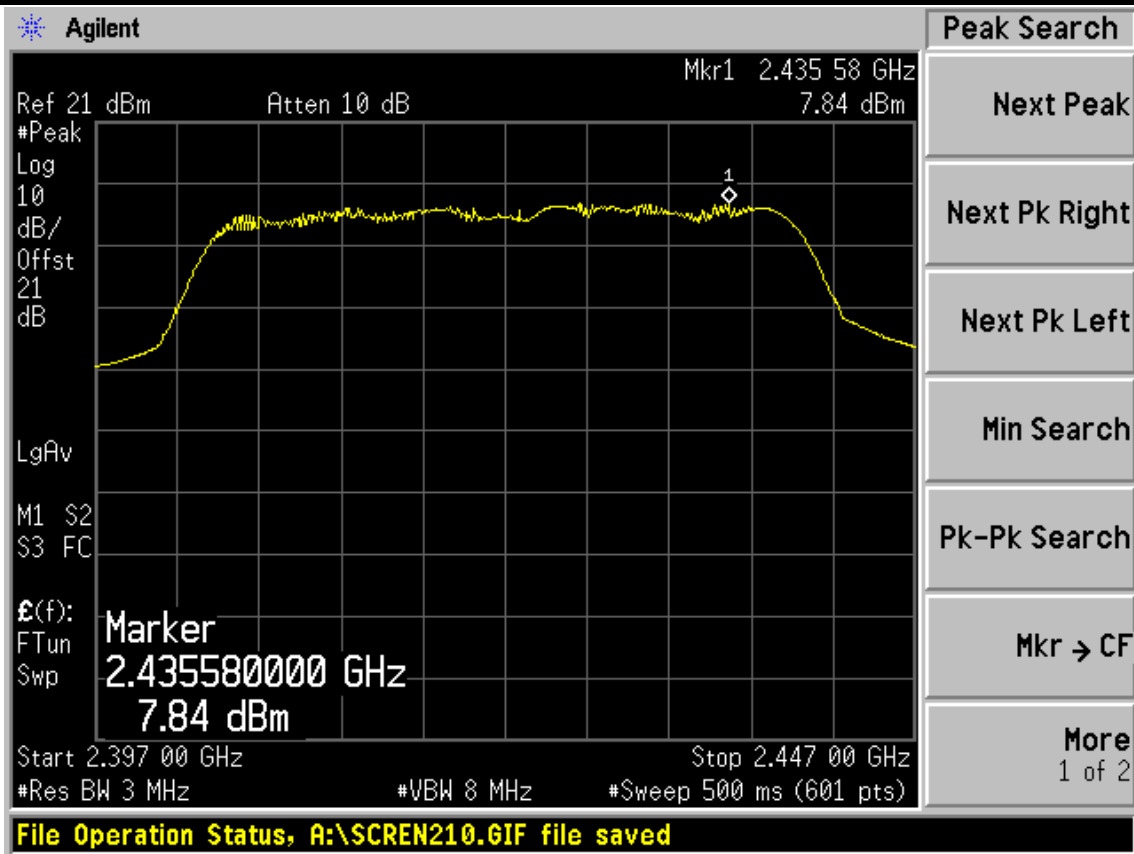

9. POWER SPECTRAL DENSITY TEST

9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 11	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08, 11	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08, 11	1Year

9.2. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

9.3. Test Procedure

The transmitter output was connected to a spectrum analyzer. Power density was measured by spectrum analyzer with 3kHz RBW and 30kHz VBW, sweep time=span/3kHz.

9.4.Test Results

EUT: Wireless N PCI Adapter		
M/N: RNX-N360PC		
Test date:2011-07-18	Pressure: 100.9 kpa	Humidity: 51 %
Tested by: Leo-Li	Test site: RF Site	Temperature : 25°C


Cable loss: 1 dB		Attenuator loss: 20 dB				Antenna Gain: 2 dBi
Test Mode	CH	Power density (dBm/3KHz)				Limit (dBm/3KHz)
		Chain0	Chain1	Chain2	Total	
11b	CH1	-8.37	-9.28	-10.20	N/A	8
	CH6	-8.14	-9.41	-10.86	N/A	8
	CH11	-9.30	-9.44	-10.90	N/A	8
11g	CH1	-13.28	-13.53	-13.62	N/A	8
	CH6	-9.81	-10.26	-11.32	N/A	8
	CH11	-15.00	-15.70	-15.80	N/A	8
11n HT20	CH1	-17.30	-17.79	-17.02	-12.59	8
	CH6	-10.59	-10.66	-10.64	-5.86	8
	CH11	-17.03	-17.16	-17.84	-12.56	8
11n HT40	CH1	-21.57	-20.58	-19.70	-15.78	8
	CH4	-13.40	-11.89	-11.52	-7.43	8
	CH7	-21.71	-21.10	-20.96	-16.47	8
Conclusion : PASS						

FCC ID: W6RRNX-N360PC


Chain 0:

Test Mode: IEEE 802.11b TX


Test CH1: 2412MHz

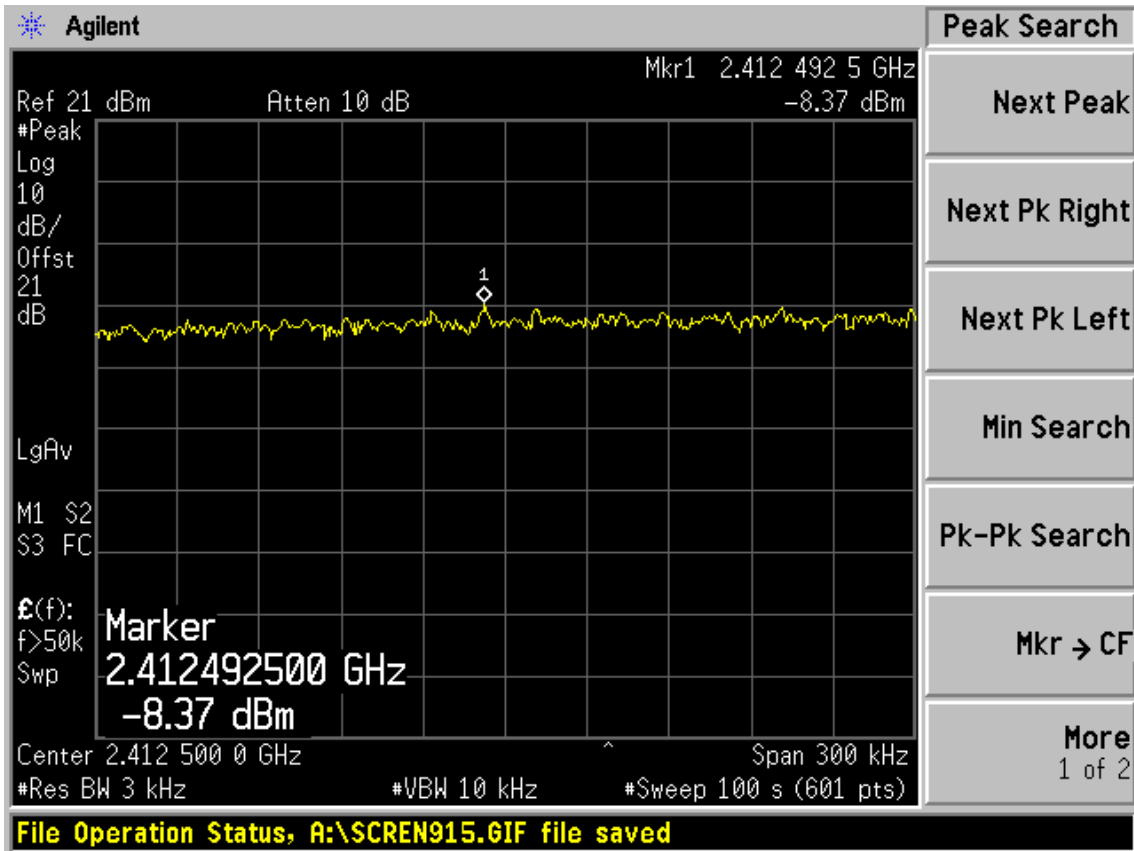

Test CH6: 2437MHz

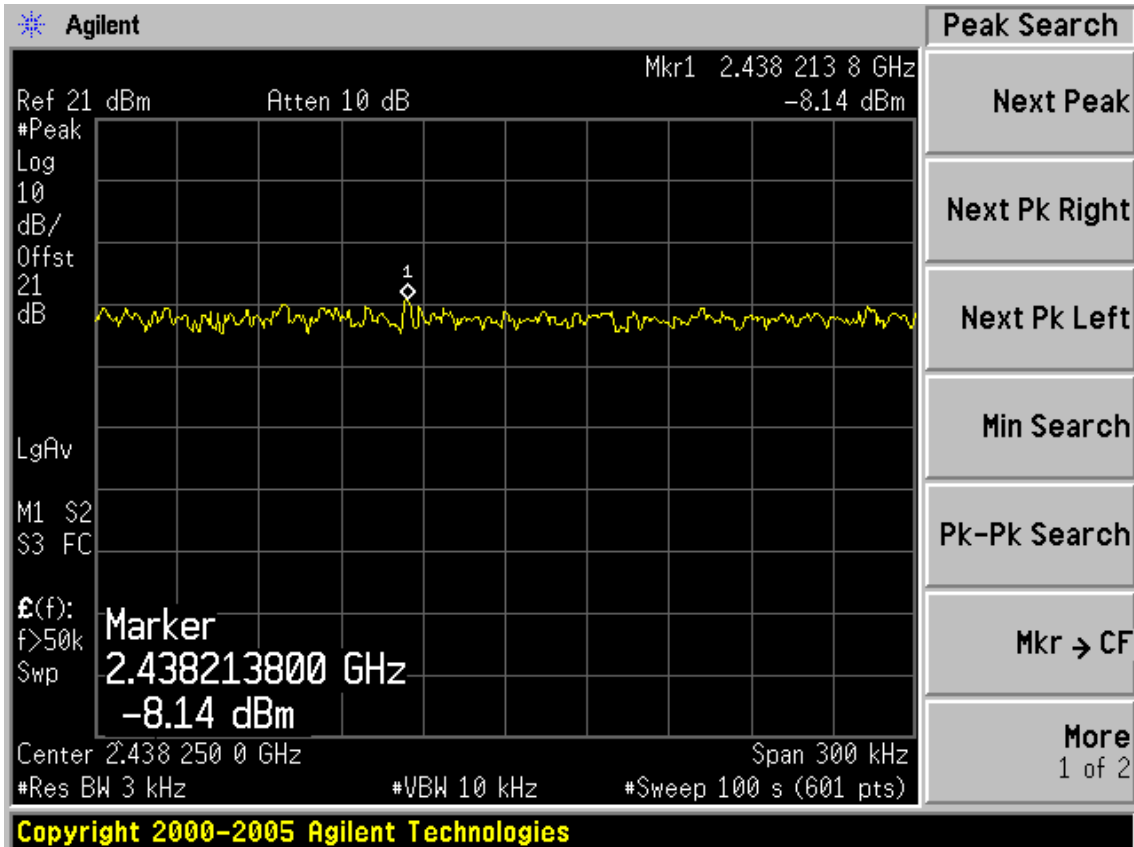


FCC ID: W6RRNX-N360PC

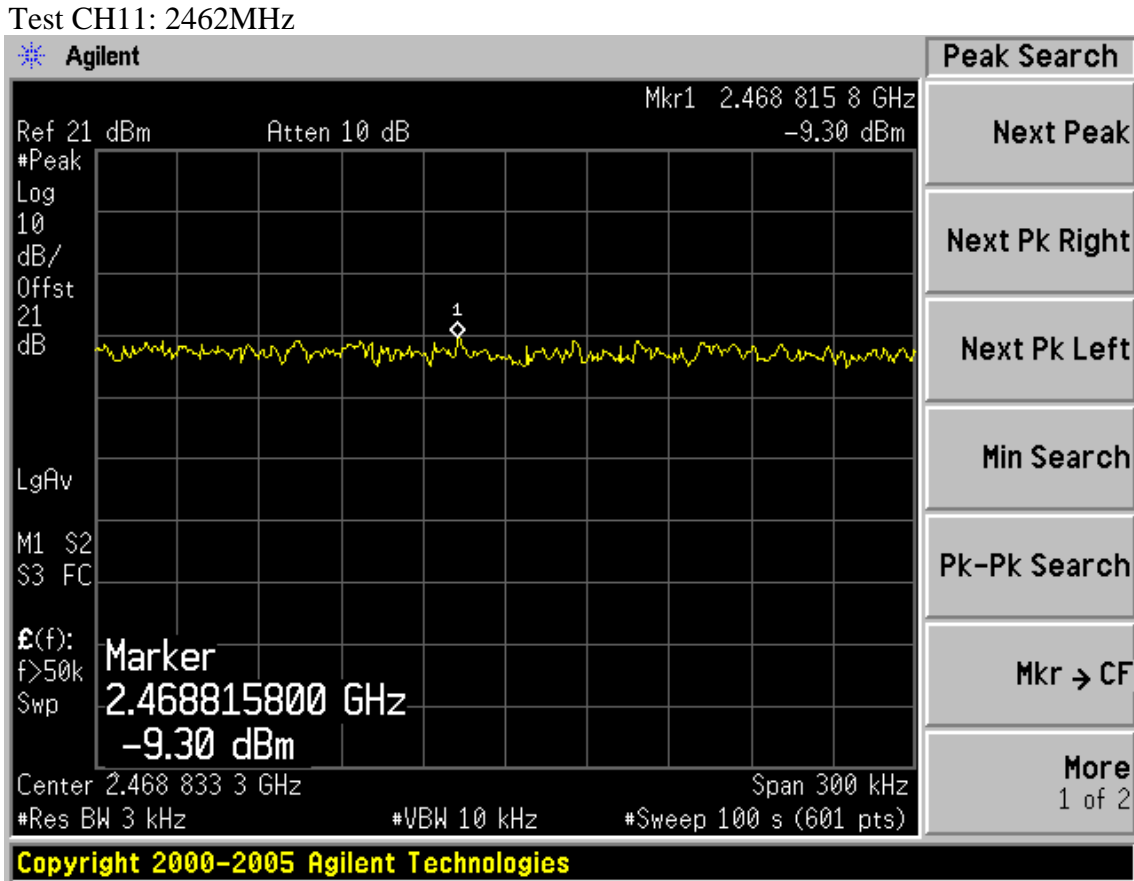


Test Mode: IEEE 802.11g TX

Test CH1: 2412MHz

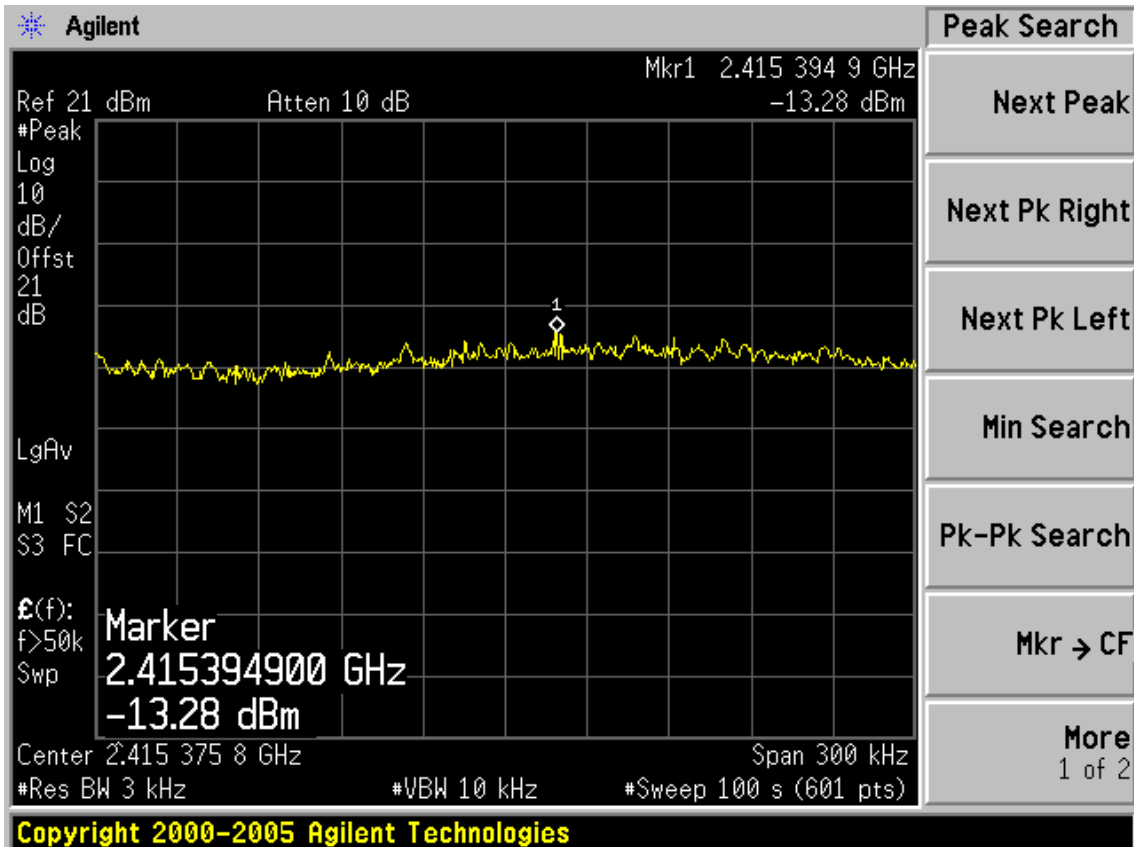


FCC ID: W6RRNX-N360PC

Test CH6: 2437MHz

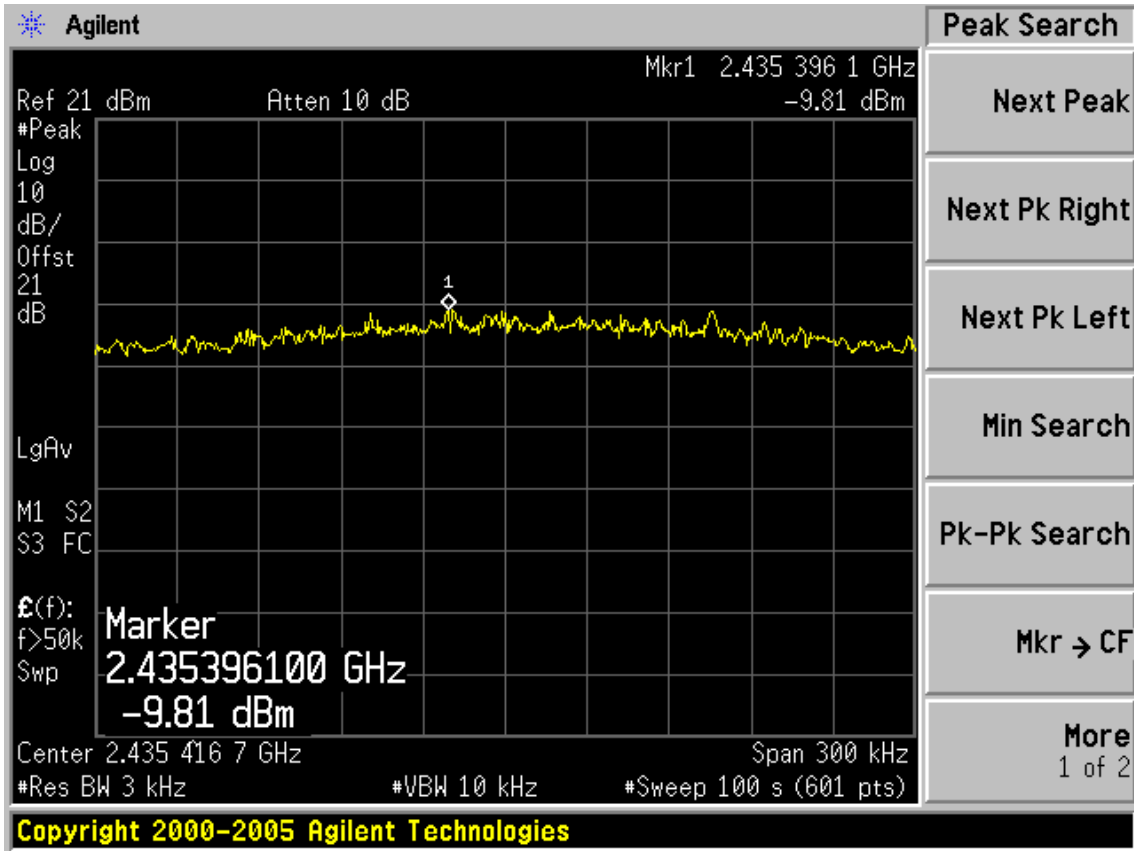


Test CH11: 2462MHz

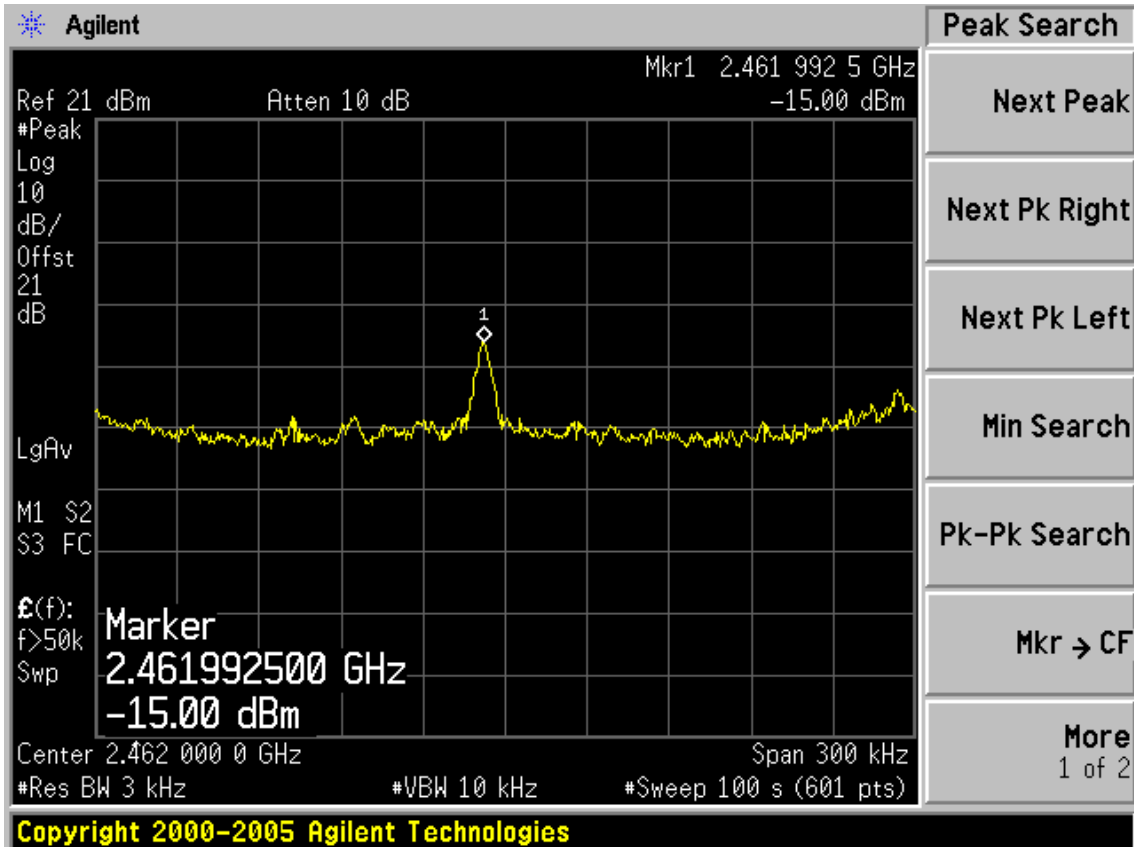


FCC ID: W6RRNX-N360PC

Test Mode: IEEE 802.11n HT20 TX


Test CH1: 2412MHz

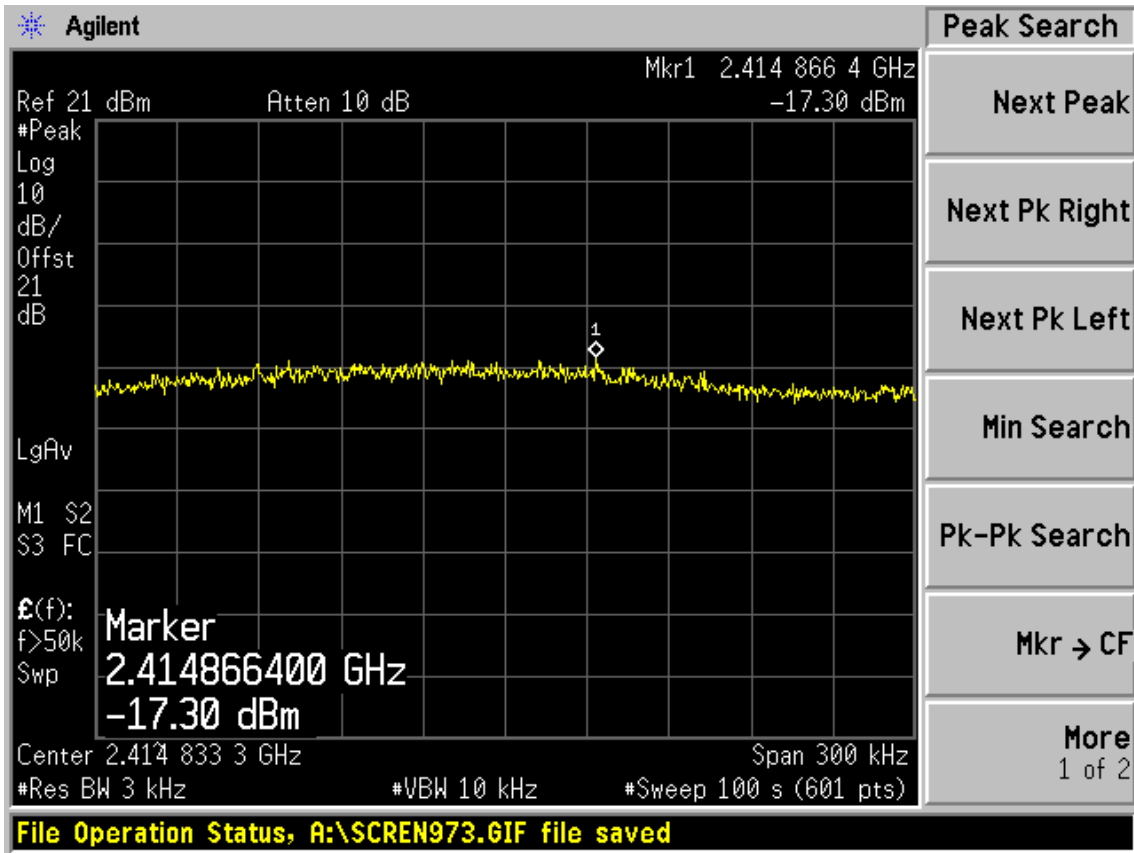


Test CH6: 2437MHz

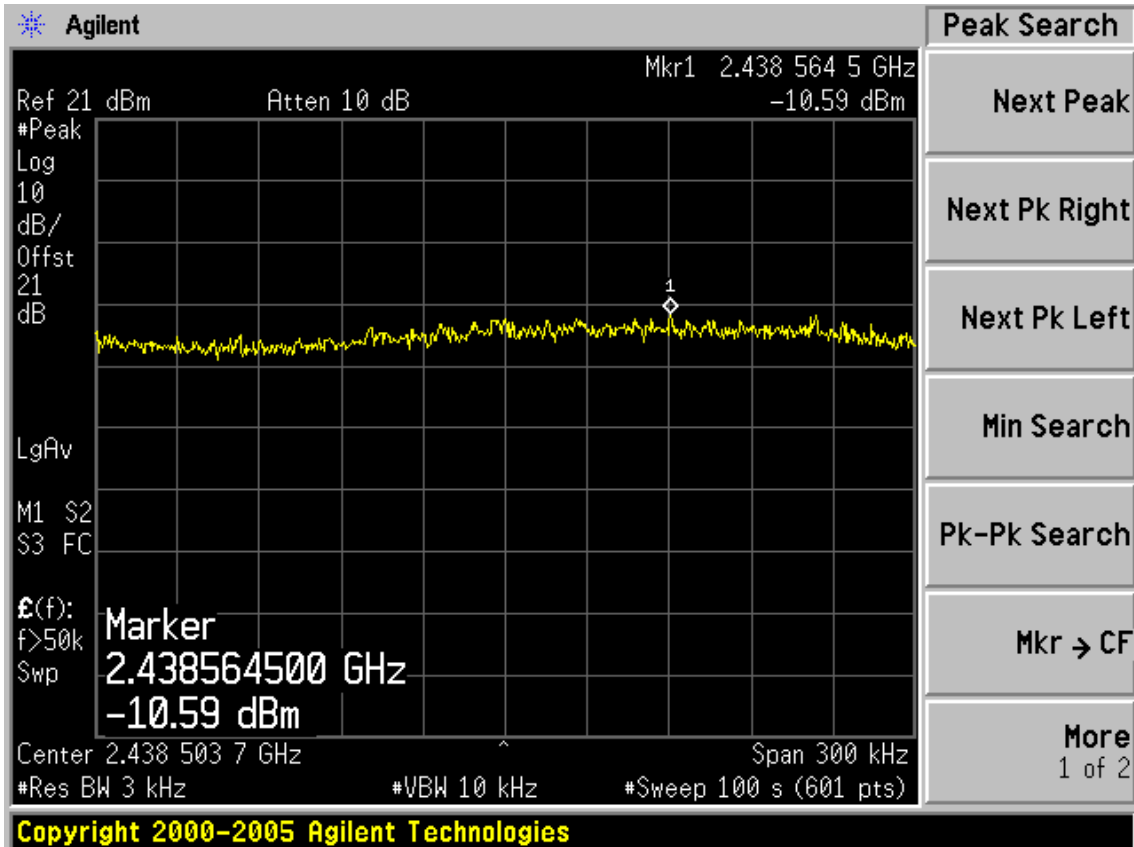



FCC ID: W6RRNX-N360PC

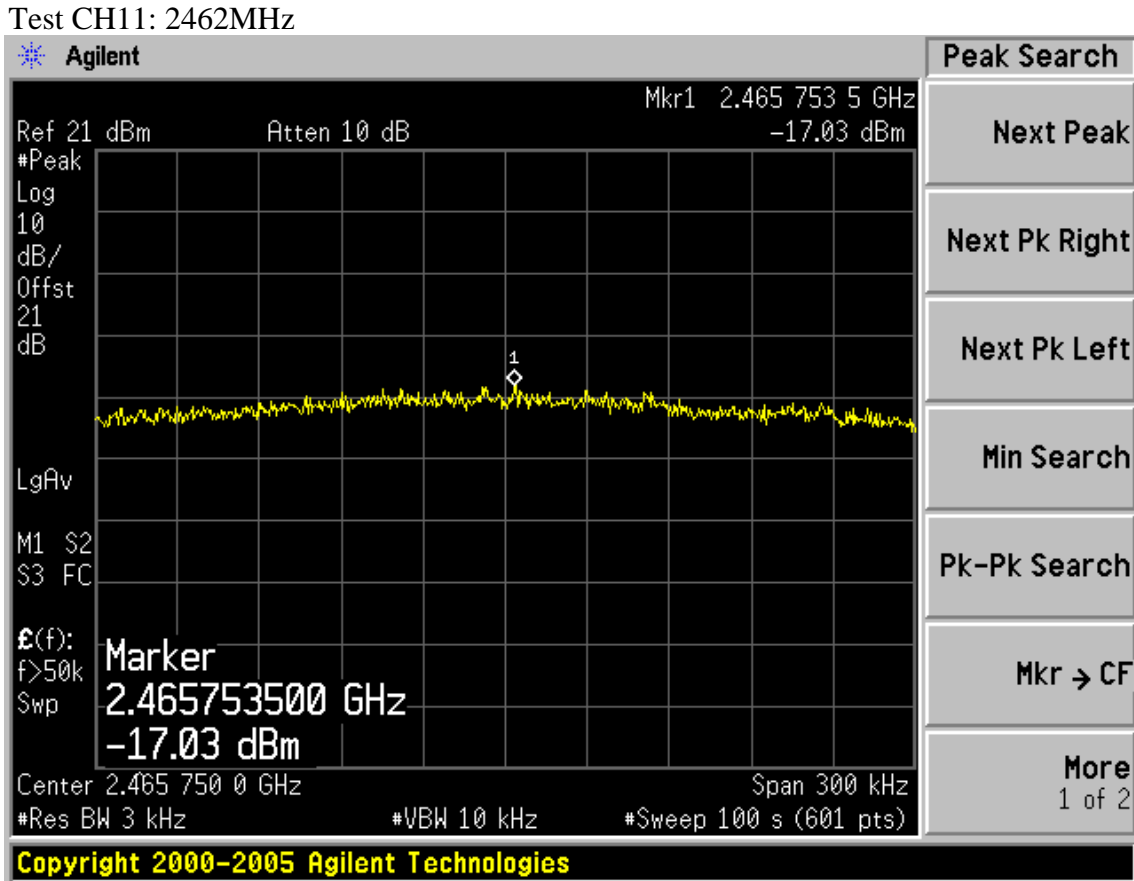

Test Mode: IEEE 802.11n HT40 TX
Test CH1: 2422MHz

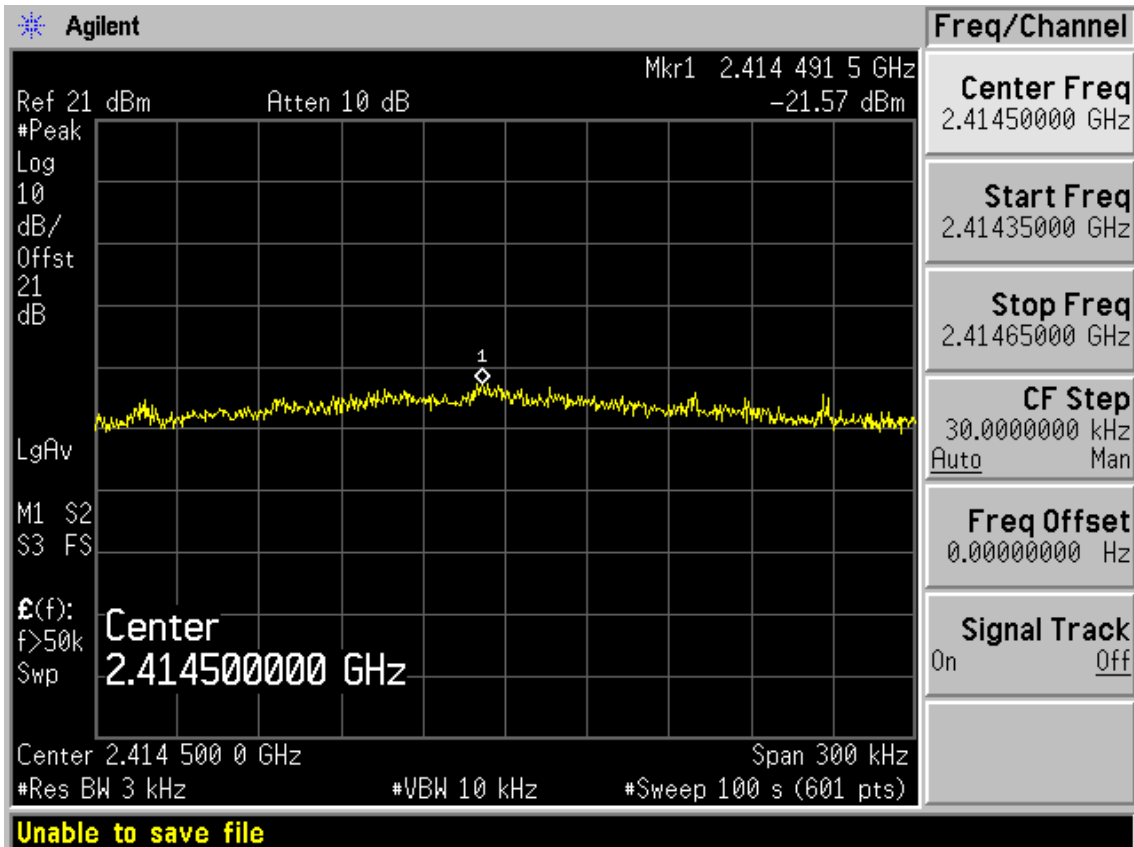

FCC ID: W6RRNX-N360PC

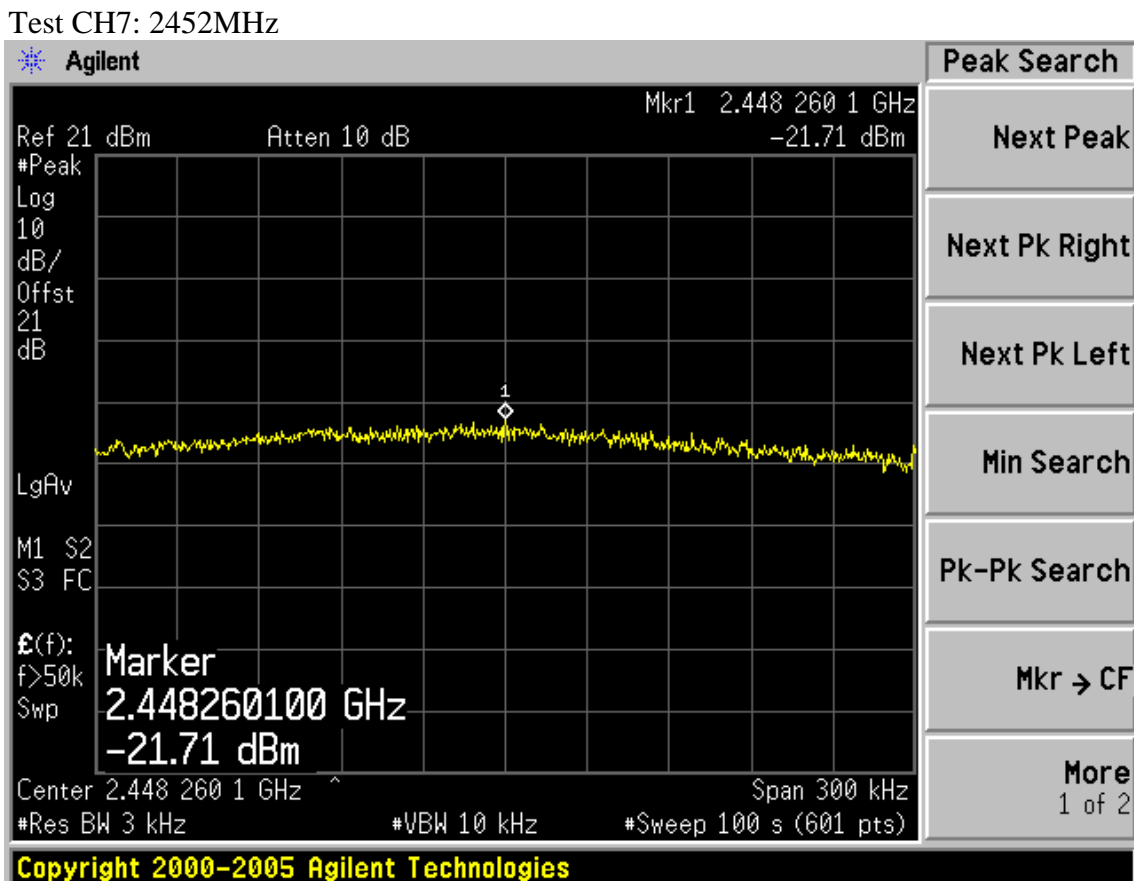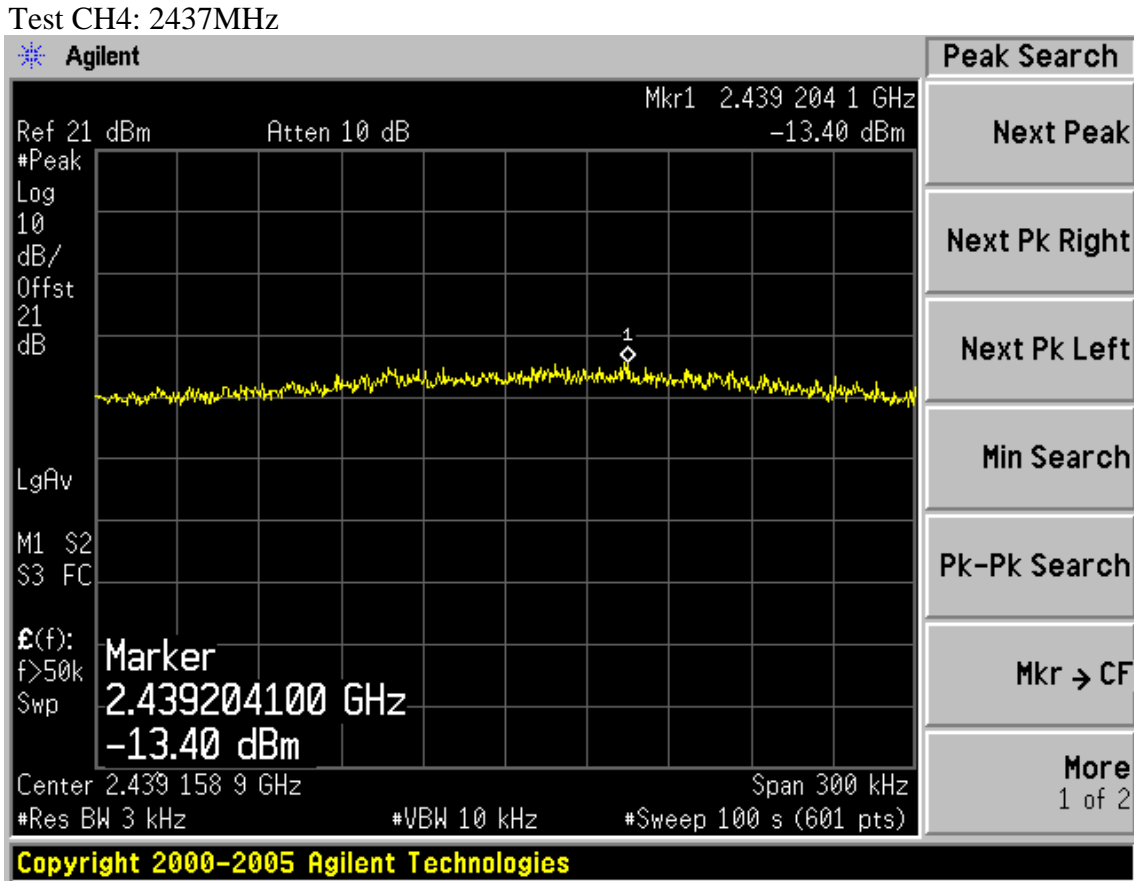


FCC ID: W6RRNX-N360PC

Chain 1:


Test Mode: IEEE 802.11b TX

Test CH1: 2412MHz

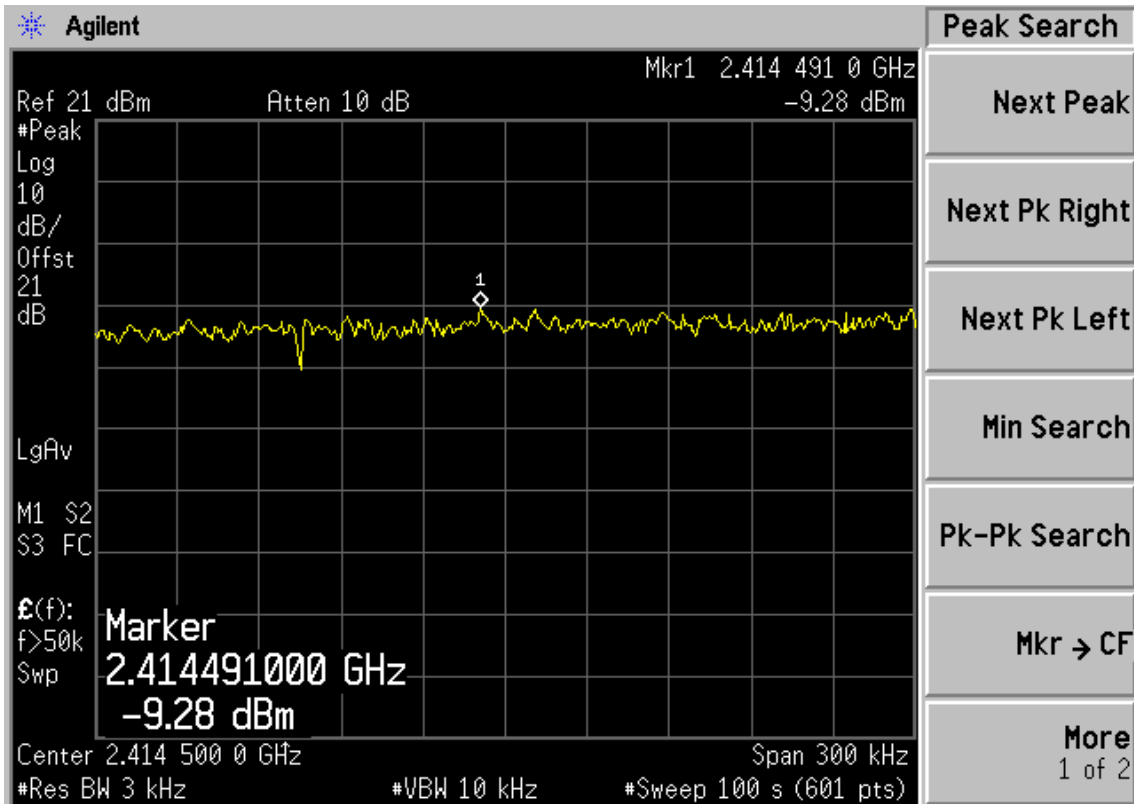

Copyright 2000-2005 Agilent Technologies


Test CH6: 2437MHz

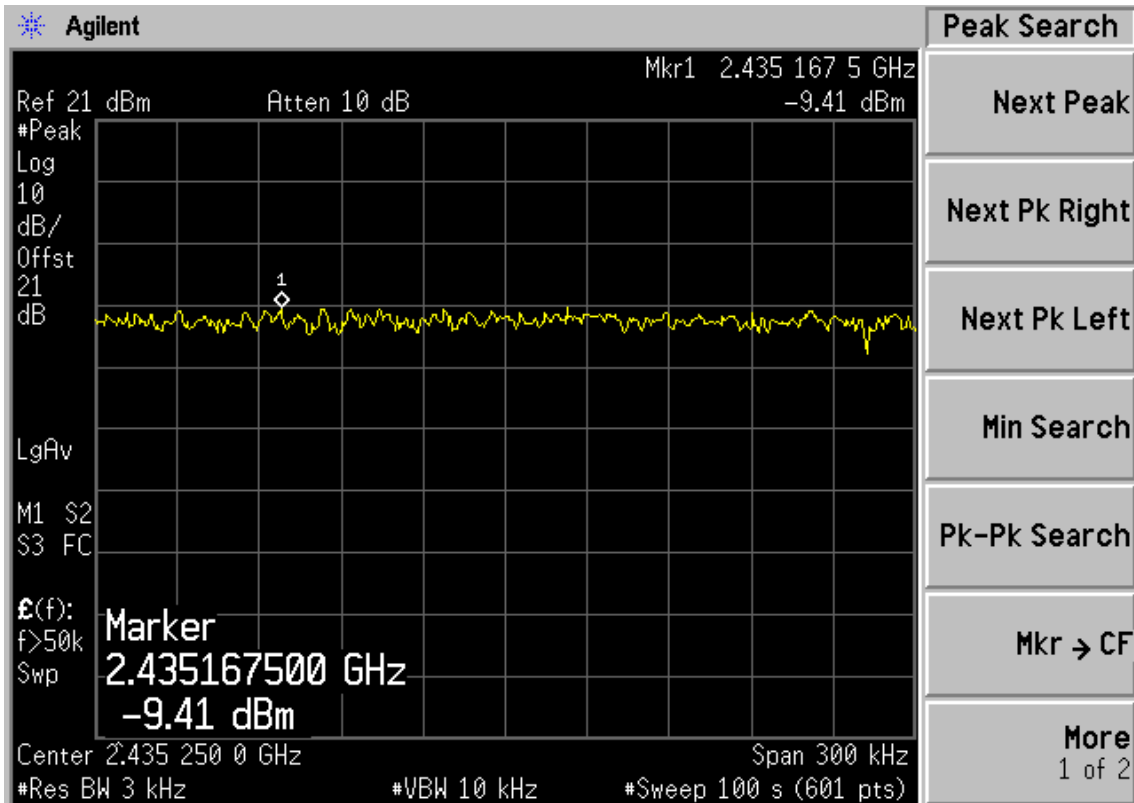

Copyright 2000-2005 Agilent Technologies


FCC ID: W6RRNX-N360PC

Test CH11: 2462MHz


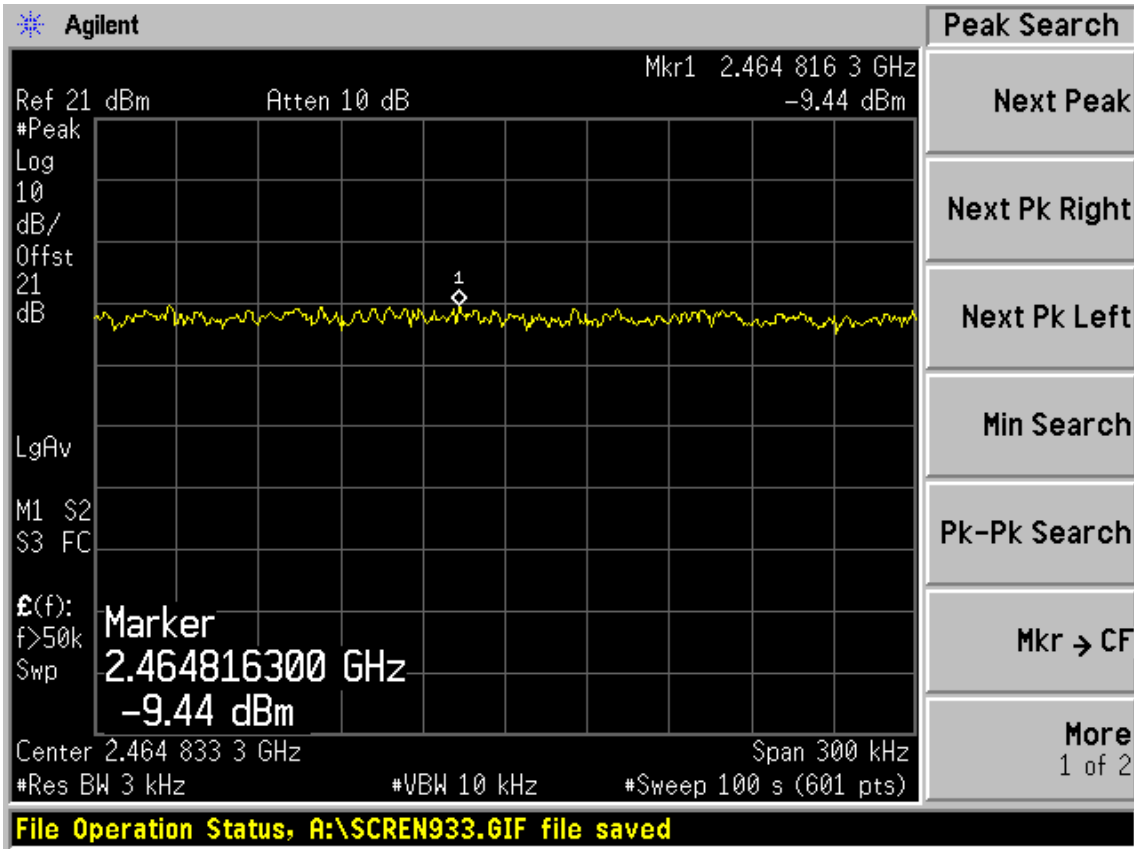


Test Mode: IEEE 802.11g TX

Test CH1: 2412MHz

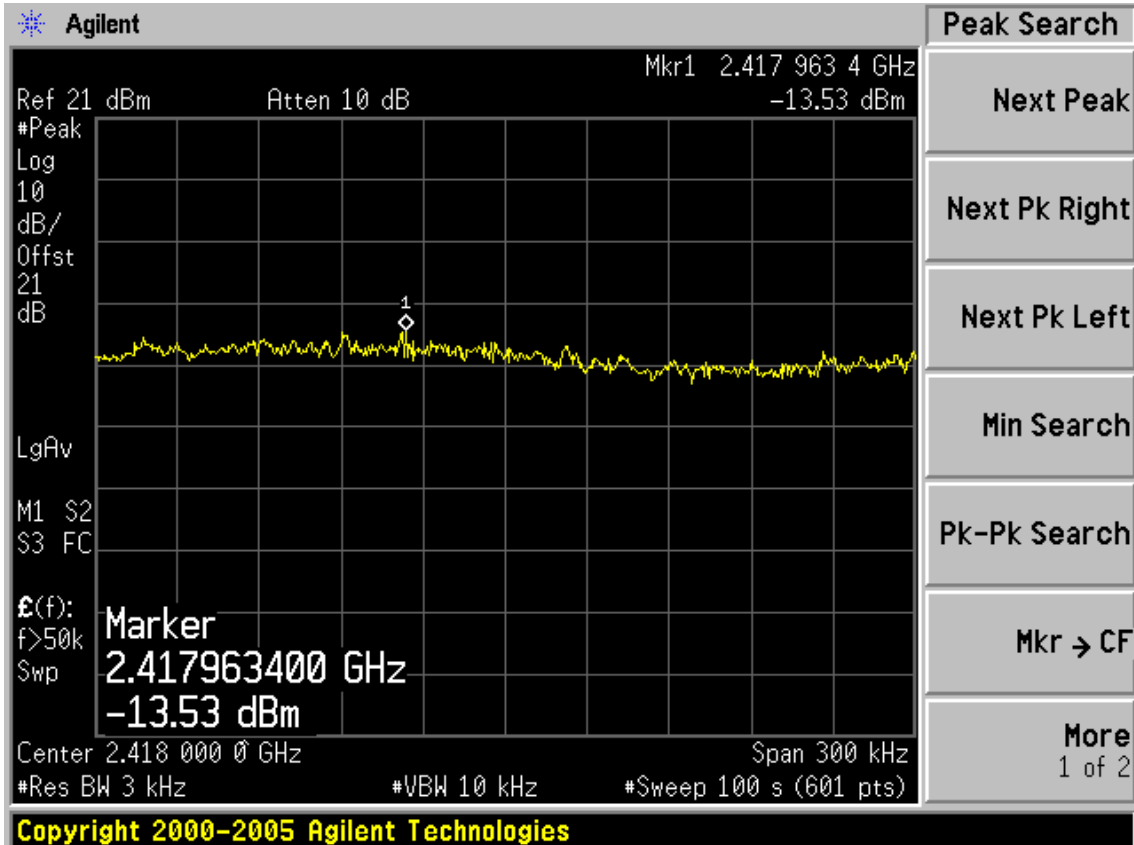


FCC ID: W6RRNX-N360PC

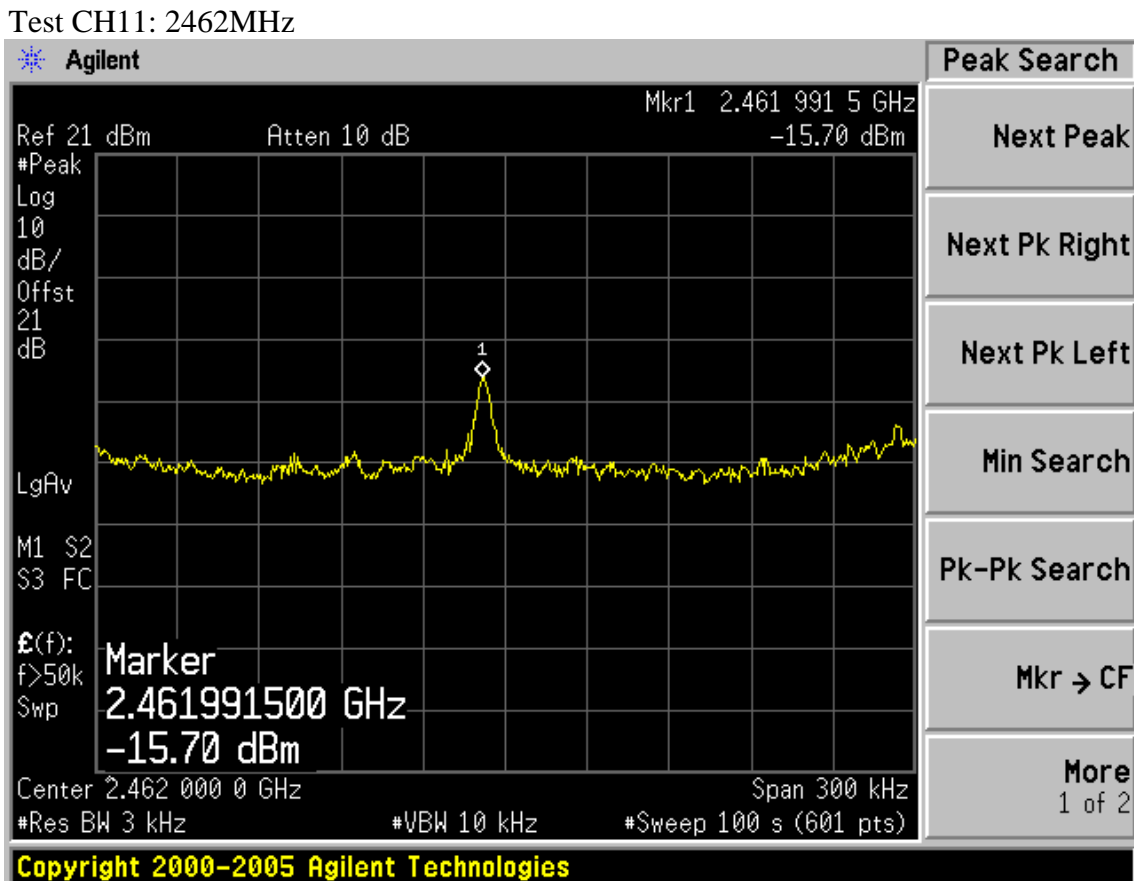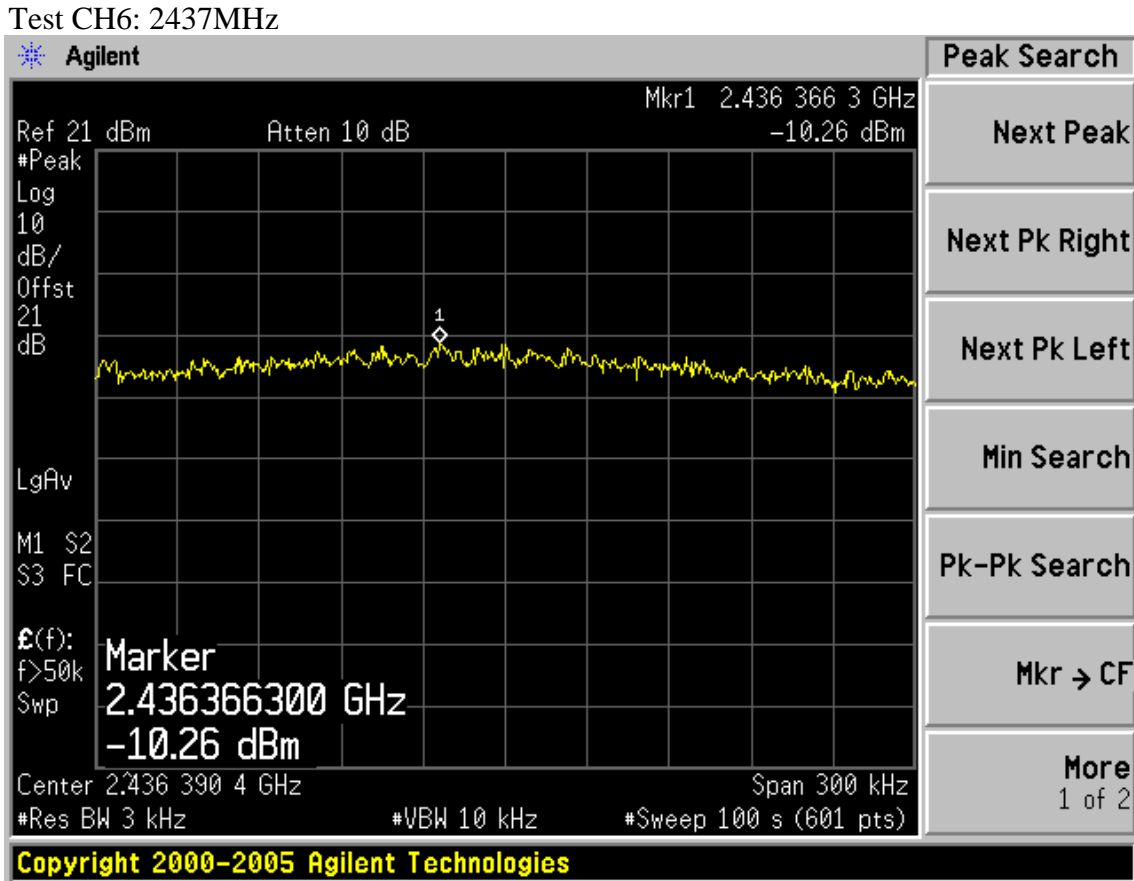


FCC ID: W6RRNX-N360PC

Test Mode: IEEE 802.11n HT20 TX
 Test CH1: 2412MHz

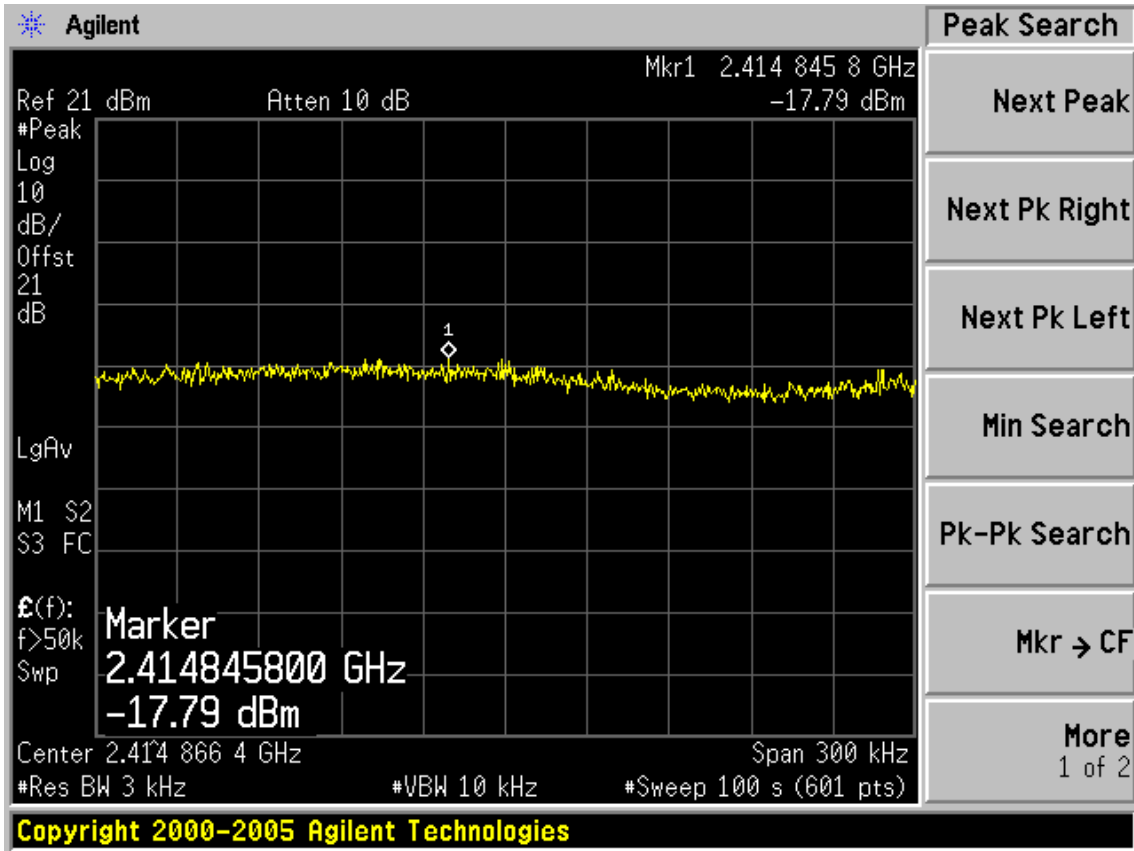


Test CH6: 2437MHz

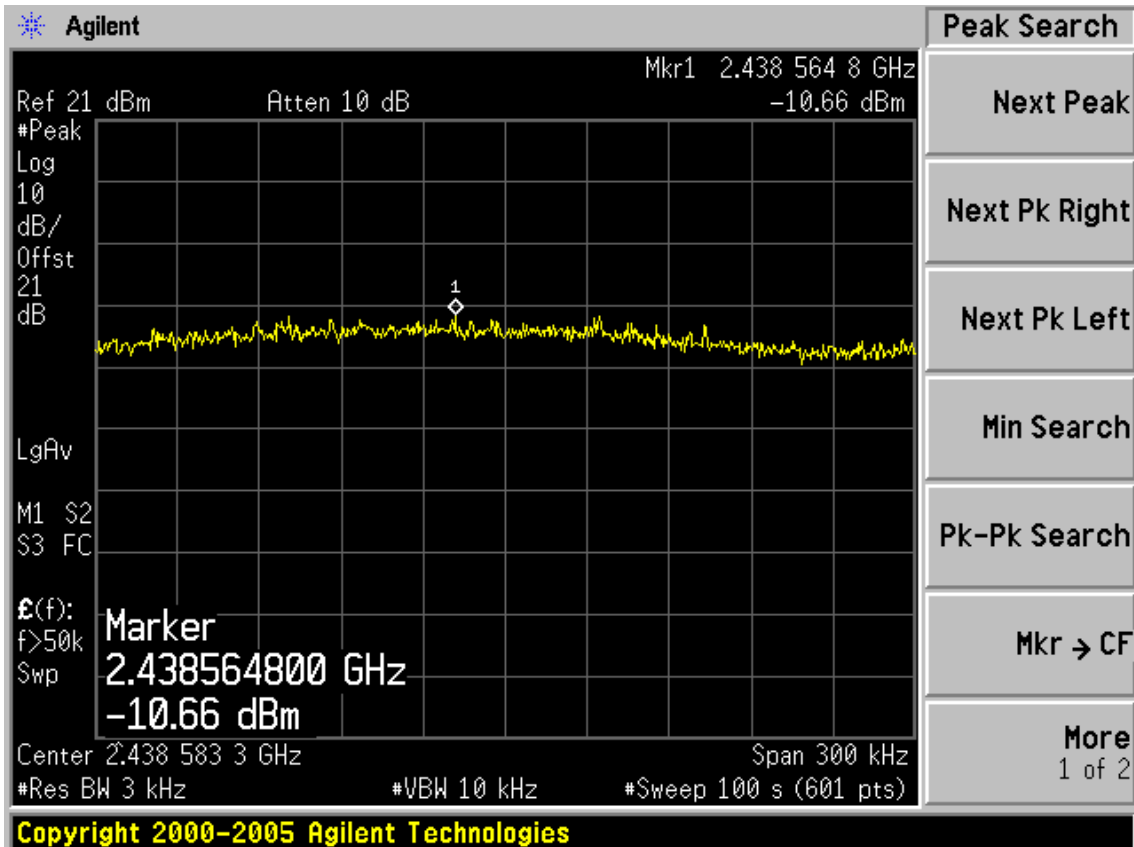


FCC ID: W6RRNX-N360PC

Test CH11: 2462MHz

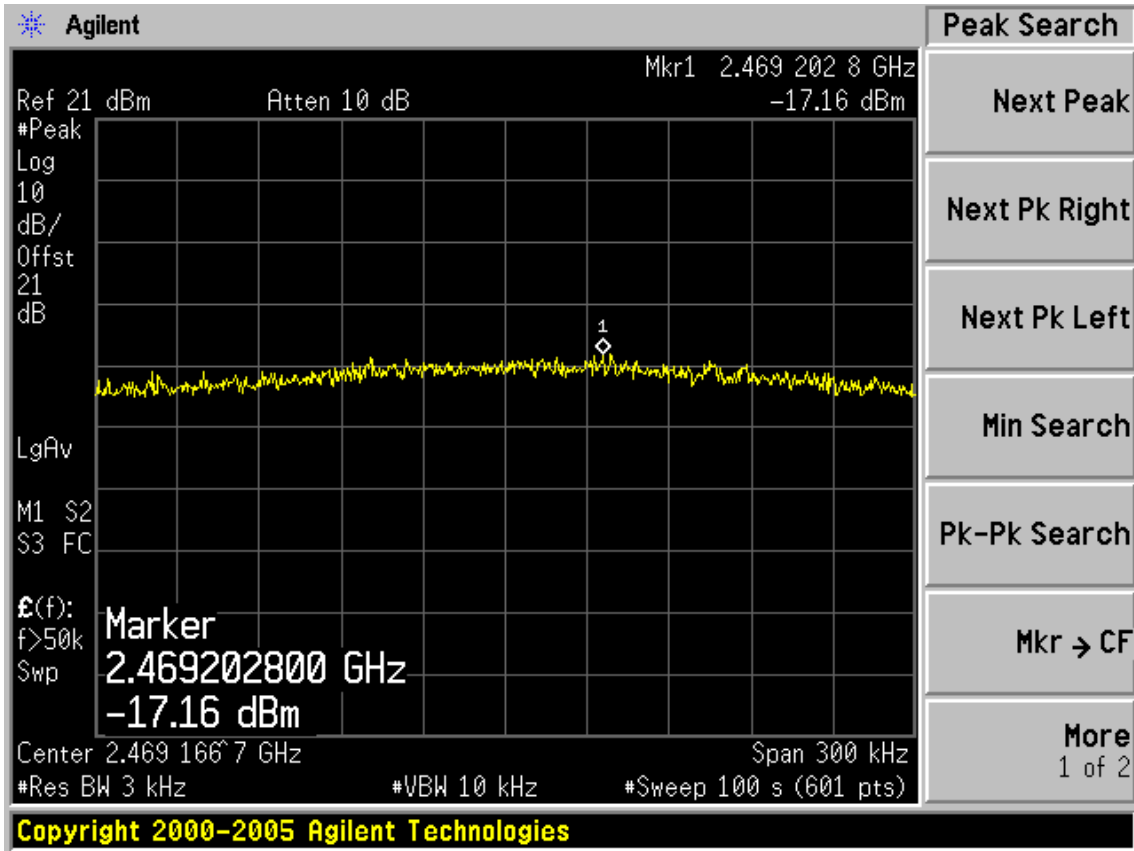


Test Mode: IEEE 802.11n HT40 TX

Test CH1: 2422MHz

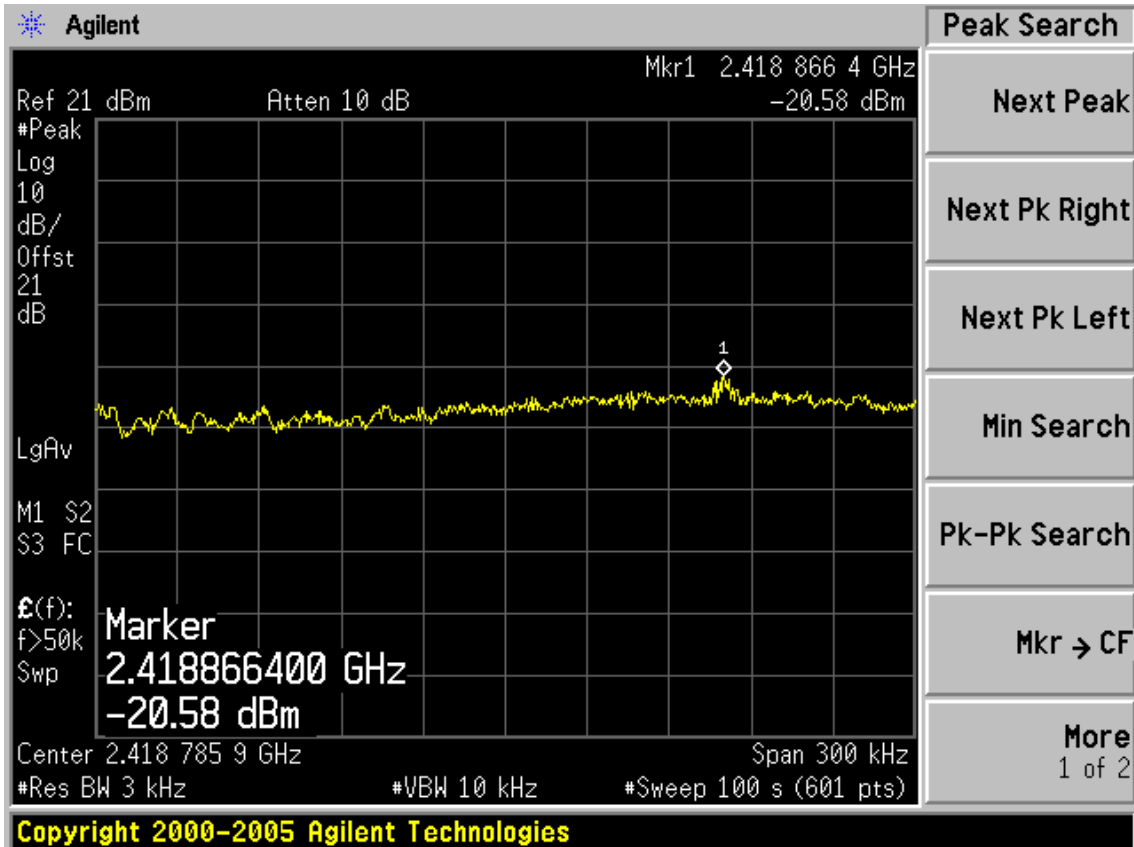


FCC ID: W6RRNX-N360PC

Test CH4: 2437MHz

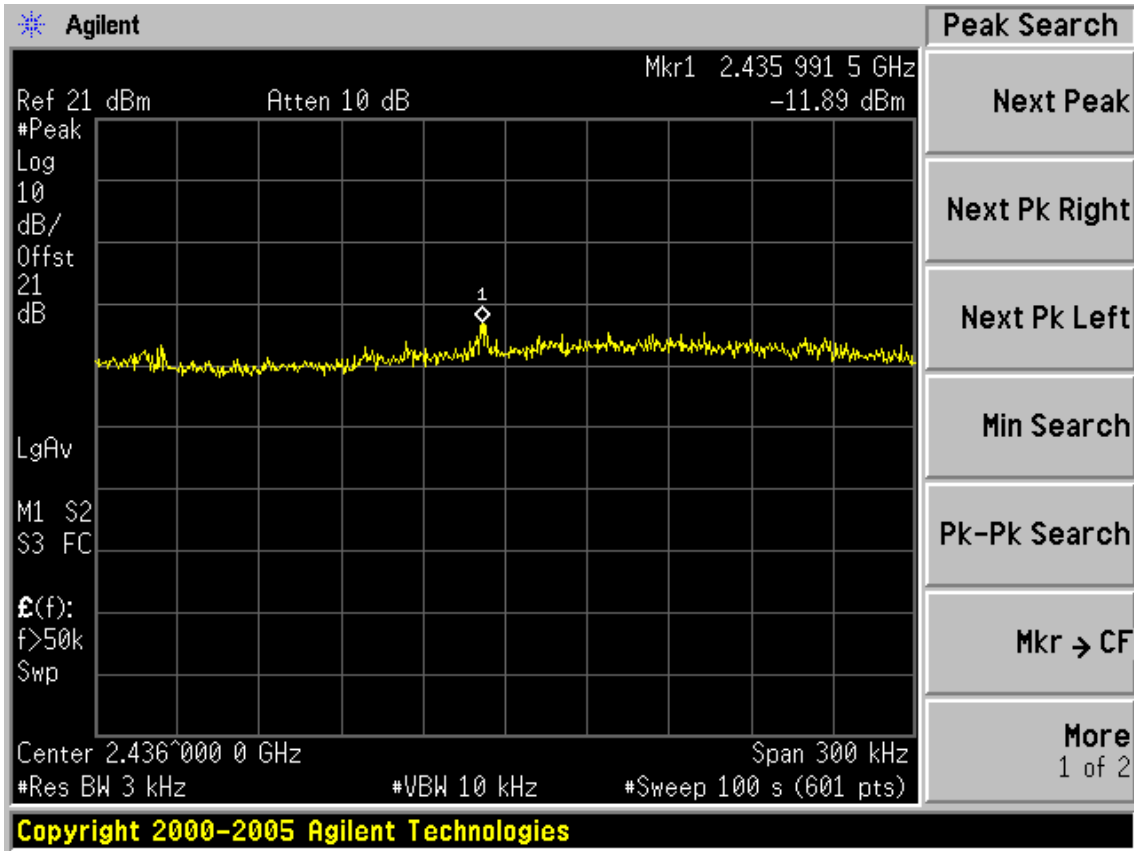

Test CH7: 2452MHz

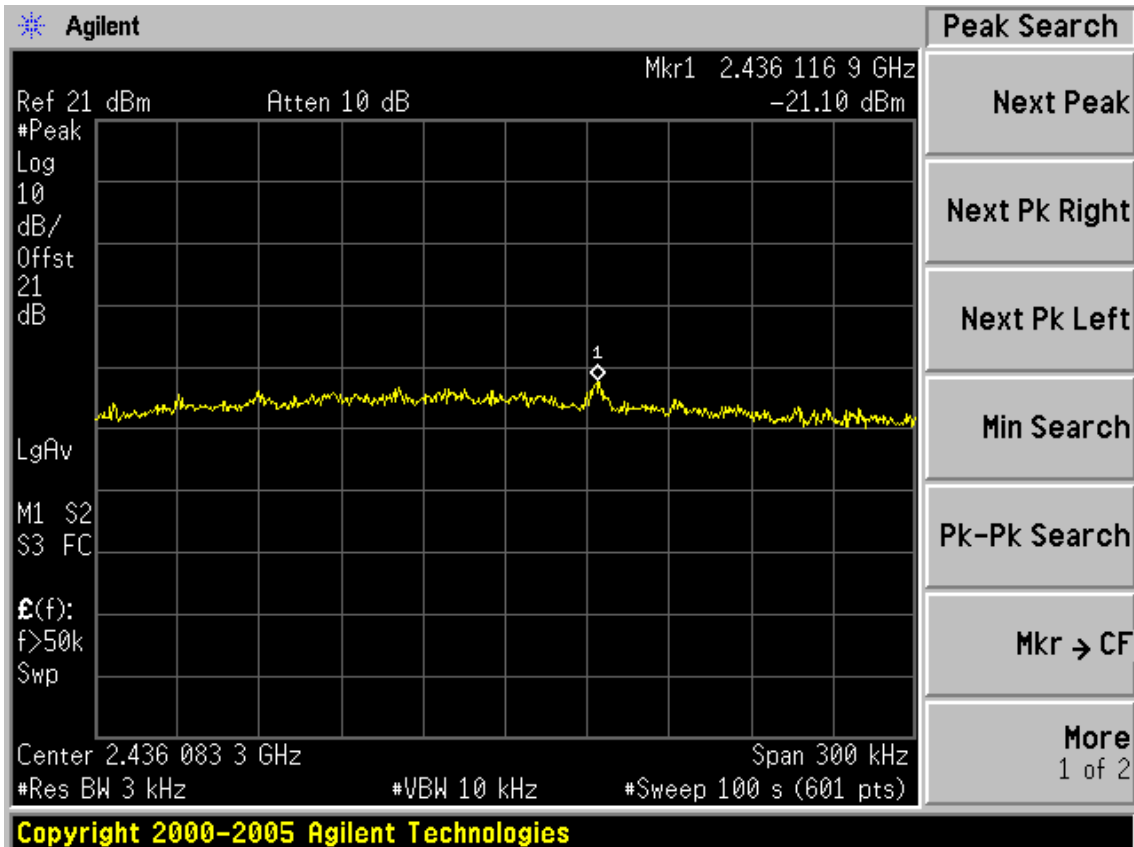


FCC ID: W6RRNX-N360PC


Chain 2:

Test Mode: IEEE 802.11b TX


Test CH1: 2412MHz

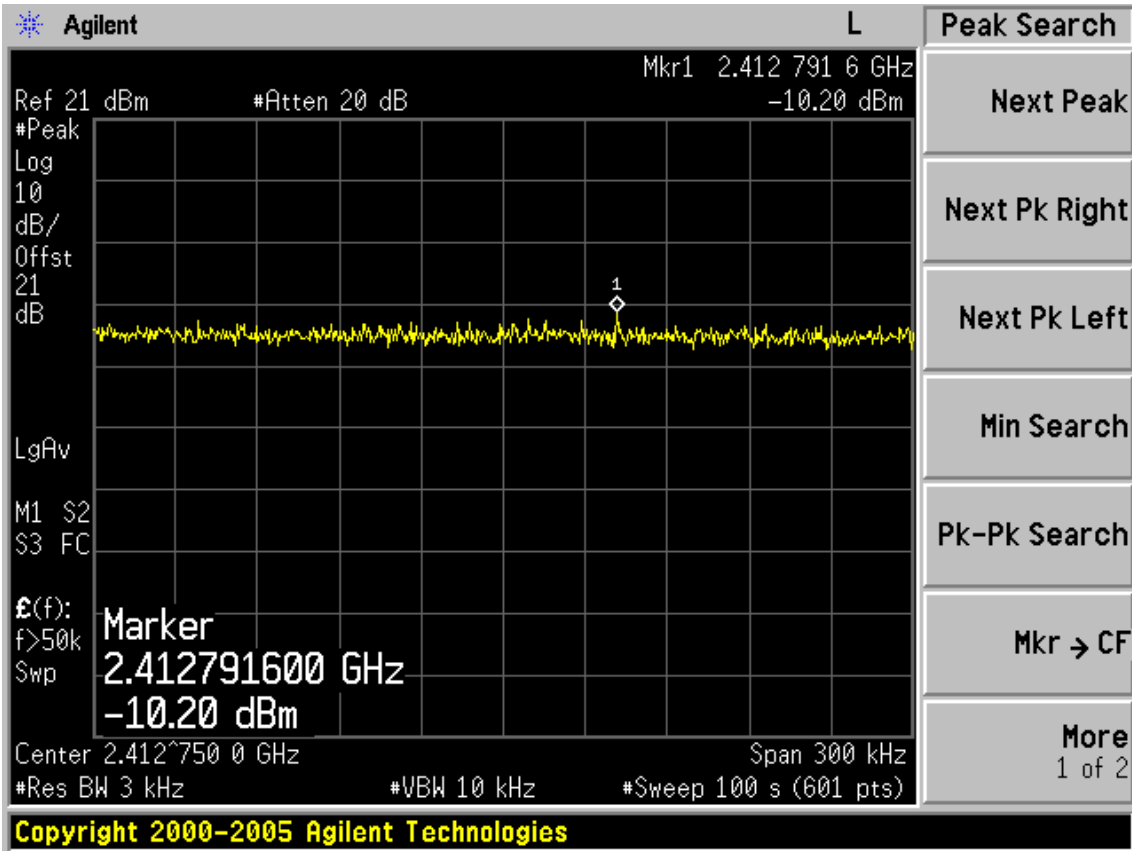


Test CH6: 2437MHz

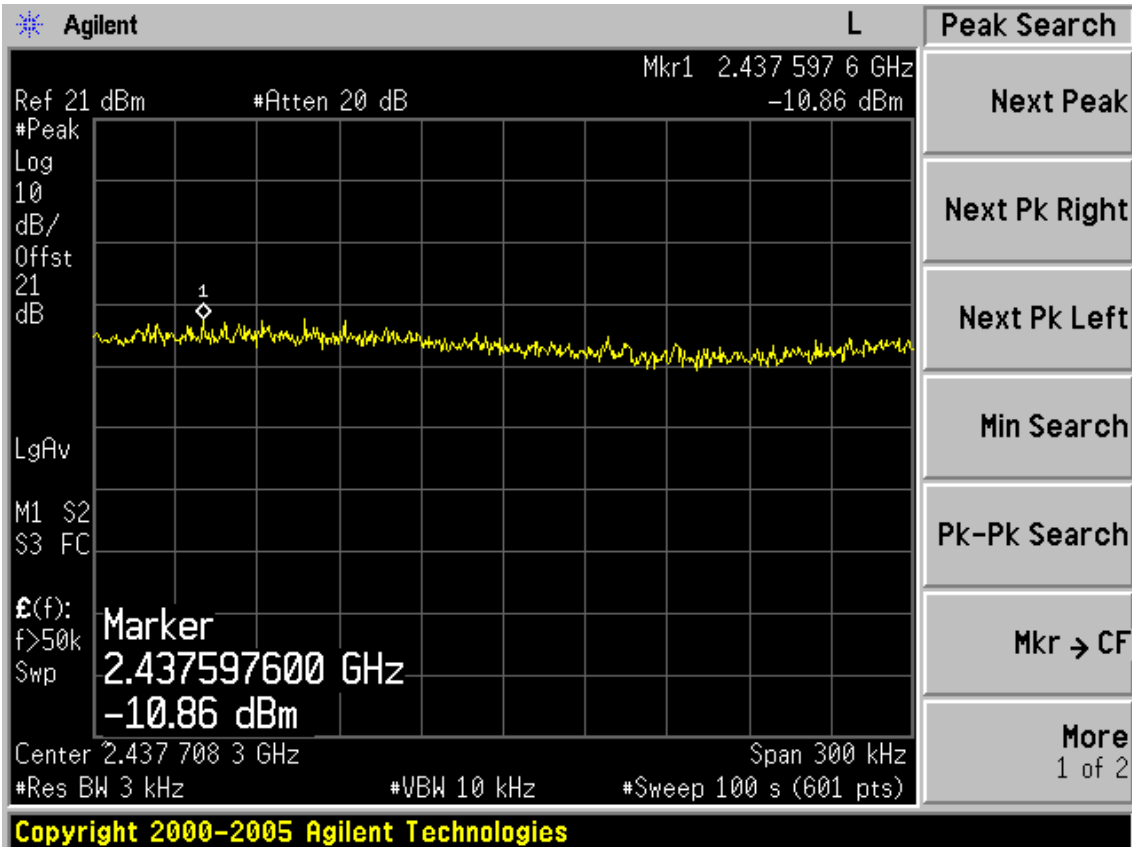

FCC ID: W6RRNX-N360PC

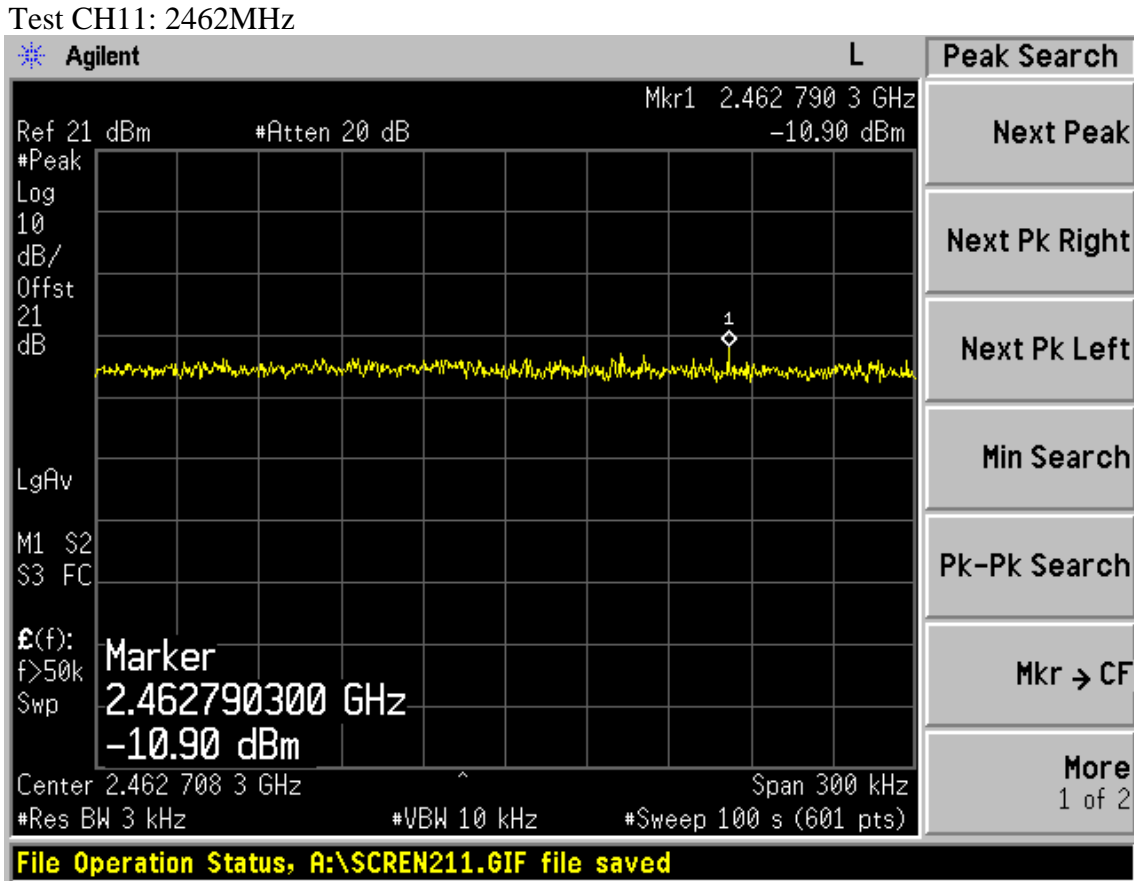


Test Mode: IEEE 802.11g TX
 Test CH1: 2412MHz

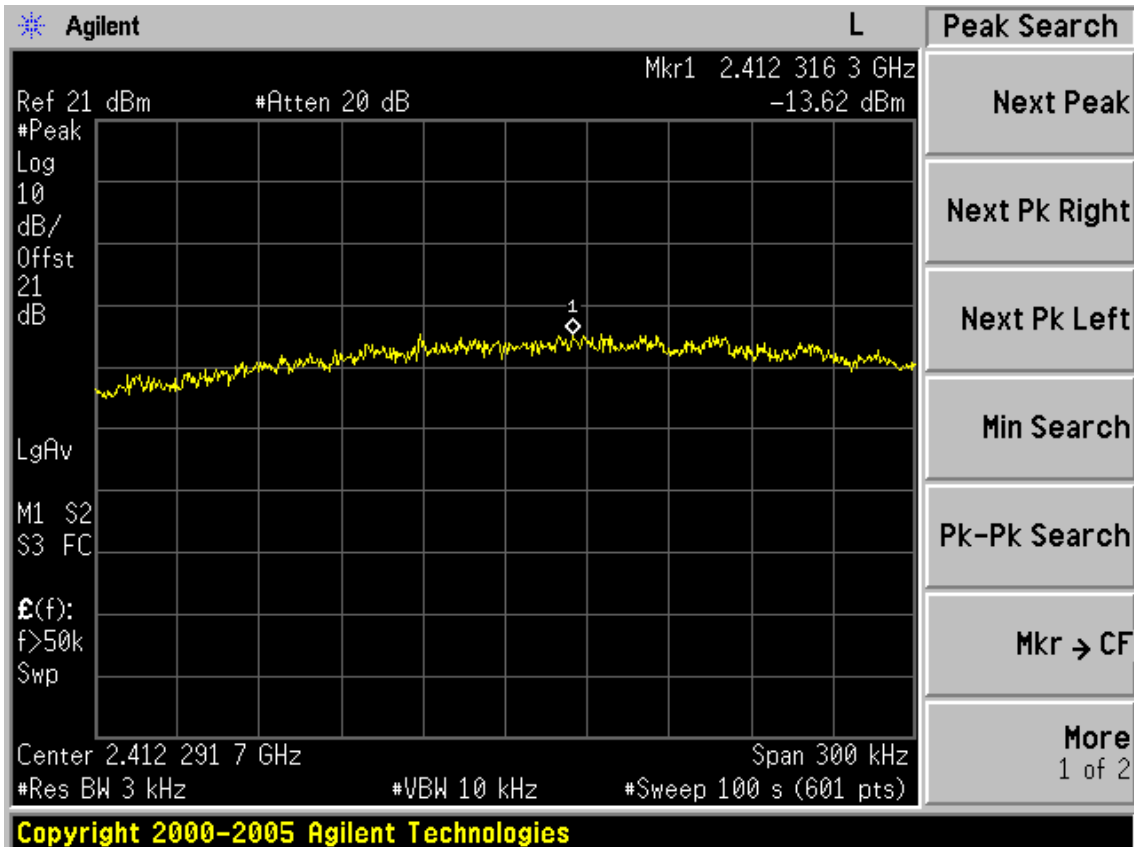


FCC ID: W6RRNX-N360PC

Test CH6: 2437MHz

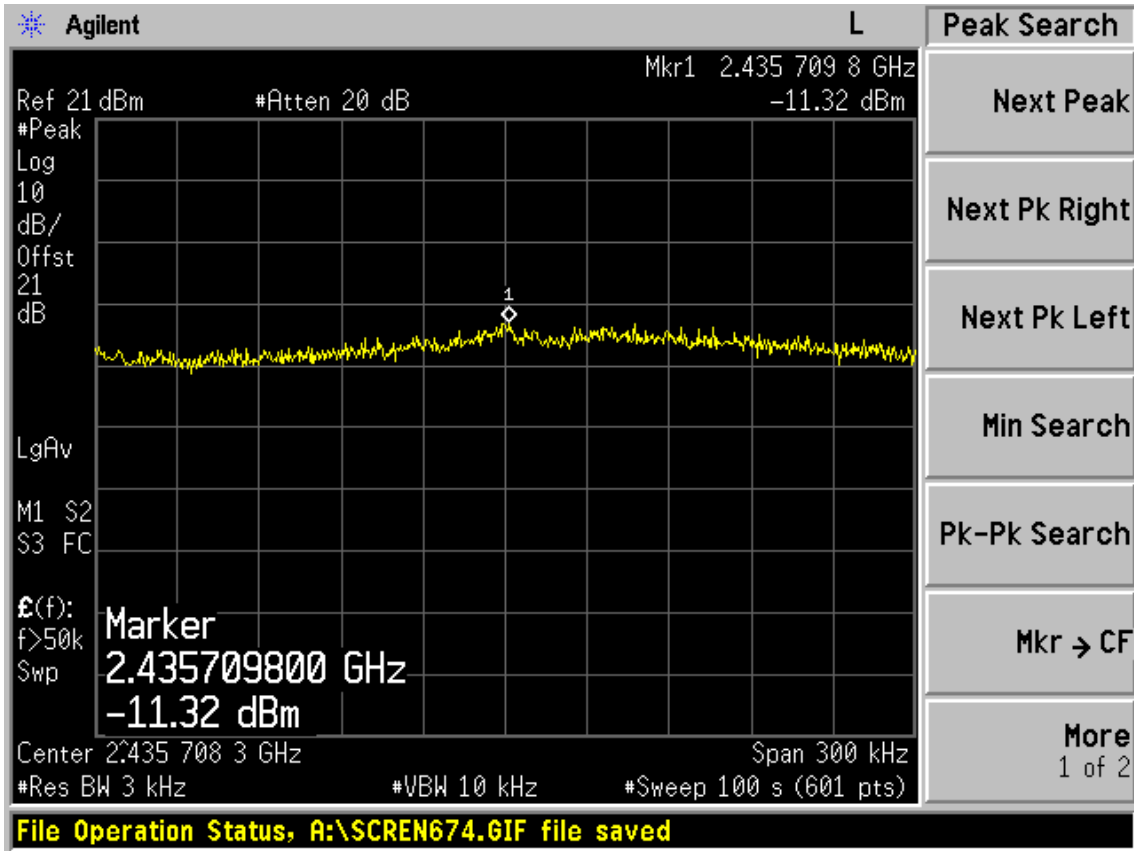


Test CH11: 2462MHz

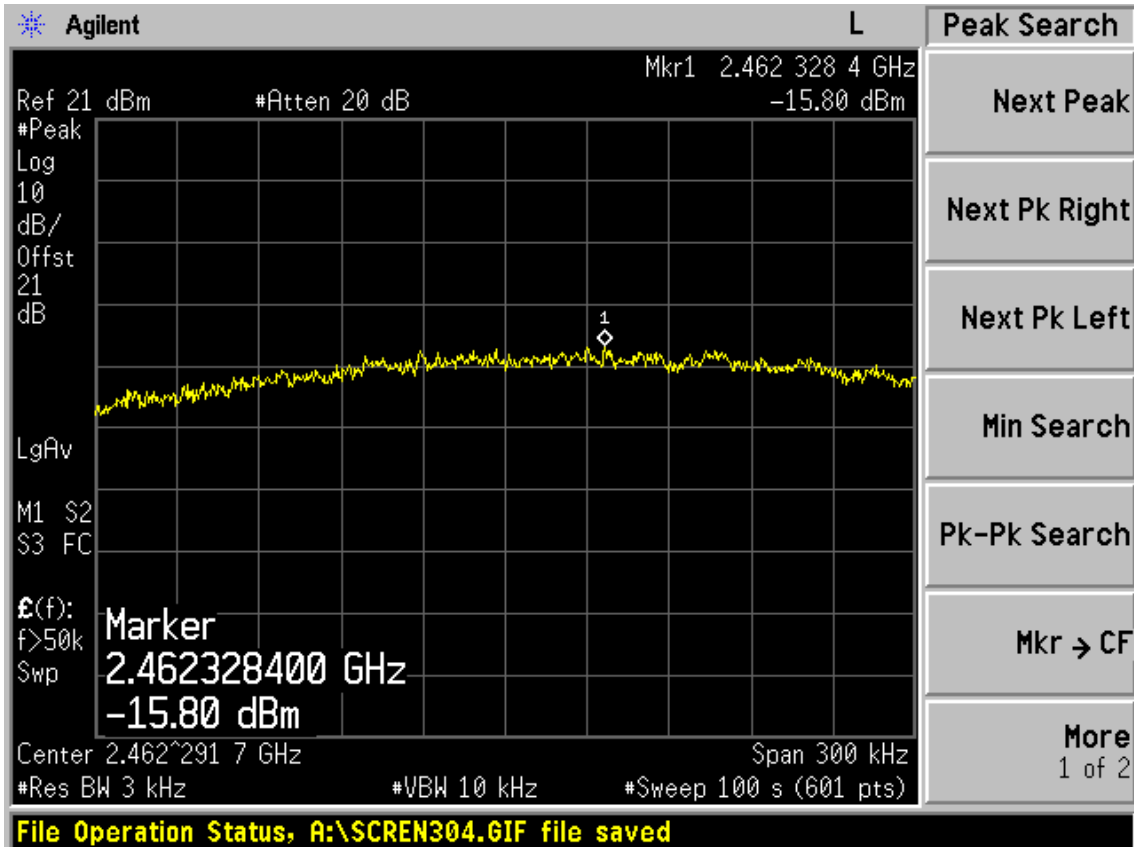


FCC ID: W6RRNX-N360PC

Test Mode: IEEE 802.11n HT20 TX


Test CH1: 2412MHz

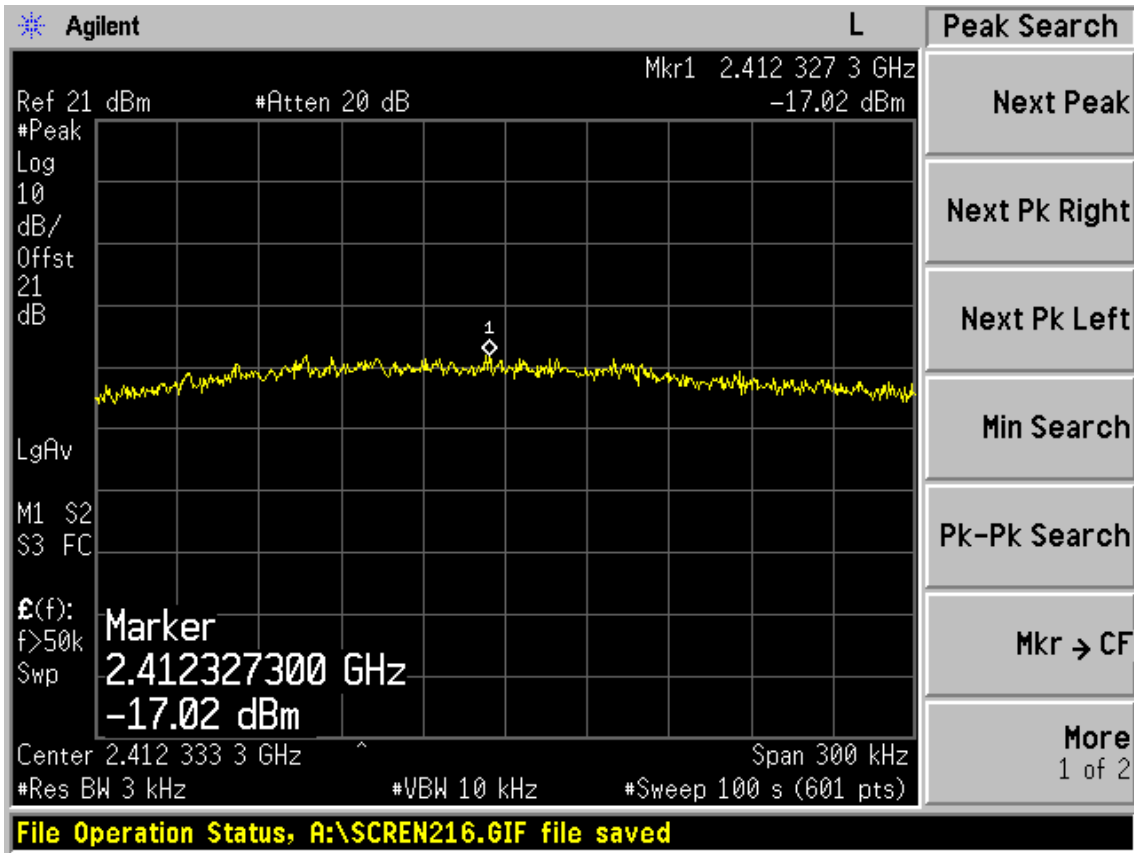


Test CH6: 2437MHz

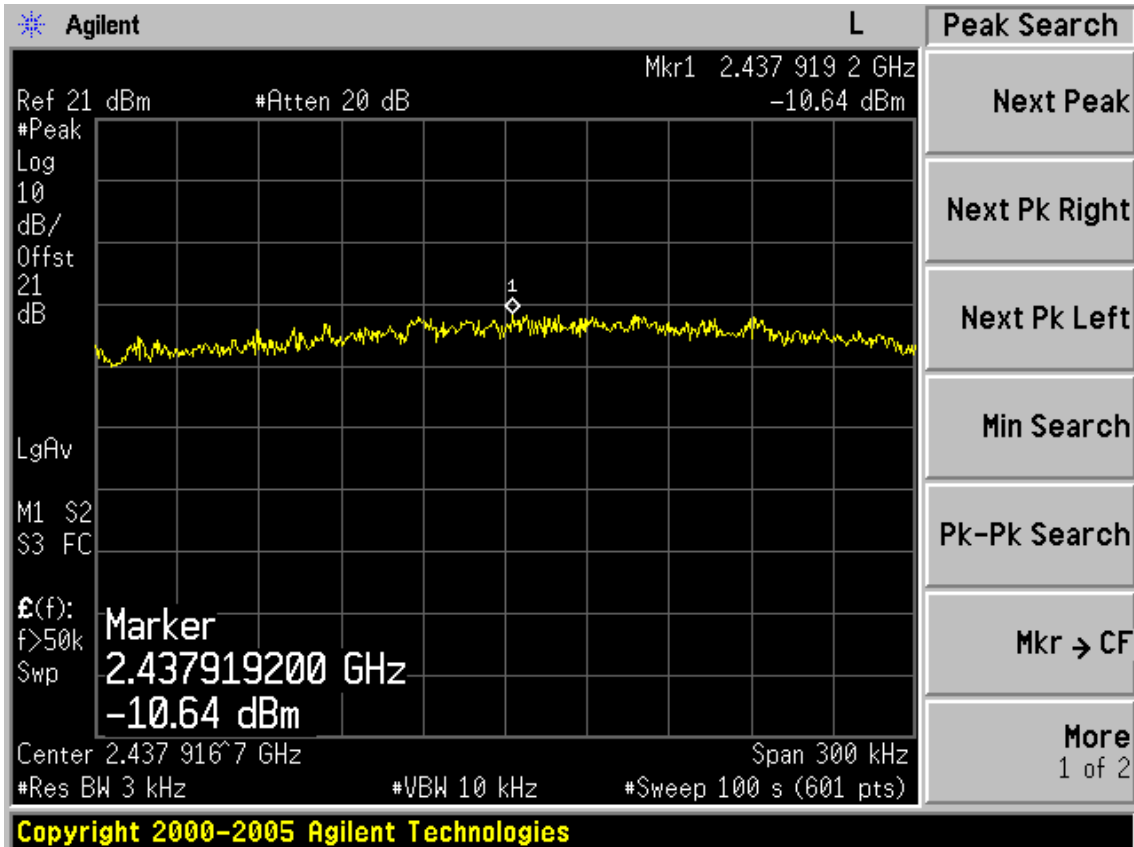



FCC ID: W6RRNX-N360PC

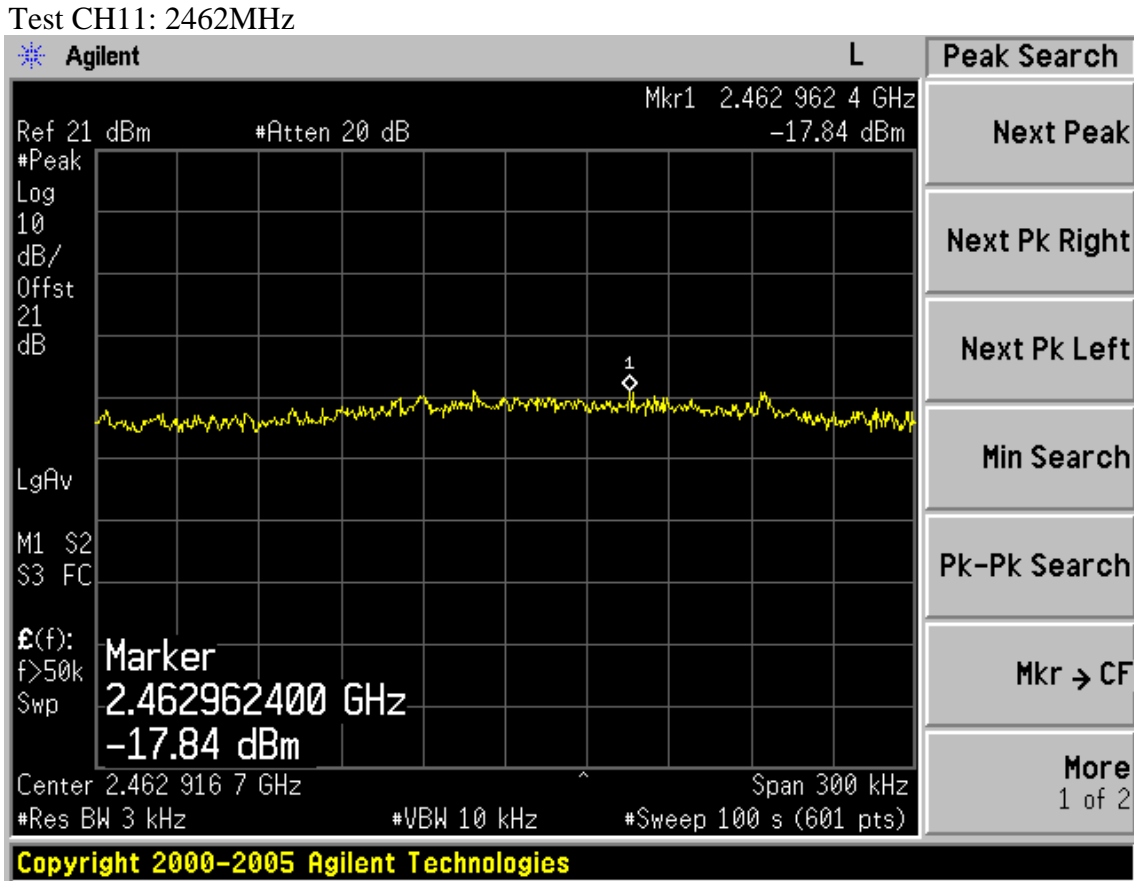

Test Mode: IEEE 802.11n HT40 TX
 Test CH1: 2422MHz

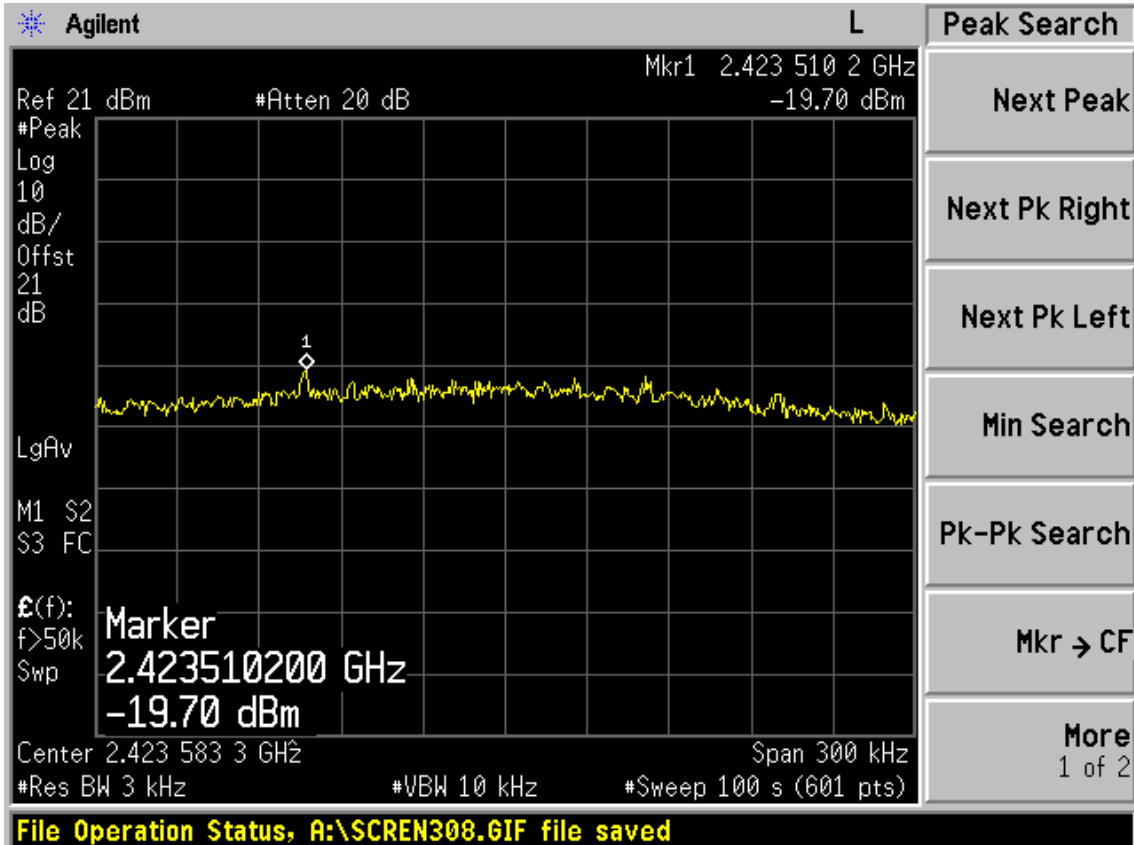

FCC ID: W6RRNX-N360PC

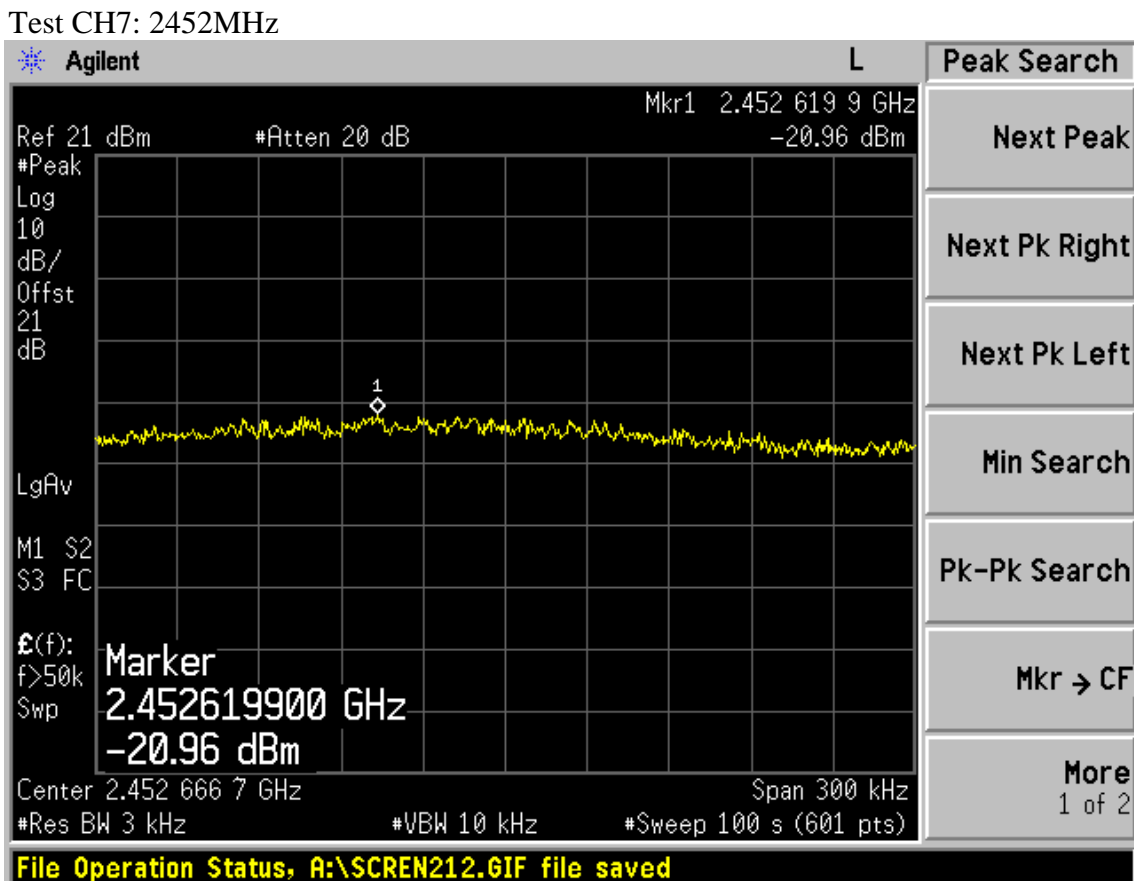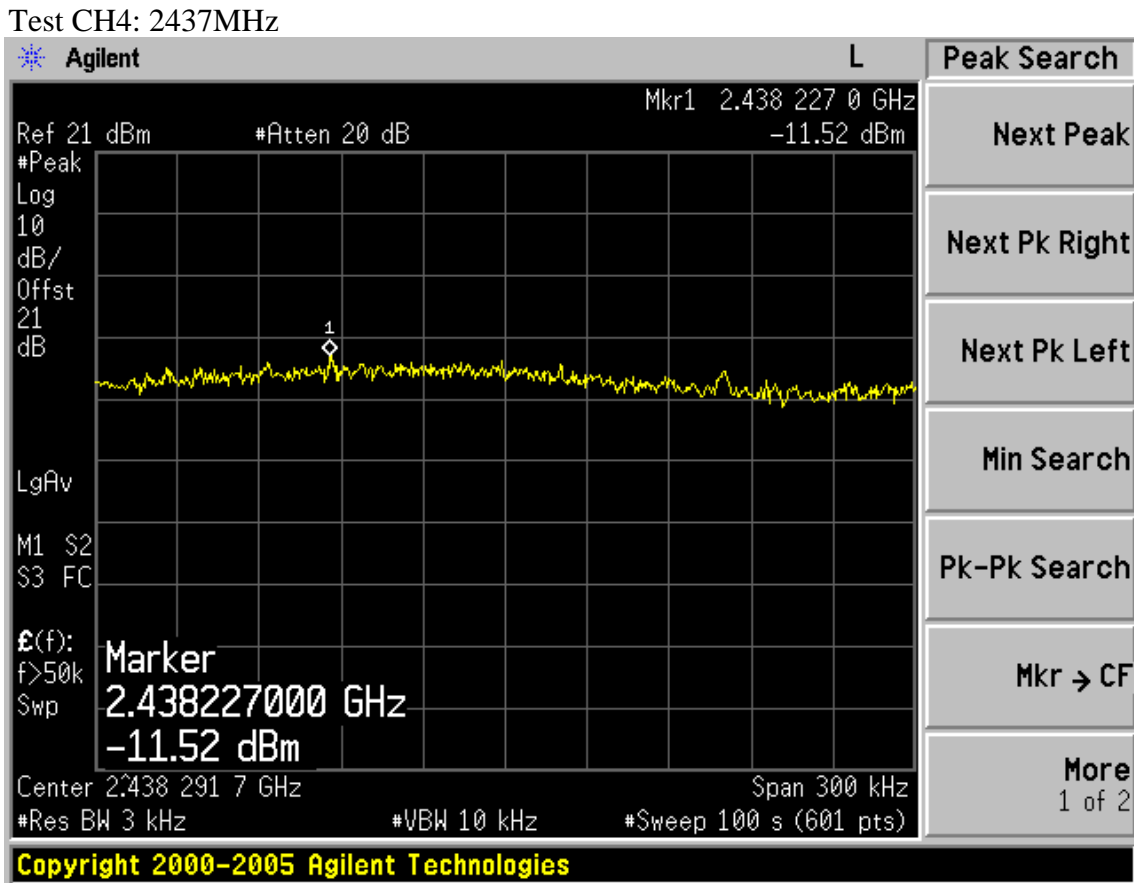

10. ANTENNA REQUIREMENT

10.1. STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. ANTENNA CONNECTED CONSTRUCTION

The antennas used for this product is Dipole MIMO antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2dBi.

11.MPE ESTIMATION

11.1.Limit for General Population/ Uncontrolled Exposures

Frequency	Power density (mW/ cm ²)	Averaging time(minutes)
300MHz----1.5GHz	F/1500	30
1.5GHz---100GHz	1.0	30

Frequency(MHz)	Power density (mW/ cm ²)	Averaging time(minutes)
2412	1	30
2437	1	30
2462	1	30

Note: F= Frequency in MHz

11.2.Estimation Result

EUT: Wireless N PCI Adapter		
M/N: RNX-N360PC		
Test date:2011-07-18	Pressure: 101.5 kpa	Humidity: 49%
Tested by: Leo-Li	Test site: RF Site	Temperature : 25°C

Cable loss: 1 dB		Attenuator loss: 20 dB				Antenna Gain: 2 dBi	
Test Mode	CH	Frequency (MHz)	Peak Output Power (dBm)	Output Power (mW)	Antenna Gain (dBi)	Antenna Gain (Linear)	MPE
11b	CH1	2412	15.64	36.64	2	1.58	0.0116
	CH6	2437	15.81	38.11	2	1.58	0.0120
	CH11	2462	15.64	36.64	2	1.58	0.0116
11g	CH1	2412	17.9	61.66	2	1.58	0.0195
	CH6	2437	19.02	79.80	2	1.58	0.0252
	CH11	2462	18.56	71.78	2	1.58	0.0226
11n HT20	CH1	2412	23.17	207.49	2	1.58	0.0655
	CH6	2437	23.17	207.49	2	1.58	0.0655
	CH11	2462	23.18	207.97	2	1.58	0.0656
11n HT40	CH1	2422	23.82	240.99	2	1.58	0.0760
	CH4	2437	23.85	242.66	2	1.58	0.0766
	CH7	2452	23.91	246.04	2	1.58	0.0776

Note1:The estimate distance is 20cm

Note2:This a MIMO device,for 11b/g mode,we choose the chain which has the maximum power to estimate,for 11n mode,We use the total chain power to estimate.

FCC ID:W6RRNX-N360PC

12.DEVIATION TO TEST SPECIFICATIONS

[NONE]