



# APPLIED TEST LAB INC.

Page 1 of 134

## FCC15.247, RSS-247 Issue 2 TEST REPORT

DTS (2400-2483.5 MHz)

Limits Applied: FCC 15.247, RSS-247 Issue 2

Report#: B002E014-51

Manufacturer: Blackline Safety

Model: G7EXO-NA2, G7EXO-AZ2

Serial Number: 3588000037, 3588400000

EUT Received Date: 2020-08-10

Test Start Date: 2020-08-11

Test Completion Date: 2020-09-15

Test Result: PASS

Report Issue Date: 2020-09-24

|                                                                               |                                                                                                            |                                                                           |  |
|-------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|--|
| <b>Tested by</b>                                                              |                                                                                                            | <b>Approved by:</b>                                                       |  |
| Jaeheon Yun, Test specialist                                                  |                                                                                                            | Adishesu Nyshadham, Quality Prime                                         |  |
| <b>Report Issued to</b>                                                       |                                                                                                            | <b>Report Issued by</b>                                                   |  |
| Blackline Safety<br>Unit 100, 803 24 Avenue SE<br>Calgary, AB Canada, T2G 1P5 |                                                                                                            | Applied Test Lab Inc.<br>Unit 4174-3961 52 Ave NE<br>Calgary, AB, T3J 0J8 |  |
| <b>Report Revision History</b>                                                |                                                                                                            |                                                                           |  |
| <b>Rev</b>                                                                    | <b>Description of Change</b>                                                                               | <b>Date</b>                                                               |  |
| Draft01                                                                       | Initial                                                                                                    | 2020-09-21                                                                |  |
| Draft 02                                                                      | Changes to Pg (1, 6, 13, 14, 20, 21, 34, 38, 57-63 deleted, 78, 88, 98, 113, 117, 127, 131, 138, 143, 147) | 2020-09-22                                                                |  |
| Release                                                                       |                                                                                                            | 2020-09-23                                                                |  |
| Release 2                                                                     | Changes to Pg (1, deleted 15-22)                                                                           | 2020-09-24                                                                |  |

Applied Test Lab Inc. (ATL) is accredited by ANAB, certificate number AT-2694, to perform the test(s) listed in this report, except where noted otherwise. ATL test facilities are recognized by FCC and Industry Canada to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and or procedures selected by the client. ATL makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or other characteristic of the article being tested, or similar products. This report should not be relied up on as an endorsement or certification by ATL of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. The report must not be used by client to claim product endorsement by FCC or Industry Canada. Any use which a third party makes of this report, or any reliance on or decisions to be made on it, are the responsibility of such third parties. ATL accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report. This report shall not be reproduced except in full without the written approval of ATL. This report may contains data that are not covered by the ANAB accreditation and are marked with an asterisk "★"

This report contains 134 pages



## Table of Contents

|                                                               |           |
|---------------------------------------------------------------|-----------|
| <b>1.0 General.....</b>                                       | <b>4</b>  |
| 1.1 Purpose.....                                              | 4         |
| 1.2 Relevant Standards and References.....                    | 4         |
| 1.3 Performance Requirement.....                              | 4         |
| 1.4 Measurement Uncertainty.....                              | 5         |
| 1.5 Test Results Summary.....                                 | 5         |
| 1.6 Test Facility Information.....                            | 6         |
| 1.7 Client Information.....                                   | 6         |
| <b>2.0 Test Sample Information.....</b>                       | <b>7</b>  |
| 2.1 Equipment Under Test (EUT).....                           | 7         |
| 2.2 Support Equipment and Details.....                        | 8         |
| 2.3 I/O Ports and Details.....                                | 8         |
| 2.4 I/O Cable Descriptions.....                               | 8         |
| <b>3.0 Test Facilities.....</b>                               | <b>9</b>  |
| 3.1 Semi-Anechoic Chamber Test Site Description.....          | 10        |
| 3.2 A diagram of the Semi-Anechoic Chamber Test Site.....     | 12        |
| 3.3 Test Equipment List.....                                  | 13        |
| <b>4.0 Test Setup Description.....</b>                        | <b>14</b> |
| 4.1 EUT System Block Diagram and Support Equipment.....       | 14        |
| <b>5.0 Test Methodology.....</b>                              | <b>15</b> |
| 5.1 Method of measurement of Radiated Spurious Emissions..... | 15        |
| 5.2 Antenna Requirements.....                                 | 18        |
| 5.3 RF Peak Power Output.....                                 | 18        |
| 5.4 Method of measurement of 20dB Bandwidth.....              | 18        |
| 5.5 Method of measurement of 99% Bandwidth.....               | 19        |
| 5.6 Out of Band Emissions (Band Edge).....                    | 19        |
| 5.7 Channel Separation.....                                   | 19        |
| 5.8 Number of Hopping Channels.....                           | 20        |
| 5.9 Dwell Time and Time of Occupancy Per Frequency.....       | 20        |
| 5.10 Method of measurement of Frequency Stability.....        | 20        |
| 5.11 AC Mains Conducted Emissions.....                        | 22        |
| 5.12 Unintentional Radiated Emissions.....                    | 23        |
| <b>6.0 Test Results.....</b>                                  | <b>25</b> |
| 6.1 Antenna Requirement.....                                  | 25        |
| 6.2 RF Peak Power Output.....                                 | 26        |
| 6.3 Radiated Spurious Emissions.....                          | 30        |
| 6.4 20dB Bandwidth.....                                       | 63        |
| 6.5 99% Bandwidth.....                                        | 73        |
| 6.6 Out of Band Emissions(Band Edge).....                     | 83        |
| 6.7 Channel Separation.....                                   | 98        |
| 6.8 Number of Hopping Channels.....                           | 102       |
| 6.9 Dwell Time and Time Occupancy Per Frequency.....          | 112       |
| 6.10 Unintentional Radiated Emissions.....                    | 116       |



|                                                                 |            |
|-----------------------------------------------------------------|------------|
| 6.11 AC Main Conducted Emission(0.15MHz - 30MHz).....           | 123        |
| 6.12 Frequency Stability.....                                   | 128        |
| <b>7.0 Appendix A – Test Sample Description.....</b>            | <b>132</b> |
| <b>8.0 Appendix B – List of Abbreviations and Acronyms.....</b> | <b>133</b> |



## 1.0 General

### 1.1 Purpose

The purpose of this report is to document conformance with RSS-247 Issue 2(DTS) and to detail the results of testing performed on the sample Model: **G7EXO-NA2,G7EXO-AZ2** manufactured by **Blackline Safety**. The test sample was received in good condition. Testing began **2020-08-11** on and was completed on **2020-09-15**.

### 1.2 Relevant Standards and References

One or more of the following standards were used to evaluate the EUT:

1. **ANSI C63.4-2014:** American National Standard for Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9 kHz to 40 GHz
2. **CFR Title 47 FCC Part 15** - Radio Frequency Devices, Subpart B – Unintentional Radiators.
3. **CFR Title 47 FCC Part 15** - Radio Frequency Devices, Subpart C – Intentional Radiators.
  - 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz
4. **RSS-Gen: Issue 5 2019-03:** General Requirement for Compliance of Radio Apparatus
5. **RSS-247 Issue 2 2017-02–** Digital Transmission System(DTSs), Frequency Hopping System(FHSs) and Licence - Exempt Local Area Network(LE-LAN) Devices
6. **ICES-003 Issue 6** – Information Technology Equipment(Including Digital Apparatus) – Limits and Methods of Measurement
7. **ANSI C63.10-2013**, “American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices”
8. **FCC KDB 558074 D01 DTS Meas Guidance v05**, “GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247”

### 1.3 Performance Requirement

The EUT is marketed as **FCC 15.247, RSS-247 Issue 2** equipment and must comply with the **FCC 15.247, RSS-247 Issue 2(DTS)** emission limits and requirements.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increase emission levels should be checked and verified to ensure continuous compliance has been maintained (i.e., printed circuit board layout changes, changes to filter performance, power supply changes, I/O cable and interface changes, critical component changes etc.)



## 1.4 Measurement Uncertainty

| Test Case                          | Uncertainty            |
|------------------------------------|------------------------|
| AC Line Conducted Emissions        | $\pm 1.50$ dB          |
| 20dB Bandwidth                     | $\pm 10$ kHz           |
| Radiated Spurious Emissions        | $\pm 3.44$ dB          |
| Radio Frequency                    | $\pm 1 \times 10^{-6}$ |
| RF output power-conducted          | $\pm 1.482$ dB         |
| Rower Spectral Density - conducted | $\pm 1.482$ dB         |
| Temperature                        | $\pm 2$ °C             |
| Humidity                           | $\pm 5\%$              |

The measurement uncertainties are evaluated for tests performed on the EUT as specified in CISPR 16-4-2.

The measurement uncertainties reported above relates to the measurement setups and procedures. It does not take into account EUT performance variations from sample to sample.

## 1.5 Test Results Summary

| Test Type                                      | Basic Standard                                                                     | Result |
|------------------------------------------------|------------------------------------------------------------------------------------|--------|
| Antenna Requirement                            | FCC 47 CFR Part 15.203<br>IC RSS-Gen Issue 5 Section 7.1.2                         | PASS   |
| RF Peak Power Output                           | FCC Title 47 CFR Part 15: Subpart C-15.247(b)(1)<br>RSS-247 Issue2                 | PASS   |
| Radiated Spurious Emissions                    | FCC Subpart C 15.205, 15.209, 15.247<br>RSS-247-Issue 2, RSS-Gen Issue 5           | PASS   |
| 20 dB Bandwidth                                | FCC Subpart C 15.247<br>RSS-247-Issue 2, RSS-Gen Issue 5                           | PASS   |
| 99% Bandwidth                                  | RSS-247-Issue 2, RSS-Gen Issue 5                                                   | PASS   |
| Out-of-Band Emissions<br>(Band edge)           | FCC Title 47 CFR Part 15: Subpart C-15.247(d)<br>RSS-247-Issue 2                   | PASS   |
| Channel Separation                             | FCC Title 47 CFR Part 15: Subpart C-15.247(a)(1)<br>RSS-247-Issue 2                | PASS   |
| Number of Hopping Channels                     | FCC Title 47 CFR Part 15: Subpart C-15.247<br>RSS-247-Issue 2                      | PASS   |
| Dwell Time and Time Occupancy<br>Per Frequency | FCC Title 47 CFR Part 15: Subpart C-15.247(a)(1)(iii)<br>RSS-247-Issue 2           | PASS   |
| Unintentional Radiated Emissions               | FCC Title 47 CFR Part 15: Subpart B -15.109<br>ICES-003 Issue 6                    | PASS   |
| AC Mains Conducted Emissions                   | FCC Title 47 CFR Part 15: Subpart B -15.109<br>ICES-003 Issue 6                    | PASS   |
| Frequency Stability                            | FCC Title 47 CFR Part 2.1055, Part 15: Subpart C-15.215(c)<br>RSS-GEN Issue 5(8.8) | PASS   |

NP=ATL was not contracted to perform the test.



## 1.6 Test Facility Information

|                         |                                                                              |                       |                        |
|-------------------------|------------------------------------------------------------------------------|-----------------------|------------------------|
| <b>Name</b>             | Applied Test Lab Inc.                                                        |                       |                        |
| <b>Address</b>          | Unit 4174-3961 52 <sup>nd</sup> Avenue NE, Calgary, Alberta, T3J 0J8, Canada |                       |                        |
| <b>Telephone</b>        | 403 590 8701                                                                 | <b>Fax</b>            | 403 590 8570           |
| <b>Email</b>            | emctesting@appliedtestlab.com                                                | <b>Website</b>        | www.appliedtestlab.com |
| <b>FCC Registration</b> | 950875                                                                       | <b>IC Recognition</b> | 10988A                 |

## 1.7 Client Information

|                     |                                                  |                      |                         |
|---------------------|--------------------------------------------------|----------------------|-------------------------|
| <b>Name</b>         | <b>Blackline Safety</b>                          |                      |                         |
| <b>Address</b>      | Unit 100, 803 24 Avenue SE   Calgary, AB T2G 1P5 |                      |                         |
| <b>Telephone</b>    | 403-451-0327                                     | <b>Website</b>       | www.blacklinesafety.com |
| <b>Contact Name</b> |                                                  | <b>Contact Email</b> |                         |



## 2.0 Test Sample Information

The **G7EXO-NA2,G7EXO-AZ2** was only operated and exercised in the mode(s) and configuration(s) described in this report. All inputs and outputs to and from support equipment associated with the **G7EXO-NA2,G7EXO-AZ2** were provided or simulated under the direction and responsibility of **Blackline Safety**. A description of these signals and their provision is included in Appendix A.

### 2.1 Equipment Under Test (EUT)

|                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product Description</b>           | <p>G7 EXO is a cloud-connected area monitor that bundles industry leading gas detection with automated compliance and business analytics tools. For the first time ever, the days of manually collecting data from the field, reviewing spreadsheets and compiling reports are behind you.</p> <p>G7 EXO solves the challenges of continuous toxic and combustible gas monitoring for sites, facilities and fence lines. Automating long-term area monitoring and connected safety for streamlined efficiency, G7 EXO allows teams to focus on their work at hand.</p> <p>In the event of a safety incident or gas exposure, monitoring personnel can see what has happened and communicate with workers directly via text messaging or an optional two-way voice calling feature through their EXO.</p> |
| <b>Manufacturer</b>                  | <b>Blackline Safety Corp.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Trade Name</b>                    | G7EXO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Model Number</b>                  | <b>G7EXO-NA2,G7EXO-AZ2</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Serial Number</b>                 | <b>3588000037, 3588400000</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Model discrepancy/ Variations</b> | G7EXO-AZ2 was used for some measurements not requiring cellular radio emissions. The only difference between the -NA2 and -AZ2 variants of G7EXO are the cellular radio modules. -NA2 contains the LARA-R202 module whereas -AZ2 contains the LARA-R280 module                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>FCC ID</b>                        | W77EXO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>IC ID</b>                         | 8255A-EXO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Power Supply and Requirements</b> | 3.0-3.6V, nominal 3.4VDC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Firmware Version</b>              | 3.442S3_EXO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Software Version</b>              | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Antenna Type and Gain</b>         | Ceramic Chip Antenna, 2.2dBi(peak), 1.9dBi(Band edges)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Operation Frequency Range</b>     | 2400MHz – 2483.5MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Modulation type(s)</b>            | GFSK, QPSK, 8-PSK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Number of TX Chains</b>           | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Product Manufacturing Status</b>  | <input type="checkbox"/> Production Unit <input type="checkbox"/> Pre-Production Unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

**2.2 Support Equipment and Details**☐ Applicable

| Manufacturer | Description | Model No. | Serial Number | Other Info |
|--------------|-------------|-----------|---------------|------------|
|              |             |           |               |            |
|              |             |           |               |            |
|              |             |           |               |            |
|              |             |           |               |            |
|              |             |           |               |            |
|              |             |           |               |            |
|              |             |           |               |            |

**2.3 I/O Ports and Details**☐ Applicable

| Port Type   | Description   | Filter Info | Shielding Info | Other Info |
|-------------|---------------|-------------|----------------|------------|
| Power port  | Power         | N/A         | Unshielded     |            |
| Signal port | communication | N/A         | Unshielded     |            |

**2.4 I/O Cable Descriptions**☐ Applicable

| Cable Description | Length (m) | Port From | Port To      | Cable Type | Remarks |
|-------------------|------------|-----------|--------------|------------|---------|
| Power cable       | 1.5        | EUT       | Power outlet | Power      |         |
| Signal cable      | 3          | EUT       | Termination  |            |         |



### 3.0 Test Facilities

#### Laboratory Location

The radiated and conducted emission test sites are located at the following address:

Applied Test Lab,  
Unit 4174, 3961-52 Ave N.E., Calgary, AB T3J 0J8

#### Laboratory Accreditation/Recognitions/Certifications

The Semi-Anechoic Chamber Test Site and Conducted Emission Site have been fully described, submitted to, and accepted by the FCC and Industry Canada for testing Interference by information technology equipment. In addition, ATL has implemented an interim in-house quality system which is based on the ISO 17025 standard and is actively pursuing to achieve its accreditation. The following certification numbers have been issued in recognition of the certifications:

FCC Registration Number: **950875**  
Industry Canada Lab Code: **IC 10988A**

| Country | Agency          | Accreditation/Certification                                          | LOGO                                                                                  |
|---------|-----------------|----------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| USA     | FCC             | 3 (m) Semi-Anechoic Chamber to perform FCC Part 15/18 measurements   |  |
| Canada  | Industry Canada | 3 (m) Semi-Anechoic Chamber to perform ICES-004 and RSS measurements |  |

**Note:** Unless otherwise specified, ATL performs the tests using standard test methods to evaluate the EUT for compliance to the defined International standards. However, the report is not to be used to claim compliance, certification or endorsement by FCC or Industry Canada or any other government agency unless specifically submitted to such agency for such purpose.




### 3.1 Semi-Anechoic Chamber Test Site Description

The Semi-Anechoic Chamber Test Site consists of a 6.24 x 9.144 x 5.79 (m) shielded enclosure. The chamber is lined with SAMWAH Ferrite Grid Absorber, model number SN-20. The ferrite tile grid is 100 x 100x 6.7 (mm) thick and weighs approximately 200 (grams). These tiles are mounted on steel panels and installed directly on the inner walls of the chamber. Inner side Wall is lined by 600H Foam Absorber with White Cap. Chamber is illuminated by set of 12 LED Bulbs.

The turntable is 198 (cm) in diameter and is located 160 (cm) from the back wall of the chamber. The chamber is grounded via Utility Ground installed at the side of the back East wall, it is bound to the Chamber ground Stud using 1/2" copper braided cable.


The turntable is all aluminum, flush mounted table installed in an all steel frame. The table is remotely operated from the control area located outside the Semi Anechoic Chamber. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

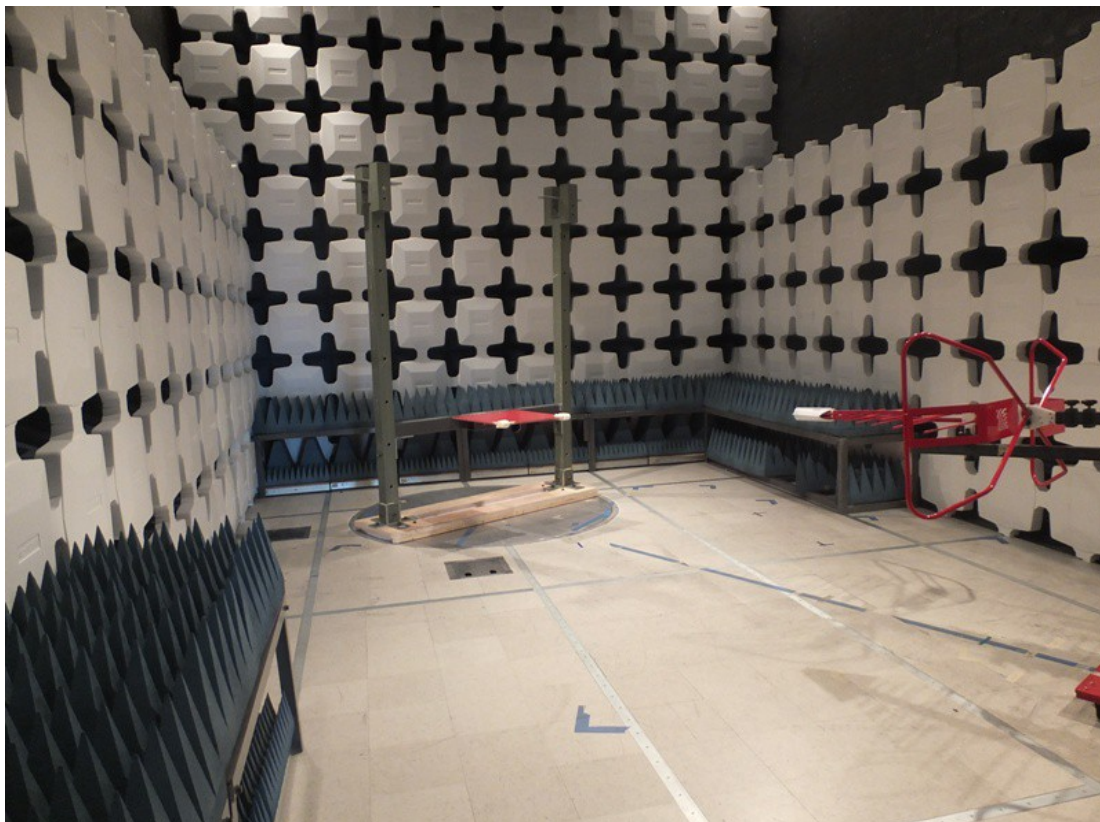

**Figure 3.1** - Test Facility (Setup for 30MHz - 1000MHz)




**Figure 3.2 - Test Facility (Setup for 1GHz – 18GHz)**

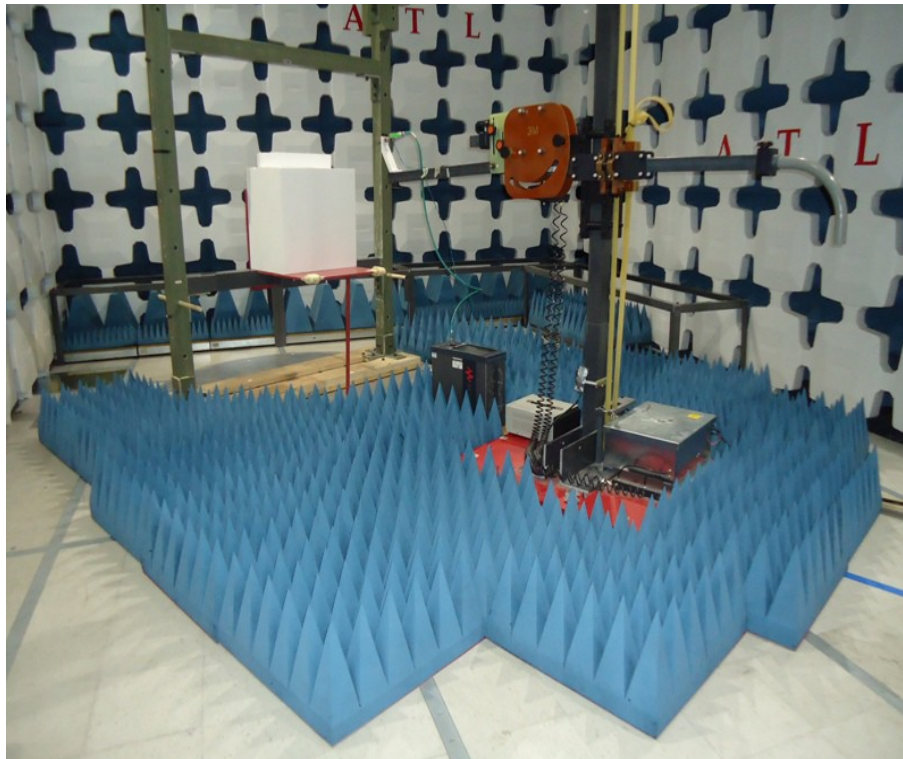


**Figure 3.3 - Test Facility (Setup for 18GHz - 26GHz)**




### 3.2 A diagram of the Semi-Anechoic Chamber Test Site

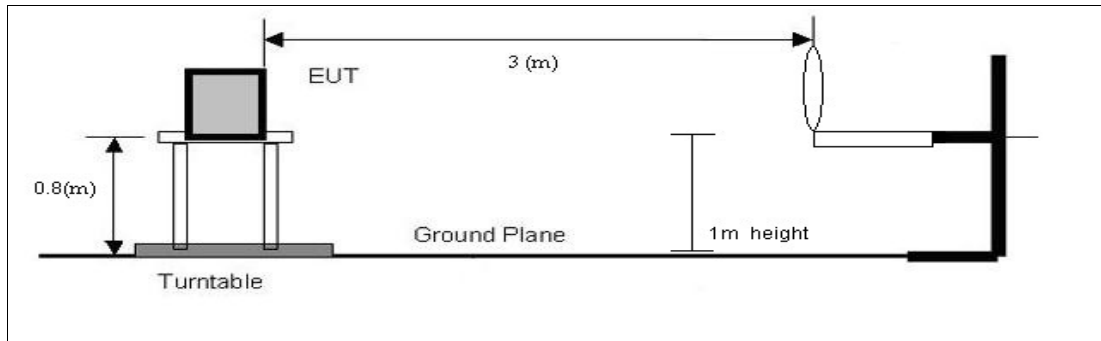


**Figure 3.4** - Semi- Anechoic chamber diagram(0.009MHz - 30MHz)

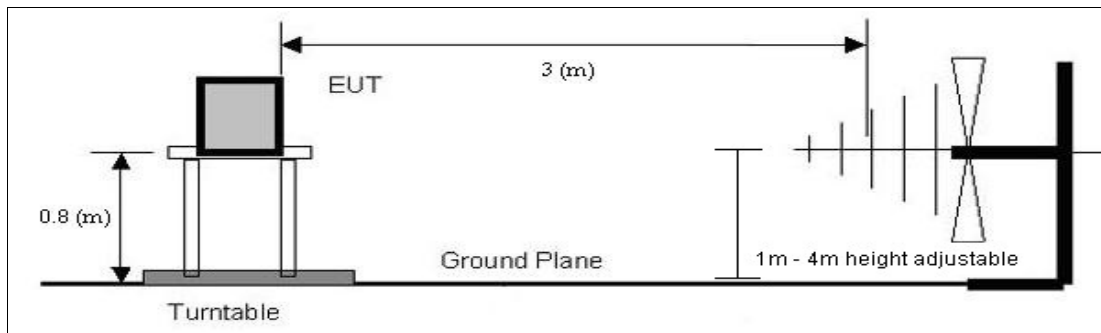

**Figure 3.5** - Semi- Anechoic chamber diagram(30MHz - 1000MHz)

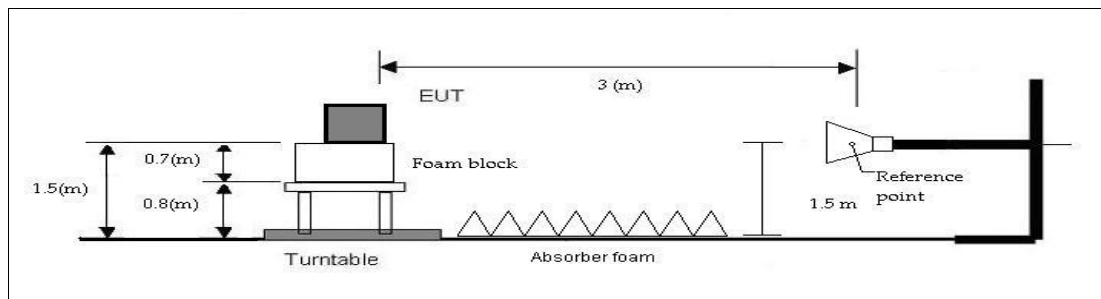

**Figure 3.6** - Semi- Anechoic chamber diagram(1GHz - 18GHz)

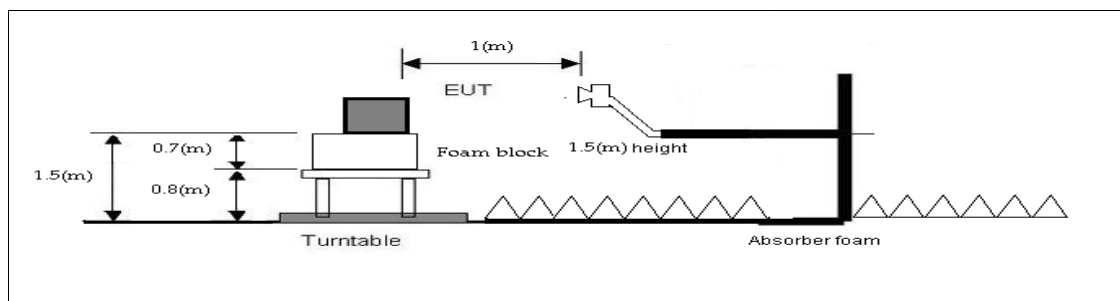

**Figure 3.7** - Semi- Anechoic chamber diagram(18GHz - 26GHz)



### 3.3 Test Equipment List

**Table 3.1** - Test Equipment used for Radiated Emission

| Description                          | Manufacturer          | Model Number                   | Serial Number             | Next Cal        |
|--------------------------------------|-----------------------|--------------------------------|---------------------------|-----------------|
| Bi-Log antenna                       | ETS Lindgren          | 3142E                          | 144761                    | Aug 31, 2021    |
| Double Ridged Horn                   | ETS Lindgren          | 3117                           | 143094                    | October 1, 2021 |
| Spectrum Analyzer                    | Hewlett Packard       | Hp8593EM                       | 3639A00172                | April 24, 2023  |
| EMI Receiver & RF filter section     | Hewlett Packard       | 8546A, 85460A                  | 3448A00267,<br>3448A00245 | June 26, 2021   |
| MXA Signal Analyzer                  | Keysight              | N9020B-526                     | SG56080714                | August 23, 2023 |
| Standard Gain Horn Antenna (18G-26G) | ETS Lindgren          | 3160-09                        | 130132                    | NCR             |
| Cable                                | Micro Coax UTIFLEX    | UFB293C                        | 303                       | PV              |
| Cable                                | Micro Coax UTIFLEX    | UFB311A                        | SFC220863                 | PV              |
| Cable                                | Micro Coax UTIFLEX    | UFA210B-0-0120-50250           | 96G1557                   | PV              |
| Turntable                            | ETS Lindgren          | 2187                           | NA                        | NCR             |
| Antenna Bore-sight Mast              | ETS Lindgren          | 2071B                          | 136243                    | NCR             |
| Multi Device Controller              | ETS Lindgren          | ETS 2090                       | 148017                    | NCR             |
| 3 Meter chamber                      | ETS Lindgren          | FACT 3-2.0                     | N/A                       | July 18, 2022   |
| LNA                                  | MITEQ                 | AMF-7D-01001800-22-10P         | 1782797                   | PV              |
| LNA                                  | Wenteq Microwave CORP | ABL0300-00-4030                | N/A                       | PV              |
| DC power supply                      | Instek                | PC-3030                        | 9503310                   | PV              |
| Test SW                              | DVT Solutions Inc     | REDvtAtIV3p29.exe - (20200417) |                           |                 |


**NCR:** No Calibration required.**PV:** Periodic Verification



## 4.0 Test Setup Description

### 4.1 EUT System Block Diagram and Support Equipment

☐ Applicable

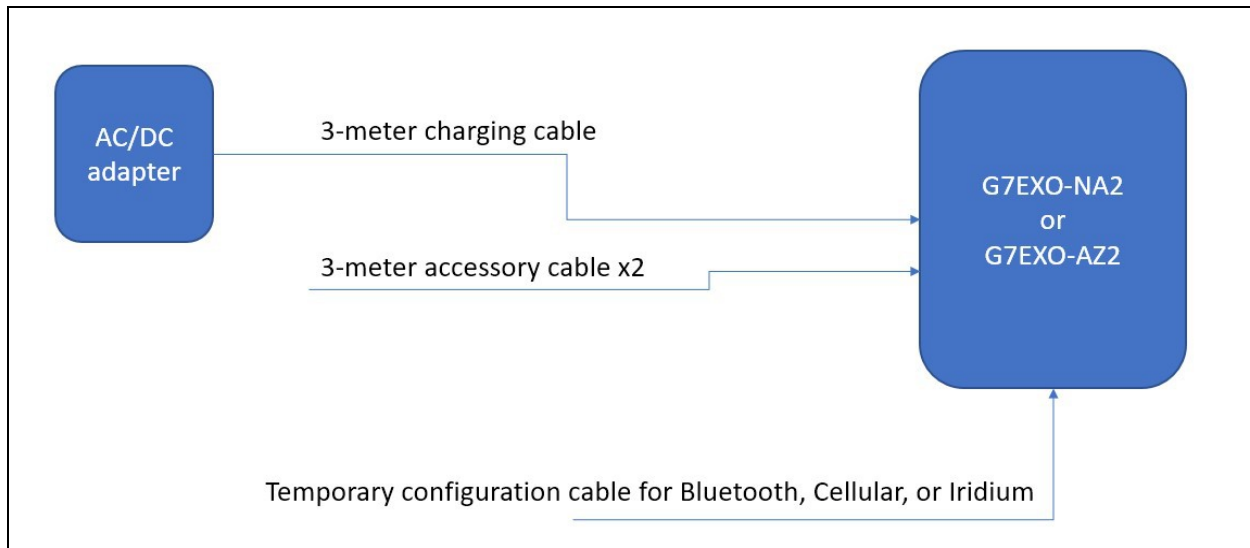

**Figure 4.1 – System Block Diagram**



## 5.0 Test Methodology

### 5.1 Method of measurement of Radiated Spurious Emissions

Below 30MHz :

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the test antenna (loop antenna). The test antenna is positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop is adjusted to 1 m above the ground. Additional tests are performed by placing the the loop antenna plane positioned horizontally at the specified distance from the EUT.

Above 30MHz :

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the test antenna. The maximal emission value is acquired by adjusting the antenna height, polarization and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarization Vertical (V) and Horizontal (H).

As per FCC 15C, section 15.225

- a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848  $\mu\text{V/m}$  (84 dB $\mu\text{V/m}$ ) at 30 m.
- b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334  $\mu\text{V/m}$  (50.5 dB $\mu\text{V/m}$ ) at 30 m.
- c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106  $\mu\text{V/m}$  (40.5 dB $\mu\text{V/m}$ ) at 30 m.
- d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209. The limits are shown below in Table 5.2:

As per RSS-247-Issue 2, RSS-Gen Issue 5, FCC Subpart C 15.205, 15.209 & 15.247

According to FCC Part15.205, the level of any transmitter spurious emission in Restricted bands shown in the following table shall not exceed the level of the emission specified in the Table 5.2

According to FCC Part15.205, Restricted bands

**Table 5.1: FCC 15. 205 – Restricted bands**

| MHz             | MHz                 | MHz           | GHz        |
|-----------------|---------------------|---------------|------------|
| 0.090-0.110     | 16.42-16.423        | 399.9-410     | 4.5-5.15   |
| 0.495-0.505     | 16.69475-16.69525   | 608-614       | 5.35-5.46  |
| 2.1735-2.1905   | 16.80425-16.80475   | 960-1240      | 7.25-7.75  |
| 4.125-4.128     | 25.5-25.67          | 1300-1427     | 8.025-8.5  |
| 4.17725-4.17775 | 37.5-38.25          | 1435-1626.5   | 9.0-9.2    |
| 4.20725-4.20775 | 73-74.6             | 1645.5-1646.5 | 9.3-9.5    |
| 6.215-6.218     | 74.8-75.2           | 1660-1710     | 10.6-12.7  |
| 6.26775-6.26825 | 108-121.94          | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138             | 2200-2300     | 14.47-14.5 |
| 8.291-8.294     | 149.9-150.05        | 2310-2390     | 15.35-16.2 |
| 8.362-8.366     | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4  |



|                   |                 |             |             |
|-------------------|-----------------|-------------|-------------|
| 8.37625-8.38675   | 156.7-156.9     | 2690-2900   | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17 | 3260-3267   | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2    | 3332-3339   | 31.2-31.8   |
| 12.51975-12.52025 | 240-285         | 3345.8-3358 | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4       | 3600-4400   | >38.6       |
| 13.36-13.41       |                 |             |             |

**Table 5.2: FCC 15. 209 and Clause 8.9 of RSS-Gen. – Radiated Emission limits.**

| Frequency (MHz) | Field Strength (uV/m) | Field Strength (dBuV/m) | Measurement Distance (m) |
|-----------------|-----------------------|-------------------------|--------------------------|
| 0.009 – 0.490   | 2400/F(kHz)           | 67 – 20 x Log 10(F)     | 300                      |
| 0.490 – 1.705   | 24000/F(kHz)          | 87 – 20 x Log 10(F)     | 30                       |
| 1.705 – 30      | 30                    | 29.5                    | 30                       |
| 30 – 88         | 100                   | 40                      | 3                        |
| 88 – 216        | 150                   | 43.5                    | 3                        |
| 216 – 960       | 200                   | 46.0                    | 3                        |
| Above 960       | 500                   | 54.0                    | 3                        |

FCC Part 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### Testing Setup/Configuration

Unless otherwise indicated, the following configuration steps are used for the equipment setup: The cable(s) were routed consistent with the typical application and installation instructions provided with the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cable(s) was investigated to find the configuration that produced maximum emissions. Cable(s) were of the type and length as specified in the individual requirements. The length(s) of cable(s) that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that is represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was measured with a spectrum analyzer or receiver using the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown below. The corrected data



was then compared to the applicable emission limits. Preliminary and final measurements were performed in order to ensure that all emissions from the EUT were detected and maximized.

### Correction Factors and sample calculation

The highest emission reading from spectrum analyzer was converted using correction factors as shown (Analyzer/Receiver) in the formula. For radiated emissions in dBuV/m, the spectrum analyzer reading in dBuV was corrected by using the following formula. This corrected reading was then compared to the applicable specification limit and the results are presented in the margin column. The margin was calculated based on subtracting the specification limit value from the corrected measurement data; a positive margin represents a measurement exceeding the specification limit, while a negative margin represents a measurement less than the specification limit.

$$\text{Corrected Reading (dBuV/m)} = \text{Analyzer/Receiver Reading (dBuV)} + \text{Correction Factor (dB/m)}$$

$$\text{Correction Factor (dB/m)} = \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)} - ((\text{Preamplifier Gain}) (\text{dB}))$$

$$\text{Margin (dB)} = \text{Corrected Reading (dBuV/m)} - \text{Applicable Limit (dBuV/m)}$$

### Test Instrumentation and Analyzer settings

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10dB per division were used.

| Measuring equipment bandwidth setting per frequency range |         |         |                    |
|-----------------------------------------------------------|---------|---------|--------------------|
| Test                                                      | Start   | Stop    | Band width setting |
| Conducted Emissions                                       | 150kHz  | 30MHz   | 9kHz               |
| Radiated Emissions                                        | 9kHz    | 150kHz  | 200Hz              |
| Radiated Emissions                                        | 150kHz  | 30MHz   | 9kHz               |
| Radiated Emissions                                        | 30MHz   | 1000MHz | 120kHz             |
| Radiated Emissions                                        | 1000MHz | >1GHz   | 1MHz               |

### Spectrum Analyzer / Receiver Detector Functions

The notes that accompany the measurements contained in the emissions tables indicate the type of the detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the “positive peak” detector mode. Whenever a “quasi-peak” or “average” reading was recorded, the measurement was annotated with a “QP” or an “AVG” on appropriate rows of the data sheets. In case where quasi-peak or average limits were employed and exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference.



## 5.2 Antenna Requirements

Test Standard: FCC 47 CFR Part 15.203 and IC RSS-Gen Issue 6 Section 7.1.2

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited." ... "the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

## 5.3 RF Peak Power Output

Test Standard: FCC Title 47 CFR Part 15: Subpart C - 15.247 (b)(1), RSS-247 Issue 2

Test Method: ANSI C63.10:2013, section 11.9.2

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels the maximum peak conducted output power of the intentional radiator shall not exceed 1 watt.

AVGSA-1

The EUT's hopping function should be disabled and placed in continuous selected channel transmitting mode. Use the spectrum analyzer settings as per sec 11.9.2.2.2. After the trace is stabilized.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with band limits set equal to the OBW band edges.

## 5.4 Method of measurement of 20dB Bandwidth

Test Standard: RSS-247-Issue 2, RSS-Gen Issue 5; FCC Subpart C §15.247

Test Method: ANSI C63.10:2013, section 6.9.2

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in 15.217 through 15.257 and in Subpart E of Part 15, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage.

According to 15.247(a)(1)(iii), for frequency hopping systems operating in the 2400 MHz-2483.5 MHz no limit was assigned for 20 dB Band width.

The EUT's hopping function should be disabled and placed in continuous selected channel transmitting mode.



Use the spectrum analyzer settings as per sec 6.9.2. After the trace is stabilized follow the method specified in sec 6.9.2 and use marker delta method to determine the 20 dB bandwidth.

### **5.5 Method of measurement of 99% Bandwidth**

Test Standard: RSS-247-Issue 2, RSS-Gen Issue 5

Test Method: ANSI C63.10:2013, section 6.9.3

The Occupied Channel Bandwidth is the bandwidth that contains 99 % of the power of the signal. The bandwidth shall fall completely within the frequency range specified by the standard.

The EUT's hopping function should be disabled and placed in continuous selected channel transmitting mode. Use the spectrum analyzer settings as per sec 6.9.3. After the trace is stabilized follow the method specified in sec 6.9.3 and use marker delta method to determine the 99% bandwidth.

### **5.6 Out of Band Emissions (Band Edge)**

Test Standard: RSS-247-Issue 2, FCC Title 47 CFR Part 15: Subpart C - 15.247 (d)

Test Method: ANSI C63.10:2013, section 6.10.4

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section A8.4 (4), the attenuation required shall be 30 dB instead of 20dB.

The EUT's hopping function should be disabled and placed in continuous selected channel transmitting mode. Use the spectrum analyzer settings as per sec 6.10.4. After the trace is stabilized follow the method specified in sec 6.10.4 and use marker delta method to determine the Out of band emissions.

The EUT's hopping function should be enabled. Use the spectrum analyzer settings as per sec 6.10.4. After the trace is stabilized follow the method specified in sec 6.10.4 and use marker delta method to determine the Out of band emissions in hopping mode

### **5.7 Channel Separation**

Test Standard: FCC Title 47 CFR Part 15: Subpart C - 15.247(a)(1), RSS-247-Issue 2

Test Method: ANSI C63.10:2013, section 7.8.2

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.



The EUT's hopping function should be enabled. Use the spectrum analyzer settings as per sec 7.8.2. After the trace is stabilized the marker-delta function was used to determine the separation between the peaks of the adjacent channels.

## 5.8 Number of Hopping Channels

Test Standard: FCC Title 47 CFR Part 15: Subpart C - 15.247, RSS-247-Issue 2  
Test Method: ANSI C63.10:2013, section 7.8.3

The EUT's hopping function should be enabled. Use the spectrum analyzer settings as per sec 7.8.3. Let the trace be stabilized.

It might be necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels.

## 5.9 Dwell Time and Time of Occupancy Per Frequency

Test Standard: FCC Title 47 CFR Part 15: Subpart C - 15.247 (a)(1)(iii), RSS-247-Issue 2  
Test Method: ANSI C63.10:2013, section 7.8.4

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

The EUT's hopping function should be enabled. Use the spectrum analyzer settings as per sec 7.8.4. After the trace is stabilized the marker-delta function was used to determine transmit time per hop.

Measurement is repeated using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time should be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

## 5.10 Method of measurement of Frequency Stability

Test Standard: FCC Title 47 CFR Part 2.1055, Part 15: Subpart C-15.215(c), RSS-GEN Issue 5(8.8))  
Test Method: ANSI C63.10:2013, section 6.8

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a



temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10o centigrade through the range. A period of time sufficient (approximately 30minutes) to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

#### **Test Procedure**

**Frequency Stability vs. Temperature:** The equipment under test was connected to PC and is powered by an external AC programmable power supply. An active loop antenna was connected to a Spectrum Analyzer to measure the magnetic field strength . The EUT and the Active Loop Antenna was placed inside the temperature chamber.

The temperature of the chamber is adjusted from 50 degrees to -20 degrees C in steps of 10 degrees C. After the temperature is stabilized for approximately 30 minutes at every step, the frequency output was recorded from the Spectrum Analyzer after at 0m, 2m, 5m, 10m, and the temperature chamber temperature is recorded

**Frequency Stability vs. Voltage:** Using an external AC/DC programmable or adjustable power supply source the voltage was set to 115% of the nominal value or highest value of the voltage range, which ever is lower. The temperature of the chamber is adjusted to 20 degrees C. After the temperature is stabilized for approximately 30 minutes, the frequency output was recorded from the Spectrum Analyzer after at 0m, 2m, 5m, 10m, and the temperature chamber temperature is recorded.

Using an external A/DC programmable or adjustable power supply source the voltage was set to 85% of the nominal value or lowest value of the voltage range, which ever is higher. The temperature of the chamber is adjusted to 20 degrees C. After the temperature is stabilized for approximately 30 minutes, the frequency output was recorded from the Spectrum Analyzer after at 0m, 2m, 5m, 10m, and the temperature chamber temperature is recorded.



## 5.11 AC Mains Conducted Emissions

Test Standard: FCC Title 47 CFR Part 15: Subpart B - 15.109, ICES-003 Issue 6

Test Method: ANSI C63.4:2014

### Conducted Emission Limits FCC/IECS-003

**Class A:** An ITE meeting the conditions for Class A operation shall comply with the Class A conducted limits set out in Table 5.3. ☐Applicable

**Table 5.3** - Class A Conducted Emission Limits (FCC and ICES-003)

| Emission Type      | Frequency Range (MHz) | FCC/IECS-003 (dBuV) |         |
|--------------------|-----------------------|---------------------|---------|
|                    |                       | Quasi-peak          | Average |
| Conducted Emission | 0.15 - 0.5            | 79                  | 66      |
|                    | 0.5 - 30              | 73                  | 60      |

**Class B:** An ITE meeting the conditions for Class B operation shall comply with the Class B conducted limits set out in Table 5.4. ☐Applicable

**Table 5.4** - Class B Conducted Emission Limits (FCC and ICES-003)

| Emission Type      | Frequency Range (MHz) | FCC/IECS-003 (dBuV) |                 |
|--------------------|-----------------------|---------------------|-----------------|
|                    |                       | Quasi-peak          | Average         |
| Conducted Emission | 0.15 - 0.5            | 66 linear to 56     | 56 linear to 46 |
|                    | 0.5 - 5               | 56                  | 46              |
|                    | 5 - 30                | 60                  | 50              |



## 5.12 Unintentional Radiated Emissions

Test Standard: FCC Title 47 CFR Part 15: Subpart B - 15.109, ICES-003 Issue 6

Test Method: ANSI C63.4:2014

Radiated emission from an ITE shall be measured from the lowest frequency generated, or used, in the device or 30 (MHz), whichever is higher, up to the frequency determined in accordance with Table 5.5

**Table 5.5 - Frequency Range of Measurement**

| Highest Frequency Generated or Used in Device | Upper Frequency of Radiated Measurement                                   |
|-----------------------------------------------|---------------------------------------------------------------------------|
| Below 1.705 MHz                               | No radiated testing required                                              |
| 1.705 MHz - 108 MHz                           | 1000 (MHz)                                                                |
| 108 MHz - 500 MHz                             | 2000 (MHz)                                                                |
| 500 MHz - 1000 MHz                            | 5000 (MHz)                                                                |
| Above 1000M Hz                                | 5th harmonic of the highest frequency or 40000 (MHz), whichever is lower. |

**Class A:** An ITE meeting the conditions for Class A operation defined in Section 1.3 shall comply with the Class A radiated limits set out in Table 5.6 determined at a distance of 3 (m).

☐ Applicable

**Table 5.6 - Class A Radiated Emission Limits(FCC & ICES-003)**

| Emission Type     | Frequency Range (MHz) | FCC @ 3 (m) (dBuV/m) |         | ICES-003 @ 3 (m) (dBuV/m) |         |
|-------------------|-----------------------|----------------------|---------|---------------------------|---------|
|                   |                       | Quasi-peak           | Average | Quasi-peak                | Average |
| Radiated Emission | 30 - 88               | 49.54                | -       | 49.46                     | -       |
|                   | 88 - 216              | 53.98                | -       | 53.96                     | -       |
|                   | 216 - 960             | 56.90                | -       | 56.86                     | -       |
|                   | 960 - 1000            | 60                   | -       | 59.96                     | -       |
|                   | Above 1000            | -                    | 60      | -                         | 59.96   |

**Class B:** An ITE that does not meeting the conditions for Class A operation shall comply with the Class B radiated limits set out in Table 5.7 determined at a distance of 3 (m).

☐ Applicable

**Table 5.7 - Class B Radiated Emission Limits (FCC & ICES-003)**

| Emission Type     | Frequency Range (MHz) | FCC @ 3 (m) (dBuV/m) |         | ICES-003 @ 3 (m) (dBuV/m) |         |
|-------------------|-----------------------|----------------------|---------|---------------------------|---------|
|                   |                       | Quasi-peak           | Average | Quasi-peak                | Average |
| Radiated Emission | 30 - 88               | 40                   | -       | 40                        | -       |
|                   | 88 - 216              | 43.52                | -       | 43.5                      | -       |



|  |            |       |       |    |    |
|--|------------|-------|-------|----|----|
|  | 216 - 960  | 46.02 | -     | 46 | -  |
|  | 960 - 1000 | 53.98 | -     | 54 | -  |
|  | Above 1000 | -     | 53.98 | -  | 54 |



## 6.0 Test Results

### 6.1 Antenna Requirement

☐ Applicable**Table 6.1.1** - Antenna Requirement Test Setup Information

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                             |                                                     |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-----------------------------------------------------|
| <b>CLIENT:</b>         | <b>Blackline Safety</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>TEST STANDARD:</b>       | <b>FCC 15.203, IC RSS Gen Issue 6 section 7.1.2</b> |
| <b>MODEL NUMBER:</b>   | <b>G7EXO-NA2,G7EXO-AZ2</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <b>PRODUCT:</b>             | <b>G7EXO-NA2,G7EXO-AZ2</b>                          |
| <b>SERIAL NUMBER:</b>  | <b>3588000037, 3588400000</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>CLASS/LIMIT APPLIED:</b> | <b>FCC 15.247, RSS-247 Issue 2</b>                  |
| <b>TEST REFERENCE:</b> | FCC 47 CFR Part 15.203 and IC RSS-Gen Issue 6 Section 7.1.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                             |                                                     |
| <b>REQUIREMENT</b>     | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded. |                             |                                                     |
| <b>REMARK</b>          | A permanently attached antenna was used which is not replaceable.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                             |                                                     |
| <b>RESULTS:</b>        | <b>PASS</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                             |                                                     |



## 6.2 RF Peak Power Output

☐ Applicable**Table 6.2.1** – RF Peak Output Power information

|                        |                                                                                                                                                                                                                                                                           |                |                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------------|
| CLIENT:                | Blackline Safety                                                                                                                                                                                                                                                          | TEST STANDARD: | FCC 15.247, RSS-247 Issue 2 |
| MODEL NUMBER:          | G7EXO-NA2,G7EXO-AZ2                                                                                                                                                                                                                                                       | PRODUCT:       |                             |
| SERIAL NUMBER:         | 3588000037                                                                                                                                                                                                                                                                | CLASS:         |                             |
| TEMPERATURE:           | 23°C                                                                                                                                                                                                                                                                      | HUMIDITY:      | 46%                         |
| TESTED BY:             | Adishesu Nyshadham                                                                                                                                                                                                                                                        | DATE OF TEST:  | 2020-09-01                  |
| TEST REFERENCE:        | FCC Title 47 CFR Part 15: Subpart C – 15.247(b)(1), RSS-247 Issue 2                                                                                                                                                                                                       |                |                             |
| TEST VOLTAGE:          | 3.0V ,3.4V ,3.6V                                                                                                                                                                                                                                                          |                |                             |
| SETUP:                 | As per ANSI C63.10:2013, sec 11.9.2                                                                                                                                                                                                                                       |                |                             |
| FREQUENCY RANGE        | 2400-2483.5 MHz                                                                                                                                                                                                                                                           |                |                             |
| FREQUENCY TESTED:      | 2402 MHz, 2441 MHz, 2480 MHz                                                                                                                                                                                                                                              |                |                             |
| FIRMWARE POWER SETTING | 11 dBm                                                                                                                                                                                                                                                                    |                |                             |
| EUT FIRMWARE           | 3.442S3_EXO                                                                                                                                                                                                                                                               |                |                             |
| MODULATION/DATA RATE   | GFSK, DH1,<br>QPSK, DH2<br>8-PSK, DH3                                                                                                                                                                                                                                     |                |                             |
| ANTENNA TYPE/GAIN      | Ceramic Chip Antenna, 2.2dBi(peak), 1.9dBi(Band edges)                                                                                                                                                                                                                    |                |                             |
| DUTY CYCLE             | NA                                                                                                                                                                                                                                                                        |                |                             |
| DECISION RULE          | Decision rule support document:<br><input type="checkbox"/> Data obtained<br><input type="checkbox"/> Video<br><input type="checkbox"/> Email conversation<br><input type="checkbox"/> inherent in the requested specification standard<br><input type="checkbox"/> other |                |                             |
| RESULTS:               | PASS                                                                                                                                                                                                                                                                      |                |                             |

**Table 6.2.2 – Test Data Summary – Output Power with Voltage Variations**

| Frequency (MHz) | Mode            | 3VDC (dBm) | 3.4VDC (dBm) | 3.6VDC (dBm) | Max Deviation from 3.4VDC (dB) |
|-----------------|-----------------|------------|--------------|--------------|--------------------------------|
| 2402            | Bluetooth, GFSK | 9.85       | 9.55         | 9.55         | -0.30                          |
| 2441            | Bluetooth, GFSK | 10.45      | 10.15        | 10.15        | -0.30                          |
| 2480            | Bluetooth, GFSK | 9.95       | 9.55         | 9.55         | -0.40                          |

**Table 6.2.3 – Antenna Conducted Output Power Measurement**

| Frequency (MHz) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV) | Corrected Reading (dBm)<br>dBm = dBuV-107.0 | RSS-247 5.4 Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|------------------------|--------------------------|---------------------------------------------|-------------------------|-------------|
| 2402            | 115.1                   | 1.45                   | 116.55                   | 9.55                                        | 30                      | -20.45      |
| 2441            | 115.7                   | 1.45                   | 117.15                   | 10.15                                       | 30                      | -19.85      |
| 2480            | 115.1                   | 1.45                   | 116.55                   | 9.55                                        | 30                      | -20.45      |

Note: The correction factor is the insertion loss of the 90cm coaxial RF cable that was a temporary antenna port for conducted measurements. Worse case insertion loss value used.

**Table 6.2.4 – Maximum Power Output Summary For all Modes – RF Conducted Measurement**

| Frequency | Mode             | Measured (dBm) | Limit (dBm) | Result |
|-----------|------------------|----------------|-------------|--------|
| 2402      | Bluetooth, GFSK  | 9.55           | 30          | PASS   |
| 2441      | Bluetooth, GFSK  | 10.15          | 30          | PASS   |
| 2480      | Bluetooth, GFSK  | 9.55           | 30          | PASS   |
| 2402      | Bluetooth, QPSK  | 6.45           | 30          | PASS   |
| 2441      | Bluetooth, QPSK  | 7.15           | 30          | PASS   |
| 2480      | Bluetooth, QPSK  | 6.45           | 30          | PASS   |
| 2402      | Bluetooth, 8-PSK | 6.45           | 30          | PASS   |
| 2441      | Bluetooth, 8-PSK | 7.15           | 30          | PASS   |
| 2480      | Bluetooth, 8-PSK | 6.55           | 30          | PASS   |

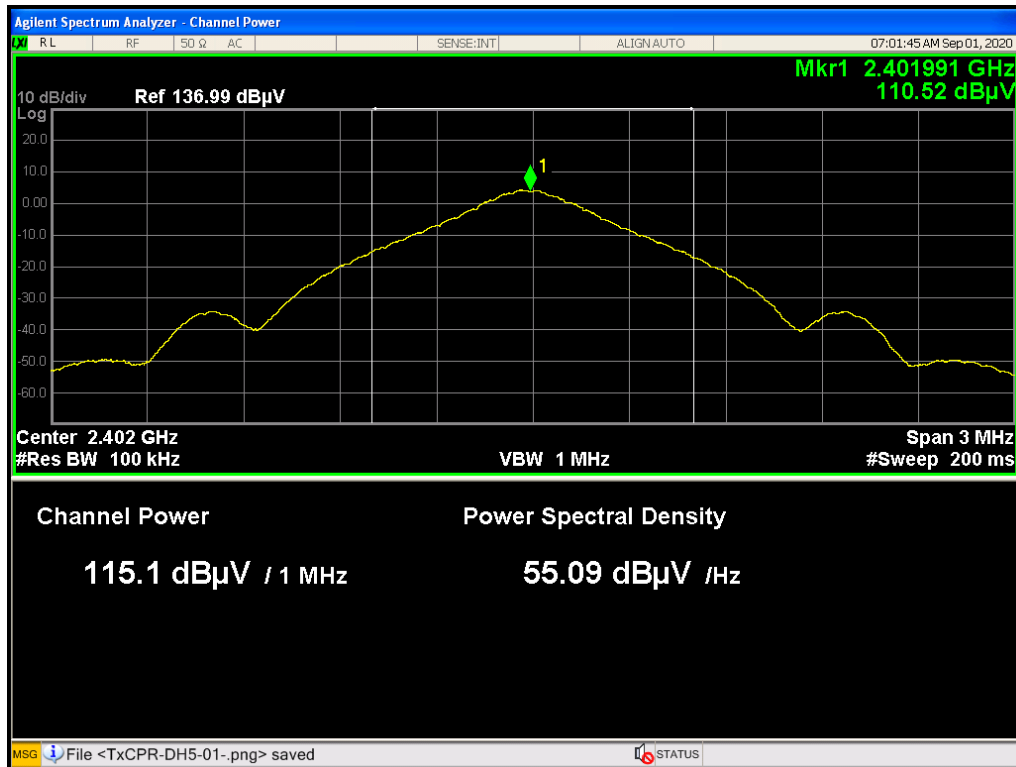


Figure 6.2.1 – Antenna Conducted Out Put Power Channel 1, GFSK Data.

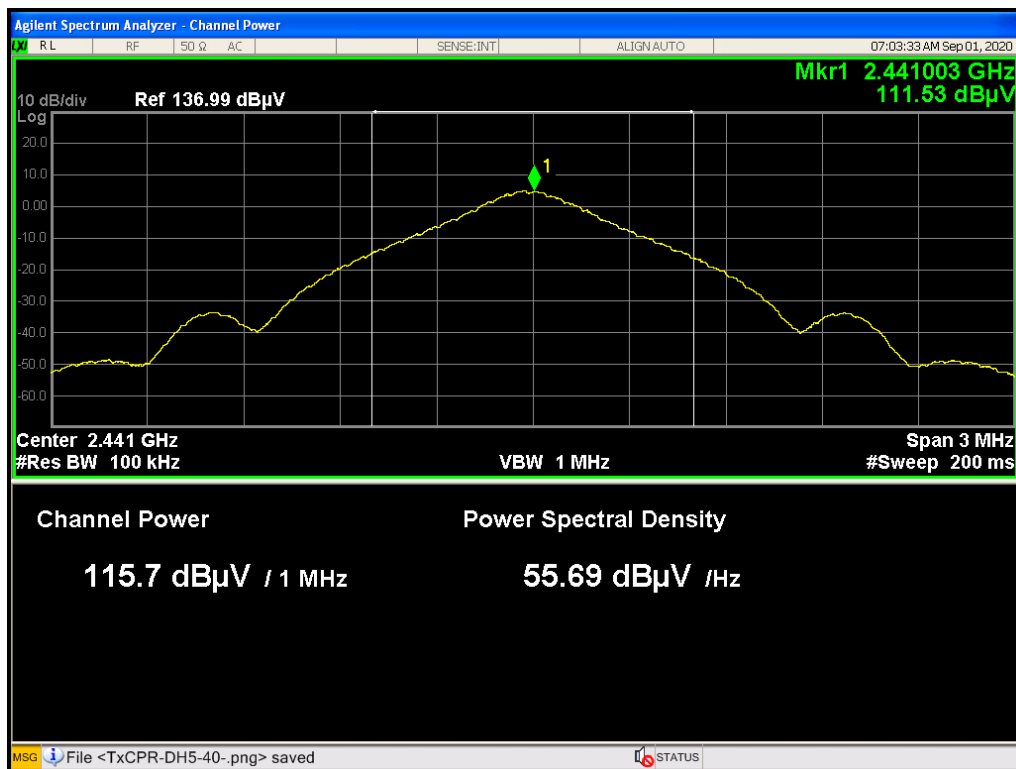


Figure 6.2.2 - Antenna Conducted Out Put Power Channel 40, GFSK Data.

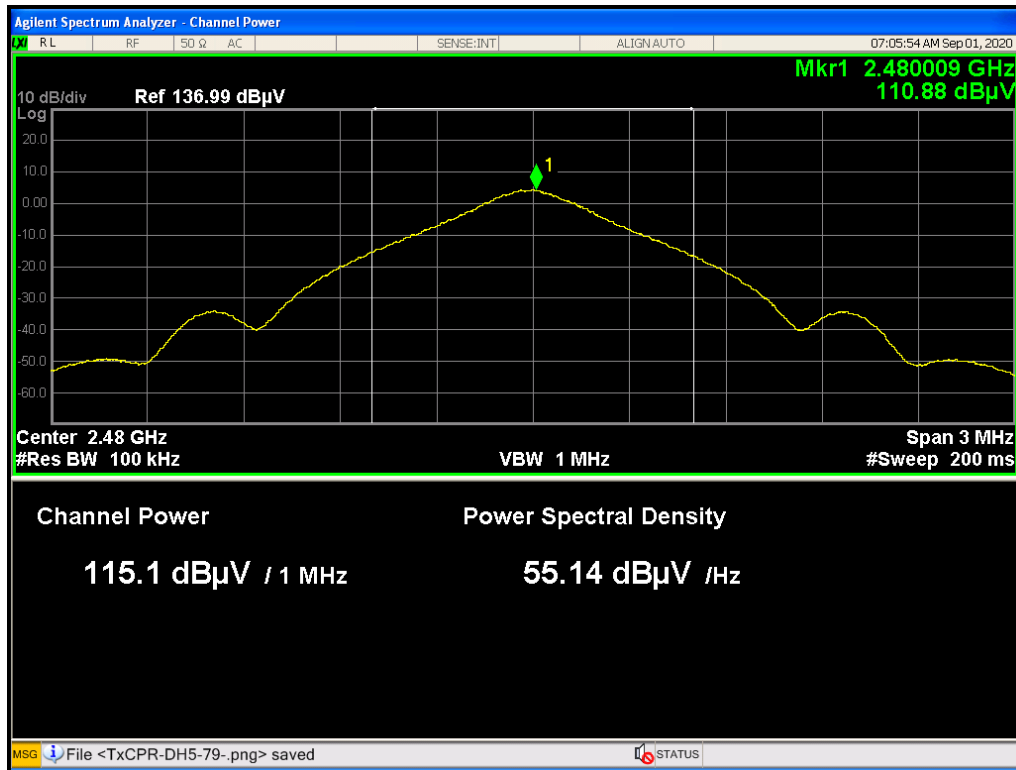


Figure 6.2.3 – Antenna Conducted Out Put Power Channel 79, GFSK Data.



### 6.3 Radiated Spurious Emissions

☐ Applicable**Table 6.3.1** – Radiated Spurious Emission Test Setup Information

|                        |                                                                                                                                                                                                                                                                           |                |                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------------|
| CLIENT:                | Blackline Safety                                                                                                                                                                                                                                                          | TEST STANDARD: | FCC 15.247, RSS-247 Issue 2 |
| MODEL NUMBER:          | G7EXO-NA2, G7EXO-AZ2                                                                                                                                                                                                                                                      | PRODUCT:       |                             |
| SERIAL NUMBER:         | 3588000037, 3588400000                                                                                                                                                                                                                                                    | CLASS:         |                             |
| TEMPERATURE:           | 28.5°C                                                                                                                                                                                                                                                                    | HUMIDITY:      | 36%                         |
| TESTED BY:             | Jaeheon Yun                                                                                                                                                                                                                                                               | DATE OF TEST:  | 2020-08-11 to 2020-08-20    |
| TEST REFERENCE:        | FCC Subpart C 15.205, 15.209, 15.247, RSS-247-Issue 2, RSS-Gen Issue 5                                                                                                                                                                                                    |                |                             |
| TEST VOLTAGE:          | 120VAC, range                                                                                                                                                                                                                                                             |                |                             |
| SETUP:                 | ANSI C63.4-2014                                                                                                                                                                                                                                                           |                |                             |
| FREQUENCY RANGE        | 30M-26.5 GHz                                                                                                                                                                                                                                                              |                |                             |
| FREQUENCY TESTED:      | 2402MHz, 2441 MHz, 2480 MHz                                                                                                                                                                                                                                               |                |                             |
| FIRMWARE POWER SETTING | 11 dBm                                                                                                                                                                                                                                                                    |                |                             |
| EUT FIRMWARE           | 3.442S3_EXO                                                                                                                                                                                                                                                               |                |                             |
| MODULATION/DATA RATE   | GFSK, DH1,<br>QPSK, DH2<br>8-PSK, DH3                                                                                                                                                                                                                                     |                |                             |
| ANTENNA TYPE/GAIN      | Ceramic Chip Antenna, 2.2dBi(peak), 1.9dBi(Band edges)                                                                                                                                                                                                                    |                |                             |
| DUTY CYCLE             | N/A                                                                                                                                                                                                                                                                       |                |                             |
| DECISION RULE          | Decision rule support document:<br><input type="checkbox"/> Data obtained<br><input type="checkbox"/> Video<br><input type="checkbox"/> Email conversation<br><input type="checkbox"/> inherent in the requested specification standard<br><input type="checkbox"/> other |                |                             |
| RESULTS:               | PASS                                                                                                                                                                                                                                                                      |                |                             |

**Radiated Spurious Emissions Data**  
**8-PSK, CH2402****Table 6.3.2a - Radiated Emission - Horizontal Polarization Quasi-peak**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 65.511          | 148                 | 396.7               | 2.23                    | 13.17                  | 15.4                       | 40                         | -24.6       |
| 460.0205        | 347.4               | 199.9               | 1.37                    | 25.21                  | 26.58                      | 46.02                      | -19.44      |

**Table 6.3.2b - Radiated Emission - Vertical Polarization Quasi-peak**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 38.674          | 320.8               | 106.6               | -1.12                   | 18.41                  | 17.29                      | 40                         | -22.71      |
| 43.6063         | 137.7               | 100                 | 6.33                    | 15.53                  | 21.86                      | 40                         | -18.14      |
| 67.2608         | 53.1                | 309.6               | 1.29                    | 13.37                  | 14.66                      | 40                         | -25.34      |
| 124.038         | 61.8                | 103.1               | 8.25                    | 14.28                  | 22.53                      | 43.52                      | -20.99      |
| 357.696         | 135                 | 367.5               | -3.96                   | 22.83                  | 18.87                      | 46.02                      | -27.15      |
| 634.067         | 112.4               | 373.7               | -5.31                   | 29.18                  | 23.87                      | 46.02                      | -22.15      |

**Table 6.3.2c - Radiated Emission - Horizontal Polarization AVG**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 1937.5          | 266.7               | 209.9               | 59.92                   | -24.04                 | 35.88                      | 53.98                      | -18.10      |
| 4804            | 266.7               | 209.9               | 47.16                   | -20.46                 | 26.70                      | 53.98                      | -27.28      |
| 7206            | 266.7               | 209.9               | 44.46                   | -17.78                 | 26.68                      | 53.98                      | -27.30      |

Note: The emissions with peak detector were measured and found to meet average limits. Only Average detector measurements were shown in the above tables.

**Radiated Spurious Emissions Data**  
**8-PSK, CH2441****Table 6.3.3a - Radiated Emission - Horizontal Polarization Quasi-peak**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 79.1475         | 186.1               | 141.2               | 11.01                   | 13.32                  | 24.33                      | 40                         | -15.67      |
| 152.0815        | 195.1               | 200.1               | 1.88                    | 16.29                  | 18.17                      | 43.52                      | -25.35      |

**Table 6.3.3b - Radiated Emission - Vertical Polarization Quasi-peak**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 30.8373         | 339.3               | 100                 | 9.91                    | 21.96                  | 31.87                      | 40                         | -8.13       |
| 45.3828         | 158.2               | 103                 | 2.7                     | 14.41                  | 17.11                      | 40                         | -22.89      |
| 121.3458        | 59.4                | 100.5               | 7.19                    | 14.01                  | 21.2                       | 43.52                      | -22.32      |
| 137.2778        | 51.8                | 103.3               | 13.53                   | 14.98                  | 28.51                      | 43.52                      | -15.01      |
| 396.025         | 181.5               | 174.6               | 1.39                    | 24.6                   | 25.99                      | 46.02                      | -20.03      |
| 892.2475        | 313.1               | 131.4               | -4.66                   | 31.62                  | 26.96                      | 46.02                      | -19.06      |

**Table 6.3.3c - Radiated Emission - Horizontal Polarization AVG**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 1937.5          | 265.7               | 211.3               | 59.94                   | -24.04                 | 35.90                      | 53.98                      | -18.08      |
| 4882            | 265.7               | 211.3               | 46.35                   | -20.41                 | 25.94                      | 53.98                      | -28.04      |
| 7323            | 265.7               | 211.3               | 43.61                   | -17.73                 | 25.88                      | 53.98                      | -28.10      |

Note: The emissions with peak detector were measured and found to meet average limits. Only Average detector measurements were shown in the above tables.

**Radiated Spurious Emissions Data**  
**8-PSK, CH2480****Table 6.3.4a - Radiated Emission - Horizontal Polarization Quasi-peak**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 30.5468         | 159                 | 100                 | -4.28                   | 22.46                  | 18.18                      | 40                         | -21.82      |
| 38.992          | 318.5               | 381.2               | -3.85                   | 18.06                  | 14.21                      | 40                         | -25.79      |
| 55.8563         | 184.2               | 399.5               | -0.16                   | 12.84                  | 12.68                      | 40                         | -27.32      |
| 68.2593         | 339.9               | 300.4               | 1.38                    | 13.09                  | 14.47                      | 40                         | -25.53      |
| 375.0158        | 337.2               | 100.3               | 3.84                    | 22.77                  | 26.61                      | 46.02                      | -19.41      |
| 437.5033        | 0                   | 100.4               | 3.01                    | 24.25                  | 27.26                      | 46.02                      | -18.76      |

**Table 6.3.4b - Radiated Emission - Vertical Polarization Quasi-peak**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 39.917          | 306.2               | 103.3               | 12.34                   | 17.65                  | 29.99                      | 40                         | -10.01      |
| 55.1103         | 292.5               | 103.2               | 4.25                    | 12.7                   | 16.95                      | 40                         | -23.05      |
| 69.711          | 66.6                | 399.6               | -1.31                   | 13.08                  | 11.77                      | 40                         | -28.23      |
| 123.4243        | 27.3                | 100.9               | 7.64                    | 13.91                  | 21.55                      | 43.52                      | -21.97      |
| 437.4668        | 248.1               | 225.1               | 2.66                    | 24.25                  | 26.91                      | 46.02                      | -19.11      |
| 971.7878        | 321.2               | 287                 | -4.35                   | 33.71                  | 29.36                      | 53.98                      | -24.62      |

**Table 6.3.4c - Radiated Emission - Horizontal Polarization AVG**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 1937.5          | 266.3               | 197.7               | 57.49                   | -24.04                 | 33.45                      | 53.98                      | -20.53      |
| 4960            | 266.3               | 197.7               | 45.28                   | -20.4                  | 24.88                      | 53.98                      | -29.10      |
| 7440            | 266.3               | 197.7               | 43.64                   | -17.59                 | 26.05                      | 53.98                      | -27.93      |

Note: The emissions with peak detector were measured and found to meet average limits. Only Average detector measurements were shown in the above tables.

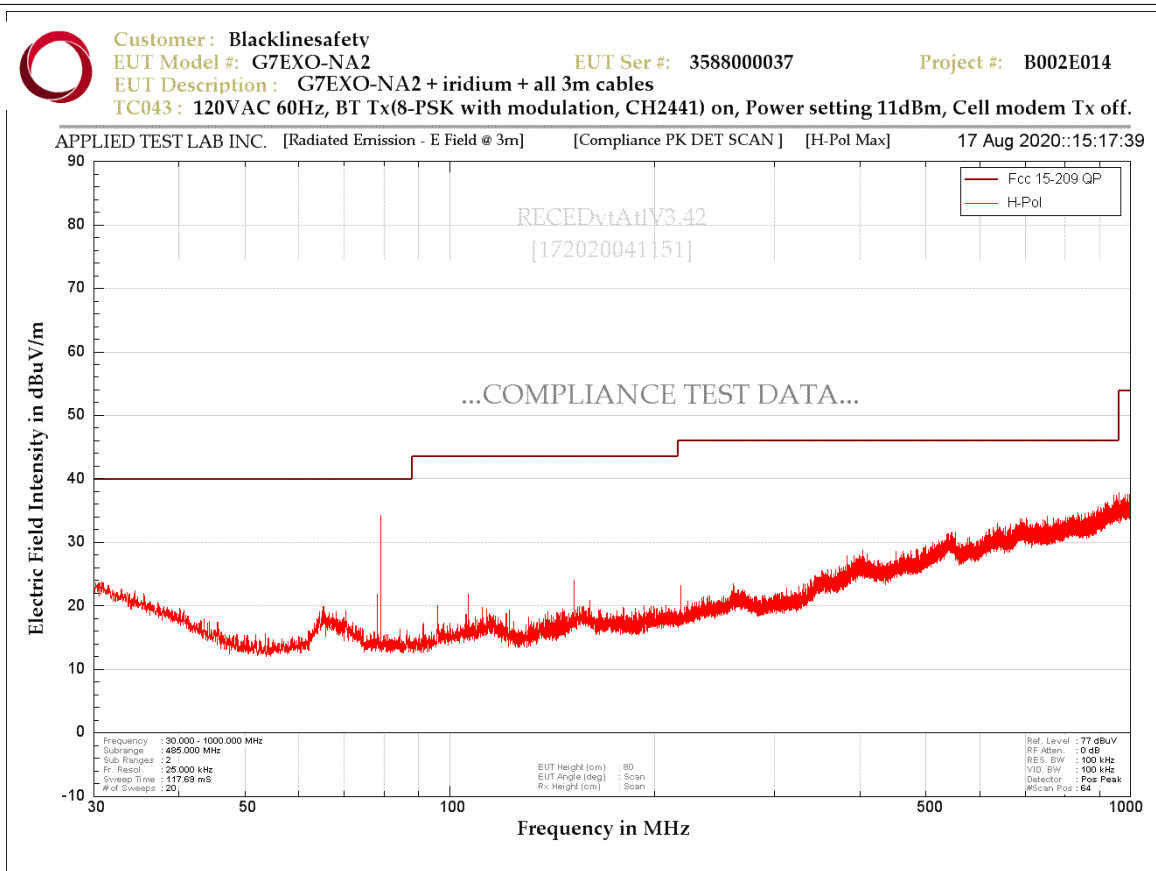


Figure 6.3.1a - Radiated Spurious Emission data(Middle channel, 8-PSK) -H-Pol-(30MHz - 1000MHz)

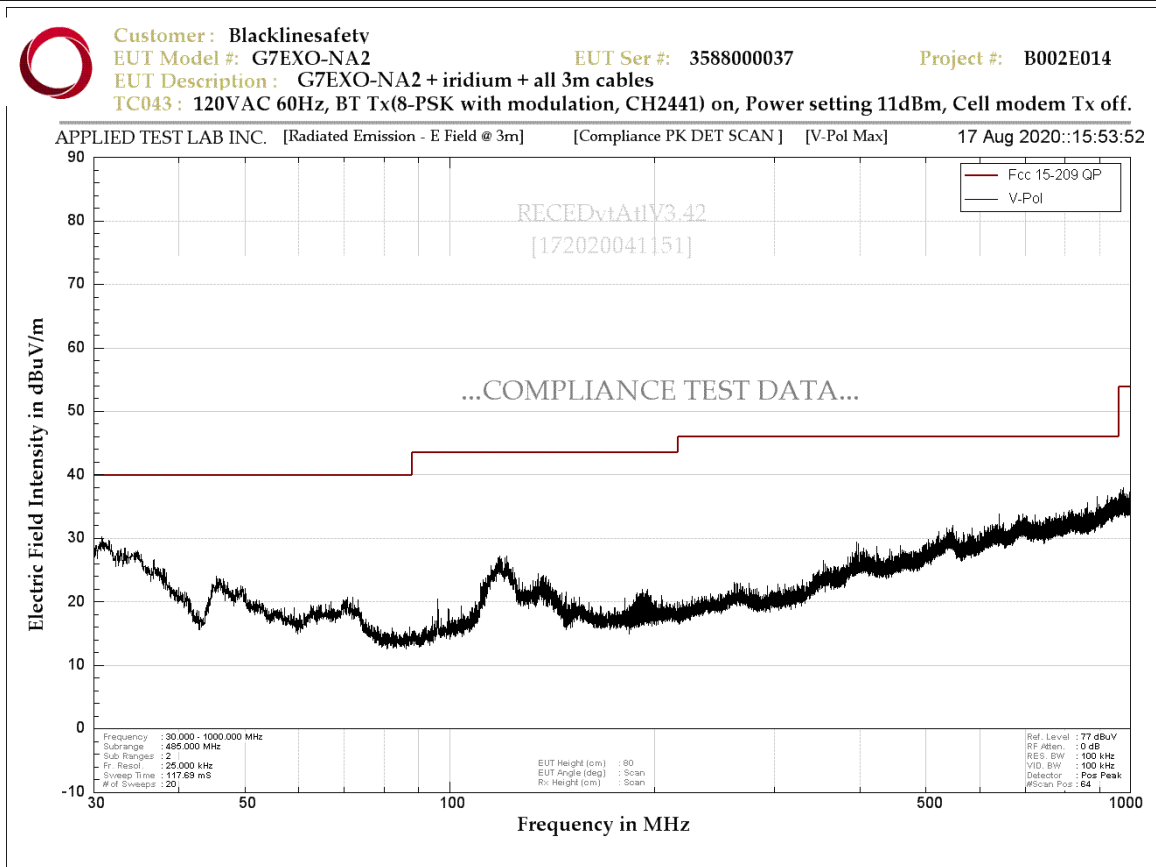


Figure 6.3.1b - Radiated Spurious Emission data(Middle channel, 8-PSK) – V-pol-(30MHz - 1000MHz)

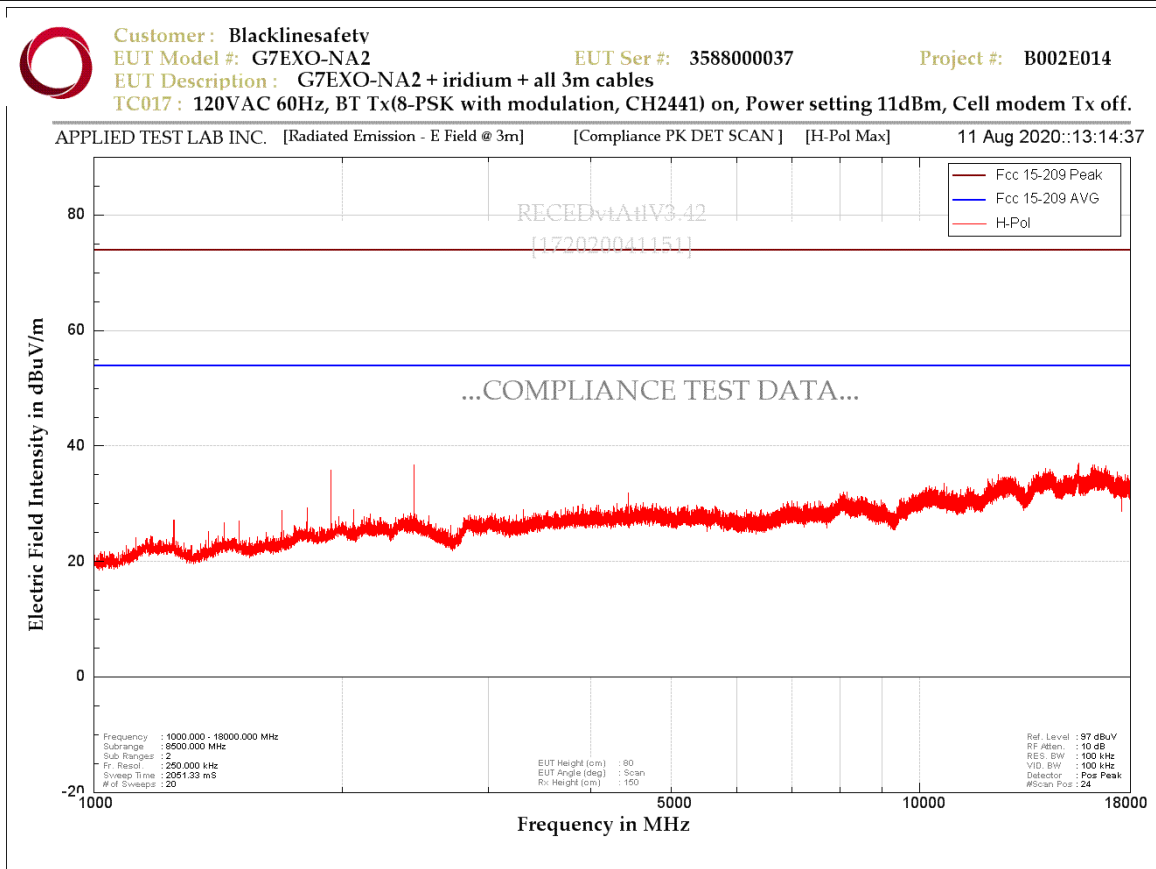


Figure 6.3.1c - Radiated Spurious Emission data(Middle channel, 8-PSK) -H-Pol-(1GHz – 18GHz)

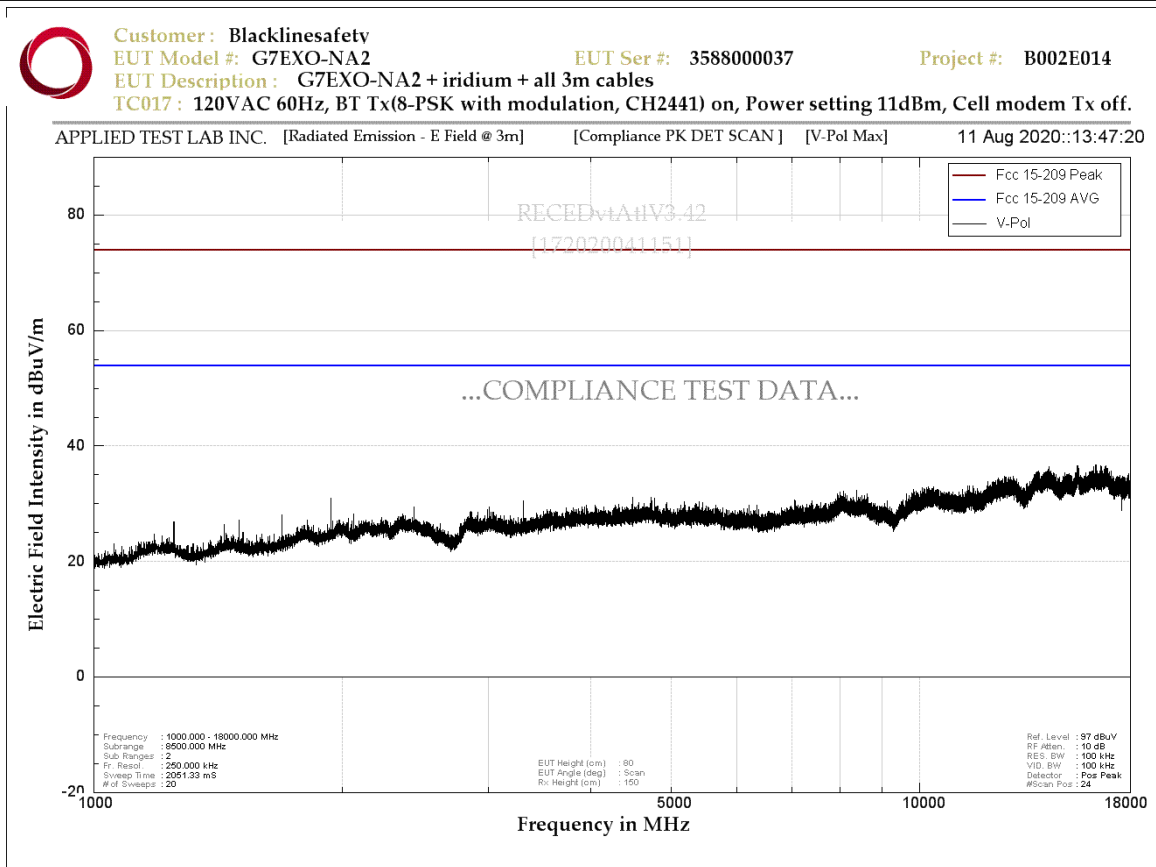


Figure 6. 3.1d - Radiated Spurious Emission data(Middle channel, 8-PSK) – V-pol-(1GHz - 18GHz)

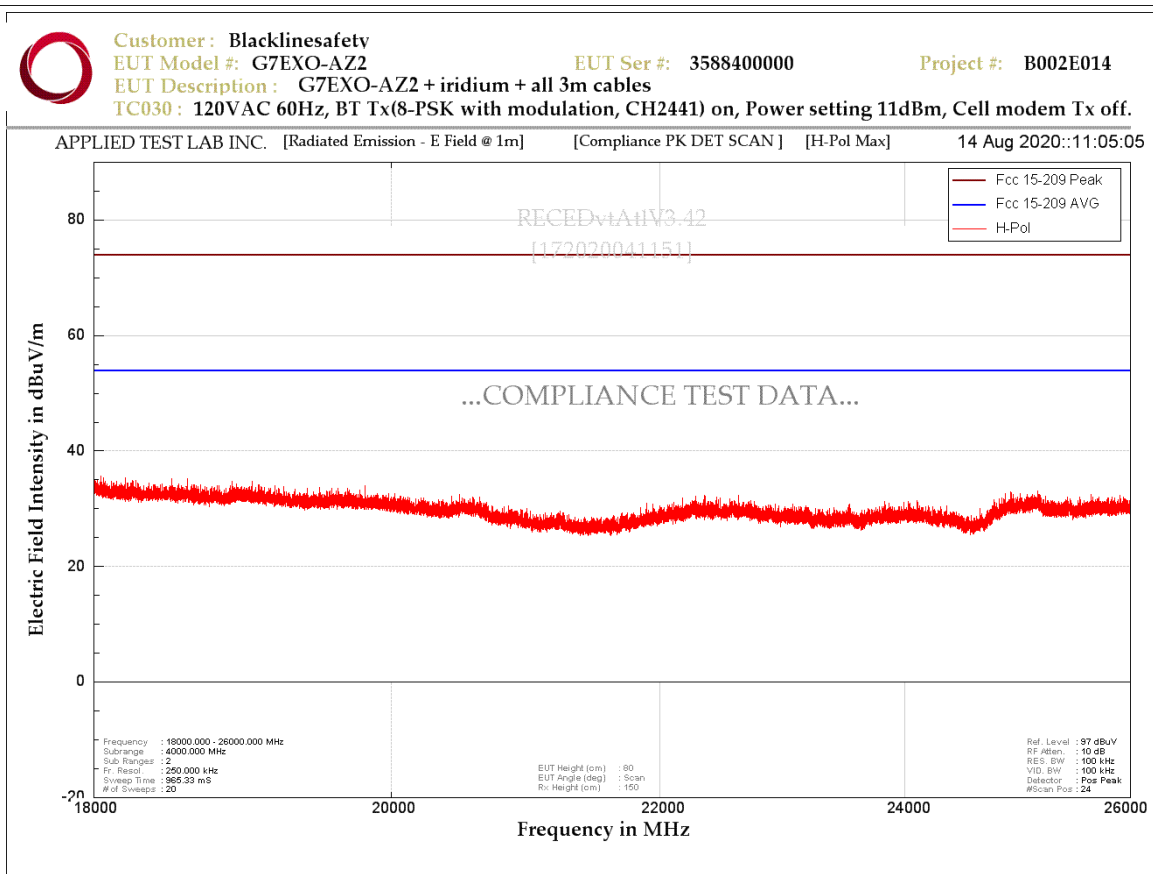


Figure 6. 3.1e - Radiated Spurious Emission data(Middle channel, 8-PSK) -H-Pol-(18GHz - 26GHz)

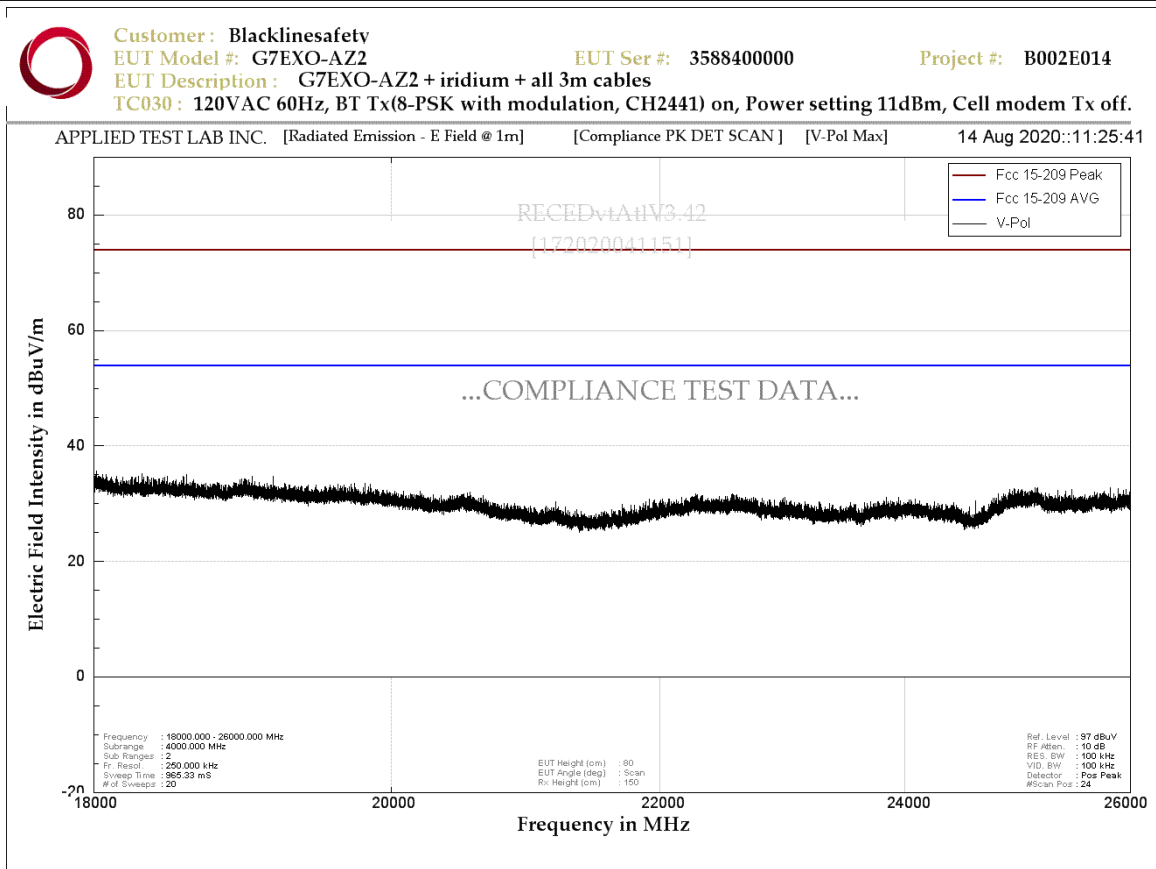


Figure 6. 3.1f - Radiated Spurious Emission data(Middle channel, 8-PSK) – V-pol-(18GHz - 26GHz)



**Table 6.3.5 - Radiated Emission - Horizontal Polarization AVG RSS-247 5.5**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| <b>GFSK</b>     |                     |                     |                         |                        |                            |                            |             |
| 4804            | 330                 | 150                 | 45.87                   | -20.77                 | 25.10                      | 53.98                      | -28.88      |
| 7206            | 330                 | 150                 | 44.29                   | -17.78                 | 26.51                      | 53.98                      | -27.47      |
| 4882            | 330                 | 150                 | 45.42                   | -20.41                 | 25.01                      | 53.98                      | -28.97      |
| 7323            | 330                 | 150                 | 43.48                   | -17.73                 | 25.75                      | 53.98                      | -28.23      |
| 4960            | 330                 | 150                 | 45.22                   | -20.4                  | 24.82                      | 53.98                      | -29.16      |
| 7440            | 330                 | 150                 | 43.5                    | -17.59                 | 25.91                      | 53.98                      | -28.07      |
| <b>QPSK</b>     |                     |                     |                         |                        |                            |                            |             |
| 4804            | 330                 | 150                 | 45.74                   | -20.77                 | 24.97                      | 53.98                      | -29.01      |
| 7206            | 330                 | 150                 | 43.48                   | -17.78                 | 25.70                      | 53.98                      | -28.28      |
| 4882            | 330                 | 150                 | 45.34                   | -20.41                 | 24.93                      | 53.98                      | -29.05      |
| 7323            | 330                 | 150                 | 43.2                    | -17.73                 | 25.47                      | 53.98                      | -28.51      |
| 4960            | 330                 | 150                 | 45.11                   | -20.4                  | 24.71                      | 53.98                      | -29.27      |
| 7440            | 330                 | 150                 | 43.39                   | -17.59                 | 25.80                      | 53.98                      | -28.18      |
| <b>8-PSK</b>    |                     |                     |                         |                        |                            |                            |             |
| 1937.5          | 266.7               | 209.9               | 59.92                   | -24.04                 | 35.88                      | 53.98                      | -18.10      |
| 4804            | 266.7               | 209.9               | 47.16                   | -20.46                 | 26.70                      | 53.98                      | -27.28      |
| 7206            | 266.7               | 209.9               | 44.46                   | -17.78                 | 26.68                      | 53.98                      | -27.30      |
| 1937.5          | 265.7               | 211.3               | 59.94                   | -24.04                 | 35.90                      | 53.98                      | -18.08      |
| 4882            | 265.7               | 211.3               | 46.35                   | -20.41                 | 25.94                      | 53.98                      | -28.04      |
| 7323            | 265.7               | 211.3               | 43.61                   | -17.73                 | 25.88                      | 53.98                      | -28.10      |
| 1937.5          | 266.3               | 197.7               | 57.49                   | -24.04                 | 33.45                      | 53.98                      | -20.53      |
| 4960            | 266.3               | 197.7               | 45.28                   | -20.4                  | 24.88                      | 53.98                      | -29.10      |
| 7440            | 266.3               | 197.7               | 43.64                   | -17.59                 | 26.05                      | 53.98                      | -27.93      |



Table 6.3.6 - Radiated Emission - Vertical Polarization AVG RSS-247 5.5

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| <b>GFSK</b>     |                     |                     |                         |                        |                            |                            |             |
| 4804            | 330                 | 150                 | 57.51                   | -20.77                 | 36.74                      | 53.98                      | -17.24      |
| 7206            | 330                 | 150                 | 55.55                   | -17.78                 | 37.77                      | 53.98                      | -16.21      |
| 4882            | 330                 | 150                 | 55.56                   | -20.41                 | 35.15                      | 53.98                      | -18.83      |
| 7323            | 330                 | 150                 | 56                      | -17.73                 | 38.27                      | 53.98                      | -15.71      |
| 4960            | 330                 | 150                 | 56.13                   | -20.4                  | 35.73                      | 53.98                      | -18.25      |
| 7440            | 330                 | 150                 | 54.47                   | -17.59                 | 36.88                      | 53.98                      | -17.10      |
| <b>QPSK</b>     |                     |                     |                         |                        |                            |                            |             |
| 4804            | 330                 | 150                 | 57.07                   | -20.77                 | 36.30                      | 53.98                      | -17.68      |
| 7206            | 330                 | 150                 | 54.37                   | -17.78                 | 36.59                      | 53.98                      | -17.39      |
| 4882            | 330                 | 150                 | 57.1                    | -20.41                 | 36.69                      | 53.98                      | -17.29      |
| 7323            | 330                 | 150                 | 55.91                   | -17.73                 | 38.18                      | 53.98                      | -15.80      |
| 4960            | 330                 | 150                 | 56.23                   | -20.4                  | 35.83                      | 53.98                      | -18.15      |
| 7440            | 330                 | 150                 | 54.45                   | -17.59                 | 36.86                      | 53.98                      | -17.12      |



**Radio Collocation Data**  
**8-PSK, CH2441 Cell modem Tx On 699MHz 24dBm**

**Table 6.3.7a - Radiated Emission - Horizontal Polarization Quasi-peak**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 96.0025         | 27                  | 206.7               | 0.68                    | 14.01                  | 14.69                      | 43.52                      | -28.83      |
| 144.1065        | 15.9                | 128.4               | 4.56                    | 14.78                  | 19.34                      | 43.52                      | -24.18      |
| 192.1263        | 331.3               | 328                 | -1.04                   | 16.26                  | 15.22                      | 43.52                      | -28.3       |
| 263.9595        | 302.6               | 100.1               | -4.02                   | 20.24                  | 16.22                      | 46.02                      | -29.8       |
| 287.7955        | 302.1               | 106.7               | -4.43                   | 19.26                  | 14.83                      | 46.02                      | -31.19      |
| 437.4793        | 208.6               | 215                 | 3.26                    | 24.25                  | 27.51                      | 46.02                      | -18.51      |

**Table 6.3.7b - Radiated Emission - Vertical Polarization Quasi-peak**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 35.604          | 0                   | 100                 | 12.22                   | 19.76                  | 31.98                      | 40                         | -8.02       |
| 48.0138         | 111.5               | 103.5               | 3.54                    | 13.33                  | 16.87                      | 40                         | -23.13      |
| 95.9905         | 28.7                | 122.8               | 5.58                    | 14                     | 19.58                      | 43.52                      | -23.94      |
| 144.0593        | 308.1               | 100.5               | 5.85                    | 14.77                  | 20.62                      | 43.52                      | -22.9       |
| 168.462         | 44.7                | 191.7               | -2.53                   | 16.24                  | 13.71                      | 43.52                      | -29.81      |
| 191.0148        | 21.4                | 172.9               | -1.46                   | 16.19                  | 14.73                      | 43.52                      | -28.79      |

**Table 6.3.7c - Radiated Emission - Horizontal Polarization AVG**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 1399.75         | 345.6               | 364.8               | 53.49                   | -26.39                 | 27.10                      | 53.98                      | -26.88      |
| 1937.5          | 266.8               | 209.6               | 58.52                   | -23.26                 | 35.26                      | 53.98                      | -18.72      |

Note: The emissions with peak detector were measured and found to meet average limits. Only Average detector measurements were shown in the above tables.

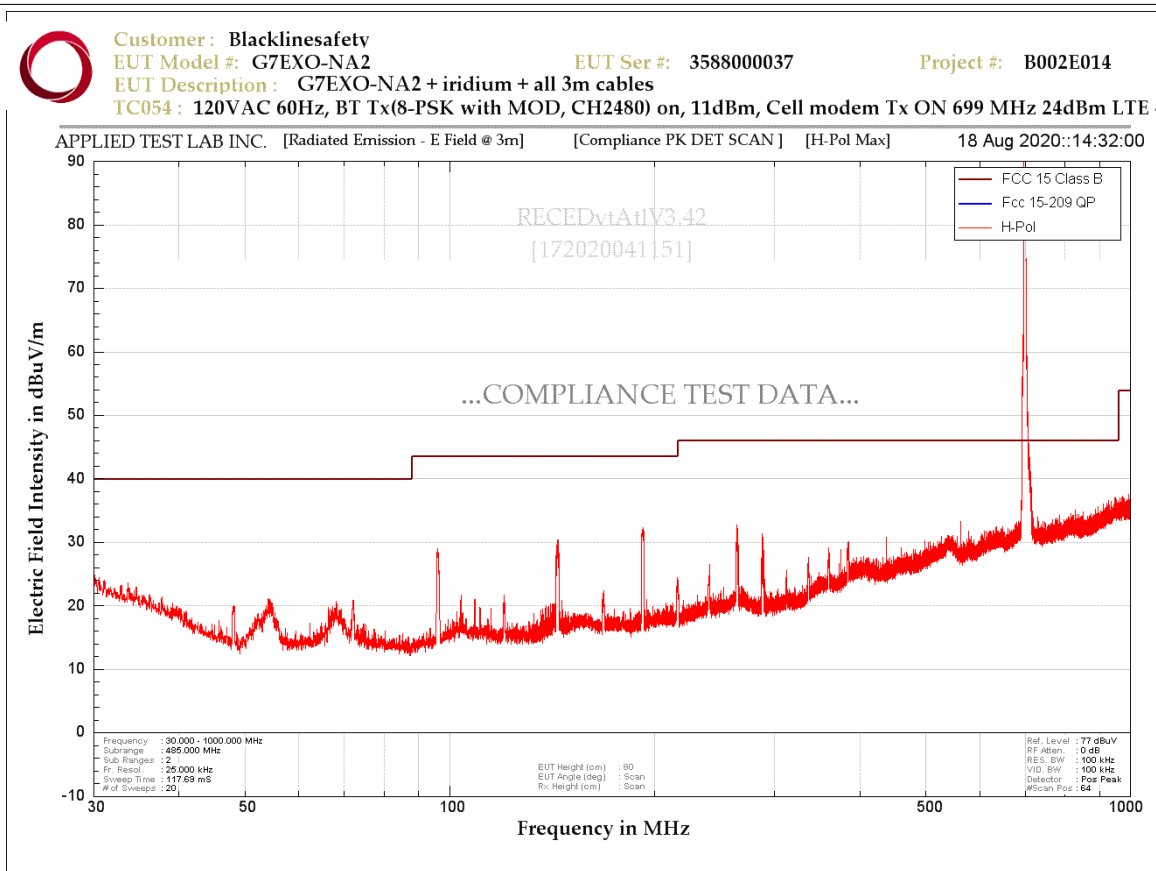


Figure 6.3.2a - Radiated Spurious Emission data(Middle channel, 8-PSK) -H-Pol-(30MHz – 1000MHz)

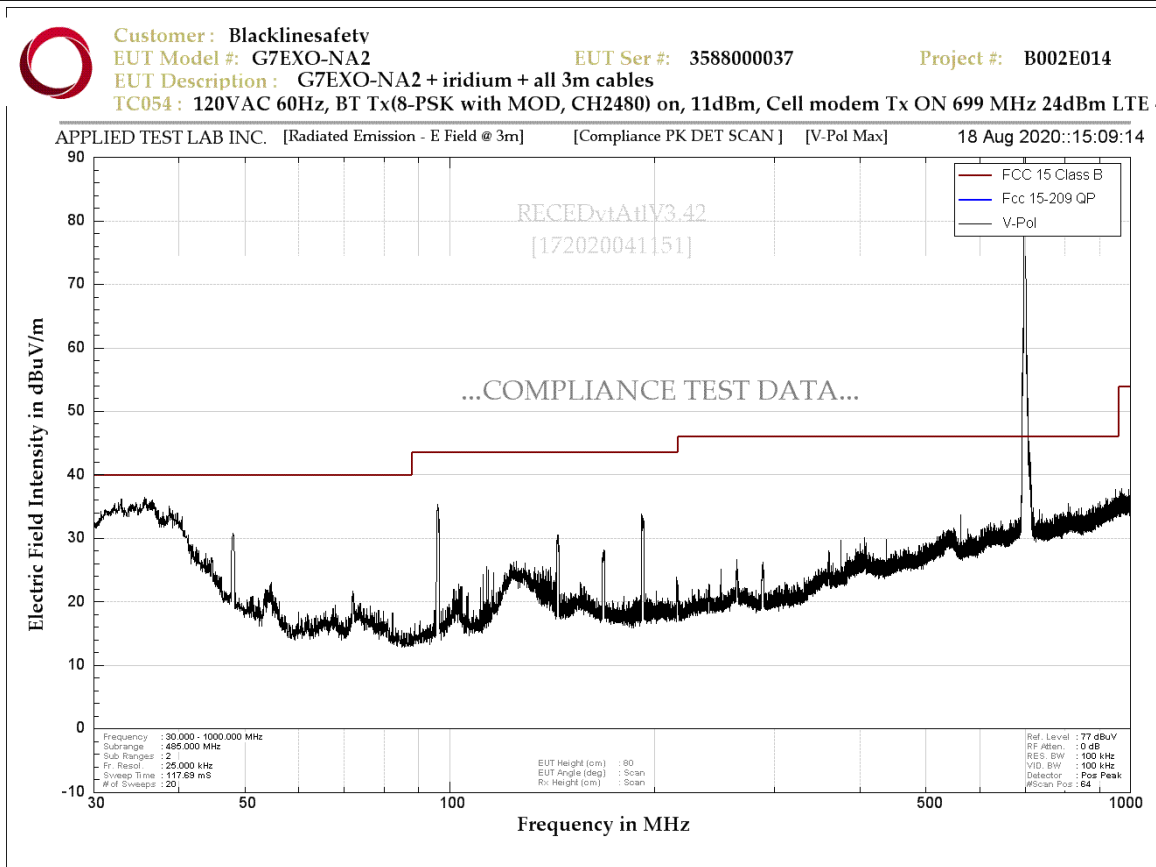


Figure 6.3.2b - Radiated Spurious Emission data(Middle channel, 8-PSK) – V-pol-(30MHz – 1000MHz)

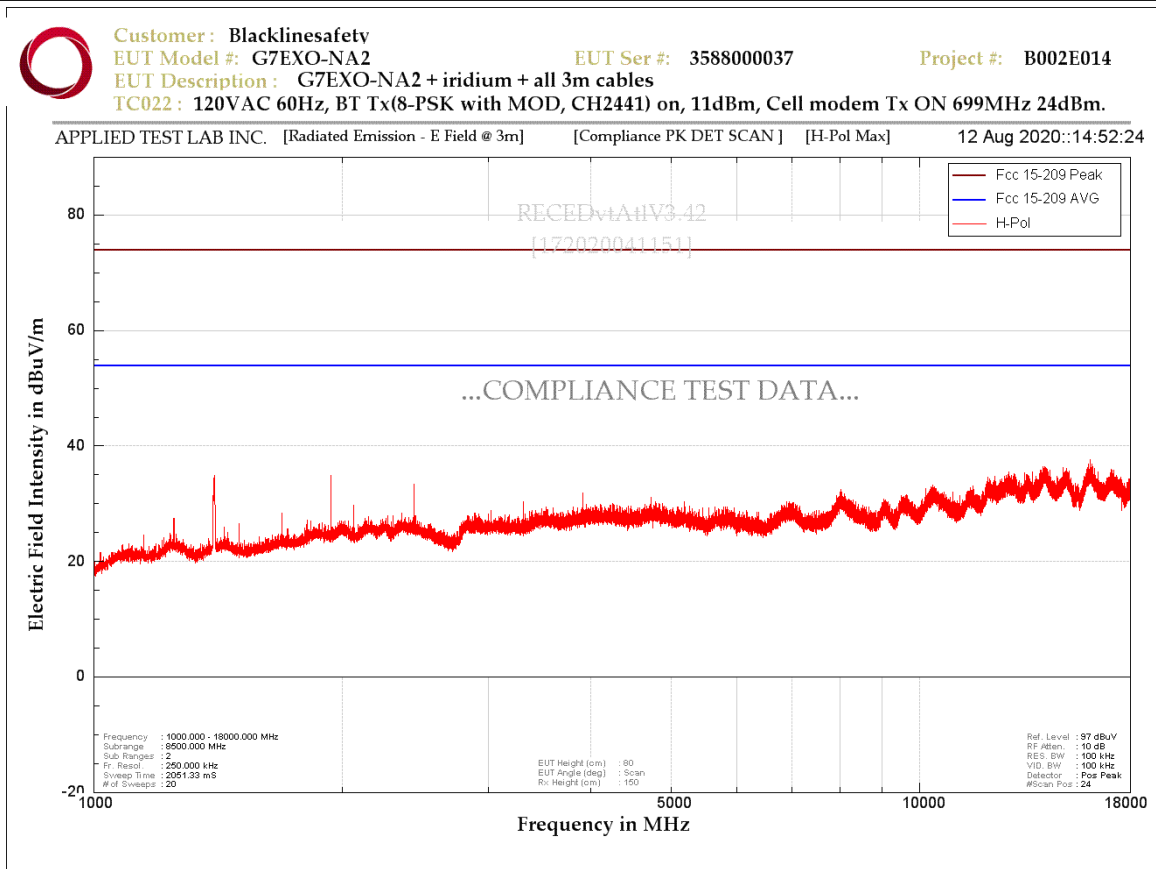


Figure 6.3.2c - Radiated Spurious Emission data(Middle channel, 8-PSK) -H-Pol-(1GHz – 18GHz)

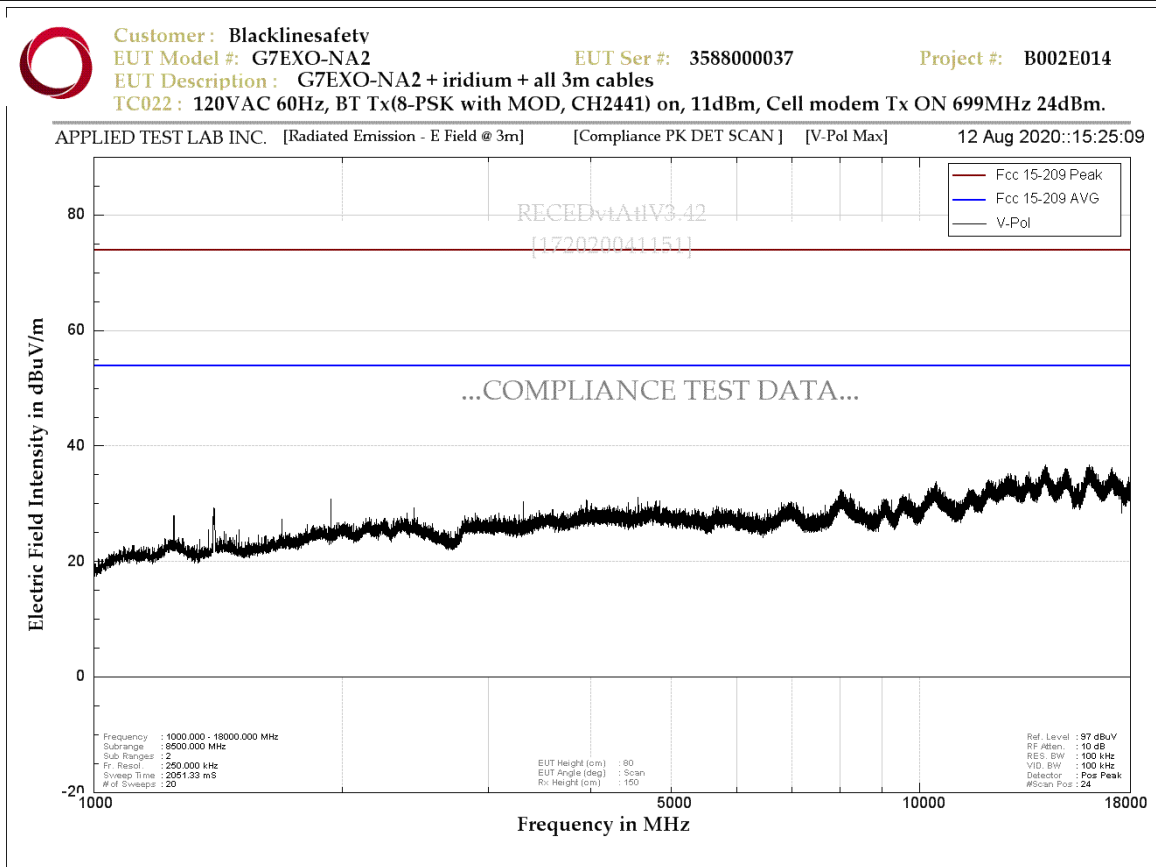


Figure 6.3.2d - Radiated Spurious Emission data(Middle channel, 8-PSK) – V-pol-(1GHz - 18GHz)

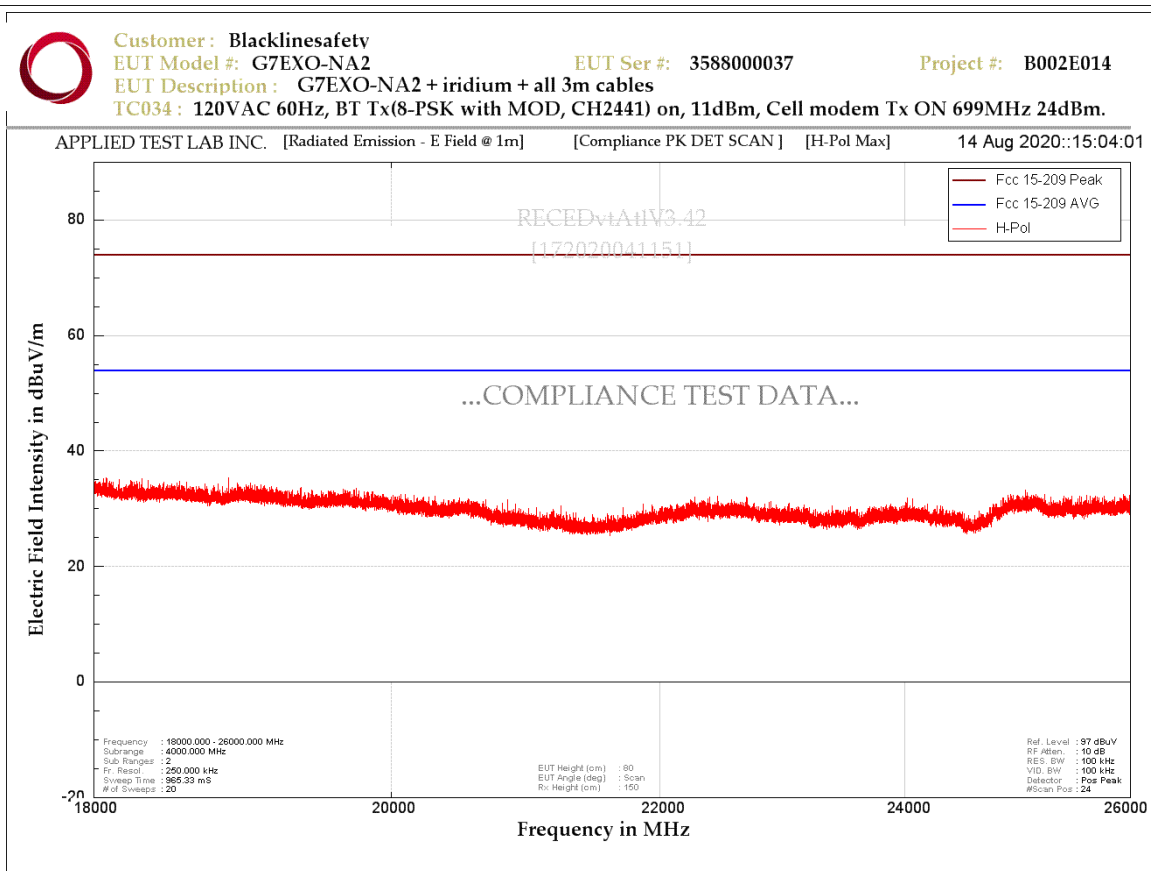


Figure 6.3.2e - Radiated Spurious Emission data(Middle channel, 8-PSK) -H-Pol-(18GHz – 26GHz)

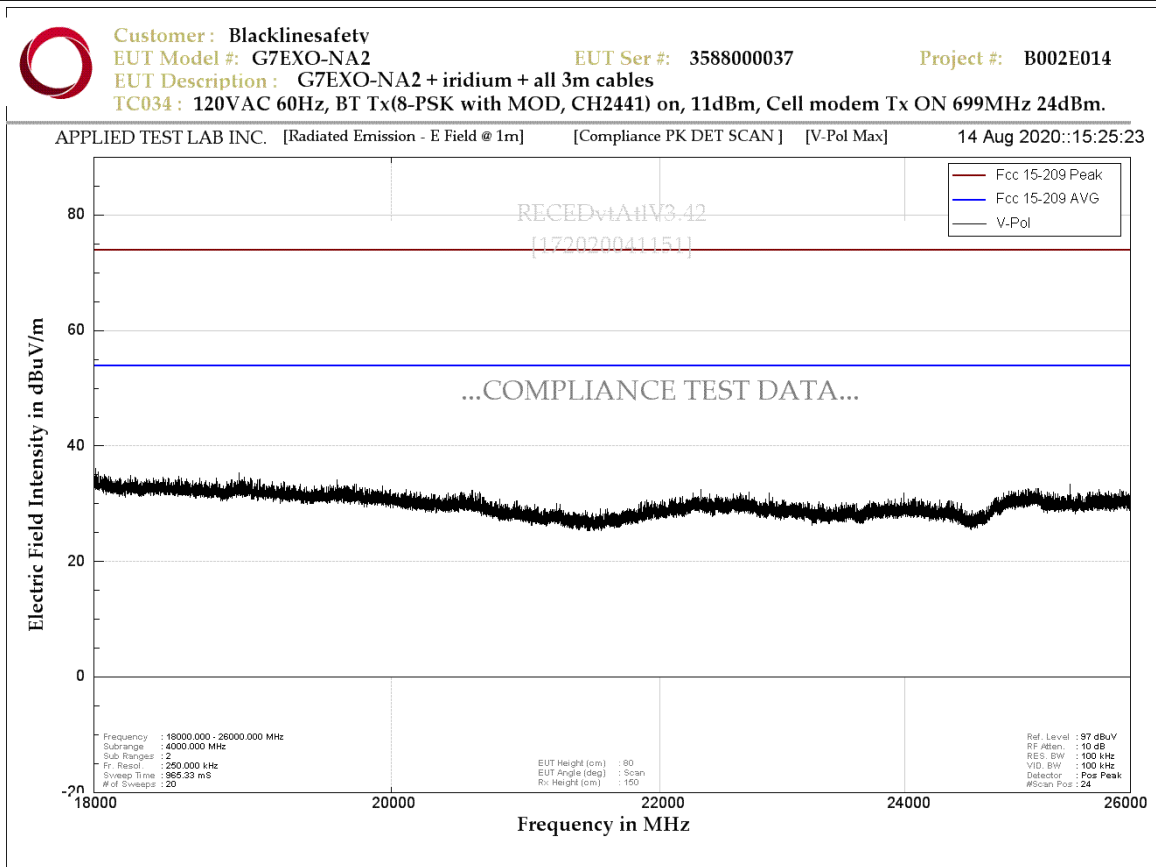


Figure 6.3.2f - Radiated Spurious Emission data(Middle channel, 8-PSK) – V-pol-(18GHz - 26GHz)



**Radio Collocation Data**  
**8-PSK, CH2441 Cell modem Tx On 824MHz 24dBm**

**Table 6.3.9a - Radiated Emission - Horizontal Polarization Quasi-peak**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 96.0263         | 275                 | 219.3               | 0.59                    | 14.02                  | 14.61                      | 43.52                      | -28.91      |
| 144.0178        | 350.3               | 157.4               | 7.66                    | 14.75                  | 22.41                      | 43.52                      | -21.11      |
| 192.0733        | 178.4               | 199.8               | -0.55                   | 16.26                  | 15.71                      | 43.52                      | -27.81      |
| 264.3033        | 299.5               | 127.1               | -4.17                   | 20.23                  | 16.06                      | 46.02                      | -29.96      |
| 287.3405        | 297                 | 100                 | -4.38                   | 19.25                  | 14.87                      | 46.02                      | -31.15      |
| 374.984         | 180                 | 100                 | 6.22                    | 22.78                  | 29                         | 46.02                      | -17.02      |

**Table 6.3.9b - Radiated Emission - Vertical Polarization Quasi-peak**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 39.2543         | 310.7               | 103.6               | 12.61                   | 17.94                  | 30.55                      | 40                         | -9.45       |
| 54.9405         | 274.8               | 100.5               | 5.76                    | 12.67                  | 18.43                      | 40                         | -21.57      |
| 124.6668        | 132.2               | 100.2               | 6.71                    | 13.89                  | 20.6                       | 43.52                      | -22.92      |
| 374.985         | 246.7               | 215.6               | 4.93                    | 22.78                  | 27.71                      | 46.02                      | -18.31      |
| 437.5075        | 232.9               | 162.5               | 5.14                    | 24.25                  | 29.39                      | 46.02                      | -16.63      |
| 562.5093        | -0.1                | 397.5               | 3.76                    | 27.05                  | 30.81                      | 53.98                      | -23.17      |

**Table 6.3.9c - Radiated Emission - Horizontal Polarization AVG**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 1937.5          | 264.1               | 210.2               | 57.12                   | -23.26                 | 33.86                      | 53.98                      | -20.12      |
| 2479            | 279.2               | 346.1               | 78.63                   | -22.51                 | 56.12                      | 86                         | -29.88      |

Note: The emissions with peak detector were measured and found to meet average limits. Only Average detector measurements were shown in the above tables.

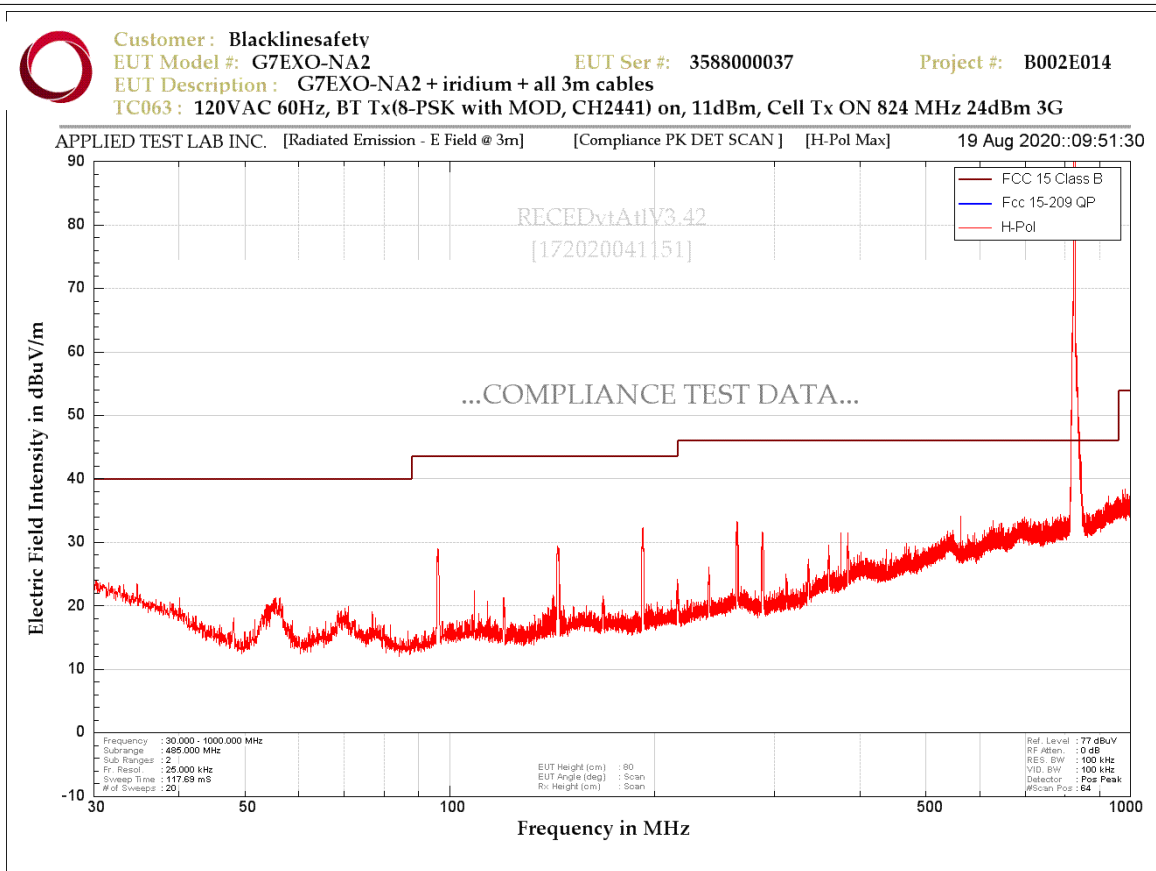


Figure 6.3.4a - Radiated Spurious Emission data(Middle channel, 8-PSK) -H-Pol-(30MHz – 1000MHz)

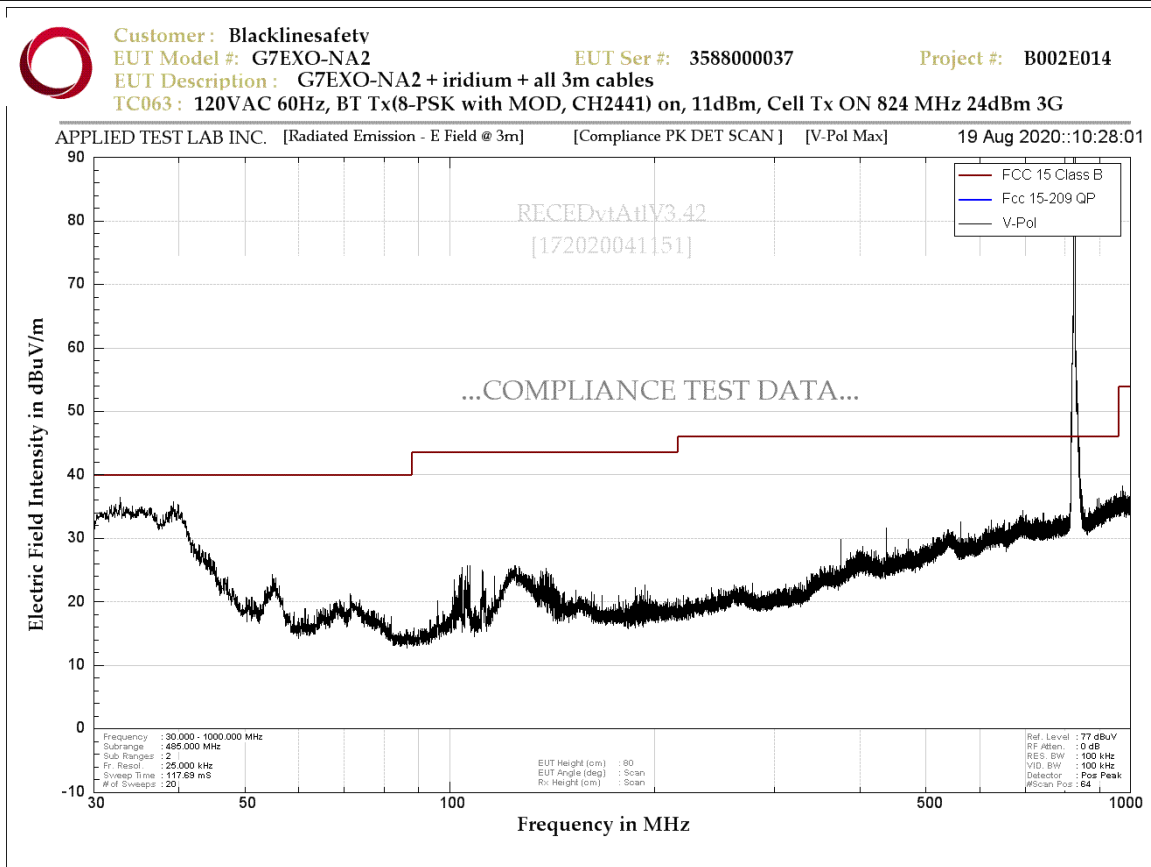


Figure 6.3.4b - Radiated Spurious Emission data(Middle channel, 8-PSK) – V-pol-(30MHz - 1000MHz)

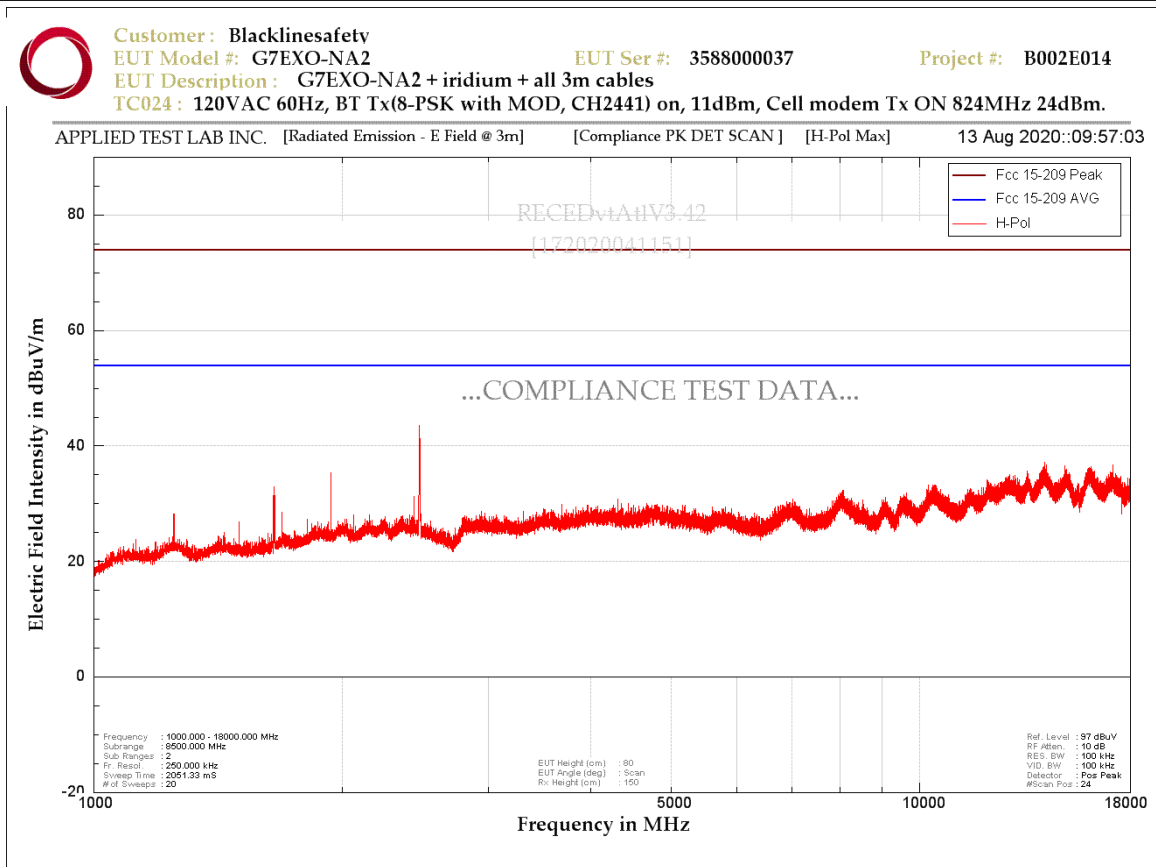


Figure 6.3.4c - Radiated Spurious Emission data(Middle channel, 8-PSK) -H-Pol-(1GHz – 18GHz)

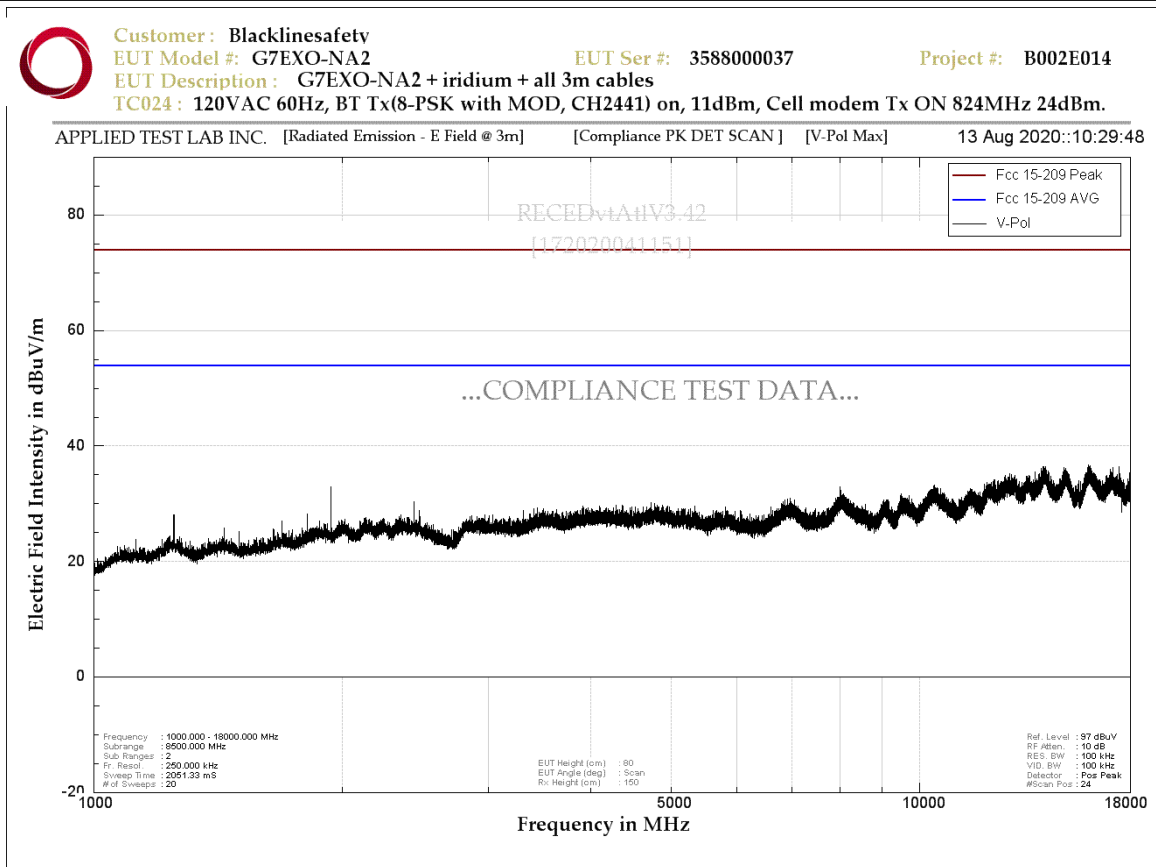


Figure 6.3.4d - Radiated Spurious Emission data(Middle channel, 8-PSK) – V-pol-(1GHz - 18GHz)

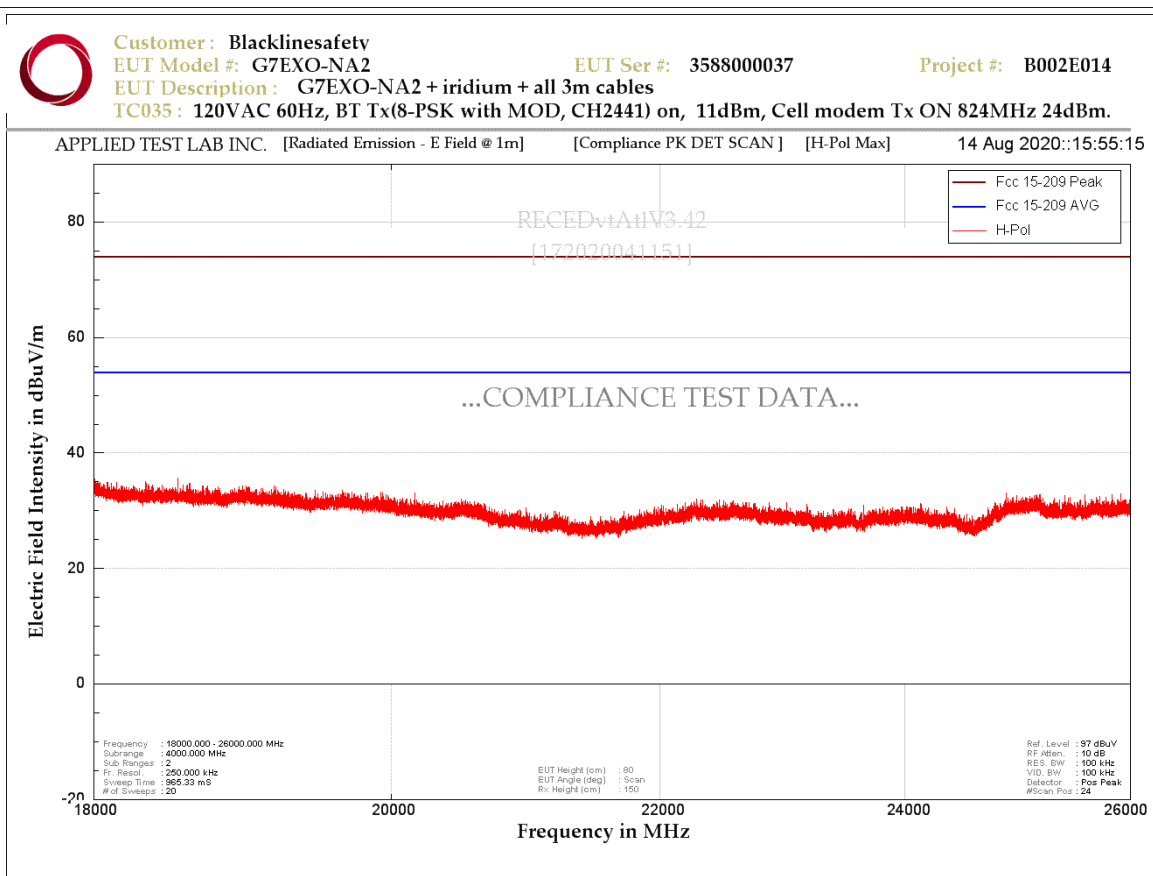


Figure 6.3.4e - Radiated Spurious Emission data(Middle channel, 8-PSK) -H-Pol-(18GHz – 26GHz)

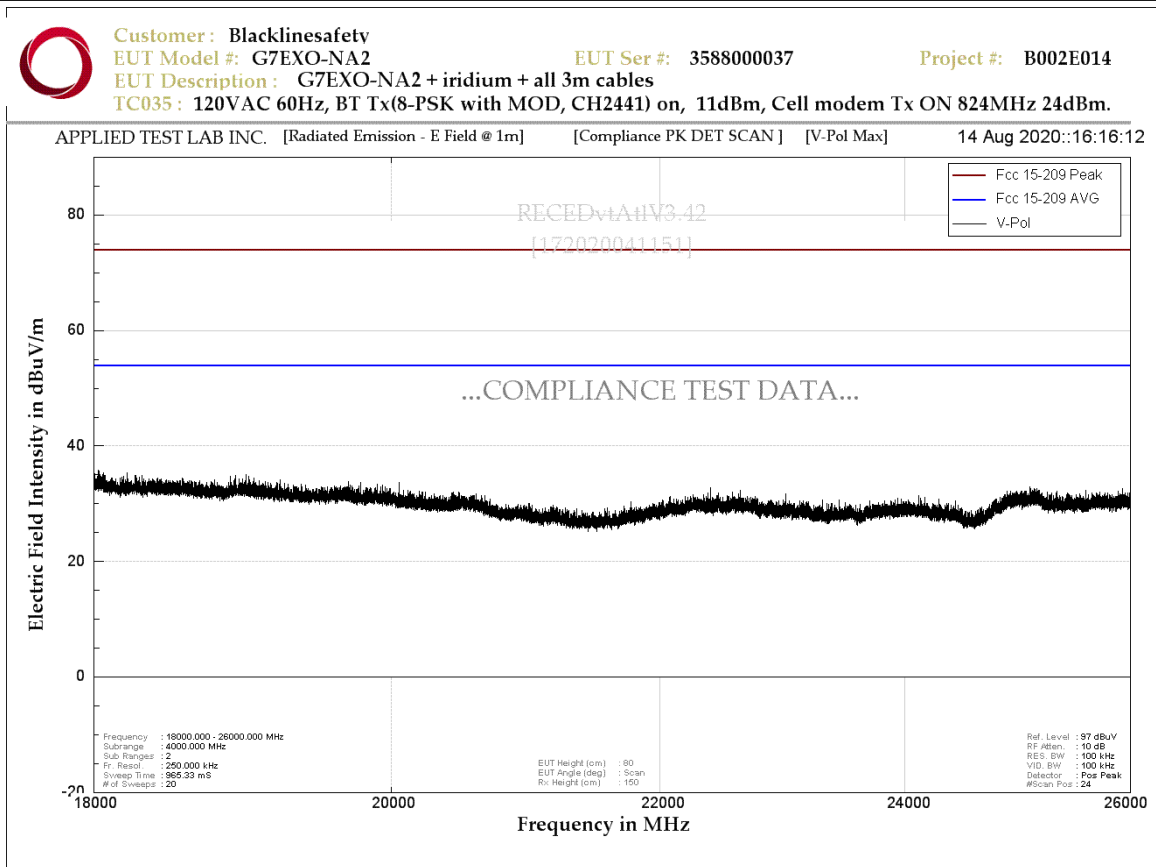


Figure 6.3.4f - Radiated Spurious Emission data(Middle channel, 8-PSK) – V-pol-(18GHz - 26GHz)



## Radio Collocation Data

8-PSK, CH2441 Cell modem Tx On 1616MHz 2W pulse 90ms

Table 6.3.10a - Radiated Emission - Horizontal Polarization Quasi-peak

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 55.4013         | 175.9               | 399.5               | 4.27                    | 12.75                  | 17.02                      | 40                         | -22.98      |
| 192.9338        | 159.8               | 163.1               | 12.45                   | 16.32                  | 28.77                      | 43.52                      | -14.75      |
| 375.0113        | 338.9               | 100.5               | 6.34                    | 22.78                  | 29.12                      | 46.02                      | -16.9       |
| 437.5023        | 197.8               | 209.9               | 3.66                    | 24.25                  | 27.91                      | 46.02                      | -18.11      |
| 562.5025        | 165.9               | 100.1               | 5.05                    | 27.05                  | 32.1                       | 46.02                      | -13.92      |
| 824.93          | 315.1               | 241.1               | -4.78                   | 31.08                  | 26.3                       | 46.02                      | -19.72      |

Table 6.3.10b - Radiated Emission - Vertical Polarization Quasi-peak

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 39.4238         | 327.6               | 100.1               | 13.46                   | 17.91                  | 31.37                      | 53.98                      | -22.61      |
| 124.5125        | 326.1               | 100.1               | 7.68                    | 14.18                  | 21.86                      | 43.52                      | -21.66      |
| 194.7213        | 360                 | 100.8               | 13.44                   | 16.53                  | 29.97                      | 43.52                      | -13.55      |
| 375.0025        | 22                  | 146.7               | 5.21                    | 22.83                  | 28.04                      | 46.02                      | -17.98      |
| 402.0075        | 167.3               | 118.1               | 0.48                    | 24.8                   | 25.28                      | 46.02                      | -20.74      |
| 562.4775        | 241.5               | 115.4               | 4.51                    | 27.05                  | 31.56                      | 53.98                      | -22.42      |

Table 6.3.10c - Radiated Emission - Horizontal Polarization AVG

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 3232            | 165                 | 150                 | 46.24                   | 9.52                   | 55.76                      | 86                         | -30.24      |
| 4848            | 165                 | 150                 | 48.61                   | -19.68                 | 28.93                      | 86                         | -57.07      |
| 6464            | 15                  | 150                 | 43.31                   | -17.42                 | 25.89                      | 86                         | -60.11      |
| 8080            | 30                  | 150                 | 42.58                   | -15.16                 | 27.42                      | 86                         | -58.58      |
| 9696            | 270                 | 150                 | 40.8                    | -15.87                 | 24.93                      | 86                         | -61.07      |

Table 6.3.10d - Radiated Emission - Vertical Polarization AVG

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | RSS-247 5.5 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|----------------------------|-------------|
| 3232            | 45                  | 150                 | 44.3                    | 9.52                   | 53.82                      | 86                         | -32.18      |
| 8080            | 30                  | 150                 | 43.23                   | -15.16                 | 28.07                      | 86                         | -57.93      |
| 9696            | 270                 | 150                 | 40.41                   | -15.87                 | 24.54                      | 86                         | -61.46      |

Note: The emissions with peak detector were measured and found to meet average limits. Only Average detector measurements were shown in the above tables.

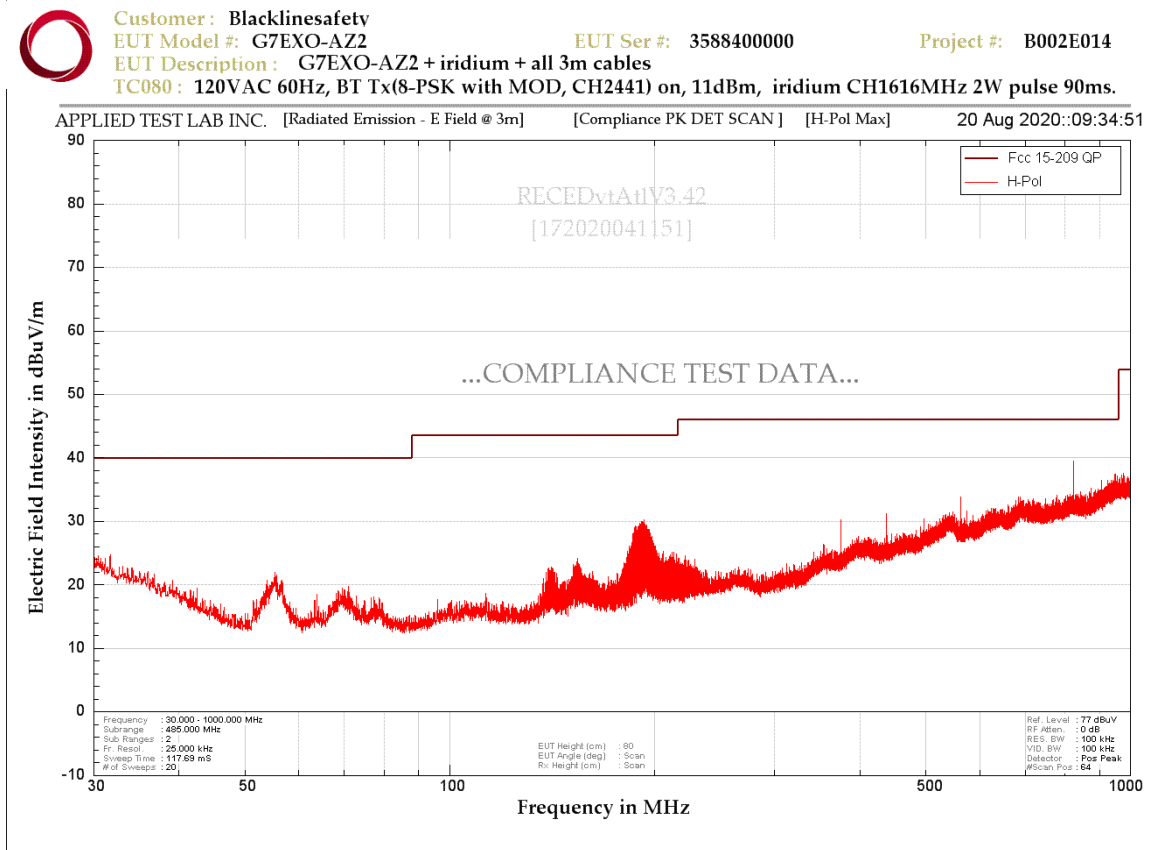


Figure 6.3.5a - Radiated Spurious Emission data(Middle channel, 8-PSK) -H-Pol-(30MHz – 1000MHz)

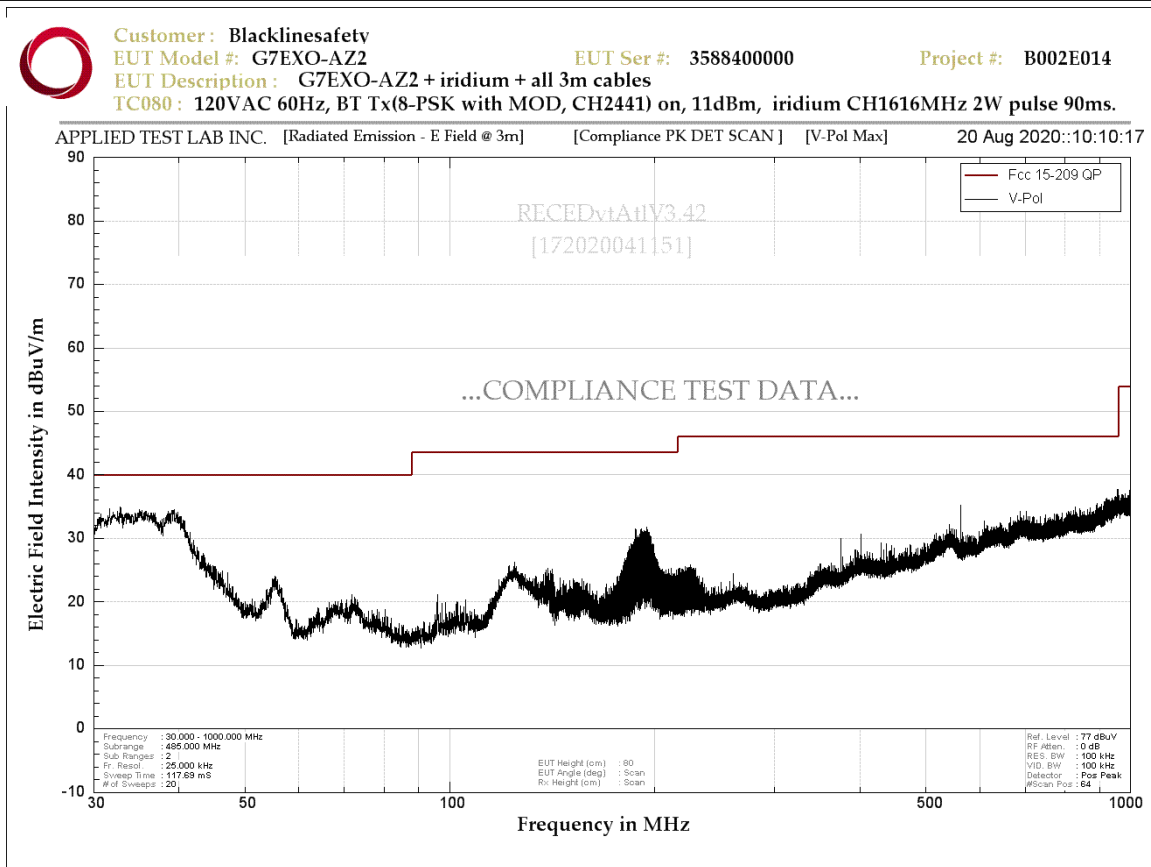


Figure 6.3.5b - Radiated Spurious Emission data(Middle channel, 8-PSK) – V-pol-(30MHz - 1000MHz)

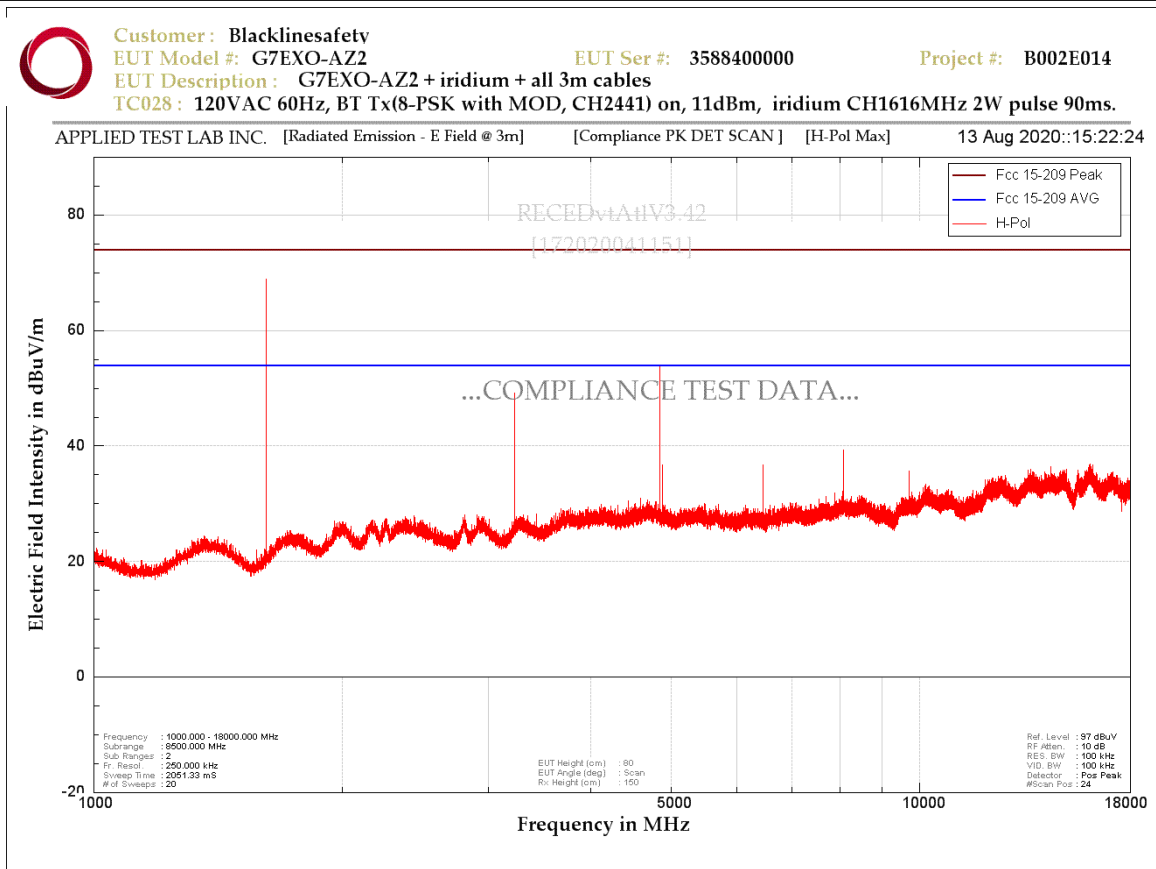


Figure 6.3.5c - Radiated Spurious Emission data(Middle channel, 8-PSK) -H-Pol-(1GHz – 18GHz)

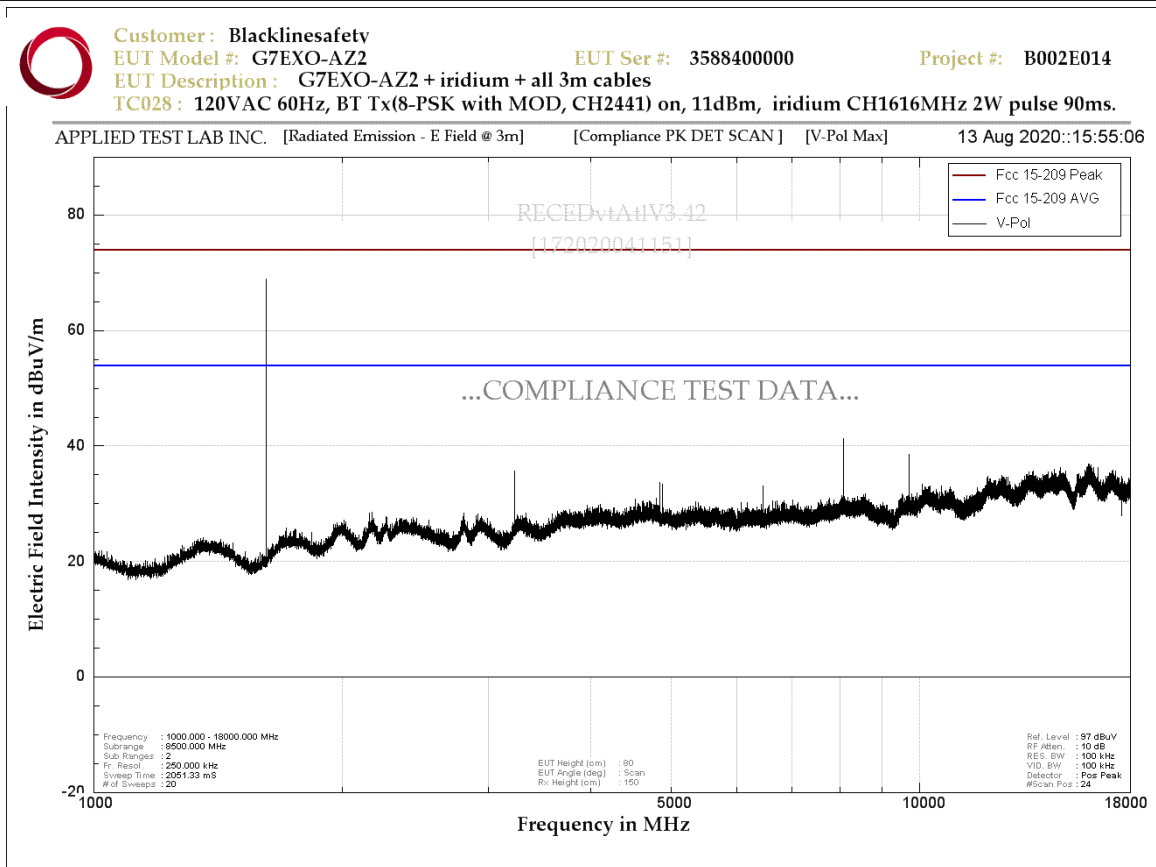


Figure 6.3.5d - Radiated Spurious Emission data(Middle channel, 8-PSK) – V-pol-(1GHz - 18GHz)

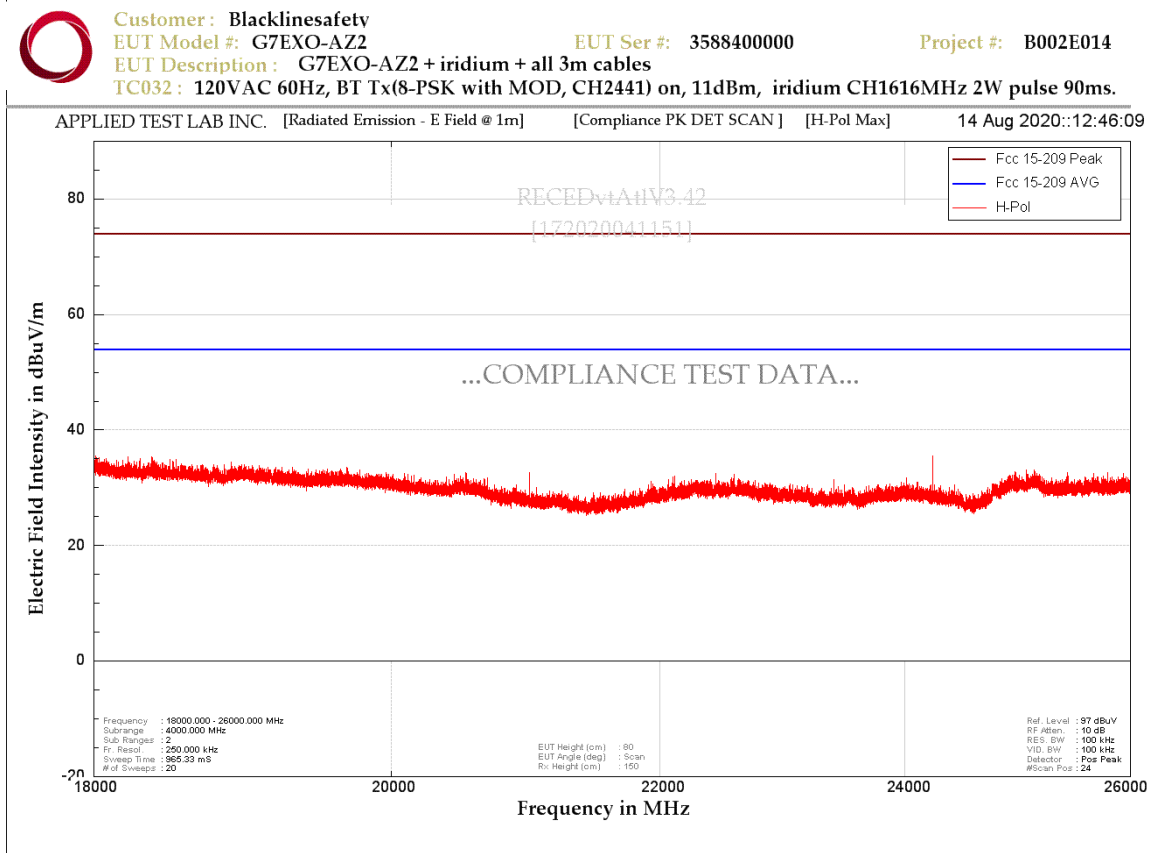


Figure 6.3.5e - Radiated Spurious Emission data(Middle channel, 8-PSK) -H-Pol-(18GHz – 26GHz)

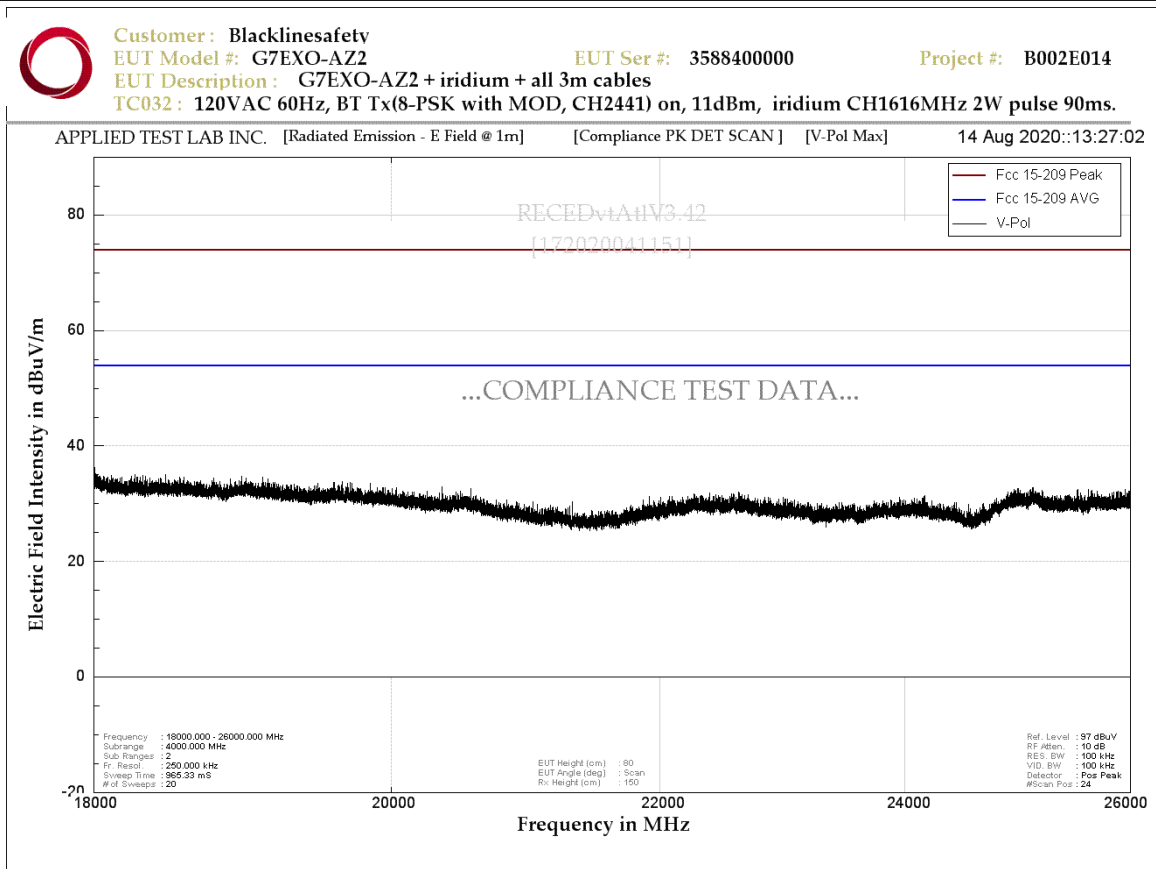


Figure 6.3.5f - Radiated Spurious Emission data(Middle channel, 8-PSK) – V-pol-(18GHz - 26GHz)



## 6.4 20dB Bandwidth

☐ Applicable

Table 6.4.1 – 20dB Bandwidth Test Setup Information

|                        |                                                                                                                                                                                                                                                                           |                |                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------------|
| CLIENT:                | Blackline Safety                                                                                                                                                                                                                                                          | TEST STANDARD: | FCC 15.247, RSS-247 Issue 2 |
| MODEL NUMBER:          | G7EXO-NA2,G7EXO-AZ2                                                                                                                                                                                                                                                       | PRODUCT:       |                             |
| SERIAL NUMBER:         | 3588000037                                                                                                                                                                                                                                                                | CLASS:         |                             |
| TEMPERATURE:           | 23°C                                                                                                                                                                                                                                                                      | HUMIDITY:      | 46%                         |
| TESTED BY:             | Adishesu Nyshadham                                                                                                                                                                                                                                                        | DATE OF TEST:  | 2020-09-01                  |
| TEST REFERENCE:        | FCC Subpart C 15.247, RSS-247-Issue 2, RSS-Gen Issue 5                                                                                                                                                                                                                    |                |                             |
| TEST VOLTAGE:          | 3.4V                                                                                                                                                                                                                                                                      |                |                             |
| SETUP:                 | As per ANSI C63.10:2013, sec 6.9.2                                                                                                                                                                                                                                        |                |                             |
| FREQUENCY RANGE        | 2400-2483.5 MHz                                                                                                                                                                                                                                                           |                |                             |
| FREQUENCY TESTED:      | 2402 MHz, 2441 MHz, 2480 MHz                                                                                                                                                                                                                                              |                |                             |
| FIRMWARE POWER SETTING | 11 dBm                                                                                                                                                                                                                                                                    |                |                             |
| EUT FIRMWARE           | 3.442S3_EXO                                                                                                                                                                                                                                                               |                |                             |
| MODULATION/DATA RATE   | GFSK, DH1,<br>QPSK, DH2<br>8-PSK, DH3                                                                                                                                                                                                                                     |                |                             |
| ANTENNA TYPE/GAIN      | Ceramic Chip Antenna, 2.2dBi(peak), 1.9dBi(Band edges)                                                                                                                                                                                                                    |                |                             |
| DUTY CYCLE             | N/A                                                                                                                                                                                                                                                                       |                |                             |
| DECISION RULE          | Decision rule support document:<br><input type="checkbox"/> Data obtained<br><input type="checkbox"/> Video<br><input type="checkbox"/> Email conversation<br><input type="checkbox"/> inherent in the requested specification standard<br><input type="checkbox"/> other |                |                             |
| RESULTS:               | PASS                                                                                                                                                                                                                                                                      |                |                             |

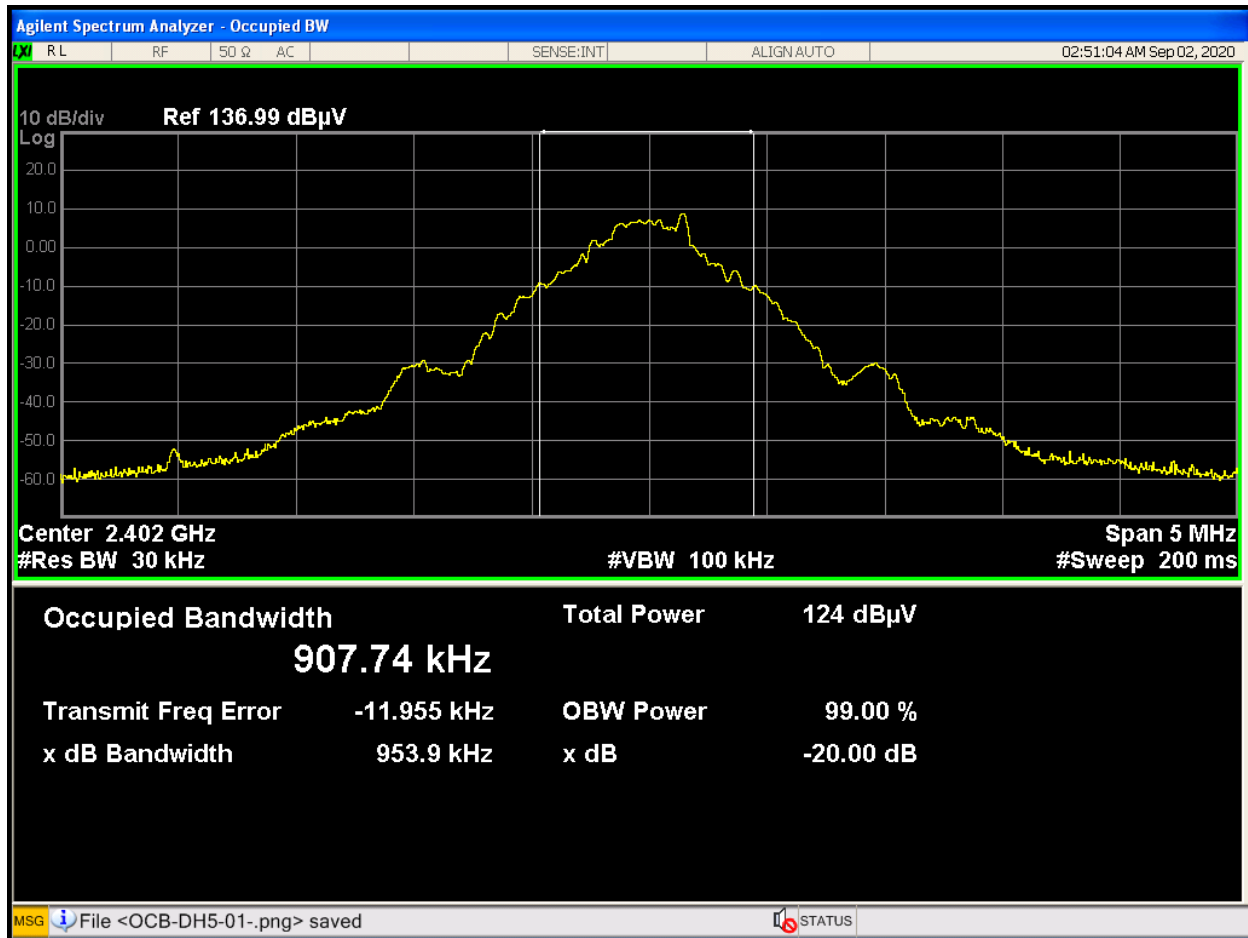


Figure 6.4.1 - 20dB Bandwidth data plot, channel 2402 MHz, GFSK

| Mode | Channel # | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Limit (kHz) | Remarks |
|------|-----------|-------------------------|-----------------------|-------------|---------|
| GFSK | 1         | 2402                    | 953.9                 | N/A         | PASS    |

Note:N/A-Not Applicable

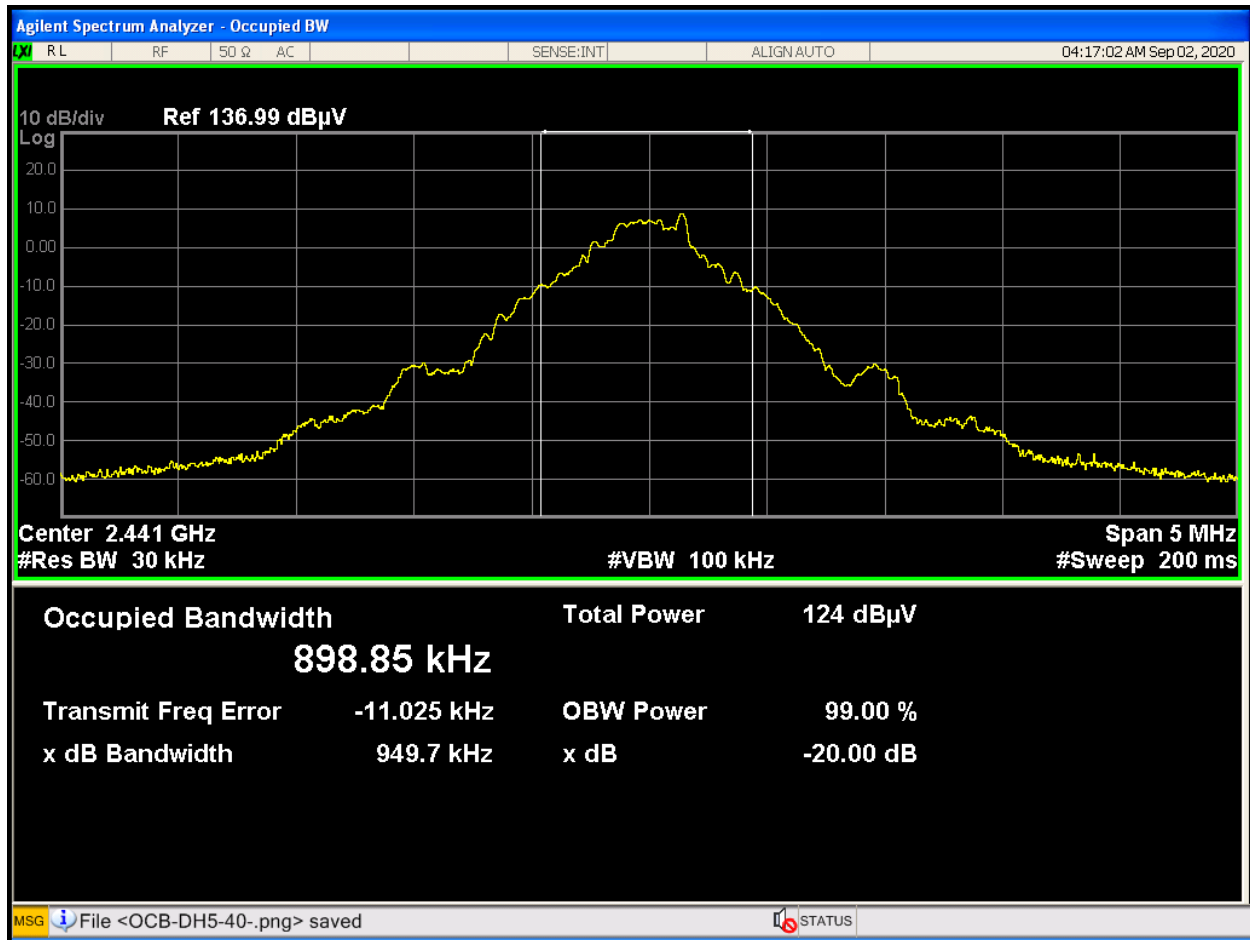


Figure 6.4.2 - 20dB Bandwidth data plot, channel 2441 MHz, GFSK

| Mode | Channel # | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Limit (kHz) | Remarks |
|------|-----------|-------------------------|-----------------------|-------------|---------|
| GFSK | 40        | 2441                    | 949.7                 | N/A         | PASS    |

Note:N/A-Not Applicable

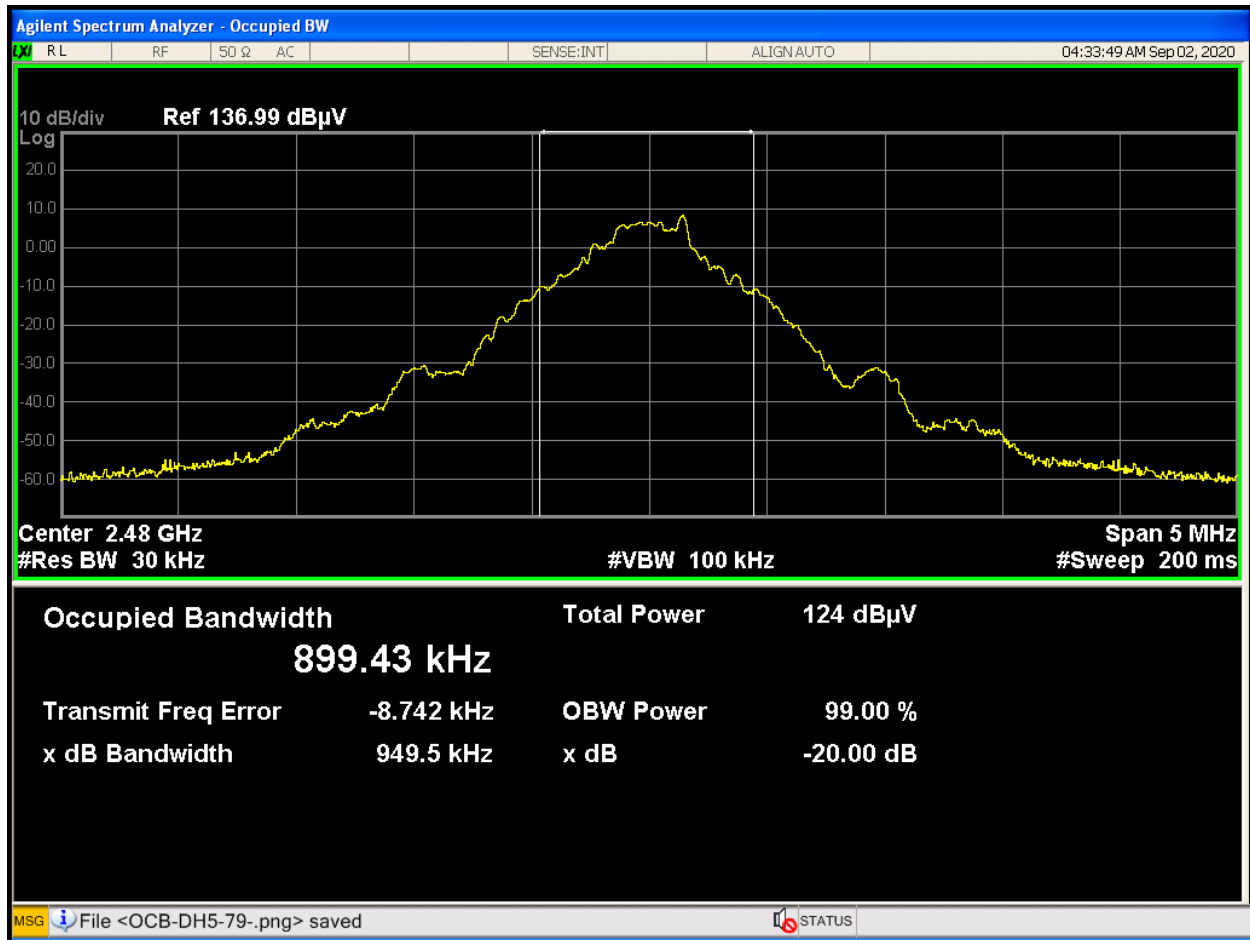


Figure 6.4.3 - 20dB Bandwidth data plot, channel 2480 MHz, GFSK

| Mode | Channel # | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Limit (kHz) | Remarks |
|------|-----------|-------------------------|-----------------------|-------------|---------|
| GFSK | 79        | 2480                    | 949.5                 | N/A         | PASS    |

Note:N/A-Not Applicable

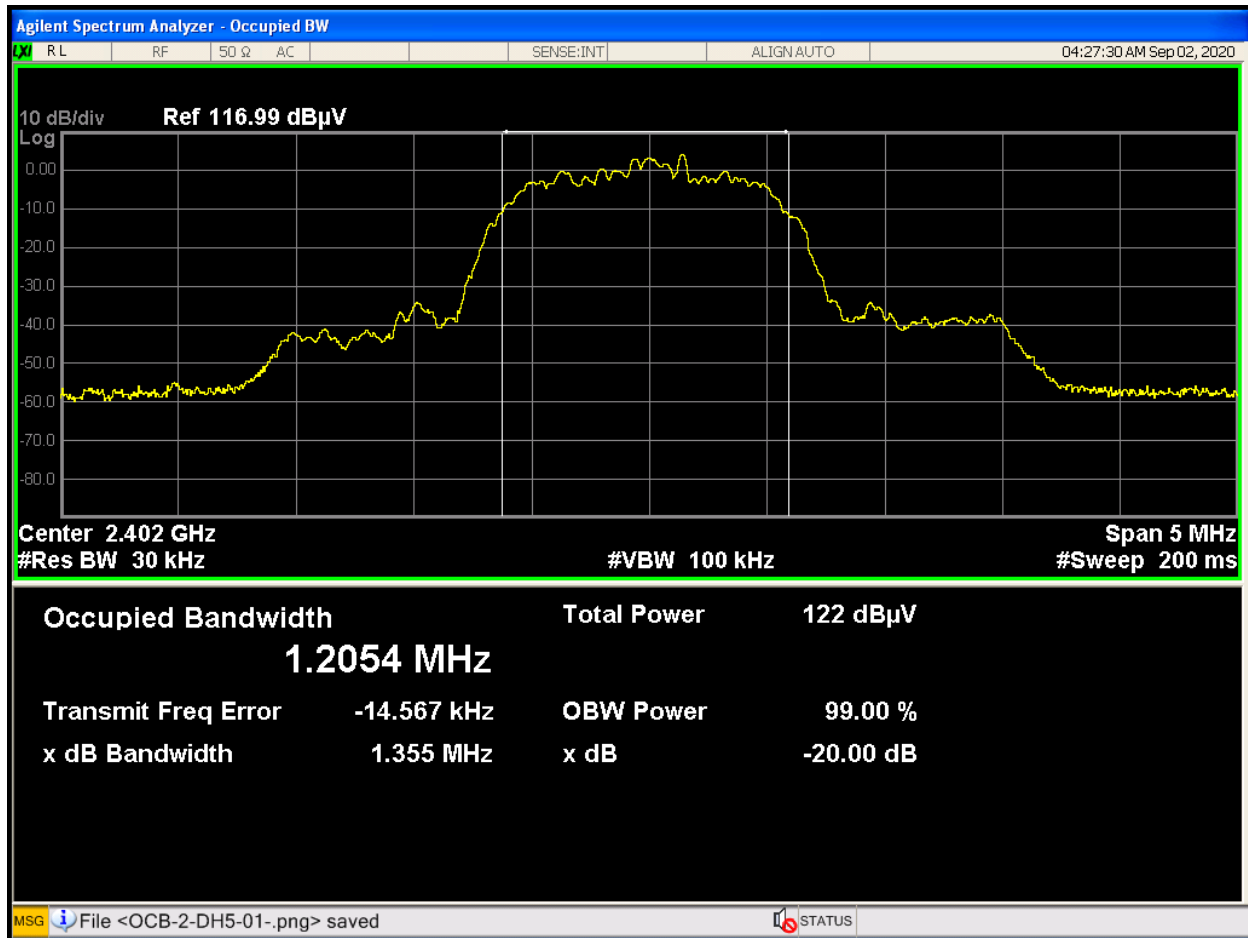


Figure 6.4.4 - 20dB Bandwidth data plot, channel 2402 MHz, QPSK

| Mode | Channel # | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Limit (kHz) | Remarks |
|------|-----------|-------------------------|-----------------------|-------------|---------|
| QPSK | 1         | 2402                    | 1355.0                | N/A         | PASS    |

Note:N/A-Not Applicable

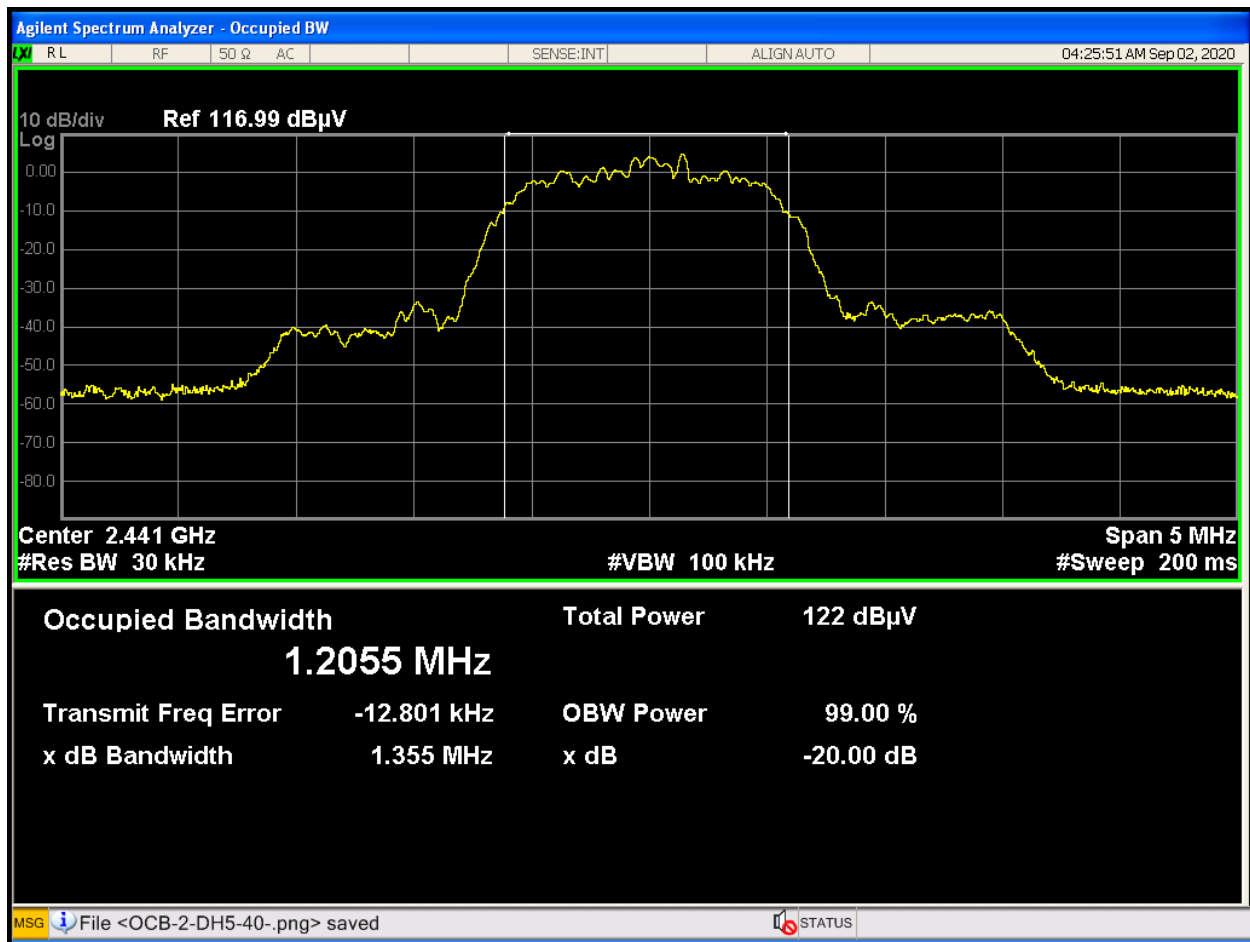


Figure 6.4.5 - 20dB Bandwidth data plot, channel 2441 MHz, QPSK

| Mode | Channel # | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Limit (kHz) | Remarks |
|------|-----------|-------------------------|-----------------------|-------------|---------|
| QPSK | 40        | 2441                    | 1355.0                | N/A         | PASS    |

Note:N/A-Not Applicable

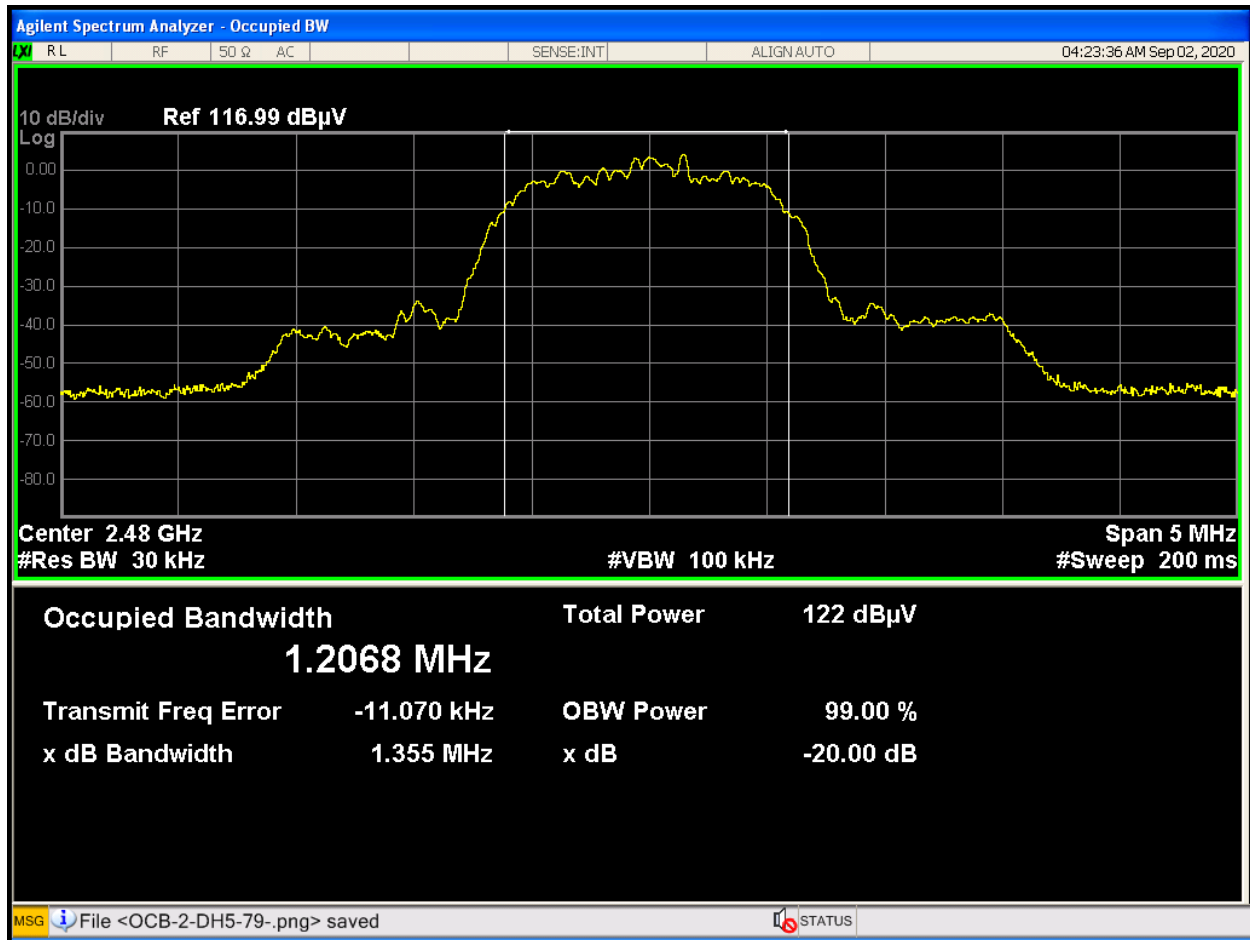


Figure 6.4.6 - 20dB Bandwidth data plot, channel 2480 MHz, QPSK

| Mode | Channel # | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Limit (kHz) | Remarks |
|------|-----------|-------------------------|-----------------------|-------------|---------|
| QPSK | 79        | 2480                    | 949.5                 | N/A         | PASS    |

Note:N/A-Not Applicable

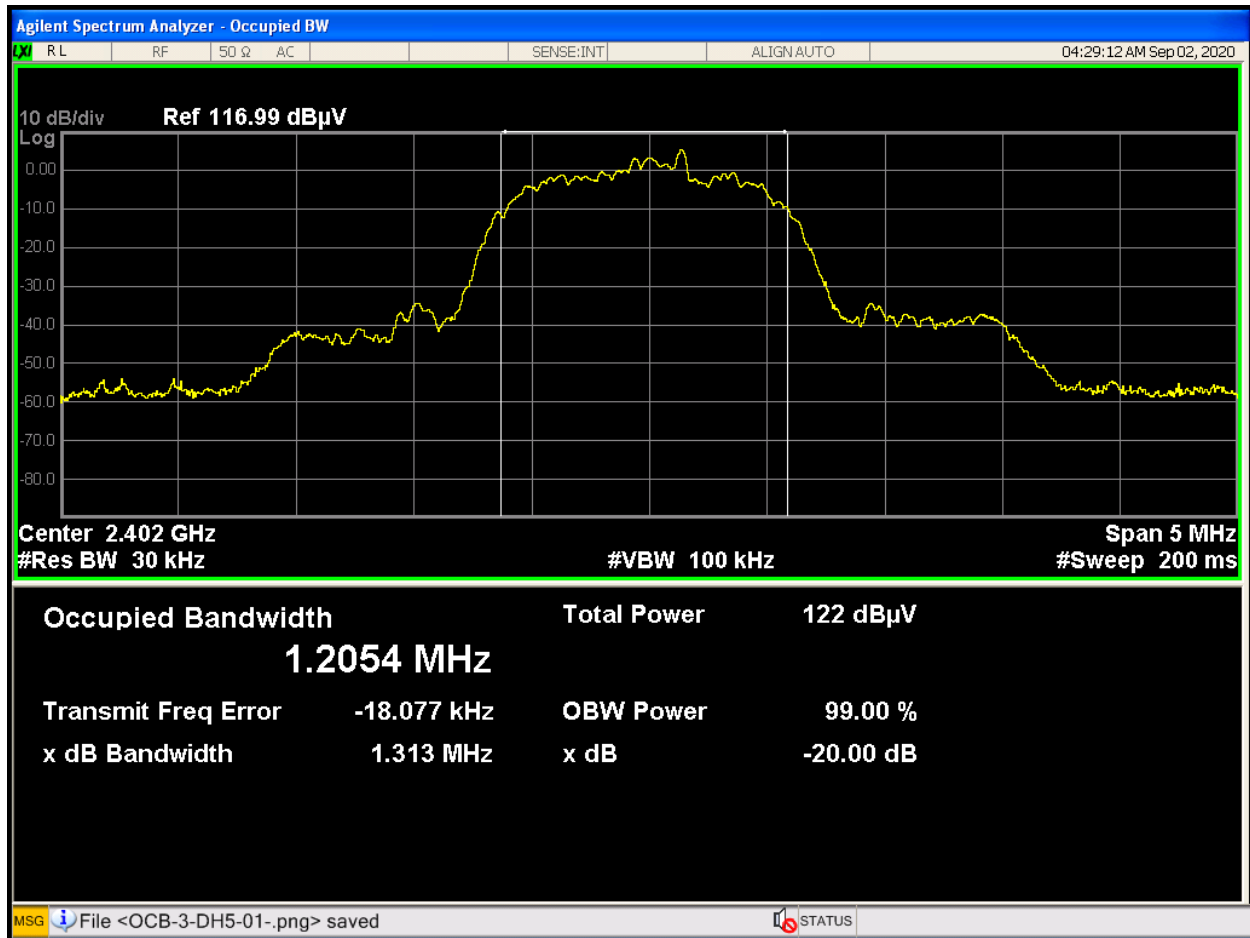


Figure 6.4.7 - 20dB Bandwidth data plot, channel 2402 MHz, 8-PSK

| Mode  | Channel # | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Limit (kHz) | Remarks |
|-------|-----------|-------------------------|-----------------------|-------------|---------|
| 8-PSK | 1         | 2402                    | 1313.0                | N/A         | PASS    |

Note:N/A-Not Applicable

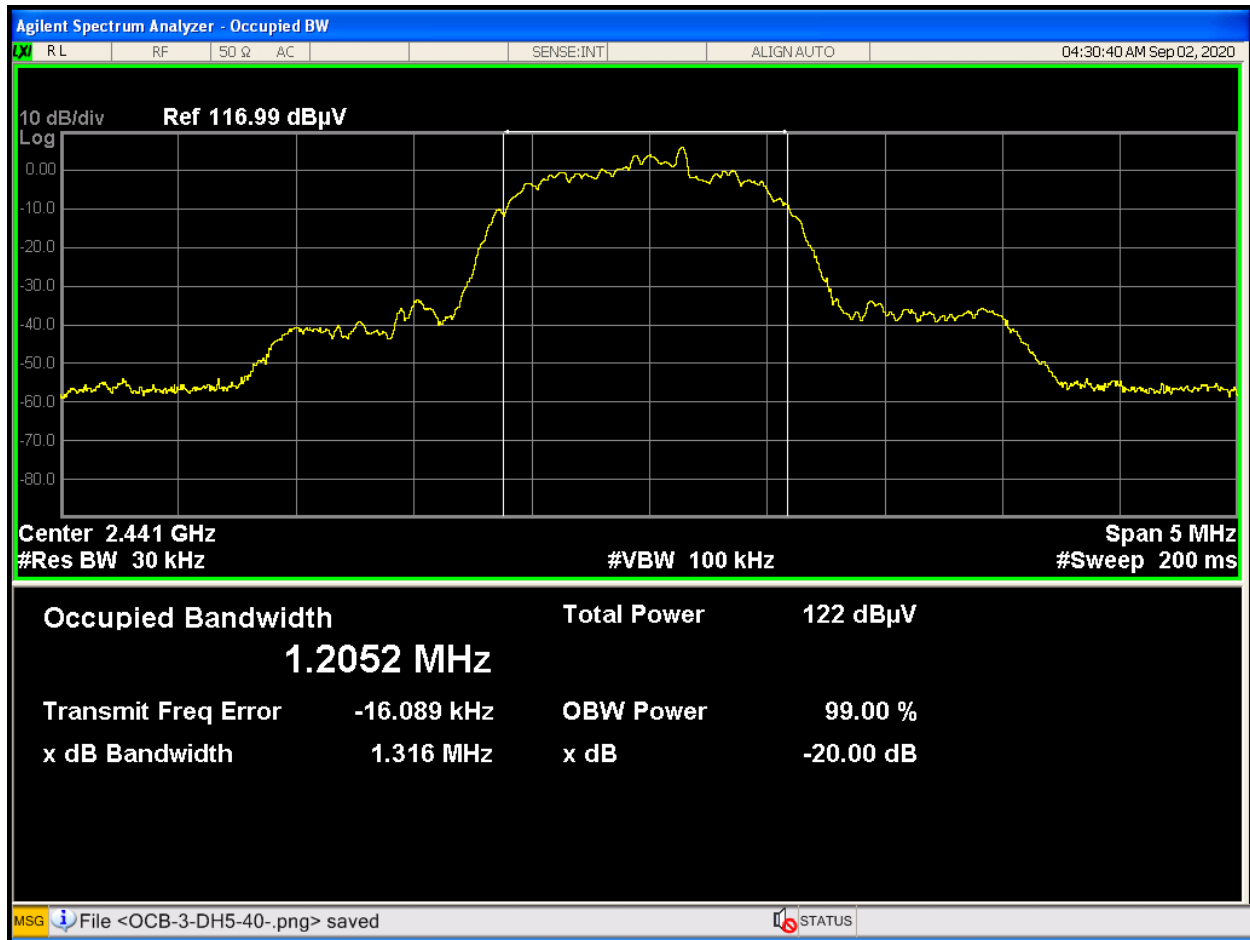


Figure 6.4.8 - 20dB Bandwidth data plot, channel 2441 MHz, 8-PSK

| Mode  | Channel # | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Limit (kHz) | Remarks |
|-------|-----------|-------------------------|-----------------------|-------------|---------|
| 8-PSK | 40        | 2441                    | 1316.0                | N/A         | PASS    |

Note:N/A-Not Applicable

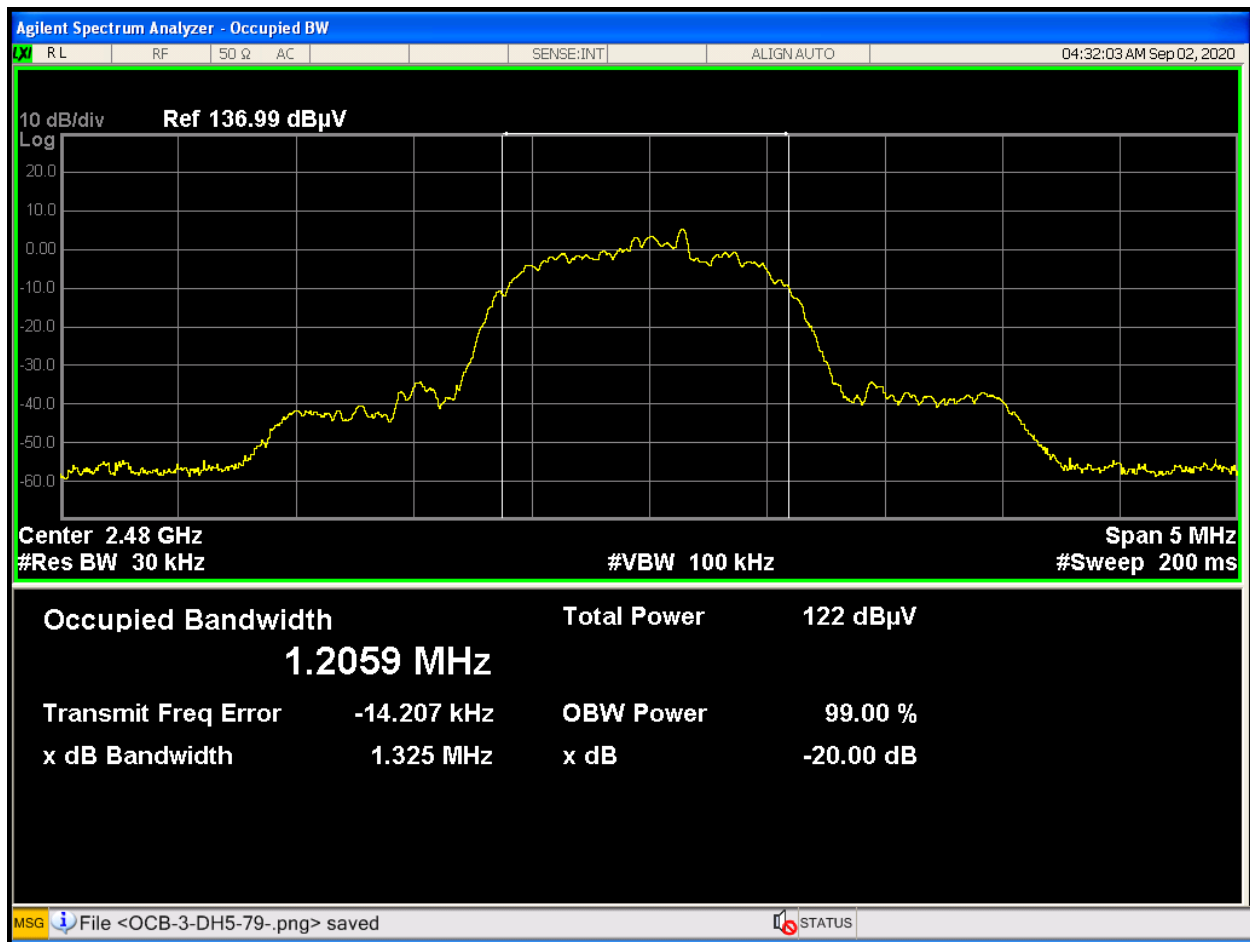


Figure 6.4.9 - 20dB Bandwidth data plot, channel 2480 MHz, 8-PSK

| Mode  | Channel # | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Limit (kHz) | Remarks |
|-------|-----------|-------------------------|-----------------------|-------------|---------|
| 8-PSK | 79        | 2480                    | 1325.0                | N/A         | PASS    |

Note:N/A-Not Applicable



## 6.5 99% Bandwidth

☐ Applicable

Table 6.5.1 – 99% Bandwidth Test Setup Information

|                        |                                                                                                                                                                                                                                                                           |                |                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------------|
| CLIENT:                | Blackline Safety                                                                                                                                                                                                                                                          | TEST STANDARD: | FCC 15.247, RSS-247 Issue 2 |
| MODEL NUMBER:          | G7EXO-NA2,G7EXO-AZ2                                                                                                                                                                                                                                                       | PRODUCT:       |                             |
| SERIAL NUMBER:         | 3588000037                                                                                                                                                                                                                                                                | CLASS:         |                             |
| TEMPERATURE:           | 23°C                                                                                                                                                                                                                                                                      | HUMIDITY:      | 46%                         |
| TESTED BY:             | Adishesu Nyshadham                                                                                                                                                                                                                                                        | DATE OF TEST:  | 2020-09-01                  |
| TEST REFERENCE:        | RSS-247-Issue 2, RSS-Gen Issue 5                                                                                                                                                                                                                                          |                |                             |
| TEST VOLTAGE:          | 3.4V                                                                                                                                                                                                                                                                      |                |                             |
| SETUP:                 | As per ANSI C63.10:2013, sec 6.9.3                                                                                                                                                                                                                                        |                |                             |
| FREQUENCY RANGE        | 2400-2483.5 MHz                                                                                                                                                                                                                                                           |                |                             |
| FREQUENCY TESTED:      | 2402 MHz, 2441 MHz, 2480 MHz                                                                                                                                                                                                                                              |                |                             |
| FIRMWARE POWER SETTING | 11 dBm                                                                                                                                                                                                                                                                    |                |                             |
| EUT FIRMWARE           | 3.442S3_EXO                                                                                                                                                                                                                                                               |                |                             |
| MODULATION/DATA RATE   | GFSK, DH1,<br>QPSK, DH2<br>8-PSK, DH3                                                                                                                                                                                                                                     |                |                             |
| ANTENNA TYPE/GAIN      | Ceramic Chip Antenna, 2.2dBi(peak), 1.9dBi(Band edges)                                                                                                                                                                                                                    |                |                             |
| DUTY CYCLE             | N/A                                                                                                                                                                                                                                                                       |                |                             |
| DECISION RULE          | Decision rule support document:<br><input type="checkbox"/> Data obtained<br><input type="checkbox"/> Video<br><input type="checkbox"/> Email conversation<br><input type="checkbox"/> inherent in the requested specification standard<br><input type="checkbox"/> other |                |                             |
| RESULTS:               | PASS                                                                                                                                                                                                                                                                      |                |                             |

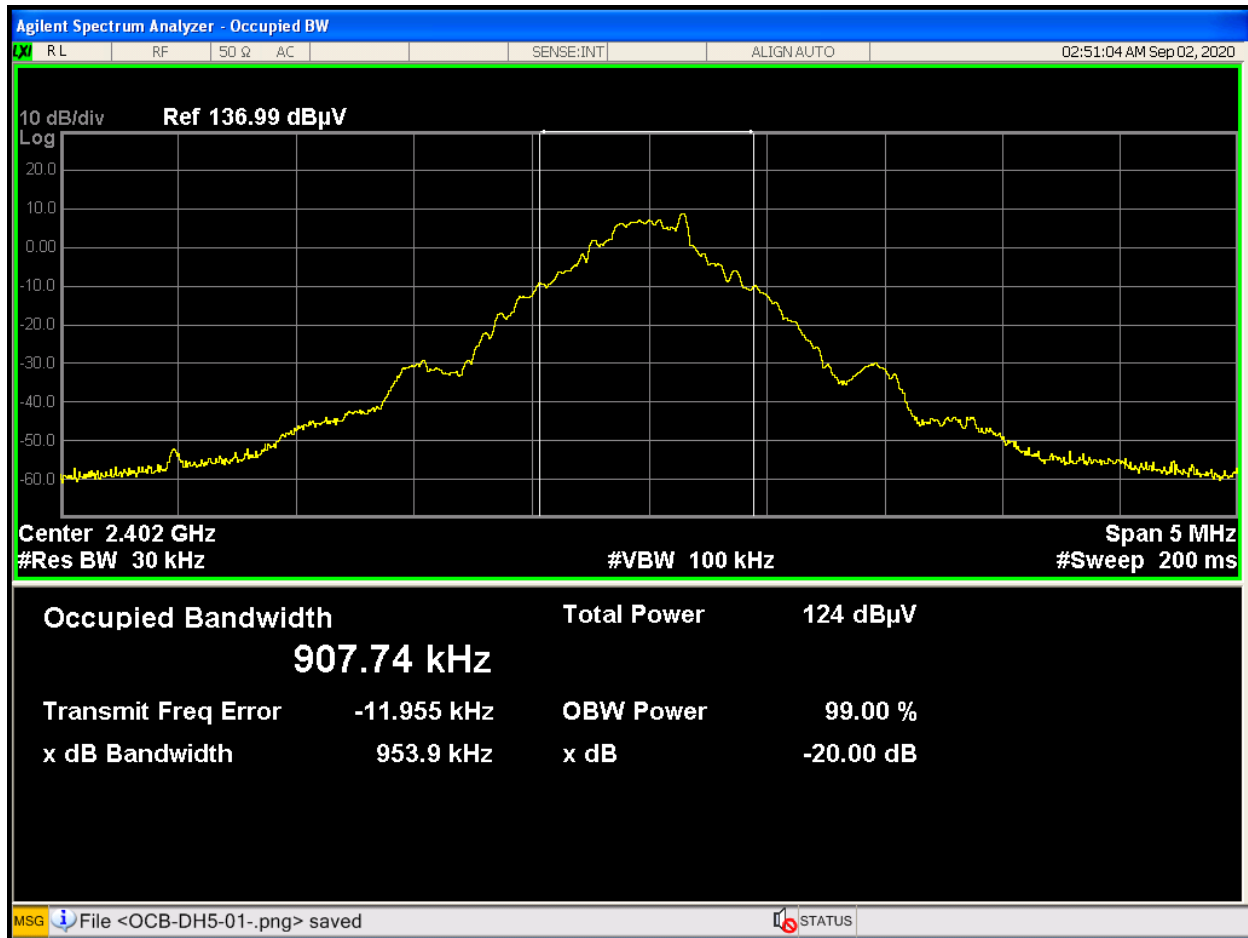


Figure 6.5.1 - 99% Bandwidth data plot, channel 2402 MHz, GFSK

| Mode | Channel # | Channel Frequency (MHz) | 99% Bandwidth (kHz) | Limit (kHz) | Remarks |
|------|-----------|-------------------------|---------------------|-------------|---------|
| GFSK | 1         | 2402                    | 907.74              | N/A         | PASS    |

Note:N/A-Not Applicable

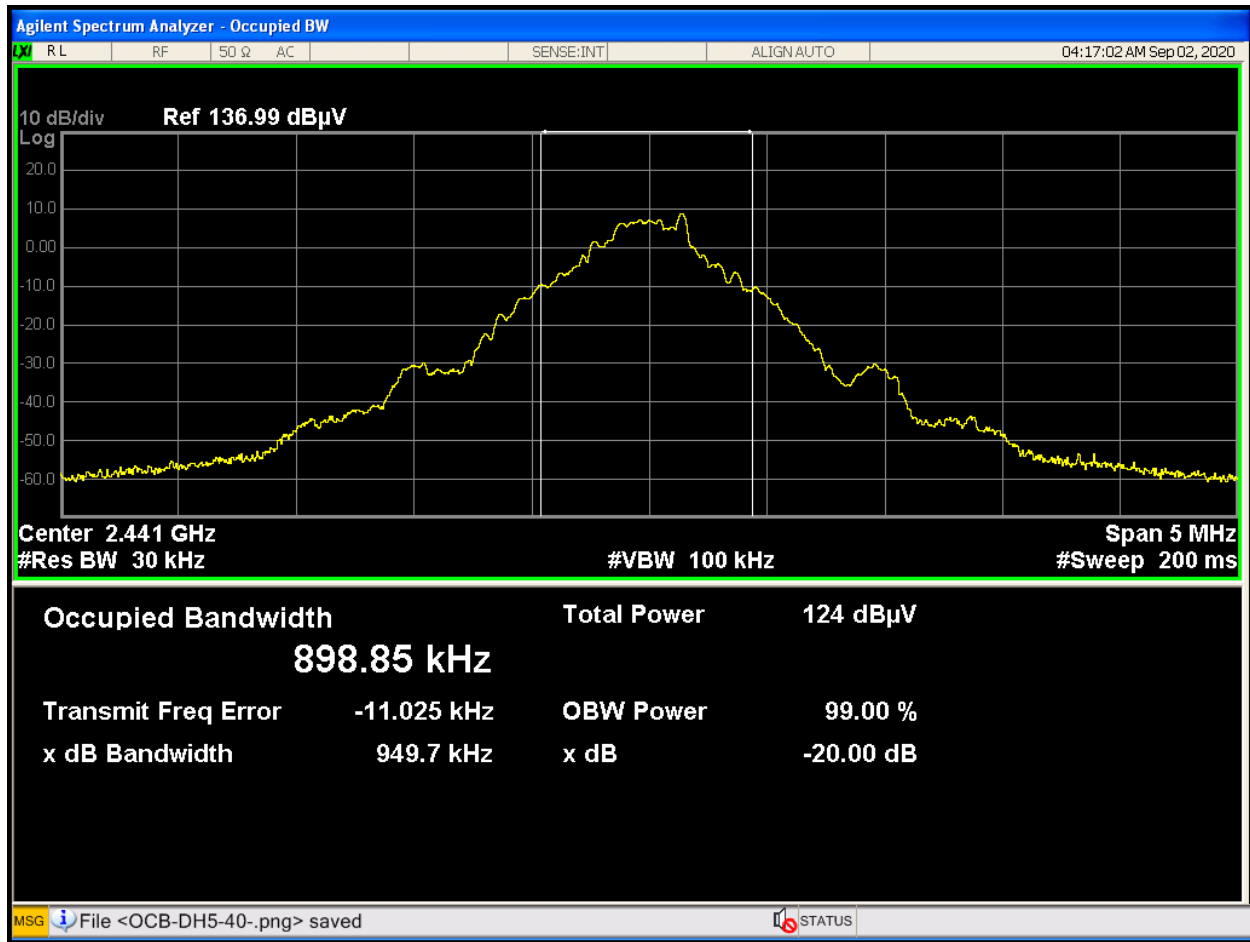


Figure 6.5.2 - 99% Bandwidth data plot, channel 2441 MHz, GFSK

| Mode | Channel # | Channel Frequency (MHz) | 99% Bandwidth (kHz) | Limit (kHz) | Remarks |
|------|-----------|-------------------------|---------------------|-------------|---------|
| GFSK | 40        | 2441                    | 898.85              | N/A         | PASS    |

Note:N/A-Not Applicable

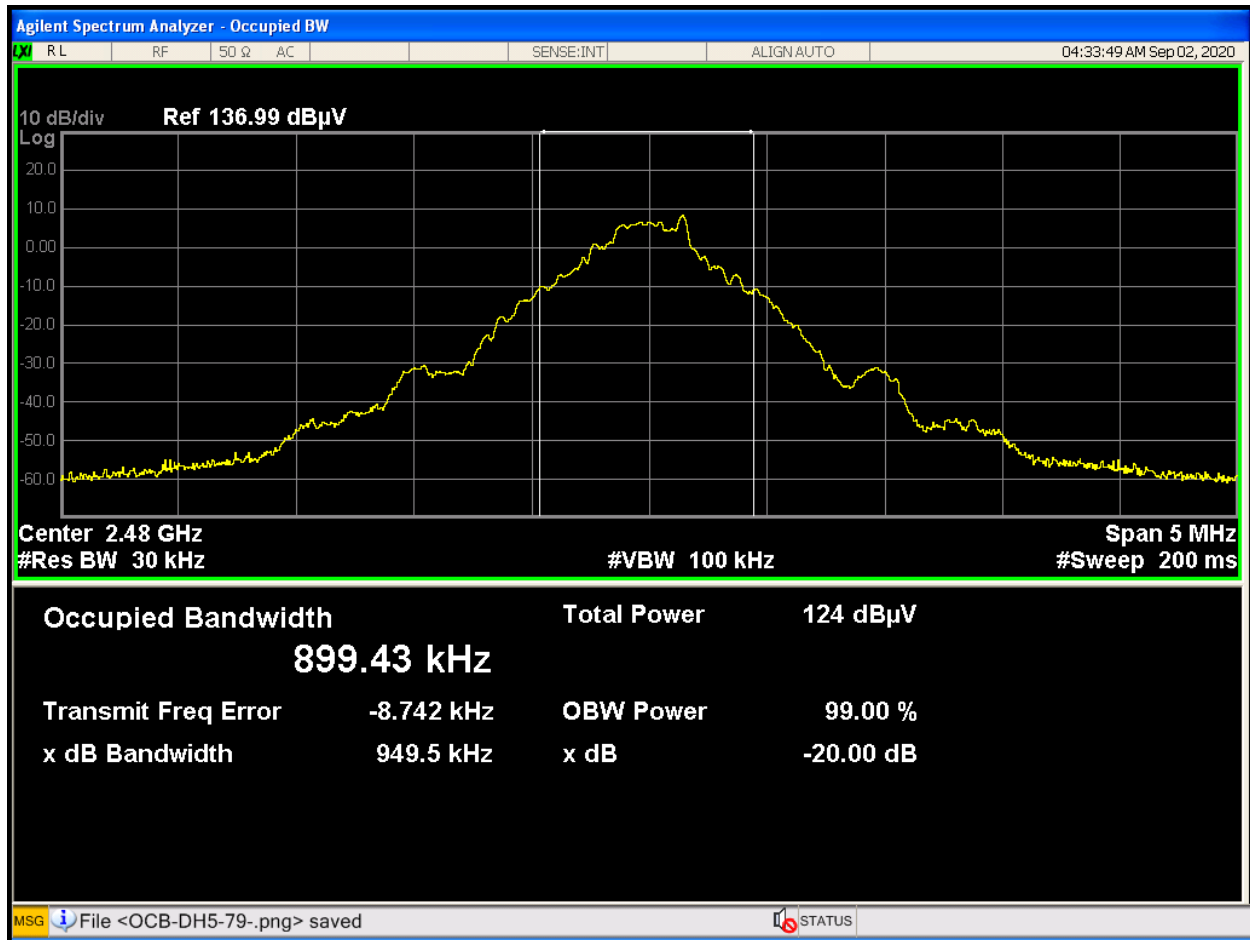


Figure 6.5.3 - 99% Bandwidth data plot, channel 2480 MHz, GFSK

| Mode | Channel # | Channel Frequency (MHz) | 99% Bandwidth (kHz) | Limit (kHz) | Remarks |
|------|-----------|-------------------------|---------------------|-------------|---------|
| GFSK | 79        | 2480                    | 899.43              | N/A         | PASS    |

Note:N/A-Not Applicable

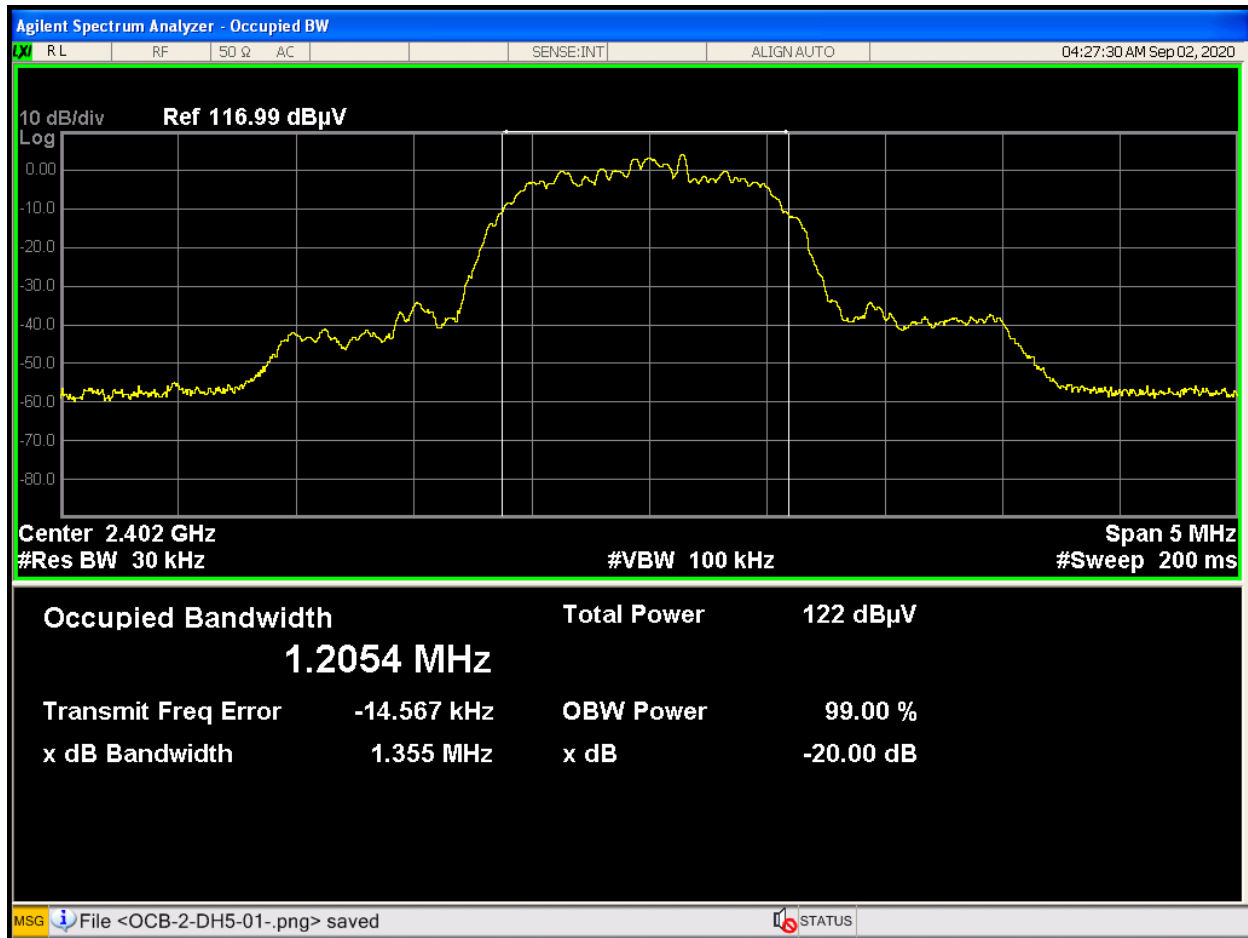


Figure 6.5.4 - 99% Bandwidth data plot, channel 2402 MHz, QPSK

| Mode | Channel # | Channel Frequency (MHz) | 99% Bandwidth (kHz) | Limit (kHz) | Remarks |
|------|-----------|-------------------------|---------------------|-------------|---------|
| QPSK | 1         | 2402                    | 1205.4              | N/A         | PASS    |

Note:N/A-Not Applicable

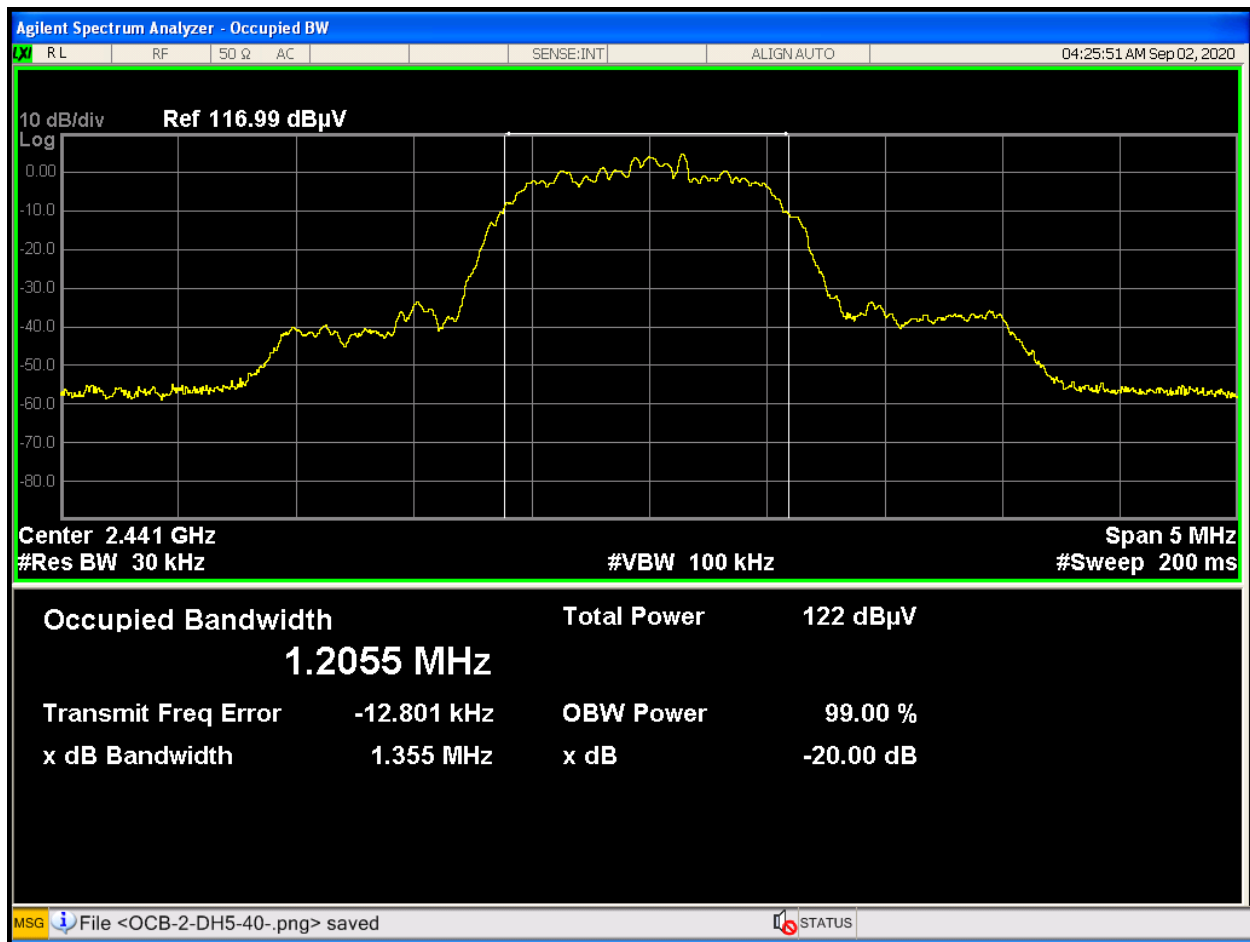


Figure 6.5.5 - 99% Bandwidth data plot, channel 2441 MHz, QPSK

| Mode | Channel # | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Limit (kHz) | Remarks |
|------|-----------|-------------------------|-----------------------|-------------|---------|
| QPSK | 40        | 2441                    | 1205.5                | N/A         | PASS    |

Note: N/A-Not Applicable

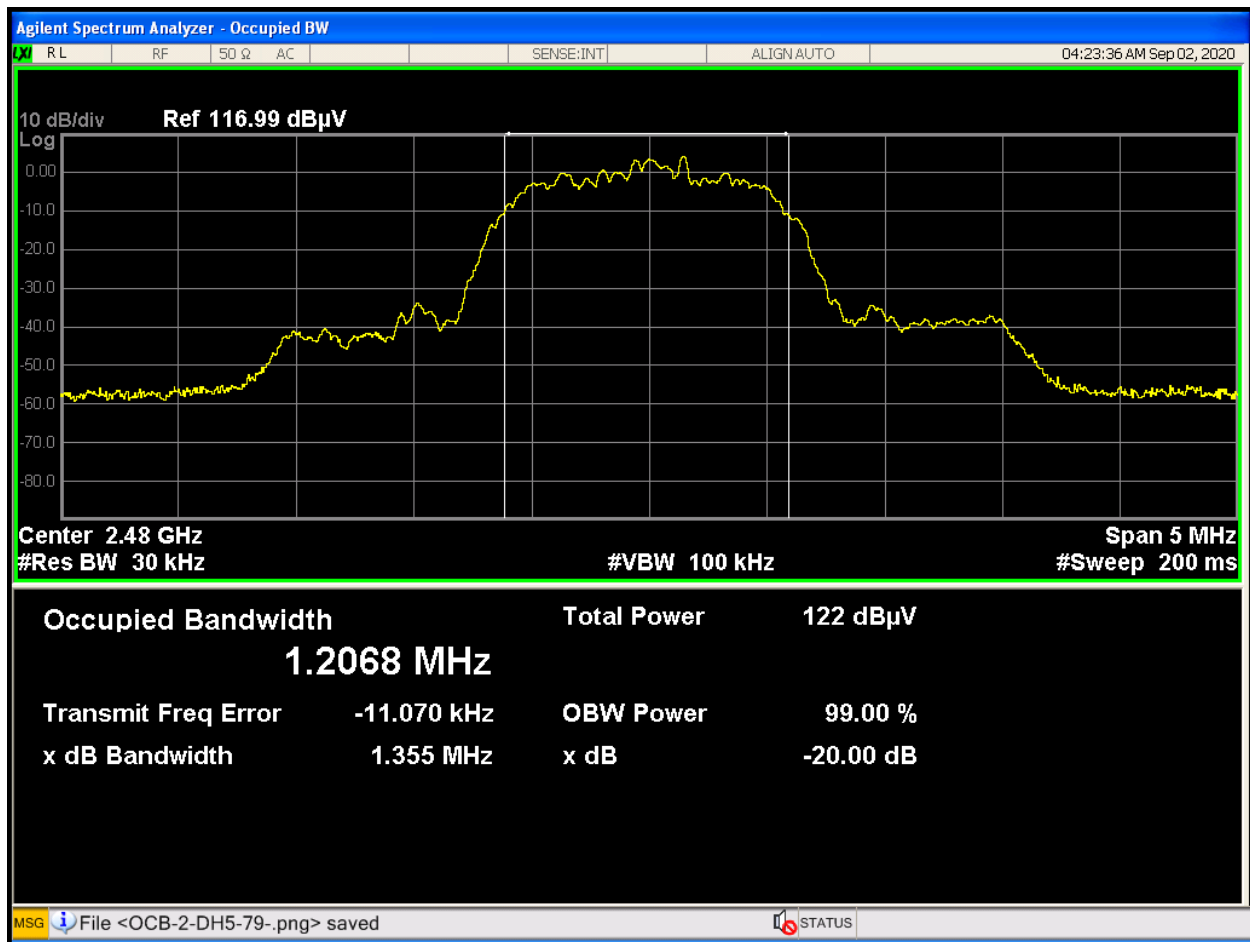


Figure 6.5.6 - 99% Bandwidth data plot, channel 2480 MHz, QPSK

| Mode | Channel # | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Limit (kHz) | Remarks |
|------|-----------|-------------------------|-----------------------|-------------|---------|
| QPSK | 79        | 2480                    | 1206.8                | N/A         | PASS    |

Note: N/A-Not Applicable

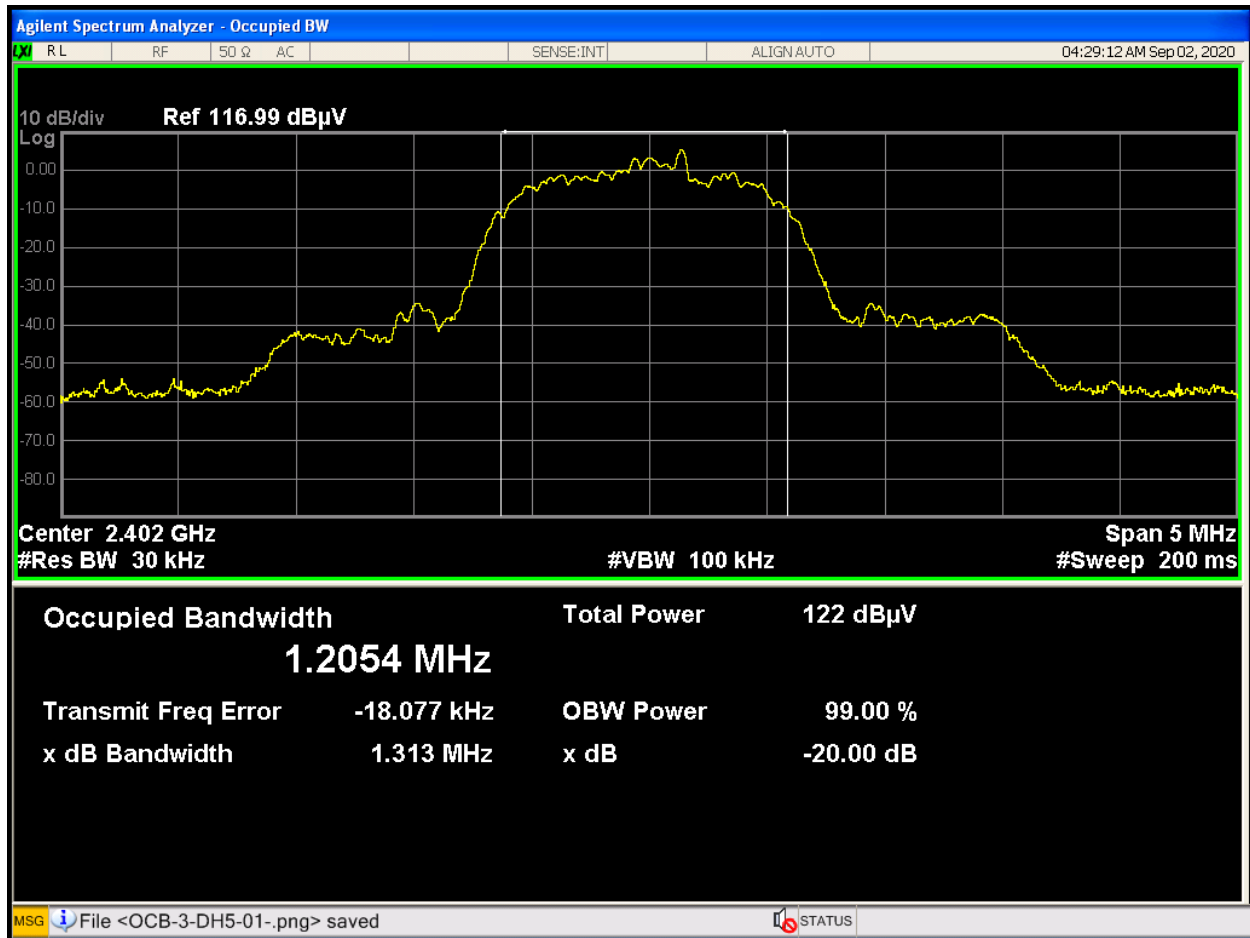


Figure 6.5.7 - 99% Bandwidth data plot, channel 2402 MHz, 8-PSK

| Mode  | Channel # | Channel Frequency (MHz) | 99% Bandwidth (kHz) | Limit (kHz) | Remarks |
|-------|-----------|-------------------------|---------------------|-------------|---------|
| 8-PSK | 1         | 2402                    | 1205.4              | N/A         | PASS    |

Note: N/A-Not Applicable

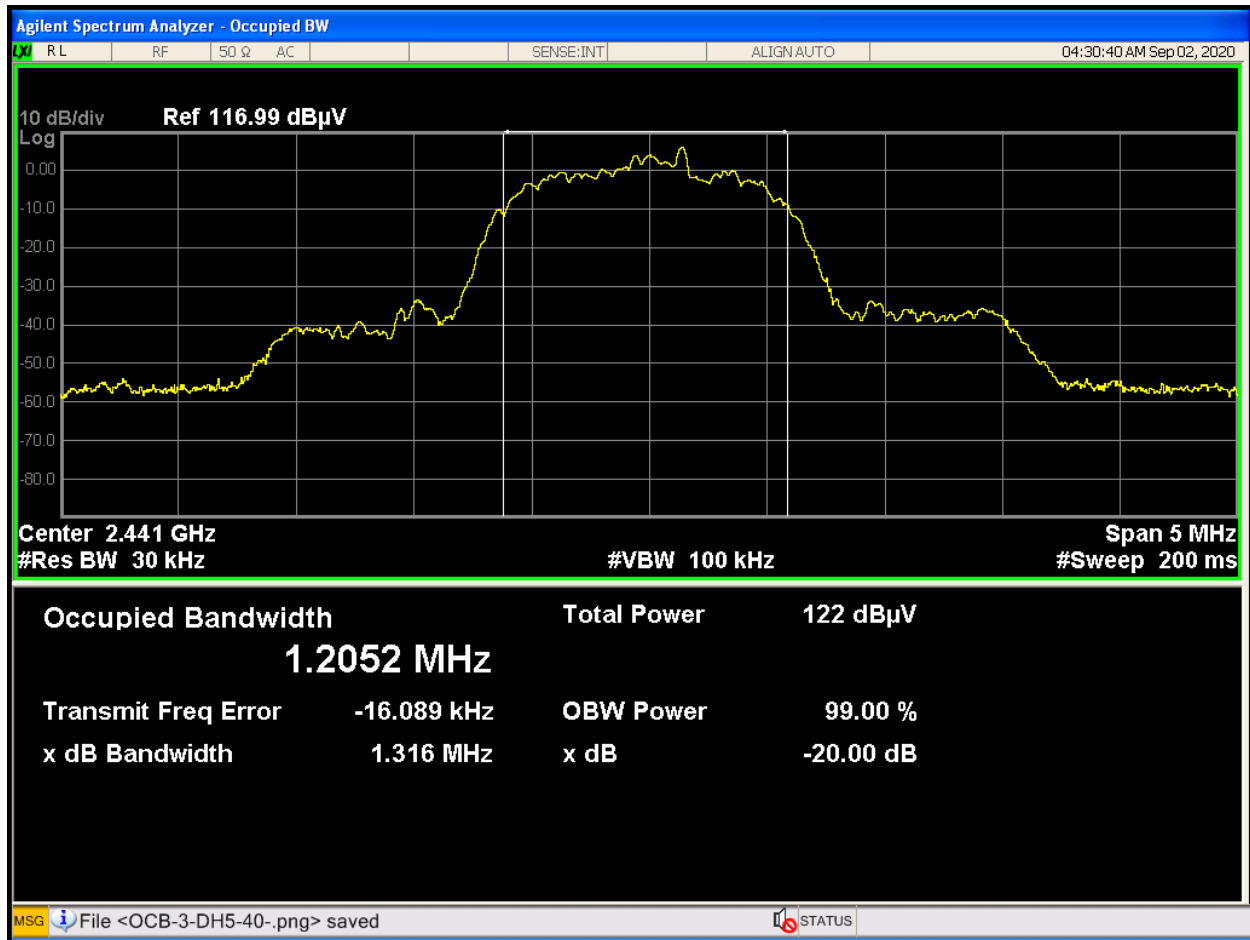


Figure 6.5.8 - 99% Bandwidth data plot, channel 2441 MHz, 8-PSK

| Mode  | Channel # | Channel Frequency (MHz) | 99% Bandwidth (kHz) | Limit (kHz) | Remarks |
|-------|-----------|-------------------------|---------------------|-------------|---------|
| 8-PSK | 40        | 2441                    | 1205.2              | N/A         | PASS    |

Note: N/A-Not Applicable

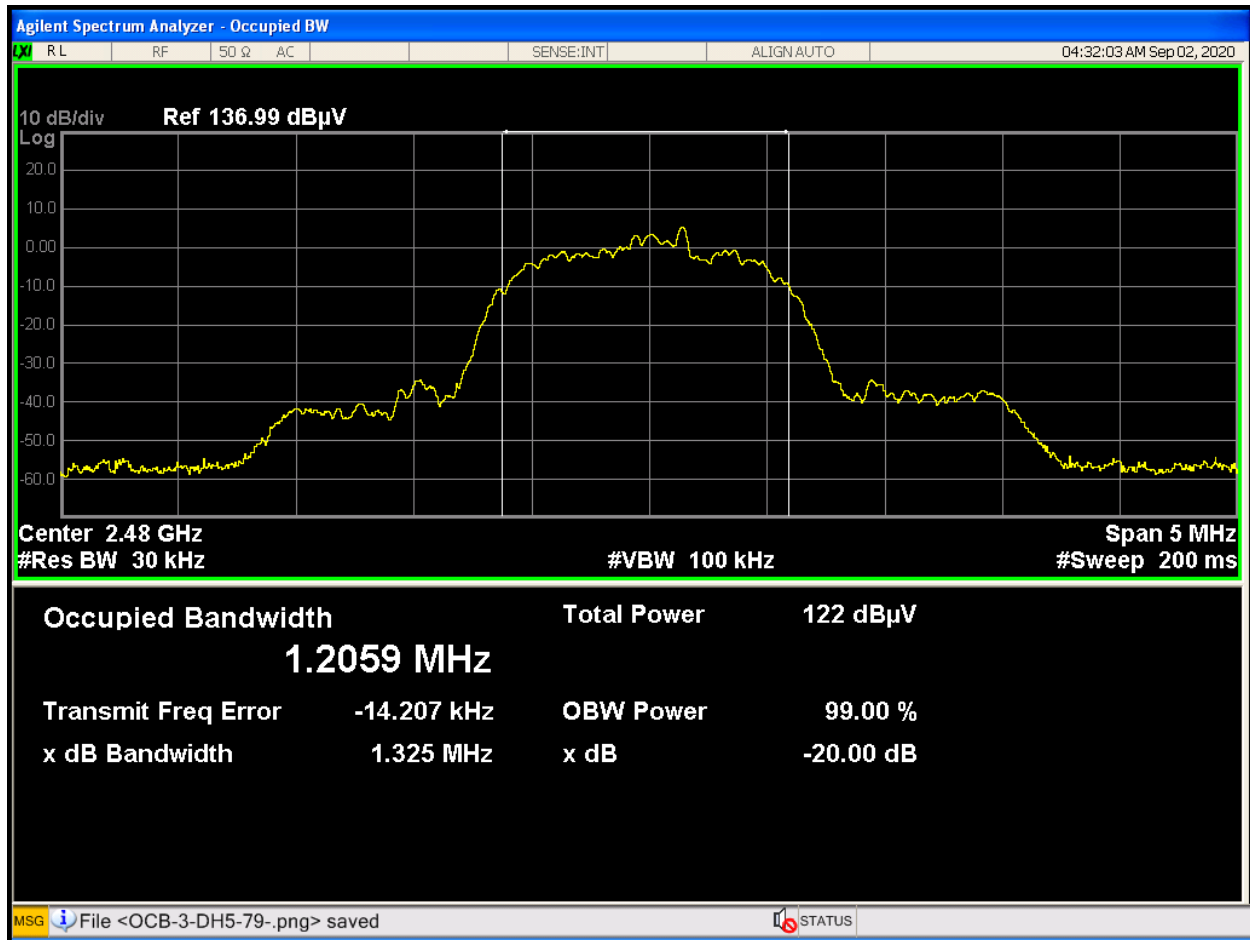


Figure 6.5.9 - 99% Bandwidth data plot, channel 2480 MHz, 8-PSK

| Mode  | Channel # | Channel Frequency (MHz) | 99% Bandwidth (kHz) | Limit (kHz) | Remarks |
|-------|-----------|-------------------------|---------------------|-------------|---------|
| 8-PSK | 79        | 2480                    | 1205.9              | N/A         | PASS    |

Note: N/A-Not Applicable

**6.6 Out of Band Emissions(Band Edge)**☐ Applicable**Table 6.6.1 – Out-of-Band Emission Test Setup Information**

|                        |                                                                                                                                                                                                                                                                           |                |                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------------|
| CLIENT:                | Blackline Safety                                                                                                                                                                                                                                                          | TEST STANDARD: | FCC 15.247, RSS-247 Issue 2 |
| MODEL NUMBER:          | G7EXO-NA2,G7EXO-AZ2                                                                                                                                                                                                                                                       | PRODUCT:       |                             |
| SERIAL NUMBER:         | 3588000037                                                                                                                                                                                                                                                                | CLASS:         |                             |
| TEMPERATURE:           | 21°C                                                                                                                                                                                                                                                                      | HUMIDITY:      | 58%                         |
| TESTED BY:             | Adishesu Nyshadham                                                                                                                                                                                                                                                        | DATE OF TEST:  | 2020-09-07                  |
| TEST REFERENCE:        | FCC Title 47 CFR Part 15: Subpart C-15.247(d), RSS-247-Issue 2                                                                                                                                                                                                            |                |                             |
| TEST VOLTAGE:          | 3.4V                                                                                                                                                                                                                                                                      |                |                             |
| SETUP:                 | As per ANSI C63.10:2013, sec 6.9.3                                                                                                                                                                                                                                        |                |                             |
| FREQUENCY RANGE        | 2400-2483.5 MHz                                                                                                                                                                                                                                                           |                |                             |
| FREQUENCY TESTED:      | 2402 MHz, 2441 MHz, 2480 MHz                                                                                                                                                                                                                                              |                |                             |
| FIRMWARE POWER SETTING | 11 dBm                                                                                                                                                                                                                                                                    |                |                             |
| EUT FIRMWARE           | 3.442S3_EXO                                                                                                                                                                                                                                                               |                |                             |
| MODULATION/DATA RATE   | GFSK, DH1,<br>QPSK, DH2<br>8-PSK, DH3                                                                                                                                                                                                                                     |                |                             |
| ANTENNA TYPE/GAIN      | Ceramic Chip Antenna, 2.2dBi(peak), 1.9dBi(Band edges)                                                                                                                                                                                                                    |                |                             |
| DUTY CYCLE             | N/A                                                                                                                                                                                                                                                                       |                |                             |
| DECISION RULE          | Decision rule support document:<br><input type="checkbox"/> Data obtained<br><input type="checkbox"/> Video<br><input type="checkbox"/> Email conversation<br><input type="checkbox"/> inherent in the requested specification standard<br><input type="checkbox"/> other |                |                             |
| RESULTS:               | PASS                                                                                                                                                                                                                                                                      |                |                             |



Table 6.6.2 – Conducted Band Edge Summary

| Frequency (MHz) | Measurement (dBuV) | In Band Level (dBuV) | Band Edge Marker Delta level(dB) | Limit (dB) | Margin (dB) | Detector | Result |
|-----------------|--------------------|----------------------|----------------------------------|------------|-------------|----------|--------|
| GFSK            |                    |                      |                                  |            |             |          |        |
| 2400            | 65.88              | 117.09               | -51.21                           | -20        | -31.21      | Peak     | PASS   |
| 2483.5          | 56.31              | 117.14               | -60.83                           | -20        | -40.83      | Peak     | PASS   |
| 2400            | 62.46              | 117.03               | -54.57                           | -20        | -34.57      | AVG      | PASS   |
| 2483.5          | 54.19              | 117.08               | -62.89                           | -20        | -42.89      | AVG      | PASS   |
| Frequency (MHz) | Measurement (dBuV) | In Band Level (dBuV) | Band Edge Marker Delta level(dB) | Limit (dB) | Margin (dB) | Detector | Result |
| QPSK            |                    |                      |                                  |            |             |          |        |
| 2400            | 66.76              | 114.91               | -48.15                           | -20        | -28.15      | Peak     | PASS   |
| 2483.5          | 56.51              | 115.02               | -58.51                           | -20        | -38.51      | Peak     | PASS   |
| 2400            | 65.4               | 114.58               | -49.18                           | -20        | -29.18      | AVG      | PASS   |
| 2483.5          | 55.97              | 114.85               | -58.88                           | -20        | -38.88      | AVG      | PASS   |
| Frequency (MHz) | Measurement (dBuV) | In Band Level (dBuV) | Band Edge Marker Delta level(dB) | Limit (dB) | Margin (dB) | Detector | Result |
| 8-PSK           |                    |                      |                                  |            |             |          |        |
| 2400            | 65.69              | 114.87               | -49.18                           | -20        | -29.18      | Peak     | PASS   |
| 2483.5          | 58.49              | 114.99               | -56.5                            | -20        | -36.5       | Peak     | PASS   |
| 2400            | 65.08              | 114.55               | -49.47                           | -20        | -29.47      | AVG      | PASS   |
| 2483.5          | 55.61              | 114.65               | -59.04                           | -20        | -39.04      | AVG      | PASS   |

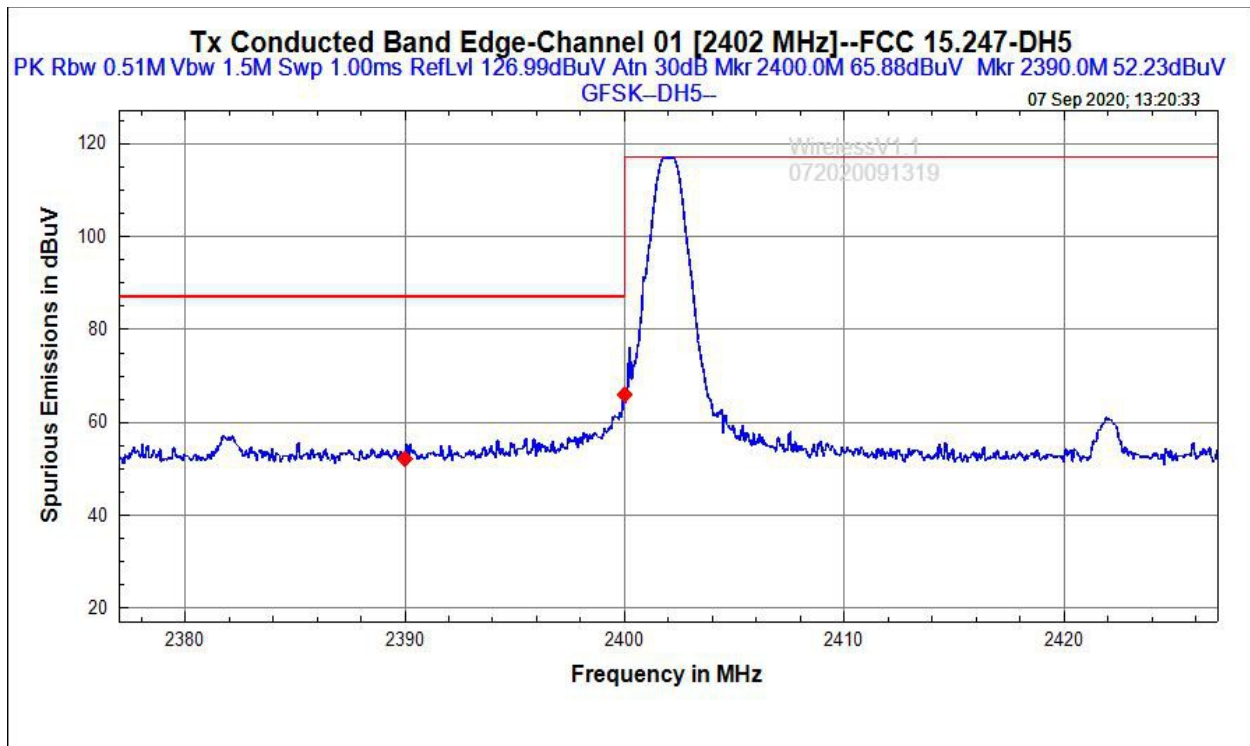


Figure 6.6.1a – Conducted Band Edge data (GFSK Peak)

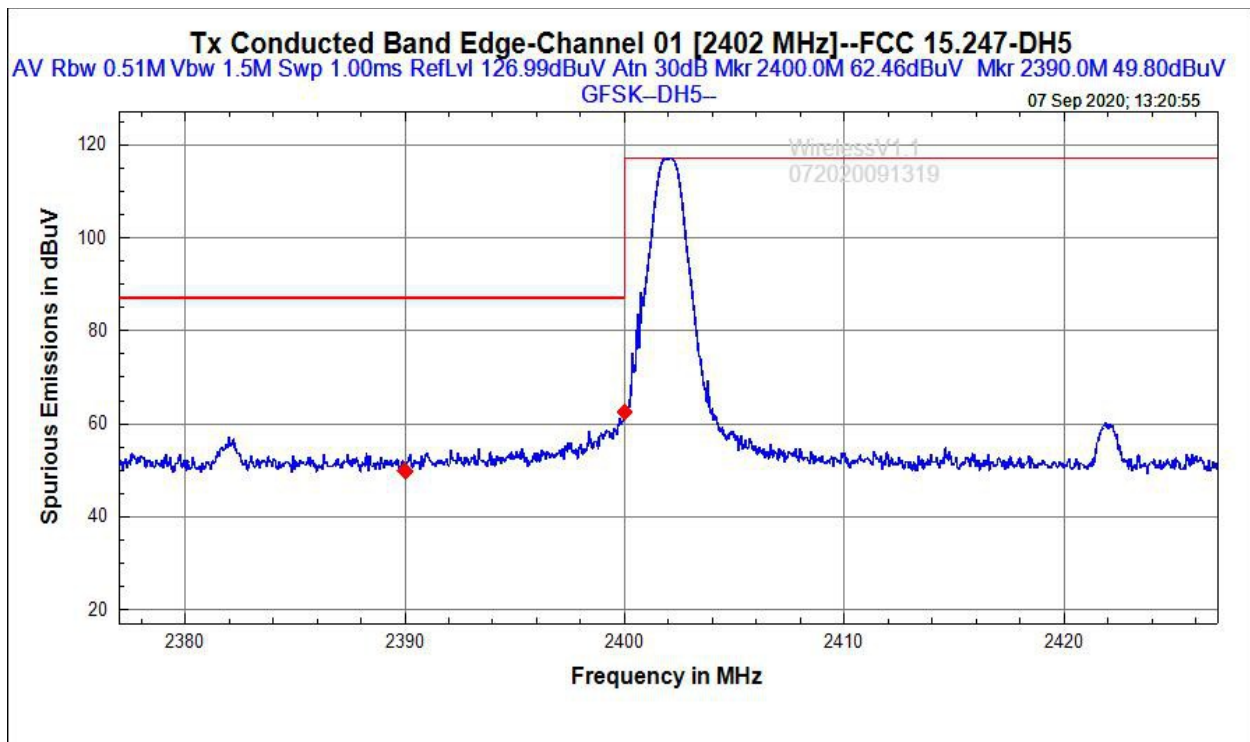


Figure 6.6.1b – Conducted Band Edge data (GFSK AVG)

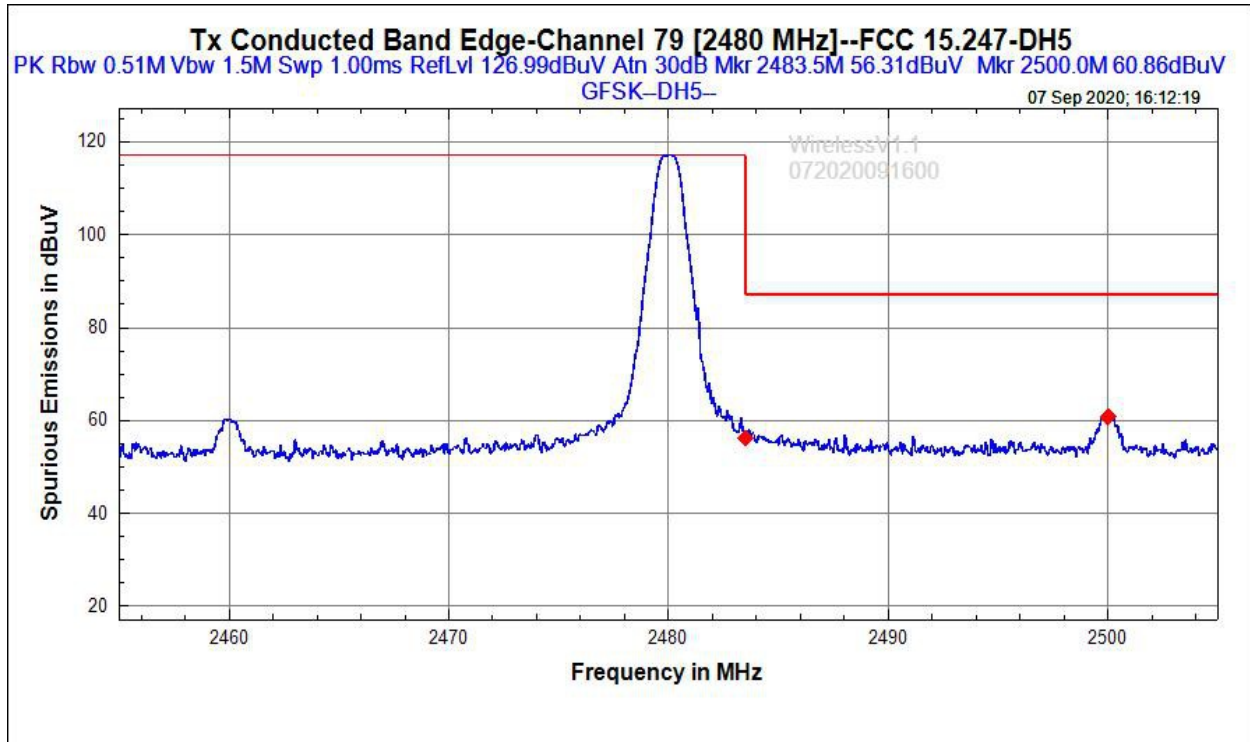


Figure 6.6.1c – Conducted Band Edge data (GFSK Peak)

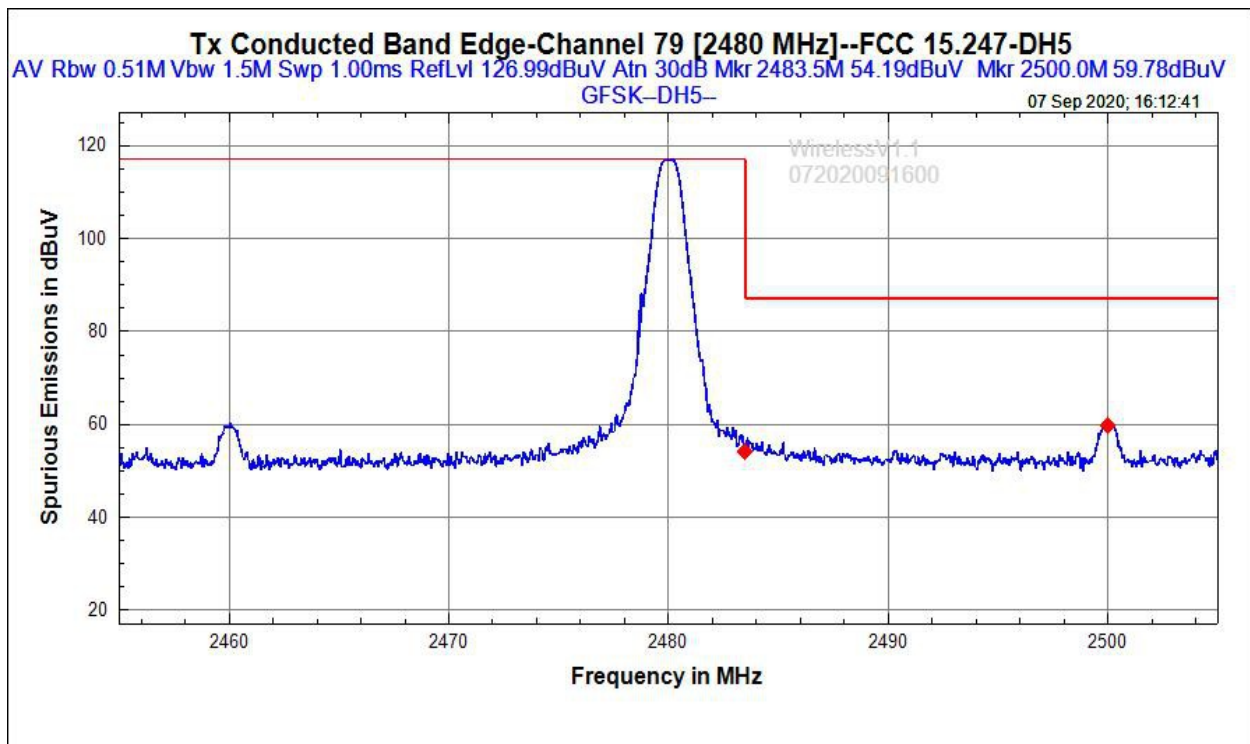


Figure 6.6.1d – Conducted Band Edge data (GFSK AVG)

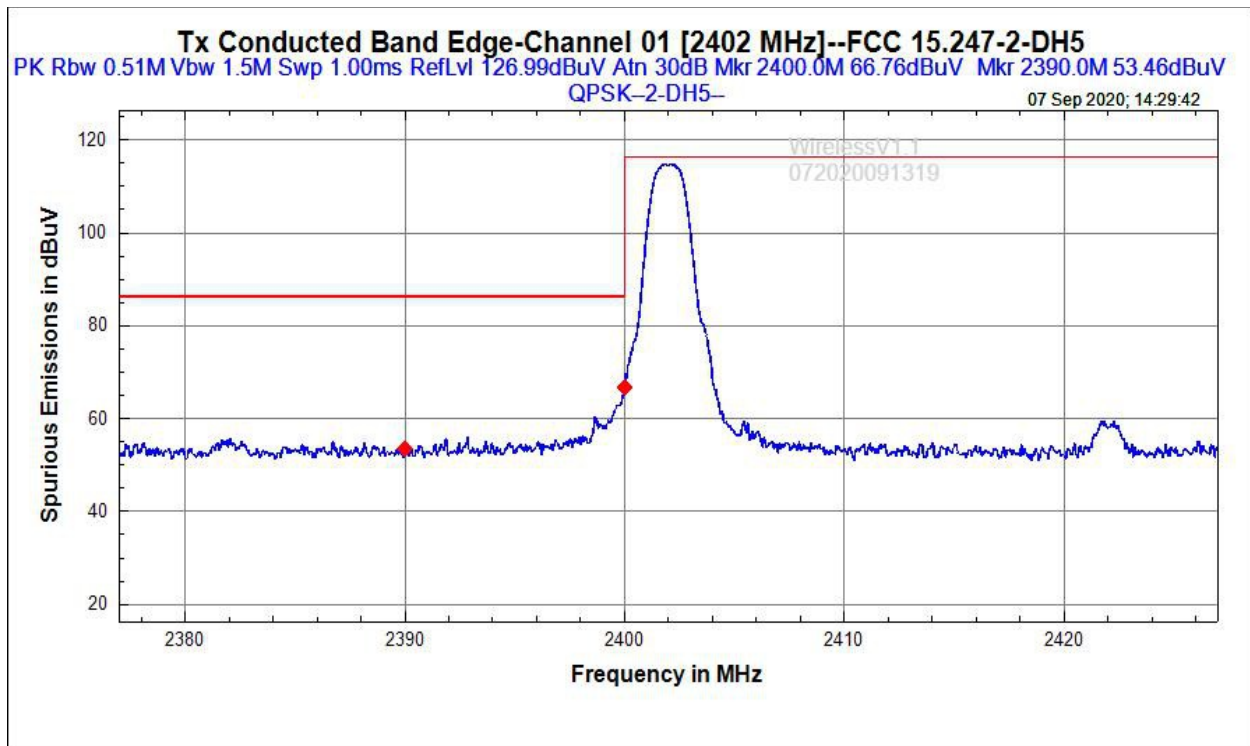


Figure 6.6.2a – Conducted Band Edge data (QPSK Peak)

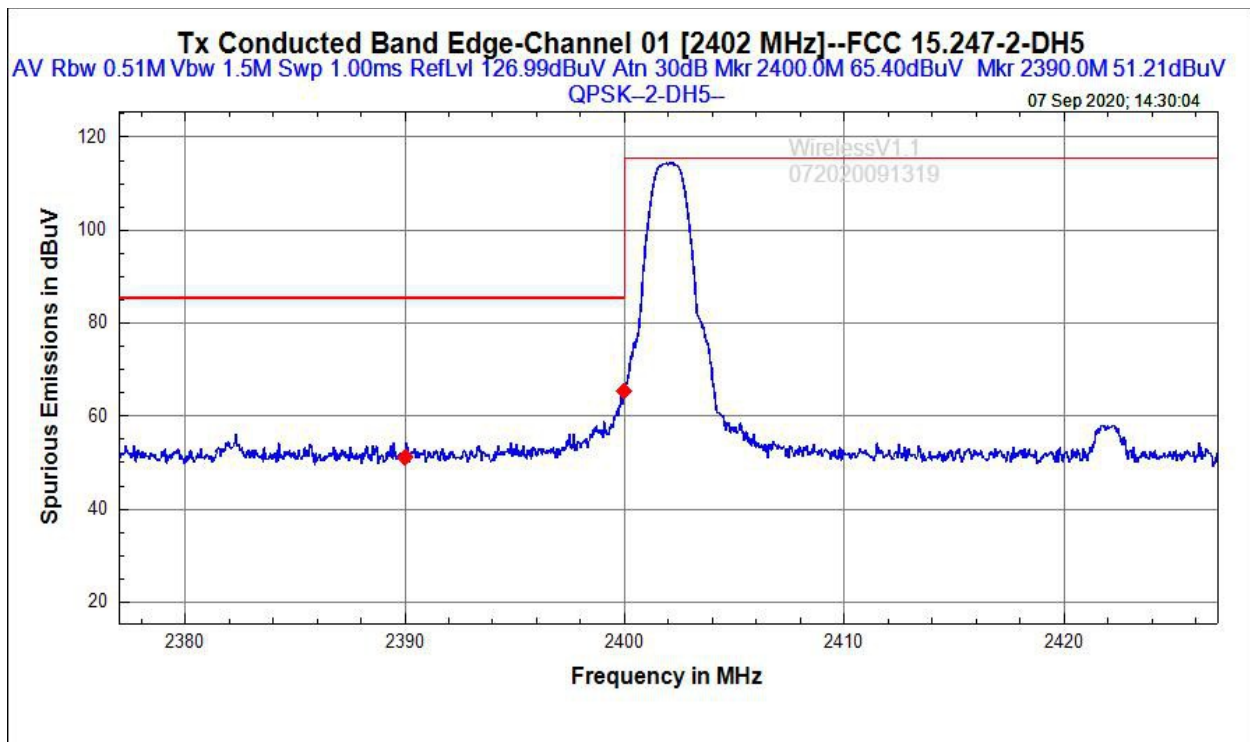


Figure 6.6.2b. – Conducted Band Edge data ( QPSK AVG)

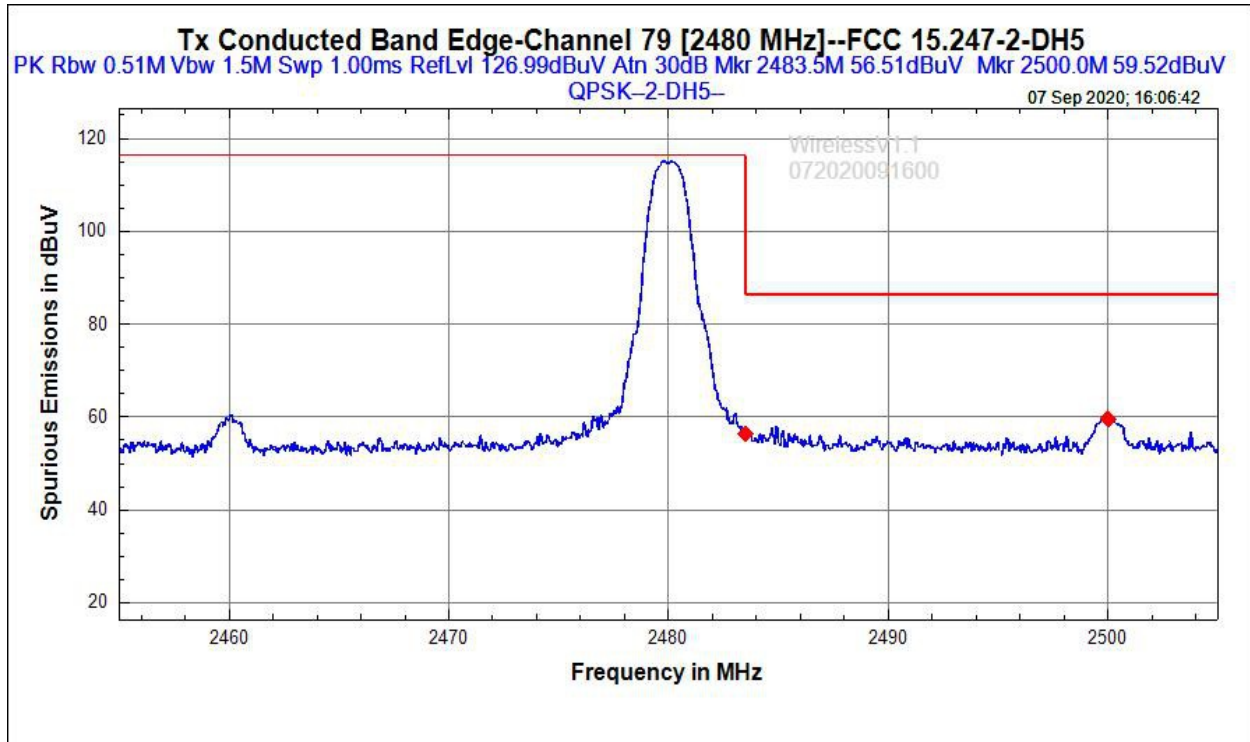


Figure 6.6.2c – Conducted Band Edge data ( QPSK Peak)

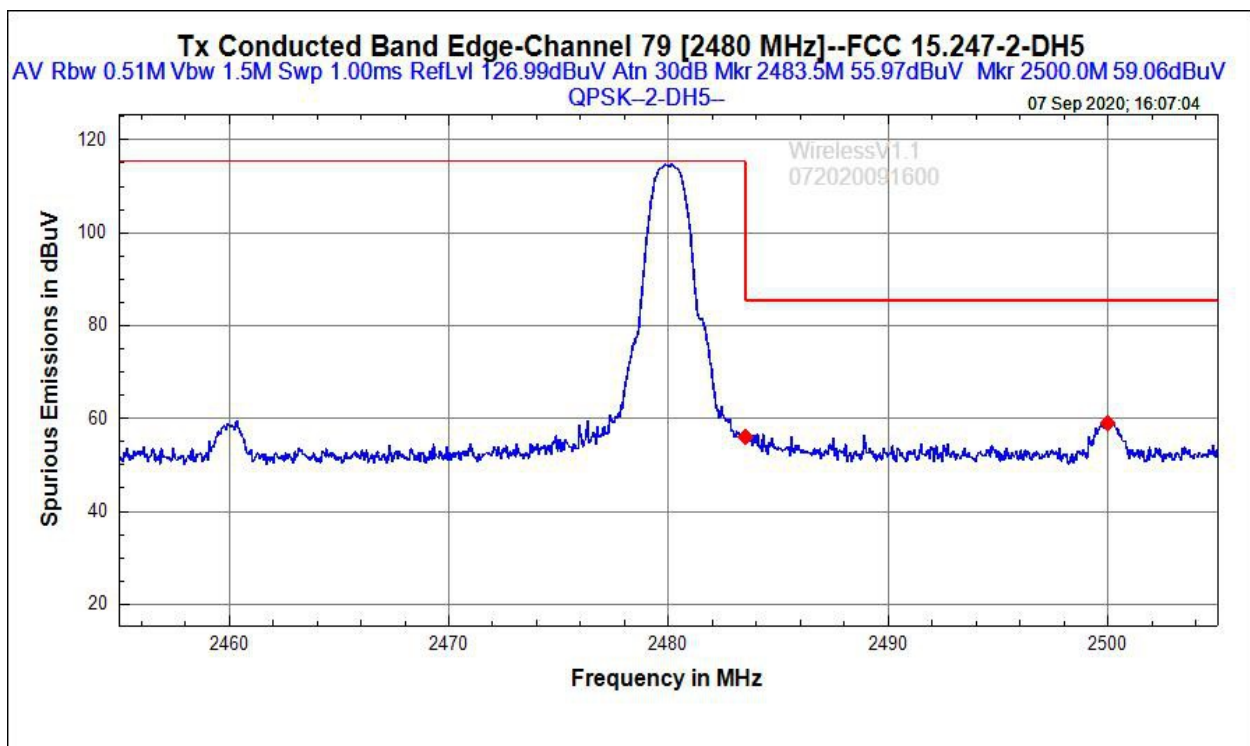


Figure 6.6.2d. – Conducted Band Edge data ( QPSK AVG)

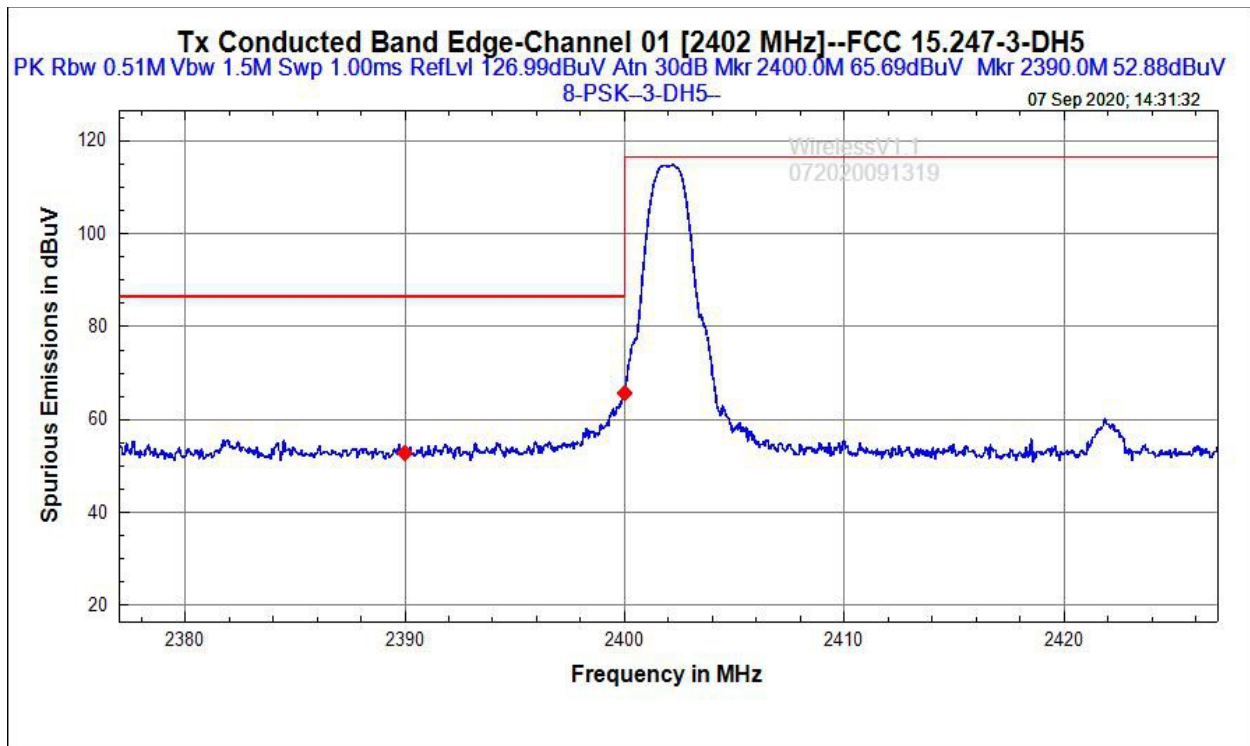


Figure 6.6.3a – Conducted Band Edge data (8-PSK Peak)

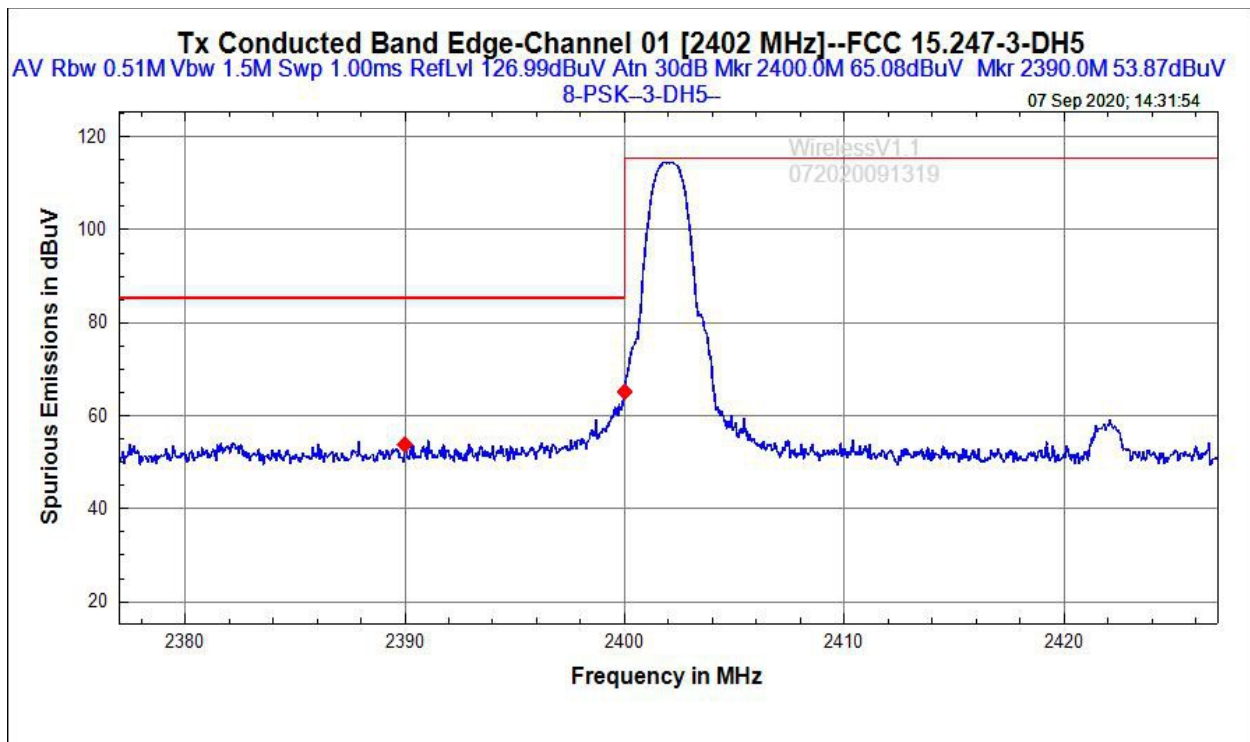


Figure 6.6.3b. – Conducted Band Edge data ( 8-PSK AVG)

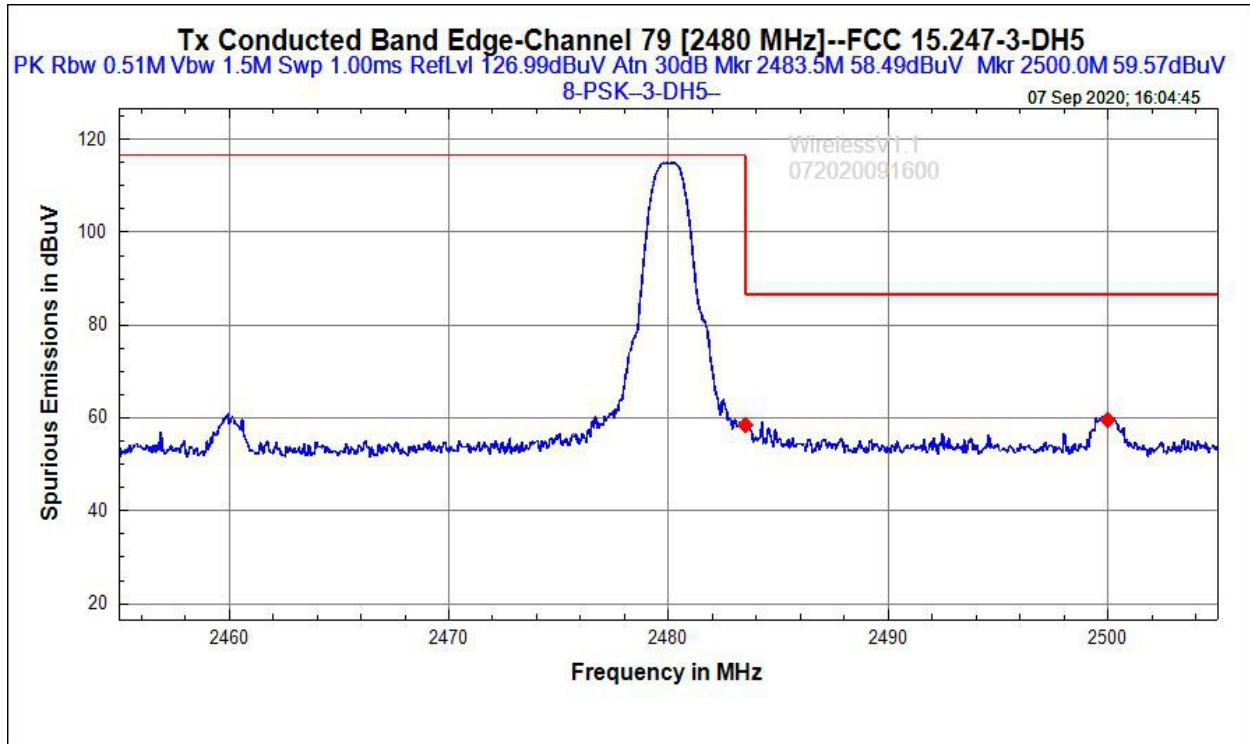


Figure 6.6.3c – Conducted Band Edge data ( 8-PSK Peak)

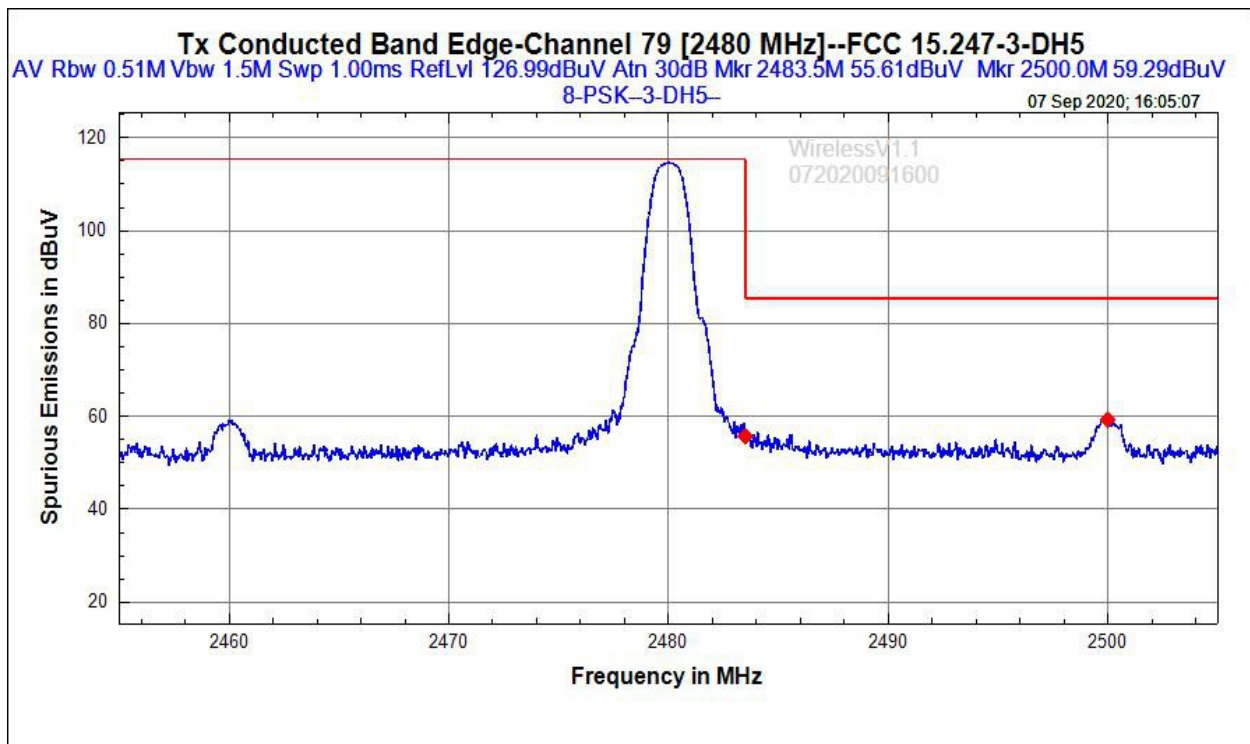


Figure 6.6.3d. – Conducted Band Edge data ( 8-PSK AVG)



Table 6.6.3 – Conducted Band Edge Summary-Hopping mode

| Frequency (MHz) | Measurement (dBuV) | In Band Level (dBuV) | Band Edge Marker Delta level(dB) | Limit (dB) | Margin (dB) | Detector | Result |
|-----------------|--------------------|----------------------|----------------------------------|------------|-------------|----------|--------|
| GFSK            |                    |                      |                                  |            |             |          |        |
| 2400            | 57.59              | 117.40               | -59.81                           | -20        | -39.81      | Peak     | PASS   |
| 2483.5          | 55.76              | 117.57               | -61.81                           | -20        | -41.81      | Peak     | PASS   |
| 2400            | 57.51              | 117.03               | -59.52                           | -20        | -39.52      | AVG      | PASS   |
| 2483.5          | 50.95              | 117.53               | -66.58                           | -20        | -46.58      | AVG      | PASS   |
| Frequency (MHz) | Measurement (dBuV) | In Band Level (dBuV) | Band Edge Marker Delta level(dB) | Limit (dB) | Margin (dB) | Detector | Result |
| QPSK            |                    |                      |                                  |            |             |          |        |
| 2400            | 63.5               | 115.33               | -51.83                           | -20        | -31.83      | Peak     | PASS   |
| 2483.5          | 56.36              | 115.31               | -58.95                           | -20        | -38.95      | Peak     | PASS   |
| 2400            | 51.93              | 114.83               | -62.9                            | -20        | -42.9       | AVG      | PASS   |
| 2483.5          | 55.58              | 115.06               | -59.48                           | -20        | -39.48      | AVG      | PASS   |
| Frequency (MHz) | Measurement (dBuV) | In Band Level (dBuV) | Band Edge Marker Delta level(dB) | Limit (dB) | Margin (dB) | Detector | Result |
| 8-PSK           |                    |                      |                                  |            |             |          |        |
| 2400            | 60.2               | 115.19               | -54.99                           | -20        | -34.99      | Peak     | PASS   |
| 2483.5          | 54.02              | 114.49               | -60.47                           | -20        | -40.47      | Peak     | PASS   |
| 2400            | 55.26              | 114.56               | -59.3                            | -20        | -39.3       | AVG      | PASS   |
| 2483.5          | 53                 | 115.21               | -62.21                           | -20        | -42.21      | AVG      | PASS   |

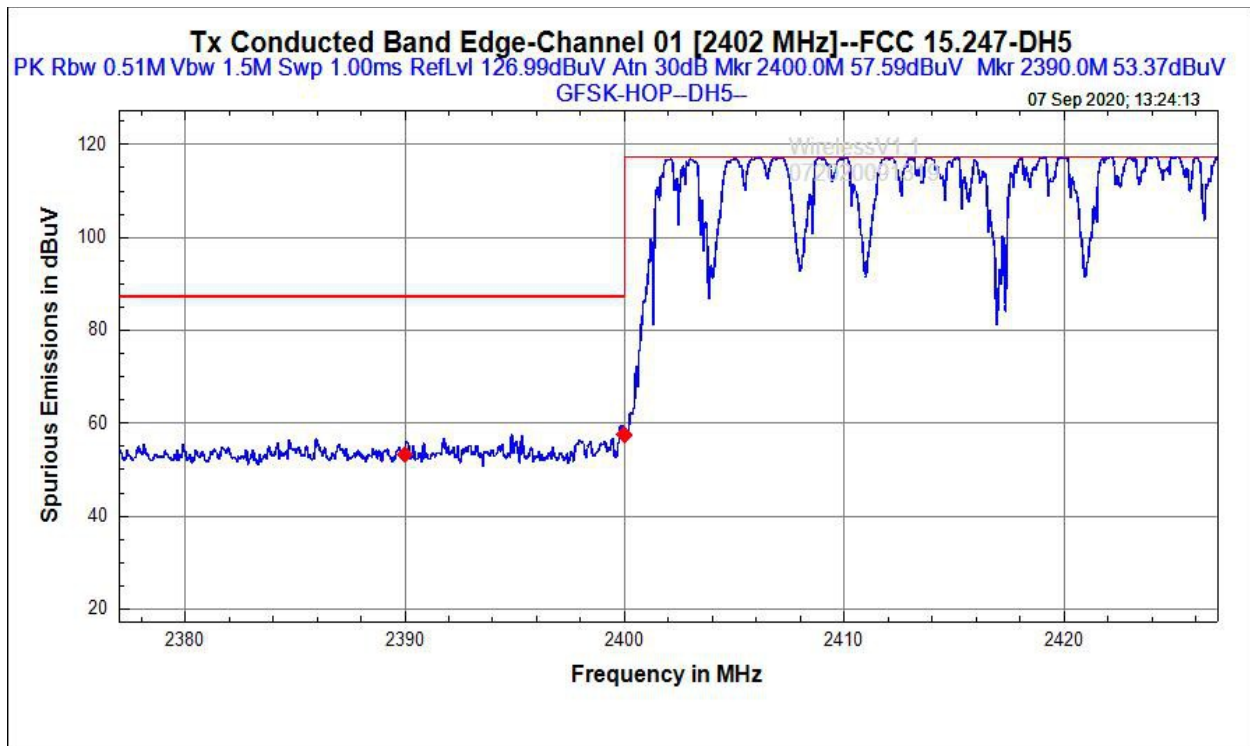


Figure 6.6.4a– Conducted Band Edge data (GFSK Peak)

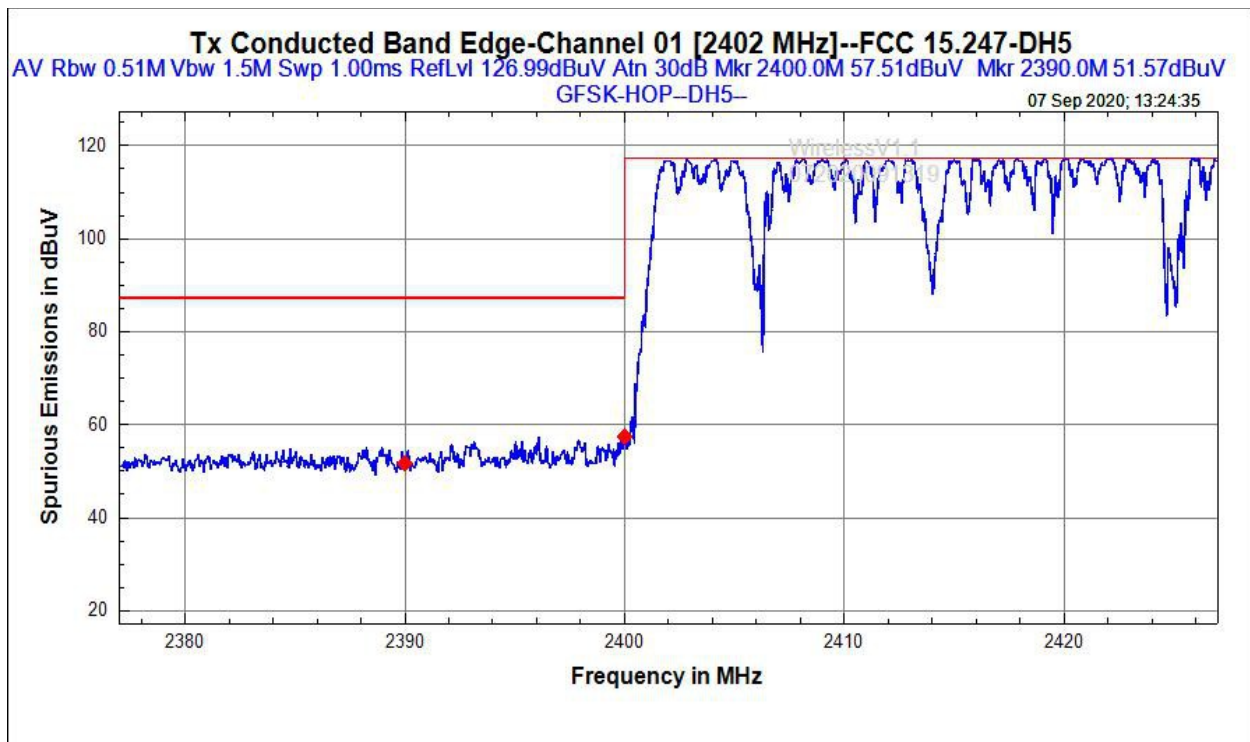


Figure 6.6.4b – Conducted Band Edge data (GFSK AVG)

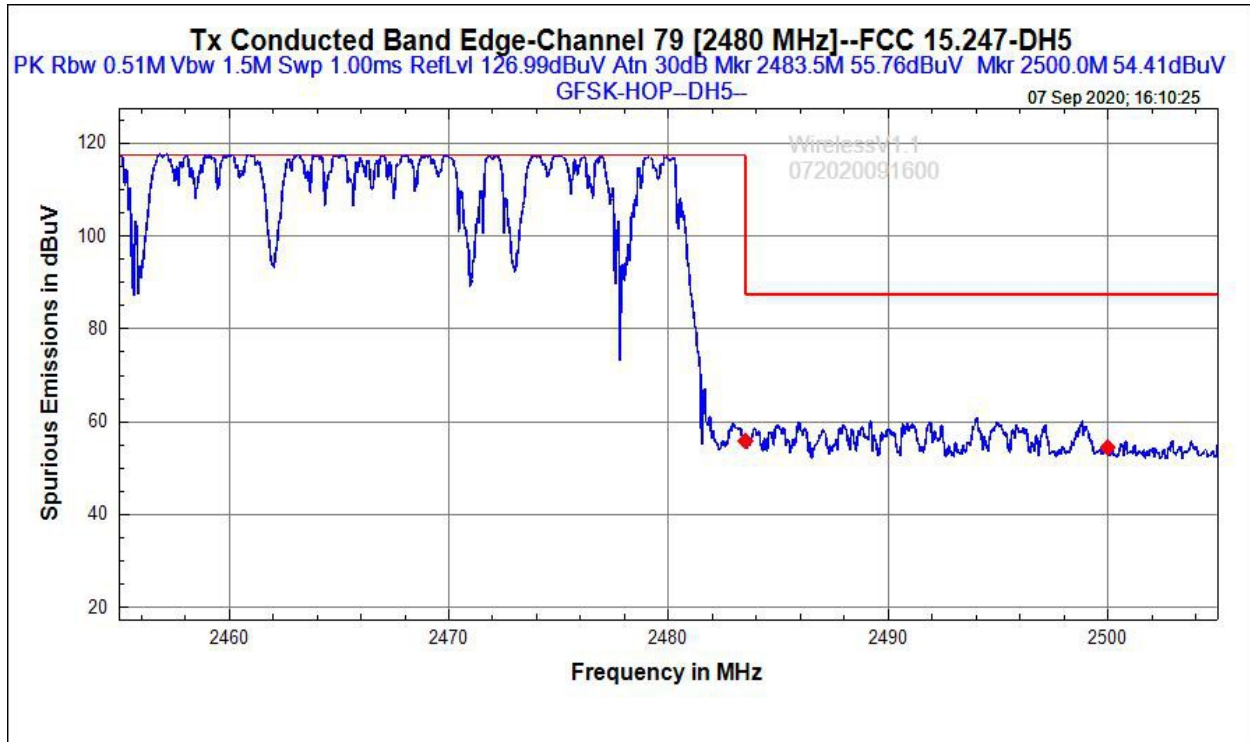


Figure 6.6.4c- Conducted Band Edge data (GFSK Peak)

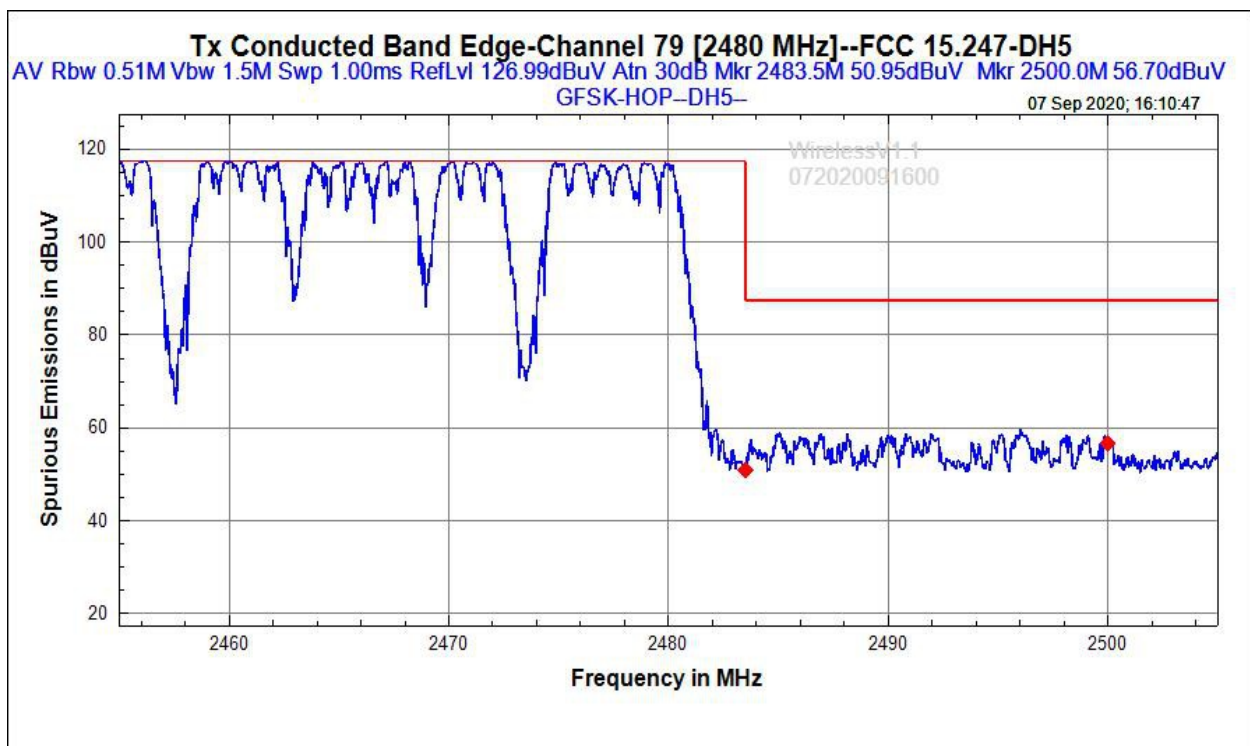


Figure 6.6.4d. - Conducted Band Edge data (GFSK AVG)

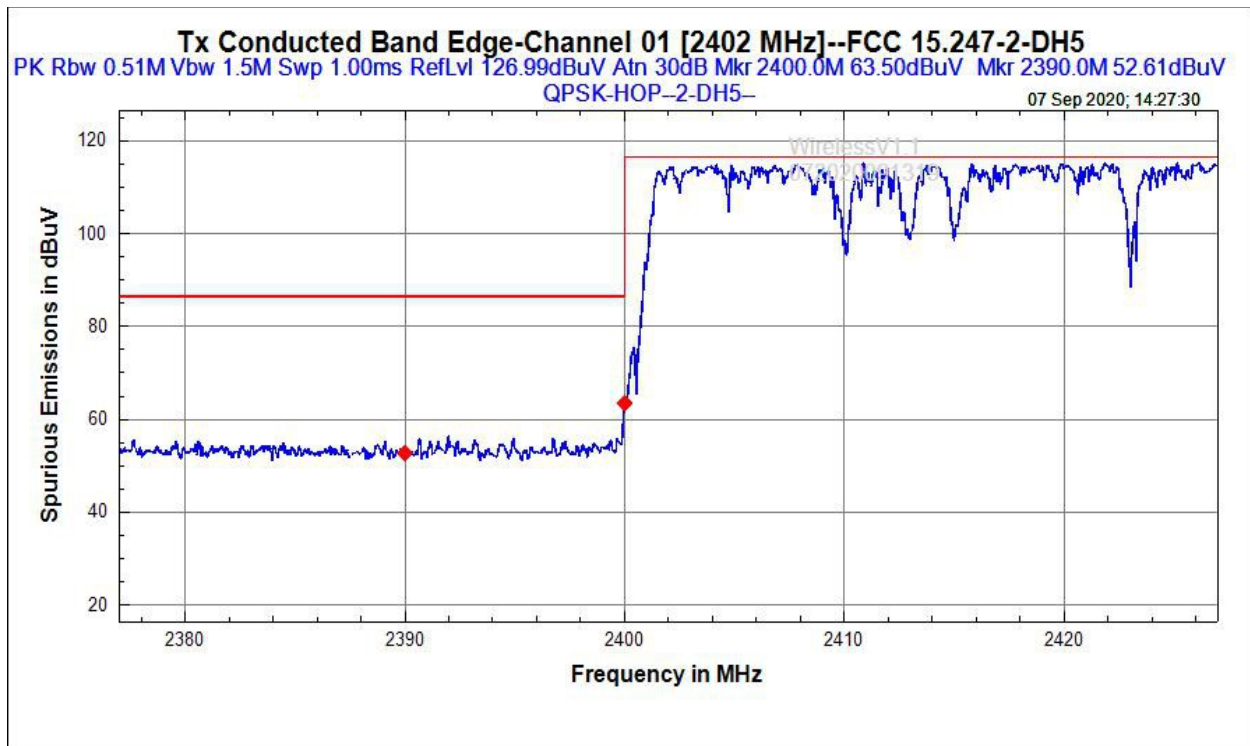


Figure 6.6.5a – Conducted Band Edge data (QPSK Peak)

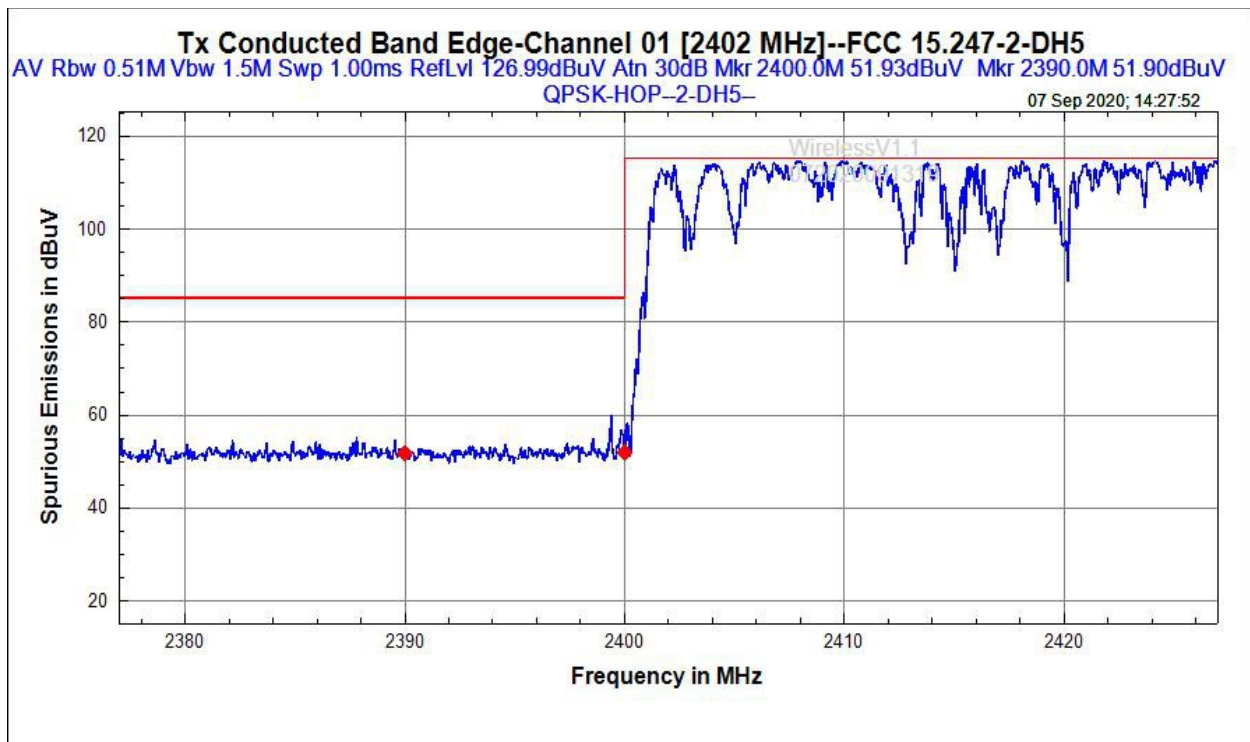


Figure 6.6.5b – Conducted Band Edge data ( QPSK AVG)

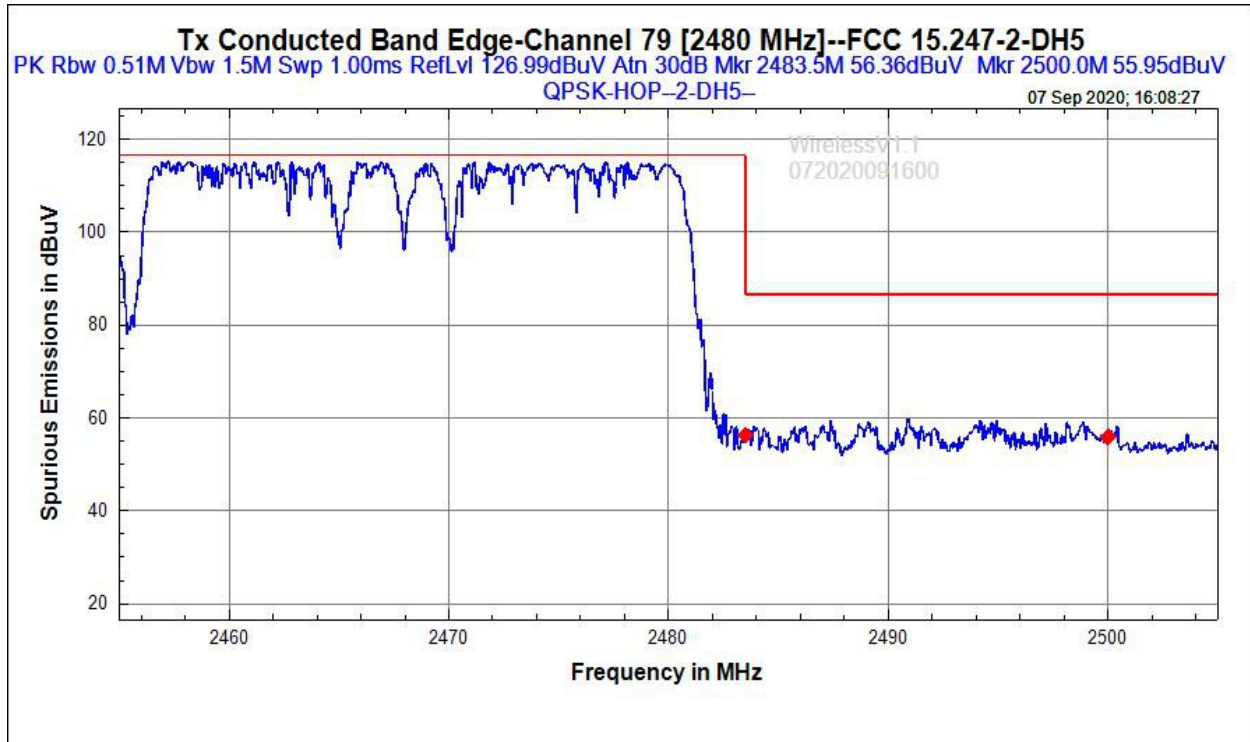


Figure 6.6.5c – Conducted Band Edge data ( QPSK Peak)

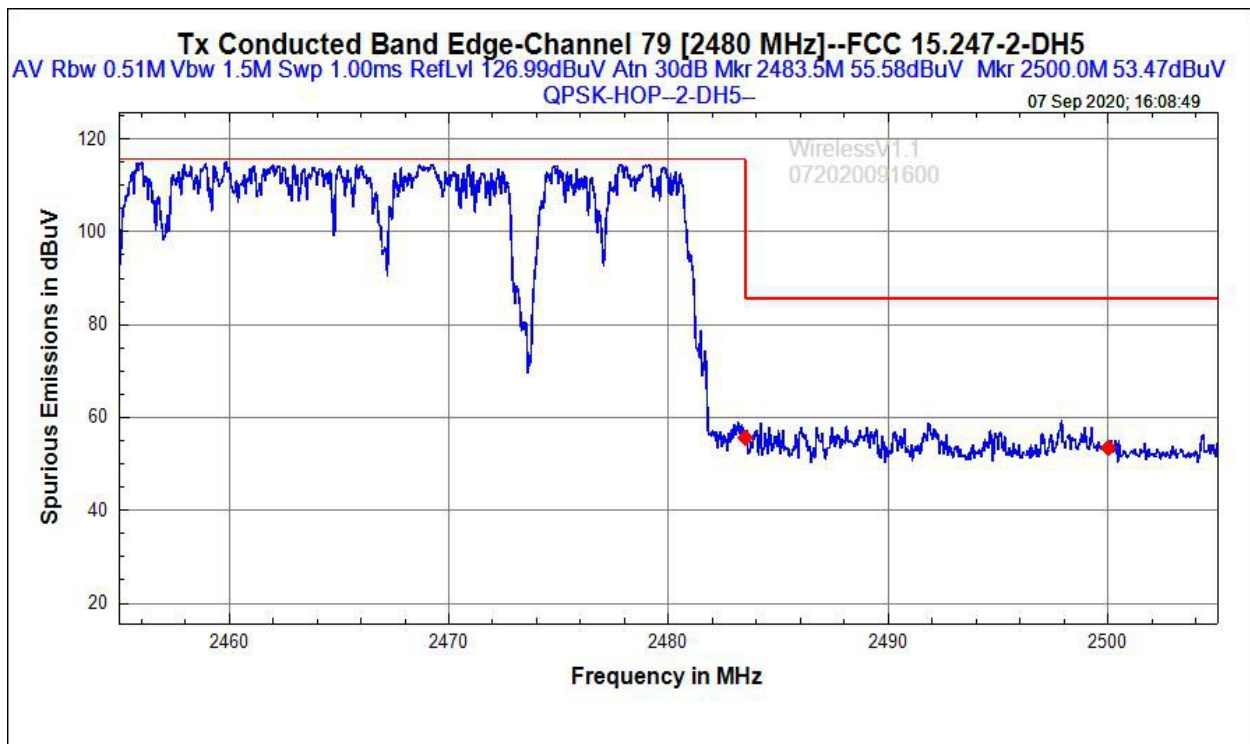


Figure 6.6.5d – Conducted Band Edge data ( QPSK AVG)

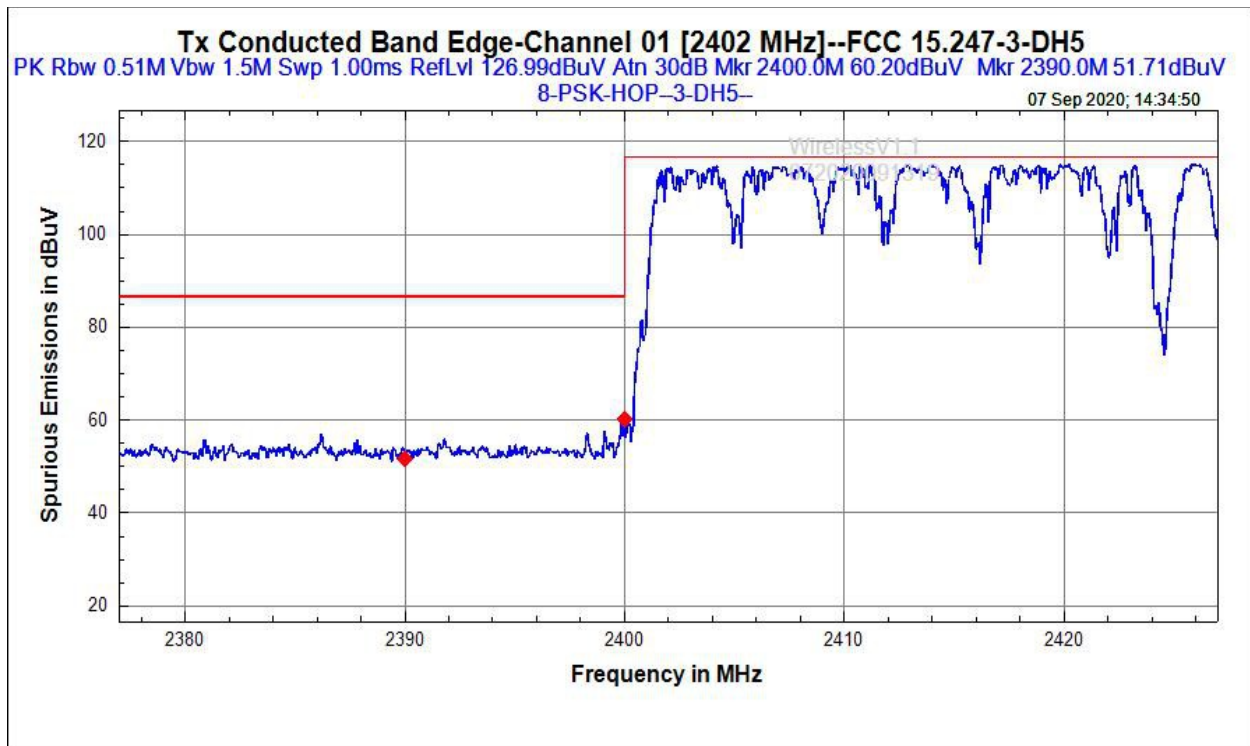


Figure 6.6.6a – Conducted Band Edge data (8-PSK Peak)

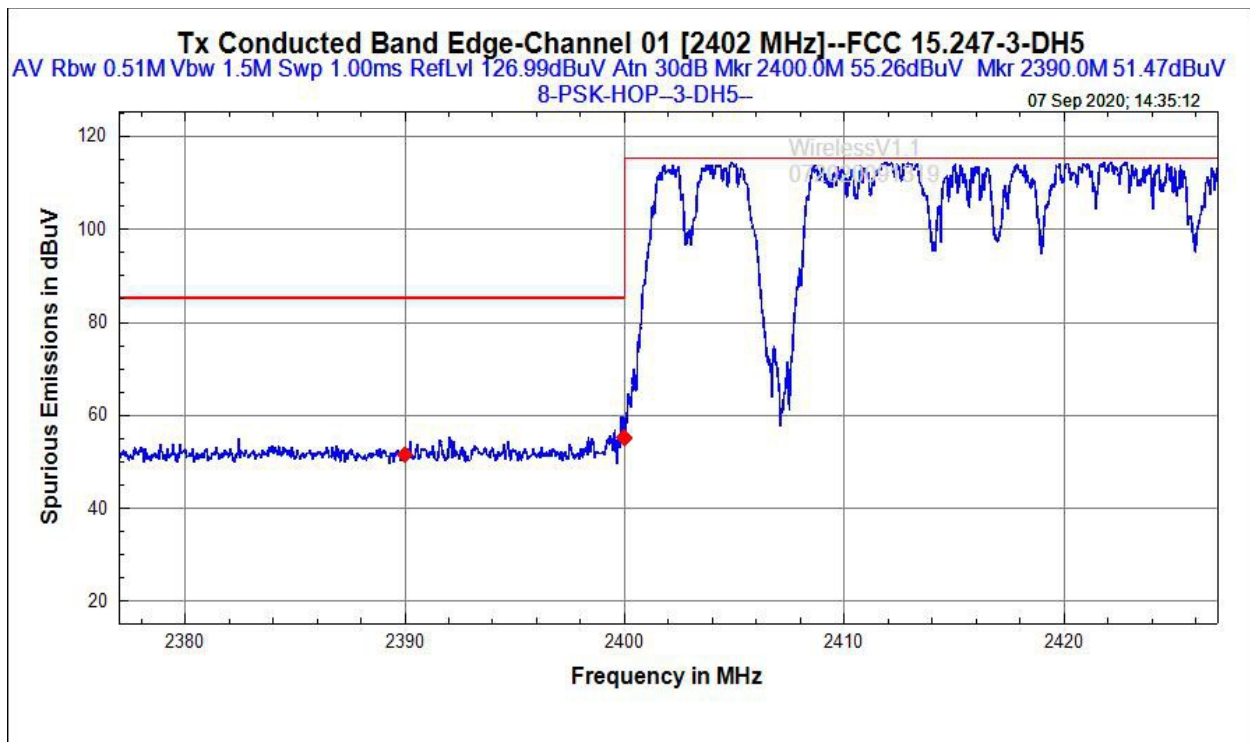


Figure 6.6.6b – Conducted Band Edge data (8-PSK AVG)

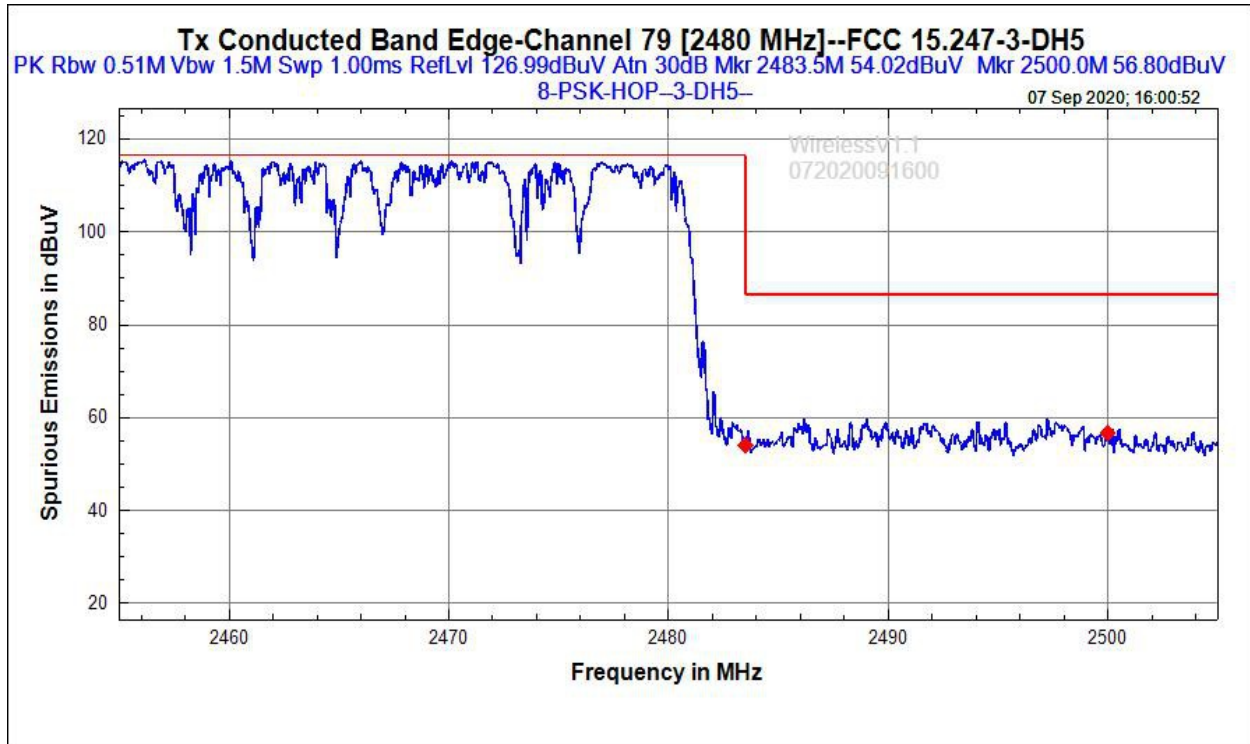


Figure 6.6.6c – Conducted Band Edge data ( 8-PSK Peak)

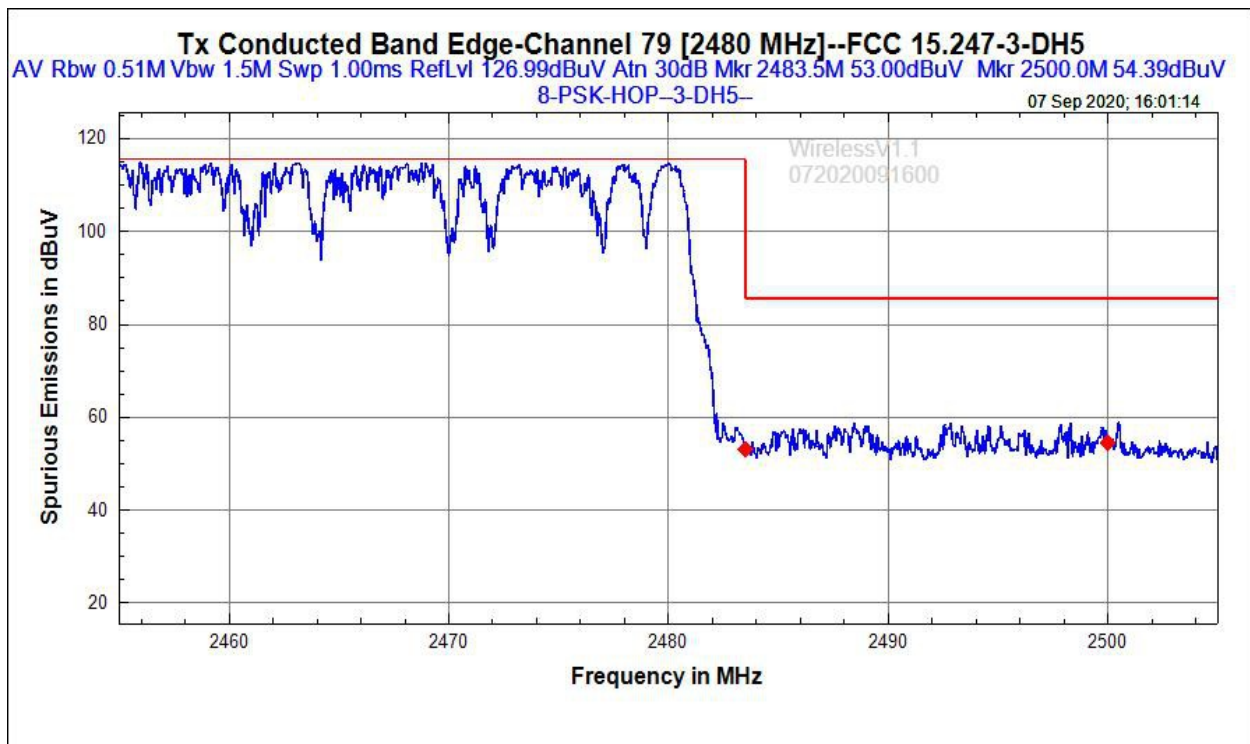


Figure 6.6.6d – Conducted Band Edge data ( 8-PSK AVG)



## 6.7 Channel Separation

☐ Applicable

Table 6.7.1 – Channel Separation Test Setup Information

|                        |                                                                                                                                                                                                                                                                           |                |                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------------|
| CLIENT:                | Blackline Safety                                                                                                                                                                                                                                                          | TEST STANDARD: | FCC 15.247, RSS-247 Issue 2 |
| MODEL NUMBER:          | G7EXO-NA2,G7EXO-AZ2                                                                                                                                                                                                                                                       | PRODUCT:       |                             |
| SERIAL NUMBER:         | 3588000037                                                                                                                                                                                                                                                                | CLASS:         |                             |
| TEMPERATURE:           | 22°C                                                                                                                                                                                                                                                                      | HUMIDITY:      | 31%                         |
| TESTED BY:             | Adishesu Nyshadham                                                                                                                                                                                                                                                        | DATE OF TEST:  | 2020-09-04                  |
| TEST REFERENCE:        | FCC Title 47 CFR Part 15: Subpart C-15.247(a)(1), RSS-247-Issue 2                                                                                                                                                                                                         |                |                             |
| TEST VOLTAGE:          | 3.4V                                                                                                                                                                                                                                                                      |                |                             |
| SETUP:                 | As per ANSI C63.10:2013, sec 7.8.2                                                                                                                                                                                                                                        |                |                             |
| FREQUENCY RANGE        | 2400-2483.5 MHz                                                                                                                                                                                                                                                           |                |                             |
| FREQUENCY TESTED:      | 2402 MHz, 2441 MHz, 2480 MHz                                                                                                                                                                                                                                              |                |                             |
| FIRMWARE POWER SETTING | 11 dBm                                                                                                                                                                                                                                                                    |                |                             |
| EUT FIRMWARE           | 3.442S3_EXO                                                                                                                                                                                                                                                               |                |                             |
| MODULATION/DATA RATE   | GFSK, DH1,<br>QPSK, DH2<br>8-PSK, DH3                                                                                                                                                                                                                                     |                |                             |
| ANTENNA TYPE/GAIN      | Ceramic Chip Antenna, 2.2dBi(peak), 1.9dBi(Band edges)                                                                                                                                                                                                                    |                |                             |
| DUTY CYCLE             | N/A                                                                                                                                                                                                                                                                       |                |                             |
| DECISION RULE          | Decision rule support document:<br><input type="checkbox"/> Data obtained<br><input type="checkbox"/> Video<br><input type="checkbox"/> Email conversation<br><input type="checkbox"/> inherent in the requested specification standard<br><input type="checkbox"/> other |                |                             |
| RESULTS:               | PASS                                                                                                                                                                                                                                                                      |                |                             |



Table 6.7.2 – Channel Separation summary

| Mode  | Number of Channels | Left marker (MHz) | dBuV    | $\Delta$ Marker (MHz) | $\Delta$ dBuV |
|-------|--------------------|-------------------|---------|-----------------------|---------------|
| GFSK  | 2                  | 2402.134          | 117.033 | 0.990                 | 0.023         |
| QPSK  | 2                  | 2401.856          | 114.683 | 1.012                 | 0.069         |
| 8-PSK | 2                  | 2401.992          | 114.763 | 0.958                 | -0.041        |

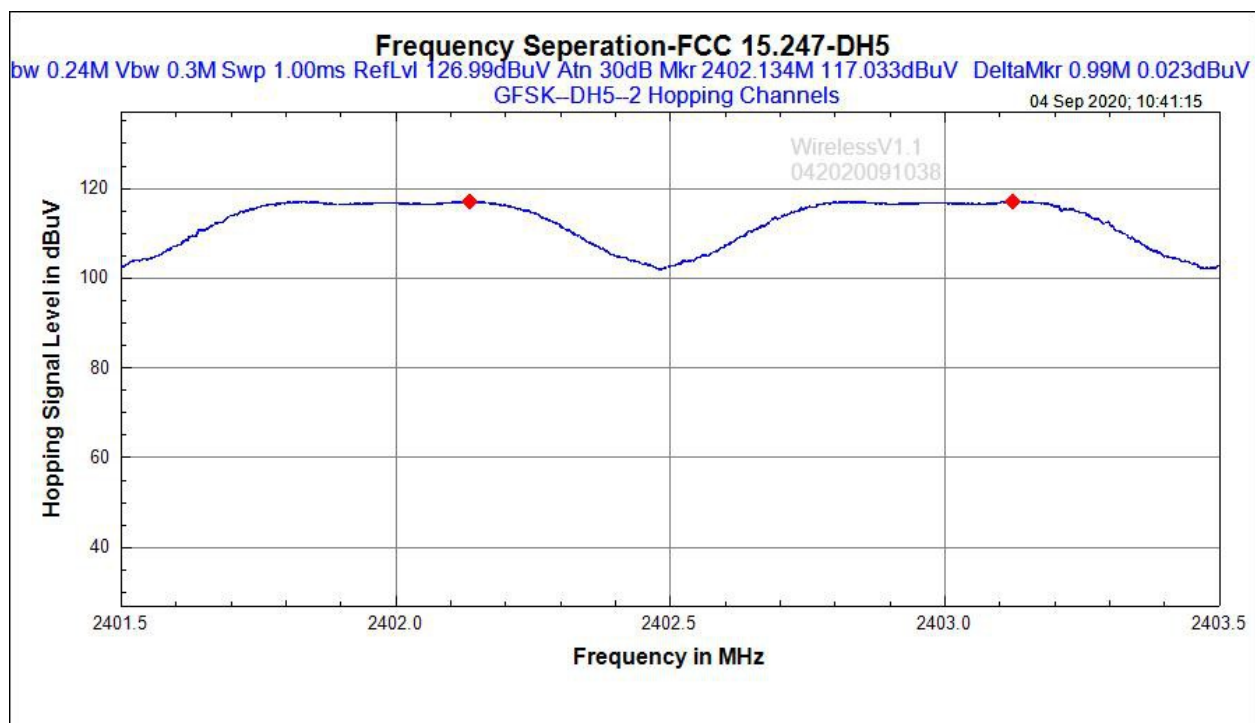


Figure 6.7.1a – Channel Separation, GFSK

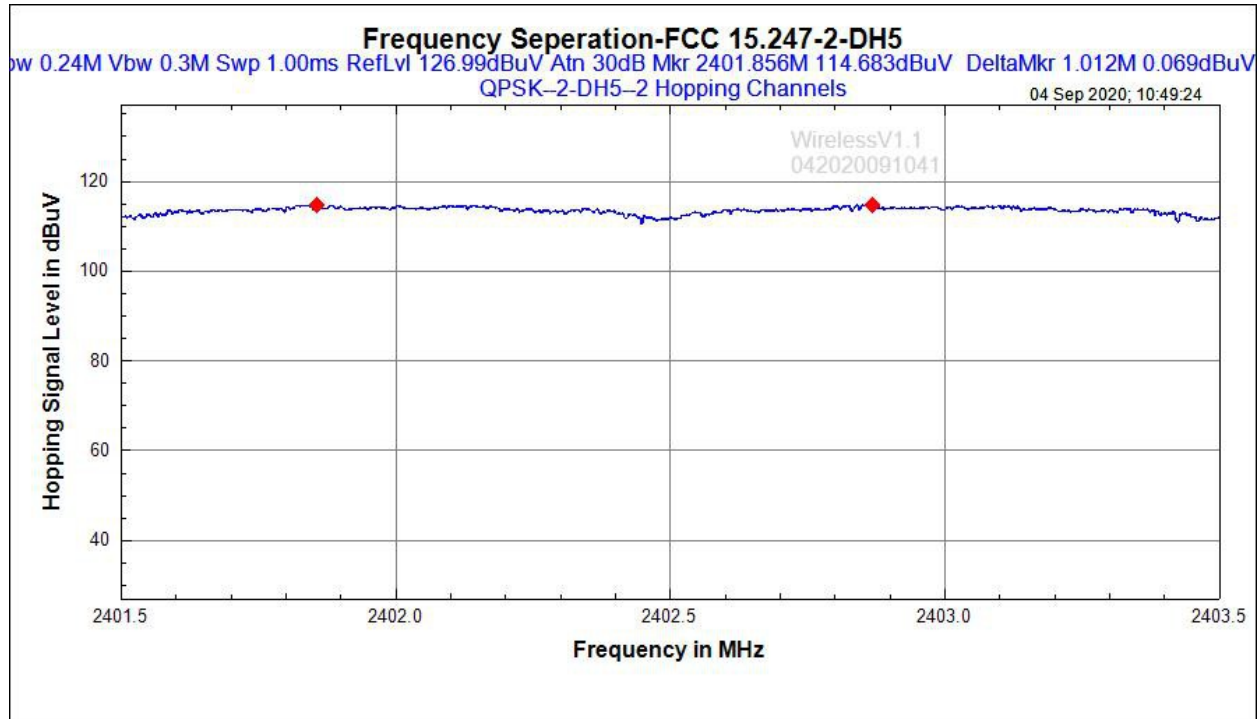


Figure 6.7.1b – Channel Separation, QPSK

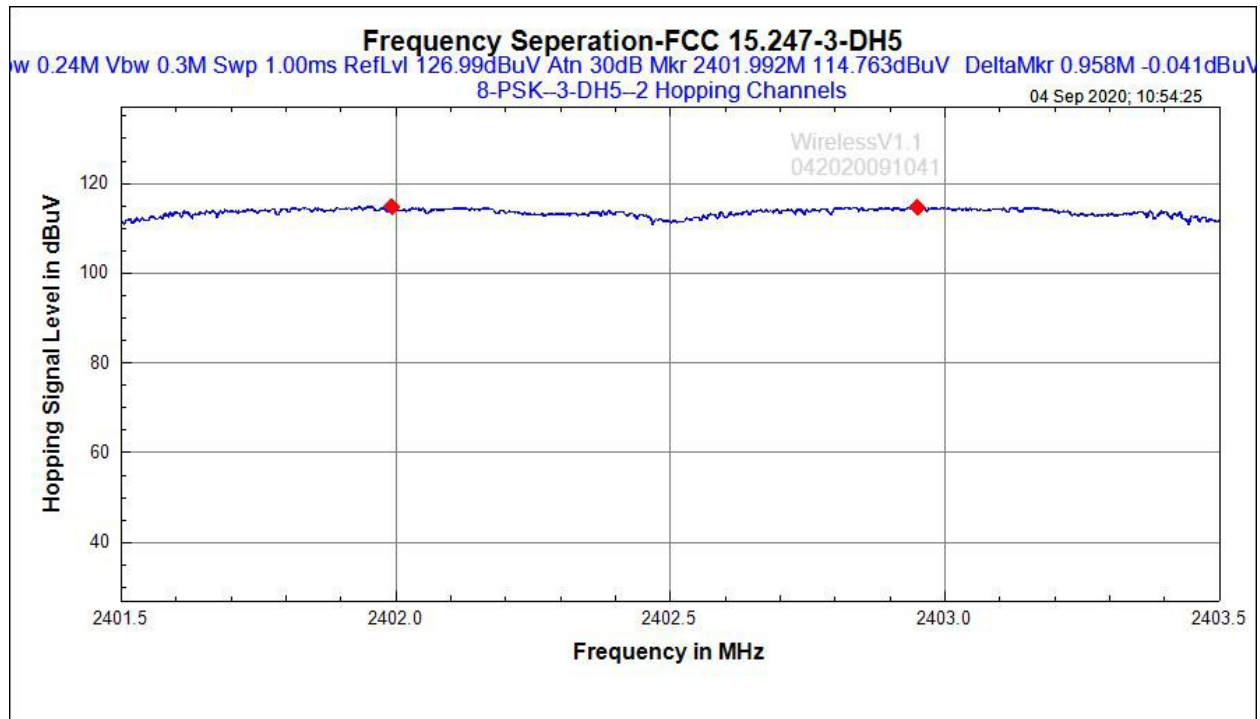


Figure 6.7.1c – Channel Separation, 8-PSK



## 6.8 Number of Hopping Channels

☐ Applicable**Table 6.8.1 – Number of hopping channels Test Setup Information**

|                        |                                                                                                                                                                                                                                                                           |                |                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------------|
| CLIENT:                | Blackline Safety                                                                                                                                                                                                                                                          | TEST STANDARD: | FCC 15.247, RSS-247 Issue 2 |
| MODEL NUMBER:          | G7EXO-NA2,G7EXO-AZ2                                                                                                                                                                                                                                                       | PRODUCT:       |                             |
| SERIAL NUMBER:         | 3588000037                                                                                                                                                                                                                                                                | CLASS:         |                             |
| TEMPERATURE:           | 21°C - 23°C                                                                                                                                                                                                                                                               | HUMIDITY:      | 29%-48%                     |
| TESTED BY:             | Adishesu Nyshadham                                                                                                                                                                                                                                                        | DATE OF TEST:  | 2020-09-02 to 2020-09-03    |
| TEST REFERENCE:        | FCC Title 47 CFR Part 15: Subpart C-15.247, RSS-247-Issue 2                                                                                                                                                                                                               |                |                             |
| TEST VOLTAGE:          | 3.4V                                                                                                                                                                                                                                                                      |                |                             |
| SETUP:                 | As per ANSI C63.10:2013, sec 7.8.3                                                                                                                                                                                                                                        |                |                             |
| FREQUENCY RANGE        | 2400-2483.5 MHz                                                                                                                                                                                                                                                           |                |                             |
| FREQUENCY TESTED:      | 2402 MHz, 2441 MHz, 2480 MHz                                                                                                                                                                                                                                              |                |                             |
| FIRMWARE POWER SETTING | 11 dBm                                                                                                                                                                                                                                                                    |                |                             |
| EUT FIRMWARE           | 3.442S3_EXO                                                                                                                                                                                                                                                               |                |                             |
| MODULATION/DATA RATE   | GFSK, DH1,<br>QPSK, DH2<br>8-PSK, DH3                                                                                                                                                                                                                                     |                |                             |
| ANTENNA TYPE/GAIN      | Ceramic Chip Antenna, 2.2dBi(peak), 1.9dBi(Band edges)                                                                                                                                                                                                                    |                |                             |
| DUTY CYCLE             | N/A                                                                                                                                                                                                                                                                       |                |                             |
| DECISION RULE          | Decision rule support document:<br><input type="checkbox"/> Data obtained<br><input type="checkbox"/> Video<br><input type="checkbox"/> Email conversation<br><input type="checkbox"/> inherent in the requested specification standard<br><input type="checkbox"/> other |                |                             |
| RESULTS:               | PASS                                                                                                                                                                                                                                                                      |                |                             |

**Table 6.8.2 – Number of Hopping Channels Summary**

| Mode  | Number of Hopping (Channels) | Figure Reference | Limits (Channels) | PASS/FAIL |
|-------|------------------------------|------------------|-------------------|-----------|
| GFSK  | 79                           | 6.8.1a           | > =15             | PASS      |
| QPSK  | 20+20+20+19=79               | 6.8.2a-6.8.2d    | >=15              | PASS      |
| 8-PSK | 20+20+20+19=79               | 6.8.3a-6.8.3d    | >=15              | PASS      |

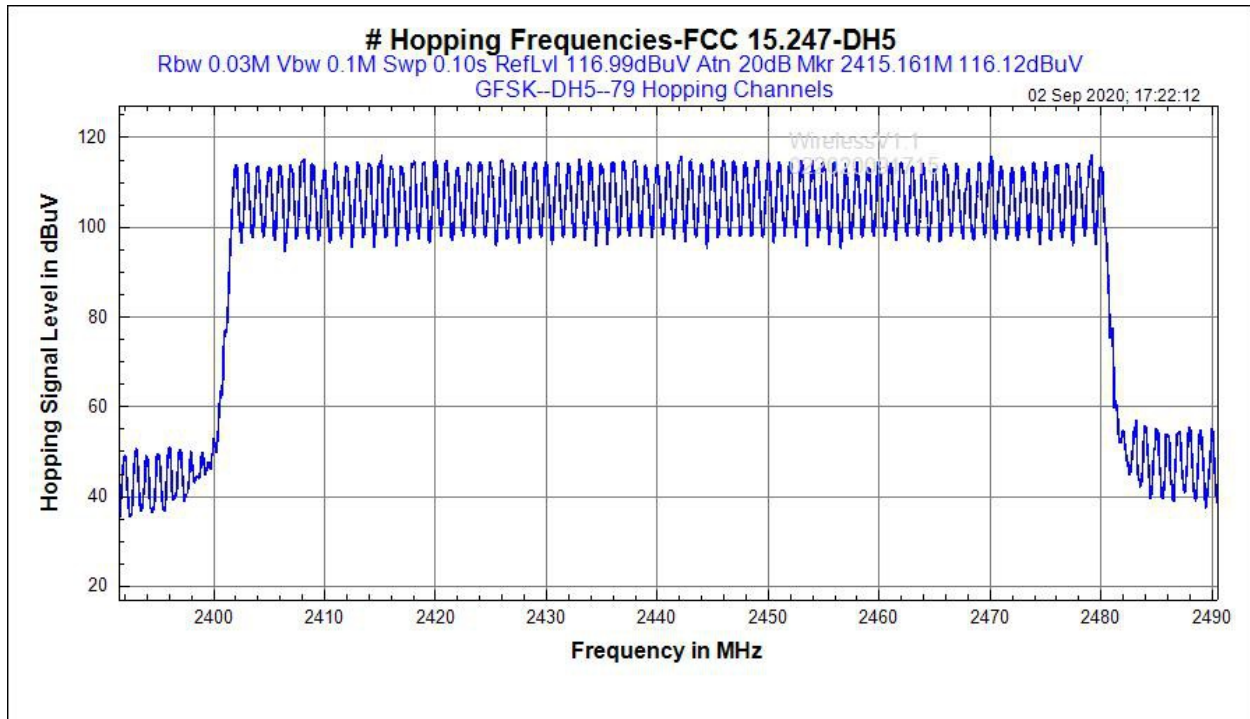


Figure 6.8.1a – Number of hopping channel, GFSK

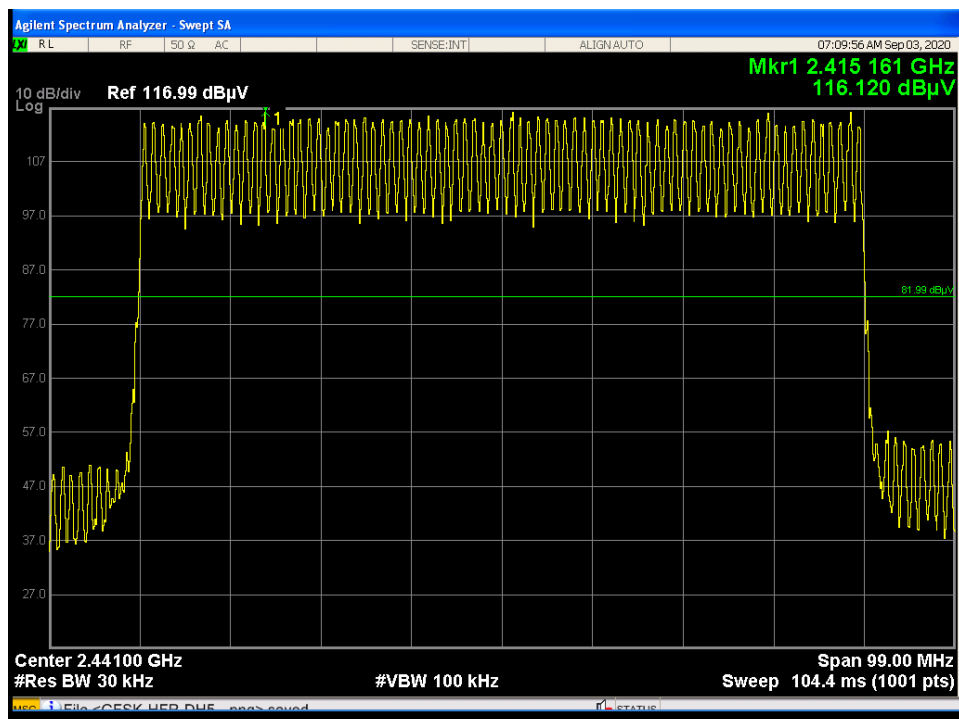


Figure 6.8.1a – Number of hopping channel, GFSK

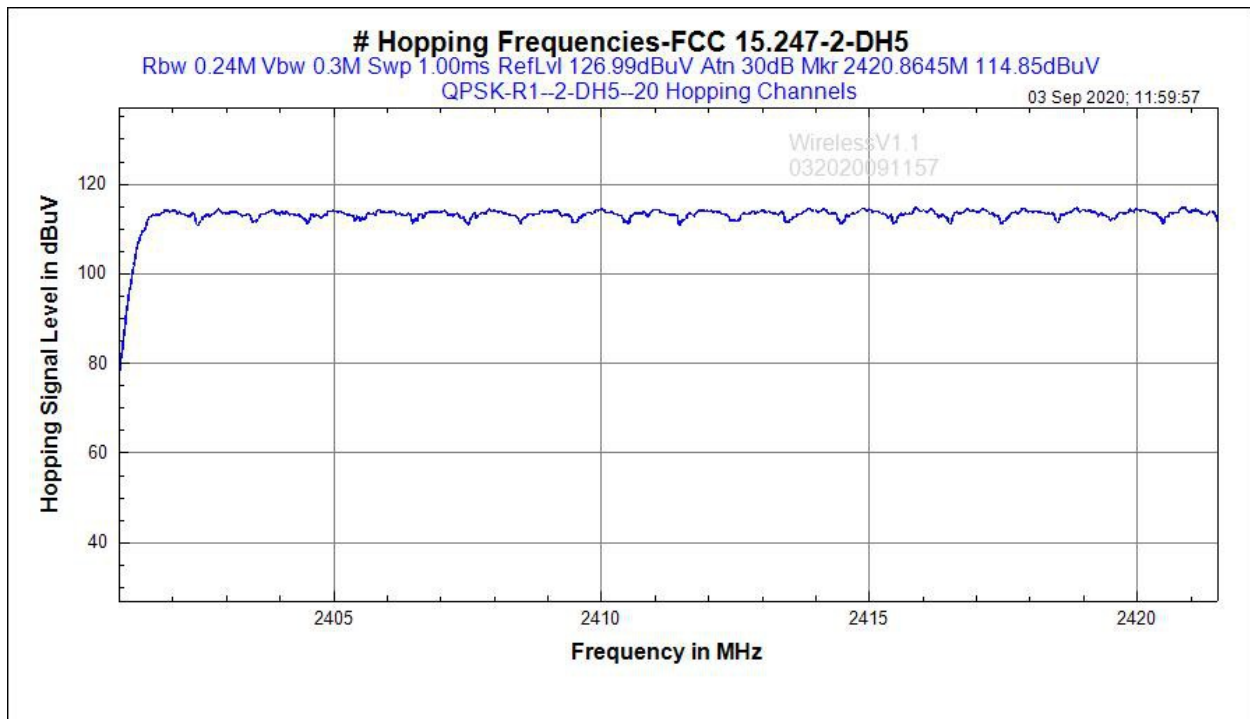


Figure 6.8.2a – Number of hopping, QPSK

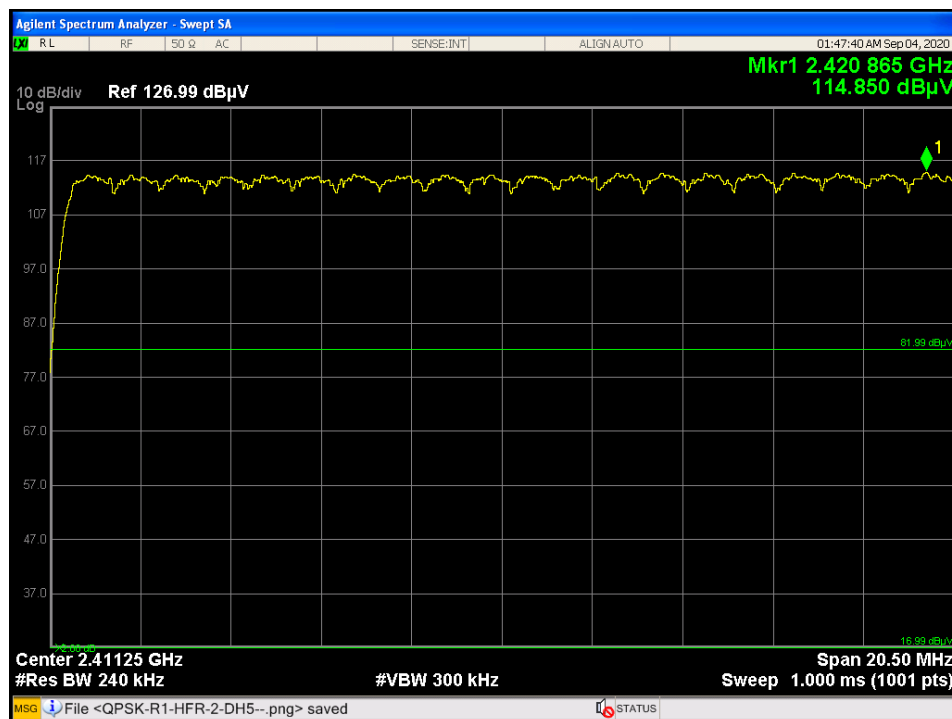


Figure 6.8.2a – Number of hopping, QPSK

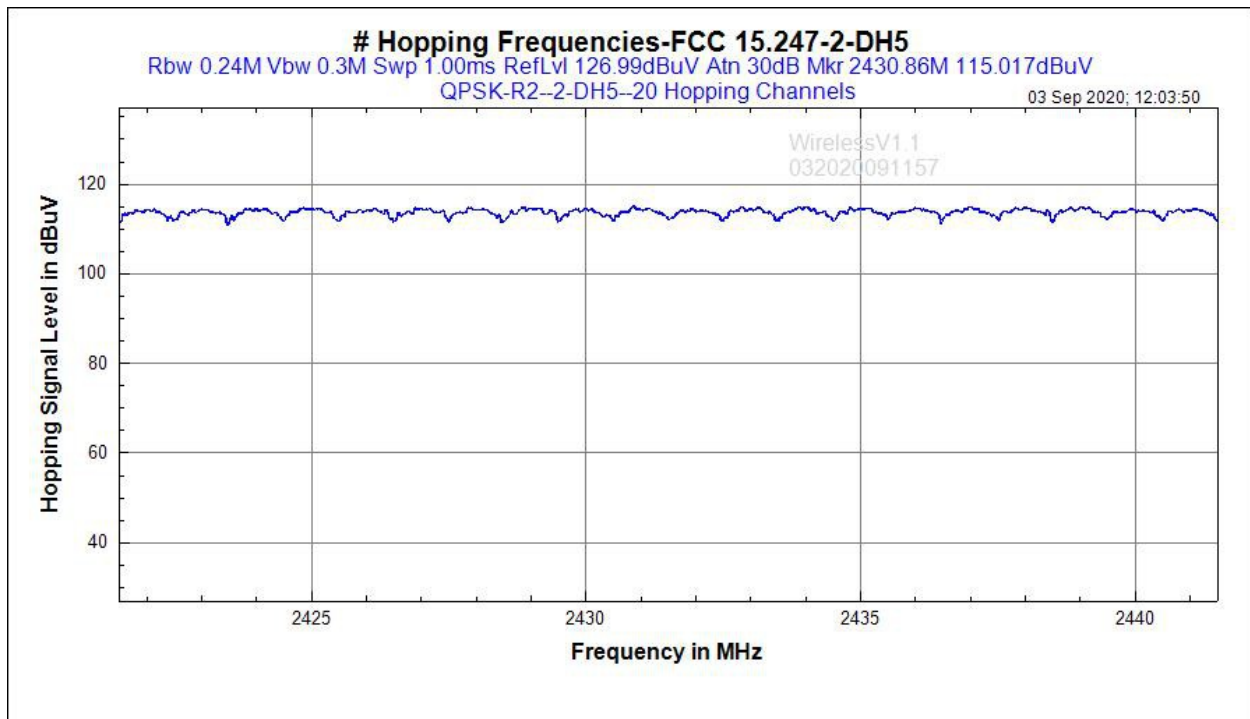


Figure 6.8.2b – Number of hopping, QPSK

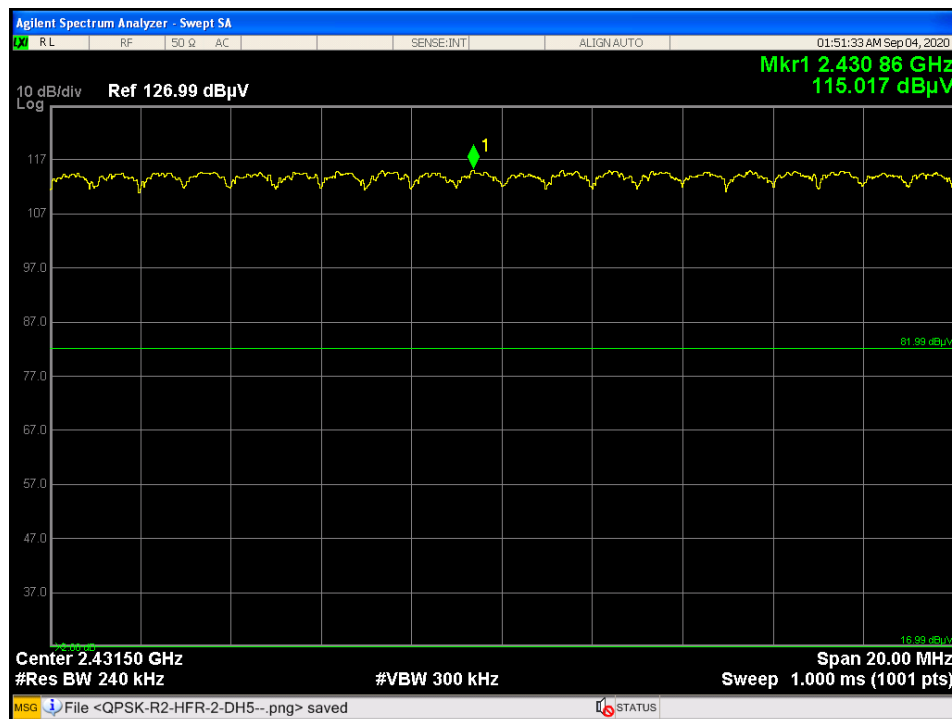


Figure 6.8.2b – Number of hopping, QPSK

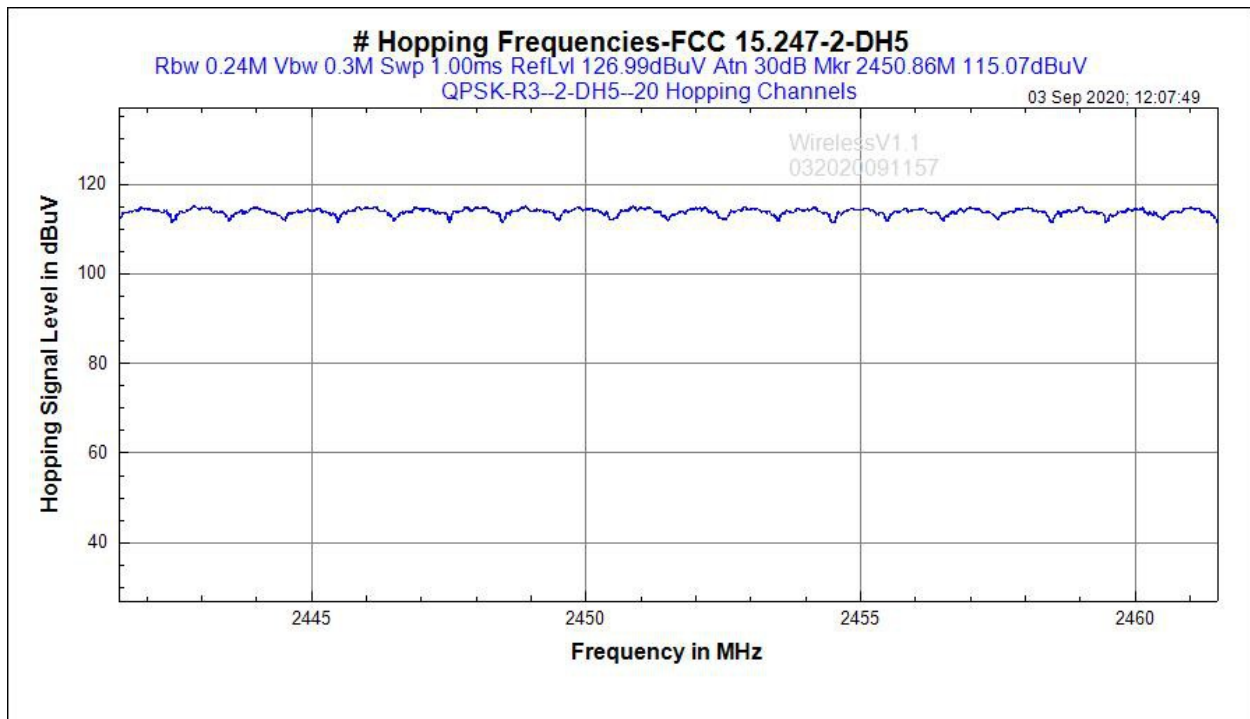


Figure 6.8.2c – Number of hopping, QPSK

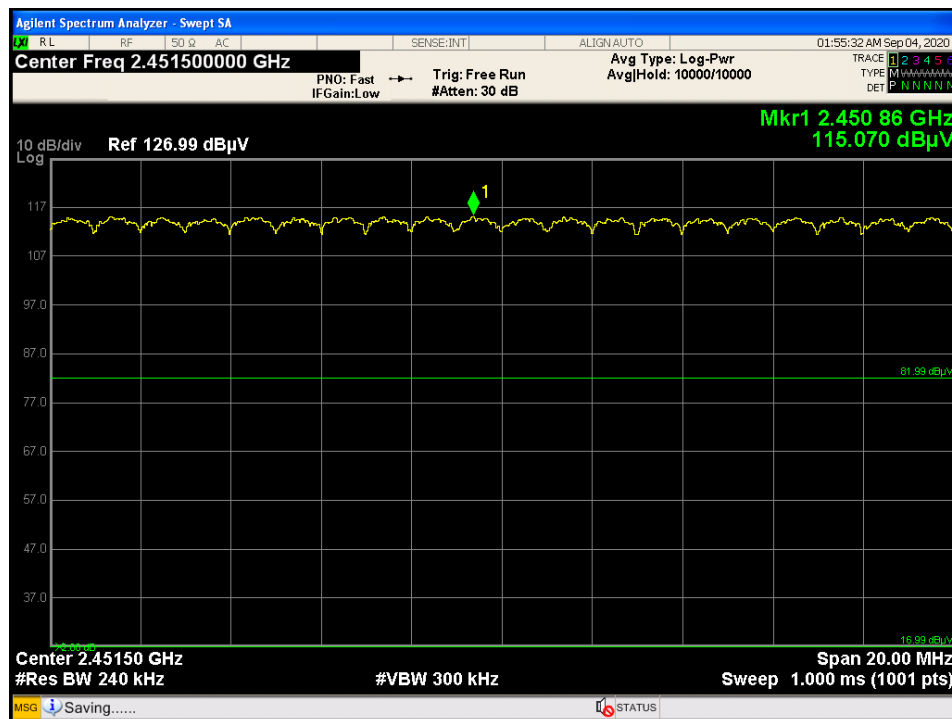


Figure 6.8.2c – Number of hopping, QPSK

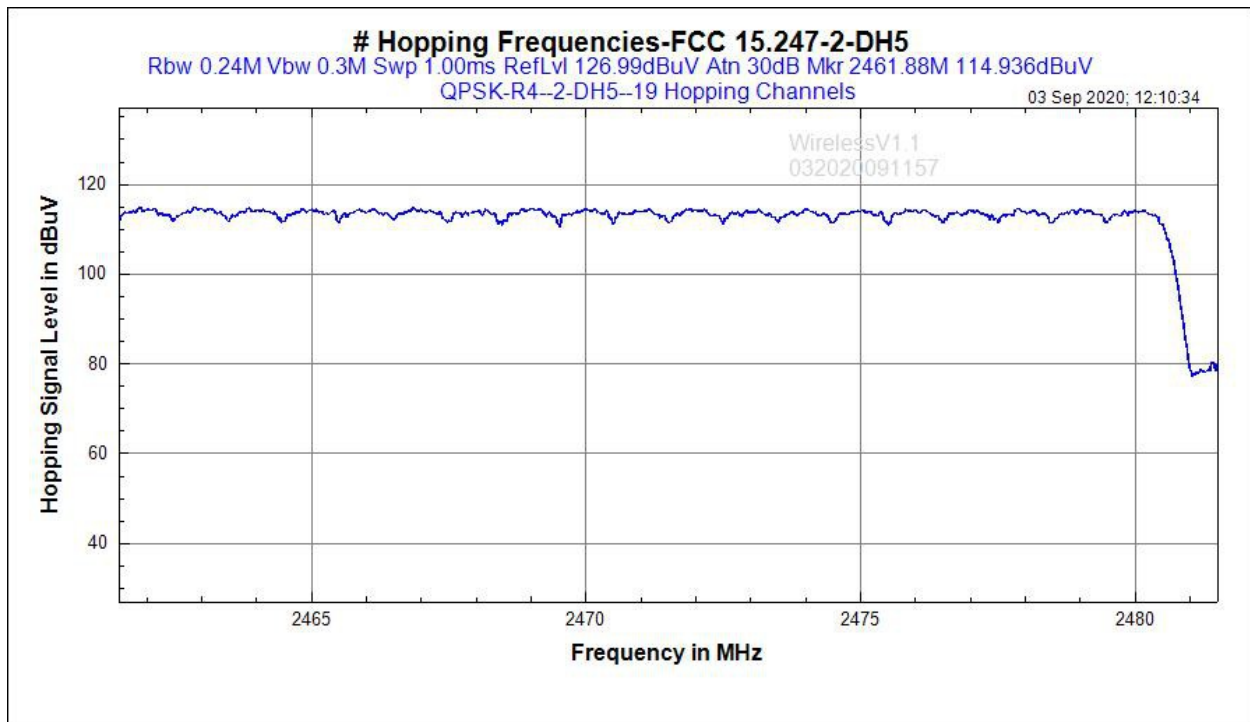


Figure 6.8.2d – Number of hopping, QPSK

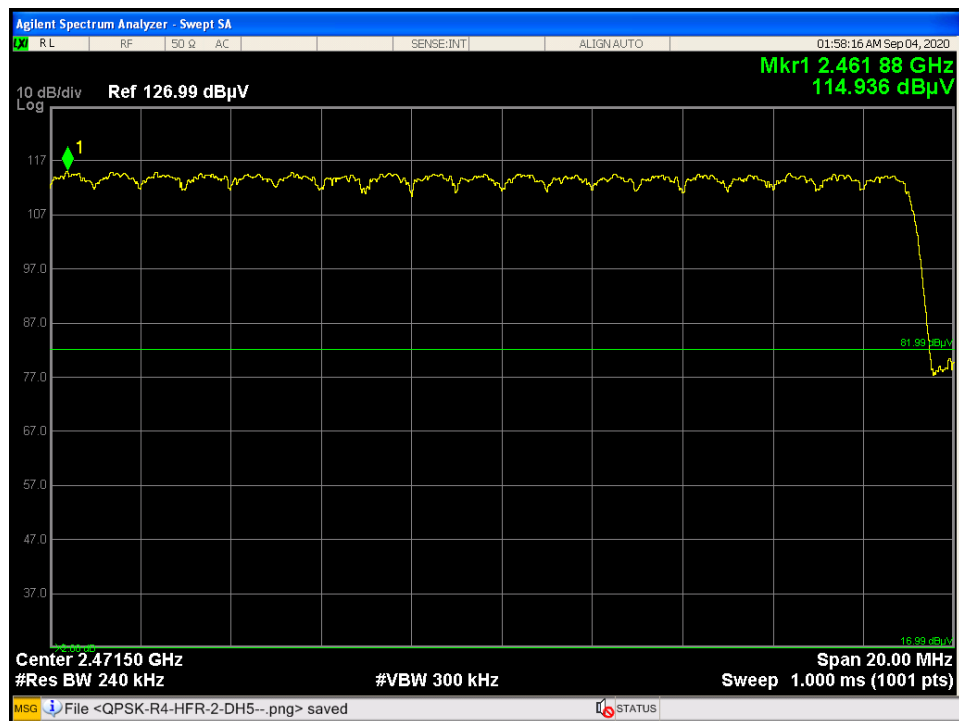


Figure 6.8.2d – Number of hopping, QPSK

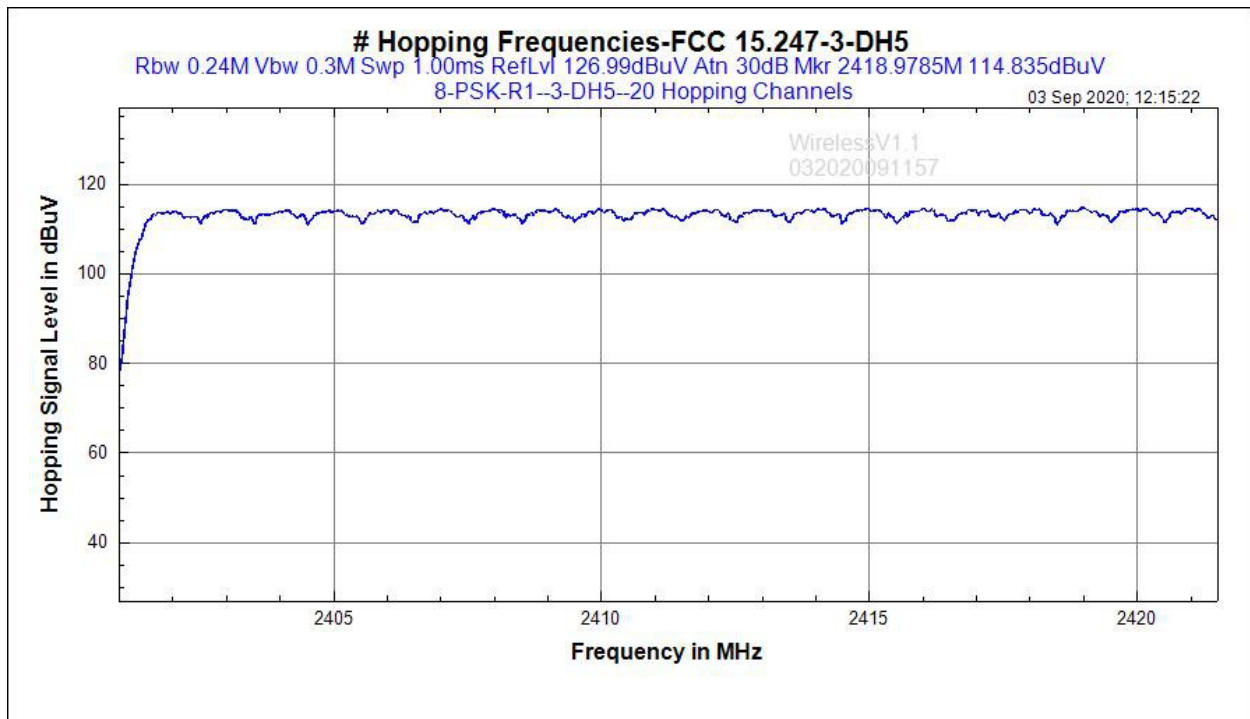


Figure 6.8.3a – Number of hopping, 8-PSK

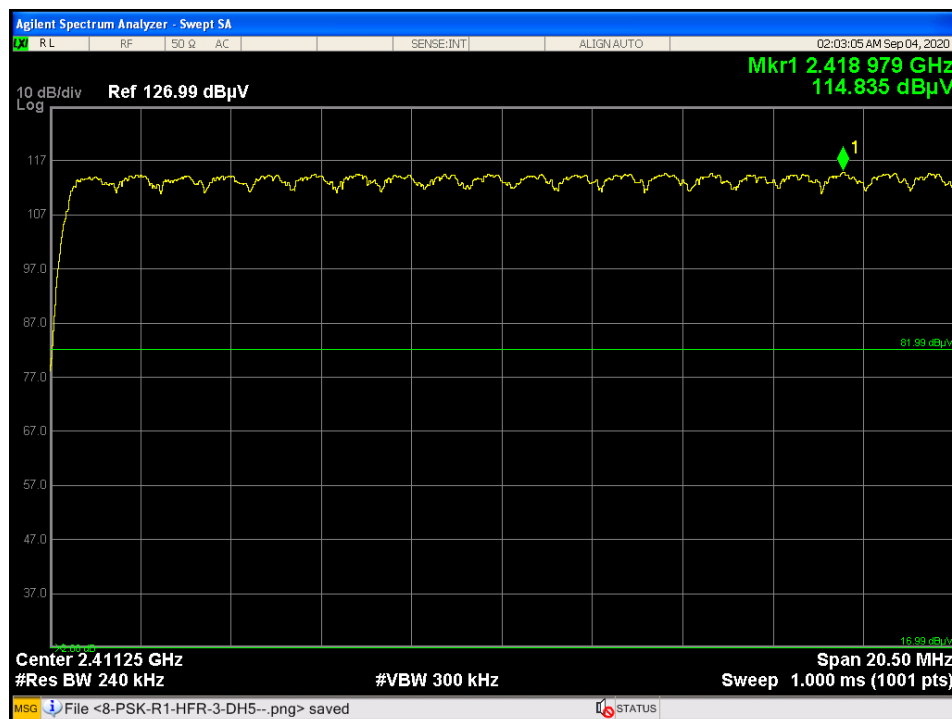


Figure 6.8.3a – Number of hopping, 8-PSK

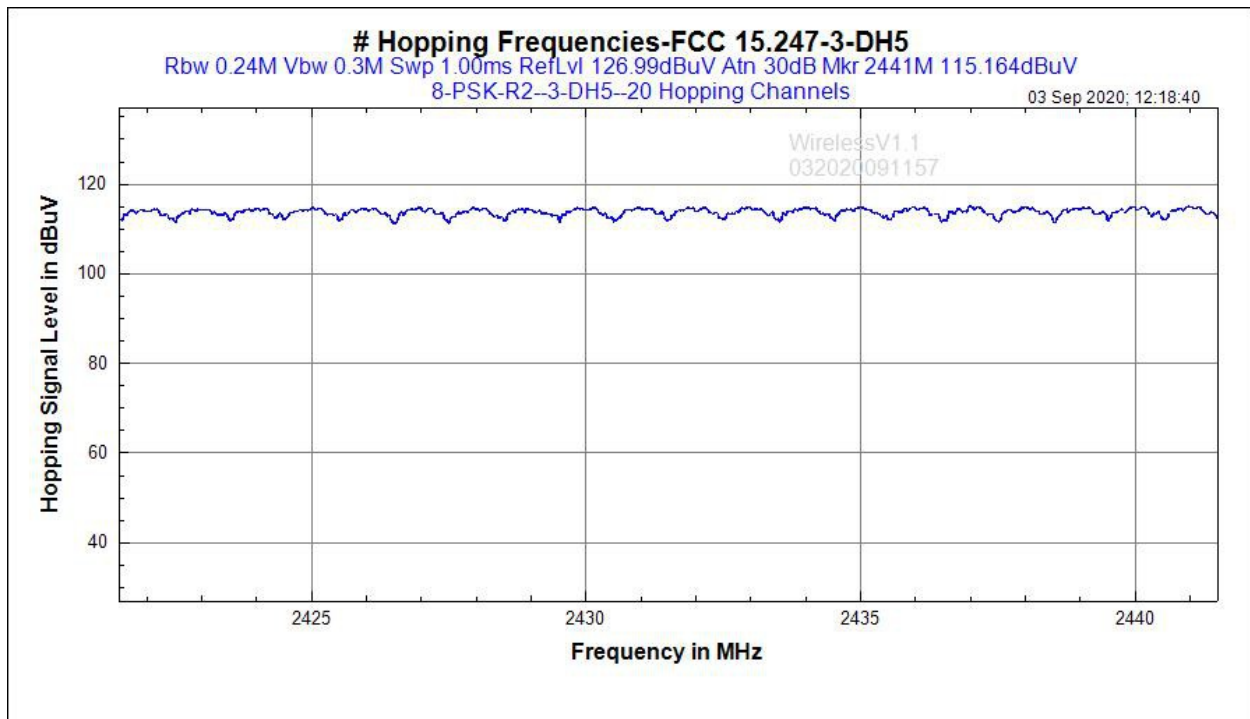


Figure 6.8.3b – Number of hopping, 8-PSK

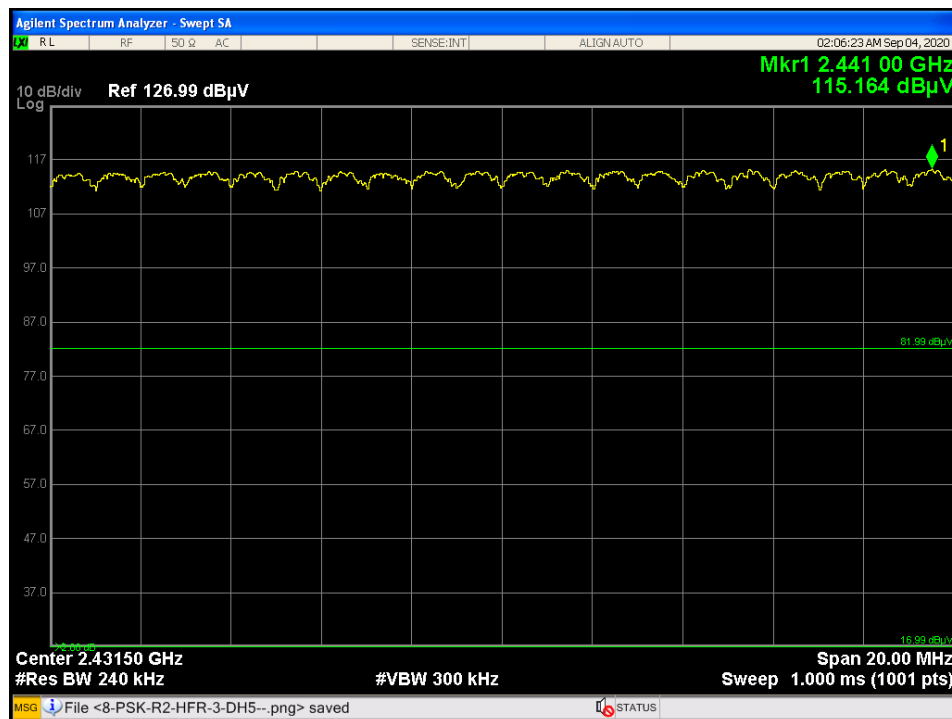


Figure 6.8.3b – Number of hopping, 8-PSK

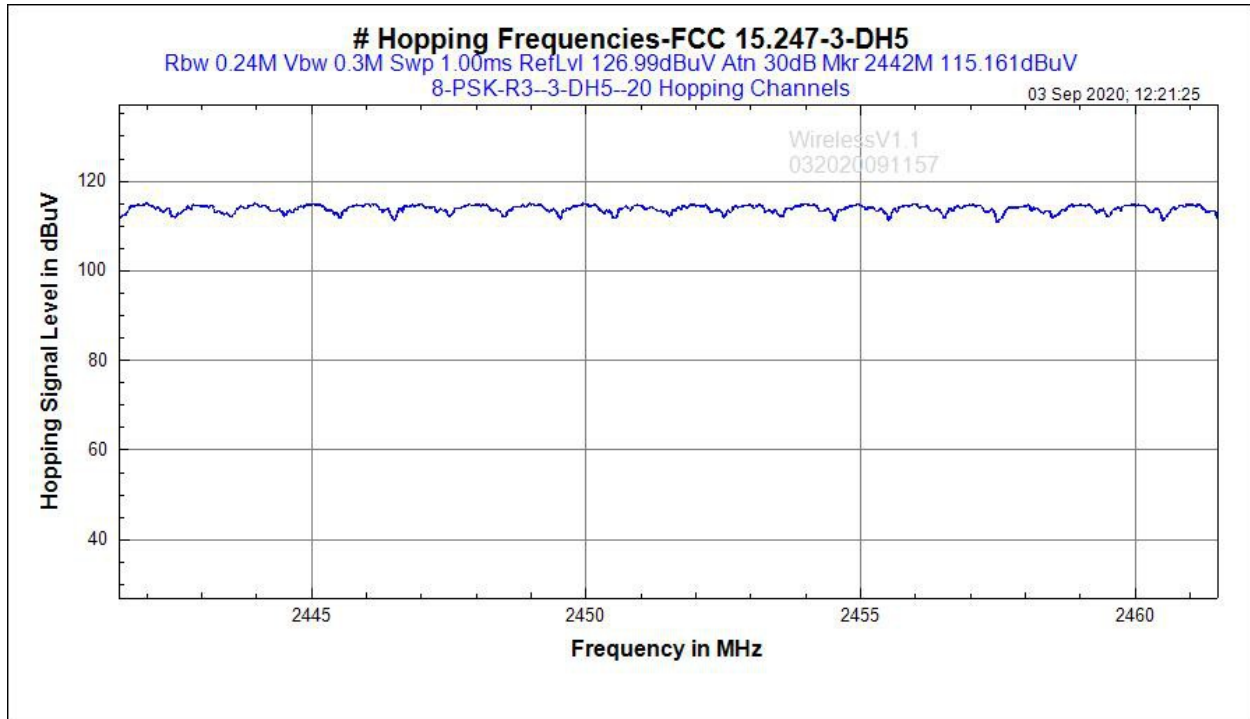


Figure 6.8.3c – Number of hopping, 8-PSK

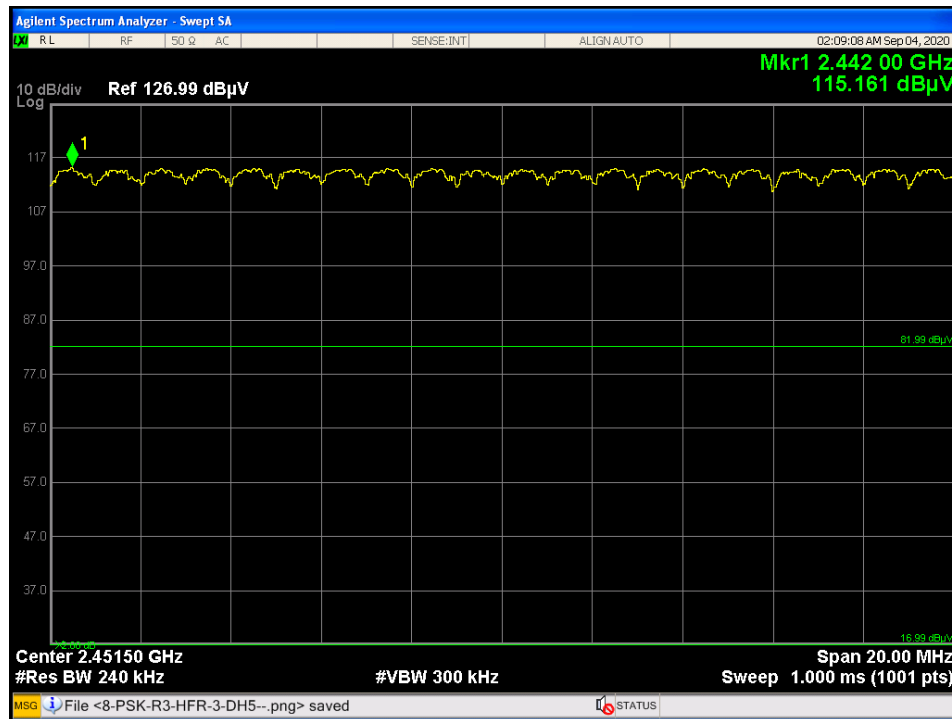


Figure 6.8.3c – Number of hopping, 8-PSK

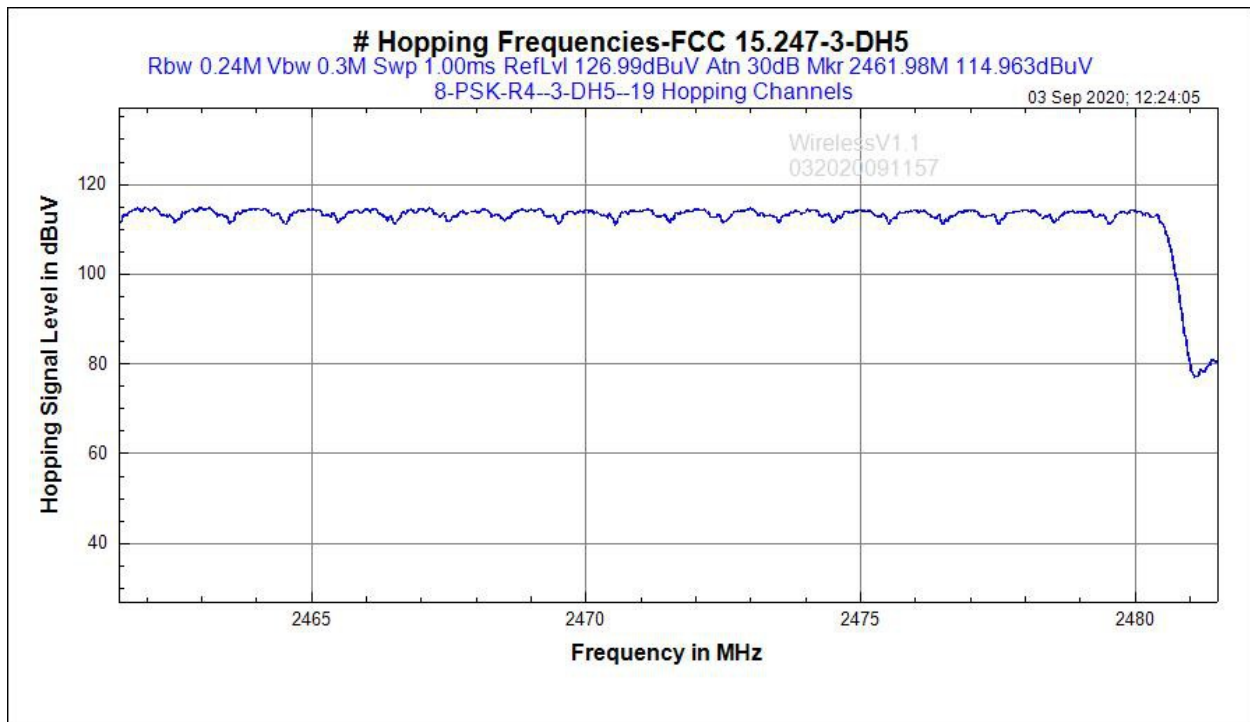


Figure 6.8.3d – Number of hopping, 8-PSK

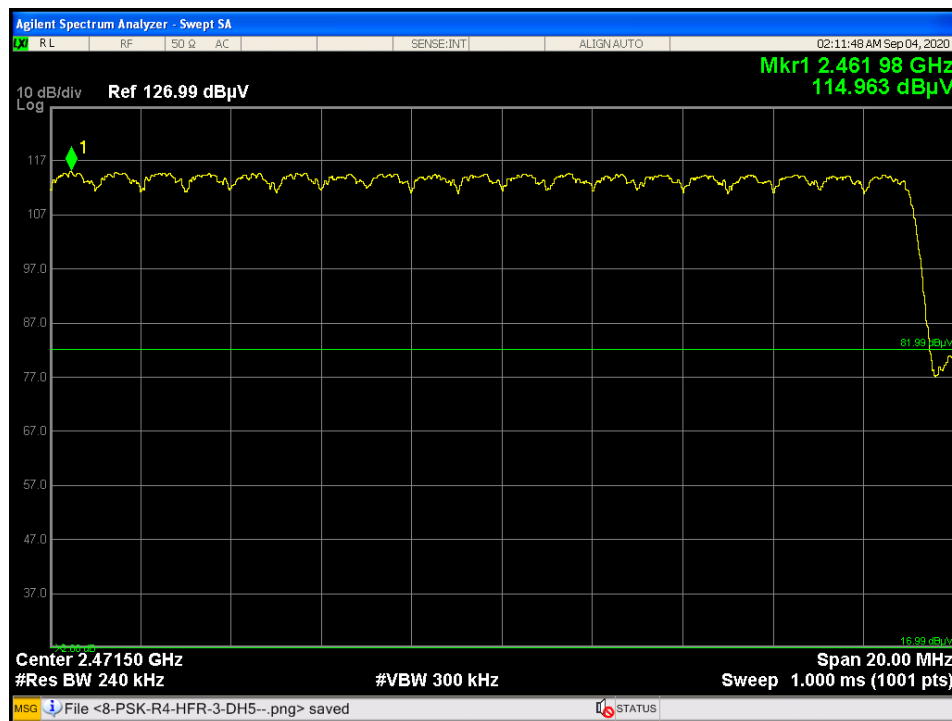


Figure 6.8.3d – Number of hopping, 8-PSK



## 6.9 Dwell Time and Time Occupancy Per Frequency

☐ Applicable**Table 6.9.1 – Dwell time and Time Occupancy Per Frequency Test Setup Information**

|                        |                                                                                                                                                                                                                                                                           |                |                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------------|
| CLIENT:                | Blackline Safety                                                                                                                                                                                                                                                          | TEST STANDARD: | FCC 15.247, RSS-247 Issue 2 |
| MODEL NUMBER:          | G7EXO-NA2,G7EXO-AZ2                                                                                                                                                                                                                                                       | PRODUCT:       |                             |
| SERIAL NUMBER:         | 3588000037                                                                                                                                                                                                                                                                | CLASS:         |                             |
| TEMPERATURE:           | 22°C                                                                                                                                                                                                                                                                      | HUMIDITY:      | 34%                         |
| TESTED BY:             | Adishesu Nyshadham                                                                                                                                                                                                                                                        | DATE OF TEST:  | 2020-09-05                  |
| TEST REFERENCE:        | FCC Title 47 CFR Part 15: Subpart C-15.247(a)(1)(iii), RSS-247-Issue 2                                                                                                                                                                                                    |                |                             |
| TEST VOLTAGE:          | 3.4V                                                                                                                                                                                                                                                                      |                |                             |
| SETUP:                 | As per ANSI C63.10:2013, sec 7.8.4                                                                                                                                                                                                                                        |                |                             |
| FREQUENCY RANGE        | 2400-2483.5 MHz                                                                                                                                                                                                                                                           |                |                             |
| FREQUENCY TESTED:      | 2402 MHz, 2441 MHz, 2480 MHz                                                                                                                                                                                                                                              |                |                             |
| FIRMWARE POWER SETTING | 11 dBm                                                                                                                                                                                                                                                                    |                |                             |
| EUT FIRMWARE           | 3.442S3_EXO                                                                                                                                                                                                                                                               |                |                             |
| MODULATION/DATA RATE   | GFSK, DH1,<br>QPSK, DH2<br>8-PSK, DH3                                                                                                                                                                                                                                     |                |                             |
| ANTENNA TYPE/GAIN      | Ceramic Chip Antenna, 2.2dBi(peak), 1.9dBi(Band edges)                                                                                                                                                                                                                    |                |                             |
| DUTY CYCLE             | N/A                                                                                                                                                                                                                                                                       |                |                             |
| DECISION RULE          | Decision rule support document:<br><input type="checkbox"/> Data obtained<br><input type="checkbox"/> Video<br><input type="checkbox"/> Email conversation<br><input type="checkbox"/> inherent in the requested specification standard<br><input type="checkbox"/> other |                |                             |
| RESULTS:               | PASS                                                                                                                                                                                                                                                                      |                |                             |

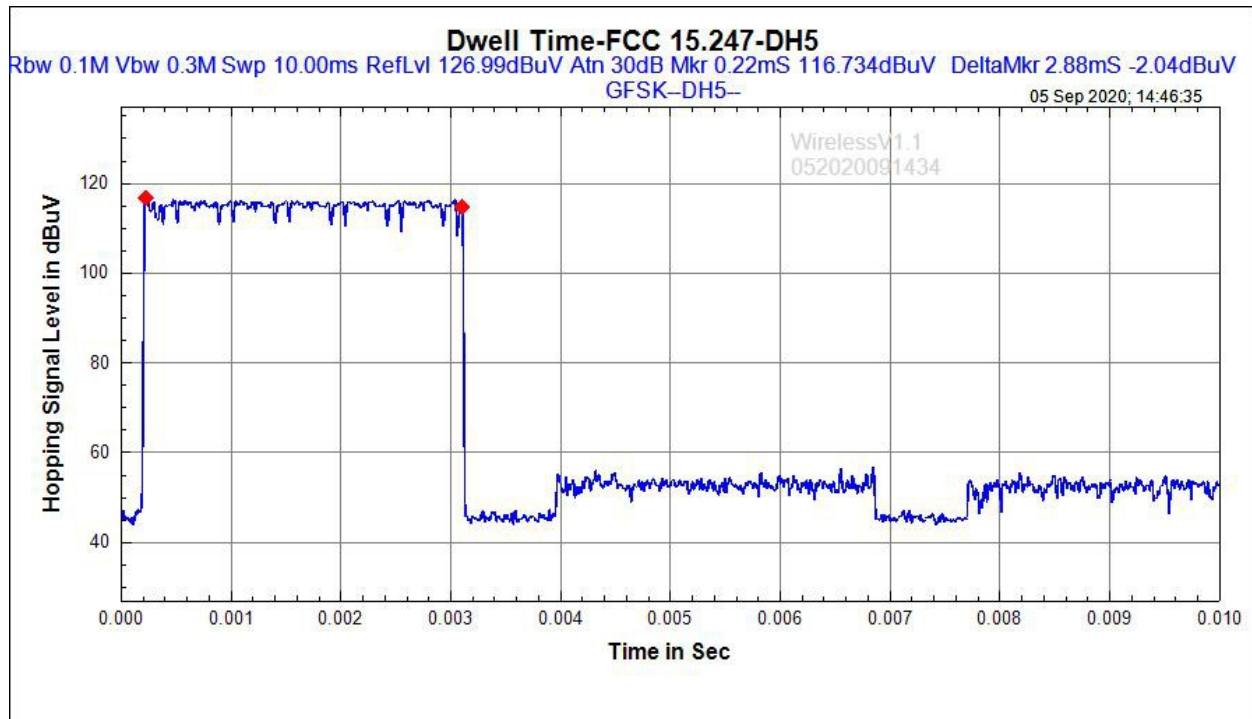


Figure 6.9.1a: Dwell Time and Time Occupancy Per Frequency(GFSK) is 288 mS

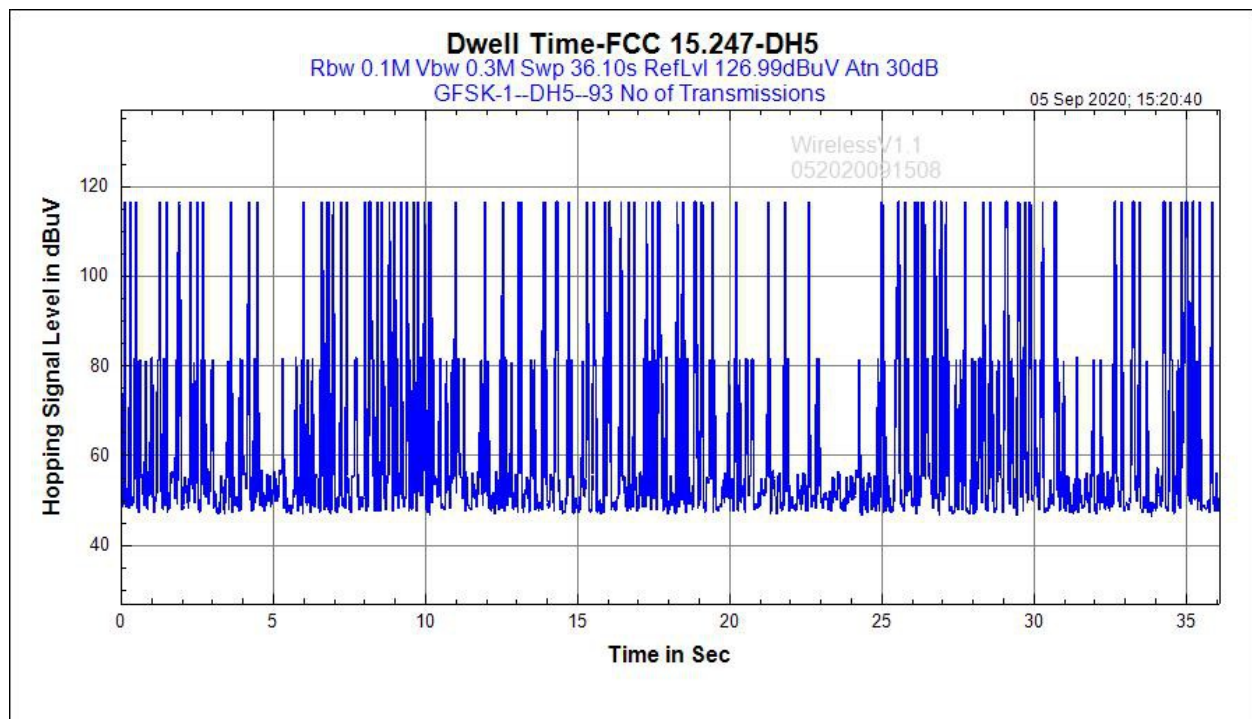


Figure 6.9.1b.: Pulse numbers in 36.1 seconds: 93 (GFSK)

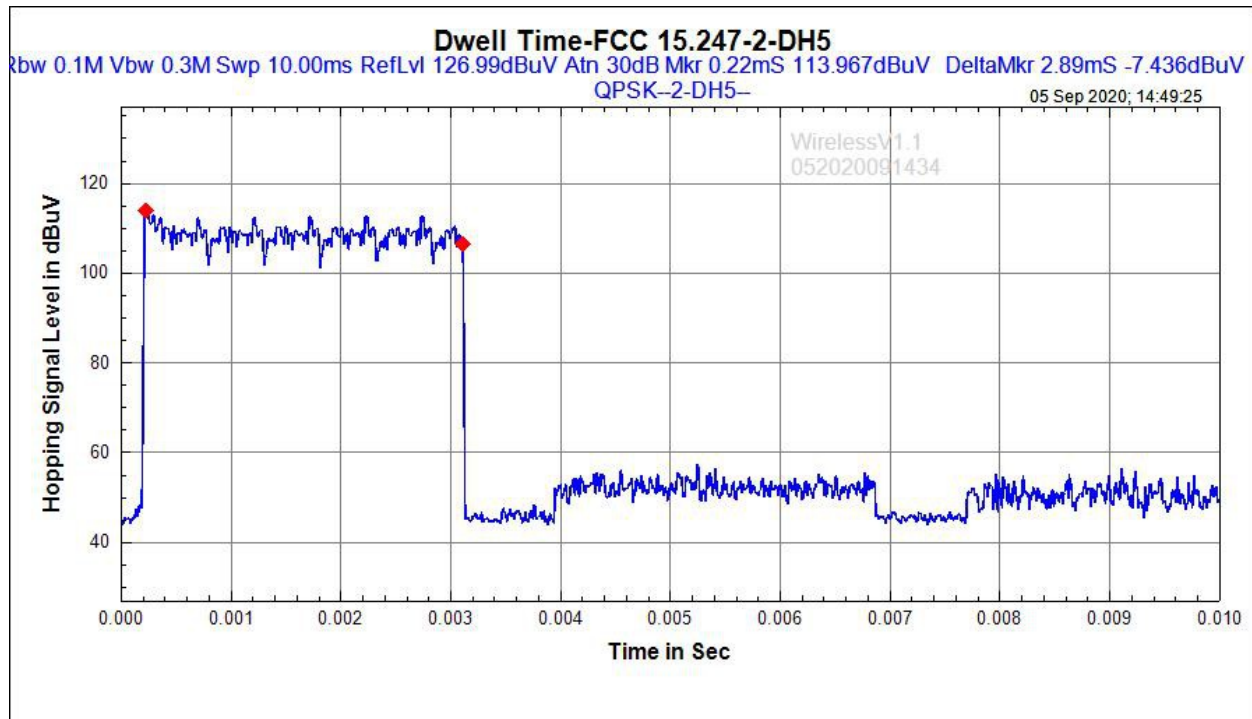


Figure 6.9.2a.: Dwell Time and Time Occupancy Per Frequency(QPSK) is 289 mS

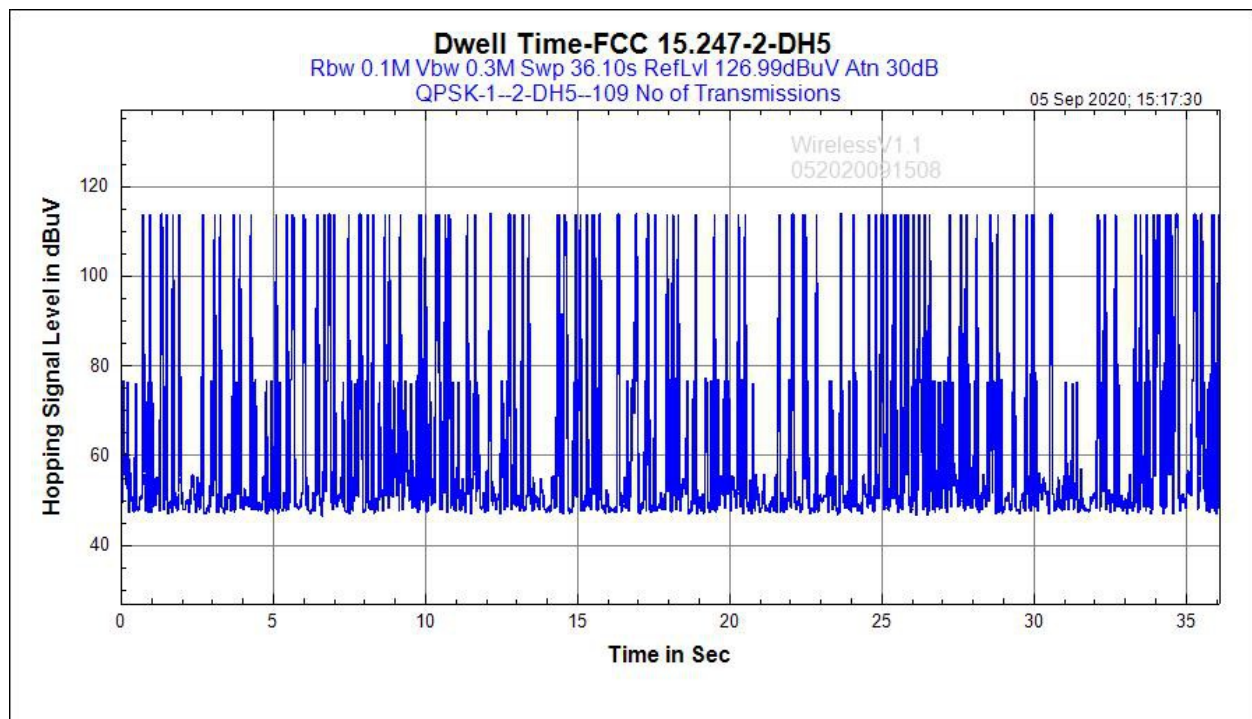


Figure 6.9.2b.: Pulse numbers in 36.1 seconds: 109 (QPSK)

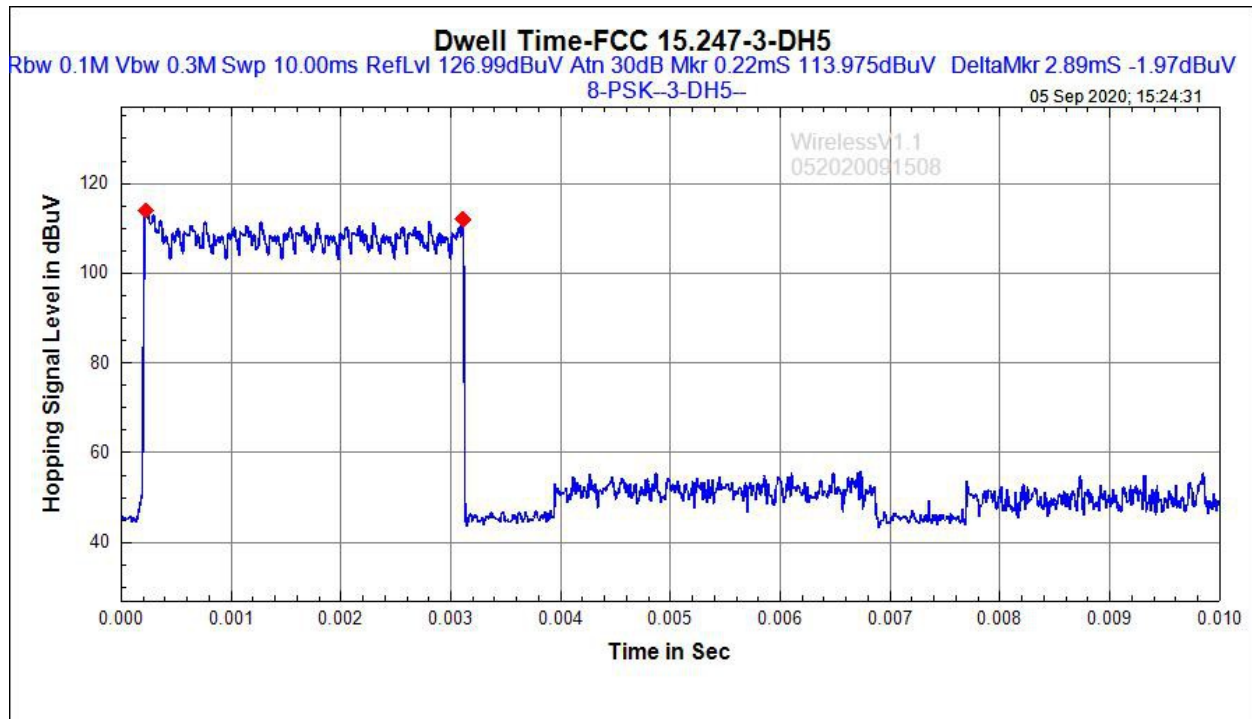


Figure 6.9.3a: Dwell Time and Time Occupancy Per Frequency(8-PSK) is 289 mS

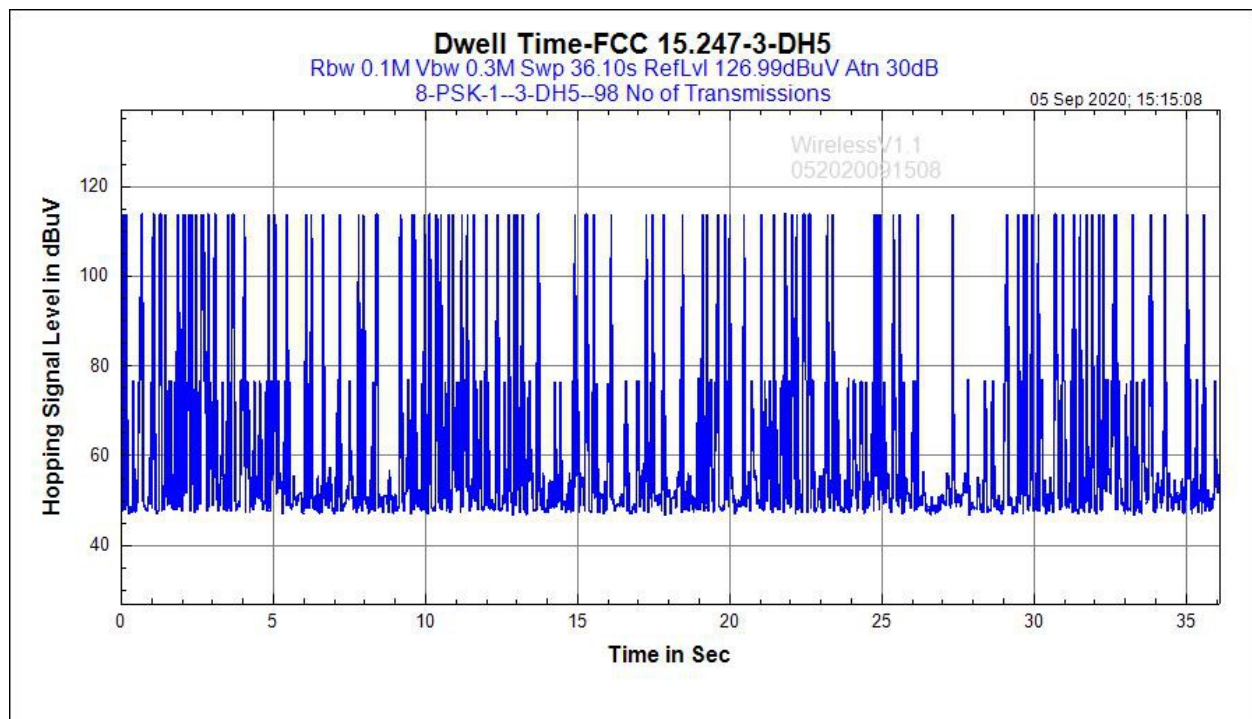


Figure 6.9.3b.: Pulse numbers in 36.1 seconds: 98 (8-PSK)

**6.10 Unintentional Radiated Emissions**☐ Applicable**Table 6.10.1 – Unintentional Radiated Emissions Test Setup Information**

|                        |                                                                                                                                                                                                                                                                           |                |                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------------|
| CLIENT:                | Blackline Safety                                                                                                                                                                                                                                                          | TEST STANDARD: | FCC 15.247, RSS-247 Issue 2 |
| MODEL NUMBER:          | G7EXO-NA2,G7EXO-AZ2                                                                                                                                                                                                                                                       | PRODUCT:       |                             |
| SERIAL NUMBER:         | 3588000037                                                                                                                                                                                                                                                                | CLASS:         |                             |
| TEMPERATURE:           | 27°C                                                                                                                                                                                                                                                                      | HUMIDITY:      | 36%                         |
| TESTED BY:             | Jecheon Yun                                                                                                                                                                                                                                                               | DATE OF TEST:  | 2020-08-10                  |
| TEST REFERENCE:        | FCC Title 47 CFR Part 15: Subpart B -15.109, ICES-003 Issue 6                                                                                                                                                                                                             |                |                             |
| TEST VOLTAGE:          | 120VAC, Range xxx                                                                                                                                                                                                                                                         |                |                             |
| SETUP:                 | As per ANSI C63.4:2014                                                                                                                                                                                                                                                    |                |                             |
| FREQUENCY RANGE        | 30MHz to 2000MHz                                                                                                                                                                                                                                                          |                |                             |
| FREQUENCY TESTED:      | Digital Emissions                                                                                                                                                                                                                                                         |                |                             |
| FIRMWARE POWER SETTING |                                                                                                                                                                                                                                                                           |                |                             |
| EUT FIRMWARE           | 3.442S3_EXO                                                                                                                                                                                                                                                               |                |                             |
| MODULATION/DATA RATE   |                                                                                                                                                                                                                                                                           |                |                             |
| ANTENNA TYPE/GAIN      |                                                                                                                                                                                                                                                                           |                |                             |
| DUTY CYCLE             |                                                                                                                                                                                                                                                                           |                |                             |
| DECISION RULE          | Decision rule support document:<br><input type="checkbox"/> Data obtained<br><input type="checkbox"/> Video<br><input type="checkbox"/> Email conversation<br><input type="checkbox"/> inherent in the requested specification standard<br><input type="checkbox"/> other |                |                             |
| RESULTS:               | PASS                                                                                                                                                                                                                                                                      |                |                             |

**Table 6.10.2a - Radiated Emission - Horizontal Polarization Quasi-peak**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height(cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | FCC Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|--------------------|-------------------------|------------------------|----------------------------|--------------------|-------------|
| 111.2248        | 163.3               | 308                | -0.84                   | 15.12                  | 14.28                      | 43.52              | -29.24      |
| 113.4415        | 169.1               | 290.2              | -0.99                   | 14.86                  | 13.87                      | 43.52              | -29.65      |
| 141.052         | 16.5                | 225                | 7.03                    | 14.76                  | 21.79                      | 43.52              | -21.73      |
| 464.0173        | 335                 | 109.5              | 1.28                    | 25.29                  | 26.57                      | 46.02              | -19.45      |
| 501.5475        | 59.6                | 200.1              | -5.1                    | 26.21                  | 21.11                      | 46.02              | -24.91      |
| 947.9028        | 245                 | 112.4              | -4.53                   | 33.4                   | 28.87                      | 46.02              | -17.15      |

**Table 6. 10.2b - Radiated Emission - Vertical Polarization Quasi-peak**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height(cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | FCC Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|--------------------|-------------------------|------------------------|----------------------------|--------------------|-------------|
| 38.1318         | 90                  | 100.2              | 6.62                    | 18.46                  | 25.08                      | 40                 | -14.92      |
| 114.7865        | 6.4                 | 100.4              | 0.84                    | 14.79                  | 15.63                      | 43.52              | -27.89      |
| 198.184         | 246.6               | 100.1              | 0.8                     | 17.04                  | 17.84                      | 43.52              | -25.68      |
| 396.865         | 172.1               | 285.3              | -3.77                   | 24.6                   | 20.83                      | 46.02              | -25.19      |
| 479.612         | 141.6               | 387.9              | -4.16                   | 25.16                  | 21                         | 46.02              | -25.02      |
| 949.4718        | 123.7               | 112.9              | -4.4                    | 33.28                  | 28.88                      | 46.02              | -17.14      |

**Table 6. 10.3a - Radiated Emission - Horizontal Polarization Quasi-peak ICES-003**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | ICES-003 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|-------------------------|-------------|
| 111.2248        | 163.3               | 308                 | -0.84                   | 15.12                  | 14.28                      | 43.5                    | -29.22      |
| 113.4415        | 169.1               | 290.2               | -0.99                   | 14.86                  | 13.87                      | 43.5                    | -29.63      |
| 141.052         | 16.5                | 225                 | 7.03                    | 14.76                  | 21.79                      | 43.5                    | -21.71      |
| 464.0173        | 335                 | 109.5               | 1.28                    | 25.29                  | 26.57                      | 46                      | -19.43      |
| 501.5475        | 59.6                | 200.1               | -5.1                    | 26.21                  | 21.11                      | 46                      | -24.89      |
| 947.9028        | 245                 | 112.4               | -4.53                   | 33.4                   | 28.87                      | 46                      | -17.13      |

**Table 6. 10.3b- Radiated Emission - Vertical Polarization Quasi-peak ICES-003**

| Frequency (MHz) | Azimuth Angle (deg) | Antenna Height (cm) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV/m) | ICES-003 Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|-------------------------|------------------------|----------------------------|-------------------------|-------------|
| 38.1318         | 90                  | 100.2               | 6.62                    | 18.46                  | 25.08                      | 40                      | -14.92      |
| 114.7865        | 6.4                 | 100.4               | 0.84                    | 14.79                  | 15.63                      | 43.5                    | -27.87      |
| 198.184         | 246.6               | 100.1               | 0.8                     | 17.04                  | 17.84                      | 43.5                    | -25.66      |
| 396.865         | 172.1               | 285.3               | -3.77                   | 24.6                   | 20.83                      | 46                      | -25.17      |
| 479.612         | 141.6               | 387.9               | -4.16                   | 25.16                  | 21                         | 46                      | -25         |
| 949.4718        | 123.7               | 112.9               | -4.4                    | 33.28                  | 28.88                      | 46                      | -17.12      |

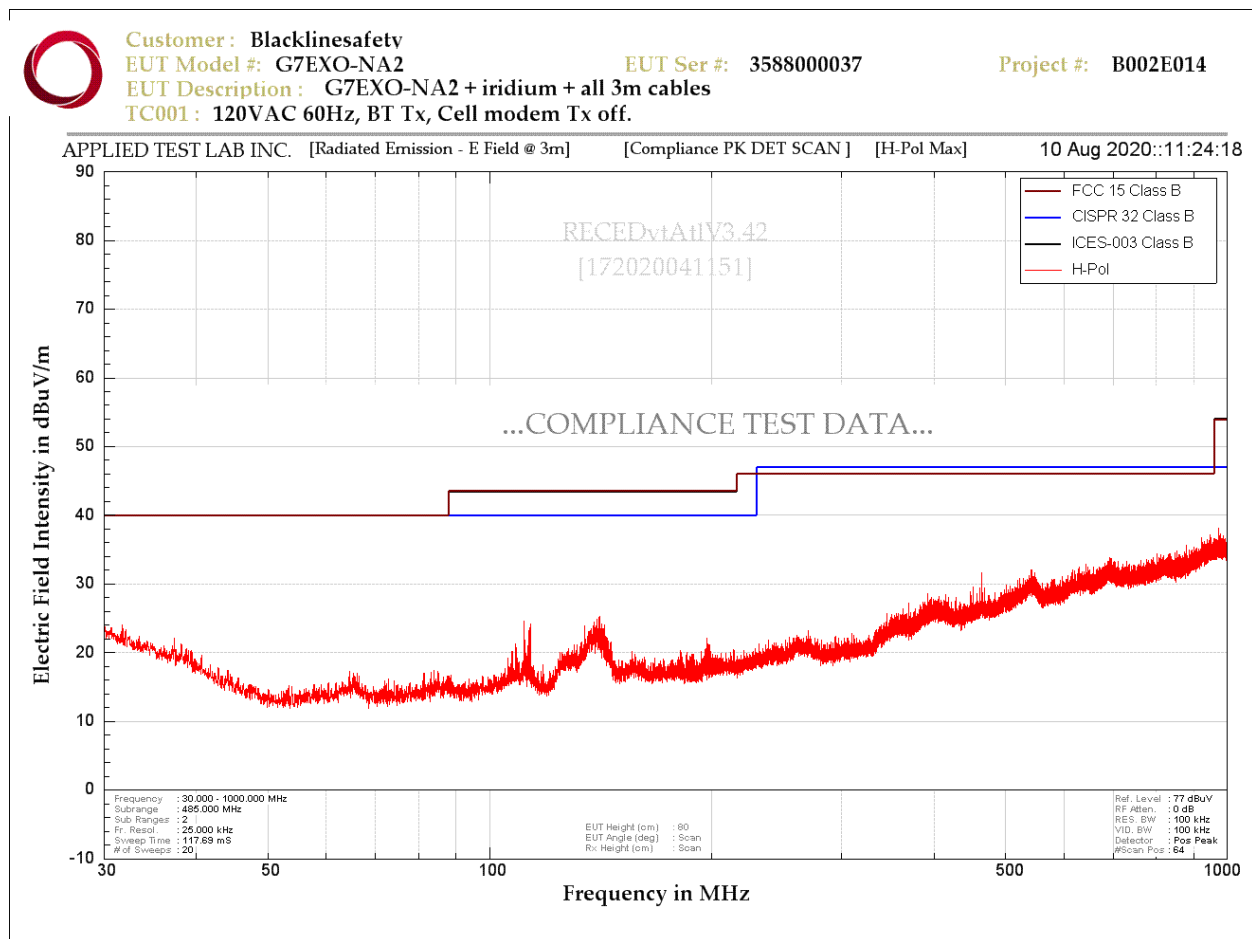


Figure 6.10.1a - Radiated Emission (FCC and ICES-003) - Scan Horizontal Polarization (30MHz - 1000MHz)

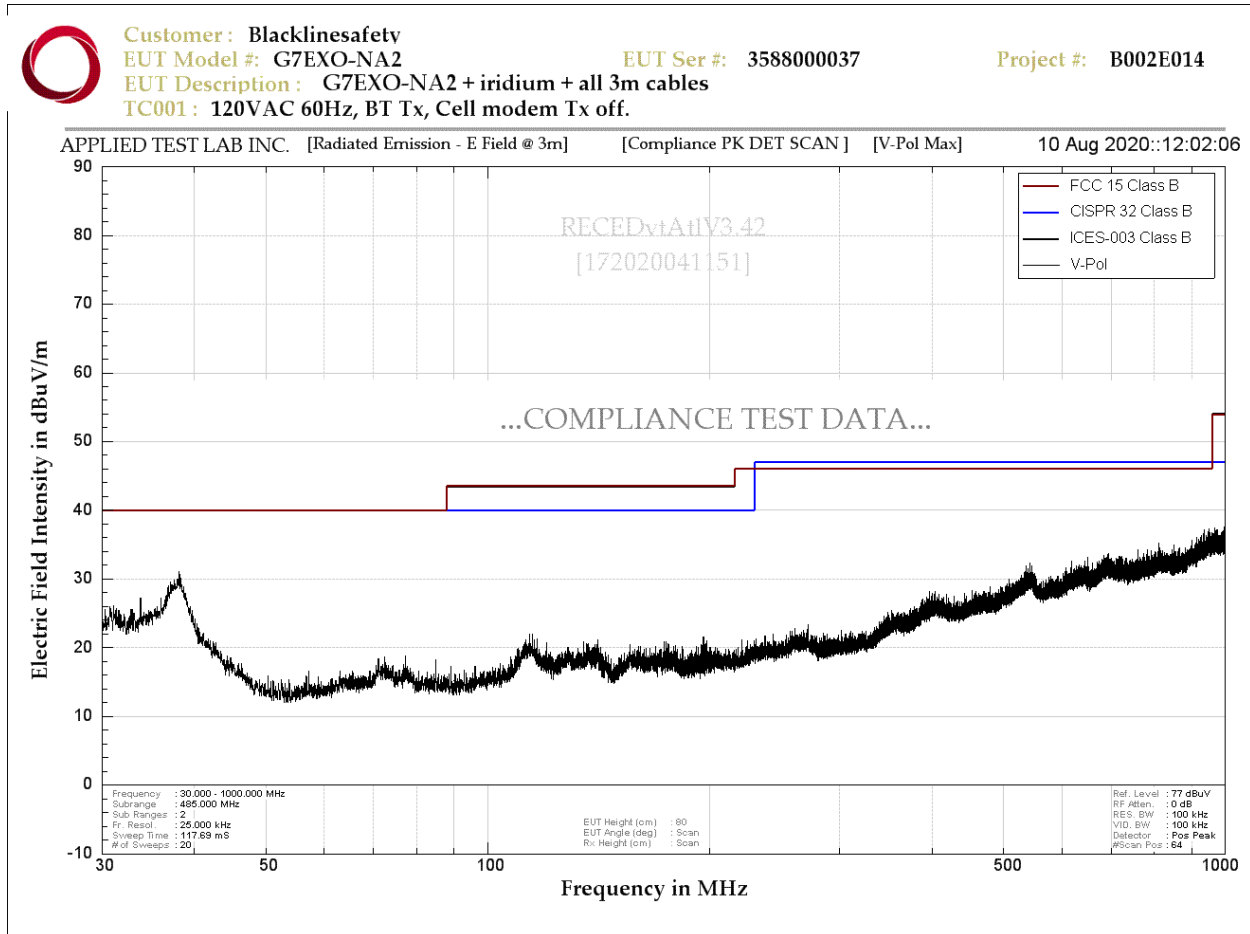
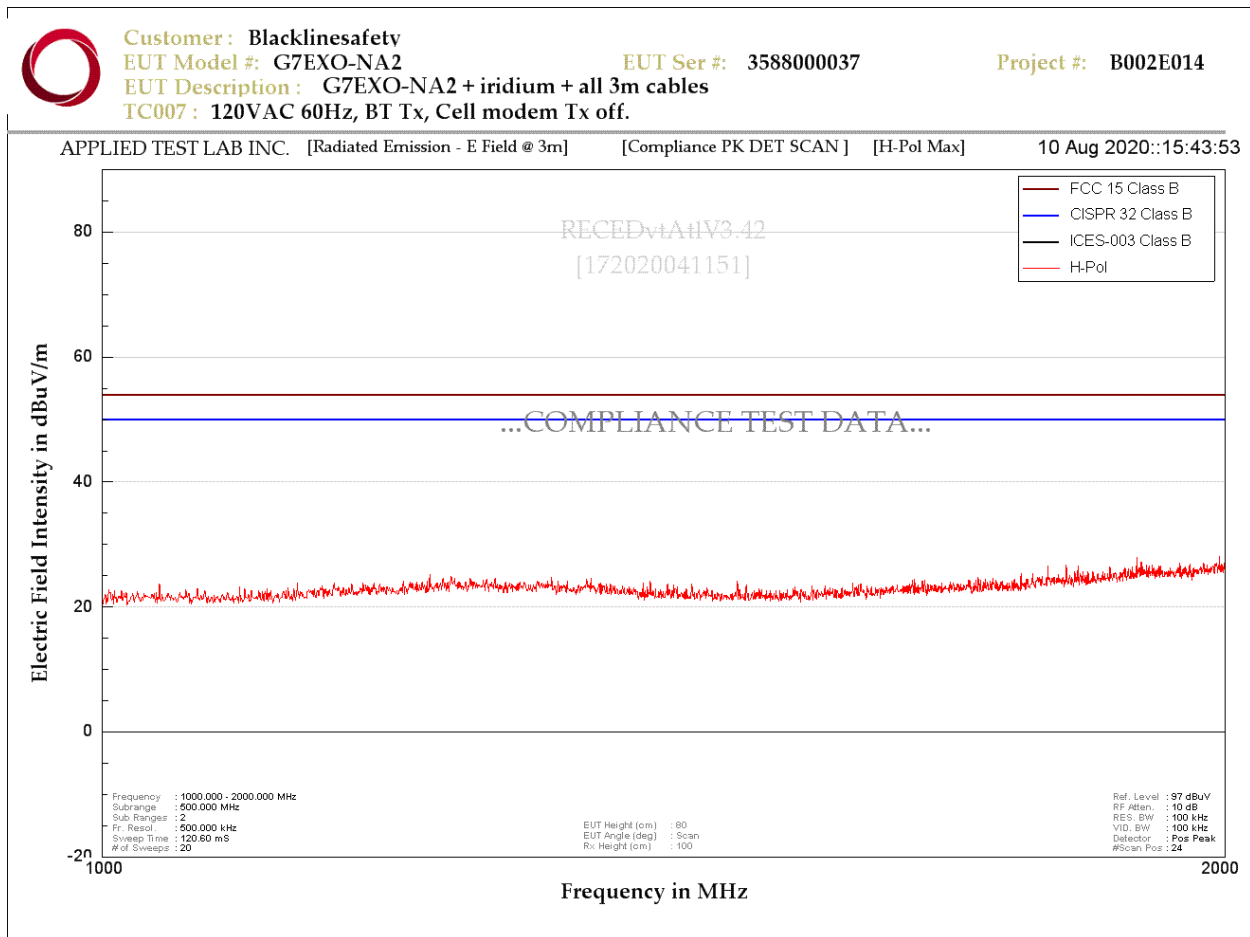


Figure 6.10.1b. - Radiated Emission (FCC and ICES-003) - Scan Vertical Polarization (30MHz – 1000MHz)

**Figure 6.10.2a.** - Radiated Emission (FCC and ICES-003 - Scan Horizontal Polarization (1GHz – 2GHz))

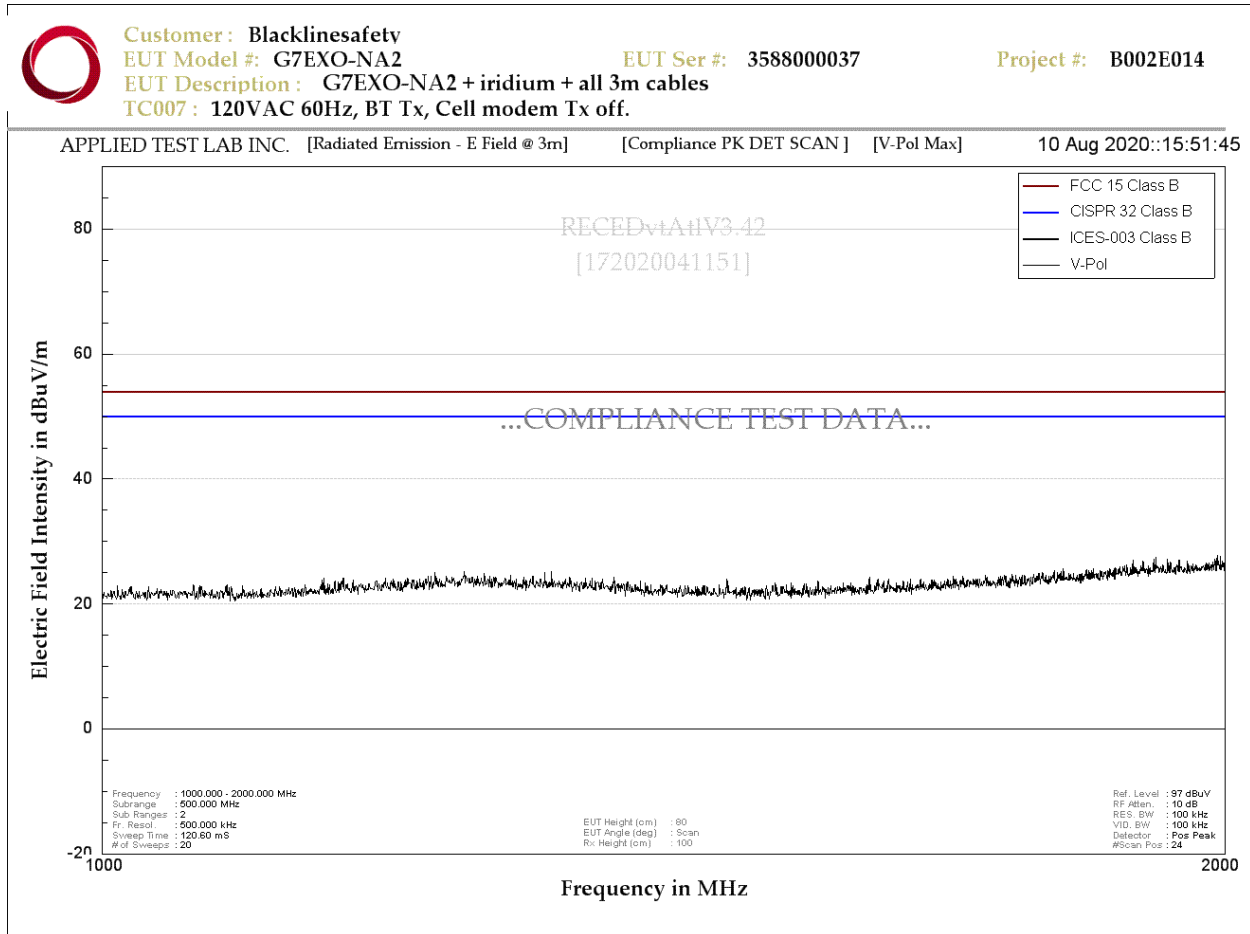


Figure 6.10.2b. - Radiated Emission (FCC and ICES-003) - Scan Vertical Polarization (1GHz – 2GHz)



## 6.11 AC Main Conducted Emission(0.15MHz - 30MHz)

☐ Applicable

Table 6.11.1 – AC Main conducted Emissions Test Setup Information (RSS-247)

|                        |                                                                                                                                                                                                                                                                           |                |                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------------|
| CLIENT:                | Blackline Safety                                                                                                                                                                                                                                                          | TEST STANDARD: | FCC 15.247, RSS-247 Issue 2 |
| MODEL NUMBER:          | G7EXO-NA2,G7EXO-AZ2                                                                                                                                                                                                                                                       | PRODUCT:       |                             |
| SERIAL NUMBER:         | 3588400000                                                                                                                                                                                                                                                                | CLASS:         |                             |
| TEMPERATURE:           | 28.5°C                                                                                                                                                                                                                                                                    | HUMIDITY:      | 38%                         |
| TESTED BY:             | Jaeheon Yun                                                                                                                                                                                                                                                               | DATE OF TEST:  | 2020-08-20                  |
| TESTREFERENCE:         | FCC Title 47 CFR Part 15: Subpart B -15.109, ICES-003 Issue 6                                                                                                                                                                                                             |                |                             |
| TEST VOLTAGE:          | 120V AC, Range xxx                                                                                                                                                                                                                                                        |                |                             |
| SETUP:                 | As per ANSI C63.4:2014                                                                                                                                                                                                                                                    |                |                             |
| FREQUENCY RANGE        | 150kHz-30MHz                                                                                                                                                                                                                                                              |                |                             |
| FREQUENCY TESTED:      | Digital Emissions                                                                                                                                                                                                                                                         |                |                             |
| FIRMWARE POWER SETTING |                                                                                                                                                                                                                                                                           |                |                             |
| EUT FIRMWARE           | 3.442S3_EXO                                                                                                                                                                                                                                                               |                |                             |
| MODULATION/DATA RATE   |                                                                                                                                                                                                                                                                           |                |                             |
| ANTENNA TYPE/GAIN      |                                                                                                                                                                                                                                                                           |                |                             |
| DUTY CYCLE             |                                                                                                                                                                                                                                                                           |                |                             |
| DECISION RULE          | Decision rule support document:<br><input type="checkbox"/> Data obtained<br><input type="checkbox"/> Video<br><input type="checkbox"/> Email conversation<br><input type="checkbox"/> inherent in the requested specification standard<br><input type="checkbox"/> other |                |                             |
| RESULTS:               | PASS                                                                                                                                                                                                                                                                      |                |                             |

**Table 6.11.2a - Conducted Emission Line 1 – AVG FCC/ICES**

| Emission Type      | Frequency (MHz) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV) | FCC/ICES AVG Limit (dBuV) | FCC Margin (dB) |
|--------------------|-----------------|-------------------------|------------------------|--------------------------|---------------------------|-----------------|
| Conducted Emission | 0.1813          | 15.16                   | 10.22                  | 25.38                    | 54.3                      | -28.93          |
|                    | 0.2871          | 34.54                   | 10.19                  | 44.73                    | 50.58                     | -5.85           |
|                    | 0.328           | 22.55                   | 10.19                  | 32.74                    | 49.48                     | -16.74          |
|                    | 2.9003          | 20.34                   | 10.23                  | 30.57                    | 46                        | -15.43          |
|                    | 3.471           | 19.52                   | 10.24                  | 29.76                    | 46                        | -16.24          |
|                    | 4.1175          | 15.74                   | 10.25                  | 25.99                    | 46                        | -20.01          |

**Table 6.11.2b - Conducted Emission Line 2 – AVG FCC/ICES**

| Emission Type      | Frequency (MHz) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV) | FCC/ICES AVG Limit (dBuV) | FCC Margin (dB) |
|--------------------|-----------------|-------------------------|------------------------|--------------------------|---------------------------|-----------------|
| Conducted Emission | 0.15            | 12.11                   | 10.23                  | 22.34                    | 56                        | -33.66          |
|                    | 0.2947          | 33.81                   | 10.16                  | 43.97                    | 50.58                     | -6.61           |
|                    | 0.6376          | 22.46                   | 10.16                  | 32.62                    | 46                        | -13.38          |
|                    | 2.8088          | 13.11                   | 10.2                   | 23.31                    | 46                        | -22.69          |
|                    | 3.4305          | 18.31                   | 10.2                   | 28.51                    | 46                        | -17.49          |
|                    | 4.0795          | 16.6                    | 10.21                  | 26.81                    | 46                        | -19.19          |

**Table 6.11.3a - Conducted Emission Line 1 – Quasi-peak FCC/ICES**

| Emission Type      | Frequency (MHz) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV) | FCC/ICES Quasi-peak Limit (dBuV) | Margin (dB) |
|--------------------|-----------------|-------------------------|------------------------|--------------------------|----------------------------------|-------------|
| Conducted Emission | 0.1813          | 38.69                   | 10.22                  | 48.91                    | 64.3                             | -15.4       |
|                    | 0.2871          | 43.17                   | 10.19                  | 53.36                    | 60.58                            | -7.22       |
|                    | 0.328           | 37.22                   | 10.19                  | 47.41                    | 59.48                            | -12.07      |
|                    | 2.9003          | 31.27                   | 10.23                  | 41.5                     | 56                               | -14.5       |
|                    | 3.471           | 31.67                   | 10.24                  | 41.91                    | 56                               | -14.09      |
|                    | 4.1175          | 28.81                   | 10.25                  | 39.06                    | 56                               | -16.94      |

**Table 6.11.3b - Conducted Emission Line 2 – Quasi-peak FCC/ICES**

| Emission Type      | Frequency (MHz) | Measured Reading (dBuV) | Correction Factor (dB) | Corrected Reading (dBuV) | FCC/ICES Quasi-peak Limit (dBuV) | Margin (dB) |
|--------------------|-----------------|-------------------------|------------------------|--------------------------|----------------------------------|-------------|
| Conducted Emission | 0.1509          | 40.84                   | 10.23                  | 51.07                    | 66                               | -14.93      |
|                    | 0.2947          | 44.11                   | 10.16                  | 54.27                    | 60.58                            | -6.31       |
|                    | 0.6376          | 34.41                   | 10.16                  | 44.57                    | 56                               | -11.43      |
|                    | 2.8088          | 28.75                   | 10.2                   | 38.95                    | 56                               | -17.05      |
|                    | 3.4305          | 33.25                   | 10.2                   | 43.45                    | 56                               | -12.55      |
|                    | 4.0795          | 32.83                   | 10.21                  | 43.04                    | 56                               | -12.96      |



☐ Applicable

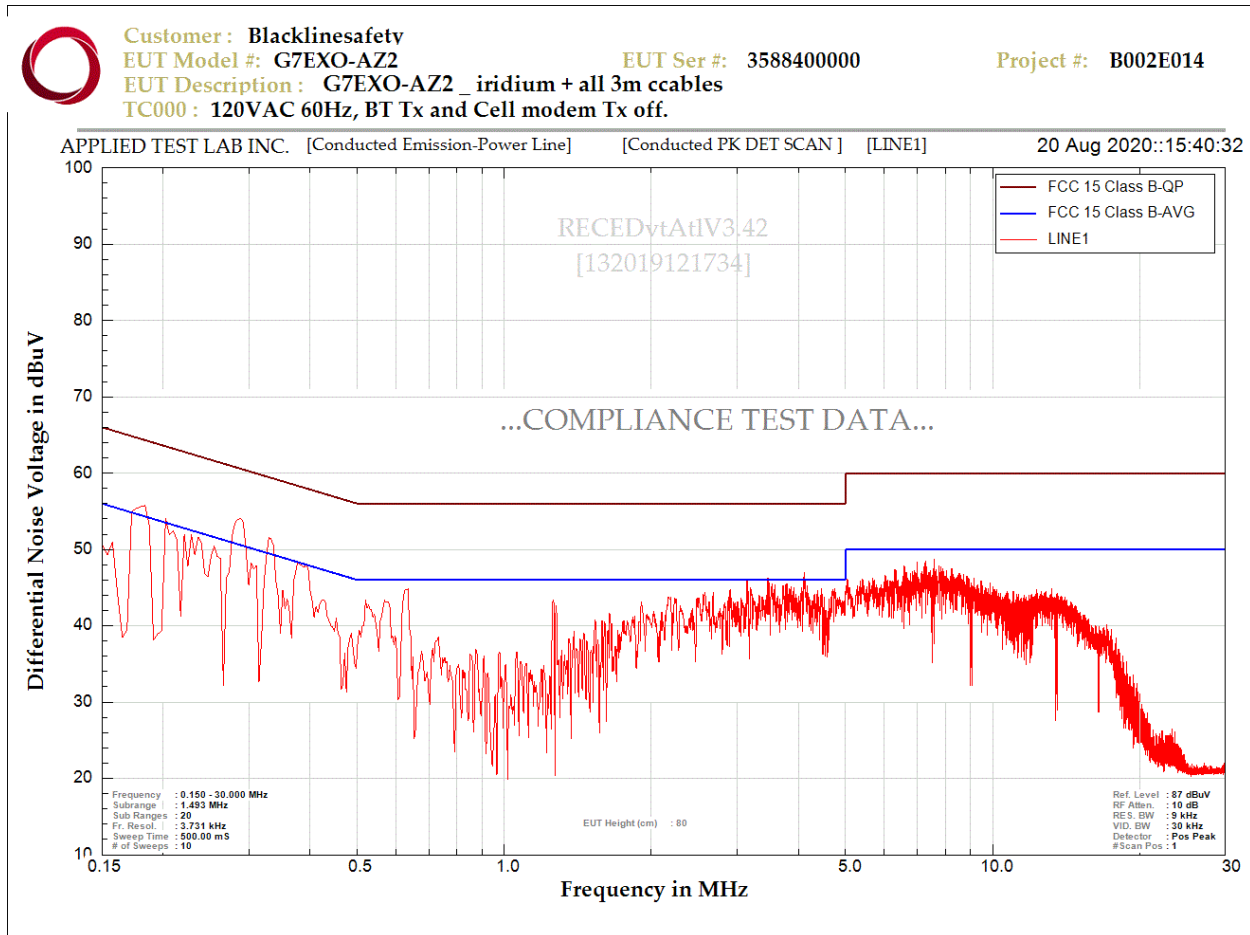


Figure 6.11.1a - Conducted Emission Scan Line 1 (Line L)

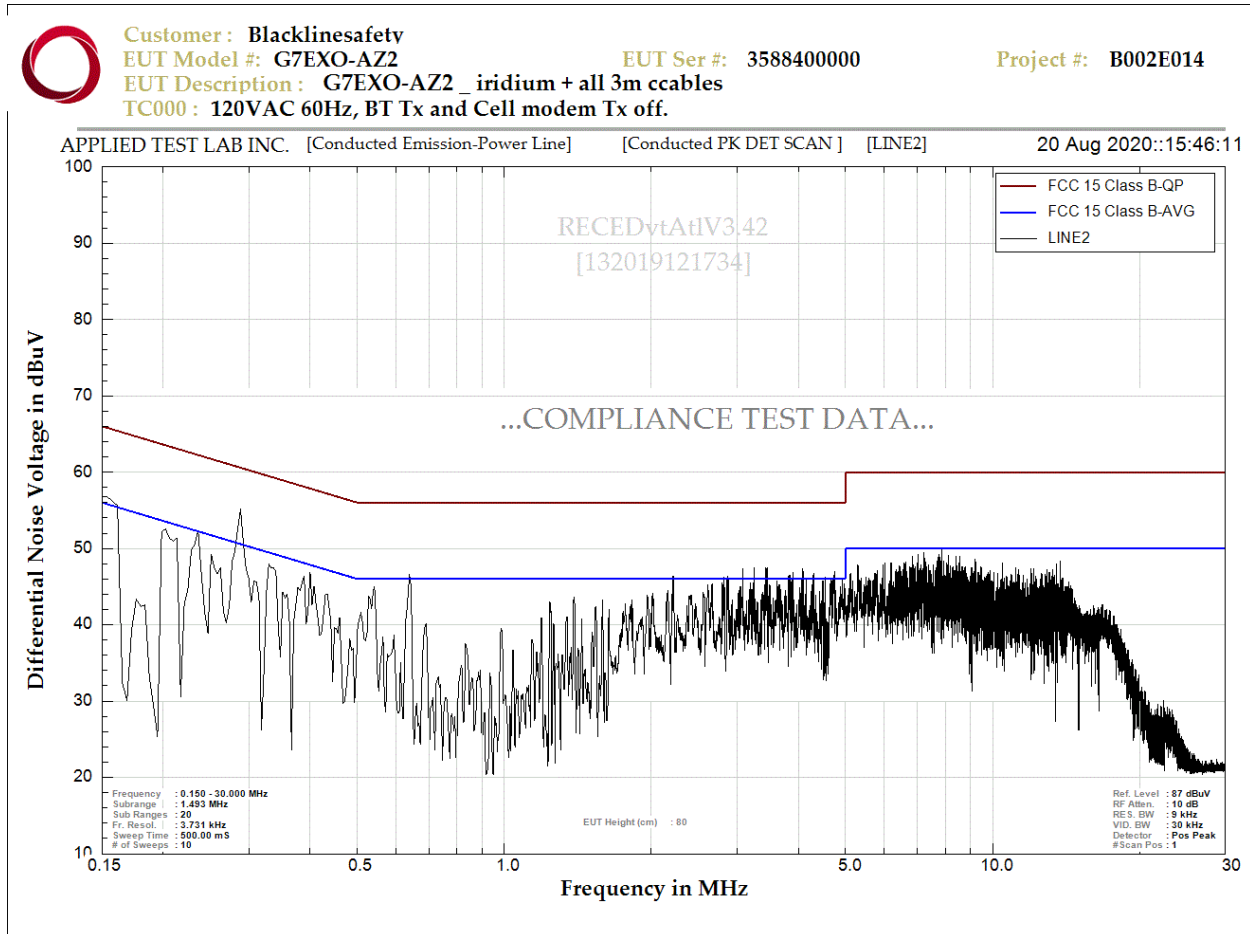


Figure 6.11.1b - Conducted Emission Scan Line 2 (Line N)



## 6.12 Frequency Stability

☐ Applicable

Table 6.12.1 – Frequency stability Test Setup Information

|                        |                                                                                                                                                                                                                                                                           |                |                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------------|
| CLIENT:                | Blackline Safety                                                                                                                                                                                                                                                          | TEST STANDARD: | FCC 15.247, RSS-247 Issue 2 |
| MODEL NUMBER:          | G7EXO-NA2,G7EXO-AZ2                                                                                                                                                                                                                                                       | PRODUCT:       |                             |
| SERIAL NUMBER:         | 3588400000                                                                                                                                                                                                                                                                | CLASS:         |                             |
| TEMPERATURE:           | 20°C                                                                                                                                                                                                                                                                      | HUMIDITY:      | 45%-56%                     |
| TESTED BY:             | Adishesu Nyshadham                                                                                                                                                                                                                                                        | DATE OF TEST:  | 2020-09-11 to 2020-09-15    |
| TEST REFERENCE:        | FCC Title 47 CFR Part 2.1055, Part 15: Subpart C-15.215(c), RSS-GEN Issue 5(8.8)                                                                                                                                                                                          |                |                             |
| TEST VOLTAGE:          | 3.0V, 3.4V, 3.6V                                                                                                                                                                                                                                                          |                |                             |
| SETUP:                 | As per ANSI C63.10:2013, sec 6.8                                                                                                                                                                                                                                          |                |                             |
| FREQUENCY RANGE        | 2400-2483.5 MHz                                                                                                                                                                                                                                                           |                |                             |
| FREQUENCY TESTED:      | 2402 MHz, 2441 MHz, 2480 MHz                                                                                                                                                                                                                                              |                |                             |
| FIRMWARE POWER SETTING | 11 dBm                                                                                                                                                                                                                                                                    |                |                             |
| EUT FIRMWARE           | 3.442S3_EXO                                                                                                                                                                                                                                                               |                |                             |
| MODULATION/DATA RATE   | GFSK, DH1,<br>QPSK, DH2<br>8-PSK, DH3                                                                                                                                                                                                                                     |                |                             |
| ANTENNA TYPE/GAIN      | Ceramic Chip Antenna, 2.2dBi(peak), 1.9dBi(Band edges)                                                                                                                                                                                                                    |                |                             |
| DUTY CYCLE             | NA                                                                                                                                                                                                                                                                        |                |                             |
| DECISION RULE          | Decision rule support document:<br><input type="checkbox"/> Data obtained<br><input type="checkbox"/> Video<br><input type="checkbox"/> Email conversation<br><input type="checkbox"/> inherent in the requested specification standard<br><input type="checkbox"/> other |                |                             |
| RESULTS:               | PASS                                                                                                                                                                                                                                                                      |                |                             |

**Table 6.12.2a** – Frequency over a temperature variation of -20 degree to +50 degrees C (CH#1 2402MHz)

| Power Supply | Temperature (°C) | Measured Frequency (MHz) | Frequency Error | FCC 15C Limit |
|--------------|------------------|--------------------------|-----------------|---------------|
| 3.4VDC       | 50               | 2401.981340              | -0.000777%      | +/- 0.01%     |
|              | 40               | 2401.981250              | -0.000781%      | +/- 0.01%     |
|              | 30               | 2401.985670              | -0.000597%      | +/- 0.01%     |
|              | 20               | 2401.993250              | -0.000281%      | +/- 0.01%     |
|              | 10               | 2401.998080              | -0.000080%      | +/- 0.01%     |
|              | 0                | 2402.001160              | 0.000048%       | +/- 0.01%     |
|              | -10              | 2402.001760              | 0.000073%       | +/- 0.01%     |
|              | -20              | 2401.998390              | -0.000067%      | +/- 0.01%     |

**Table 6.12.2b**– Variation in the primary voltage from EUT limit's minimum and maximum of the rated supply voltage at 20 degree C

| Power Supply | Temperature (°C) | Measured Frequency (MHz) | Frequency Error | FCC 15C, Section 15.225 Limit |
|--------------|------------------|--------------------------|-----------------|-------------------------------|
| 3VDC(Min)    | 20               | 2401.992630              | -0.000307%      | +/- 0.01%                     |
| 3.6VDC(Max)  | 20               | 2401.993690              | -0.000263%      | +/- 0.01%                     |

**Table 6.12.3a** – Frequency over a temperature variation of -20 degree to +50 degrees C (CH#40 2441MHz)

| Power Supply | Temperature (°C) | Measured Frequency (MHz) | Frequency Error | FCC 15C, Section 15.225 Limit |
|--------------|------------------|--------------------------|-----------------|-------------------------------|
| 3.4VDC       | 50               | 2440.979630              | -0.000834%      | +/- 0.01%                     |
|              | 40               | 2440.983200              | -0.000688%      | +/- 0.01%                     |
|              | 30               | 2440.988940              | -0.000453%      | +/- 0.01%                     |
|              | 20               | 2440.994910              | -0.000209%      | +/- 0.01%                     |
|              | 10               | 2441.000240              | 0.000010%       | +/- 0.01%                     |
|              | 0                | 2441.003890              | 0.000159%       | +/- 0.01%                     |
|              | -10              | 2441.003890              | 0.000159%       | +/- 0.01%                     |
|              | -20              | 2440.999720              | -0.000011%      | +/- 0.01%                     |

**Table 6. 12.3b**– Variation in the primary voltage from EUT limit's minimum and maximum of the rated supply voltage at 20 degree C

| Power Supply | Temperature (°C) | Measured Frequency (MHz) | Frequency Error | FCC 15C, Section 15.225 Limit |
|--------------|------------------|--------------------------|-----------------|-------------------------------|
| 3VDC(Min)    | 20               | 2440.994920              | -0.000208%      | +/- 0.01%                     |
| 3.6VDC(Max)  | 20               | 2440.995910              | -0.000168%      | +/- 0.01%                     |

**Table 6.12.4a** – Frequency over a temperature variation of -20 degree to +50 degrees C (CH#79 2480MHz)

| Power Supply | Temperature (°C) | Measured Frequency (MHz) | Frequency Error | FCC 15C, Section 15.225 Limit |
|--------------|------------------|--------------------------|-----------------|-------------------------------|
| 3.4VDC       | 50               | 2479.981070              | -0.000763%      | +/- 0.01%                     |
|              | 40               | 2479.984270              | -0.000634%      | +/- 0.01%                     |
|              | 30               | 2479.991310              | -0.000350%      | +/- 0.01%                     |
|              | 20               | 2479.995770              | -0.000171%      | +/- 0.01%                     |
|              | 10               | 2480.002720              | 0.000110%       | +/- 0.01%                     |
|              | 0                | 2480.006190              | 0.000250%       | +/- 0.01%                     |
|              | -10              | 2480.006070              | 0.000245%       | +/- 0.01%                     |
|              | -20              | 2480.001460              | 0.000059%       | +/- 0.01%                     |

**Table 6. 12.4b**– Variation in the primary voltage from EUT limit's minimum and maximum of the rated supply voltage at 20 degree C

| Power Supply | Temperature (°C) | Measured Frequency (MHz) | Frequency Error | FCC 15C, Section 15.225 Limit |
|--------------|------------------|--------------------------|-----------------|-------------------------------|
| 3VDC(Min)    | 20               | 2479.997080              | -0.000118%      | +/- 0.01%                     |
| 3.6VDC(Max)  | 20               | 2479.998210              | -0.000072%      | +/- 0.01%                     |



## 7.0 Appendix A – Test Sample Description

(From Data Provided by the Customer)

### EUT Information

#### Description

G7 EXO is a cloud-connected area monitor that bundles industry leading gas detection with automated compliance and business analytics tools. For the first time ever, the days of manually collecting data from the field, reviewing spreadsheets and compiling reports are behind you.

G7 EXO solves the challenges of continuous toxic and combustible gas monitoring for sites, facilities and fence lines. Automating long-term area monitoring and connected safety for streamlined efficiency, G7 EXO allows teams to focus on their work at hand.

In the event of a safety incident or gas exposure, monitoring personnel can see what has happened and communicate with workers directly via text messaging or an optional two-way voice calling feature through their EXO.

Manufacturer: Blackline Safety Corp.

Trade name: G7EXO

Model Number: G7EXO-NA2

Serial Number: 3588000037, 3588400000

Model discrepancy/variations: G7EXO-AZ2 was used for some measurements not requiring cellular radio emissions. The only difference between the -NA2 and -AZ2 variants of G7EXO are the cellular radio modules. -NA2 contains the LARA-R202 module whereas -AZ2 contains the LARA-R280 module.

Firmware Version: 3.442S3\_EXO

SW Version: N/A



## 8.0 Appendix B – List of Abbreviations and Acronyms

### **Industrial, scientific and medical (ISM) applications (of radio frequency energy)**

operation of equipment or appliances designed to generate and use locally radio frequency energy for industrial, scientific, medical, domestic or similar purposes, excluding applications in the field of telecommunications

### **ISM equipment and appliances**

equipment or appliances designed to generate and/or use locally radio-frequency energy for industrial, scientific, medical, domestic or similar purposes, excluding applications in the field of telecommunications and information technology and other applications covered by other CISPR publications

### **Electromagnetic radiation**

1. phenomenon by which energy in the form of electromagnetic waves emanates from a source into space
2. energy transferred through space in the form of electromagnetic waves

### **Boundary of the equipment under test**

imaginary straight line periphery describing a simple geometric configuration encompassing the equipment under test. All interconnecting cables are included within this boundary

### **Electro-discharge machining (EDM) equipment**

all the necessary units for the spark erosion process including the machine tool, the generator, control circuits, the working fluid container and integral devices

### **Spark erosion**

removal of material in a dielectric working fluid by electro-discharges, which are separated in time and randomly distributed in space, between two electrically conductive electrodes (the tool electrode and the work piece electrode), and where the energy in the discharge is controlled

### **Arc welding equipment**

equipment for applying current and voltage and having the required characteristics suitable for arc welding and allied processes

### **Equipment for resistance welding and allied processes**

all equipment associated with carrying out the processes of resistance welding or allied processes consisting of e.g. power source, electrodes, tooling and associated control equipment, which may be a separate unit or part of a complex machine

### **Low voltage LV**

a set of voltage levels used for the distribution of electricity and whose upper limit is generally accepted to be 1 000 V a.c.



**End of document**